

FCC Test Report (Co-Located)

Report No.: RF170906C12A-1

FCC ID: PY317400402

Test Model: RBR20

Series Model: RBS20 (Refer to item 3.1 for more details)

Received Date: Aug. 25, 2017

Test Date: Oct. 13 ~ Oct. 15, 2017

Issued Date: Dec. 06, 2017

Applicant: NETGEAR, INC.

Address: 350 East Plumeria Drive San Jose, CA 95134

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan (R.O.C.)

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City 33383, TAIWAN (R.O.C.)

**FCC Registration /
Designation Number:** 788550 / TW0003



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	12
3.3 Description of Support Units	14
3.3.1 Configuration of System under Test	14
3.4 General Description of Applied Standards	14
4 Test Types and Results	15
4.1 Radiated Emission and Bandedge Measurement.....	15
4.1.1 Limits of Radiated Emission and Bandedge Measurement	15
4.1.2 Test Instruments	16
4.1.3 Test Procedures.....	17
4.1.4 Deviation from Test Standard	17
4.1.5 Test Setup.....	18
4.1.6 EUT Operating Conditions.....	19
4.1.7 Test Results	20
4.2 Conducted Emission Measurement	32
4.2.1 Limits of Conducted Emission Measurement	32
4.2.2 Test Instruments	32
4.2.3 Test Procedures.....	33
4.2.4 Deviation from Test Standard	33
4.2.5 Test Setup.....	33
4.2.6 EUT Operating Conditions.....	33
4.2.7 Test Results	34
4.3 Conducted Out of Band Emission Measurement.....	46
4.3.1 Limits of Conducted Out of Band Emission Measurement.....	46
4.3.2 Test Setup.....	46
4.3.3 Test Instruments	46
4.3.4 Test Procedure	46
4.3.5 Deviation from Test Standard	46
4.3.6 EUT Operating Condition	46
4.3.7 Test Results	47
5 Pictures of Test Arrangements	48
Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	49
Appendix – Information on the Testing Laboratories	50

Release Control Record

Issue No.	Description	Date Issued
RF170906C12A-1	Original release.	Dec. 06, 2017

1 Certificate of Conformity

Product: Orbi Router, Orbi Satellite (Refer to item 3.1 for more details)

Brand: NETGEAR

Test Model: RBR20

Series Model: RBS20 (Refer to item 3.1 for more details)

Sample Status: Engineering sample

Applicant: NETGEAR, INC.

Test Date: Oct. 13 ~ Oct. 15, 2017

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Celine Chou , **Date:** Dec. 06, 2017
Celine Chou / Specialist

Approved by : Ken Liu , **Date:** Dec. 06, 2017
Ken Liu / Senior Manager

2 Summary of Test Results

Applied Standard:	47 CFR FCC Part 15, Subpart C (Section 15.247) 47 CFR FCC Part 15, Subpart E (Section 15.407)		
FCC Clause	Test Item	Result	Remarks
15.207 15.407(b)(6)	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -8.74dB at 0.28513MHz.
15.205 / 15.209 / 15.247(d) 15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -0.6dB at 2488.00MHz.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.94 dB
Radiated Emissions up to 1 GHz	30MHz ~ 200MHz	3.63 dB
	200MHz ~ 1000MHz	3.64 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	2.29 dB
	18GHz ~ 40GHz	2.29 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Orbi Router, Orbi Satellite (Refer to note for more details)
Brand	NETGEAR
Test Model	RBR20
Series Model	RBS20
Model Difference	Refer to note for more details
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 256QAM, 64QAM, 16QAM, QPSK, BPSK for OFDM
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: 11/5.5/2/1Mbps 802.11a/g: 54/48/36/24/18/12/9/6Mbps 802.11n: up to 300Mbps 802.11ac: up to 867Mbps
Operating Frequency	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5825MHz
Number of Channel	2412 ~ 2462MHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5180 ~ 5240MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5260 ~ 5320MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 4 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1 5500 ~ 5720MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 11 802.11n (HT40), 802.11ac (VHT40): 5 802.11ac (VHT80): 2 5745 ~ 5825MHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 5 802.11n (HT40), 802.11ac (VHT40): 2 802.11ac (VHT80): 1

Output Power	CDD Mode: 2412 ~ 2462MHz: 310.845mW 5180 ~ 5240MHz: 210.769mW 5260 ~ 5320MHz: 217.617mW 5500 ~ 5700MHz: 246.258mW 5745 ~ 5825MHz: 615.033mW Beamforming Mode: 2412 ~ 2462MHz: 257.156mW 5180 ~ 5240MHz: 210.769mW 5260 ~ 5320MHz: 217.617mW 5500 ~ 5700MHz: 246.258mW 5745 ~ 5825MHz: 615.033mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter
Data Cable Supplied	NA

Note:

1. This report is prepared for FCC class II permissive change. The differences compared with the original report (BV CPS report no.: RF170906C12D-2) is adding 5.26GHz to 5.32GHz & 5.50GHz to 5.70GHz by software.
2. The EUT incorporates a MIMO function. Physically, the EUT provides 2 completed transmitters and 2 receivers.

Band	Modulation Mode	Beamforming Mode	TX Function
2.4GHz	802.11b	Not Support	2TX
	802.11g	Not Support	2TX
	802.11n (HT20)	Support (CDD / NSS1)	2TX
	802.11n (HT40)	Support (CDD / NSS1)	2TX
5G	802.11a	Not Support	2TX
	802.11n (HT20)	Support (CDD / NSS=1)	2TX
	802.11n (HT40)	Support (CDD / NSS=1)	2TX
	802.11ac (VHT20)	Support (CDD / NSS=1)	2TX
	802.11ac (VHT40)	Support (CDD / NSS=1)	2TX
	802.11ac (VHT80)	Support (CDD / NSS=1)	2TX

* For 802.11n, CDD mode is the worst case for final radiated emission and power line conducted emission tests after pretesting CDD mode and beamforming mode.

3. All models are electrically identical except software firmware. Model: RBR20 is the representative for final test.

Brand	Model	Function	Band	RF Module	Difference
NETGEAR	RBR20	Router	2.4G/UNII-2C/UNII-3	Module 1	Master mode only
			UNII-1/UNII-2A	Module 2	
	RBS20	Satellite	2.4G/UNII-2C/UNII-3	Module 1	Master mode and Client mode for 2.4GHz Client mode for UNII-2C/UNII-3
			UNII-1/UNII-2A	Module 2	Master mode only for U-NII-1/UNII-2A

The following RF Modules are for the EUT.

RF Module	Band	Antenna No.
Module 1	2.4G	1/2
	UNII-2C/UNII-3	1/2
Module 2	UNII-1/UNII-2A	3/4

4. The following filters are provided to this EUT.

RF Module Brand / Model	Filter	Position	Filter Model Name	Remark
Module 1	1st	TFL1 ,TFL2	Filter 1	passive filter (pin to pin & Same design)
	2nd	TFL1 ,TFL2	Filter 2	passive filter (pin to pin & Same design)
Module 2	1st	BFL2, BFL3	Filter 3	passive filter (pin to pin & Same design)
	2nd	BFL2, BFL3	Filter 4	passive filter (pin to pin & Same design)

5. The EUT uses following antennas.

Ant. Type	Dipole				
Connector Type	I-PEX				
Directional Antenna Gain (dBi)					
Item	2.4G	5G Band 1	5G Band 2	5G Band 3	5G Band 4
-	5.71	5.01	5.63	5.71	4.65

6. The EUT consumes power from the following adapters.

Adapter 1	
Brand	NETGEAR
Model	ML18-F120150-A1
P/N	332-11014-01
Input Power	100-120Vac, 50/60Hz, 0.5A
Output Power	12Vdc, 1.5A
Power Line	1.8m power cable without core attached on adapter

Adapter 2	
Brand	NETGEAR
Model	MU18A2120150-A1
P/N	332-11015-01
Input Power	100-240Vac, 50/60Hz, 0.5A
Output Power	12Vdc, 1.5A
Power Line	1.8m power cable without core attached on adapter

Adapter 3	
Brand	NETGEAR
Model	2ABB018F 1 NJ
P/N	332-11008-01
Input Power	100-120Vac, 50/60Hz, 0.6A
Output Power	12Vdc, 1.5A
Power Line	1.8m power cable without core attached on adapter

Adapter 4	
Brand	NETGEAR
Model	2ABB018F NA
P/N	332-11009-01
Input Power	100-240Vac, 50/60Hz, 0.6A
Output Power	12Vdc, 1.5A
Power Line	1.85m power cable without core attached on adapter

* Adapter 1 and 2 are electrically identical, different model names are for marketing purpose. Therefore adapter 1 was chosen for final test and presented in the test report.

* Adapter 3 and 4 are electrically identical, different model names are for marketing purpose. Therefore adapter 3 was chosen for final test and presented in the test report.

3.2 Description of Test Modes

For 2.4GHz

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

For 5180~5240MHz:

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

For 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
58	5290 MHz

For 5500 ~ 5700MHz

11 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz		

5 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz		

2 channels are provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530MHz	122	5610 MHz

For 5745~5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to				Description
	RE≥1G	RE<1G	PLC	OB	
A	√	√	√	√	Power from adapter 1
B	-	√	√	-	Power from adapter 3

Where **RE≥1G**: Radiated Emission above 1GHz & Bandedge Measurement
RE<1G: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission
OB: Conducted Out-Band Emission

Note:

1. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Z-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Range (MHz)	Available Channel	Tested Channel	Modulation Technology
A	802.11b + 802.11a + 802.11a	2412 ~ 2462	1 to 11	11 + 40 + 116	DBPSK
		5180 ~ 5240	36 to 48		OFDM
		5500 ~ 5700	100 to 140		OFDM
A	802.11b + 802.11ac (VHT20) + 802.11a	2412 ~ 2462	1 to 11	11 + 52 + 116	DBPSK
		5260 ~ 5320	52 to 64		OFDM
		5500 ~ 5700	100 to 140		OFDM
A	802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)	2412 ~ 2462	1 to 11	11 + 52 + 157	DBPSK
		5260 ~ 5320	52 to 64		OFDM
		5745 ~ 5825	149 to 165		OFDM

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Range (MHz)	Available Channel	Tested Channel	Modulation Technology
A	802.11b + 802.11a + 802.11a	2412 ~ 2462	1 to 11	11 + 40 + 116	DBPSK
		5180 ~ 5240	36 to 48		OFDM
		5500 ~ 5700	100 to 140		OFDM
A	802.11b + 802.11ac (VHT20) + 802.11a	2412 ~ 2462	1 to 11	11 + 52 + 116	DBPSK
		5260 ~ 5320	52 to 64		OFDM
		5500 ~ 5700	100 to 140		OFDM
A	802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)	2412 ~ 2462	1 to 11	11 + 52 + 157	DBPSK
		5260 ~ 5320	52 to 64		OFDM
		5745 ~ 5825	149 to 165		OFDM

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Range (MHz)	Available Channel	Tested Channel	Modulation Technology
A	802.11b + 802.11a + 802.11a	2412 ~ 2462	1 to 11	11 + 40 + 116	DBPSK
		5180 ~ 5240	36 to 48		OFDM
		5500 ~ 5700	100 to 140		OFDM
A	802.11b + 802.11ac (VHT20) + 802.11a	2412 ~ 2462	1 to 11	11 + 52 + 116	DBPSK
		5260 ~ 5320	52 to 64		OFDM
		5500 ~ 5700	100 to 140		OFDM
A	802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)	2412 ~ 2462	1 to 11	11 + 52 + 157	DBPSK
		5260 ~ 5320	52 to 64		OFDM
		5745 ~ 5825	149 to 165		OFDM

Conducted Out-Band Emission Measurement

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Range (MHz)	Available Channel	Tested Channel	Modulation Technology
A	802.11b + 802.11a	2412 ~ 2462	1 to 11	11 + 116	DBPSK
		5500 ~ 5700	100 to 140		OFDM

Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	25 deg. C, 70% RH	120Vac, 60Hz	Luis Lee
RE<1G	25 deg. C, 65% RH	120Vac, 60Hz	Luis Lee
PLC	25 deg. C, 70% RH	120Vac, 60Hz	Luis Lee
OB	25 deg. C, 70% RH	120Vac, 60Hz	Luis Lee

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Notebook	DELL	E5410	6RP2YM1	FCC DoC Approved	-
B.	Load	NA	NA	NA	NA	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item A acted as a communication partner to transfer data.

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ45, Cat5e	1	3	N	0	-
2.	RJ45, Cat5e	1	1.8	N	0	-

3.3.1 Configuration of System under Test

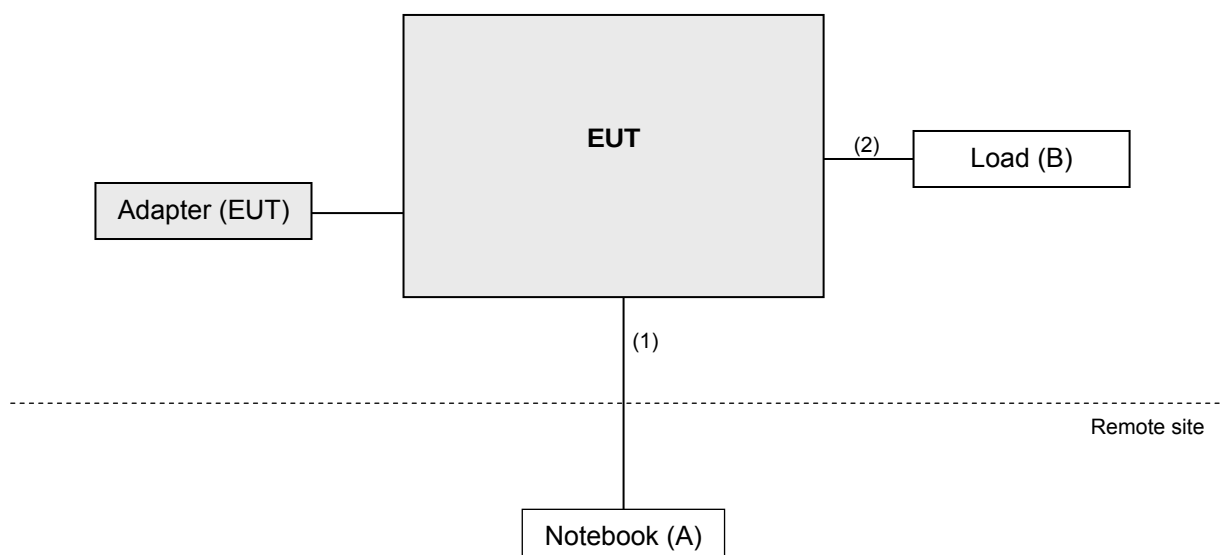

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

FCC Part 15, Subpart E (15.407)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v02r01			Field Strength at 3m	
			PK: 74 (dBµV/m)	AV: 54 (dBµV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK: -27 (dBm/MHz)	PK: 68.2(dBµV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK: -27 (dBm/MHz) ^{*1} PK: 10 (dBm/MHz) ^{*2} PK: 15.6 (dBm/MHz) ^{*3} PK: 27 (dBm/MHz) ^{*4}	PK: 68.2(dBµV/m) ^{*1} PK: 105.2 (dBµV/m) ^{*2} PK: 110.8(dBµV/m) ^{*3} PK: 122.2 (dBµV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Oct. 24, 2016	Oct. 23, 2017
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100040	Aug. 18, 2017	Aug. 17, 2018
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Dec. 28, 2016	Dec. 27, 2017
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-1170	Dec. 15, 2016	Dec. 14, 2017
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170241	Dec. 14, 2016	Dec. 13, 2017
Loop Antenna EMCI	EM-6879	269	Aug. 11, 2017	Aug. 10, 2018
Preamplifier Agilent	8449B	3008A01960	Aug. 08, 2017	Aug. 07, 2018
Preamplifier Agilent	8447D	2944A10631	Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	MY 13380+295012/04	Aug. 08, 2017	Aug. 07, 2018
RF signal cable HUBER+SUHNER	SUCOFLEX 104	Cable-CH4-03 (250724)	Aug. 08, 2017	Aug. 07, 2018
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller BV ADT	AT100	AT93021703	NA	NA
Turn Table BV ADT	TT100	TT93021703	NA	NA
Turn Table Controller BV ADT	SC100	SC93021703	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 17, 2016	Oct. 16, 2017

- Note:
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 4.
 3. The horn antenna and preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Designation Number is TW0003. The number will be varied with the Lab location and scope as attached.
 5. The IC Site Registration No. is IC7450F-4.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

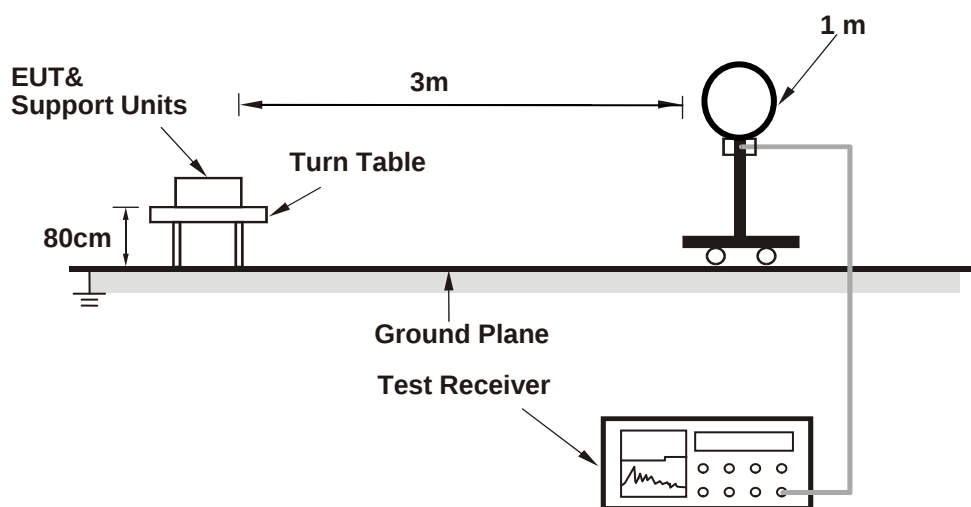

For Radiated emission 30MHz to 1GHz

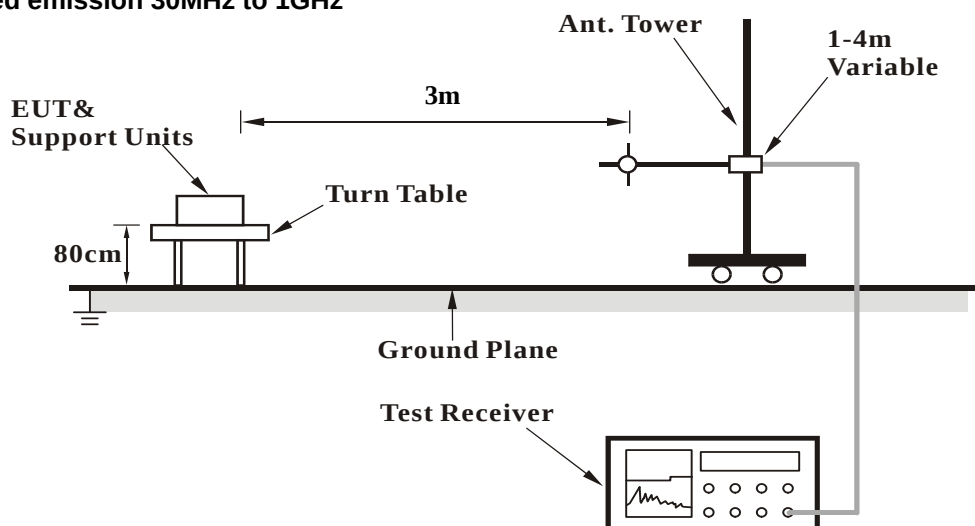

For Radiated emission above 1GHz

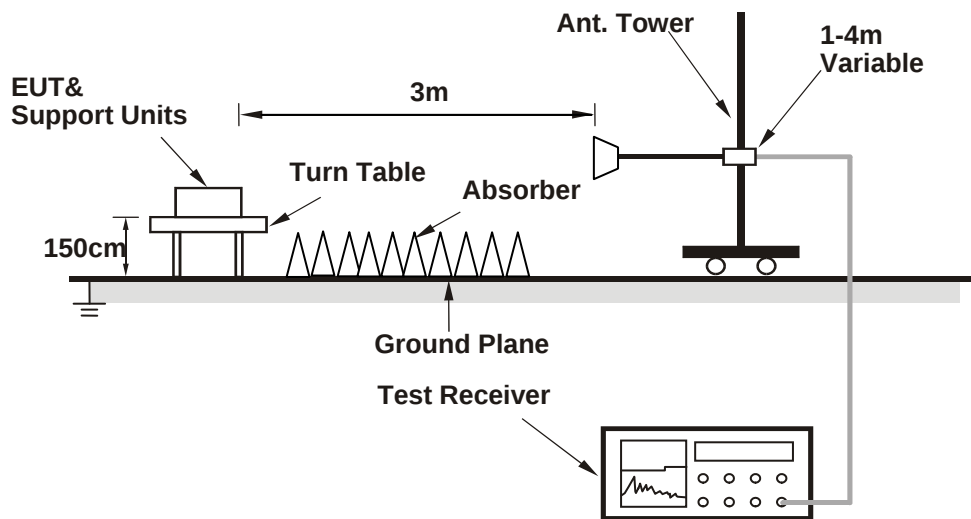

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Placed the EUT on the testing table.
- Prepared a notebook to act as a communication partner and placed it outside of testing area.
- The communication partner connected with EUT via a RJ45 cable and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- The communication partner sent data to EUT by command "PING".

4.1.7 Test Results

Above 1GHz Data:

802.11b + 802.11a + 802.11a

CHANNEL	CH 11 + CH 40 + CH 116	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.0 PK			3.42 H	175	74.2	33.8
2	*2462.00	106.1 AV			3.42 H	175	72.3	33.8
3	2488.00	60.3 PK	74.0	-13.7	3.42 H	175	26.4	33.9
4	2488.00	50.1 AV	54.0	-3.9	3.42 H	175	16.2	33.9
5	4924.00	50.5 PK	74.0	-23.5	2.51 H	126	42.2	8.3
6	4924.00	37.4 AV	54.0	-16.6	2.51 H	126	29.1	8.3
7	*5200.00	107.7 PK			3.41 H	290	66.4	41.3
8	*5200.00	97.6 AV			3.41 H	290	56.3	41.3
9	*5580.00	109.4 PK			1.25 H	118	67.2	42.2
10	*5580.00	98.8 AV			1.25 H	118	56.6	42.2
11	#10400.00	62.1 PK	74.0	-11.9	2.81 H	172	41.9	20.2
12	#10400.00	49.0 AV	54.0	-5.0	2.81 H	172	28.8	20.2
13	11160.00	62.8 PK	74.0	-11.2	1.57 H	189	41.3	21.5
14	11160.00	49.6 AV	54.0	-4.4	1.57 H	189	28.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	CH 11 + CH 40 + CH 116	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.4 PK			2.26 V	60	81.6	33.8
2	*2462.00	112.3 AV			2.26 V	60	78.5	33.8
3	2488.00	62.1 PK	74.0	-11.9	2.26 V	60	28.2	33.9
4	2488.00	53.1 AV	54.0	-0.9	2.26 V	60	19.2	33.9
5	4924.00	50.4 PK	74.0	-23.6	1.80 V	106	42.1	8.3
6	4924.00	36.8 AV	54.0	-17.2	1.80 V	106	28.5	8.3
7	*5200.00	120.5 PK			2.19 V	182	79.2	41.3
8	*5200.00	108.9 AV			2.19 V	182	67.6	41.3
9	*5580.00	121.0 PK			2.59 V	89	78.8	42.2
10	*5580.00	109.8 AV			2.59 V	89	67.6	42.2
11	#10400.00	62.7 PK	74.0	-11.3	1.81 V	62	42.5	20.2
12	#10400.00	49.5 AV	54.0	-4.5	1.81 V	62	29.3	20.2
13	11160.00	63.6 PK	74.0	-10.4	1.92 V	238	42.1	21.5
14	11160.00	50.6 AV	54.0	-3.4	1.92 V	238	29.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11b + 802.11ac (VHT20) + 802.11a

CHANNEL	CH 11 + CH 52 + CH 116	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.7 PK			3.41 H	175	75.9	33.8
2	*2462.00	105.9 AV			3.41 H	175	72.1	33.8
3	2488.00	60.2 PK	74.0	-13.8	3.41 H	175	26.3	33.9
4	2488.00	50.0 AV	54.0	-4.0	3.41 H	175	16.1	33.9
5	4924.00	49.8 PK	74.0	-24.2	2.71 H	105	41.5	8.3
6	4924.00	37.0 AV	54.0	-17.0	2.71 H	105	28.7	8.3
7	5150.00	58.4 PK	74.0	-15.6	3.41 H	322	51.0	7.4
8	5150.00	46.0 AV	54.0	-8.0	3.41 H	322	38.6	7.4
9	*5260.00	110.1 PK			3.41 H	322	68.6	41.5
10	*5260.00	99.3 AV			3.41 H	322	57.8	41.5
11	*5580.00	109.4 PK			1.26 H	114	67.2	42.2
12	*5580.00	98.8 AV			1.26 H	114	56.6	42.2
13	#10520.00	61.6 PK	74.0	-12.4	2.72 H	153	41.3	20.3
14	#10520.00	48.7 AV	54.0	-5.3	2.72 H	153	28.4	20.3
15	11160.00	62.8 PK	74.0	-11.2	1.69 H	187	41.3	21.5
16	11160.00	49.6 AV	54.0	-4.4	1.69 H	187	28.1	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	CH 11 + CH 52 + CH 116	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.5 PK			2.18 V	69	81.7	33.8
2	*2462.00	112.2 AV			2.18 V	69	78.4	33.8
3	2488.00	62.3 PK	74.0	-11.7	2.18 V	69	28.4	33.9
4	2488.00	53.4 AV	54.0	-0.6	2.18 V	69	19.5	33.9
5	4924.00	49.8 PK	74.0	-24.2	1.70 V	82	41.5	8.3
6	4924.00	36.6 AV	54.0	-17.4	1.70 V	82	28.3	8.3
7	5150.00	59.1 PK	74.0	-14.9	2.62 V	194	51.7	7.4
8	5150.00	46.3 AV	54.0	-7.7	2.62 V	194	38.9	7.4
9	*5260.00	119.4 PK			2.62 V	194	77.9	41.5
10	*5260.00	108.6 AV			2.62 V	194	67.1	41.5
11	*5580.00	120.3 PK			2.64 V	99	78.1	42.2
12	*5580.00	109.5 AV			2.64 V	99	67.3	42.2
13	#10520.00	61.8 PK	74.0	-12.2	1.52 V	29	41.5	20.3
14	#10520.00	49.1 AV	54.0	-4.9	1.52 V	29	28.8	20.3
15	11160.00	63.6 PK	74.0	-10.4	1.74 V	206	42.1	21.5
16	11160.00	50.7 AV	54.0	-3.3	1.74 V	206	29.2	21.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)

CHANNEL	CH 11 + CH 52 + CH 157	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	110.3 PK			3.24 H	192	76.5	33.8
2	*2462.00	106.2 AV			3.24 H	192	72.4	33.8
3	2488.00	60.0 PK	74.0	-14.0	3.24 H	192	26.1	33.9
4	2488.00	49.9 AV	54.0	-4.1	3.24 H	192	16.0	33.9
5	4924.00	49.5 PK	74.0	-24.5	2.66 H	121	41.2	8.3
6	4924.00	37.1 AV	54.0	-16.9	2.66 H	121	28.8	8.3
7	5150.00	58.3 PK	74.0	-15.7	3.42 H	301	50.9	7.4
8	5150.00	46.0 AV	54.0	-8.0	3.42 H	301	38.6	7.4
9	*5260.00	109.5 PK			3.42 H	301	68.0	41.5
10	*5260.00	98.4 AV			3.42 H	301	56.9	41.5
11	#5616.80	61.5 PK	68.2	-6.7	1.36 H	142	53.0	8.5
12	*5785.00	114.2 PK			1.36 H	142	71.5	42.7
13	*5785.00	103.5 AV			1.36 H	142	60.8	42.7
14	#5955.20	61.7 PK	68.2	-6.5	1.36 H	142	52.1	9.6
15	#10520.00	61.6 PK	74.0	-12.4	2.41 H	226	41.3	20.3
16	#10520.00	48.7 AV	54.0	-5.3	2.41 H	226	28.4	20.3
17	11570.00	62.5 PK	74.0	-11.5	1.93 H	288	40.7	21.8
18	11570.00	50.1 AV	54.0	-3.9	1.93 H	288	28.3	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	CH 11 + CH 52 + CH 157	DETECTOR FUNCTION	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.7 PK			2.13 V	62	81.9	33.8
2	*2462.00	112.3 AV			2.13 V	62	78.5	33.8
3	2488.00	62.0 PK	74.0	-12.0	2.13 V	62	28.1	33.9
4	2488.00	53.1 AV	54.0	-0.9	2.13 V	62	19.2	33.9
5	4924.00	49.9 PK	74.0	-24.1	1.88 V	115	41.6	8.3
6	4924.00	36.7 AV	54.0	-17.3	1.88 V	115	28.4	8.3
7	5150.00	59.2 PK	74.0	-14.8	2.15 V	168	51.8	7.4
8	5150.00	46.5 AV	54.0	-7.5	2.15 V	168	39.1	7.4
9	*5260.00	119.4 PK			2.15 V	168	77.9	41.5
10	*5260.00	108.6 AV			2.15 V	168	67.1	41.5
11	#5604.00	61.8 PK	68.2	-6.4	2.52 V	103	53.3	8.5
12	*5785.00	124.2 PK			2.52 V	103	81.5	42.7
13	*5785.00	113.1 AV			2.52 V	103	70.4	42.7
14	#5943.20	62.1 PK	68.2	-6.1	2.52 V	103	52.7	9.4
15	#10520.00	61.8 PK	74.0	-12.2	1.82 V	69	41.5	20.3
16	#10520.00	49.1 AV	54.0	-4.9	1.82 V	69	28.8	20.3
17	11570.00	64.0 PK	74.0	-10.0	2.46 V	331	42.2	21.8
18	11570.00	51.2 AV	54.0	-2.8	2.46 V	331	29.4	21.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz data

802.11b + 802.11a + 802.11a

CHANNEL	CH 11 + CH 40 + CH 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	84.23	9.7 QP	40.0	-30.3	1.00 H	239	28.9	-19.2
2	253.05	24.9 QP	46.0	-21.1	1.00 H	137	38.8	-13.9
3	373.35	22.5 QP	46.0	-23.5	1.00 H	147	33.2	-10.7
4	472.31	22.1 QP	46.0	-23.9	1.00 H	201	31.0	-8.9
5	840.99	38.0 QP	46.0	-8.0	1.00 H	218	39.4	-1.4
6	910.84	34.4 QP	46.0	-11.6	1.00 H	165	34.5	-0.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.77	25.3 QP	40.0	-14.7	1.00 V	77	41.1	-15.8
2	212.30	13.5 QP	43.5	-30.0	1.00 V	268	29.6	-16.1
3	303.50	18.0 QP	46.0	-28.0	1.00 V	152	30.0	-12.0
4	363.65	24.1 QP	46.0	-21.9	1.00 V	166	34.9	-10.8
5	703.22	35.1 QP	46.0	-10.9	1.00 V	132	39.3	-4.2
6	808.00	31.7 QP	46.0	-14.3	1.00 V	161	33.5	-1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	CH 11 + CH 40 + CH 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	57.07	21.9 QP	40.0	-18.1	1.24 H	309	36.5	-14.6
2	126.92	25.2 QP	43.5	-18.3	1.50 H	58	40.7	-15.5
3	291.85	25.5 QP	46.0	-20.5	1.00 H	170	37.7	-12.2
4	503.36	26.1 QP	46.0	-19.9	1.00 H	99	34.4	-8.3
5	709.04	37.6 QP	46.0	-8.4	1.00 H	137	41.7	-4.1
6	885.62	40.3 QP	46.0	-5.7	1.50 H	215	41.3	-1.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.81	21.1 QP	43.5	-22.4	1.00 V	138	39.8	-18.7
2	167.67	23.7 QP	43.5	-19.8	1.50 V	37	37.5	-13.8
3	247.22	21.7 QP	46.0	-24.3	1.24 V	176	35.8	-14.1
4	377.23	25.0 QP	46.0	-21.0	1.24 V	193	35.6	-10.6
5	699.34	35.8 QP	46.0	-10.2	1.00 V	129	40.0	-4.2
6	961.29	36.6 QP	54.0	-17.4	1.50 V	181	35.8	0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

802.11b + 802.11ac (VHT20) + 802.11a

CHANNEL	CH 11 + CH 52 + CH 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	113.34	16.0 QP	43.5	-27.5	1.00 H	85	32.8	-16.8
2	163.79	23.0 QP	43.5	-20.5	1.00 H	295	36.7	-13.7
3	270.51	23.6 QP	46.0	-22.4	1.00 H	264	36.5	-12.9
4	670.23	34.9 QP	46.0	-11.1	1.00 H	158	39.5	-4.6
5	877.85	38.0 QP	46.0	-8.0	1.00 H	184	39.1	-1.1
6	965.17	33.2 QP	54.0	-20.8	1.00 H	222	32.3	0.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	53.18	26.5 QP	40.0	-13.5	1.00 V	148	40.8	-14.3
2	82.29	14.1 QP	40.0	-25.9	1.00 V	303	33.0	-18.9
3	175.43	17.5 QP	43.5	-26.0	1.00 V	307	31.9	-14.4
4	268.57	17.7 QP	46.0	-28.3	1.00 V	284	30.8	-13.1
5	648.89	30.4 QP	46.0	-15.6	1.00 V	6	35.3	-4.9
6	879.80	37.7 QP	46.0	-8.3	1.00 V	163	38.7	-1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	CH 11 + CH 52 + CH 116	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	47.36	19.8 QP	40.0	-20.2	1.50 H	171	34.3	-14.5
2	95.87	17.2 QP	43.5	-26.3	2.00 H	249	36.1	-18.9
3	126.92	25.2 QP	43.5	-18.3	1.50 H	58	40.7	-15.5
4	198.71	18.8 QP	43.5	-24.7	1.50 H	322	35.0	-16.2
5	637.25	30.7 QP	46.0	-15.3	1.50 H	217	35.8	-5.1
6	897.26	39.0 QP	46.0	-7.0	1.00 H	156	39.7	-0.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	66.77	23.7 QP	40.0	-16.3	2.00 V	102	39.5	-15.8
2	148.26	20.7 QP	43.5	-22.8	1.24 V	8	34.4	-13.7
3	247.22	21.7 QP	46.0	-24.3	1.24 V	176	35.8	-14.1
4	332.60	20.7 QP	46.0	-25.3	1.50 V	147	31.9	-11.2
5	650.83	32.0 QP	46.0	-14.0	1.00 V	348	36.9	-4.9
6	776.95	30.4 QP	46.0	-15.6	2.00 V	192	32.6	-2.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)

CHANNEL	CH 11 + CH 52 + CH 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	A		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	70.65	14.5 QP	40.0	-25.5	1.00 H	134	30.6	-16.1
2	130.80	18.9 QP	43.5	-24.6	1.00 H	88	34.2	-15.3
3	189.01	16.9 QP	43.5	-26.6	1.00 H	325	32.7	-15.8
4	460.67	21.7 QP	46.0	-24.3	1.00 H	204	30.8	-9.1
5	639.19	30.7 QP	46.0	-15.3	1.00 H	154	35.8	-5.1
6	879.80	38.1 QP	46.0	-7.9	1.00 H	168	39.1	-1.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	41.54	27.4 QP	40.0	-12.6	1.00 V	217	42.3	-14.9
2	101.69	19.7 QP	43.5	-23.8	1.00 V	6	37.8	-18.1
3	154.09	21.2 QP	43.5	-22.3	1.00 V	290	34.8	-13.6
4	297.68	18.2 QP	46.0	-27.8	1.00 V	260	30.3	-12.1
5	447.09	22.5 QP	46.0	-23.5	1.00 V	166	31.8	-9.3
6	852.63	38.0 QP	46.0	-8.0	1.00 V	177	39.4	-1.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

CHANNEL	CH 11 + CH 52 + CH 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		
TEST MODE	B		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	68.71	16.0 QP	40.0	-24.0	1.00 H	143	31.9	-15.9
2	163.79	30.0 QP	43.5	-13.5	1.00 H	140	43.7	-13.7
3	245.28	25.6 QP	46.0	-20.4	1.00 H	117	39.8	-14.2
4	557.69	25.9 QP	46.0	-20.1	1.24 H	243	33.3	-7.4
5	734.27	37.8 QP	46.0	-8.2	1.00 H	146	41.1	-3.3
6	868.15	40.7 QP	46.0	-5.3	1.50 H	210	41.8	-1.1
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	86.17	17.9 QP	40.0	-22.1	1.00 V	243	37.4	-19.5
2	123.04	21.4 QP	43.5	-22.1	1.00 V	319	37.2	-15.8
3	190.95	15.2 QP	43.5	-28.3	1.00 V	73	31.1	-15.9
4	293.79	18.6 QP	46.0	-27.4	1.00 V	170	30.8	-12.2
5	926.36	37.6 QP	46.0	-8.4	1.50 V	163	37.3	0.3
6	974.87	34.7 QP	54.0	-19.3	1.50 V	163	33.9	0.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver ROHDE & SCHWARZ	ESCI	100613	Nov. 21, 2016	Nov. 20, 2017
RF signal cable (with 10dB PAD) Woken	5D-FB	Cable-cond1-01	Dec. 22, 2016	Dec. 21, 2017
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Mar. 10, 2017	Mar. 09, 2018
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100311	Aug. 15, 2017	Aug. 14, 2018
Software ADT	BV ADT_Conc_ V7.3.7.3	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Shielded Room 1.

3. The VCCI Site Registration No. is C-2040.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

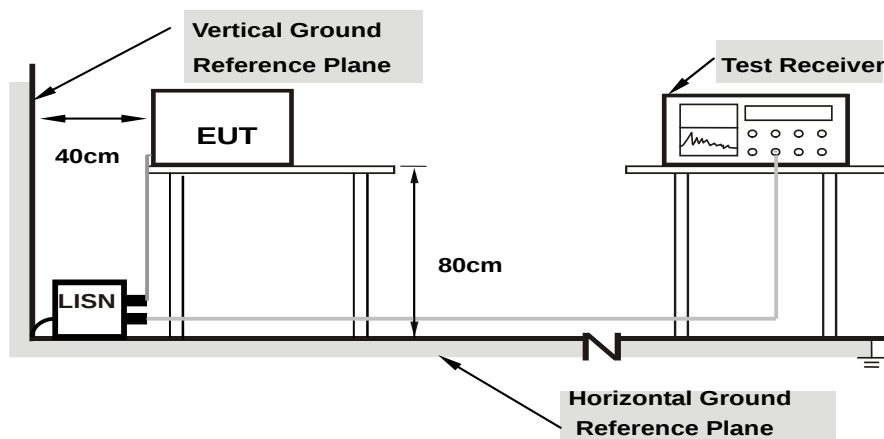

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


802.11b + 802.11a + 802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 40 + CH 116	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.45	37.60	21.85	48.05	32.30	65.79	55.79	-17.74	-23.49
2	0.16526	10.45	35.19	18.17	45.64	28.62	65.20	55.20	-19.56	-26.58
3	0.18266	10.45	33.90	20.24	44.35	30.69	64.36	54.36	-20.01	-23.67
4	0.20511	10.46	30.39	17.31	40.85	27.77	63.40	53.40	-22.55	-25.63
5	0.47412	10.51	25.53	19.93	36.04	30.44	56.44	46.44	-20.40	-16.00
6	7.19582	10.80	24.48	19.14	35.28	29.94	60.00	50.00	-24.72	-20.06

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

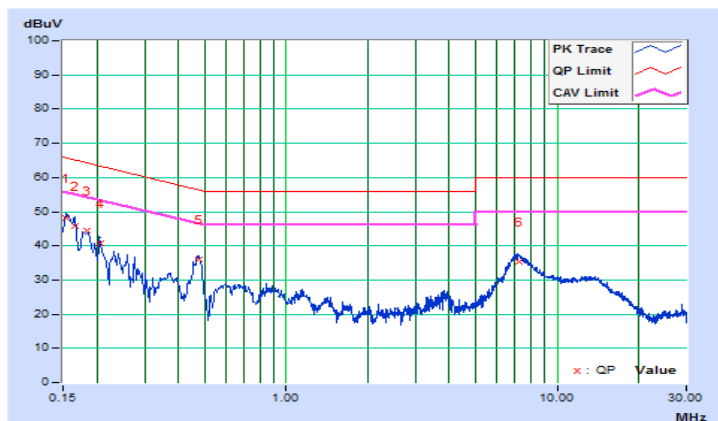


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 40 + CH 116	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16096	10.21	37.33	21.84	47.54	32.05	65.41	55.41	-17.87	-23.36
2	0.17605	10.21	33.87	17.01	44.08	27.22	64.67	54.67	-20.59	-27.45
3	0.18754	10.22	31.74	14.41	41.96	24.63	64.14	54.14	-22.18	-29.51
4	0.20243	10.22	29.28	14.59	39.50	24.81	63.51	53.51	-24.01	-28.70
5	0.48041	10.24	22.57	18.15	32.81	28.39	56.33	46.33	-23.52	-17.94
6	6.92212	10.53	24.18	19.25	34.71	29.78	60.00	50.00	-25.29	-20.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

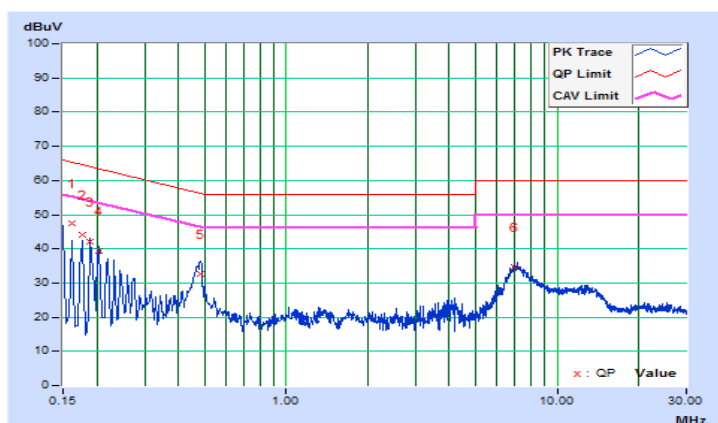


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 40 + CH 116	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	10.45	32.24	19.71	42.69	30.16	65.20	55.20	-22.51	-25.04
2	0.18075	10.45	32.10	22.01	42.55	32.46	64.45	54.45	-21.90	-21.99
3	0.20511	10.46	32.68	23.23	43.14	33.69	63.40	53.40	-20.26	-19.71
4	0.22434	10.46	31.35	22.53	41.81	32.99	62.66	52.66	-20.85	-19.67
5	0.27844	10.48	36.30	29.98	46.78	40.46	60.86	50.86	-14.08	-10.40
6	3.57516	10.62	20.84	14.61	31.46	25.23	56.00	46.00	-24.54	-20.77

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

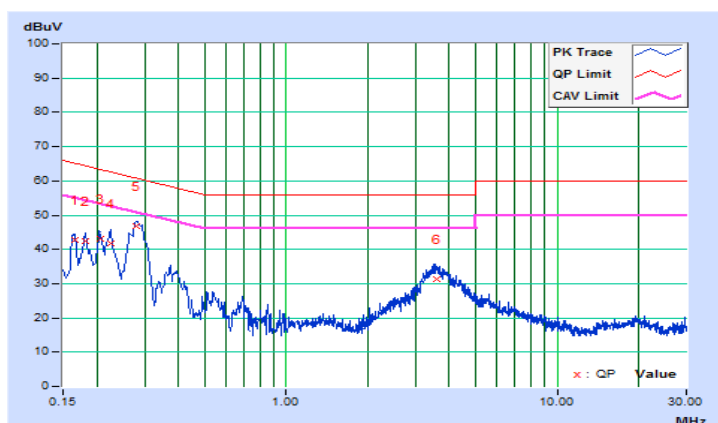


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 40 + CH 116	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.21	33.96	19.04	44.17	29.25	65.79	55.79	-21.62	-26.54
2	0.16526	10.21	32.34	19.95	42.55	30.16	65.20	55.20	-22.65	-25.04
3	0.19717	10.22	30.93	22.79	41.15	33.01	63.73	53.73	-22.58	-20.72
4	0.27120	10.23	33.93	24.38	44.16	34.61	61.08	51.08	-16.92	-16.47
5	0.39219	10.24	20.71	13.92	30.95	24.16	58.02	48.02	-27.07	-23.86
6	3.71983	10.39	22.40	16.01	32.79	26.40	56.00	46.00	-23.21	-19.60

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

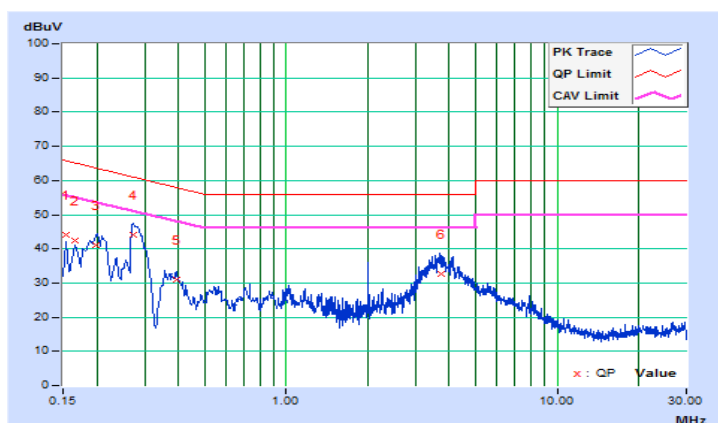


802.11b + 802.11ac (VHT20) + 802.11a

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 116	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15719	10.45	36.66	23.19	47.11	33.64	65.61	55.61	-18.50	-21.97
2	0.17605	10.45	33.61	18.25	44.06	28.70	64.67	54.67	-20.61	-25.97
3	0.18508	10.45	32.43	18.75	42.88	29.20	64.25	54.25	-21.37	-25.05
4	0.21282	10.46	27.19	12.48	37.65	22.94	63.09	53.09	-25.44	-30.15
5	0.47412	10.51	25.64	19.63	36.15	30.14	56.44	46.44	-20.29	-16.30
6	7.11625	10.79	25.34	20.12	36.13	30.91	60.00	50.00	-23.87	-19.09

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

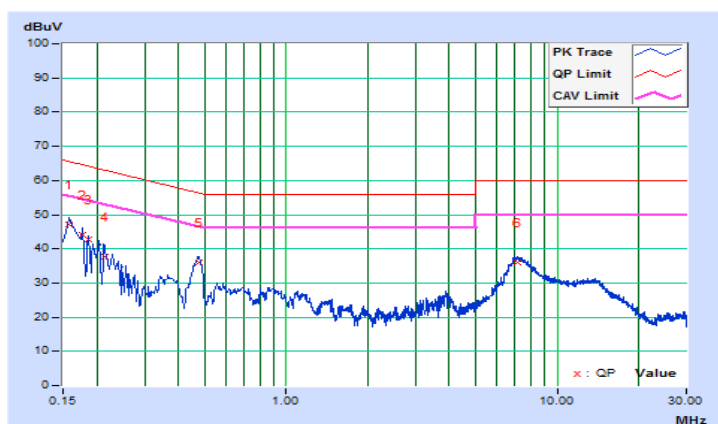


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 116	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.21	35.86	18.81	46.07	29.02	65.79	55.79	-19.72	-26.77
2	0.17374	10.21	32.07	13.68	42.28	23.89	64.78	54.78	-22.50	-30.89
3	0.18754	10.22	29.92	13.39	40.14	23.61	64.14	54.14	-24.00	-30.53
4	0.20474	10.22	27.96	13.43	38.18	23.65	63.42	53.42	-25.24	-29.77
5	0.46792	10.24	23.57	14.48	33.81	24.72	56.55	46.55	-22.74	-21.83
6	7.18409	10.55	24.11	18.95	34.66	29.50	60.00	50.00	-25.34	-20.50

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

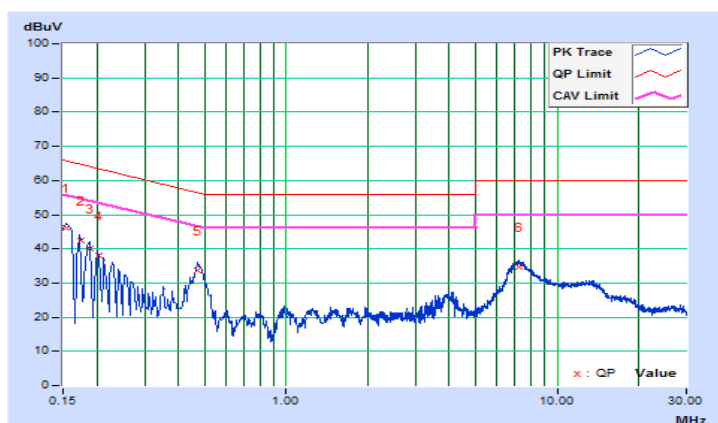


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 116	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16526	10.45	32.50	19.34	42.95	29.79	65.20	55.20	-22.25	-25.41
2	0.21282	10.46	32.84	23.19	43.30	33.65	63.09	53.09	-19.79	-19.44
3	0.28513	10.48	36.80	31.45	47.28	41.93	60.67	50.67	-13.39	-8.74
4	0.38604	10.51	21.97	15.51	32.48	26.02	58.15	48.15	-25.67	-22.13
5	0.49846	10.51	14.50	6.21	25.01	16.72	56.03	46.03	-31.02	-29.31
6	3.58298	10.62	20.60	14.16	31.22	24.78	56.00	46.00	-24.78	-21.22

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

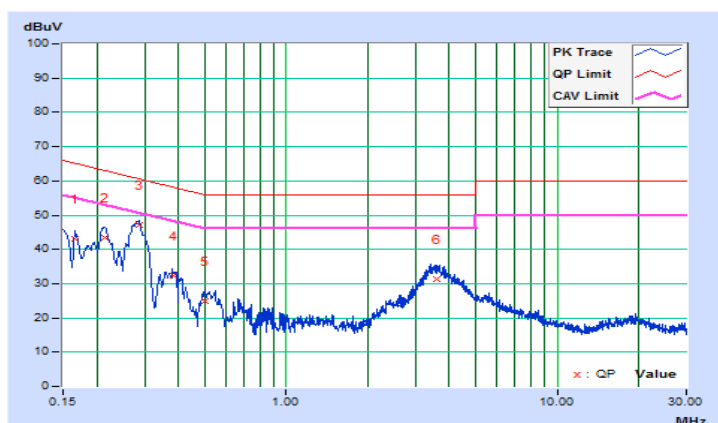


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 116	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.21	34.33	19.19	44.54	29.40	65.79	55.79	-21.25	-26.39
2	0.18508	10.22	31.56	23.37	41.78	33.59	64.25	54.25	-22.47	-20.66
3	0.19717	10.22	29.78	20.83	40.00	31.05	63.73	53.73	-23.73	-22.68
4	0.21565	10.22	29.97	21.12	40.19	31.34	62.98	52.98	-22.79	-21.64
5	0.28685	10.23	36.15	29.91	46.38	40.14	60.62	50.62	-14.24	-10.48
6	3.66509	10.39	24.47	17.79	34.86	28.18	56.00	46.00	-21.14	-17.82

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

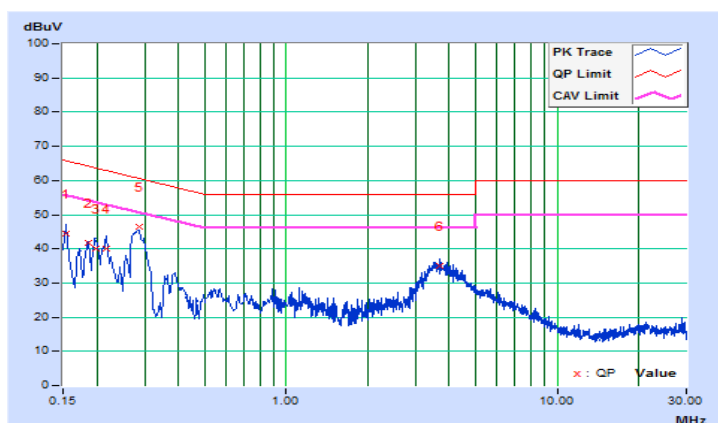


802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 157	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15719	10.45	36.07	22.74	46.52	33.19	65.61	55.61	-19.09	-22.42
2	0.16526	10.45	34.44	17.94	44.89	28.39	65.20	55.20	-20.31	-26.81
3	0.18218	10.45	33.23	19.86	43.68	30.31	64.39	54.39	-20.71	-24.08
4	0.19978	10.45	29.26	15.74	39.71	26.19	63.62	53.62	-23.91	-27.43
5	0.47453	10.51	25.98	19.85	36.49	30.36	56.43	46.43	-19.94	-16.07
6	7.37177	10.81	25.22	20.02	36.03	30.83	60.00	50.00	-23.97	-19.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

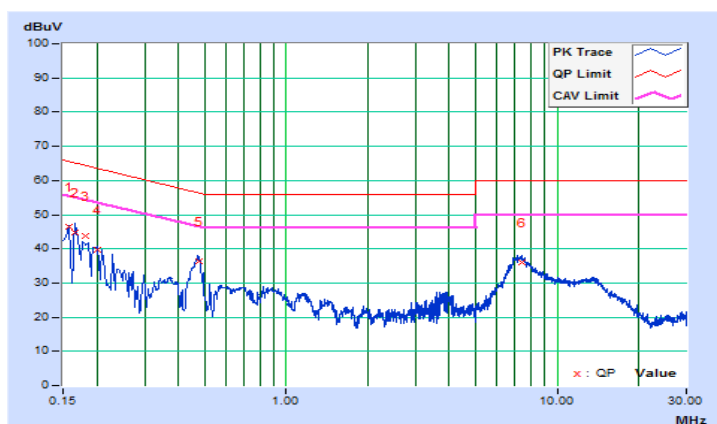


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 157	Test Mode	A

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16096	10.21	35.14	19.94	45.35	30.15	65.41	55.41	-20.06	-25.26
2	0.17374	10.21	31.97	13.50	42.18	23.71	64.78	54.78	-22.60	-31.07
3	0.18754	10.22	30.00	13.67	40.22	23.89	64.14	54.14	-23.92	-30.25
4	0.20474	10.22	28.12	13.52	38.34	23.74	63.42	53.42	-25.08	-29.68
5	0.46792	10.24	24.15	15.01	34.39	25.25	56.55	46.55	-22.16	-21.30
6	7.18409	10.55	24.20	18.96	34.75	29.51	60.00	50.00	-25.25	-20.49

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

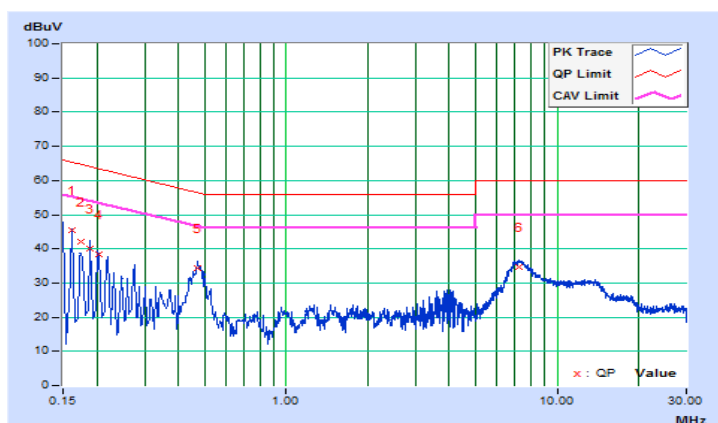


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 157	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.45	33.30	19.17	43.75	29.62	65.79	55.79	-22.04	-26.17
2	0.16967	10.45	31.25	16.76	41.70	27.21	64.98	54.98	-23.28	-27.77
3	0.19717	10.45	31.15	19.89	41.60	30.34	63.73	53.73	-22.13	-23.39
4	0.26765	10.47	34.67	25.89	45.14	36.36	61.19	51.19	-16.05	-14.83
5	0.28140	10.48	36.08	30.10	46.56	40.58	60.77	50.77	-14.21	-10.19
6	3.72765	10.63	19.92	13.77	30.55	24.40	56.00	46.00	-25.45	-21.60

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

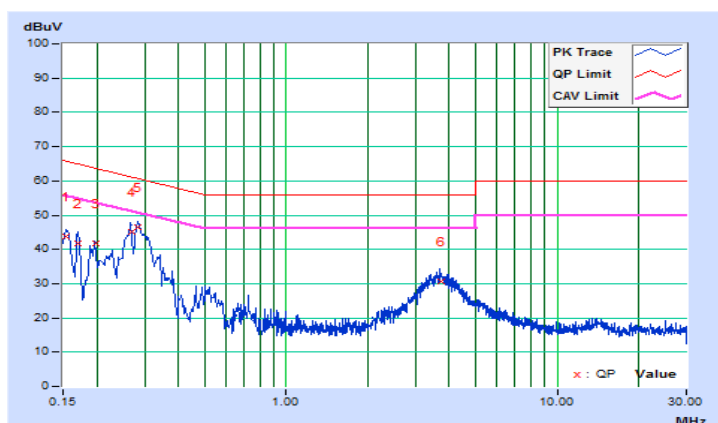


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Channel	CH 11 + CH 52 + CH 157	Test Mode	B

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.21	34.73	19.43	44.94	29.64	65.79	55.79	-20.85	-26.15
2	0.16526	10.21	32.81	19.45	43.02	29.66	65.20	55.20	-22.18	-25.54
3	0.21059	10.22	30.04	20.88	40.26	31.10	63.18	53.18	-22.92	-22.08
4	0.22434	10.23	28.93	19.47	39.16	29.70	62.66	52.66	-23.50	-22.96
5	0.28140	10.23	33.73	28.58	43.96	38.81	60.77	50.77	-16.81	-11.96
6	3.61817	10.39	21.66	15.49	32.05	25.88	56.00	46.00	-23.95	-20.12

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

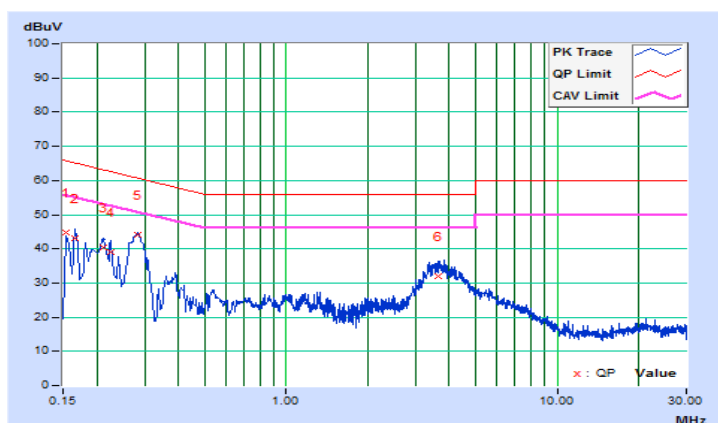


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set the RBW = 100 kHz.
- Set the VBW $\geq$ 300 kHz.
- Detector = average.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

- Set RBW = 100 kHz.
- Set VBW $\geq$ 300 kHz.
- Detector = average.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard

No deviation.


4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

802.11b CH 11 + 802.11a CH 116

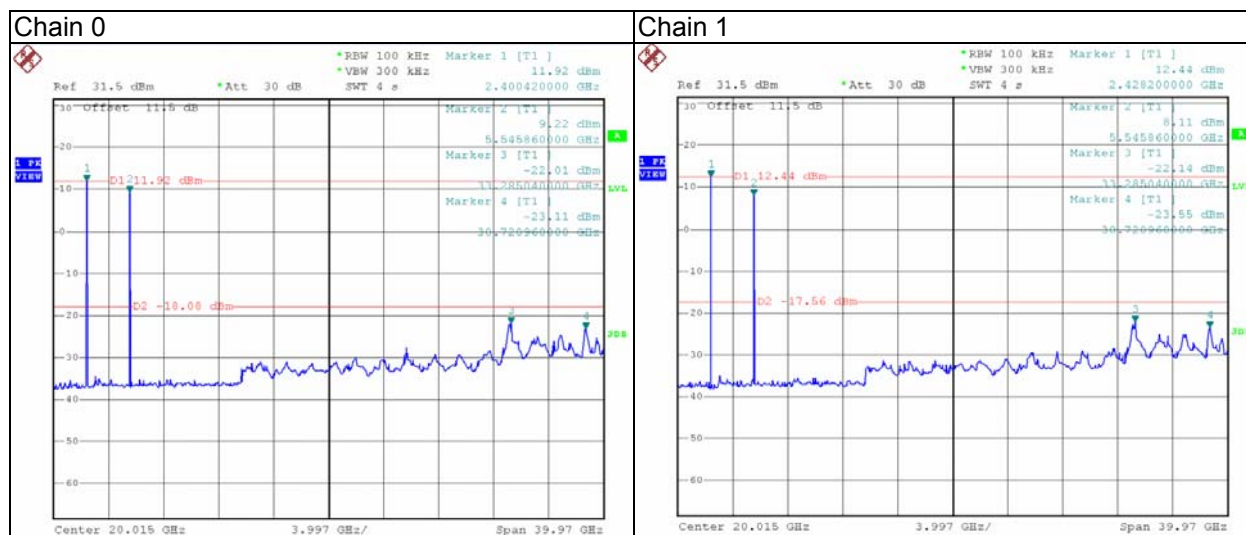


5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)

802.11b + 802.11ac (VHT20) + 802.11ac (VHT20)

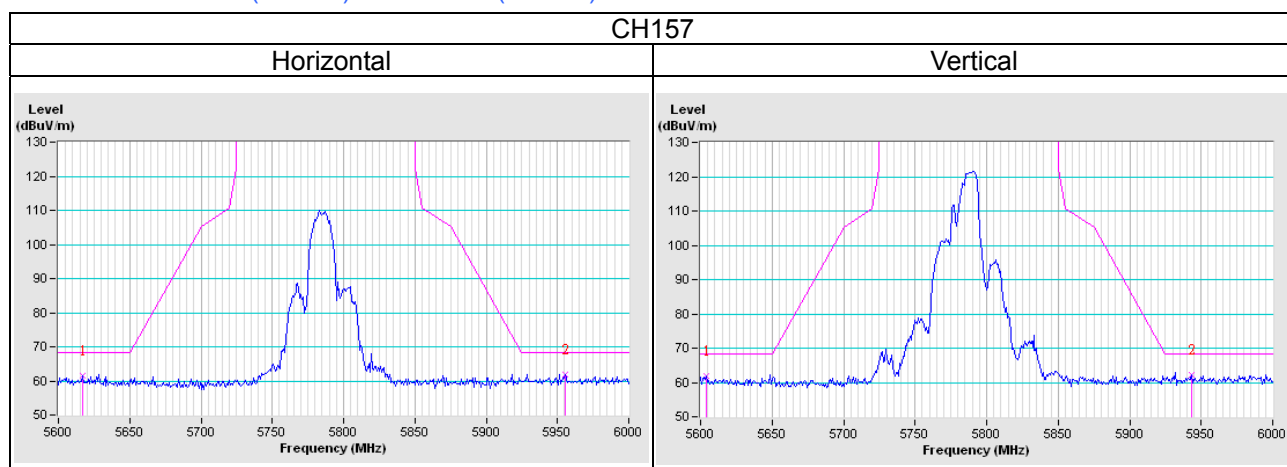

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---