

**Test Plot1#: GSM 850\_Head Left Cheek\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0264 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.867 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.0310 W/kg

**SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.021 W/kg**

Maximum value of SAR (measured) = 0.0299 W/kg

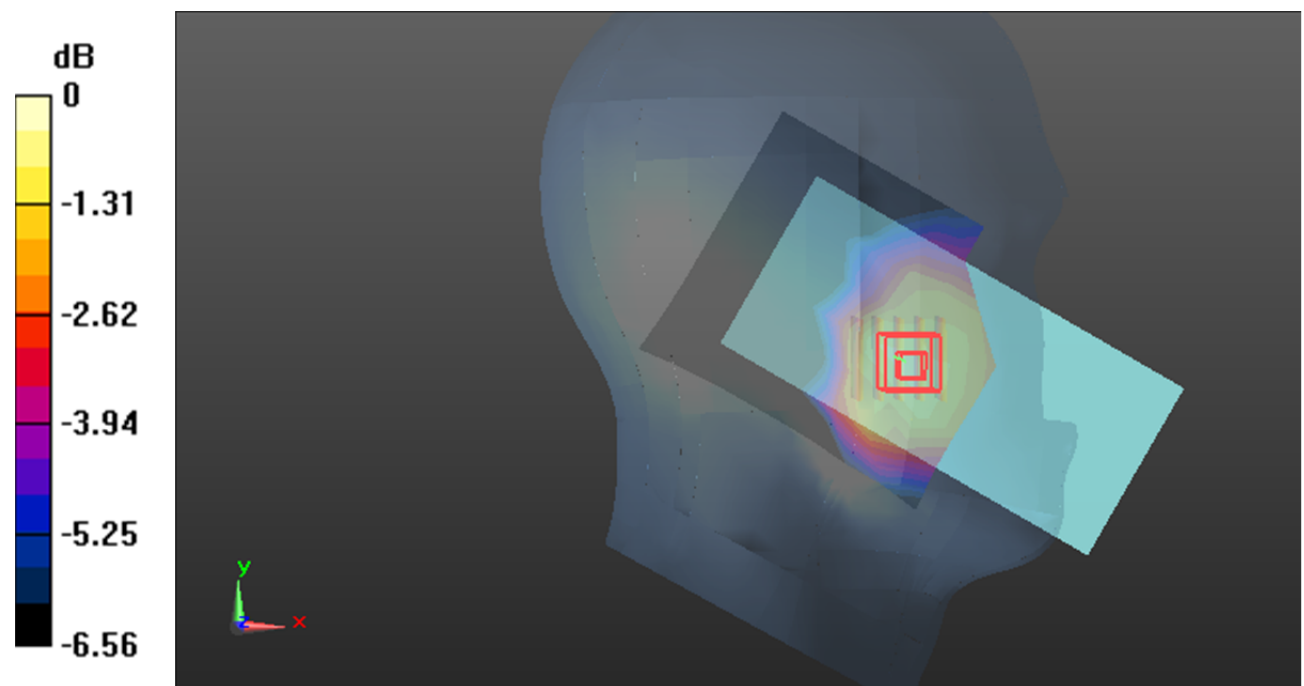

0 dB = 0.0299 W/kg = -15.24 dB dBW/kg

**Test Plot2#: GSM 850\_Body Back\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.218 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.811 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.274 W/kg

**SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.228 W/kg

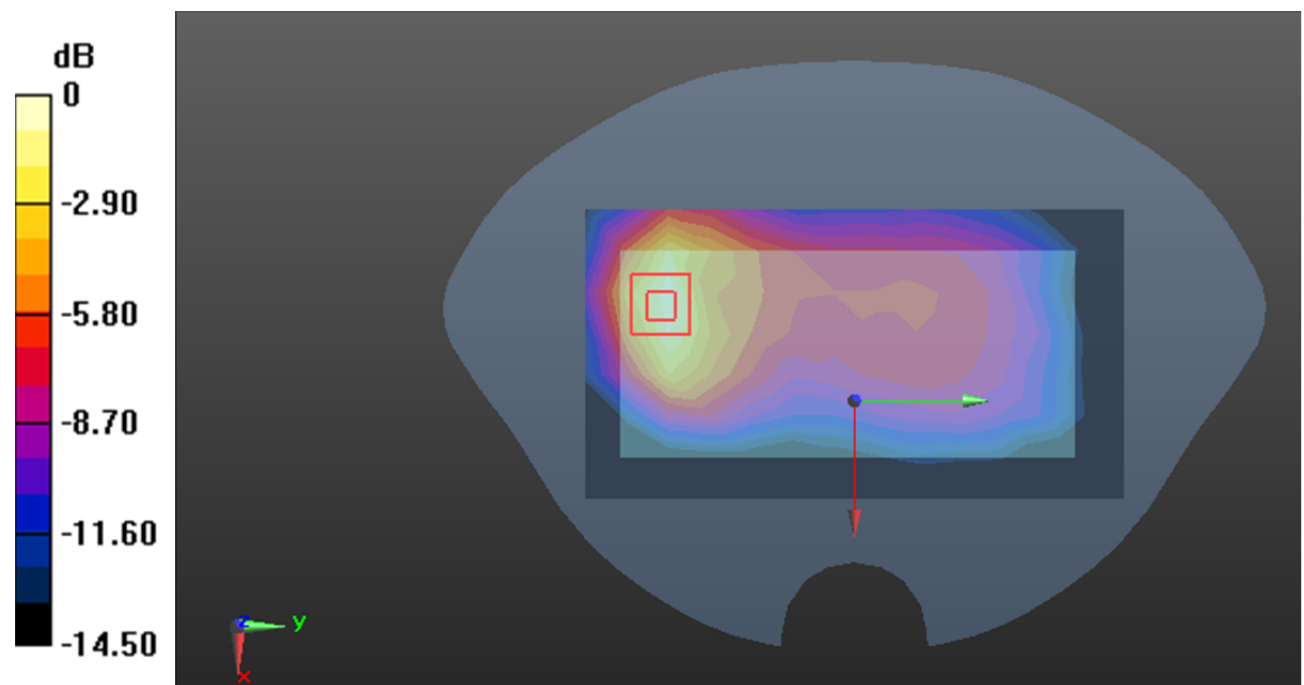

0 dB = 0.228 W/kg = -6.42 dB dBW/kg

**Test Plot3#: GSM 850\_Head Right Cheek\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.905 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.70 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.42 W/kg

**SAR(1 g) = 0.688 W/kg; SAR(10 g) = 0.394 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

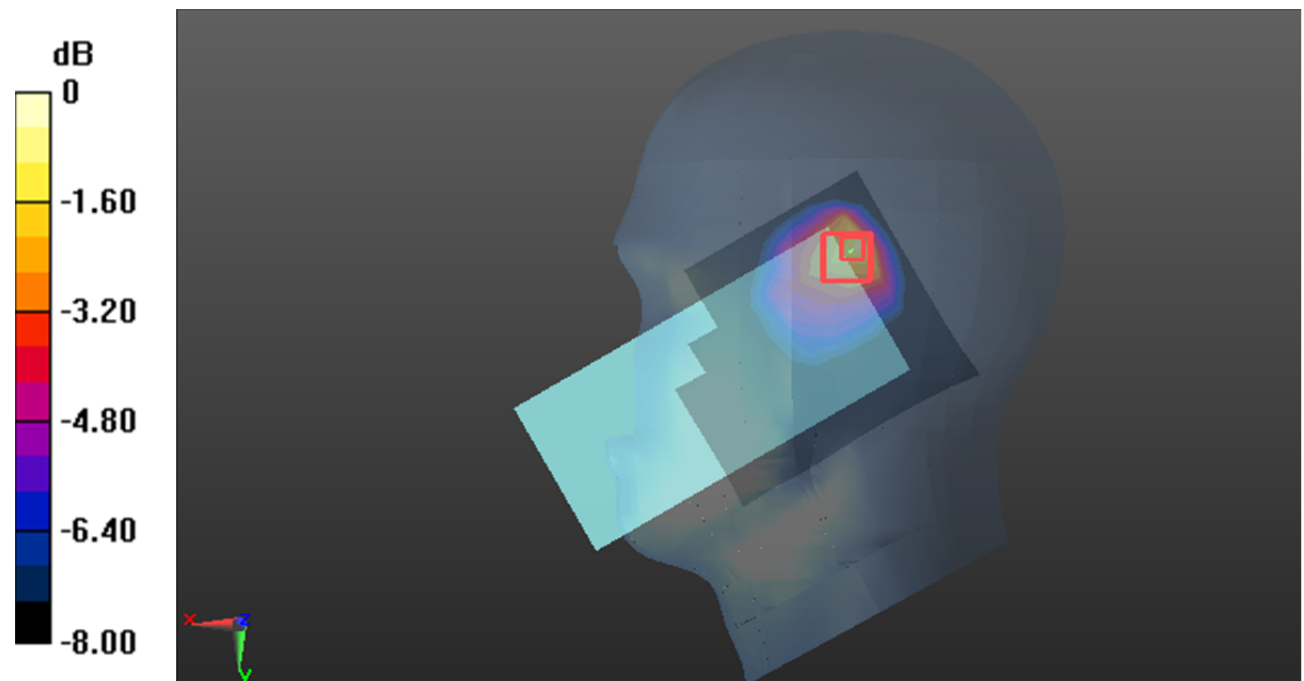

0 dB = 1.05 W/kg = 0.21 dB dBW/kg

**Test Plot4#: GSM 850\_Body Back\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.360 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.04 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.425 W/kg

**SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.183 W/kg**

Maximum value of SAR (measured) = 0.346 W/kg

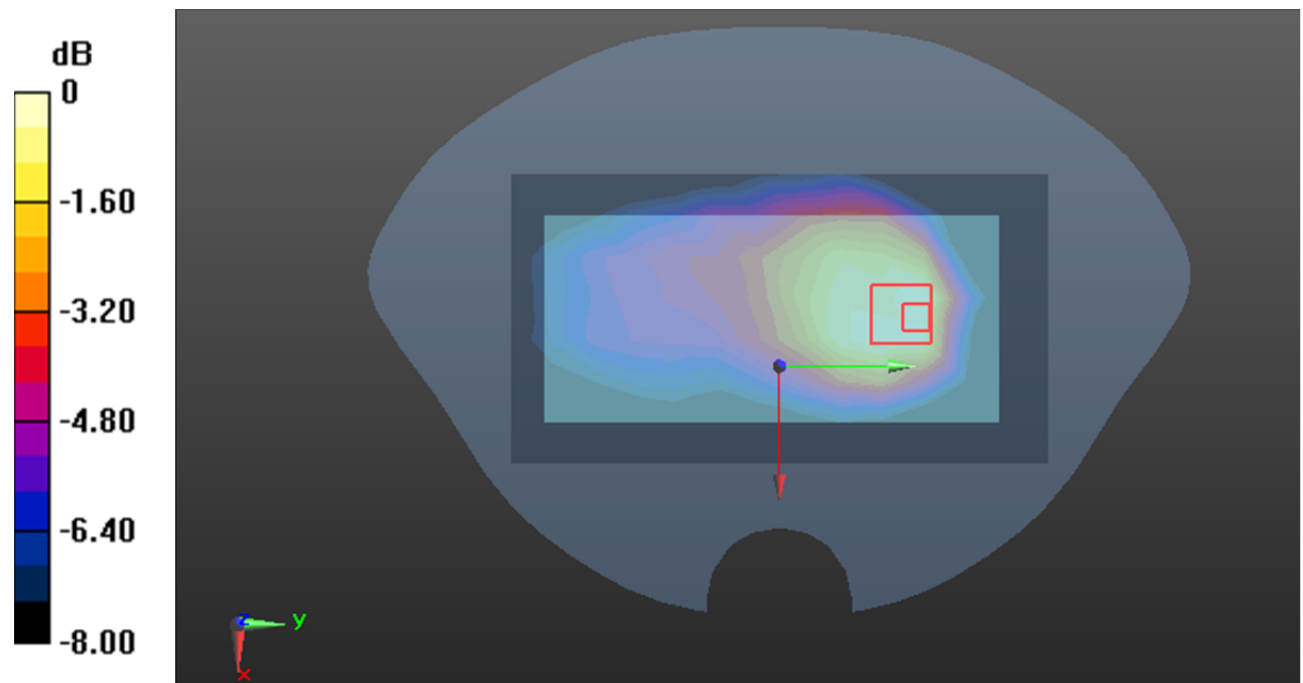

0 dB = 0.346 W/kg = -4.61 dB dBW/kg

**Test Plot5#: PCS 1900\_Body Bottom\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.59 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.438 W/kg

**SAR(1 g) = 0.263 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.385 W/kg

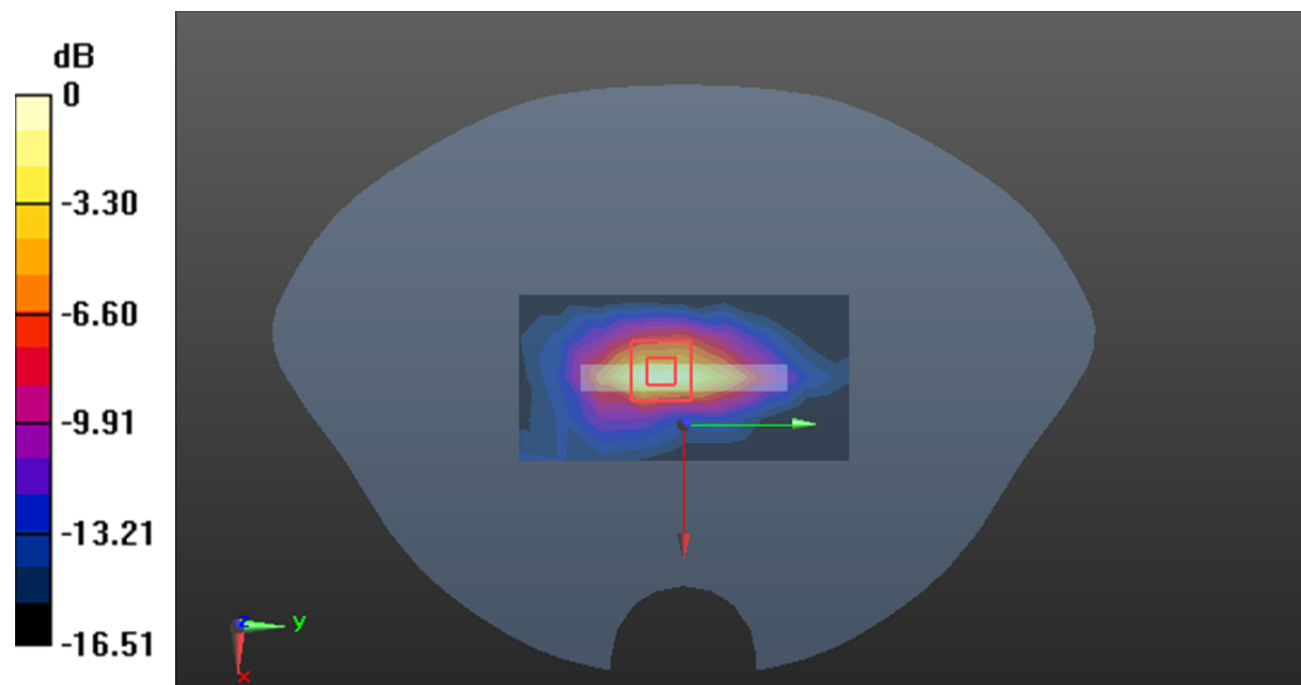

0 dB = 0.385 W/kg = -4.15 dB dBW/kg

**Test Plot6#: PCS 1900\_Head Right Tilt\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.770 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.759 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.586 W/kg; SAR(10 g) = 0.298 W/kg**

Maximum value of SAR (measured) = 0.845 W/kg

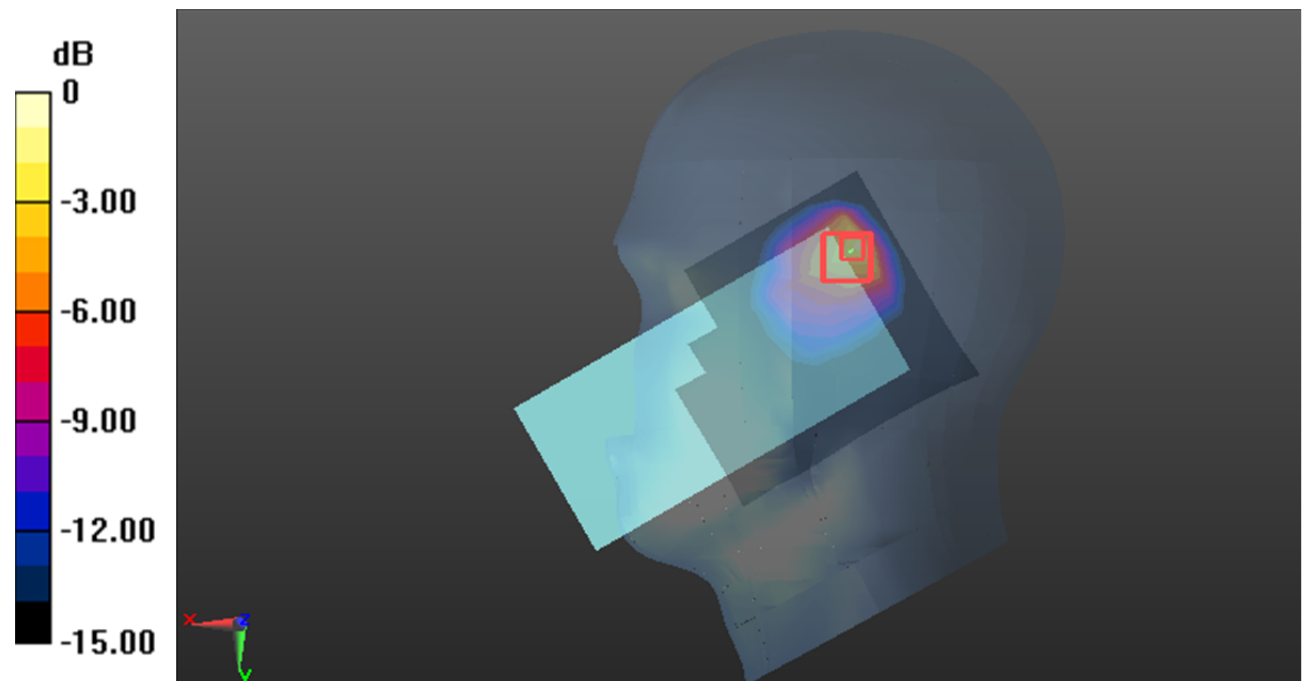

0 dB = 0.845 W/kg = -0.73 dB dBW/kg

**Test Plot7#: PCS 1900\_Body Top\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.277 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.53 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.388 W/kg

**SAR(1 g) = 0.240 W/kg; SAR(10 g) = 0.133 W/kg**

Maximum value of SAR (measured) = 0.337 W/kg

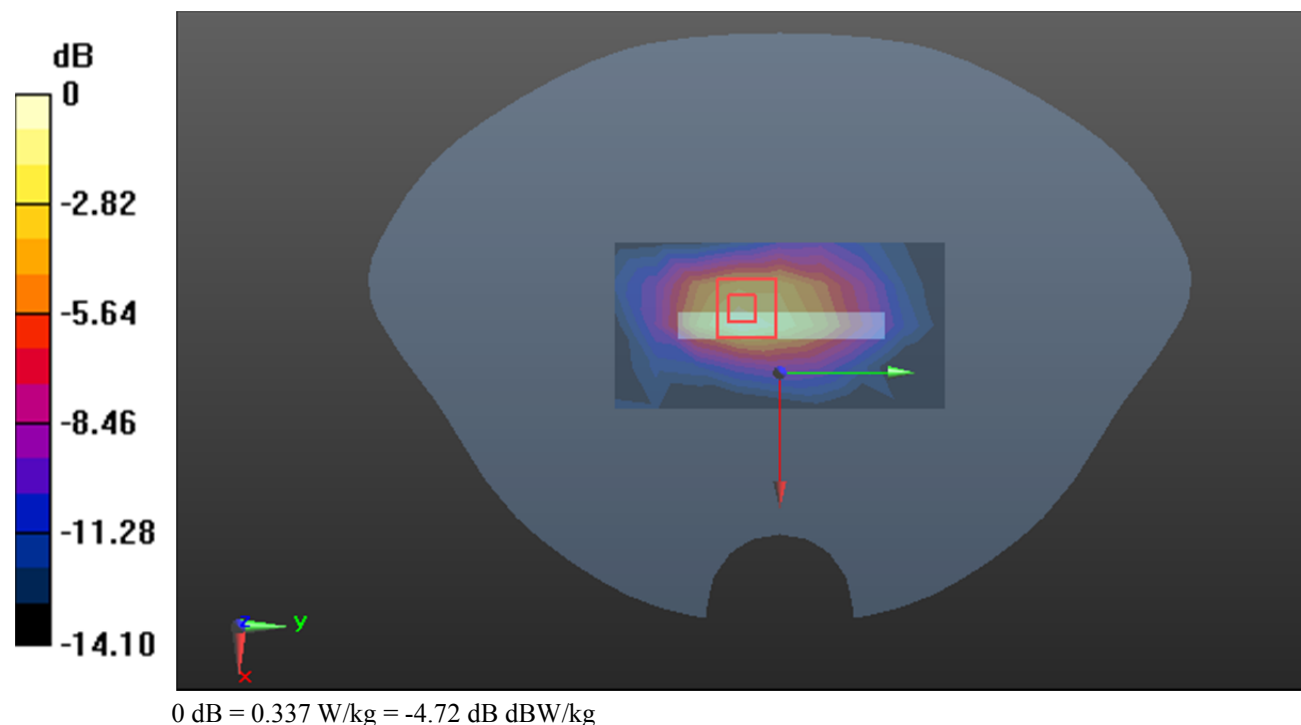

**Test Plot8#: WCDMA Band 2\_Head Right Cheek\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0219 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.190 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0220 W/kg

**SAR(1 g) = 0.015 W/kg; SAR(10 g) = 0.012 W/kg**

Maximum value of SAR (measured) = 0.0194 W/kg

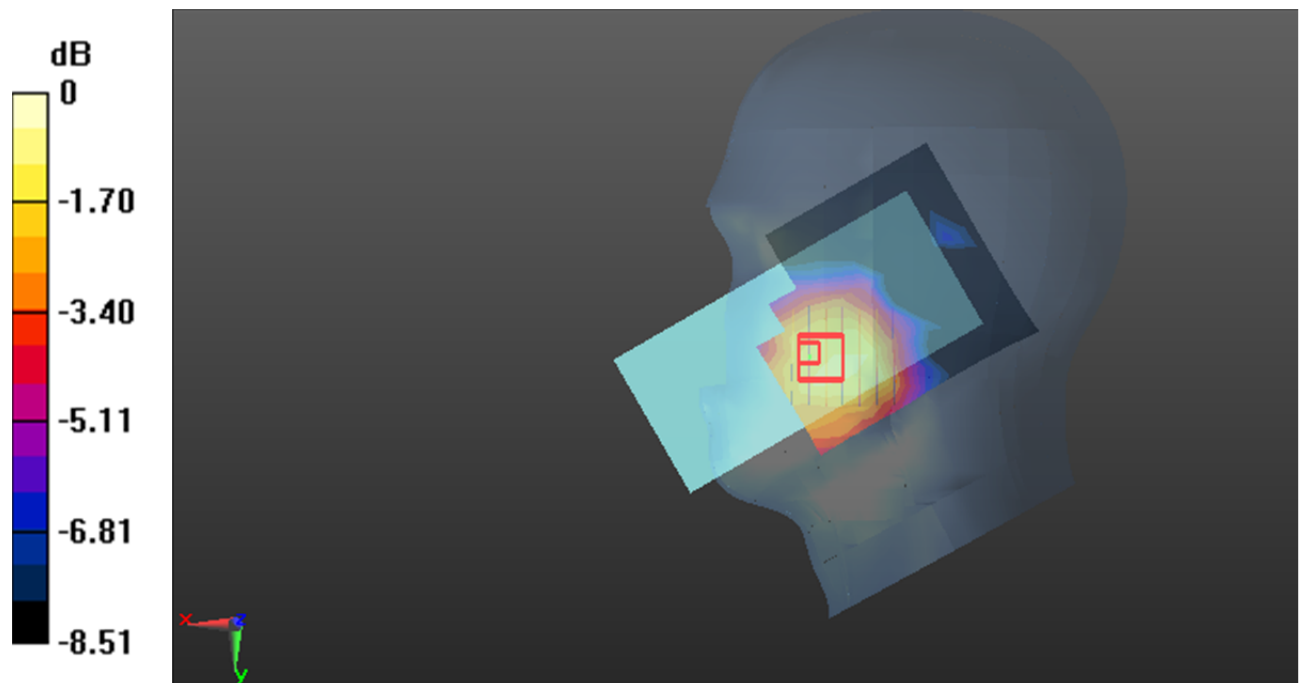

0 dB = 0.0194 W/kg = -17.12 dB dBW/kg

**Test Plot9#: WCDMA Band 2\_Body Bottom\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.729 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.99 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.886 W/kg

**SAR(1 g) = 0.539 W/kg; SAR(10 g) = 0.303 W/kg**

Maximum value of SAR (measured) = 0.776 W/kg

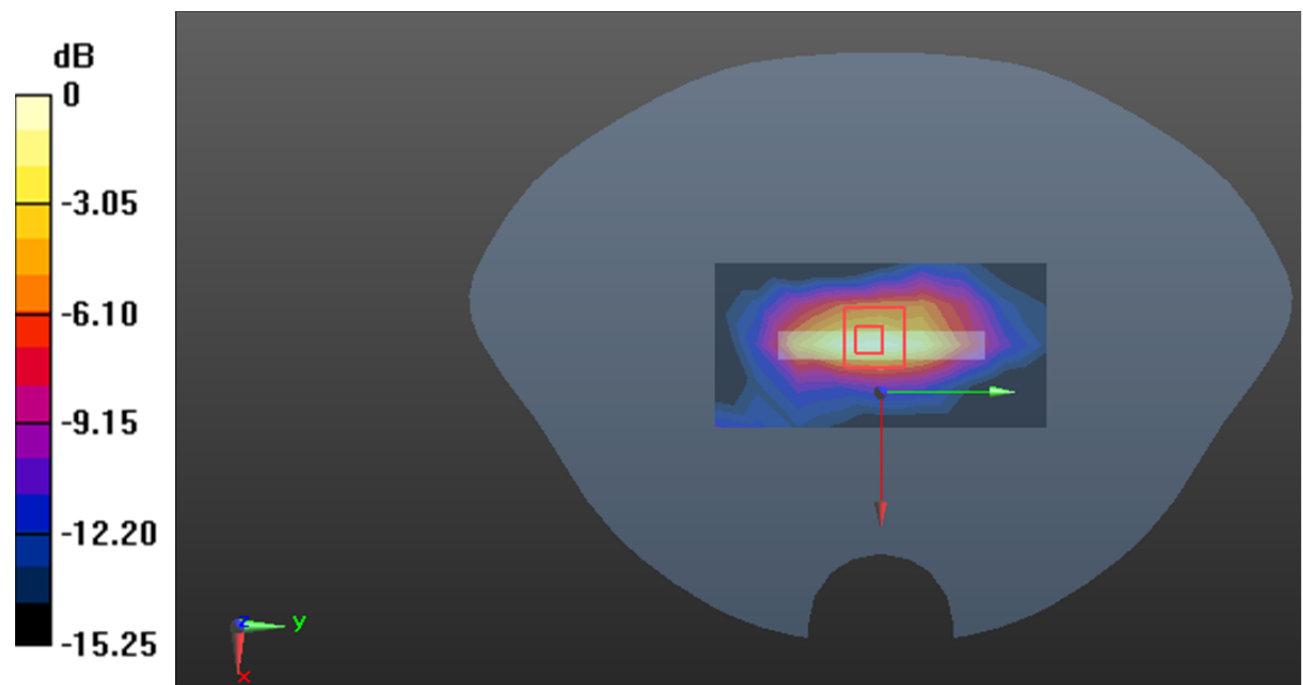

**Test Plot10#: WCDMA Band 2\_Head Right Cheek\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0864 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.799 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.028 W/kg**

Maximum value of SAR (measured) = 0.0734 W/kg

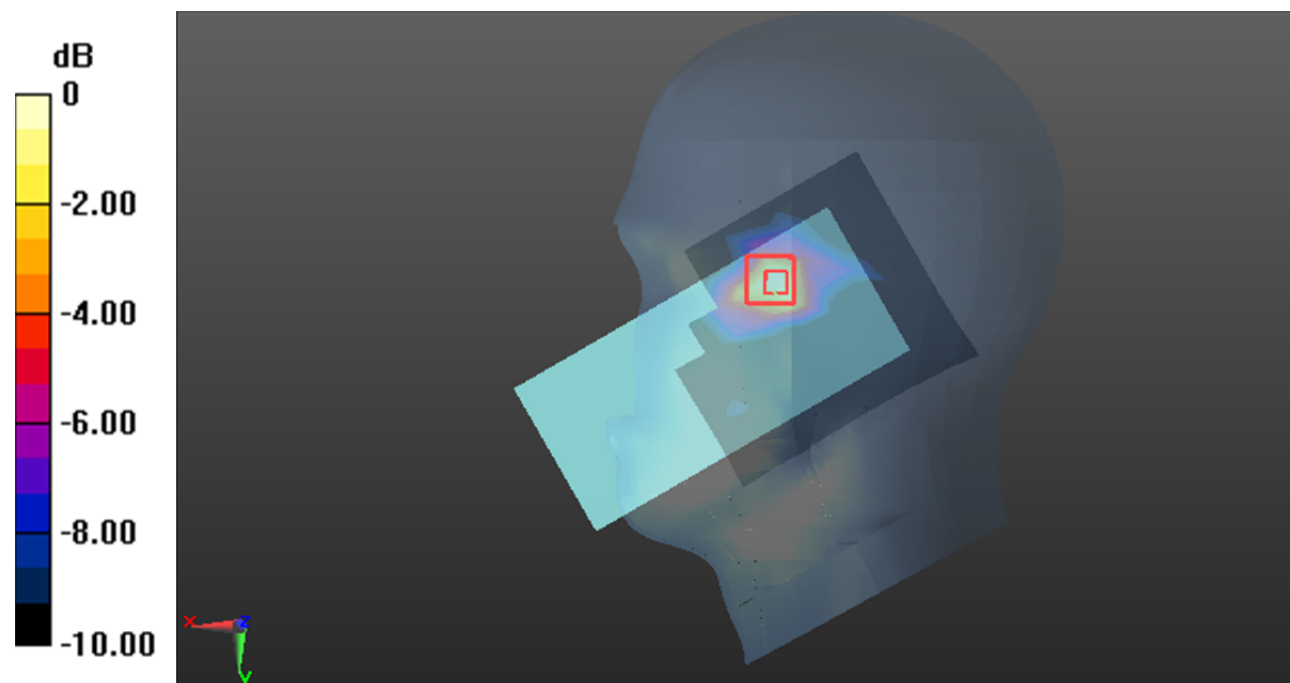

0 dB = 0.0734 W/kg = -11.34 dB dBW/kg

**Test Plot11#: WCDMA Band 2\_Body Back\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.403$  S/m;  $\epsilon_r = 39.727$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):**Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0641 W/kg


**Zoom Scan (5x5x7)/Cube 0:**Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.442 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.108 W/kg

**SAR(1 g) = 0.051 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0878 W/kg

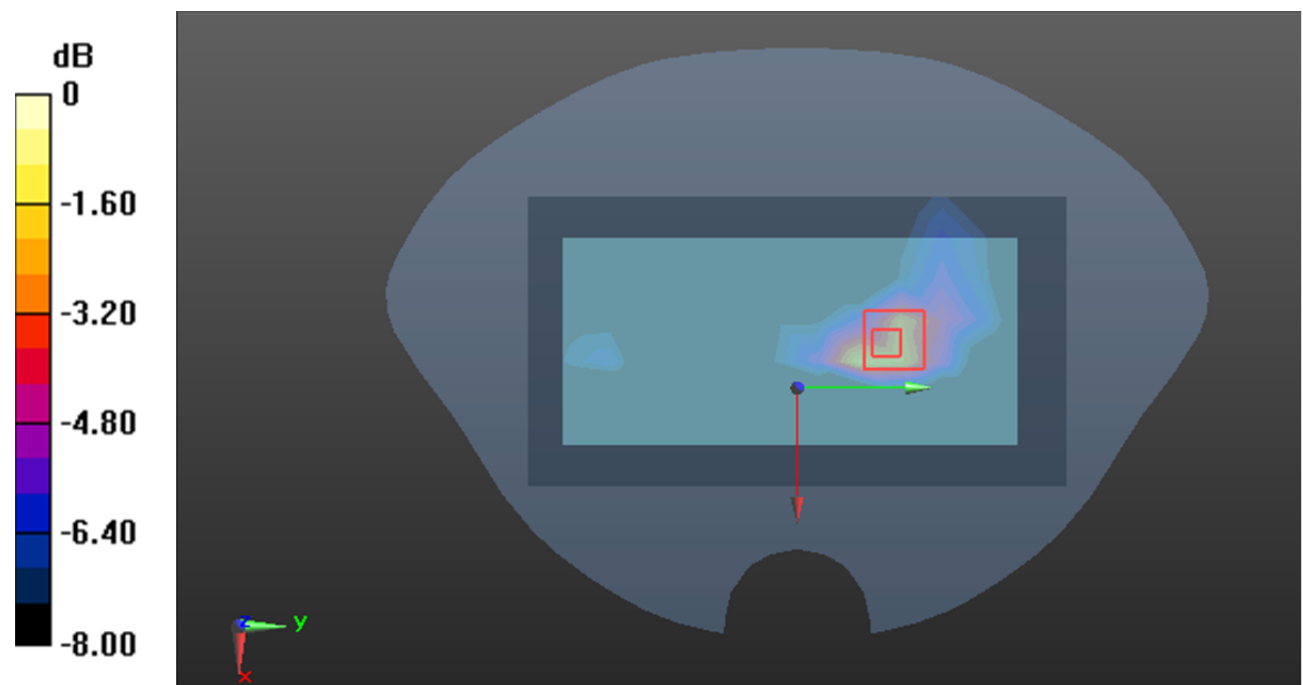

**Test Plot12#: WCDMA Band 4\_Body Back\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f=1732.6$  MHz;  $\sigma = 1.349$  S/m;  $\epsilon_r = 40.653$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0589 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.715 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.0770 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.0589 W/kg

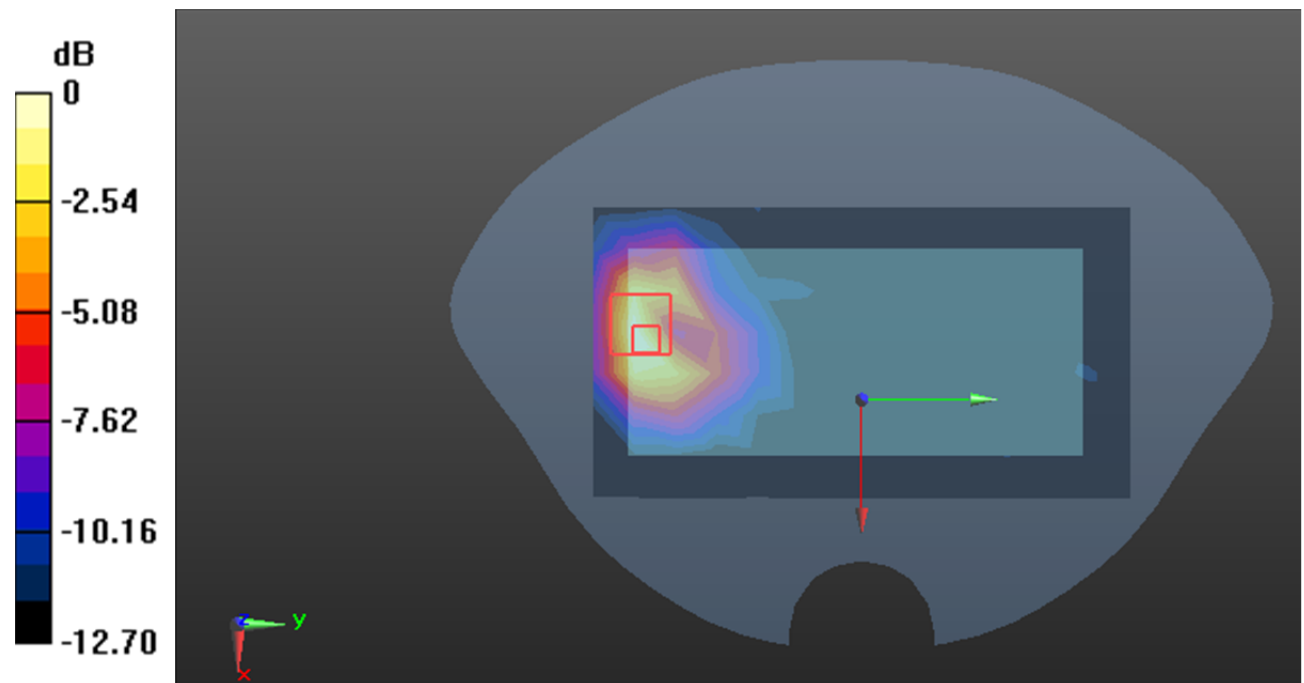

0 dB = 0.0589 W/kg = -12.30 dB dBW/kg

**Test Plot13#: WCDMA Band 4\_Head Right Tilt\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f=1732.6$  MHz;  $\sigma = 1.349$  S/m;  $\epsilon_r = 40.653$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.452 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.62 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.728 W/kg

**SAR(1 g) = 0.409 W/kg; SAR(10 g) = 0.211 W/kg**

Maximum value of SAR (measured) = 0.597 W/kg

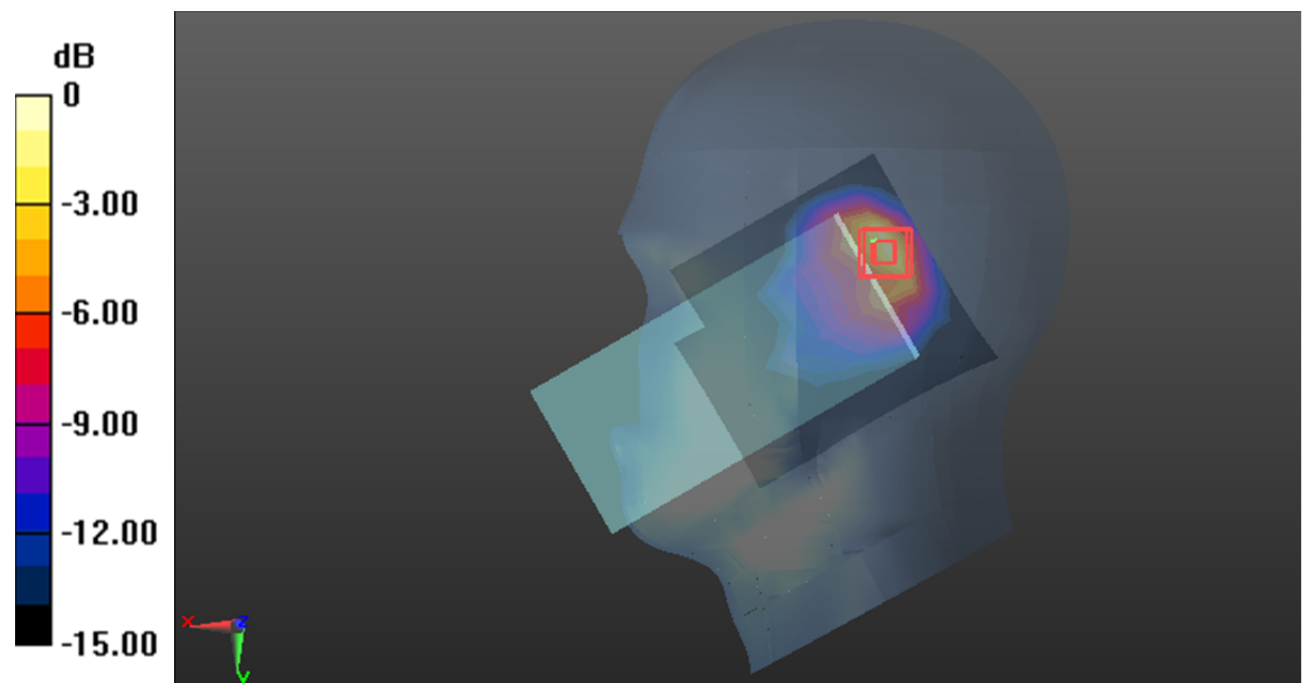

0 dB = 0.597 W/kg = -2.24 dB dBW/kg

**Test Plot14#: WCDMA Band 4\_Body Top\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f=1732.6$  MHz;  $\sigma = 1.349$  S/m;  $\epsilon_r = 40.653$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1732.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.195 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.788 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.231 W/kg

**SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.081 W/kg**

Maximum value of SAR (measured) = 0.201 W/kg

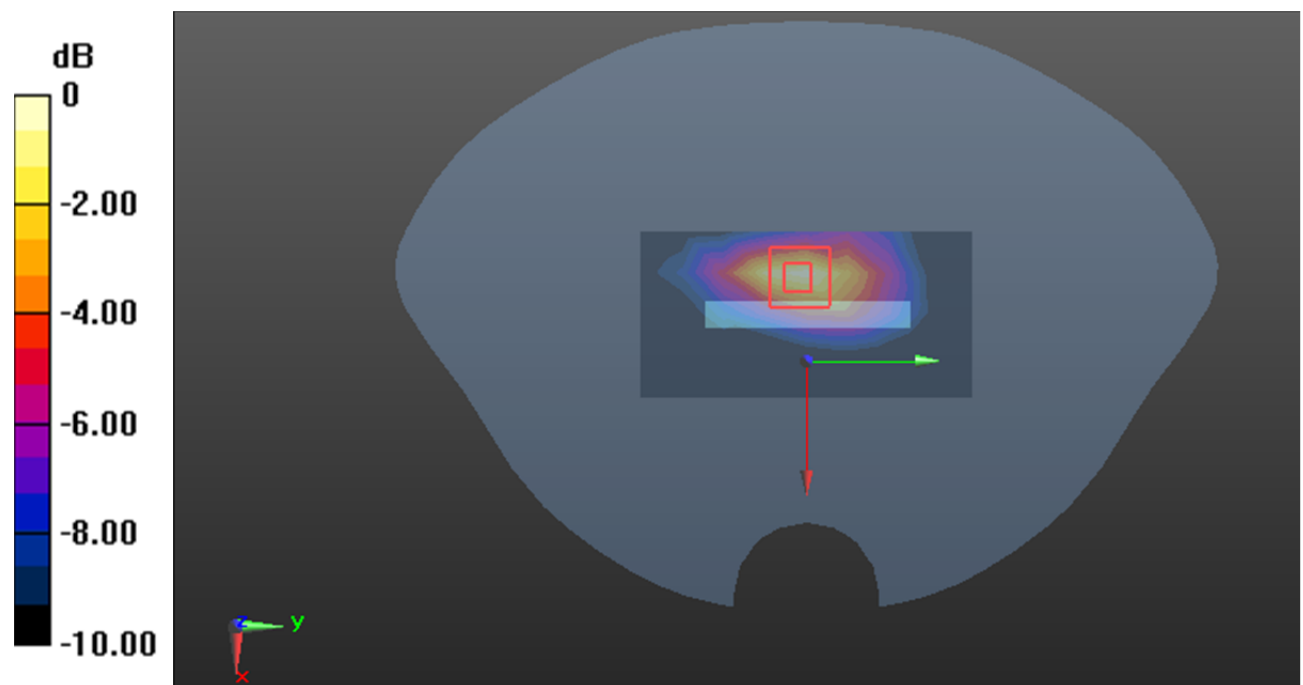

0 dB = 0.201 W/kg = -6.97 dB dBW/kg

**Test Plot15#: WCDMA Band 5\_Head Right Cheek\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0399 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.334 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.0460 W/kg

**SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.030 W/kg**

Maximum value of SAR (measured) = 0.0431 W/kg

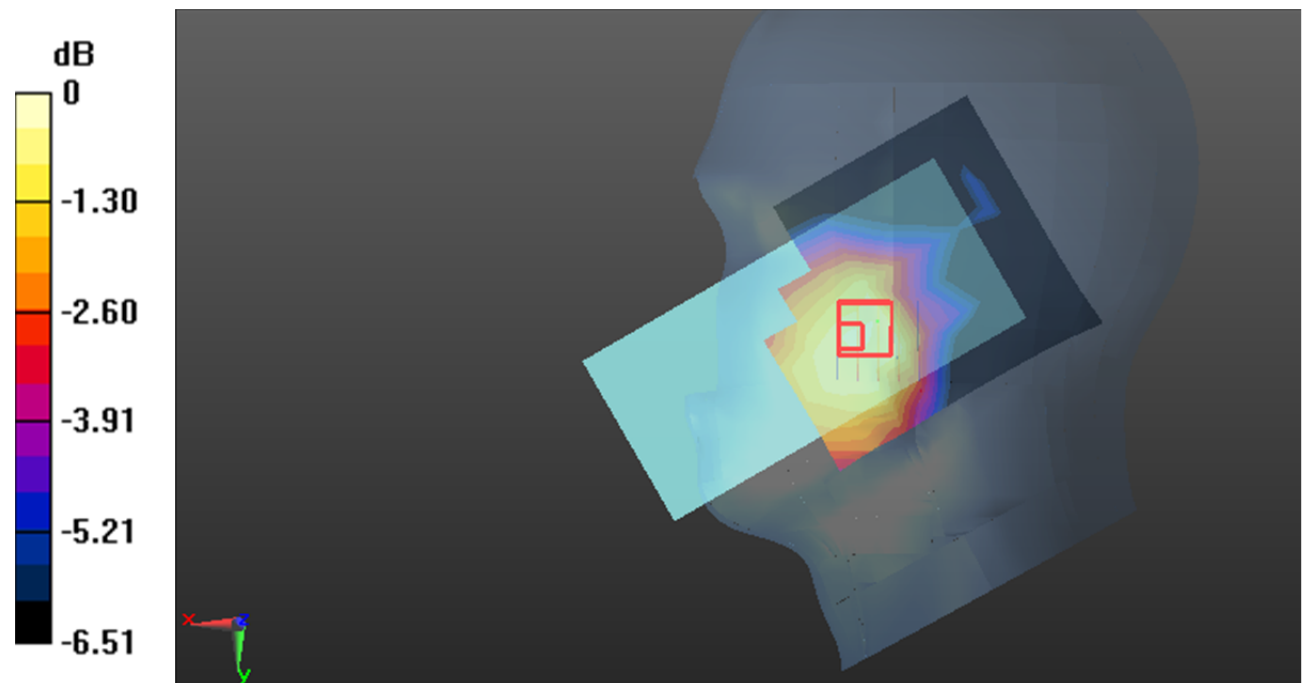

0 dB = 0.0431 W/kg = -13.66 dB dBW/kg

**Test Plot16#: WCDMA Band 5\_Body Back\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0866 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.075 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.118 W/kg

**SAR(1 g) = 0.070 W/kg; SAR(10 g) = 0.040 W/kg**

Maximum value of SAR (measured) = 0.0993 W/kg

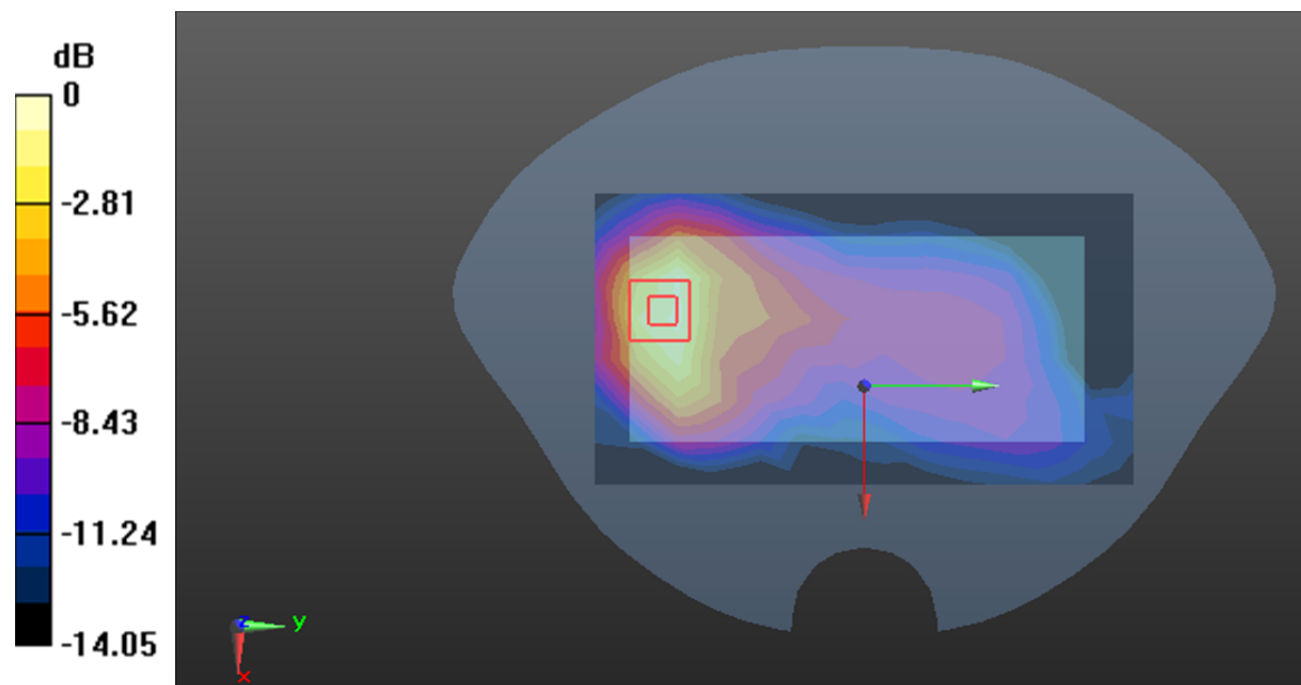

0 dB = 0.0993 W/kg = -10.03 dB dBW/kg

**Test Plot17#: WCDMA Band 5\_Head Right Tilt\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.76 V/m; Power Drift = 0.1 dB

Peak SAR (extrapolated) = 1.65 W/kg

**SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.406 W/kg**

Maximum value of SAR (measured) = 1.25 W/kg

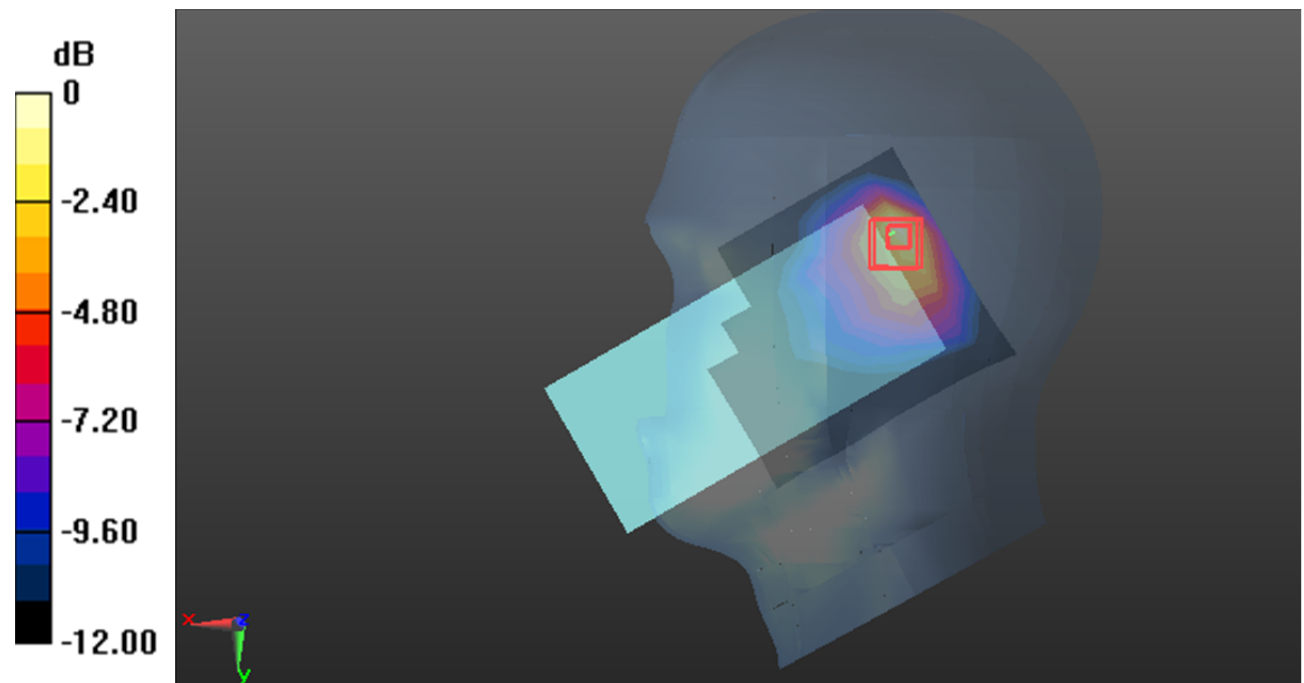

0 dB = 1.25 W/kg = 0.97 dB dBW/kg

**Test Plot18#: WCDMA Band 5\_Body Front\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.6$  MHz;  $\sigma=0.904$  S/m;  $\epsilon_r=41.902$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.216 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.314 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.238 W/kg

**SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.113 W/kg**

Maximum value of SAR (measured) = 0.218 W/kg

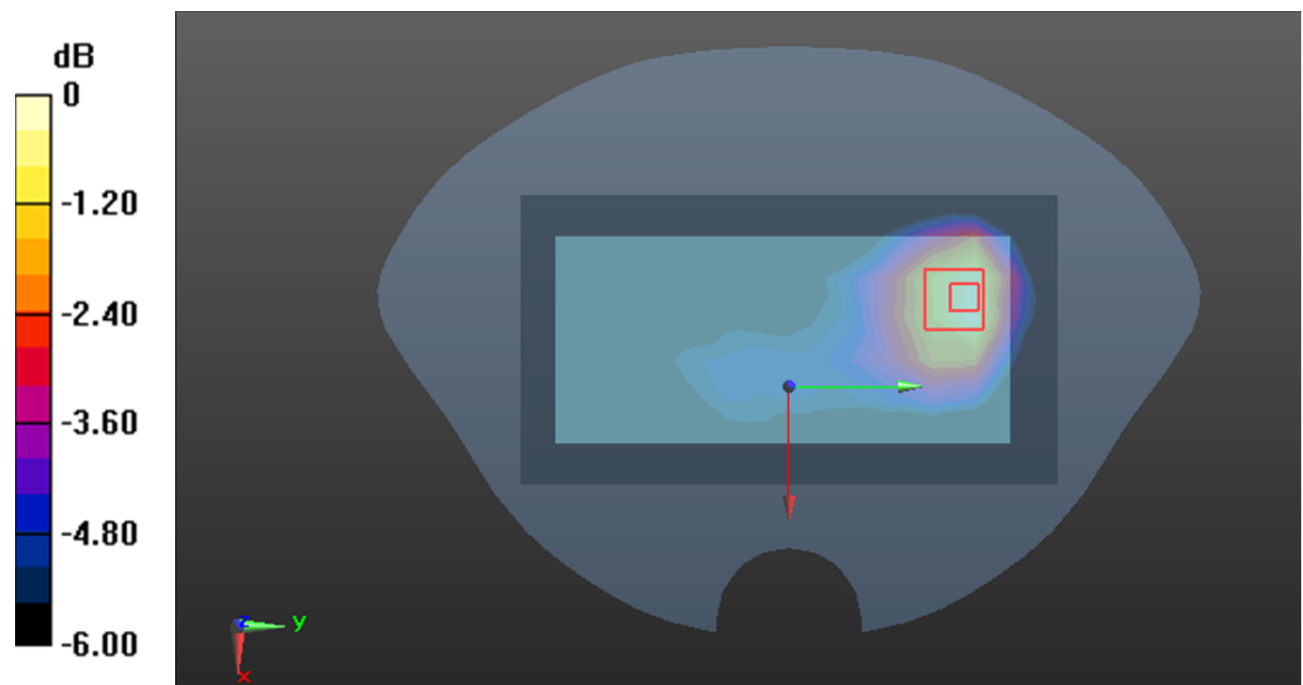

0 dB = 0.218 W/kg = -6.62 dB dBW/kg

**Test Plot19#: LTE Band 2\_Head Left Cheek\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 39.658$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0110 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.4570 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.0400 W/kg

**SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.010 W/kg**

Maximum value of SAR (measured) = 0.0163 W/kg

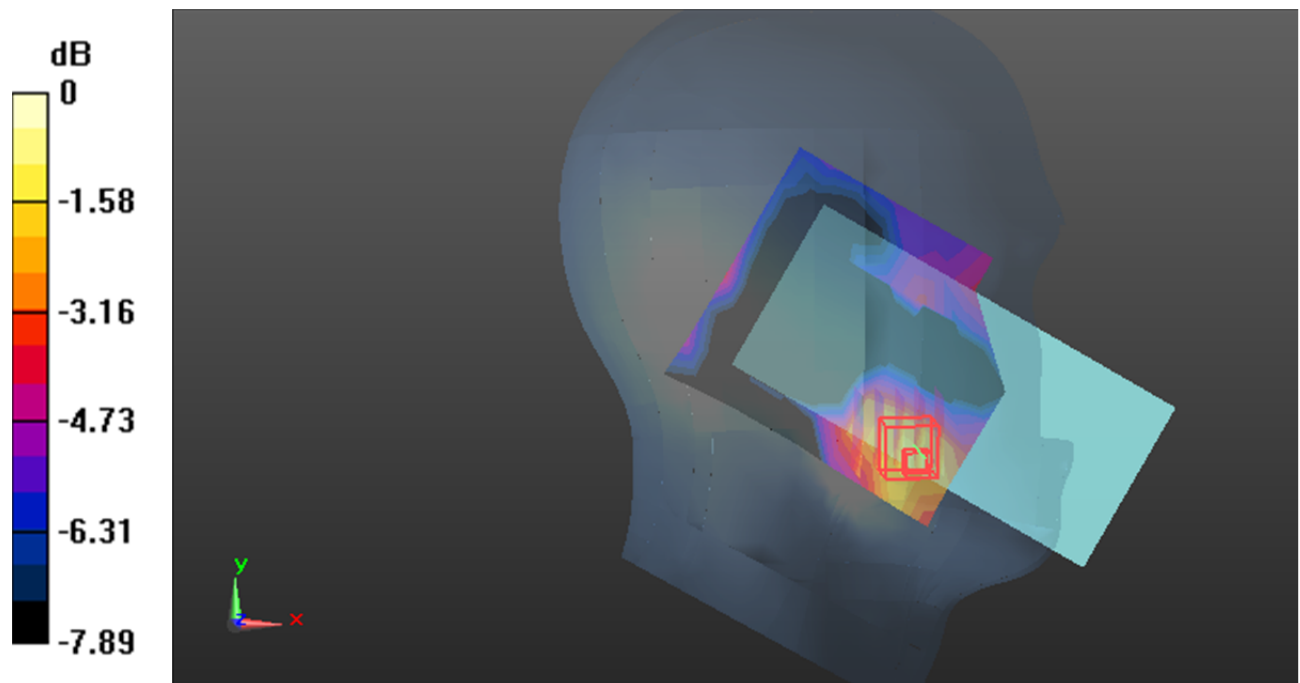

0 dB = 0.0163 W/kg = -17.88 dB dBW/kg

**Test Plot20#: LTE Band 2\_Body Bottom\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 39.658$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.794 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.22 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.09 W/kg

**SAR(1 g) = 0.704 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 0.976 W/kg

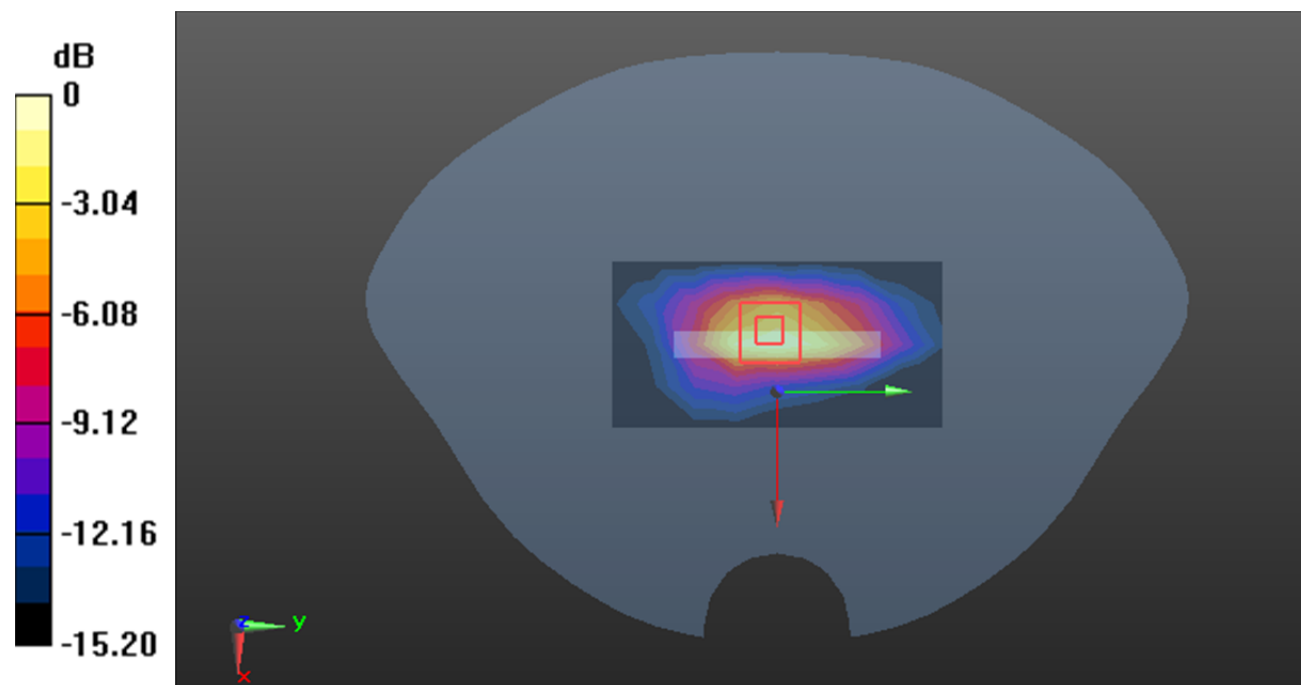

**Test Plot21#: LTE Band 2\_Head Right Cheek\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 39.658$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0783 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.473 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.178 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.024 W/kg**

Maximum value of SAR (measured) = 0.130 W/kg

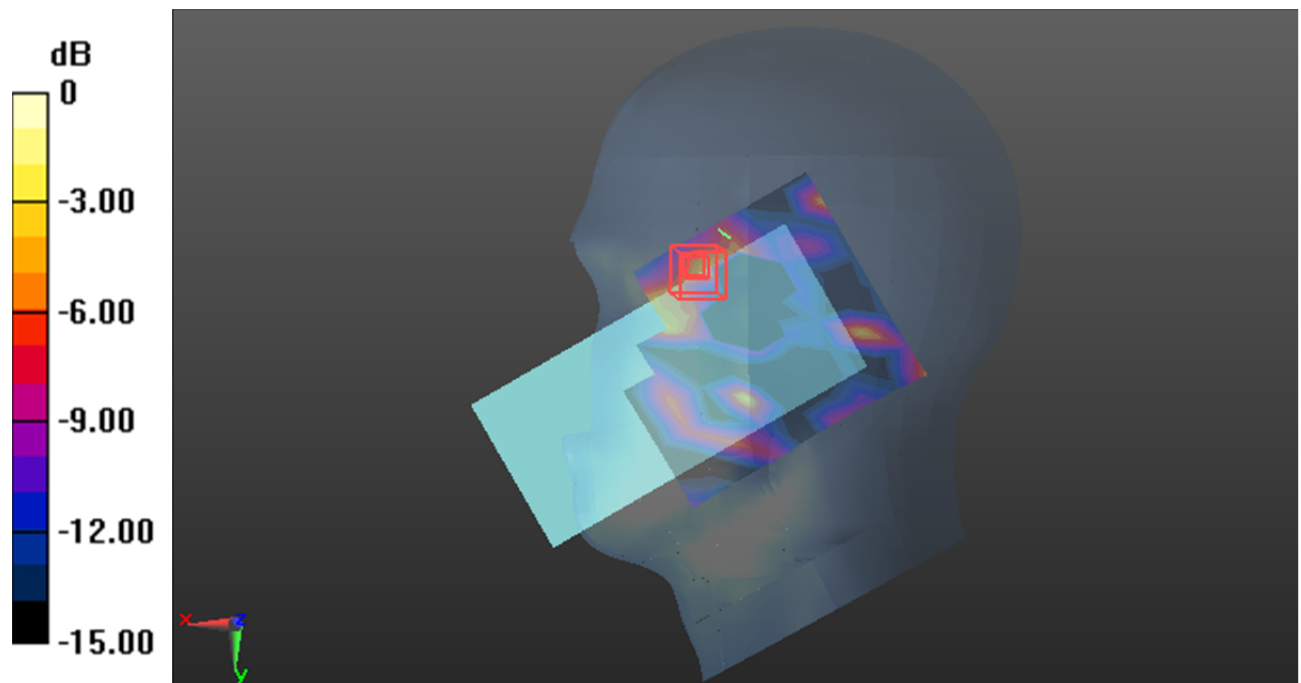

0 dB = 0.130 W/kg = -8.86 dB dBW/kg

**Test Plot22#: LTE Band 2\_Body Left\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f=1880$  MHz;  $\sigma = 1.393$  S/m;  $\epsilon_r = 39.658$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.169 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.177 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.199 W/kg

**SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.065 W/kg**

Maximum value of SAR (measured) = 0.173 W/kg

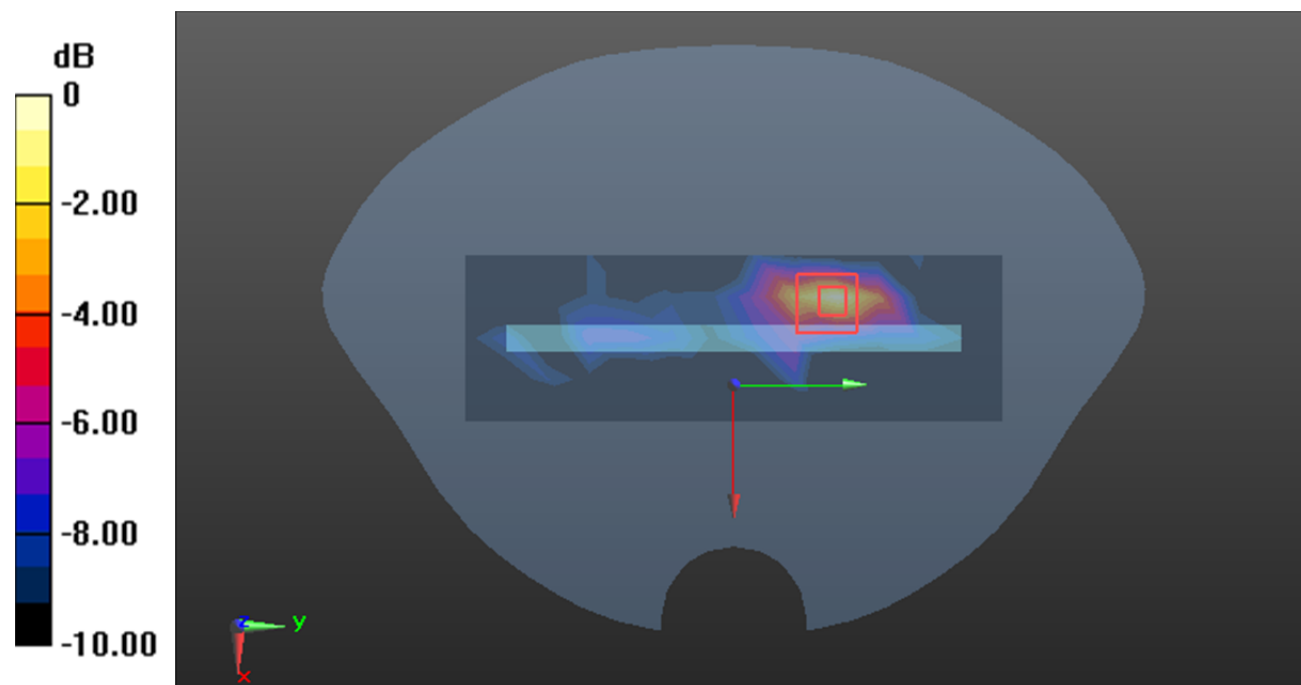

0 dB = 0.173 W/kg = -7.62 dB dBW/kg

**Test Plot23#: LTE Band 5\_Head Right Cheek\_50%RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.901$  S/m;  $\epsilon_r=42.193$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0292 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.268 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0360 W/kg

**SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0340 W/kg

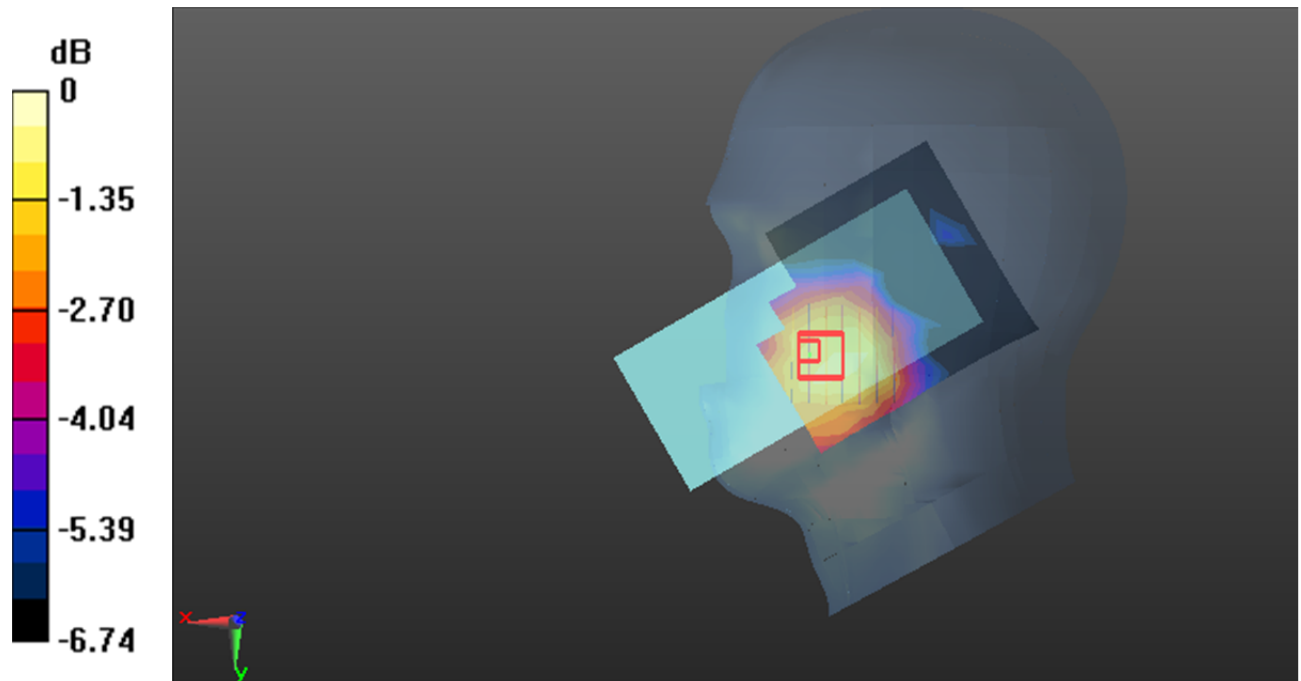

0 dB = 0.0340 W/kg = -14.69 dB dBW/kg

**Test Plot24#: LTE Band 5\_Body Back\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.901$  S/m;  $\epsilon_r=42.193$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.304 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.234 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.423 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.116 W/kg**

Maximum value of SAR (measured) = 0.337 W/kg

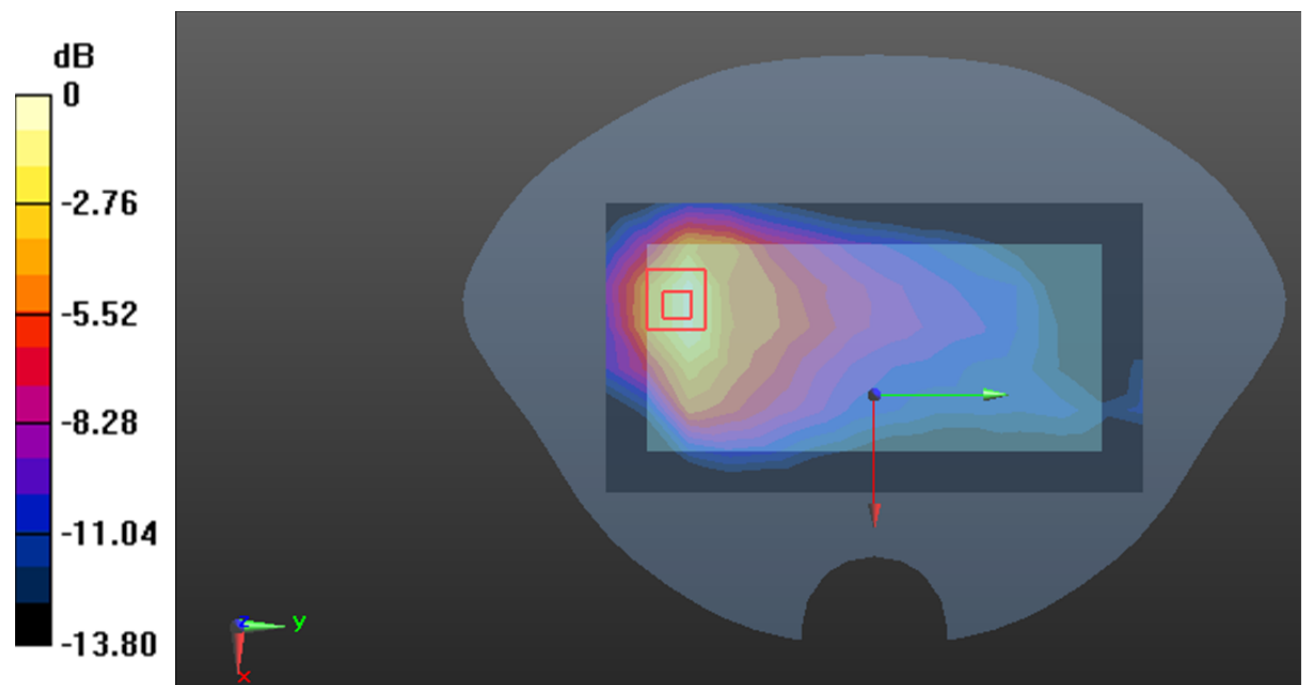

0 dB = 0.337 W/kg = -4.72 dB dBW/kg

**Test Plot25#: LTE Band 5\_Head Right Tilt\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.901$  S/m;  $\epsilon_r=42.193$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.527 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.80 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 0.789 W/kg

**SAR(1 g) = 0.315 W/kg; SAR(10 g) = 0.162 W/kg**

Maximum value of SAR (measured) = 0.600 W/kg

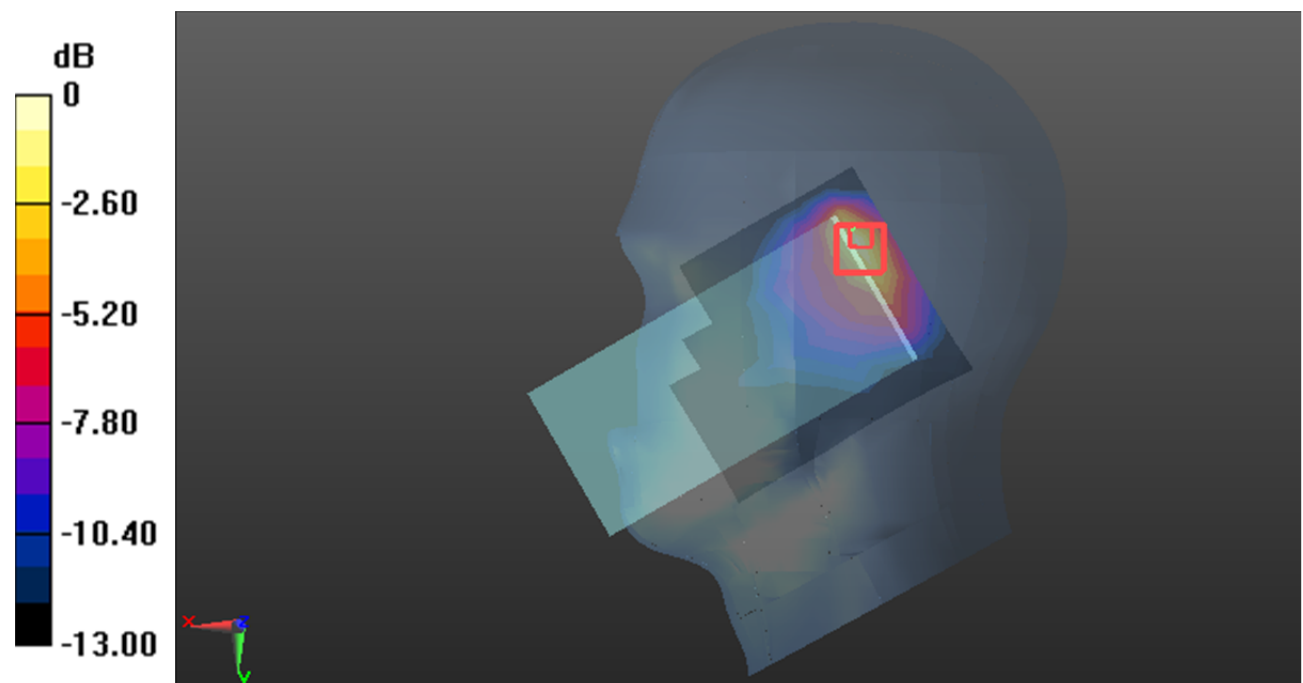

0 dB = 0.600 W/kg = -2.22 dB dBW/kg

**Test Plot26#: LTE Band 5\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=836.5$  MHz;  $\sigma=0.901$  S/m;  $\epsilon_r=42.193$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @836.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.113 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.089 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.136 W/kg

**SAR(1 g) = 0.089 W/kg; SAR(10 g) = 0.060 W/kg**

Maximum value of SAR (measured) = 0.118 W/kg

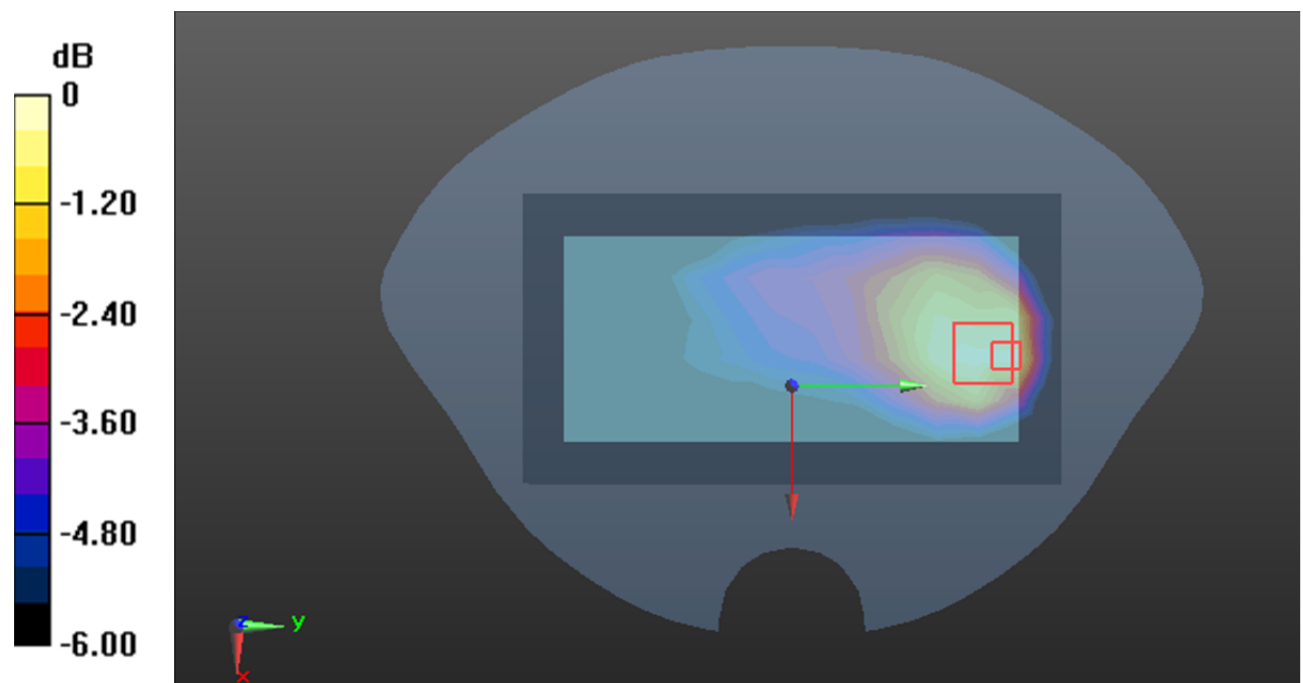

0 dB = 0.118 W/kg = -9.28 dB dBW/kg

**Test Plot27#: LTE Band 7\_Body Back\_50%RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 38.656$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.724 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.807 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.921 W/kg

**SAR(1 g) = 0.518 W/kg; SAR(10 g) = 0.253 W/kg**

Maximum value of SAR (measured) = 0.799 W/kg

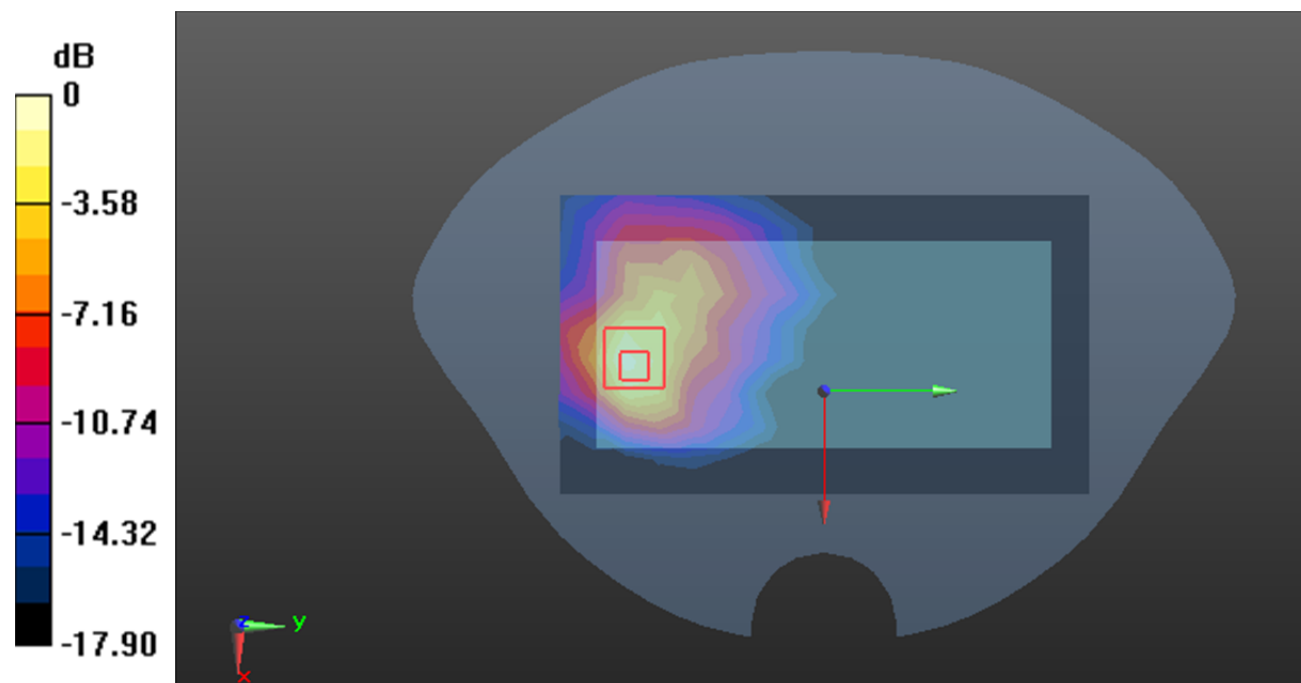

0 dB = 0.799 W/kg = -0.97 dB dBW/kg

**Test Plot28#: LTE Band 7\_Head Left Cheek\_1RB\_Middle Ant5****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 38.656$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.188 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.231 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.247 W/kg

**SAR(1 g) = 0.139 W/kg; SAR(10 g) = 0.076 W/kg**

Maximum value of SAR (measured) = 0.213 W/kg

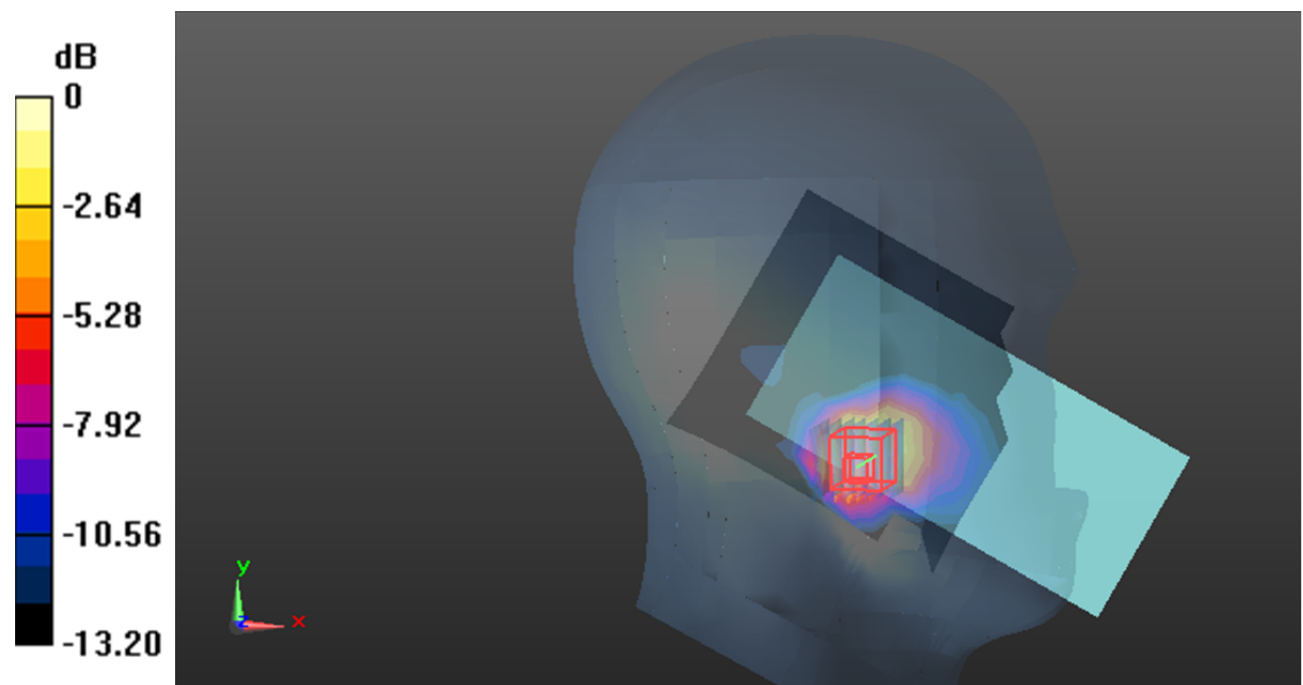

0 dB = 0.213 W/kg = -6.72 dB dBW/kg

**Test Plot29#: LTE Band 7\_Body Back\_1RB\_Middle Ant5****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.887$  S/m;  $\epsilon_r = 38.656$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.105 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.290 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.046 W/kg**

Maximum value of SAR (measured) = 0.159 W/kg

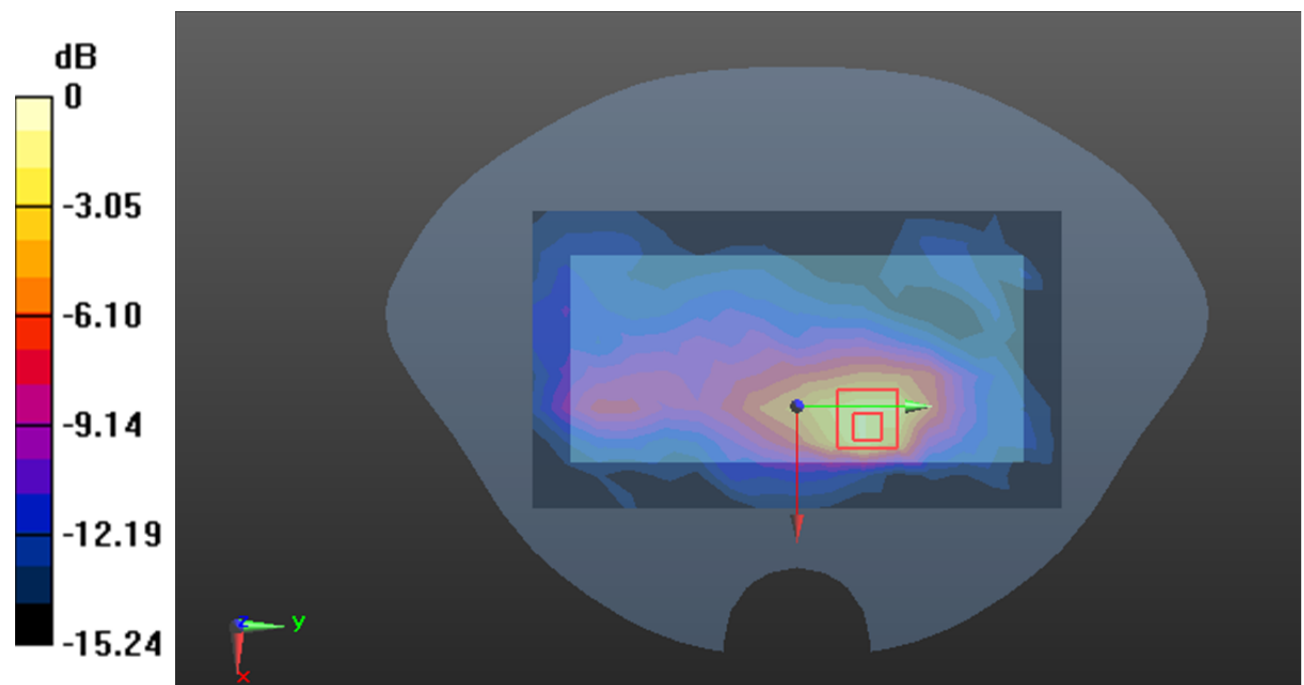

**Test Plot30#: LTE Band 7\_Head Right Cheek\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.897$  S/m;  $\epsilon_r = 38.865$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (9x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.492 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.113 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.686 W/kg

**SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.190 W/kg**

Maximum value of SAR (measured) = 0.576 W/kg

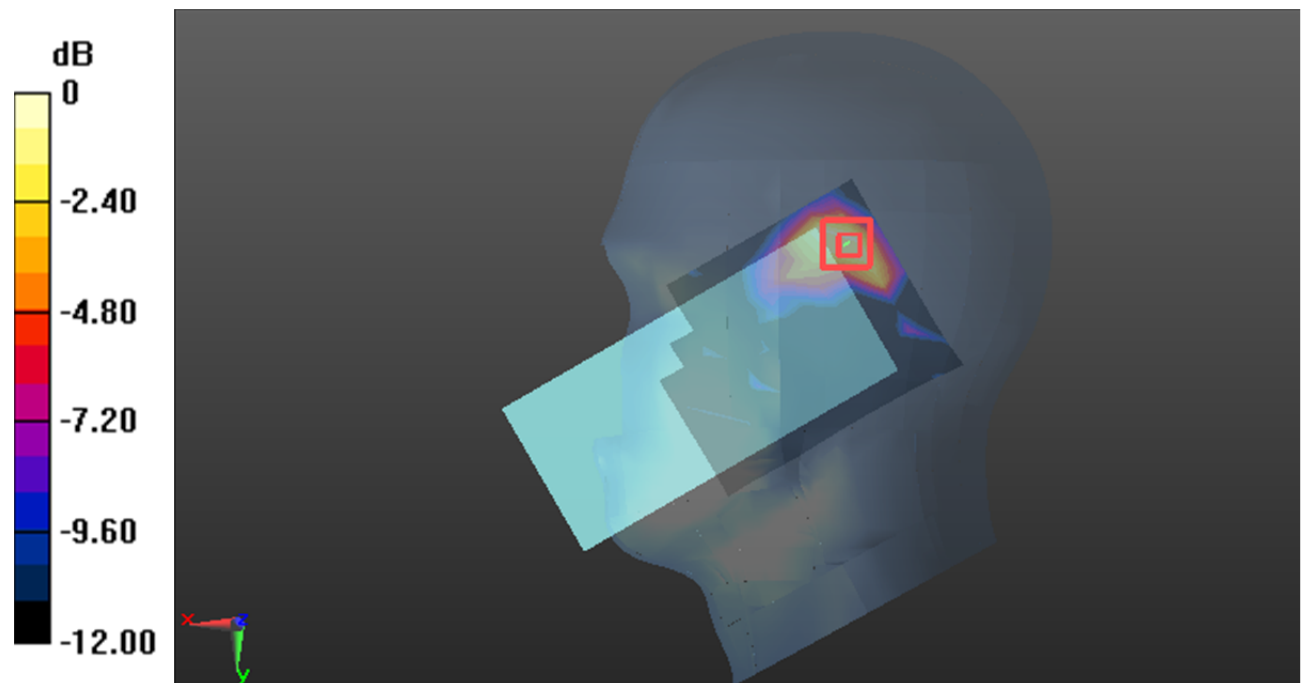

0 dB = 0.576 W/kg = -2.40 dB dBW/kg

**Test Plot31#: LTE Band 7\_Body Top\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=2535$  MHz;  $\sigma = 1.897$  S/m;  $\epsilon_r = 38.865$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2535 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (6x11x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.292 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.613 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.372 W/kg

**SAR(1 g) = 0.218 W/kg; SAR(10 g) = 0.104 W/kg**

Maximum value of SAR (measured) = 0.327 W/kg

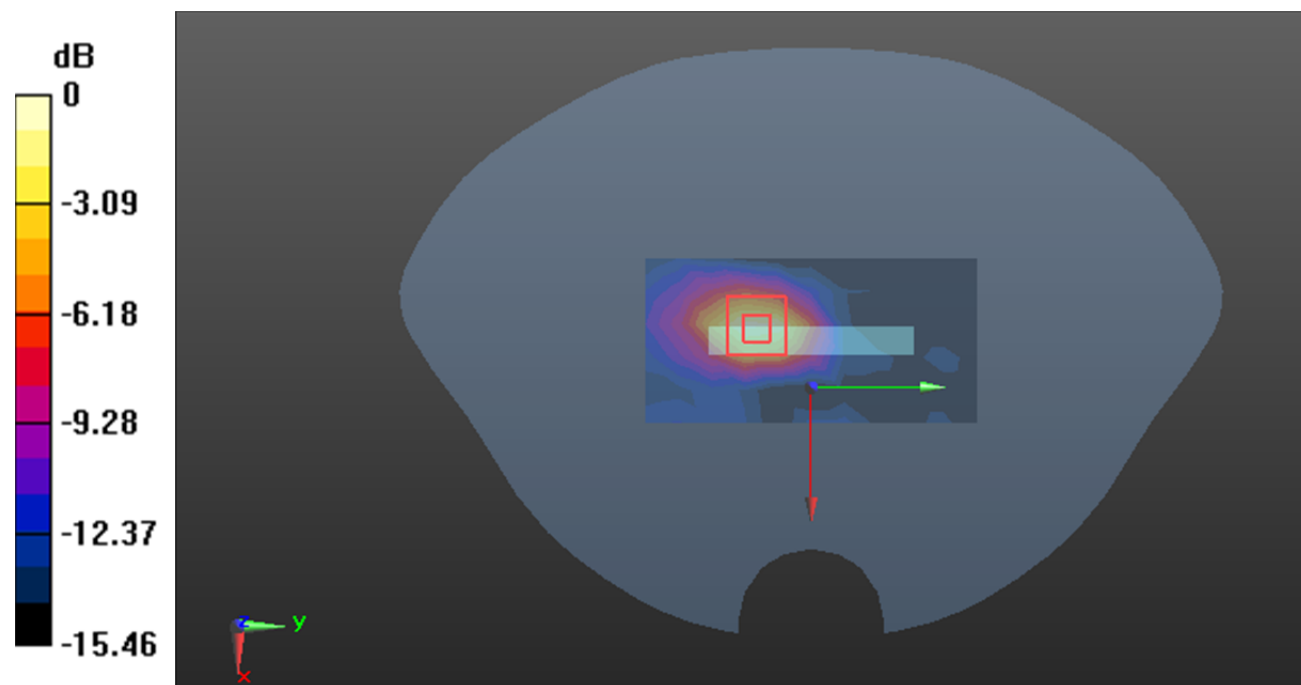

**Test Plot32#: LTE Band 12\_Head Left Cheek\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0222 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.471 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0250 W/kg

**SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.019 W/kg**

Maximum value of SAR (measured) = 0.0244 W/kg

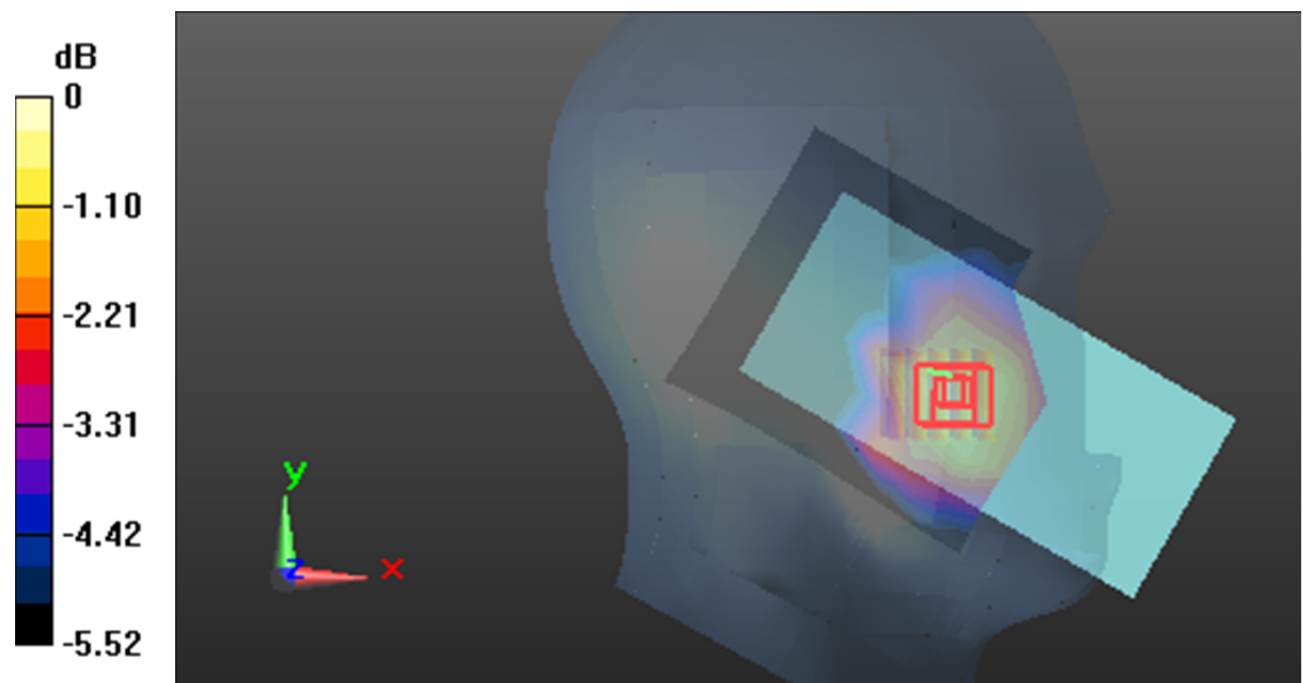

0 dB = 0.0244 W/kg = -16.13 dB dBW/kg

**Test Plot33#: LTE Band 12\_Body Right\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (5x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0744 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.354 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.061 W/kg; SAR(10 g) = 0.044 W/kg**

Maximum value of SAR (measured) = 0.0759 W/kg

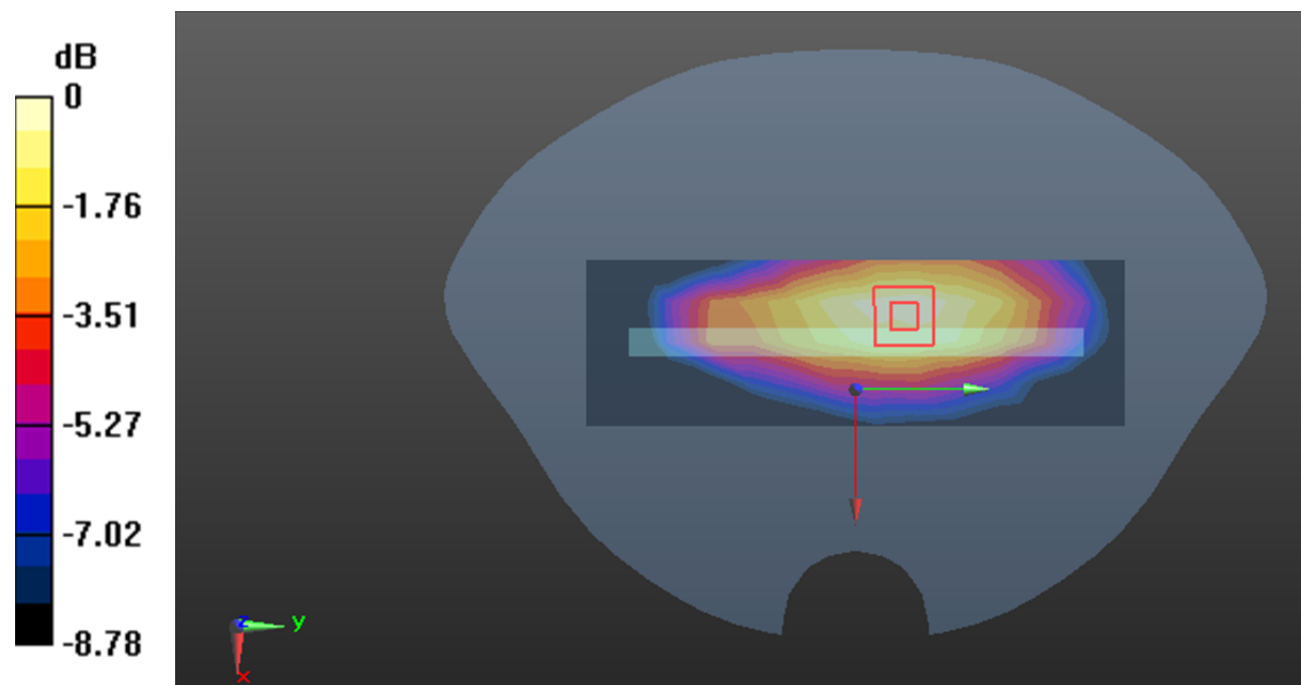

0 dB = 0.0759 W/kg = -11.20 dB dBW/kg

**Test Plot34#: LTE Band 12\_Head Right Tilt\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.560 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.96 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.798 W/kg

**SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.168 W/kg**

Maximum value of SAR (measured) = 0.622 W/kg

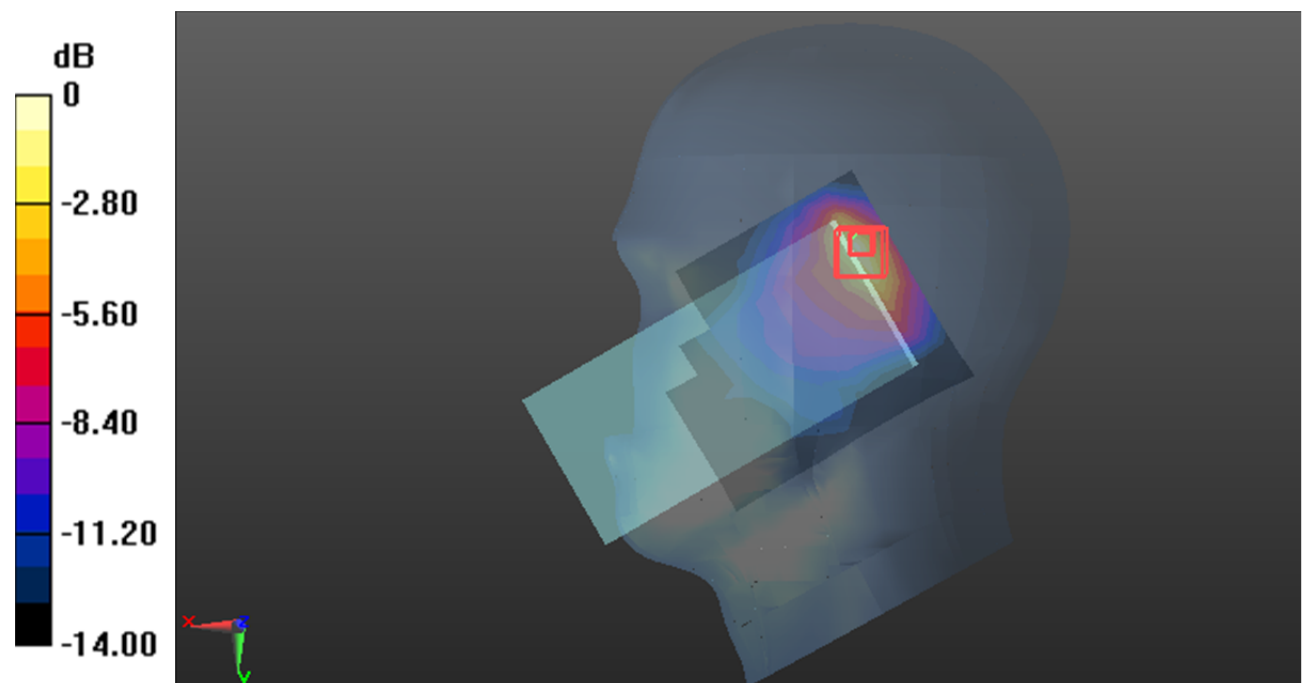

0 dB = 0.622 W/kg = -2.06 dB dBW/kg

**Test Plot35#: LTE Band 12\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 42.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @707.5 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.119 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.039 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.153 W/kg

**SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.062 W/kg**

Maximum value of SAR (measured) = 0.132 W/kg

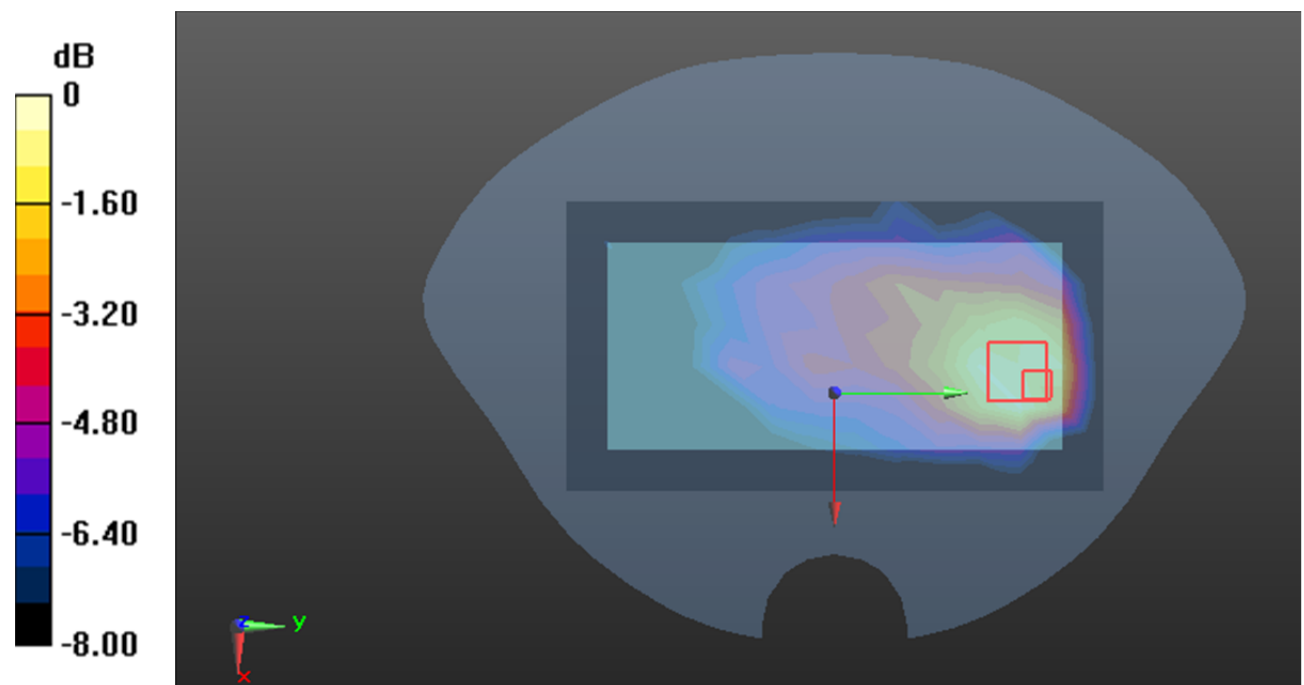

0 dB = 0.132 W/kg = -8.79 dB dBW/kg

**Test Plot36#: LTE Band 13\_Head Left Cheek\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.897$  S/m;  $\epsilon_r=42.330$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0466 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.381 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.0510 W/kg

**SAR(1 g) = 0.045 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.0501 W/kg

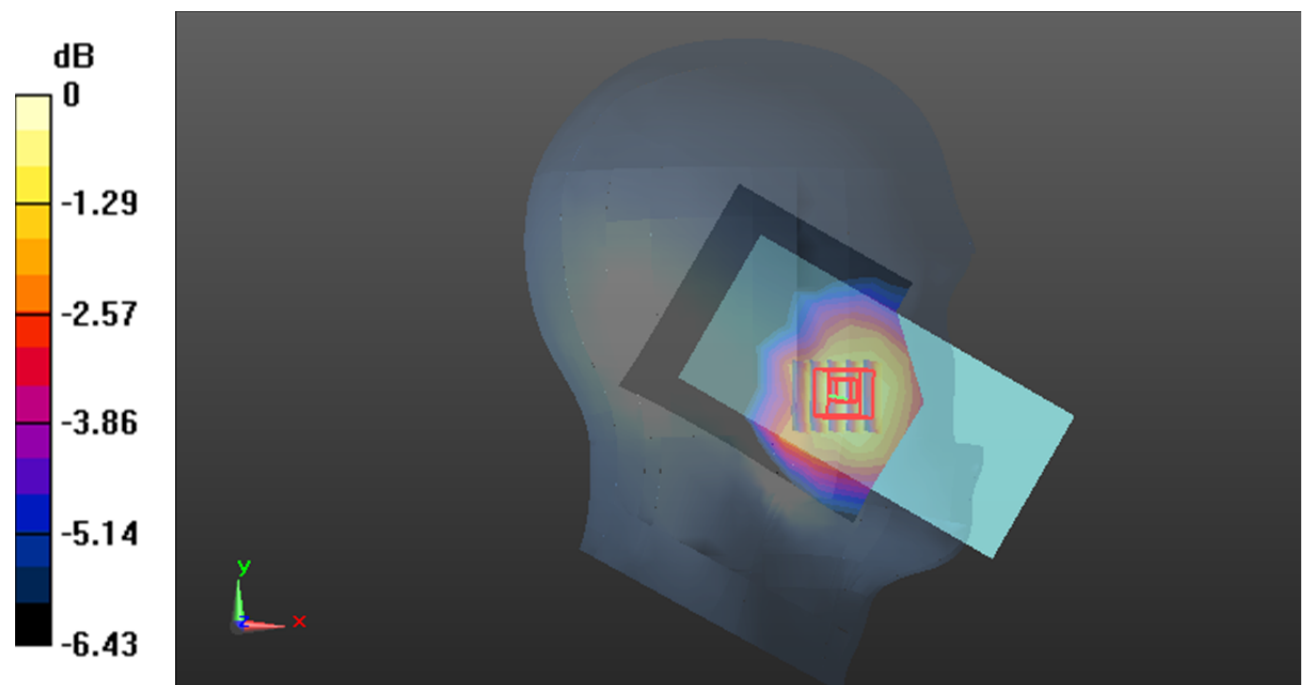

0 dB = 0.0501 W/kg = -13.00 dB dBW/kg

**Test Plot37#: LTE Band 13\_Body Back\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.897$  S/m;  $\epsilon_r=42.330$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.156 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.744 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.209 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.055 W/kg**

Maximum value of SAR (measured) = 0.161 W/kg

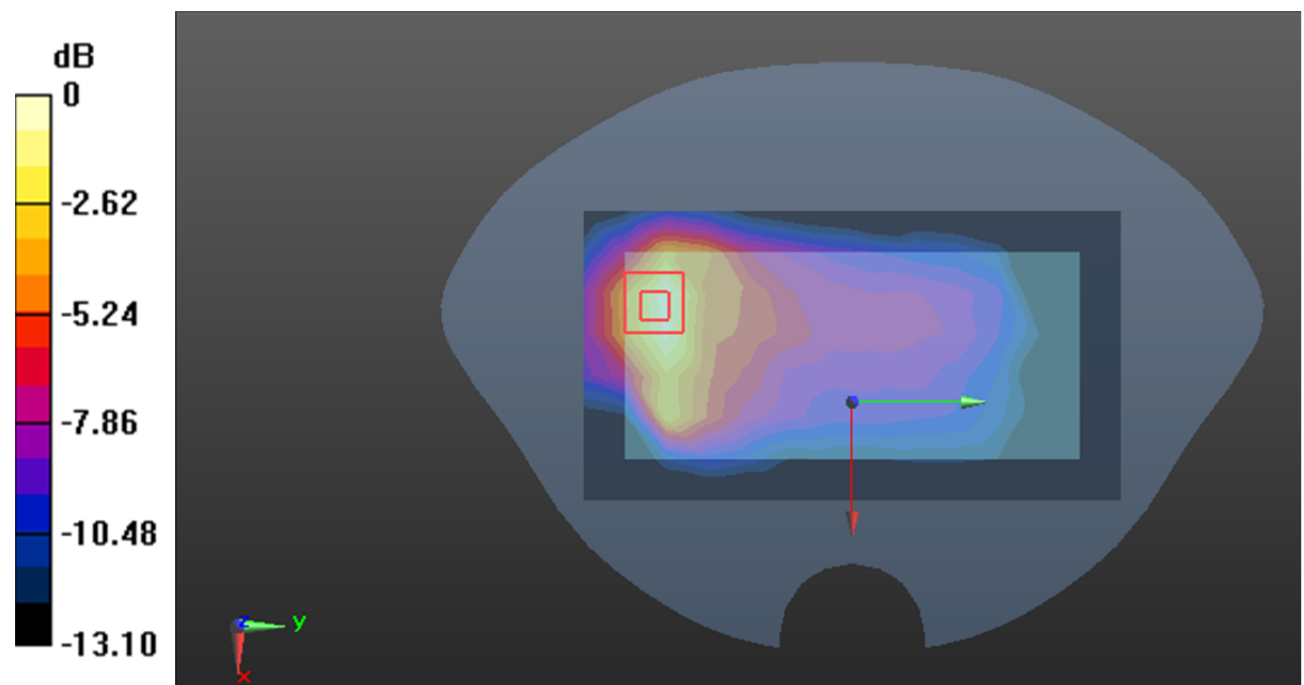

**Test Plot38#: LTE Band 13\_Head Right Tilt\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.897$  S/m;  $\epsilon_r=42.330$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x9x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.707 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.67 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.970 W/kg

**SAR(1 g) = 0.403 W/kg; SAR(10 g) = 0.208 W/kg**

Maximum value of SAR (measured) = 0.745 W/kg

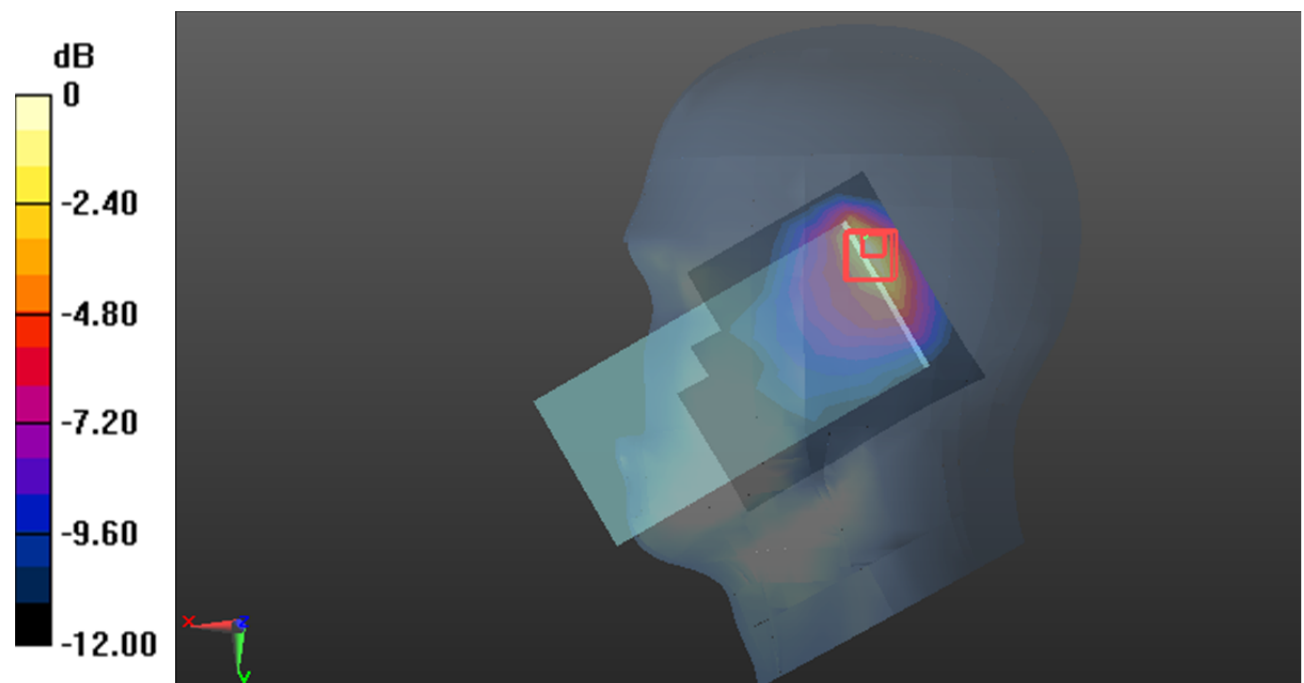

0 dB = 0.745 W/kg = -1.28 dB dBW/kg

**Test Plot39#: LTE Band 13\_Body Back\_1RB\_Middle Ant7****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f=782$  MHz;  $\sigma=0.897$  S/m;  $\epsilon_r=42.330$ ;  $\rho=1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.79, 10.07, 9.05) @782 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (8x14x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.157 W/kg


**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.900 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.194 W/kg

**SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.083 W/kg**

Maximum value of SAR (measured) = 0.164 W/kg

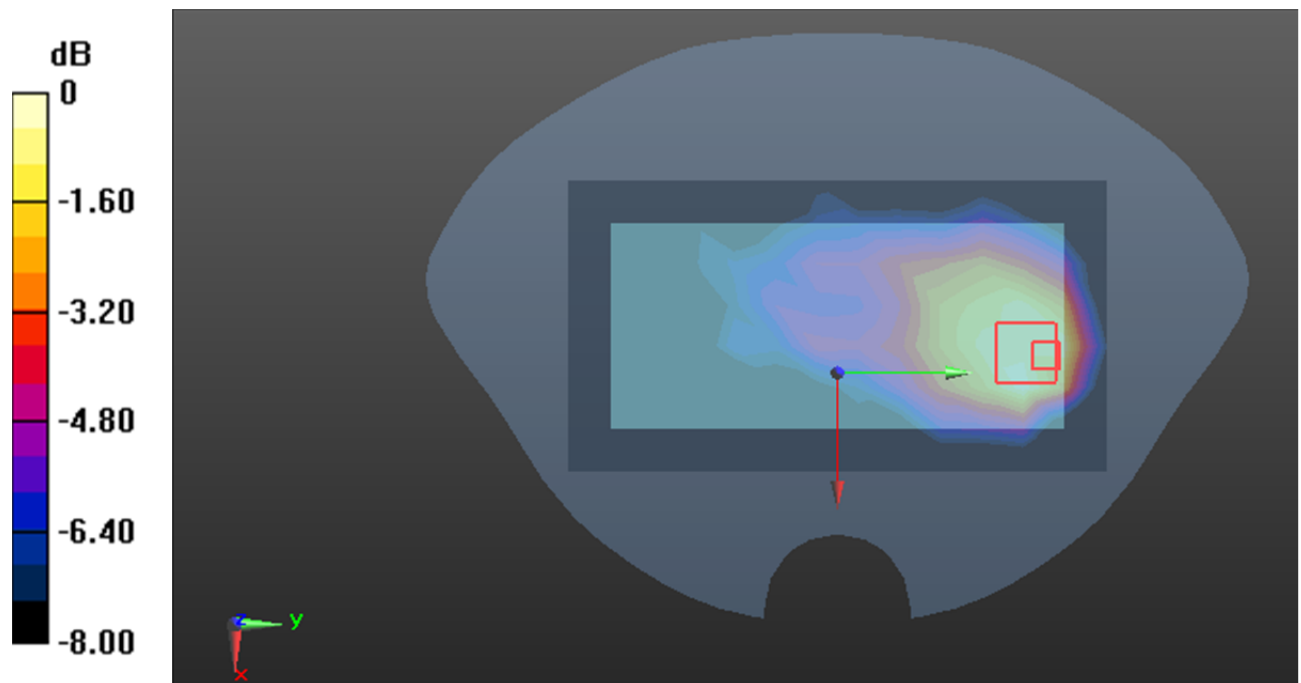

0 dB = 0.164 W/kg = -7.85 dB dBW/kg

**Test Plot40#: LTE Band 41\_Body Back\_1RB\_Middle Ant3****DUT: Mobile Phone; Type: KL8s; Serial: 2NHZ-1;**

Communication System: Generic TDD-LTE (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58  
Medium parameters used (interpolated):  $f=2593$  MHz;  $\sigma = 1.941$  S/m;  $\epsilon_r = 38.444$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(6.91, 7.77, 7.08) @2593 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.277 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.707 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.323 W/kg

**SAR(1 g) = 0.178 W/kg; SAR(10 g) = 0.087 W/kg**

Maximum value of SAR (measured) = 0.280 W/kg

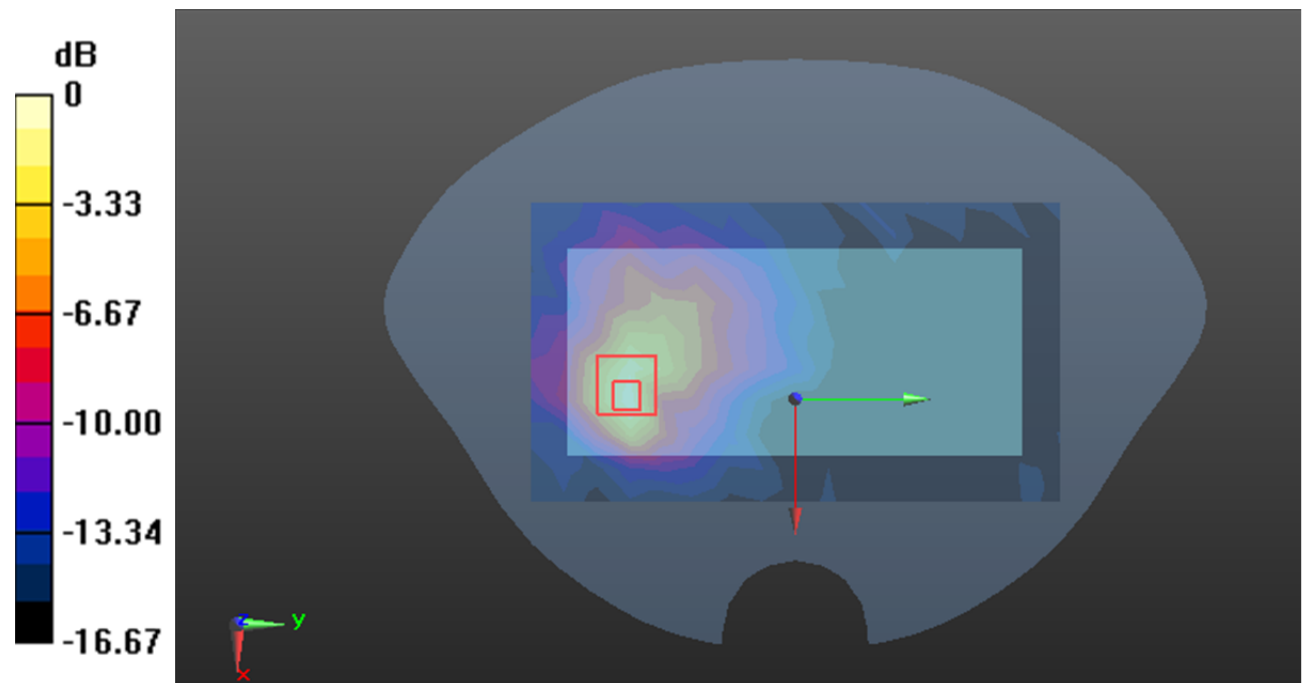

0 dB = 0.280 W/kg = -5.53 dB dBW/kg