

Radio Test Report

Report No.:STS2308302W03

Issued for

Buddi Limited

Talbot House, 17 Church Street, Rickmansworth, WD3 1DE,
Hertfordshire, UK

Product Name: Alco Tag

Brand Name: Buddi Limited

Model Name: A2-BUD-A-TENX-B-TEEU-L

Series Model(s): 4000002

FCC ID: ZDLST8

Test Standards: FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, all test data presented in this report is only applicable to presented test sample.

**TEST REPORT**

Applicant's Name : Buddi Limited
Address : Talbot House, 17 Church Street, Rickmansworth, WD3 1DE,
Hertfordshire, UK
Manufacturer's Name : Buddi Limited
Address : Talbot House, 17 Church Street, Rickmansworth, WD3 1DE,
Hertfordshire, UK

Product Description

Product Name : Smart Beacon V2.2
Brand Name : Buddi Limited
Model Name : T7-BUD-A-TEEU-B-2.2
Series Model(s) : 3450006

Test Standards : FCC Part15.249

Test Procedure : ANSI C63.10-2013

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document only be altered or revised by STS, personal only, and shall be noted in the revision of the document.

Date of Test :

Date of receipt of test item : 02 Aug. 2023

Date of performance of tests . : 02 Aug. 2023 ~ 07 Sept. 2023

Date of Issue : 07 Sept. 2023

Test Result : **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Sean She

(Sean she)

Authorized Signatory :

Chris Chen

(Chris Chen)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
2. GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF THE EUT	7
2.2 DESCRIPTION OF THE TEST MODES	9
2.3 TEST SOFTWARE AND POWER LEVEL	9
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3. EMC EMISSION TEST	13
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 RADIATED EMISSION MEASUREMENT	15
4. BANDWIDTH TEST	40
4.1 TEST PROCEDURE	40
4.2 TEST SETUP	40
4.3 EUT OPERATION CONDITIONS	40
4.4 TEST RESULTS	41
5. ANTENNA REQUIREMENT	43
5.1 STANDARD REQUIREMENT	43
5.2 EUT ANTENNA	43
APPENDIX- PHOTOS OF TEST SETUP	44



Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	07 Sept. 2023	STS2308302W03	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part 15.249 , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.203	Antenna Requirement	PASS	
15.249	Radiated Spurious Emission	PASS	
15.249	Radiated Band Edge Emission	PASS	
15.249	Field Strength of fundamental	PASS	
15.215(c)	20dB Bandwidth	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 1.197\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.896\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.84\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 3.94\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.59\text{dB}$
6	All emissions, radiated >6G	$\pm 5.22\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.14\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.54\text{dB}$
9	Power Spectral Density, Conducted	$\pm 1.25\text{dB}$
10	Occupied Channel Bandwidth	$\pm 3.5\%$

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Alco Tag	
Brand Name	Buddi Limited	
Model Name	A2-BUD-A-TENX-B-TEEU-L	
Series Model(s)	4000002	
Model Difference	The difference only in the model name.	
Product Description	The EUT is a Alco Tag.	
	Operation Frequency:	914.5-921MHz
	Modulation Type:	ASK
	Antenna Designation:	SMD
	Antenna Gain(Peak):	1.5dBi
	Based on the application, features, or specification exhibited in User Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User Manual.	
Adapter	OBC Dock: Input: 100-240V~47-63Hz 0.4A Output: DC 5.99V 2A max OBC charger: Input: DC 5.99V 2A Output: DC 5V, 800mA	
Battery	Main device battery: Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity: 1200mAh Charger OBC battery: Rated Voltage: 3.7V Charge Limit Voltage: 4.2V Capacity: 2300mAh	
Rating	Input: DC 5V, 800mA	
Connecting I/O Port(s)	Please refer to the Note 1.	
Hardware version number	V1.1	
Software version number	1.40.20	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
- 2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	914.50	2	917.50	3	921.00



3.

Test channel List		
Test Channel	EUT Channel	Test Frequency (MHz)
lowest	CH01	914.50
middle	CH02	917.50
highest	CH03	921.00

Note: The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.

2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Pretest Mode	Description	Data/Modulation
Mode 1	TX/CH01	ASK
Mode 2	TX/CH02	ASK
Mode 3	TX/CH03	ASK

Note:

(1) All above mode have been measurement, only worst data was reported.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 4 : Keeping TX

2.3 TEST SOFTWARE AND POWER LEVEL


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
Other SRD	917.50 MHz	ASK	1.5	Default	The EUT has signal transmission when it is powered on

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters.

Radiated Spurious Emission Test

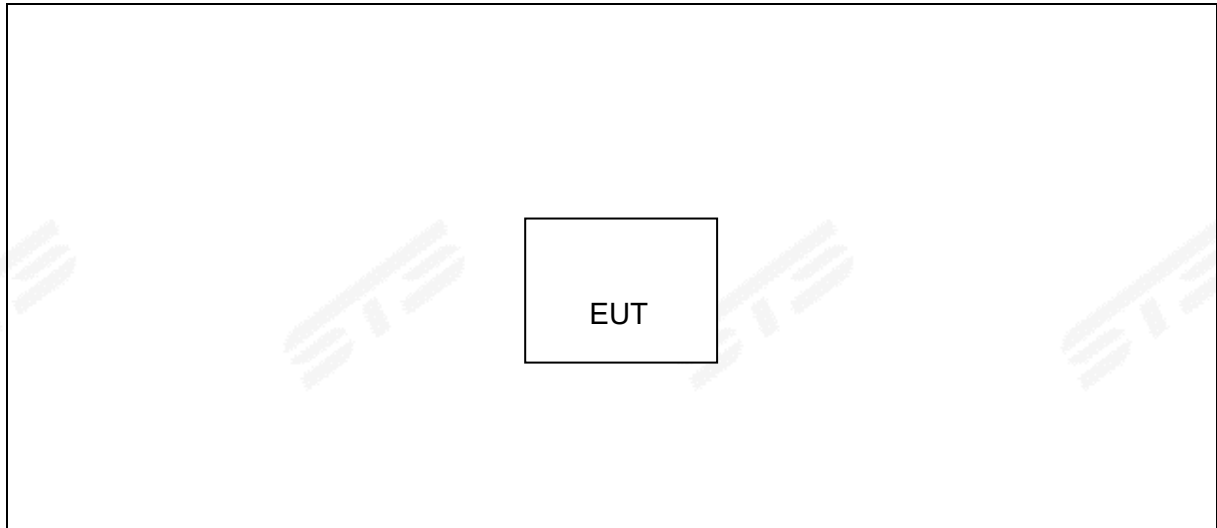

2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Necessary accessories

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Support units

Item	Equipment	Mfr/Brand	Model/Type No.	Length	Note
N/A	N/A	N/A	N/A	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2023.03.03	2024.03.02
Pre-Amplifier (0.1M-3GHz)	EM	EM330	060665	2023.02.28	2024.02.27
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2022.09.29	2023.09.28
18GHz-40GHz Filter	XINGBO	XBLBQ-GTA44	22062003-1	2023.03.06	2024.03.05
Pre-amplifier (18G-40G)	SKET	LNPA_1840-50	SK2018101801	2023.03.06	2024.03.05
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2022.09.29	2023.09.28
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Active loop Antenna	ZHINAN	ZN30900C	16035	2023.02.28	2024.02.27
Bilog Antenna	TESEQ	CBL6111D	34678	2022.09.30	2024.09.29
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2021.10.11	2023.10.10
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2021.09.28	2023.09.27
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2022.09.29	2023.09.28
LISN	R&S	ENV216	101242	2022.09.28	2023.09.27
LISN	EMCO	3810/2NM	23625	2022.09.28	2023.09.27
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2023.03.01	2024.02.28
Temperature & Humidity	HH660	Mieo	N/A	2022.09.30	2023.09.29

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

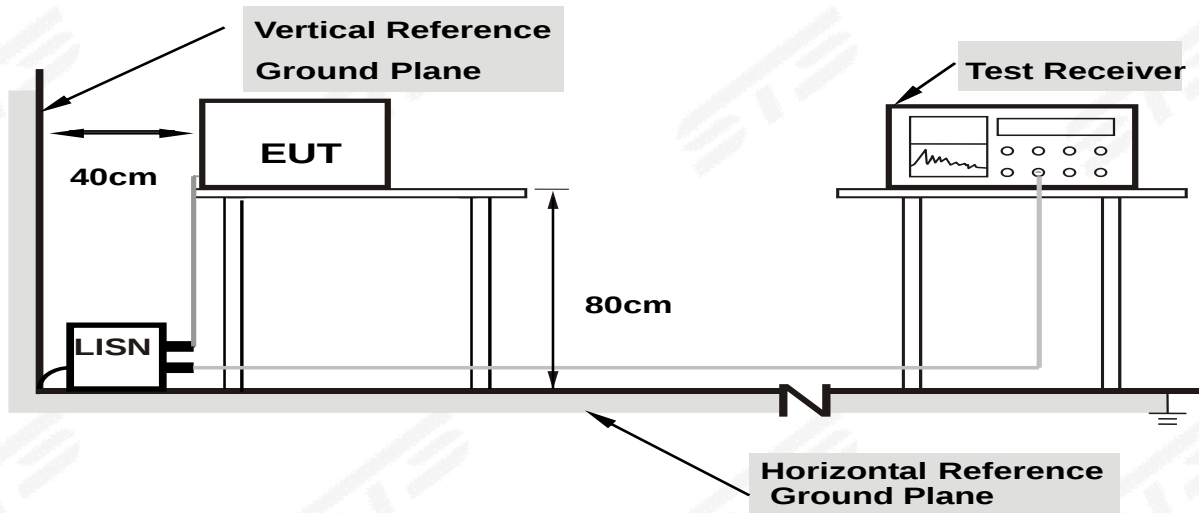

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support.

3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

3.1.5 TEST RESULT

Temperature:	--(C)	Relative Humidity:	--%RH
Test Voltage:	N/A	Phase:	L/N
Test Mode:	N/A		

Note: Battery powered, not applicable.

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 and the Part 15.209(a) limit in the table below has to be followed.

Standard FCC 15.209

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3
Above 1000	Other:74.0 dB(μ V)/m (Peak) 54.0 dB(μ V)/m (Average)	3

Standard FCC 15.249

Frequency of Emission (MHz)	Field Strength of fundamental (millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
900~928	50	500
2400~2483.5	50	500
5725~5875	50	500
24000~242500	250	2500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7

6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Spectrum Parameter	Setting
Detector	Peak/AV
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB (emission in restricted band)	>20BW
VB (emission in restricted band)	=3xRB

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
	90kHz~110kHz / RB 200Hz for QP
	110kHz~490kHz / RB 200Hz for PK & AV
	490kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE


- a. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Below 1GHz)
- b. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Above 1GHz)
- c. The height of the test antenna shall vary between 1m to 4m. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform (Below 1GHz)
- f. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform. (Above 1GHz)
- g. For the actual test configuration, please refer to the related Item –EUT Test Photos.
Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

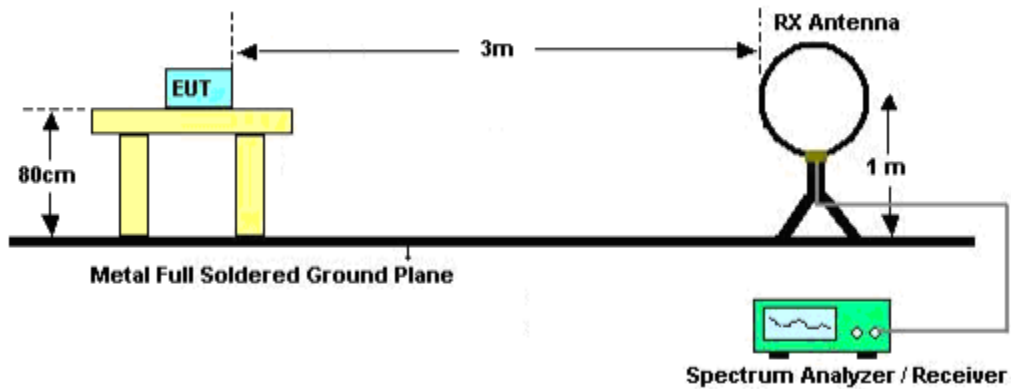

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

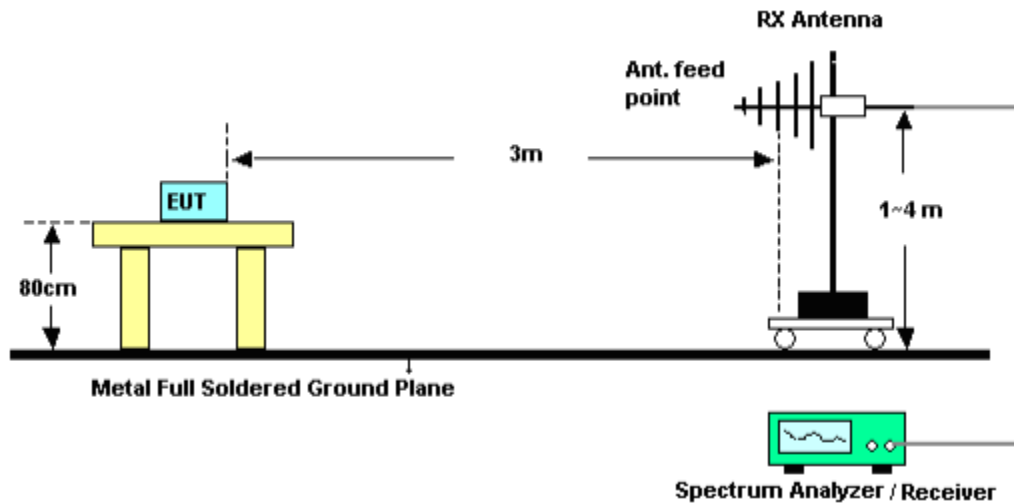

(C) Radiated Emission Test-Up Frequency Above 1GHz

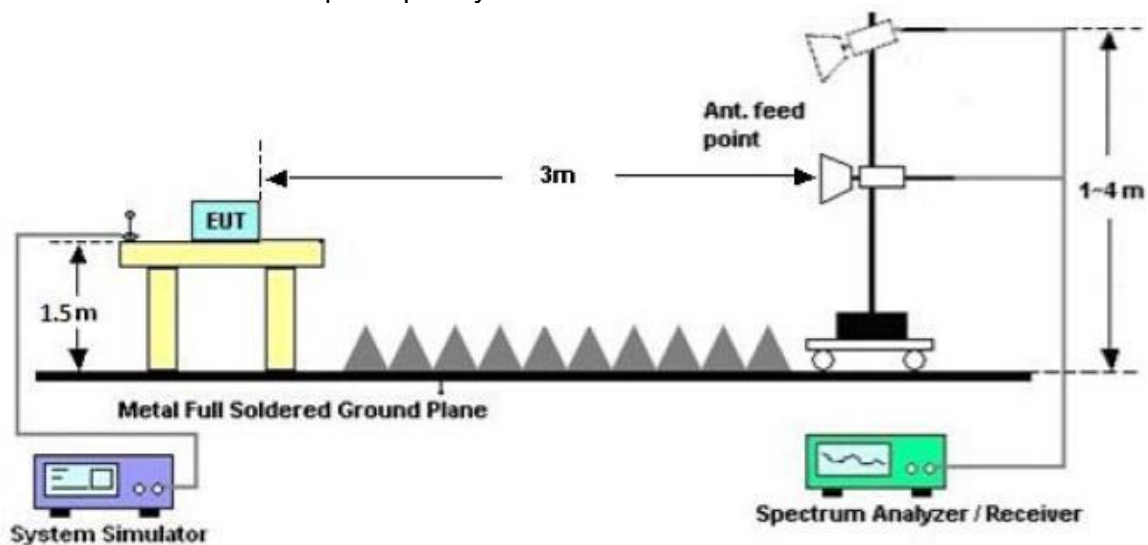

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

Margin=PL-PK L or AL- AV L; Margin only shown the worst case.

Where

PR = Peak Reading

AR = Average Reading

PL = Peak Level

AL = Average Level

AF = Antenna Factor

PK L = Peak Limit

AV L = AV Limit

For example

Frequency	PR	AR	AF	PL	AL	PK L	AV L	Margin
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dBμV/m)	(dB)
2178	40.23	30.31	9.83	50.06	40.14	74.00	54.00	-13.86

3.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

Below 30 MHz

Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	AC 120V/60Hz	Polarization:	---
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

Between 30MHz – 1000 MHz Radiation Spurious


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	32.22	-14.33	17.89	40.00	-22.11	peak
2	91.1100	41.10	-21.31	19.79	43.50	-23.71	peak
3	250.1900	31.54	-16.10	15.44	46.00	-30.56	peak
4	547.0100	28.25	-6.10	22.15	46.00	-23.85	peak
5	733.2500	31.14	-2.35	28.79	46.00	-17.21	peak
6	914.6400	84.84	-0.10	84.74	N/A	N/A	Fundamental

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

100.0 dBuV/m

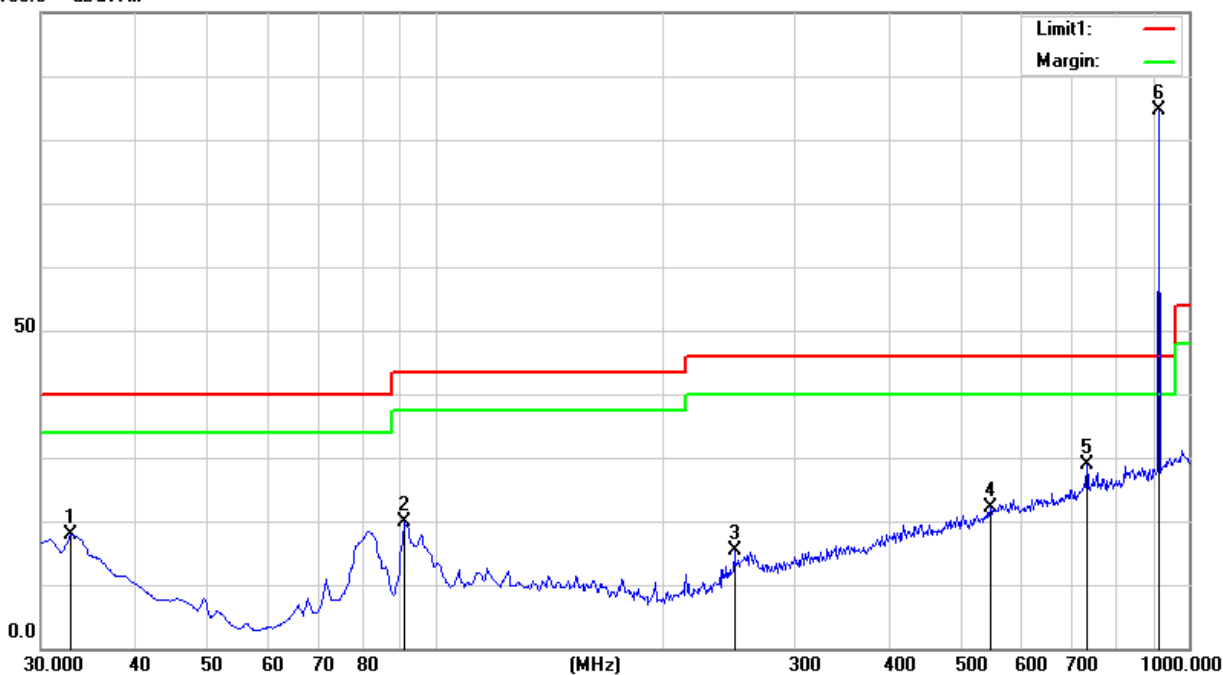


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 1		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	46.88	-14.80	32.08	40.00	-7.92	peak
2	65.8900	42.65	-25.60	17.05	40.00	-22.95	peak
3	125.0600	33.80	-18.22	15.58	43.50	-27.92	peak
4	361.7400	49.03	-12.80	36.23	46.00	-9.77	peak
5	752.6500	29.27	-2.16	27.11	46.00	-18.89	peak
6	914.6400	93.61	-0.10	93.51	N/A	N/A	Fundamental

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

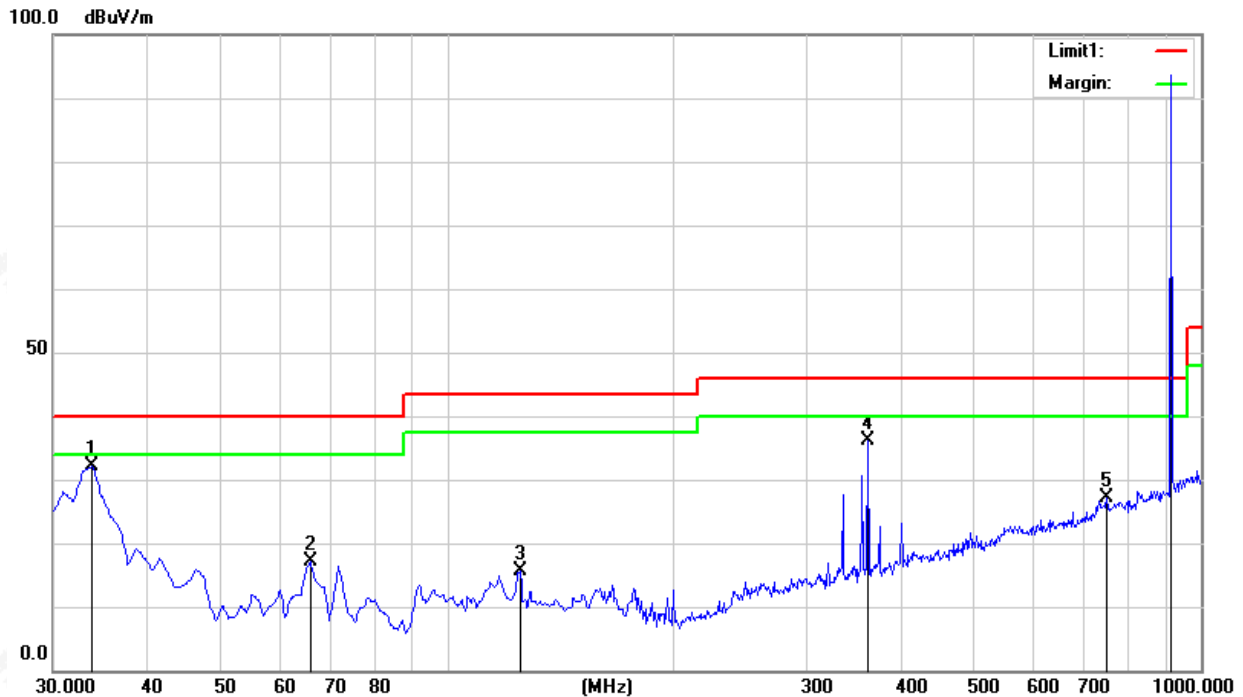


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	Mode 2		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	33.56	-14.33	19.23	40.00	-20.77	peak
2	81.4100	40.60	-22.82	17.78	40.00	-22.22	peak
3	91.1100	40.17	-21.31	18.86	43.50	-24.64	peak
4	545.0700	28.74	-6.31	22.43	46.00	-23.57	peak
5	733.2500	30.10	-2.35	27.75	46.00	-18.25	peak
6	917.5500	83.19	-0.06	83.13	N/A	N/A	Fundamental

Remark:

3. Margin = Result (Result =Reading + Factor)-Limit

4. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

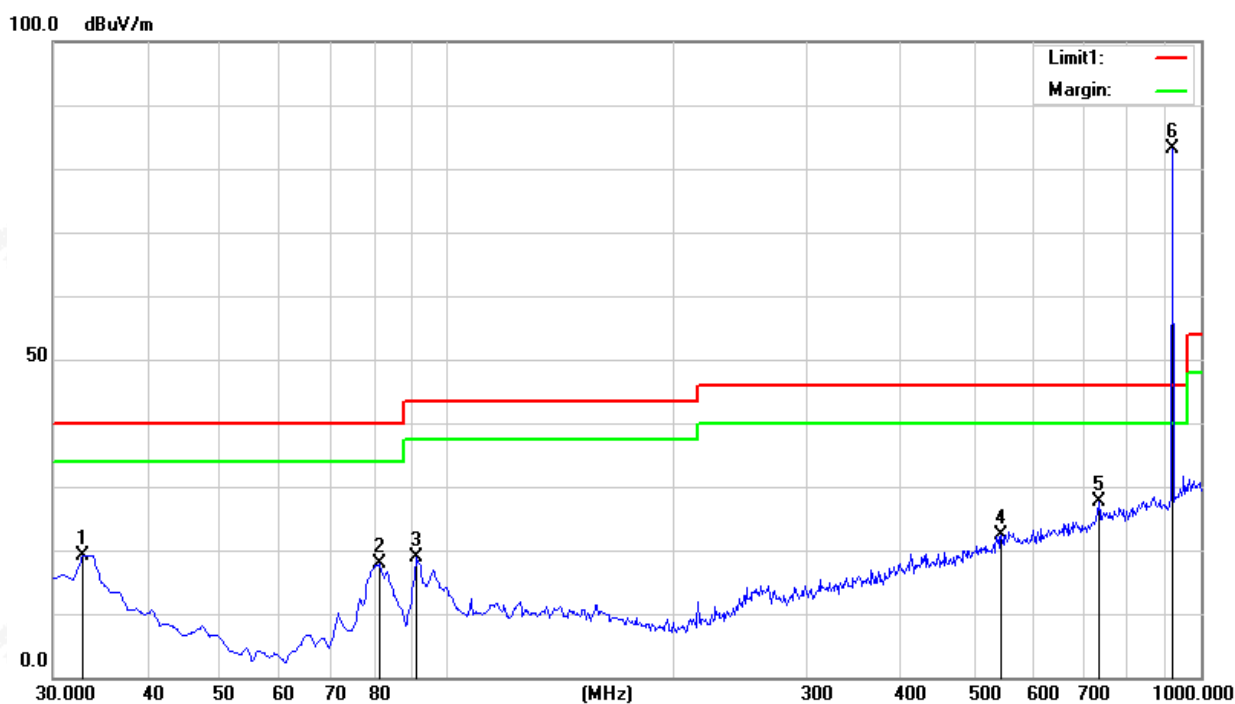


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 2		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	47.54	-14.80	32.74	40.00	-7.26	peak
2	75.5900	44.95	-23.78	21.17	40.00	-18.83	peak
3	120.2100	42.44	-18.35	24.09	43.50	-19.41	peak
4	383.0800	33.38	-12.06	21.32	46.00	-24.68	peak
5	748.7700	28.70	-2.15	26.55	46.00	-19.45	peak
6	917.5500	93.09	-0.06	93.03	N/A	N/A	Fundamental

Remark:

3. Margin = Result (Result =Reading + Factor)-Limit

4. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

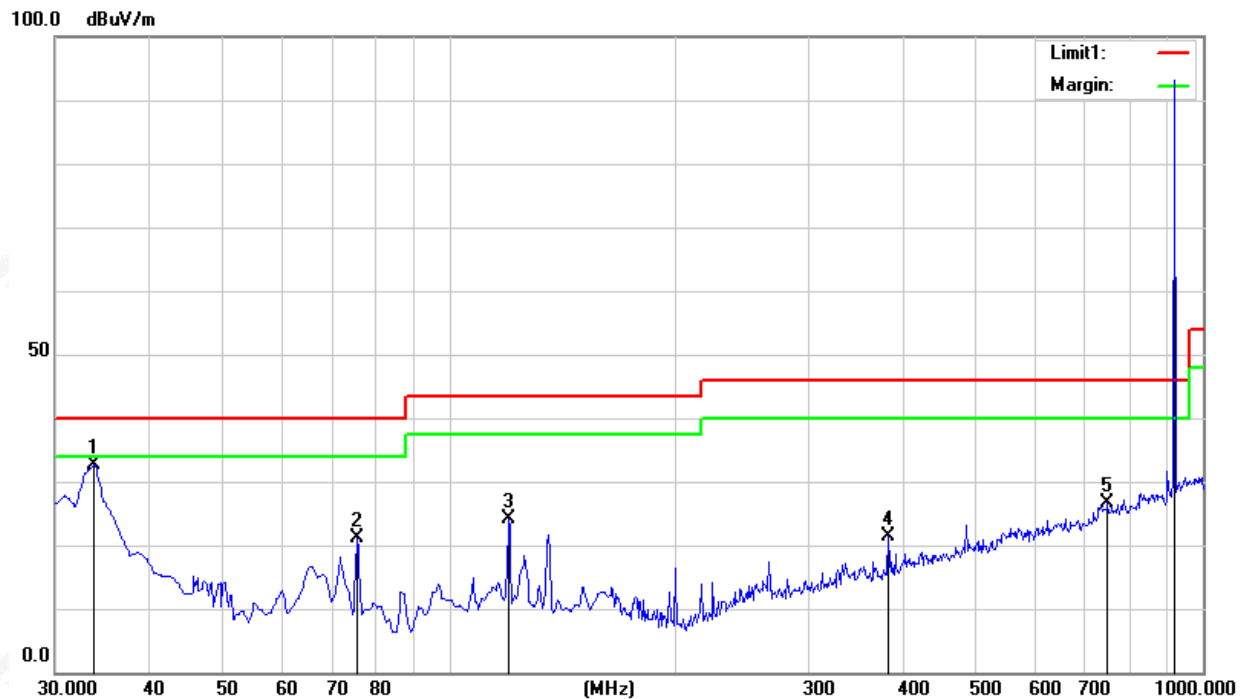


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Horizontal
Test Mode:	Mode 3		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	32.39	-14.80	17.59	40.00	-22.41	peak
2	96.9300	38.56	-20.57	17.99	43.50	-25.51	peak
3	159.0100	46.64	-18.77	27.87	43.50	-15.63	peak
4	375.3200	28.49	-12.37	16.12	46.00	-29.88	peak
5	733.2500	30.17	-2.35	27.82	46.00	-18.18	peak
6	921.4300	83.49	0.06	83.55	N/A	N/A	Fundamental

Remark:

5. Margin = Result (Result =Reading + Factor)-Limit

6. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

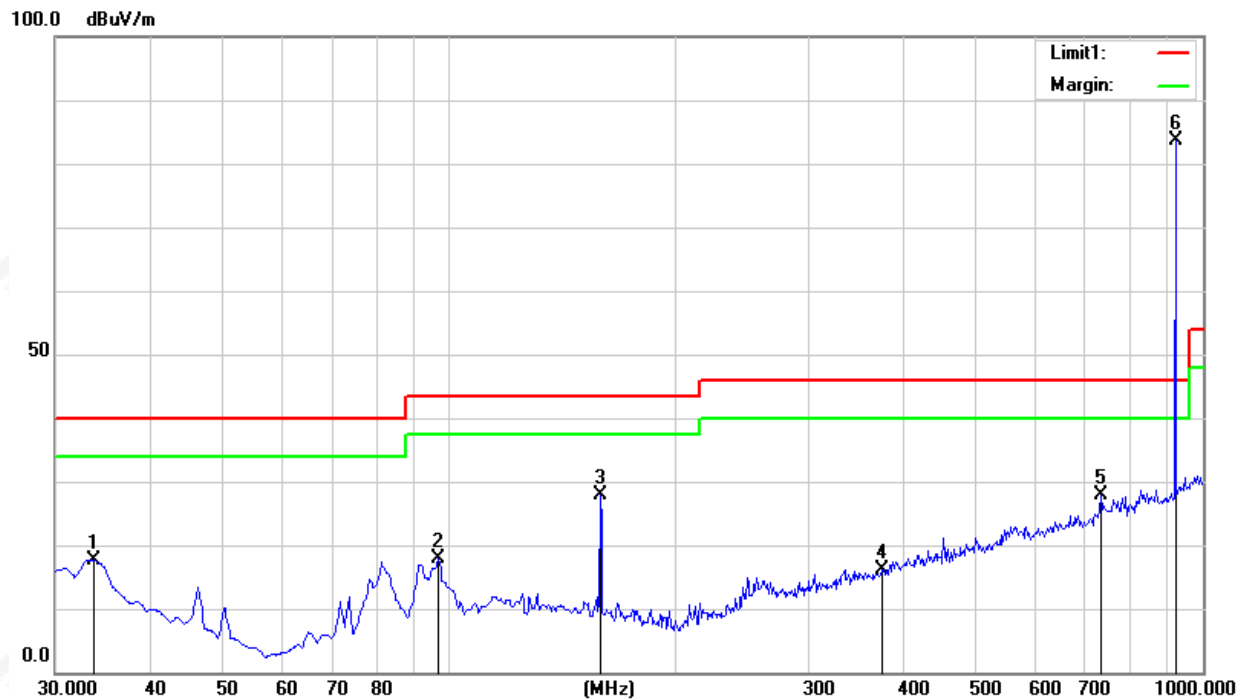


Temperature:	23.1(C)	Relative Humidity:	60%RH
Test Voltage:	DC 3.7V	Phase:	Vertical
Test Mode:	Mode 3		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	47.45	-14.80	32.65	40.00	-7.35	peak
2	65.8900	42.62	-25.60	17.02	40.00	-22.98	peak
3	125.0600	34.83	-18.22	16.61	43.50	-26.89	peak
4	410.2400	28.34	-10.55	17.79	46.00	-28.21	peak
5	670.2000	28.55	-4.58	23.97	46.00	-22.03	peak
6	921.4300	93.04	0.06	93.10	N/A	N/A	Fundamental

Remark:

5. Margin = Result (Result =Reading + Factor)-Limit

6. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

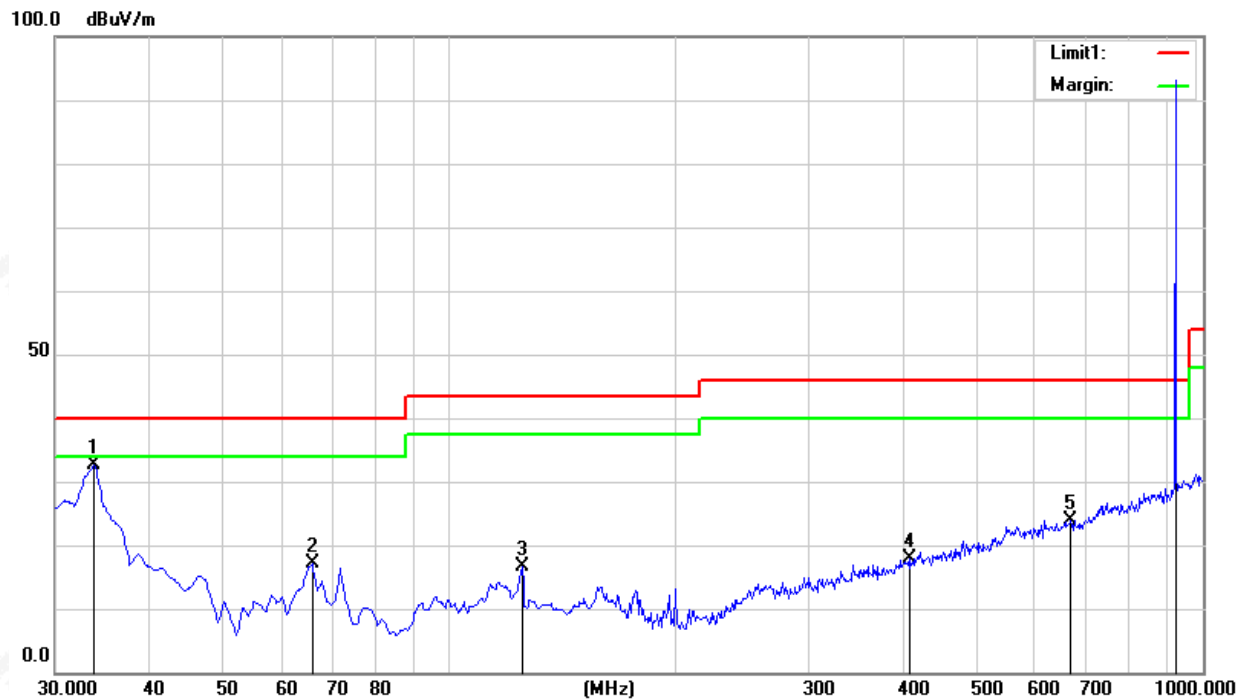




Above 1G Radiation Spurious

Temperature:	23.4(C)	Relative Humidity:	60%RH
Test Mode:	Mode 1	Phase:	Horizontal
Describe:	Low		

RE_FCC Test Case_FCC 15C 1GHz-18GHz

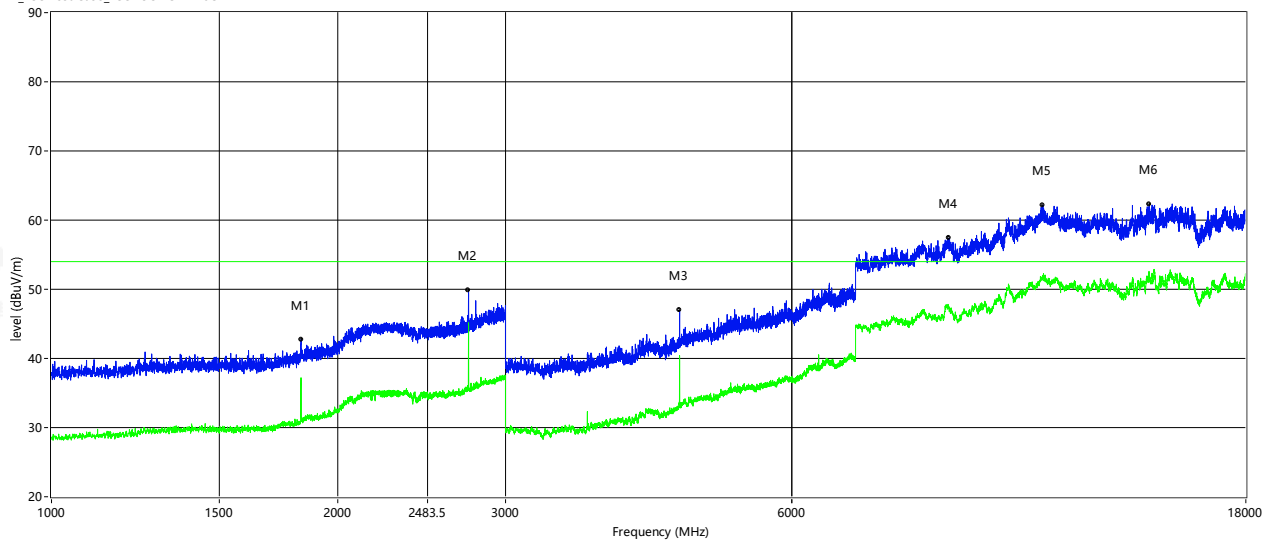


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1829.500	42.75	34.97	0.42	74.0	54.0	-19.03	148.50	100	Pass
2743.500	49.85	45.15	4.88	74.0	54.0	-8.85	162.70	100	Pass
4573.000	46.96	39.55	-7.86	74.0	54.0	-14.45	351.80	100	Pass
8773.750	57.40	47.22	4.93	74.0	54.0	-6.78	359.00	100	Pass
11015.000	62.15	51.59	10.14	74.0	54.0	-2.41	267.90	100	Pass
14246.250	62.28	52.09	11.24	74.0	54.0	-1.91	66.00	100	Pass



Temperature:	23.4(C)	Relative Humidity:	60%RH
Test Mode:	Mode 1	Phase:	Vertical
Describe:	Low		

RE_FCC Test Case_FCC 15C 1GHz-18GHz

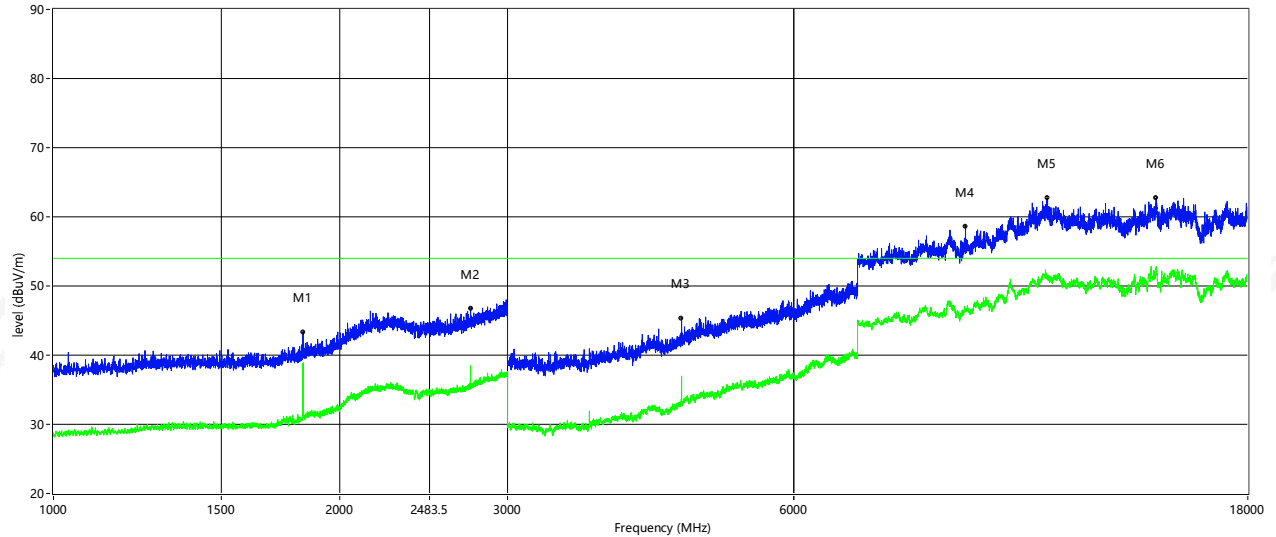


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1829.000	43.31	38.90	0.41	74.0	54.0	-15.10	89.10	100	Pass
2744.000	46.72	38.48	4.89	74.0	54.0	-15.52	147.10	100	Pass
4572.000	45.27	36.97	-7.87	74.0	54.0	-17.03	57.50	100	Pass
9090.000	58.60	46.69	4.76	74.0	54.0	-7.31	1.80	100	Pass
11086.500	62.67	51.19	9.75	74.0	54.0	-2.81	341.40	100	Pass
14414.000	62.69	52.47	11.26	74.0	54.0	-1.53	157.60	100	Pass



Temperature:	23.4(C)	Relative Humidity:	60%RH
Test Mode:	Mode 2	Phase:	Horizontal
Describe:	Middle		

RE_FCC Test Case_FCC 15C 1GHz-18GHz

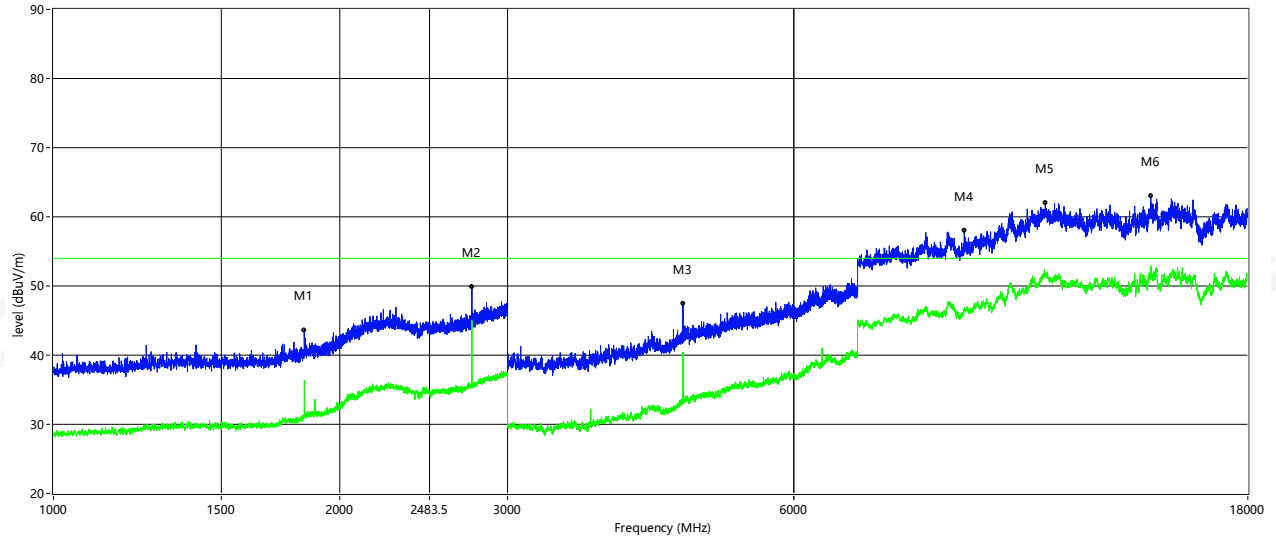


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1834.500	43.57	35.25	0.51	74.0	54.0	-18.75	207.20	100	Pass
2753.000	49.89	44.32	4.96	74.0	54.0	-9.68	178.80	100	Pass
4587.000	47.48	40.46	-7.72	74.0	54.0	-13.54	159.80	100	Pass
9062.500	57.98	46.38	4.61	74.0	54.0	-7.62	297.50	100	Pass
11026.000	62.03	51.96	10.08	74.0	54.0	-2.04	75.90	100	Pass
14232.500	63.01	52.28	11.35	74.0	54.0	-1.72	258.90	100	Pass



Temperature:	23.4(C)	Relative Humidity:	60%RH
Test Mode:	Mode 2	Phase:	Vertical
Describe:	Middle		

RE_FCC Test Case_FCC 15C 1GHz-18GHz

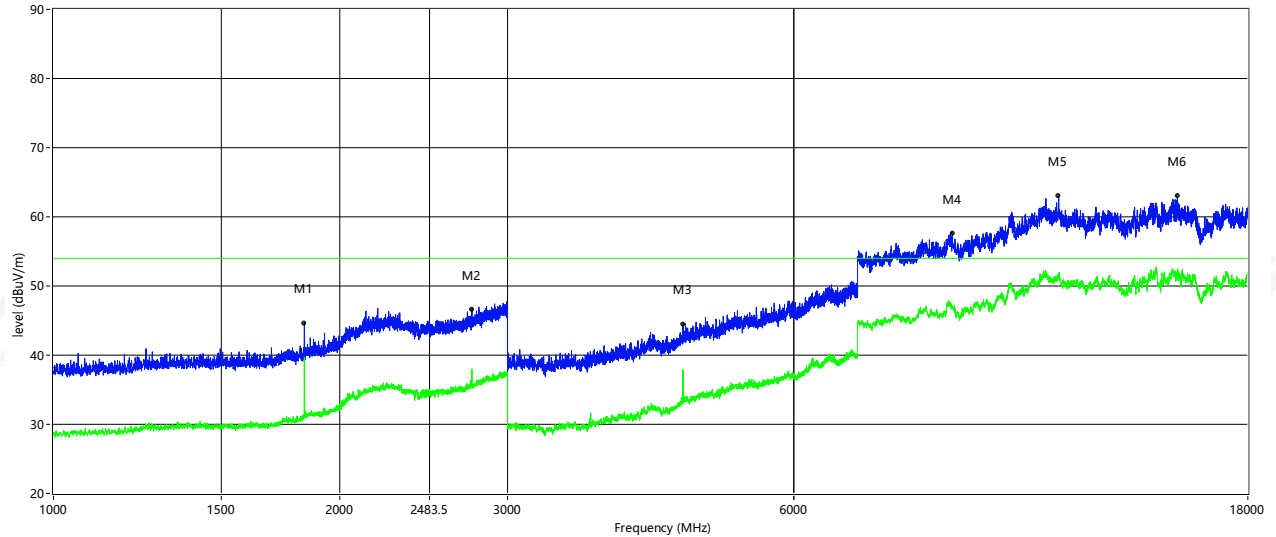


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1835.000	44.54	39.69	0.52	74.0	54.0	-14.31	127.40	100	Pass
2753.000	46.61	37.92	4.96	74.0	54.0	-16.08	232.70	100	Pass
4587.000	44.39	37.90	-7.72	74.0	54.0	-16.10	38.70	100	Pass
8804.000	57.53	46.77	4.83	74.0	54.0	-7.23	134.20	100	Pass
11389.000	63.02	51.49	9.72	74.0	54.0	-2.51	80.40	100	Pass
15178.500	62.94	51.90	10.88	74.0	54.0	-2.10	84.50	100	Pass



Temperature:	23.4(C)	Relative Humidity:	60%RH
Test Mode:	Mode 3	Phase:	Horizontal
Describe:	Hig		

RE_FCC Test Case_FCC 15C 1GHz-18GHz

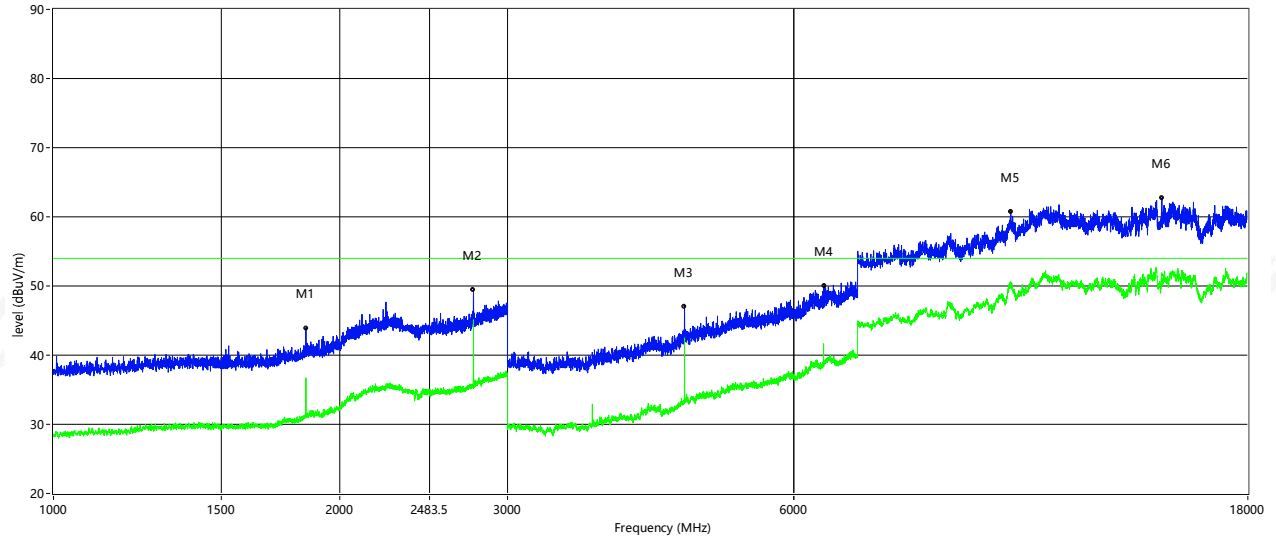


Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1842.000	43.87	36.71	0.64	74.0	54.0	-17.29	160.70	100	Pass
2763.000	49.40	45.10	5.03	74.0	54.0	-8.90	162.20	100	Pass
4605.000	47.06	42.49	-7.58	74.0	54.0	-11.51	247.20	100	Pass
6457.000	49.95	39.25	-0.77	74.0	54.0	-14.75	255.80	100	Pass
10140.500	60.75	50.01	7.15	74.0	54.0	-3.99	221.30	100	Pass
14617.500	62.76	51.80	11.16	74.0	54.0	-2.20	96.80	100	Pass



Temperature:	23.4(C)	Relative Humidity:	60%RH
Test Mode:	Mode 3	Phase:	Vertical
Describe:	Hig		


RE_FCC Test Case_FCC 15C 1GHz-18GHz

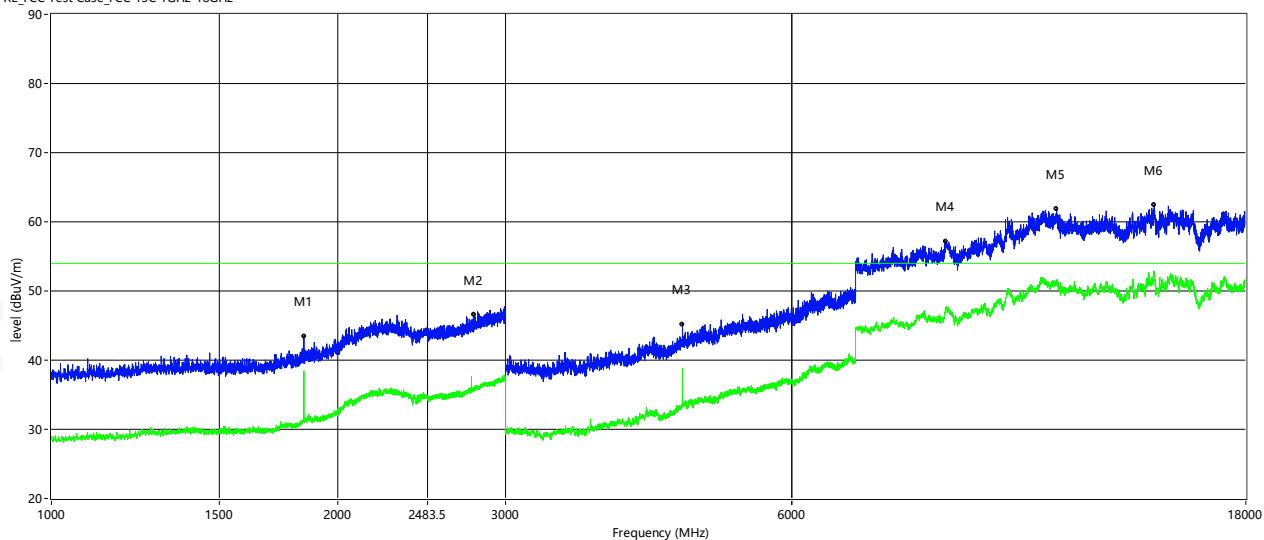

Frequency (MHz)	Peak Level (dBuV/m)	Average Level (dBuV/m)	Factor (dB)	PK Limit (dBuV/m)	AV Limit (dBuV/m)	Over Limit (dB)	Table (o)	Height (cm)	Verdict
1842.000	43.40	38.45	0.64	74.0	54.0	-15.55	104.10	100	Pass
2783.000	46.63	35.68	5.16	74.0	54.0	-18.32	112.40	100	Pass
4605.000	45.13	38.87	-7.58	74.0	54.0	-15.13	46.20	100	Pass
8710.500	57.10	47.65	5.13	74.0	54.0	-6.35	126.60	100	Pass
11389.000	61.84	51.55	9.72	74.0	54.0	-2.45	192.00	100	Pass
14416.750	62.41	52.61	11.23	74.0	54.0	-1.39	162.40	100	Pass



Duty cycle

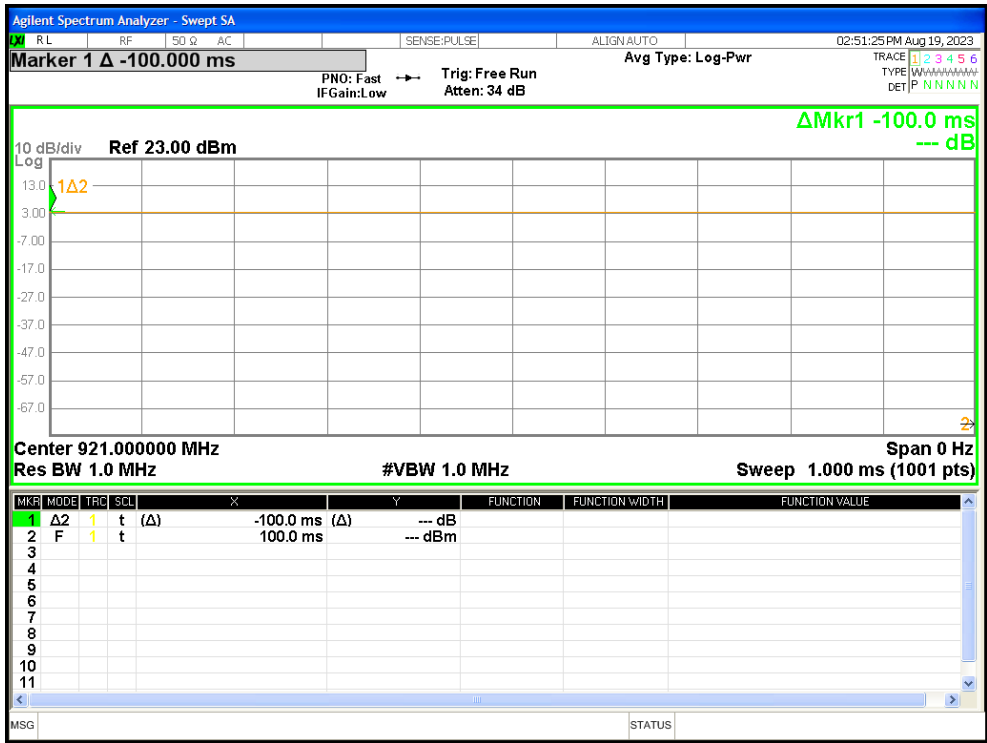


Ton (ms)	Tp (ms)	Duty Factor
100	100	0.00

Note: Duty Factor= $20 \cdot \text{LOG}_{10}(1/(T_{\text{on}}/T_{\text{p}}))$

(Radiation Band edge)

914.5MHz

Horizontal

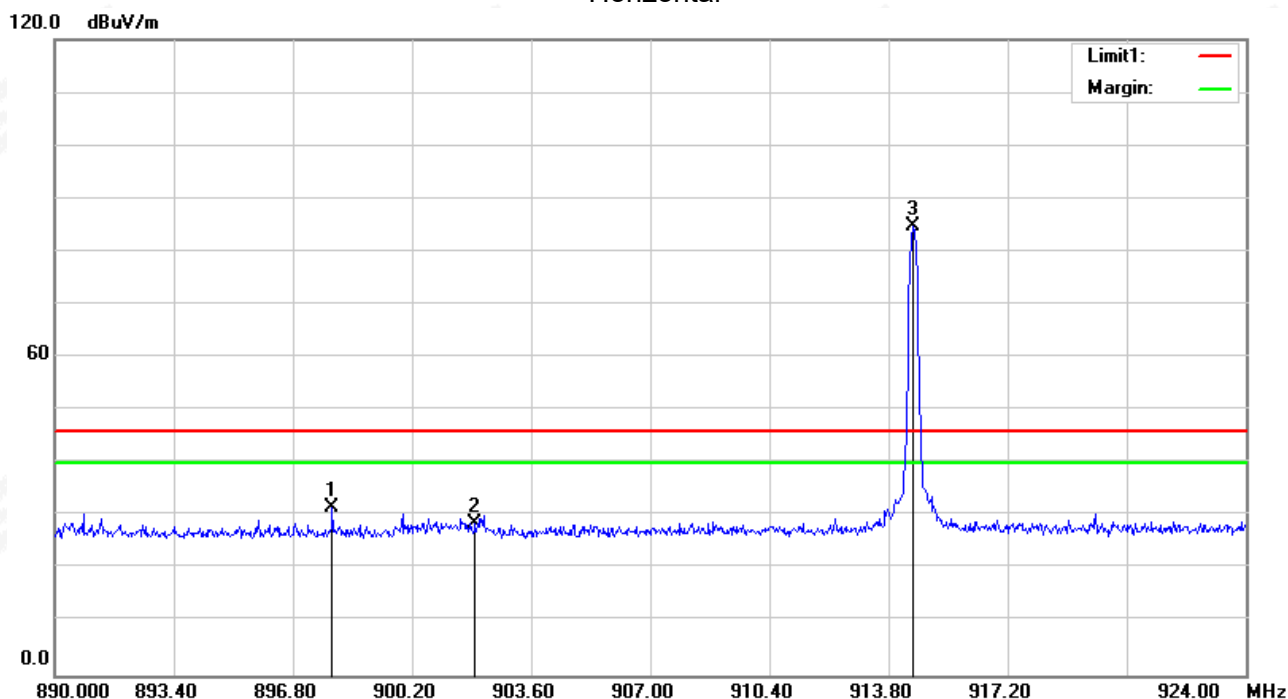


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	897.9220	32.07	-0.50	31.57	46.00	-14.43	peak
2	902.0000	29.04	-0.40	28.64	46.00	-17.36	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
3	914.5000	84.82	-0.11	-	84.71	114	-29.29	peak
4	914.5000	84.82	-0.11	0	84.71	94	-9.29	AVG

Vertical

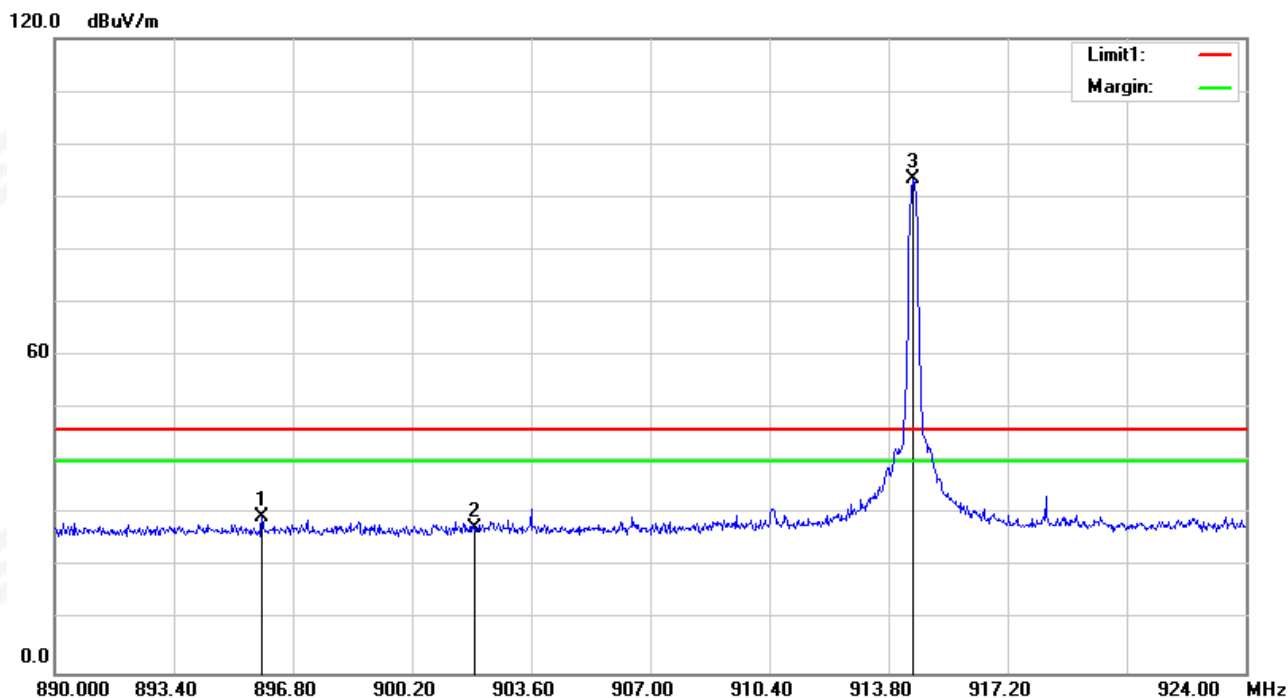


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	895.9160	30.19	-0.55	29.64	46.00	-16.36	peak
2	902.0000	27.91	-0.40	27.51	46.00	-18.49	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
3	914.5000	93.58	-0.11	-	93.47	114	-20.53	peak
4	914.5000	93.58	-0.11	0	93.47	94	-0.53	AVG


917.5MHz
Horizontal

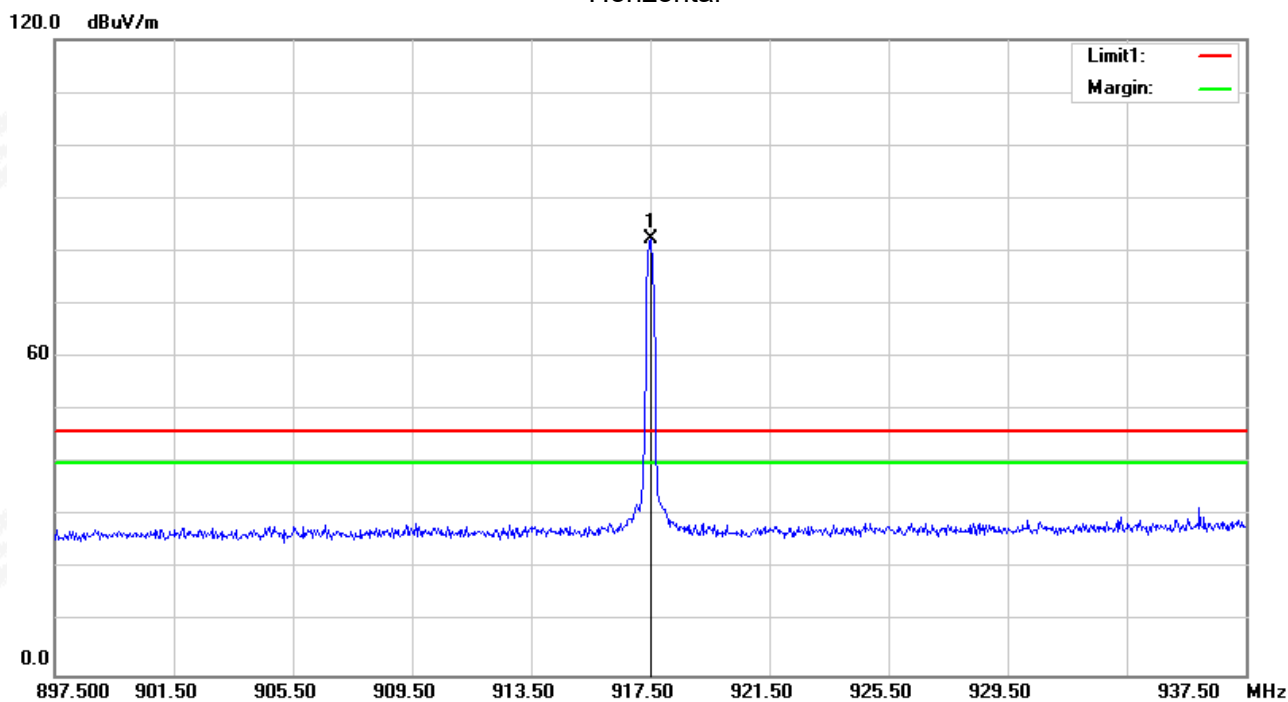

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	917.5000	82.49	-0.06	-	82.43	114	-31.57	peak
2	917.5000	82.49	-0.06	0	82.43	94	-11.57	AVG


Vertical

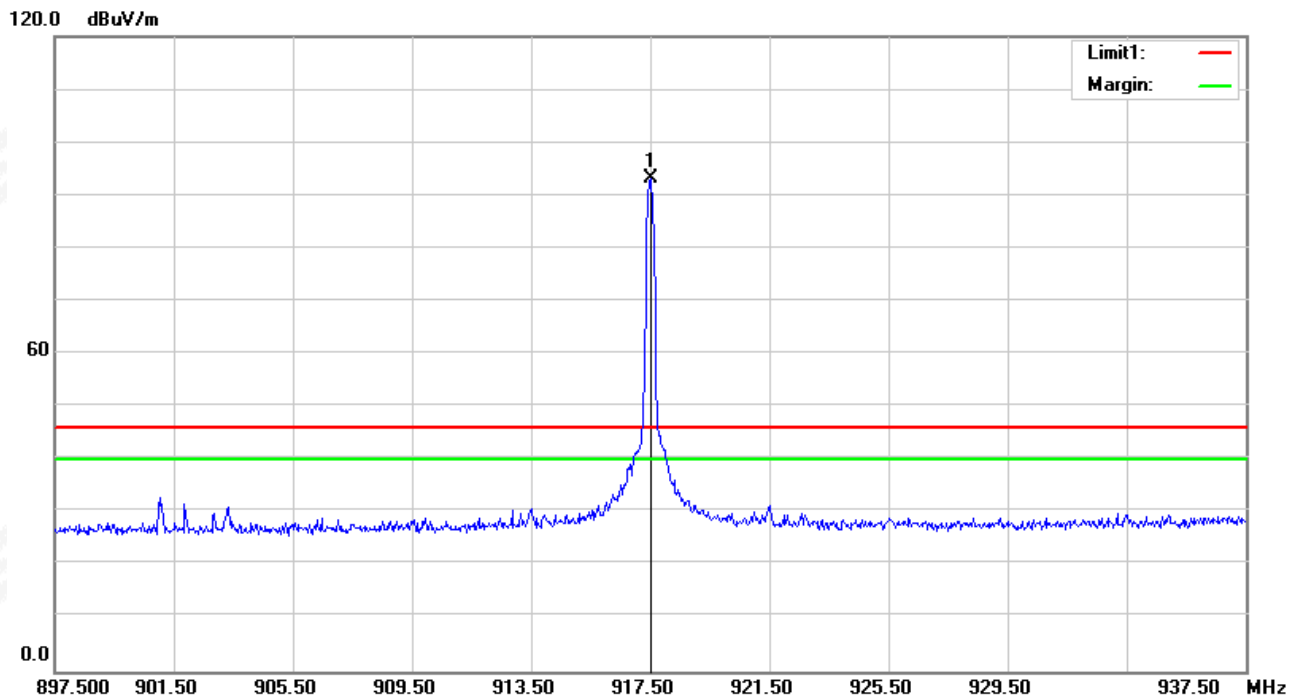

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	917.5000	93.13	-0.06	-	93.07	114	-20.93	peak
2	917.5000	93.13	-0.06	0	93.07	94	-0.93	AVG

921.00MHz
Horizontal

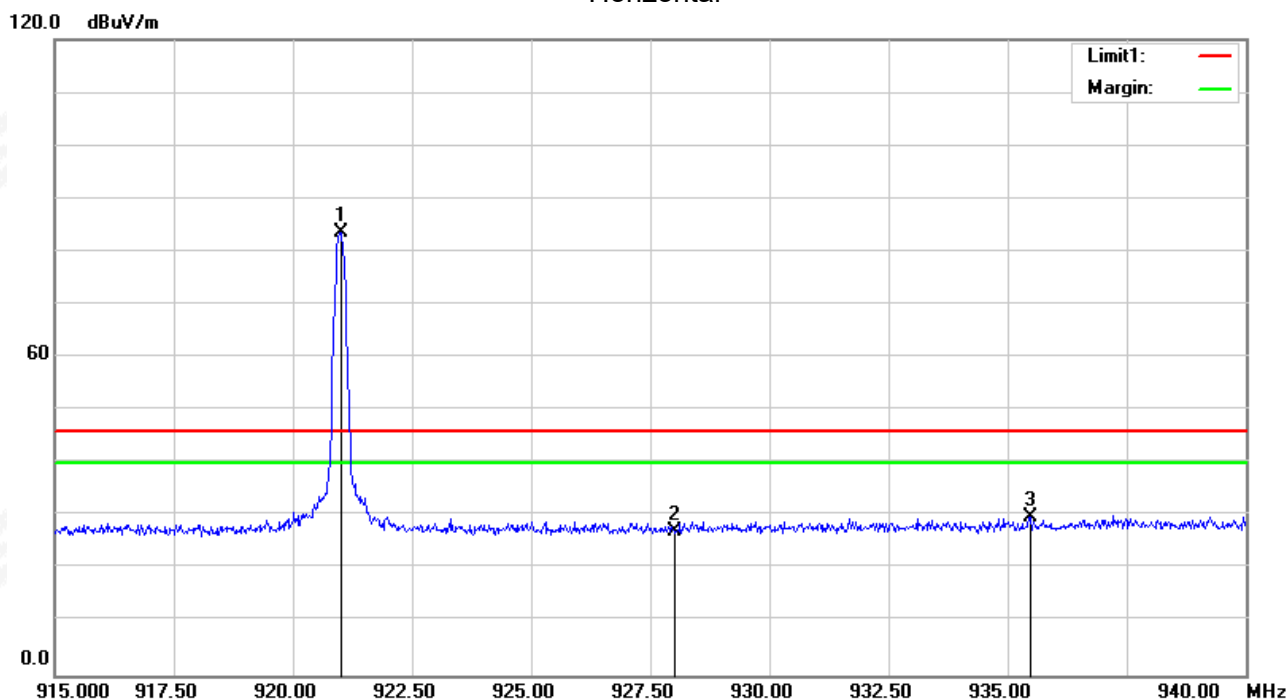


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	928.0000	26.70	0.43	27.13	46.00	-18.87	peak
3	935.4750	28.88	1.01	29.89	46.00	-16.11	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	921.0000	83.48	0.04	-	83.52	114	-30.48	peak
4	921.0000	83.48	0.04	0	83.52	94	-10.48	AVG

Vertical

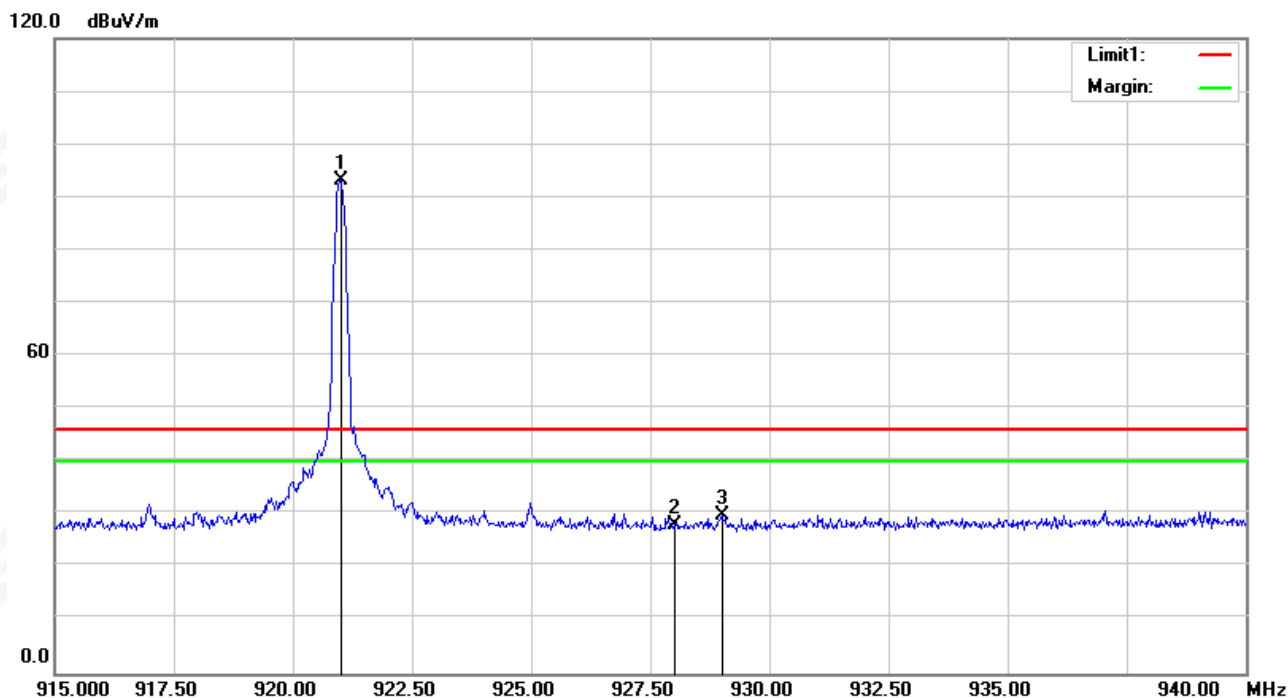

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2	928.0000	27.57	0.43	28.00	46.00	-18.00	peak
3	929.0000	29.43	0.49	29.92	46.00	-16.08	peak

Fundamental Frequency

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Duty cycle Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	921.0000	93.05	0.04	-	93.09	114	-20.91	peak
4	921.0000	93.05	0.04	0	93.09	94	-0.91	AVG

4. BANDWIDTH TEST

4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- b. Spectrum Setting : RBW= 1% to 5% OBW, VBW $\geq$ RBW, Sweep time = Auto.

4.2 TEST SETUP



4.3 EUT OPERATION CONDITIONS

TX mode.




4.4 TEST RESULTS

Temperature:	25 °C	Relative Humidity:	50%
Test Voltage:	AC 120V/60Hz		


Test Channel	Frequency(MHz)	20 dB Bandwidth(KHz)	99% Bandwidth(KHz)
CH01	914.5	79.02	74.946
CH02	917.5	74.61	73.019
CH03	921.0	75.74	73.638

CH01

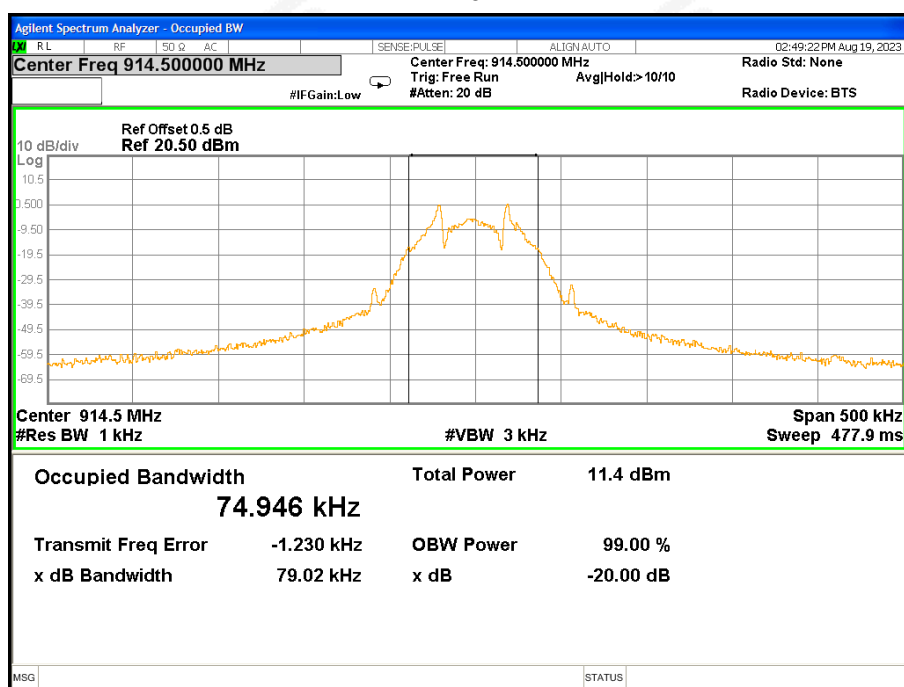




CH02

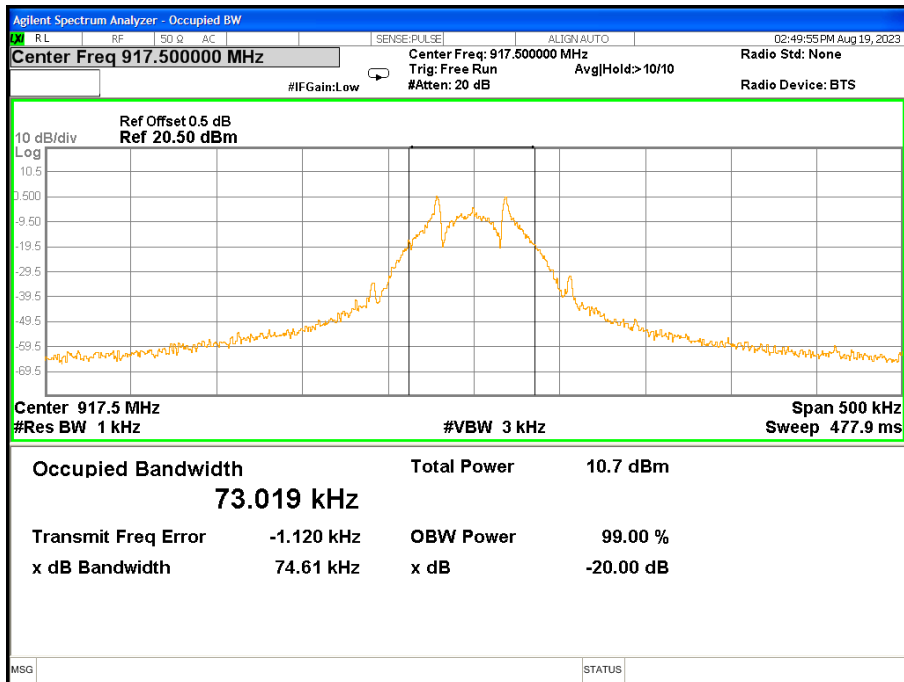

CH03

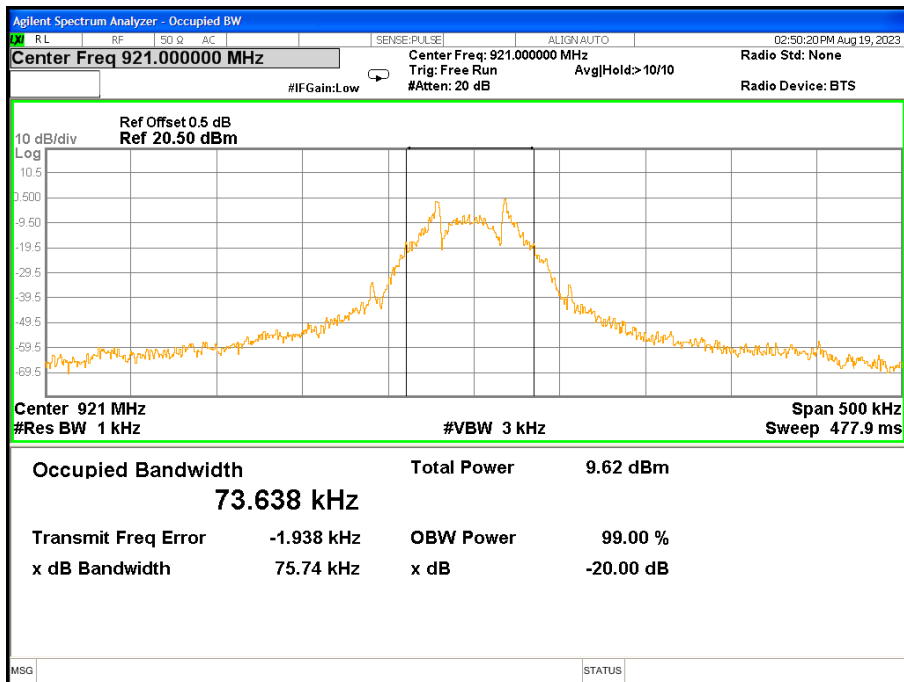



5. ANTENNA REQUIREMENT

5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

5.2 EUT ANTENNA

The EUT antenna is Internal Antenna. It conforms to the standard requirements.



APPENDIX- PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****