




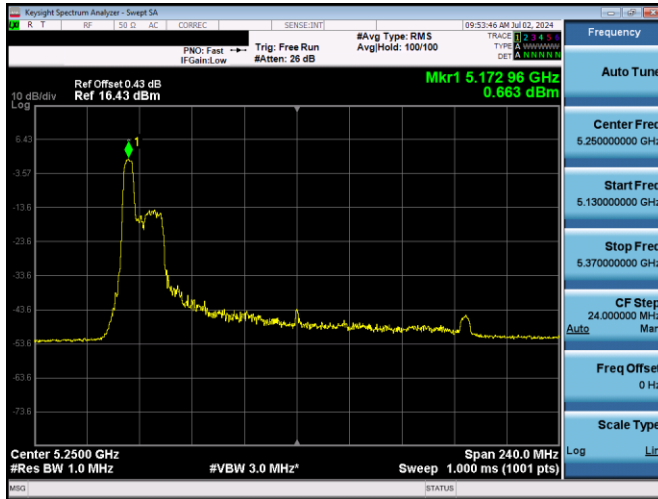


Plot 7-391. ISED PSD SDM Antenna WF5T (160MHz BW 11ax Index 37 - RU52 - Ch.50 (L))

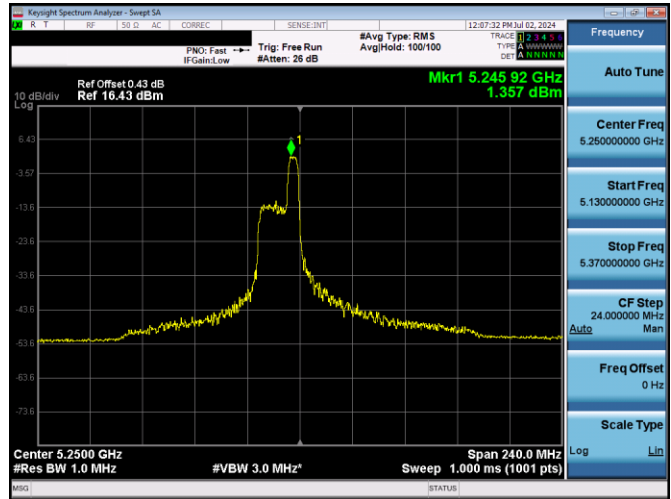


Plot 7-394. ISED PSD SDM Antenna WF2 (160MHz BW 11ax Index 52 - RU52 - Ch.50 (L))

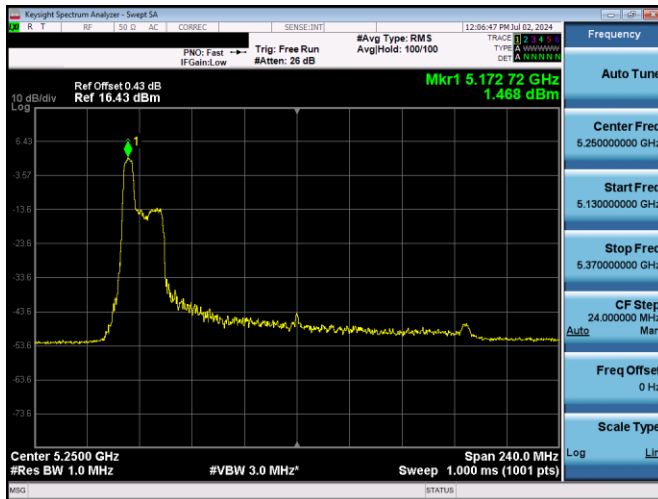


Plot 7-392. ISED PSD SDM Antenna WF2 (160MHz BW 11ax Index 37 - RU52 - Ch.50 (L))

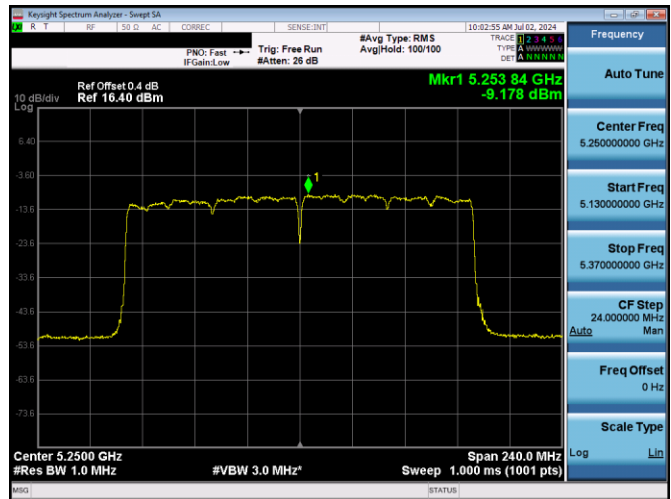

Plot 7-395. ISED PSD CDD Antenna WF5T (160MHz BW 11ax - RU996x2 - Ch.50)

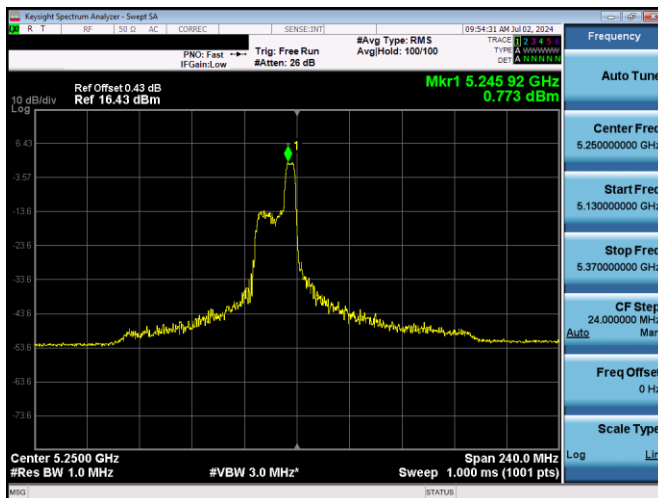

Plot 7-393. ISED PSD SDM Antenna WF5T (160MHz BW 11ax Index 52 - RU52 - Ch.50 (L))

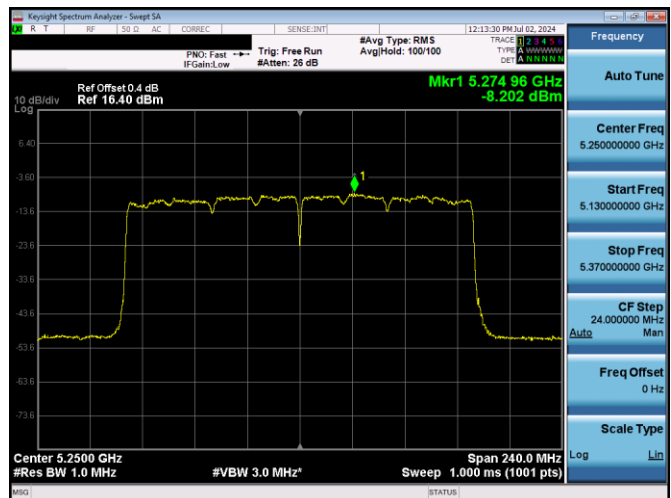

Plot 7-396. ISED PSD CDD Antenna WF2 (160MHz BW 11ax - RU996x2 - Ch.50)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 148 of 274

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Note:

Per ANSI C63.10-2020 Subclause 14.5.2.2 and KDB 662911 v02r01 Section E)2), the power spectral density at Antenna WF5T and Antenna WF2 were first measured separately during CDD/SDM transmission as shown in the section above. The measured values were then summed in linear power units then converted back to dBm.

Sample Directional Gain Calculation:

For correlated signals, assuming the antenna gain is 4.6 dBi for Antenna WF5T and 0.1 dBi for Antenna WF2.

$$\begin{aligned} \text{Directional gain} &= 10 \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{4.6/20} + 10^{0.1/20} / 2] \text{ dBi} \\ &= 5.65 \text{ dBi} \end{aligned}$$

For uncorrelated signals, assuming the antenna gain is 4.6 dBi for Antenna WF5T and 0.1 dBi for Antenna WF2.

$$\begin{aligned} \text{Directional gain} &= 10 \log[(10^{G_1/10} + 10^{G_2/10} + \dots + 10^{G_N/10}) / N_{\text{ANT}}] \text{ dBi} \\ &= 10 \log[(10^{4.6/10} + 10^{0.1/10} / 2] \text{ dBi} \\ &= 2.91 \text{ dBi} \end{aligned}$$

Sample CDD/SDM Calculation:

Assuming the average conducted power spectral density was measured to be -0.27 dBm for Antenna WF5T and 0.63 dBm for Antenna WF2.

$$\begin{aligned} \text{Antenna WF5T} + \text{Antenna WF2} &= \text{CDD/SDM} \\ (-0.27 \text{ dBm} + 0.63 \text{ dBm}) &= (0.94 \text{ mW} + 1.16 \text{ mW}) = 2.10 \text{ mW} = 3.22 \text{ dBm} \end{aligned}$$

Sample e.i.r.p Power Spectral Density Calculation:

Assuming the average CDD/SDM power density was calculated to be 3.22 dBm with directional gain of 2.91 dBi.

$$\begin{aligned} \text{e.i.r.p. Power Spectral Density(dBm)} &= \text{Power Spectral Density (dBm)} + \text{directional gain (dBi)} \\ 3.22 \text{ dBm} + 2.91 \text{ dBi} &= 6.13 \text{ dBm} \end{aligned}$$

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 149 of 274

V 10.6 10/27/2023

7.6 Radiated Spurious Emission – Above 1GHz

§15.407(b) §15.205 §15.209; RSS-Gen [8.9]

Test Overview and Limit

All out of band radiated spurious emissions are measured with a spectrum analyzer connected to a receive antenna while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2020 and KDB 789033 D02 v02r01, and at the appropriate frequencies. All channels, modes (e.g. RU26, 52 Tones, RU106, RU242, RU484, RU996 and RU996x2), and modulations/data rates were investigated among all UNII bands. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.

For transmitters operating in the 5.15-5.25 GHz and 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of –27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR and Table 7 of RSS-Gen (8.10) must not exceed the limits shown in Table 7-123 per Section 15.209 and RSS-Gen (8.9).

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
Above 960.0 MHz	500	3

Table 7-123. Radiated Limits

Test Procedures Used

ANSI C63.10-2020 – Subclauses 12.7.7.2, 12.7.6

KDB 789033 D02 v02r01 – Section G

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 150 of 274

V 10.6 10/27/2023

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions about this or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact ct.info@element.com.

Test Settings

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = power average (RMS)
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span/RBW}$)
6. Averaging type = power (RMS)
7. Sweep time = auto couple
8. Trace was averaged over 100 sweeps

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

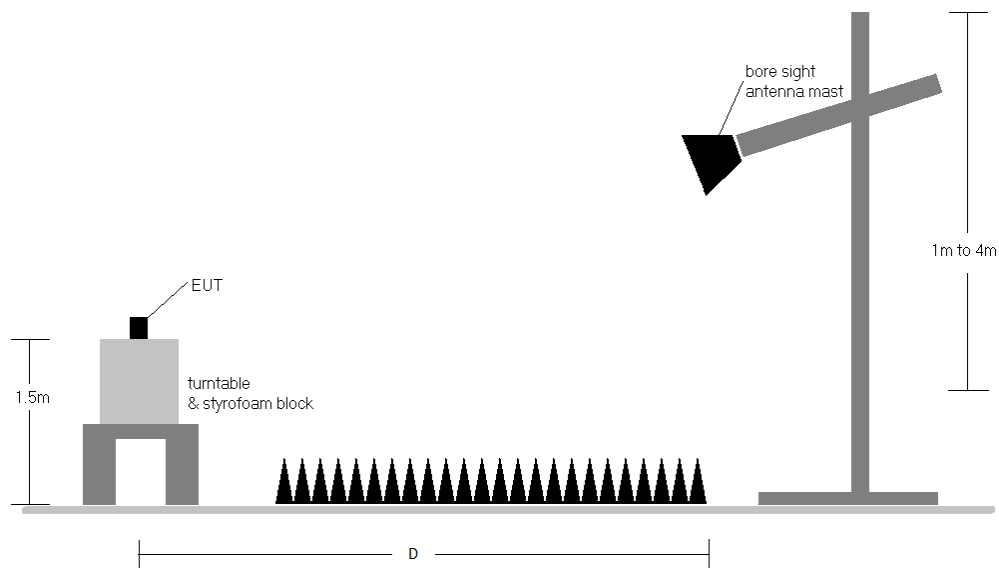


Figure 7-5. Test Instrument & Measurement Setup

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 151 of 274

V 10.6 10/27/2023

Test Notes

1. All emissions that lie in the restricted bands (denoted by a * next to the frequency) specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-123.
2. All spurious emissions lying in restricted bands specified in §15.205 and Section 8.10 of RSS-Gen are below the limit shown in Table 7-123. All spurious emissions that do not lie in a restricted band are subject to a peak limit of -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions of 68.2dBμV/m.
3. The antenna is manipulated through typical positions, polarity and length during the tests. The EUT is manipulated through three orthogonal planes.
4. This unit was tested with its standard battery.
5. The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1GHz. Above 1 GHz, average and peak measurements were taken using linearly polarized horn antennas.
6. D is the measurement test distance and emissions 1-18GHz were measured at a 3 meters test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
7. The wide spectrum spurious emissions plots shown on the following pages are used only for the purpose of emission identification. Any emissions found to be within 20dB of the limit are fully investigated and the results are shown in this section.
8. The “-” shown in the following RSE tables are used to denote a noise floor measurement.
9. Per RSS-247 Section 6.2.3, transmission on channels which overlap the 5600-5650 MHz is prohibited. This device operates under these frequencies only under the control of a certified master device and does not support active scanning on these channels. This device does not transmit any beacons or initiate any transmissions in UNII Bands 2A or 2C.
10. For radiated measurements, emissions were investigated for the fully-loaded RU configuration and for all of the partially-loaded RU configurations. Among all of the available partially-loaded RU configurations, only the configuration with the worst case emissions is reported.

FCC ID: BCGA2993 IC: 579C-A2993	 MEASUREMENT REPORT (CERTIFICATION)		Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 152 of 274

V 10.6 10/27/2023

Sample Calculations

Determining Spurious Emissions Levels

- Field Strength Level $_{[dB\mu V/m]} = \text{Analyzer Level }_{[dBm]} + 107 + \text{AFCL }_{[dB/m]}$
- $\text{AFCL }_{[dB/m]} = \text{Antenna Factor }_{[dB/m]} + \text{Cable Loss }_{[dB]} - \text{Preamplifier Gain }_{[dB]}$
- $\text{Margin }_{[dB]} = \text{Field Strength Level }_{[dB\mu V/m]} - \text{Limit }_{[dB\mu V/m]}$


Radiated Band Edge Measurement Offset

- The amplitude offset shown in the radiated restricted band edge plots in Section 7.6.4 to Section 7.6.15 was calculated using the formula:
Offset (dB) = (Antenna Factor + Cable Loss + Attenuator) – Preamplifier Gain

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 153 of 274

V 10.6 10/27/2023

7.6.1 Antenna WF5T Radiated Spurious Emission RU26/52

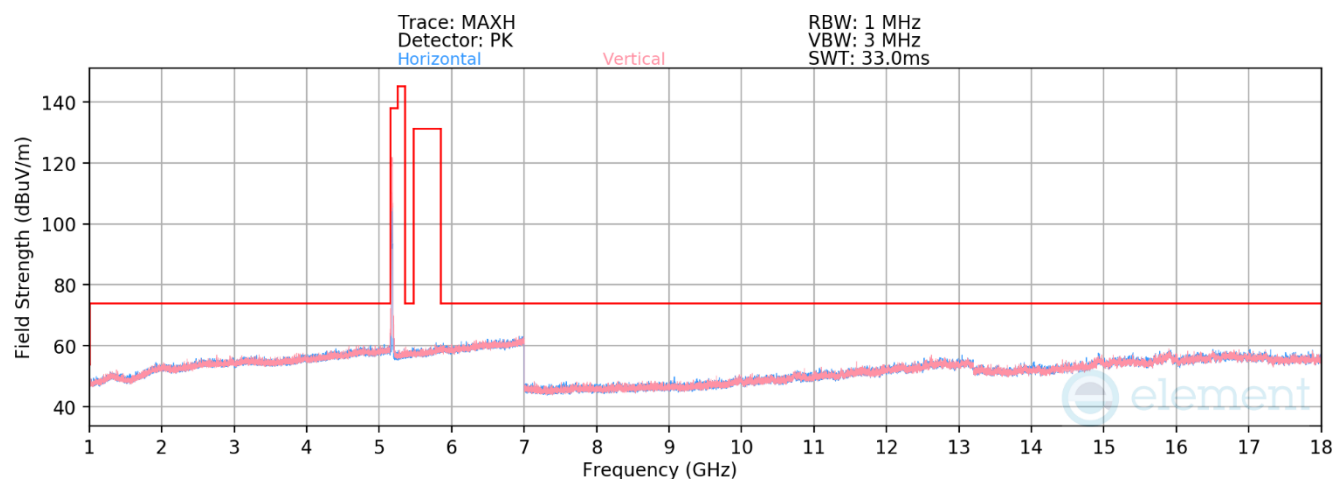

Plot 7-397. RSE above 1GHz Antenna WF5T (11ax – Ch.36 – RU26)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS0
RU Index:	4
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10360.00	Peak	H	-	-	-71.51	15.25	50.74	68.23	-17.49
*	15540.00	Average	H	-	-	-85.12	23.50	45.38	53.98	-8.60
*	15540.00	Peak	H	-	-	-73.50	23.25	56.76	73.98	-17.22

Table 7-124. Radiated Measurements Antenna WF5T (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 154 of 274

V 10.6 10/27/2023

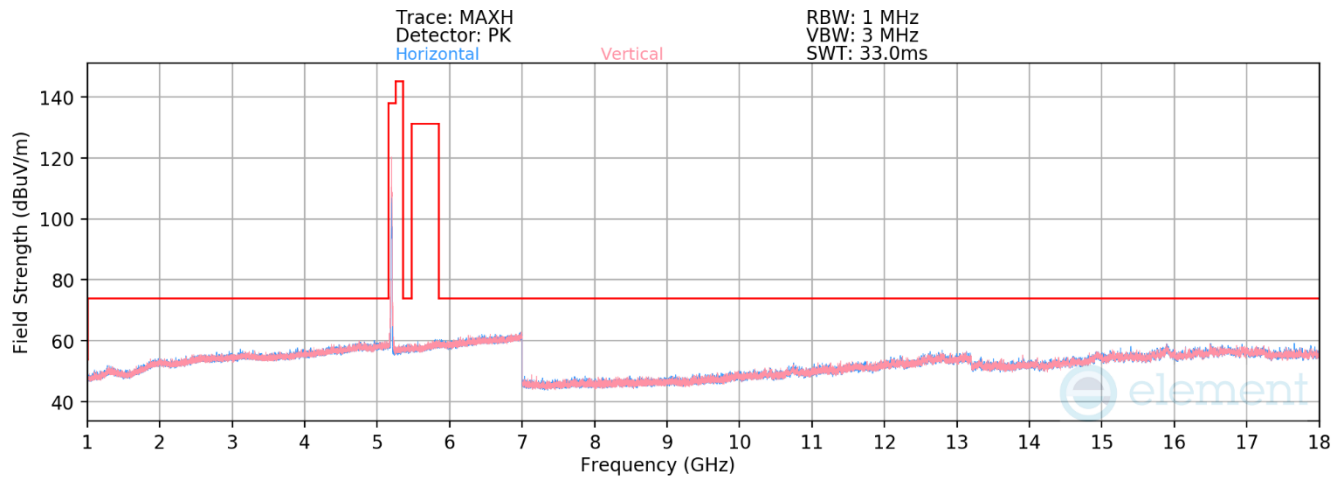

Plot 7-398. RSE above 1GHz Antenna WF5T (11ax – Ch.40 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10400.00	Peak	V	-	-	-70.73	14.63	50.90	68.23	-17.33
*	15600.00	Average	H	-	-	-85.30	23.30	45.00	53.98	-8.98
*	15600.00	Peak	H	-	-	-73.50	22.74	56.24	73.98	-17.74

Table 7-125. Radiated Measurements Antenna WF5T (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 155 of 274

V 10.6 10/27/2023

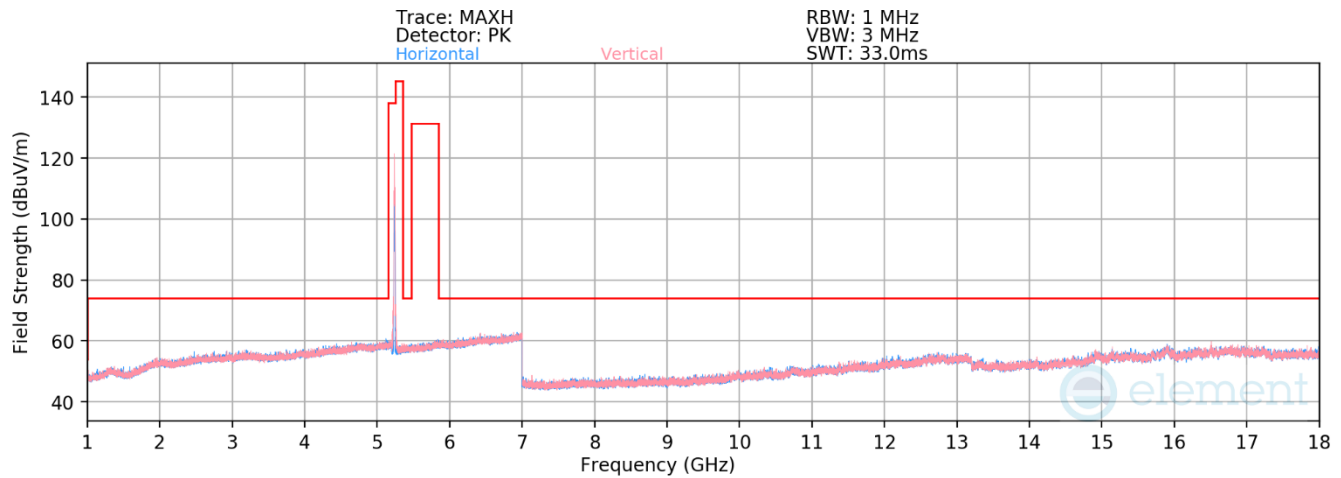

Plot 7-399. RSE above 1GHz Antenna WF5T (11ax – Ch.48 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	H	-	-	-71.10	15.20	51.11	68.23	-17.12
* 15720.00	Average	H	-	-	-84.51	23.37	45.86	53.98	-8.12
* 15720.00	Peak	H	-	-	-73.57	23.90	57.33	73.98	-16.65

Table 7-126. Radiated Measurements Antenna WF5T (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 156 of 274

V 10.6 10/27/2023

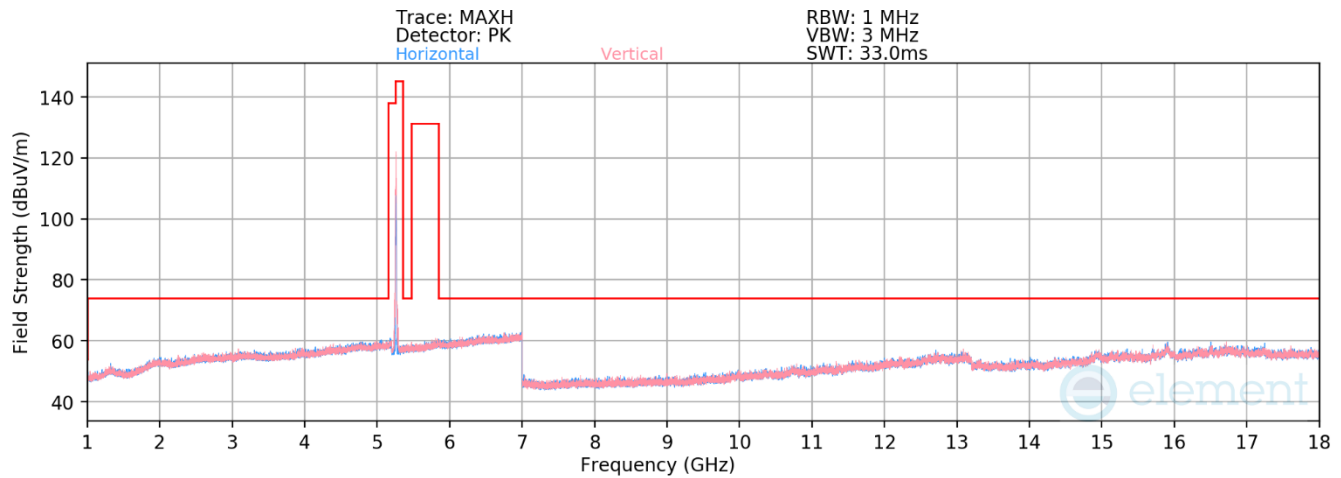

Plot 7-400. RSE above 1GHz Antenna WF5T (11ax – Ch.52 – RU52)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS0

RU Index: 38

Distance of Measurements: 3 Meters

Operating Frequency: 5260MHz


Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-71.76	15.23	50.47	68.23	-17.76
* 15780.00	Average	H	-	-	-84.61	24.23	46.63	53.98	-7.35
* 15780.00	Peak	H	-	-	-72.52	23.62	58.11	73.98	-15.87

Table 7-127. Radiated Measurements Antenna WF5T (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 157 of 274

V 10.6 10/27/2023

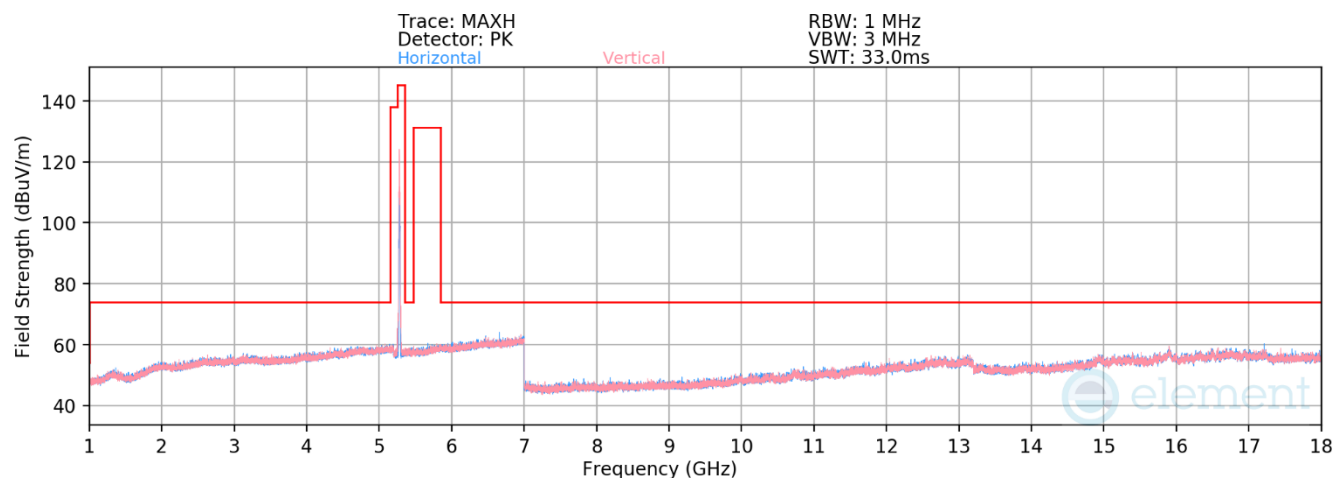

Plot 7-401. RSE above 1GHz Antenna WF5T (11ax – Ch.56 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10560.00	Peak	H	-	-	-71.82	14.98	50.16	68.23	-18.07
*	15840.00	Average	H	-	-	-84.87	24.55	46.69	53.98	-7.29
*	15840.00	Peak	H	-	-	-73.55	24.55	58.00	73.98	-15.98

Table 7-128. Radiated Measurements Antenna WF5T (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 158 of 274

V 10.6 10/27/2023

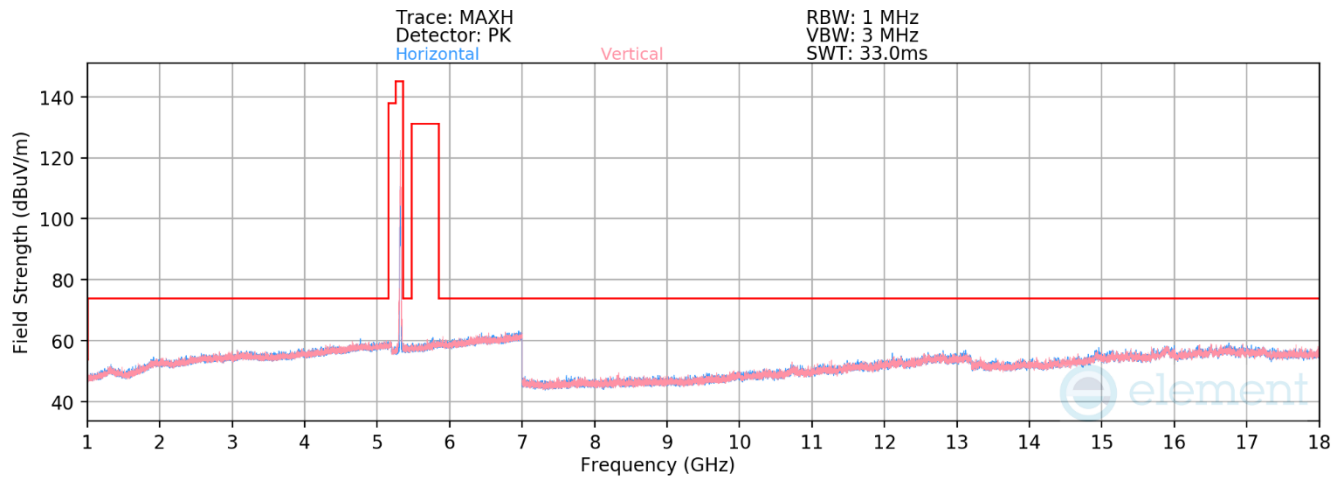

Plot 7-402. RSE above 1GHz Antenna WF5T (11ax – Ch.64 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	H	-	-	-82.38	15.23	39.85	53.98	-14.13
*	10640.00	Peak	H	-	-	-70.72	15.59	51.87	73.98	-22.11
*	15960.00	Average	V	-	-	-85.48	25.16	46.68	53.98	-7.30
*	15960.00	Peak	V	-	-	-73.84	24.43	57.59	73.98	-16.39

Table 7-129. Radiated Measurements Antenna WF5T (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 159 of 274

V 10.6 10/27/2023

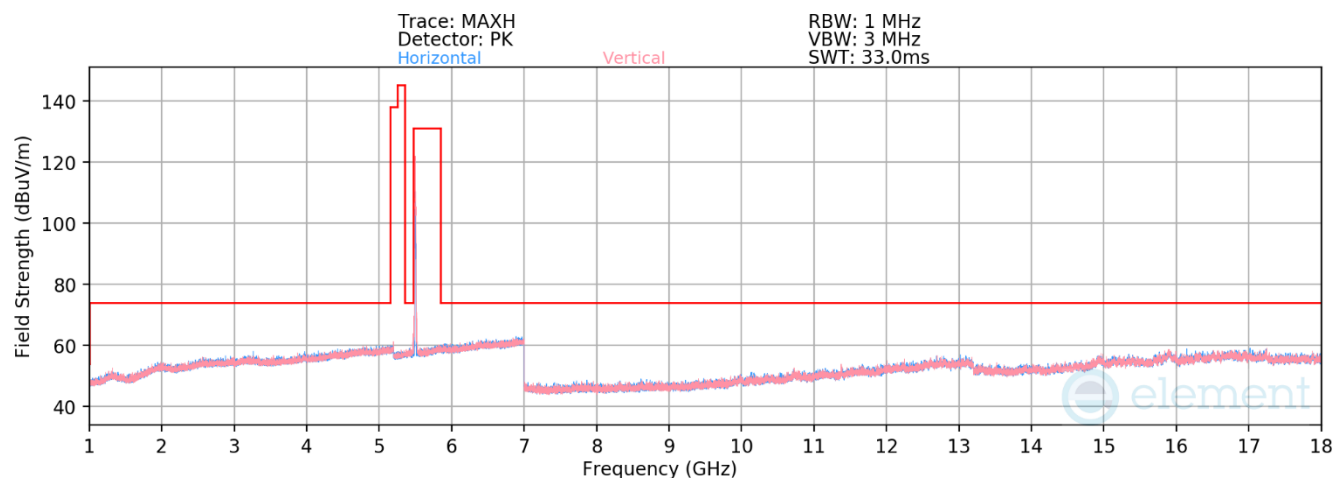

Plot 7-403. RSE above 1GHz Antenna WF5T (11ax – Ch.100 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	V	-	-	-83.25	16.40	40.15	53.98	-13.83
*	11000.00	Peak	V	-	-	-70.42	15.86	52.45	73.98	-21.53
	16500.00	Peak	H	-	-	-74.07	25.87	58.80	68.23	-9.43

Table 7-130. Radiated Measurements Antenna WF5T (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 160 of 274

V 10.6 10/27/2023

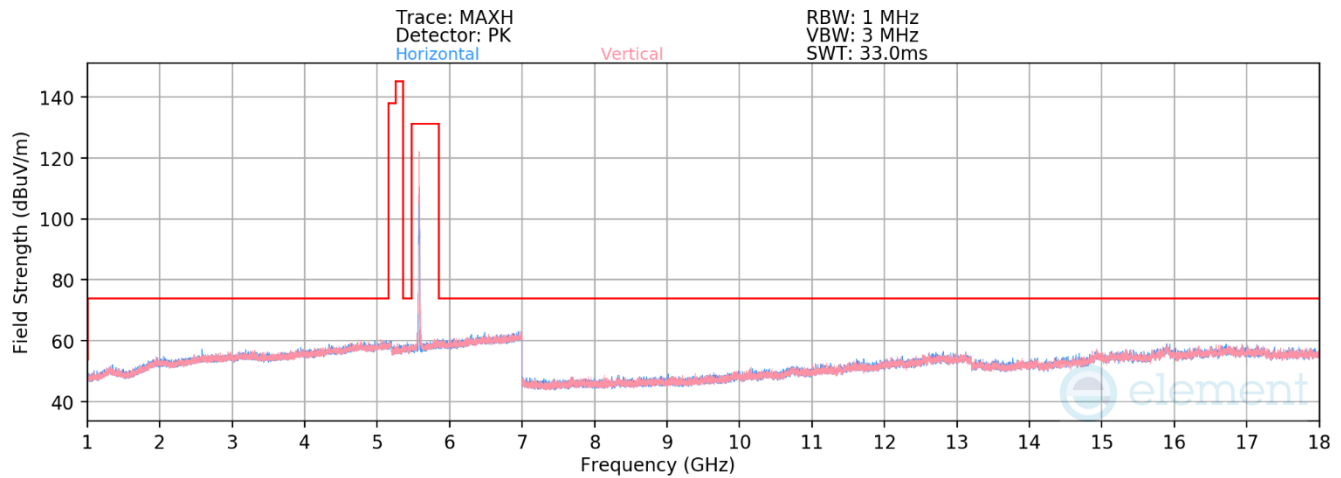

Plot 7-404. RSE above 1GHz Antenna WF5T (11ax – Ch.116 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	V	-	-	-82.60	16.49	40.89	53.98	-13.09
*	11160.00	Peak	V	-	-	-71.88	16.58	51.70	73.98	-22.28
	16740.00	Peak	H	-	-	-72.93	25.28	59.36	68.23	-8.87

Table 7-131. Radiated Measurements Antenna WF5T (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 161 of 274

V 10.6 10/27/2023

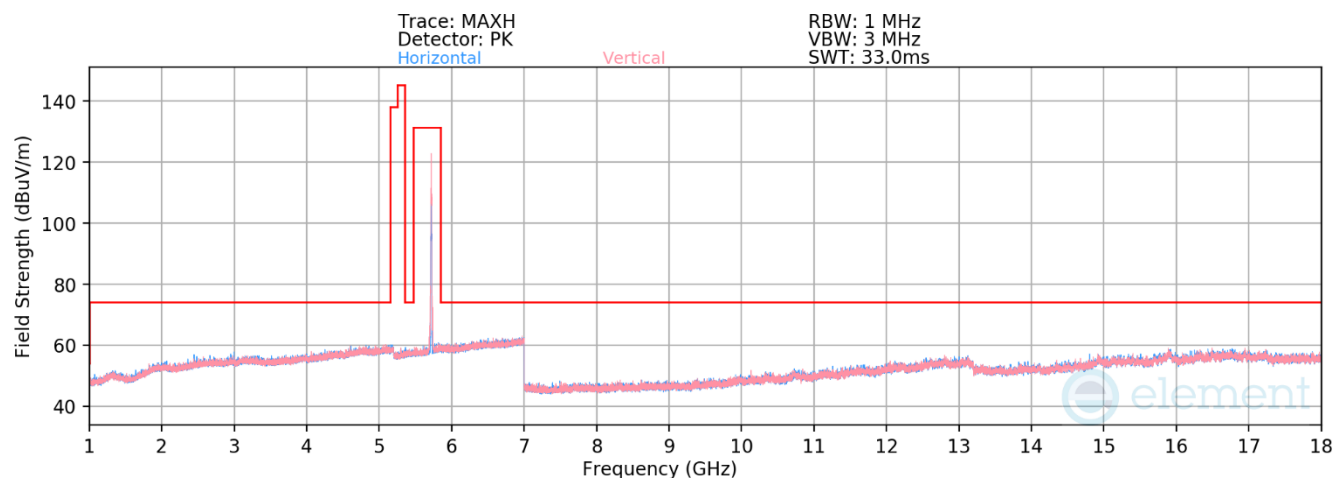

Plot 7-405. RSE above 1GHz Antenna WF5T (11ax – Ch.144 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-83.25	17.28	41.03	53.98	-12.95
*	11440.00	Peak	H	-	-	-72.08	17.25	52.17	73.98	-21.81
	17160.00	Peak	H	-	-	-73.59	24.80	58.21	68.23	-10.02

Table 7-132. Radiated Measurements Antenna WF5T (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 162 of 274

V 10.6 10/27/2023

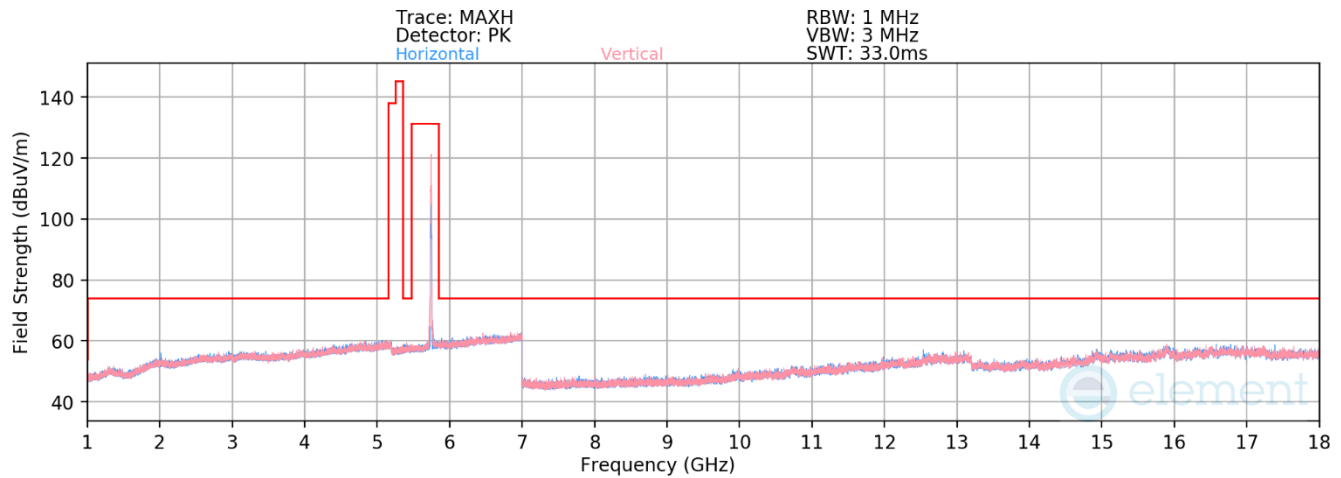

Plot 7-406. RSE above 1GHz Antenna WF5T (11ax – Ch.149 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	V	-	-	-82.78	16.89	41.11	53.98	-12.87
*	11490.00	Peak	V	-	-	-71.77	16.67	51.91	73.98	-22.07
	17235.00	Peak	H	-	-	-73.49	24.93	58.43	68.23	-9.80

Table 7-133. Radiated Measurements Antenna WF5T (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 163 of 274

V 10.6 10/27/2023

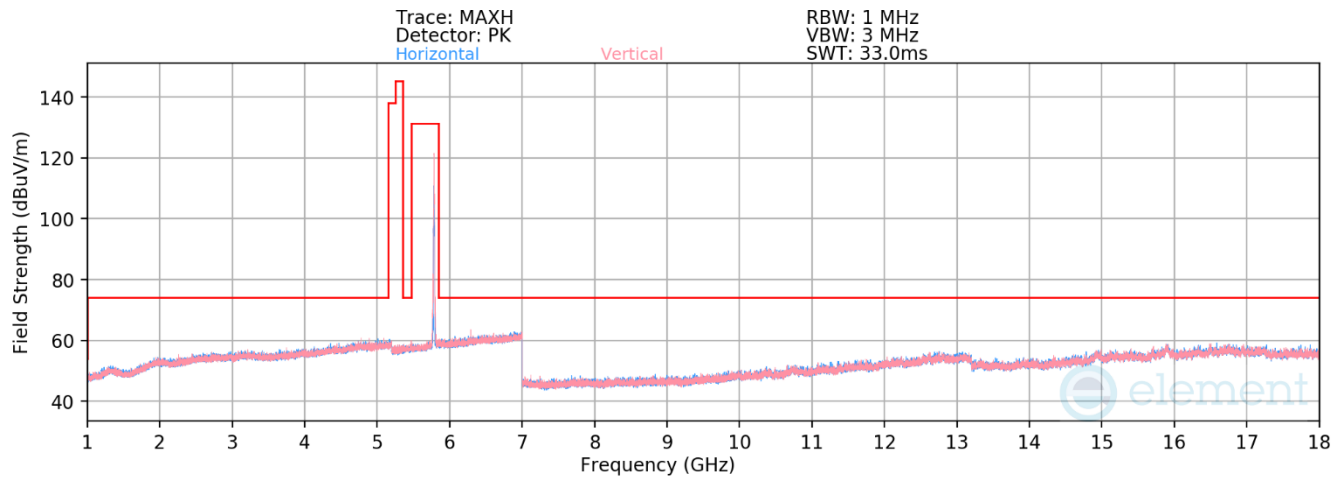

Plot 7-407. RSE above 1GHz Antenna WF5T (11ax – Ch.157 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	V	-	-	-83.20	17.13	40.92	53.98	-13.06
*	11570.00	Peak	V	-	-	-71.97	17.30	52.34	73.98	-21.64
	17355.00	Peak	H	-	-	-74.12	24.61	57.49	68.23	-10.74

Table 7-134. Radiated Measurements Antenna WF5T (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 164 of 274

V 10.6 10/27/2023

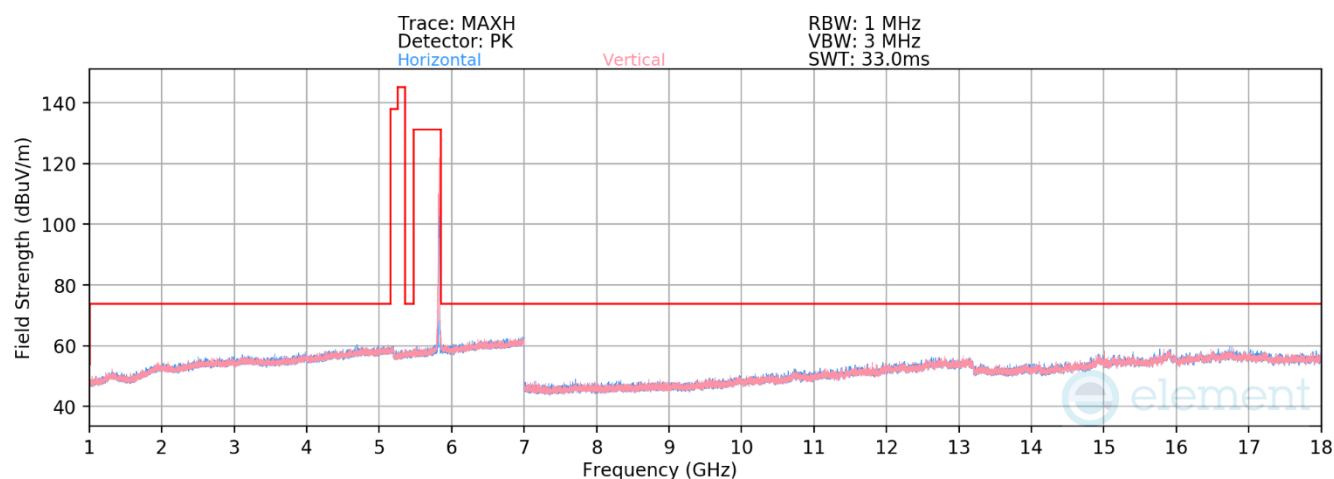

Plot 7-408. RSE above 1GHz Antenna WF5T (11ax – Ch.165 – RU26)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11650.00	Average	H	-	-	-82.98	17.17	41.19	53.98	-12.79
*	11650.00	Peak	H	-	-	-72.14	17.53	52.39	73.98	-21.59
	17475.00	Peak	V	-	-	-74.00	24.78	57.77	68.23	-10.46

Table 7-135. Radiated Measurements Antenna WF5T (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 165 of 274

V 10.6 10/27/2023

RU242

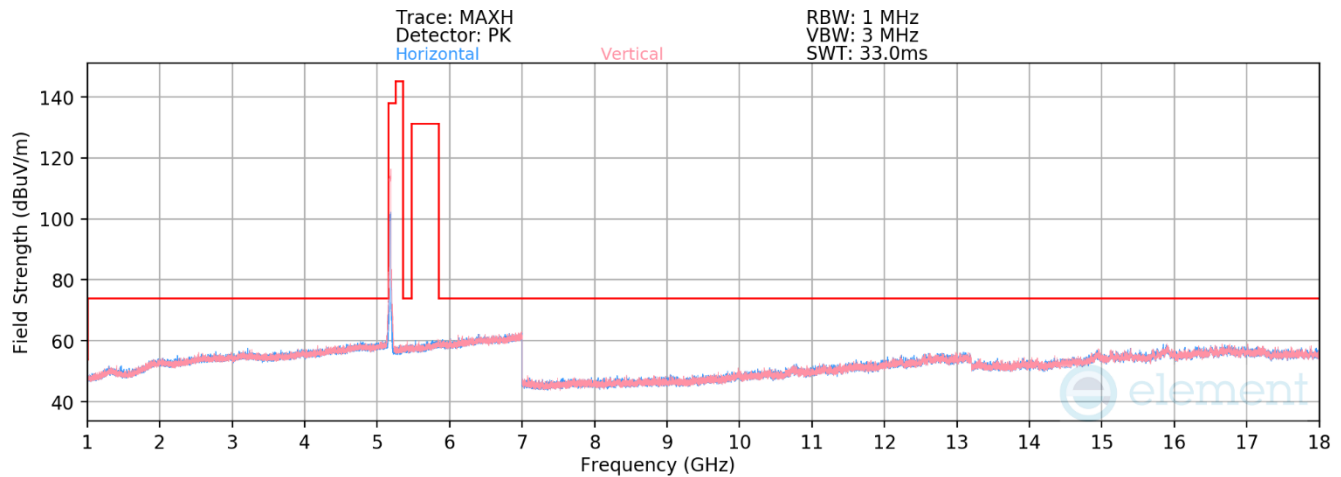

Plot 7-409. RSE above 1GHz Antenna WF5T (11ax – Ch.36 – RU242)


Mode:	802.11ax (20MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-70.49	15.41	51.92	68.23	-16.31
* 15540.00	Average	V	-	-	-85.00	23.50	45.50	53.98	-8.48
* 15540.00	Peak	V	-	-	-74.33	23.50	56.17	73.98	-17.81

Table 7-136. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 166 of 274

V 10.6 10/27/2023

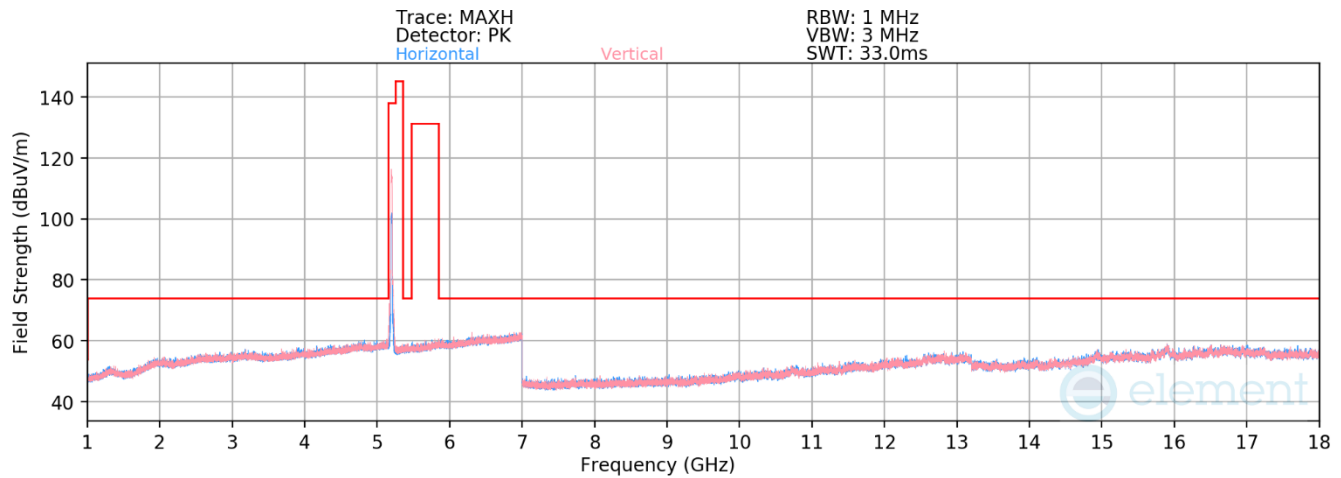


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-71.85	15.38	50.53	68.23	-17.70
* 15600.00	Average	H	-	-	-85.05	23.30	45.25	53.98	-8.73
* 15600.00	Peak	H	-	-	-72.97	22.53	56.56	73.98	-17.42

Table 7-137. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 167 of 274

V 10.6 10/27/2023

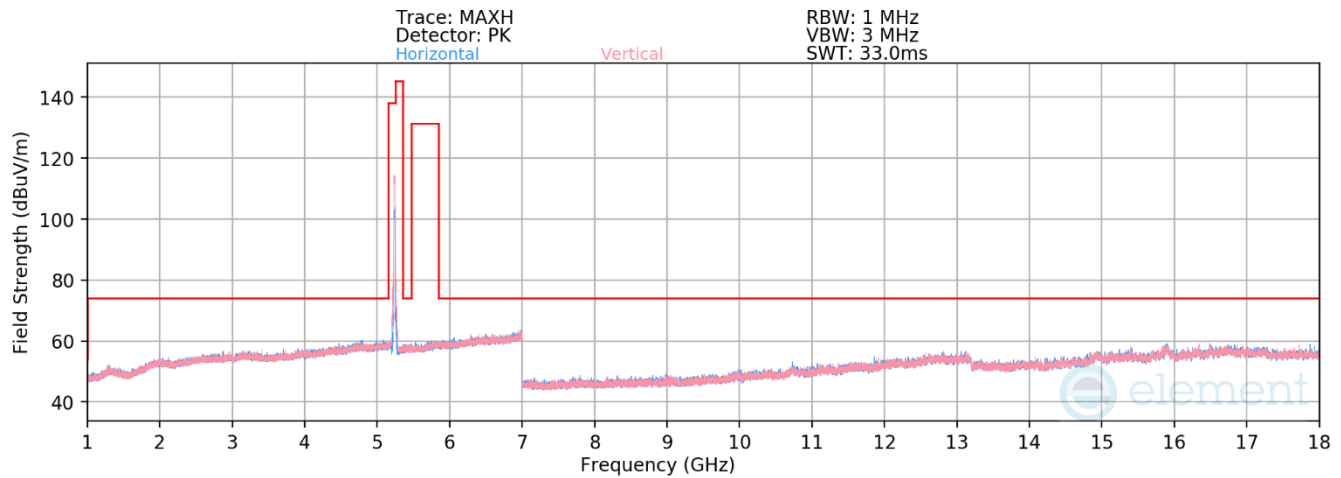

Plot 7-411. RSE above 1GHz Antenna WF5T (11ax – Ch.48 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10480.00	Peak	H	-	-	-71.10	15.20	51.11	68.23	-17.12
*	15720.00	Average	H	-	-	-84.51	23.37	45.86	53.98	-8.12
*	15720.00	Peak	H	-	-	-73.57	23.90	57.33	73.98	-16.65

Table 7-138. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 168 of 274

V 10.6 10/27/2023

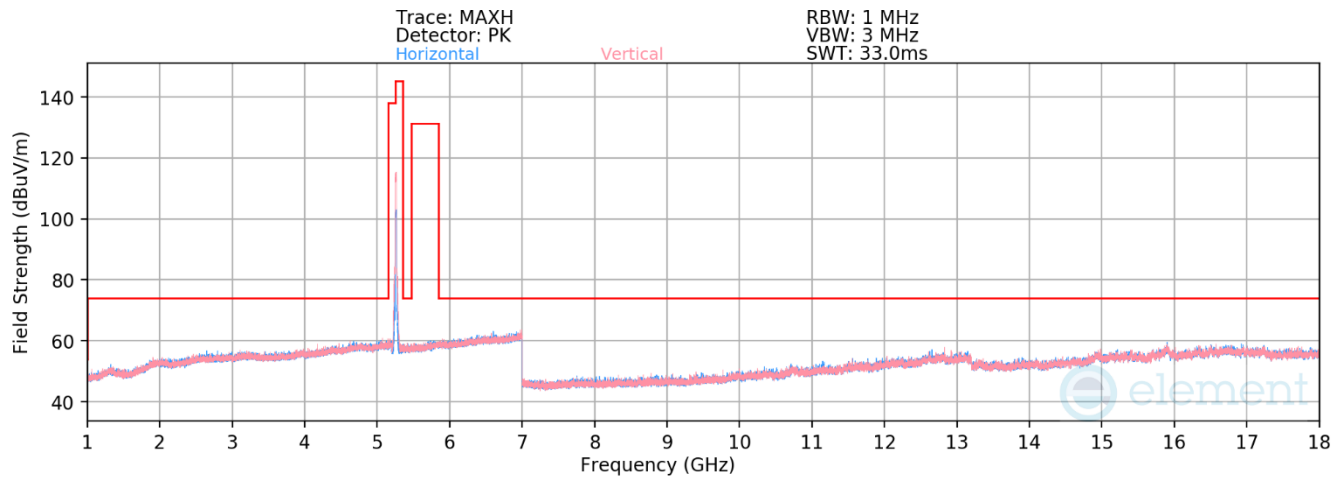

Plot 7-412. RSE above 1GHz Antenna WF5T (11ax – Ch.52 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10520.00	Peak	V	-	-	-71.76	15.23	50.47	68.23	-17.76
* 15780.00	Average	H	-	-	-84.61	24.23	46.63	53.98	-7.35
* 15780.00	Peak	H	-	-	-72.52	23.62	58.11	73.98	-15.87

Table 7-139. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 169 of 274

V 10.6 10/27/2023

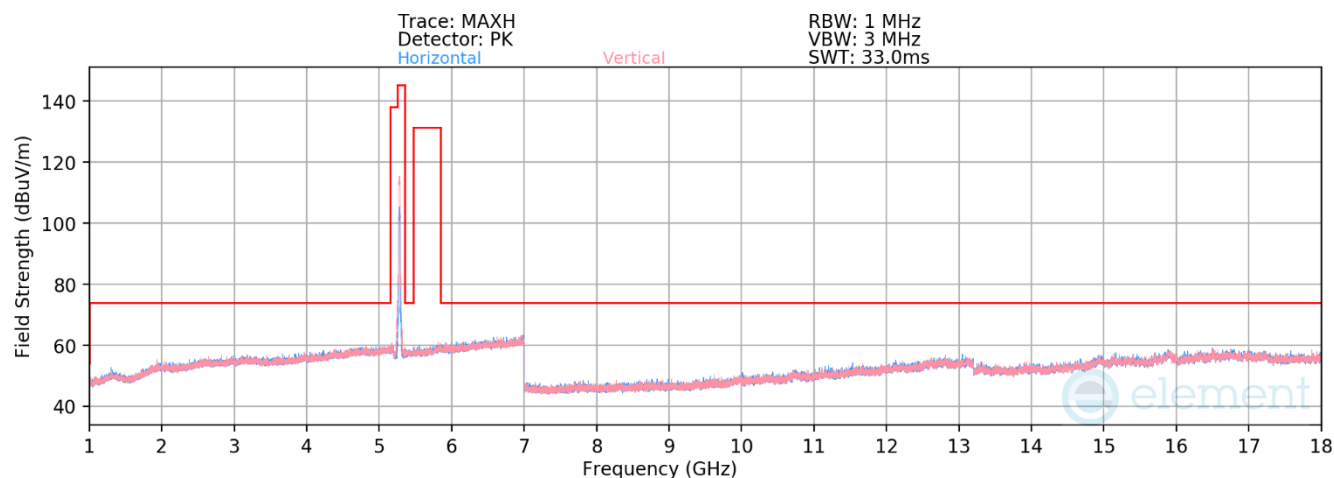

Plot 7-413. RSE above 1GHz Antenna WF5T (11ax – Ch.56 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10560.00	Peak	V	-	-	-70.98	14.75	50.77	68.23	-17.46
* 15840.00	Average	V	-	-	-84.58	23.73	46.16	53.98	-7.82
* 15840.00	Peak	V	-	-	-73.87	25.00	58.14	73.98	-15.84

Table 7-140. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 170 of 274

V 10.6 10/27/2023

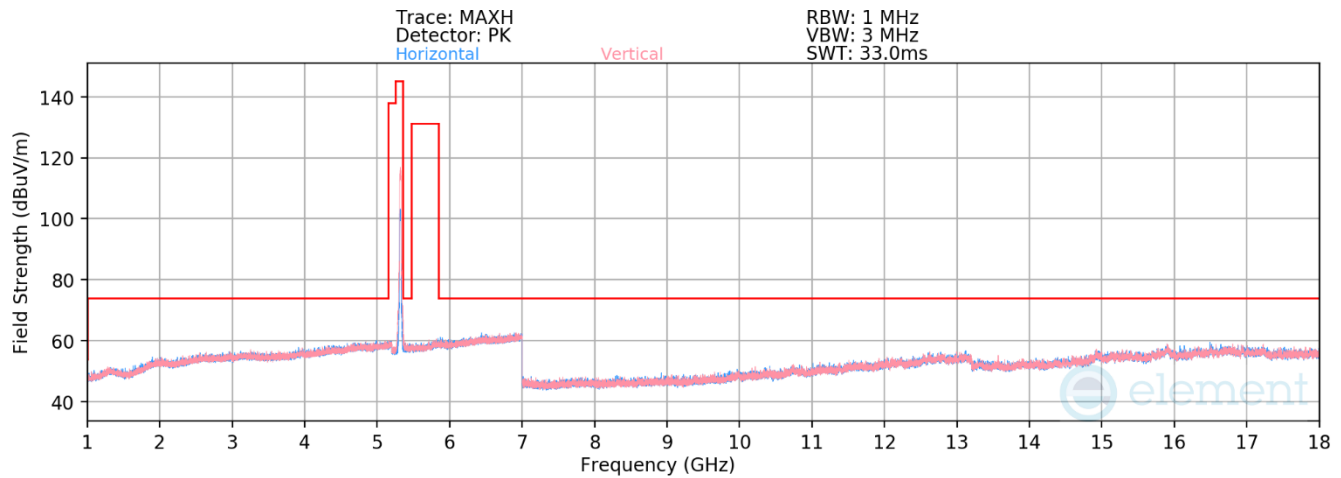

Plot 7-414. RSE above 1GHz Antenna WF5T (11ax – Ch.64 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	V	-	-	-82.39	15.23	39.84	53.98	-14.14
*	10640.00	Peak	V	-	-	-71.50	15.59	51.10	73.98	-22.88
*	15960.00	Average	H	-	-	-85.23	24.43	46.20	53.98	-7.78
*	15960.00	Peak	H	-	-	-73.98	23.96	56.98	73.98	-17.00

Table 7-141. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 171 of 274

V 10.6 10/27/2023

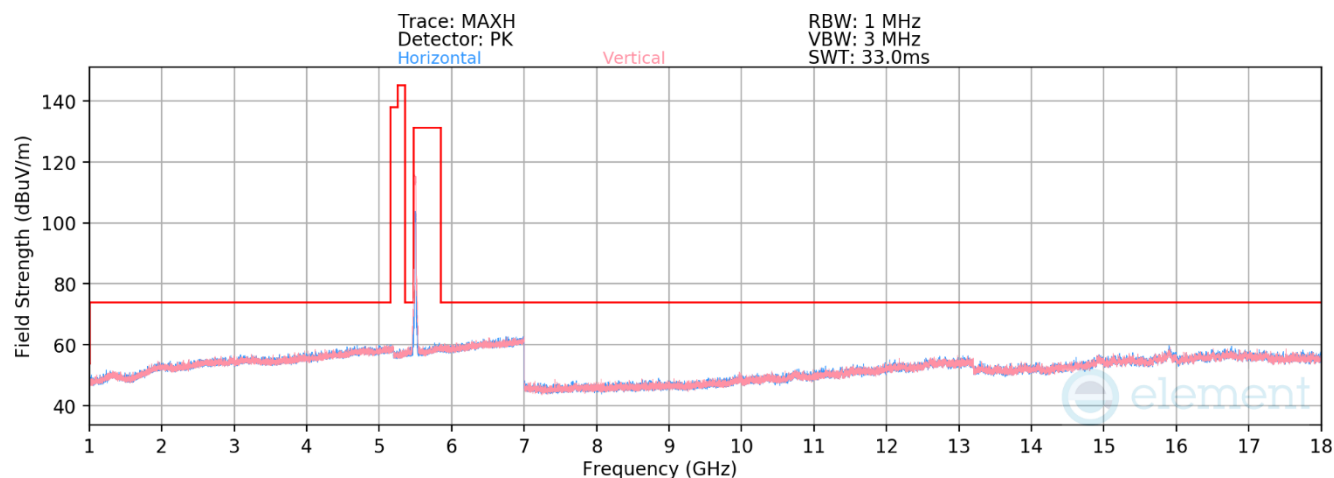

Plot 7-415. RSE above 1GHz Antenna WF5T (11ax – Ch.100 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	V	-	-	-83.14	16.40	40.26	53.98	-13.72
*	11000.00	Peak	V	-	-	-71.77	15.88	51.12	73.98	-22.86
	16500.00	Peak	H	-	-	-73.79	25.87	59.08	68.23	-9.15

Table 7-142. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 172 of 274

V 10.6 10/27/2023

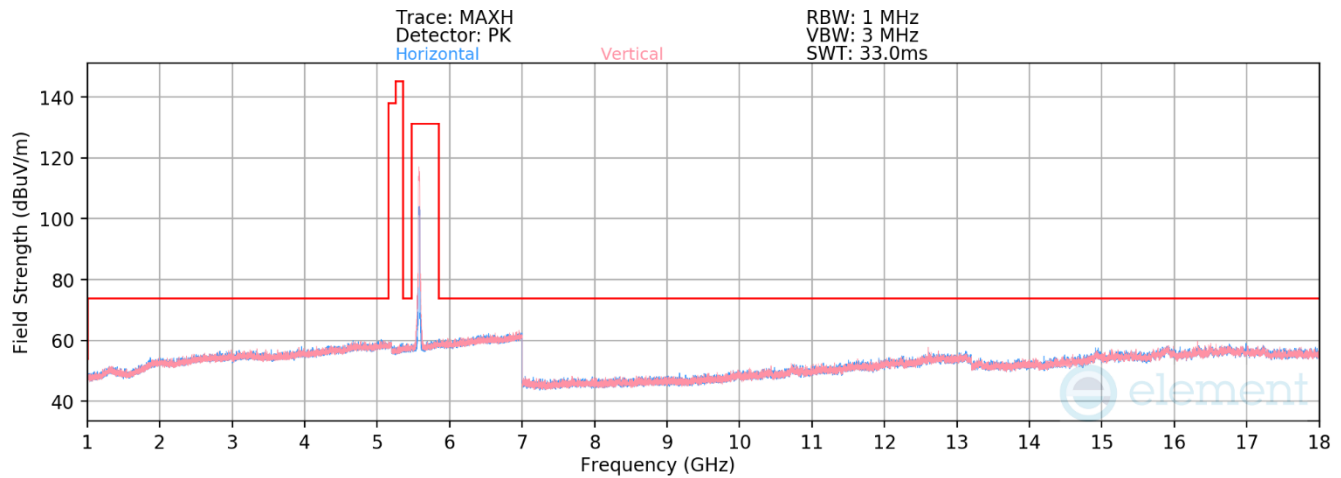

Plot 7-416. RSE above 1GHz Antenna WF5T (11ax – Ch.116 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5580MHz
Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	V	-	-	-82.92	16.58	40.66	53.98	-13.32
*	11160.00	Peak	V	-	-	-72.64	17.04	51.41	73.98	-22.57
	16740.00	Peak	V	-	-	-72.79	24.37	58.57	68.23	-9.66

Table 7-143. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 173 of 274

V 10.6 10/27/2023

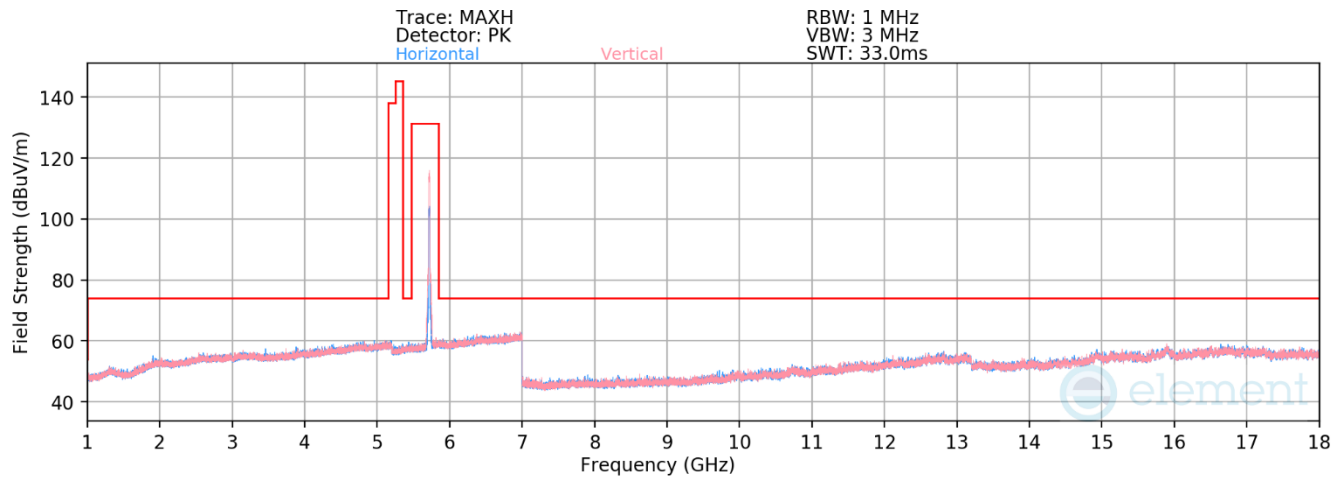

Plot 7-417. RSE above 1GHz Antenna WF5T (11ax – Ch.144 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-83.52	17.28	40.76	53.98	-13.22
*	11440.00	Peak	H	-	-	-72.72	17.28	51.56	73.98	-22.42
	17160.00	Peak	V	-	-	-73.60	24.86	58.26	68.23	-9.97

Table 7-144. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 174 of 274

V 10.6 10/27/2023

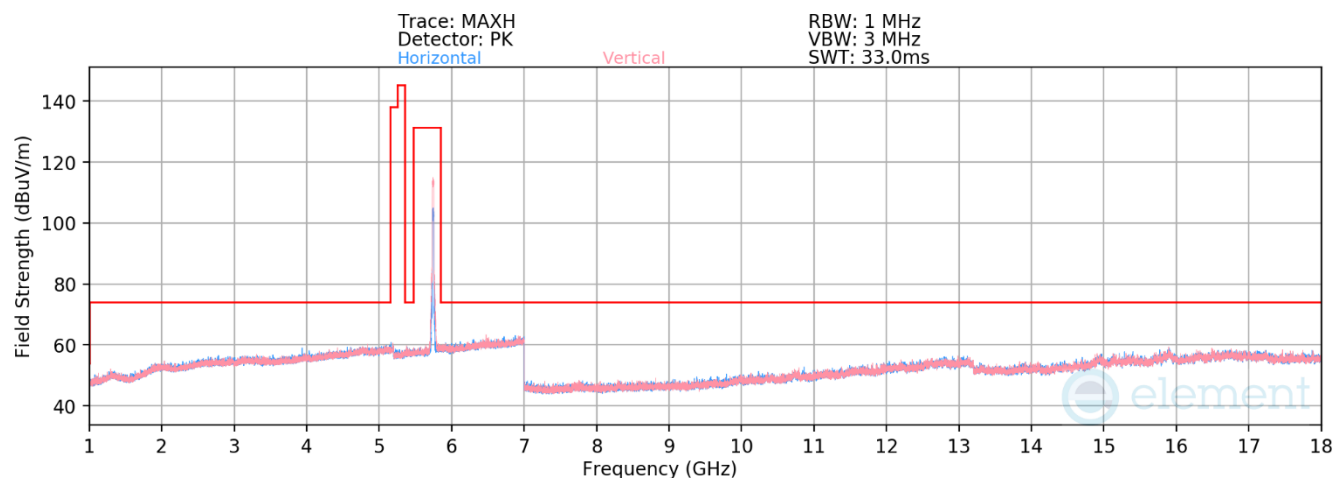

Plot 7-418. RSE above 1GHz Antenna WF5T (11ax – Ch.149 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	V	-	-	-82.78	16.89	41.11	53.98	-12.87
*	11490.00	Peak	V	-	-	-71.77	16.67	51.91	73.98	-22.07
	17235.00	Peak	H	-	-	-73.49	24.93	58.43	68.23	-9.80

Table 7-145. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 175 of 274

V 10.6 10/27/2023

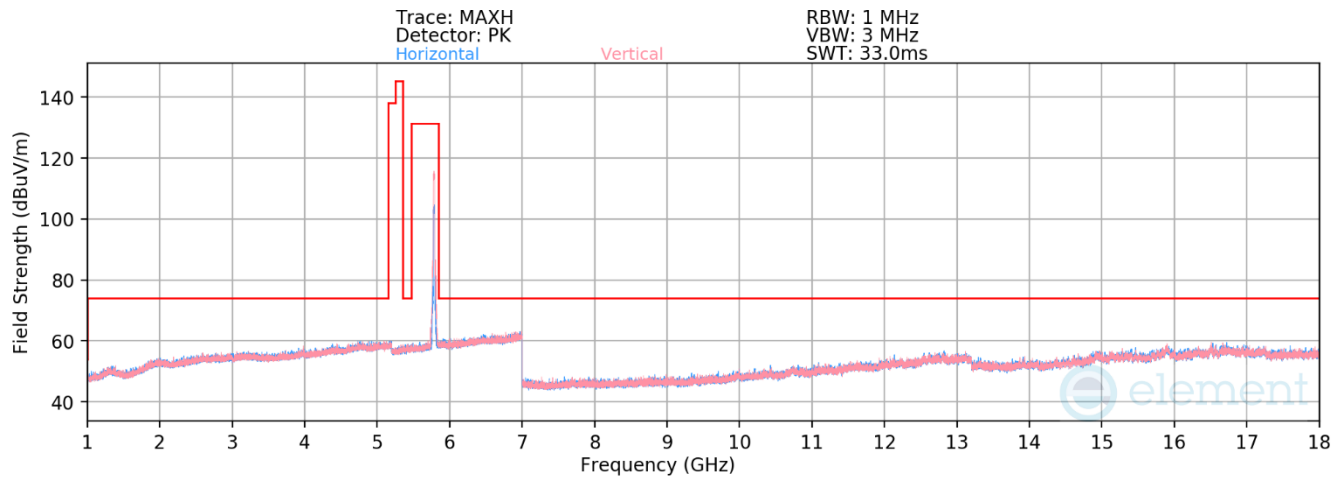

Plot 7-419. RSE above 1GHz Antenna WF5T (11ax – Ch.157 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-82.80	16.93	41.13	53.98	-12.85
*	11570.00	Peak	H	-	-	-72.32	17.13	51.81	73.98	-22.17
	17355.00	Peak	V	-	-	-73.92	24.61	57.69	68.23	-10.54

Table 7-146. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 176 of 274

V 10.6 10/27/2023

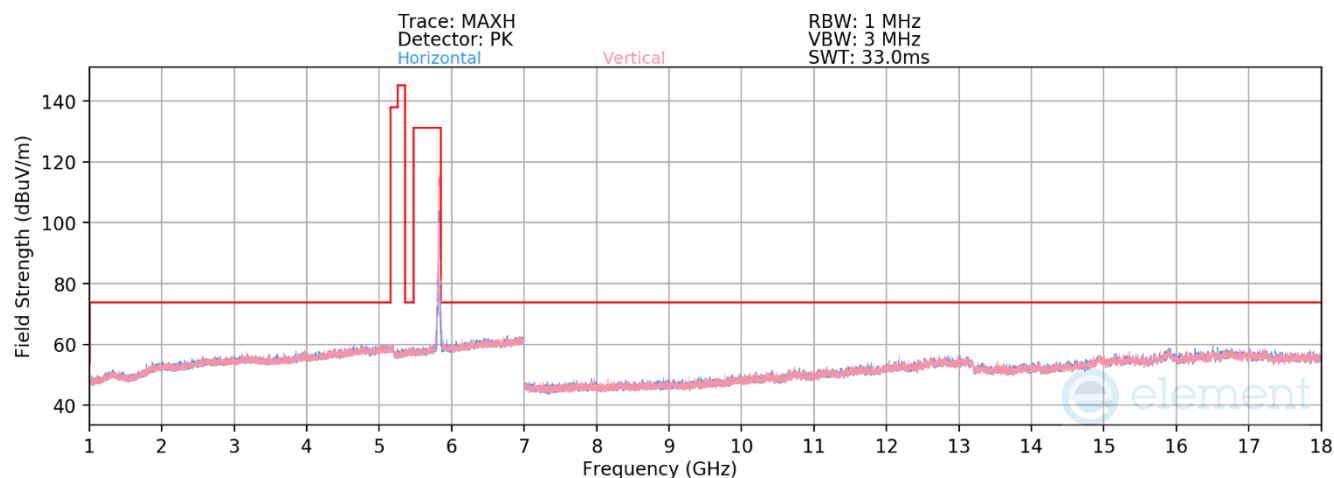

Plot 7-420. RSE above 1GHz Antenna WF5T (11ax – Ch.165 – RU242)

Mode:	802.11ax (20MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5825MHz
Channel:	165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11650.00	Average	V	-	-	-83.66	17.92	41.25	53.98	-12.73
*	11650.00	Peak	V	-	-	-72.76	17.59	51.83	73.98	-22.15
	17475.00	Peak	V	-	-	-74.37	24.88	57.51	68.23	-10.72

Table 7-147. Radiated Measurements Antenna WF5T (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 177 of 274

V 10.6 10/27/2023

7.6.2 Antenna WF2 Radiated Spurious Emission RU26/52

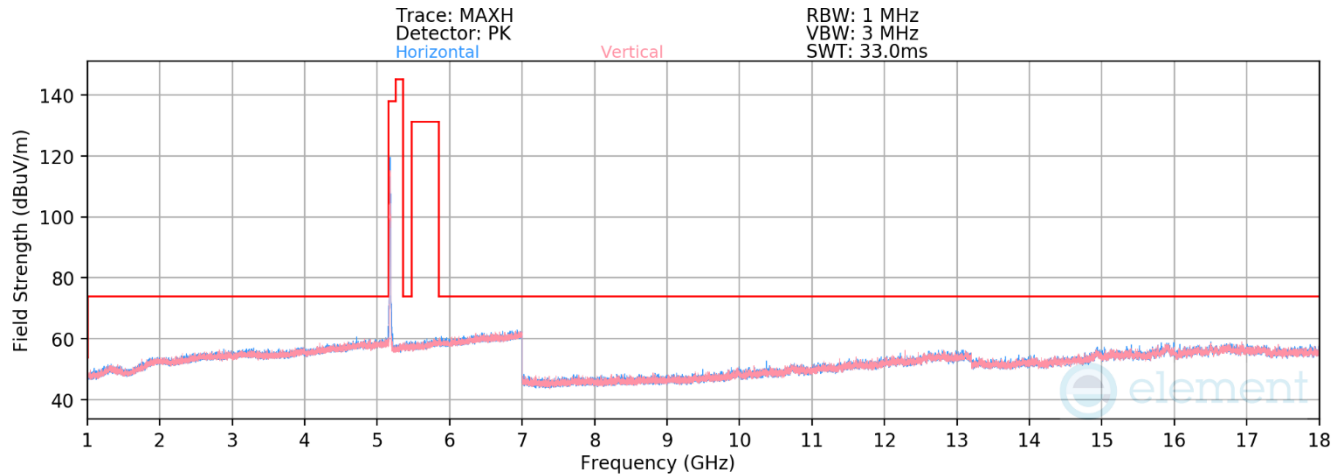

Plot 7-421. RSE above 1GHz Antenna WF2 (11ax – Ch.36 – RU26)


Mode: 11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5180MHz
Channel: 36

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10360.00	Peak	V	-	-	-71.49	15.25	50.76	68.23	-17.47
* 15540.00	Average	H	-	-	-84.63	23.20	45.58	53.98	-8.40
* 15540.00	Peak	H	-	-	-73.32	23.25	56.94	73.98	-17.04

Table 7-148. Radiated Measurements Antenna WF2 (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 178 of 274

V 10.6 10/27/2023

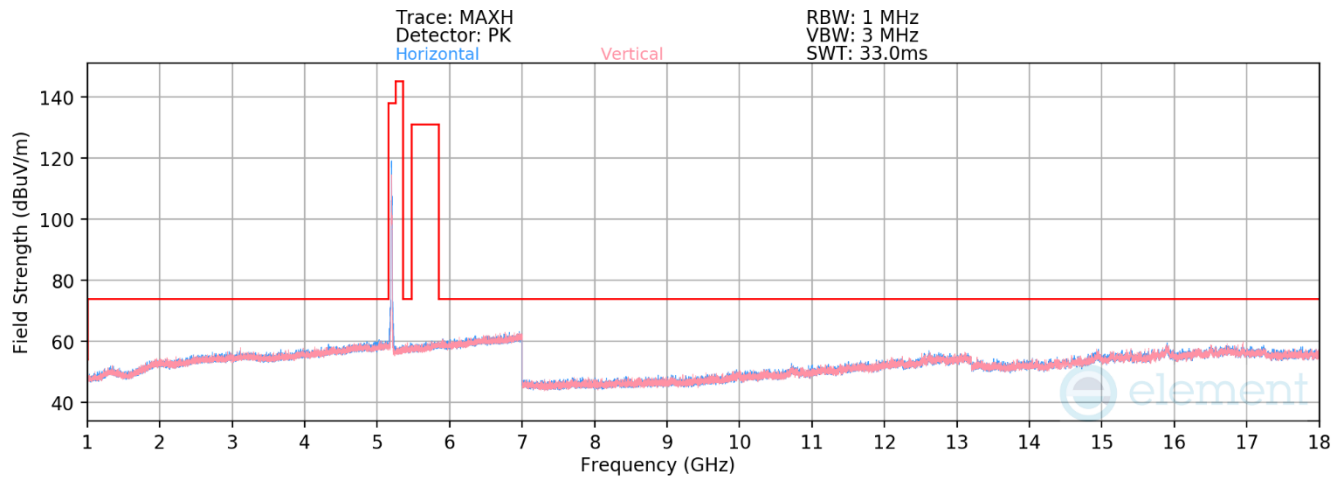

Plot 7-422. RSE above 1GHz Antenna WF2 (11ax – Ch.40 – RU26)


Mode: 802.11ax (20MHz BW)
 Data Rate: MCS0
 RU Index: 4
 Distance of Measurements: 3 Meters
 Operating Frequency: 5200MHz
 Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	V	-	-	-71.53	15.25	50.72	68.23	-17.51
* 15600.00	Average	V	-	-	-85.07	23.30	45.23	53.98	-8.75
* 15600.00	Peak	V	-	-	-73.21	22.49	56.27	73.98	-17.71

Table 7-149. Radiated Measurements Antenna WF2 (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 179 of 274

V 10.6 10/27/2023

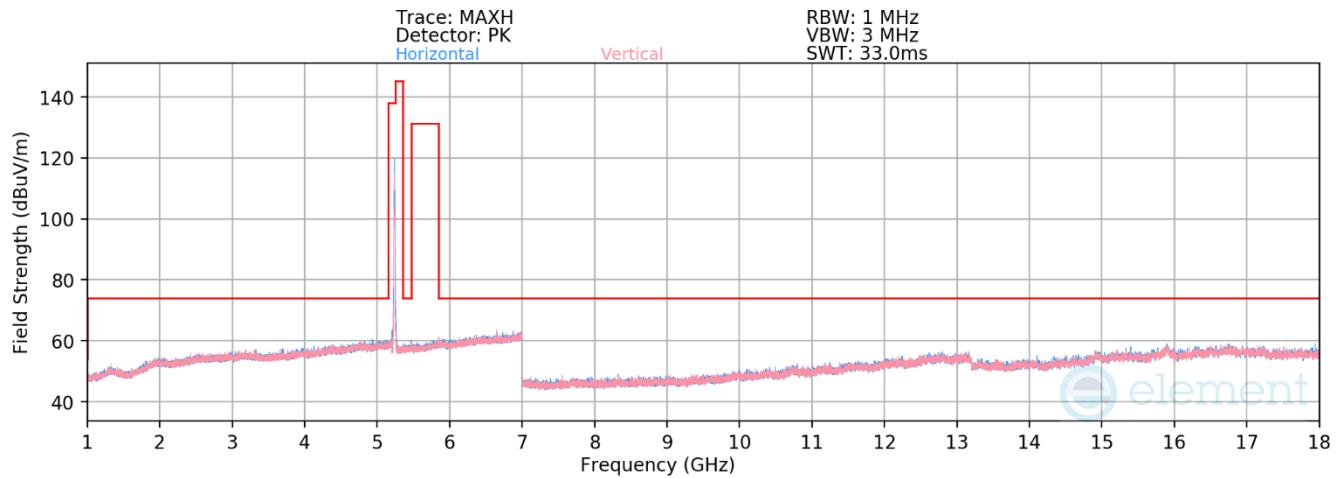

Plot 7-423. RSE above 1GHz Antenna WF2 (11ax – Ch.48 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10480.00	Peak	H	-	-	-70.93	14.94	51.01	68.23	-17.22
*	15720.00	Average	H	-	-	-84.67	23.90	46.22	53.98	-7.76
*	15720.00	Peak	H	-	-	-73.59	23.92	57.33	73.98	-16.65

Table 7-150. Radiated Measurements Antenna WF2 (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 180 of 274

V 10.6 10/27/2023

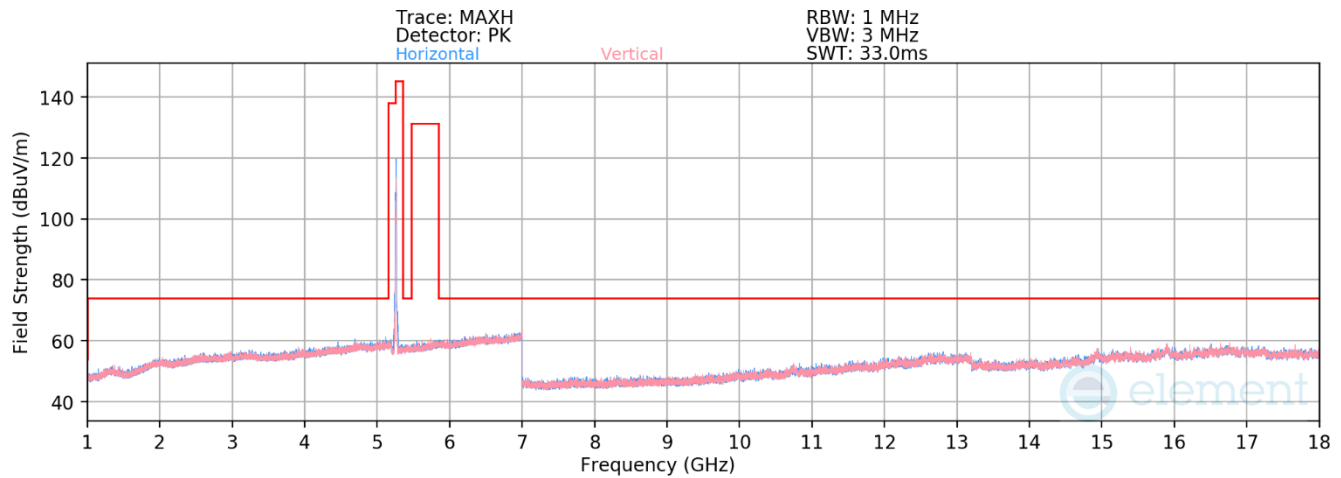

Plot 7-424. RSE above 1GHz Antenna WF2 (11ax – Ch.52 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10520.00	Peak	H	-	-	-70.90	15.20	51.30	68.23	-16.93
*	15780.00	Average	H	-	-	-84.90	24.23	46.33	53.98	-7.65
*	15780.00	Peak	H	-	-	-73.74	24.23	57.49	73.98	-16.49

Table 7-151. Radiated Measurements Antenna WF2 (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 181 of 274

V 10.6 10/27/2023

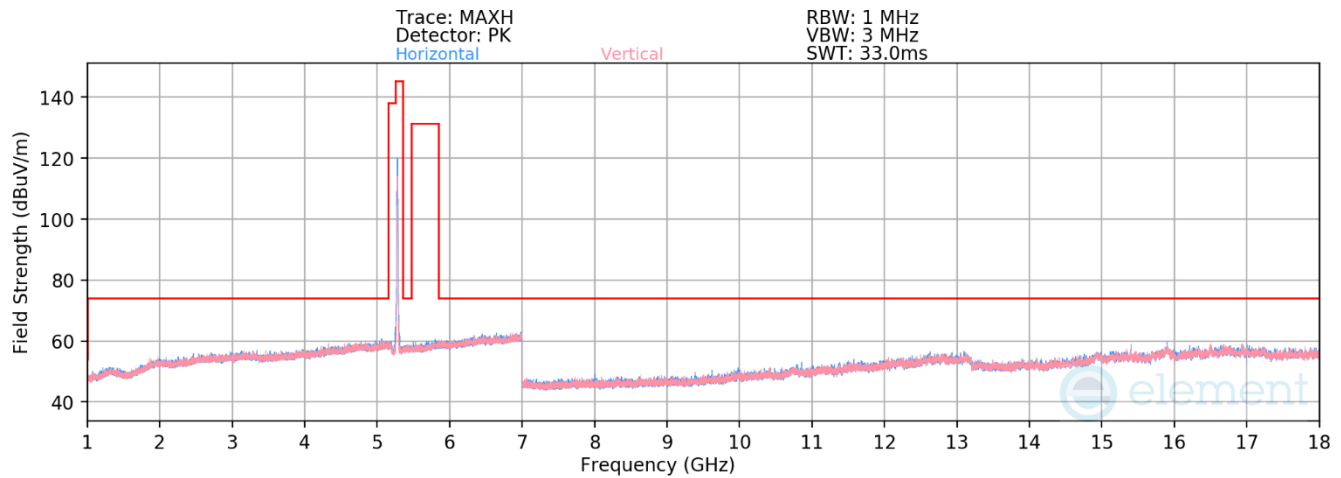

Plot 7-425. RSE above 1GHz Antenna WF2 (11ax – Ch.56 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10560.00	Peak	V	-	-	-72.03	14.98	49.95	68.23	-18.28
*	15840.00	Average	H	-	-	-84.82	24.55	46.73	53.98	-7.25
*	15840.00	Peak	H	-	-	-72.52	23.85	58.33	73.98	-15.65

Table 7-152. Radiated Measurements Antenna WF2 (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 182 of 274

V 10.6 10/27/2023

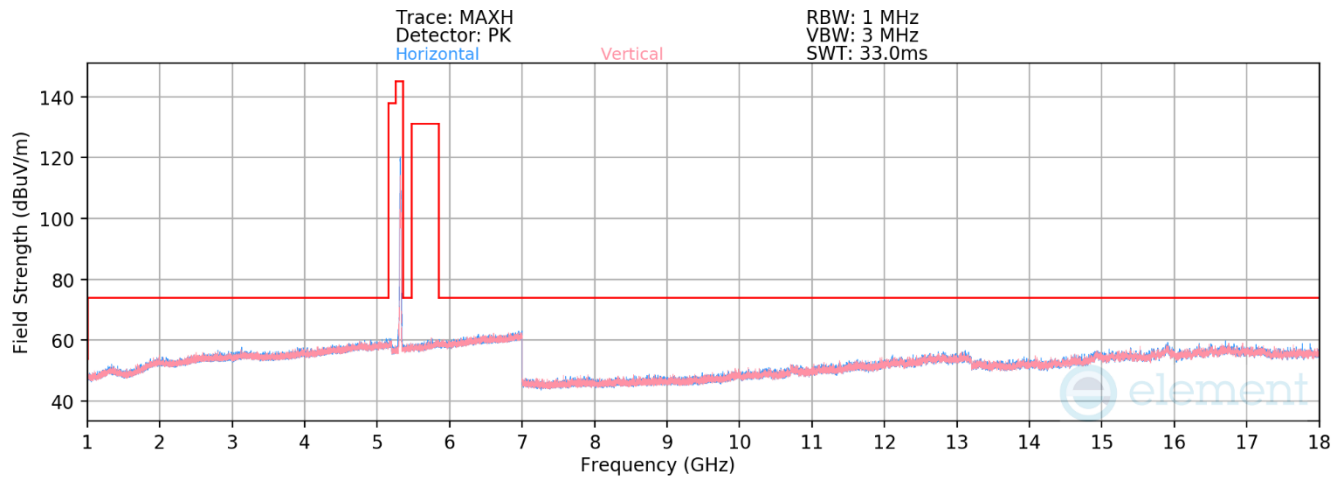

Plot 7-426. RSE above 1GHz Antenna WF2 (11ax – Ch.64 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	V	-	-	-82.47	15.59	40.13	53.98	-13.85
*	10640.00	Peak	V	-	-	-71.49	15.25	50.76	73.98	-23.22
*	15960.00	Average	H	-	-	-85.76	25.16	46.40	53.98	-7.58
*	15960.00	Peak	H	-	-	-73.60	24.02	57.42	73.98	-16.56

Table 7-153. Radiated Measurements Antenna WF2 (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 183 of 274

V 10.6 10/27/2023

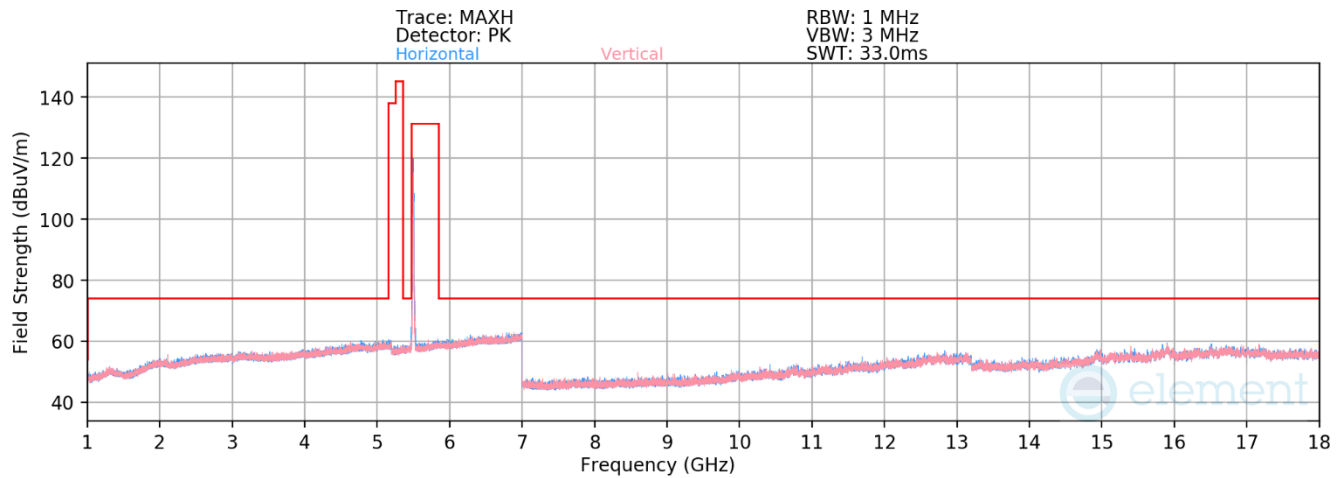

Plot 7-427. RSE above 1GHz Antenna WF2 (11ax – Ch.100 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	V	-	-	-83.57	16.40	39.83	53.98	-14.15
*	11000.00	Peak	V	-	-	-71.16	15.48	51.31	73.98	-22.67
	16500.00	Peak	H	-	-	-73.18	25.04	58.86	68.23	-9.37

Table 7-154. Radiated Measurements Antenna WF2 (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 184 of 274

V 10.6 10/27/2023

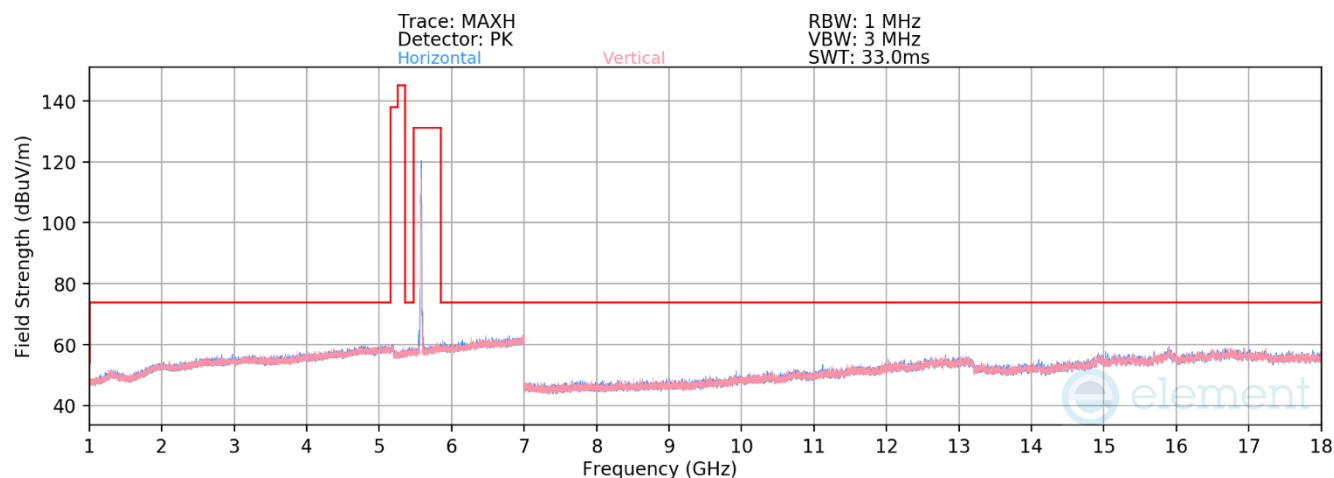

Plot 7-428. RSE above 1GHz Antenna WF2 (11ax – Ch.116 – RU52)

Mode: 802.11ax (20MHz BW)

Data Rate: MCS0

RU Index: 38

Distance of Measurements: 3 Meters

Operating Frequency: 5580MHz


Channel: 116

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11160.00	Average	V	-	-	-83.32	17.04	40.73	53.98	-13.25
*	11160.00	Peak	V	-	-	-70.96	17.04	53.08	73.98	-20.90
	16740.00	Peak	H	-	-	-73.84	25.50	58.66	68.23	-9.57

Table 7-155. Radiated Measurements Antenna WF2 (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 185 of 274

V 10.6 10/27/2023

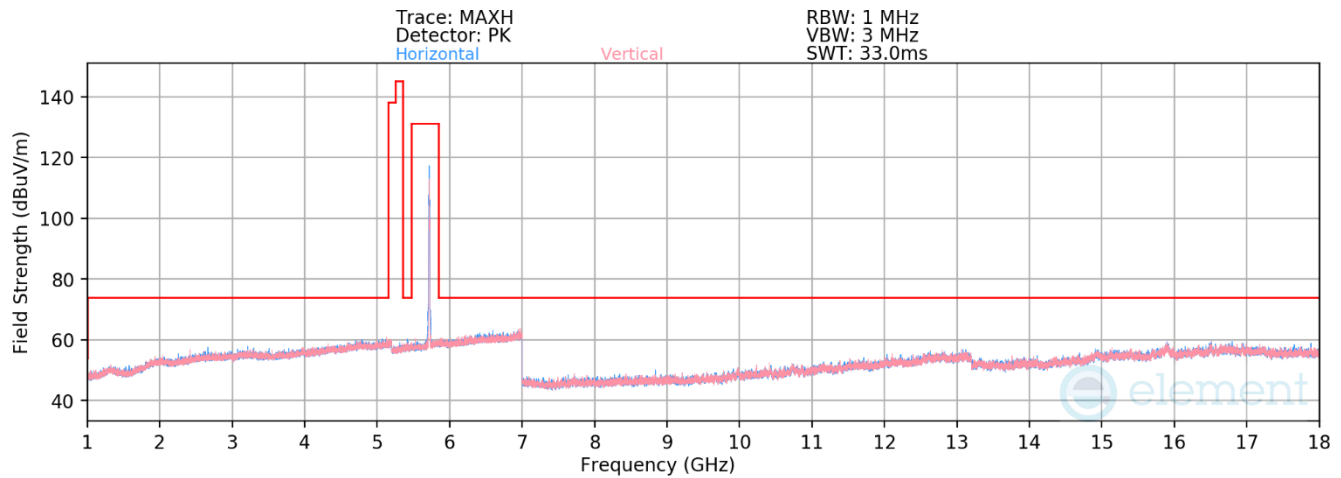

Plot 7-429. RSE above 1GHz Antenna WF2 (11ax – Ch.144 – RU52)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 38
Distance of Measurements: 3 Meters
Operating Frequency: 5720MHz
Channel: 144

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11440.00	Average	H	-	-	-83.21	17.28	41.06	53.98	-12.92
*	11440.00	Peak	H	-	-	-71.73	17.28	52.55	73.98	-21.43
	17160.00	Peak	V	-	-	-72.80	24.88	59.08	68.23	-9.15

Table 7-156. Radiated Measurements Antenna WF2 (RU52)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 186 of 274

V 10.6 10/27/2023

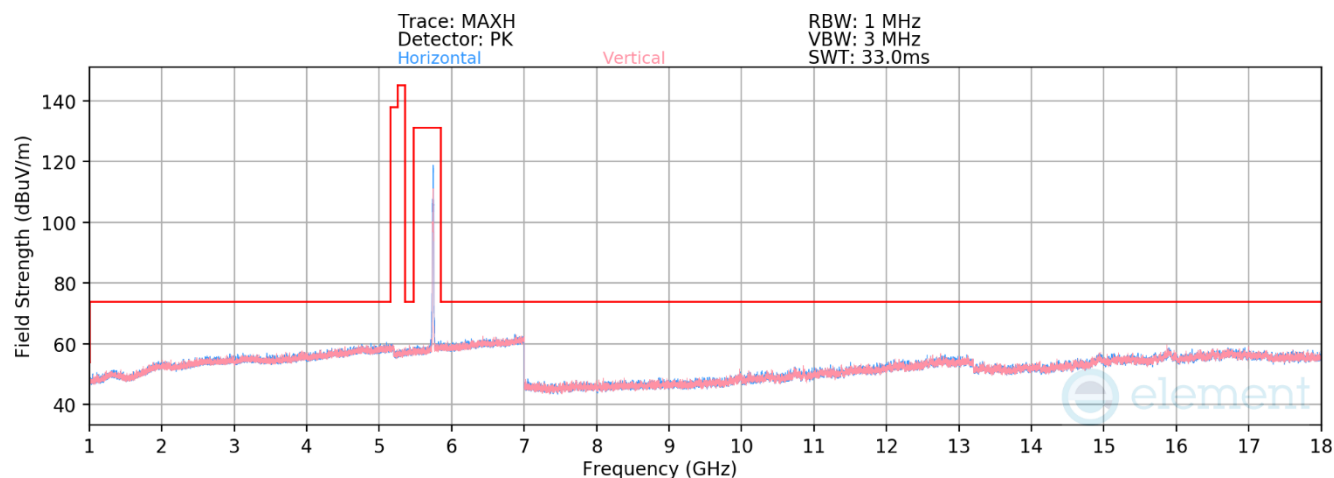

Plot 7-430. RSE above 1GHz Antenna WF2 (11ax – Ch.149 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5745MHz
Channel: 149

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11490.00	Average	V	-	-	-83.35	17.83	41.49	53.98	-12.49
*	11490.00	Peak	V	-	-	-72.44	17.83	52.39	73.98	-21.59
	17235.00	Peak	H	-	-	-73.15	24.93	58.78	68.23	-9.45

Table 7-157. Radiated Measurements Antenna WF2 (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 187 of 274

V 10.6 10/27/2023

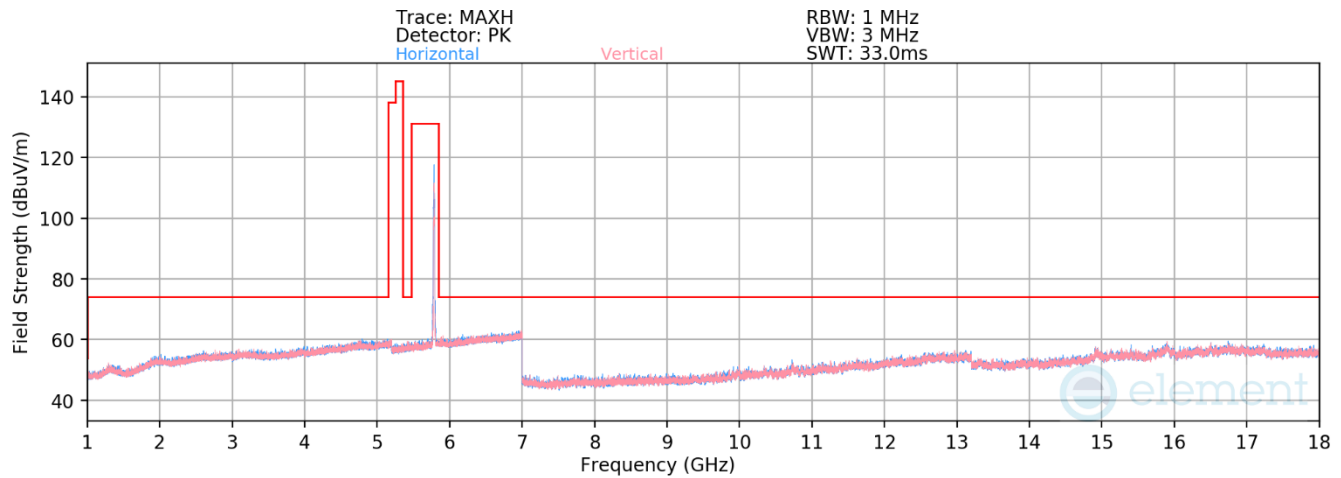

Plot 7-431. RSE above 1GHz Antenna WF2 (11ax – Ch.157 – RU26)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5785MHz
Channel: 157

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11570.00	Average	H	-	-	-83.38	17.30	40.93	53.98	-13.05
*	11570.00	Peak	H	-	-	-72.75	17.30	51.55	73.98	-22.43
	17355.00	Peak	V	-	-	-73.56	24.49	57.93	68.23	-10.30

Table 7-158. Radiated Measurements Antenna WF2 (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 188 of 274

V 10.6 10/27/2023

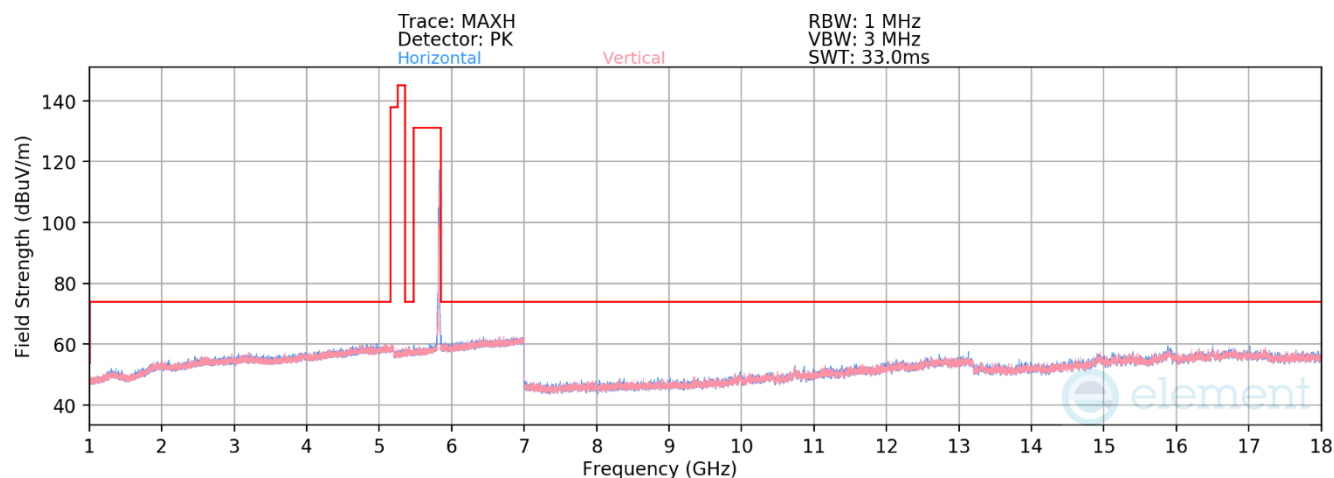

Plot 7-432. RSE above 1GHz Antenna WF2 (11ax – Ch.165 – RU26)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 4
Distance of Measurements: 3 Meters
Operating Frequency: 5825MHz
Channel: 165


	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11650.00	Average	V	-	-	-83.56	17.59	41.03	53.98	-12.95
*	11650.00	Peak	V	-	-	-72.80	17.63	51.83	73.98	-22.15
	17475.00	Peak	H	-	-	-73.83	24.78	57.95	68.23	-10.28

Table 7-159. Radiated Measurements Antenna WF2 (RU26)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 189 of 274

V 10.6 10/27/2023

RU242

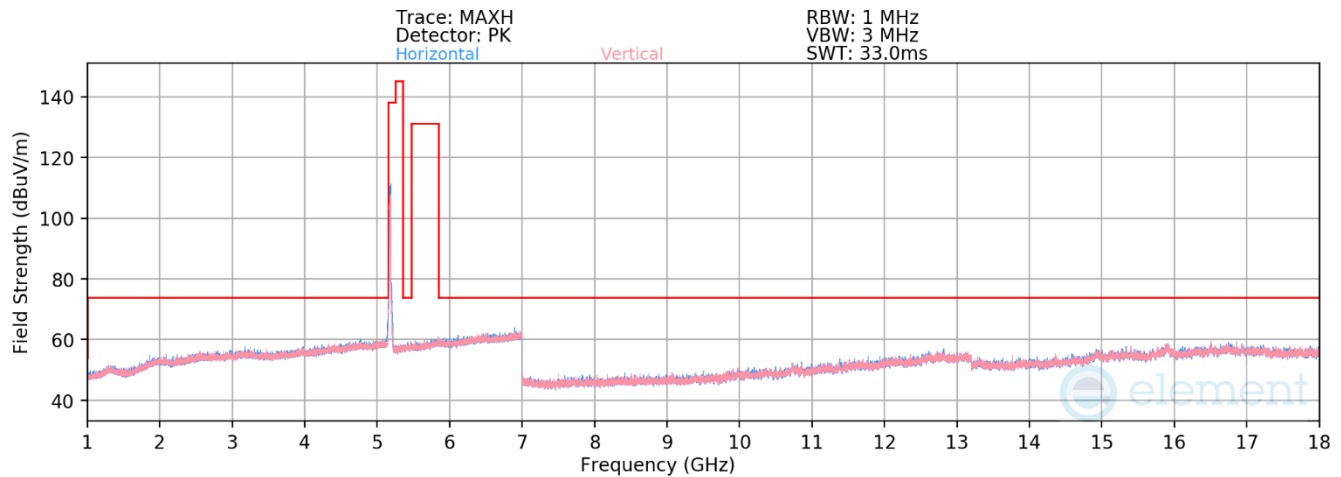

Plot 7-433. RSE above 1GHz Antenna WF2 (11ax – Ch.36 – RU242)


Mode:	11ax (20MHz BW)
Data Rate:	MCS0
RU Index:	61
Distance of Measurements:	3 Meters
Operating Frequency:	5180MHz
Channel:	36

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10360.00	Peak	H	-	-	-70.03	14.29	51.27	68.23	-16.96
*	15540.00	Average	H	-	-	-84.76	23.20	45.44	53.98	-8.54
*	15540.00	Peak	H	-	-	-73.68	23.50	56.82	73.98	-17.16

Table 7-160. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 190 of 274

V 10.6 10/27/2023

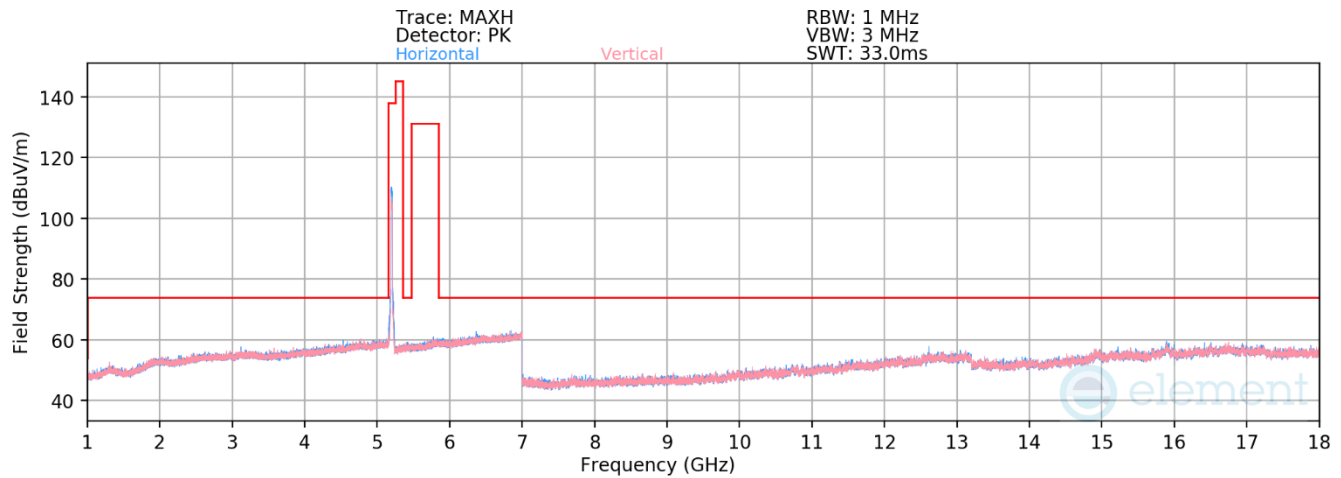

Plot 7-434. RSE above 1GHz Antenna WF2 (11ax – Ch.40 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5200MHz
Channel: 40

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10400.00	Peak	H	-	-	-72.20	15.91	50.71	68.23	-17.52
* 15600.00	Average	V	-	-	-84.68	22.74	45.06	53.98	-8.92
* 15600.00	Peak	V	-	-	-73.00	22.74	56.74	73.98	-17.24

Table 7-161. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 191 of 274

V 10.6 10/27/2023

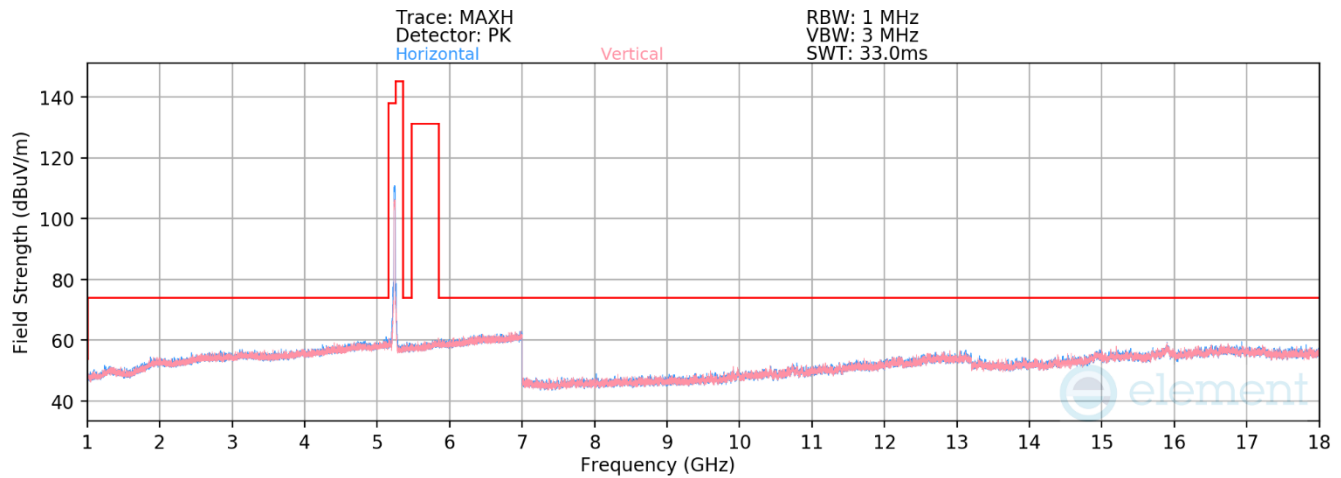

Plot 7-435. RSE above 1GHz Antenna WF2 (11ax – Ch.48 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5240MHz
Channel: 48

Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
10480.00	Peak	V	-	-	-71.41	15.04	50.62	68.23	-17.61
* 15720.00	Average	V	-	-	-84.66	23.86	46.20	53.98	-7.78
* 15720.00	Peak	V	-	-	-73.17	23.90	57.73	73.98	-16.25

Table 7-162. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 192 of 274

V 10.6 10/27/2023

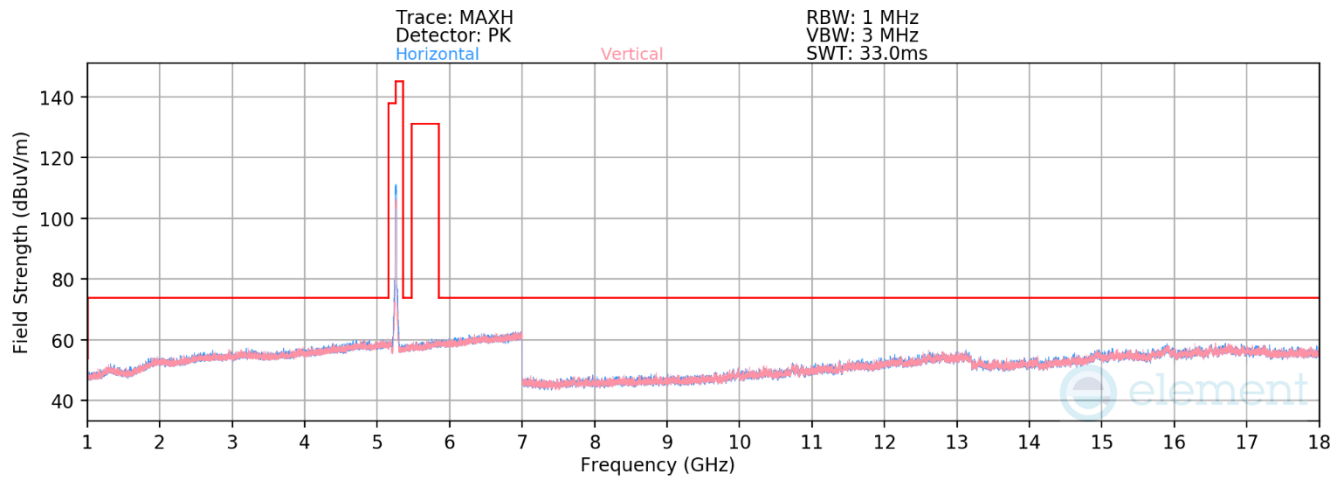

Plot 7-436. RSE above 1GHz Antenna WF2 (11ax – Ch.52 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5260MHz
Channel: 52

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10520.00	Peak	V	-	-	-71.68	15.24	50.56	68.23	-17.67
*	15780.00	Average	V	-	-	-84.79	24.23	46.45	53.98	-7.53
*	15780.00	Peak	V	-	-	-72.51	23.07	57.55	73.98	-16.43

Table 7-163. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 193 of 274

V 10.6 10/27/2023

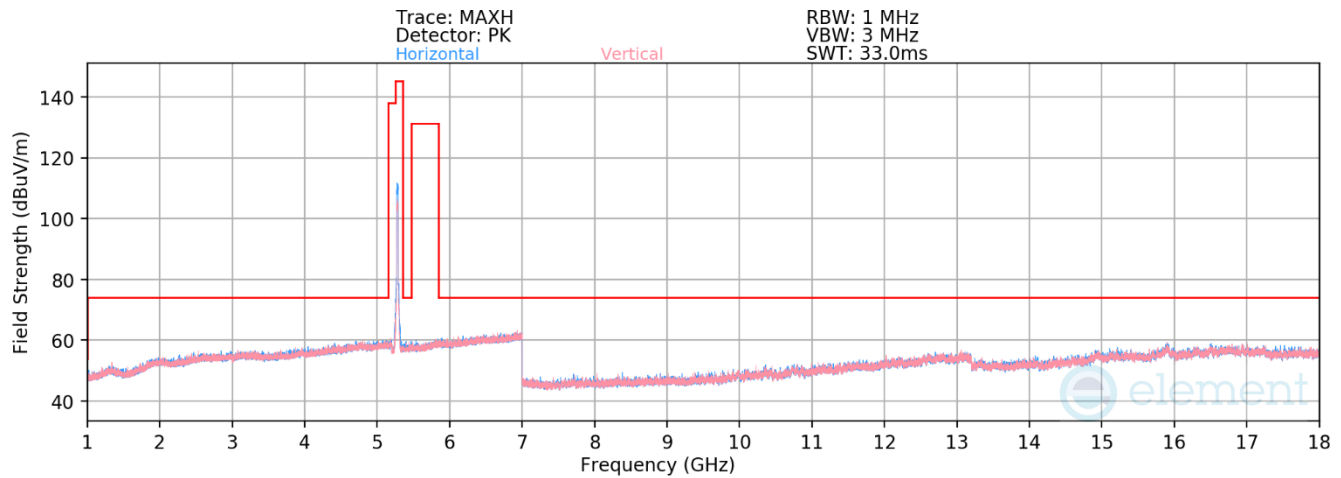


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5280MHz
Channel: 56

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
	10560.00	Peak	H	-	-	-71.17	14.75	50.57	68.23	-17.66
*	15840.00	Average	H	-	-	-84.91	24.55	46.64	53.98	-7.34
*	15840.00	Peak	H	-	-	-73.50	23.85	57.35	73.98	-16.63

Table 7-164. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 194 of 274

V 10.6 10/27/2023

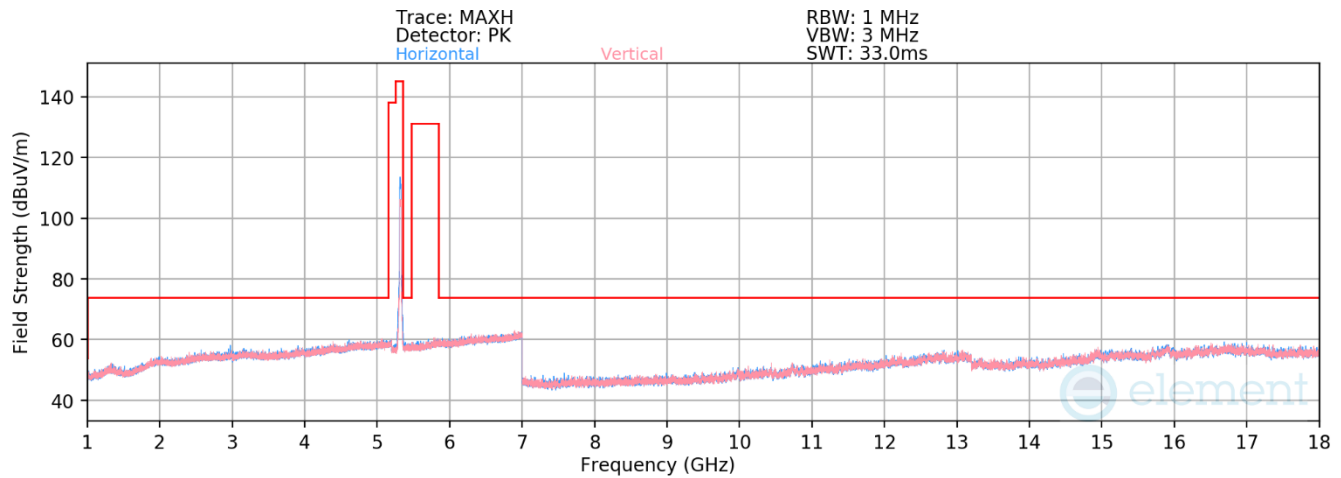

Plot 7-438. RSE above 1GHz Antenna WF2 (11ax – Ch.64 – RU242)


Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5320MHz
Channel: 64

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	10640.00	Average	V	-	-	-82.42	15.29	39.87	53.98	-14.11
*	10640.00	Peak	V	-	-	-71.20	15.29	51.09	73.98	-22.89
*	15960.00	Average	H	-	-	-84.38	24.12	46.74	53.98	-7.24
*	15960.00	Peak	H	-	-	-74.07	24.43	57.35	73.98	-16.63

Table 7-165. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 195 of 274

V 10.6 10/27/2023

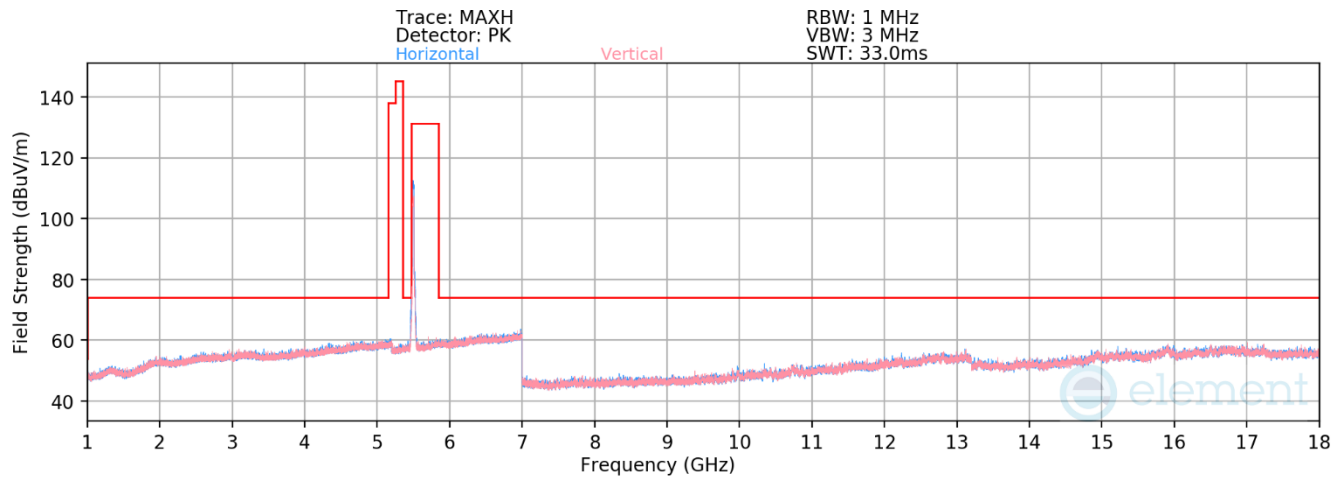

Plot 7-439. RSE above 1GHz Antenna WF2 (11ax – Ch.100 – RU242)

Mode: 802.11ax (20MHz BW)
Data Rate: MCS0
RU Index: 61
Distance of Measurements: 3 Meters
Operating Frequency: 5500MHz
Channel: 100

	Frequency [MHz]	Detector	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBuV/m]	Limit [dBuV/m]	Margin [dB]
*	11000.00	Average	H	-	-	-82.78	15.88	40.10	53.98	-13.88
*	11000.00	Peak	H	-	-	-72.14	16.40	51.27	73.98	-22.71
	16500.00	Peak	V	-	-	-73.67	25.87	59.21	68.23	-9.02

Table 7-166. Radiated Measurements Antenna WF2 (RU242)

FCC ID: BCGA2993 IC: 579C-A2993		MEASUREMENT REPORT (CERTIFICATION)	Approved by: Quality Manager
Test Report S/N: 1C2405200017-12-R1.BCG	Test Dates: 5/20/2024 - 8/28/2024	EUT Type: Tablet Device	Page 196 of 274

V 10.6 10/27/2023