



# TEST REPORT

## FCC ID: 2AQRZW11

Product : Mutil-relay  
Model Name : ZW11  
Brand : EVA LOGIK  
Report No. : PTC19110402501E-FC01

### Prepared for

NIE-TECH Co., Ltd

Jinlian commercial center 9001, Jinxiu road No.2, Changan Town,Dongguan City, GuangDongProv.,  
CHINA

### Prepared by

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road 2, Guangming Community,Dongcheng  
District, Dongguan, Guangdong, China



Report No.: PTC19110402501E-FC01

## 1 TEST RESULT CERTIFICATION

Applicant's name : NIE-TECH Co., Ltd

Address : Jinlian commercial center 9001, Jinxiu road No.2, Changan Town, Dongguan City, Guangdong Prov., CHINA

Manufacture's name : NIE-TECH Co., Ltd

Address : Jinlian commercial center 9001, Jinxiu road No.2, Changan Town, Dongguan City, Guangdong Prov., CHINA

Product name : Mutil-relay

Model name : ZW11

Standards : FCC CFR47 Part 15 Section 15.249

Test procedure : ANSI C63.10:2013

Test Date : Nov 10, 2019 to Nov 15, 2019

Date of Issue : Nov 15, 2019

Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads 'Leo Yang'.

Leo Yang / Engineer

Technical Manager:

A handwritten signature in black ink that appears to read 'Chris Du'.

Chris Du / Manager



## Contents

### Page

<b>1</b>	<b>TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2</b>	<b>TEST SUMMARY.....</b>	<b>5</b>
<b>3</b>	<b>TEST FACILITY.....</b>	<b>6</b>
<b>4</b>	<b>GENERAL INFORMATION.....</b>	<b>7</b>
4.1	GENERAL DESCRIPTION OF E.U.T.....	7
<b>5</b>	<b>EQUIPMENT DURING TEST.....</b>	<b>8</b>
5.1	EQUIPMENTS LIST.....	8
5.2	MEASUREMENT UNCERTAINTY.....	10
5.3	DESCRIPTION OF SUPPORT UNITS.....	11
<b>6</b>	<b>CONDUCTED EMISSION.....</b>	<b>12</b>
6.1	E.U.T. OPERATION.....	12
6.2	EUT SETUP.....	12
6.3	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
6.4	MEASUREMENT PROCEDURE.....	13
6.5	CONDUCTED EMISSION LIMIT.....	13
6.6	MEASUREMENT DESCRIPTION.....	13
6.7	CONDUCTED EMISSION TEST RESULT.....	13
<b>7</b>	<b>FIELD STRENGTH OF FUNDAMENTAL EMISSION AND RADIATED SPURIOUS EMISSIONS.....</b>	<b>16</b>
7.1	EUT OPERATION.....	17
7.2	TEST SETUP.....	17
7.3	SPECTRUM ANALYZER SETUP.....	19
7.4	TEST PROCEDURE.....	19
7.5	SUMMARY OF TEST RESULTS.....	20
<b>8</b>	<b>20 DB BANDWIDTH MEASUREMENT.....</b>	<b>24</b>
8.1	TEST PROCEDURE.....	24
8.2	TEST RESULT.....	24
<b>9</b>	<b>BAND EDGES REQUIREMENT.....</b>	<b>25</b>
9.1	TEST RESULT.....	25
<b>10</b>	<b>ANTENNA REQUIREMENT.....</b>	<b>27</b>



Report No.: PTC19110402501E-FC01

11	TEST PHOTOS.....	28
12	EUT PHOTOS.....	30



## 2 Test Summary

Test Items	Test Requirement	Result
AC Power Conducted Emission	15.207	PASS
20dB Bandwidth	15.215(c)	PASS
Band edge	15.249(d)	PASS
Field Strength of Fundamental Emissions	15.249(a) 15.249(c)	PASS
Radiated Spurious Emissions	15.205(a) 15.209(a)	PASS
Antenna Requirement	15.203	PASS



Report No.: PTC19110402501E-FC01

### **3 TEST FACILITY**

DongGuan Precise testing & Certification Corp. Ltd

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong,  
China, Dongguan, 523129

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1



## 4 General Information

### 4.1 General Description of E.U.T.

Product Name	:	Mutil-relay
Model Name	:	ZW11
Operation Frequency:	:	908.42MHz
Antenna installation:	:	Internal Antenna
Antenna Gain:	:	1dBi
Type of Modulation	:	ASK
Hardware Version	:	V1.0
Software Version	:	V1.0
Power supply	:	DC5V/AC12-24V



## 5 Equipment During Test

### 5.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2020
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2020
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 28, 2020
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 28, 2020

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(9KHz-18GHz)

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 28, 2020
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 28, 2020
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 22, 2020
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2020
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2020
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 28, 2020
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Apr. 13, 2020
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2020
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Apr. 13, 2020
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2020
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2020





Report No.: PTC19110402501E-FC01

RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2020
----------	-----	------	------	------------	---------------

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 28, 2020
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2020
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2020



## 5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	$\pm 1.0\text{dB}$
Power Spectral Density, conducted	$\pm 2.2\text{dB}$
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
Time	$\pm 2\%$
Duty Cycle	$\pm 2\%$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 3\%$
Conducted Emissions (150kHz~30MHz)	$\pm 3.64\text{dB}$
Radiated Emission(30MHz~1GHz)	$\pm 5.03\text{dB}$
Radiated Emission(1GHz~25GHz)	$\pm 4.74\text{dB}$
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



Report No.: PTC19110402501E-FC01

### 5.3 Description of Support Units

Equipment	Model No.	Series No.
Lampholder	N/A	N/A
Tungsten lamp	N/A	N/A

## 6 Conducted Emission

Test Requirement:	: FCC CFR 47 Part 15 Section 15.207
Test Voltage	: AC 24V
Test Method:	: ANSI C63.10:2013
Test Result:	: PASS
Frequency Range:	: 150kHz to 30MHz
Class/Severity:	: Class B
Detector:	: Peak for pre-scan (9kHz Resolution Bandwidth)


### 6.1 E.U.T. Operation

Operating Environment :


Temperature:	: 23.8 °C
Humidity:	: 50% RH
Atmospheric Pressure:	: 101.12kPa

### 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013.

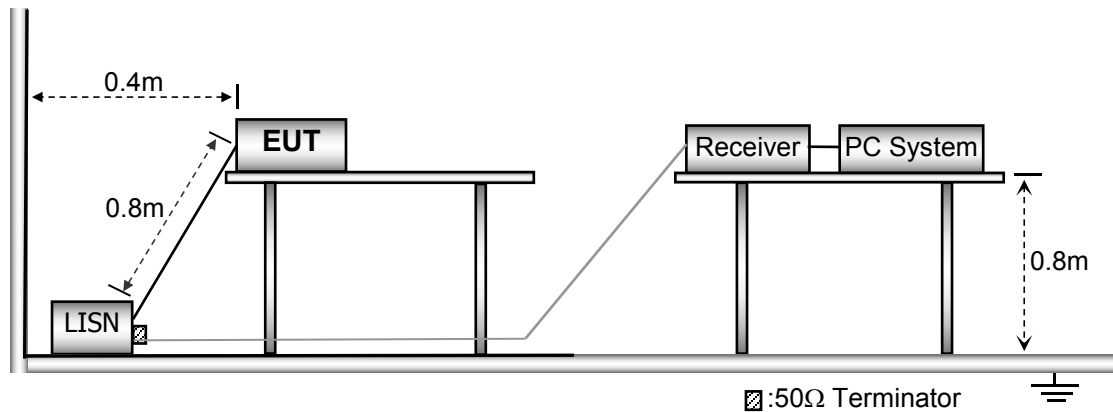

### 6.3 Test SET-UP (Block Diagram of Configuration)

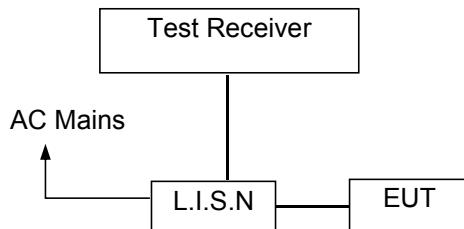

### 6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 6.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 6.7 Conducted Emission Test Result

Pass

Please find the following pages.




Test Phase: Line:

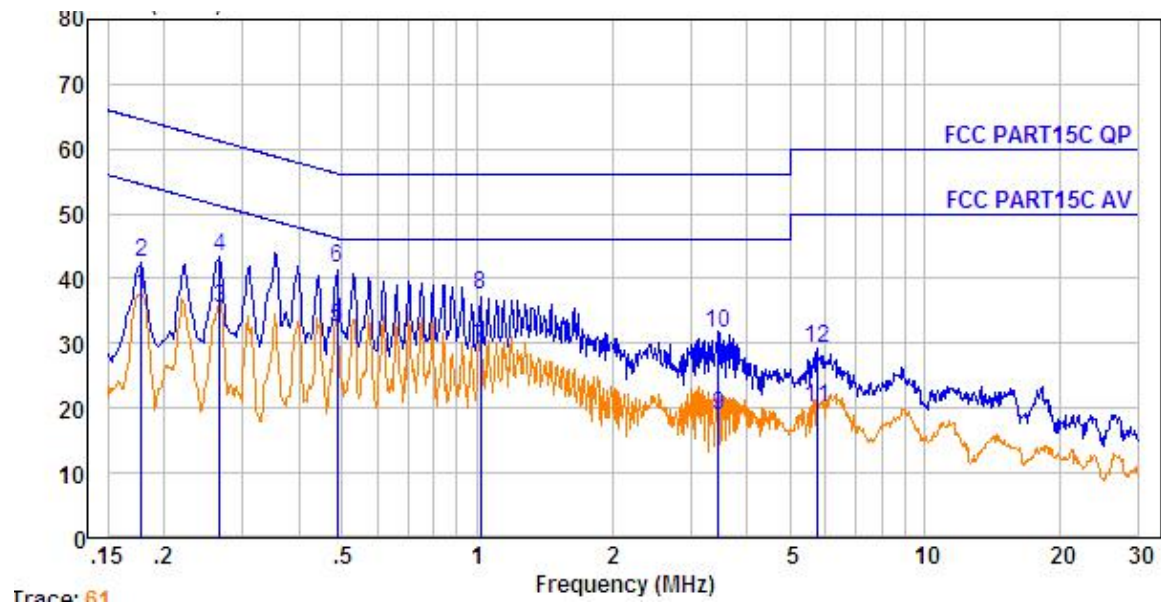

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.178	0.25	9.59	27.58	37.42	54.59	-17.17	Average
2.	0.178	0.25	9.59	32.78	42.62	64.59	-21.97	QP
3.	0.266	0.34	9.60	25.43	35.37	51.25	-15.88	Average
4.	0.266	0.34	9.60	33.34	43.28	61.25	-17.97	QP
5.	0.486	0.43	9.61	22.36	32.40	46.23	-13.83	Average
6.	0.486	0.43	9.61	31.61	41.65	56.23	-14.58	QP
7.	1.016	0.46	9.61	19.25	29.32	46.00	-16.68	Average
8.	1.016	0.46	9.61	27.51	37.58	56.00	-18.42	QP
9.	3.454	0.47	9.64	8.64	18.75	46.00	-27.25	Average
10.	3.454	0.47	9.64	21.43	31.54	56.00	-24.46	QP
11.	5.744	0.52	9.70	9.89	20.11	50.00	-29.89	Average
12.	5.744	0.52	9.70	18.95	29.17	60.00	-30.83	QP



Test Phase: Neutral

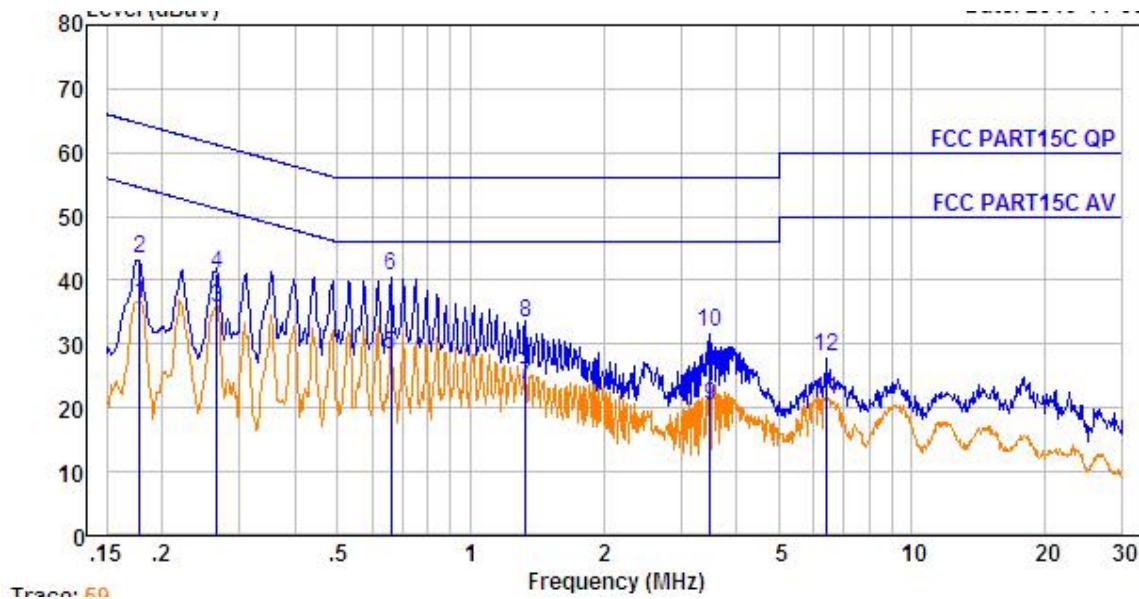

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBμV	Emission Level dBμV	Limit dBμV	Over Limit dB	Remark
1.	0.178	0.25	9.61	26.36	36.22	54.59	-18.37	Average
2.	0.178	0.25	9.61	33.65	43.51	64.59	-21.08	QP
3.	0.266	0.34	9.62	25.82	35.78	51.25	-15.47	Average
4.	0.266	0.34	9.62	31.16	41.12	61.25	-20.13	QP
5.	0.661	0.44	9.64	18.17	28.25	46.00	-17.75	Average
6.	0.661	0.44	9.64	30.76	40.84	56.00	-15.16	QP
7.	1.331	0.46	9.64	13.53	23.63	46.00	-22.37	Average
8.	1.331	0.46	9.64	23.29	33.39	56.00	-22.61	QP
9.	3.491	0.47	9.67	10.23	20.37	46.00	-25.63	Average
10.	3.491	0.47	9.67	21.70	31.84	56.00	-24.16	QP
11.	6.420	0.54	9.74	11.07	21.35	50.00	-28.65	Average
12.	6.420	0.54	9.74	17.64	27.92	60.00	-32.08	QP



## 7 Field Strength of Fundamental Emission and Radiated Spurious Emissions

Test Requirement: : FCC Part C section 15.205 & 15.209 & 15.249  
 Test Method: : ANSI C63.10: 2013  
 Test Result: : PASS  
 Measurement Distance: : 3m  
 Limit: : See the follow table  
 15.209 limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Note: 1. Emission level in dBuV/m= $20 \log (\text{uV/m})$

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

The field strength of emission from intentional radiators operated within these frequency bands shall comply with the following:

15.249(a) Limit:

Fundamental Frequency (MHz)	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54
24000-24250	250	108	2500	68



## 7.1 EUT Operation


Operating Environment :

Temperature: : 23.5 °C  
 Humidity: : 51.1 % RH  
 Atmospheric Pressure: : 101.2kPa  
 Test Voltage : AC24V


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

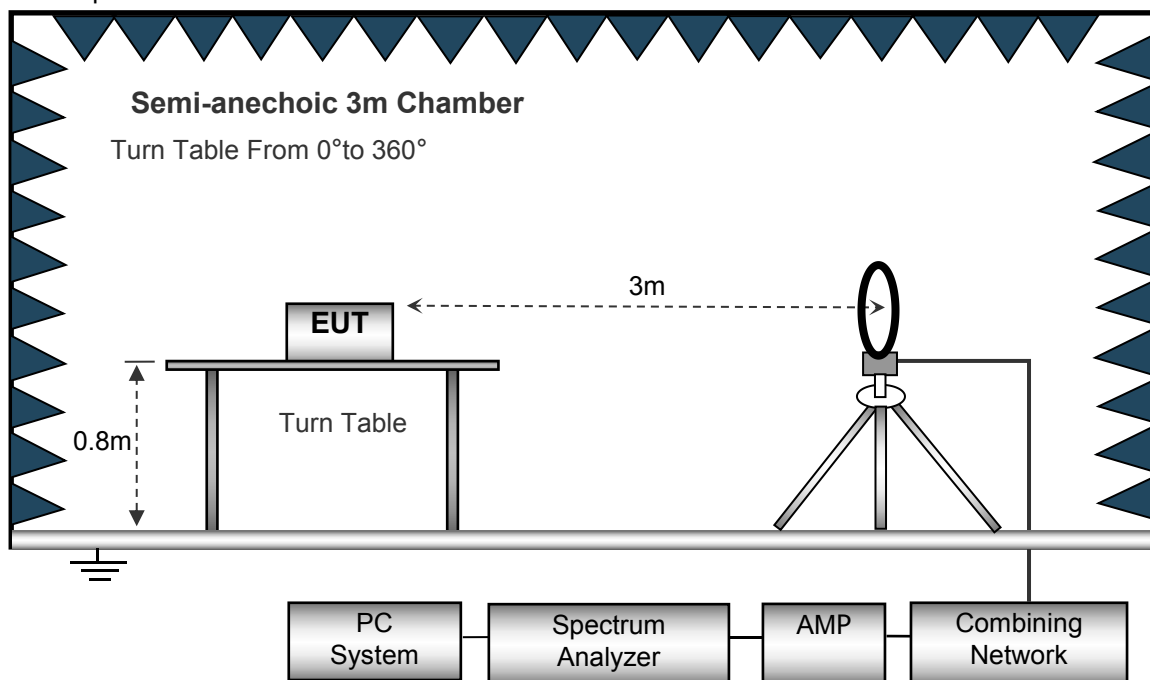

The test setup for emission measurement from 30 MHz to 1 GHz.

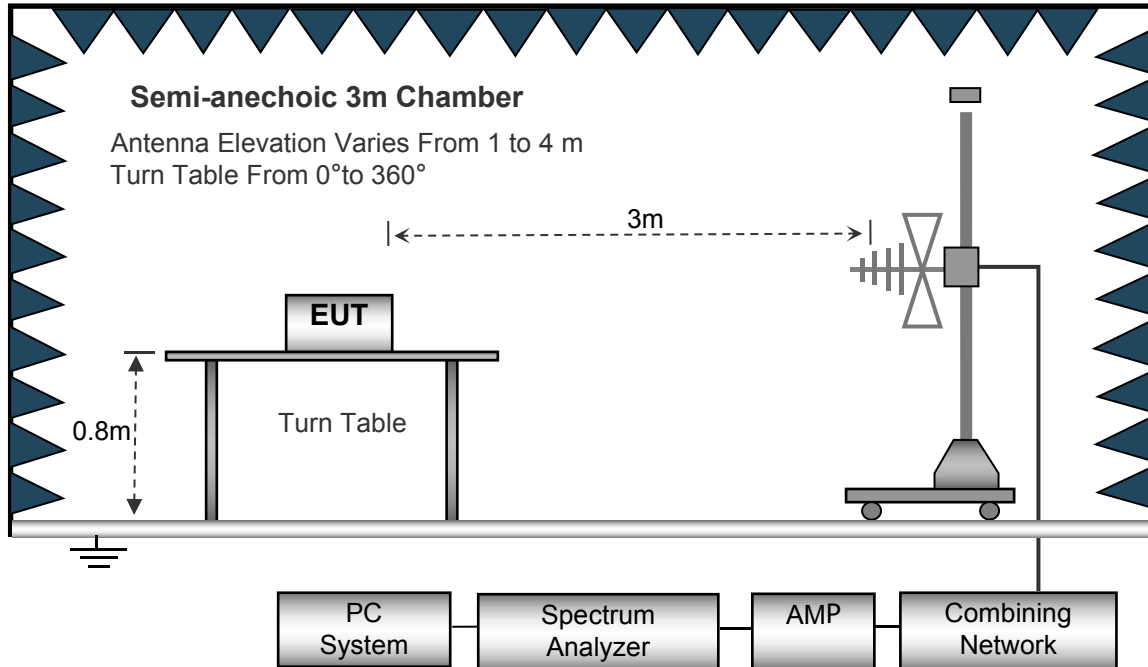

The test setup for emission measurement above 1 GHz.

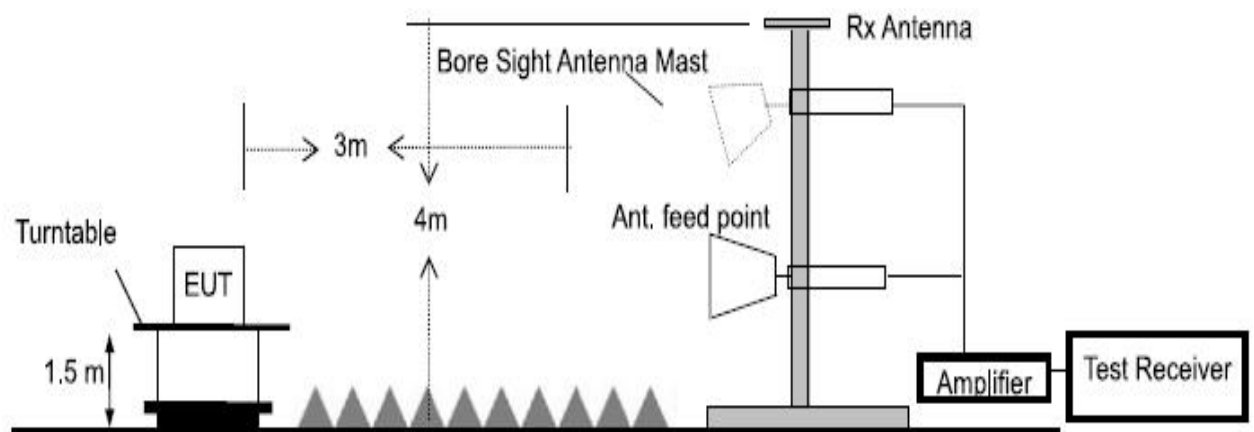

### 7.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

### 7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.



- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

#### Note:


The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance} / \text{test distance})$  (dB);  
Limit line = Specific limits(dBuV) + distance extrapolation factor.

### Test Frequency: 30MHz ~ 1GHz




Horizontal:

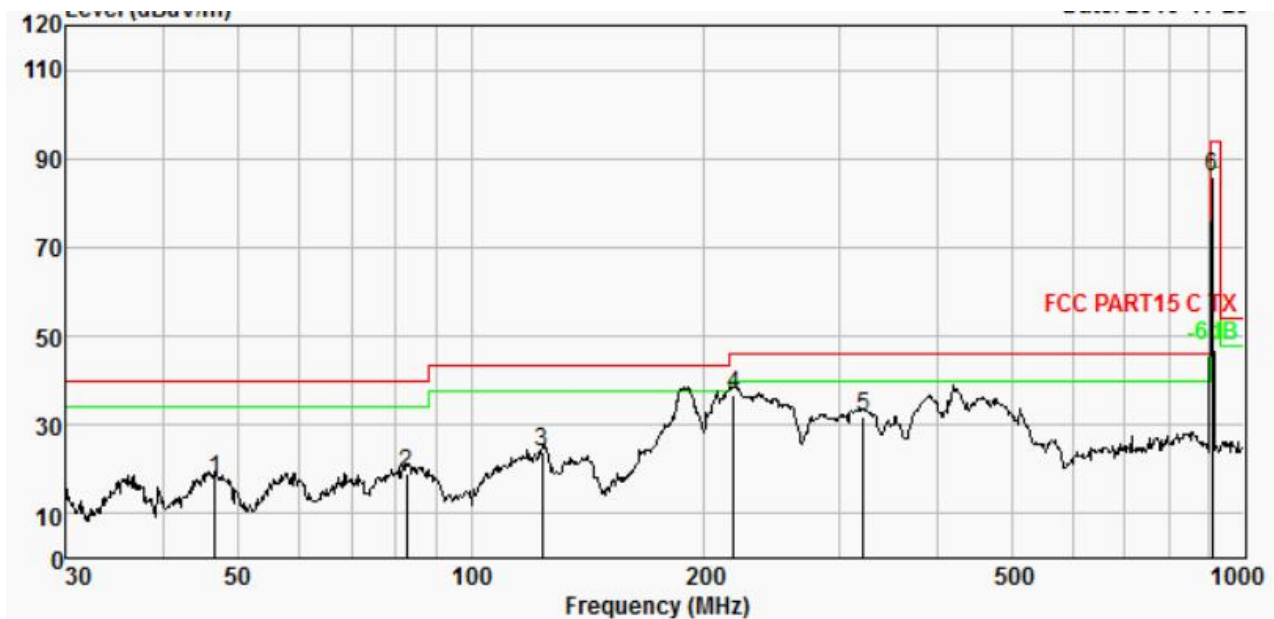

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	46.666	1.96	12.23	33.26	29.92	17.53	40.00	-22.47	QP
2.	82.648	2.95	8.84	37.40	29.97	19.22	40.00	-20.78	QP
3.	123.699	3.64	12.26	38.00	30.01	23.89	43.50	-19.61	QP
4.	218.309	4.61	11.59	50.55	30.10	36.65	46.00	-9.35	QP
5.	321.061	5.28	13.73	43.16	30.41	31.76	46.00	-14.24	QP
6.	908.400	7.07	22.13	87.89	31.04	86.05	94.00	-7.95	QP



Vertical:

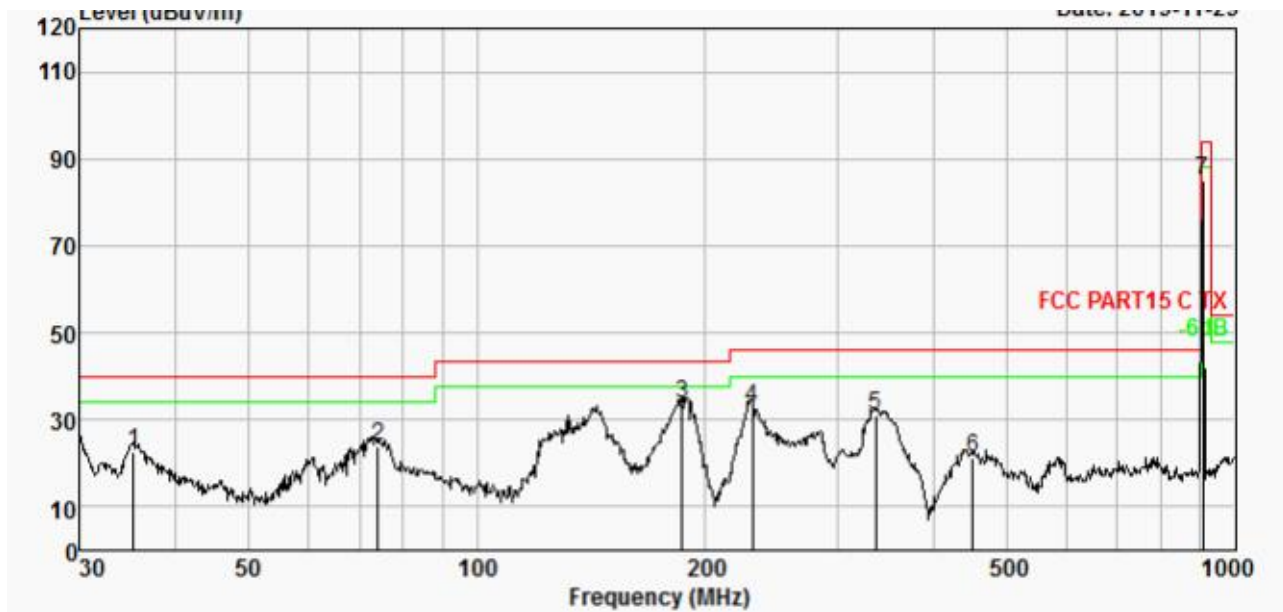

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamplifier Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	35.251	1.48	12.19	38.88	29.90	22.65	40.00	-17.35	QP
2.	74.135	2.76	9.52	41.44	29.96	23.76	40.00	-16.24	QP
3.	186.441	4.34	12.00	47.30	30.03	33.61	43.50	-9.89	QP
4.	230.907	4.71	11.97	46.18	30.14	32.72	46.00	-13.28	QP
5.	336.035	5.36	14.08	41.85	30.47	30.82	46.00	-15.18	QP
6.	451.135	5.86	15.93	30.12	30.81	21.10	46.00	-24.90	QP
7.	908.040	7.07	22.13	86.81	31.04	84.97	94.00	-9.03	QP



### Fundamental and Harmonics Average Result

Frequency	Emission Level	Limit	Margin	Ant. Polar	Detector
(MHz)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	H/V	
908.42	86.05	94	-7.95	H	QP
908.42	84.97	94	-9.03	V	QP

### Test Frequency 1GHz-10GHz:

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
1816.84	V	54.85	43.84	74	54	-19.15	-10.16
2725.26	V	54.67	43.31	74	54	-19.33	-10.69
3633.68	V	53.94	44.08	74	54	-20.06	-9.92
4542.10	V	54.72	43.24	74	54	-19.28	-10.76
5450.52	V	55.11	42.51	74	54	-18.89	-11.49
6358.94	V	54.65	38.49	74	54	-19.35	-15.51
1816.84	H	55.28	45.14	74	54	-18.72	-8.86
2725.26	H	54.81	44.01	74	54	-19.19	-9.99
3633.68	H	53.76	42.56	74	54	-20.24	-11.44
4542.10	H	53.83	43.31	74	54	-20.17	-10.69
5450.52	H	54.11	42.84	74	54	-19.89	-11.16
6358.94	H	53.69	43.11	74	54	-20.31	-10.89

Remark:

1. Margin= Emission Level - Limit
2. “\*” means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.



## 8 20 dB Bandwidth Measurement


Test Method : ANSI C63.10: 2013

### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

### 8.2 Test Result

Channel frequency (MHz)	20dB Down BW(KHz)
908.42	796

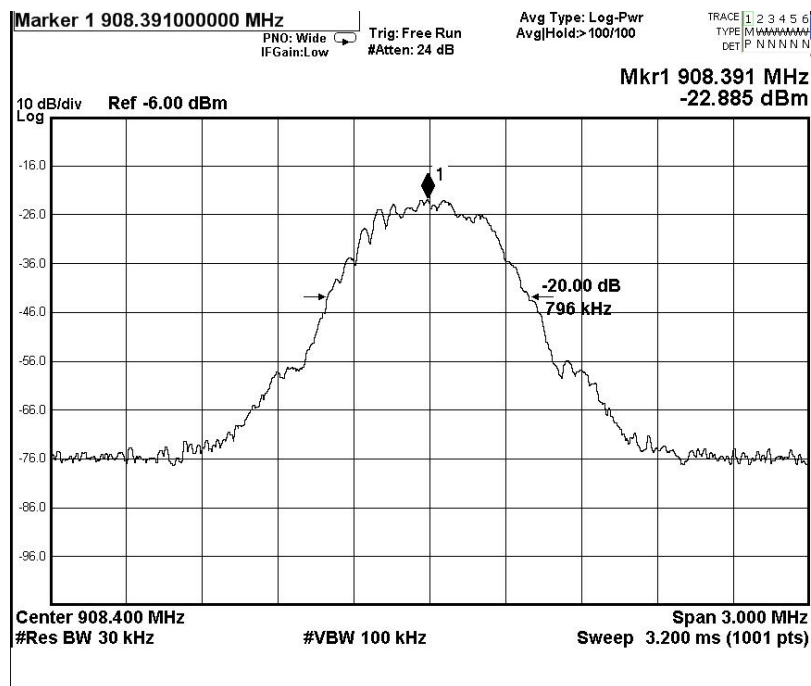






## 9 Band edges Requirement

Test Requirement:	FCC Part 15 C section 15.249(d)  (d) Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.
Test Method:	ANSI C63.10: Clause 6.10
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports(if EUT with antenna diversity architecture). The lowest, middle and highest channels were selected for the final test as listed below.

### 9.1 Test Result

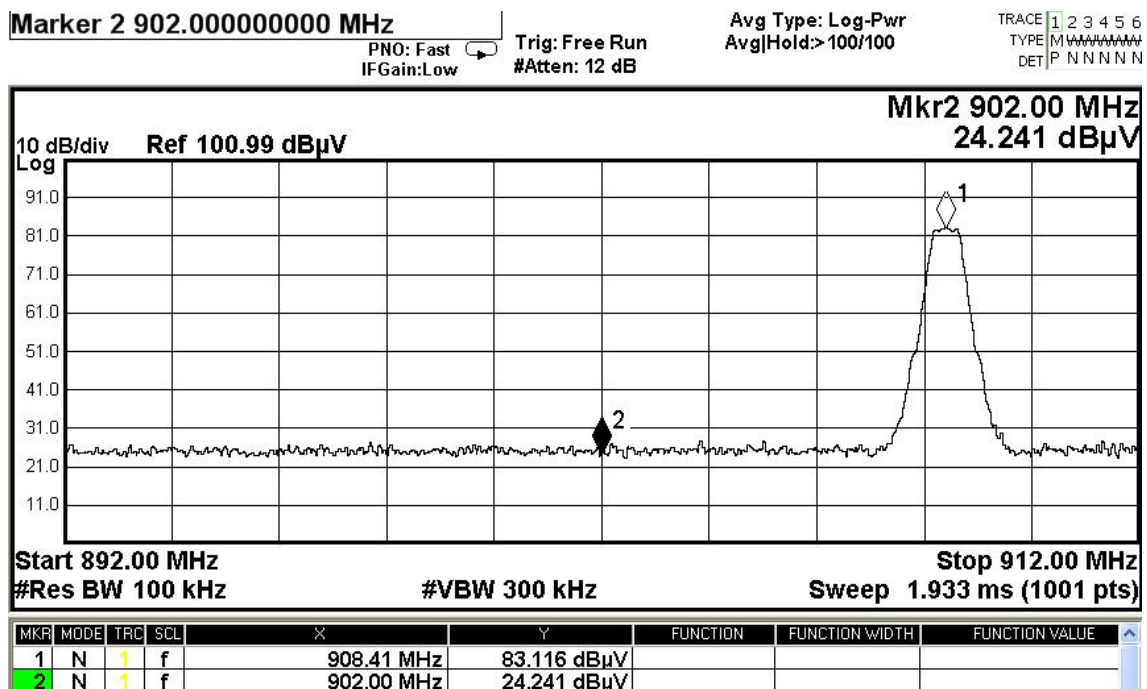



Report No.: PTC19110402501E-FC01


Ref Level 106.99 dB $\mu$ V

PN0: Fast  
IFGain: Low

Trig: Free Run  
#Atten: 10 dB

Avg Type: Log-Pwr  
Avg|Hold:>100/100

TRACE 1 2 3 4 5 6  
TYPE M M M M M M M M  
DET P N N N N N N

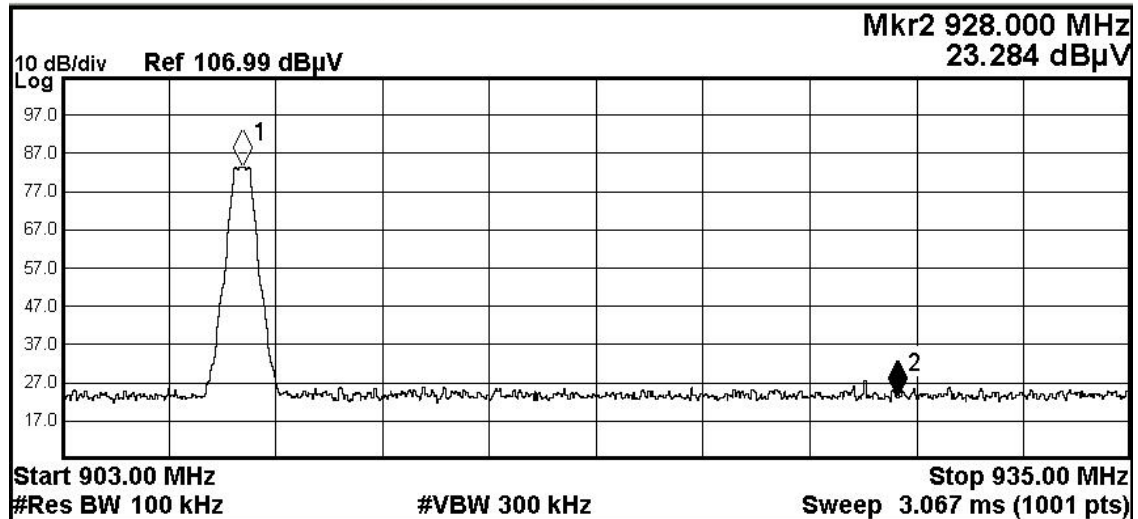

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	908.41 MHz	83.507 dB $\mu$ V			
2	N	1	f	928.000 MHz	23.284 dB $\mu$ V			



## 10 Antenna Requirement


According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an Internal Antenna which meets the requirement of this section.

## 11 TEST PHOTOS


Conducted Emissions



Radiated Spurious Emissions  
Test Frequency From 30MHz-1000MHz

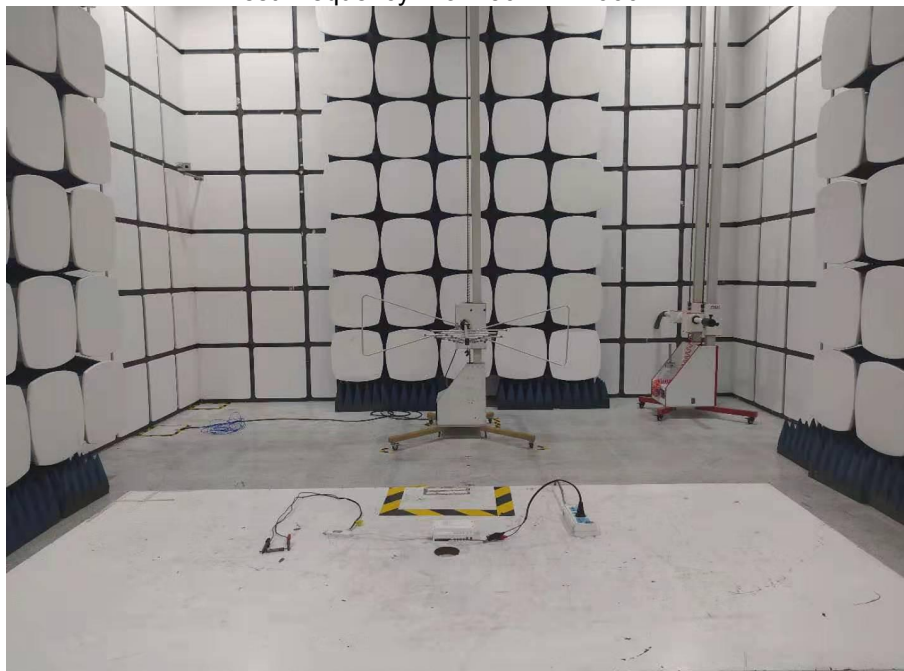



Test frequency from 1GHz-18GHz

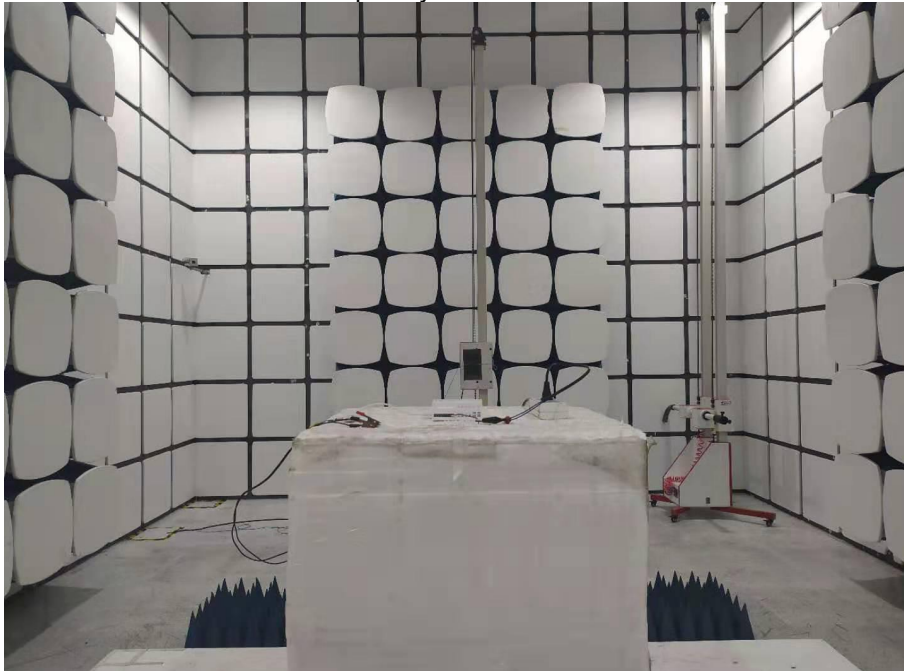


## 12 EUT PHOTOS






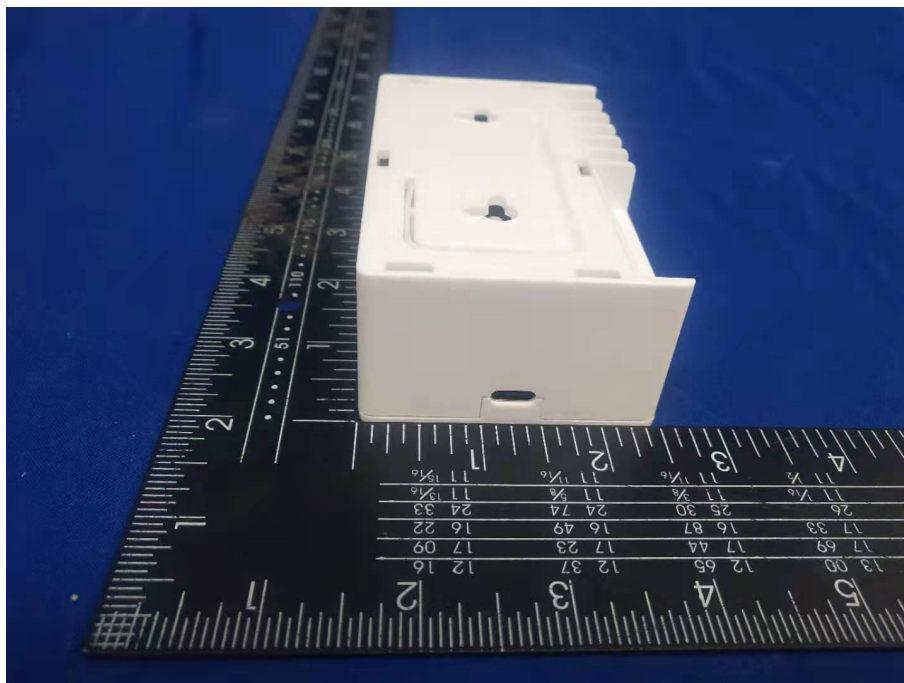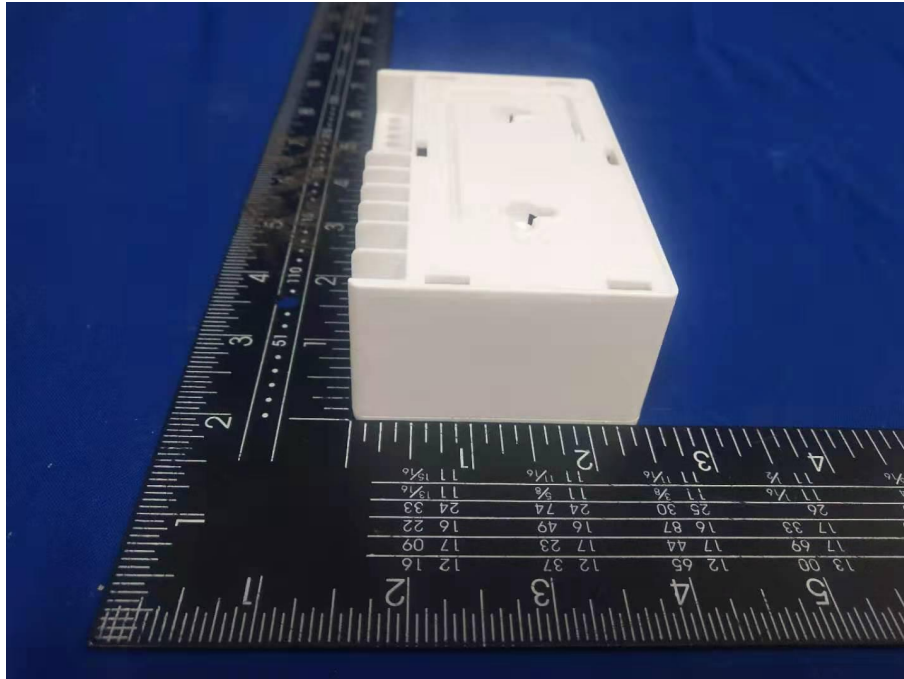


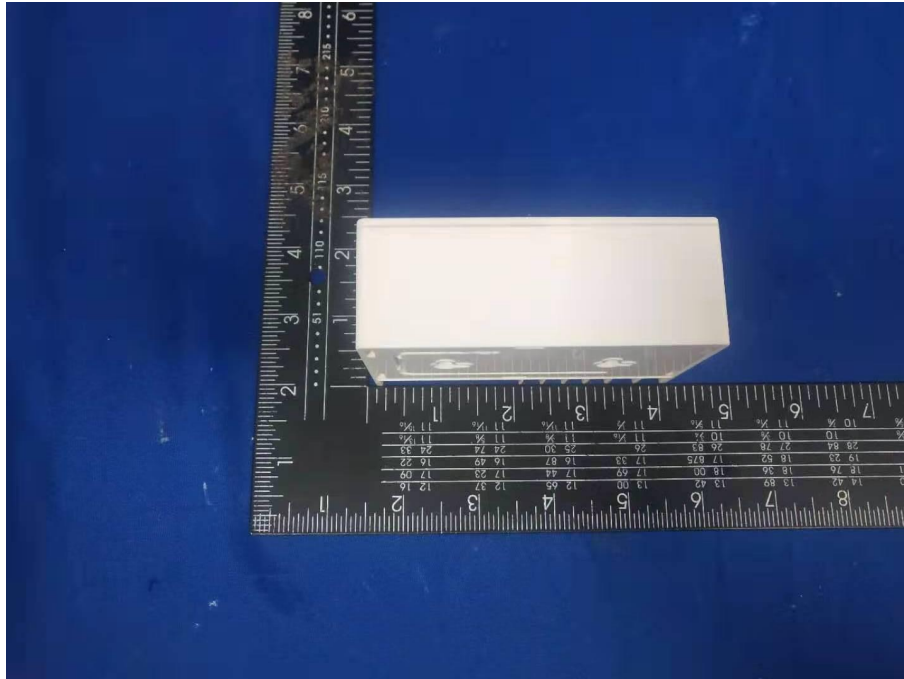



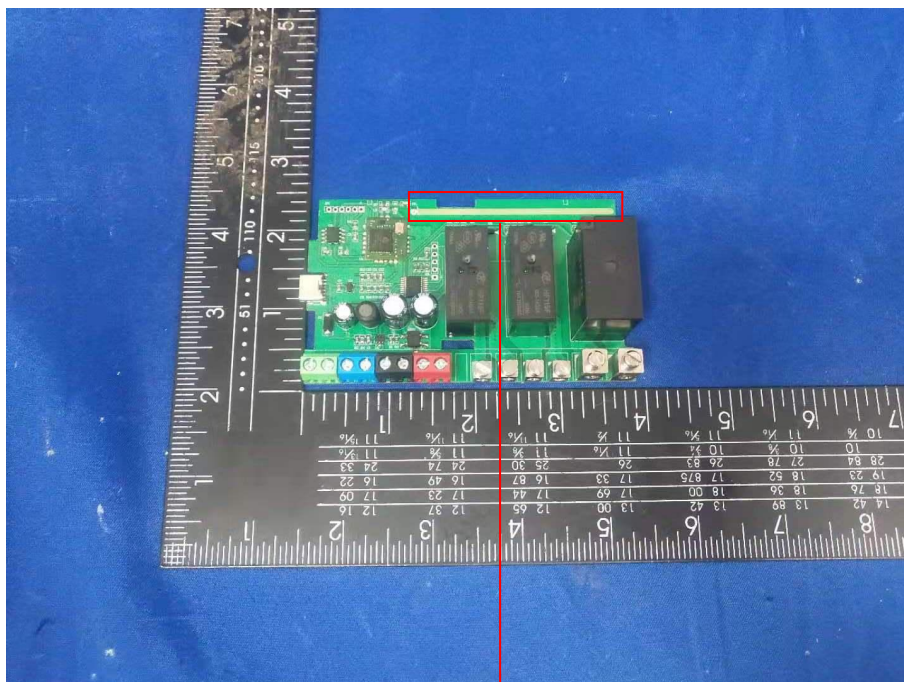

RF Antenna

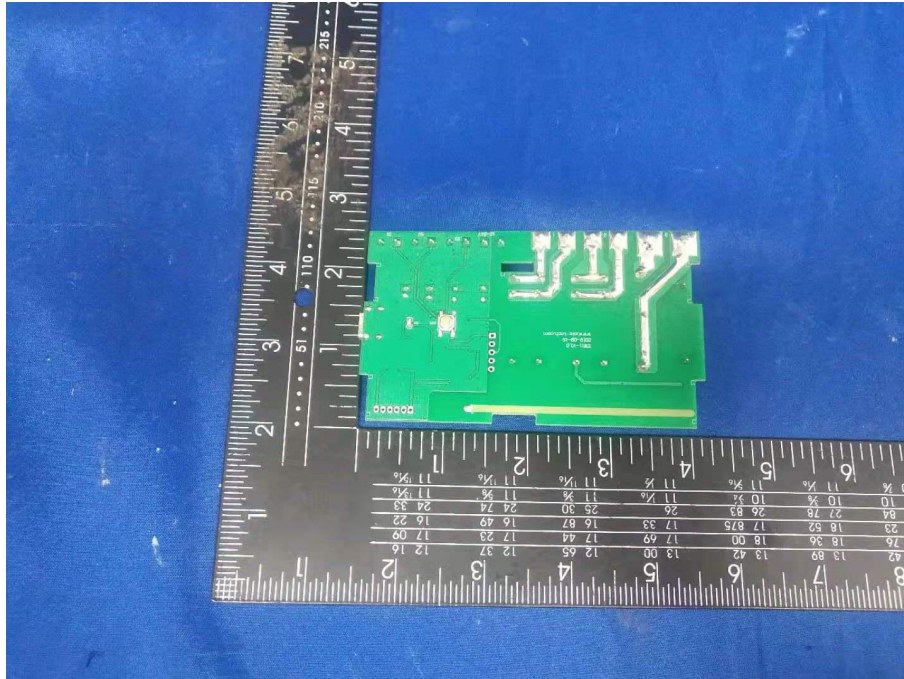

\*\*\*\*\*THE END REPORT\*\*\*\*\*