




# FCC DFS TEST REPORT

Applicant : ELO TOUCH SOLUTIONS, INC.

Address : 670 N. McCarthy Blvd., Suite 100 Milpitas, CA 95035  
USA

Equipment : Computer Box

Model No. : ESY00I1E


Trade Name : Elo or 

FCC ID : RBWESY00I1E

## I HEREBY CERTIFY THAT :

The sample was received on Aug. 19, 2024 and the testing was completed on Nov. 11, 2024 at CerpPASS Technology Corp. The test result refers exclusively to the test presented test model / sample. Without written approval of CerpPASS Technology Corp., the test report shall not be reproduced except in full.

Approved by:

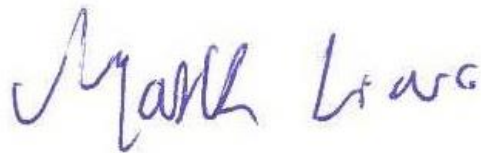

Mark Liao / Supervisor

Laboratory Accreditation:

CerpPASS Technology Corporation Test Laboratory





## CONTENTS

1.	Summary of Test Procedure and Test Results .....	4
1.1.	Applicable Standards .....	4
2.	Test Configuration of Equipment under Test .....	5
2.1.	Feature of Equipment under Test.....	5
2.2.	Description of Test System.....	7
2.3.	General Information of Test.....	8
2.4.	Measurement Uncertainty .....	8
3.	Test Equipment and Ancillaries Used for Tests .....	9
4.	Antenna Requirements .....	10
4.1.	Standard Applicable .....	10
4.2.	Antenna Construction and Directional Gain.....	10
5.	Dynamic Frequency Selection .....	11
5.1.	List of Measurement and Examinations .....	11
5.2.	Test Setup .....	13
5.3.	DFS Detection Threshold .....	15
5.4.	In-Service Monitoring .....	17
5.5.	Non-Occupancy Period .....	19
5.6.	EUT Setup Photos .....	21



### History of this test report

Report No.	Issued Date	Description
24080253-TRFCC05	Nov. 12, 2024	Original



## 1. Summary of Test Procedure and Test Results

### 1.1. Applicable Standards

**ANSI C63.10:2013**

**FCC Rules and Regulations Part 15 Subpart E §15.407**

**KDB 789033**

**KDB 905462**

FCC Rule	Description of Test	Result
15.407	Dynamic Frequency Selection	PASS

\*The lab has reduced the uncertainty risk factor from test equipment, environment and staff technicians which according to the standard on contract. Therefore, the test result will only be determined by standard requirement, measurement uncertainty evaluation is not considered.



## 2. Test Configuration of Equipment under Test

### 2.1. Feature of Equipment under Test

Operation Frequency Range	BT / BLE: 2400-2483.5MHz WLAN:802.11b/g/n/ax: 2400-2483.5MHz 5GHz:802.11a/n/ac/ax:5150-5250MHz, 5250-5350MHz, 5470-5725MHz, 5725-5875MHz 6GHz: 802.11a/ax: 5925MHz~6425MHz, 6425MHz~6525MHz 6525MHz~6875MHz, 6875MHz~7125MHz
Center Frequency Range	BT / BLE: 2402MHz-2480MHz WLAN:802.11b/g/n/ax: 2412MHz-2462MHz 5GHz:802.11a/n/ac/ax:5180-5240MHz, 5260-5320MHz, 5500-5700MHz, 5745-5825MHz 6GHz: 802.11a/ax: 5955MHz~6415MHz, 6435MHz~6515MHz 6535MHz~6855MHz, 6895MHz~7115MHz
Modulation Type	BT: GFSK, $\pi/4$ -DQPSK, 8DPSK BLE: GFSK WLAN: 2.4GHz: 802.11b: CCK, DQPSK, DBPSK 802.11g/n: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 5GHz: 802.11a/n: BPSK, QPSK, 16QAM, 64QAM 802.11ac: BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM 6GHz 802.11a: BPSK, QPSK, 16QAM, 64QAM 802.11ax: BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Modulation Technology	DSSS, OFDM, FHSS, DTS, OFDMA
Data Rate	BT: GFSK: 1Mbps, $\pi/4$ -DQPSK: 2Mbps, 8DPSK: 3Mbps BLE: GFSK: 1Mbps, 2Mbps WLAN: 2.4GHz: 802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ax: MCS0 – MCS11, HE20/40 5GHz: 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: MCS0 – MCS15, HT20/40 802.11ac: MCS0 – MCS9, VHT20/40/80/160 802.11ax: MCS0 – MCS11, HE20/40/80/160 6GHz 802.11a: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11ax: MCS0 – MCS11, HE20/40/80/160
Antenna Type	Dipole Antenna



Antenna Gain	For BT / BLE: 2402-2480MHz: ANT A: 3dBi For WLAN: 2412-2462MHz: ANT A: 3dBi, ANT B: 3dBi 5180-5240MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5260-5320MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5500-5700MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5745-5825MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5945~6425MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 6425~6525MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 6525~6875MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 6875~7125MHz: ANT A: 3.5dBi, ANT B: 3.5dBi
Adapter	Brand: Billion Model: BA070-190342MBX
Adapter	Brand: Delta Model: ADP-65JH HB
Power cord (US)	Brand: I-SHENG Model: V44VS336T1218000-A01
Power cord (EU)	Brand: I-SHENG Model: EU85B300S121800
Firmware Number	14

## Note:

- 1.EUT support TPC Function.
- 2.WLAN and BT can simultaneously transmission.
- 3.EUT supports DFS Client Mode, without radar detection.
- 4.The device not support Channel Puncturing or Bandwidth Reduction mechanisms supported.
- 5.802.11ax EUT only Support Full RU.
- 6.EUT Operating mode: Indoor Client.
- 7.For more details, please refer to the User's manual of the EUT

**2.2. Description of Test System**

DFS					
Equipment	Brand	Model	Length/Type	Power cord/Length/Type	FCC ID
Notebook	Lenovo	L440	N/A	Adapter / 1.8m / NS	---
RJ45 Cable	TE CONNECTIVITY	CAT5E	1.2m / NS	N/A	---
AP	KEENETIC	KN-3710	N/A	Adapter / 1.5m / NS	PY318200414



### 2.3. General Information of Test

<input checked="" type="checkbox"/> Test Site	CerpPASS Technology Corporation Test Laboratory Address: No.10, Ln. 2, Lianfu St., Luzhu Dist., Taoyuan City 33848, Taiwan (R.O.C.) Tel: +886-3-3226-888 Fax: +886-3-3226-881	
	FCC	TW1439, TW1079
	IC	4934E-1, 4934E-2
Frequency Range Investigated	Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 40,000MHz	
Test Distance	The test distance of radiated emission from antenna to EUT is 3 M.	

Test Item	Test Site	Test Period	Environmental Conditions	Tested By
DFS	RFDFS01-NK	2024/09/13	25.2°C / 47%	Eason Hsu
DFS	RFDFS01-NK	2024/11/11	25.2°C / 42%	Eason Hsu

### 2.4. Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Item	Uncertainty
Channel Move Time	±5.6%
Channel Closing Transmission Time	±7.4%
Threshold	±2.5dB





### 3. Test Equipment and Ancillaries Used for Tests

Test Item	DFS				
Test Site	RFDFS01-NK				
Instrument	Manufacturer	Model No	Serial No	Calibration Date	Valid Date
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100291	2023/10/11	2024/10/10
CAX Signal Analyzer	KEYSIGHT	N9000B	MY57100291	2024/10/15	2025/10/14
MXG-B RF Vector Signal Generator + Frequency Extender	KEYSIGHT	N5182B+ N5182BX07	MY53051383+ MY59362519	2024/02/16	2025/02/15
Control BOX	World-pallas	AD222	L4490A	NA	NA
IOT0047A	KEYSIGHT	V23.9.1.10	NA	NA	NA
N7607C Signal Studio	KEYSIGHT	v1.5.5.0	NA	NA	NA
InServiceMonitorUtility	Theda	v10.0.0.0	NA	NA	NA



## 4. Antenna Requirements

### 4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 4.2. Antenna Construction and Directional Gain

Antenna Type	Dipole Antenna
Antenna Gain	For WLAN: 5180-5240MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5260-5320MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5500-5700MHz: ANT A: 3.5dBi, ANT B: 3.5dBi 5745-5825MHz: ANT A: 3.5dBi, ANT B: 3.5dBi



## 5. Dynamic Frequency Selection

### 5.1. List of Measurement and Examinations

#### EUT Applicability of DFS requirements and Frequency Range

Operation Mode		Operating Frequency Range	
		5250-5350MHz	5470-5725MHz (Support 5600MHz-5650MHz)
Master	--	--	--
Client without radar detection	√	√	√
Client with radar detection	--	--	--

#### DEVICES WITH RADAR DETECTION

MAXIMUM TRANSMIT POWER	VALUE (SEE Note 1 and 2)
≥ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911

**Table1: Applicability of DFS requirements prior to use of a channel**

REQUIREMENT RADAR	OPERATIONAL MODE		
	MASTER	CLIENT WITHOUT RADAR DETECTION	CLIENT WITH RADAR DETECTION
Non-Occupancy Period	V	Not required	V
DFS Detection Threshold	V	Not required	V
Channel Availability Check Time	V	Not required	Not required
U-NII Detection Bandwidth	V	Not required	V

**Table2: Applicability of DFS requirements during normal operation**

REQUIREMENT RADAR	OPERATIONAL MODE		
	MASTER	CLIENT WITHOUT RADAR DETECTION	CLIENT WITH RADAR DETECTION
DFS Detection Threshold	V	Not required	V
Channel Closing Transmission Time	V	V	V
Channel Move Time	V	V	V
U-NII Detection Bandwidth	V	Not required	V

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.



## 5.2. Test Setup

### Setup for Master with injection at the Master

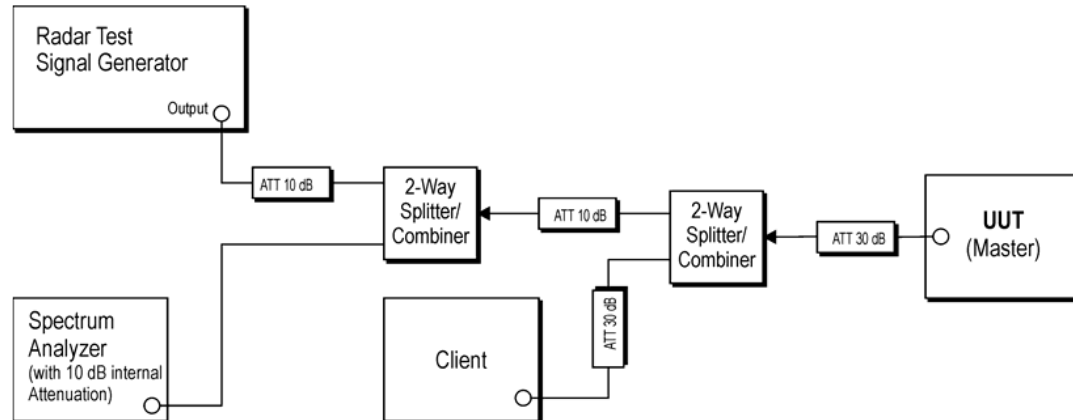


Figure 1: Example Conducted Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

### Setup for Client with injection at the Master

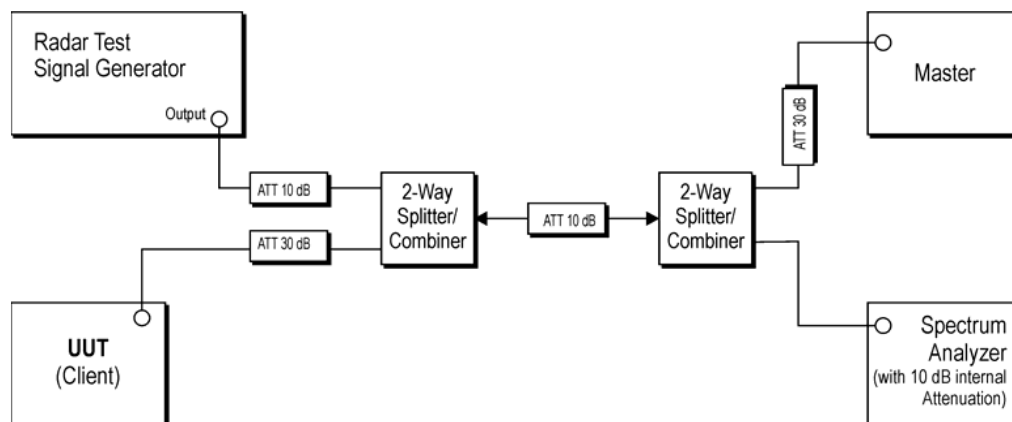


Figure 2: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Master



### Setup for Client with injection at the Client

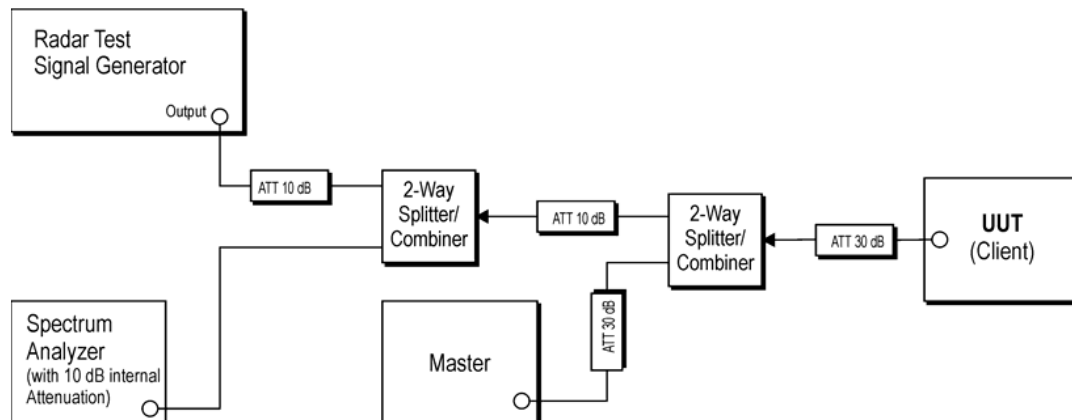


Figure 3: Example Conducted Setup where UUT is a Client and Radar Test Waveforms are injected into the Client



### 5.3. DFS Detection Threshold

DFS Detection Threshold is the level used by the DFS mechanism to detect radar interference.

#### 5.3.1. Test Limit

Limits Clause 4.7.2.1.2

DFS Detection Thresholds for Master Devices and Client Devices with Radar

Detection

MAXIMUM TRANSMIT POWER	VALUE (SEE Note 1 and 2)
$\geq 200$ milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.


Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911



### 5.3.2. Test Result of DFS Detection Threshold

Modulation Type:802.11ax160, CH114@5500MNz

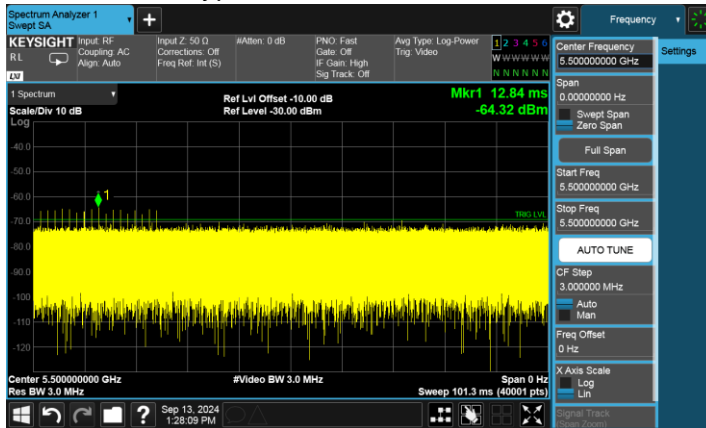





## 5.4. In-Service Monitoring

The In-Service Monitoring is defined as the process by which an RLAN monitors the Operating Channel for the presence of radar signals.

Additional requirements for devices with multiple bandwidth modes	Master or Client with radar detection	Client without radar detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

### 5.4.1. Test Limit

Parameter	Value
Channel Move Time	< 10 s (See Note 1)
Channel Closing Transmission Time	< 200 ms+ an aggregate of 60 milliseconds over remaining 10 second period. (See Notes 1 and Notes 2.)
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	

#### Limits Clause 4.7.2.2.2

The In-Service Monitoring shall be used to continuously monitor an Operating Channel.


The In-Service-Monitoring shall start immediately after the RLAN has started transmissions on an Operating Channel.



### 5.4.2. Test Result of In-Service Monitoring

	Value	Limit
Channel Move Time	1.0119747	<10 s
Channel Closing Transmission Time	1.83995	< 60 ms

Modulation Type:802.11ax160, ch114@5500MHz

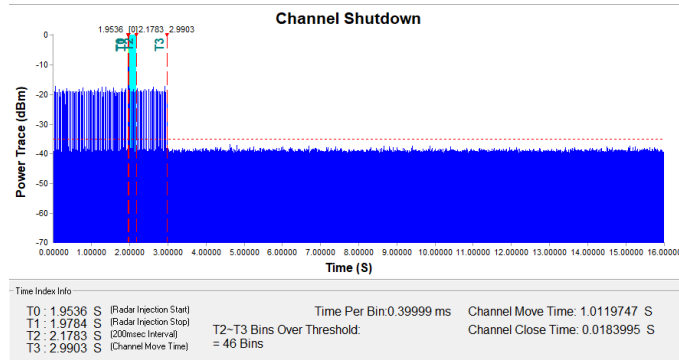



### 5.5. Non-Occupancy Period

The Channel Shutdown is defined as the process initiated by the RLAN device immediately after a radar signal has been detected on an Operating Channel.

The master device shall instruct all associated slave devices to stop transmitting on this channel, which they shall do within the Channel Move Time.

Slave devices with a Radar Interference Detection function, shall stop their own transmissions within the Channel Move Time.

The aggregate duration of all transmissions of the RLAN device on this channel during the Channel Move Time shall be limited to the Channel Closing Transmission Time. The aggregate duration of all transmissions shall not include quiet periods in between transmissions.

#### 5.5.1. Test Limit

Radar Test Signal	Master (min)	Client (min)
0	> 30	> 30


#### 5.5.2. Channel Loading

A link is established between the Control BOX. Use IOT0047A ver.23.9.1.10 Software to simulate data transfer is streamed to generate WLAN traffic.

Timing plots are required with calculations demonstrating a minimum channel loading of approximately 17% or greater. For example, channel loading can be estimated by setting the spectrum analyzer for zero span and approximate the Time On/ (Time On + Off Time). This can be done with any appropriate channel BW and modulation type

Modulation Type:802.11ax160

Time On/ (Time On + Off Time) =21.18%

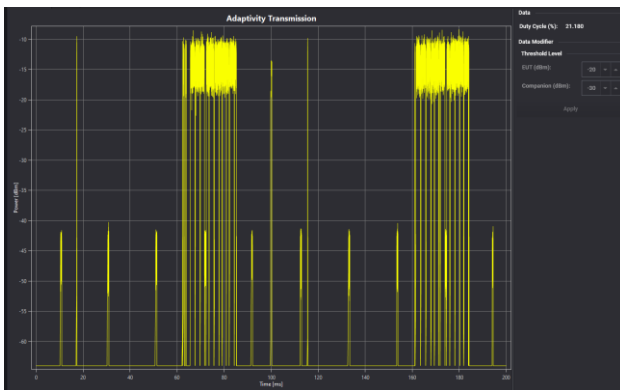



### 5.5.3. Test Result of Non-Occupancy Period

Modulation Type:802.11ax160, ch114@5500MHz



-----THE END OF REPORT-----