

FCC RF Test Report


APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : GSM/WCDMA/LTE Phone+Bluetooth,
DTS/UNII a/b/g/n and NFC
BRAND NAME : Sony
FCC ID : PY7-76476N
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on May 01, 2017 and testing was completed on Jun. 07, 2017. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Reviewed by: Joseph Lin / Supervisor



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-76476N

Page Number : 1 of 22

Report Issued Date : Jul. 25, 2017

Report Version : Rev. 01

Report Template No.: BU5-FG22/24/27 Version 1.2



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.6 Testing Location	7
1.7 Applicable Standards	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 CONDUCTED TEST RESULT.....	11
3.1 Measuring Instruments.....	11
3.2 Test Setup	11
3.3 Test Result of Conducted Test.....	11
3.4 Conducted Output Power and ERP/EIRP	12
3.5 Peak-to-Average Ratio	13
3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.7 Conducted Band Edge	15
3.8 Conducted Spurious Emission	16
3.9 Frequency Stability	17
4 RADIATED TEST ITEMS	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 LIST OF MEASURING EQUIPMENT	20
6 UNCERTAINTY OF EVALUATION	22
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF ERP/EIRP AND RADIATED TEST	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG742210-01A	Rev. 01	Initial issue of report	Jul. 25, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(2)	Effective Radiated Power	< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
	§27.50(d)(4)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	§2.1049 §22.917(b) §24.238(b) §27.53(g)	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Band Edge Measurement	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability for Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 19.97 dB at 5550.000 MHz



1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.2 Manufacturer

Sony Mobile Communications Inc.

4-12-3 Higashi-Shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan

1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII, a/b/g/n, NFC and GPS

Product Specification subjective to this standard	
Antenna Type	C-feed Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.32	RQ3004U10C	Conducted Measurement ERP/EIRP Test Radiated Spurious Emission

Accessory List	
AC Adapter 1	Model No. : UCH20
	S/N : 1215W48600059
Earphone 1	Model No. : MH410c
	S/N : 1632A86900000FC
USB Cable	Model No. : UCB20
	S/N : 1625A91900007E2

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.
4. For conducted test items except conducted output power is carrying out, FG742210-01A report reuses test data from the FG692213-01A report.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.



1.5 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.4887	0.0227 ppm	246KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1225	0.0670 ppm	245KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0624	0.0167 ppm	4M21F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.7780	0.0117 ppm	247KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.2600	0.0266 ppm	248KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.1795	0.0027 ppm	4M18F9W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.1000	0.0121 ppm	4M17F9W

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW0007 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No.
	TH03-HY

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH10-HY

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E), 27(L)
- ANSI / TIA / EIA-603-D-2010
- FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
GSM 1900	■ GPRS class 8 Link ■ EDGE class 8 Link	■ GPRS class 8 Link ■ EDGE class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

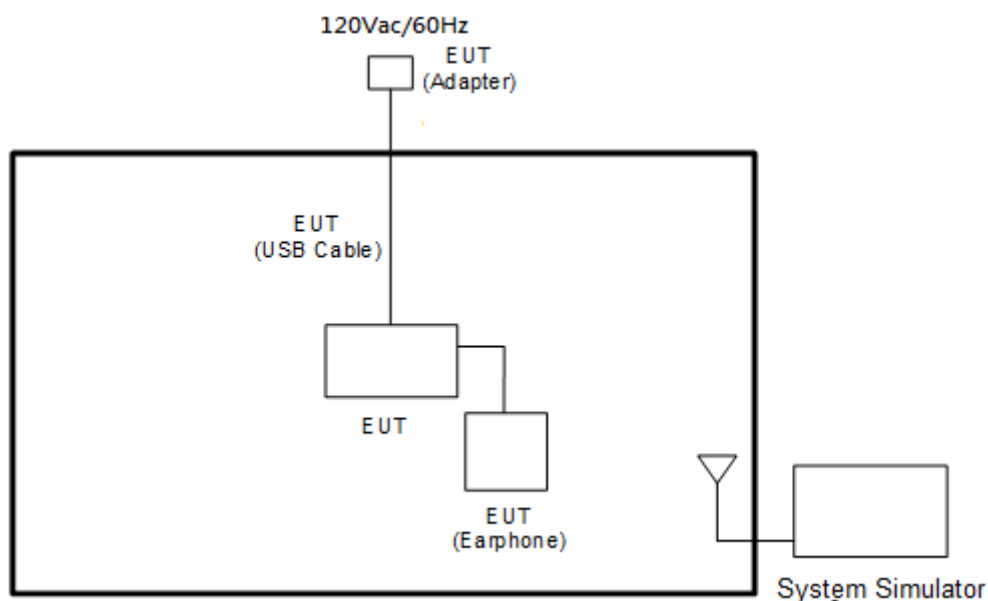

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. Set EUT to transmit at maximum output power.
4. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
Record the maximum PAPR level associated with a probability of 0.1%.

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The band edges of low and high channels for the highest RF powers were measured.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 6.0.
2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz



4.2.2 For radiated test above 1GHz

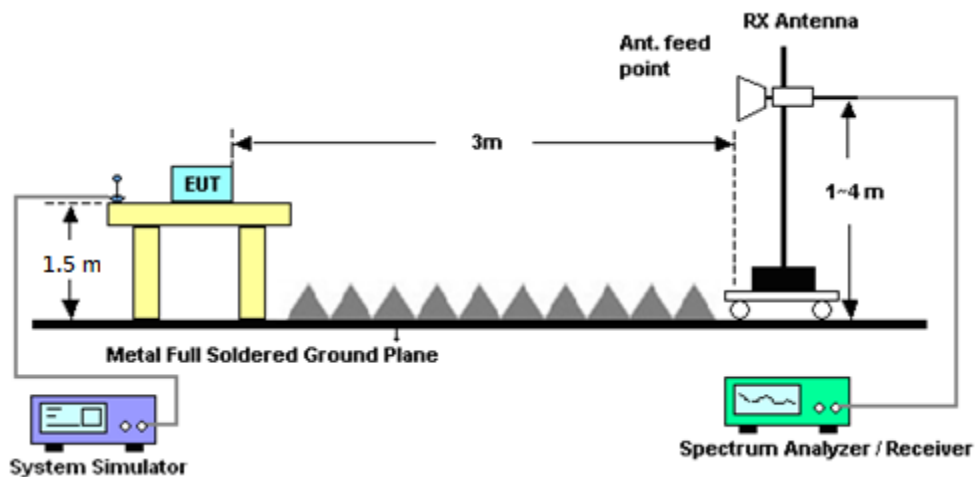

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
12. $ERP \text{ (dBm)} = EIRP - 2.15$
13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 20, 2017	May 11, 2017	Mar. 19, 2018	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 27, 2016	May 11, 2017	Jun. 26, 2017	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 16, 2016	May 11, 2017	Nov. 15, 2017	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;Current:0~5A	Nov. 22, 2016	May 11, 2017	Nov. 21, 2017	Conducted (TH03-HY)
Base Station(Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 05, 2016	May 11, 2017	Aug. 04, 2017	Conducted (TH03-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	1GHz~26GHz	Dec. 02, 2016	May 11, 2017	Dec. 01, 2017	Conducted (TH03-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800N	35413&02	30MHz~1GHz	Jan. 07, 2017	May 30, 2017~Jun. 07, 2017	Jan. 06, 2018	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2016	May 30, 2017~Jun. 07, 2017	Sep. 29, 2017	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Oct. 07, 2016	May 30, 2017~Jun. 07, 2017	Oct. 06, 2017	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170576	18GHz ~ 40GHz	Apr. 27, 2017	May 30, 2017~Jun. 07, 2017	Apr. 26, 2018	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz~ 40GHz	Nov. 08, 2016	May 30, 2017~Jun. 07, 2017	Nov. 07, 2017	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 26, 2016	May 30, 2017~Jun. 07, 2017	Oct. 25, 2017	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Oct. 26, 2016	May 30, 2017~Jun. 07, 2017	Oct. 25, 2017	Radiation (03CH10-HY)
Preamplifier	MITEQ	JS44-18004000-33-8P	1840917	18GHz ~ 40GHz	Jun. 14, 2016	May 30, 2017~Jun. 07, 2017	Jun. 13, 2017	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHz	Oct. 17, 2016	May 30, 2017~Jun. 07, 2017	Oct. 16, 2017	Radiation (03CH10-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	May 30, 2017~Jun. 07, 2017	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	May 30, 2017~Jun. 07, 2017	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	May 30, 2017~Jun. 07, 2017	N/A	Radiation (03CH10-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 14, 2016	May 30, 2017~Jun. 07, 2017	Nov. 13, 2017	Radiation (03CH10-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2017	May 30, 2017~Jun. 07, 2017	May 21, 2018	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY249564 MY249524	25GHz~40GHz	Sep. 30, 2016	May 30, 2017~Jun. 07, 2017	Sep. 29, 2017	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY249564 MY249524	30MHz~1GHz	Sep. 30, 2016	May 30, 2017~Jun. 07, 2017	Sep. 29, 2017	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY249564 MY249524	1GHz~25GHz	Sep. 30, 2016	May 30, 2017~Jun. 07, 2017	Sep. 29, 2017	Radiation (03CH10-HY)
Filter	Wainwright	WHKX12-1080-1200-1500-60S	SN2	1.2G High Pass	Sep. 19, 2016	May 30, 2017~Jun. 07, 2017	Sep. 18, 2017	Radiation (03CH10-HY)
Filter	Wainwright	H3G018G1	SN477221	3.0 G High Pass	N/A	May 30, 2017~Jun. 07, 2017	N/A	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCG824/849-40/8SS	SN35	CDMA 850	Nov. 22, 2016	May 30, 2017~Jun. 07, 2017	Nov. 21, 2017	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT1850/1910-40/8SS	SN21	1900	Nov. 22, 2016	May 30, 2017~Jun. 07, 2017	Nov. 21, 2017	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCG1710/1755-1690/1755-4	SN2	AWS Band	Nov. 21, 2016	May 30, 2017~Jun. 07, 2017	Nov. 20, 2017	Radiation (03CH10-HY)
Test Software	N/A	E3	6.2009-8-24	N/A	N/A	May 30, 2017~Jun. 07, 2017	N/A	Radiation (03CH10-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.17
---	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.48
---	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.00
---	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	33.22	33.21	33.20	30.15	30.23	30.30
GPRS class 8	33.24	33.22	33.21	30.15	30.24	30.31
GPRS class 10	30.61	30.54	30.55	27.28	27.44	27.59
GPRS class 11	28.62	28.62	28.62	25.61	25.79	25.97
GPRS class 12	27.51	27.43	27.45	24.37	24.56	24.73
EGPRS class 8	27.10	27.16	27.23	25.30	25.51	25.55
EGPRS class 10	26.88	26.93	27.04	25.23	25.45	25.44
EGPRS class 11	26.64	26.71	26.83	24.76	24.91	24.96
EGPRS class 12	26.38	26.41	26.55	24.57	24.64	24.67

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	24.26	24.28	24.30	23.88	23.87	23.94
HSDPA Subtest-1	23.33	23.35	23.36	22.89	22.92	22.98
HSDPA Subtest-2	23.32	23.31	23.24	22.90	22.94	22.97
HSDPA Subtest-3	22.84	22.82	22.93	22.38	22.46	22.49
HSDPA Subtest-4	22.81	22.84	22.91	22.41	22.47	22.48
HSUPA Subtest-1	21.51	21.57	21.59	20.95	20.94	20.98
HSUPA Subtest-2	21.31	21.37	21.41	20.91	20.93	20.99
HSUPA Subtest-3	22.28	22.33	22.36	21.89	21.91	21.95
HSUPA Subtest-4	20.84	20.89	20.91	20.41	20.43	20.49
HSUPA Subtest-5	22.30	22.36	22.41	21.82	21.91	22.00

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.27	23.29	23.30
HSDPA Subtest-1	22.32	22.28	22.34
HSDPA Subtest-2	22.33	22.31	22.33
HSDPA Subtest-3	21.86	21.82	21.89
HSDPA Subtest-4	21.87	21.85	21.86
HSUPA Subtest-1	20.53	20.52	20.51
HSUPA Subtest-2	20.33	20.29	20.35
HSUPA Subtest-3	21.28	21.31	21.36
HSUPA Subtest-4	19.85	19.87	19.84
HSUPA Subtest-5	21.34	21.31	21.33









A2. GSM







Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.16	3.36	PASS
Middle CH	0.16	3.16	
Highest CH	0.12	3.08	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.12	3.48	PASS
Middle CH	0.16	3.40	
Highest CH	0.12	3.40	

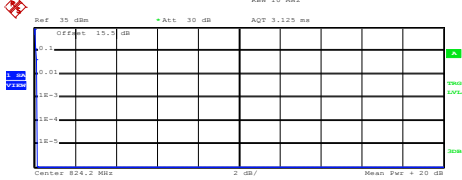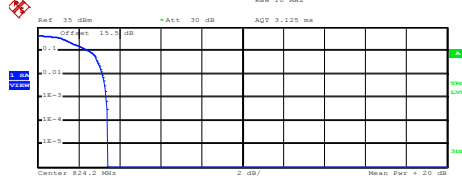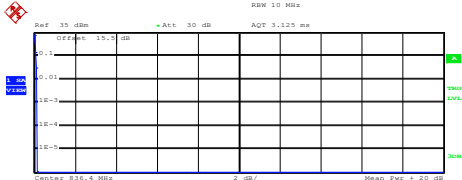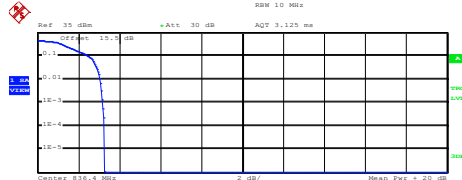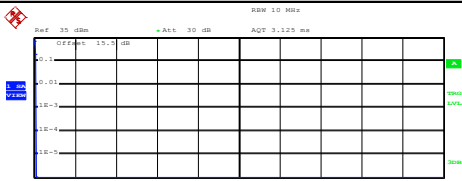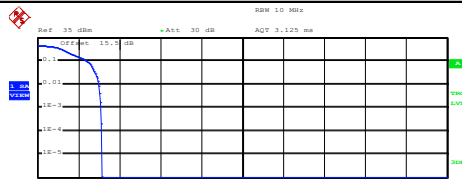


GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm, Att: 30 dB, AGT: 3.125 ms, RSW: 10 MHz, Center: 824.2 MHz, 2 dB, Mean: 31.94 dBm, Peak: 32.08 dBm, Crest: 0.14 dB Trace 1 Mean 31.94 dBm Peak 32.08 dBm Crest 0.14 dB 10 % 0.08 dB 1 % 0.16 dB .1 % 0.16 dB .01 % 0.16 dB Date: 15.OCT.2016 04:43:37		 Ref: 35 dBm, Att: 30 dB, AGT: 3.125 ms, RSW: 10 MHz, Center: 824.2 MHz, 2 dB, Mean: 26.04 dBm, Peak: 29.47 dBm, Crest: 3.43 dB Trace 1 Mean 26.04 dBm Peak 29.47 dBm Crest 3.43 dB 10 % 2.52 dB 1 % 3.16 dB .1 % 3.36 dB .01 % 3.44 dB Date: 15.OCT.2016 05:00:11	
Middle Channel		Middle Channel	
 Ref: 35 dBm, Att: 30 dB, AGT: 3.125 ms, RSW: 10 MHz, Center: 836.4 MHz, 2 dB, Mean: 32.09 dBm, Peak: 32.22 dBm, Crest: 0.13 dB Trace 1 Mean 32.09 dBm Peak 32.22 dBm Crest 0.13 dB 10 % 0.08 dB 1 % 0.16 dB .1 % 0.16 dB .01 % 0.16 dB Date: 15.OCT.2016 04:44:30		 Ref: 35 dBm, Att: 30 dB, AGT: 3.125 ms, RSW: 10 MHz, Center: 836.4 MHz, 2 dB, Mean: 26.34 dBm, Peak: 29.61 dBm, Crest: 3.27 dB Trace 1 Mean 26.34 dBm Peak 29.61 dBm Crest 3.27 dB 10 % 2.48 dB 1 % 3.04 dB .1 % 3.16 dB .01 % 3.28 dB Date: 15.OCT.2016 05:01:18	
Highest Channel		Highest Channel	
 Ref: 35 dBm, Att: 30 dB, AGT: 3.125 ms, RSW: 10 MHz, Center: 848.8 MHz, 2 dB, Mean: 32.12 dBm, Peak: 32.22 dBm, Crest: 0.10 dB Trace 1 Mean 32.12 dBm Peak 32.22 dBm Crest 0.10 dB 10 % 0.12 dB 1 % 0.12 dB .1 % 0.12 dB .01 % 0.12 dB Date: 15.OCT.2016 04:45:16		 Ref: 35 dBm, Att: 30 dB, AGT: 3.125 ms, RSW: 10 MHz, Center: 848.8 MHz, 2 dB, Mean: 26.42 dBm, Peak: 29.54 dBm, Crest: 3.12 dB Trace 1 Mean 26.42 dBm Peak 29.54 dBm Crest 3.12 dB 10 % 2.44 dB 1 % 3.00 dB .1 % 3.08 dB .01 % 3.16 dB Date: 15.OCT.2016 05:02:15	

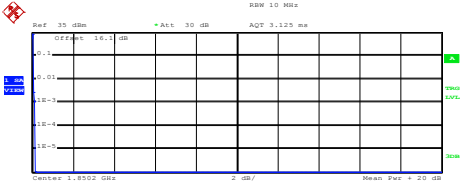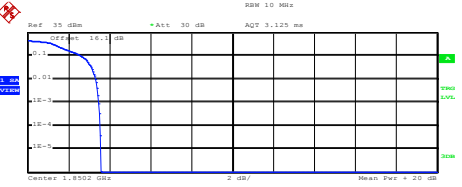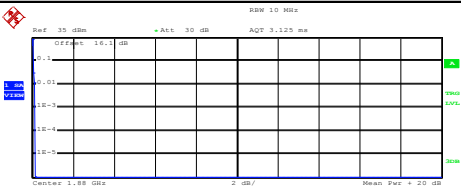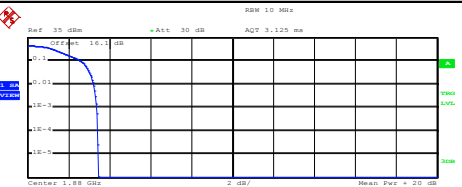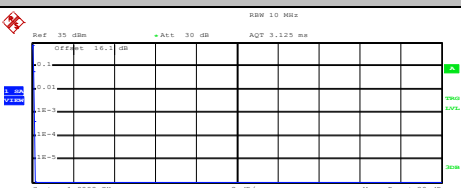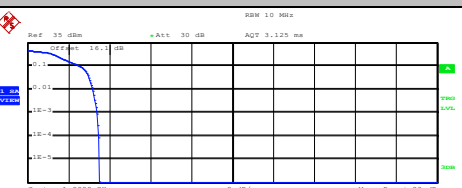
GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)
Lowest Channel	Lowest Channel
 Ref 35 dBm Att 30 dB AQT 3.125 ms Center 1.8502 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 28.47 dBm Peak 28.62 dBm Crest 0.15 dB 10 % 0.08 dB 1 % 0.08 dB .1 % 0.12 dB .01 % 0.16 dB Date: 15.OCT.2016 05:17:24	 Ref 35 dBm Att 30 dB AQT 3.125 ms Center 1.8502 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.02 dBm Peak 26.57 dBm Crest 3.56 dB 10 % 2.64 dB 1 % 3.32 dB .1 % 3.48 dB .01 % 3.56 dB Date: 5.NOV.2016 09:24:19
Middle Channel	Middle Channel
 Ref 35 dBm Att 30 dB AQT 3.125 ms Center 1.85 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 28.27 dBm Peak 28.41 dBm Crest 0.14 dB 10 % 0.08 dB 1 % 0.12 dB .1 % 0.16 dB .01 % 0.16 dB Date: 15.OCT.2016 05:18:18	 Ref 35 dBm Att 30 dB AQT 3.125 ms Center 1.85 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.14 dBm Peak 26.57 dBm Crest 3.43 dB 10 % 2.60 dB 1 % 3.24 dB .1 % 3.40 dB .01 % 3.44 dB Date: 5.NOV.2016 09:24:57
Highest Channel	Highest Channel
 Ref 35 dBm Att 30 dB AQT 3.125 ms Center 1.9098 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 28.32 dBm Peak 28.48 dBm Crest 0.16 dB 10 % 0.08 dB 1 % 0.12 dB .1 % 0.12 dB .01 % 0.16 dB Date: 15.OCT.2016 05:19:05	 Ref 35 dBm Att 30 dB AQT 3.125 ms Center 1.9098 GHz 2 dB/ Mean Pwr + 20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.15 dBm Peak 26.64 dBm Crest 3.49 dB 10 % 2.56 dB 1 % 3.20 dB .1 % 3.40 dB .01 % 3.48 dB Date: 5.NOV.2016 09:25:14

**26dB Bandwidth**

Mode	GSM850 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.314	0.284
Middle CH	0.291	0.260
Highest CH	0.297	0.291

Mode	GSM1900 : 26dB BW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.301	0.302
Middle CH	0.304	0.306
Highest CH	0.312	0.304

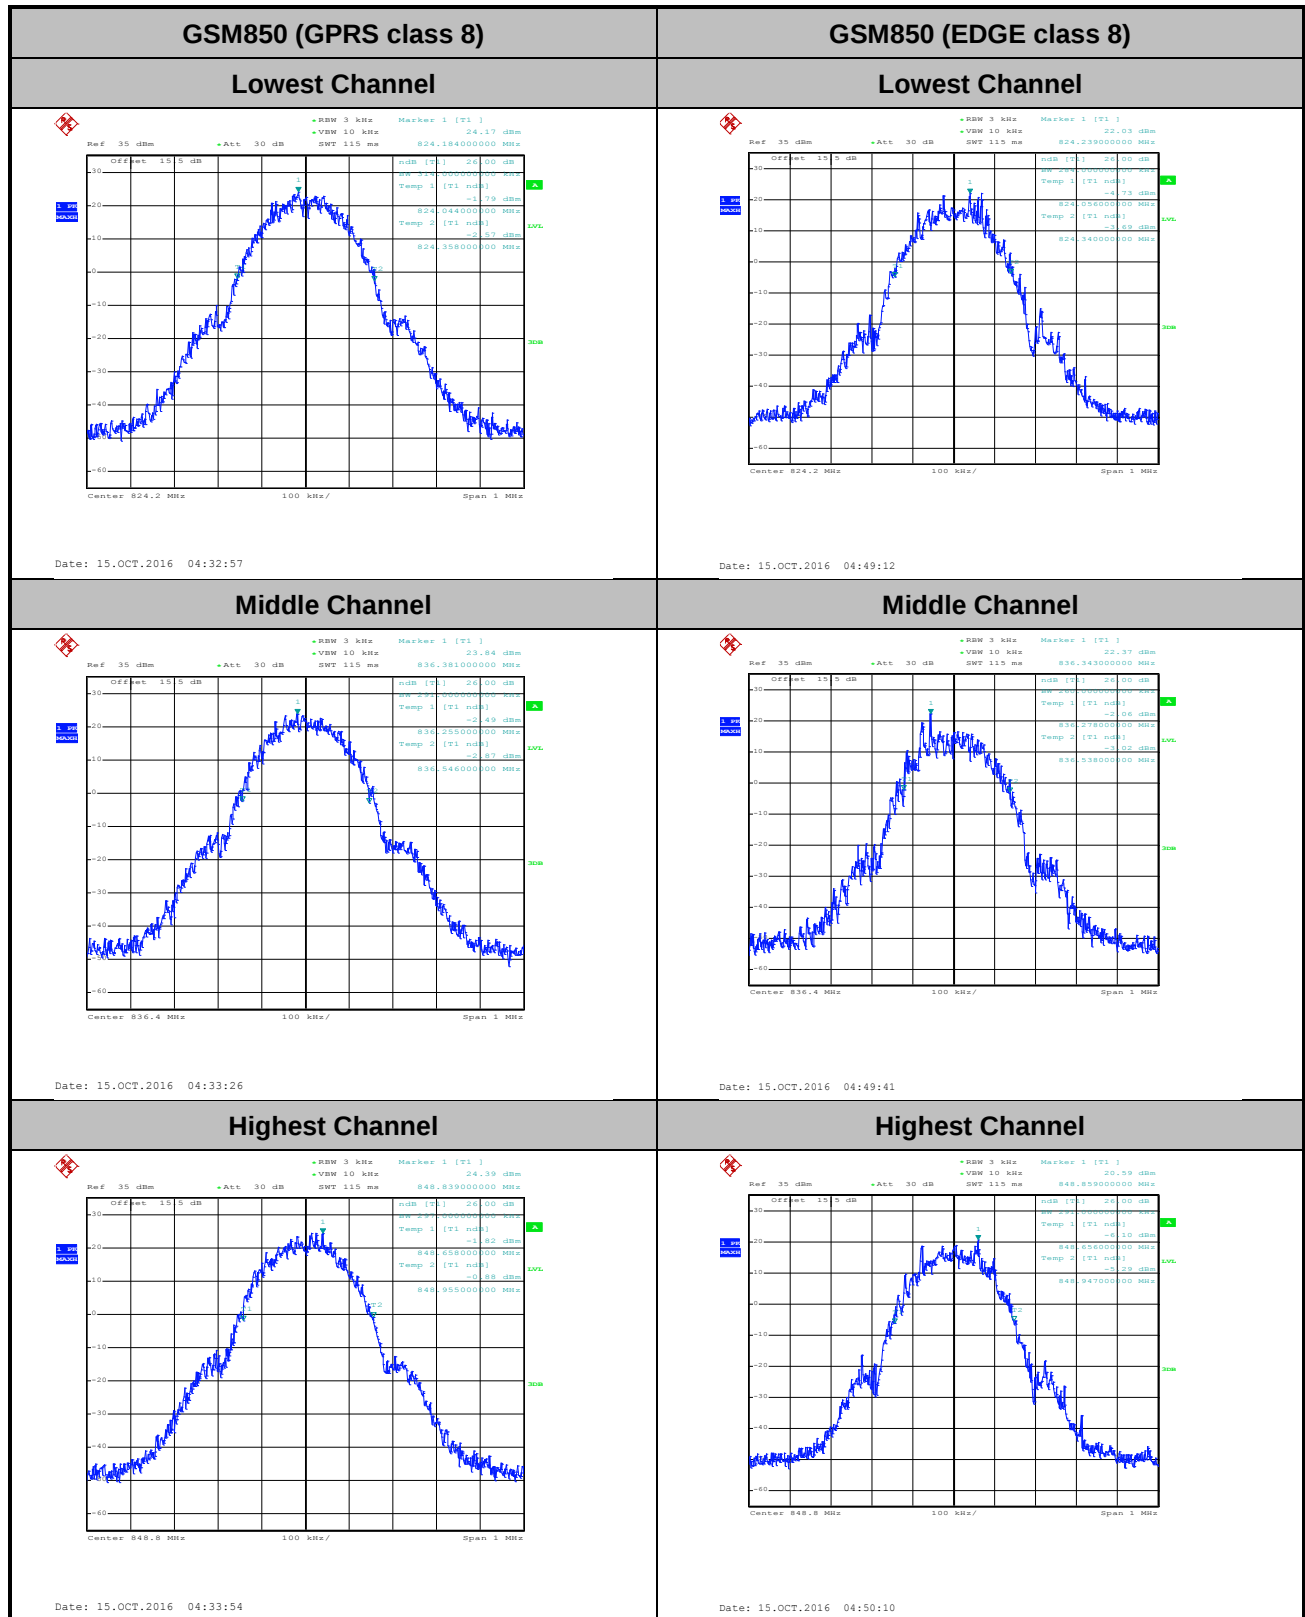


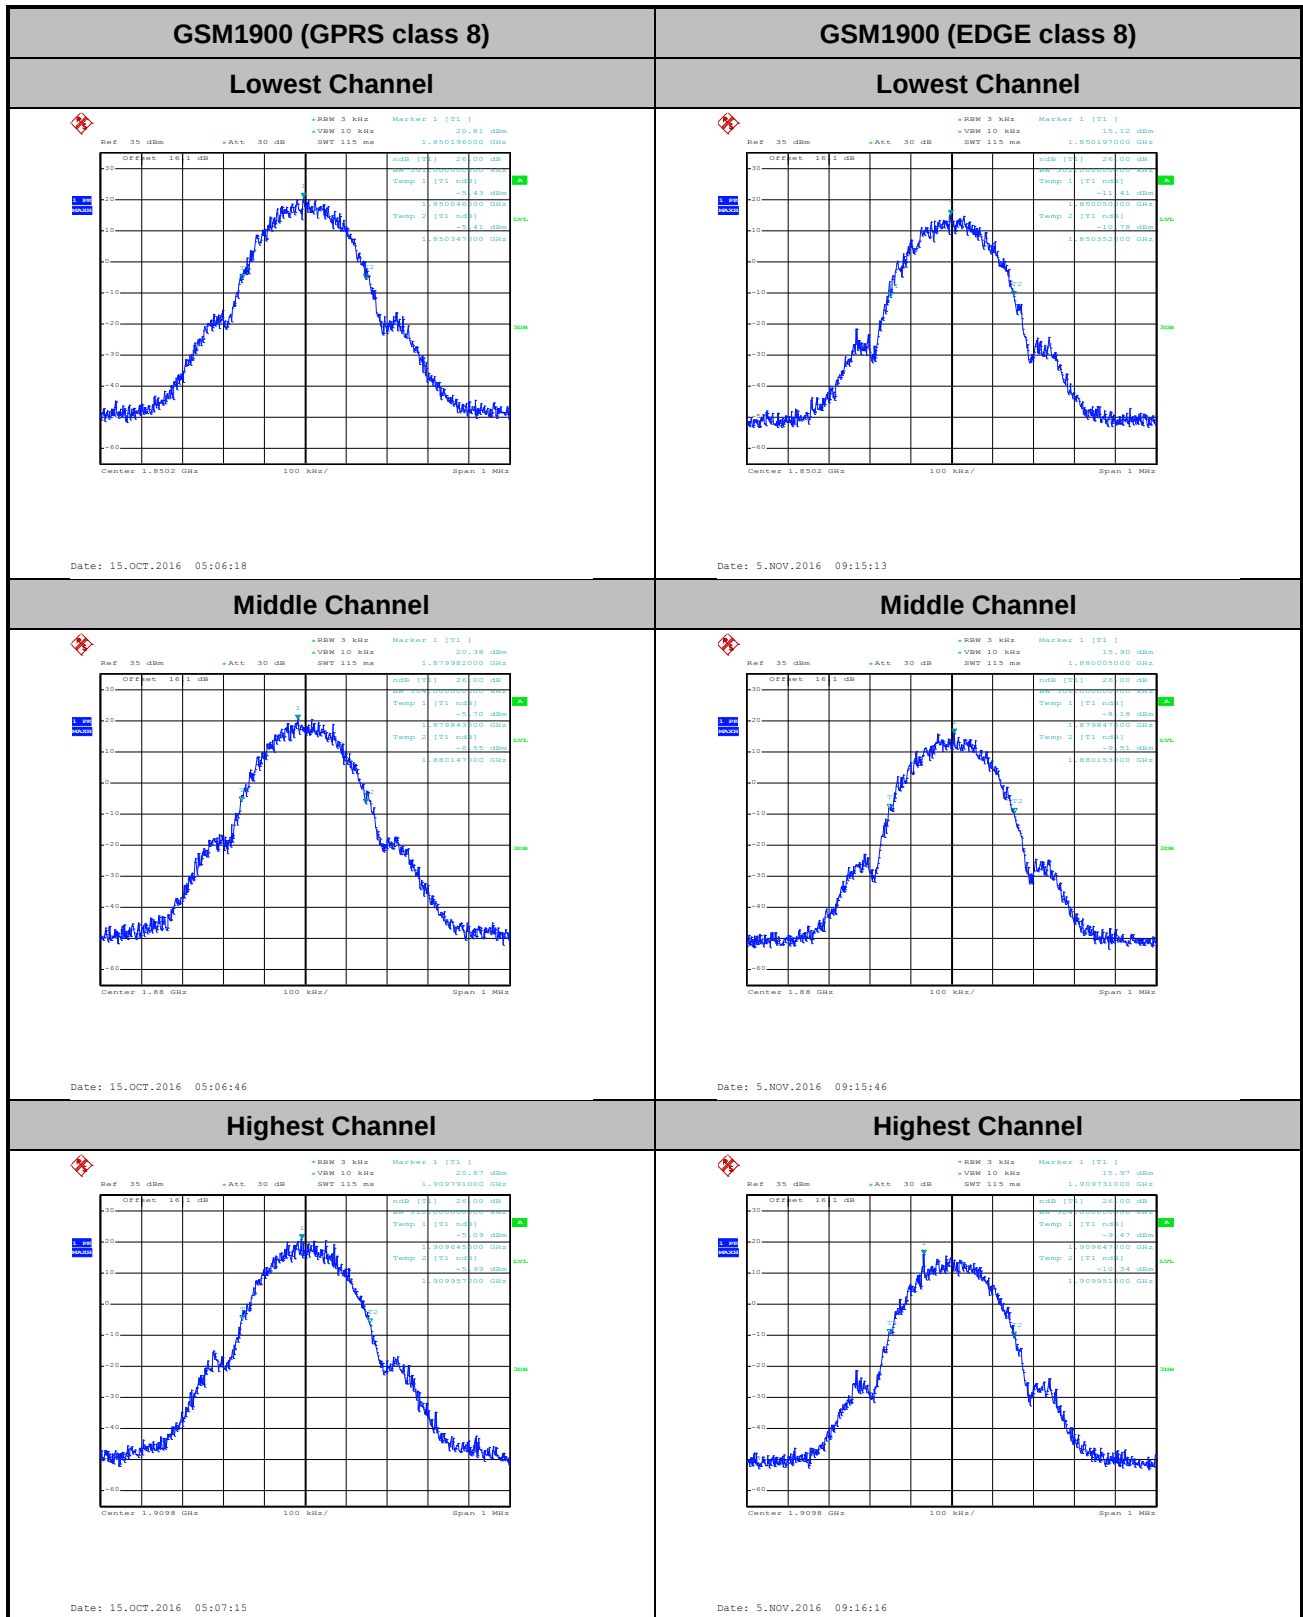


**Occupied Bandwidth**

Mode	GSM850 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.244	0.242
Middle CH	0.246	0.245
Highest CH	0.245	0.241

Mode	GSM1900 : 99%OBW(MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.247	0.248
Middle CH	0.245	0.246
Highest CH	0.242	0.241

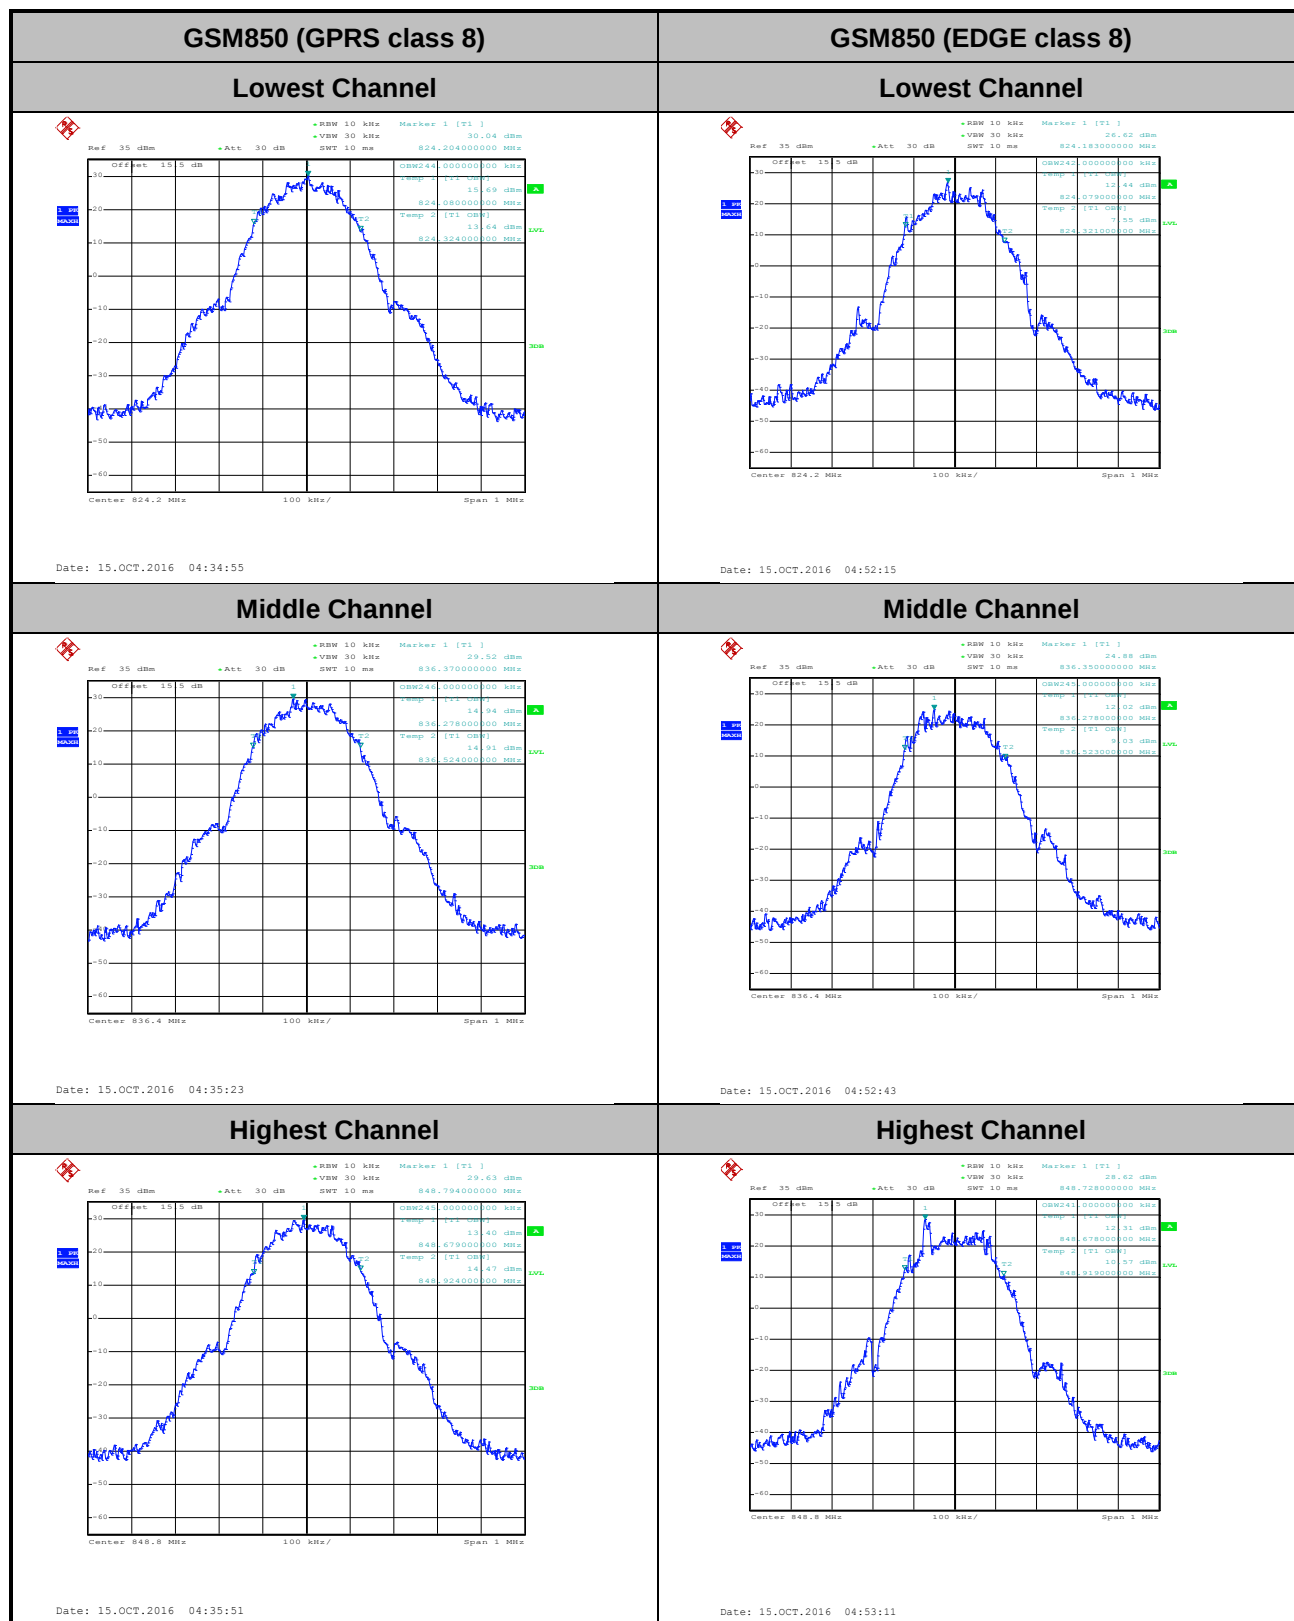

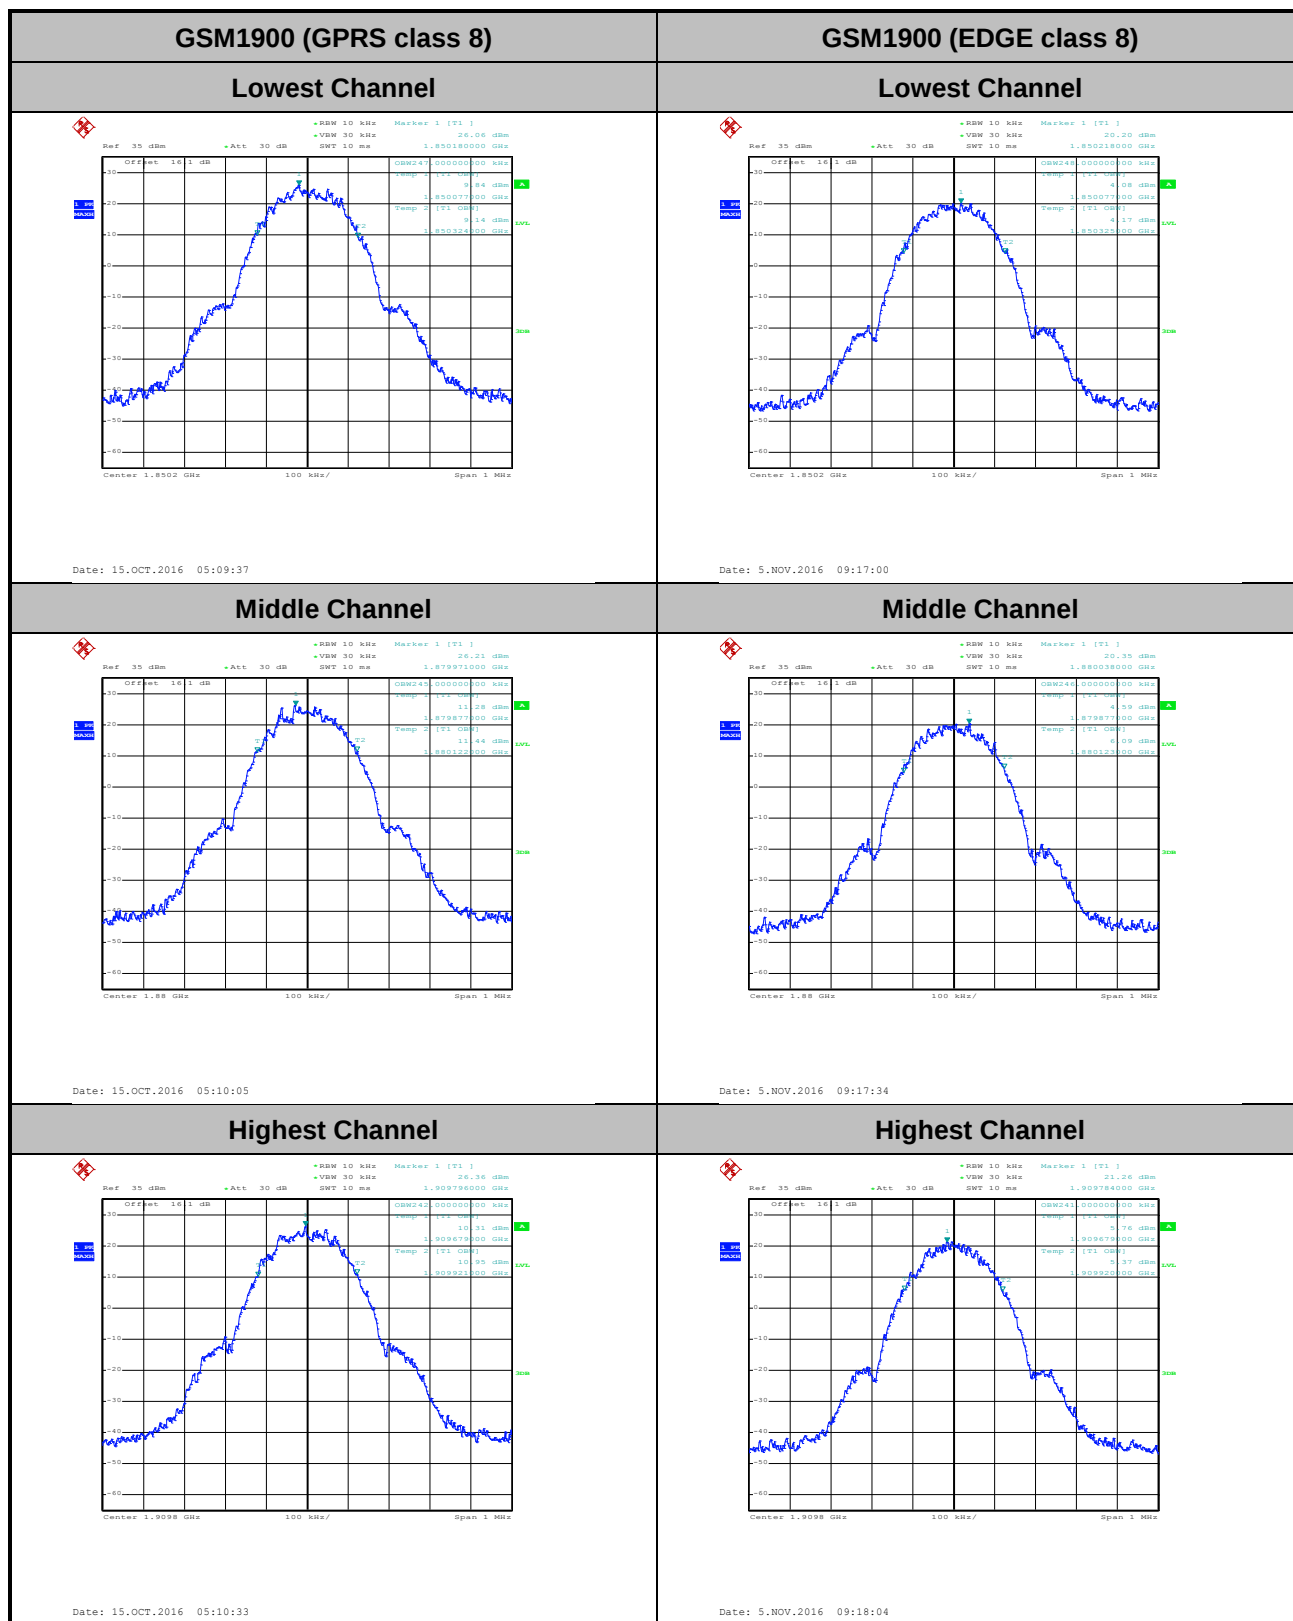




Conducted Band Edge


GSM850 (GPRS class 8)

Lowest Band Edge

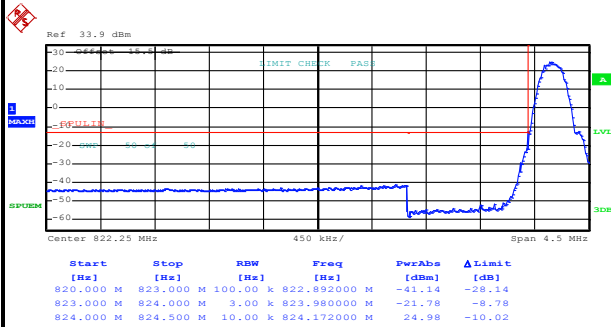

Date: 15.OCT.2016 04:37:30


Highest Band Edge

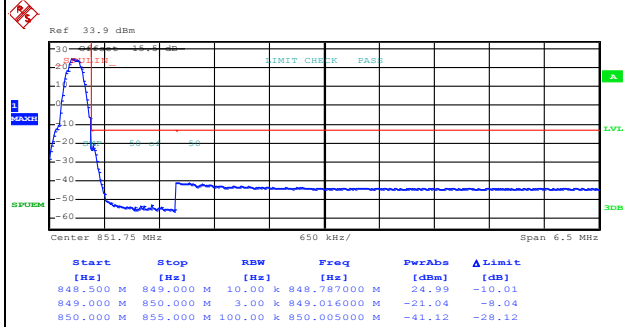

Date: 15.OCT.2016 04:38:58


GSM850 (EDGE class 8)

Lowest Band Edge

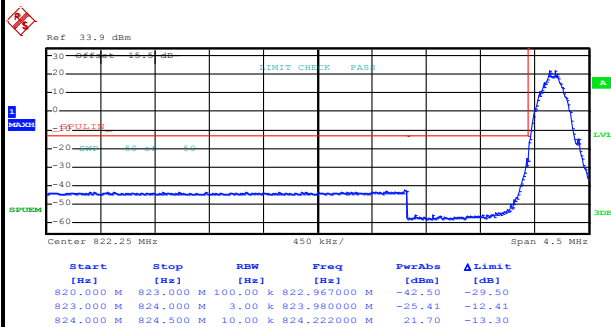

Date: 15.OCT.2016 04:54:42

Highest Band Edge

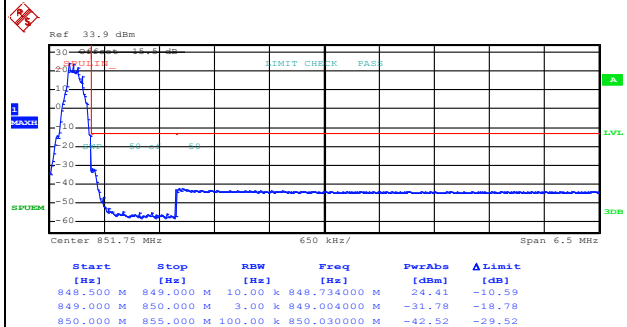


Date: 15.OCT.2016 04:56:10




GSM1900 (GPRS class 8)

Lowest Band Edge

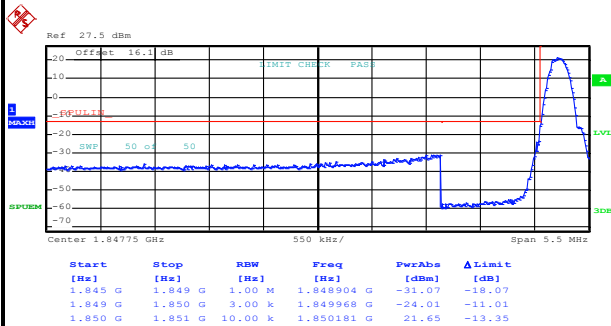

Date: 15.OCT.2016 05:12:12


Highest Band Edge

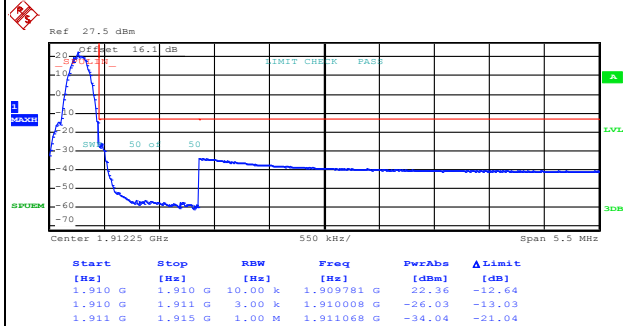

Date: 15.OCT.2016 05:13:40


GSM1900 (EDGE class 8)

Lowest Band Edge

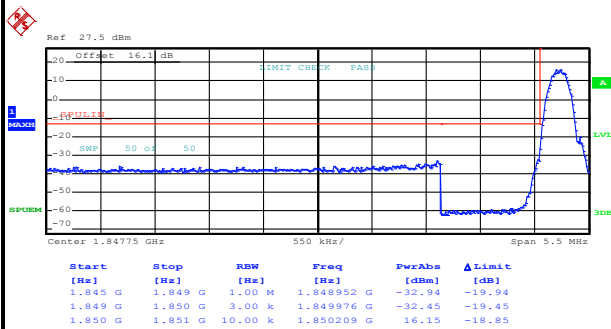

Date: 5.NOV.2016 09:19:37







Highest Band Edge

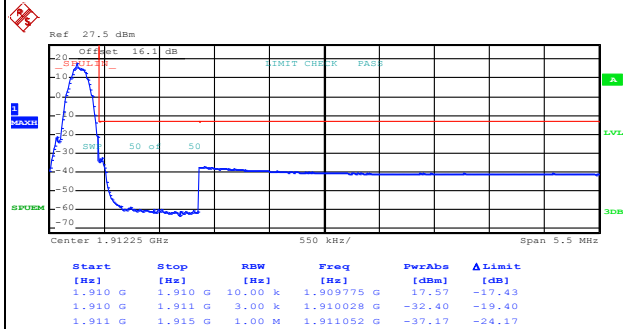

Date: 5.NOV.2016 09:21:06




Conducted Spurious Emission

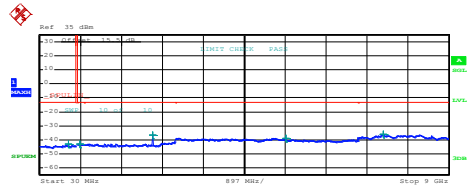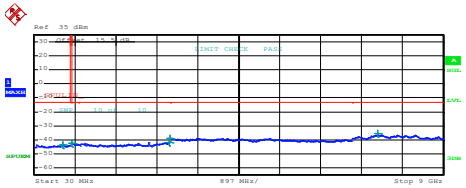GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																																					
Lowest Channel		Lowest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1,00 M</td><td>821.897500 M</td><td>-43.95</td><td>-30.95</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,00 M</td><td>853.637502 M</td><td>-43.04</td><td>-30.04</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>1.648500 G</td><td>-28.20</td><td>-25.20</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.022000 G</td><td>-38.87</td><td>-25.87</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.388000 G</td><td>-36.47</td><td>-23.47</td></tr></table> Date: 15.OCT.2016 04:39:55		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1,00 M	821.897500 M	-43.95	-30.95	855,000 M	1,000 G	1,00 M	853.637502 M	-43.04	-30.04	1,000 G	3,000 G	1,00 M	1.648500 G	-28.20	-25.20	3,000 G	7,000 G	1,00 M	3.022000 G	-38.87	-25.87	7,000 G	9,000 G	1,00 M	8.388000 G	-36.47	-23.47	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1,00 M</td><td>819.802500 M</td><td>-29.83</td><td>-16.83</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,00 M</td><td>873.741251 M</td><td>-43.08</td><td>-30.08</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>2.983000 G</td><td>-40.24</td><td>-27.24</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.035000 G</td><td>-38.42</td><td>-25.42</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>7.540500 G</td><td>-35.66</td><td>-22.66</td></tr></table> Date: 15.OCT.2016 04:57:04		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1,00 M	819.802500 M	-29.83	-16.83	855,000 M	1,000 G	1,00 M	873.741251 M	-43.08	-30.08	1,000 G	3,000 G	1,00 M	2.983000 G	-40.24	-27.24	3,000 G	7,000 G	1,00 M	3.035000 G	-38.42	-25.42	7,000 G	9,000 G	1,00 M	7.540500 G	-35.66	-22.66
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1,00 M	821.897500 M	-43.95	-30.95																																																																																		
855,000 M	1,000 G	1,00 M	853.637502 M	-43.04	-30.04																																																																																		
1,000 G	3,000 G	1,00 M	1.648500 G	-28.20	-25.20																																																																																		
3,000 G	7,000 G	1,00 M	3.022000 G	-38.87	-25.87																																																																																		
7,000 G	9,000 G	1,00 M	8.388000 G	-36.47	-23.47																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1,00 M	819.802500 M	-29.83	-16.83																																																																																		
855,000 M	1,000 G	1,00 M	873.741251 M	-43.08	-30.08																																																																																		
1,000 G	3,000 G	1,00 M	2.983000 G	-40.24	-27.24																																																																																		
3,000 G	7,000 G	1,00 M	3.035000 G	-38.42	-25.42																																																																																		
7,000 G	9,000 G	1,00 M	7.540500 G	-35.66	-22.66																																																																																		
Middle Channel		Middle Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1,00 M</td><td>855.087500 M</td><td>-43.23</td><td>-30.23</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,00 M</td><td>912.673254 M</td><td>-43.23</td><td>-30.23</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>2.509500 G</td><td>-36.76</td><td>-23.76</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>5.436000 G</td><td>-38.85</td><td>-25.85</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>7.360000 G</td><td>-35.98</td><td>-22.98</td></tr></table> Date: 15.OCT.2016 04:40:41		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1,00 M	855.087500 M	-43.23	-30.23	855,000 M	1,000 G	1,00 M	912.673254 M	-43.23	-30.23	1,000 G	3,000 G	1,00 M	2.509500 G	-36.76	-23.76	3,000 G	7,000 G	1,00 M	5.436000 G	-38.85	-25.85	7,000 G	9,000 G	1,00 M	7.360000 G	-35.98	-22.98	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1,00 M</td><td>660.815000 M</td><td>-43.73</td><td>-30.73</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,00 M</td><td>855.307500 M</td><td>-42.45</td><td>-29.45</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>2.999000 G</td><td>-41.86</td><td>-28.86</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.013000 G</td><td>-38.73</td><td>-25.73</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>7.361000 G</td><td>-35.64</td><td>-22.64</td></tr></table> Date: 15.OCT.2016 04:57:51		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1,00 M	660.815000 M	-43.73	-30.73	855,000 M	1,000 G	1,00 M	855.307500 M	-42.45	-29.45	1,000 G	3,000 G	1,00 M	2.999000 G	-41.86	-28.86	3,000 G	7,000 G	1,00 M	3.013000 G	-38.73	-25.73	7,000 G	9,000 G	1,00 M	7.361000 G	-35.64	-22.64
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1,00 M	855.087500 M	-43.23	-30.23																																																																																		
855,000 M	1,000 G	1,00 M	912.673254 M	-43.23	-30.23																																																																																		
1,000 G	3,000 G	1,00 M	2.509500 G	-36.76	-23.76																																																																																		
3,000 G	7,000 G	1,00 M	5.436000 G	-38.85	-25.85																																																																																		
7,000 G	9,000 G	1,00 M	7.360000 G	-35.98	-22.98																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1,00 M	660.815000 M	-43.73	-30.73																																																																																		
855,000 M	1,000 G	1,00 M	855.307500 M	-42.45	-29.45																																																																																		
1,000 G	3,000 G	1,00 M	2.999000 G	-41.86	-28.86																																																																																		
3,000 G	7,000 G	1,00 M	3.013000 G	-38.73	-25.73																																																																																		
7,000 G	9,000 G	1,00 M	7.361000 G	-35.64	-22.64																																																																																		
Highest Channel		Highest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1,00 M</td><td>303.340200 M</td><td>-43.48</td><td>-30.48</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,00 M</td><td>858.371250 M</td><td>-42.86</td><td>-29.86</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>2.975000 G</td><td>-39.30</td><td>-26.30</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.662000 G</td><td>-38.25</td><td>-25.25</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.059500 G</td><td>-36.56</td><td>-23.56</td></tr></table> Date: 15.OCT.2016 04:41:29		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1,00 M	303.340200 M	-43.48	-30.48	855,000 M	1,000 G	1,00 M	858.371250 M	-42.86	-29.86	1,000 G	3,000 G	1,00 M	2.975000 G	-39.30	-26.30	3,000 G	7,000 G	1,00 M	3.662000 G	-38.25	-25.25	7,000 G	9,000 G	1,00 M	8.059500 G	-36.56	-23.56	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>820,000 M</td><td>820,000 M</td><td>1,00 M</td><td>816.050500 M</td><td>-43.64</td><td>-30.64</td></tr><tr><td>855,000 M</td><td>1,000 G</td><td>1,00 M</td><td>855.036250 M</td><td>-38.63</td><td>-25.63</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>1.697500 G</td><td>-34.99</td><td>-21.99</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.099000 G</td><td>-38.82</td><td>-25.82</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>7.669500 G</td><td>-36.61</td><td>-23.61</td></tr></table> Date: 15.OCT.2016 04:58:38		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	820,000 M	820,000 M	1,00 M	816.050500 M	-43.64	-30.64	855,000 M	1,000 G	1,00 M	855.036250 M	-38.63	-25.63	1,000 G	3,000 G	1,00 M	1.697500 G	-34.99	-21.99	3,000 G	7,000 G	1,00 M	3.099000 G	-38.82	-25.82	7,000 G	9,000 G	1,00 M	7.669500 G	-36.61	-23.61
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1,00 M	303.340200 M	-43.48	-30.48																																																																																		
855,000 M	1,000 G	1,00 M	858.371250 M	-42.86	-29.86																																																																																		
1,000 G	3,000 G	1,00 M	2.975000 G	-39.30	-26.30																																																																																		
3,000 G	7,000 G	1,00 M	3.662000 G	-38.25	-25.25																																																																																		
7,000 G	9,000 G	1,00 M	8.059500 G	-36.56	-23.56																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
820,000 M	820,000 M	1,00 M	816.050500 M	-43.64	-30.64																																																																																		
855,000 M	1,000 G	1,00 M	855.036250 M	-38.63	-25.63																																																																																		
1,000 G	3,000 G	1,00 M	1.697500 G	-34.99	-21.99																																																																																		
3,000 G	7,000 G	1,00 M	3.099000 G	-38.82	-25.82																																																																																		
7,000 G	9,000 G	1,00 M	7.669500 G	-36.61	-23.61																																																																																		

GSM1900 (GPRS class 8)


Lowest Channel

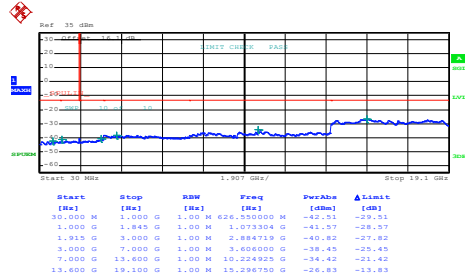

Date: 15.OCT.2016 05:14:52


GSM1900 (EDGE class 8)

Lowest Channel

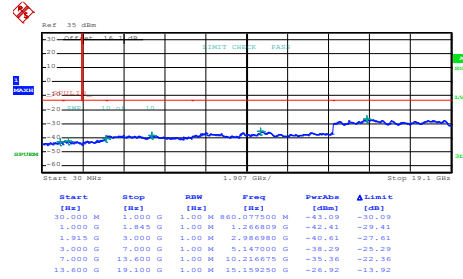


Date: 5.NOV.2016 09:22:00

Middle Channel

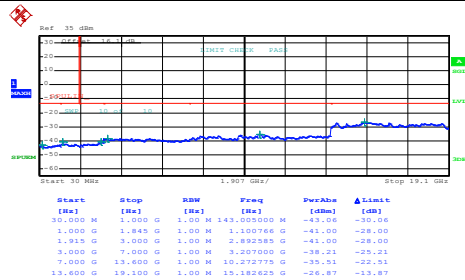


Date: 15.OCT.2016 05:15:38

Middle Channel

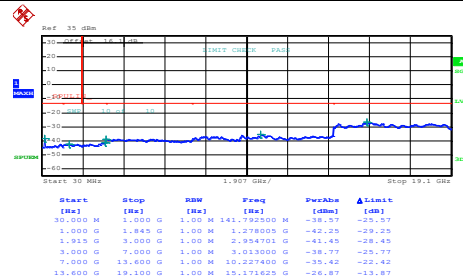


Date: 5.NOV.2016 09:22:56

Highest Channel

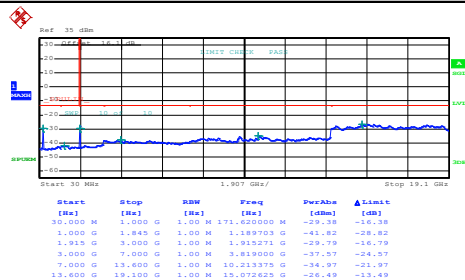

Date: 15.OCT.2016 05:16:23

Highest Channel

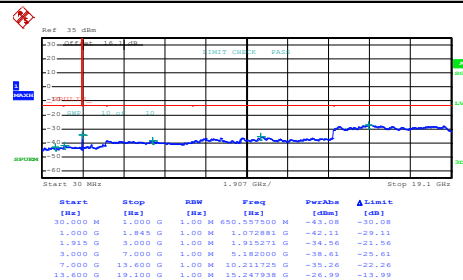

Date: 5.NOV.2016 09:23:50

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0096	0.0024	PASS
40	Normal Voltage	0.0072	0.0096	
30	Normal Voltage	0.0048	0.0024	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0036	0.0502	
0	Normal Voltage	0.0203	0.0478	
-10	Normal Voltage	0.0167	0.0562	
-20	Normal Voltage	0.0227	0.0646	
-30	Normal Voltage	0.0191	0.0670	
20	Maximum Voltage	0.0048	0.0012	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0000	0.0036	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0005	0.0048	PASS
40	Normal Voltage	0.0016	0.0011	
30	Normal Voltage	0.0005	0.0027	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0032	0.0043	
0	Normal Voltage	0.0074	0.0128	
-10	Normal Voltage	0.0074	0.0160	
-20	Normal Voltage	0.0096	0.0266	
-30	Normal Voltage	0.0117	0.0170	
20	Maximum Voltage	0.0027	0.0005	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0011	0.0021	

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block.









A2. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	2.16	2.28	2.64	PASS
Middle CH	2.24	2.52	2.56	
Highest CH	1.96	2.40	2.48	

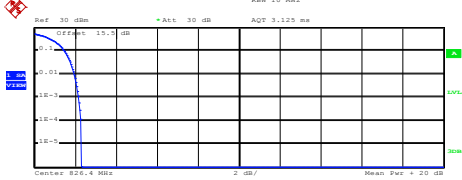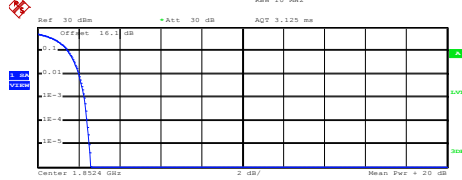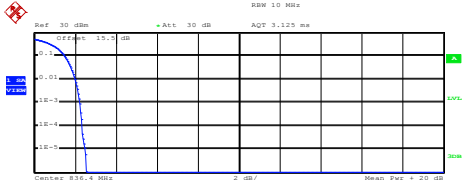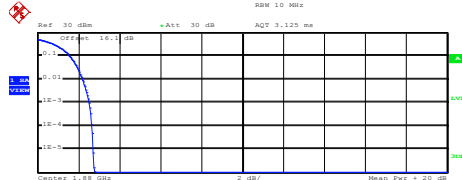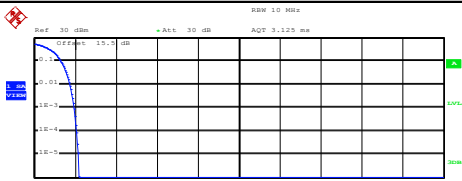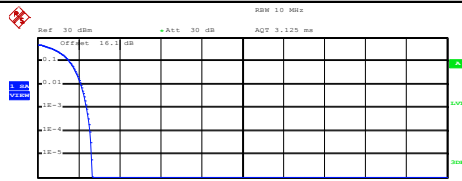


WCDMA Band V (RMC 12.2Kbps)	WCDMA Band II (RMC 12.2Kbps)																												
Lowest Channel	Lowest Channel																												
 Center 826.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.99 dBm</td></tr><tr><td>Peak</td><td>26.30 dBm</td></tr><tr><td>Crest</td><td>2.32 dB</td></tr></table> <table><tr><td>10 %</td><td>1.48 dB</td></tr><tr><td>1 %</td><td>1.96 dB</td></tr><tr><td>.1 %</td><td>2.16 dB</td></tr><tr><td>.01 %</td><td>2.28 dB</td></tr></table> Date: 5.NOV.2016 10:34:33	Mean	23.99 dBm	Peak	26.30 dBm	Crest	2.32 dB	10 %	1.48 dB	1 %	1.96 dB	.1 %	2.16 dB	.01 %	2.28 dB	 Center 1.8524 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.30 dBm</td></tr><tr><td>Peak</td><td>24.89 dBm</td></tr><tr><td>Crest</td><td>2.59 dB</td></tr></table> <table><tr><td>10 %</td><td>1.48 dB</td></tr><tr><td>1 %</td><td>2.00 dB</td></tr><tr><td>.1 %</td><td>2.28 dB</td></tr><tr><td>.01 %</td><td>2.40 dB</td></tr></table> Date: 5.NOV.2016 09:41:49	Mean	22.30 dBm	Peak	24.89 dBm	Crest	2.59 dB	10 %	1.48 dB	1 %	2.00 dB	.1 %	2.28 dB	.01 %	2.40 dB
Mean	23.99 dBm																												
Peak	26.30 dBm																												
Crest	2.32 dB																												
10 %	1.48 dB																												
1 %	1.96 dB																												
.1 %	2.16 dB																												
.01 %	2.28 dB																												
Mean	22.30 dBm																												
Peak	24.89 dBm																												
Crest	2.59 dB																												
10 %	1.48 dB																												
1 %	2.00 dB																												
.1 %	2.28 dB																												
.01 %	2.40 dB																												
Middle Channel	Middle Channel																												
 Center 836.4 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.88 dBm</td></tr><tr><td>Peak</td><td>26.44 dBm</td></tr><tr><td>Crest</td><td>2.56 dB</td></tr></table> <table><tr><td>10 %</td><td>1.48 dB</td></tr><tr><td>1 %</td><td>2.00 dB</td></tr><tr><td>.1 %</td><td>2.24 dB</td></tr><tr><td>.01 %</td><td>2.36 dB</td></tr></table> Date: 5.NOV.2016 10:34:40	Mean	23.88 dBm	Peak	26.44 dBm	Crest	2.56 dB	10 %	1.48 dB	1 %	2.00 dB	.1 %	2.24 dB	.01 %	2.36 dB	 Center 1.88 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.33 dBm</td></tr><tr><td>Peak</td><td>25.10 dBm</td></tr><tr><td>Crest</td><td>2.77 dB</td></tr></table> <table><tr><td>10 %</td><td>1.56 dB</td></tr><tr><td>1 %</td><td>2.20 dB</td></tr><tr><td>.1 %</td><td>2.52 dB</td></tr><tr><td>.01 %</td><td>2.64 dB</td></tr></table> Date: 5.NOV.2016 09:42:00	Mean	22.33 dBm	Peak	25.10 dBm	Crest	2.77 dB	10 %	1.56 dB	1 %	2.20 dB	.1 %	2.52 dB	.01 %	2.64 dB
Mean	23.88 dBm																												
Peak	26.44 dBm																												
Crest	2.56 dB																												
10 %	1.48 dB																												
1 %	2.00 dB																												
.1 %	2.24 dB																												
.01 %	2.36 dB																												
Mean	22.33 dBm																												
Peak	25.10 dBm																												
Crest	2.77 dB																												
10 %	1.56 dB																												
1 %	2.20 dB																												
.1 %	2.52 dB																												
.01 %	2.64 dB																												
Highest Channel	Highest Channel																												
 Center 846.6 MHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>23.91 dBm</td></tr><tr><td>Peak</td><td>26.09 dBm</td></tr><tr><td>Crest</td><td>2.18 dB</td></tr></table> <table><tr><td>10 %</td><td>1.32 dB</td></tr><tr><td>1 %</td><td>1.76 dB</td></tr><tr><td>.1 %</td><td>1.96 dB</td></tr><tr><td>.01 %</td><td>2.08 dB</td></tr></table> Date: 5.NOV.2016 10:34:50	Mean	23.91 dBm	Peak	26.09 dBm	Crest	2.18 dB	10 %	1.32 dB	1 %	1.76 dB	.1 %	1.96 dB	.01 %	2.08 dB	 Center 1.9076 GHz Complementary Cumulative Distribution Function (100000 samples) Trace 1 <table><tr><td>Mean</td><td>22.53 dBm</td></tr><tr><td>Peak</td><td>25.17 dBm</td></tr><tr><td>Crest</td><td>2.64 dB</td></tr></table> <table><tr><td>10 %</td><td>1.56 dB</td></tr><tr><td>1 %</td><td>2.12 dB</td></tr><tr><td>.1 %</td><td>2.40 dB</td></tr><tr><td>.01 %</td><td>2.56 dB</td></tr></table> Date: 5.NOV.2016 09:42:10	Mean	22.53 dBm	Peak	25.17 dBm	Crest	2.64 dB	10 %	1.56 dB	1 %	2.12 dB	.1 %	2.40 dB	.01 %	2.56 dB
Mean	23.91 dBm																												
Peak	26.09 dBm																												
Crest	2.18 dB																												
10 %	1.32 dB																												
1 %	1.76 dB																												
.1 %	1.96 dB																												
.01 %	2.08 dB																												
Mean	22.53 dBm																												
Peak	25.17 dBm																												
Crest	2.64 dB																												
10 %	1.56 dB																												
1 %	2.12 dB																												
.1 %	2.40 dB																												
.01 %	2.56 dB																												




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

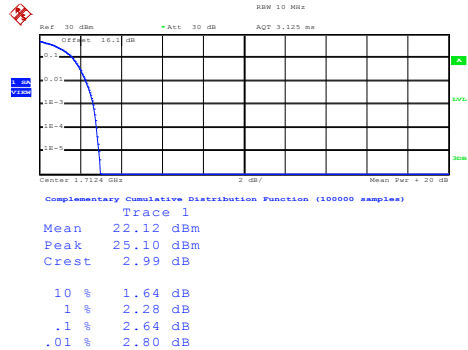


Date: 5.NOV.2016 10:07:53

Middle Channel

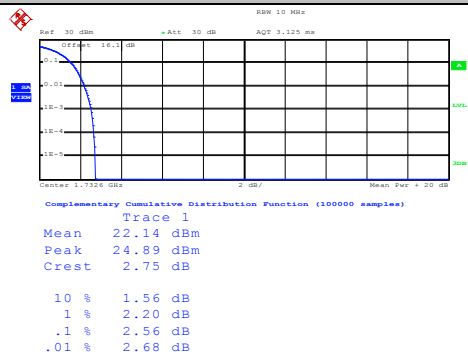

Date: 5.NOV.2016 10:08:03

Highest Channel

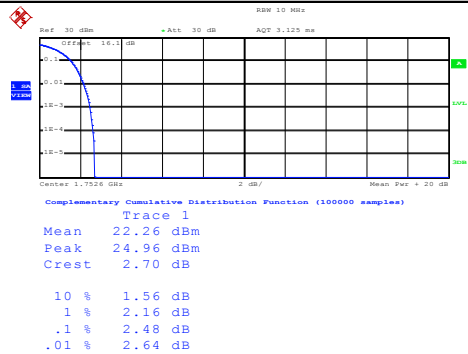


Date: 5.NOV.2016 10:08:13



26dB Bandwidth


Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band II 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.74	4.72	4.69
Middle CH	4.75	4.71	4.71
Highest CH	4.77	4.72	4.70

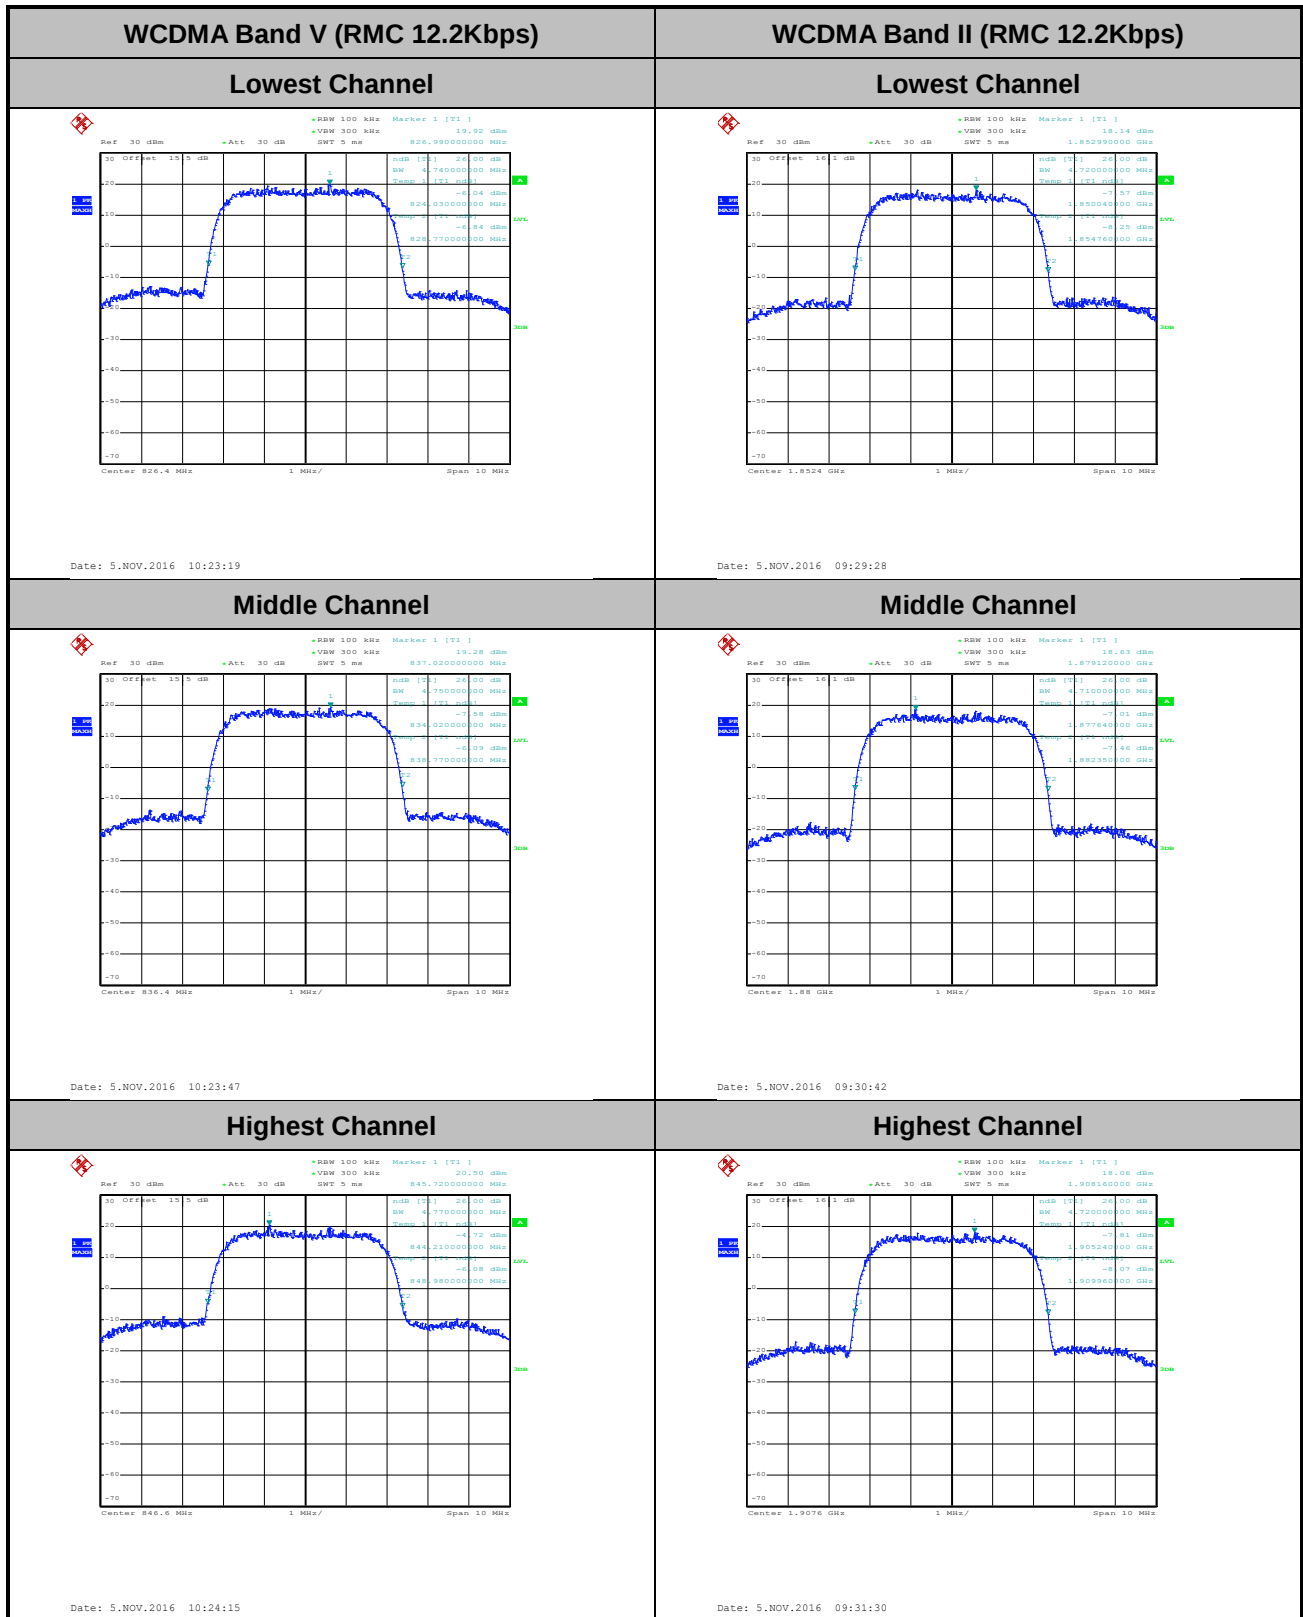




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

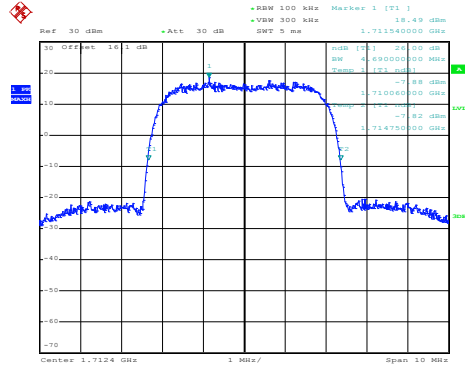


Date: 5.NOV.2016 09:57:04

Middle Channel

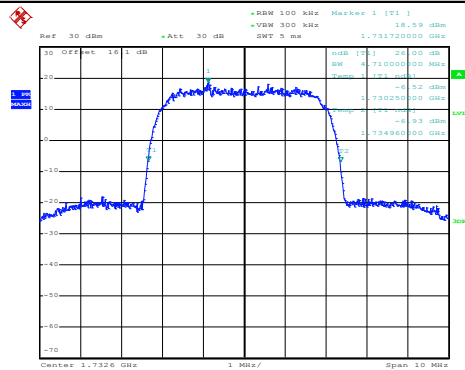

Date: 5.NOV.2016 09:57:32

Highest Channel

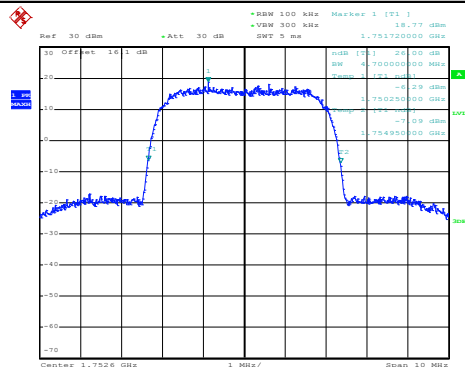


Date: 5.NOV.2016 09:58:00




Occupied Bandwidth

Mode	WCDMA Band V 99%OBW(MHz)	WCDMA Band II 99%OBW(MHz)	WCDMA Band IV 99%OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.18	4.18	4.16
Middle CH	4.19	4.17	4.17
Highest CH	4.21	4.17	4.17

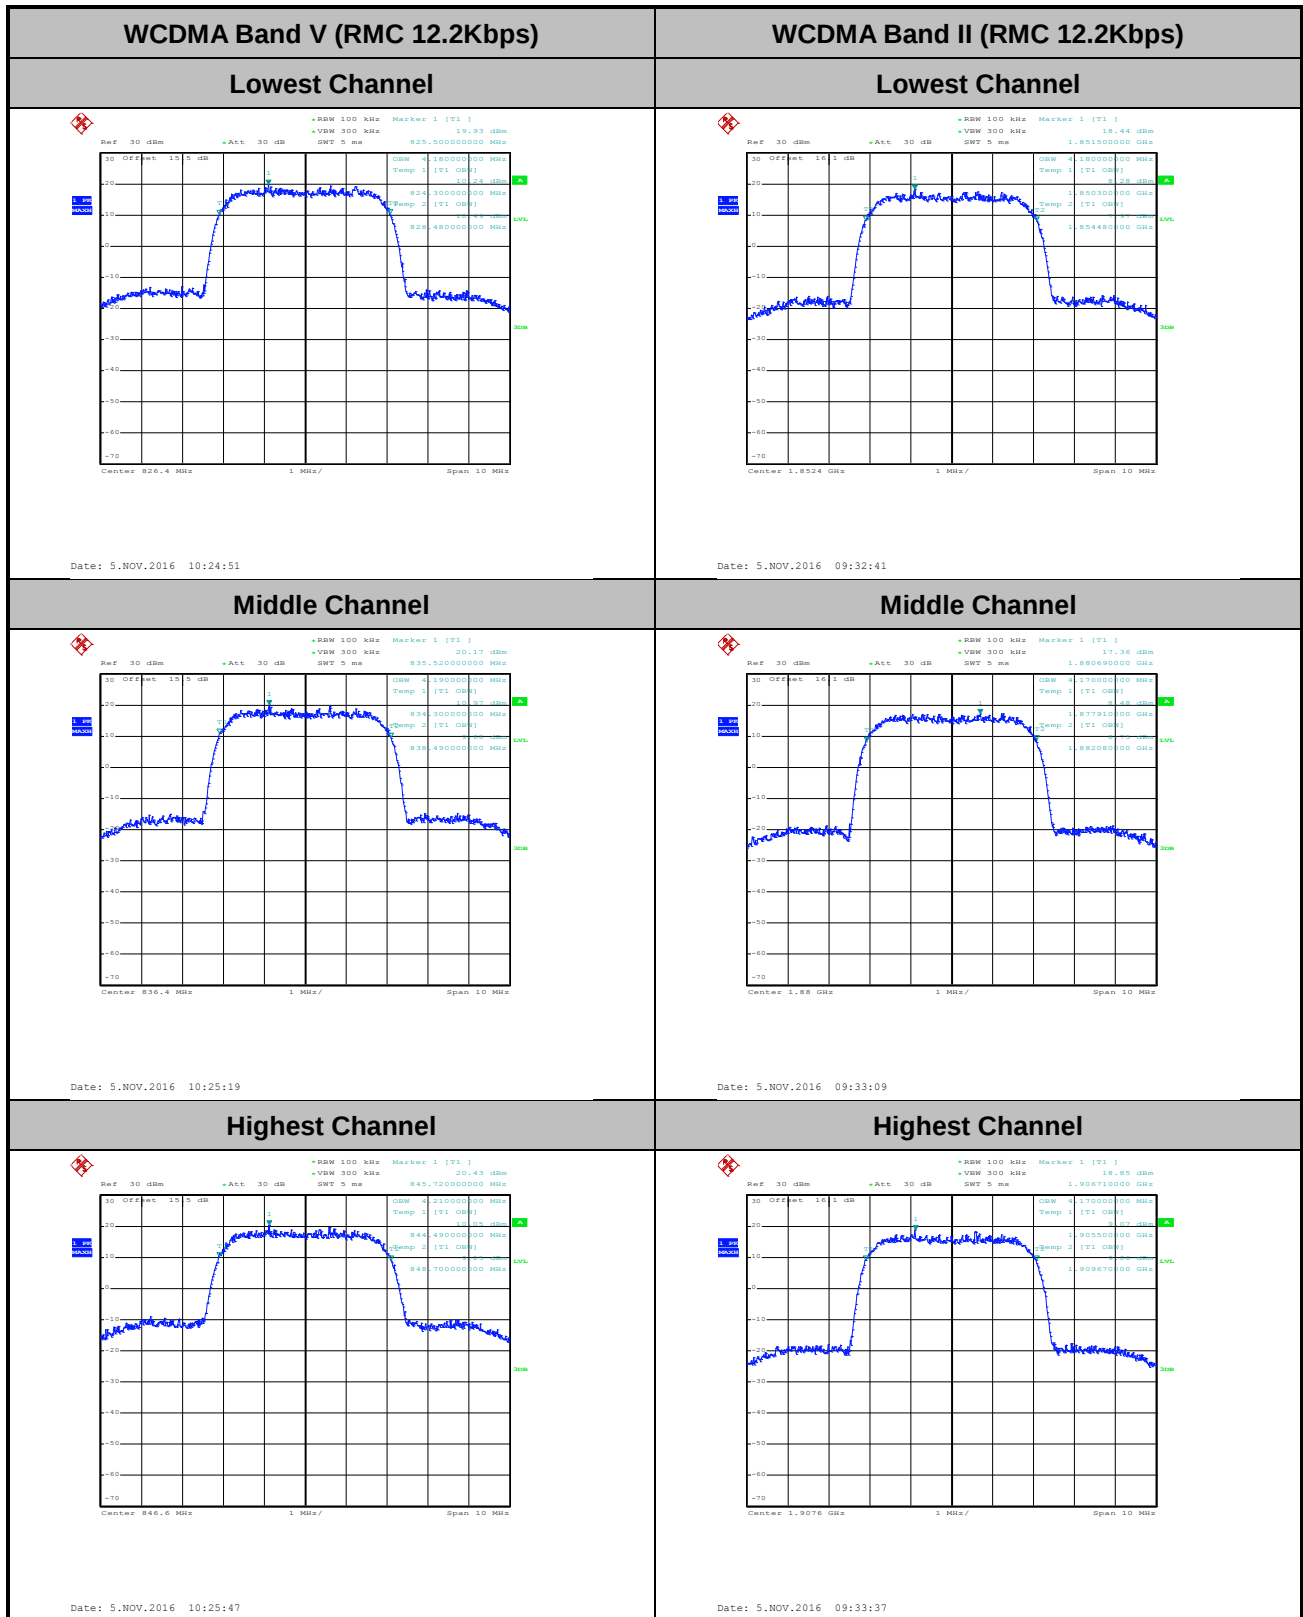


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

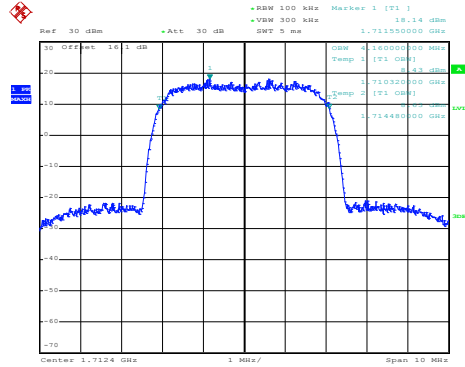


Date: 5.NOV.2016 09:58:45

Middle Channel

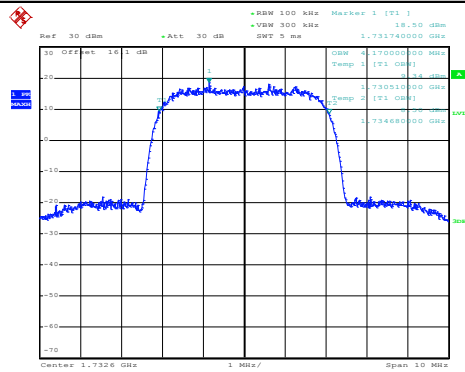

Date: 5.NOV.2016 09:59:13

Highest Channel

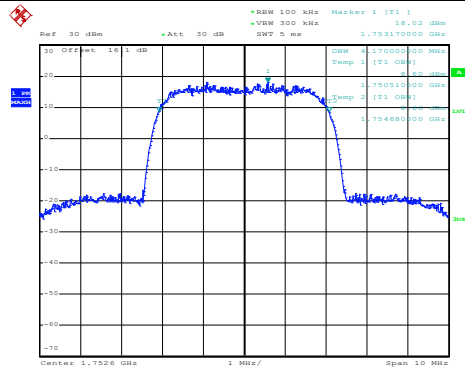


Date: 5.NOV.2016 09:59:41



Conducted Band Edge


WCDMA Band V (RMC 12.2Kbps)

Lowest Band Edge

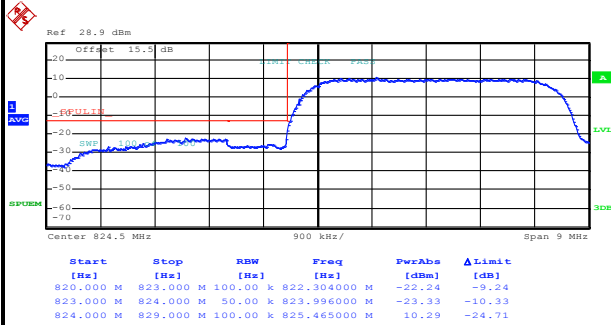

Date: 5.NOV.2016 10:28:33


Highest Band Edge

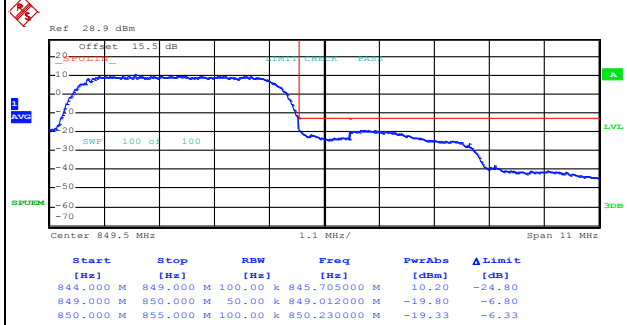

Date: 5.NOV.2016 10:31:15


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

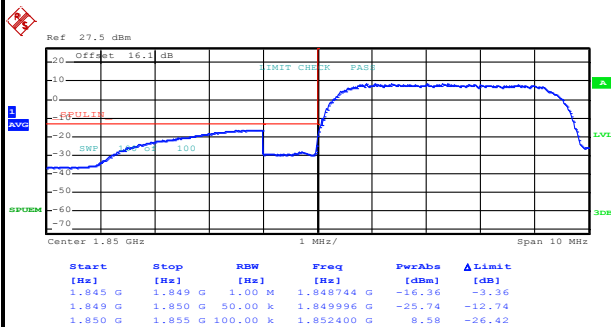

Date: 5.NOV.2016 09:36:26

Highest Band Edge

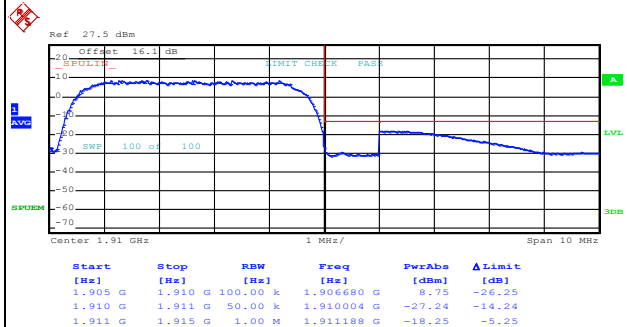


Date: 5.NOV.2016 09:39:08




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

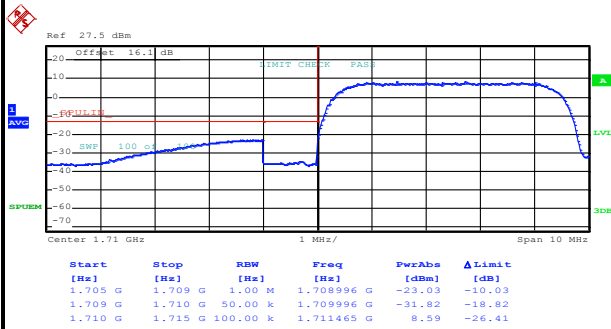

Date: 5.NOV.2016 10:02:31

Highest Band Edge

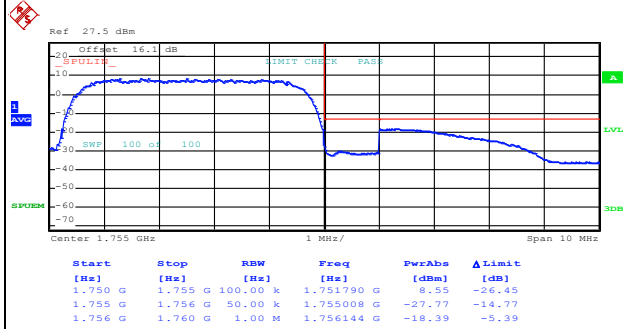


Date: 5.NOV.2016 10:05:13



Conducted Spurious Emission

WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

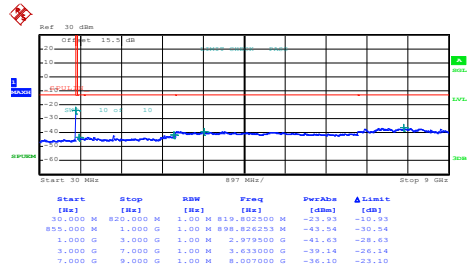

Date: 5.NOV.2016 10:32:22


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

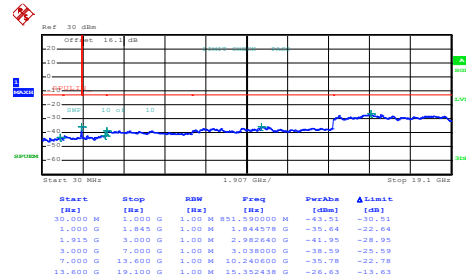


Date: 5.NOV.2016 09:40:02

Middle Channel

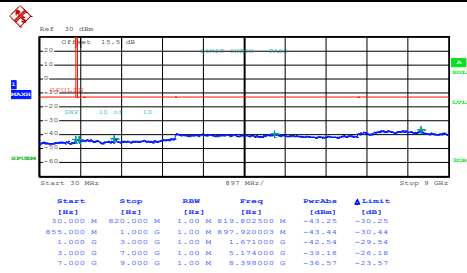


Date: 5.NOV.2016 10:33:08

Middle Channel

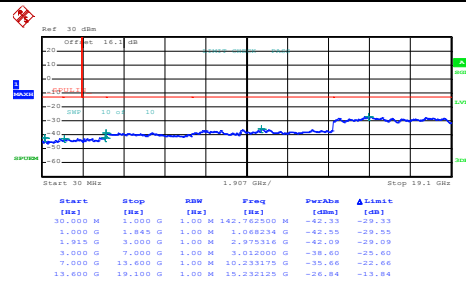


Date: 5.NOV.2016 09:40:47

Highest Channel

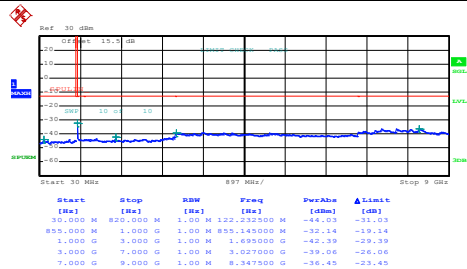

Date: 5.NOV.2016 10:33:54


Highest Channel

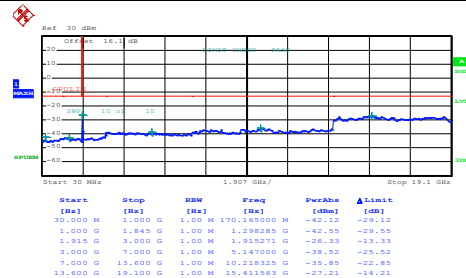

Date: 5.NOV.2016 09:41:33


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

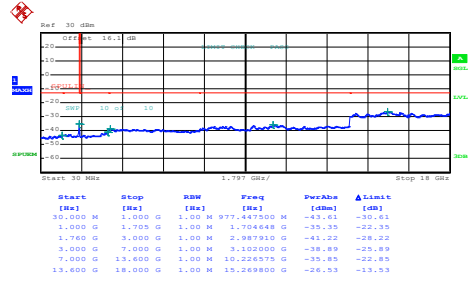


Date: 5.NOV.2016 10:06:03

Middle Channel

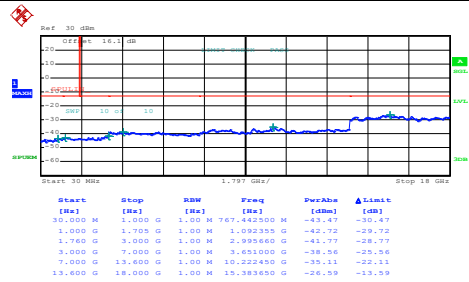

Date: 5.NOV.2016 10:06:49

Highest Channel

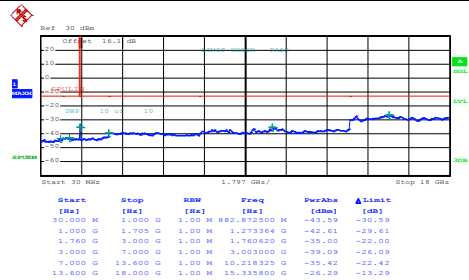

Date: 5.NOV.2016 10:07:35

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0024	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0108	
0	Normal Voltage	0.0143	
-10	Normal Voltage	0.0167	
-20	Normal Voltage	0.0167	
-30	Normal Voltage	0.0155	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0024	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0011	PASS
40	Normal Voltage	0.0011	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0011	
-10	Normal Voltage	0.0021	
-20	Normal Voltage	0.0005	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0027	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0006	
30	Normal Voltage	0.0012	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0006	
0	Normal Voltage	0.0000	
-10	Normal Voltage	0.0121	
-20	Normal Voltage	0.0115	
-30	Normal Voltage	0.0023	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage =4.35 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Appendix B. Test Results of ERP/EIRP and Radiated Test

ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8 (GT - LC = -4.2 dB)	33.24	2.1086	26.89	0.4887
Middle		33.22	2.0989	26.87	0.4864
Highest		33.21	2.0941	26.86	0.4853
Lowest	GSM850 EDGE class 8 (GT - LC = -4.2 dB)	27.10	0.5129	20.75	0.1189
Middle		27.16	0.5200	20.81	0.1205
Highest		27.23	0.5284	20.88	0.1225
Lowest	WCDMA Band V RMC 12.2Kbps (GT - LC = -4.2 dB)	24.26	0.2667	17.91	0.0618
Middle		24.28	0.2679	17.93	0.0621
Highest		24.30	0.2692	17.95	0.0624
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8 (GT - LC = -1.4 dB)	30.15	1.0351	28.75	0.7499
Middle		30.24	1.0568	28.84	0.7656
Highest		30.31	1.0740	28.91	0.7780
Lowest	GSM1900 EDGE class 8 (GT - LC = -1.4 dB)	25.30	0.3388	23.90	0.2455
Middle		25.51	0.3556	24.11	0.2576
Highest		25.55	0.3589	24.15	0.2600
Lowest	WCDMA Band II RMC 12.2Kbps (GT - LC = -1.4 dB)	23.88	0.2443	22.48	0.1770
Middle		23.87	0.2438	22.47	0.1766
Highest		23.94	0.2477	22.54	0.1795
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV RMC 12.2Kbps (GT - LC = -3.3 dB)	23.27	0.2123	19.97	0.0993
Middle		23.29	0.2133	19.99	0.0998
Highest		23.30	0.2138	20.00	0.1000
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission****Part22H GPRS 850**

Mode 1_GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-48.36	-13	-35.36	-57.25	-55.31	0.53	9.63	H
	2472	-44.94	-13	-31.94	-56.91	-52.92	0.65	10.78	H
	4120	-43.57	-13	-30.57	-59.41	-52.91	0.86	12.35	H
	1648	-50.06	-13	-37.06	-58.72	-57.01	0.53	9.63	V
	2472	-46.61	-13	-33.61	-59.43	-54.59	0.65	10.78	V
	4120	-45.68	-13	-32.68	-62.41	-55.02	0.86	12.35	V
Middle	1672	-50.90	-13	-37.90	-59.83	-57.9	0.53	9.68	H
	2512	-43.25	-13	-30.25	-55.08	-51.25	0.66	10.81	H
	4184	-43.32	-13	-30.32	-59.22	-52.66	0.84	12.33	H
	1672	-51.83	-13	-38.83	-60.51	-58.83	0.53	9.68	V
	2512	-44.96	-13	-31.96	-57.68	-52.96	0.66	10.81	V
	4184	-44.53	-13	-31.53	-61.32	-53.87	0.84	12.33	V



Highest	1696	-48.56	-13	-35.56	-57.54	-55.61	0.53	9.73	H
	2544	-40.82	-13	-27.82	-52.74	-48.83	0.67	10.83	H
	4248	-44.16	-13	-31.16	-60.24	-53.47	0.84	12.30	H
	1696	-49.56	-13	-36.56	-58.26	-56.61	0.53	9.73	V
	2544	-43.00	-13	-30.00	-55.62	-51.01	0.67	10.83	V
	4248	-46.06	-13	-33.06	-63.01	-55.37	0.84	12.30	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part22H EDGE 850**

Mode 2_EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-53.01	-13	-40.01	-61.9	-59.96	0.53	9.63	H
	2472	-51.95	-13	-38.95	-63.89	-59.93	0.65	10.78	H
	3296	-54.44	-13	-41.44	-68.74	-63.52	0.76	11.99	H
	1648	-55.82	-13	-42.82	-64.49	-62.77	0.53	9.63	V
	2472	-50.78	-13	-37.78	-63.6	-58.76	0.65	10.78	V
	3296	-55.54	-13	-42.54	-69.85	-64.62	0.76	11.99	V
Middle	1672	-54.08	-13	-41.08	-63.01	-61.08	0.53	9.68	H
	2512	-54.46	-13	-41.46	-66.29	-62.46	0.66	10.81	H
	3344	-54.85	-13	-41.85	-69.02	-64.07	0.76	12.13	H
	1672	-56.38	-13	-43.38	-65.06	-63.38	0.53	9.68	V
	2512	-54.58	-13	-41.58	-67.3	-62.58	0.66	10.81	V
	3344	-55.06	-13	-42.06	-69.26	-64.28	0.76	12.13	V



Highest	1696	-55.37	-13	-42.37	-64.35	-62.42	0.53	9.73	H
	2544	-49.49	-13	-36.49	-61.41	-57.5	0.67	10.83	H
	3392	-55.19	-13	-42.19	-69.16	-64.55	0.77	12.28	H
	1696	-55.62	-13	-42.62	-64.32	-62.67	0.53	9.73	V
	2544	-48.85	-13	-35.85	-61.47	-56.86	0.67	10.83	V
	3392	-55.65	-13	-42.65	-69.45	-65.01	0.77	12.28	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part22H WCDMA 850**

Mode 3_WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-58.69	-13	-45.69	-67.53	-65.64	0.53	9.63	H
	2472	-56.44	-13	-43.44	-68.43	-64.42	0.65	10.78	H
	3296	-54.63	-13	-41.63	-68.9	-63.71	0.76	11.99	H
	1648	-58.40	-13	-45.40	-67.01	-65.35	0.53	9.63	V
	2472	-50.27	-13	-37.27	-63.05	-58.25	0.65	10.78	V
	3296	-54.60	-13	-41.60	-69	-63.68	0.76	11.99	V
Middle	1672	-57.36	-13	-44.36	-66.29	-64.36	0.53	9.68	H
	2512	-47.15	-13	-34.15	-58.98	-55.15	0.66	10.81	H
	3344	-54.56	-13	-41.56	-68.81	-63.78	0.76	12.13	H
	1672	-56.83	-13	-43.83	-65.51	-63.83	0.53	9.68	V
	2512	-50.51	-13	-37.51	-63.23	-58.51	0.66	10.81	V
	3344	-54.80	-13	-41.80	-69.01	-64.02	0.76	12.13	V



Highest	1696	-57.99	-13	-44.99	-66.97	-65.04	0.53	9.73	H
	2536	-56.26	-13	-43.26	-68.15	-64.27	0.66	10.82	H
	3384	-55.68	-13	-42.68	-69.59	-65.01	0.77	12.25	H
	1696	-58.40	-13	-45.40	-67.14	-65.45	0.53	9.73	V
	2536	-56.27	-13	-43.27	-68.94	-64.28	0.66	10.82	V
	3384	-55.34	-13	-42.34	-69.43	-64.67	0.77	12.25	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part24E GSM 1900**

Mode 1_GSM 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-38.03	-13	-25.03	-54.12	-49.82	0.72	12.52	H
	5550	-36.52	-13	-23.52	-55.9	-48.69	1.00	13.17	H
	7398	-45.66	-13	-32.66	-67.41	-55.06	1.18	10.58	H
	3702	-43.26	-13	-30.26	-59.5	-55.05	0.72	12.52	V
	5550	-32.97	-13	-19.97	-52.56	-45.14	1.00	13.17	V
	7398	-46.62	-13	-33.62	-68.43	-56.02	1.18	10.58	V
Middle	3762	-39.83	-13	-26.83	-55.98	-51.64	0.69	12.50	H
	5640	-37.55	-13	-24.55	-56.75	-49.68	0.98	13.12	H
	7518	-46.46	-13	-33.46	-69.36	-55.73	1.18	10.45	H
	3762	-40.86	-13	-27.86	-57.34	-52.67	0.69	12.50	V
	5640	-40.81	-13	-27.81	-60.3	-52.94	0.98	13.12	V
	7518	-46.01	-13	-33.01	-68.99	-55.28	1.18	10.45	V



Highest	3822	-37.44	-13	-24.44	-53.59	-49.22	0.69	12.47	H
	5730	-44.51	-13	-31.51	-63.96	-56.58	0.99	13.06	H
	7638	-46.15	-13	-33.15	-68.96	-55.75	1.18	10.79	H
	3822	-38.76	-13	-25.76	-55.26	-50.54	0.69	12.47	V
	5730	-43.93	-13	-30.93	-63.46	-56	0.99	13.06	V
	7638	-46.05	-13	-33.05	-68.84	-55.65	1.18	10.79	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part24E EDGE 1900**

Mode 2_EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-47.65	-13	-34.65	-63.66	-59.44	0.72	12.52	H
	5550	-50.22	-13	-37.22	-69.46	-62.39	1.00	13.17	H
	7398	-47.18	-13	-34.18	-69.07	-56.58	1.18	10.58	H
	3702	-48.76	-13	-35.76	-64.93	-60.55	0.72	12.52	V
	5550	-37.10	-13	-24.10	-56.73	-49.27	1.00	13.17	V
	7398	-47.06	-13	-34.06	-69	-56.46	1.18	10.58	V
Middle	3762	-46.62	-13	-33.62	-62.65	-58.43	0.69	12.50	H
	5640	-49.74	-13	-36.74	-68.82	-61.87	0.98	13.12	H
	7518	-45.93	-13	-32.93	-68.81	-55.2	1.18	10.45	H
	3762	-46.73	-13	-33.73	-63.03	-58.54	0.69	12.50	V
	5640	-49.06	-13	-36.06	-68.62	-61.19	0.98	13.12	V
	7518	-45.78	-13	-32.78	-68.66	-55.05	1.18	10.45	V



Highest	3822	-45.45	-13	-32.45	-61.58	-57.23	0.69	12.47	H
	5730	-48.07	-13	-35.07	-67.43	-60.14	0.99	13.06	H
	7638	-46.09	-13	-33.09	-68.9	-55.69	1.18	10.79	H
	3822	-45.51	-13	-32.51	-62.06	-57.29	0.69	12.47	V
	5730	-48.28	-13	-35.28	-67.84	-60.35	0.99	13.06	V
	7638	-45.43	-13	-32.43	-68.19	-55.03	1.18	10.79	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part24E WCDMA 1900**

Mode 3_WCDMA 1900

Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-52.09	-13	-39.09	-68.18	-63.88	0.72	12.52	H
	5550	-50.27	-13	-37.27	-69.57	-62.44	1.00	13.17	H
	7410	-46.78	-13	-33.78	-68.71	-56.16	1.18	10.56	H
	3702	-52.68	-13	-39.68	-68.82	-64.47	0.72	12.52	V
	5550	-49.89	-13	-36.89	-69.55	-62.06	1.00	13.17	V
	7410	-40.86	-13	-27.86	-62.9	-50.24	1.18	10.56	V
Middle	3762	-49.63	-13	-36.63	-65.65	-61.44	0.69	12.50	H
	5640	-50.49	-13	-37.49	-69.79	-62.62	0.98	13.12	H
	7518	-45.17	-13	-32.17	-68.07	-54.44	1.18	10.45	H
	3762	-51.80	-13	-38.80	-68.34	-63.61	0.69	12.50	V
	5640	-49.97	-13	-36.97	-69.52	-62.1	0.98	13.12	V
	7518	-40.28	-13	-27.28	-63.27	-49.55	1.18	10.45	V



Highest	3816	-52.23	-13	-39.23	-68.33	-64.02	0.69	12.47	H
	5724	-49.54	-13	-36.54	-68.99	-61.61	0.99	13.07	H
	7638	-43.69	-13	-30.69	-66.5	-53.29	1.18	10.79	H
	3816	-52.09	-13	-39.09	-68.57	-63.88	0.69	12.47	V
	5724	-48.69	-13	-35.69	-68.3	-60.76	0.99	13.07	V
	7638	-38.23	-13	-25.23	-61.04	-47.83	1.18	10.79	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**Part27L WCDMA 1700**

Mode 1_ WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3426	-51.85	-13	-38.85	-66.79	-63.45	0.77	12.38	H
	5142	-46.59	-13	-33.59	-64.8	-58.1	0.97	12.48	H
	6852	-40.82	-13	-27.82	-62.35	-51.61	0.83	11.63	H
	3426	-51.26	-13	-38.26	-66.25	-62.86	0.77	12.38	V
	5142	-44.90	-13	-31.90	-63.69	-56.41	0.97	12.48	V
	6852	-47.24	-13	-34.24	-68.87	-58.03	0.83	11.63	V
Middle	3468	-50.48	-13	-37.48	-65.87	-62.21	0.78	12.50	H
	5196	-47.88	-13	-34.88	-66.34	-59.48	0.99	12.59	H
	6930	-40.69	-13	-27.69	-62.24	-51.14	1.01	11.45	H
	3468	-51.84	-13	-38.84	-67.41	-63.57	0.78	12.50	V
	5196	-47.81	-13	-34.81	-66.81	-59.41	0.99	12.59	V
	6930	-46.99	-13	-33.99	-68.59	-57.44	1.01	11.45	V



Highest	3504	-51.20	-13	-38.20	-66.99	-63.02	0.78	12.60	H
	5262	-46.76	-13	-33.76	-65.37	-58.47	1.01	12.72	H
	7008	-40.86	-13	-27.86	-62.62	-50.98	1.17	11.29	H
	3504	-51.75	-13	-38.75	-67.69	-63.57	0.78	12.60	V
	5256	-47.19	-13	-34.19	-66.5	-58.89	1.01	12.71	V
	7008	-46.89	-13	-33.89	-68.61	-57.01	1.17	11.29	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.