





CSE Plot on Ch 78 between 30MHz ~ 3 GHz

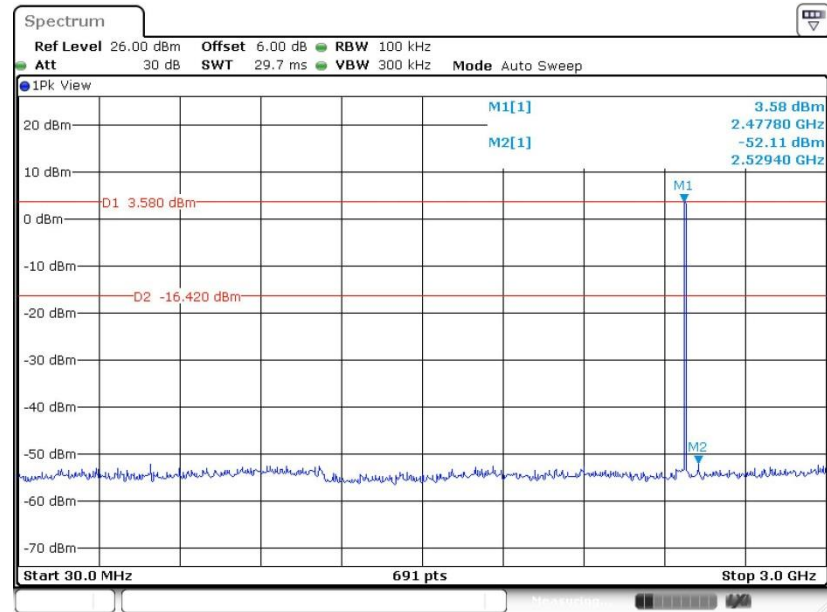

Date: 17.NOV.2022 12:18:16

CSE Plot on Ch 78 between 2 GHz ~ 25 GHz

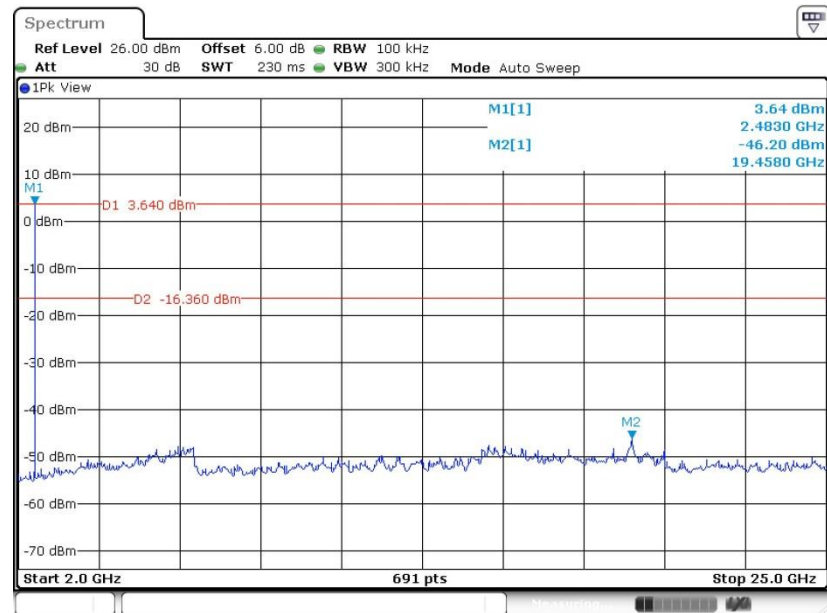

Date: 17.NOV.2022 12:18:46

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1MHz for $f > 1$ GHz ; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
$$\text{On time} = N_1 * L_1 + N_2 * L_2 + \dots + N_{n-1} * L_{n-1} + N_n * L_n$$

Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 * \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.


Note: The average levels were calculated from the peak level corrected with duty cycle correction factor (-24.76dB) derived from $20 \log(\text{dwell time}/100\text{ms})$. This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.8.4 Test Setup


For radiated emissions below 30MHz

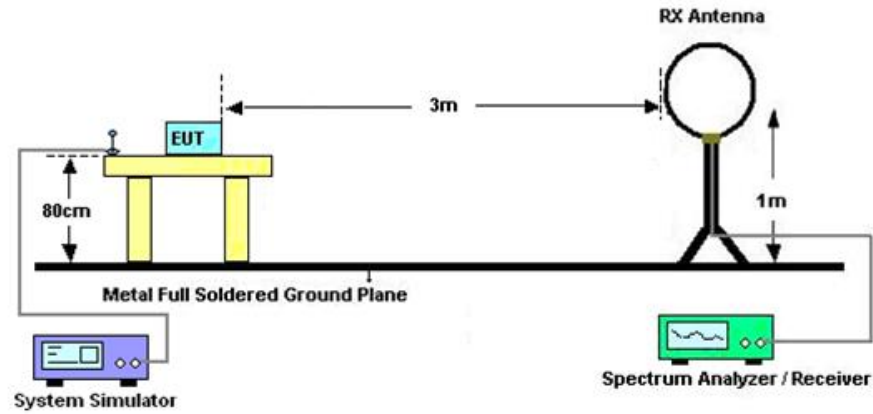

For radiated emissions from 30MHz to 1GHz

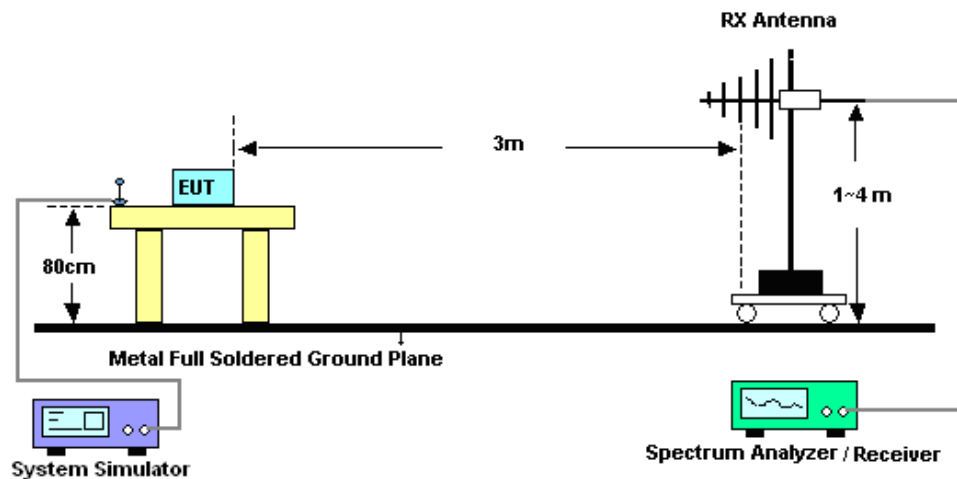

For radiated emissions above 1GHz

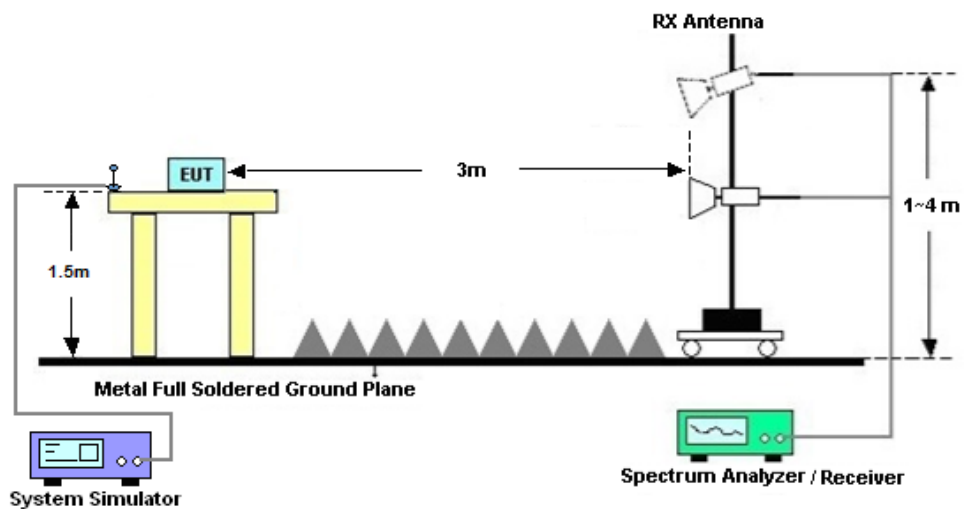



3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.8.7 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.8.8 Duty cycle correction factor for average measurement

Please refer to Appendix D.

3.9 AC Conducted Emission Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test Setup

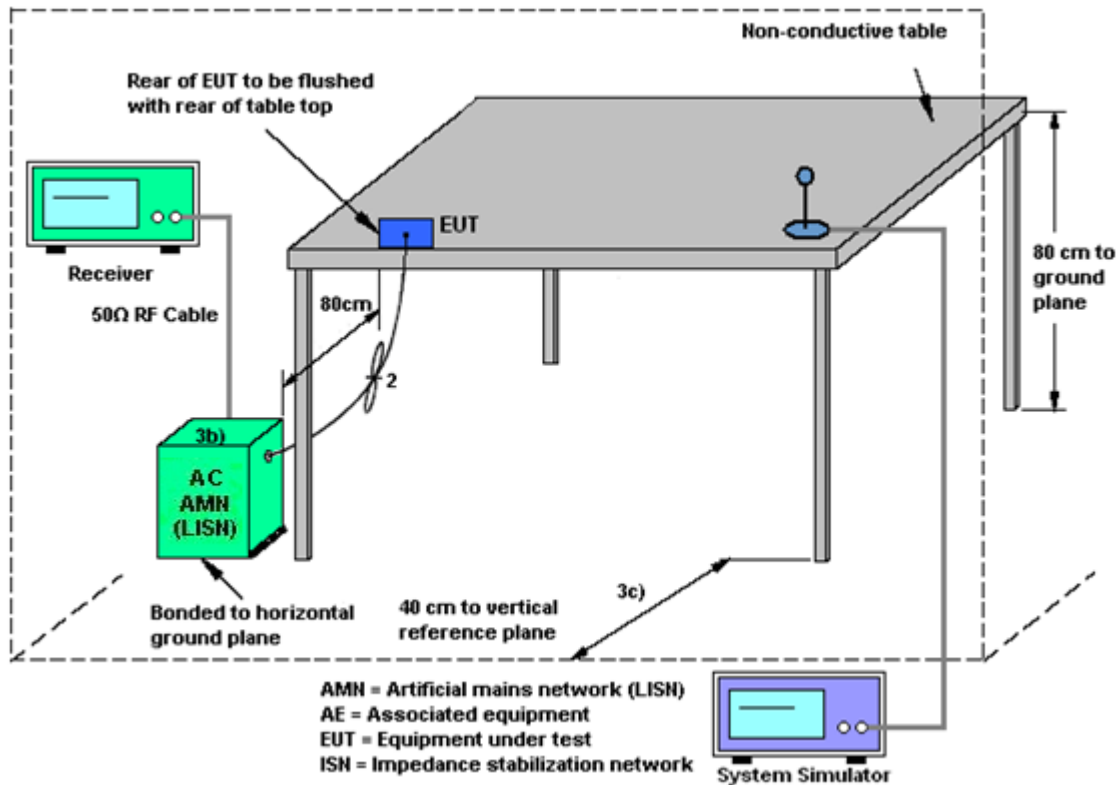

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Nov. 03, 2022~Dec. 01, 2022	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Nov. 03, 2022~Dec. 01, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Nov. 03, 2022~Dec. 01, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 13, 2022	Dec. 07, 2022	Oct. 12, 2023	Radiation (03CH04-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz~44GHz, MAX 30dB	Oct. 12, 2022	Dec. 07, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Dec. 07, 2022	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz~1GHz	May 24, 2022	Dec. 07, 2022	May 23, 2023	Radiation (03CH05-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Jan. 05, 2022	Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz~1GHz	Jan. 05, 2022	Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Dec. 07, 2022	Jan. 04, 2023	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18GA	060840	1Ghz~18Ghz	Oct. 12, 2022	Dec. 07, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz~18Ghz	Oct. 12, 2022	Dec. 07, 2022	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Dec. 07, 2022	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Dec. 07, 2022	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Dec. 07, 2022	NCR	Radiation (03CH04-KS)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 07, 2022	Nov. 25, 2022	Jul. 06, 2023	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Sep. 15, 2022	Nov. 25, 2022	Sep. 14, 2023	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 17, 2022	Nov. 25, 2022	Oct. 16, 2023	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2022	Nov. 25, 2022	Jul. 06, 2023	Conduction (CO01-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	± 0.56 dB
Conducted Emissions	± 0.92 dB
Occupied Channel Bandwidth	± 0.03 %

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.2dB
--	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.0dB
--	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1dB
--	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.1dB
--	-------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth

Test Engineer:	Jacob Zhang	Temperature:	20~26	°C
Test Date:	2022/11/3~2022/12/1	Relative Humidity:	40~51	%

TEST RESULTS DATA**20dB and 99% Occupied Bandwidth and Hopping Channel Separation**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	20db BW (MHz)	99% Bandwidth (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
DH	1Mbps	1	0	2402	0.947	0.865	1002.900	0.6310	Pass
DH	1Mbps	1	39	2441	0.949	0.865	976.800	0.6329	Pass
DH	1Mbps	1	78	2480	0.949	0.863	998.600	0.6329	Pass
2DH	2Mbps	1	0	2402	1.237	1.166	998.600	0.8249	Pass
2DH	2Mbps	1	39	2441	1.259	1.166	1002.900	0.8393	Pass
2DH	2Mbps	1	78	2480	1.259	1.166	924.700	0.8393	Pass
3DH	3Mbps	1	0	2402	1.237	1.149	998.600	0.8249	Pass
3DH	3Mbps	1	39	2441	1.237	1.149	968.200	0.8249	Pass
3DH	3Mbps	1	78	2480	1.233	1.149	1002.900	0.8220	Pass

TEST RESULTS DATA**Dwell Time**

Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.9101	0.31	0.4	Pass
AFH	20	53.33	2.9101	0.16	0.4	Pass

TEST RESULTS DATA**Peak Power Table**


DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH1	0	1	11.03	20.97	Pass
	39	1	11.28	20.97	Pass
	78	1	11.08	20.97	Pass
2DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
2DH1	0	1	5.99	20.97	Pass
	39	1	6.28	20.97	Pass
	78	1	6.51	20.97	Pass
3DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
3DH1	0	1	6.36	20.97	Pass
	39	1	6.58	20.97	Pass
	78	1	6.81	20.97	Pass

TEST RESULTS DATA**Number of Hopping Frequency**

Number of Hopping (Channel)	Adaptive Frequency Hopping (Channel)	Limits (Channel)	Pass/Fail
79	79	> 15	Pass




Appendix B. AC Conducted Emission Test Results

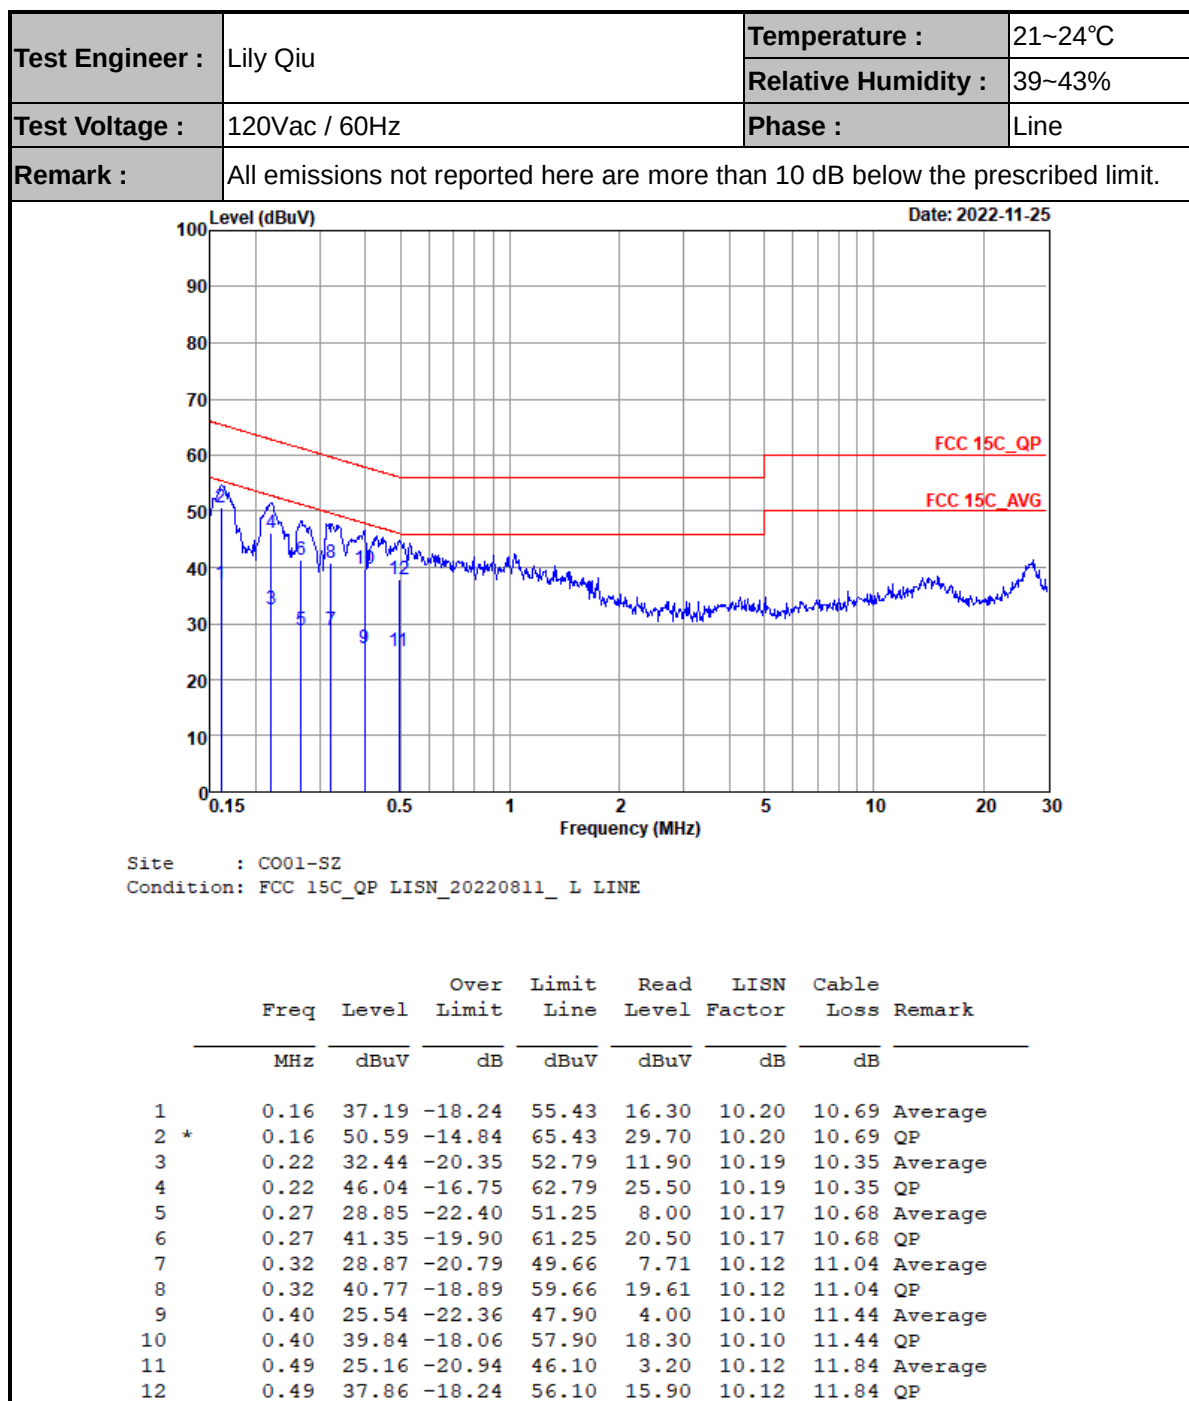



Test Engineer :	Lily Qiu	Temperature :	21~24°C
		Relative Humidity :	39~43%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

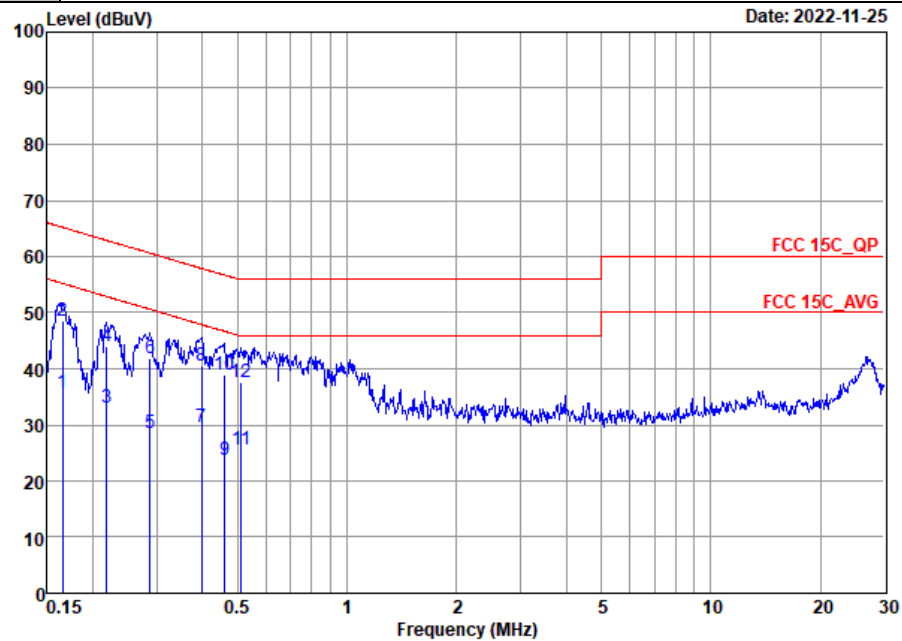

Site : C001-SZ
Condition: FCC 15C_QP LISN_20220811_ N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	35.62	-19.59	55.21	14.70	10.31	10.61	Average
2 *	0.17	48.42	-16.79	65.21	27.50	10.31	10.61	QP
3	0.22	33.08	-19.80	52.88	12.49	10.27	10.32	Average
4	0.22	43.98	-18.90	62.88	23.39	10.27	10.32	QP
5	0.29	28.55	-22.04	50.59	7.50	10.22	10.83	Average
6	0.29	41.75	-18.84	60.59	20.70	10.22	10.83	QP
7	0.40	29.63	-18.27	47.90	8.00	10.19	11.44	Average
8	0.40	40.63	-17.27	57.90	19.00	10.19	11.44	QP
9	0.46	23.80	-22.87	46.67	1.90	10.19	11.71	Average
10	0.46	39.00	-17.67	56.67	17.10	10.19	11.71	QP
11	0.51	25.60	-20.40	46.00	3.60	10.20	11.80	Average
12	0.51	37.70	-18.30	56.00	15.70	10.20	11.80	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	Bluetooth BR_GFSK	CH00	2402	1Mbps	-
Mode 2	2400-2483.5	Bluetooth BR_GFSK	CH39	2441	1Mbps	-
Mode 3	2400-2483.5	Bluetooth BR_GFSK	CH78	2480	1Mbps	-
Mode 4	2400-2483.5	Bluetooth BR_GFSK	CH78	2480	1Mbps	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth BR_GFSK	CH00	2377.60	51.24	74.00	-22.76	V	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	CH00	4804	49.73	74	-24.27	V	PEAK	Pass	Harmonic
2	Bluetooth BR_GFSK	CH39	-	-	-	-	-	-	-	Band Edge
	Bluetooth BR_GFSK	CH39	4882.00	50.94	74.00	-23.06	V	PEAK	Pass	Harmonic
3	Bluetooth BR_GFSK	CH78	2483.60	61.42	74.00	-12.58	V	PEAK	Pass	Band Edge
	Bluetooth BR_GFSK	CH78	4960.00	50.12	74.00	-23.88	V	PEAK	Pass	Harmonic
4	Bluetooth BR_GFSK	CH78	48.43	31.10	40	-8.90	V	PEAK	Pass	LF

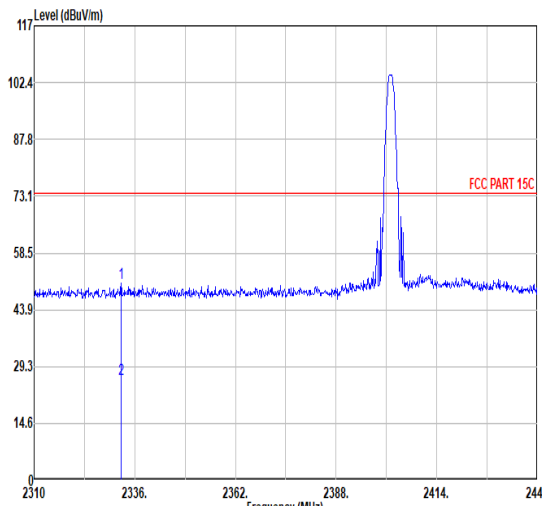
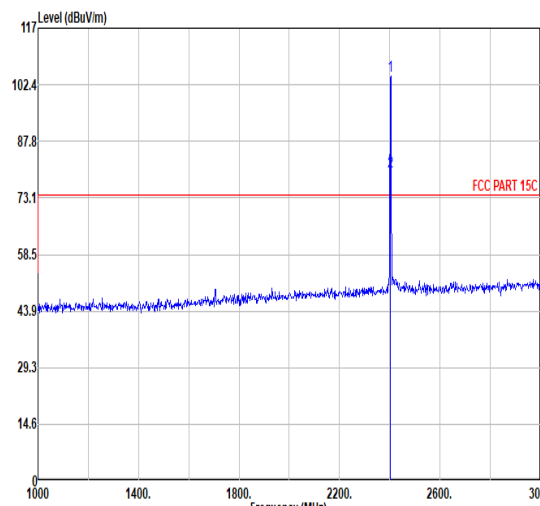


Mode	1																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CHCH00_2402MHz																																																																			
Pol.	Horizontal																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2332.49</td><td>50.82</td><td>74.00</td><td>-23.18</td><td>43.90</td><td>30.76</td><td>7.07</td><td>36.91</td><td>6.00</td><td>300</td><td>57 PEAK</td></tr><tr><td>2</td><td>2332.49</td><td>26.06</td><td>74.00</td><td>-47.94</td><td>19.14</td><td>30.76</td><td>7.07</td><td>36.91</td><td>6.00</td><td>300</td><td>57 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2332.49	50.82	74.00	-23.18	43.90	30.76	7.07	36.91	6.00	300	57 PEAK	2	2332.49	26.06	74.00	-47.94	19.14	30.76	7.07	36.91	6.00	300	57 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2332.49	50.82	74.00	-23.18	43.90	30.76	7.07	36.91	6.00	300	57 PEAK																																																									
2	2332.49	26.06	74.00	-47.94	19.14	30.76	7.07	36.91	6.00	300	57 Average																																																									
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>104.57</td><td>74.00</td><td>30.57</td><td>97.29</td><td>31.01</td><td>7.19</td><td>36.92</td><td>6.00</td><td>300</td><td>57 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>79.81</td><td>74.00</td><td>5.81</td><td>72.55</td><td>31.00</td><td>7.18</td><td>36.92</td><td>6.00</td><td>300</td><td>57 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	104.57	74.00	30.57	97.29	31.01	7.19	36.92	6.00	300	57 PEAK	2	2402.00	79.81	74.00	5.81	72.55	31.00	7.18	36.92	6.00	300	57 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2402.00	104.57	74.00	30.57	97.29	31.01	7.19	36.92	6.00	300	57 PEAK																																																									
2	2402.00	79.81	74.00	5.81	72.55	31.00	7.18	36.92	6.00	300	57 Average																																																									





Mode	1																																																																																																															
	Band Edge																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CHCH00_2402MHz																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.60</td><td>51.24</td><td>74.00</td><td>-22.76</td><td>44.10</td><td>30.92</td><td>7.14</td><td>36.92</td><td>6.00</td><td>100</td><td>115 PEAK</td></tr><tr><td>2</td><td>2377.60</td><td>26.48</td><td>74.00</td><td>-47.52</td><td>19.34</td><td>30.92</td><td>7.14</td><td>36.92</td><td>6.00</td><td>100</td><td>115 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2377.60	51.24	74.00	-22.76	44.10	30.92	7.14	36.92	6.00	100	115 PEAK	2	2377.60	26.48	74.00	-47.52	19.34	30.92	7.14	36.92	6.00	100	115 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>106.35</td><td>74.00</td><td>32.35</td><td>99.07</td><td>31.01</td><td>7.19</td><td>36.92</td><td>6.00</td><td>100</td><td>115 PEAK</td></tr><tr><td>2</td><td>2402.00</td><td>81.58</td><td>74.00</td><td>7.58</td><td>74.32</td><td>31.00</td><td>7.18</td><td>36.92</td><td>6.00</td><td>100</td><td>115 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	106.35	74.00	32.35	99.07	31.01	7.19	36.92	6.00	100	115 PEAK	2	2402.00	81.58	74.00	7.58	74.32	31.00	7.18	36.92	6.00	100	115 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2377.60	51.24	74.00	-22.76	44.10	30.92	7.14	36.92	6.00	100	115 PEAK																																																																																																					
2	2377.60	26.48	74.00	-47.52	19.34	30.92	7.14	36.92	6.00	100	115 Average																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	2402.00	106.35	74.00	32.35	99.07	31.01	7.19	36.92	6.00	100	115 PEAK																																																																																																					
2	2402.00	81.58	74.00	7.58	74.32	31.00	7.18	36.92	6.00	100	115 Average																																																																																																					

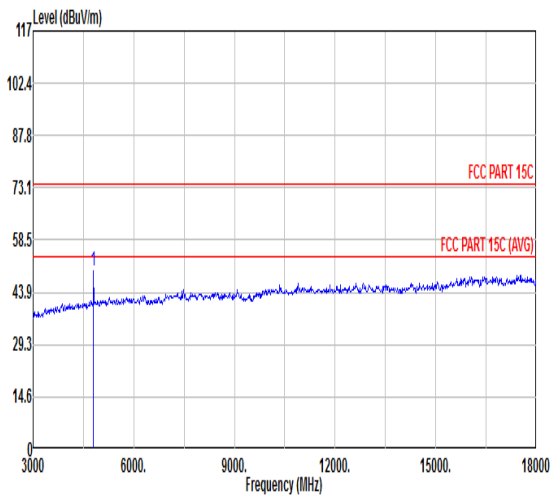
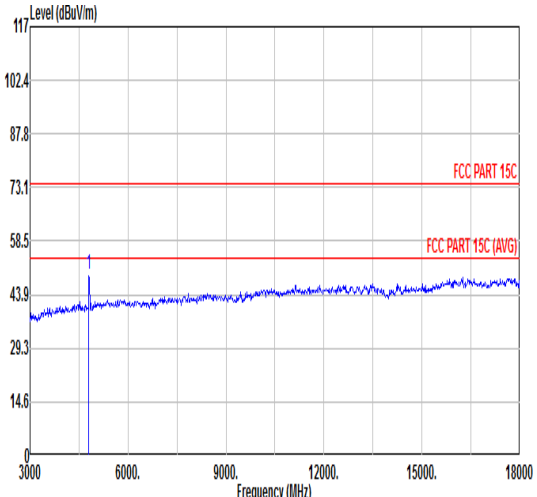


Mode	1																																																																																																										
	Harmonic																																																																																																										
	2400-2483.5_Bluetooth BR_GFSK_CHCH00_2402MHz																																																																																																										
Pol.	Horizontal						Vertical																																																																																																				
Peak Avg																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>49.73</td><td>74.00</td><td>-24.27</td><td>69.10</td><td>34.51</td><td>10.21</td><td>64.09</td><td>0.00</td><td>300</td><td>36</td><td>Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	49.73	74.00	-24.27	69.10	34.51	10.21	64.09	0.00	300	36	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>49.65</td><td>74.00</td><td>-24.35</td><td>69.00</td><td>34.52</td><td>10.22</td><td>64.09</td><td>0.00</td><td>101</td><td>312</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4804.00	49.65	74.00	-24.35	69.00	34.52	10.22	64.09	0.00	101	312
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	4804.00	49.73	74.00	-24.27	69.10	34.51	10.21	64.09	0.00	300	36	Peak																																																																																															
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	4804.00	49.65	74.00	-24.35	69.00	34.52	10.22	64.09	0.00	101	312	PEAK																																																																																															

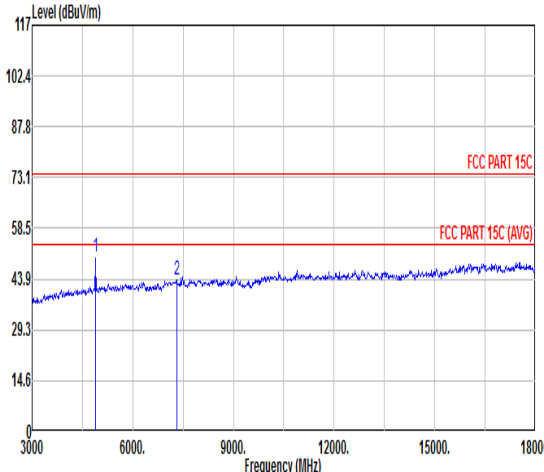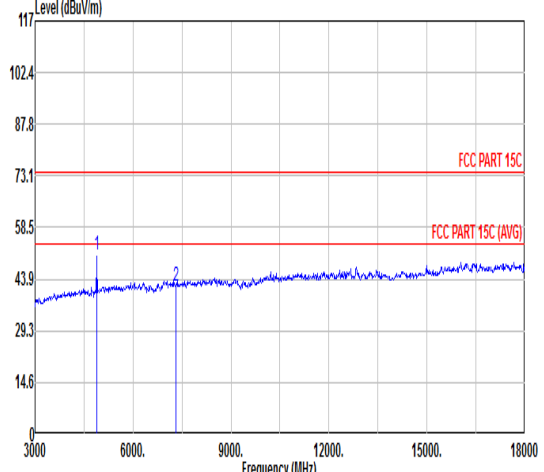


Mode	2																																																																			
	Harmonic																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CHCH39_2441MHz																																																																			
Pol.	Horizontal						Vertical																																																													
Peak Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4882.00</td><td>50.35</td><td>74.00</td><td>-23.65</td><td>69.44</td><td>34.66</td><td>10.32</td><td>64.07</td><td>0.00</td><td>101</td><td>305</td><td>PEAK</td></tr><tr><td>2</td><td>7323.00</td><td>43.88</td><td>74.00</td><td>-30.12</td><td>58.39</td><td>36.56</td><td>12.72</td><td>63.79</td><td>0.00</td><td>101</td><td>305</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4882.00	50.35	74.00	-23.65	69.44	34.66	10.32	64.07	0.00	101	305	PEAK	2	7323.00	43.88	74.00	-30.12	58.39	36.56	12.72	63.79	0.00	101	305	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1	4882.00	50.35	74.00	-23.65	69.44	34.66	10.32	64.07	0.00	101	305	PEAK																																																								
2	7323.00	43.88	74.00	-30.12	58.39	36.56	12.72	63.79	0.00	101	305	PEAK																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4882.00</td><td>50.94</td><td>74.00</td><td>-23.06</td><td>70.03</td><td>34.66</td><td>10.32</td><td>64.07</td><td>0.00</td><td>101</td><td>308</td><td>PEAK</td></tr><tr><td>2</td><td>7320.00</td><td>41.95</td><td>74.00</td><td>-32.05</td><td>56.46</td><td>36.56</td><td>12.72</td><td>63.79</td><td>0.00</td><td>100</td><td>145</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4882.00	50.94	74.00	-23.06	70.03	34.66	10.32	64.07	0.00	101	308	PEAK	2	7320.00	41.95	74.00	-32.05	56.46	36.56	12.72	63.79	0.00	100	145	Peak	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1	4882.00	50.94	74.00	-23.06	70.03	34.66	10.32	64.07	0.00	101	308	PEAK																																																								
2	7320.00	41.95	74.00	-32.05	56.46	36.56	12.72	63.79	0.00	100	145	Peak																																																								

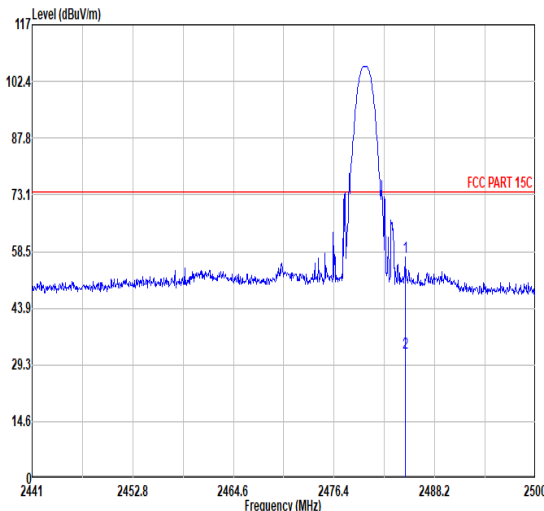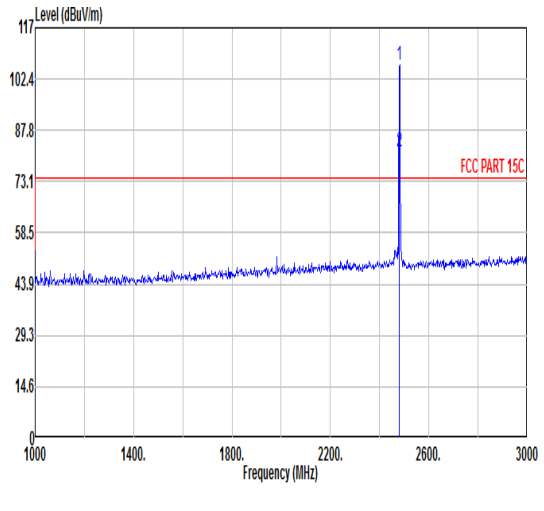

Mode	3																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CHCH78_2480MHz																																																																			
Pol.	Horizontal																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.72</td><td>57.15</td><td>74.00</td><td>-16.85</td><td>49.65</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>300</td><td>47 PEAK</td></tr><tr><td>2</td><td>2484.72</td><td>32.39</td><td>74.00</td><td>-41.61</td><td>24.89</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>300</td><td>47 Average</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.72	57.15	74.00	-16.85	49.65	31.14	7.32	36.96	6.00	300	47 PEAK	2	2484.72	32.39	74.00	-41.61	24.89	31.14	7.32	36.96	6.00	300	47 Average
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2484.72	57.15	74.00	-16.85	49.65	31.14	7.32	36.96	6.00	300	47 PEAK																																																									
2	2484.72	32.39	74.00	-41.61	24.89	31.14	7.32	36.96	6.00	300	47 Average																																																									
																																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>106.27</td><td>74.00</td><td>32.27</td><td>98.77</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>300</td><td>47 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>81.50</td><td>74.00</td><td>7.50</td><td>74.00</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>300</td><td>47 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	106.27	74.00	32.27	98.77	31.14	7.32	36.96	6.00	300	47 PEAK	2	2480.00	81.50	74.00	7.50	74.00	31.14	7.32	36.96	6.00	300	47 Average			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2480.00	106.27	74.00	32.27	98.77	31.14	7.32	36.96	6.00	300	47 PEAK																																																									
2	2480.00	81.50	74.00	7.50	74.00	31.14	7.32	36.96	6.00	300	47 Average																																																									

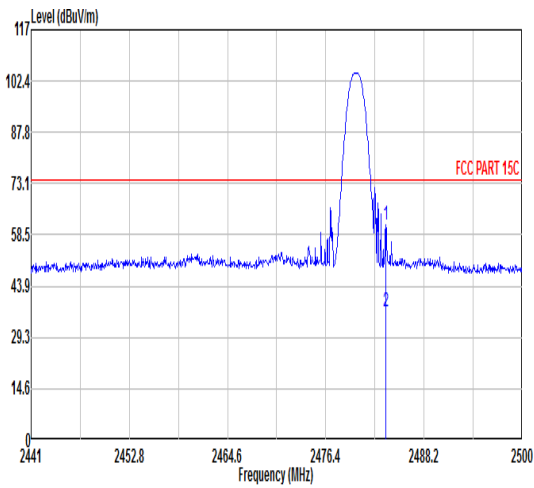

Mode	3																																																																			
	Band Edge																																																																			
	2400-2483.5_Bluetooth BR_GFSK_CHCH78_2480MHz																																																																			
Pol.	Vertical																																																																			
Peak																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>61.42</td><td>74.00</td><td>-12.58</td><td>53.92</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>100</td><td>79 PEAK</td></tr><tr><td>2</td><td>2483.60</td><td>36.66</td><td>74.00</td><td>-37.34</td><td>29.16</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>100</td><td>79 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.60	61.42	74.00	-12.58	53.92	31.14	7.32	36.96	6.00	100	79 PEAK	2	2483.60	36.66	74.00	-37.34	29.16	31.14	7.32	36.96	6.00	100	79 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2483.60	61.42	74.00	-12.58	53.92	31.14	7.32	36.96	6.00	100	79 PEAK																																																									
2	2483.60	36.66	74.00	-37.34	29.16	31.14	7.32	36.96	6.00	100	79 Average																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.16</td><td>74.00</td><td>31.16</td><td>97.66</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>100</td><td>79 PEAK</td></tr><tr><td>2</td><td>2480.00</td><td>80.39</td><td>74.00</td><td>6.39</td><td>72.89</td><td>31.14</td><td>7.32</td><td>36.96</td><td>6.00</td><td>100</td><td>79 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.16	74.00	31.16	97.66	31.14	7.32	36.96	6.00	100	79 PEAK	2	2480.00	80.39	74.00	6.39	72.89	31.14	7.32	36.96	6.00	100	79 Average	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	2480.00	105.16	74.00	31.16	97.66	31.14	7.32	36.96	6.00	100	79 PEAK																																																									
2	2480.00	80.39	74.00	6.39	72.89	31.14	7.32	36.96	6.00	100	79 Average																																																									




Mode	3											
	Harmonic											
	2400-2483.5_Bluetooth BR_GFSK_CHCH78_2480MHz											
Pol.	Horizontal						Vertical					
Peak Avg												




Mode	4																																																																																																																																																																																													
	Emission below 1GHz																																																																																																																																																																																													
	2400-2483.5_Bluetooth BR_GFSK_CHCH78_2480MHz																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																												
Peak QP	Horizontal Emission Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red limit line labeled 'FCC PART 15C' and a blue test signal. Six peaks are identified and numbered 1 through 6. <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>92.08</td><td>20.25</td><td>43.50</td><td>-23.25</td><td>36.22</td><td>15.08</td><td>1.35</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>193.93</td><td>23.39</td><td>43.50</td><td>-20.11</td><td>38.71</td><td>15.03</td><td>2.05</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>278.32</td><td>28.64</td><td>46.00</td><td>-17.36</td><td>39.71</td><td>18.98</td><td>2.35</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>304.51</td><td>25.62</td><td>46.00</td><td>-20.38</td><td>36.00</td><td>19.45</td><td>2.57</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>437.40</td><td>23.11</td><td>46.00</td><td>-22.89</td><td>29.73</td><td>22.68</td><td>3.10</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>898.15</td><td>31.06</td><td>46.00</td><td>-14.94</td><td>29.03</td><td>29.07</td><td>4.48</td><td>31.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	92.08	20.25	43.50	-23.25	36.22	15.08	1.35	32.40	---	---	Peak	2	193.93	23.39	43.50	-20.11	38.71	15.03	2.05	32.40	---	---	Peak	3	278.32	28.64	46.00	-17.36	39.71	18.98	2.35	32.40	---	---	Peak	4	304.51	25.62	46.00	-20.38	36.00	19.45	2.57	32.40	---	---	Peak	5	437.40	23.11	46.00	-22.89	29.73	22.68	3.10	32.40	---	---	Peak	6	898.15	31.06	46.00	-14.94	29.03	29.07	4.48	31.52	---	---	Peak	Vertical Emission Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes a red limit line labeled 'FCC PART 15C' and a blue test signal. Six peaks are identified and numbered 1 through 6. <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>48.43</td><td>31.10</td><td>40.00</td><td>-8.90</td><td>47.07</td><td>15.45</td><td>0.98</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>66.86</td><td>28.79</td><td>40.00</td><td>-11.21</td><td>45.48</td><td>14.56</td><td>1.15</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>220.12</td><td>23.49</td><td>46.00</td><td>-22.51</td><td>38.43</td><td>15.37</td><td>2.09</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>303.54</td><td>26.83</td><td>46.00</td><td>-19.17</td><td>37.23</td><td>19.43</td><td>2.57</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>533.43</td><td>24.79</td><td>46.00</td><td>-21.21</td><td>29.27</td><td>24.75</td><td>3.17</td><td>32.40</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>898.15</td><td>36.88</td><td>46.00</td><td>-9.12</td><td>34.85</td><td>29.07</td><td>4.48</td><td>31.52</td><td>---</td><td>---</td><td>Peak</td></tr></table>		Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	48.43	31.10	40.00	-8.90	47.07	15.45	0.98	32.40	---	---	Peak	2	66.86	28.79	40.00	-11.21	45.48	14.56	1.15	32.40	---	---	Peak	3	220.12	23.49	46.00	-22.51	38.43	15.37	2.09	32.40	---	---	Peak	4	303.54	26.83	46.00	-19.17	37.23	19.43	2.57	32.40	---	---	Peak	5	533.43	24.79	46.00	-21.21	29.27	24.75	3.17	32.40	---	---	Peak	6	898.15	36.88	46.00	-9.12	34.85	29.07	4.48	31.52	---	---	Peak
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																				
1	92.08	20.25	43.50	-23.25	36.22	15.08	1.35	32.40	---	---	Peak																																																																																																																																																																																			
2	193.93	23.39	43.50	-20.11	38.71	15.03	2.05	32.40	---	---	Peak																																																																																																																																																																																			
3	278.32	28.64	46.00	-17.36	39.71	18.98	2.35	32.40	---	---	Peak																																																																																																																																																																																			
4	304.51	25.62	46.00	-20.38	36.00	19.45	2.57	32.40	---	---	Peak																																																																																																																																																																																			
5	437.40	23.11	46.00	-22.89	29.73	22.68	3.10	32.40	---	---	Peak																																																																																																																																																																																			
6	898.15	31.06	46.00	-14.94	29.03	29.07	4.48	31.52	---	---	Peak																																																																																																																																																																																			
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																				
1	48.43	31.10	40.00	-8.90	47.07	15.45	0.98	32.40	---	---	Peak																																																																																																																																																																																			
2	66.86	28.79	40.00	-11.21	45.48	14.56	1.15	32.40	---	---	Peak																																																																																																																																																																																			
3	220.12	23.49	46.00	-22.51	38.43	15.37	2.09	32.40	---	---	Peak																																																																																																																																																																																			
4	303.54	26.83	46.00	-19.17	37.23	19.43	2.57	32.40	---	---	Peak																																																																																																																																																																																			
5	533.43	24.79	46.00	-21.21	29.27	24.75	3.17	32.40	---	---	Peak																																																																																																																																																																																			
6	898.15	36.88	46.00	-9.12	34.85	29.07	4.48	31.52	---	---	Peak																																																																																																																																																																																			

Appendix D. Duty Cycle Plots

DH5 on time (One Pulse) Plot on Channel 39

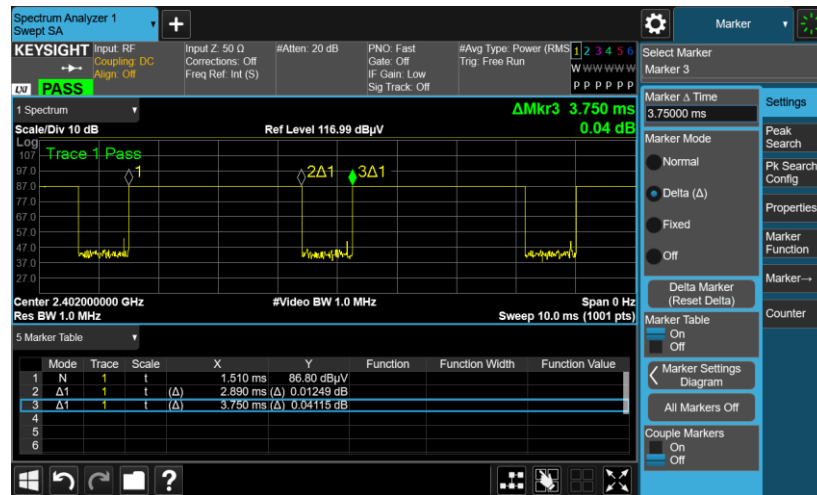

DH5 on time (Count Pulses) Plot on Channel 39

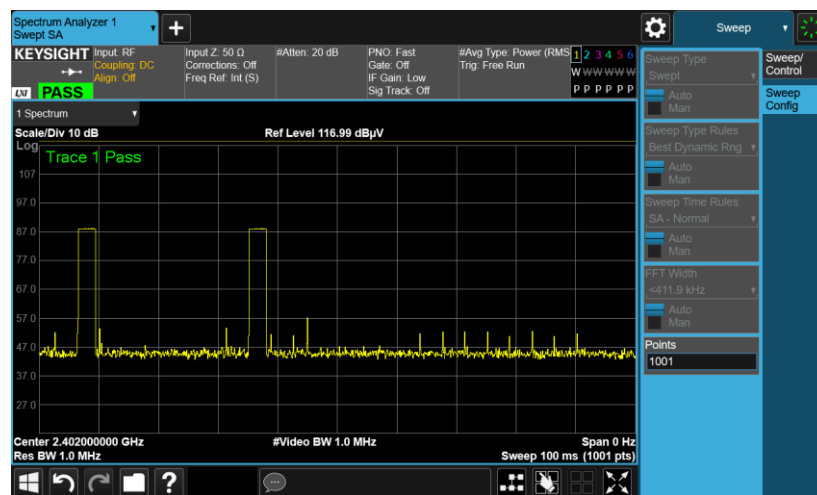

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.89 / 100 = 5.78 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.76 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.