

Annex 1: Measurement diagrams to TEST REPORT No.: 16-1-0130001T07b-C2

According to:

FCC Regulations

Part 15.205

Part 15.209

Part 15.407

ISED-Regulations

RSS-Gen, Issue 4

RSS-247, Issue 2

for

Prodrive Technologies BV

Carrier Controller Master – CCM

FCC ID: Y2ICCMUL

ISED: 9389A-CCMUL

PMN: CCM-IO-ETH, UL

HVIN: 64533

Laboratory Accreditation and Listings			
  Deutsche Akreditierungsstelle D-PL-12047-01-01 D-PL-12047-01-03 D-PL-12047-01-04	 MRA US-EU 0003	 Industry Canada Reg. No.: 3462D-2 Reg. No.: 3462D-3	 Voluntary Controls for Electromagnetic Emissions Reg. No.: R-2666 C-2914, T-1967, G-301
 AUTHORIZED RF LABORATORY	 AuthorizedTM Test Lab Lab Code: 20011130-00		
accredited according to DIN EN ISO/IEC 17025			
CETECOM GmbH Laboratory Radio Communications & Electromagnetic Compatibility Im Teelbruch 116 • 45219 Essen • Germany Registered in Essen, Germany, Reg. No.: HRB Essen 8984 Tel.: + 49 (0) 20 54 / 95 19-954 • Fax: + 49 (0) 20 54 / 95 19-964 E-mail: info@cetecom.com • Internet: www.cetecom.com			

Table of Contents

1. MEASUREMENT DIAGRAMS.....	3
1.1. Conducted emissions on AC-Power lines.....	3
1.2. Duty Cycle.....	6
1.3. Radiated magnetic field measurements below 30 MHz.....	7
1.4. Radiated electric field measurement 30 MHz to 1 GHz	13
1.5. Radiated electric field measurement 1GHz to 7 GHz.....	19
1.6. Radiated electric field measurement 7GHz to 18 GHz.....	25
1.7. Radiated electric field measurement 18GHz to 40 GHz	31
1.8. Radiated Band Edge measurement	34

1. Measurement diagrams

1.1. Conducted emissions on AC-Power lines

1.01


Common Information

Test Description:	Conducted Voltage Measurement Class B
Test Site & Location:	Conducted Emission, CETECOM GmbH Essen
Test Software:	R&S EMC32 v9.15
Test Specification:	FCC 15.107, FCC 15.207
Operating Mode:	WLAN 5GHz
Measured on line:	N/L1
Diagram details:	Shows the peak values as a sum of measured ports in maxhold mode
Environmental Conditions:	Humidity: 42%rH; Temperature: 20°C
Operator:	Mar

EUT Information

Manufacturer:	Prodrive Technologies B.V.
Model:	Carrier Control Master + Carrier Control Slave
Type:	CCM-IO-ETH + CCL, UL
HW version:	6752-1500-0103 + 6752-1600-1500
SW version:	CPU: 6752-1400-2608, uC: 6752-1400-2912
Serial Number:	1uC: 67528-08-858-1400-611 +2912 18-1 0-A02-FW3
Connected Interfaces:	Motor, Antenna, LAN cablePower
Supply:	100VDC
Comments:	with Eupen Radiated cable antenna

Full Spectrum

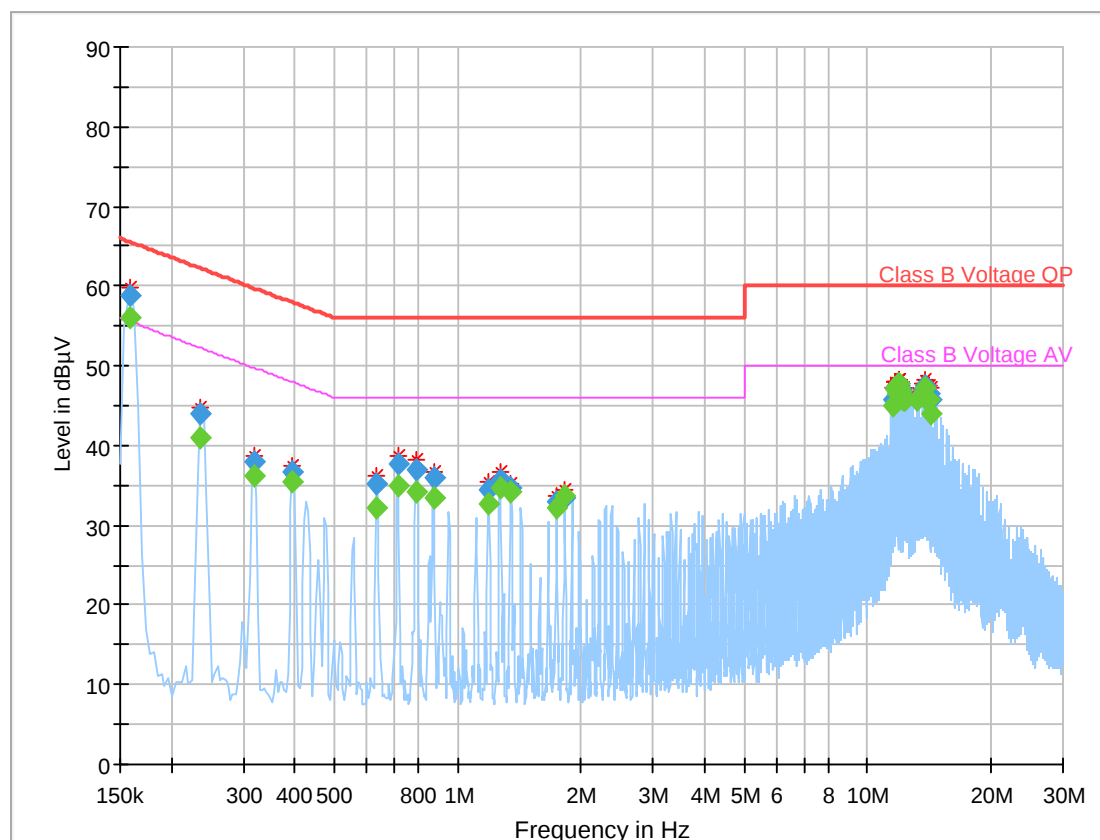


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)
0.157813	---	55.03	55.58
0.157813	58.94	---	65.58
0.235938	---	41.09	52.24
0.235938	44.05	---	62.24
0.317969	---	36.27	49.76
0.317969	37.93	---	59.76
0.396094	36.63	---	57.93
0.396094	---	35.53	47.93
0.634375	35.17	---	56.00
0.634375	---	32.09	46.00
0.712500	37.74	---	56.00
0.712500	---	35.02	46.00
0.794531	---	34.13	46.00
0.794531	37.07	---	56.00
0.872656	---	33.37	46.00
0.872656	35.83	---	56.00
1.189063	---	32.57	46.00
1.189063	34.47	---	56.00
1.267188	35.80	---	56.00
1.267188	---	34.61	46.00
1.345313	---	34.25	46.00
1.345313	34.64	---	56.00
1.743750	32.84	---	56.00
1.743750	---	32.13	46.00
1.821875	---	33.62	46.00
1.821875	33.53	---	56.00
11.521094	---	44.94	50.00
11.521094	45.80	---	60.00
11.599219	---	47.03	50.00
11.599219	47.17	---	60.00
11.677344	47.23	---	60.00
11.677344	---	47.32	50.00
11.755469	46.88	---	60.00
11.755469	---	46.60	50.00
11.837500	---	46.95	50.00
11.837500	47.09	---	60.00
11.915625	---	47.72	50.00
11.915625	47.73	---	60.00
11.993750	---	47.15	50.00
11.993750	47.49	---	60.00
12.075781	---	46.88	50.00
12.075781	46.98	---	60.00
12.232031	46.24	---	60.00
12.232031	---	45.86	50.00
12.314063	45.75	---	60.00
12.314063	---	45.64	50.00
13.267188	---	45.74	50.00
13.267188	45.85	---	60.00
13.661719	---	46.37	50.00
13.661719	47.02	---	60.00
13.743750	---	47.38	50.00
13.743750	47.50	---	60.00
13.821875	---	46.09	50.00
13.821875	46.21	---	60.00
14.138281	---	45.81	50.00
14.138281	46.57	---	60.00
14.216406	45.79	---	60.00
14.216406	---	43.98	50.00


Final Result

Frequency (MHz)	QuasiPeak (dBμV)	CAverage (dBμV)	Limit (dBμV)
0.157813	---	56.03	55.58
0.157813	58.94	---	65.58
0.235938	---	41.09	52.24
0.235938	44.05	---	62.24
0.317969	---	36.27	49.76
0.317969	37.93	---	59.76
0.396094	36.63	---	57.93
0.396094	---	35.53	47.93
0.634375	35.17	---	56.00
0.634375	---	32.09	46.00
0.712500	37.74	---	56.00
0.712500	---	35.02	46.00
0.794531	---	34.13	46.00
0.794531	37.07	---	56.00
0.872656	---	33.37	46.00
0.872656	35.83	---	56.00
1.189063	---	32.57	46.00
1.189063	34.47	---	56.00
1.267188	35.80	---	56.00
1.267188	---	34.61	46.00
1.345313	---	34.25	46.00
1.345313	34.64	---	56.00
1.743750	32.84	---	56.00
1.743750	---	32.13	46.00
1.821875	---	33.62	46.00
1.821875	33.53	---	56.00
11.521094	---	44.94	50.00
11.521094	45.80	---	60.00
11.599219	---	47.03	50.00
11.599219	47.17	---	60.00
11.677344	47.23	---	60.00
11.677344	---	47.32	50.00
11.755469	46.88	---	60.00
11.755469	---	46.60	50.00
11.837500	---	46.95	50.00
11.837500	47.09	---	60.00
11.915625	---	47.72	50.00
11.915625	47.73	---	60.00
11.993750	---	47.15	50.00
11.993750	47.49	---	60.00
12.075781	---	46.88	50.00
12.075781	46.98	---	60.00
12.232031	46.24	---	60.00
12.232031	---	45.86	50.00
12.314063	45.75	---	60.00
12.314063	---	45.64	50.00
13.267188	---	45.74	50.00
13.267188	45.85	---	60.00
13.661719	---	46.37	50.00
13.661719	47.02	---	60.00
13.743750	---	47.38	50.00
13.743750	47.50	---	60.00
13.821875	---	46.09	50.00
13.821875	46.21	---	60.00
14.138281	---	45.81	50.00
14.138281	46.57	---	60.00
14.216406	45.79	---	60.00
14.216406	---	43.98	50.00

1.2. Duty Cycle

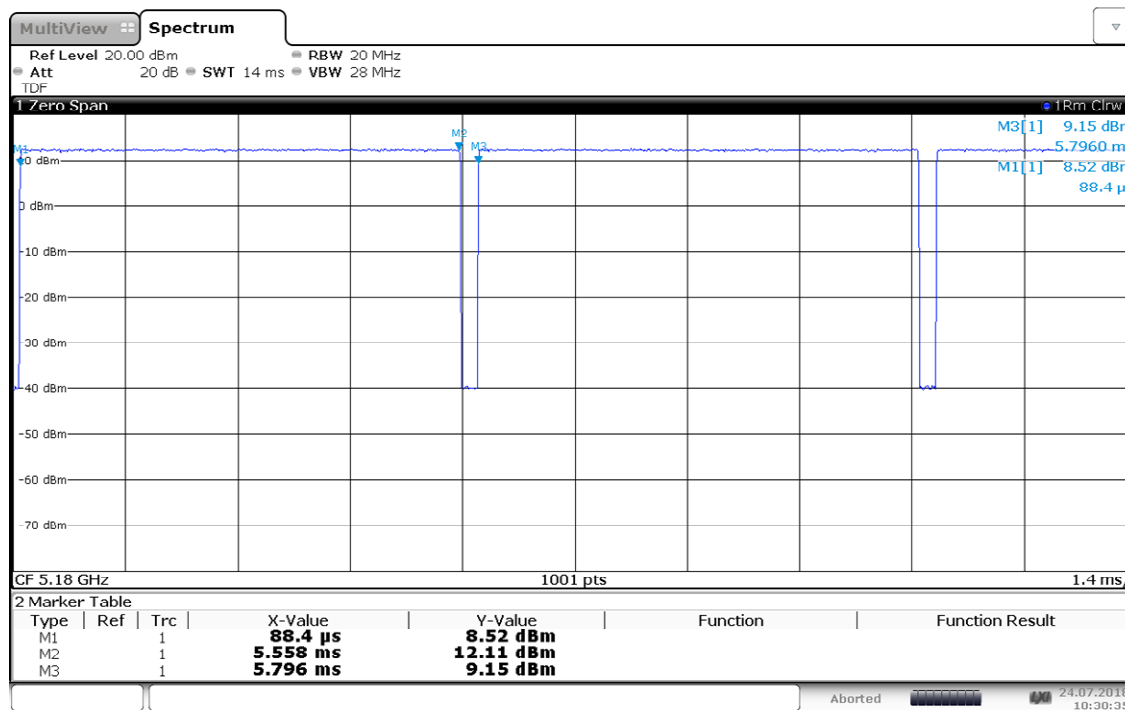

DC_36_a-mode_6Mbit

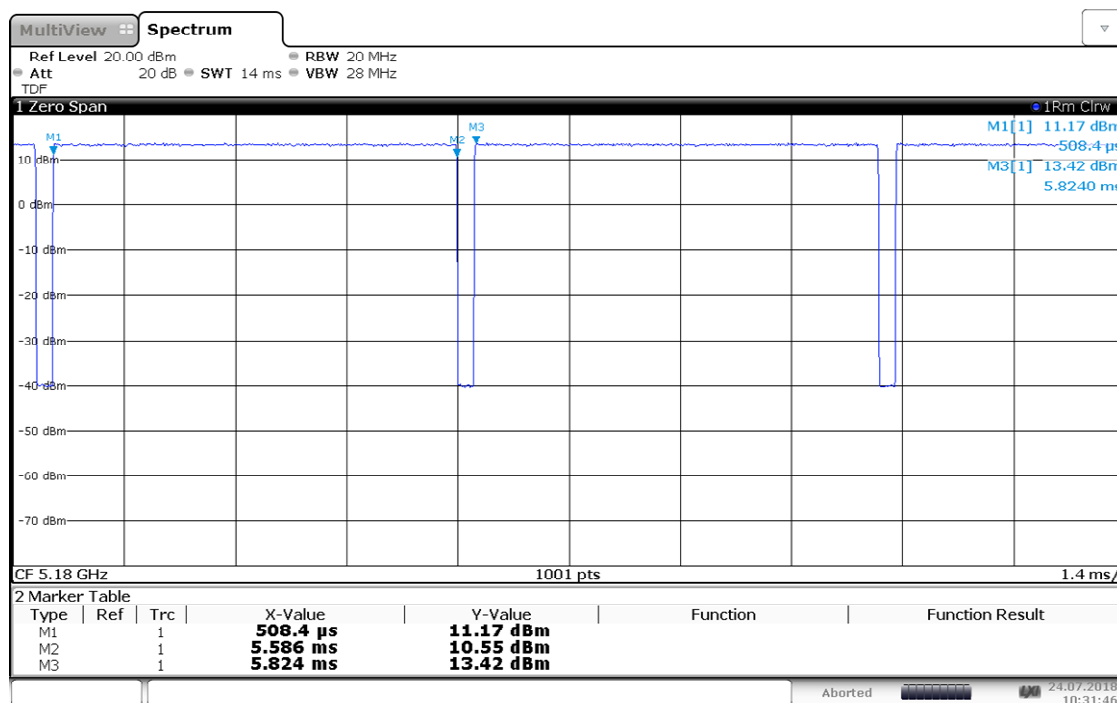

DC_36_n-mode_20M_MCS0

1.3. Radiated magnetic field measurements below 30 MHz

2.01_ CCM-IO-ETH-WLA-TX-aMode-BW20MHz-6Mbit-Ch36-19.5dBm


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site and distance	Ref.-Nr.441, Semi Anechoic Room (SAR) with 3m measurement distance
Version of Testsoftware	EMC32 V9.25.0
Distance Correction	used accord. table, pls see test report
Rec Antenna	height = _1_m , polarisation according to pre-scan results
Used filter	bypass
Test specification	FCC 15.209 Class B; RSS-Gen. Issue 4
Operator	DLe
Operating mode	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Operating conditions	Humidity: 48%RH; Temperature: 20°C
Comment	DC 100V
Comment	Radiated cable antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

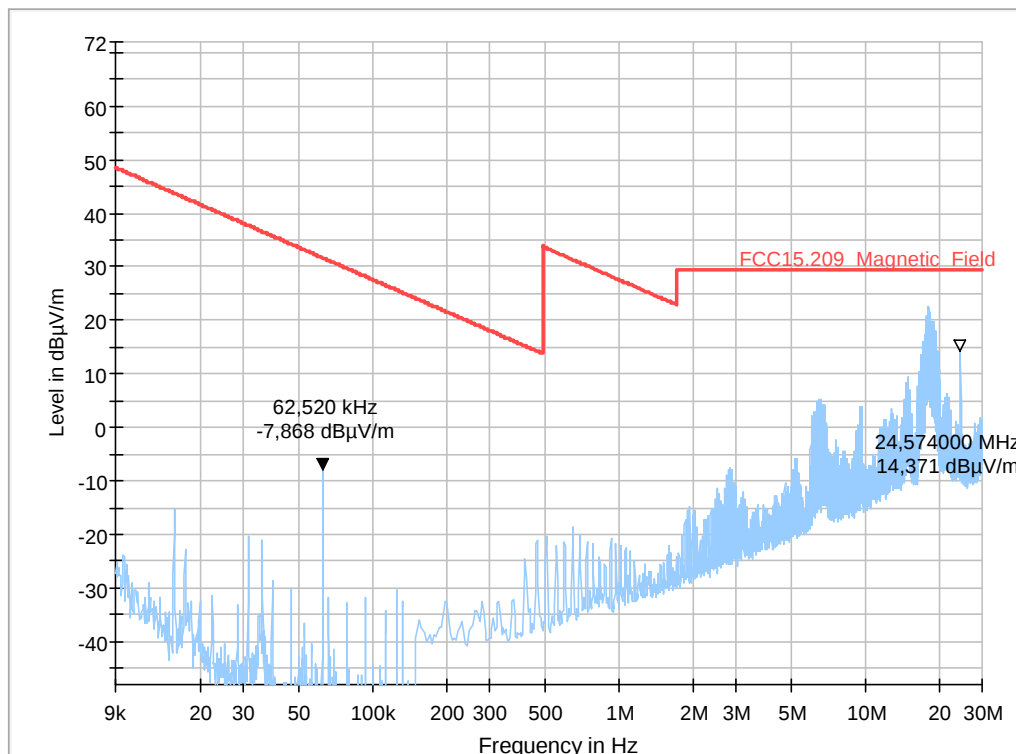

2.01_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch36-19.5dBm


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site and distance	Ref.-Nr.441, Semi Anechoic Room (SAR) with 3m measurement distance
Version of Testsoftware	EMC32 V9.25.0
Distance Correction	used accord. table, pls see test report
Rec Antenna	height = _1_m , polarisation according to pre-scan results
Used filter	bypass
Test specification	FCC 15.209 Class B; RSS-Gen. Issue 4
Operator	DLe
Operating mode	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Operating conditions	Humidity: 48%RH; Temperature: 20°C
Comment	DC 100V
Comment	Radiated cable antenna used standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

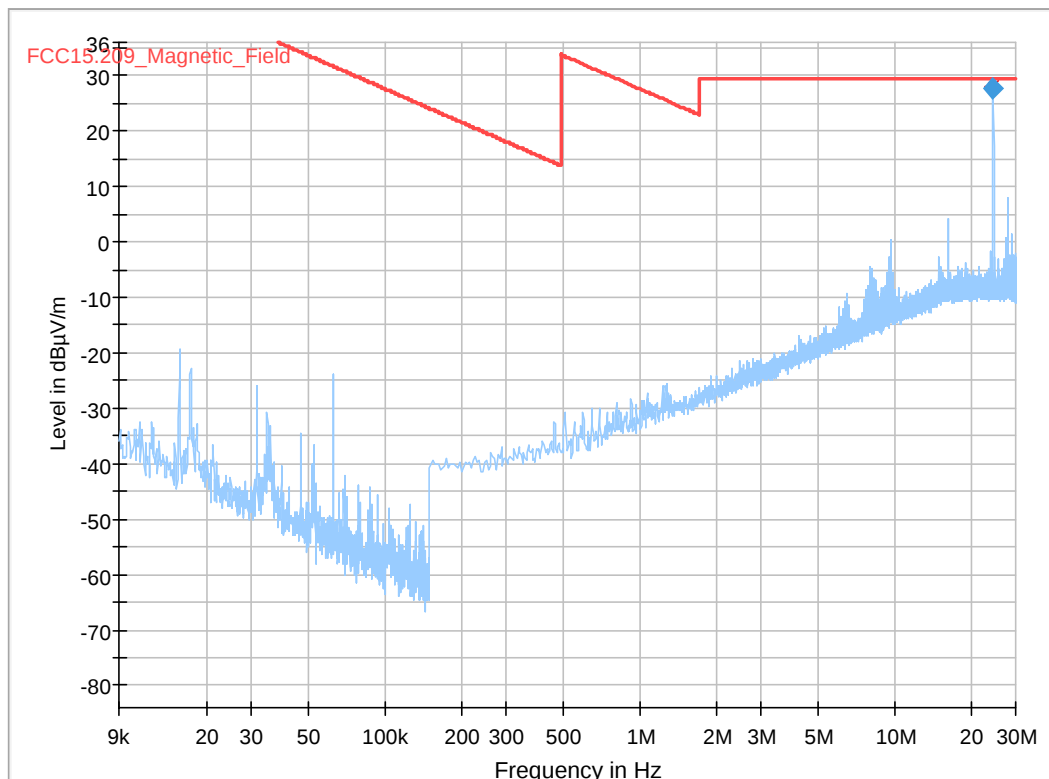

2.02_ CCM-IO-ETH-TX-nMode-BW20MHz-MCS0-Ch56-19.5dBm


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site and distance	Ref.-Nr.441, Semi Anechoic Room (SAR) with 3m measurement distance
Version of Testsoftware	EMC32 V9.25.0
Used filter	bypass
Test specification	FCC 15.209 Class B; RSS-Gen. Issue 4
Operator	DLe
Operating mode	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 56 (5280 MHz)- PWR+19.5 dBm
Operating conditions	Humidity: 48%rH; Temperature: 20°C
Comment	DC 100V
Comment	Radiated cable antenna used Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

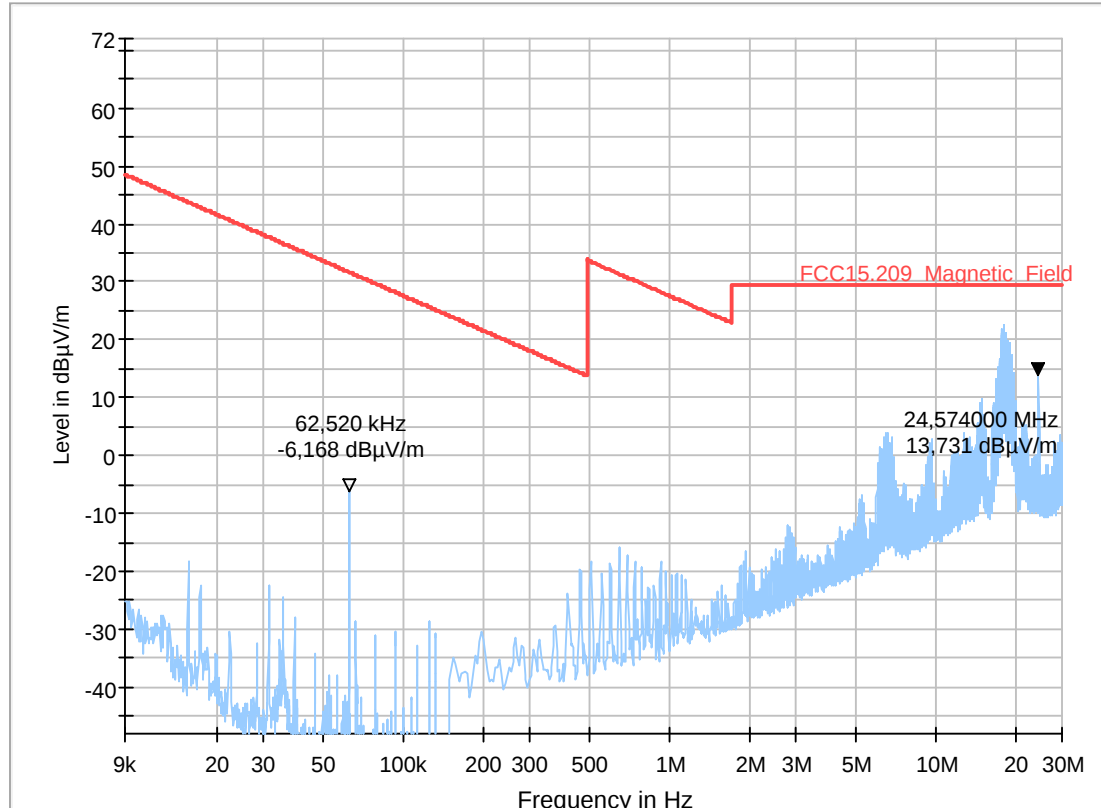

2.02_ CCM-IO-ETH-GHz-TX-nMode-BW20MHz-MCS0-Ch56-19.5dBm


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site and distance	Ref.-Nr.441, Semi Anechoic Room (SAR) with 3m measurement distance
Version of Testsoftware	EMC32 V9.25.0
Used filter	bypass
Test specification	FCC 15.209 Class B; RSS-Gen. Issue 4
Operator	DLe
Operating mode	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 56 (5280 MHz)- PWR+19.5 dBm
Operating conditions	Humidity: 48%rH; Temperature: 20°C
Comment	DC 100V
Comment	Radiated cable antenna used Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

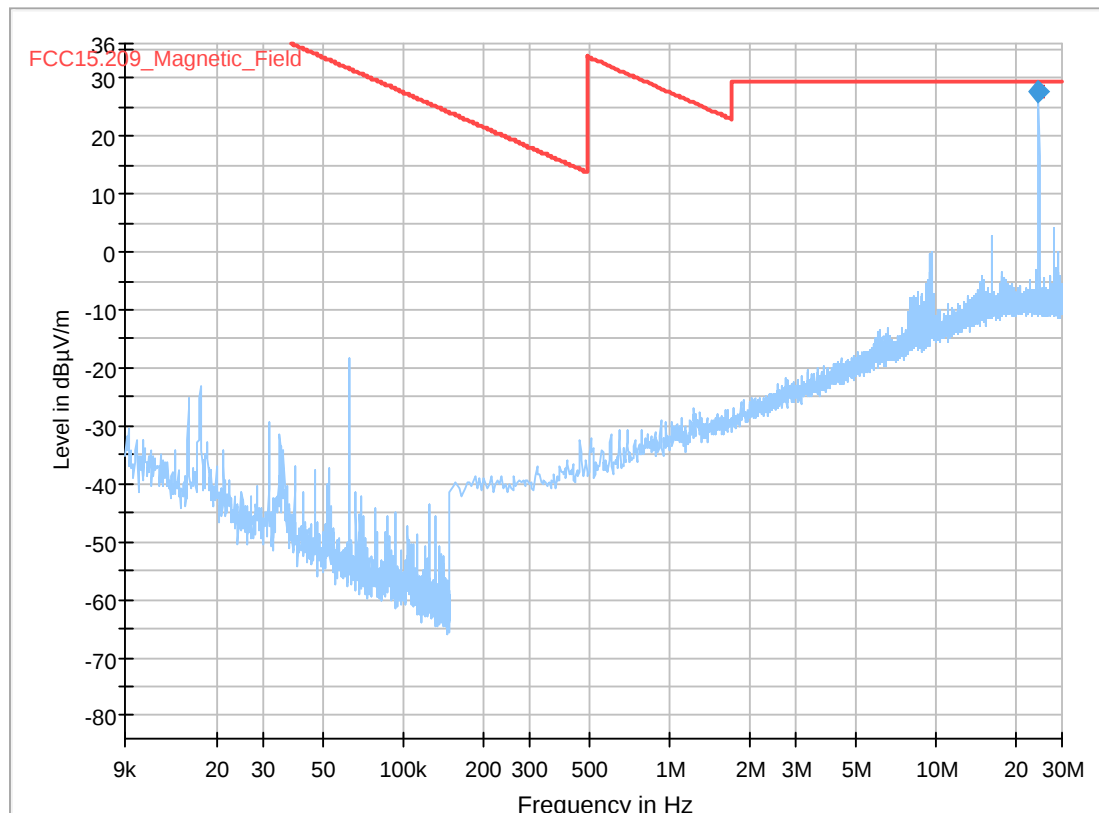

2.03_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site and distance	Ref.-Nr.441, Semi Anechoic Room (SAR) with 3m measurement distance
Version of Testsoftware	EMC32 V9.25.0
Used filter	bypass
Test specification	FCC 15.209 Class B; RSS-Gen. Issue 4
Operator	DLe
Operating mode	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Operating conditions	Humidity: 48%rH; Temperature: 20°C
Comment	DC 100V
Comment	Radiated cable antenna used Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

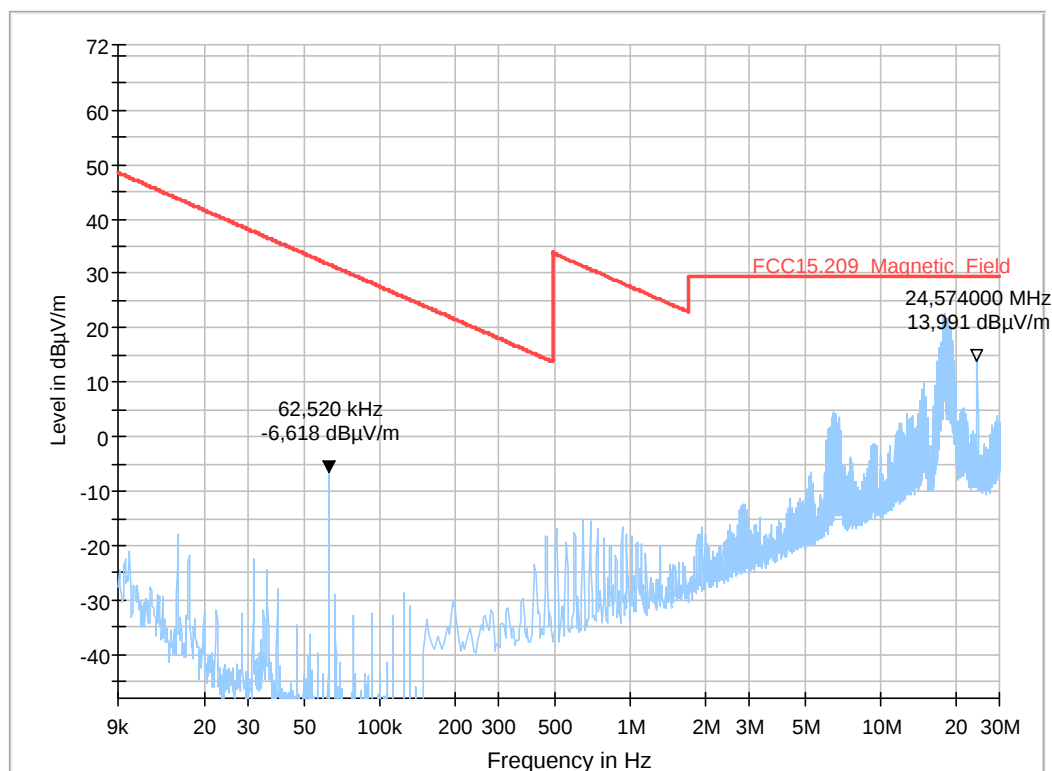

2.03_CCM-IO-ETH-GHz-TX-aMode-BW20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site and distance	Ref.-Nr.441, Semi Anechoic Room (SAR) with 3m measurement distance
Version of Testsoftware	EMC32 V9.25.0
Used filter	bypass
Test specification	FCC 15.209 Class B; RSS-Gen. Issue 4
Operator	DLe
Operating mode	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Operating conditions	Humidity: 48%rH; Temperature: 20°C
Comment	DC 100V
Comment	Radiated cable antenna used Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

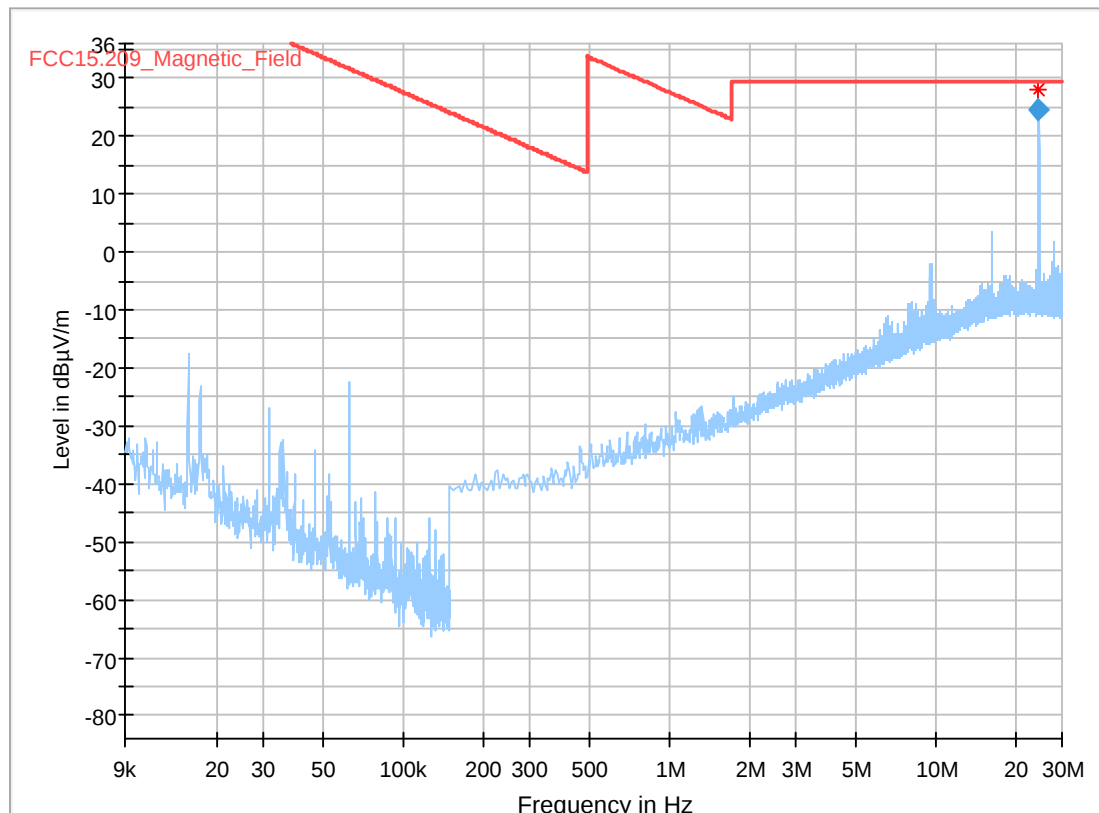

1.4. Radiated electric field measurement 30 MHz to 1 GHz

3.01_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch36-19.5dBm


Common Information

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Power during tests:	100 V DC
DUT:	LAYING

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

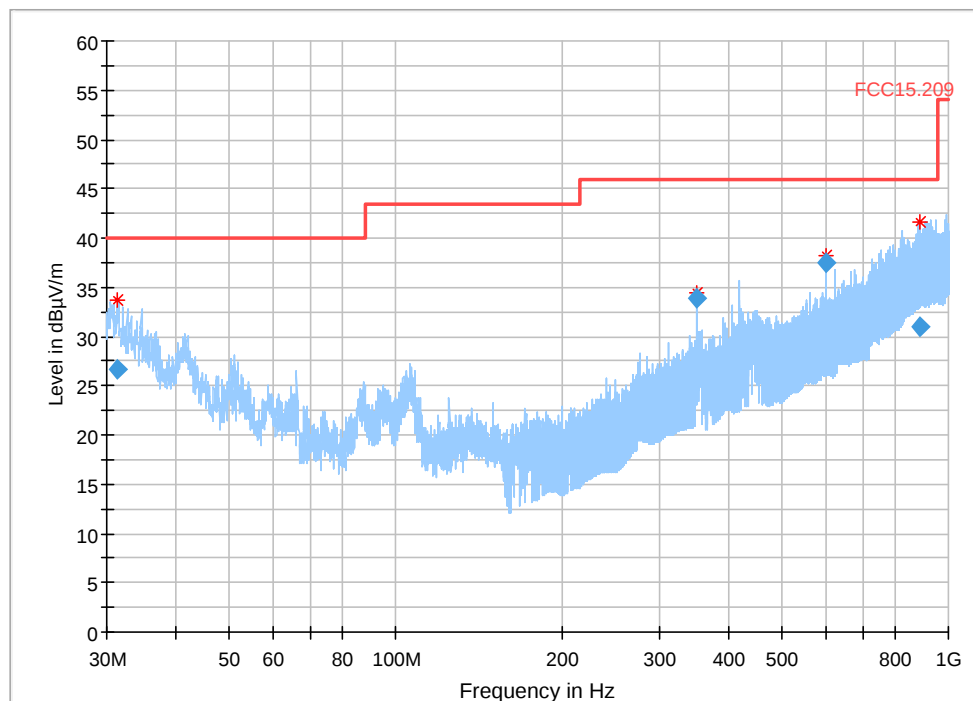

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
31.432000	26.58	40.00	13.42	1000.0	120.000	178.0	H	98.0	0.0	20.9
349.992000	33.79	46.00	12.21	1000.0	120.000	141.0	V	125.0	0.0	16.6
599.988000	37.41	46.00	8.59	1000.0	120.000	105.0	V	90.0	0.0	22.0
889.276000	30.98	46.00	15.02	1000.0	120.000	335.0	V	53.0	0.0	26.6

3.01_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch36-19.5dBm


Common Information

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: HEI
 Operating conditions: TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
 Power during tests: 100 V DC
 DUT: EUT Standing

EUT Information

Manufacturer: Prodrive B.V.
 Model: CCM-IO-ETH ,UL
 Type: MASTER
 EUT:(Master) CCM-IO-ETH, UL (Master)
 HW version: same as PN
 SW version: 2014.11-R07
 SN: 17-16-008-092
 PN: 6752-1600-1400
 BG Article No.: 64533
 Connected Interfaces: CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 | SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A | 1.8N.m 4244RPM)-
 Master / Slave Power Supply: 100V DC 10A (Using External Power Supply | XANTREX|Type: XFR150-18)
 Motor Power Supply: 100 V DC (from Master | 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

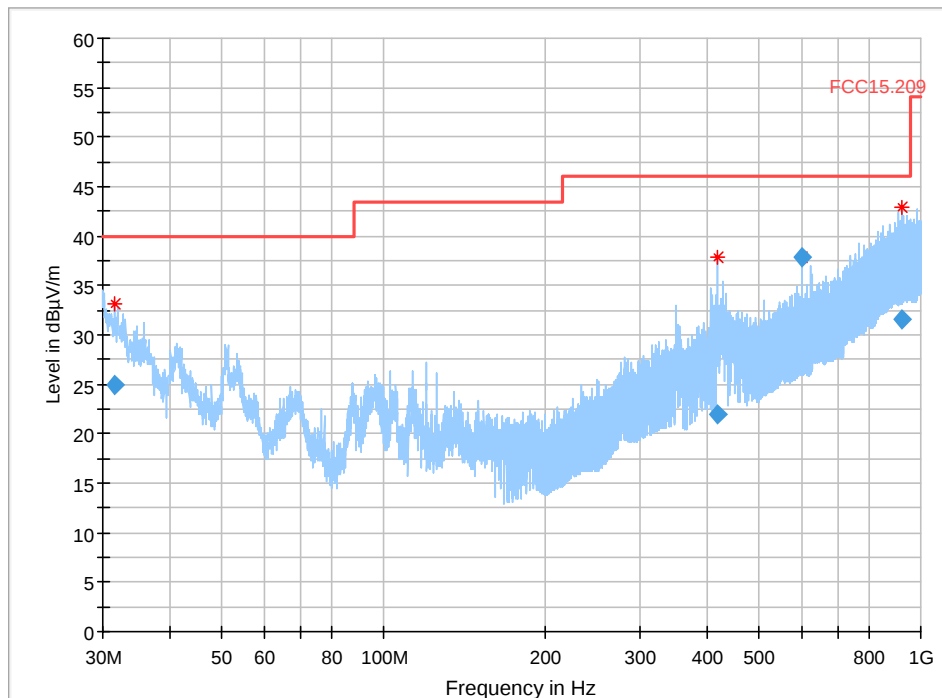

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
31.608000	24.88	40.00	15.12	1000.0	120.000	203.0	H	40.0	0.0	20.8
419.024000	21.94	46.00	24.06	1000.0	120.000	347.0	V	114.0	0.0	18.8
599.988000	37.93	46.00	8.07	1000.0	120.000	105.0	H	215.0	0.0	22.0
925.364000	31.64	46.00	14.36	1000.0	120.000	237.0	H	73.0	0.0	27.1

3.02_ CCM-IO-ETH-TX-nMode-BW20MHz-MCS0-Ch52-19.5dBm


Common Information

Test description: Electric Field Strength Measurement
 Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
 Version of Testsoftware: EMC32 V9.25.0
 Test specification.: FCC 15.209; RSS-Gen: Issue 3
 Operator: HEI
 Operating conditions: Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 52 (5260 MHz)-PWR+19.5 dBm
 Power during tests: 100 V DC
 DUT: LAYING

EUT Information

Manufacturer: Prodrive B.V.
 Model: CCM-IO-ETH ,UL
 Type: MASTER
 EUT:(Master) CCM-IO-ETH, UL (Master)
 HW version: same as PN
 SW version: 2014.11-R07
 SN: 17-16-008-092
 PN: 6752-1600-1400
 BG Article No.: 64533
 Connected Interfaces: CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 | SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A | 1.8N.m 4244RPM)-
 Master / Slave Power Supply: 100V DC 10A (Using External Power Supply | XANTREX|Type: XFR150-18)
 Motor Power Supply: 100 V DC (from Master | 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

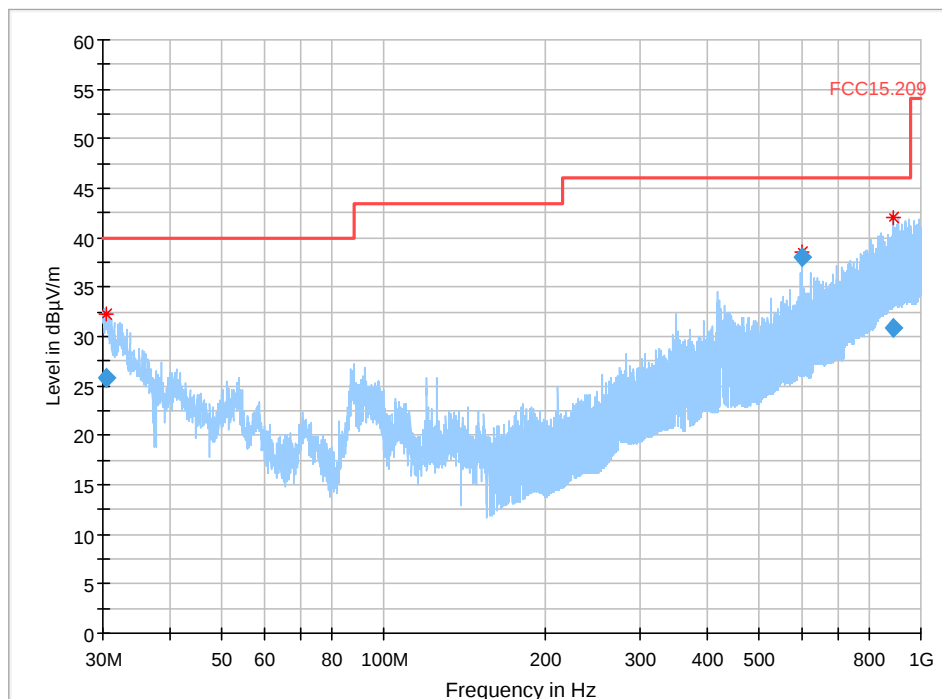

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
30.416000	25.78	40.00	14.22	1000.0	120.000	125.0	V	262.0	0.0	21.3
599.988000	38.01	46.00	7.99	1000.0	120.000	105.0	V	88.0	0.0	22.0
887.596000	30.85	46.00	15.15	1000.0	120.000	360.0	V	180.0	0.0	26.6

3.02_ CCM-IO-ETH-TX-nMode-BW20MHz-MCS0-Ch52-19.5dBm


Common Information

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 52 (5260 MHz)- PWR+19.5 dBm
Power during tests:	100 V DC
DUT:	EUT Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

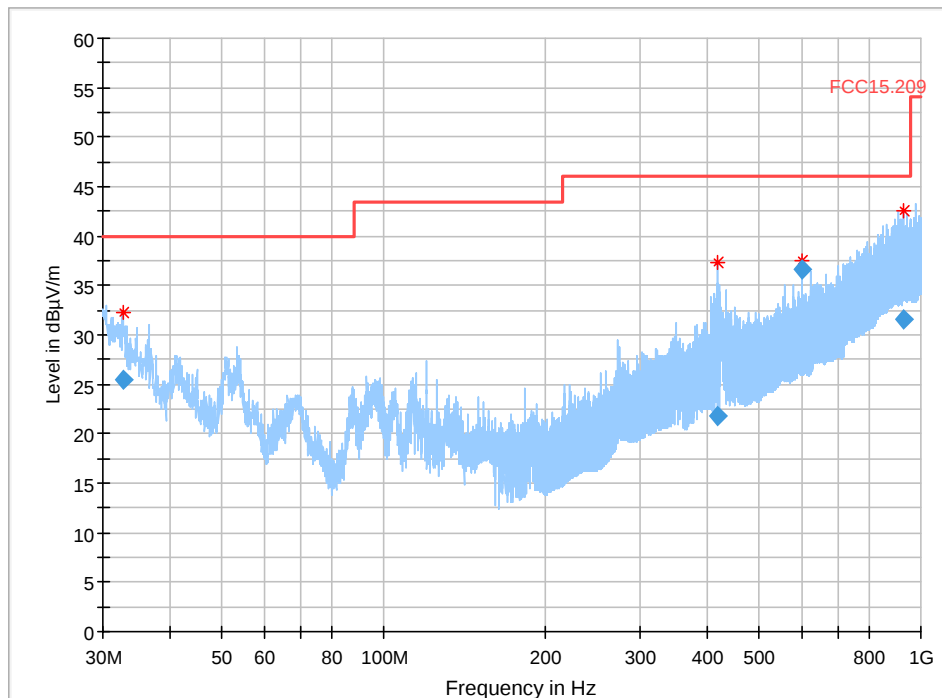

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
32.712000	25.46	40.00	14.54	1000.0	120.000	126.0	V	16.0	0.0	20.3
419.072000	21.78	46.00	24.22	1000.0	120.000	360.0	V	90.0	0.0	18.8
599.988000	36.57	46.00	9.43	1000.0	120.000	173.0	H	219.0	0.0	22.0
926.176000	31.57	46.00	14.43	1000.0	120.000	203.0	H	11.0	0.0	27.0

3.03_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test description:	Electric Field Strength Measurement
Test site and distance:	Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware:	EMC32 V9.25.0
Test specification.:	FCC 15.209; RSS-Gen: Issue 3
Operator:	HEI
Operating conditions:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Power during tests:	100 V DC
DUT:	LAYING

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

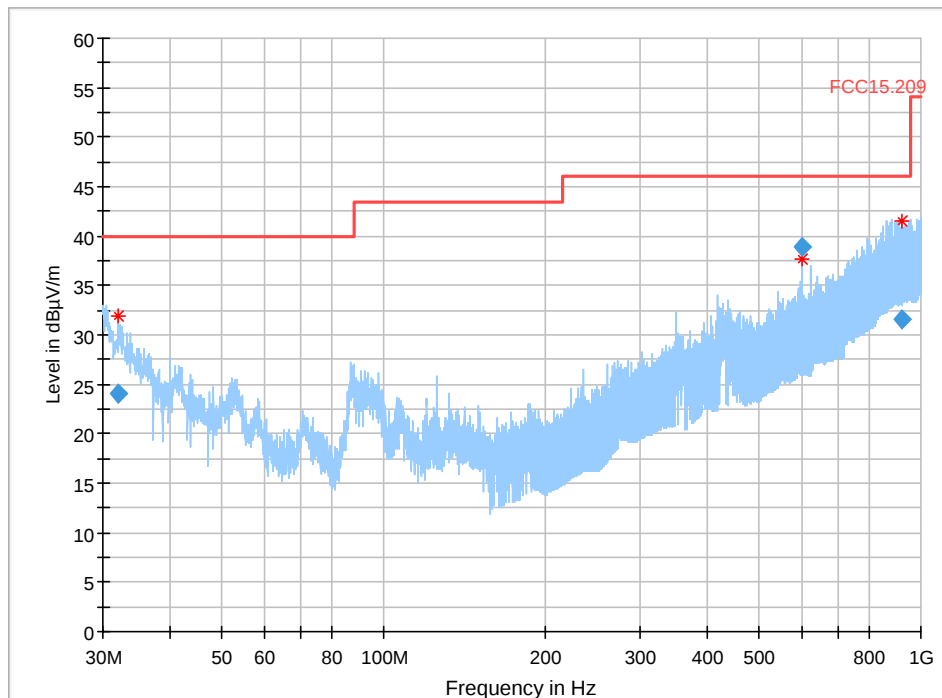

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Correction (dB)
32.084000	24.01	40.00	15.99	1000.0	120.000	121.0	V	194.0	0.0	20.6
599.988000	38.98	46.00	7.02	1000.0	120.000	109.0	V	233.0	0.0	22.0
924.128000	31.58	46.00	14.42	1000.0	120.000	360.0	V	136.0	0.0	27.1

3.03_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test description: Electric Field Strength Measurement
Test site and distance: Ref.-Nr. 441 Semi Anechoic Room (SAR) with 3 m measurement distance
Version of Testsoftware: EMC32 V9.25.0
Test specification.: FCC 15.209; RSS-Gen: Issue 3
Operator: HEI
Operating conditions: Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)-PWR+19.5 dBm
Power during tests: 100 V DC
DUT: EUT Standing

EUT Information

Manufacturer: Prodrive B.V.
Model: CCM-IO-ETH ,UL
Type: MASTER
EUT:(Master) CCM-IO-ETH, UL (Master)
HW version: same as PN
SW version: 2014.11-R07
SN: 17-16-008-092
PN: 6752-1600-1400
BG Article No.: 64533
Connected Interfaces: CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 | SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A | 1.8N.m 4244RPM)-
Master / Slave Power Supply: 100V DC 10A (Using External Power Supply | XANTREX|Type: XFR150-18)
Motor Power Supply: 100 V DC (from Master | 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

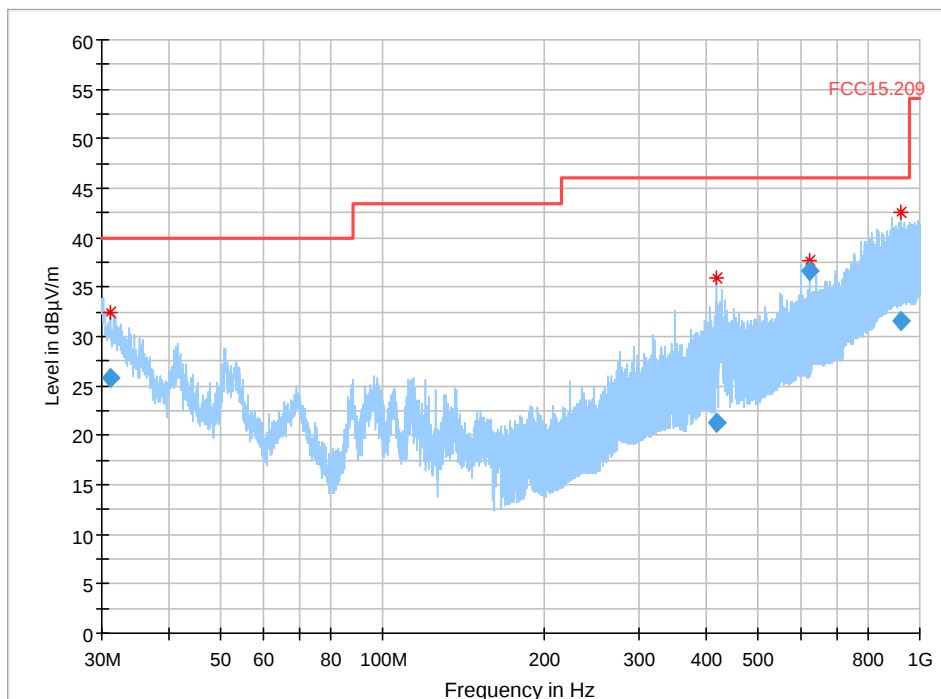

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)	Corr. (dB)
31.128000	25.74	40.00	14.26	1000.0	120.000	253.0	H	19.0	0.0	21.0
419.076000	21.23	46.00	24.77	1000.0	120.000	350.0	V	256.0	0.0	18.8
622.484000	36.71	46.00	9.29	1000.0	120.000	109.0	H	121.0	0.0	22.0
922.976000	31.52	46.00	14.48	1000.0	120.000	301.0	H	310.0	0.0	27.1

1.5. Radiated electric field measurement 1GHz to 7 GHz

4.01_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch36-19.5dBm-


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	LKu
Comment:	Radiated cable antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

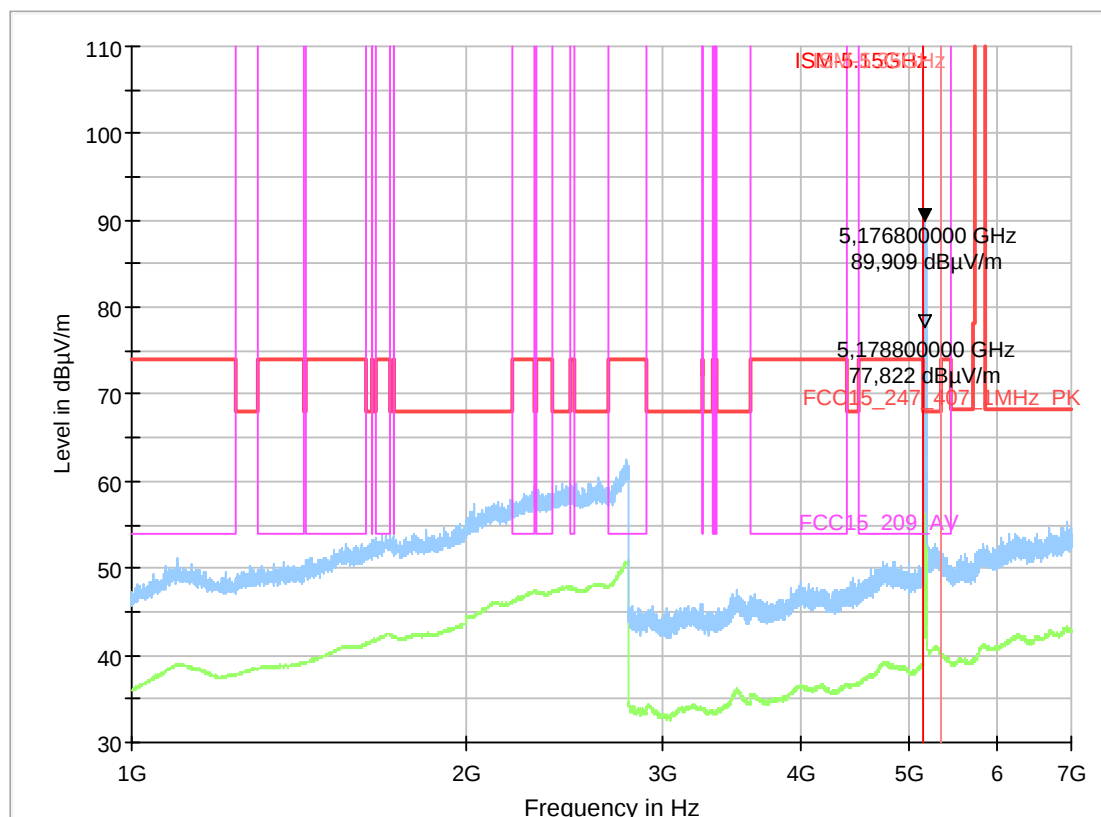

4.01_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch36-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Radiated cable antenna Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

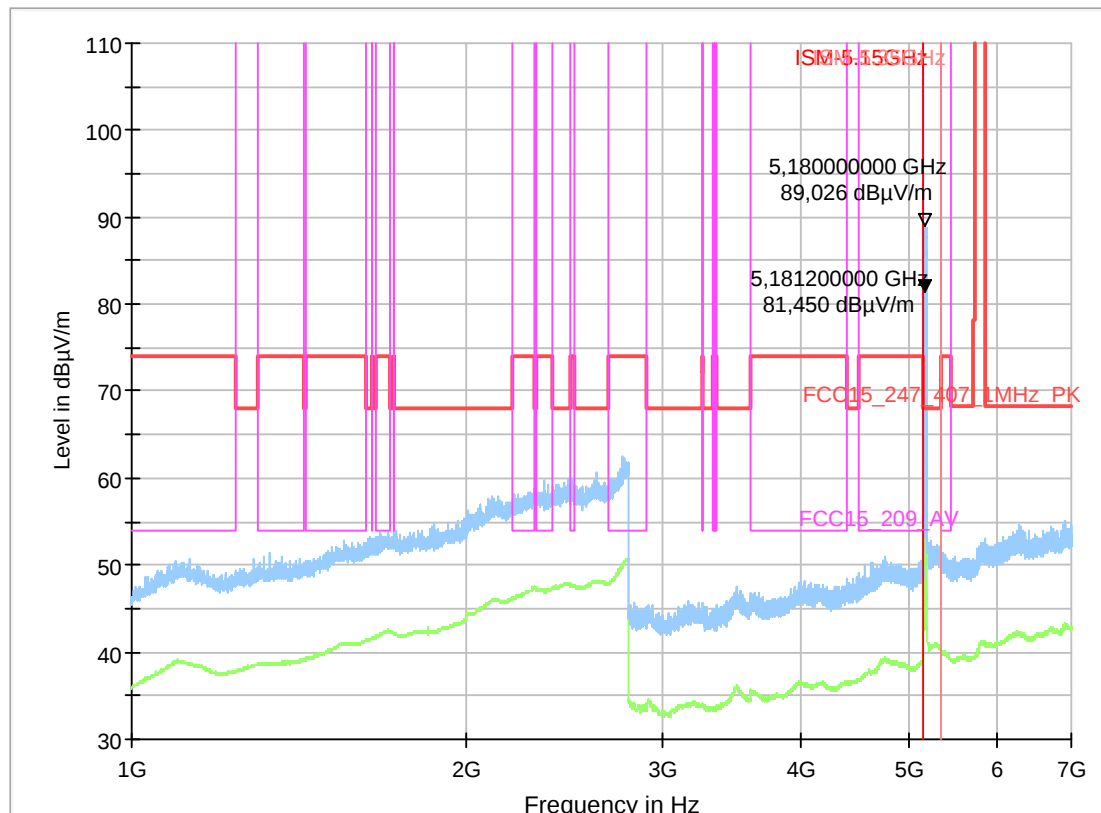

4.02_ CCM-IO-ETH-nMode-20MHz-MCS0-Ch56-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 56 (5280 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEL/ LKu
Comment:	Radiated cable antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

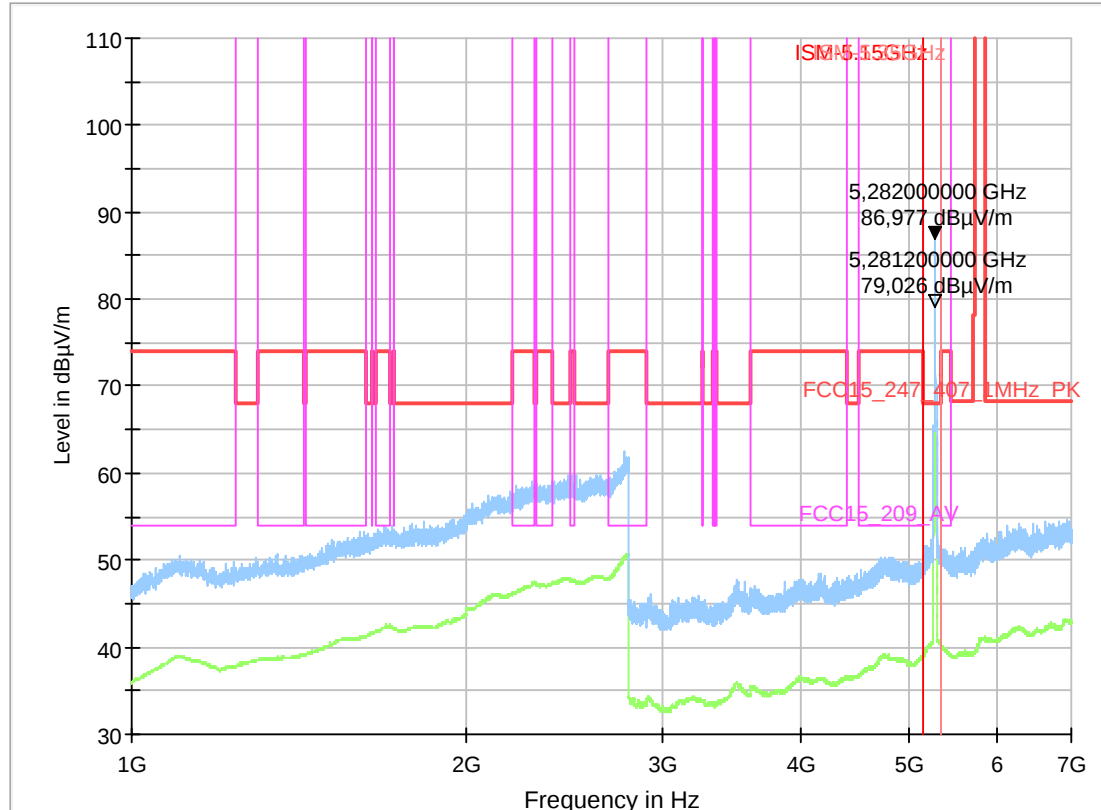

4.02_ CCM-IO-ETH-TX-nMode-B.W20MHz-MCS0-Ch56-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 56 (5280 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Radiated cable antenna Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

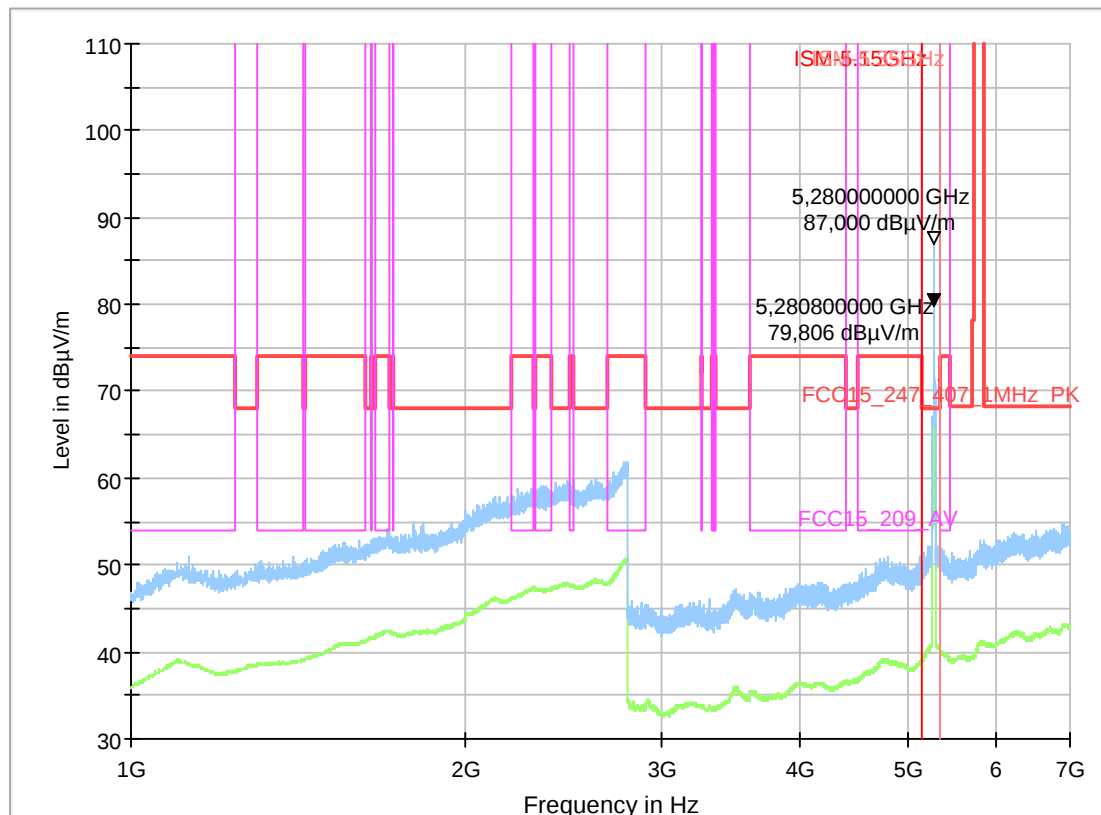

4.03_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Radiated cable antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

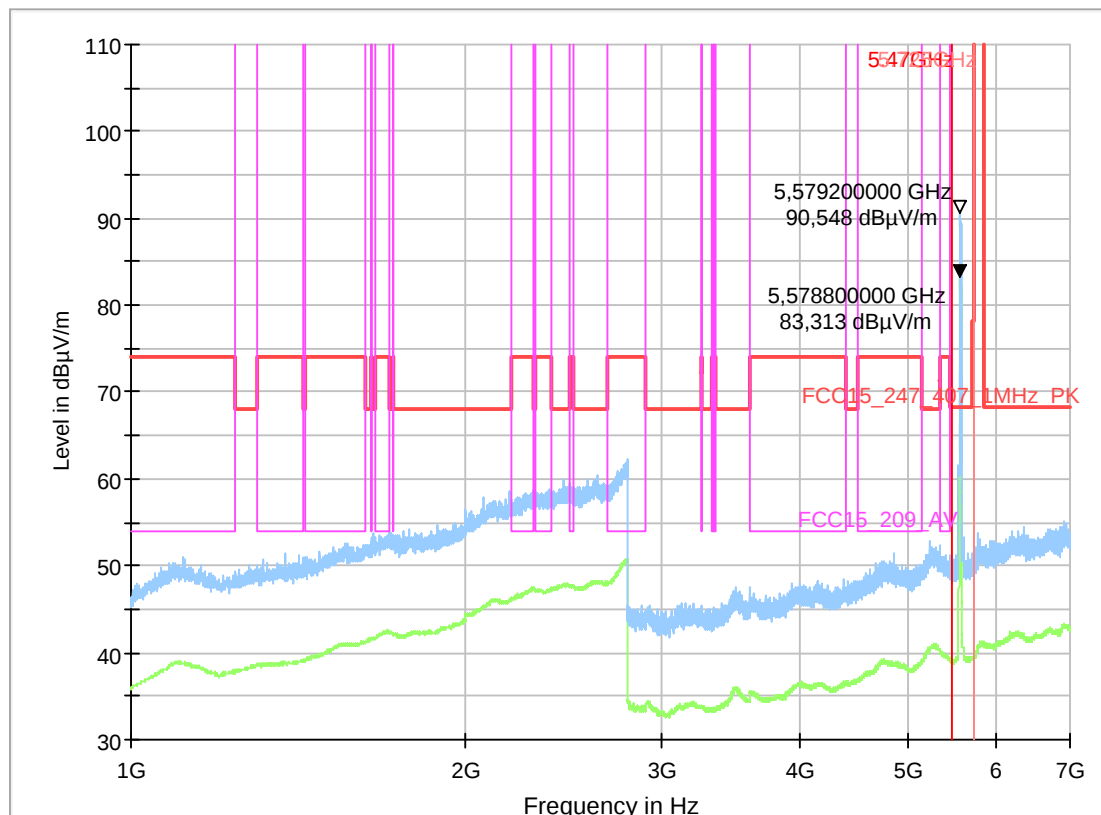

4.03_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Radiated cable antenna Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

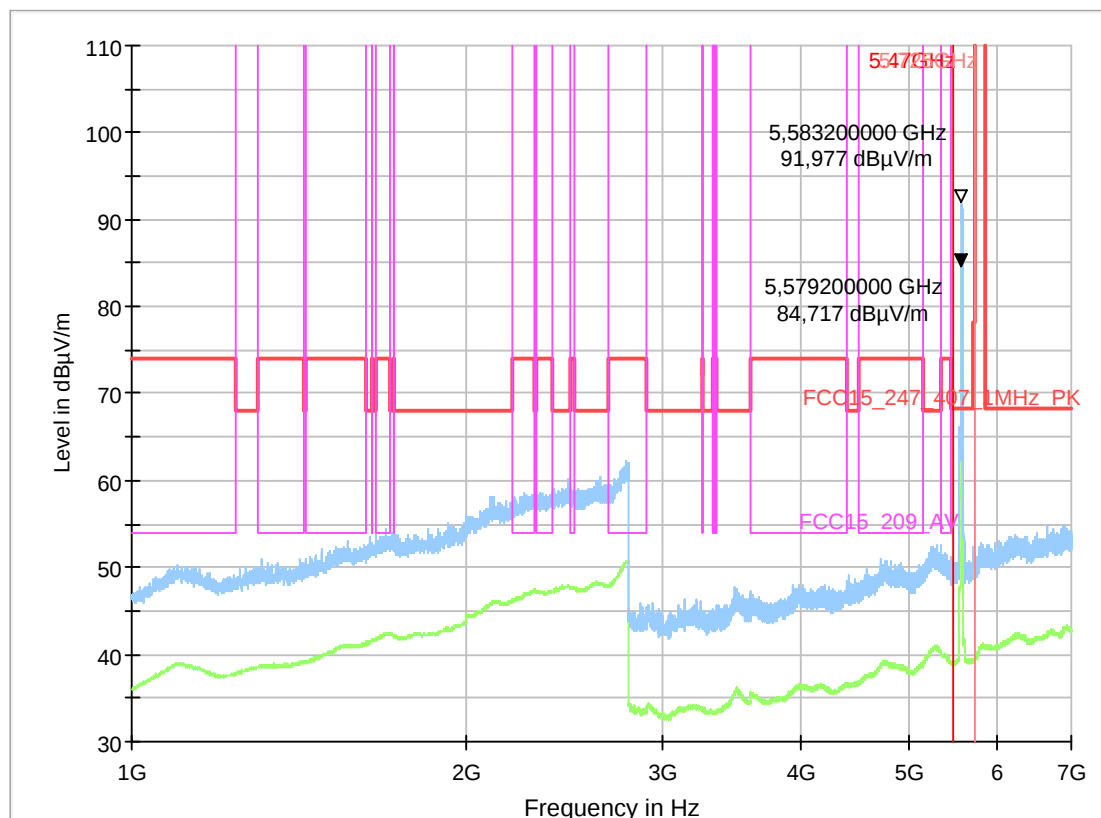

1.6. Radiated electric field measurement 7GHz to 18 GHz

4.01a_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch36-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Operator Name:	HEI
Comment:	Stap Antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

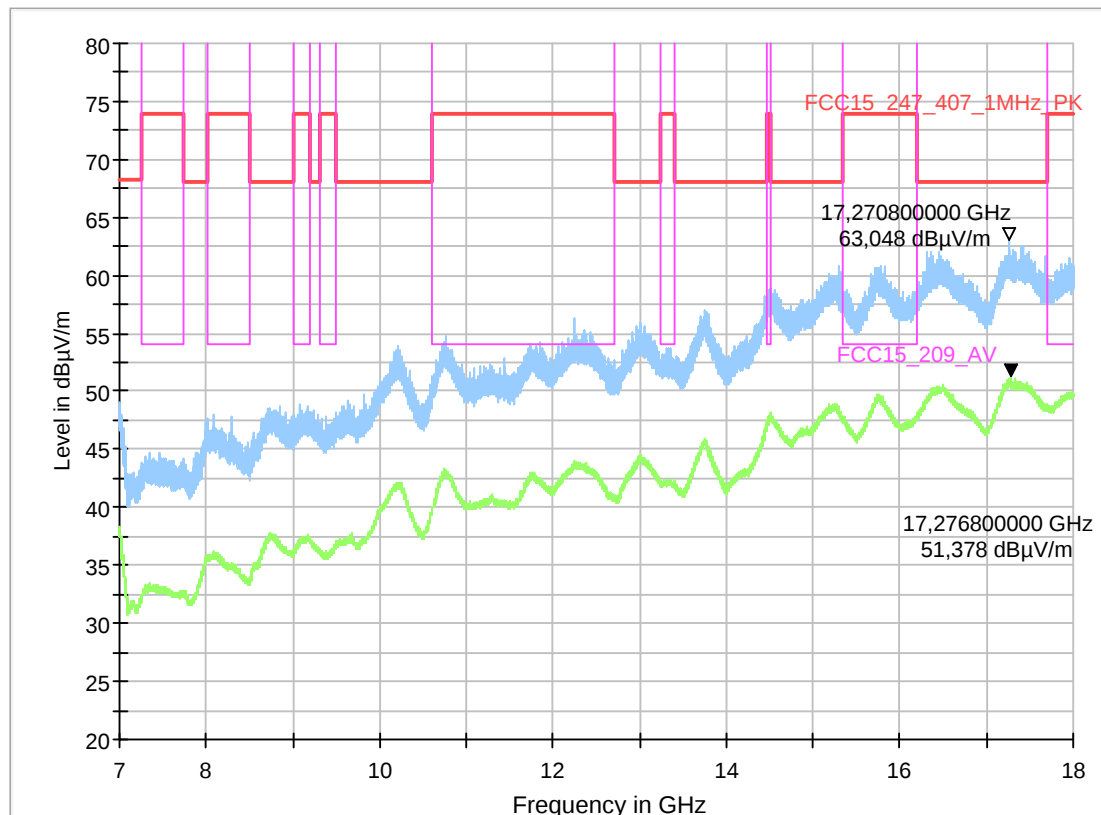

4.01a_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch36-19.5dBm-


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%RH; Temperature: 20°C
Operator Name:	HEI
Comment:	Stap Antenna Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

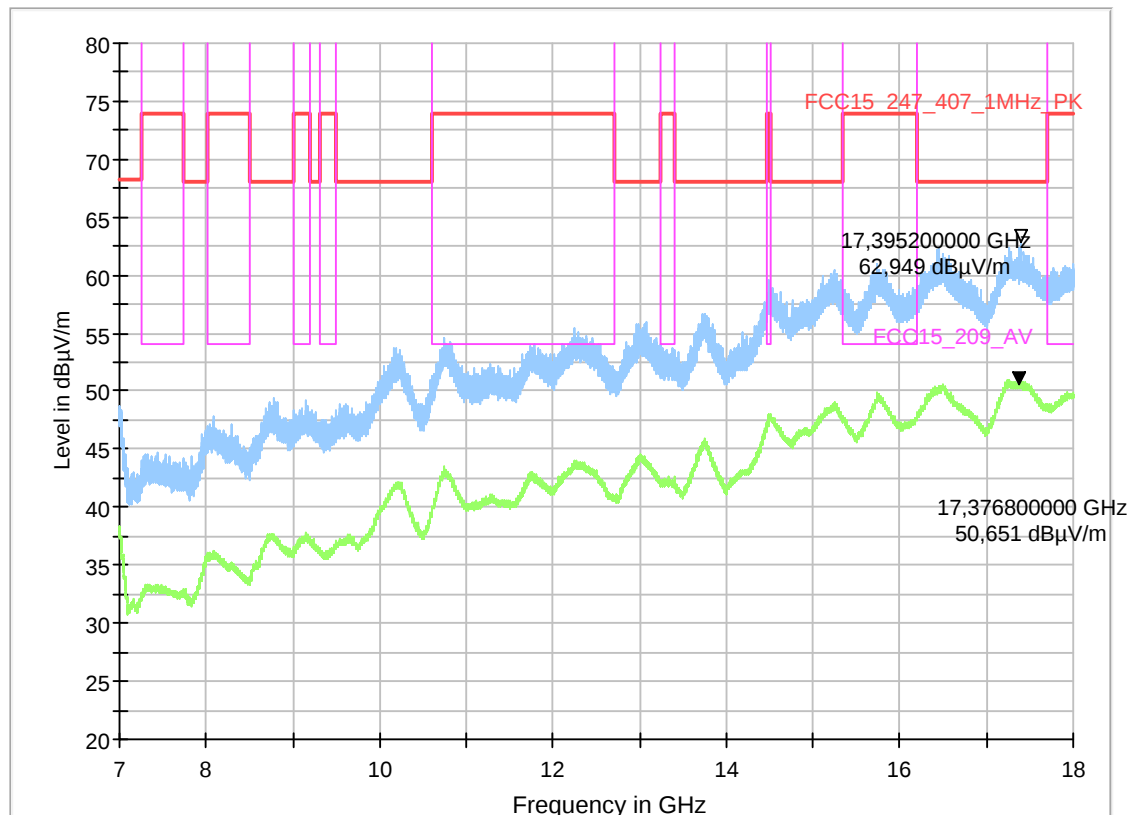

4.02a_ CCM-IO-ETH-TX-nMode-BW20MHz-MCS0-Ch56-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 56 (5280 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Stap Antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

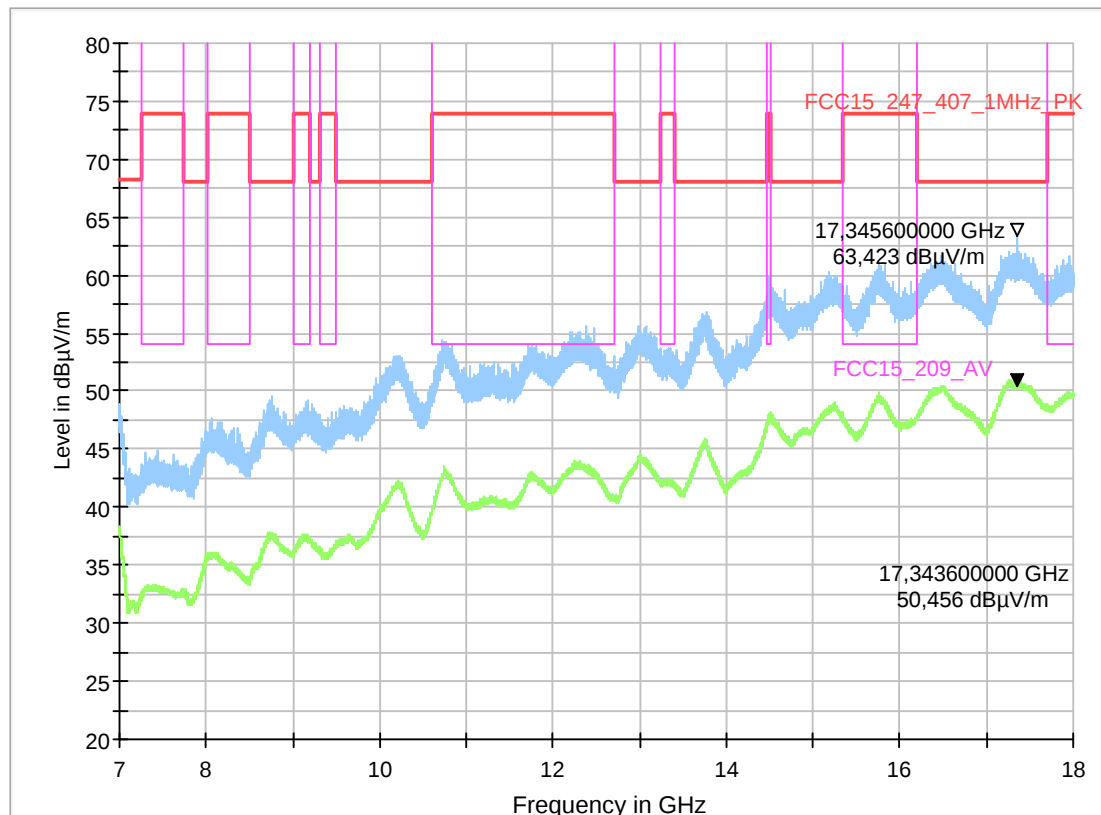

4.02a_ CCM-IO-ETH-TX-nMode-B.W20MHz-MCS0-Ch56-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 56 (5280 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Stop Antenna Standing

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

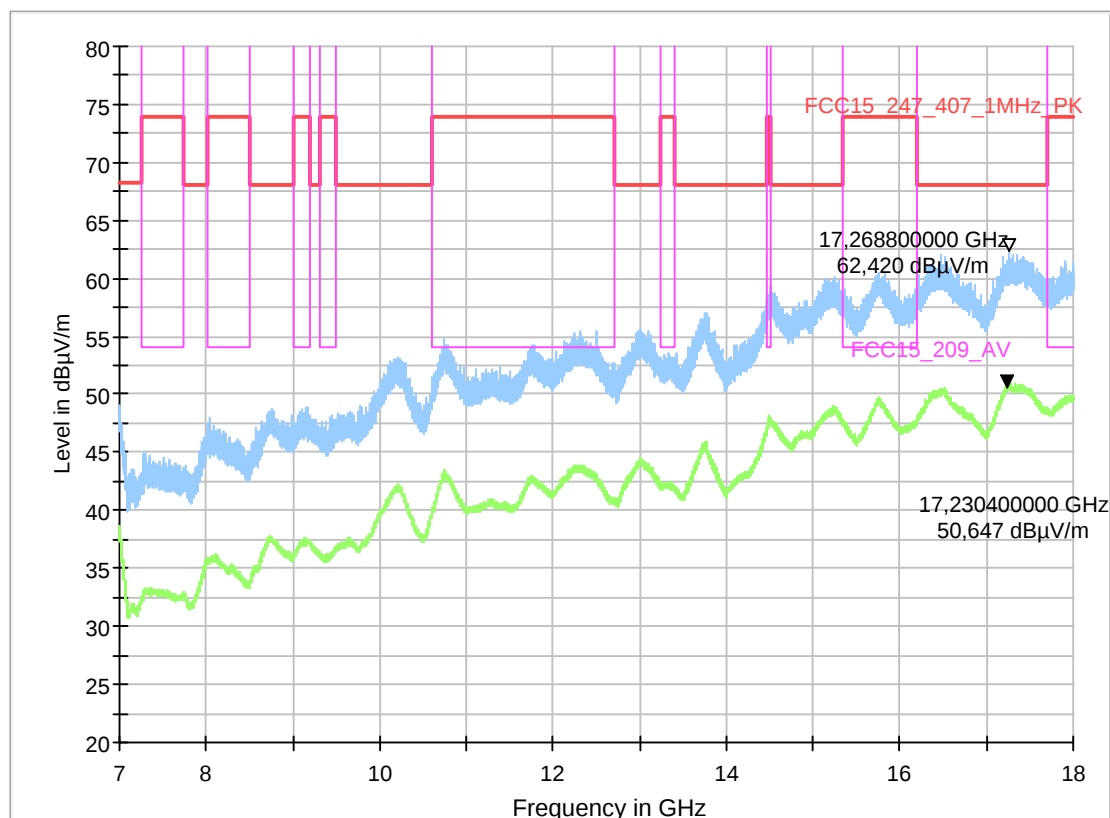

4.03a_ CCM-IO-ETH-TX-aMode-B.W20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%RH; Temperature: 20°C
Operator Name:	HEI
Comment:	Stap Antenna Laying

EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

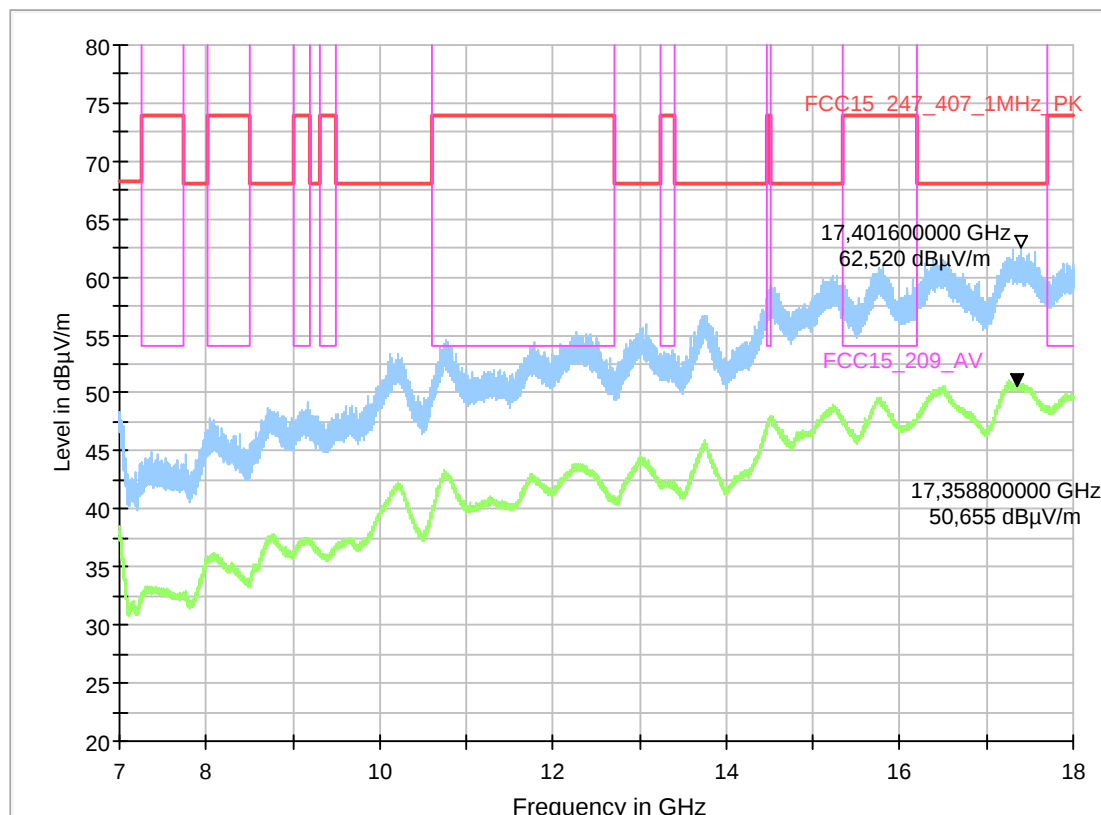

4.03a_ CCM-IO-ETH-TX-aMode-BW20MHz-6Mbit-Ch116-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 116 (5580 MHz)- PWR+19.5 dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Stap Antenna Standing


EUT Information

Manufacturer:	Prodrive B.V.
Model:	CCM-IO-ETH ,UL
Type:	MASTER
EUT:(Master)	CCM-IO-ETH, UL (Master)
HW version:	same as PN
SW version:	2014.11-R07
SN:	17-16-008-092
PN:	6752-1600-1400
BG Article No.:	64533
Connected Interfaces:	CCM-IO-ETH, UL (Master) connected with CCS-IO, UL (Slave) (PN:6752-1601-4200 SN:17-13-003-328)+ CrossBelt Motor 35 Kg (Model:80ZWX-15.0505-A 1.8N.m 4244RPM)-
Master / Slave Power Supply:	100V DC 10A (Using External Power Supply XANTREX Type: XFR150-18)
Motor Power Supply:	100 V DC (from Master 100 V RMS 7.5 ARMS 3 Phase)

Full Spectrum

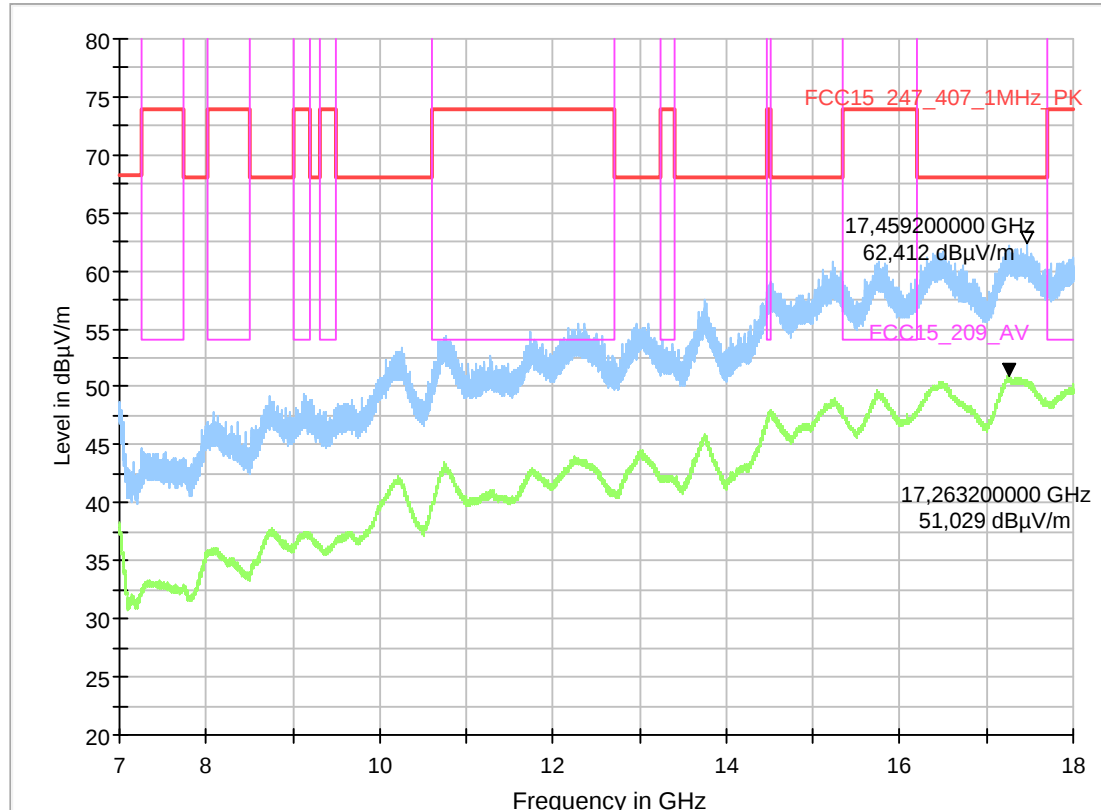


1.7. Radiated electric field measurement 18GHz to 40 GHz

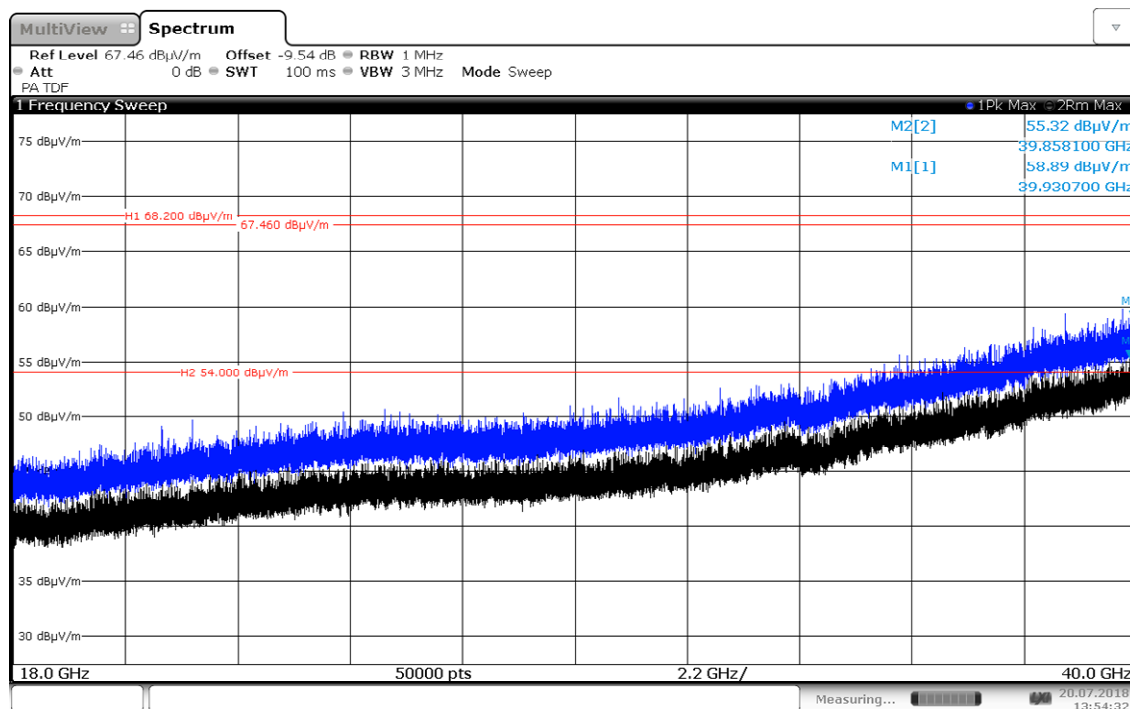


13:54:32 20.07.2018

4.01b_ CCM-IO-ETH-WLAN5 GHz-TX-aMode-B.W20MHz-6Mbit-Ch36-19.5dBm

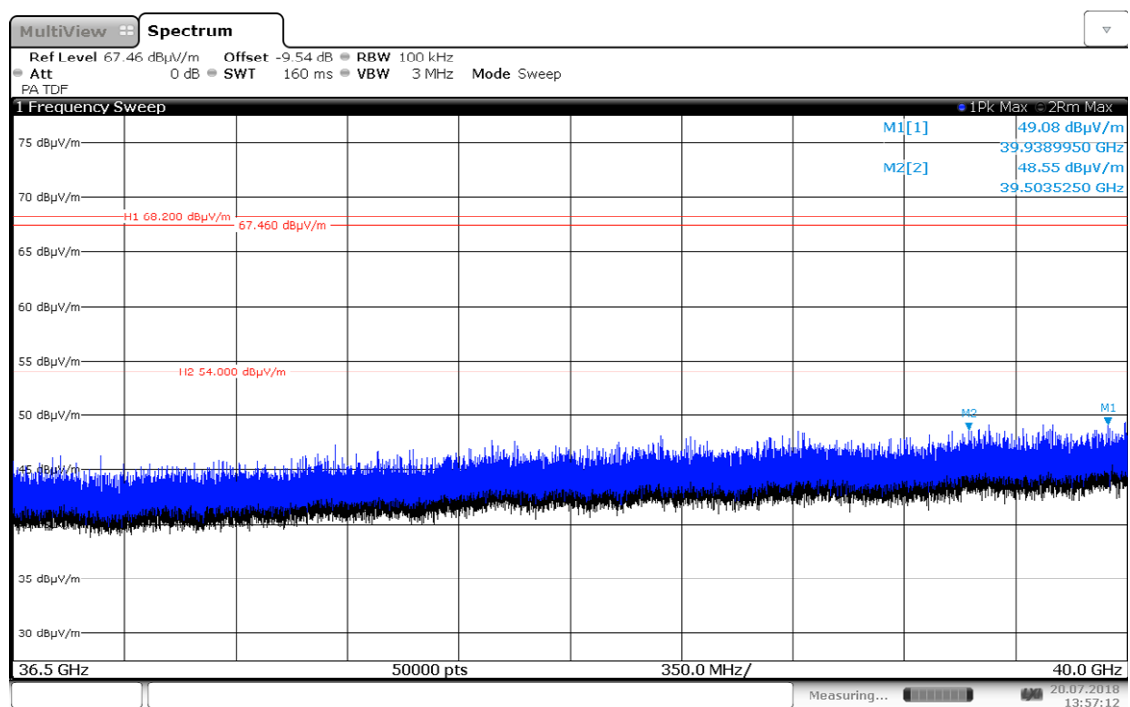


13:57:13 20.07.2018

4.01b_ CCM-IO-ETH-WLAN5 GHz-TX-aMode-B.W20MHz-6Mbit-Ch36-19.5dBm_100kHz

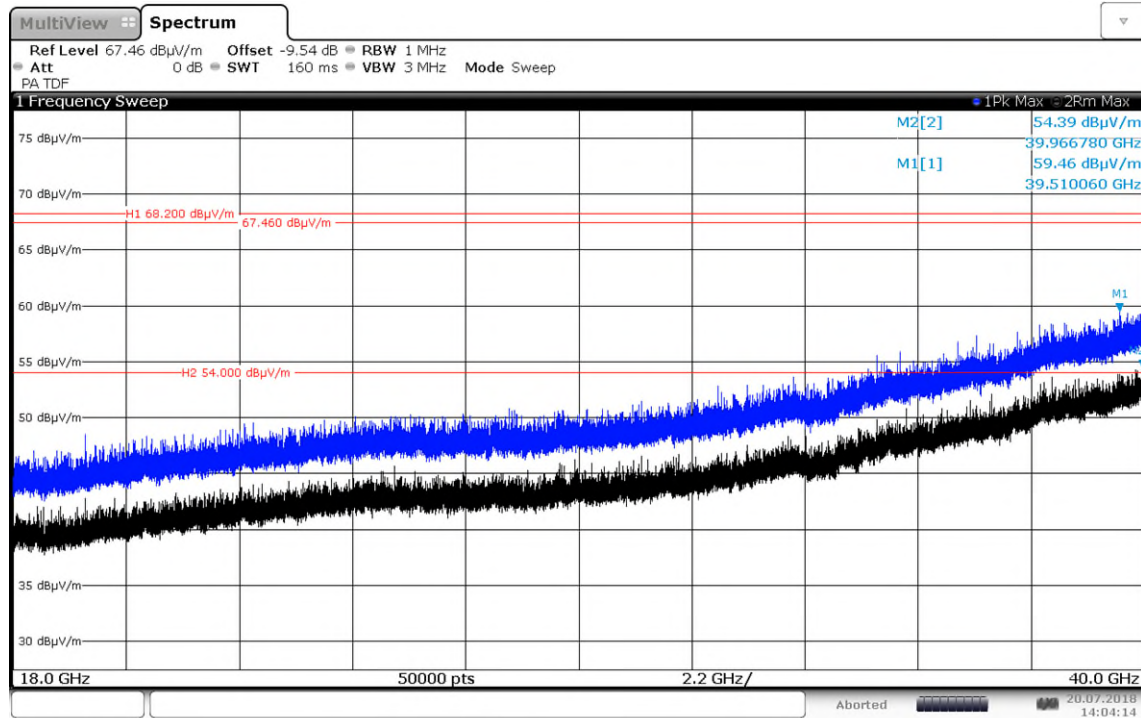


14:04:14 20.07.2018

4.02b_ CCM-IO-ETH-WLAN5 GHz-TX-nMode-B.W20MHz-MCS0-Ch56-19.5dBm

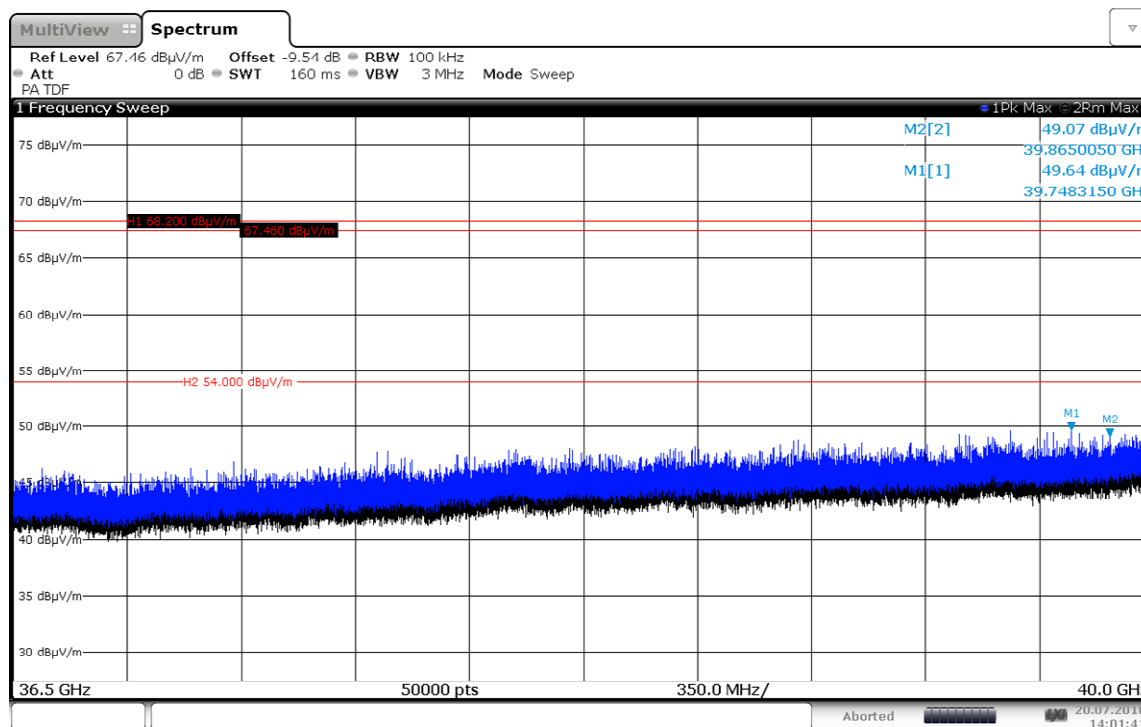


14:01:41 20.07.2018

4.02b_ CCM-IO-ETH-WLAN5 GHz-TX-nMode-B.W20MHz-MCS0-Ch56-19.5dBm_100kHz

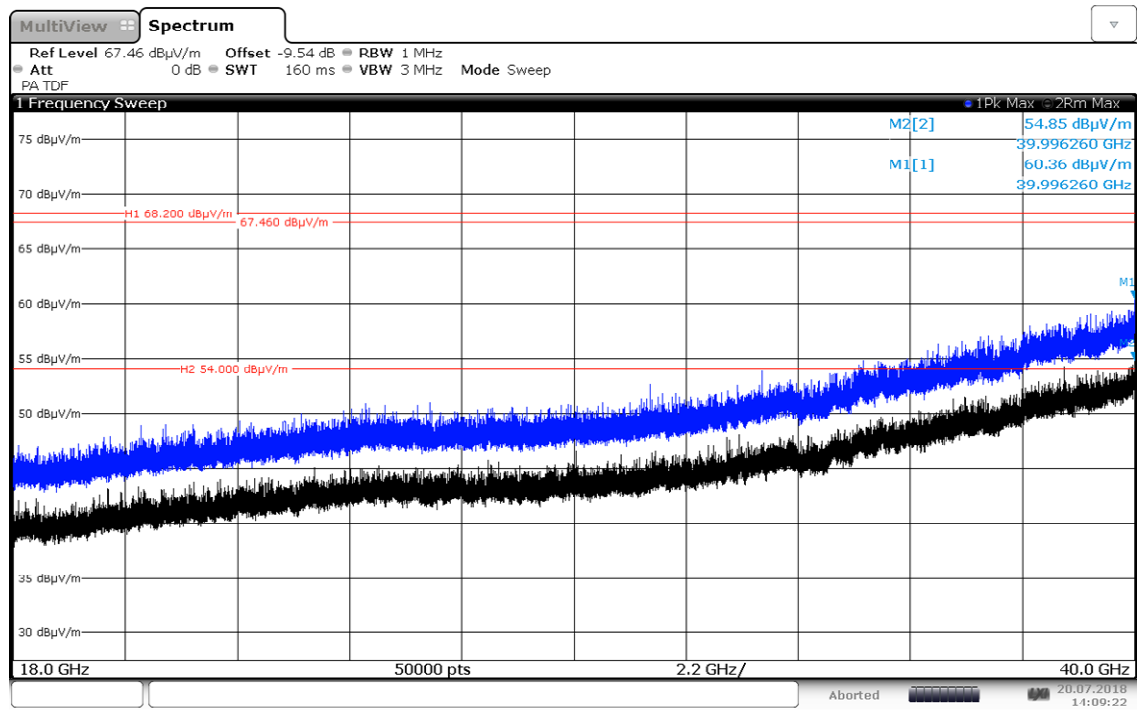

14:09:22 20.07.2018

4.03b_ CCM-IO-ETH-WLAN5 GHz-TX-aMode-B.W20MHz-6Mbit-Ch116-19.5dBm

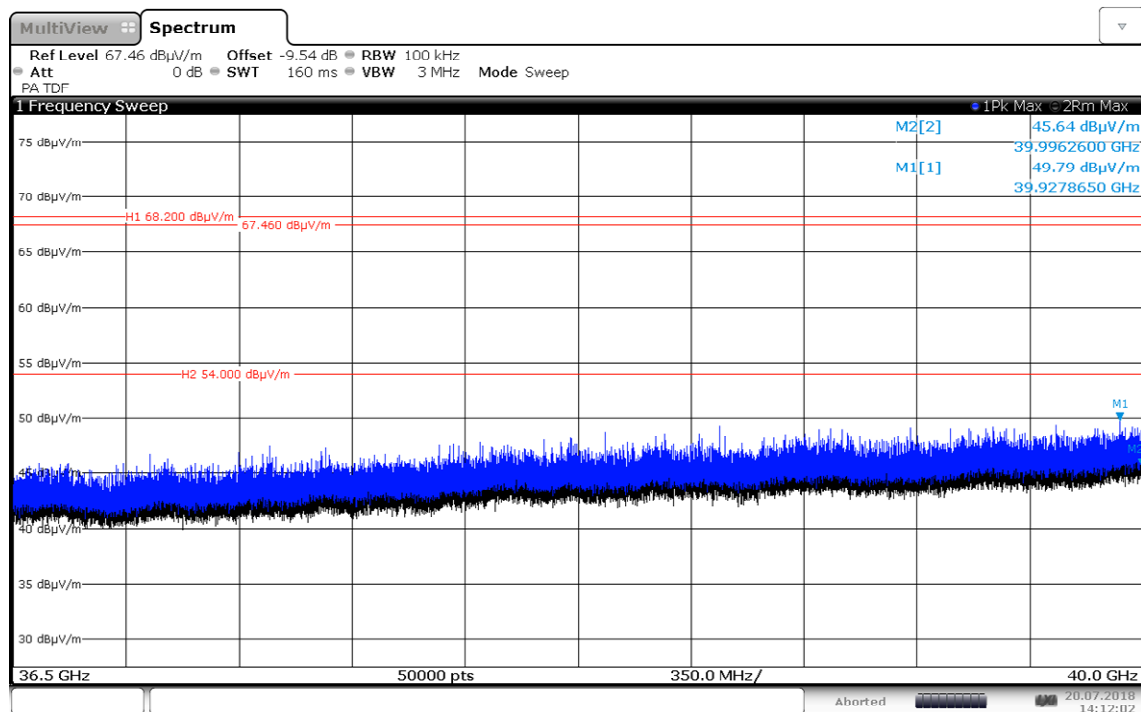

14:12:02 20.07.2018

4.03b_ CCM-IO-ETH-WLAN5 GHz-TX-aMode-B.W20MHz-6Mbit-Ch116-19.5dBm_100kHz

1.8. Radiated Band Edge measurement


1.8.1. a-mode

9.01_ BE Low-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch36-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)-PWR+19.5dBm
Operator Name:	LKu
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	EUT Laying

Full Spectrum

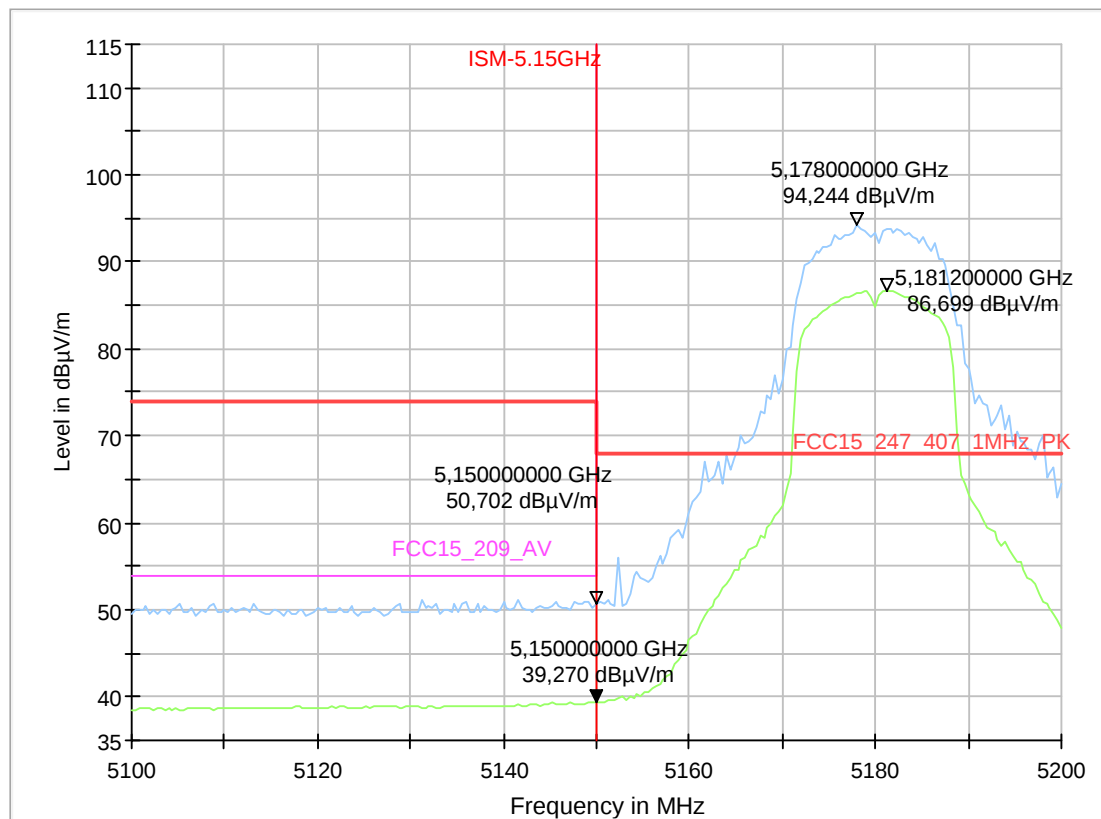


9.01_BE Low-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch36-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5dBm
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Operator Name:	HEI
Comment:	Stab Antenna Standing

Full Spectrum

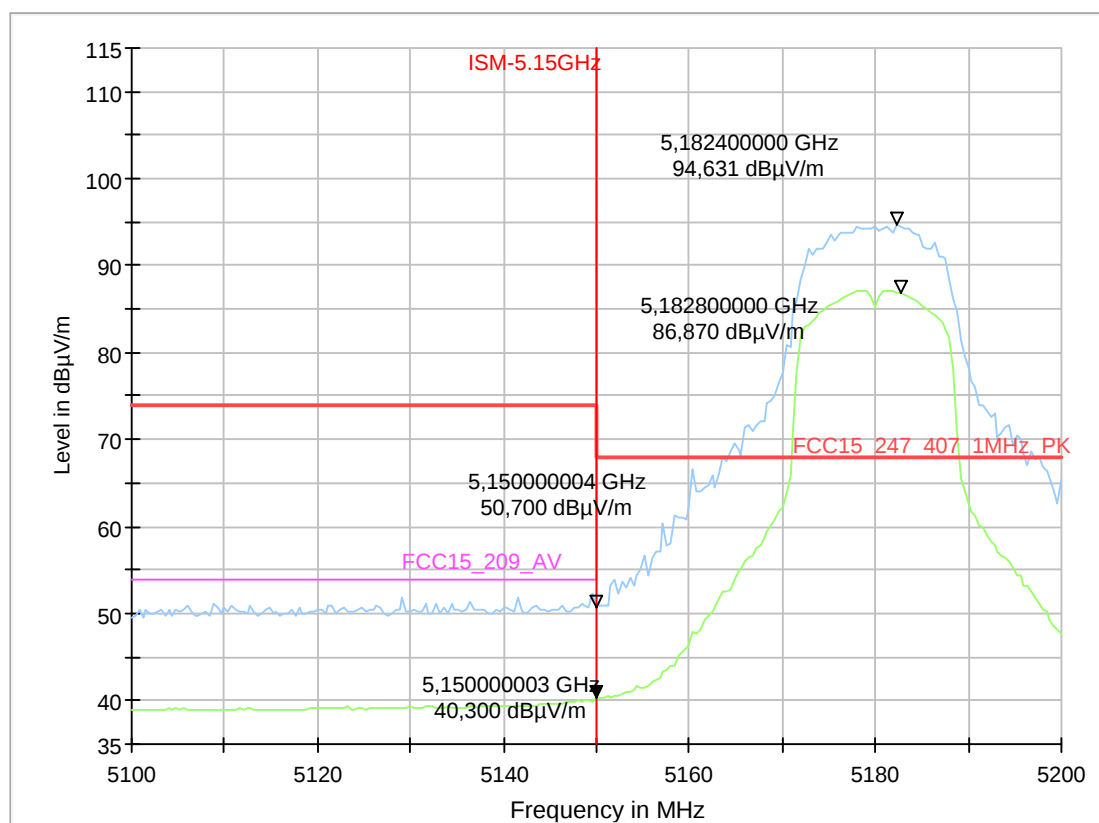


9.02_ BE High-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch48-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 48 (5240 MHz)- PWR+19.5dBm
Operator Name:	LKu
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Laying

Full Spectrum

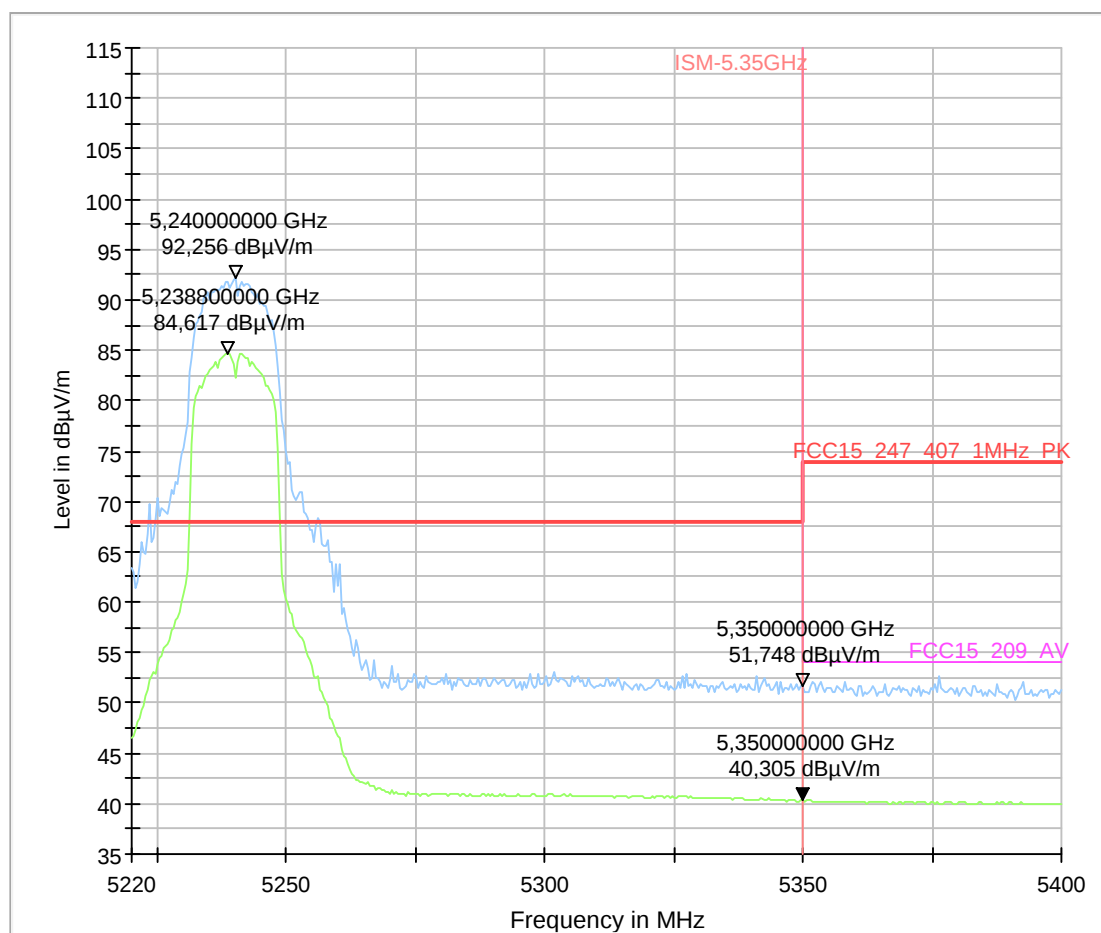


9.02_ BE High-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch48-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-1-Ch 48 (5240 MHz)- PWR+19.5dBm
Operator Name:	HEI
Environmental Conditions:	Humidity: 40%rH; Temperature: 20°C
Comment:	Stab Antenna Standing

Full Spectrum

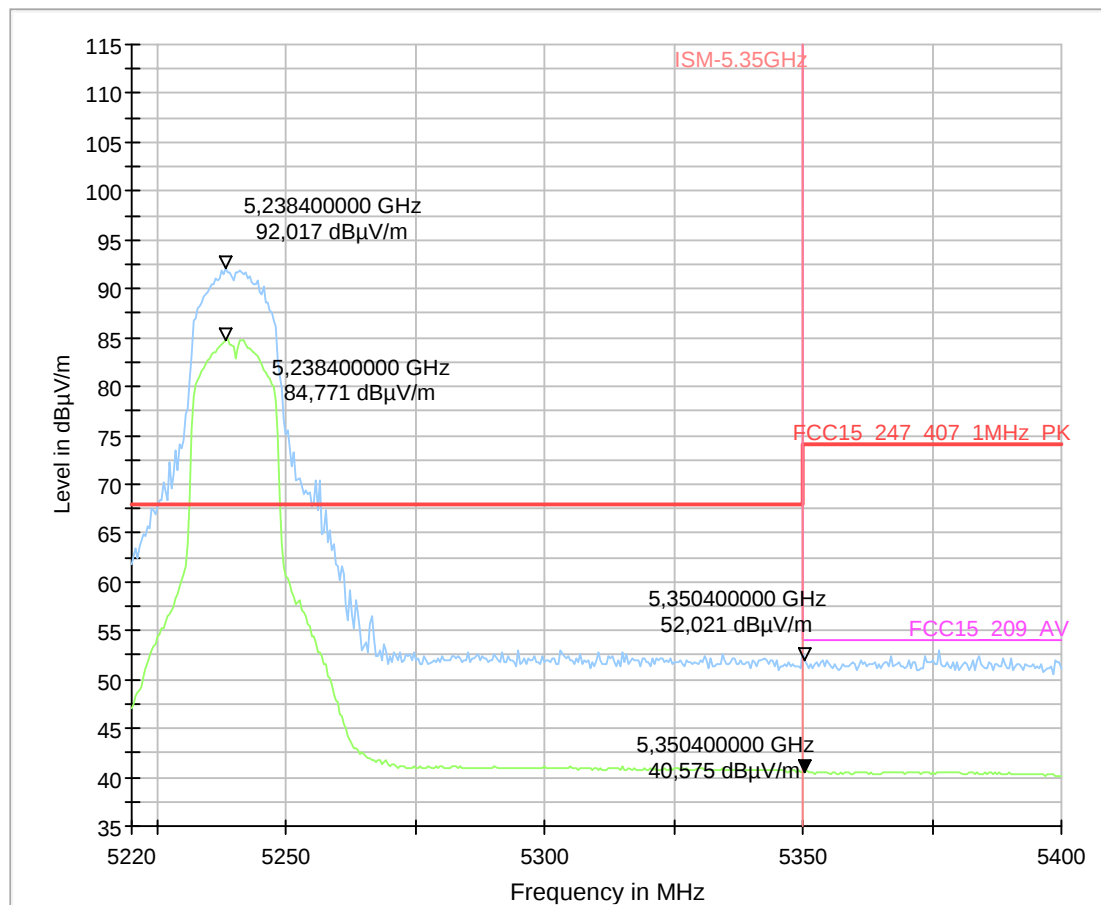


9.04_ BE High-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch64-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2A-Ch 64 (5320 MHz)- PWR+19.5dBm
Operator Name:	LKu
Comment:	Humidity: 40%rH; Temperature: 20°C
Comment 2:	Stab Antenna Laying

Full Spectrum

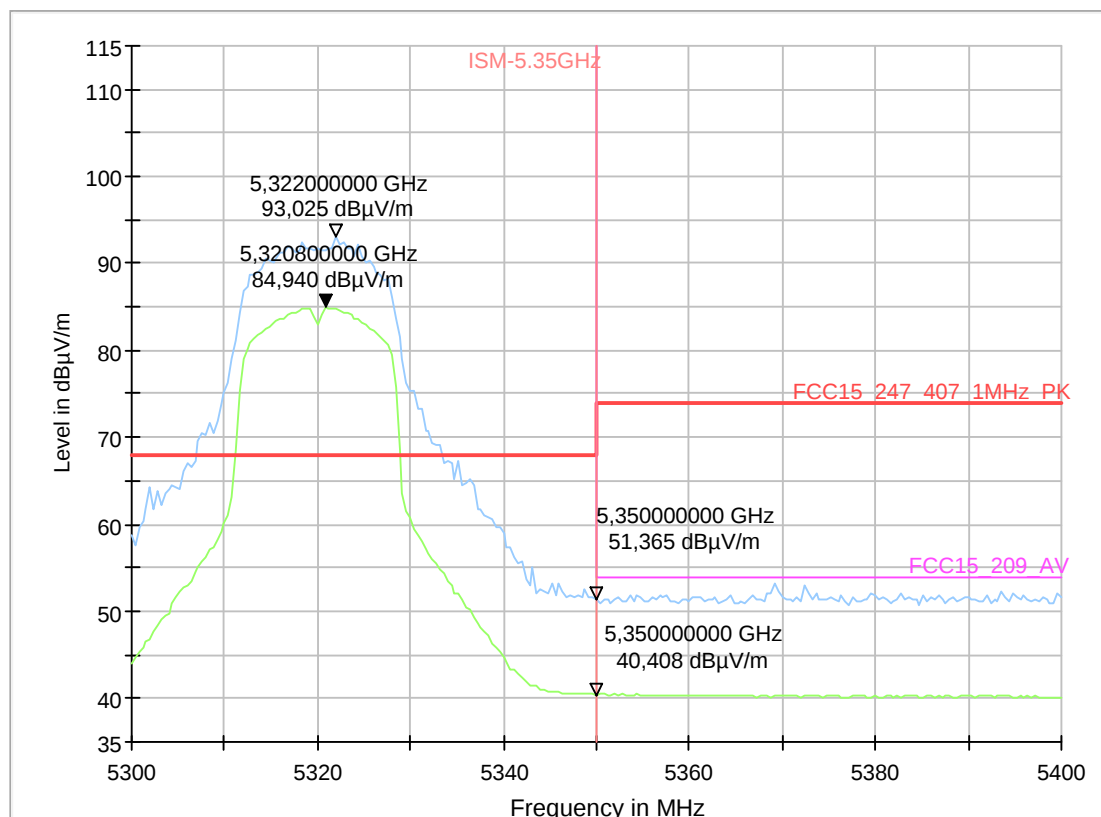


9.04_ BE High-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch64-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2A-Ch 64 (5320 MHz)- PWR+19.5dBm
Operator Name:	HEI
Comment:	Humidity: 40%rH; Temperature: 20°C
Comment 2:	Stab Antenna Standing

Full Spectrum

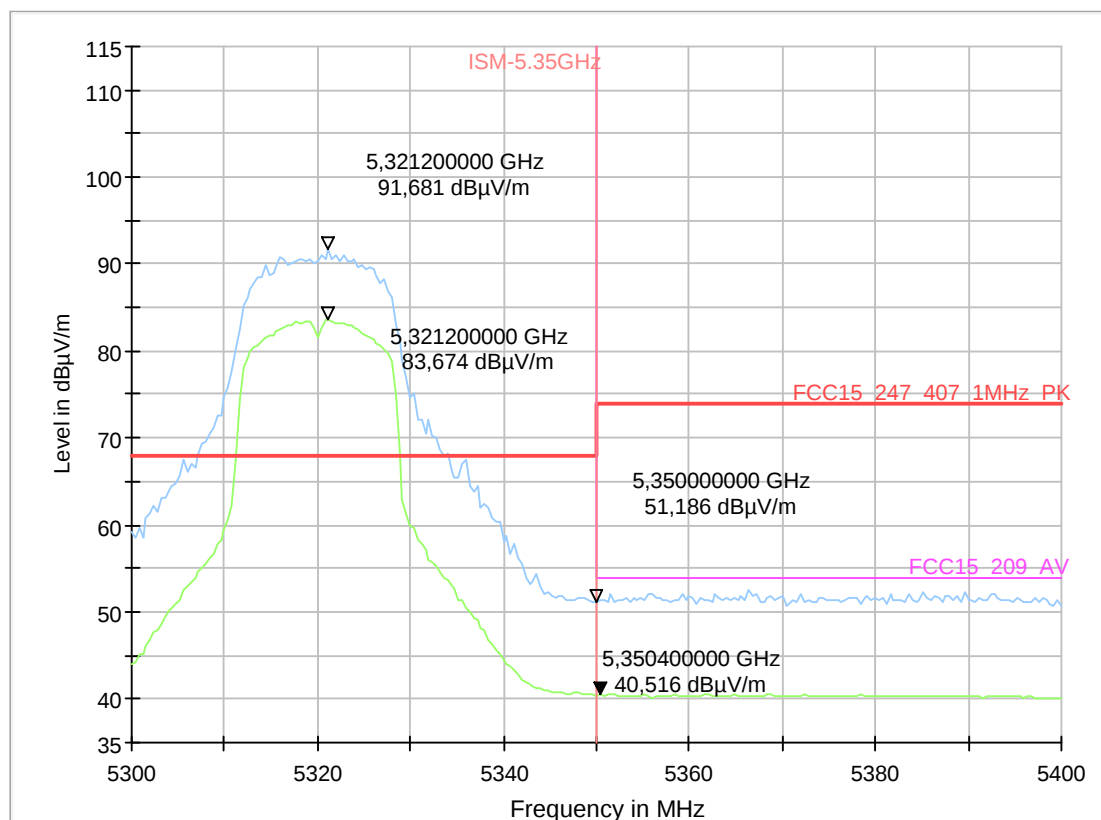


9.05_ BE Low-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch100-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 100 (5500 MHz)-PWR+19.5dBm
Operator Name:	LKu
Comment:	Humidity: 41%rH; Temperature: 21°C
Comments	Stab Antenne Laying

Full Spectrum

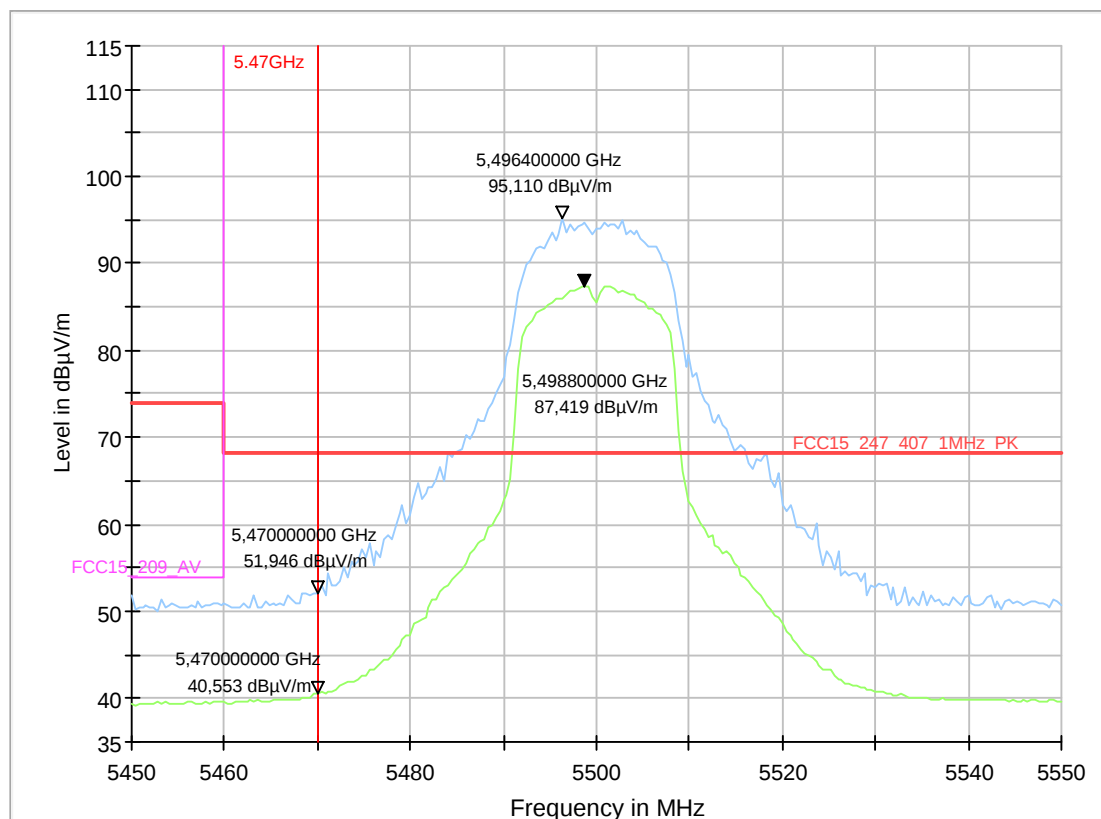


9.05_ BE Low-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch100-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 100 (5500 MHz)-PWR+19.5dBm
Operator Name:	HEI
Comment:	Humidity: 41%rH; Temperature: 21°C
Comment:	Stab Antenna Standing

Full Spectrum

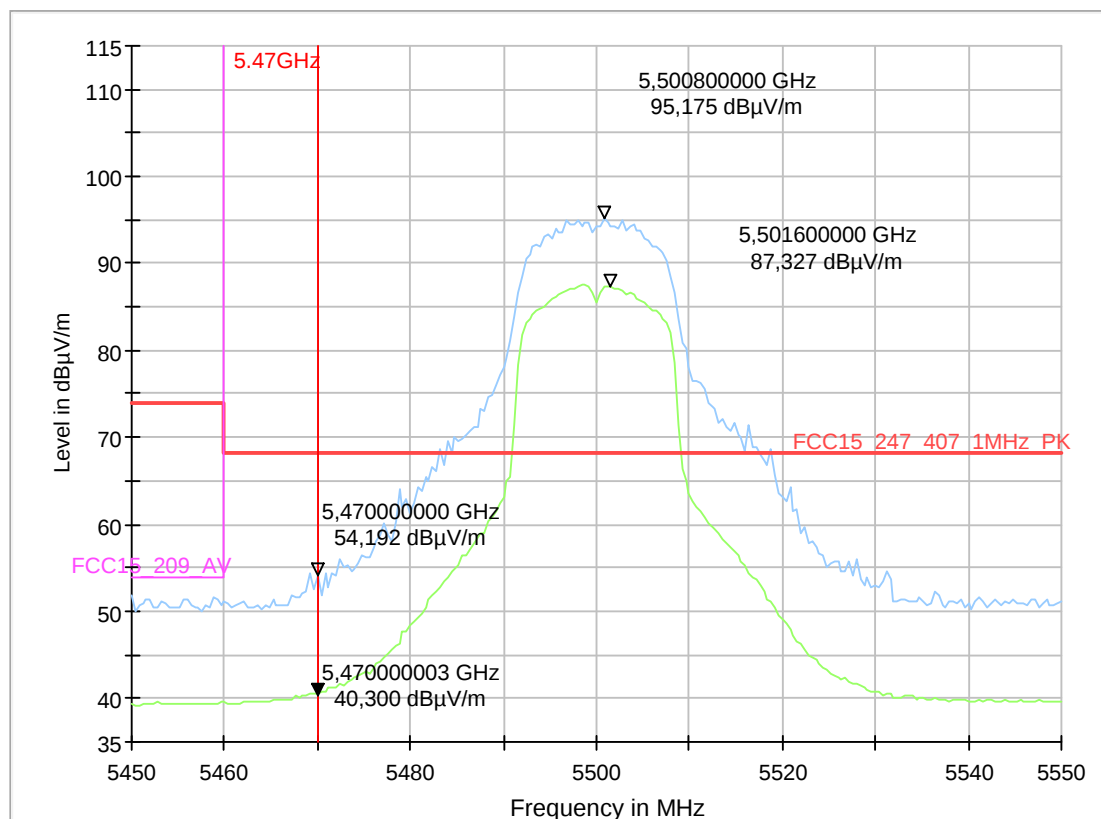


9.06_ BE High-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch140-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 140 (5700 MHz)- PWR+19.5dBm
Operator Name:	LKu
Comment:	Humidity: 41%rH; Temperature: 21°C
Comments	Stab Antenne Laying

Full Spectrum

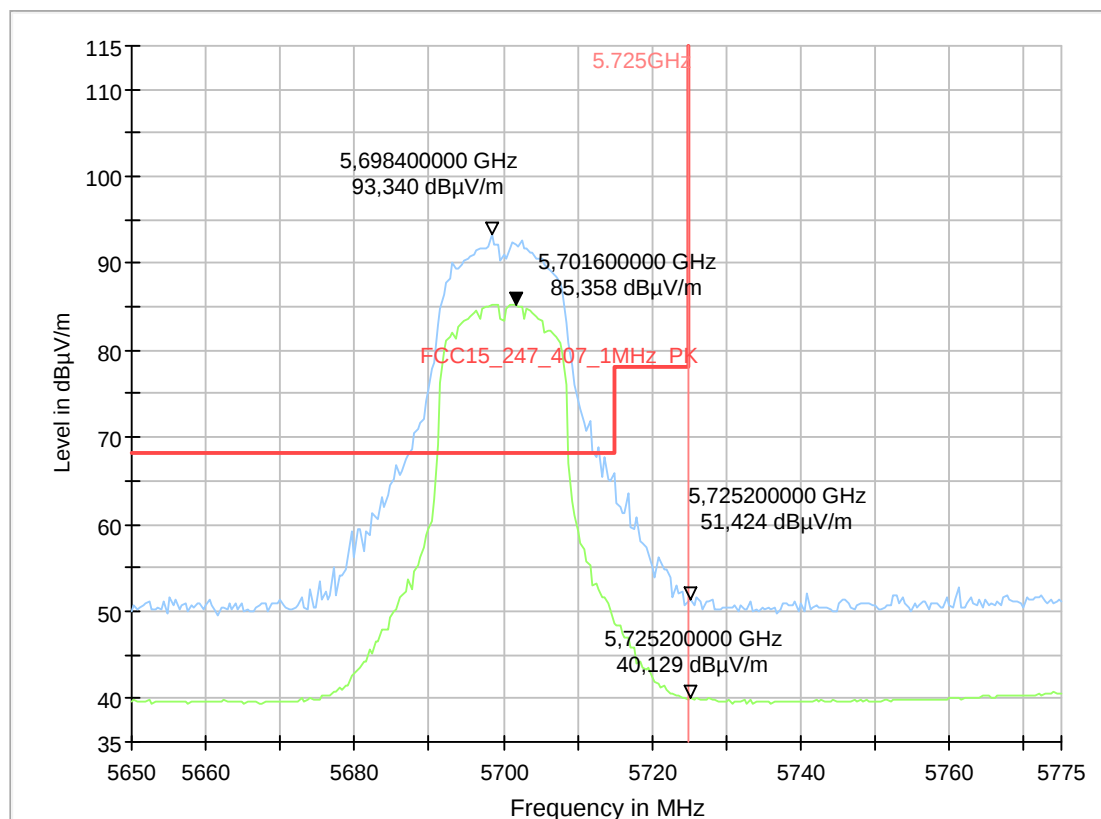


9.06_ BE High-CCM-IO-ETH-TX-aMode-20MHz-6Mbit-Ch140-19.5dBm


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-a Mode-B.W. 20 MHz-6Mbit- U-NII-2C-Ch 140 (5700 MHz)- PWR+19.5dBm
Operator Name:	HEI
Comment:	Humidity: 41%rH; Temperature: 21°C
Comment:	Stab Antenna Standing

Full Spectrum

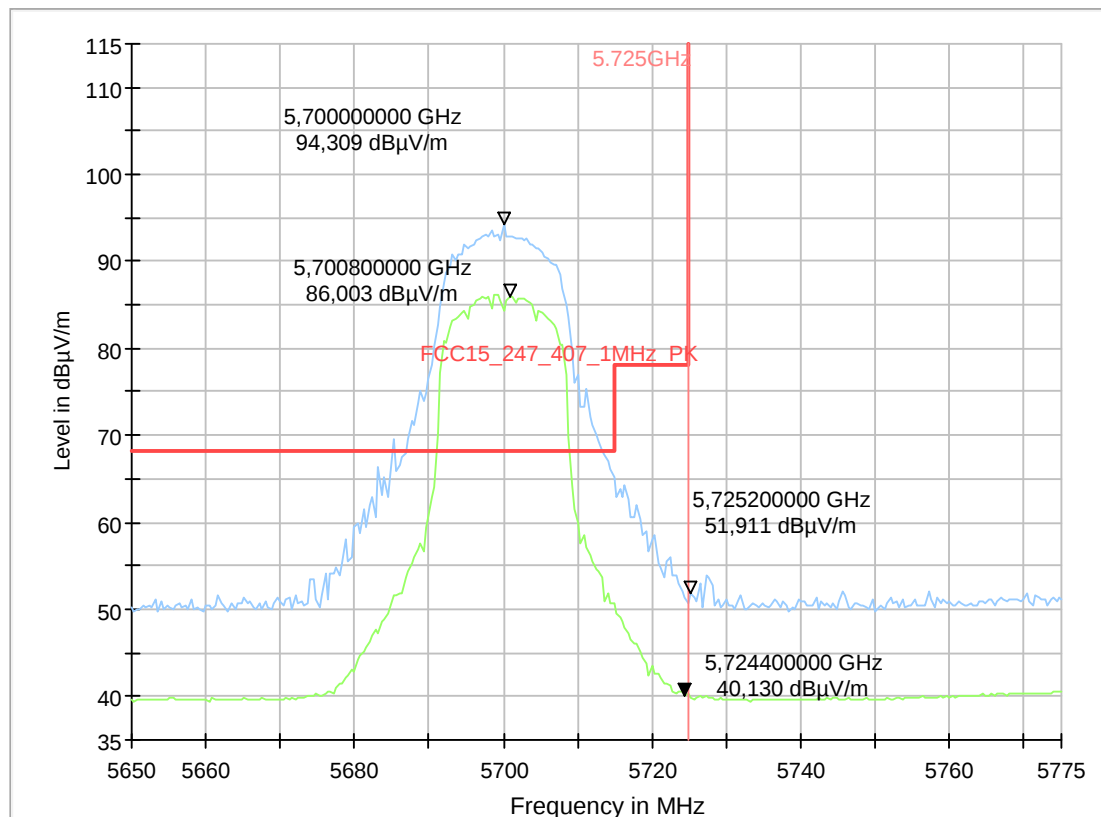


1.8.2. a-mode ISED Requirement

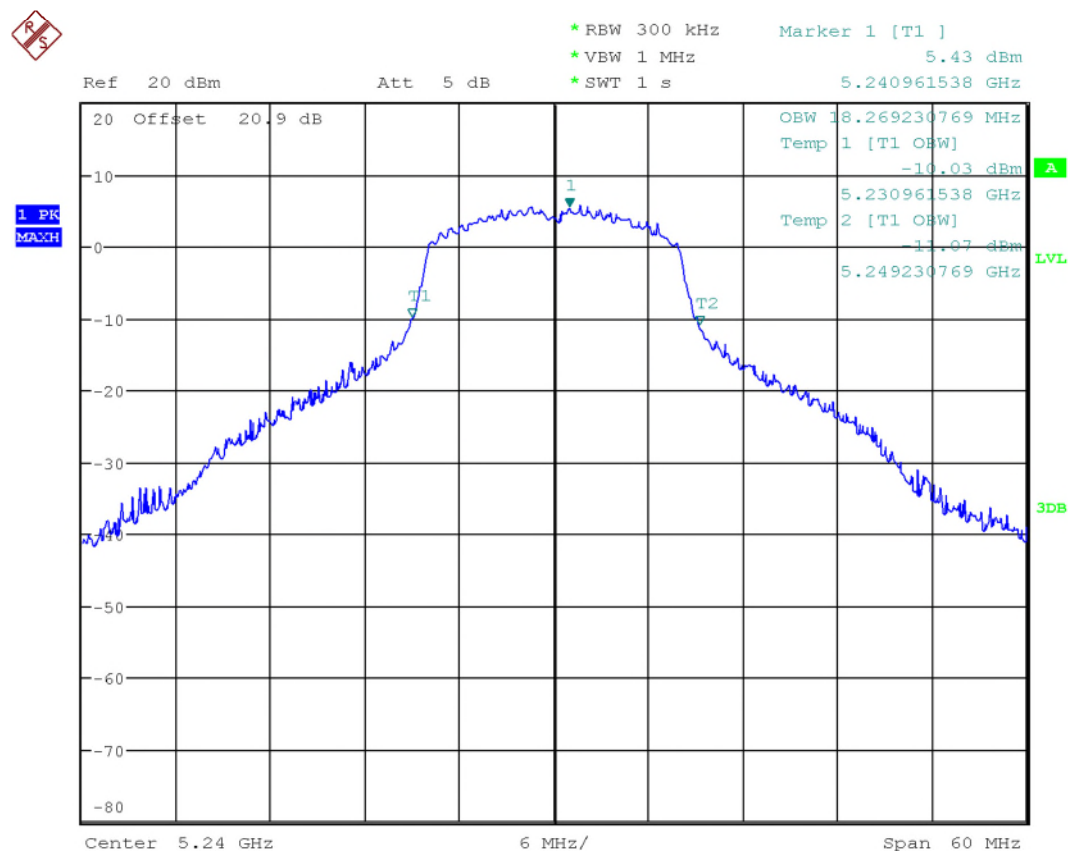


Date: 18.SEP.2018 13:16:35

30.01_BE_OCBW-aMode-20MHz-6Mbit-Ch48-19.5dBm

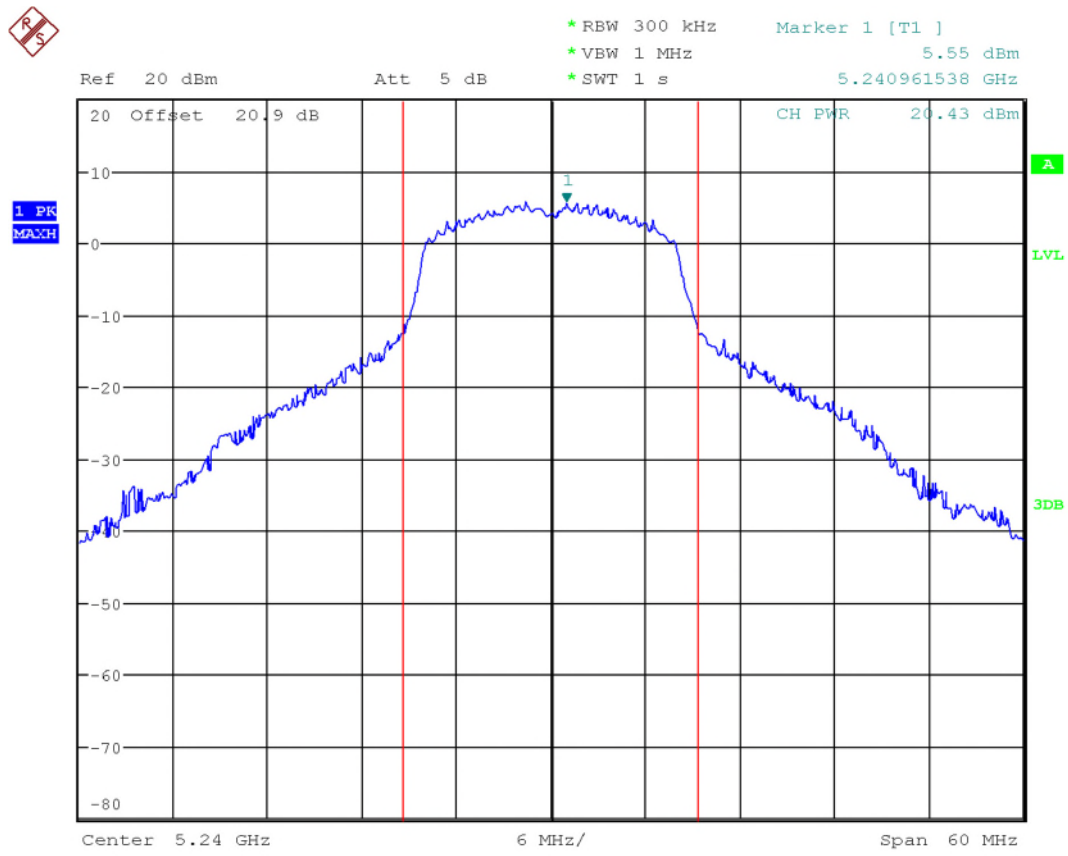

Date: 18.SEP.2018 13:18:24

30.02_BE_CHPWR-aMode-20MHz-6Mbit-Ch48-19.5dBm

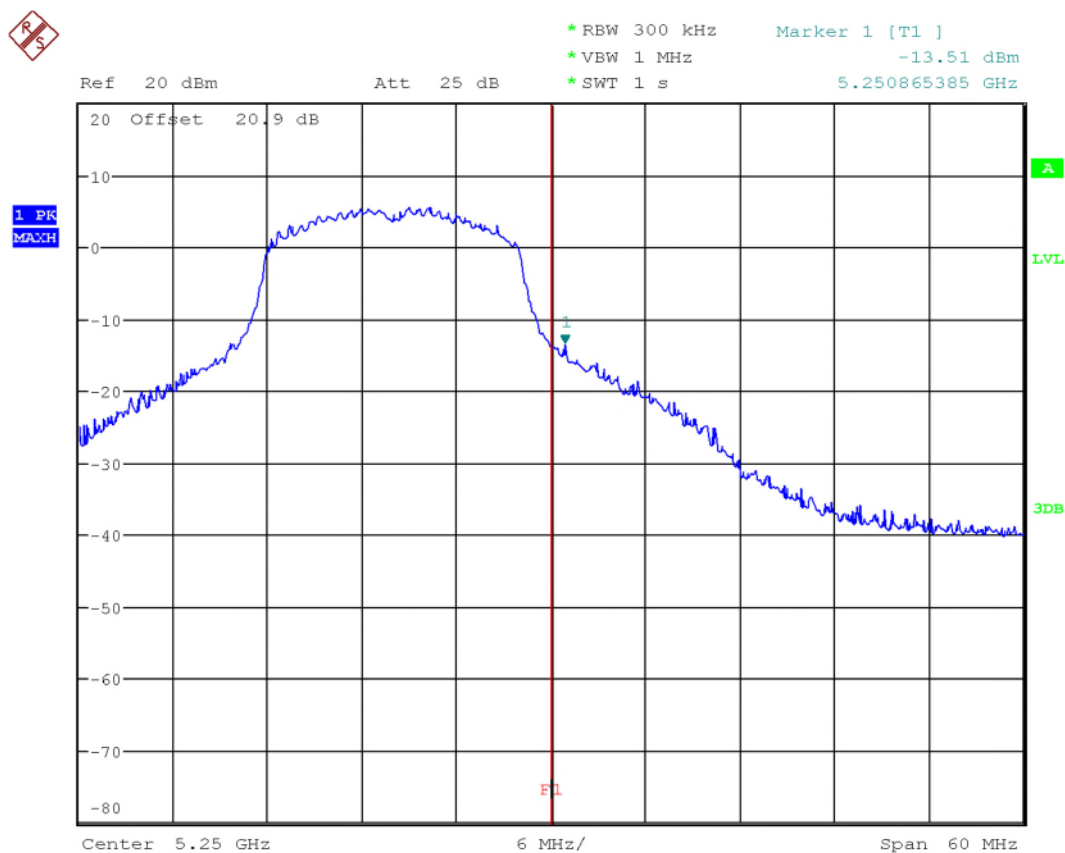

Date: 18.SEP.2018 13:20:11

30.03_BE_26dB-aMode-20MHz-6Mbit-Ch48-19.5dBm


1.8.3. n-mode HT20

9.11_ BE Low-CCM-IO-ETH-TX-nMode-20MHz-MCS0-Ch36-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-1-Ch 36 (5180 MHz)- PWR+19.5dBm
Operator Name:	LKu
Comment:	Humidity: 41%rH; Temperature: 21°C
Comments	Stab Antenne Laying

Full Spectrum

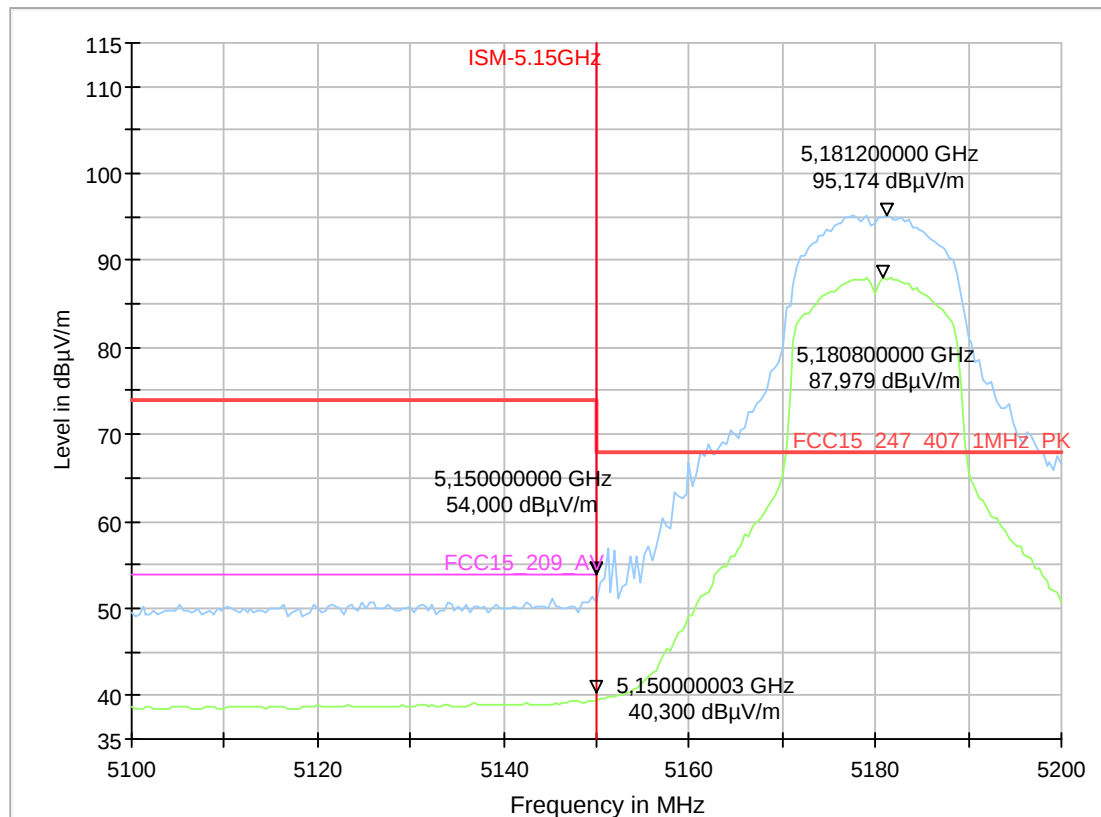


9.11_ BE Low-CCM-IO-ETH-TX-nMode-20MHz-MCS0-Ch36-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-1-Ch 36 (5180 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 41%rH; Temperature: 21°C
Comments	Stab Antenne Standing

Full Spectrum

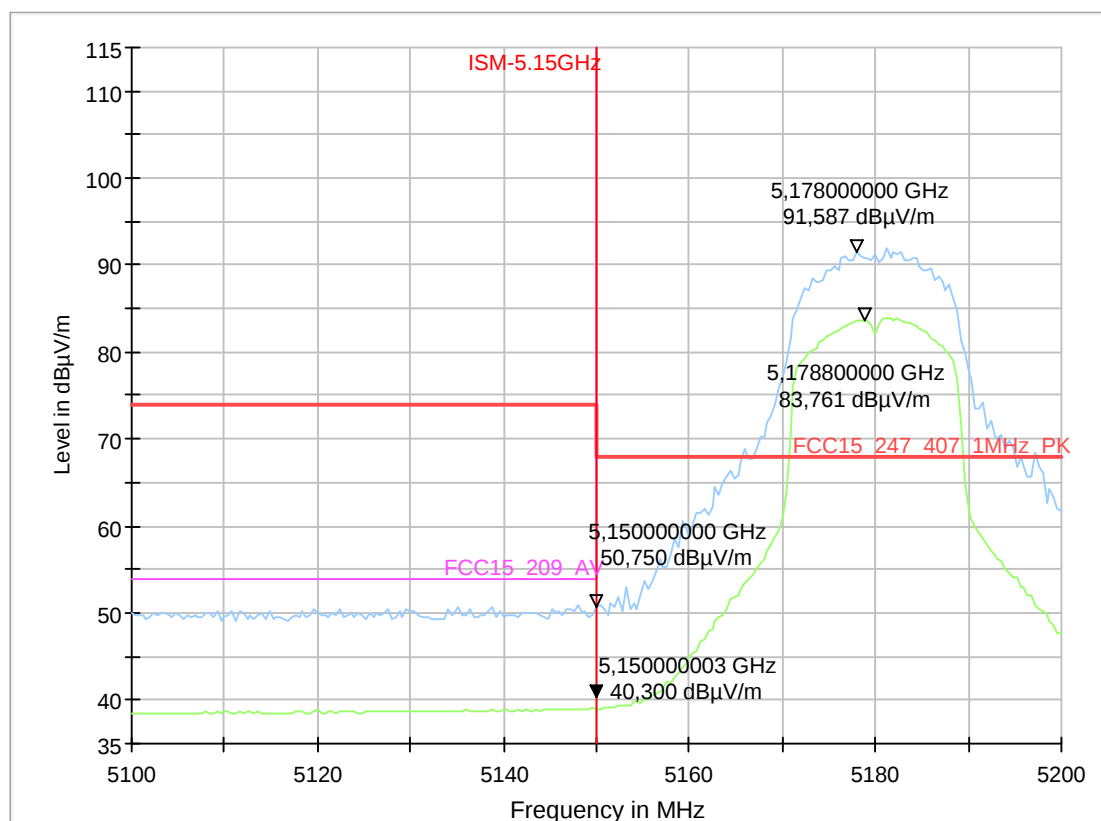


9.12_ BE High-CCM-IO-ETH-TX-nMode-20MHz-MCS0-Ch48-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-1-Ch 48 (5240 MHz)-PWR+19.5dBm
Operator Name:	LKu
Comment:	Humidity: 41%rH; Temperature: 21°C
Comments	Stab Antenne Laying

Full Spectrum

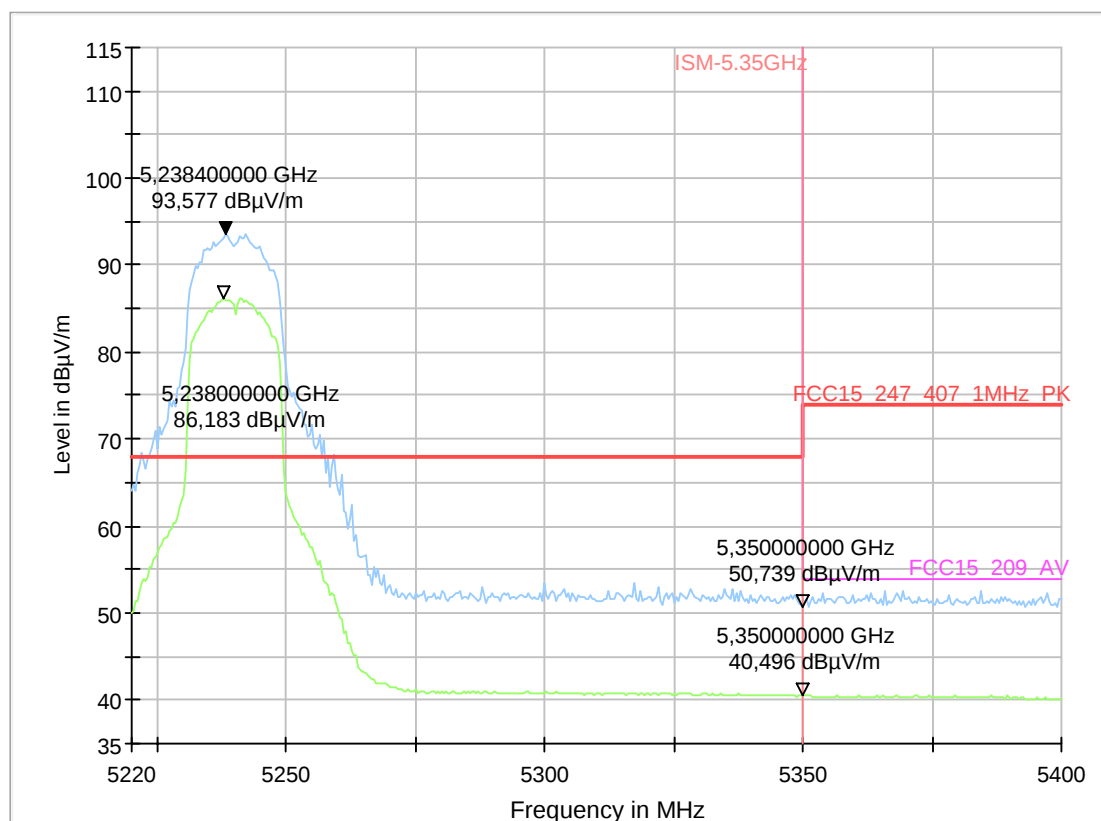


9.12_ BE High-CCM-IO-ETH-TX-nMode-20MHz-MCS0-Ch48-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-1-Ch 48 (5240 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 41%rH; Temperature: 21°C
Comments	Stab Antenne Standing

Full Spectrum

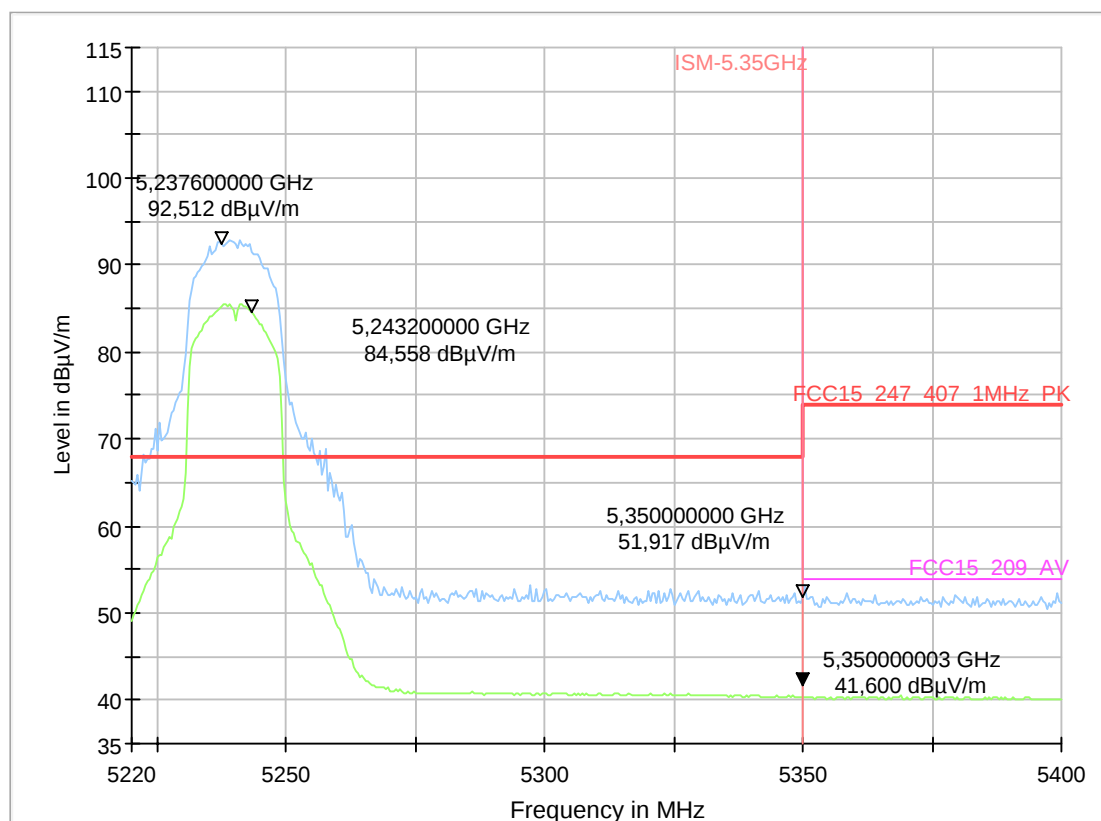


9.14_ BE High-CCM-IO-ETH-nMode-20MHz-MCS0-Ch64-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 64 (5320 MHz)-PWR+19.5dBm
Operator Name:	LKu
Comment:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Laying

Full Spectrum

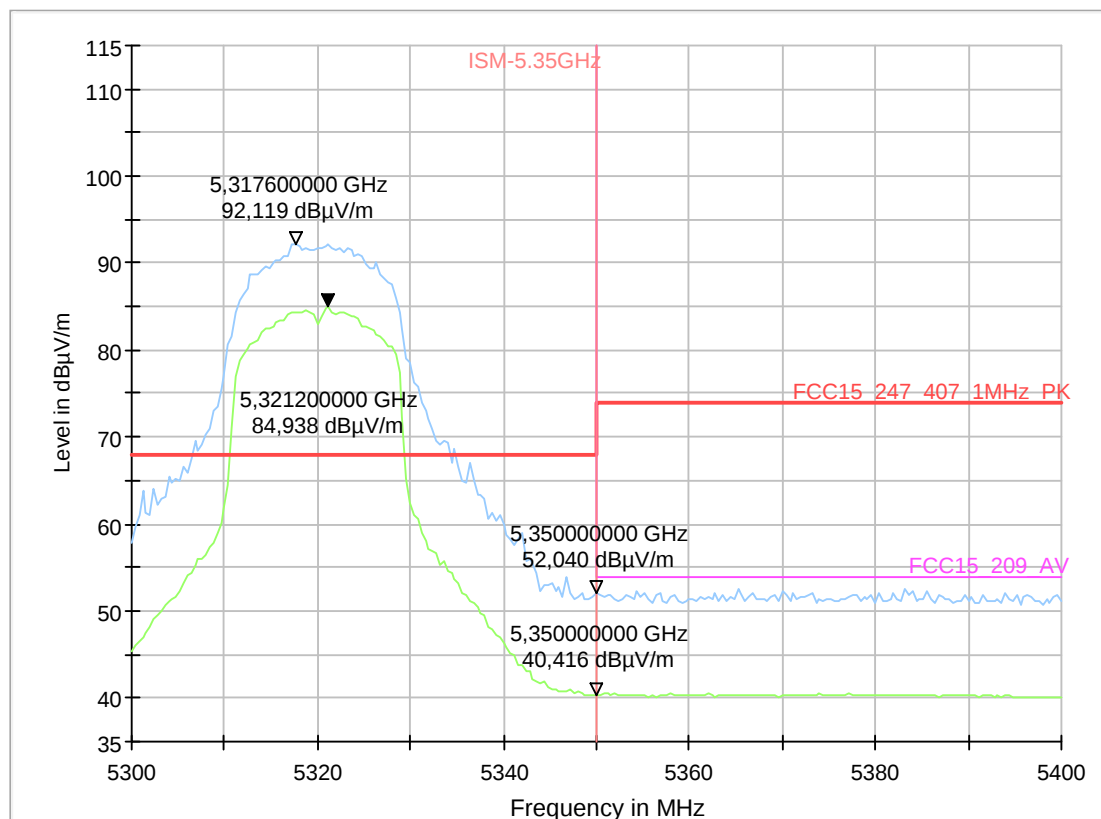


9.14_ BE High-CCM-IO-ETH-nMode-20MHz-MCS0-Ch64-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 64 (5320 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Standing


Full Spectrum

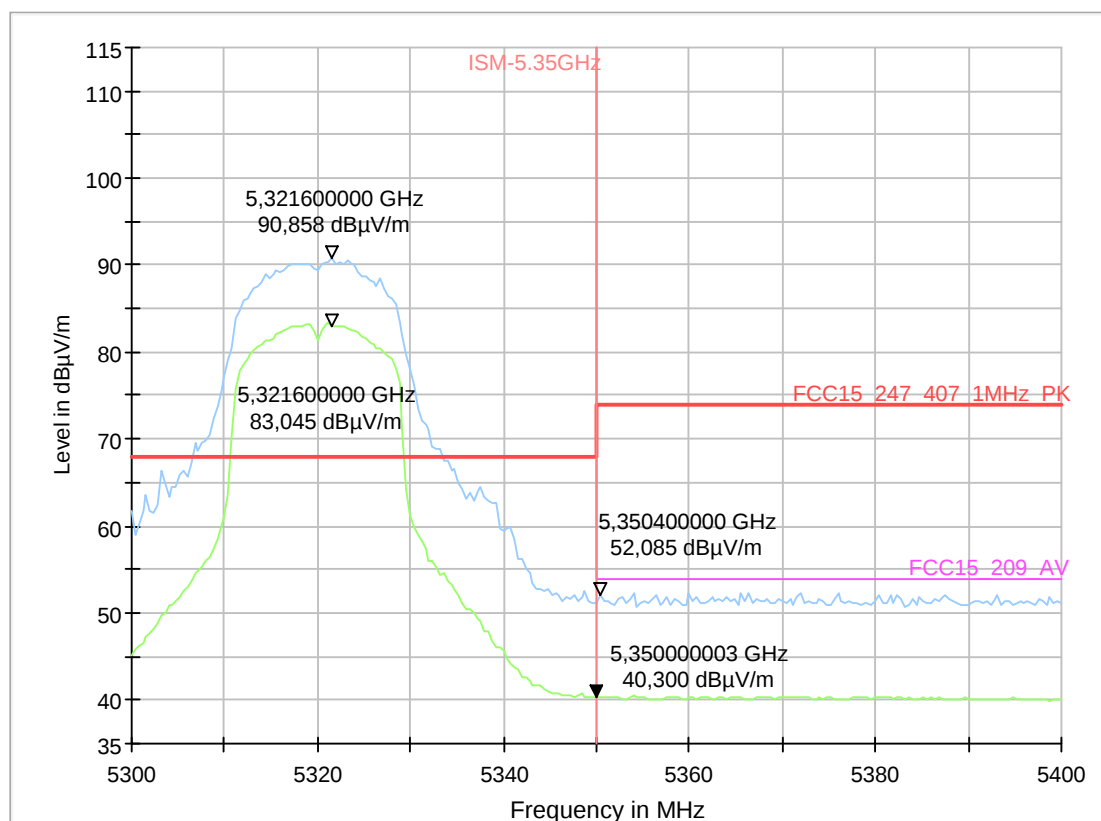

9.15_ BE Low-CCM-IO-ETH-nMode-20MHz-MCS0-Ch100-19.5dBm

Common Information


Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2C-Ch 100 (5500 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Laying

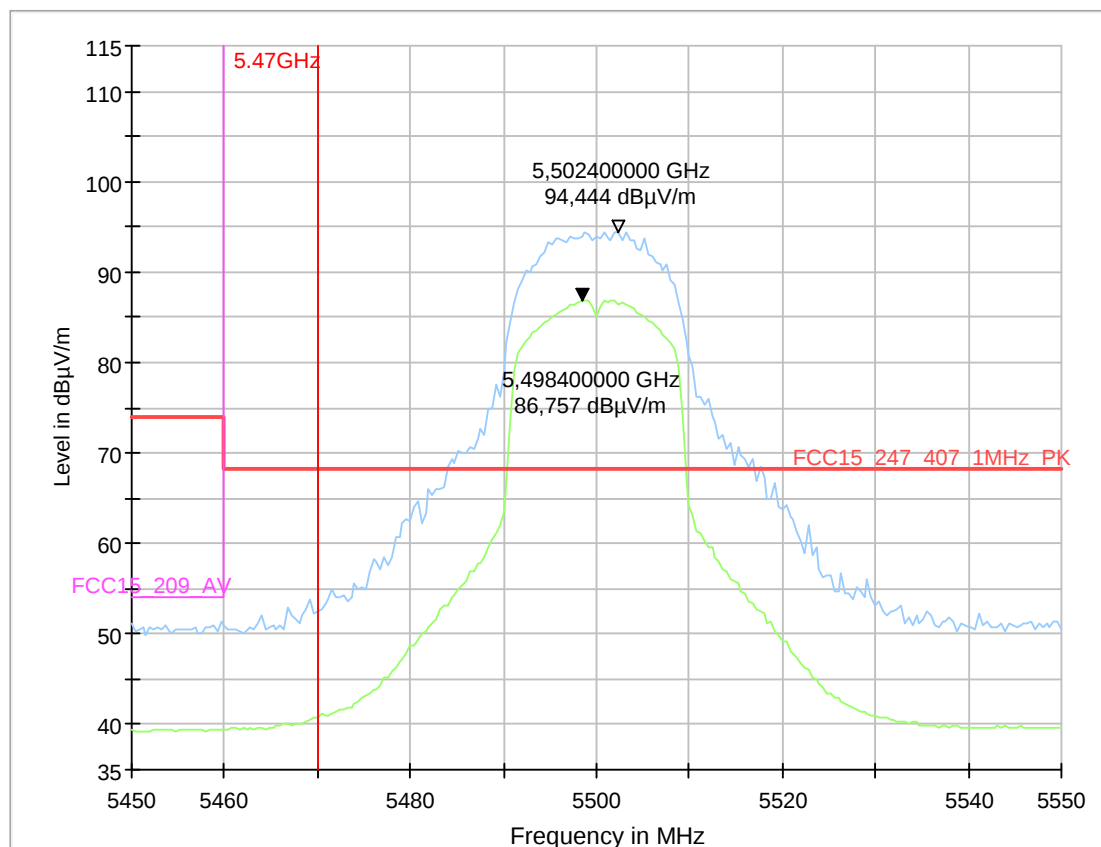

9.15_ BE Low-CCM-IO-ETH-nMode-20MHz-MCS0-Ch100-19.5dBm

Common Information


Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2C-Ch 100 (5500 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Laying

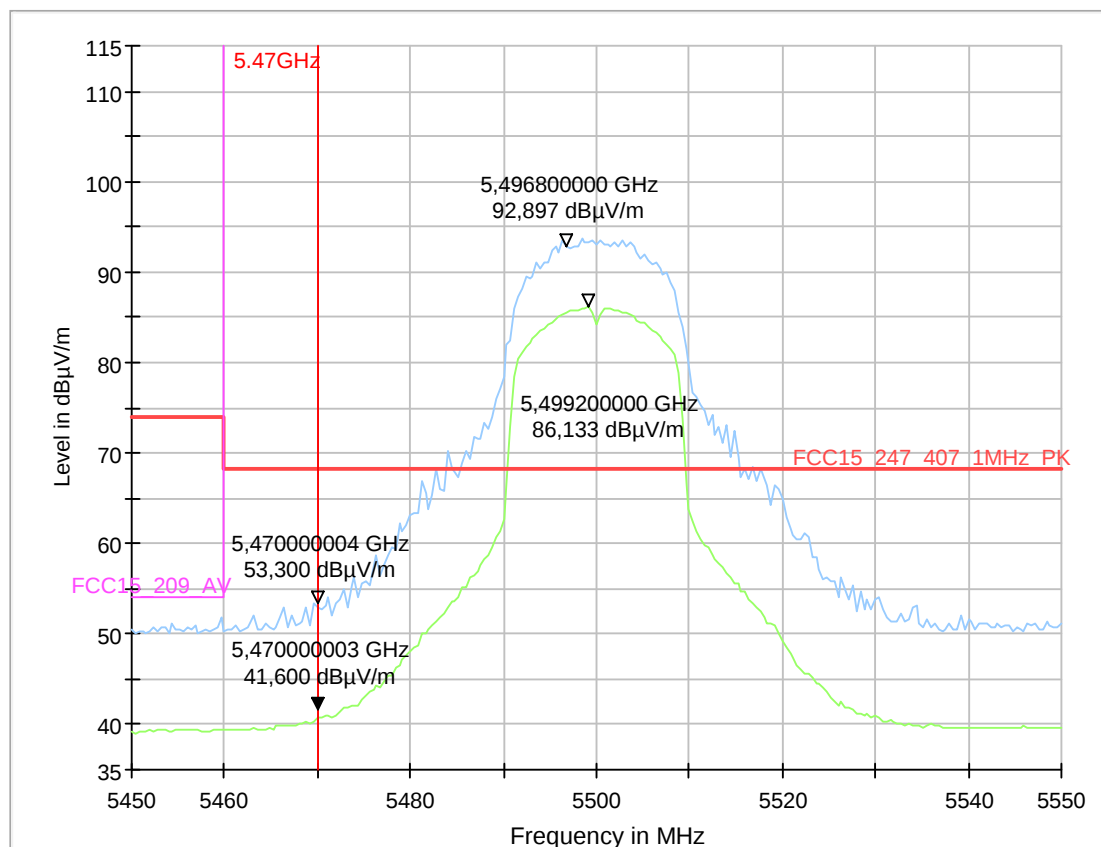

9.16_ BE High-CCM-IO-ETH-nMode-20MHz-MCS0-Ch140-19.5dBm

Common Information


Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2C-Ch 140 (5700 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Laying

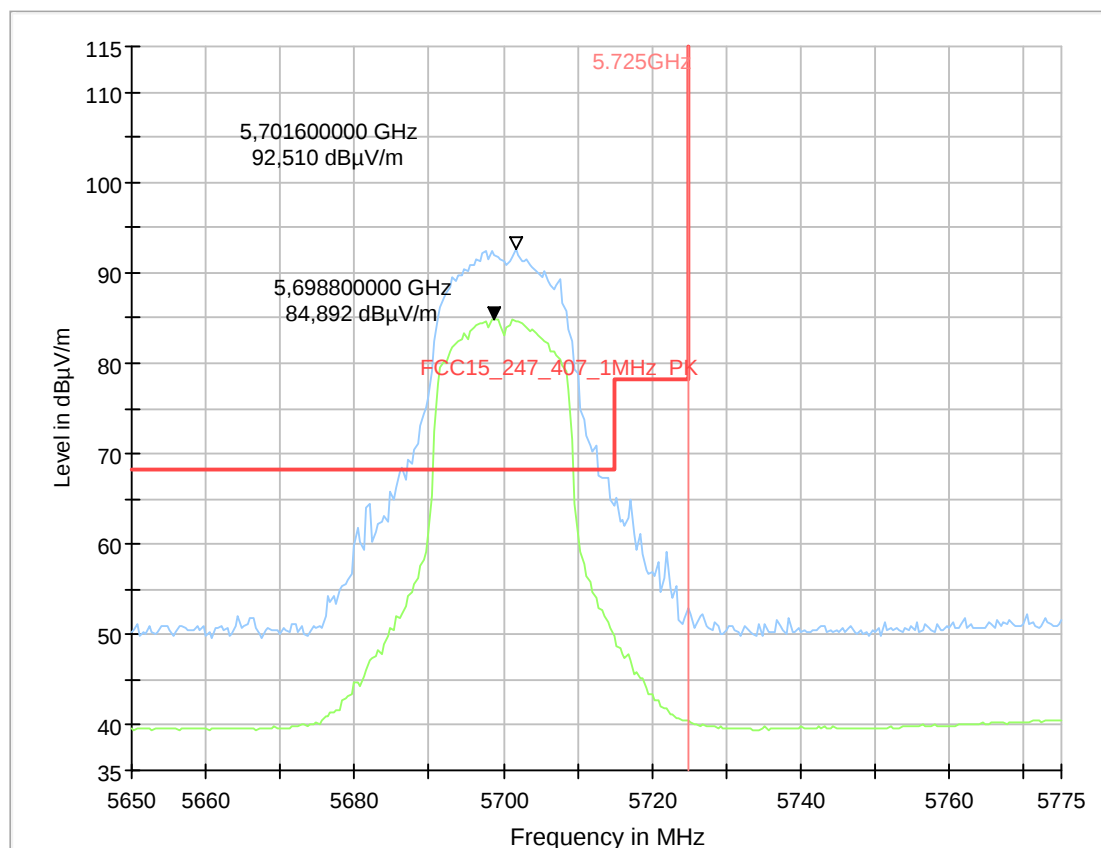


9.16_ BE High-CCM-IO-ETH-nMode-20MHz-MCS0-Ch140-19.5dB

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2C-Ch 140 (5700 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	Stab Antenne Standing

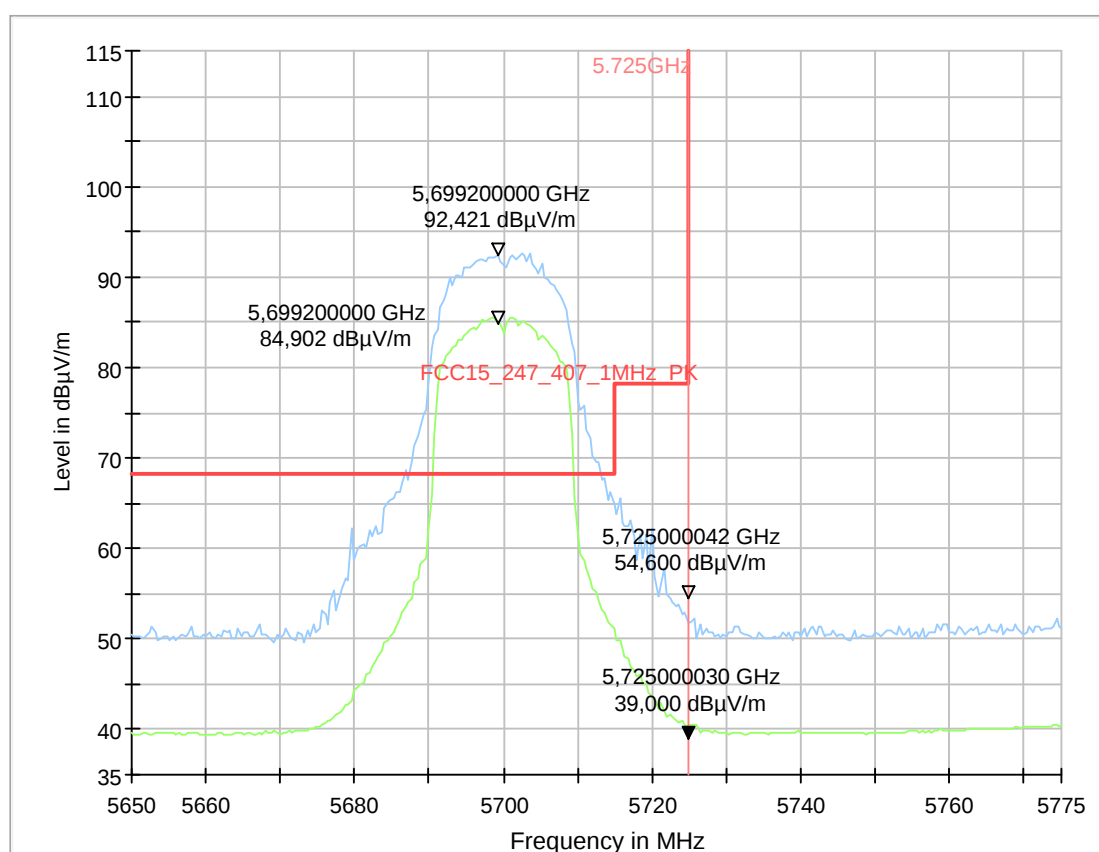


1.8.4. n-mode HT20 ISED Requirement

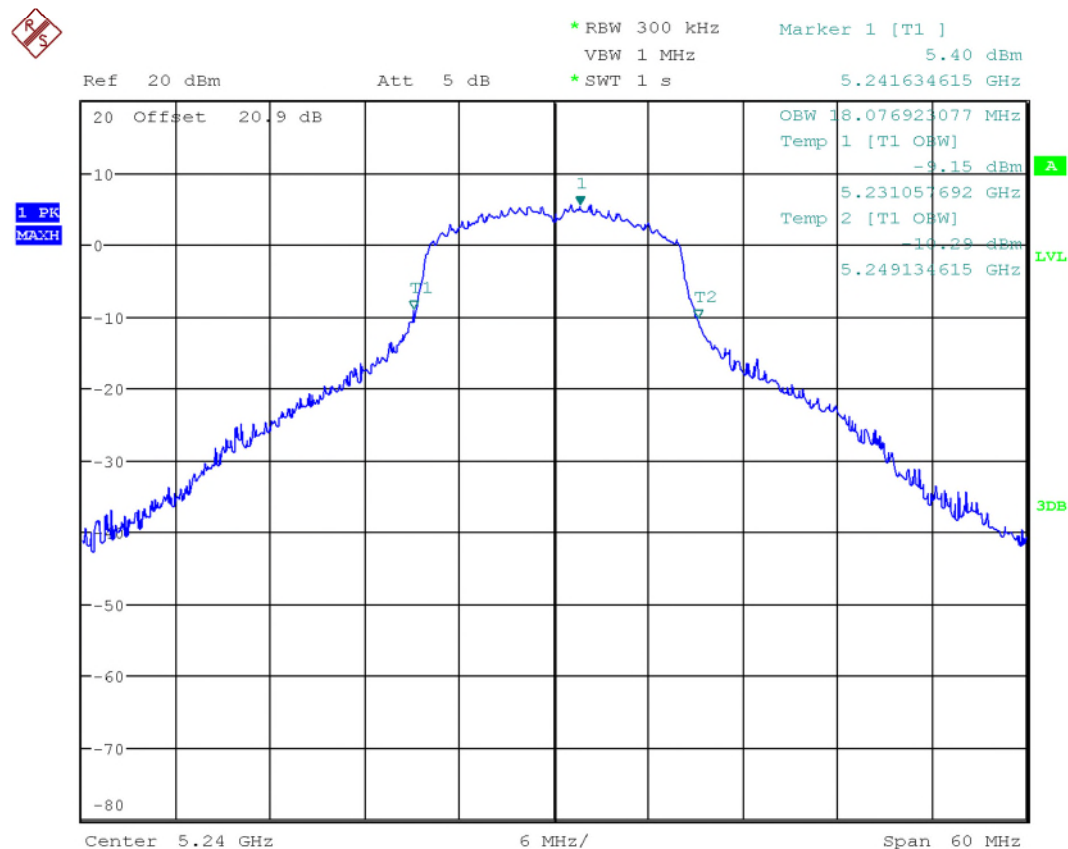


Date: 18.SEP.2018 14:35:05

30.11_BE_OCBW-nMode-20MHz-MCS0-Ch48-19.5dBm

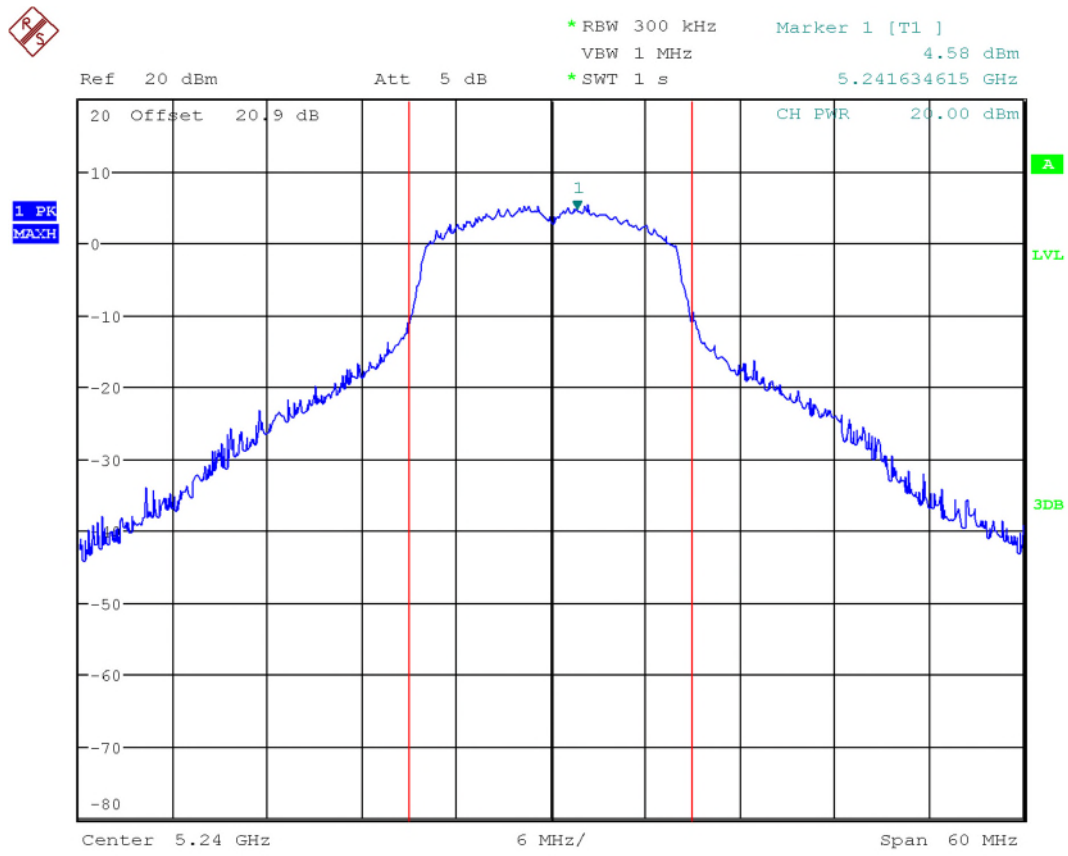

Date: 18.SEP.2018 14:35:49

30.12_BE_CHPWR-nMode-20MHz-MCS0-Ch48-19.5dBm

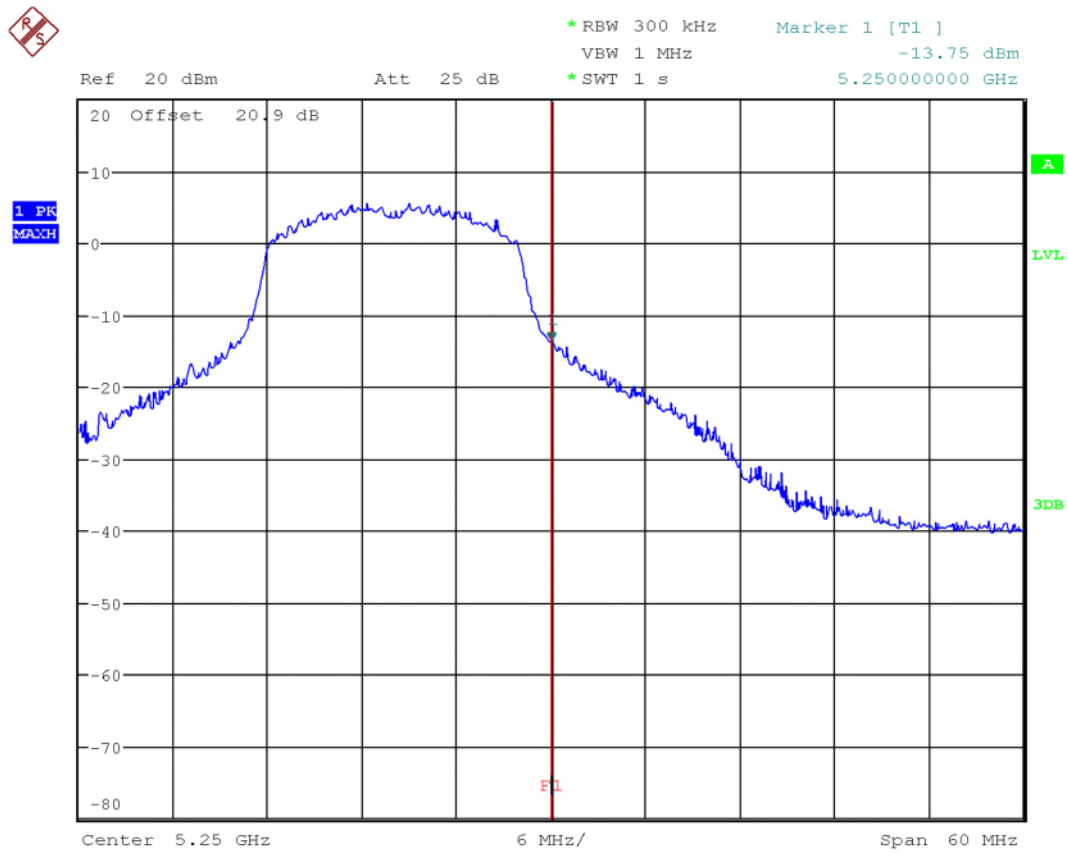

Date: 18.SEP.2018 14:37:11


30.13_BE_26dB-nMode-20MHz-MCS0-Ch48-19.5dBm

9.13a_ BE Low-CCM-IO-ETH-nMode-20MHz-MCS0-Ch52-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 52 (5280 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C
Comments	EUT Standing

Full Spectrum

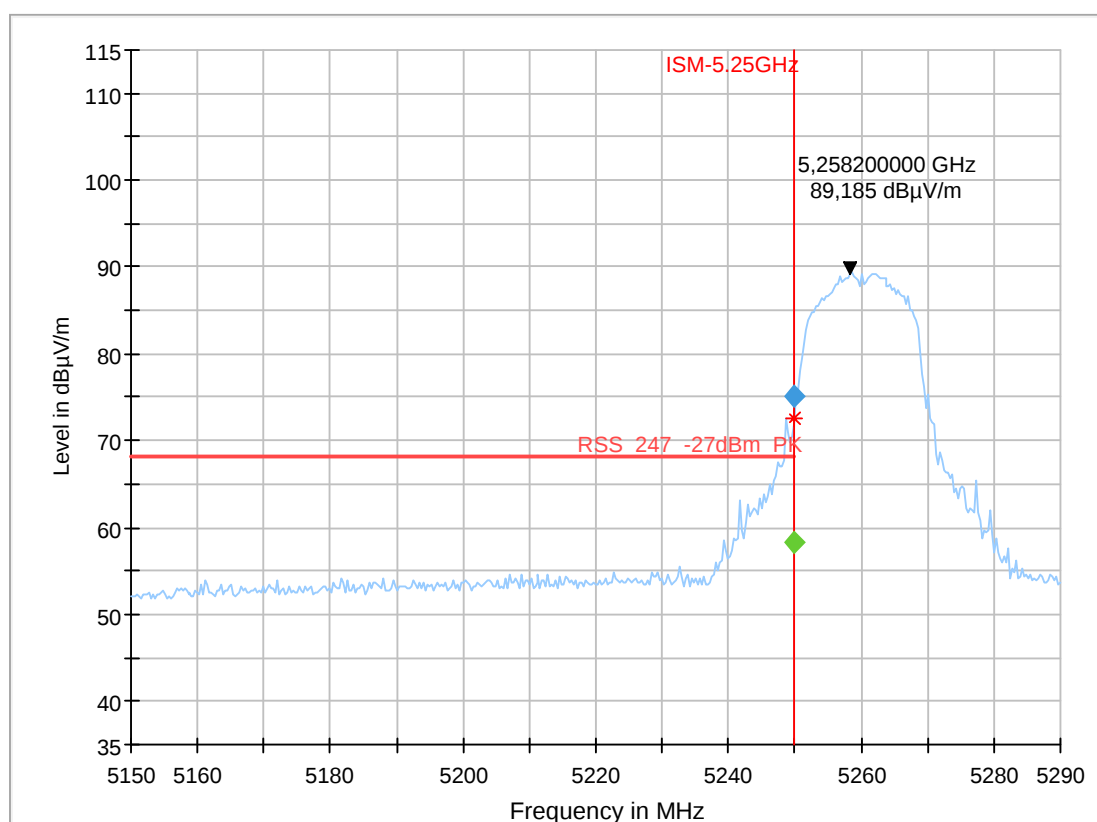

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	RMS (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5249.850000	---	58.29	---	---	100.0	1000.000	155.0	H	274.0	0.0
5249.850000	75.16	---	68.20	-6.96	100.0	1000.000	155.0	H	274.0	0.0

9.13b_ BE Low-CCM-IO-ETH-nMode-20MHz-MCS0-Ch52-19.5dBm

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.407&15.209 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Software Version:	#Ver
Operation mode:	Continuous TX-n Mode-B.W. 20 MHz-MCS0- U-NII-2A-Ch 52 (5280 MHz)-PWR+19.5dBm
Operator Name:	Klv
Environment Conditions:	Humidity: 40%rH; Temperature: 20°C

Full Spectrum

