




EMI TEST REPORT


Test Report No. : 24DE0265-YK-2

Applicant: HORI CO., LTD.
Type of Equipment: Game Controller
Model No.: UHP2-109-A
FCC ID RQZUHP2-109-A
Test standard: FCC Part15 Subpart C, Section 15.249
Test Result: Complied

1. This test report shall not be reproduced except in full or partial, without the written approval of UL Apex Co., Ltd.
2. The results in this report apply only to the sample tested.

Date of test: January 15 and 19, 2004

Tested by: 
Ichiro Isozaki

Approved by: 
Osamu Watatani
Site Manager of Yamakita Lab.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

Table of Contents	Page
1 GENERAL INFORMATION	3
1.1 Tested Methodology	3
1.2 Test Facility	3
2 PRODUCT DESCRIPTION	4
3 SYSTEM TEST CONFIGURATION	5
3.1 Justification	5
3.2. Configuration of Tested System	5
4 MEASUREMENT UNCERTAINTY	6
5 SUMMARY OF TESTS	7
5.1 §15.249(a) Field Strength(Radiated Emissions)	7
5.2 26dB Bandwidth	7
 <u>Contents of Appendixes</u>	 8
APPENDIX 1: Photographs of test setup	9
APPENDIX 2: Test Data	12
APPENDIX 3: Test instruments	28

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

1 GENERAL INFORMATION

Applicant

Company Name : HORI CO., LTD.
Brand Name : HORI
Address : 640 Saedo-cho, Tsuzuki-ku, Yokohama, 224-0054 Japan
Telephone Number : +81 45 933 9611
Facsimile Number : +81 45 933 9617
Contact Person : Kazutoshi Kijima / kijima-k@hori.ne.jp
Type of Equipment : Game Controller
Model No. : UHP2-109-A
Serial No. : S1
Rating : DC3.3V
Receipt Date of Sample : January 13, 2004
Condition of EUT : Production prototype
Regulation(s) : FCC Part15 Subpart C, Section 15.249
Test Site : UL Apex No.1 Anechoic Chamber

1.1 Tested Methodology

The measurements were performed according to the procedures in ANSI C63.4 (2001).

1.2 Test Facility

This site has been fully described in a report submitted to FCC office, and accepted on November 28, 2002 (Registration No.: 95967).

NVLAP Lab. code : 200441-0

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

2 PRODUCT DESCRIPTION

HORI CO., LTD. , Model: UHP2-109-A (referred to as the EUT in this report) is a Game Controller.
The clock frequencies used in EUT : 14.7456MHz, 10MHz

Frequency characteristics	:	903.018MHz through 926.3652MHz
Number of channels/ channel spacing	:	8 channels/ 3MHz
Modulation	:	Frequency modulation
Antenna type	:	Monopole
Antenna Gain	:	-10dBi
Operating Voltage	:	DC3.3V

FCC Part15.31 (e)

The host device UHP2-109-A provides the Game Controller with stable power supply (DC3.3V), and the power is not changed when voltage of the Game Controller is varied.
Therefore, the Game Controller complies power supply regulation.

*FCC Part15.203

The Game controller and its antenna comply with this requirement since this antenna is built in Game controller when they are put up for sale and they are used with a particular antenna connector.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

3 SYSTEM TEST CONFIGURATION

3.1 Justification


The system was configured in typical fashion (as a customer would normally use it) for testing.

Test mode: Transmitting mode
Low channel : 903.0180MHz
Middle channel : 912.8484MHz
High channel : 926.3652MHz


The EUT was tested in all three orthogonal planes in order to determine worst case emissions. Channels at 903.0180 MHz, 912.8484 MHz and 926.3652 MHz were tested and investigated from 30 MHz to 10 GHz. Data for all three channels are presented in this report.

3.2 Configuration of Tested System

Front View

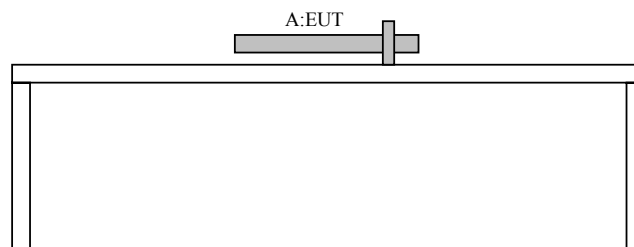

Top View

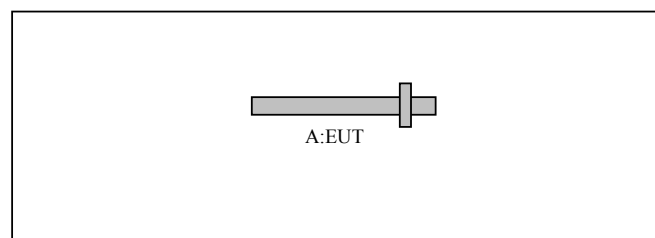

Description of EUT and support equipment

No.	Item	Model number	Serial number	Manufacturer	FCC ID	Remarks
A	Game Controller	UHP2-109-A	S1	HORI CO., LTD.	RQZUHP2-109-A	EUT

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

4 MEASUREMENT UNCERTAINTY

Radiated emission test

The measurement uncertainty (with 95% confidence level) for this test using Biconical antenna is $\pm 4.8\text{dB}$.

The measurement uncertainty (with 95% confidence level) for this test using Logperiodic antenna is $\pm 5.2\text{dB}$.

The measurement uncertainty (with 95% confidence level) for this test using Horn antenna is $\pm 6.6\text{dB}$.

The result is within Yamakita EMC lab's uncertainty.

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

5 SUMMARY OF TESTS

5.1 § 15.249(a) & (d) Field Strength (Radiated Emissions)

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1.8m, raised 80cm above the conducting ground plane. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength. The Radiated Electric Field Strength intensity has been measured in an anechoic chamber with a ground plane and at a distance of 3m. The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization. EUT emission levels were compared when the EUT antenna position was vertical polarization and horizontal polarization.

The equipment was also previously checked at each position of three axis X, Y and Z. At <1GHz, Z was worst in these positions under the horizontal antenna polarization and X was worst in these positions under the vertical antenna polarization. At >1GHz, Z was worst in these positions under the horizontal antenna polarization and Y was worst in these positions under the vertical antenna polarization. The position in which the maximum noise occurred was chosen to put into measurement. See the photographs in page 10 to 11.

Maximum Filed Strength of Fundamental by §15.249 (a)

Measurement range : CISPR QP Detector, IF BW 120kHz

Test data : APPENDIX Page 12 to 14
Test result : Pass
Test instruments : KAF-05, KAT6-01, KTR-01, KCC-A1/A3, KLA-03, KAEC-01

Filed Strength of Spurious emissions by §15.249 (d)

Measurement range : 30MHz to 1000MHz CISPR QP Detector, IF BW 120kHz
: 1GHz to 10GHz PK and AV Detector, IF BW 1MHz

Test data : APPENDIX Page 15 to 20 (30 - 1000MHz)
: APPENDIX Page 21 to 26 (1 - 10GHz)
Test result : Pass
Test instruments : KAF-02, KAF-05, KAT10-S1, KAT6-01, KBA-03, KTR-01, KFL-01
KCC-A1/A3, KCC-D7, KCC-D13, KHA-01, KLA-03, KAEC-01, KSA-04
Photographs of test setup : Page 9

5.2 26dB Bandwidth

Test Procedure

The minimum 26dB bandwidth was measured with a radiated condition.

26dB Bandwidth 903.018MHz:158.717kHz
912.8484MHz:179.760kHz
926.3652MHz:199.900kHz

Test data : APPENDIX Page 27
Test result : Pass
Test instruments : KAF-05, KAT6-01, KTR-01, KCC-A1/A3, KLA-03, KAEC-01

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

APPENDIX 1: Photographs of test setup

- 1. Page 9 : Radiated emission
- 2. Page 10 - 11 : Pre check of worse-case position

APPENDIX 2: Test Data

- 1. Page 12 - 14 : Field strength of Fundamental(Radiated)
- 2. Page 15 - 26 : Field strength of Spurious emission(Radiated)
- 3. Page 27 : 26dB Bandwidth

APPENDIX 3: Test instruments

- Page 28 : Test instruments

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

Radiated emission



UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN


Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112


MF060b(23.04.02)

Pre check of worse-case position

X axis

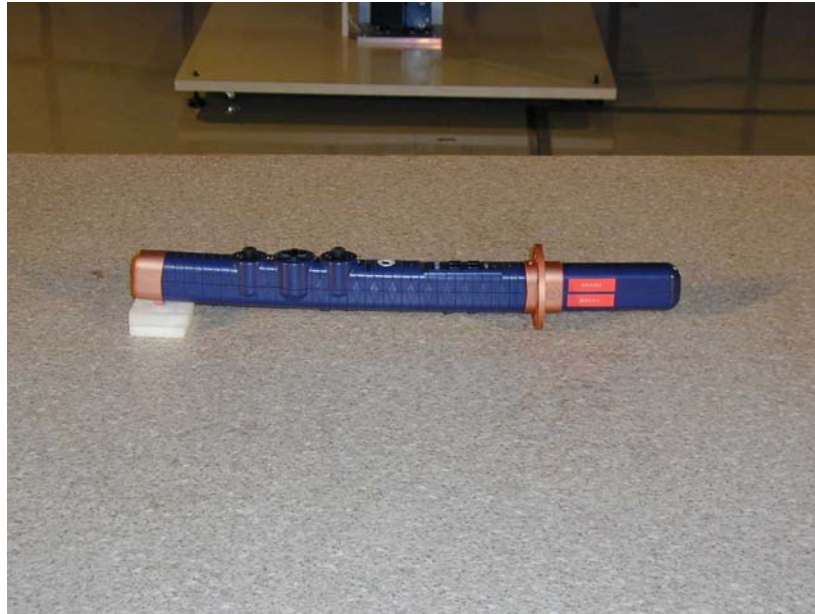

Y axis

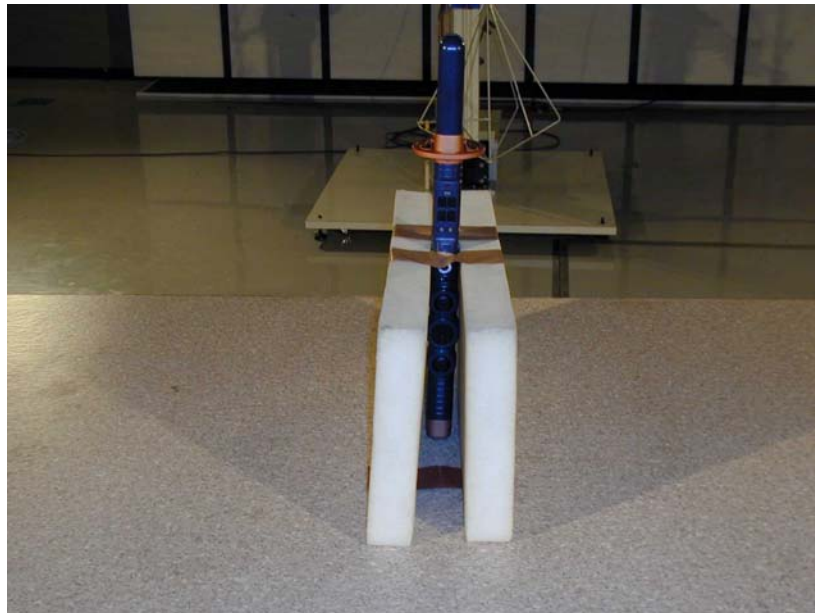

UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

Pre check of worse-case position

Z axis



UL Apex Co., Ltd.

YAMAKITA EMC LAB.

907 Kawanishi, Yamakita-machi, Ashigarakami-gun, Kanagawa-ken, 258-0124 JAPAN

Telephone: +81 465 77 1011

Facsimile: +81 465 77 2112

MF060b(23.04.02)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK ∞ 2

Applicant : HORI CO.,LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH1:903.0180MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.249(a) Fundamental (D:3m)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR	AMP GAIN	CABLE LOSS	ATTEN. [dB]	RESULT		LIMITS	MARGIN	
			HOR [dB μ V]	VER [dB/m]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	903.02	BB	82.3	78.0	22.4	28.8	3.4	6.1	85.4	81.1	93.9	8.5	12.8

CALCULATION: READING[dB μ V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz

■ CABLE: KCC-A1/A3 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
Yamakita No.1 Anechoic Chamber
Report No. : 24DE0265-YK-2

Applicant : HORI CO.,LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH6:912.8484MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.249(a) Fundamental (D:3m)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR	AMP GAIN	CABLE LOSS	ATTEN. [dB]	RESULT		LIMITS	MARGIN	
			HOR	VER					HOR	VER		HOR	VER
			[dB μV]	[dB/m]		[dB]	[dB]		[dB μV/m]	[dB μV/m]		[dB]	[dB]
1.	912.85	BB	83.6	77.9	22.5	28.8	3.4	6.1	86.8	81.1	93.9	7.1	12.8

CALCULATION: $\text{READING}[\text{dB} \mu\text{V}] + \text{ANT. FACTOR}[\text{dB/m}] + \text{CABLE LOSS}[\text{dB}] - \text{AMP. GAIN}[\text{dB}] + \text{ATTEN}[\text{dB}]$.

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz
■ CABLE: KCC-A1/A3 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK \Rightarrow 2

Applicant : HORI CO.,LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH8:926.3652MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.249(a) Fundamental (D:3m)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR	AMP GAIN	CABLE LOSS	ATTEN. [dB]	RESULT		LIMITS	MARGIN	
			HOR [dB μ V]	VER [dB/m]					HOR [dB μ V/m]	VER [dB μ V/m]		HOR [dB]	VER [dB]
1.	926.37	BB	83.4	79.1	22.6	28.7	3.5	6.1	86.9	82.6	93.9	7.0	11.3

CALCULATION: READING[dB μ V] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz

■ CABLE: KCC-A1/A3 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK = 2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH1:903.0180MHz
 Remarks :
 Date : 1/15/2004
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15.209

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	206.42	BB	38.5	26.4	16.5	27.9	1.5	6.1	34.7	22.6	43.5	8.8	20.9
2.	213.79	BB	38.8	27.7	16.6	27.8	1.5	6.1	35.2	24.1	43.5	8.3	19.4
3.	221.16	BB	46.5	35.9	16.7	27.8	1.6	6.1	43.1	32.5	46.0	2.9	13.5
4.	250.65	BB	40.6	30.8	17.1	27.6	1.7	6.1	37.9	28.1	46.0	8.1	17.9
5.	280.14	BB	39.4	29.2	18.8	27.6	1.8	6.1	38.5	28.3	46.0	7.5	17.7
6.	309.64	BB	46.4	34.2	14.7	27.7	1.9	6.1	41.4	29.2	46.0	4.6	16.8
7.	339.13	BB	50.0	37.3	15.5	27.9	2.0	6.1	45.7	33.0	46.0	0.3	13.0
8.	368.62	BB	44.4	34.0	16.3	28.1	2.0	6.1	40.7	30.3	46.0	5.3	15.7
9.	427.60	BB	37.6	26.3	17.5	28.6	2.2	6.1	34.8	23.5	46.0	11.2	22.5
10.	766.76	BB	33.5	28.6	21.4	29.1	3.1	6.1	35.0	30.1	46.0	11.0	15.9

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz

■ CABLE: KCC-A1/A3 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK \Rightarrow 2

Applicant : HORI CO.,LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH1:903.0180MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.209

Engineer : Ichiro Isozaki

Emission Level [dB μ V/m]

□ Horizontal

× Vertical

70

60

50


40

30

20

10

0

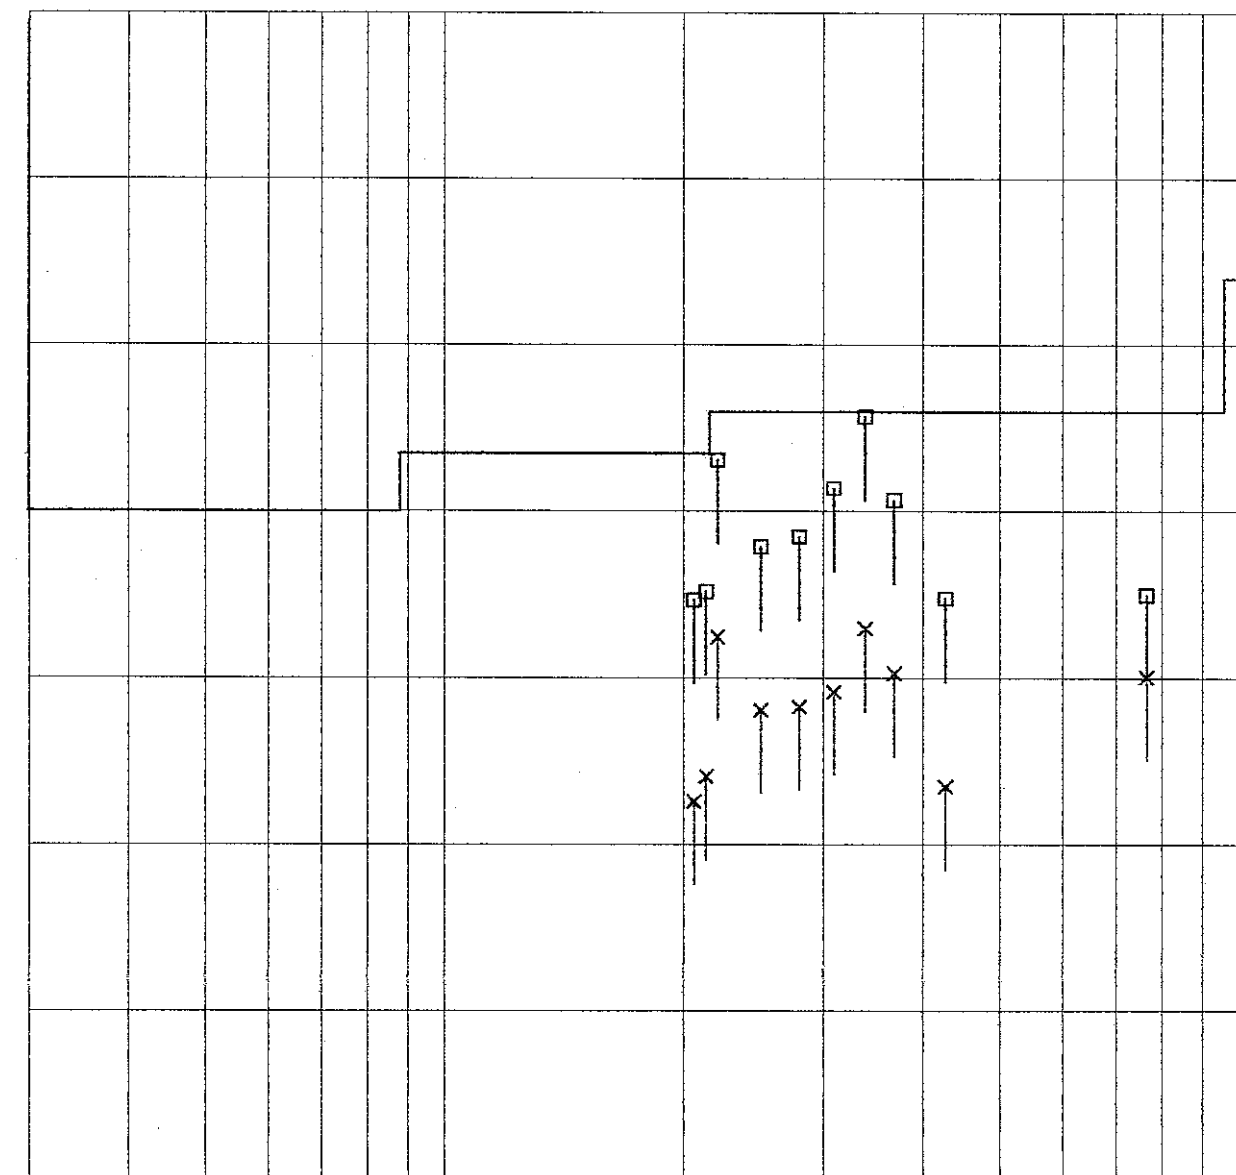

Frequency [MHz]

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK-2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH6:912.8484MHz
 Remarks :
 Date : 1/15/2004
 Test Distance : 3 m
 Temperature : 20 °C
 Humidity : 38 %
 Regulation : FCC Part15C § 15.209

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR	AMP GAIN	CABLE LOSS	ATTEN.	RESULT		LIMITS	MARGIN	
			HOR	VER					HOR	VER		HOR	VER
			[dB μV]	[dB μV]	[dB/m]	[dB]	[dB]	[dB]	[dB μV/m]	[dB μV/m]	[dB μV/m]	[dB]	[dB]
1.	206.42	BB	37.3	27.5	16.5	27.9	1.5	6.1	33.5	23.7	43.5	10.0	19.8
2.	221.16	BB	47.1	36.5	16.7	27.8	1.6	6.1	43.7	33.1	46.0	2.3	12.9
3.	250.65	BB	39.0	29.7	17.1	27.6	1.7	6.1	36.3	27.0	46.0	9.7	19.0
4.	280.14	BB	39.5	29.4	18.8	27.6	1.8	6.1	38.6	28.5	46.0	7.4	17.5
5.	309.63	BB	46.6	33.7	14.7	27.7	1.9	6.1	41.6	28.7	46.0	4.4	17.3
6.	339.17	BB	49.3	36.9	15.5	27.9	2.0	6.1	45.0	32.6	46.0	1.0	13.4
7.	368.62	BB	44.7	35.1	16.3	28.1	2.0	6.1	41.0	31.4	46.0	5.0	14.6
8.	766.76	BB	34.7	29.5	21.4	29.1	3.1	6.1	36.2	31.0	46.0	9.8	15.0

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz

■ CABLE: KCC-A1/A3 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK = 2

Applicant : HORI CO., LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH6:912.8484MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.209

Engineer : Ichiro Isozaki

Emission Level [dB μ V/m]

□Horizontal

×Vertical

70

60

50


40

30

20

10

0

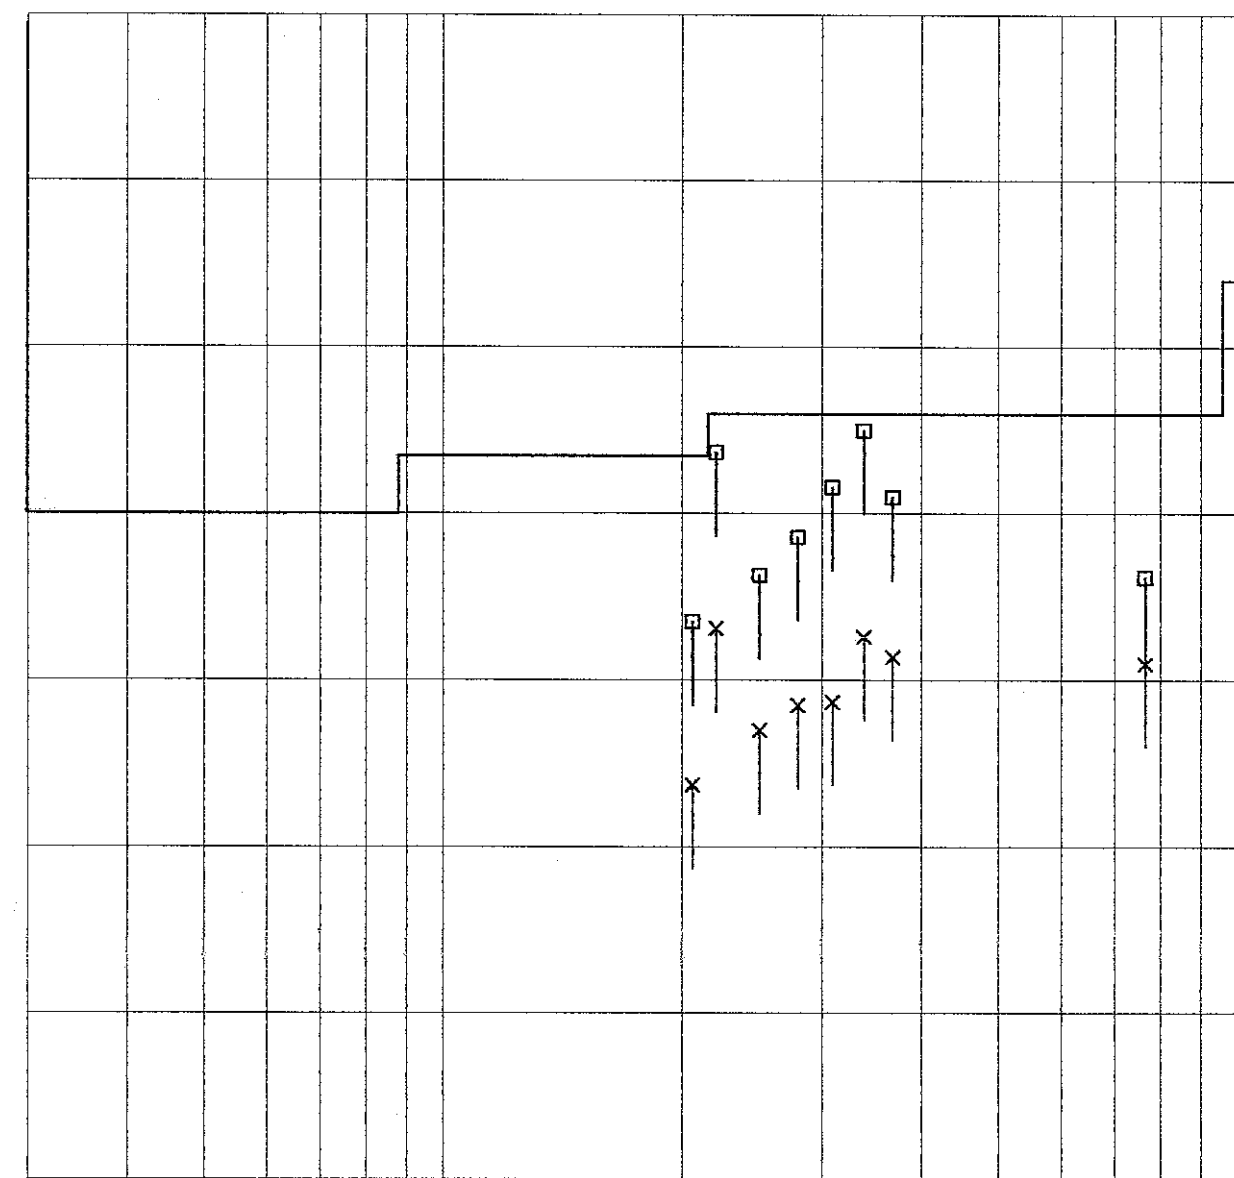

30

100

Frequency [MHz]

500

1000

DATA OF RADIATION TEST

UL Apex Co.,Ltd.
Yamakita No.1 Anechoic Chamber
Report No. : 24DE0265-YK-2

Applicant : HORI CO.,LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH8:926.3652MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.209

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	206.42	BB	36.2	26.4	16.5	27.9	1.5	6.1	32.4	22.6	43.5	11.1	20.9
2.	213.79	BB	31.4	23.4	16.6	27.8	1.5	6.1	27.8	19.8	43.5	15.7	23.7
3.	221.16	BB	48.3	37.6	16.7	27.8	1.6	6.1	44.9	34.2	46.0	1.1	11.8
4.	250.65	BB	38.4	29.2	17.1	27.6	1.7	6.1	35.7	26.5	46.0	10.3	19.5
5.	280.14	BB	38.8	29.9	18.8	27.6	1.8	6.1	37.9	29.0	46.0	8.1	17.0
6.	309.63	BB	45.6	33.5	14.7	27.7	1.9	6.1	40.6	28.5	46.0	5.4	17.5
7.	339.17	BB	49.6	37.3	15.5	27.9	2.0	6.1	45.3	33.0	46.0	0.7	13.0
8.	368.62	BB	44.1	34.6	16.3	28.1	2.0	6.1	40.4	30.9	46.0	5.6	15.1
9.	427.60	BB	37.3	26.2	17.5	28.6	2.2	6.1	34.5	23.4	46.0	11.5	22.6
10.	766.76	BB	34.5	29.7	21.4	29.1	3.1	6.1	36.0	31.2	46.0	10.0	14.8

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KBA-03 (BBA9106) 30-299.99MHz/KLA-03 (USLP9143) 300-1000MHz
■ CABLE: KCC-A1/A3 ■ PREAMP: KAF-05 (8447D) ■ EMI RECEIVER: KTR-01 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK = 2

Applicant : HORI CO., LTD.
Kind of Equipment : GAME CONTROLLER
Model No. : UHP2-109-A
Serial No. : S1
Power : DC3.3V
Mode : Transmitting CH8:926.3652MHz
Remarks :
Date : 1/15/2004
Test Distance : 3 m
Temperature : 20 °C
Humidity : 38 %
Regulation : FCC Part15C § 15.209

Engineer : Ichiro Isozaki

Emission Level [dB μ V/m]

□Horizontal

×Vertical

70

60

50


40

30

20

10

0

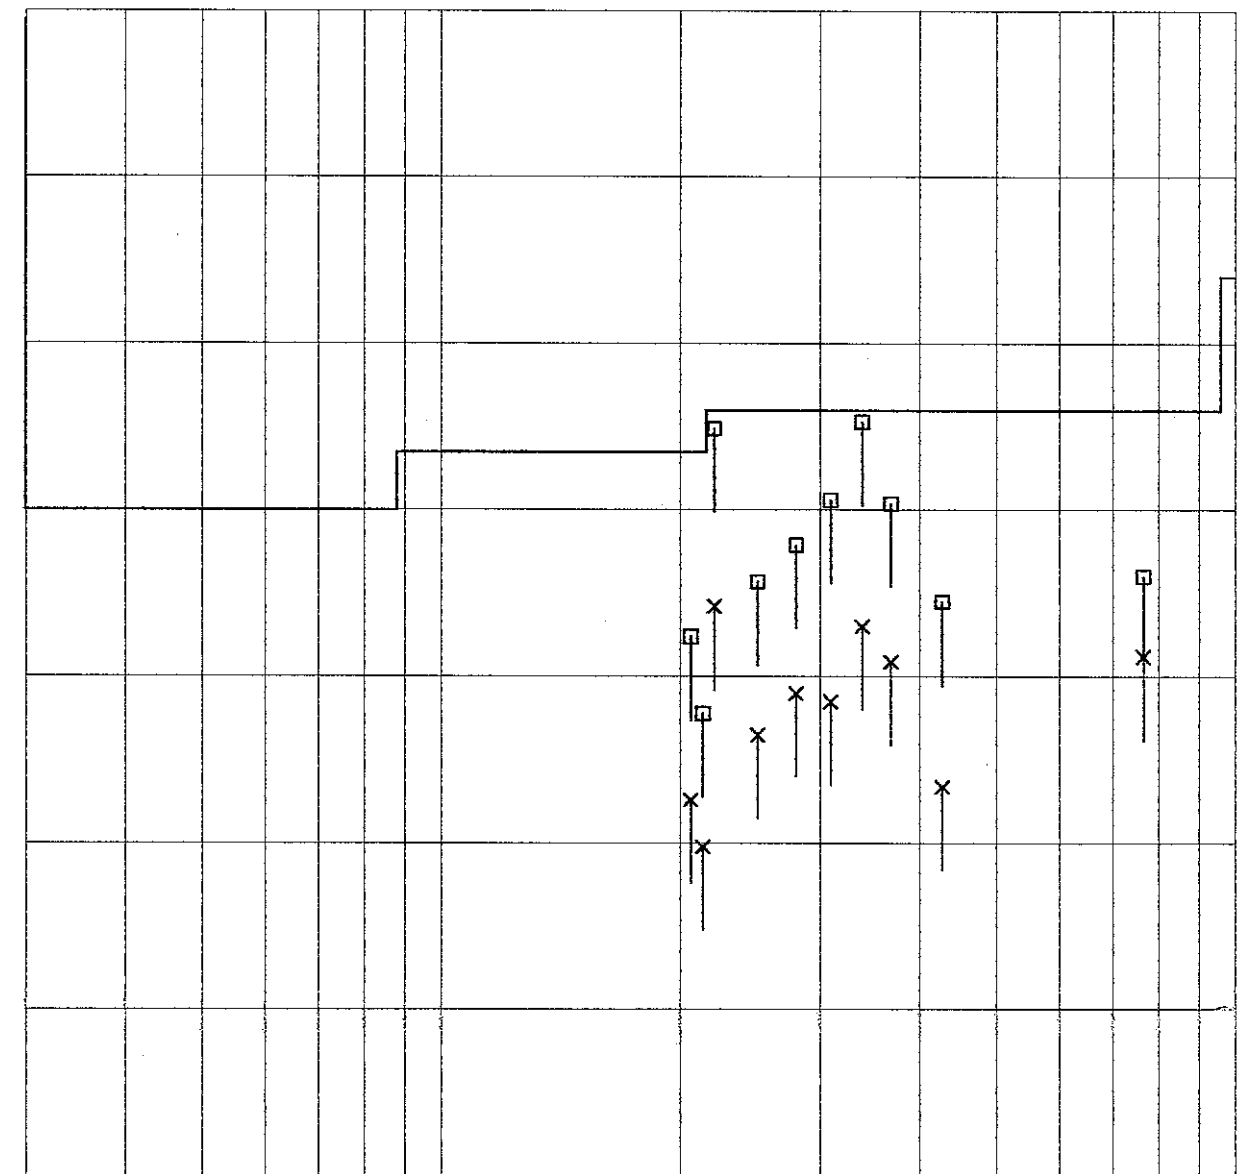

30

100

Frequency [MHz]

500

1000

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK-2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH1:903.0180MHz
 Remarks :
 Date : 1/19/2004
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 32 %
 Regulation : FCC Part15C § 15.209 (AV Detection)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1806.04	BB	42.7	46.7	29.0	37.1	3.6	10.0	48.2	52.2	54.0	5.8	1.8
2.	2709.05	BB	40.9	39.1	30.7	37.0	4.5	10.0	49.1	47.3	54.0	4.9	6.7
3.	3612.07	BB	49.6	48.9	32.1	36.7	5.2	1.0	51.2	50.5	54.0	2.8	3.5
4.	4515.09	BB	34.8	35.1	33.8	35.2	5.9	0.7	40.0	40.3	54.0	14.0	13.7
5.	5418.11	BB	33.2	33.2	35.9	36.2	6.4	0.8	40.1	40.1	54.0	13.9	13.9
6.	6321.13	BB	43.4	35.8	37.3	36.4	7.0	0.3	51.6	44.0	54.0	2.4	10.0
7.	7224.14	BB	32.9	33.6	38.2	36.8	7.6	0.5	42.4	43.1	54.0	11.6	10.9
8.	8127.16	BB	32.6	33.1	37.9	37.0	8.1	0.5	42.1	42.6	54.0	11.9	11.4
9.	9030.18	BB	32.8	33.3	39.4	37.1	8.5	0.5	44.1	44.6	54.0	9.9	9.4

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ ANTENNA: KHA-01 (SAS-200 571) 1-18GHz

■ CABLE: KCC-D7/D13 ■ PREAMP: KAF-02 (8449B) ■ EMI RECEIVER: KTR-0 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK - 2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH1:903.0180MHz
 Remarks :
 Date : 1/19/2004
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 32 %
 Regulation : FCC Part15C § 15.209 (PK Detection)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1806.04	BB	48.3	50.8	29.0	37.1	3.6	10.0	53.8	56.3	74.0	20.2	17.7
2.	2709.05	BB	48.2	46.5	30.7	37.0	4.5	10.0	56.4	54.7	74.0	17.6	19.3
3.	3612.07	BB	51.8	52.2	32.1	36.7	5.2	1.0	53.4	53.8	74.0	20.6	20.2
4.	4515.09	BB	45.1	46.2	33.8	35.2	5.9	0.7	50.3	51.4	74.0	23.7	22.6
5.	5418.11	BB	44.1	43.6	35.9	36.2	6.4	0.8	51.0	50.5	74.0	23.0	23.5
6.	6321.13	BB	48.6	46.0	37.3	36.4	7.0	0.3	56.8	54.2	74.0	17.2	19.8
7.	7224.14	BB	44.4	45.4	38.2	36.8	7.6	0.5	53.9	54.9	74.0	20.1	19.1
8.	8127.16	BB	44.3	45.5	37.9	37.0	8.1	0.5	53.8	55.0	74.0	20.2	19.0
9.	9030.18	BB	44.9	45.2	39.4	37.1	8.5	0.5	56.2	56.5	74.0	17.8	17.5

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ANTENNA:KHA-01 (SAS-200 571) 1-18GHz

■CABLE:KCC-D7/D13 ■PREAMP:KAF-02 (8449B) ■EMI RECEIVER:KTR-0 (ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK = 2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH6:912.8484MHz
 Remarks :
 Date : 1/19/2004
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 32 %
 Regulation : FCC Part15C § 15.209(AV Detection)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1825.70	BB	45.4	48.2	29.1	37.1	3.6	10.0	51.0	53.8	54.0	3.0	0.2
2.	2738.55	BB	45.3	42.9	30.7	37.0	4.5	10.0	53.5	51.1	54.0	0.5	2.9
3.	3651.39	BB	50.6	49.6	32.3	36.7	5.2	0.9	52.3	51.3	54.0	1.7	2.7
4.	4564.24	BB	35.0	35.5	34.0	35.2	5.9	0.7	40.4	40.9	54.0	13.6	13.1
5.	5477.09	BB	32.5	33.6	35.9	36.3	6.4	0.9	39.4	40.5	54.0	14.6	13.5
6.	6389.94	BB	37.8	37.2	37.3	36.5	7.0	0.2	45.8	45.2	54.0	8.2	8.8
7.	7302.79	BB	32.9	33.0	38.4	36.8	7.6	0.5	42.6	42.7	54.0	11.4	11.3
8.	8215.64	BB	32.5	32.9	38.0	37.0	8.2	0.6	42.3	42.7	54.0	11.7	11.3
9.	9128.48	BB	32.6	32.9	39.3	37.0	8.6	0.4	43.9	44.2	54.0	10.1	9.8

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ANTENNA:KHA-01(SAS-200 571)1-18GHz

■CABLE:KCC-D7/D13■PREAMP:KAF-02(8449B)■EMI RECEIVER:KTR-0(ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK = 2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH6:912.8484MHz
 Remarks :
 Date : 1/19/2004
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 32 %
 Regulation : FCC Part15C § 15.209(PK Detection)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR	AMP GAIN	CABLE LOSS	ATTEN.	RESULT		LIMITS	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1825.70	BB	49.9	53.1	29.1	37.1	3.6	10.0	55.5	58.7	74.0	18.5	15.3
2.	2738.55	BB	49.5	49.5	30.7	37.0	4.5	10.0	57.7	57.7	74.0	16.3	16.3
3.	3651.39	BB	52.9	53.0	32.3	36.7	5.2	0.9	54.6	54.7	74.0	19.4	19.3
4.	4564.24	BB	44.4	44.9	34.0	35.2	5.9	0.7	49.8	50.3	74.0	24.2	23.7
5.	5477.09	BB	43.2	45.1	35.9	36.3	6.4	0.9	50.1	52.0	74.0	23.9	22.0
6.	6389.94	BB	45.8	48.4	37.3	36.5	7.0	0.2	53.8	56.4	74.0	20.2	17.6
7.	7302.79	BB	43.5	45.2	38.4	36.8	7.6	0.5	53.2	54.9	74.0	20.8	19.1
8.	8215.64	BB	44.2	45.2	38.0	37.0	8.2	0.6	54.0	55.0	74.0	20.0	19.0
9.	9128.48	BB	44.7	45.1	39.3	37.0	8.6	0.4	56.0	56.4	74.0	18.0	17.6

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ANTENNA:KHA-01(SAS-200 571)1-18GHz

■CABLE:KCC-D7/D13■PREAMP:KAF-02(8449B)■EMI RECEIVER:KTR-0(ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK-2

Applicant : HORI CO.,LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH8:926.3652MHz
 Remarks :
 Date : 1/19/2004
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 32 %
 Regulation : FCC Part15C § 15.209(AV Detection)

Engineer : Ichiro Isozaki

No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1852.73	BB	46.5	48.0	29.3	37.0	3.6	10.0	52.4	53.9	54.0	1.6	0.1
2.	2779.10	BB	45.3	42.6	30.7	37.0	4.6	10.0	53.6	50.9	54.0	0.4	3.1
3.	3705.46	BB	47.1	44.8	32.5	36.6	5.3	0.9	49.2	46.9	54.0	4.8	7.1
4.	4631.83	BB	34.4	34.1	34.4	35.2	6.0	0.7	40.3	40.0	54.0	13.7	14.0
5.	5558.19	BB	31.9	30.3	36.1	36.3	6.5	0.8	39.0	37.4	54.0	15.0	16.6
6.	6484.56	BB	35.8	37.9	37.3	36.5	7.1	0.2	43.9	46.0	54.0	10.1	8.0
7.	7410.92	BB	32.5	32.6	38.7	36.9	7.6	0.5	42.4	42.5	54.0	11.6	11.5
8.	8337.29	BB	32.4	32.6	38.1	37.0	8.2	0.6	42.3	42.5	54.0	11.7	11.5
9.	9263.65	BB	32.6	32.8	39.2	37.0	8.6	0.4	43.8	44.0	54.0	10.2	10.0

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].

■ANTENNA:KHA-01(SAS-200 571)1-18GHz

■CABLE:KCC-D7/D13■PREAMP:KAF-02(8449B)■EMI RECEIVER:KTR-0(ES140)

DATA OF RADIATION TEST

UL Apex Co.,Ltd.

Yamakita No.1 Anechoic Chamber

Report No. : 24DE0265-YK-2

Applicant : HORI CO., LTD.
 Kind of Equipment : GAME CONTROLLER
 Model No. : UHP2-109-A
 Serial No. : S1
 Power : DC3.3V
 Mode : Transmitting CH8:926.3652MHz
 Remarks :
 Date : 1/19/2004
 Test Distance : 3 m
 Temperature : 21 °C
 Humidity : 32 %
 Regulation : FCC Part15C § 15.209(PK Detection)

Engineer : Ichiro Isozaki


No.	FREQ. [MHz]	ANT TYPE	READING		ANT FACTOR [dB/m]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS [dB μV/m]	MARGIN	
			HOR [dB μV]	VER [dB μV]					HOR [dB μV/m]	VER [dB μV/m]		HOR [dB]	VER [dB]
1.	1852.73	BB	51.6	53.3	29.3	37.0	3.6	10.0	57.5	59.2	74.0	16.5	14.8
2.	2779.10	BB	50.2	48.7	30.7	37.0	4.6	10.0	58.5	57.0	74.0	15.5	17.0
3.	3705.46	BB	50.9	49.6	32.5	36.6	5.3	0.9	53.0	51.7	74.0	21.0	22.3
4.	4631.83	BB	43.8	44.0	34.4	35.2	6.0	0.7	49.7	49.9	74.0	24.3	24.1
5.	5558.19	BB	44.0	42.2	36.1	36.3	6.5	0.8	51.1	49.3	74.0	22.9	24.7
6.	6484.56	BB	45.1	46.8	37.3	36.5	7.1	0.2	53.2	54.9	74.0	20.8	19.1
7.	7410.92	BB	44.5	44.3	38.7	36.9	7.6	0.5	54.4	54.2	74.0	19.6	19.8
8.	8337.29	BB	43.7	45.3	38.1	37.0	8.2	0.6	53.6	55.2	74.0	20.4	18.8
9.	9263.65	BB	44.5	44.8	39.2	37.0	8.6	0.4	55.7	56.0	74.0	18.3	18.0

CALCULATION: READING[dB μV] + ANT. FACTOR[dB/m] + CABLE LOSS[dB] - AMP. GAIN[dB] + ATTEN[dB].


■ANTENNA:KHA-01(SAS-200 571)1-18GHz

■CABLE:KCC-D7/D13■PREAMP:KAF-02(8449B)■EMI RECEIVER:KTR-0(ES140)


1. Ch Low:903.018MHz

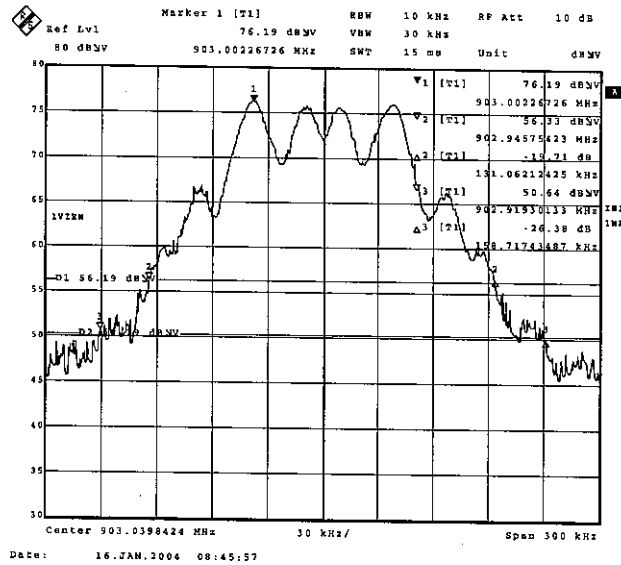U. Suzuki

2. Ch Mid:912.8484MHz

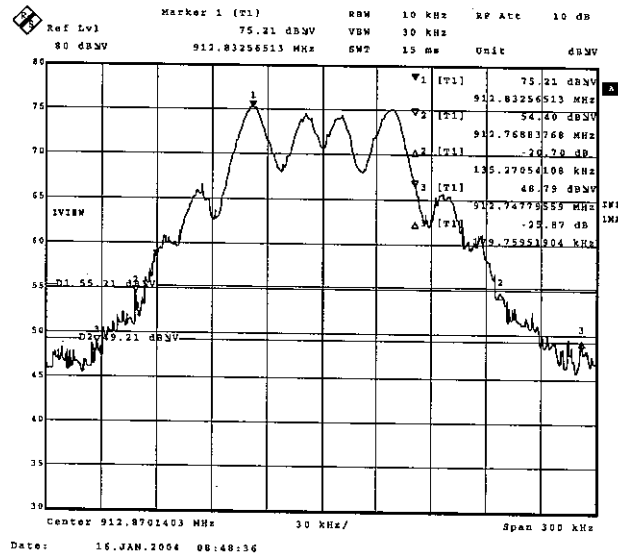

3. Ch High:926.3652MHz

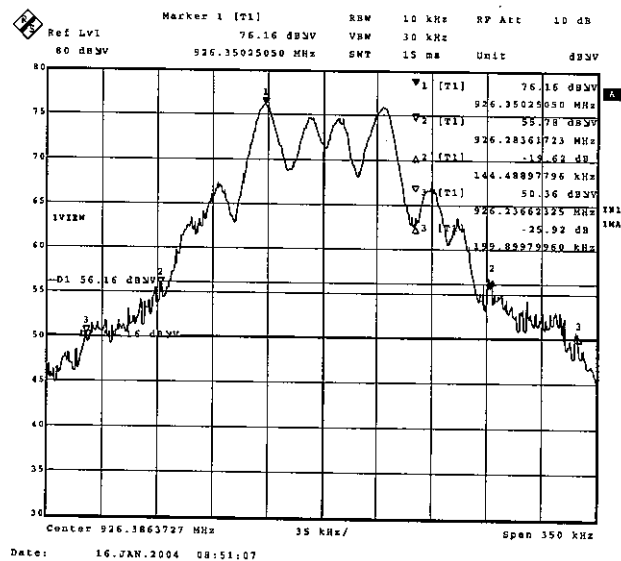

Test Report No :24DE0265-YK-2

APPENDIX 3 Test Instruments

EMI test equipment

Control No.	Instrument	Manufacturer	Model No	Test Item	Calibration Date * Interval(month)
KAEC-01(NSA)	Anechoic Chamber	JSE	Semi 3m	RE	2003/09/07 * 12
KAF-02	Pre Amplifier	Hewlett Packard	8449B	RE	2003/05/08 * 12
KAF-05	Pre Amplifier	Agilent	8447D	RE	2003/06/12 * 12
KAT10-S1	Attenuator	Agilent	8449D 010	RE	2003/04/18 * 12
KAT6-01	Attenuator	INMET	i8N-6dB	RE	2003/05/12 * 12
KBA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2003/02/06 * 12
KCC-A1/A3	Coaxial Cable	Fujikura	5D-2W	RE	2003/07/25 * 12
KFL-01	Highpass Filter	Hewlett Packard	84300 80038	RE	2003/04/18 * 12
KHA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE	2003/08/11 * 12
KLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	RE	2003/02/06 * 12
KTR-01	Test Receiver	Rohde & Schwarz	ESI40	RE	2003/07/25 * 12
KSA-04	Spectrum Analyzer	Advantest	R3271A	RE	2003/09/17 * 12
KCC-D7/D13	Coaxial cable	Advantest/Suhuner	A01002/SUCOFLEX1 04	RE	2003/04/18 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Test Item:

RE: Radiated emission,