




FCC RADIO TEST REPORT

FCC ID : UZ7RFD4031
Equipment : RFID Sled
Brand Name : ZEBRA
Model Name : RFD4031
Applicant : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Manufacturer : Zebra Technologies Corporation
1 Zebra Plaza, Holtsville, NY 11742
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 28, 2021 and testing was started from May 20, 2021 and completed on Sep. 09, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	5
1.3 Modification of EUT	6
1.4 Testing Location	6
1.5 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result.....	11
3.1 Number of Channel Measurement	11
3.2 Hopping Channel Separation Measurement	13
3.3 Dwell Time Measurement.....	16
3.4 20dB and 99% Bandwidth Measurement	18
3.5 Output Power Measurement.....	23
3.6 Conducted Band Edges Measurement.....	25
3.7 Conducted Spurious Emission Measurement	28
3.8 Radiated Band Edges and Spurious Emission Measurement	31
3.9 AC Power Line Conducted Emissions Measurement.....	35
3.10 Antenna Requirements.....	37
4 List of Measuring Equipment	38
5 Uncertainty of Evaluation.....	40
Appendix A. AC Conducted Emission Test Result	
Appendix B. Radiated Spurious Emission	
Appendix C. Radiated Spurious Emission Plots	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR142718	01	Initial issue of report	Sep. 17, 2021

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(1)	Number of Channels	Pass	-
3.2	15.247(a)(1)	Hopping Channel Separation	Pass	-
3.3	15.247(a)(1)	Dwell Time of Each Channel	Pass	-
3.4	15.247(a)(1)	20dB Bandwidth	Pass	-
3.4	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.5	15.247(b)(1)	Output Power	Pass	-
3.6	15.247(d)	Conducted Band Edges	Pass	-
3.7	15.247(d)	Conducted Spurious Emission	Pass	-
3.8	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	Under limit 3.07 dB at 45.520 MHz
3.9	15.207	AC Conducted Emission	Pass	Under limit 3.08 dB at 0.501MHz
3.10	15.203 & 15.247(b)	Antenna Requirement	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wei Chen

Report Producer: Ruby Zou

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	RFID Sled
Brand Name	ZEBRA
Model Name	RFD4031
FCC ID	UZ7RFD4031
Sample 1	Premium+. with SE4100 barcode engine
Sample 2	Premium. without barcode engine
EUT supports Radios application	UHF RFID WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE
HW Version	DV1.5
SW Version	SAAFKS00-001-N34D0
MFD	04MAR21
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer.

Specification of Accessories				
Battery	Brand Name	ZEBRA	Model Name	BT-000380

Supported Unit Used in Test Configuration and System				
Adapter	Brand Name	ZEBRA	Part Number	PWR-WUA5V12W0US
USB Cable	Brand Name	ZEBRA	Part Number	CBL-TC5X-USBC2A-01
Terminal	Brand Name	ZEBRA	Model Name	TC26BK
Battery	Brand Name	ZEBRA	Model Name	BT-000409A

1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	902.75 MHz ~ 927.25 MHz
Number of Channels	1
Maximum Output Power to Antenna	29.79dBm (0.9528 W)
20dB Bandwidth	0.084 MHz
99% Occupied Bandwidth	0.078 MHz
Antenna Type / Gain	Helix Antenna with gain 0.17 dBi
Type of Modulation	ASK

Remark: The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

1.3 Modification of EUT

No modifications are made to the EUT during all test items.

1.4 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory	
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	CO05-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory	
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855	
Test Site No.	Sporton Site No.	
	03CH11-HY (TAF Code: 3786)	
Remark	The Radiated Spurious Emissions test item subcontracted to Sporton International Inc. Wensan Laboratory.	

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v05r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
902.75-927.25 MHz	0	902.75	27	916.25
	1	903.25	28	916.75
	2	903.75	29	917.25
	3	904.25	30	917.75
	4	904.75	31	918.25
	5	905.25	32	918.75
	6	905.75	33	919.25
	7	906.25	34	919.75
	8	906.75	35	920.25
	9	907.25	36	920.75
	10	907.75	37	921.25
	11	908.25	38	921.75
	12	908.75	39	922.25
	13	909.25	40	922.75
	14	909.75	41	923.25
	15	910.25	42	923.75
	16	910.75	43	924.25
	17	911.25	44	924.75
	18	911.75	45	925.25
	19	912.25	46	925.75
	20	912.75	47	926.25
	21	913.25	48	926.75
	22	913.75	49	927.25
	23	914.25		
	24	914.75		
	25	915.25		
	26	915.75		

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find Z plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	UHF RFID
Conducted Test Cases	Mode 1: UHF RFID Tx CH00_902.75 MHz Mode 2: UHF RFID Tx CH24_914.75 MHz Mode 3: UHF RFID Tx CH49_927.25 MHz
Radiated Test Cases	Mode 1: UHF RFID Tx CH00_902.75 MHz Mode 2: UHF RFID Tx CH24_914.75 MHz Mode 3: UHF RFID Tx CH49_927.25 MHz
AC Conducted Emission	Mode 1: EUT with Terminal PDA + RFID Link + USB Cable (Charging from AC Adapter) + Scan Bar Code for Sample 1 Mode 2: EUT with Terminal PDA + RFID Link + USB Cable (Charging from AC Adapter) for Sample 2

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

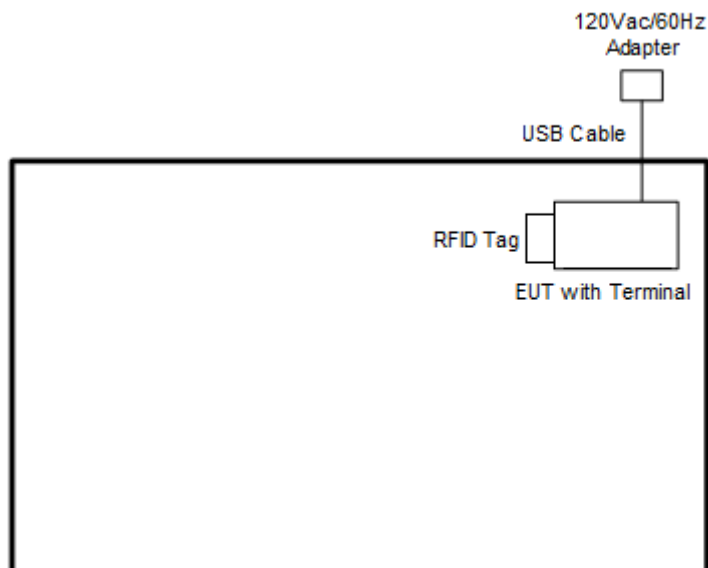

<Radiated Spurious Emission Mode>

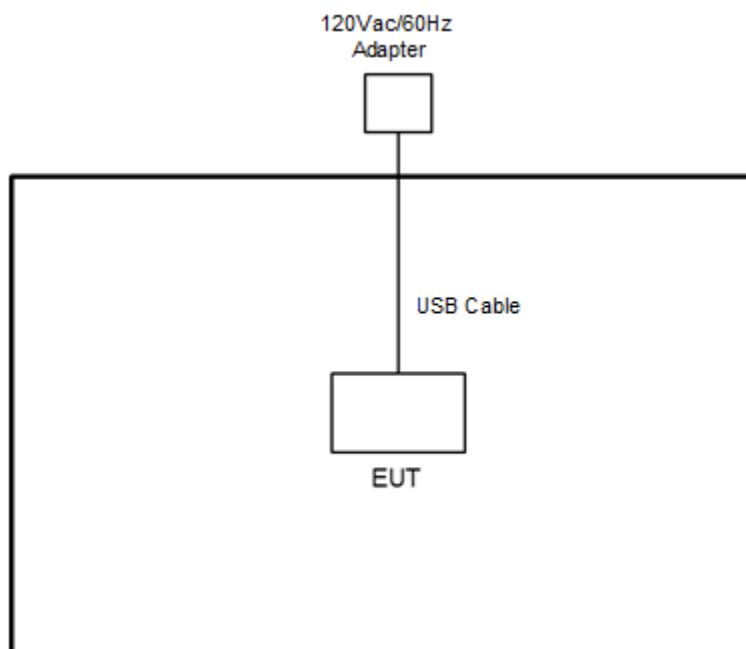



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	RFID Tag	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 Number of Channel Measurement

3.1.1 Limits of Number of Hopping Frequency

Frequency hopping systems in the 902.75-927.25 MHz band shall use at least 25 channels.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = the frequency band of operation;
RBW = 300 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. The number of hopping frequency used is defined as the number of total channel.
7. Record the measurement data derived from spectrum analyzer.

3.1.4 Test Setup




3.1.5 Test Result of Number of Hopping Frequency

Test Mode :	UHF	Temperature :	21.6~24.7°C
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%
Number of Hopping (Channel)	Limits (Channel)	Pass/Fail	
50	> 25	Pass	



Number of Hopping Channel Plot on Channel 00 - 49

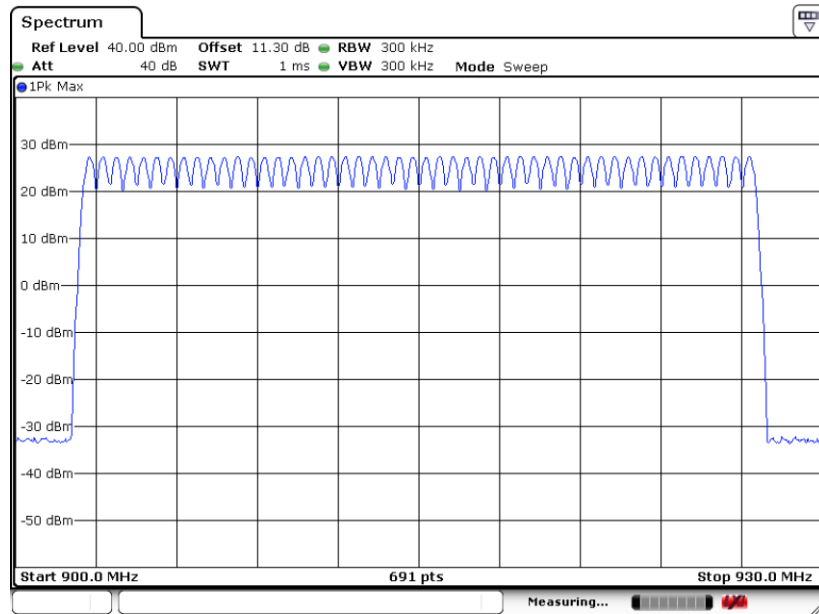

Date: 29.MAY.2021 12:35:14

3.2 Hopping Channel Separation Measurement

3.2.1 Limit of Hopping Channel Separation

Frequency hopping systems operating in the 902.75-927.25 MHz band may have hopping channel carrier frequencies that are 20 dB bandwidth of the hopping channel, whichever is greater.


3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.2.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings:
Span = wide enough to capture the peaks of two adjacent channels;
RBW = 300 kHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.


3.2.4 Test Setup

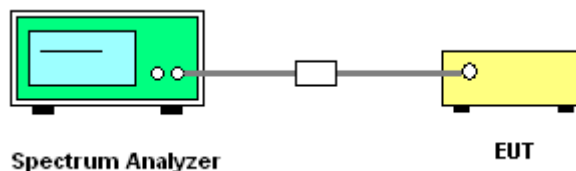

**3.2.5 Test Result of Hopping Channel Separation**

Test Mode :	UHF	Temperature :	21.6~24.7℃
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%


Mod.	NTX	CH.	Freq. (MHz)	Hopping Channel Separation Measurement (MHz)	Hopping Channel Separation Measurement Limit (MHz)	Pass/Fail
UHF RFID	1	0	902.75	0.502	0.0825	Pass
UHF RFID	1	24	914.75	0.501	0.0839	Pass
UHF RFID	1	49	927.25	0.502	0.0839	Pass

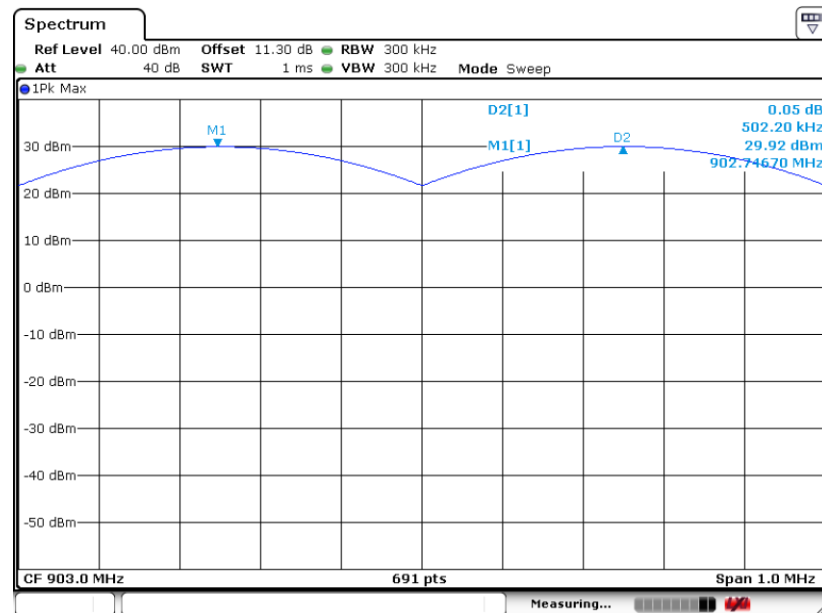Channel Separation Plot on Channel 00 - 01

Date: 29.MAY.2021 10:11:47




Channel Separation Plot on Channel 24 - 25

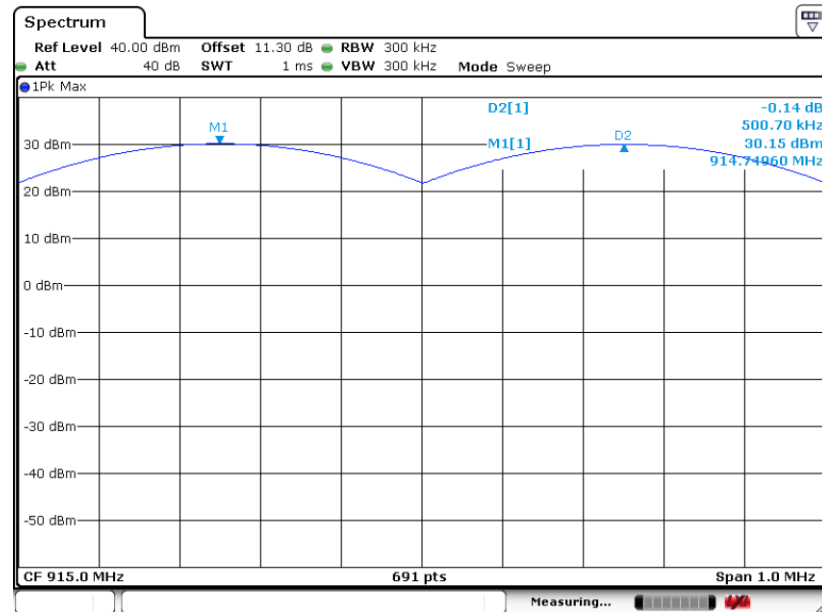

Date: 29.MAY.2021 10:20:52

Channel Separation Plot on Channel 48 - 49

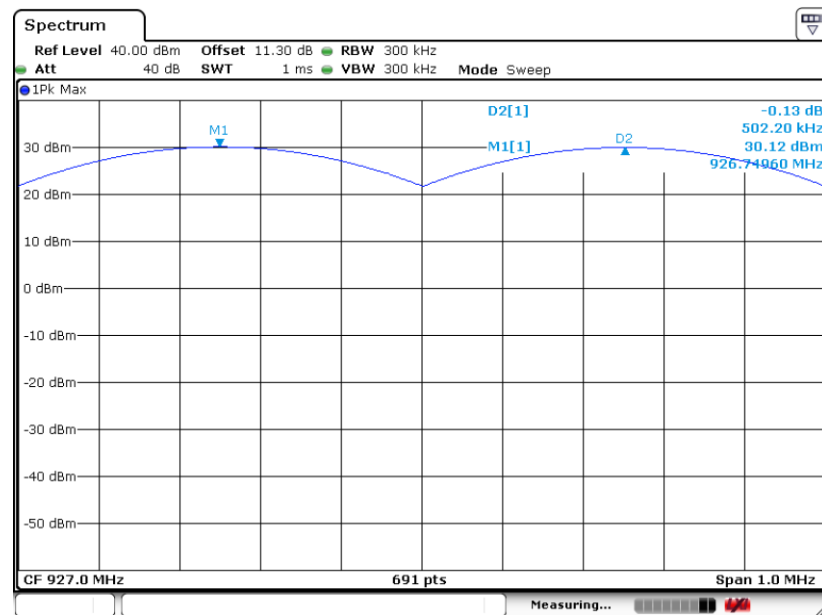

Date: 29.MAY.2021 10:43:01

3.3 Dwell Time Measurement

3.3.1 Limit of Dwell Time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 20 seconds multiplied by the number of hopping channels employed.


3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.4.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Enable the EUT hopping function.
5. Use the following spectrum analyzer settings: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold.
6. Measure and record the results in the test report.

3.3.4 Test Setup

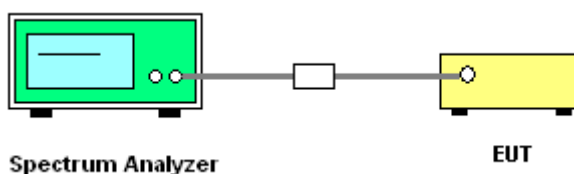



3.3.5 Test Result of Dwell Time

Test Mode :	UHF	Temperature :	21.6~24.7°C
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%

Mod.	Channel Number Rate	Package Transfer Time (msec)	Hops Over Occupancy Time (hops)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	50	13.04	1	0.013	0.4	Pass



Package Transfer Time Plot

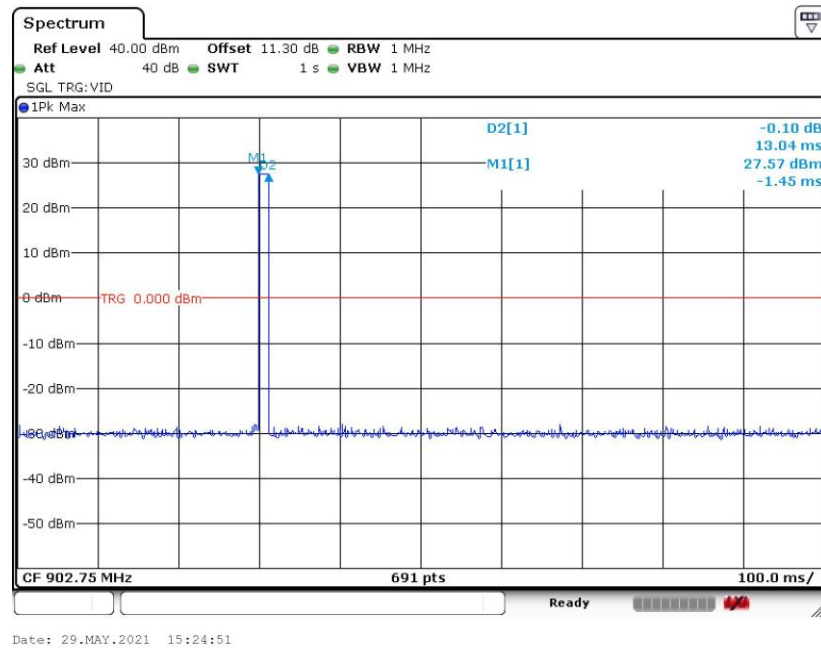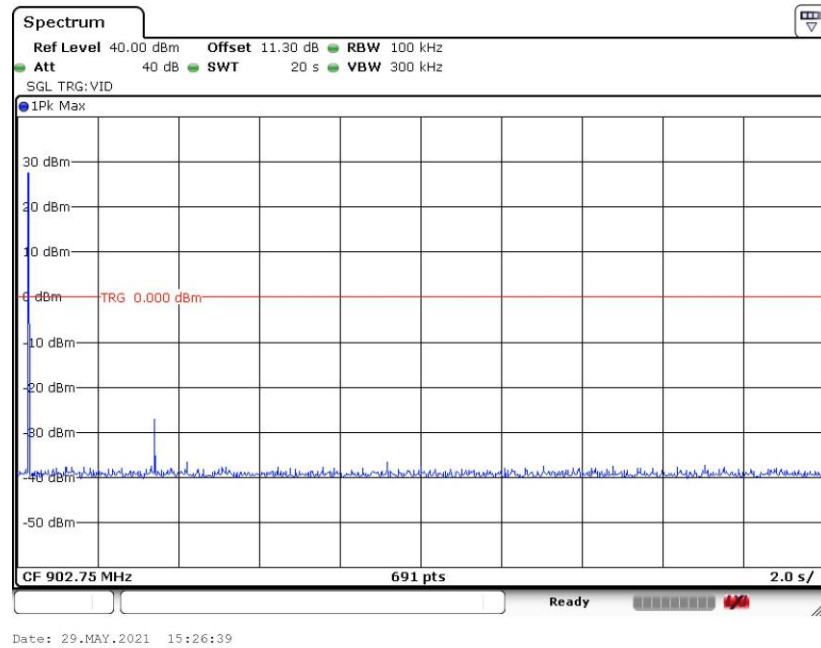

Remark: Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time

3.4 20dB and 99% Bandwidth Measurement

3.4.1 Limit of 20dB and 99% Bandwidth

Reporting only


3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 6.9.2 and 6.9.3.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Use the following spectrum analyzer settings for 20 dB Bandwidth measurement.
Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hopping channel;
RBW \geq 1% of the 20 dB bandwidth; VBW \geq RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
5. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
Span = approximately 1.5 to 5 times the 99% bandwidth, centered on a hopping channel;
RBW \geq 1-5% of the 99% bandwidth; VBW \geq 3 * RBW; Sweep = auto; Detector function = peak;
Trace = max hold.
6. Measure and record the results in the test report.

3.4.4 Test Setup

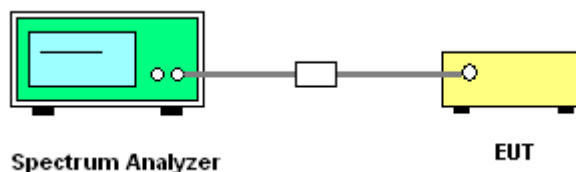



3.4.5 Test Result of 20dB Bandwidth

Test Mode :	UHF	Temperature :	21.6~24.7°C
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%


Mod.	N _{TX}	CH.	Freq.(MHz)	20db BW (MHz)	Pass/Fail
UHF RFID	1	0	902.75	0.083	Pass
UHF RFID	1	24	914.75	0.084	Pass
UHF RFID	1	49	927.25	0.084	Pass

20 dB Bandwidth Plot on Channel 00

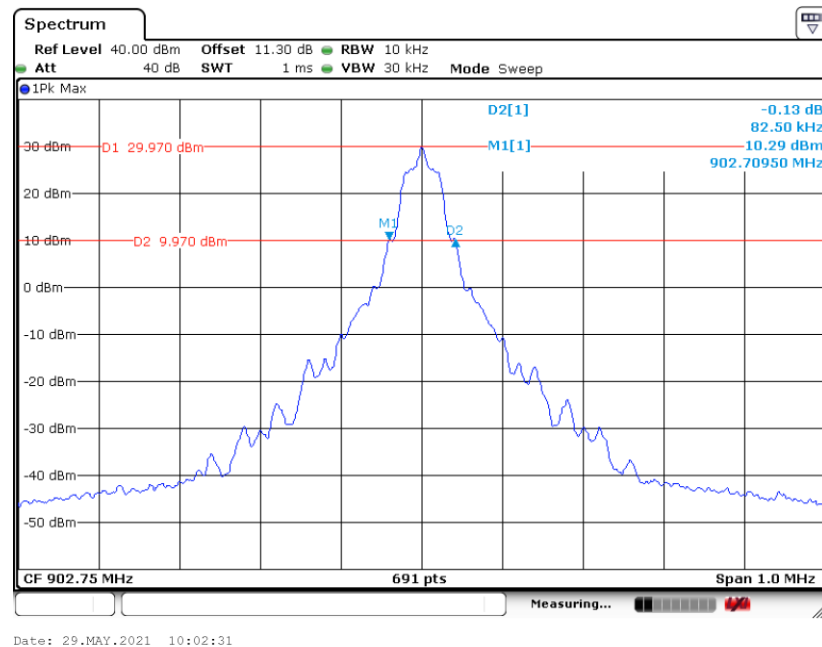

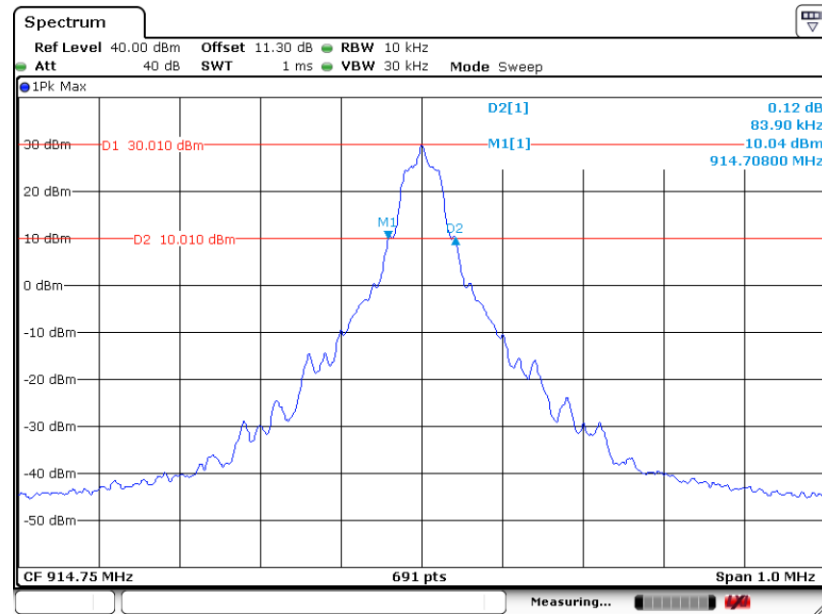**20 dB Bandwidth Plot on Channel 24**

Date: 29.MAY.2021 10:25:35

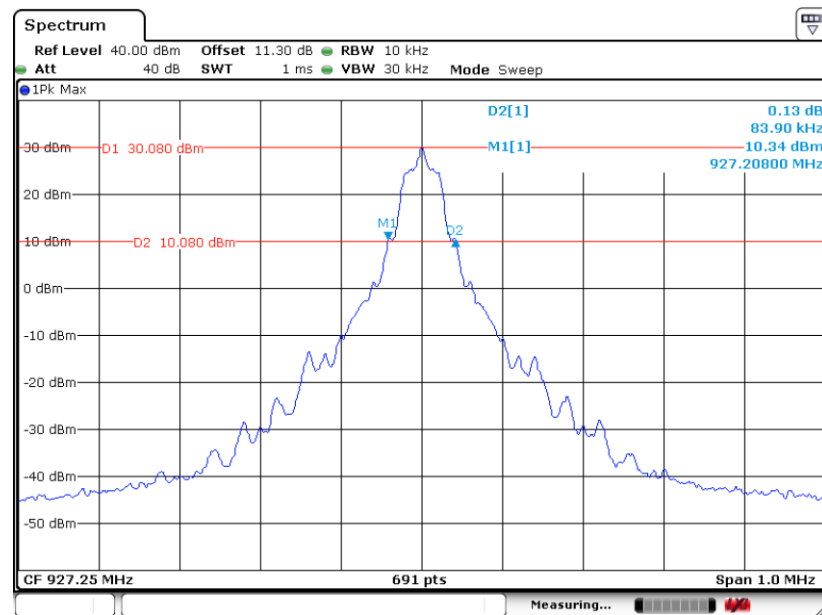
20 dB Bandwidth Plot on Channel 49

Date: 29.MAY.2021 10:36:08



**3.4.6 Test Result of 99% Occupied Bandwidth**

Test Mode :	UHF	Temperature :	21.6~24.7°C
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%

Mod.	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	Pass/Fail
UHF RFID	1	0	902.75	0.075	Pass
UHF RFID	1	24	914.75	0.075	Pass
UHF RFID	1	49	927.25	0.078	Pass

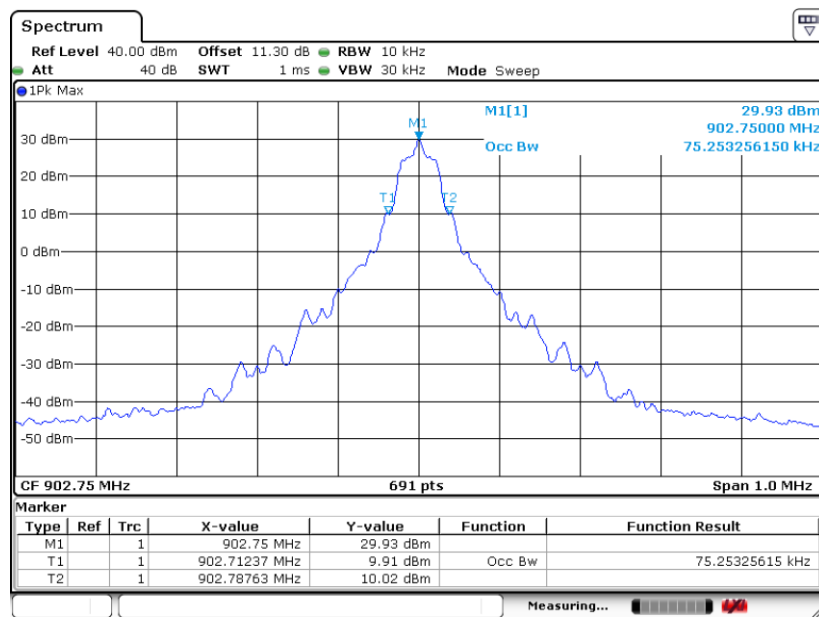99% Occupied Bandwidth Plot on Channel 00

Date: 29.MAY.2021 09:56:21

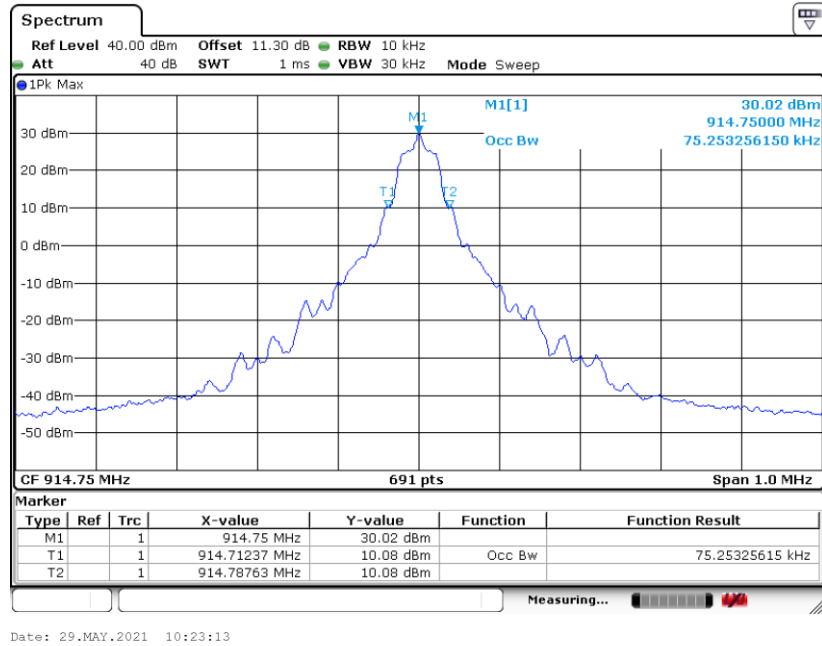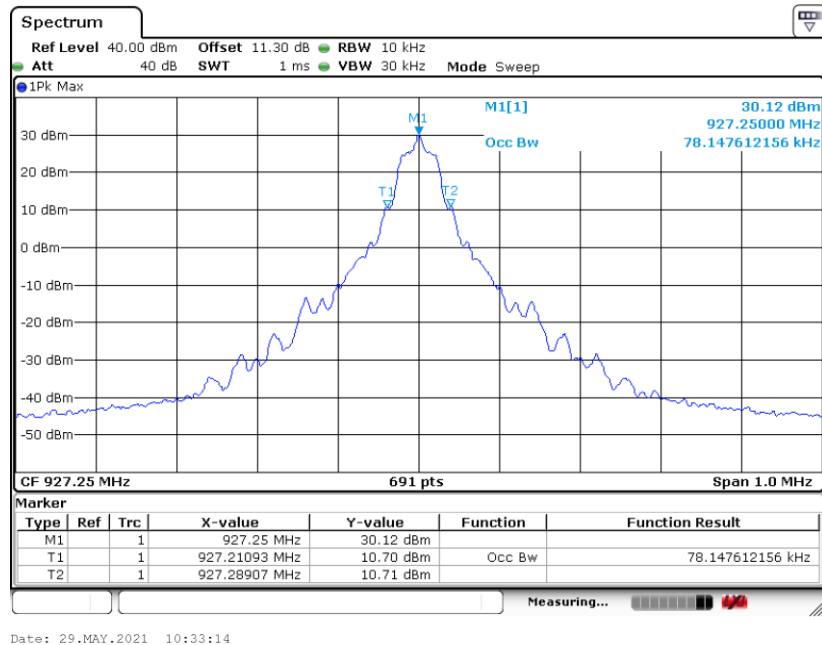**99% Occupied Bandwidth Plot on Channel 24****99% Occupied Bandwidth Plot on Channel 49**

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.5 Output Power Measurement

3.5.1 Limit of Output Power

Section 15.247 (a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions: (1)(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Section 15.247 (b) The maximum peak conducted output power of the intentional radiator shall not exceed the following: (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power with cable loss and record the results in the test report.
5. Measure and record the results in the test report.

3.5.4 Test Setup

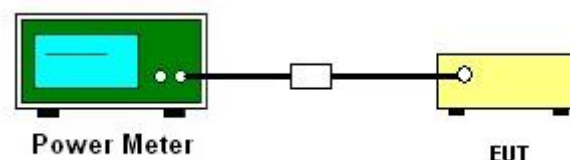

**3.5.5 Test Result of Output Power**

Test Mode :	UHF	Temperature :	21.6~24.7℃
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%

Channel	Frequency (MHz)	RF Power (dBm)		
		UHF	Max. Limits (dBm)	Pass/Fail
0	902.75	29.75	30.00	Pass
24	914.75	29.76	30.00	Pass
49	927.25	29.79	30.00	Pass

3.5.6 Test Result of Average Power (Reporting Only)

Test Mode :	UHF	Temperature :	21.6~24.7℃
Test Engineer :	Tommy Lee	Relative Humidity :	46.9~53.5%

Channel	Frequency (MHz)	RF Power (dBm)
		UHF
0	902.75	29.33
24	914.75	29.34
49	927.25	29.37

3.6 Conducted Band Edges Measurement

3.6.1 Limit of Band Edges

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.6.2 Measuring Instruments

See list of measuring equipment of this test report.

3.6.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.6.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Set RBW = 100 kHz, VBW = 300 kHz. Band edge emissions must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The attenuation shall be 30 dB instead of 20 dB when RMS conducted output power procedure is used.
4. Enable hopping function of the EUT and then repeat step 2 and 3.
5. Measure and record the results in the test report.


3.6.4 Test Setup

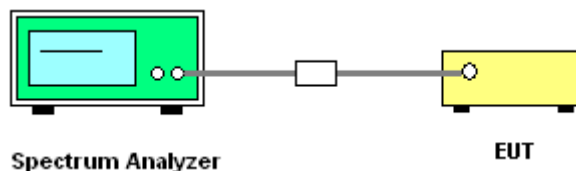




3.6.5 Test Result of Conducted Band Edges

Low Band Edge Plot on Channel 00

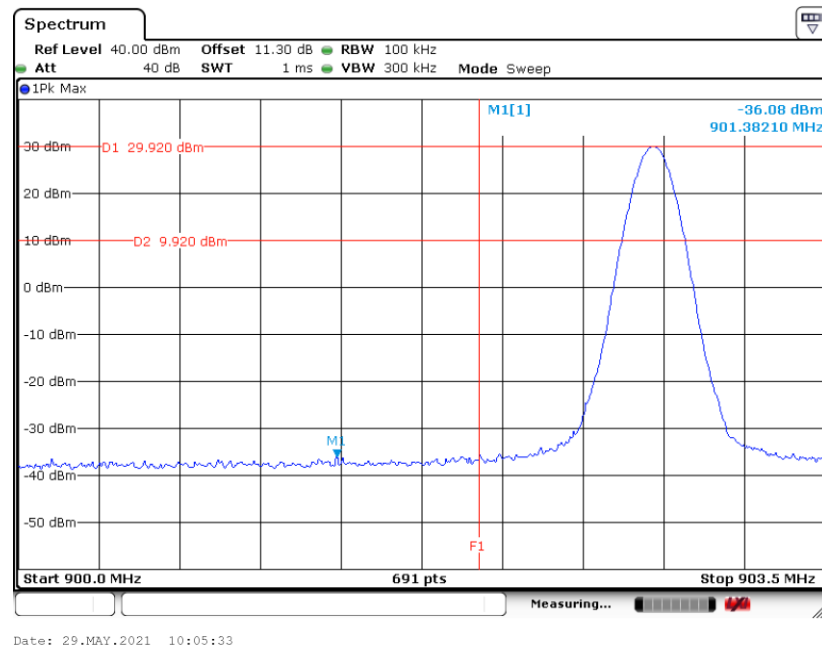


High Band Edge Plot on Channel 49

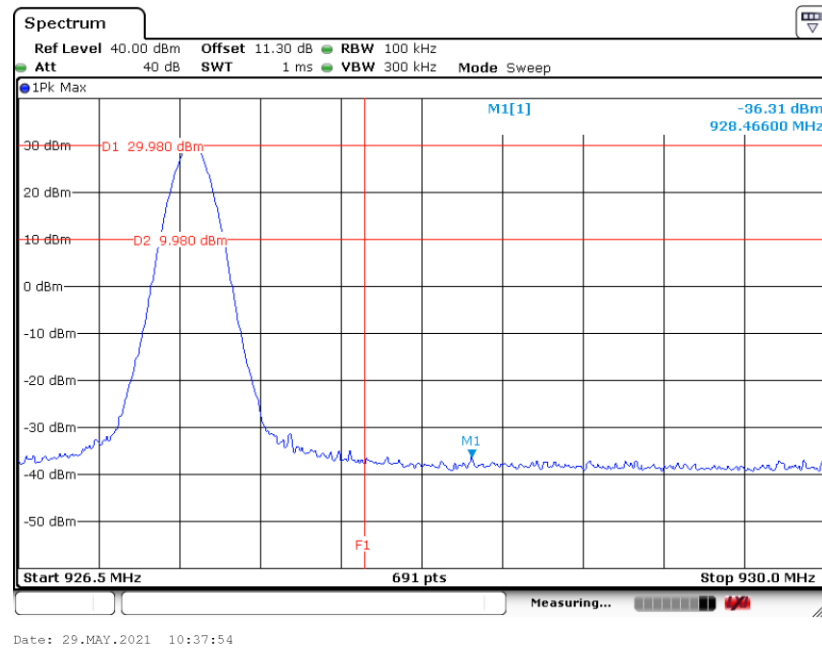




3.6.6 Test Result of Conducted Hopping Mode Band Edges

Hopping Mode Low Band Edge Plot

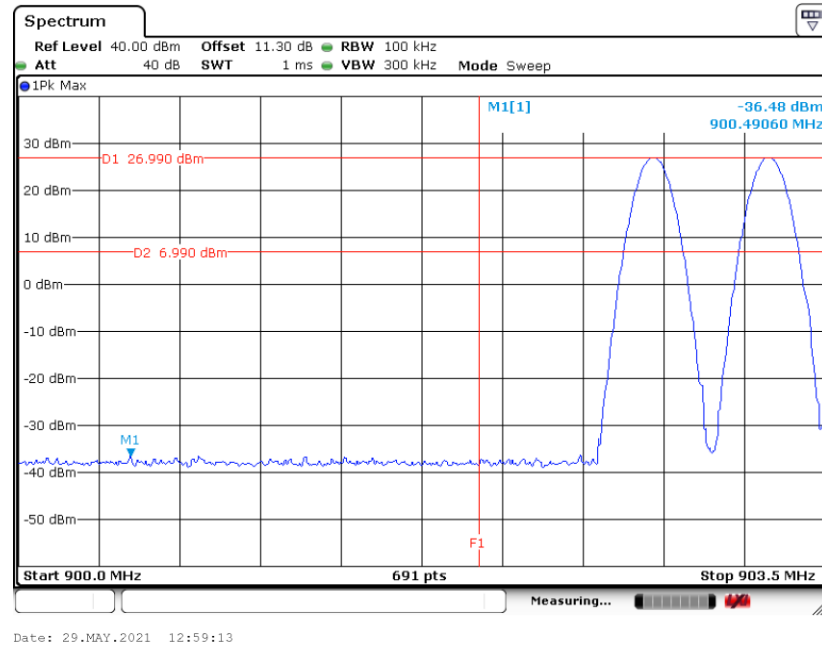

Hopping Mode High Band Edge Plot

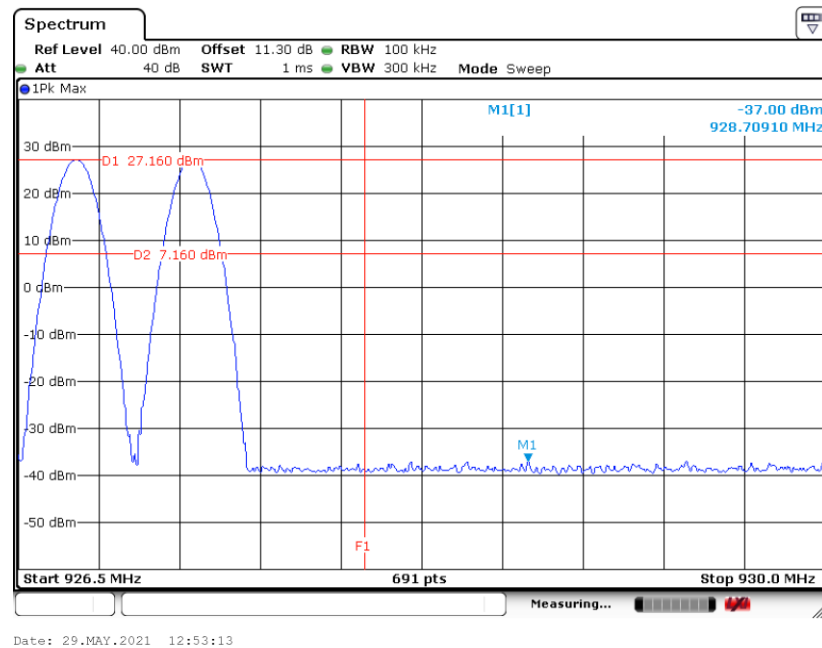

3.7 Conducted Spurious Emission Measurement

3.7.1 Limit of Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. In addition, radiated emissions which fall in the restricted bands must also comply with the radiated emission limits.


3.7.2 Measuring Instruments

See list of measuring equipment of this test report.

3.7.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 7.8.8.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, scan up through 10th harmonic. All harmonics / spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.7.4 Test Setup

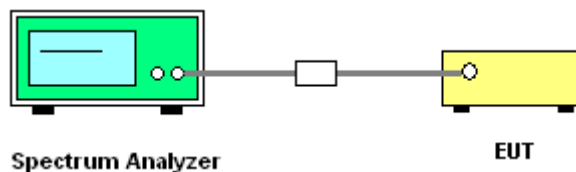




3.7.5 Test Result of Conducted Spurious Emission

CSE Plot on Ch 00 between 30MHz ~ 10 GHz

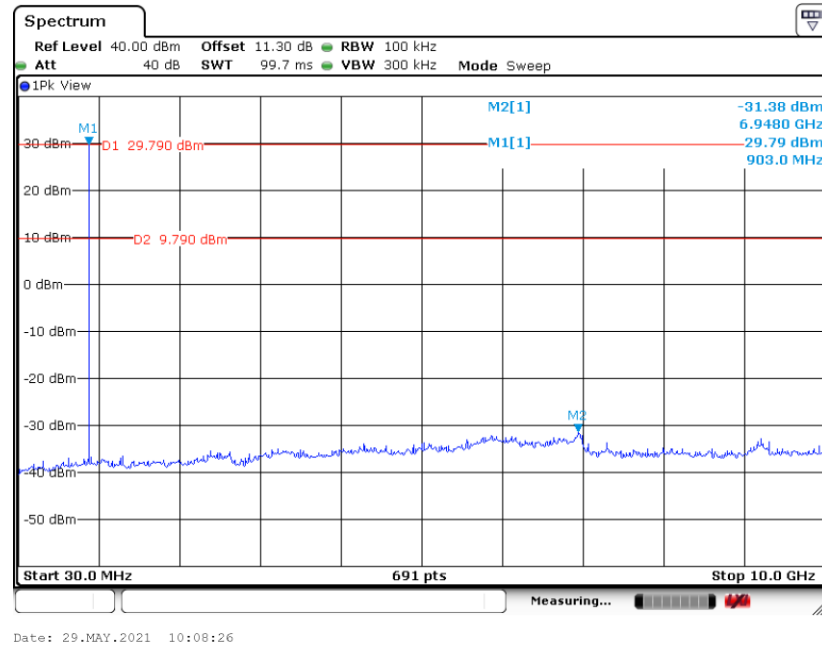


CSE Plot on Ch 24 between 30MHz ~ 10 GHz

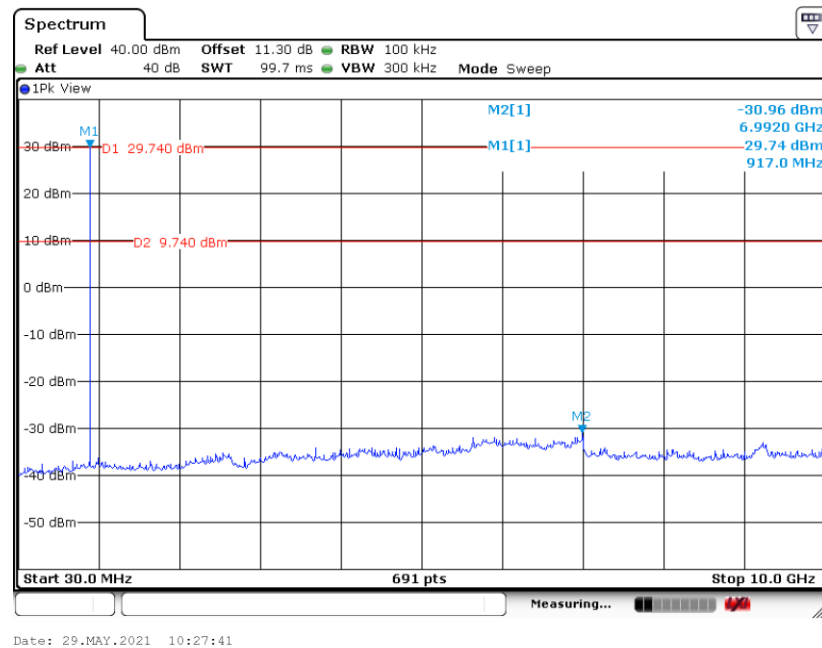



CSE Plot on Ch 49 between 30MHz ~ 10 GHz

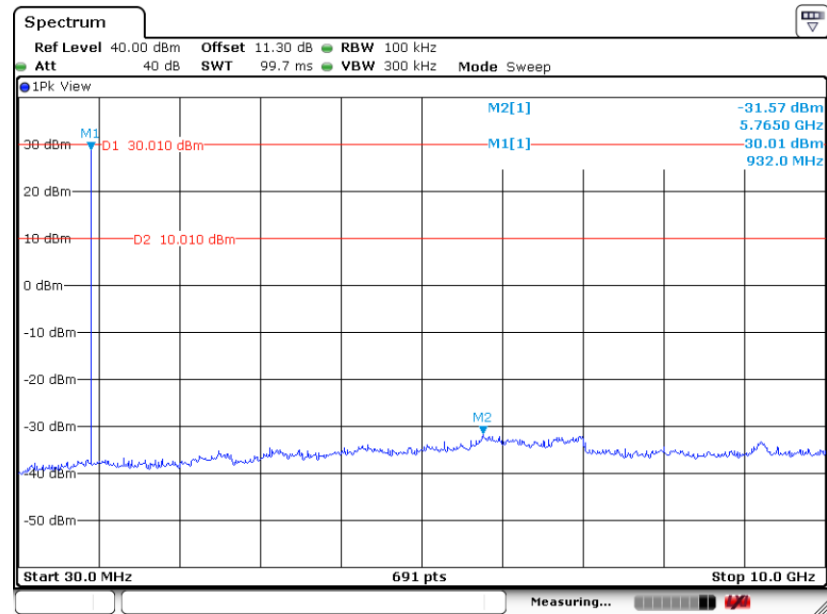

Date: 29.MAY.2021 10:40:14

3.8 Radiated Band Edges and Spurious Emission Measurement

3.8.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.8.2 Measuring Instruments


See list of measuring equipment of this test report.

3.8.3 Test Procedures


1. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz, RBW=1 MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N1 \cdot L1 + N2 \cdot L2 + \dots + Nn-1 \cdot L_{Nn-1} + Nn \cdot L_n$
Where N1 is number of type 1 pulses, L1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 \cdot \log(\text{Duty cycle})$
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0degree to 360 degree to find the peak maximum hold reading. When there is no suspected emission found and the worst case emission level is with at least 6dB margin against QP limit line, the position is marked as "-".
8. Radiated testing above 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0degree to 360 degree to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the worst case harmonic emission level is with at least 6dB margin against average limit line, the position is marked as "-".

3.8.4 Test Setup


For radiated emissions below 30MHz

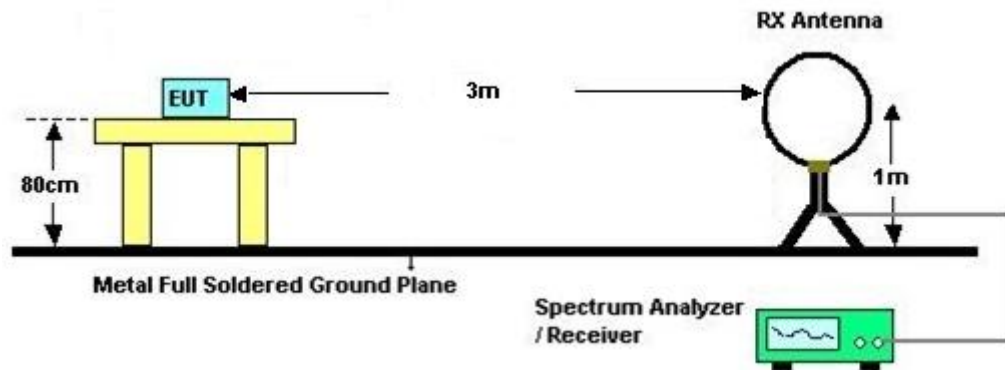

For radiated emissions from 30MHz to 1GHz

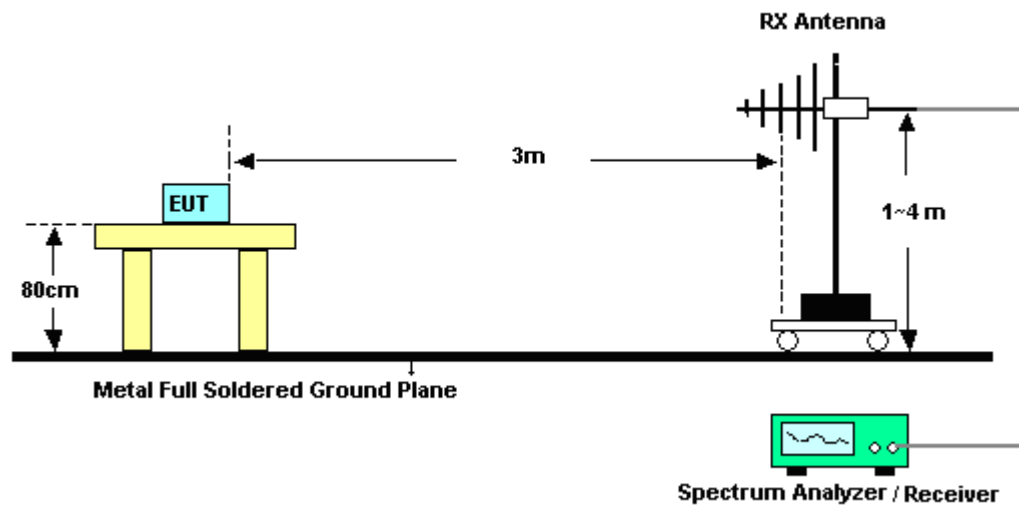

For radiated emissions above 1GHz

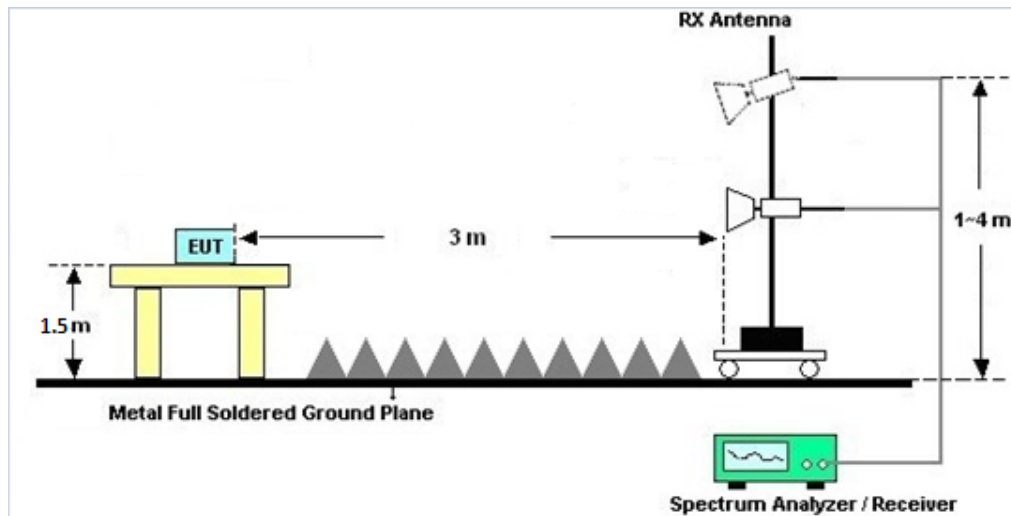

3.8.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.8.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

3.8.7 Duty Cycle

Please refer to Appendix D.

3.8.8 Test Result of Radiated Spurious Emission

Please refer to Appendix B and C.

3.9 AC Power Line Conducted Emissions Measurement

3.9.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.9.2 Measuring Instruments

See list of measuring equipment of this test report.

3.9.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.9.4 Test setup

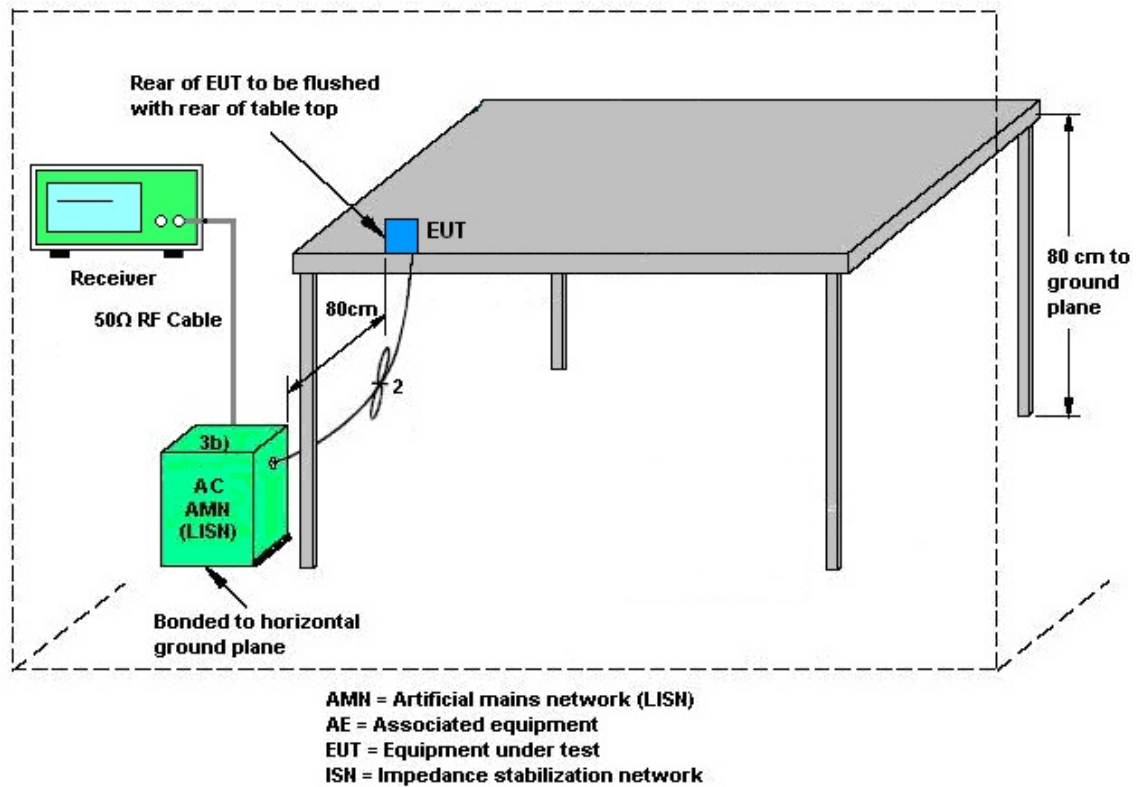

3.9.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3.10 Antenna Requirements

3.10.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.10.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.10.3 Antenna Gain

The antenna peak gain of EUT is 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jul. 02, 2021~ Sep. 09, 2021	Jan. 03, 2022	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Jul. 02, 2021~ Sep. 09, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-132 6	1GHz ~ 18GHz	Nov. 03, 2020	Jul. 02, 2021~ Sep. 09, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	Jul. 02, 2021~ Sep. 09, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Oct. 27, 2020	Jul. 02, 2021~ Sep. 09, 2021	Oct. 26, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY542004 86	10Hz~44GHz	Oct. 23, 2020	Jul. 02, 2021~ Sep. 09, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY541300 85	20MHz~8.4GHz	Nov. 02, 2020	Jul. 02, 2021~ Sep. 09, 2021	Nov. 01, 2021	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500- B	N/A	1~4m	N/A	Jul. 02, 2021~ Sep. 09, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 02, 2021~ Sep. 09, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-00105 3	N/A	N/A	Jul. 02, 2021~ Sep. 09, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	9kHz-30MHz	Mar. 11, 2021	Jul. 02, 2021~ Sep. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 11, 2021	Jul. 02, 2021~ Sep. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4 PE	30M-18G	Mar. 11, 2021	Jul. 02, 2021~ Sep. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 11, 2021	Jul. 02, 2021~ Sep. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1 530-8000-40S S	SN11	1.53G Low Pass	Sep. 14, 2020	Jul. 02, 2021~ Sep. 09, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-935 -1000-15000- 40ST	SN12	1GHz High Pass Filter	Nov. 15, 2020	Jul. 02, 2021~ Sep. 09, 2021	Nov. 14, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 18, 2020	Jul. 02, 2021~ Sep. 09, 2021	Nov. 17, 2021	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Aug. 30, 2021	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Nov. 30, 2020	Aug. 30, 2021	Nov. 29, 2021	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Nov. 18, 2020	Aug. 30, 2021	Nov. 17, 2021	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 16, 2020	Aug. 30, 2021	Nov. 15, 2021	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Aug. 30, 2021	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	00691	N/A	Jul. 28, 2021	Aug. 30, 2021	Jul. 27, 2022	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 31, 2020	Aug. 30, 2021	Dec. 30, 2021	Conduction (CO05-HY)
Hygrometer	TECPEL	TR-32	HE17XB2468	N/A	Mar. 09, 2021	May 20, 2021~ May 29, 2021	Mar. 08, 2022	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1218006	N/A	Oct. 18, 2020	May 20, 2021~ May 29, 2021	Oct. 17, 2021	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1207363	N/A	Oct. 18, 2020	May 20, 2021~ May 29, 2021	Oct. 17, 2021	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz ~ 40GHz	Jul. 22, 2020	May 20, 2021~ May 29, 2021	Jul. 21, 2021	Conducted (TH02-HY)
Switch Box & RF Cable	EM Electronics	EMSW18SE	SW200302	N/A	Mar. 17, 2021	May 20, 2021~ May 29, 2021	Mar. 16, 2022	Conducted (TH02-HY)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.2 dB
---	--------




Appendix A. AC Conducted Emission Test Results

Test Engineer :	Tom Lee	Temperature :	23~26°C
		Relative Humidity :	40~50%

EUT Information

Report NO : 142718
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

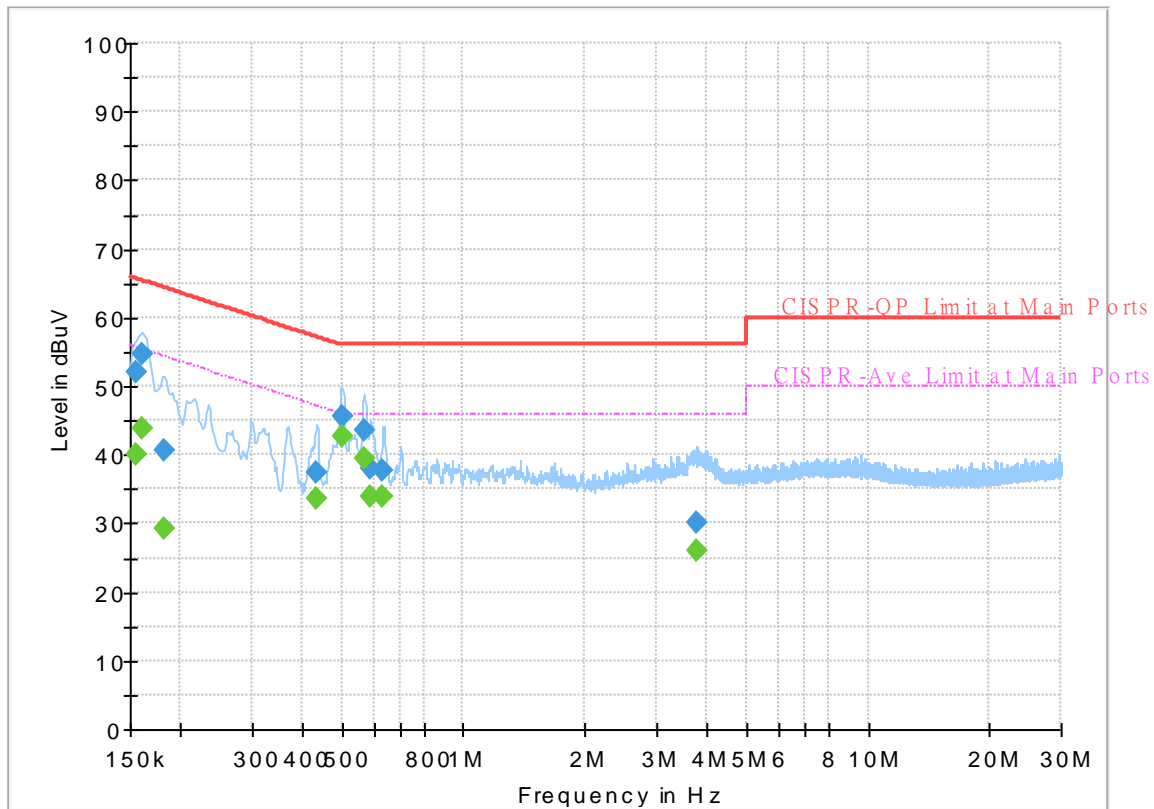


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	40.10	55.75	15.65	L1	OFF	19.6
0.154500	52.02	---	65.75	13.73	L1	OFF	19.6
0.161250	---	43.87	55.40	11.53	L1	OFF	19.6
0.161250	54.72	---	65.40	10.68	L1	OFF	19.6
0.181500	---	29.16	54.42	25.26	L1	OFF	19.6
0.181500	40.65	---	64.42	23.77	L1	OFF	19.6
0.433500	---	33.50	47.19	13.69	L1	OFF	19.7
0.433500	37.53	---	57.19	19.66	L1	OFF	19.7
0.501000	---	42.61	46.00	3.39	L1	OFF	19.8
0.501000	45.52	---	56.00	10.48	L1	OFF	19.8
0.566250	---	39.34	46.00	6.66	L1	OFF	19.9
0.566250	43.46	---	56.00	12.54	L1	OFF	19.9
0.591000	---	34.05	46.00	11.95	L1	OFF	19.9
0.591000	37.90	---	56.00	18.10	L1	OFF	19.9
0.633750	---	33.98	46.00	12.02	L1	OFF	19.9
0.633750	37.71	---	56.00	18.29	L1	OFF	19.9
3.779250	---	25.98	46.00	20.02	L1	OFF	20.0
3.779250	30.05	---	56.00	25.95	L1	OFF	20.0

EUT Information

Report NO : 142718
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

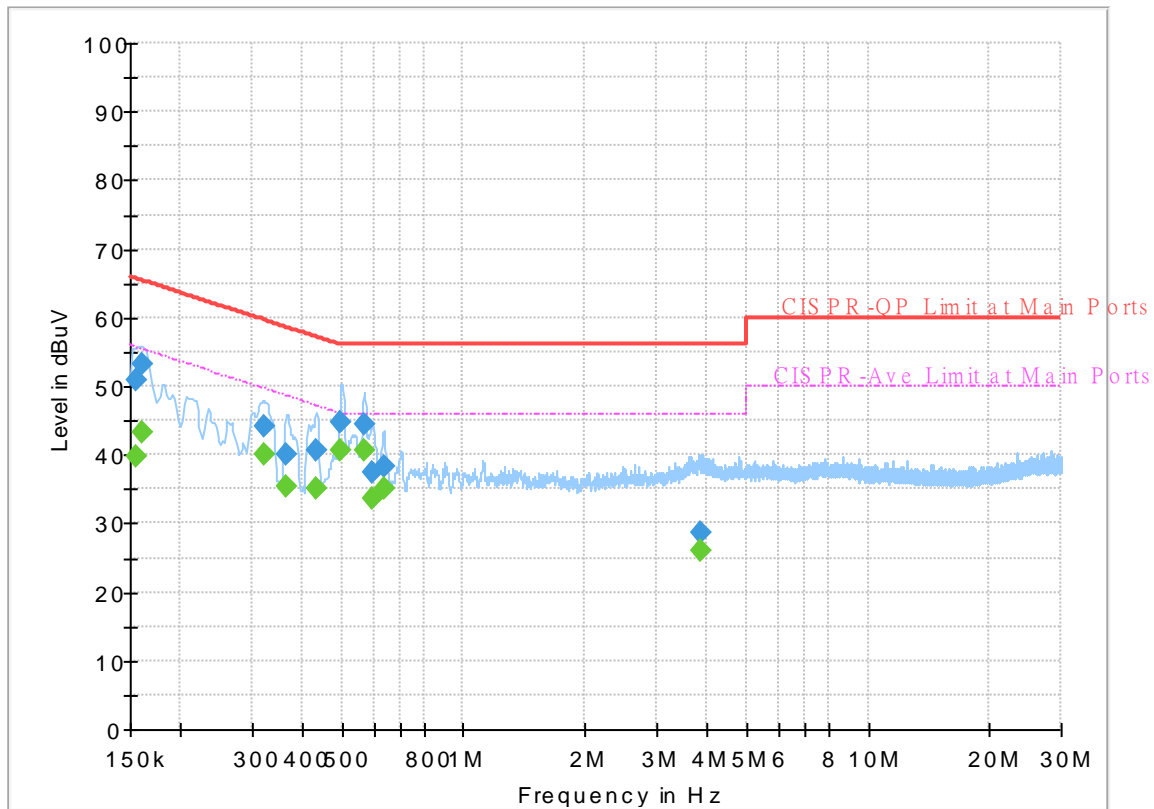


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.154500	---	39.67	55.75	16.08	N	OFF	19.7
0.154500	50.91	---	65.75	14.84	N	OFF	19.7
0.161250	---	43.23	55.40	12.17	N	OFF	19.7
0.161250	53.18	---	65.40	12.22	N	OFF	19.7
0.321000	---	39.98	49.68	9.70	N	OFF	19.7
0.321000	44.05	---	59.68	15.63	N	OFF	19.7
0.366000	---	35.36	48.59	13.23	N	OFF	19.7
0.366000	39.95	---	58.59	18.64	N	OFF	19.7
0.433500	---	35.21	47.19	11.98	N	OFF	19.7
0.433500	40.72	---	57.19	16.47	N	OFF	19.7
0.498750	---	40.70	46.02	5.32	N	OFF	19.8
0.498750	44.74	---	56.02	11.28	N	OFF	19.8
0.568500	---	40.72	46.00	5.28	N	OFF	19.9
0.568500	44.51	---	56.00	11.49	N	OFF	19.9
0.595500	---	33.52	46.00	12.48	N	OFF	19.9
0.595500	37.52	---	56.00	18.48	N	OFF	19.9
0.636000	---	34.95	46.00	11.05	N	OFF	20.0
0.636000	38.39	---	56.00	17.61	N	OFF	20.0
3.867000	---	25.96	46.00	20.04	N	OFF	20.0
3.867000	28.70	---	56.00	27.30	N	OFF	20.0

EUT Information

Report NO : 142718
Test Mode : Mode 2
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

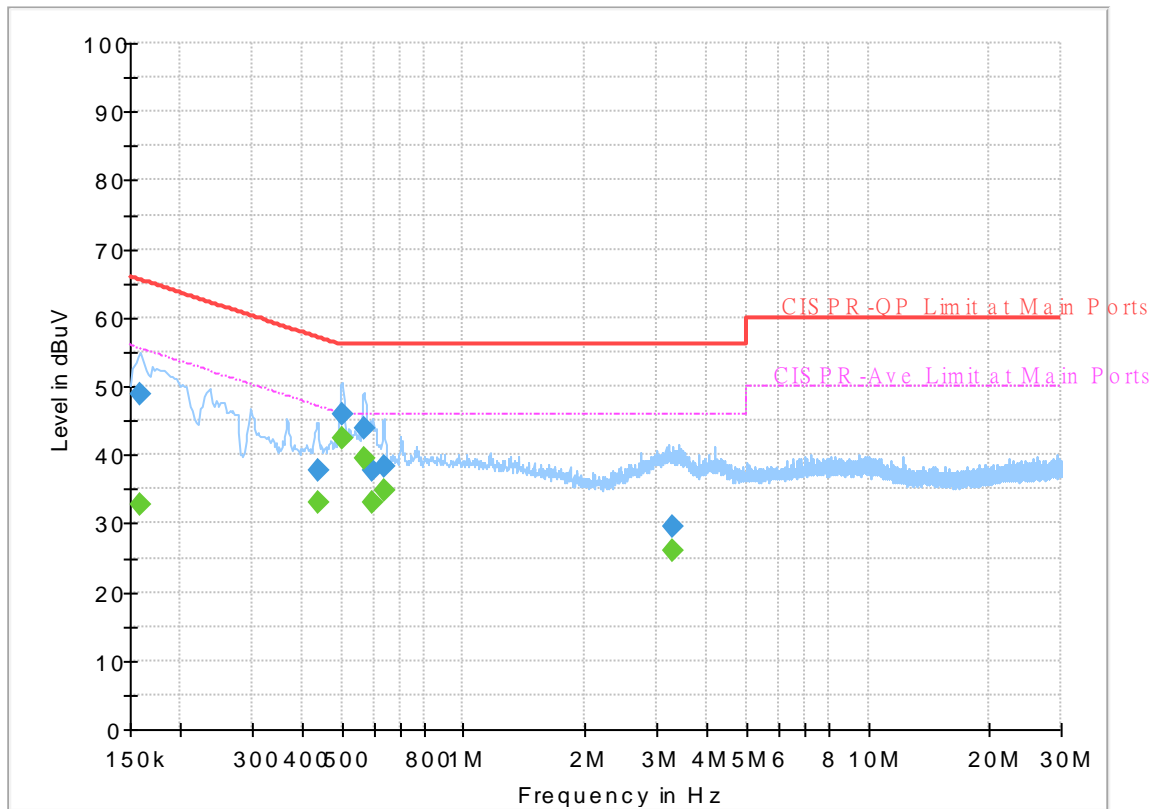


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.159000	---	32.65	55.52	22.87	L1	OFF	19.6
0.159000	48.73	---	65.52	16.79	L1	OFF	19.6
0.435750	---	32.94	47.14	14.20	L1	OFF	19.7
0.435750	37.68	---	57.14	19.46	L1	OFF	19.7
0.501000	---	42.47	46.00	3.53	L1	OFF	19.8
0.501000	45.92	---	56.00	10.08	L1	OFF	19.8
0.566250	---	39.39	46.00	6.61	L1	OFF	19.9
0.566250	43.72	---	56.00	12.28	L1	OFF	19.9
0.597750	---	33.15	46.00	12.85	L1	OFF	19.9
0.597750	37.74	---	56.00	18.26	L1	OFF	19.9
0.636000	---	34.91	46.00	11.09	L1	OFF	19.9
0.636000	38.44	---	56.00	17.56	L1	OFF	19.9
3.277500	---	26.15	46.00	19.85	L1	OFF	20.0
3.277500	29.50	---	56.00	26.50	L1	OFF	20.0

EUT Information

Report NO : 142718
 Test Mode : Mode 2
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

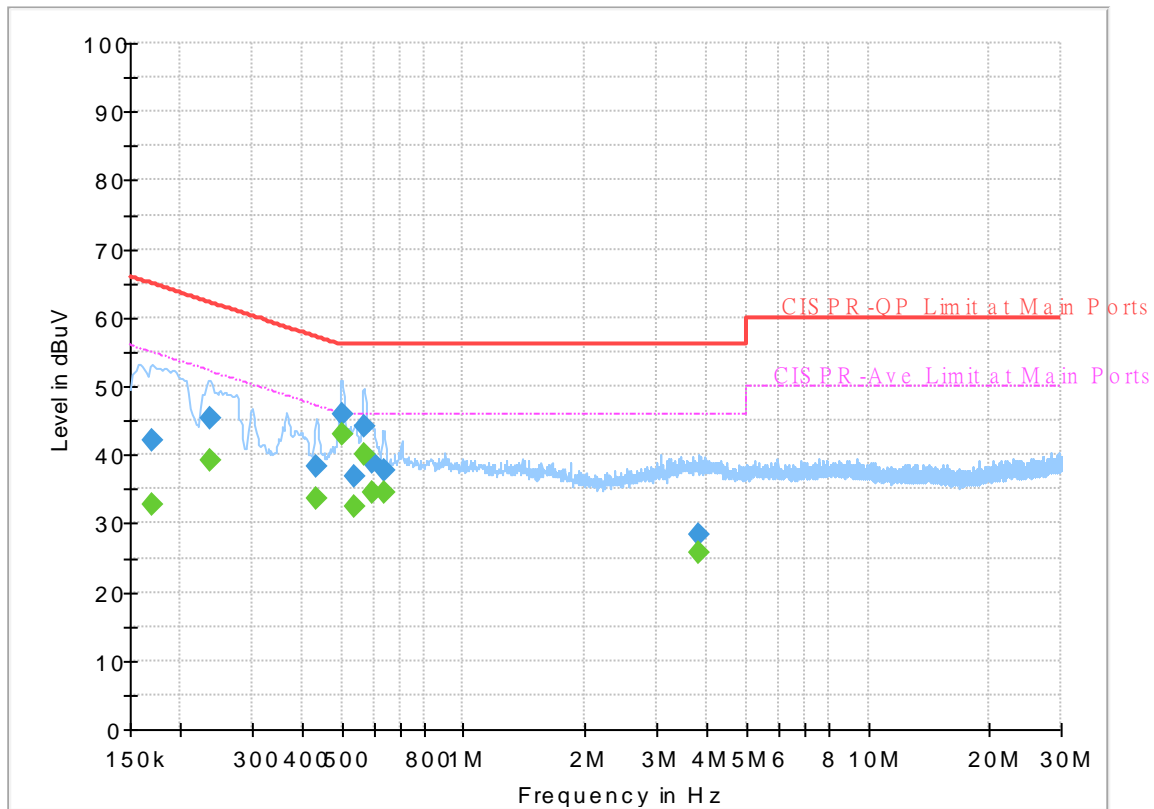

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.170250	---	32.89	54.95	22.06	N	OFF	19.7
0.170250	42.13	---	64.95	22.82	N	OFF	19.7
0.235500	---	39.21	52.25	13.04	N	OFF	19.7
0.235500	45.18	---	62.25	17.07	N	OFF	19.7
0.433500	---	33.76	47.19	13.43	N	OFF	19.7
0.433500	38.23	---	57.19	18.96	N	OFF	19.7
0.501000	---	42.92	46.00	3.08	N	OFF	19.8
0.501000	46.05	---	56.00	9.95	N	OFF	19.8
0.537000	---	32.39	46.00	13.61	N	OFF	19.9
0.537000	36.80	---	56.00	19.20	N	OFF	19.9
0.566250	---	39.98	46.00	6.02	N	OFF	19.9
0.566250	44.20	---	56.00	11.80	N	OFF	19.9
0.593250	---	34.63	46.00	11.37	N	OFF	19.9
0.593250	38.77	---	56.00	17.23	N	OFF	19.9
0.636000	---	34.51	46.00	11.49	N	OFF	20.0
0.636000	37.83	---	56.00	18.17	N	OFF	20.0
3.801750	---	25.82	46.00	20.18	N	OFF	20.0
3.801750	28.50	---	56.00	27.50	N	OFF	20.0



Appendix B. Radiated Spurious Emission

Test Engineer :	Harvey Guo, Fu Chen and Troye Hsieh	Temperature :	19.1~24.4°C
		Relative Humidity :	63.7~69.2%



<Sample 1>

UHF

UHF (Band Edge @ 3m)

UHF	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF 902.75MHz		30	31.64	-8.36	40	29.35	24.06	10.67	32.44	-	-	P	H
		87.23	29.23	-10.77	40	36.2	14.24	11.3	32.51	-	-	P	H
		147.37	35.59	-7.91	43.5	39.37	17.03	11.71	32.52	-	-	P	H
		848.68	40.66	-67.7	108.36	28.64	29.1	14.33	31.41	-	-	P	H
		864.2	41.61	-66.75	108.36	29.31	29.26	14.38	31.34	-	-	P	H
	*	902.75	128.36	-	-	115.92	29.12	14.5	31.18	150	297	P	H
		958.29	43.66	-64.7	108.36	28.8	31.06	14.62	30.82	-	-	P	H
													H
													H
													H
		42.61	36.83	-3.17	40	40.6	17.84	10.9	32.51	100	18	Q	V
		62.98	32.82	-7.18	40	42.49	11.78	11.09	32.54	-	-	P	V
		133.79	30.14	-13.36	43.5	33.64	17.37	11.64	32.51	-	-	P	V
		803.09	40.5	-64.44	104.94	29.63	28.28	14.18	31.59	-	-	P	V
		858.38	41.82	-63.12	104.94	29.54	29.28	14.37	31.37	-	-	P	V
	*	902.75	124.94	-	-	112.5	29.12	14.5	31.18	200	295	P	V
		953.44	43.05	-61.89	104.94	28.44	30.84	14.62	30.85	-	-	P	V
													V
													V
													V
													V
Remark		1. No other spurious found. 2. All results are PASS against limit line. 3. Non restricted band limit is radio frequency level down 20db 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



UHF	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF 914.75MHz		30	30.15	-9.85	40	27.86	24.06	10.67	32.44	-	-	P	H
		88.2	30.32	-13.18	43.5	37.12	14.4	11.31	32.51	-	-	P	H
		183.26	32.59	-10.91	43.5	38.58	14.53	12.01	32.53	-	-	P	H
		841.89	41.4	-66.87	108.27	29.62	28.91	14.3	31.43	-	-	P	H
		865.17	41.63	-66.64	108.27	29.33	29.25	14.39	31.34	-	-	P	H
	*	914.75	128.27	-	-	115.63	29.21	14.53	31.1	153	298	P	H
		950.53	42.96	-65.31	108.27	28.52	30.7	14.61	30.87	-	-	P	H
													H
													H
													H
		43.58	32.93	-7.07	40	37.24	17.3	10.91	32.52	-	-	P	V
		62.98	31.84	-8.16	40	41.51	11.78	11.09	32.54	-	-	P	V
		88.2	29.5	-14	43.5	36.3	14.4	11.31	32.51	-	-	P	V
		842.86	41.19	-63.55	104.74	29.38	28.94	14.3	31.43	-	-	P	V
		869.05	41.36	-63.38	104.74	28.98	29.31	14.39	31.32	-	-	P	V
	*	914.75	124.74	-	-	112.1	29.21	14.53	31.1	200	299	P	V
		955.38	42.86	-61.88	104.74	28.14	30.94	14.62	30.84	-	-	P	V
													V
													V
													V
Remark		1. No other spurious found.											
		2. All results are PASS against limit line.											
		3. Non restricted band limit is radio frequency level down 20db											
		4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											

[illegible]

**UHF (Harmonic @ 3m)**

UHF	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF 902.75MHz		2708.25	44.62	-29.38	74	42.04	28	7.91	33.33	-	-	P	H
		3611	37.75	-36.25	74	65.13	29	10.02	66.4	-	-	P	H
		4513.75	39.63	-34.37	74	64.09	30.6	11.32	66.38	-	-	P	H
		5416.5	40.54	-33.46	74	62.66	31.47	12.07	65.66	-	-	P	H
												P	H
		2708.25	44.88	-29.12	74	42.3	28	7.91	33.33	-	-	P	V
		3611	38.3	-35.7	74	65.68	29	10.02	66.4	-	-	P	V
		4513.75	39.99	-34.01	74	64.45	30.6	11.32	66.38	-	-	P	V
		5416.5	43.42	-30.58	74	65.54	31.47	12.07	65.66	-	-	P	V
												P	V
UHF 914.75MHz		2744.25	44.89	-29.11	74	42.26	28	7.95	33.32	-	-	P	H
		3659	37.65	-36.35	74	64.99	29.02	10.05	66.41	-	-	P	H
		4573.75	38.95	-35.05	74	63.28	30.65	11.36	66.34	-	-	P	H
												P	H
												P	H
		2744.25	45.04	-28.96	74	42.41	28	7.95	33.32	-	-	P	V
		3659	37.04	-36.96	74	64.38	29.02	10.05	66.41	-	-	P	V
		4573.75	39.99	-34.01	74	64.32	30.65	11.36	66.34	-	-	P	V
												P	V
												P	V



UHF 927.25MHz		2781.75	53.24	-20.76	74	50.42	28.13	7.7	33.31	-	-	P	H
		2781.75	36.47	-17.53	54	33.65	28.13	7.7	33.31	-	-	A	H
		3709	39.34	-34.66	74	66.59	29.1	9.32	66.43	-	-	P	H
		4636.25	38.76	-35.24	74	62.86	30.84	10.73	66.29	-	-	P	H
												P	H
		2781.75	55.23	-18.77	74	52.41	28.13	7.7	33.31	-	-	P	V
		2781.75	37.86	-16.14	54	35.04	28.13	7.7	33.31	-	-	A	V
		3709	38.23	-35.77	74	65.48	29.1	9.32	66.43	-	-	P	V
		4636.25	41.32	-32.68	74	65.42	30.84	10.73	66.29	-	-	P	V
												P	V
Remark	<ol style="list-style-type: none"> 1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non restricted band limit is radio frequency level down 20db 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<Sample 2>

UHF

UHF (Band Edge @ 3m)

UHF	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
UHF 927.25MHz		30.97	30.83	-9.17	40	28.8	23.79	10.69	32.45	-	-	P	H
		89.17	34.73	-8.77	43.5	41.37	14.54	11.33	32.51	-	-	P	H
		170.65	33.41	-10.09	43.5	38.58	15.43	11.93	32.53	-	-	P	H
		835.1	41.73	-64.63	106.36	30.29	28.63	14.27	31.46	-	-	P	H
		866.14	41.98	-64.38	106.36	29.67	29.27	14.38	31.34	-	-	P	H
	*	924.25	126.36	80.36	46	113.36	29.49	14.55	31.04	150	324	P	H
		956.35	43.06	-63.3	106.36	28.3	30.98	14.61	30.83	-	-	P	H
													H
													H
													H
		46.49	33.46	-6.54	40	39.31	15.73	10.95	32.53	100	16	Q	V
		62.98	33.22	-6.78	40	42.89	11.78	11.09	32.54	100	14	Q	V
		89.17	35.28	-8.22	43.5	41.92	14.54	11.33	32.51	-	-	P	V
		858.38	41.29	-63.97	105.26	29.01	29.28	14.37	31.37	-	-	P	V
		901.06	41.6	-63.66	105.26	29.15	29.14	14.5	31.19	-	-	P	V
	*	924.25	125.26	79.26	46	112.26	29.49	14.55	31.04	200	284	P	V
		955.38	43.45	-61.81	105.26	28.73	30.94	14.62	30.84	-	-	P	V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. Non restricted band limit is radio frequency level down 20db 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



UHF (Harmonic @ 3m)

UHF	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
UHF 927.25MHz		3707	42.02	-31.98	74	69.27	29.1	10.08	66.43	-	-	P	H
		4636.25	49.45	-24.55	74	73.55	30.84	11.35	66.29	-	-	P	H
		4636.25	47.49	-6.51	54	71.59	30.84	11.35	66.29	-	-	A	H
												P	H
												P	H
		3707	40.26	-33.74	74	67.51	29.1	10.08	66.43	-	-	P	V
		4636.25	49.67	-24.33	74	73.77	30.84	11.35	66.29	-	-	P	V
		4636.25	47.86	-6.14	54	71.96	30.84	11.35	66.29	-	-	A	V
												P	V
												P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. Non restricted band limit is radio frequency level down 20db 4. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	Horizontal or Vertical

A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix C. Radiated Spurious Emission Plots



Test Engineer :	Harvey Guo, Fu Chen and Troye Hsieh	Temperature :	19.1~24.4°C
		Relative Humidity :	63.7~69.2%

<Sample 1>



UHF (Band Edge @ 3m)

UHF	UHF	
	UHF 902.75MHz	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	<p>Site : 03CH11-HY Condition : QP 3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>

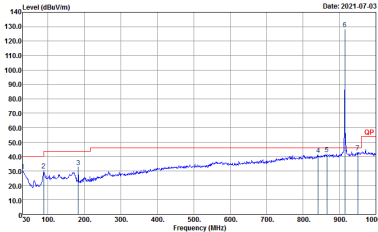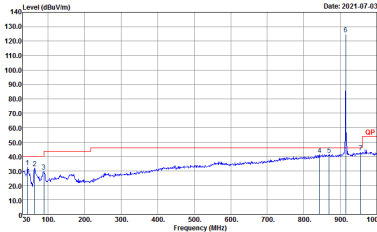

UHF	UHF	
	UHF 914.75MHz	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH11-HY Condition : QP-3m BE-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : QP-3m BE-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>

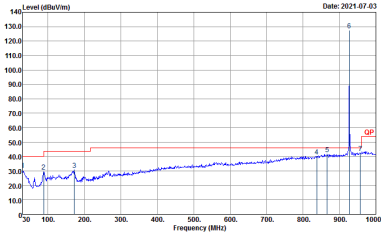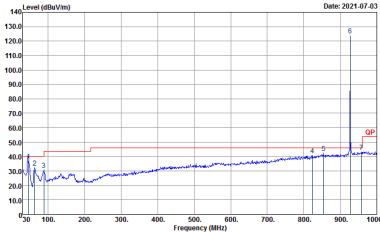

UHF	UHF	
	UHF 927.25MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH11-HY Condition : QP-3m 8F-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	 <p>Site : 03CH11-HY Condition : QP-3m 8F-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>



UHF (Harmonic @ 3m)

UHF	UHF	
	UHF 902.75MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m) Date: 2021.07.03</p><p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m) Date: 2021.07.03</p><p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak</p></div>



UHF	UHF	
	UHF 914.75MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2021-07-03</p><p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2021-07-03</p><p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p></div>





UHF	UHF	
	UHF 927.25MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2021.07.02</p><p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2021.07.02</p><p>Site : 03CH11-HY Condition : PEAK_74 3m HORN 9120D-HF_1326 VERTICAL Detector : Peak</p></div>



<Sample 2>

UHF

UHF (Band Edge @ 3m)

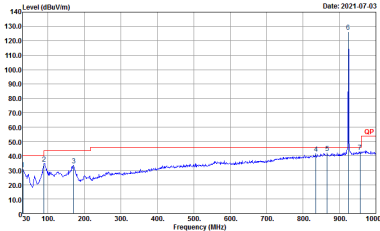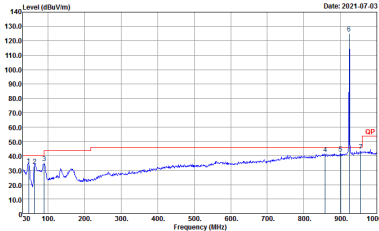UHF	UHF	
	UHF 927.25MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CHI1-HY Condition : QP 3m BT-LOG 6111D-LF_ETC HORIZONTAL Detector : Peak</p>	 <p>Site : 03CHI1-HY Condition : QP 3m BT-LOG 6111D-LF_ETC VERTICAL Detector : Peak</p>



UHF (Harmonic @ 3m)

UHF	UHF	
	UHF 927.25MHz	
	Horizontal	Vertical
Peak Avg.	<div><p>Level (dBuV/m)</p><p>Date: 2021-09-09</p><p>Site : 03CHI1-HY Condition : PEAK_74 3m HORN 91200-HF_1326 HORIZONTAL Detector : Peak</p></div>	<div><p>Level (dBuV/m)</p><p>Date: 2021-09-09</p><p>Site : 03CHI1-HY Condition : PEAK_74 3m HORN 91200-HF_1326 VERTICAL Detector : Peak</p></div>



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
UHF for Sample 1	87.47	49200	0.02	30Hz
UHF for Sample 2	87.47	49200	0.02	30Hz

