



FCC TEST REPORT

REPORT NO.: RF911122R04A

MODEL NO.: T60H656

RECEIVED: Dec. 31, 2002

TESTED: Jan. 02 to 15, 2003

APPLICANT: AMBIT Microsystems Corporation

ADDRESS: 4-1, Ming-Sheng ST., Tu-Cheng Industrial Area,
Tu-Cheng City, Taipei, Taiwan R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 77 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0536
ILAC MRA



Lab Code: 200376-0



Table of Contents

1	CERTIFICATION.....	4
2	SUMMARY OF TEST RESULTS.....	5
3	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	7
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
3.4	DESCRIPTION OF SUPPORT UNITS.....	8
4	TEST TYPES AND RESULTS	9
4.1	CONDUCTED EMISSION MEASUREMENT.....	9
4.1.1	TEST INSTRUMENTS	9
4.1.2	TEST PROCEDURES	10
4.1.3	DEVIATION FROM TEST STANDARD	10
4.1.4	TEST SETUP	11
4.1.5	EUT OPERATING CONDITIONS	11
4.1.6	TEST RESULTS.....	12
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	18
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURES	20
4.2.4	DEVIATION FROM TEST STANDARD	20
4.2.5	TEST SETUP	21
4.2.6	EUT OPERATING CONDITIONS	21
4.2.7	TEST RESULTS (A).....	22
4.2.8	TEST RESULTS (B).....	26
4.2.9	TEST RESULTS (C).....	30
4.2.10	TEST RESULTS (D).....	34
4.2.11	TEST RESULTS (E).....	38
4.2.12	TEST RESULTS (F).....	42
4.2.13	TEST RESULTS (G).....	46
4.2.14	TEST RESULTS (H).....	50
4.3	6dB BANDWIDTH MEASUREMENT	54
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT.....	54
4.3.2	TEST INSTRUMENTS	54
4.3.3	TEST PROCEDURE	55
4.3.4	DEVIATION FROM TEST STANDARD	55



4.3.5	TEST SETUP	55
4.3.6	EUT OPERATING CONDITIONS	55
4.3.7	TEST RESULTS.....	56
4.4	MAXIMUM PEAK OUTPUT POWER	60
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	60
4.4.2	TEST INSTRUMENTS	60
4.4.3	TEST PROCEDURES	61
4.4.4	DEVIATION FROM TEST STANDARD	61
4.4.5	TEST SETUP	61
4.4.6	EUT OPERATING CONDITIONS	61
4.4.7	TEST RESULTS.....	62
4.5	POWER SPECTRAL DENSITY MEASUREMENT	63
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT.....	63
4.5.2	TEST INSTRUMENTS	63
4.5.3	TEST PROCEDURE	64
4.5.4	DEVIATION FROM TEST STANDARD	64
4.5.5	TEST SETUP	64
4.5.6	EUT OPERATING CONDITIONS	64
4.5.7	TEST RESULTS.....	65
4.6	BAND EDGES MEASUREMENT.....	69
4.6.1	LIMITS OF BAND EDGES MEASUREMENT.....	69
4.6.2	TEST INSTRUMENTS	69
4.6.3	TEST PROCEDURE	69
4.6.4	DEVIATION FROM TEST STANDARD	69
4.6.5	EUT OPERATING CONDITION.....	70
4.6.6	TEST RESULTS.....	70
4.7	ANTENNA REQUIREMENT.....	73
4.7.1	STANDARD APPLICABLE.....	73
4.7.2	ANTENNA CONNECTED CONSTRUCTION	73
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	74
6	INFORMATION ON THE TESTING LABORATORIES.....	77



1 CERTIFICATION

PRODUCT : 802.11b Wireless LAN MiniPCI Card
BRAND NAME : AMBIT
MODEL NO. : T60H656
APPLICANT : AMBIT Microsystems Corporation
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992

We, Advance Data Technology Corporation, hereby certify that one sample of the designation has been tested in our facility from Jan. 02 to 15, 2003. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

CHECKED BY: Amanda Chu, **DATE:** Jan. 21, 2003
(Amanda Chu)

APPROVED BY: Eric Lin, **DATE:** Jan. 21, 2003
(Eric Lin, Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -28.10dBuV at 0.561 MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -0.70dBuV at 352.00 MHz
15.247(d)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit
15.247(c)	Band Edge Measurement Limit: 20 dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	802.11b Wireless LAN MiniPCI Card
MODEL NO.	T60H656
POWER SUPPLY	3.3VDC from host equipment
MODULATION TYPE	CCK, DBPSK, DQPSK
RADIO TECHNOLOGY	DSSS
TRANSFER RATE	1/2/5.5/11Mbps
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11
OUTPUT POWER	10.50dBm
ANTENNA TYPE	PIFA antenna and Inverted-F antenna
DATA CABLE	NA
I/O PORTS	NA
ASSOCIATED DEVICES	NA

NOTE:

1. There are eight types of antennas provided to this EUT, please refer to the following table:

No.	Model No.	Gain (dBi)	Antenna Type	Interface
1	ANTB24-THIN-SO	-2.83	Inverted-F	MiniPCI Type IIIB
2	HFDO4-R	-1.98	PIFA	
3	HFDO1-R	-2.33	PIFA	
4	BY27	+2.89	Inverted-F	
5	Pelican	+3.00	Inverted-F	
6	R:WDAN-Q1BM1002 L: WDAN-Q1BM1001	-1.35	PIFA	
7	Mitac GP3	+1.87	Inverted-F	
8	Quanta ZG1S	+0.31	PIFA	

2. For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided in this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

NOTE:

1. For radiated measurement, test result (A) is for antenna 1, test result (B) is for antenna 2, test result (C) is for antenna 3, test result (D) is for antenna 4, test result (E) is for antenna 5, test result (F) is for antenna 6, test result (G) is for antenna 7 and test result (H) is for antenna 8, which were mentioned on section 3.1.
2. Below 1 GHz, the channel 1, 6, and 11 were pre-tested in chamber. The channel 11, worst case one, was chosen for final test.
3. Above 1 GHz, the channel 1, 6, and 11 were tested individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a 802.11b Wireless LAN MiniPCI Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)
ANSI C63.4 : 1992

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.


3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	NOTEBOOK COMPUTER	Sony	PCG-8E2A PVT UTA-9	*2500PUTA 0000002*	NA
2	PRINTER	HP	C2642A	MY7961C1M2	B94C2642X

No.	Signal cable description
1	NA
2	1.0m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core

NOTE: All power cords of the above support units are unshielded (1.8m).

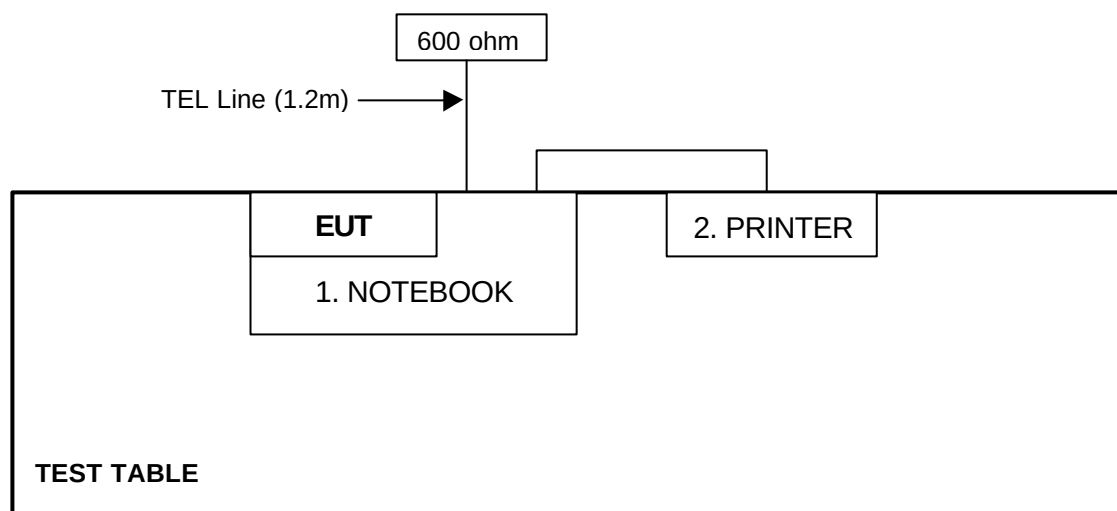

4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	847124/029	Nov. 17, 2003
ROHDE & SCHWARZ LISN (for EUT)	ESHS-Z5	848773/004	Nov. 13, 2003
KYORITSU LISN (for peripheral)	KNW-407	8/1395/12	Jul. 23, 2003
RF Cable (JETBAO)	RG233/U	Cable_CA_01	Jul. 03, 2003
Terminator(for KYORITSU)	50	#1	Apr. 11, 2003
Software	Cond-V2e	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in ADT Shielded Room No. A.
 3. The VCCI Con A Registration No. is C-817.




4.1.2 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

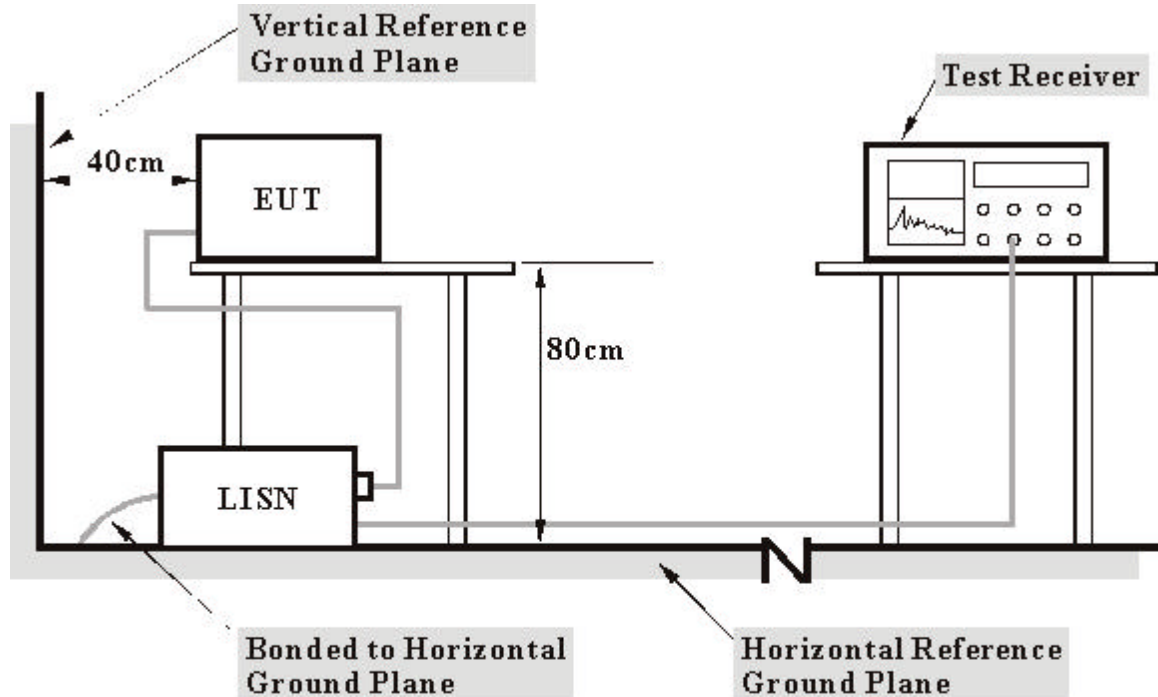

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- a. Plug the EUT into the PCI extender which connected to a computer system placed on a testing table.
- b. The computer system ran a test program to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The computer system sent "H" messages to its screen.
- d. The computer system sent "H" messages to printer, and the printer prints them on paper.

4.1.6 TEST RESULTS

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 978 hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	33.20	-	33.30	-	64.25	54.25	-30.95	-
2	0.310	0.10	30.67	-	30.77	-	59.97	49.97	-29.20	-
3	0.498	0.10	26.19	-	26.29	-	56.04	46.04	-29.75	-
4	1.869	0.10	22.37	-	22.47	-	56.00	46.00	-33.53	-
5	5.836	0.36	19.90	-	20.26	-	60.00	50.00	-39.74	-
6	19.543	0.98	13.91	-	14.89	-	60.00	50.00	-45.11	-

NOTES: (1) "-": Undetectable


(2) Q.P. and AV. are abbreviations of quasi-peak and average.

(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.

(4) The emission levels of other frequencies were very low against the limit.

(5) Correction Factor = Insertion loss + Cable loss


(6) Margin value = Emission level - Limit value

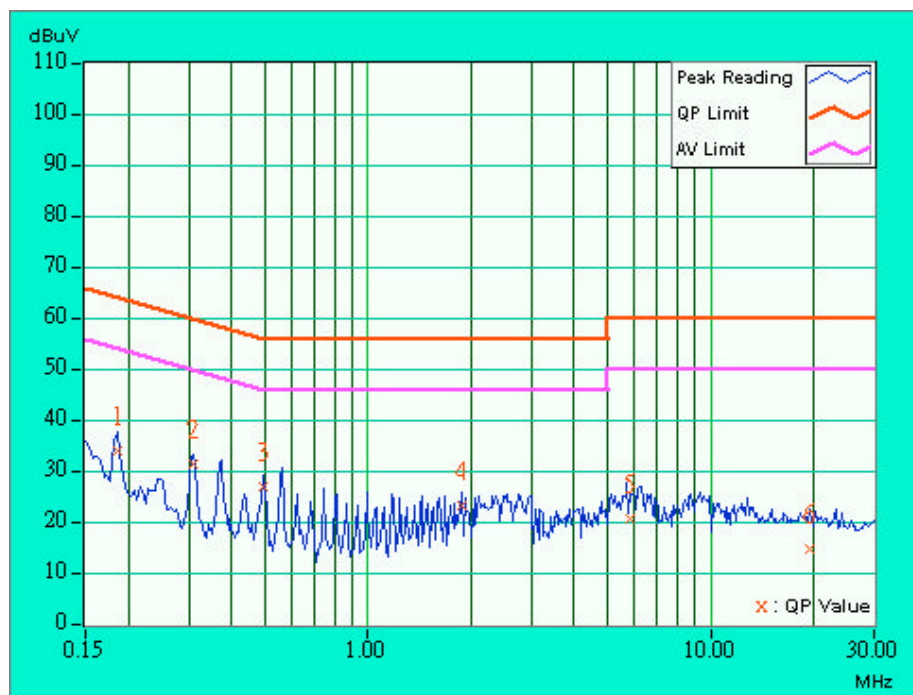

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 1	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 978 hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	35.91	-	36.01	-	64.25	54.25	-28.24	-
2	0.310	0.10	30.95	-	31.05	-	59.97	49.97	-28.92	-
3	0.369	0.10	30.09	-	30.19	-	58.53	48.53	-28.34	-
4	1.974	0.10	16.73	-	16.83	-	56.00	46.00	-39.17	-
5	6.105	0.34	19.91	-	20.25	-	60.00	50.00	-39.75	-
6	9.313	0.49	20.25	-	20.74	-	60.00	50.00	-39.26	-


- NOTES: (1) "-": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

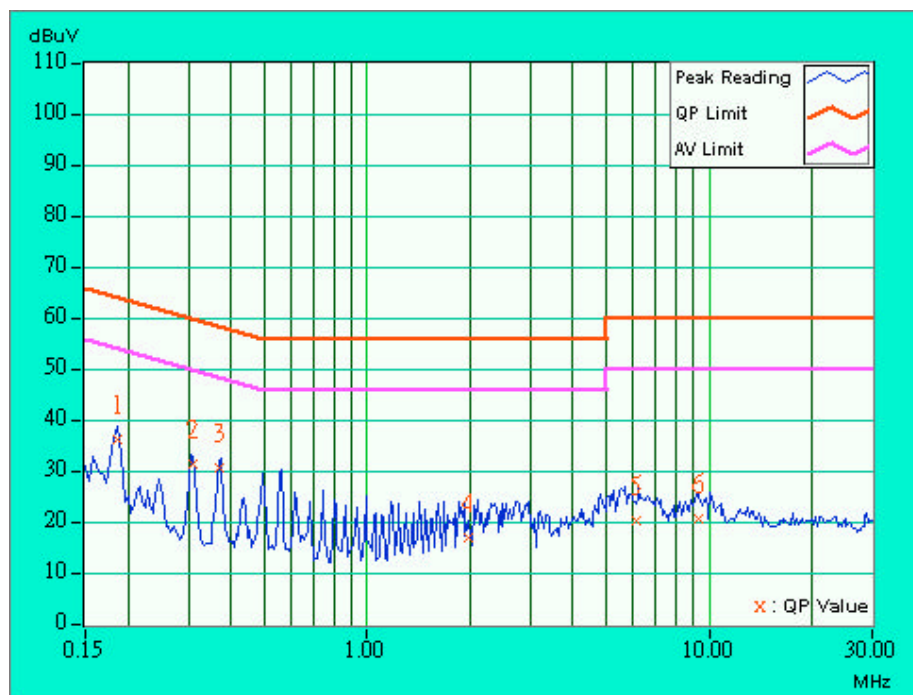

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 978 hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	35.09	-	35.19	-	64.25	54.25	-29.06	-
2	0.561	0.10	27.80	-	27.90	-	56.00	46.00	-28.10	-
3	0.744	0.10	23.27	-	23.37	-	56.00	46.00	-32.63	-
4	2.357	0.12	17.01	-	17.13	-	56.00	46.00	-38.87	-
5	5.723	0.36	23.35	-	23.71	-	60.00	50.00	-36.29	-
6	10.566	0.62	17.32	-	17.94	-	60.00	50.00	-42.06	-


- NOTES: (1) "": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

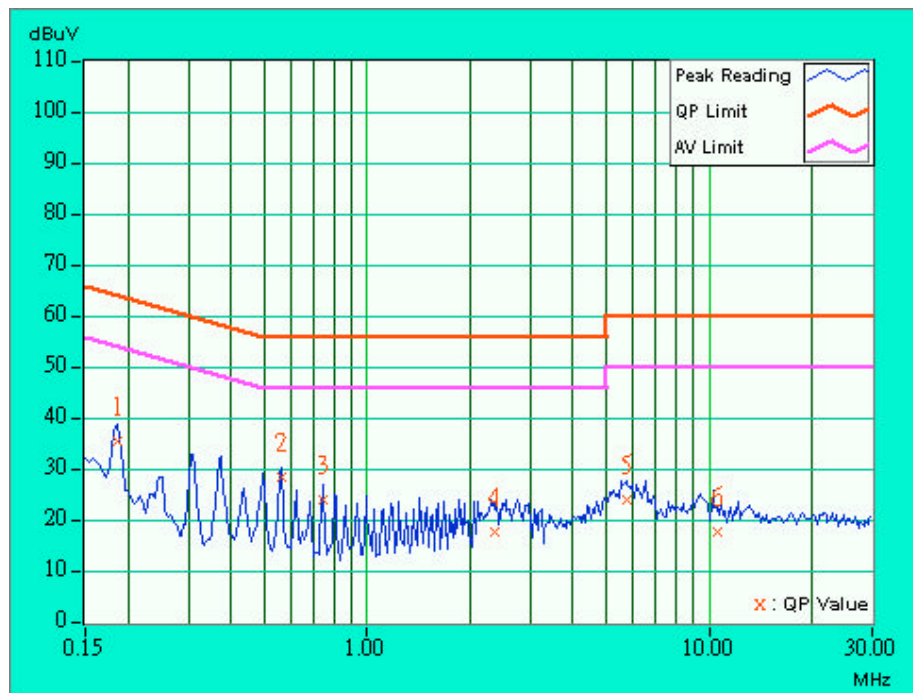

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 6	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 978 hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.373	0.10	30.03	-	30.13	-	58.44	48.44	-28.31	-
2	0.498	0.10	26.19	-	26.29	-	56.04	46.04	-29.75	-
3	0.755	0.10	11.65	-	11.75	-	56.00	46.00	-44.25	-
4	1.869	0.10	22.37	-	22.47	-	56.00	46.00	-33.53	-
5	5.836	0.33	19.90	-	20.23	-	60.00	50.00	-39.77	-
6	19.543	0.69	13.91	-	14.60	-	60.00	50.00	-45.40	-


- NOTES: (1) "-": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

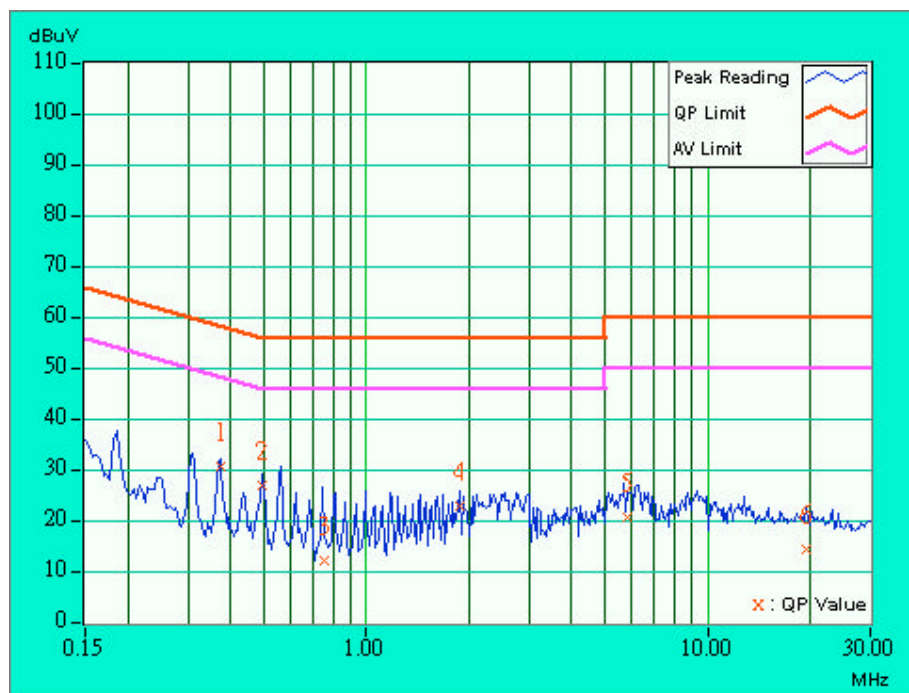

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 978 hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	35.37	-	35.47	-	64.25	54.25	-28.78	-
2	0.560	0.10	27.98	-	28.08	-	56.00	46.00	-27.92	-
3	2.177	0.11	15.86	-	15.97	-	56.00	46.00	-40.03	-
4	6.020	0.37	21.76	-	22.13	-	60.00	50.00	-37.87	-
5	9.941	0.60	19.85	-	20.45	-	60.00	50.00	-39.55	-
6	22.387	1.10	11.60	-	12.70	-	60.00	50.00	-47.30	-


- NOTES: (1) "-": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

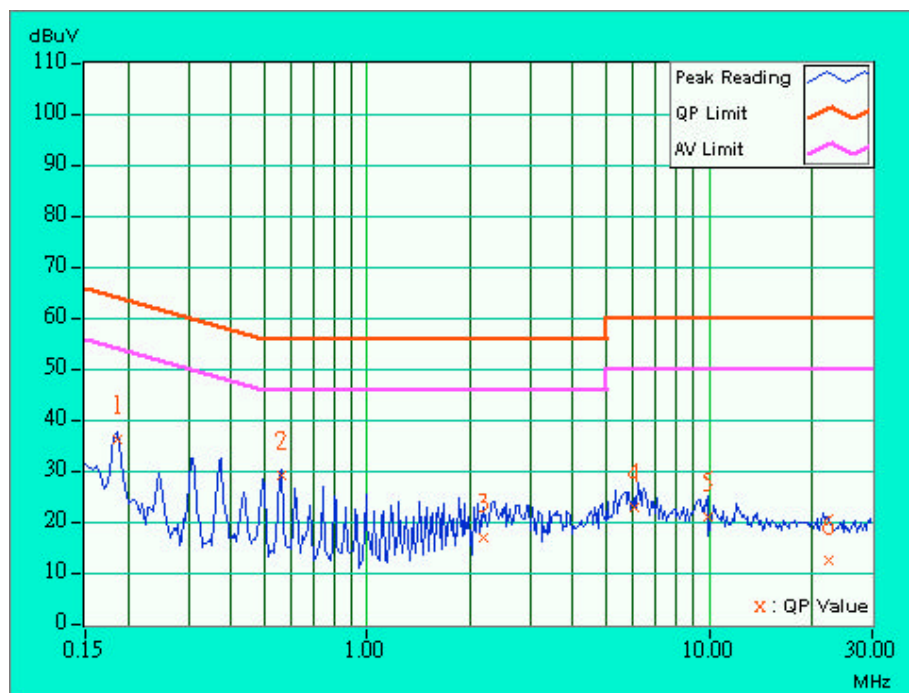

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 11	6dB BANDWIDTH	9 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50%RH, 978 hPa	TESTED BY	Eric Lee

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.185	0.10	34.23	-	34.33	-	64.25	54.25	-29.92	-
2	0.369	0.10	29.55	-	29.65	-	58.53	48.53	-28.88	-
3	0.548	0.10	20.57	-	20.67	-	56.00	46.00	-35.33	-
4	2.377	0.12	5.70	-	5.82	-	56.00	46.00	-50.18	-
5	6.840	0.39	24.83	-	25.22	-	60.00	50.00	-34.78	-
6	10.680	0.51	18.17	-	18.68	-	60.00	50.00	-41.32	-

- NOTES: (1) "-": Undetectable
(2) Q.P. and AV. are abbreviations of quasi-peak and average.
(3) "-": The Quasi-peak reading value also meets an average limit, thus measurement with the average detector is unnecessary.
(4) The emission levels of other frequencies were very low against the limit.
(5) Correction Factor = Insertion loss + Cable loss
(6) Margin value = Emission level - Limit value

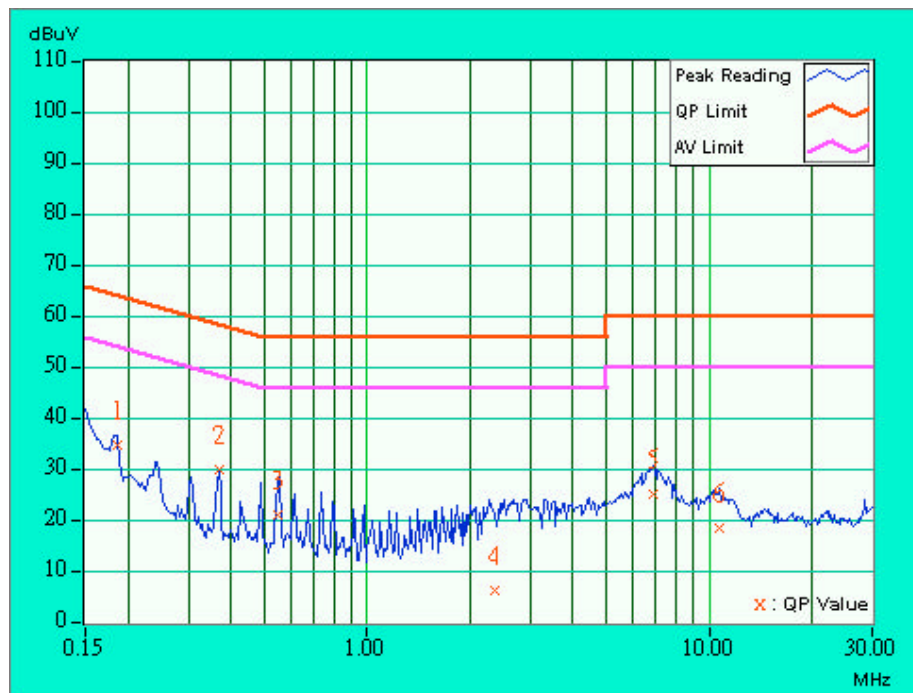

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
HP Spectrum Analyzer	8594ER	3829U04676	Jul. 14, 2003
ADVANTEST Spectrum Analyzer	R3271A	85060311	May 21, 2003
CHASE RF Pre Amplifier	CPA9232	1057	Apr. 24, 2003
HP Pre Amplifier	8449B	3008A01281	June 27, 2003
ROHDE & SCHWARZ Test Receiver	ESVS 10	849231 /019	Nov. 03, 2003
CHASE Broadband Antenna	CBL6111c	2730	Jul 17, 2003
Schwarzbeck Horn Antenna	BBHA9120-D1	D123	Jul. 31, 2003
SCHWARZBECK Tunable Dipole Antenna	UHAP	896	Mar. 07, 2003
SCHWARZBECK Tunable Dipole Antenna	VHAP	879	Mar. 07, 2003
RF Switches (ARNITSU)	CS-201	1565157	Jul. 29, 2003
RF CABLE (Chaintek) 1GHz-20GHz	Ak 9515-D	001	Ang, 20.2003
RF Cable(RICHTEC)	9913-30M	STCCAB-30M-1GHz-021	Nov. 5, 2003
Software	AS60P8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA
Burgeon AC Filter	LRE-2030 W/P	N/A	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. * = These equipment are used for the final measurement.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The test was performed in ADT Open Site No. C.
5. The FCC Site Registration No. is 656396.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

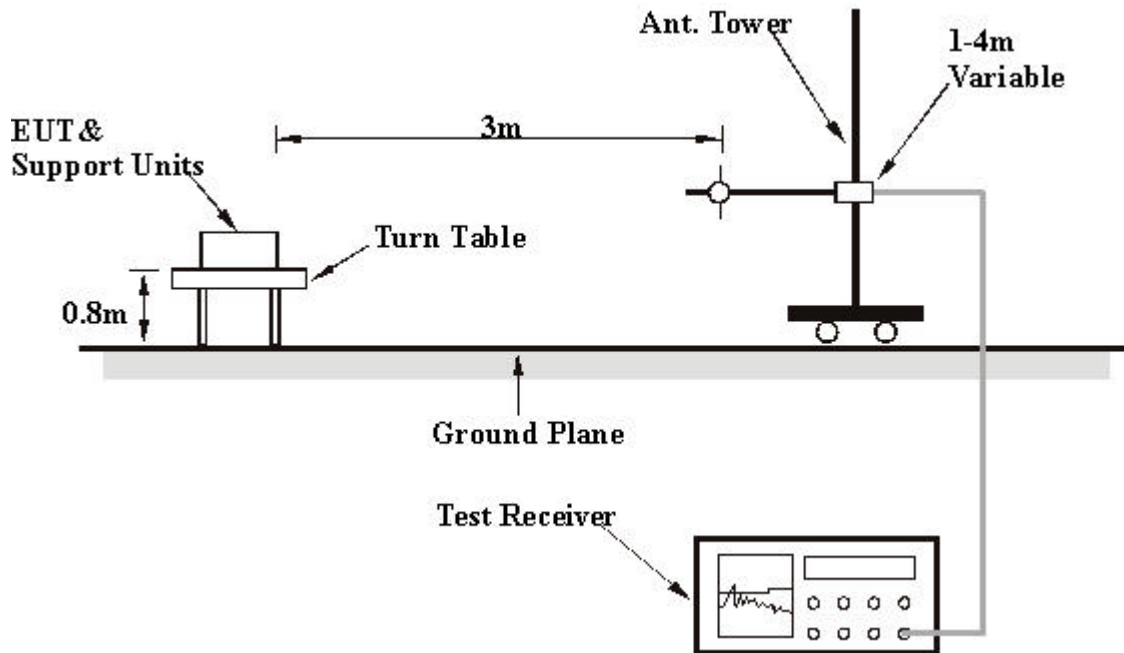

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS (A)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 1, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	18 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	36.1 QP	43.50	-7.40	1.25 H	200	24.20	11.90
2	176.00	38.8 QP	43.50	-4.70	1.48 H	145	29.60	9.20
3	198.00	39.5 QP	43.50	-4.00	1.39 H	288	30.30	9.20
4	220.00	40.2 QP	46.00	-5.80	1.26 H	225	31.30	8.90
5	231.00	36.4 QP	46.00	-9.60	1.54 H	263	26.30	10.10
6	308.00	42.7 QP	46.00	-3.30	1.26 H	235	27.70	15.00
7	352.00	44.9 QP	46.00	-1.10	1.13 H	217	29.80	15.10
8	396.00	42.5 QP	46.00	-3.50	1.00 H	191	26.50	15.90
9	440.00	43.9 QP	46.00	-2.10	1.23 H	200	26.20	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	37.3 QP	43.50	-6.20	1.00 V	262	25.40	11.90
2	176.00	32.5 QP	43.50	-11.00	1.00 V	155	23.30	9.20
3	198.01	39.0 QP	43.50	-4.50	1.00 V	230	29.90	9.20
4	220.00	37.8 QP	46.00	-8.20	1.26 V	61	28.90	8.90
5	231.01	36.3 QP	46.00	-9.70	1.14 V	162	26.10	10.10
6	264.00	39.0 QP	46.00	-7.00	1.02 V	272	26.70	12.30
7	308.00	42.9 QP	46.00	-3.10	1.00 V	65	27.90	15.00
9	352.00	43.6 QP	46.00	-2.40	1.00 V	110	28.50	15.10
10	396.00	35.7 QP	46.00	-10.30	1.40 V	196	19.70	15.90
11	440.00	37.4 QP	46.00	-8.60	1.62 V	288	19.70	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 1, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	19 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.50	52.0 PK	74.00	-22.00	1.20 H	16	16.10	35.80
1	2387.50	48.8 AV	54.00	-5.20	1.20 H	16	13.00	35.80
2	*2412.00	97.5 PK			1.79 H	310	61.60	35.90
2	*2412.00	93.4 AV			1.79 H	310	57.50	35.90
3	2490.00	37.7 PK	74.00	-36.30	1.20 H	17	1.50	36.20
4	4824.00	50.7 PK	74.00	-23.30	1.78 H	58	7.60	43.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	46.6 PK	74.00	-27.40	1.02 V	200	10.80	35.80
2	*2412.00	99.3 PK			1.09 V	229	63.40	35.90
2	*2412.00	97.7 AV			1.09 V	229	61.80	35.80
3	2490.00	33.0 PK	74.00	-41.00	1.05 V	50	-3.20	36.20
4	4824.00	50.0 PK	74.00	-24.00	1.06 V	350	6.90	43.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 1, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	40.2 PK	74.00	-33.80	1.11 H	170	4.50	35.70
2	*2437.00	101.9 PK			1.48 H	11	65.90	36.00
2	*2437.00	97.6 AV			1.48 H	11	61.60	35.70
3	2489.00	39.3 PK	74.00	-34.70	1.20 H	210	3.10	36.20
4	4874.00	51.8 PK	74.00	-22.20	1.22 H	56	8.60	43.20
4	4874.00	47.6 AV	54.00	-6.40	1.22 H	56	4.40	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	38.7 PK	74.00	-35.30	1.19 V	301	3.00	35.70
2	*2437.00	99.9 PK			1.45 V	302	63.90	36.00
2	*2437.00	95.7 AV			1.45 V	302	59.60	35.70
3	2490.00	38.6 PK	74.00	-35.40	1.21 V	70	2.40	36.20
4	4874.00	48.6 PK	74.00	-25.40	1.35 V	104	5.40	43.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 1, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	39.3 PK	74.00	-34.70	1.20 H	150	3.60	35.70
2	*2462.00	104.0 PK			1.20 H	150	67.90	36.10
2	*2462.00	99.1 AV			1.20 H	150	63.00	35.70
3	2489.00	54.8 PK	74.00	-19.20	1.13 H	32	18.60	36.20
3	2489.00	48.4 AV	54.00	-5.60	1.13 H	32	12.10	36.10
4	4924.00	53.9 PK	74.00	-20.10	1.14 H	305	10.60	43.30
4	4924.00	47.2 AV	54.00	-6.80	1.14 H	305	3.90	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	38.6 PK	74.00	-35.40	1.25 V	275	2.90	35.70
2	*2462.00	104.3 PK			1.35 V	15	68.20	36.10
2	*2462.00	97.3 AV			1.35 V	15	61.10	35.70
3	2489.00	47.5 PK	74.00	-26.50	1.02 V	111	11.20	36.20
4	4924.00	50.7 PK	74.00	-23.30	1.11 V	302	7.40	43.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.8 TEST RESULTS (B)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 2, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	35.2 QP	43.50	-8.30	2.22 H	284	23.40	11.90
2	176.00	32.1 QP	43.50	-11.40	2.10 H	109	22.90	9.20
3	198.00	29.7 QP	43.50	-13.80	2.16 H	247	20.50	9.20
4	220.00	44.8 QP	46.00	-1.20	2.07 H	137	35.90	8.90
5	231.00	24.3 QP	46.00	-21.70	2.01 H	111	14.20	10.10
6	264.00	40.2 QP	46.00	-5.80	1.61 H	280	27.90	12.30
7	308.00	37.6 QP	46.00	-8.40	1.44 H	144	22.60	15.00
8	352.00	43.2 QP	46.00	-2.80	1.37 H	274	28.10	15.10
9	396.00	36.6 QP	46.00	-9.40	1.00 H	246	20.60	15.90
10	440.00	38.8 QP	46.00	-7.20	1.04 H	141	21.10	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	33.3 QP	43.50	-10.20	1.16 V	60	21.40	11.90
2	176.00	23.5 QP	43.50	-20.00	2.70 V	221	14.30	9.20
3	198.00	23.2 QP	43.50	-20.30	1.62 V	266	14.00	9.20
4	220.00	35.7 QP	46.00	-10.30	2.35 V	229	26.80	8.90
5	231.01	19.4 QP	46.00	-26.60	1.69 V	215	9.30	10.10
6	264.00	34.4 QP	46.00	-11.60	2.03 V	280	22.10	12.30
7	308.00	29.5 QP	46.00	-16.50	1.94 V	280	14.50	15.00
8	352.00	37.1 QP	46.00	-8.90	1.00 V	187	22.00	15.10
9	396.00	30.7 QP	46.00	-15.30	1.00 V	210	14.80	15.90
10	440.00	29.2 QP	46.00	-16.80	1.07 V	314	11.50	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 2, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	44.0 PK	74.00	-30.00	1.14 H	54	8.20	35.80
2	*2412.00	81.1 PK			1.25 H	254	45.20	35.90
2	*2412.00	75.5 AV			1.25 H	254	39.60	35.80
3	2490.00	46.2 PK	74.00	-27.80	1.30 H	100	10.00	36.20
4	4824.00	57.6 PK	74.00	-16.40	1.58 H	200	14.50	43.10
4	4824.00	51.0 AV	54.00	-3.00	1.58 H	200	7.90	35.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	44.0 PK	74.00	-30.00	1.63 V	316	8.20	35.80
2	*2412.00	78.9 PK			1.74 V	259	43.00	35.90
2	*2412.00	70.0 AV			1.74 V	259	34.10	35.80
3	2490.00	43.5 PK	74.00	-30.50	1.47 V	301	7.20	36.20
4	4824.00	57.8 PK	74.00	-16.20	1.36 V	30	14.70	43.10
4	4824.00	50.1 AV	54.00	-3.90	1.36 V	30	7.00	35.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 2, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	44.8 PK	74.00	-29.20	1.13 H	89	9.00	35.80
2	*2437.00	86.2 PK			1.73 H	203	50.10	36.00
2	*2437.00	78.1 AV			1.73 H	203	42.00	35.80
3	2490.00	46.8 PK	74.00	-27.20	1.18 H	2	10.50	36.20
4	4874.00	53.4 PK	74.00	-20.60	1.29 H	65	10.10	43.20
4	4874.00	45.0 AV	54.00	-9.00	1.29 H	65	1.80	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	46.0 PK	74.00	-28.00	1.62 V	57	10.20	35.80
2	*2437.00	85.7 PK			1.68 V	69	49.70	36.00
2	*2437.00	77.0 AV			1.68 V	69	41.00	35.80
3	2491.00	46.2 PK	74.00	-27.80	1.18 V	259	10.00	36.20
4	4874.00	53.7 PK	74.00	-20.30	1.34 V	205	10.50	43.20
4	4874.00	44.3 AV	54.00	-9.70	1.34 V	205	1.10	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 2, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	43.7 PK	74.00	-30.30	1.69 H	276	7.90	35.80
2	*2462.00	82.1 PK			1.09 H	209	46.00	36.10
2	*2462.00	76.2 AV			1.09 H	209	40.10	35.80
3	2491.00	44.8 PK	74.00	-29.20	1.48 H	350	8.50	36.20
4	4924.00	54.9 PK	74.00	-19.10	1.19 H	65	11.50	43.30
4	4924.00	48.2 AV	54.00	-5.80	1.19 H	65	4.90	36.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	43.6 PK	74.00	-30.40	1.29 V	301	7.90	35.70
2	*2462.00	82.0 PK			1.08 V	255	45.90	36.10
2	*2462.00	74.2 AV			1.08 V	255	38.10	35.70
3	2491.00	45.9 PK	74.00	-28.10	1.09 V	86	9.70	36.20
4	4924.00	51.9 PK	74.00	-22.10	1.02 V	142	8.60	43.30
4	4924.00	45.7 AV	54.00	-8.30	1.02 V	142	2.40	36.10

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.9 TEST RESULTS (C)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 3, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	38.2 QP	43.50	-5.30	2.11 H	302	26.30	11.90
2	176.00	29.5 QP	43.50	-14.00	2.08 H	296	20.30	9.20
3	220.00	38.3 QP	46.00	-7.70	2.15 H	288	29.40	8.90
4	231.00	36.5 QP	46.00	-9.50	1.93 H	286	26.40	10.10
5	264.00	43.1 QP	46.00	-2.90	1.92 H	272	30.80	12.30
6	297.00	38.3 QP	46.00	-7.70	1.54 H	299	23.90	14.40
7	308.00	37.9 QP	46.00	-8.10	2.01 H	293	22.90	15.00
8	352.00	39.5 QP	46.00	-6.50	1.43 H	293	24.40	15.10
9	396.00	32.5 QP	46.00	-13.50	1.48 H	302	16.50	15.90
10	440.00	31.6 QP	46.00	-14.40	2.15 H	325	13.90	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.01	36.6 QP	43.50	-6.90	1.00 V	0	24.80	11.90
2	176.01	20.4 QP	43.50	-23.10	1.58 V	177	11.20	9.20
3	198.02	24.2 QP	43.50	-19.30	1.00 V	355	15.00	9.20
4	220.02	32.7 QP	46.00	-13.30	1.00 V	258	23.80	8.90
5	231.01	31.7 QP	46.00	-14.30	1.12 V	147	21.60	10.10
6	264.00	37.6 QP	46.00	-8.40	2.02 V	198	25.30	12.30
7	308.01	37.1 QP	46.00	-8.90	2.09 V	292	22.10	15.00
8	352.01	36.9 QP	46.00	-9.10	1.37 V	227	21.80	15.10
9	396.01	32.4 QP	46.00	-13.60	1.73 V	282	16.40	15.90
10	440.01	34.0 QP	46.00	-12.00	1.70 V	285	16.30	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 3, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2373.00	46.0 PK	74.00	-28.00	1.43 H	302	10.20	35.80
2	*2412.00	99.6 PK			1.45 H	251	63.60	35.90
2	*2412.00	91.7 AV			1.45 H	251	55.80	35.80
3	2491.00	46.8 PK	74.00	-27.20	1.39 H	203	10.60	36.20
4	4824.00	56.5 PK	74.00	-17.50	1.48 H	307	13.40	43.10
4	4824.00	50.7 AV	54.00	-3.30	1.48 H	307	7.60	35.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2373.00	49.4 PK	74.00	-24.60	1.39 V	105	13.60	35.80
2	*2412.00	97.9 PK			1.59 V	302	62.00	35.90
2	*2412.00	89.6 AV			1.59 V	302	53.60	35.80
3	2490.00	45.5 PK	74.00	-28.50	1.15 V	209	9.20	36.20
4	4824.00	53.7 PK	74.00	-20.30	1.22 V	201	10.60	43.10
4	4824.00	46.4 AV	54.00	-7.60	1.22 V	201	3.20	35.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 3, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2373.00	47.0 PK	74.00	-27.00	1.25 H	263	11.20	35.80
2	*2437.00	97.0 PK			1.42 H	325	61.00	36.00
2	*2437.00	90.2 AV			1.42 H	325	54.20	35.80
3	2490.00	45.4 PK	74.00	-28.60	1.48 H	264	9.20	36.20
4	4874.00	56.5 PK	74.00	-17.50	1.11 H	189	13.20	43.20
4	4874.00	51.1 AV	54.00	-2.90	1.11 H	189	7.90	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2373.00	46.5 PK	74.00	-27.50	1.52 V	309	10.70	35.80
2	*2437.00	95.3 PK			1.59 V	29	59.30	36.00
2	*2437.00	89.0 AV			1.59 V	29	53.00	35.80
3	2490.00	43.6 PK	74.00	-30.40	1.08 V	280	7.30	36.20
4	4874.00	53.4 PK	74.00	-20.60	1.74 V	192	10.20	43.20
4	4874.00	45.4 AV	54.00	-8.60	1.74 V	192	2.20	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 3, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	44.0 PK	74.00	-30.00	1.25 H	105	8.20	35.80
2	*2462.00	101.3 PK			1.69 H	288	65.20	36.10
2	*2462.00	94.8 AV			1.69 H	288	58.70	35.80
3	2489.00	55.9 PK	74.00	-18.10	1.41 H	354	19.70	36.20
3	2489.00	45.8 AV	54.00	-8.20	1.41 H	354	9.60	36.10
4	4924.00	56.3 PK	74.00	-17.70	1.50 H	189	13.00	43.30
4	4924.00	50.0 AV	54.00	-4.00	1.50 H	189	6.70	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	46.1 PK	74.00	-27.90	1.12 V	260	10.30	35.80
2	*2462.00	99.4 PK			1.69 V	205	63.20	36.10
2	*2462.00	93.0 AV			1.69 V	205	56.90	35.80
3	2489.00	55.9 PK	74.00	-18.10	1.59 V	90	19.60	36.20
3	2489.00	43.5 AV	54.00	-10.50	1.59 V	90	7.20	36.10
4	4924.00	56.2 PK	74.00	-17.80	1.25 V	298	12.90	43.30
4	4924.00	47.4 AV	54.00	-6.60	1.25 V	298	4.10	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.10 TEST RESULTS (D)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 4, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	18 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	37.8 QP	43.50	-5.70	2.09 H	0	25.90	11.90
2	176.00	25.9 QP	43.50	-17.60	2.14 H	93	16.70	9.20
3	198.00	24.3 QP	43.50	-19.20	1.58 H	189	15.10	9.20
4	220.00	39.8 QP	46.00	-6.20	1.90 H	165	30.90	8.90
5	231.00	24.1 QP	46.00	-21.90	1.54 H	65	14.00	10.10
6	264.00	38.0 QP	46.00	-8.00	1.00 H	197	25.70	12.30
7	308.00	33.0 QP	46.00	-13.00	1.11 H	158	18.00	15.00
8	352.00	37.9 QP	46.00	-8.10	1.71 H	205	22.80	15.10
9	396.00	43.2 QP	46.00	-2.80	1.58 H	356	27.30	15.90
10	440.00	35.3 QP	46.00	-10.70	1.00 H	176	17.60	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	35.9 QP	43.50	-7.60	1.00 V	353	24.00	11.90
2	176.00	16.6 QP	43.50	-26.90	1.05 V	171	7.30	9.20
3	198.00	20.0 QP	43.50	-23.50	1.56 V	175	10.80	9.20
4	220.00	30.9 QP	46.00	-15.10	1.82 V	226	22.00	8.90
5	231.00	19.7 QP	46.00	-26.30	1.79 V	218	9.60	10.10
6	264.00	31.3 QP	46.00	-14.70	2.12 V	224	19.00	12.30
7	308.01	30.3 QP	46.00	-15.70	1.70 V	169	15.30	15.00
8	352.00	41.8 QP	46.00	-4.20	1.69 V	14	26.70	15.10
9	396.00	33.6 QP	46.00	-12.40	2.09 V	0	17.70	15.90
10	440.00	30.5 QP	46.00	-15.50	2.21 V	274	12.80	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 4, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	18 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.00	46.8 PK	74.00	-27.20	1.07 H	246	11.00	35.80
2	*2412.00	99.5 PK			1.36 H	266	63.50	35.90
2	*2412.00	91.6 AV			1.36 H	266	55.70	35.80
3	2490.00	46.3 PK	74.00	-27.70	1.60 H	164	10.00	36.20
4	4824.00	57.7 PK	74.00	-16.30	1.01 H	340	14.60	43.10
4	4824.00	50.8 AV	54.00	-3.20	1.01 H	340	7.60	35.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2350.00	44.5 PK	74.00	-29.50	1.78 V	207	8.90	35.70
2	*2412.00	97.6 PK			1.28 V	210	61.60	35.90
2	*2412.00	91.6 AV			1.28 V	210	55.60	35.70
3	2490.00	45.2 PK	74.00	-28.80	1.40 V	146	9.00	36.20
4	4824.00	54.7 PK	74.00	-19.30	1.81 V	340	11.60	43.10
4	4824.00	46.7 AV	54.00	-7.30	1.81 V	340	3.50	35.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 4, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	18 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	45.4 PK	74.00	-28.60	1.11 H	142	9.60	35.80
2	*2437.00	100.3 PK			1.20 H	320	64.30	36.00
2	*2437.00	95.5 AV			1.20 H	320	59.50	35.80
3	2490.00	45.8 PK	74.00	-28.20	1.45 H	234	9.60	36.20
4	4874.00	55.4 PK	74.00	-18.60	1.12 H	251	12.20	43.20
4	4874.00	49.2 AV	54.00	-4.80	1.12 H	251	6.00	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	44.8 PK	74.00	-29.20	1.00 V	292	9.00	35.80
2	*2437.00	99.6 PK			1.18 V	140	63.60	36.00
2	*2437.00	93.4 AV			1.18 V	140	57.40	35.80
3	2490.00	46.0 PK	74.00	-28.00	1.46 V	210	9.70	36.20
4	4874.00	53.9 PK	74.00	-20.10	1.25 V	302	10.70	43.20
4	4874.00	47.2 AV	54.00	-6.80	1.25 V	302	4.00	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 4, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	18 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	44.8 PK	74.00	-29.20	1.12 H	282	9.00	35.80
2	*2462.00	101.5 PK			1.16 H	258	65.40	36.10
2	*2462.00	94.1 AV			1.16 H	258	58.00	35.80
3	2490.00	56.8 PK	74.00	-17.20	1.49 H	337	20.60	36.20
3	2490.00	44.3 AV	54.00	-9.70	1.49 H	337	8.00	36.10
4	4924.00	54.7 PK	74.00	-19.30	1.14 H	60	11.40	43.30
4	4924.00	47.7 AV	54.00	-6.30	1.14 H	60	4.40	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2375.00	43.7 PK	74.00	-30.30	1.16 V	258	7.90	35.80
2	*2462.00	100.1 PK			1.54 V	309	64.00	36.10
2	*2462.00	92.7 AV			1.54 V	309	56.50	35.80
3	2489.00	53.5 PK	74.00	-20.50	1.48 V	351	17.20	36.20
3	2489.00	41.4 AV	54.00	-12.60	1.48 V	351	5.10	36.10
4	4924.00	56.0 PK	74.00	-18.00	1.05 V	144	12.70	43.30
4	4924.00	47.8 AV	54.00	-6.20	1.05 V	144	4.50	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.11 TEST RESULTS (E)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 5, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.02	22.4 QP	43.50	-21.10	1.89 H	295	10.50	11.90
2	176.00	20.2 QP	43.50	-23.30	1.46 H	323	11.00	9.20
3	198.00	27.9 QP	43.50	-15.60	1.59 H	204	18.70	9.20
4	220.01	29.4 QP	46.00	-16.60	1.00 H	286	20.50	8.90
5	231.00	26.5 QP	46.00	-19.50	1.65 H	0	16.40	10.10
6	264.00	44.3 QP	46.00	-1.70	1.40 H	360	32.00	12.30
7	308.01	40.5 QP	46.00	-5.50	1.14 H	40	25.50	15.00
8	352.00	41.5 QP	46.00	-4.50	1.00 H	0	26.40	15.10
9	396.00	36.2 QP	46.00	-9.80	1.25 H	151	20.30	15.90
10	440.00	31.9 QP	46.00	-14.10	1.00 H	66	14.20	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	28.2 QP	43.50	-15.30	1.00 V	67	16.40	11.90
2	176.00	16.1 QP	43.50	-27.40	1.30 V	25	6.90	9.20
3	198.00	21.8 QP	43.50	-21.70	1.60 V	321	12.60	9.20
4	220.00	21.9 QP	46.00	-24.10	1.09 V	222	13.00	8.90
5	231.00	21.3 QP	46.00	-24.70	1.27 V	256	11.20	10.10
6	264.00	41.4 QP	46.00	-4.60	1.00 V	10	29.10	12.30
7	308.00	33.2 QP	46.00	-12.80	1.49 V	9	18.20	15.00
8	352.00	34.3 QP	46.00	-11.70	1.61 V	343	19.20	15.10
9	396.00	29.1 QP	46.00	-16.90	1.06 V	67	13.20	15.90
10	440.00	25.8 QP	46.00	-20.20	1.17 V	204	8.10	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 5, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	52.3 PK	74.00	-21.70	1.25 H	129	16.50	35.80
1	2387.00	39.3 AV	54.00	-14.70	1.25 H	129	3.50	35.80
2	*2412.00	97.2 PK			1.14 H	344	61.20	35.90
2	*2412.00	90.0 AV			1.14 H	344	54.10	35.90
3	2491.00	45.1 PK	74.00	-28.90	1.24 H	127	8.80	36.20
4	4824.00	61.4 PK	74.00	-12.60	1.41 H	243	18.20	43.10
4	4824.00	53.0 AV	54.00	-1.00	1.41 H	243	9.90	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.00	46.8 PK	74.00	-27.20	1.01 V	184	11.00	35.80
2	*2412.00	103.9 PK			1.20 V	354	68.00	35.90
2	*2412.00	97.1 AV			1.20 V	354	61.20	35.80
3	2491.00	46.8 PK	74.00	-27.20	1.34 V	256	10.50	36.20
4	4824.00	59.0 PK	74.00	-15.00	1.34 V	79	15.90	43.10
4	4824.00	51.7 AV	54.00	-2.30	1.34 V	79	8.60	35.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 5, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	45.3 PK	74.00	-28.70	1.33 H	77	9.40	35.80
2	*2437.00	101.9 PK			1.42 H	326	65.90	36.00
2	*2437.00	91.7 AV			1.42 H	326	55.60	35.80
3	2491.00	48.1 PK	74.00	-25.90	1.12 H	248	11.80	36.20
4	4874.00	60.2 PK	74.00	-13.80	1.00 H	165	17.00	43.20
4	4874.00	52.0 AV	54.00	-2.00	1.00 H	165	8.80	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	51.8 PK	74.00	-22.20	1.24 V	329	16.00	35.80
1	2388.00	40.4 AV	54.00	-13.60	1.24 V	329	4.50	35.80
2	*2437.00	105.8 PK			1.39 V	329	69.70	36.00
2	*2437.00	98.7 AV			1.39 V	329	62.70	36.00
3	2490.00	50.1 PK	74.00	-23.90	1.39 V	223	13.90	36.20
4	4874.00	62.0 PK	74.00	-12.00	1.20 V	119	18.80	43.20
4	4874.00	52.7 AV	54.00	-1.30	1.20 V	119	9.50	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency



EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 5, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	45.0 PK	74.00	-29.00	1.39 H	300	9.20	35.80
2	*2462.00	99.1 PK			1.20 H	49	63.00	36.10
2	*2462.00	92.8 AV			1.20 H	49	56.70	35.80
3	2491.00	55.2 PK	74.00	-18.80	1.36 H	57	19.00	36.20
3	2491.00	44.2 AV	54.00	-9.80	1.36 H	57	7.90	36.10
4	4924.00	60.2 PK	74.00	-13.80	1.42 H	237	16.90	43.30
4	4924.00	52.3 AV	54.00	-1.70	1.42 H	237	9.00	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	48.6 PK	74.00	-25.40	1.11 V	258	12.80	35.80
2	*2462.00	108.6 PK			1.18 V	356	72.50	36.10
2	*2462.00	101.5 AV			1.18 V	356	65.40	35.80
3	2489.00	55.9 PK	74.00	-18.10	1.18 V	340	19.60	36.20
3	2489.00	45.5 AV	54.00	-8.50	1.18 V	340	9.20	36.10
4	4924.00	61.6 PK	74.00	-12.40	1.38 V	321	18.20	43.30
4	4924.00	52.4 AV	54.00	-1.60	1.38 V	321	9.10	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.12 TEST RESULTS (F)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 6, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	24.3 QP	43.50	-19.20	2.21 H	0	12.40	11.90
2	176.00	24.1 QP	43.50	-19.40	1.61 H	234	14.90	9.20
3	198.00	28.1 QP	43.50	-15.40	1.93 H	28	18.90	9.20
4	220.00	36.4 QP	46.00	-9.60	1.54 H	288	27.50	8.90
5	231.00	34.3 QP	46.00	-11.70	1.50 H	56	24.20	10.10
6	264.00	42.8 QP	46.00	-3.20	1.34 H	325	30.50	12.30
7	308.01	38.8 QP	46.00	-7.20	1.58 H	199	23.80	15.00
8	352.00	43.6 QP	46.00	-2.40	1.00 H	157	28.50	15.10
9	396.00	38.5 QP	46.00	-7.50	1.32 H	172	22.50	15.90
10	440.00	35.0 QP	46.00	-11.00	1.18 H	277	17.30	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.00	22.8 QP	43.50	-20.70	1.25 V	154	10.90	11.90
2	176.00	28.4 QP	43.50	-15.10	1.11 V	206	19.20	9.20
3	198.00	28.4 QP	43.50	-15.10	1.09 V	300	19.20	9.20
4	220.00	33.8 QP	46.00	-12.20	1.54 V	254	24.90	8.90
5	231.00	32.1 QP	46.00	-13.90	1.35 V	58	22.00	10.10
6	264.00	39.6 QP	46.00	-6.40	1.21 V	300	27.30	12.30
7	308.00	34.9 QP	46.00	-11.10	1.18 V	277	19.90	15.00
8	352.00	36.3 QP	46.00	-9.70	1.34 V	269	21.20	15.10
9	396.00	34.2 QP	46.00	-11.80	1.32 V	277	18.30	15.90
10	440.00	30.2 QP	46.00	-15.80	1.58 V	321	12.50	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 6, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.00	45.5 PK	74.00	-28.50	1.55 H	197	9.80	35.80
2	*2412.00	98.5 PK			1.01 H	317	62.60	35.90
2	*2412.00	90.7 AV			1.01 H	317	54.80	35.80
3	2491.00	43.8 PK	74.00	-30.20	1.25 H	300	7.50	36.20
4	4824.00	62.0 PK	74.00	-12.00	1.08 H	214	18.90	43.10
4	4824.00	52.8 AV	54.00	-1.20	1.08 H	214	9.70	35.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.00	46.0 PK	74.00	-28.00	1.11 V	209	10.20	35.80
2	*2412.00	96.5 PK			1.30 V	285	60.60	35.90
2	*2412.00	88.5 AV			1.30 V	285	52.50	35.80
3	2490.00	43.8 PK	74.00	-30.20	1.32 V	301	7.50	36.20
4	4824.00	53.8 PK	74.00	-20.20	1.58 V	302	10.70	43.10
4	4824.00	47.7 AV	54.00	-6.30	1.58 V	302	4.60	35.90

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 6, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2377.00	46.4 PK	74.00	-27.60	1.30 H	194	10.60	35.80
2	*2437.00	98.4 PK			1.55 H	300	62.40	36.00
2	*2437.00	92.9 AV			1.55 H	300	56.90	35.80
3	2491.00	48.5 PK	74.00	-25.50	1.54 H	65	12.20	36.20
4	4874.00	59.6 PK	74.00	-14.40	1.38 H	239	16.40	43.20
4	4874.00	52.5 AV	54.00	-1.50	1.38 H	239	9.30	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	44.2 PK	74.00	-29.80	1.00 V	298	8.50	35.80
2	*2437.00	100.2 PK			1.64 V	264	64.20	36.00
2	*2437.00	92.9 AV			1.64 V	264	56.90	35.80
3	2490.00	47.1 PK	74.00	-26.90	1.33 V	98	10.80	36.20
4	4874.00	57.6 PK	74.00	-16.40	1.78 V	301	14.40	43.20
4	4874.00	48.8 AV	54.00	-5.20	1.78 V	301	5.60	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 6, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2370.00	43.3 PK	74.00	-30.70	1.00 H	54	7.50	35.80
2	*2462.00	104.4 PK			1.47 H	331	68.20	36.10
2	*2462.00	96.0 AV			1.47 H	331	59.90	35.80
3	2491.00	54.9 PK	74.00	-19.10	1.04 H	251	18.70	36.20
3	2491.00	43.1 AV	54.00	-10.90	1.04 H	251	6.90	36.10
4	4924.00	58.5 PK	74.00	-15.50	1.55 H	302	15.10	43.30
4	4924.00	52.9 AV	54.00	-1.10	1.55 H	302	9.60	36.20

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2380.00	45.6 PK	74.00	-28.40	1.19 V	133	9.80	35.80
2	*2462.00	99.9 PK			1.66 V	326	63.80	36.10
2	*2462.00	92.1 AV			1.66 V	326	56.00	35.80
3	2491.00	54.1 PK	74.00	-19.90	1.46 V	268	17.90	36.20
3	2491.00	39.8 AV	54.00	-14.20	1.46 V	268	3.60	36.10
4	4924.00	55.1 PK	74.00	-18.90	1.37 V	203	11.80	43.30
4	4924.00	48.2 AV	54.00	-5.80	1.37 V	203	4.90	36.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.13 TEST RESULTS (G)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.01	33.6 QP	43.50	-9.90	1.37 H	320	21.70	11.90
2	176.02	37.3 QP	43.50	-6.20	1.20 H	147	28.10	9.20
3	198.01	34.6 QP	43.50	-8.90	1.02 H	353	25.40	9.20
4	220.01	38.7 QP	46.00	-7.30	1.09 H	59	29.80	8.90
5	231.01	33.2 QP	46.00	-12.80	1.19 H	5	23.10	10.10
6	264.02	36.2 QP	46.00	-9.80	1.39 H	179	23.90	12.30
7	297.01	40.8 QP	46.00	-5.20	1.00 H	316	26.40	14.40
8	308.03	43.2 QP	46.00	-2.80	1.00 H	111	28.20	15.00
9	352.00	45.0 QP	46.00	-1.00	1.01 H	68	29.90	15.10
10	396.01	42.0 QP	46.00	-4.00	1.08 H	222	26.10	15.90
11	440.00	41.4 QP	46.00	-4.60	1.07 H	360	23.70	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.03	29.5 QP	43.50	-14.00	1.32 V	254	17.60	11.90
2	176.01	33.0 QP	43.50	-10.50	1.14 V	323	23.80	9.20
3	198.00	29.3 QP	43.50	-14.20	1.00 V	195	20.10	9.20
4	220.01	33.2 QP	46.00	-12.80	1.01 V	3	24.30	8.90
5	231.02	29.4 QP	46.00	-16.60	1.09 V	59	19.30	10.10
6	264.01	29.6 QP	46.00	-16.40	1.43 V	268	17.30	12.30
7	297.01	31.9 QP	46.00	-14.10	1.24 V	64	17.50	14.40
8	308.01	39.6 QP	46.00	-6.40	1.00 V	357	24.60	15.00
9	352.01	38.7 QP	46.00	-7.30	1.02 V	237	23.60	15.10
10	396.01	34.9 QP	46.00	-11.10	1.15 V	199	19.00	15.90
11	440.02	35.9 QP	46.00	-10.10	1.07 V	360	18.20	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.00	43.6 PK	74.00	-30.40	1.01 H	151	8.00	35.70
2	*2412.00	98.8 PK			1.20 H	145	63.20	35.60
2	*2412.00	93.3 AV			1.20 H	145	57.70	35.70
3	2496.00	46.7 PK	74.00	-27.30	1.09 H	20	7.80	38.90
4	4824.00	49.7 PK	74.00	-24.30	1.06 H	309	6.20	43.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2374.00	46.4 PK	74.00	-27.60	1.10 V	300	10.70	35.70
2	*2412.00	102.6 PK			1.19 V	99	67.00	35.60
2	*2412.00	95.7 AV			1.19 V	99	60.10	35.70
3	2496.00	46.8 PK	74.00	-27.20	1.10 V	98	7.90	38.90
4	4824.00	53.9 PK	74.00	-20.10	1.07 V	203	10.50	43.50
4	4824.00	50.5 AV	54.00	-3.50	1.07 V	203	7.00	35.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2378.00	46.5 PK	74.00	-27.50	1.03 H	278	10.80	35.70
2	*2437.00	98.1 PK			1.19 H	110	62.20	36.00
2	*2437.00	92.0 AV			1.19 H	110	56.10	35.70
3	2487.00	44.6 PK	74.00	-29.40	1.15 H	163	8.00	36.60
4	4874.00	51.9 PK	74.00	-22.10	1.02 H	169	8.20	43.70
4	4874.00	48.1 AV	54.00	-5.90	1.02 H	169	4.40	36.00

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2378.00	45.7 PK	74.00	-28.30	1.04 V	287	10.00	35.70
2	*2437.00	100.4 PK			1.00 V	289	64.40	36.00
2	*2437.00	94.0 AV			1.00 V	289	58.10	35.70
3	2487.00	43.9 PK	74.00	-30.10	1.11 V	0	7.30	36.60
4	4874.00	53.8 PK	74.00	-20.20	1.18 V	258	10.10	43.70
4	4874.00	50.0 AV	54.00	-4.00	1.18 V	258	6.30	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 7, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	44.9 PK	74.00	-29.10	1.02 H	233	9.20	35.70
2	*2462.00	98.2 PK			1.06 H	0	61.90	36.30
2	*2462.00	91.9 AV			1.06 H	0	55.60	35.70
3	2490.00	52.4 PK	74.00	-21.60	1.11 H	13	10.50	41.90
3	2490.00	43.9 AV	54.00	-10.10	1.11 H	13	2.10	36.30
4	4924.00	51.8 PK	74.00	-22.20	1.23 H	359	7.90	43.90
4	4924.00	45.8 AV	54.00	-8.20	1.23 H	359	1.90	41.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2376.00	47.2 PK	74.00	-26.80	1.07 V	91	11.50	35.70
2	*2462.00	99.7 PK			1.00 V	111	63.40	36.30
2	*2462.00	92.3 AV			1.00 V	111	56.00	35.70
3	2490.00	49.4 PK	74.00	-24.60	1.36 V	198	7.50	41.90
4	4924.00	54.9 PK	74.00	-19.10	1.22 V	200	11.00	43.90
4	4924.00	52.0 AV	54.00	-2.00	1.22 V	200	8.10	36.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.2.14 TEST RESULTS (H)

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 8, Channel 11	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.02	32.4 QP	43.50	-11.10	1.35 H	222	20.60	11.90
2	176.02	37.0 QP	43.50	-6.50	1.28 H	192	27.80	9.20
3	198.01	34.9 QP	43.50	-8.60	1.34 H	348	25.70	9.20
4	220.02	38.5 QP	46.00	-7.50	1.16 H	0	29.60	8.90
5	231.03	32.1 QP	46.00	-13.90	1.08 H	18	22.00	10.10
6	264.03	35.6 QP	46.00	-10.40	1.00 H	209	23.30	12.30
7	297.01	41.2 QP	46.00	-4.80	1.00 H	1	26.80	14.40
8	308.01	42.3 QP	46.00	-3.70	1.27 H	102	27.30	15.00
9	352.00	45.3 QP	46.00	-0.70	1.00 H	48	30.20	15.10
10	396.01	41.8 QP	46.00	-4.20	1.07 H	199	25.80	15.90
11	440.00	40.1 QP	46.00	-5.90	1.00 H	112	22.40	17.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	132.01	28.7 QP	43.50	-14.80	1.06 V	201	16.80	11.90
2	176.01	30.1 QP	43.50	-13.40	1.08 V	145	20.90	9.20
3	198.02	28.5 QP	43.50	-15.00	1.10 V	203	19.30	9.20
4	220.00	34.5 QP	46.00	-11.50	1.20 V	54	25.60	8.90
5	231.01	28.3 QP	46.00	-17.70	1.11 V	299	18.20	10.10
6	264.00	30.7 QP	46.00	-15.30	1.21 V	101	18.40	12.30
7	297.01	36.1 QP	46.00	-9.90	1.30 V	301	21.70	14.40
8	308.00	37.9 QP	46.00	-8.10	1.04 V	253	22.90	15.00
9	352.01	37.6 QP	46.00	-8.40	1.43 V	342	22.50	15.10
10	396.00	35.7 QP	46.00	-10.30	1.00 V	163	19.80	15.90
11	440.00	35.9 QP	46.00	-10.10	1.07 V	199	18.20	17.70

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 8, Channel 1	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	49.8 PK	74.00	-24.20	1.23 H	124	12.00	37.80
2	*2412.00	96.8 PK			1.25 H	360	61.20	35.60
2	*2412.00	90.0 AV			1.25 H	360	54.40	37.80
3	2488.00	42.8 PK	74.00	-31.20	1.20 H	25	6.20	36.70
4	4824.00	54.2 PK	74.00	-19.80	1.32 H	312	10.70	43.50
4	4824.00	51.5 AV	54.00	-2.50	1.32 H	312	8.00	35.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	47.6 PK	74.00	-26.40	1.08 V	65	9.80	37.80
2	*2412.00	95.1 PK			1.00 V	220	59.50	35.60
2	*2412.00	88.5 AV			1.00 V	220	52.90	37.80
3	2499.00	44.1 PK	74.00	-29.90	1.10 V	12	6.70	37.40
4	4824.00	54.6 PK	74.00	-19.40	1.05 V	359	11.10	43.50
4	4824.00	52.0 AV	54.00	-2.00	1.05 V	359	8.50	35.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 8, Channel 6	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	49.7 PK	74.00	-24.30	1.10 H	295	11.60	38.10
2	*2437.00	98.3 PK			1.22 H	126	62.40	36.00
2	*2437.00	91.4 AV			1.22 H	126	55.40	38.10
3	2490.00	51.8 PK	74.00	-22.20	1.30 H	320	9.90	41.90
3	2490.00	38.1 AV	54.00	-15.90	1.30 H	320	-3.80	36.00
4	4874.00	57.8 PK	74.00	-16.20	1.13 H	21	14.10	43.70
4	4874.00	50.6 AV	54.00	-3.40	1.13 H	21	6.90	41.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	49.0 PK	74.00	-25.00	1.03 V	329	10.90	38.10
2	*2437.00	95.6 PK			1.00 V	125	59.60	36.00
2	*2437.00	87.8 AV			1.00 V	125	51.90	38.10
3	2490.00	50.5 PK	74.00	-23.50	1.14 V	267	8.60	41.90
4	4874.00	57.6 PK	74.00	-16.40	1.04 V	98	13.90	43.70
4	4874.00	51.6 AV	54.00	-2.40	1.04 V	98	7.90	36.00

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
MODE	Antenna 8, Channel 11	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	25 deg. C, 50 % RH, 978 hPa	TESTED BY	Eric Lee

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2337.00	43.0 PK	74.00	-31.00	1.03 H	200	7.60	35.50
2	*2462.00	88.3 PK			1.07 H	348	52.00	36.30
2	*2462.00	94.0 AV			1.07 H	348	57.70	35.50
3	2488.00	41.4 PK	74.00	-32.60	1.26 H	87	4.80	36.70
4	4924.00	55.5 PK	74.00	-18.50	1.11 H	269	11.60	43.90
4	4924.00	51.1 AV	54.00	-2.90	1.11 H	269	7.20	36.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2337.00	41.6 PK	74.00	-32.40	1.06 V	281	6.20	35.50
2	*2462.00	97.2 PK			1.00 V	220	60.90	36.30
2	*2462.00	91.0 AV			1.00 V	220	54.70	35.50
3	2488.00	39.7 PK	74.00	-34.30	1.12 V	300	3.00	36.70
4	4924.00	55.7 PK	74.00	-18.30	1.44 V	247	11.80	43.90
4	4924.00	52.9 AV	54.00	-1.10	1.44 V	247	9.00	36.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 kHz RBW and 100 kHz VBW. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 60 %RH, 978 hPa
TESTED BY	Eric Lee		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.16	0.5	PASS
6	2437	11.20	0.5	PASS
11	2462	11.16	0.5	PASS



CH1

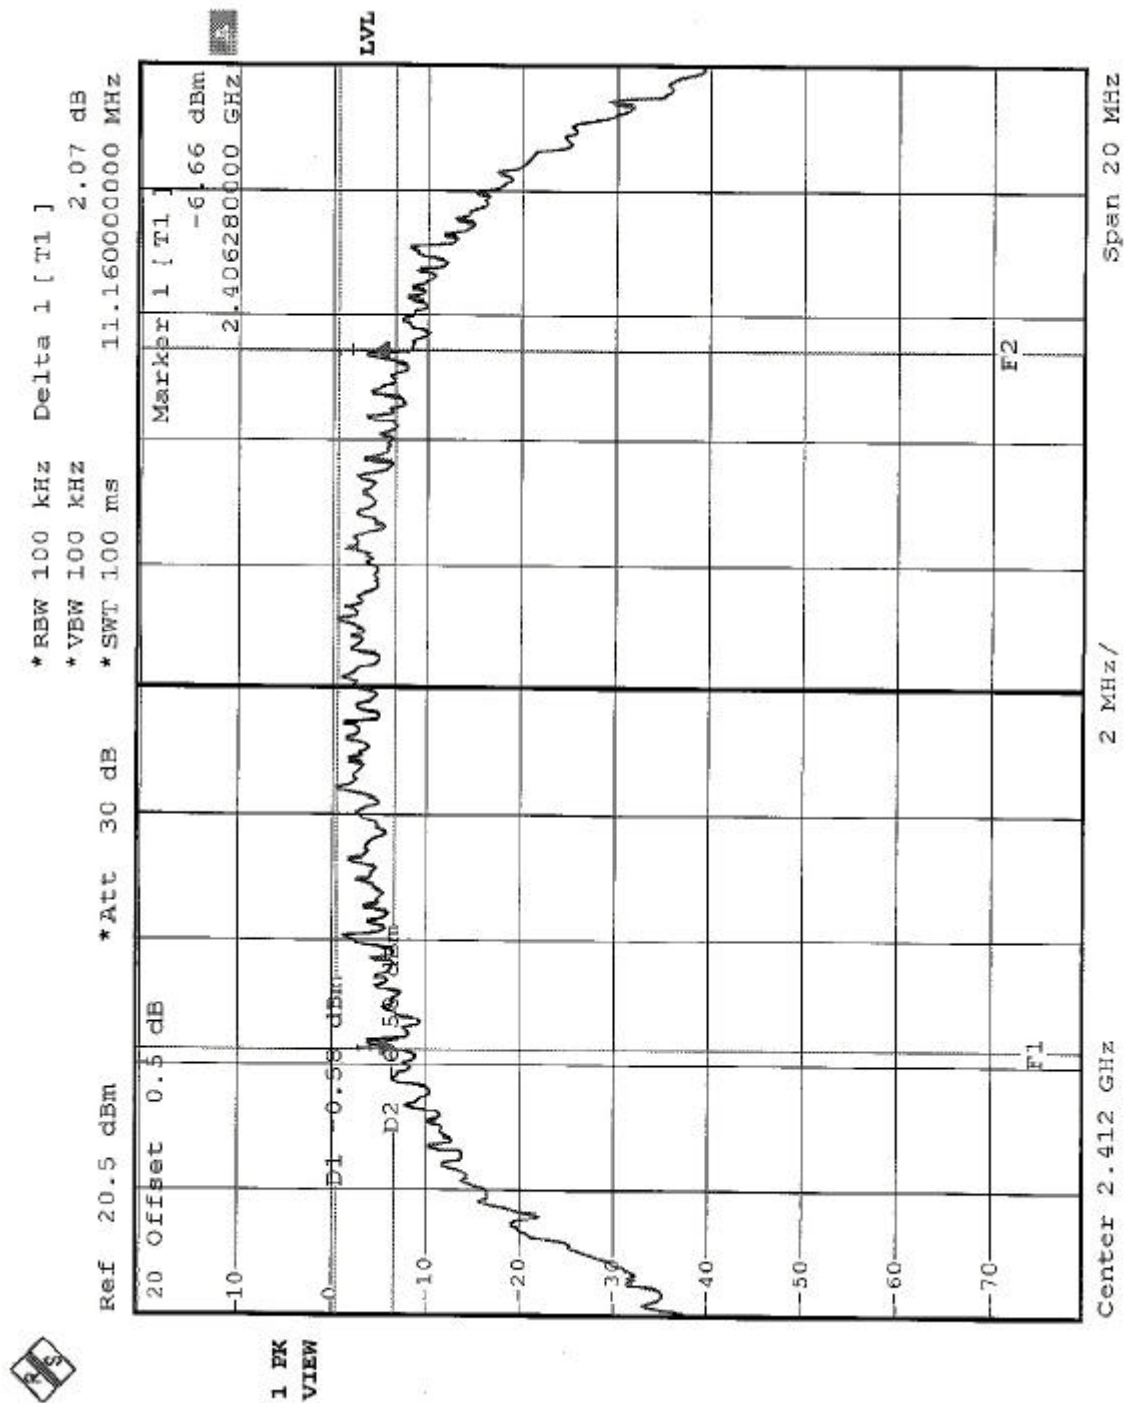


CH6

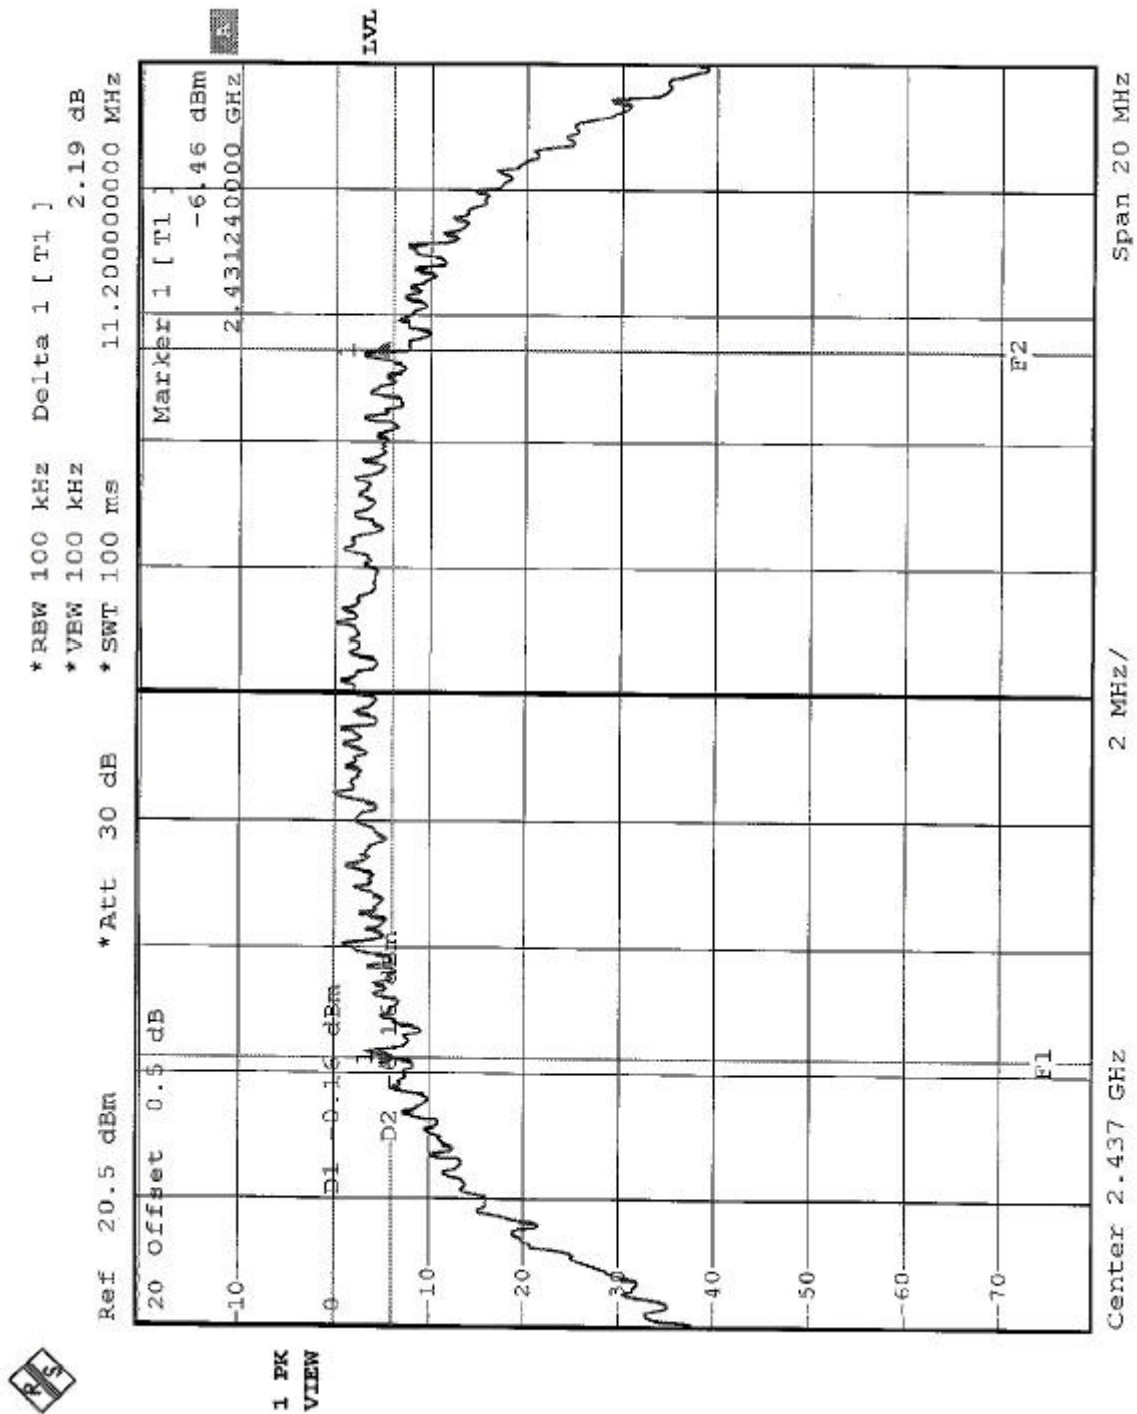



CH11

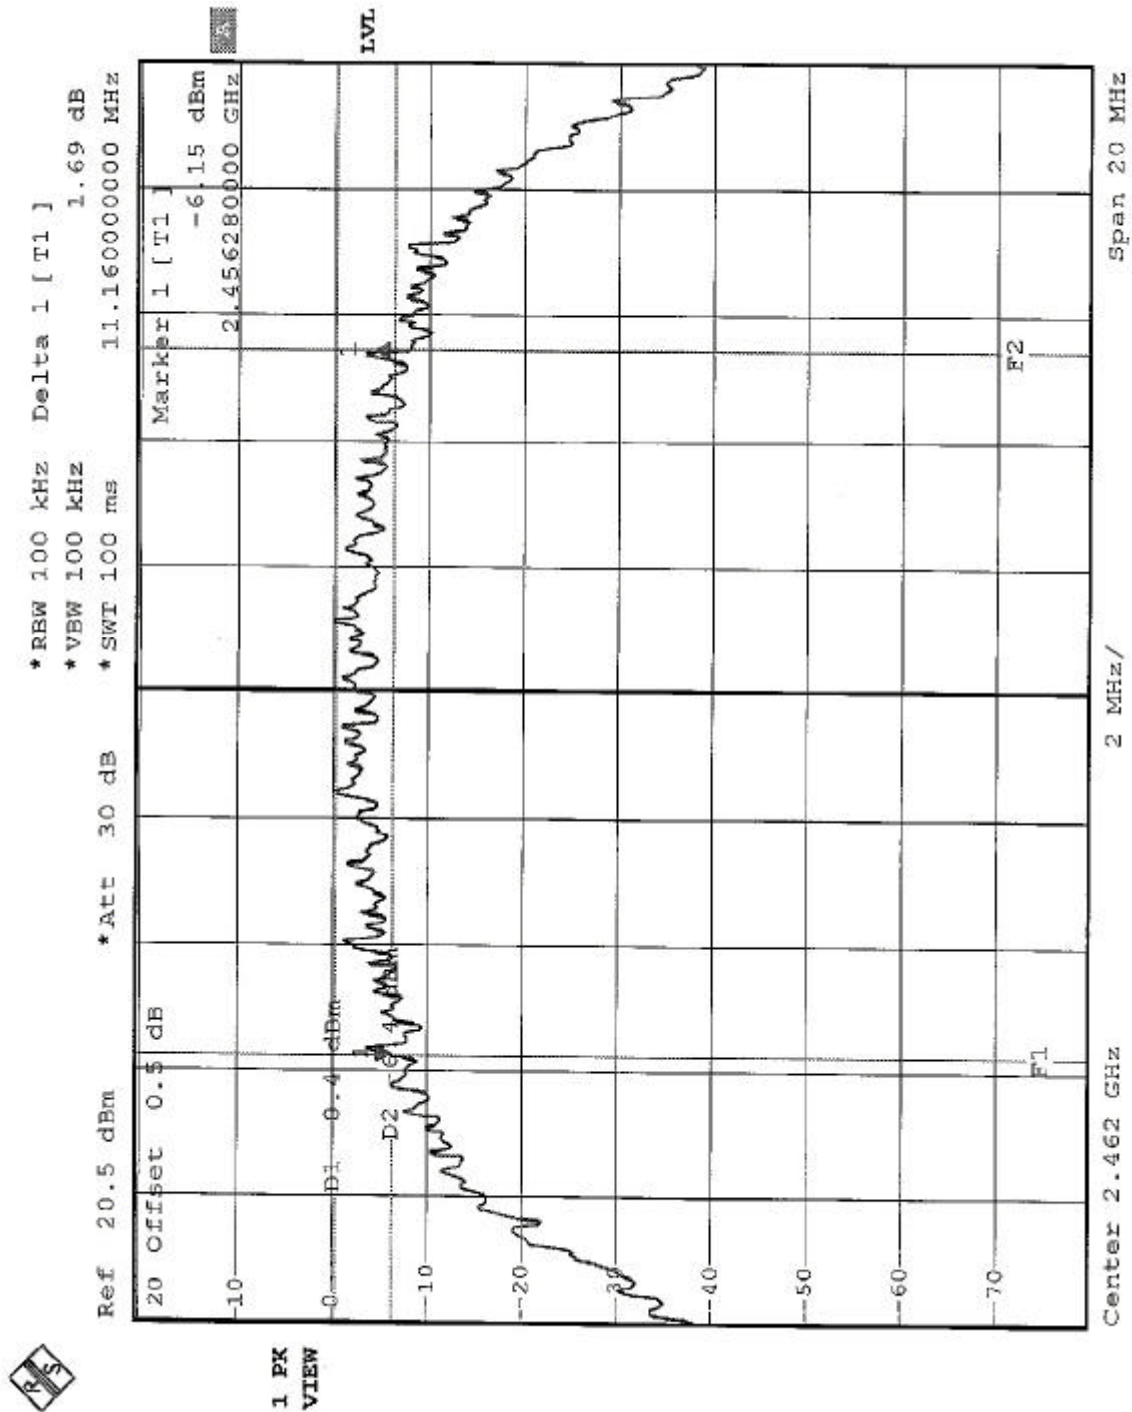

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SINGLE CHANNEL POWER METER	NRVS	100026	Feb. 21, 2003
PEAK POWER SENSOR	NRV-Z32	100013	Feb. 21, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURES

The transmitter output was connected to the power meter.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



4.4.7 TEST RESULTS

EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25 deg. C, 60 %RH, 978 hPa
TESTED BY	Eric Lee		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	9.92	30	PASS
6	2437	10.50	30	PASS
11	2462	10.30	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITIONS

Same as 4.3.6.




4.5.7 TEST RESULTS


EUT	802.11b Wireless LAN MiniPCI Card	MODEL	T60H656
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	22 deg. C, 60 %RH, 978 hPa
TESTED BY	Eric Lee		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-13.31	8	PASS
6	2437	-14.21	8	PASS
11	2462	-13.01	8	PASS


CH1

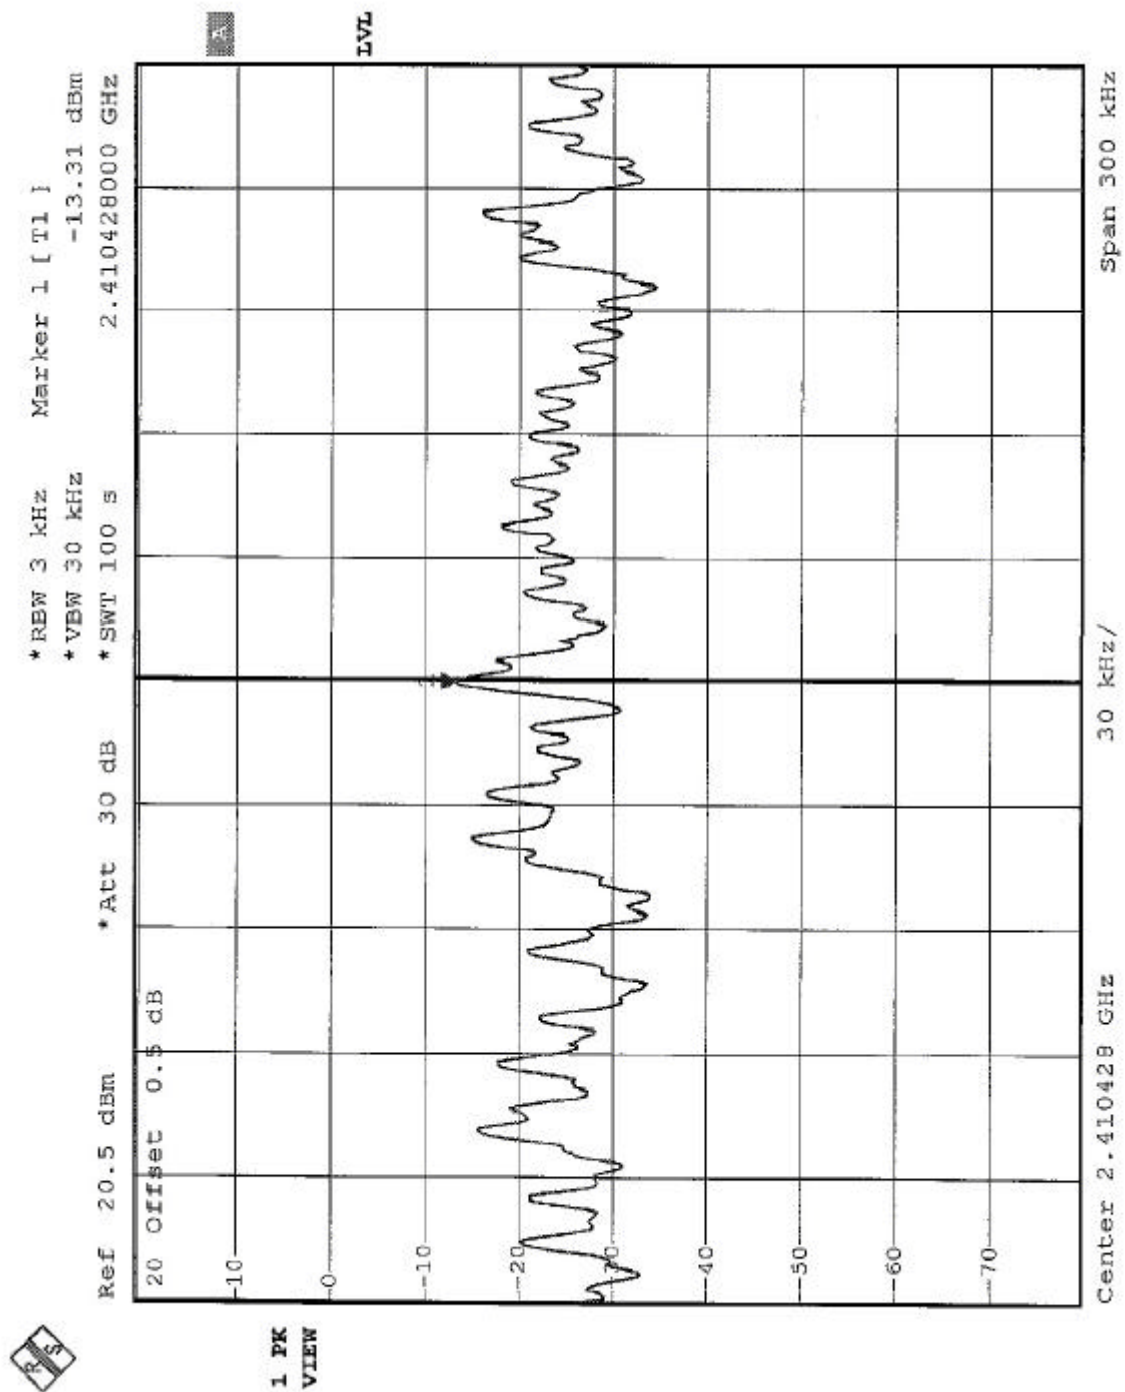

CH6

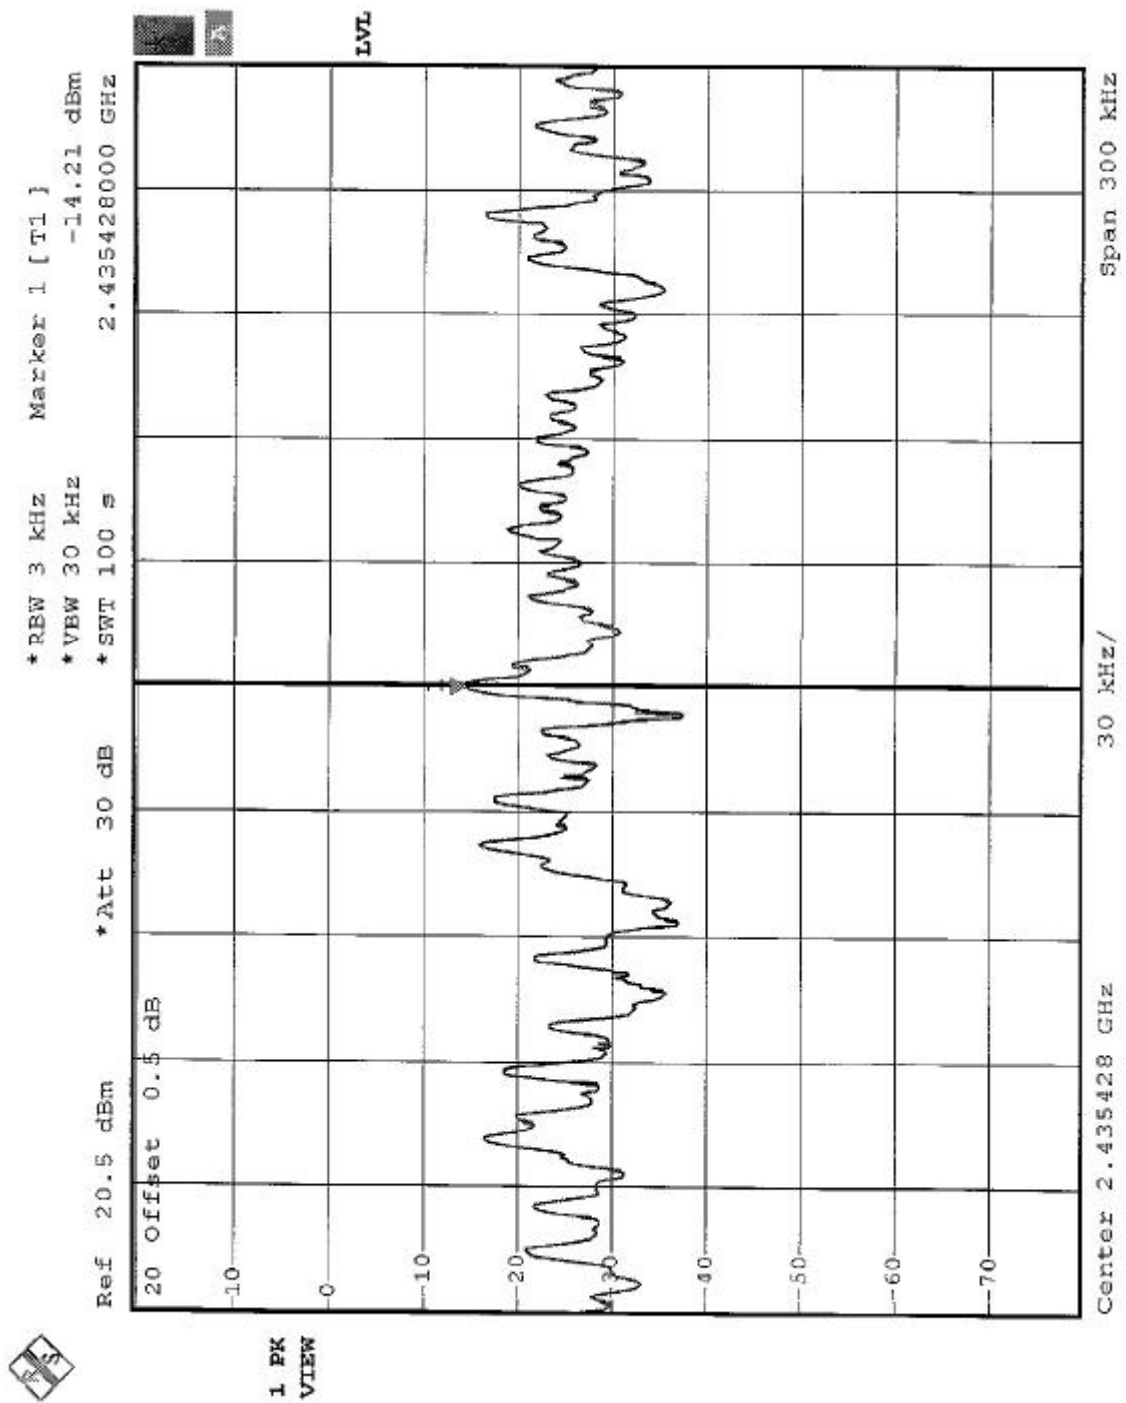

CH11

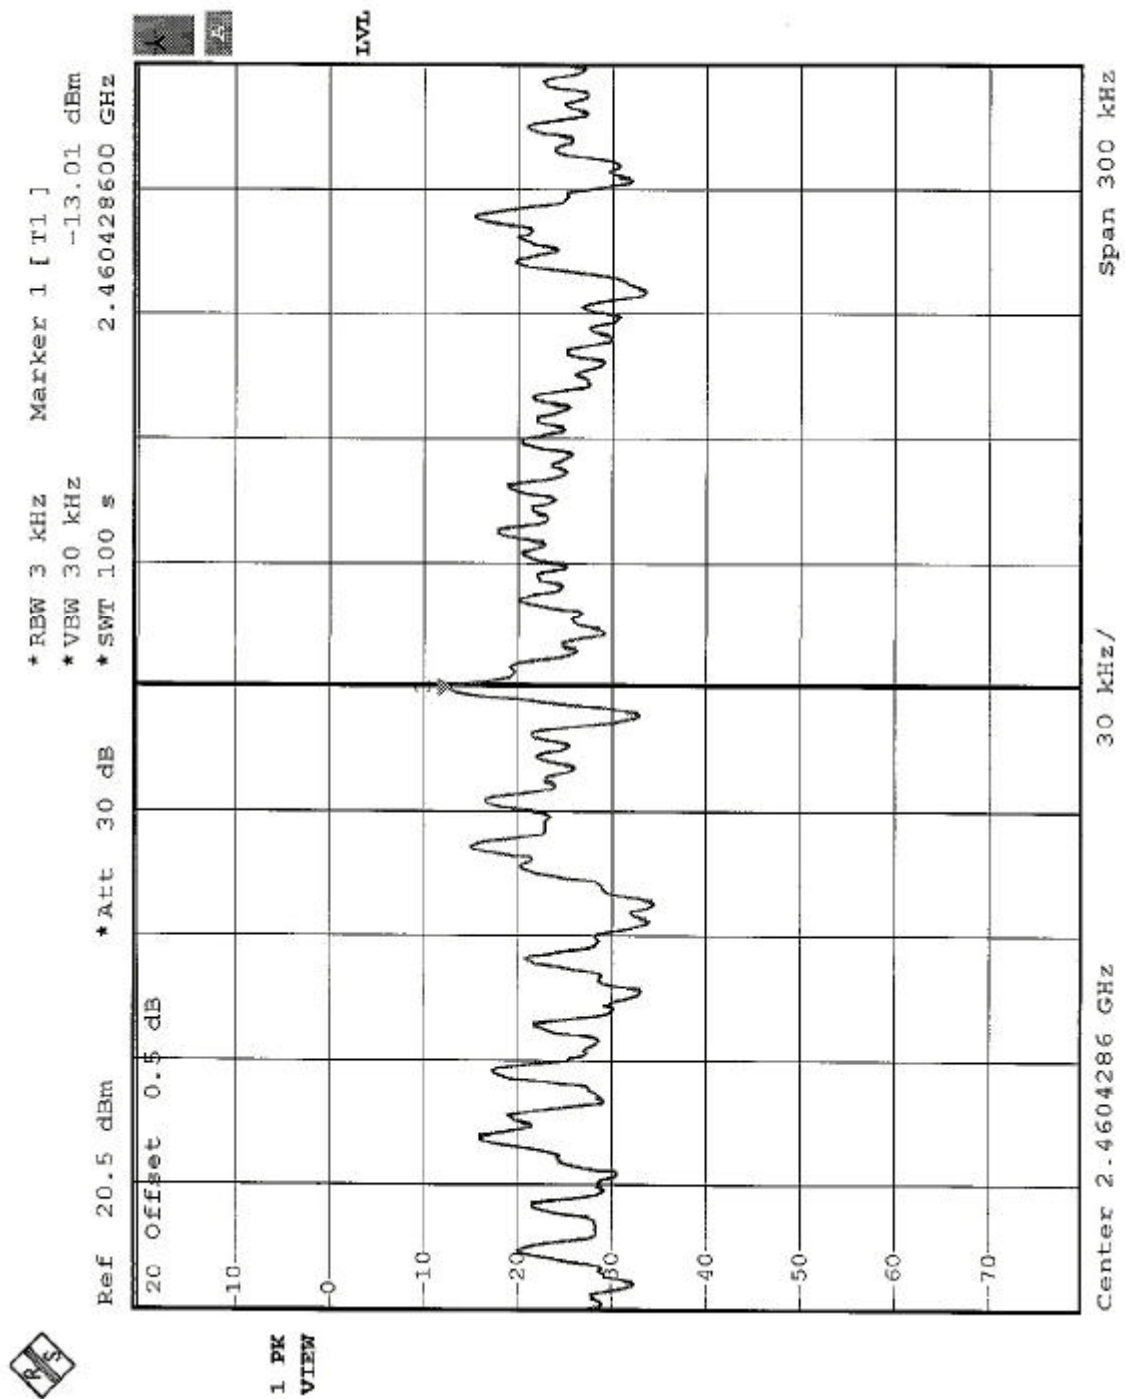

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	July 24, 2003

NOTE:

1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation




4.6.5 EUT OPERATING CONDITION


Same as Item 4.3.6.

4.6.6 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 49.04dB / 49.71dB delta between carrier maximum power and local maximum emission in restrict band (2.3742GHz / 2.4886GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.10 (Page 47) is 101.50dBuV/m, so the maximum field strength in restrict band is $101.5 - 49.71 = 51.79$ dBuV/m which is under 54 dBuV/m limit.

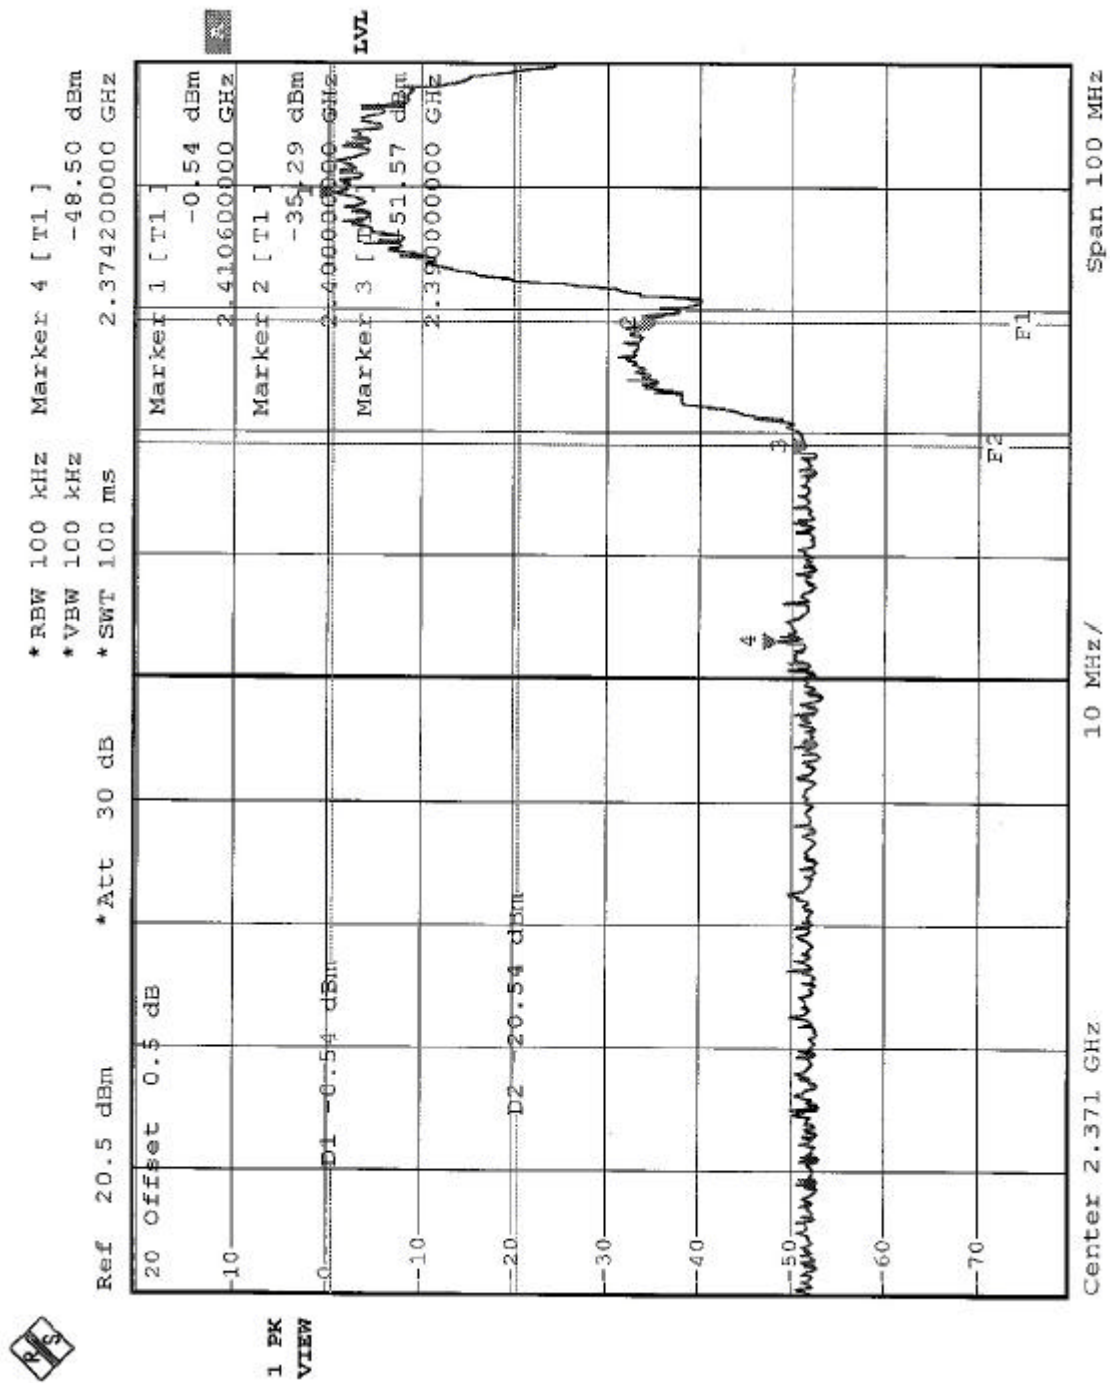

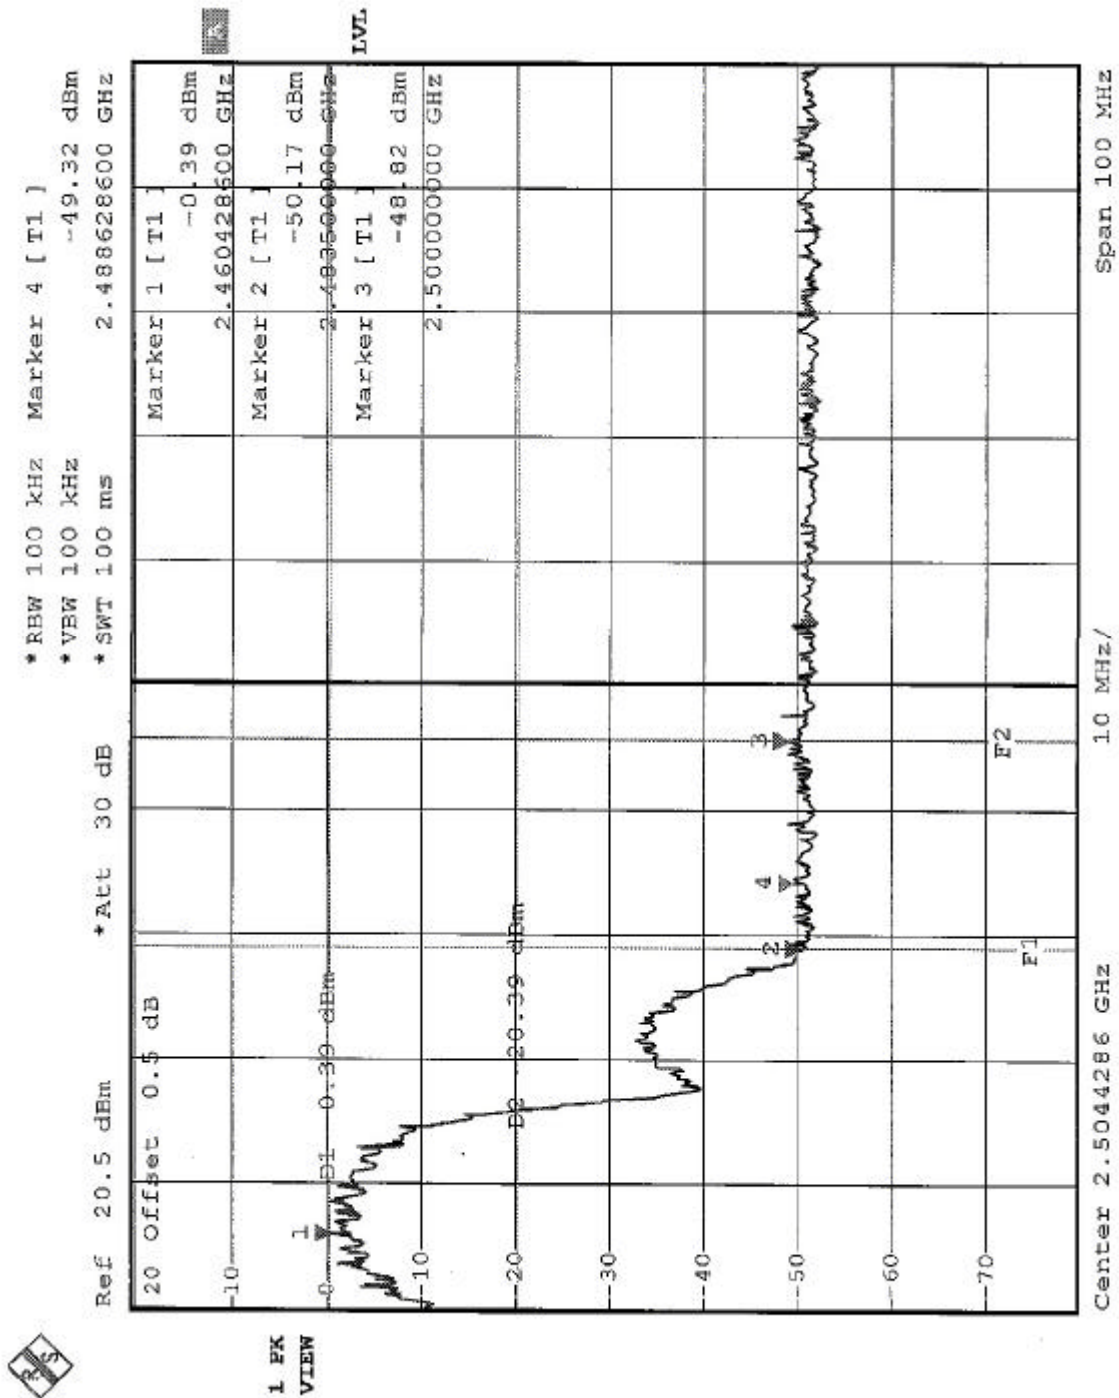



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.



And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The maximum Gain antenna used in this product is printed inverted F antenna, and the antenna connector type for the EUT is UFL. And the maximum Gain of these antennas is 3dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

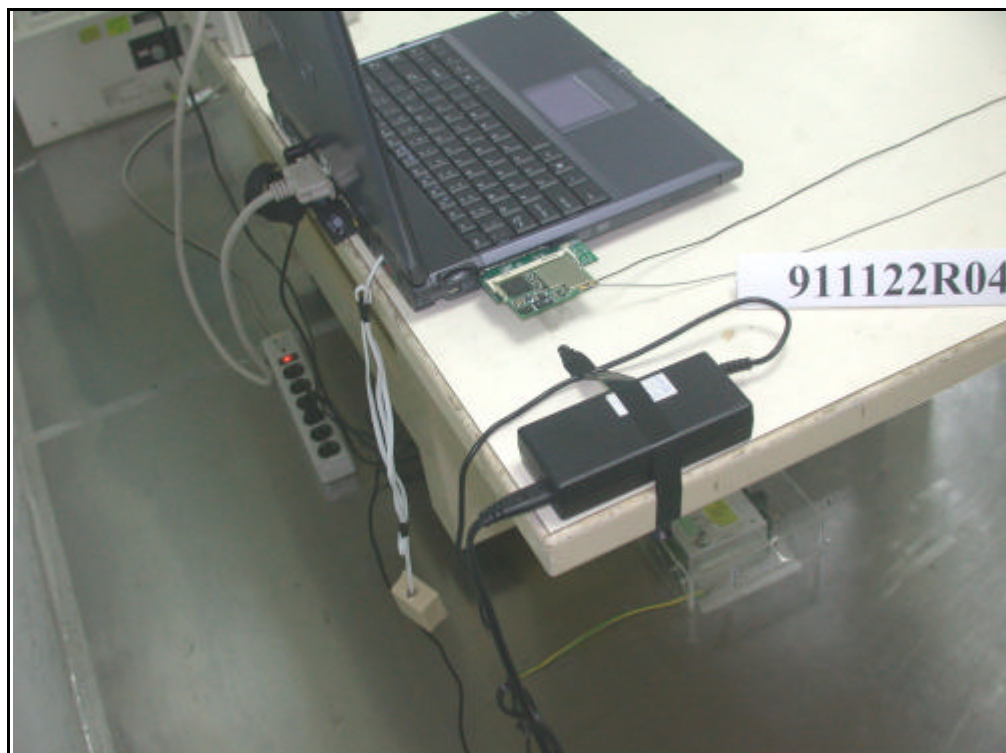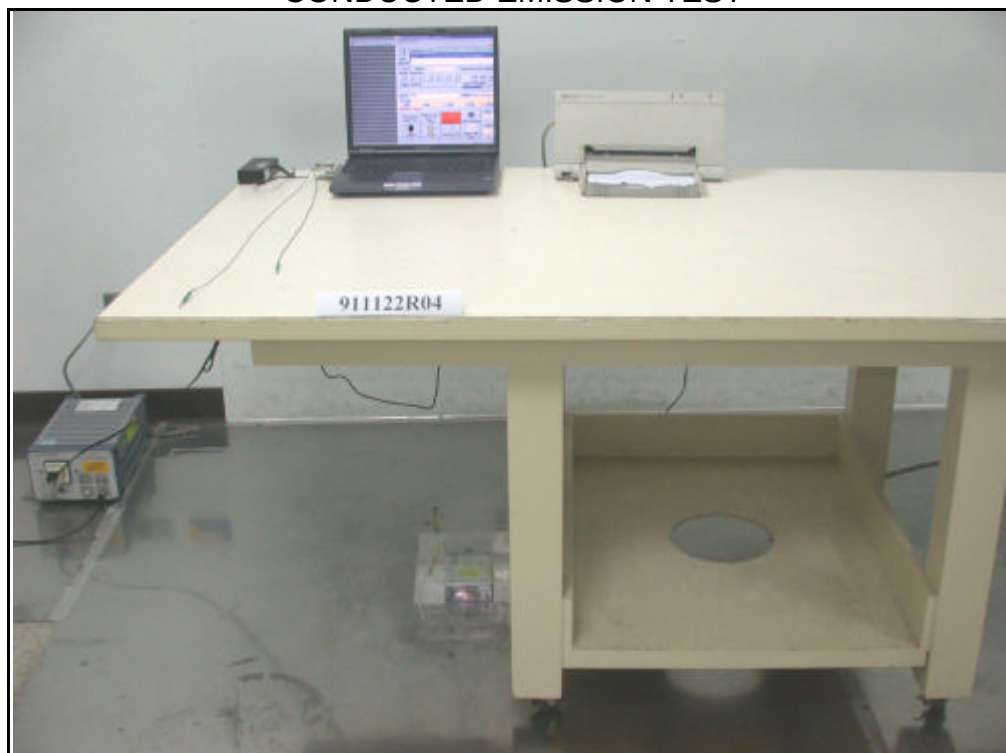

RADIATED EMISSION TEST







6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.