Appendix Test Data for BT(BLE) (Conducted Measurement)

Product Name: Smart Watch

Trade Mark: XINJI

Test Model: C1 PROS

FCC ID: 2AE8V-C1PROS

Environmental Conditions

Temperature:	22.8° C
Relative Humidity:	56%
ATM Pressure:	100.0 kPa
Test Engineer:	Anna Hu
Supervised by:	Hugo Chen
NOTE	N/A

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.648	2401.680	2402.328	0.5	PASS
		2440	0.656	2439.680	2440.336	0.5	PASS
		2480	0.652	2479.680	2480.332	0.5	PASS
BLE_2M	Ant1	2402	1.132	2401.456	2402.588	0.5	PASS
		2440	1.288	2439.388	2440.676	0.5	PASS
		2480	1.020	2479.476	2480.496	0.5	PASS

Test Graphs

BLE_1M_Ant1_2402

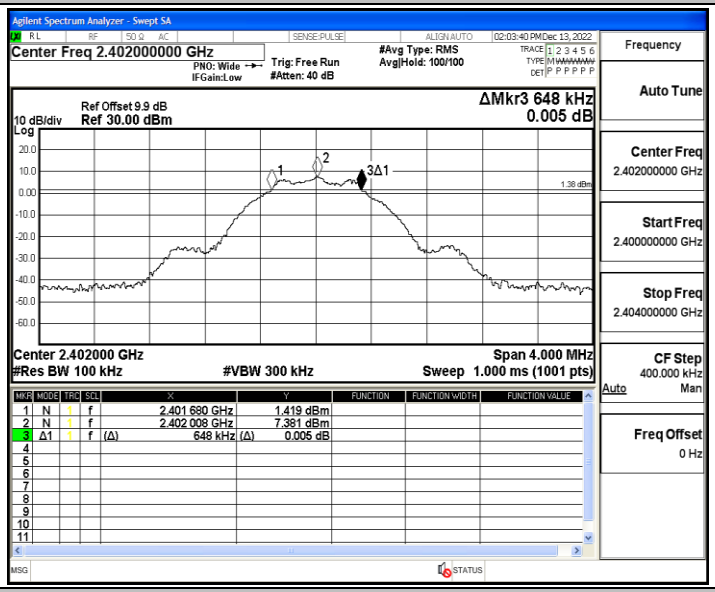

BLE_1M_Ant1_2440

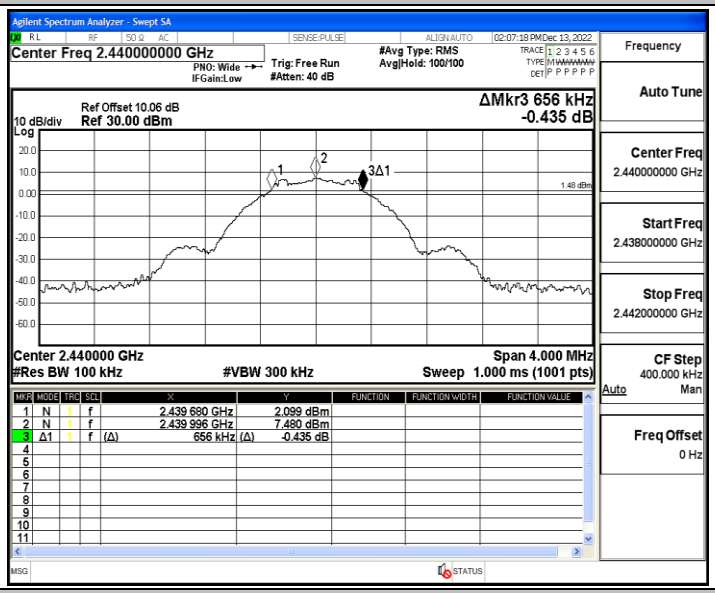

BLE_1M_Ant1_2480

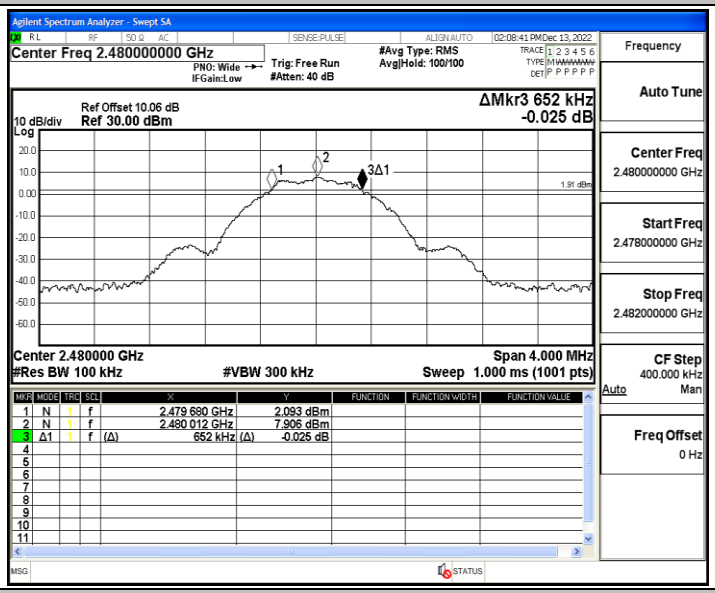

BLE_2M_Ant1_2402

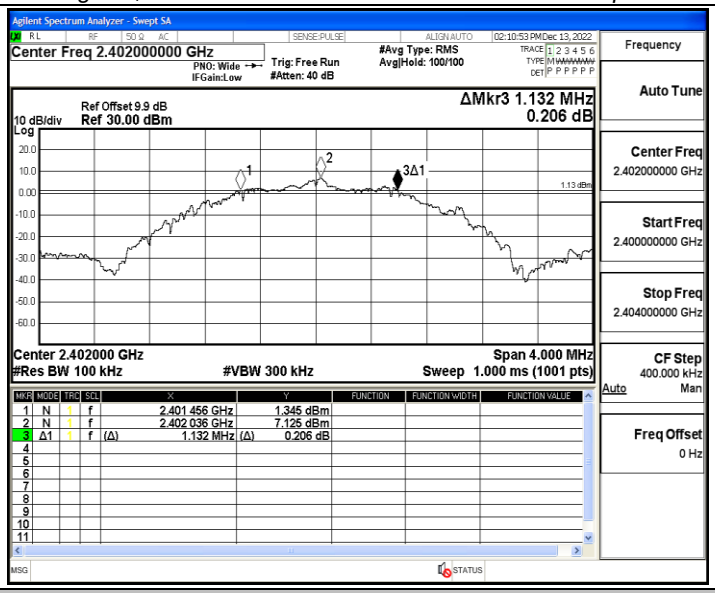

BLE_2M_Ant1_2440

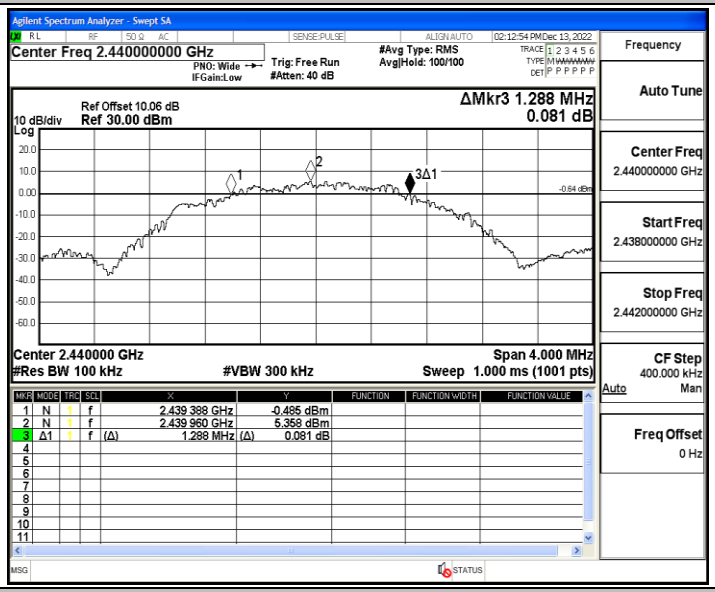

BLE_2M_Ant1_2480

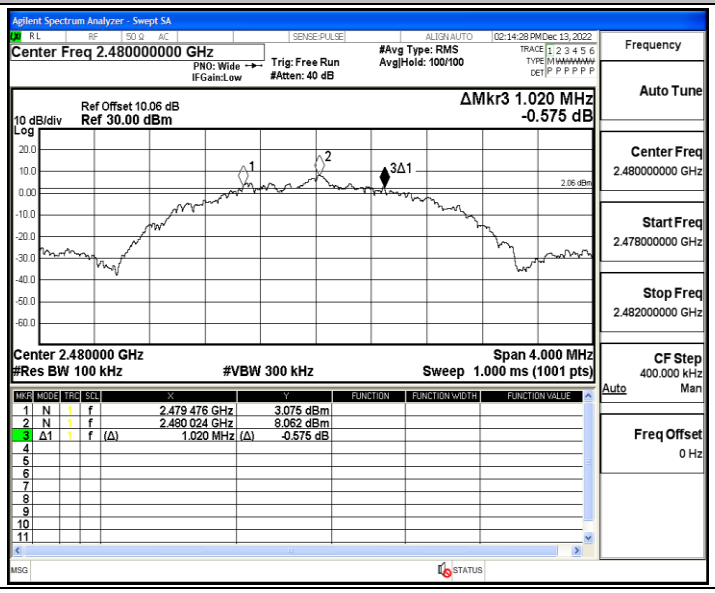

Appendix B: Occupied Channel Bandwidth

Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.0262	2401.5031	2402.5293	---	---
		2440	1.0283	2439.4948	2440.5231	---	---
		2480	1.0349	2479.4957	2480.5306	---	---
BLE_2M	Ant1	2402	2.0620	2401.0016	2403.0636	---	---
		2440	2.0679	2439.0023	2441.0702	---	---
		2480	2.0592	2479.0075	2481.0667	---	---

Test Graphs

BLE_1M_Ant1_2402

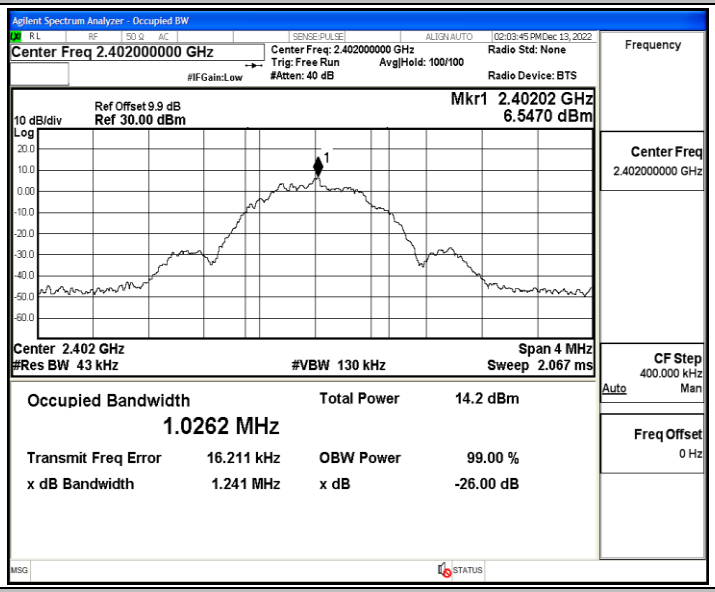

BLE_1M_Ant1_2440

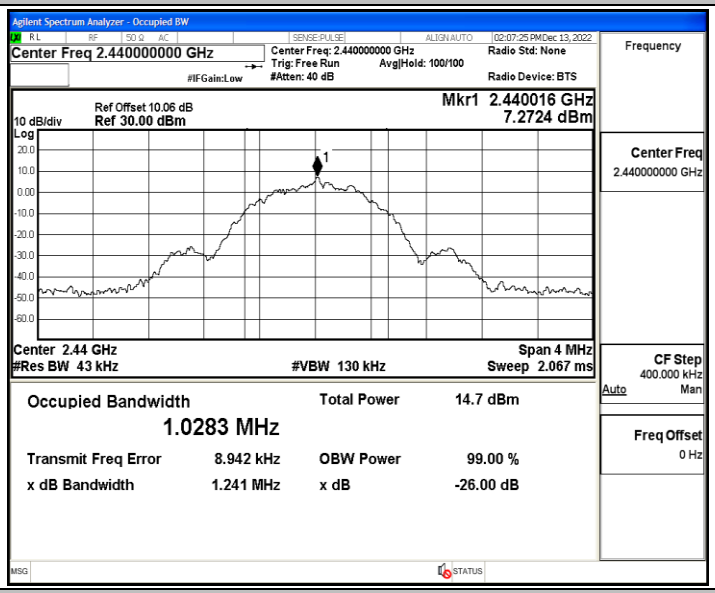

BLE_1M_Ant1_2480

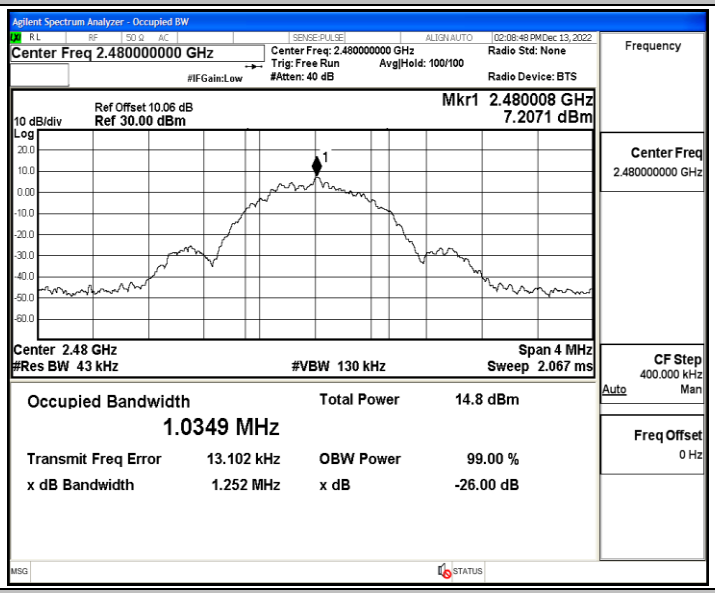

BLE_2M_Ant1_2402

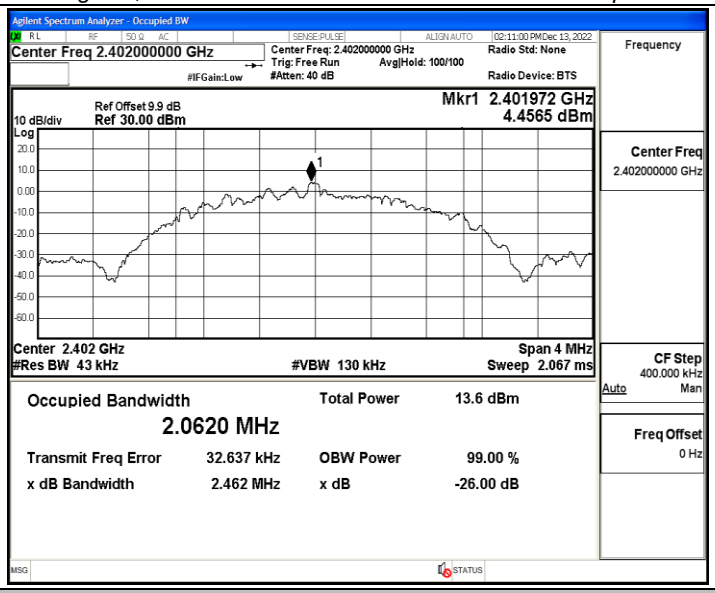

BLE_2M_Ant1_2440

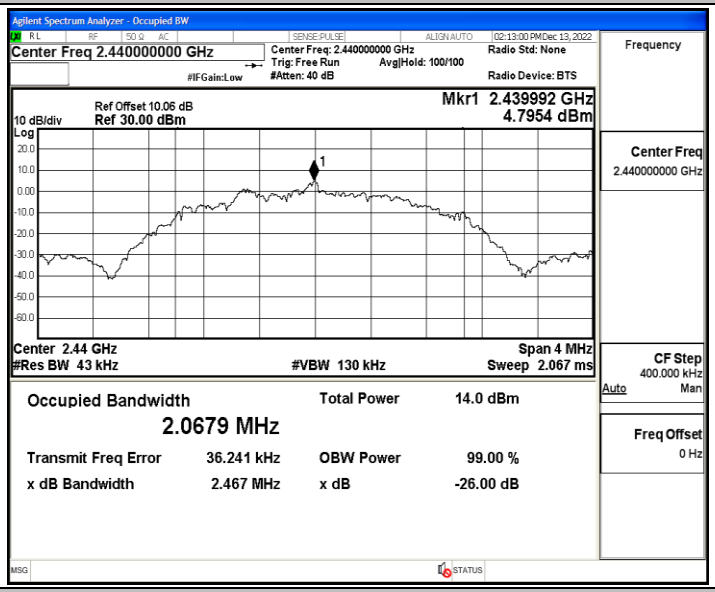

BLE_2M_Ant1_2480

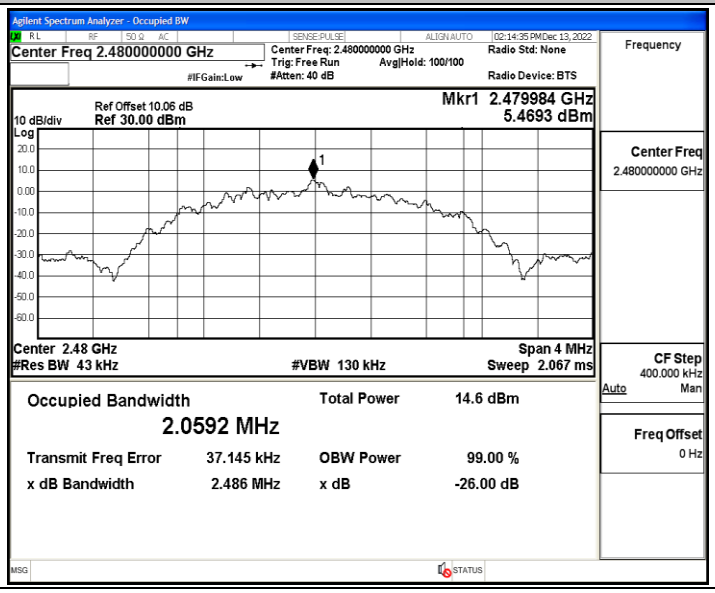

Appendix C: Maximum Peak conducted output power

Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	7.58	≤30	PASS
		2440	7.99	≤30	PASS
		2480	8.13	≤30	PASS
BLE_2M	Ant1	2402	7.8	≤30	PASS
		2440	8.36	≤30	PASS
		2480	8.45	≤30	PASS

Test Graphs

BLE_1M_Ant1_2402

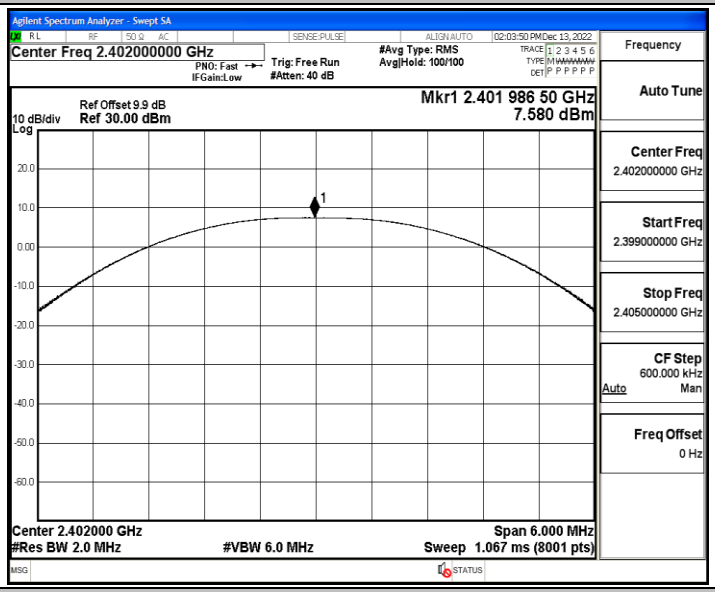

BLE_1M_Ant1_2440

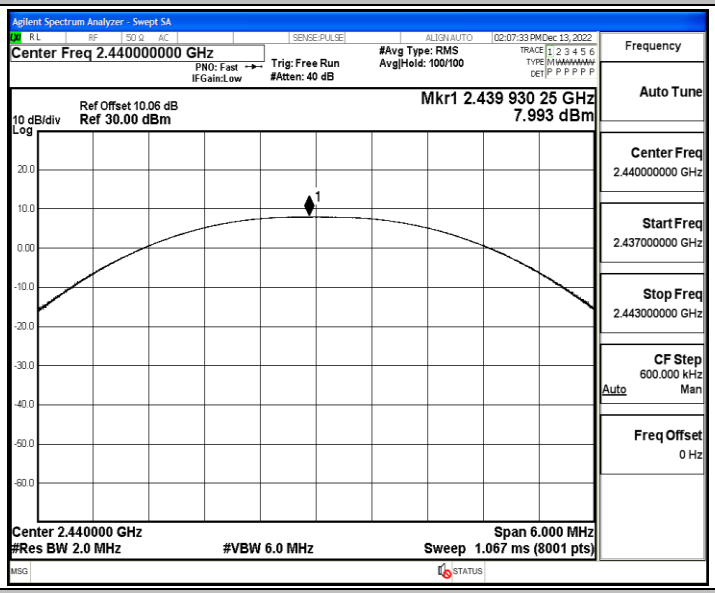

BLE_1M_Ant1_2480

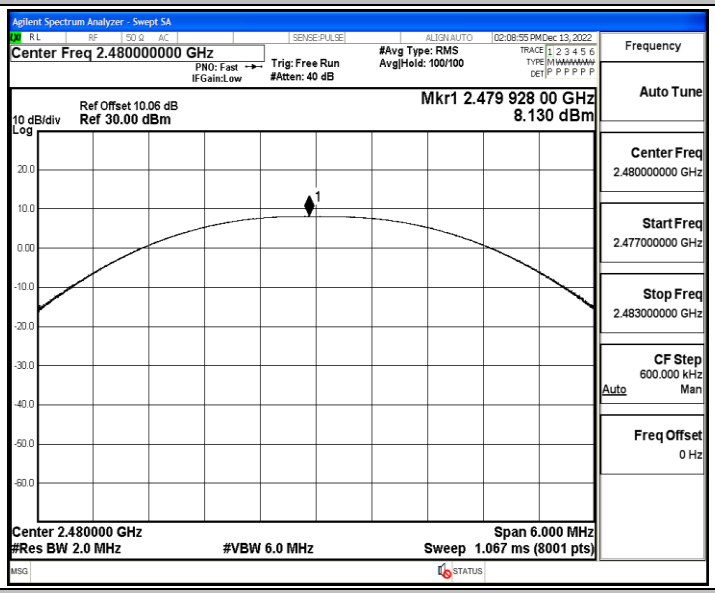

BLE_2M_Ant1_2402

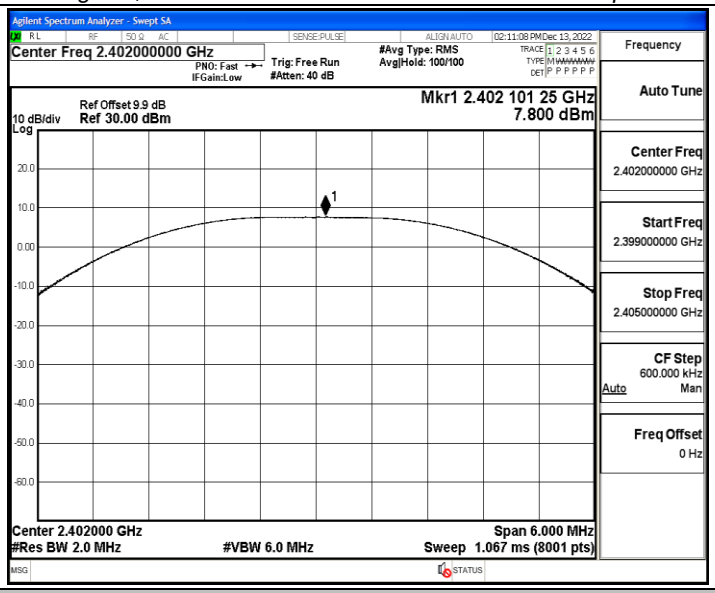

BLE_2M_Ant1_2440

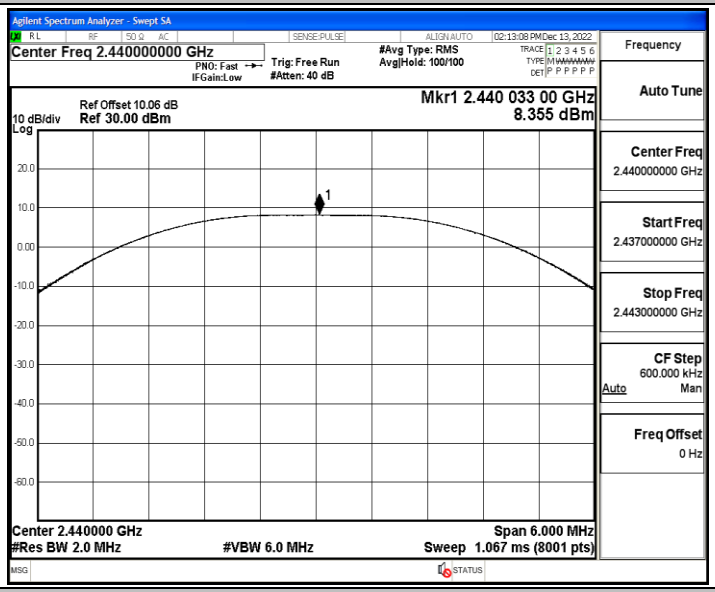

BLE_2M_Ant1_2480

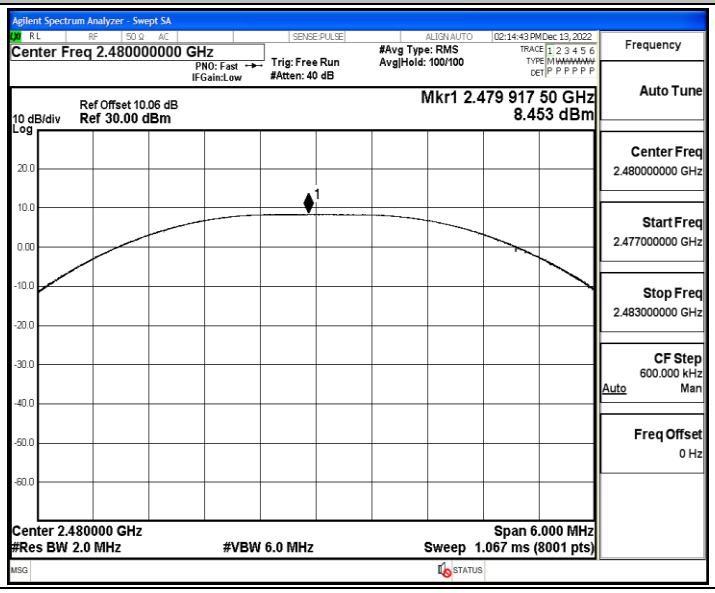

Appendix D: Maximum power spectral density

Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-7.93	≤8.00	PASS
		2440	-6.26	≤8.00	PASS
		2480	-7.67	≤8.00	PASS
BLE_2M	Ant1	2402	-9.83	≤8.00	PASS
		2440	-8.51	≤8.00	PASS
		2480	-9.42	≤8.00	PASS

Test Graphs

BLE_1M_Ant1_2402

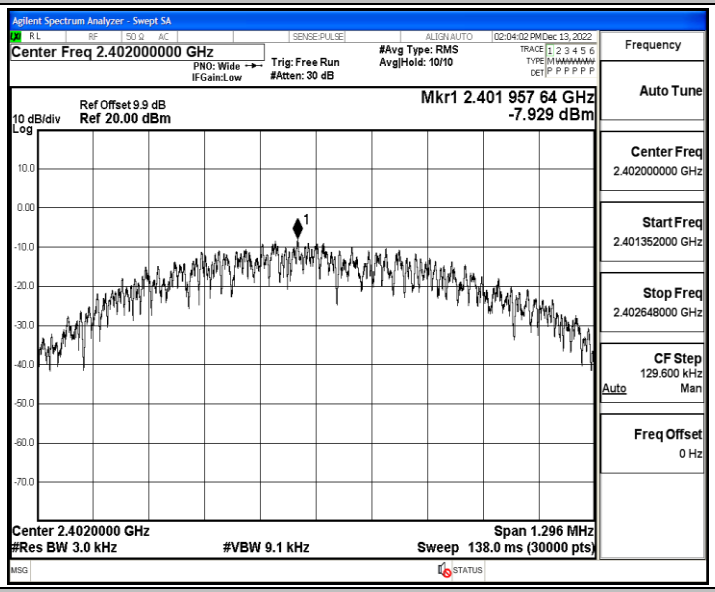

BLE_1M_Ant1_2440

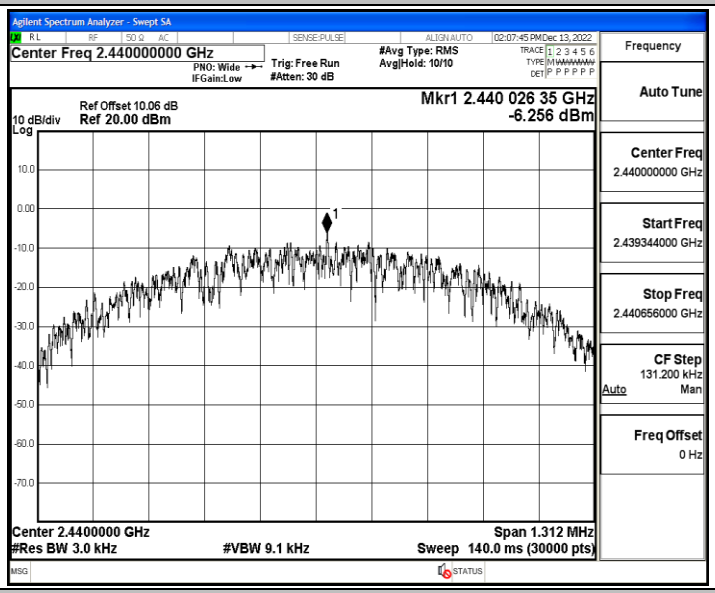

BLE_1M_Ant1_2480

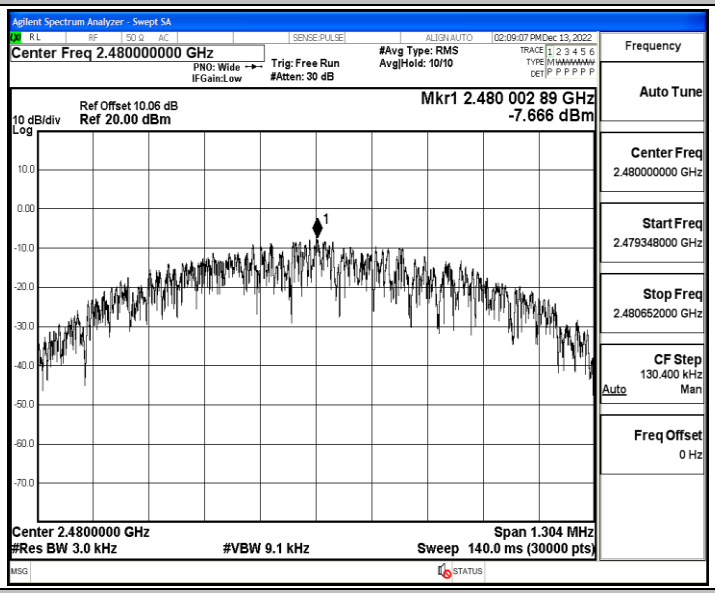

BLE_2M_Ant1_2402

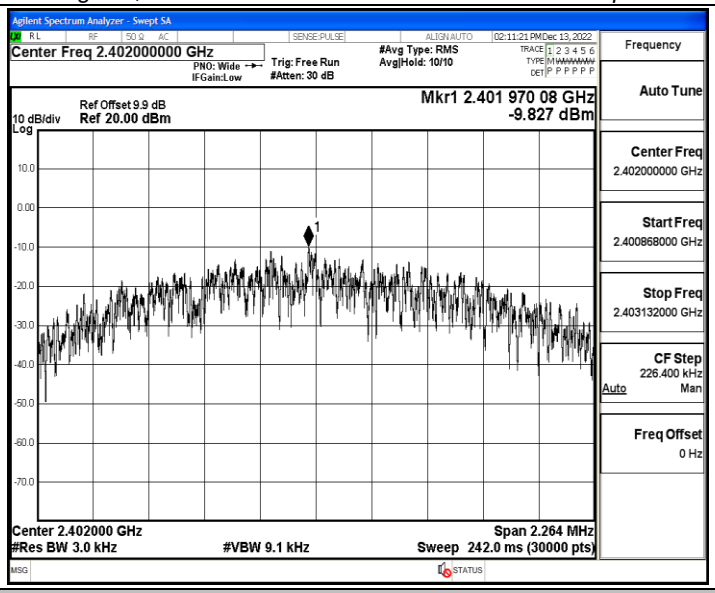

BLE_2M_Ant1_2440

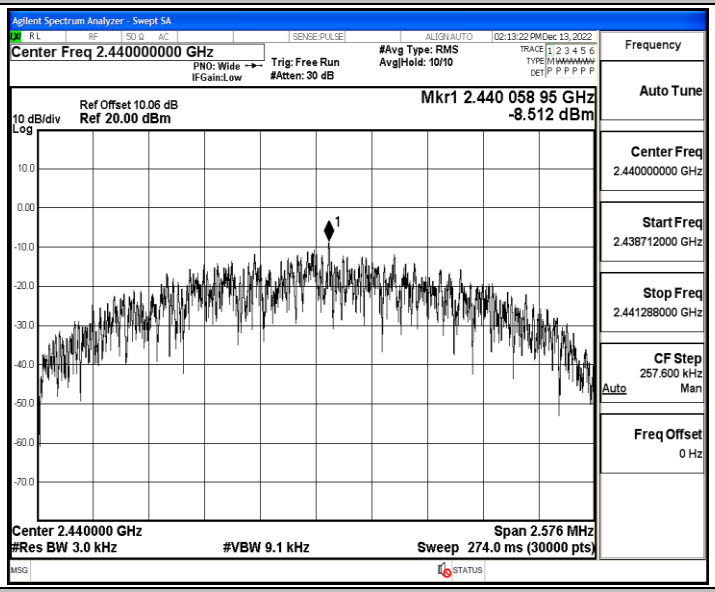

BLE_2M_Ant1_2480

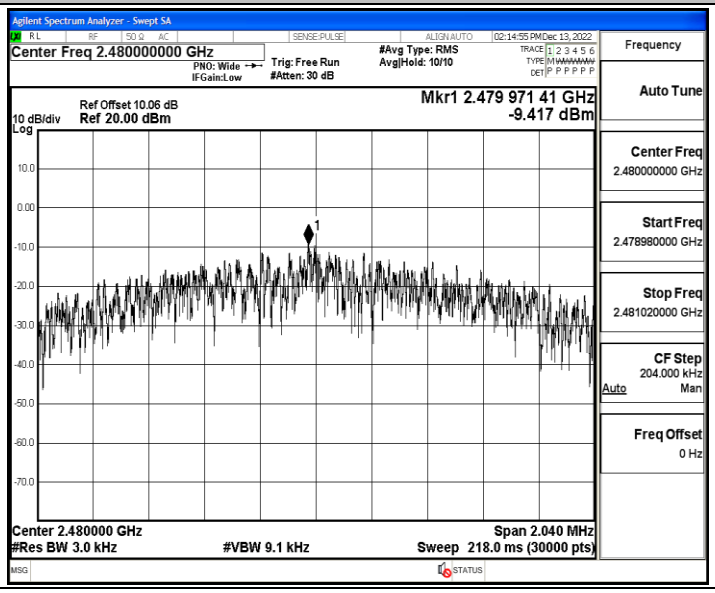

Appendix E: Band edge measurements

Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	7.57	-47.73	≤-12.43	PASS
		High	2480	8.06	-48.61	≤-11.94	PASS
BLE_2M	Ant1	Low	2402	7.29	-25.84	≤-12.71	PASS
		High	2480	8.02	-48.37	≤-11.99	PASS

Test Graphs

BLE_1M_Ant1_Low_2402

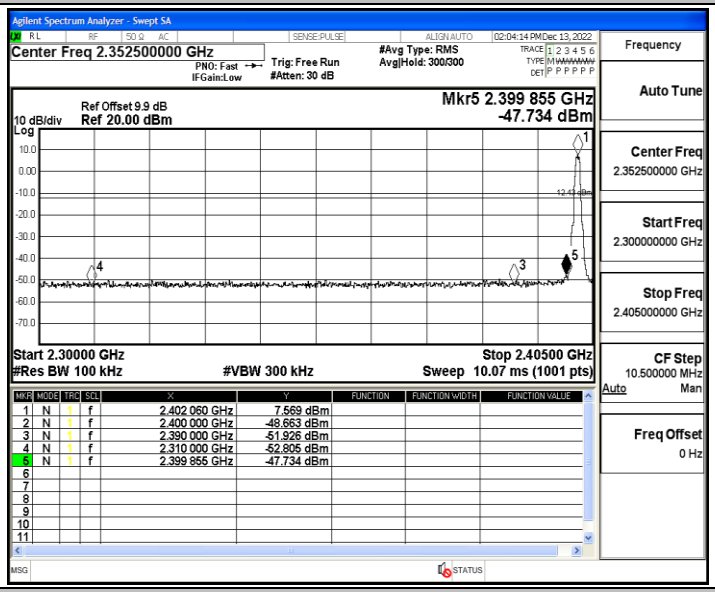

BLE_1M_Ant1_High_2480

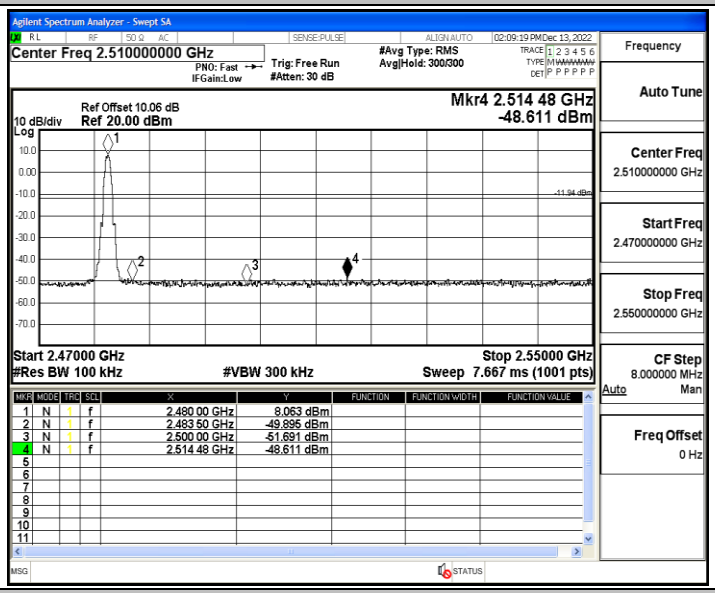

BLE_2M_Ant1_Low_2402

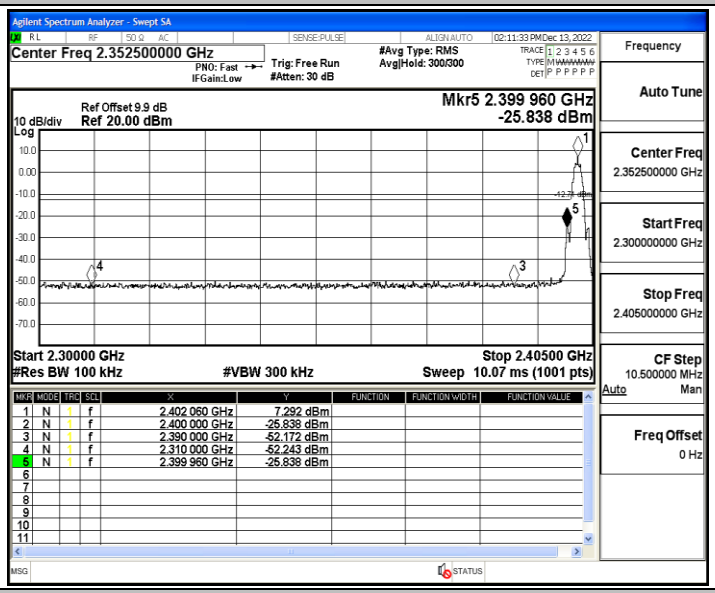

BLE_2M_Ant1_High_2480

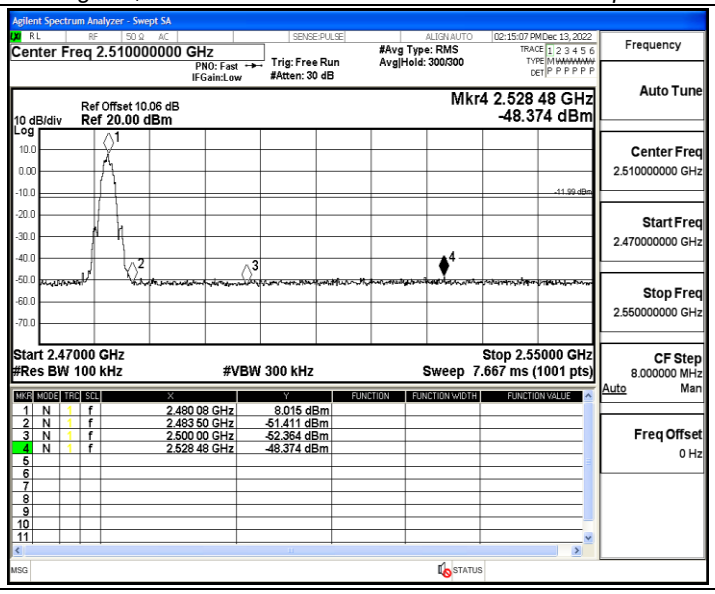
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.510000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
#Avg Type: RMS
Avg|Hold: 300/300
02:15:07 PM Dec 13, 2022
Frequency
Auto Tune
Ref Offset 10.06 dB
10 dB/div
Ref 20.00 dBm
Log
Mkr4 2.528 48 GHz
-48.374 dBm
-11.99 dBm
Center Freq
2.510000000 GHz
Start Freq
2.470000000 GHz
Stop Freq
2.550000000 GHz
CF Step
8.000000 MHz
Auto
Man
Freq Offset
0 Hz
Start 2.47000 GHz
#Res BW 100 kHz
#VBW 300 kHz
Stop 2.55000 GHz
Sweep 7.667 ms (1001 pts)
1 N 1 f 2.480 08 GHz 8.015 dBm
2 N 1 f 2.483 50 GHz -51.411 dBm
3 N 1 f 2.500 00 GHz -52.364 dBm
4 N 1 f 2.528 48 GHz -48.374 dBm
MSG
STATUS

Appendix F: Conducted Spurious Emission

Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	Reference	7.31	7.31	---	PASS
			30~1000	7.31	-58.58	≤-12.69	PASS
			1000~26500	7.31	-50.74	≤-12.69	PASS
		2440	Reference	7.88	7.88	---	PASS
			30~1000	7.88	-59.71	≤-12.12	PASS
			1000~26500	7.88	-50.49	≤-12.12	PASS
		2480	Reference	8.00	8.00	---	PASS
			30~1000	8.00	-60.1	≤-12	PASS
			1000~26500	8.00	-50.57	≤-12	PASS
BLE_2M	Ant1	2402	Reference	7.42	7.42	---	PASS
			30~1000	7.42	-60.89	≤-12.58	PASS
			1000~26500	7.42	-48.85	≤-12.58	PASS
		2440	Reference	7.89	7.89	---	PASS
			30~1000	7.89	-60.44	≤-12.11	PASS
			1000~26500	7.89	-51.55	≤-12.11	PASS
		2480	Reference	7.16	7.16	---	PASS
			30~1000	7.16	-60.31	≤-12.84	PASS
			1000~26500	7.16	-50.5	≤-12.84	PASS

Test Graphs

BLE_1M_Ant1_2402_0~Reference

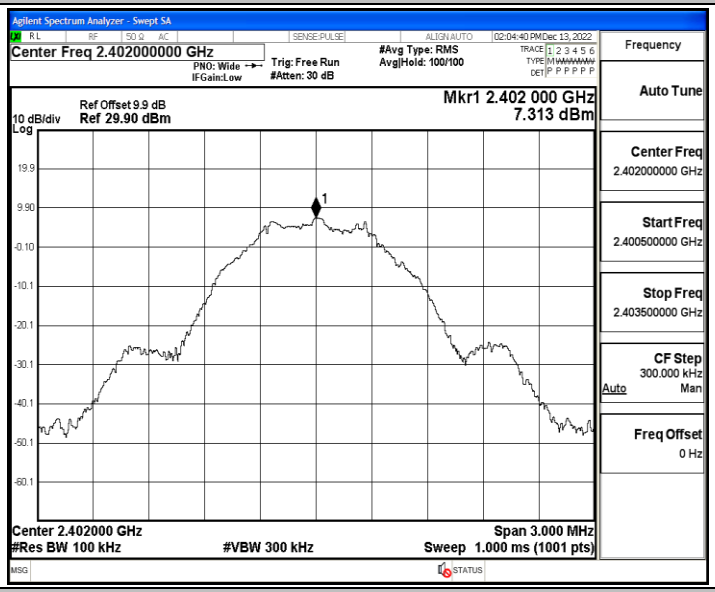

BLE_1M_Ant1_2402_30~1000

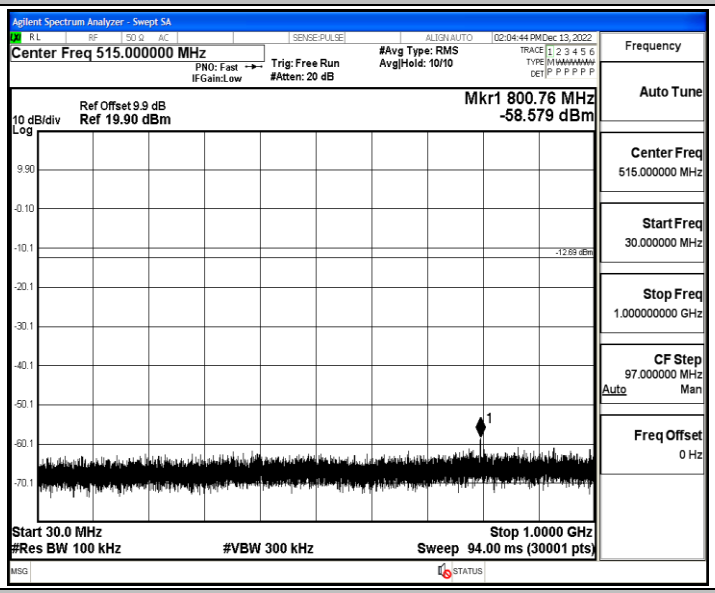

BLE_1M_Ant1_2402_1000~26500

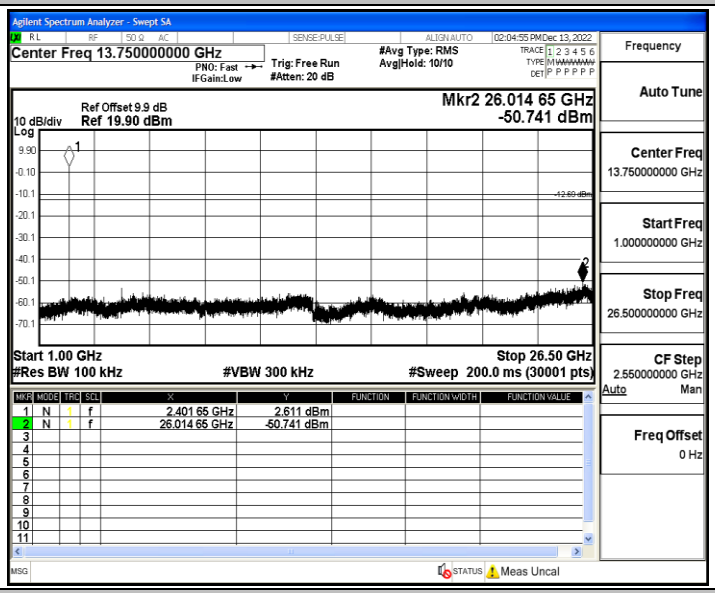

BLE_1M_Ant1_2440_0~Reference

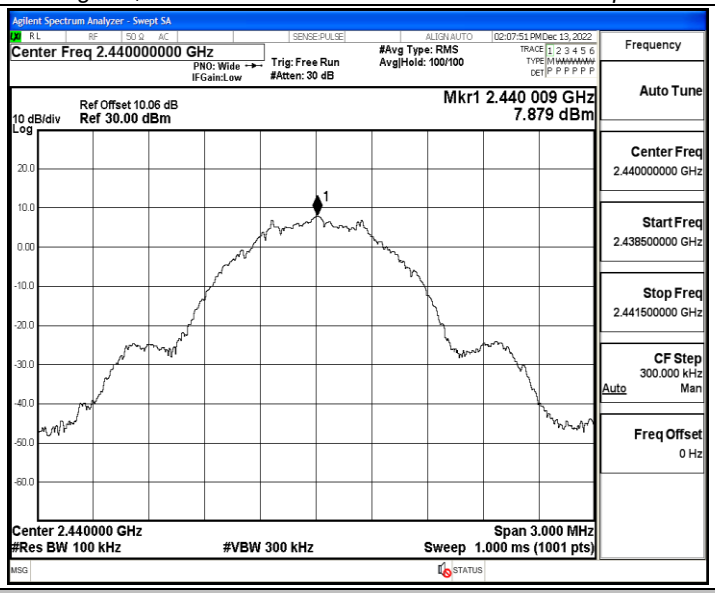

BLE_1M_Ant1_2440_30~1000

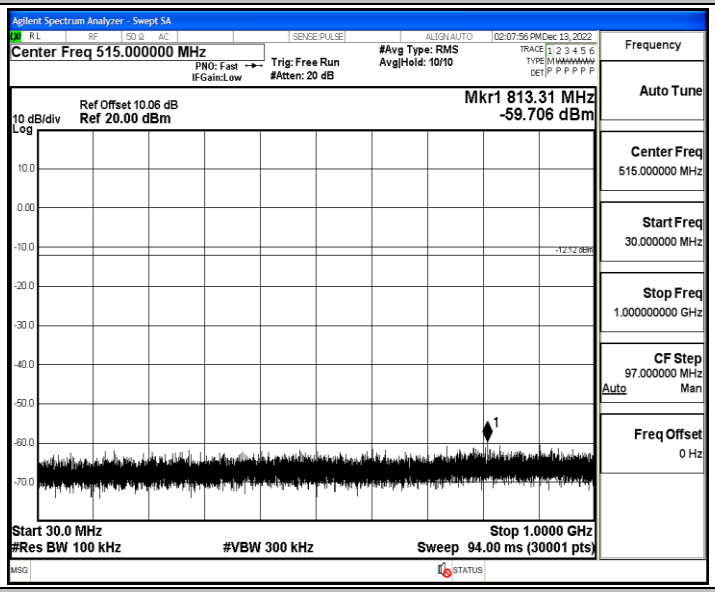

BLE_1M_Ant1_2440_1000~26500

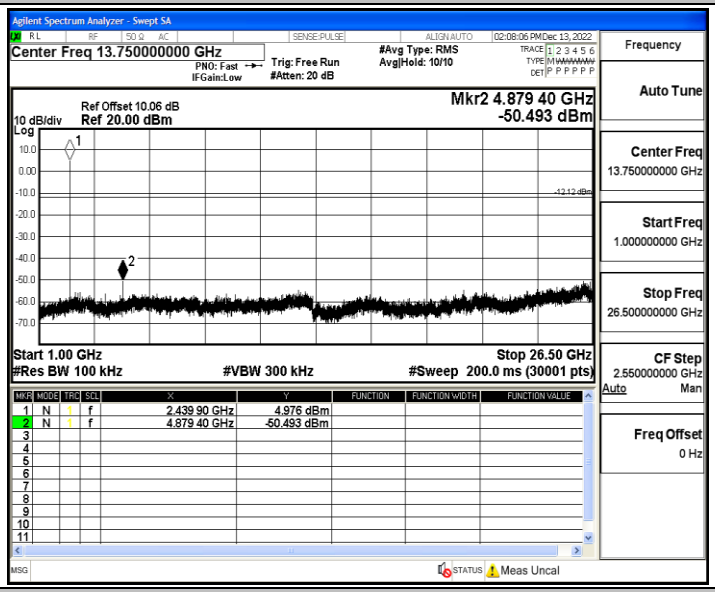

BLE_1M_Ant1_2480_0~Reference

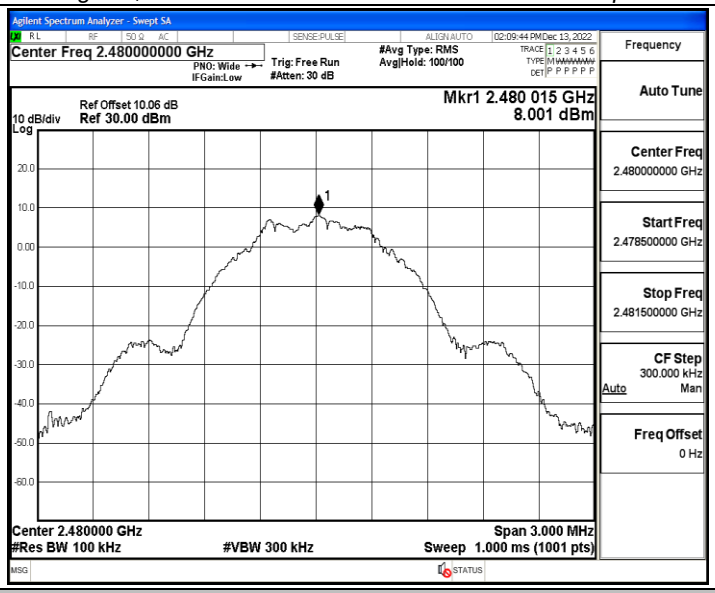

BLE_1M_Ant1_2480_30~1000

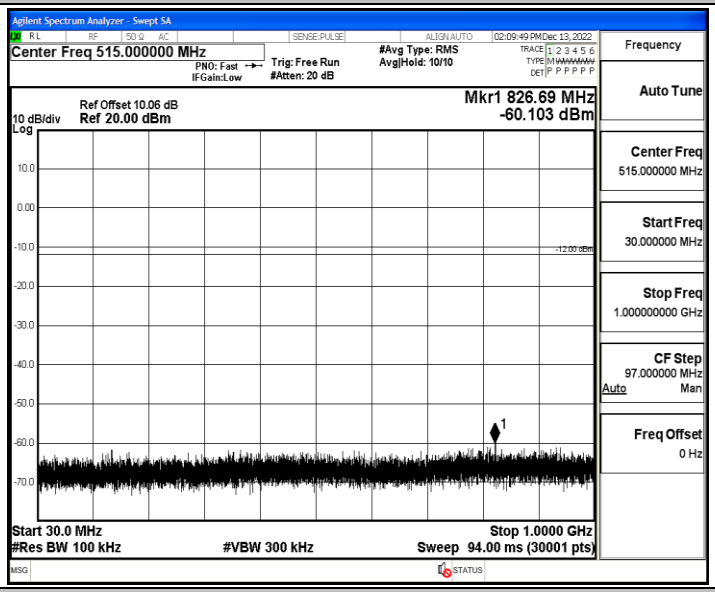

BLE_1M_Ant1_2480_1000~26500

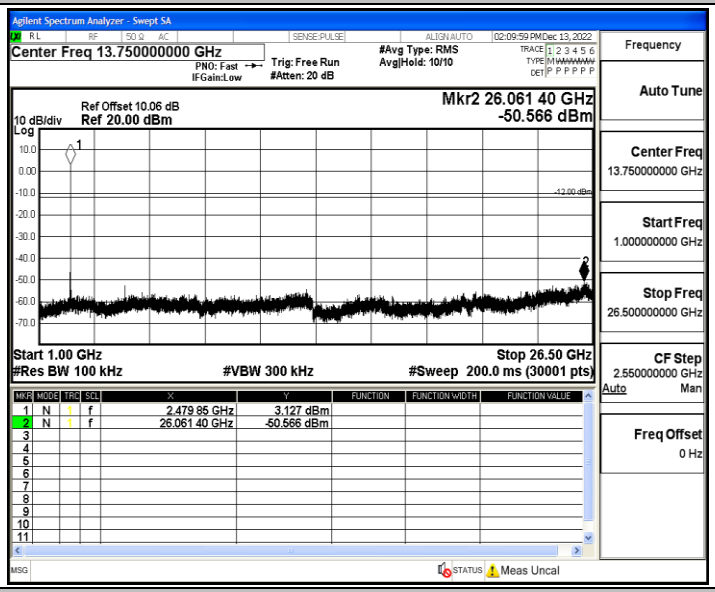

BLE_2M_Ant1_2402_0~Reference

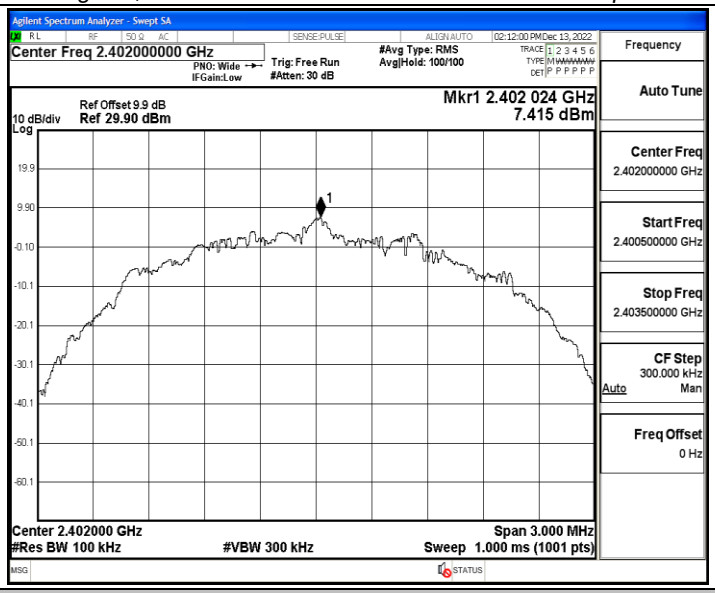

BLE_2M_Ant1_2402_30~1000

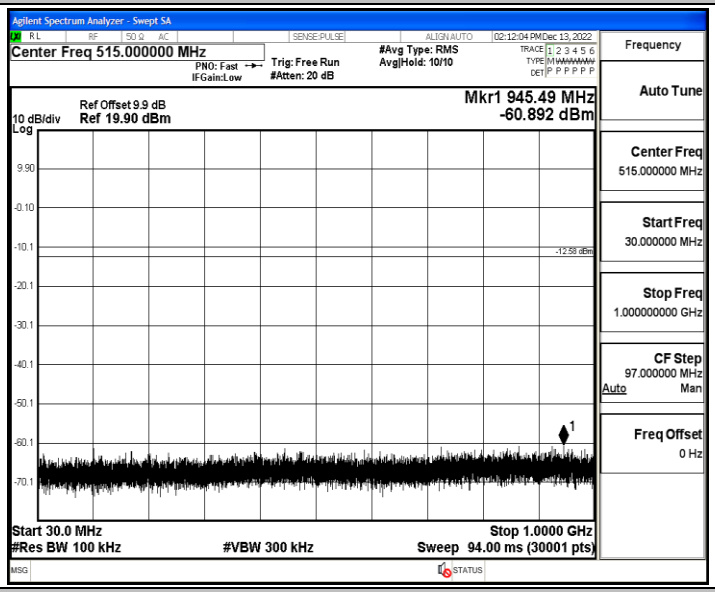

BLE_2M_Ant1_2402_1000~26500

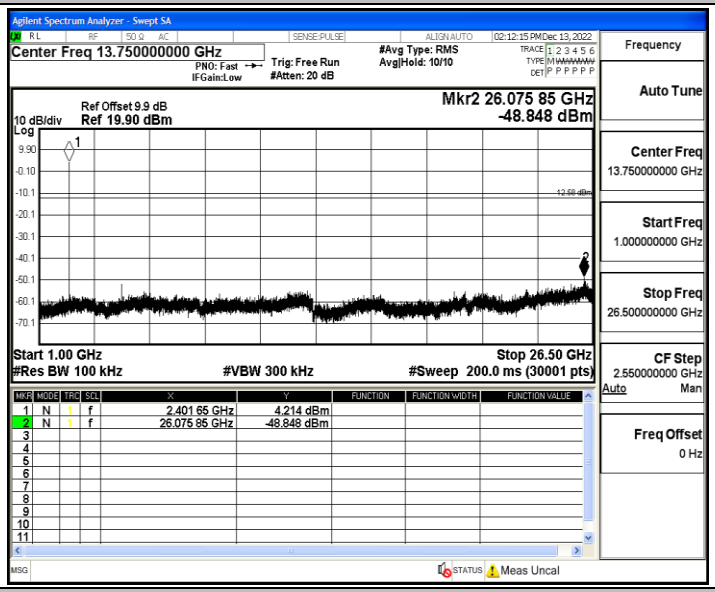

BLE_2M_Ant1_2440_0~Reference

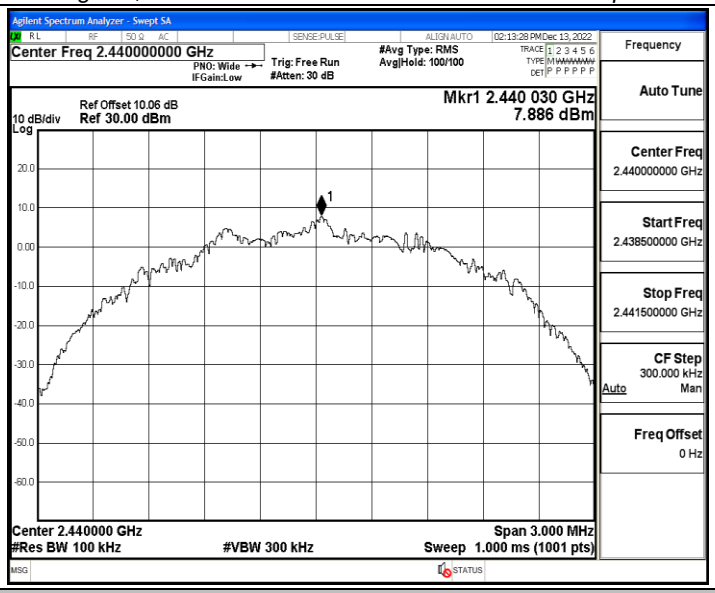

BLE_2M_Ant1_2440_30~1000

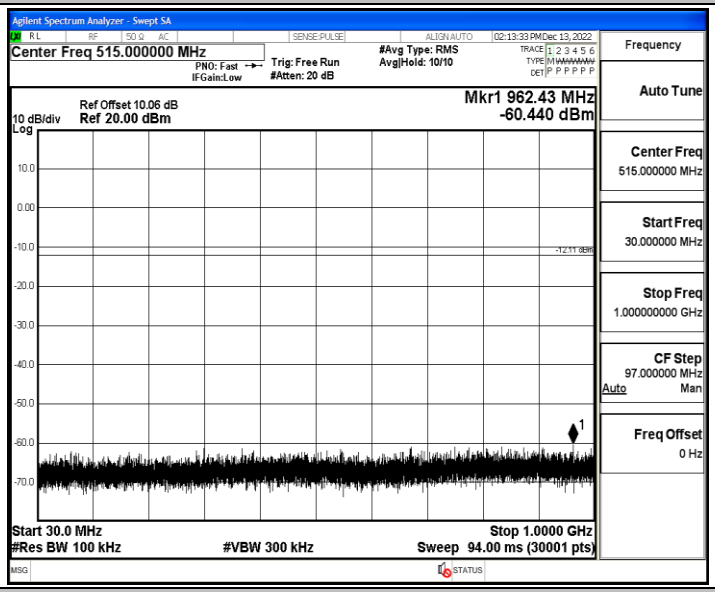

BLE_2M_Ant1_2440_1000~26500

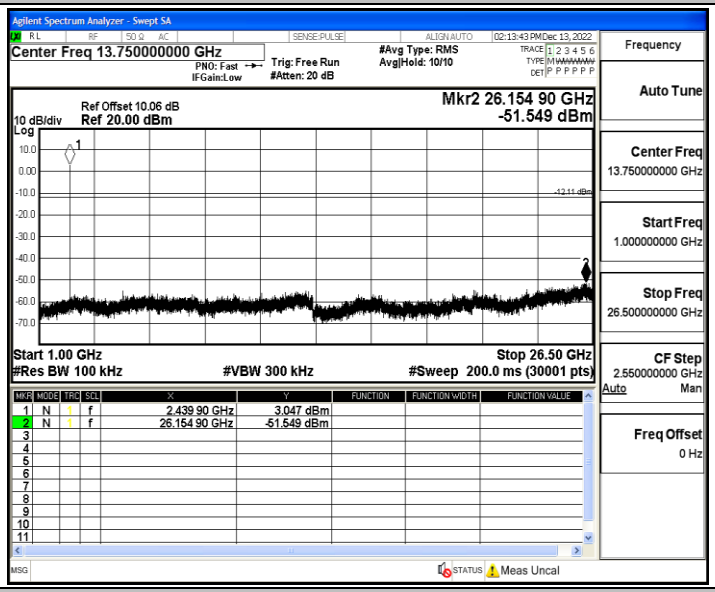

BLE_2M_Ant1_2480_0~Reference

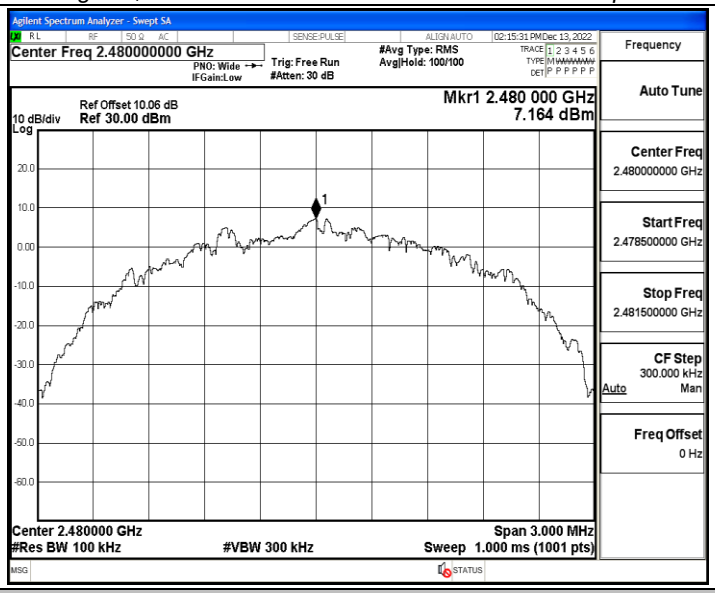

BLE_2M_Ant1_2480_30~1000

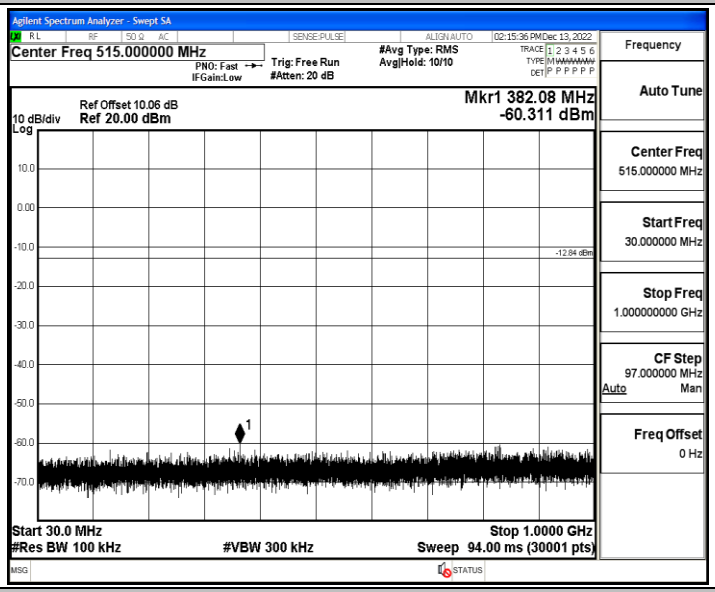

BLE_2M_Ant1_2480_1000~26500

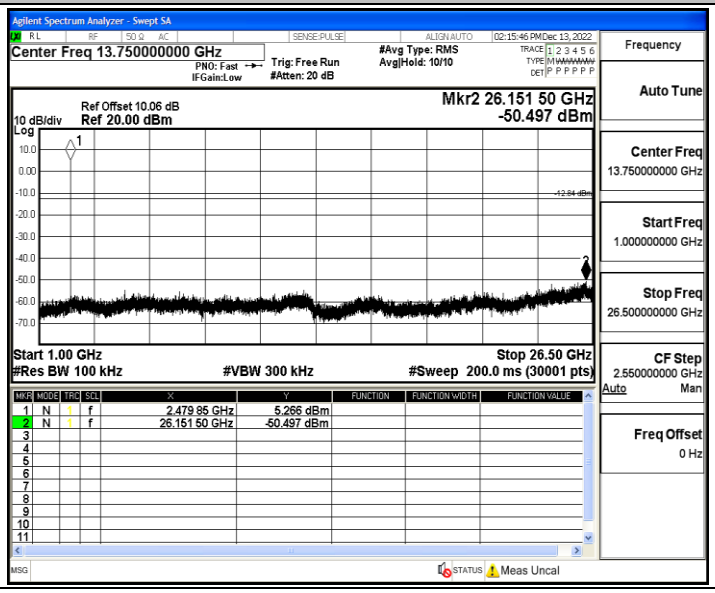

Appendix G: Duty Cycle

Test Result

TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T[kHz]
BLE_1M	Ant1	2402	0.39	0.62	62.90	2.56
		2440	0.39	0.62	62.90	2.56
		2480	0.39	0.62	62.90	2.56
BLE_2M	Ant1	2402	0.21	0.63	33.33	4.76
		2440	0.21	0.63	33.33	4.76
		2480	0.21	0.62	33.87	4.76

Test Graphs

BLE_1M_Ant1_2402

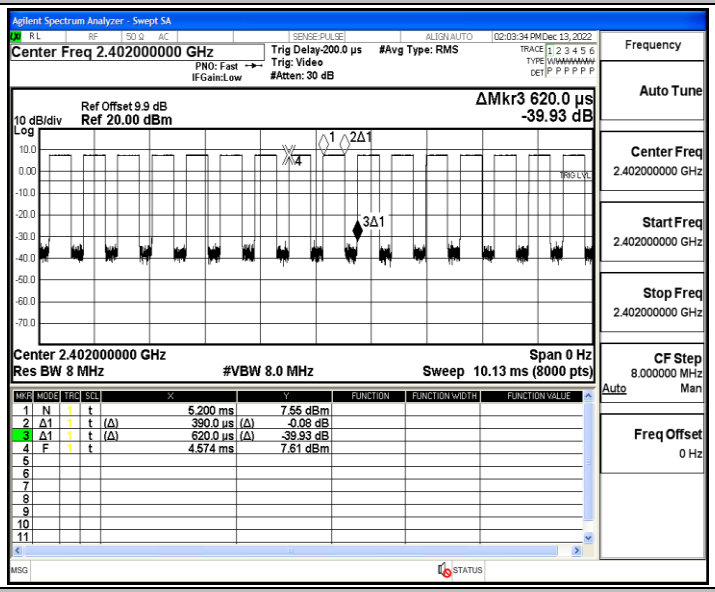

BLE_1M_Ant1_2440

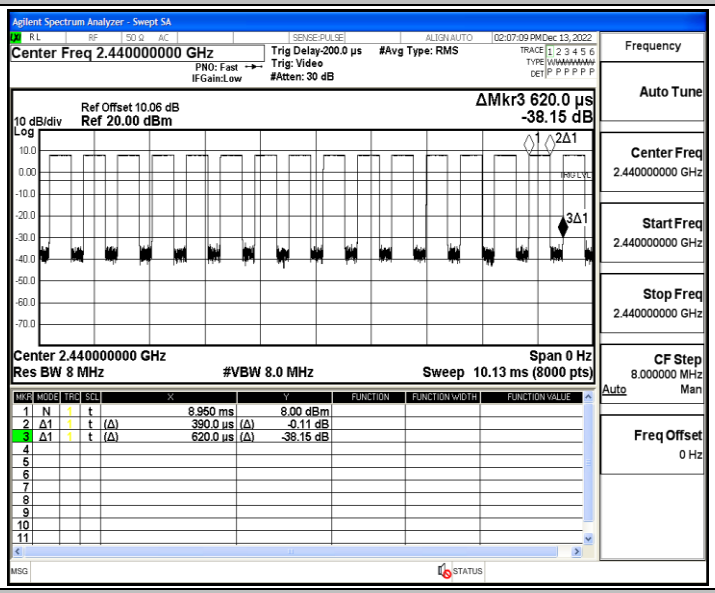

BLE_1M_Ant1_2480

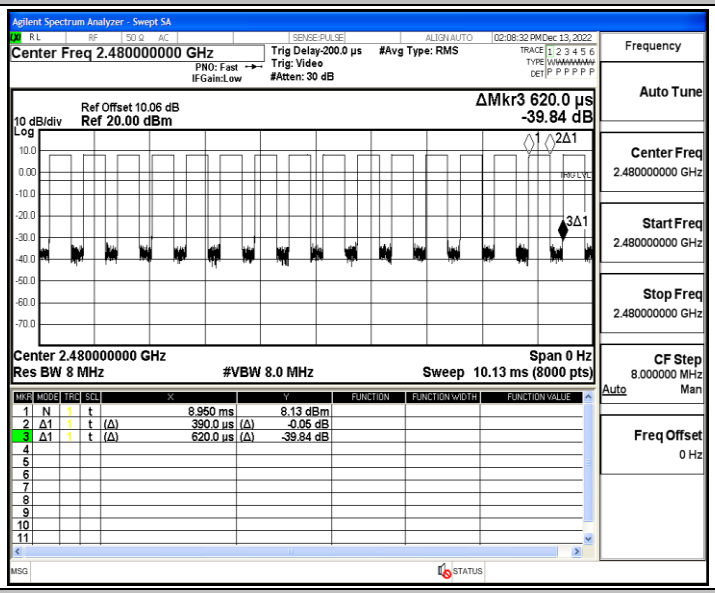

BLE_2M_Ant1_2402

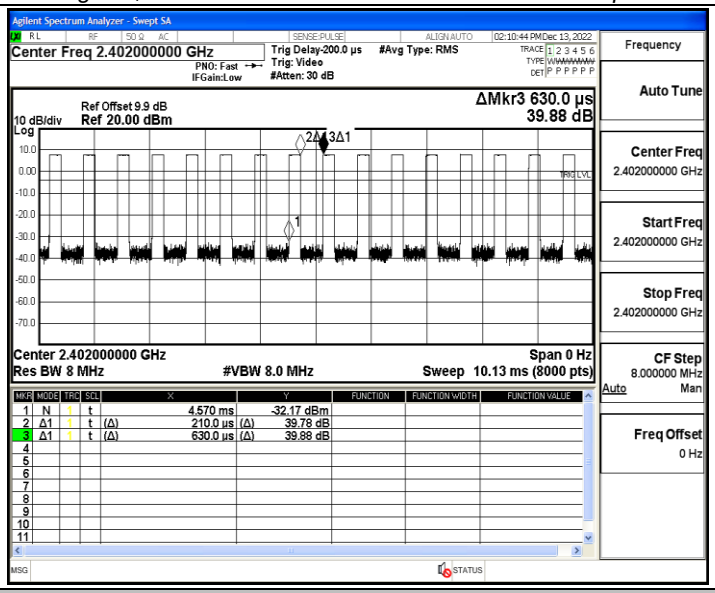

BLE_2M_Ant1_2440

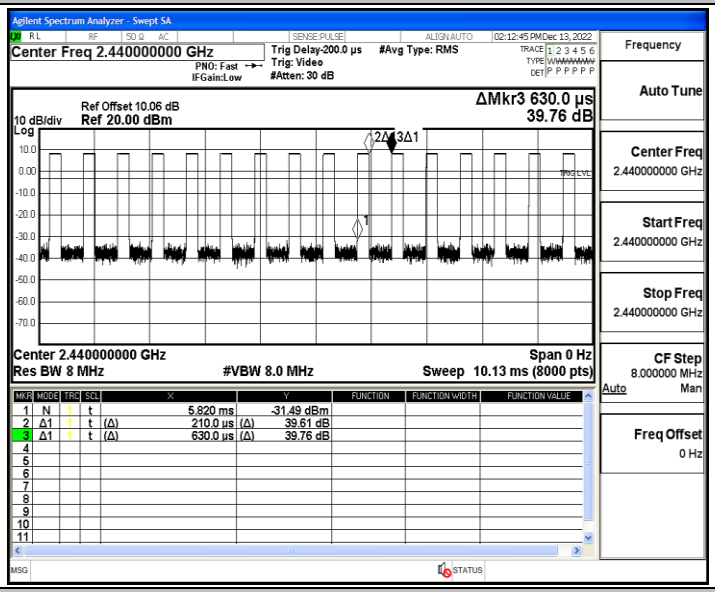

BLE_2M_Ant1_2480

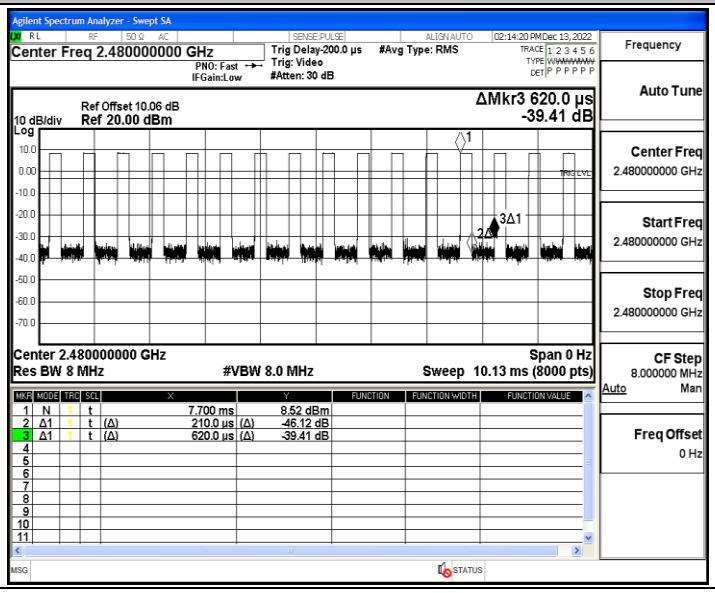

Appendix H: Emissions in Restricted Bands

Test Result

TestMode	Antenna	ChName	Channel	Detector	Freq. [MHz]	Result [dBm]	Limit [dBm]	Verdict
BLE_1M	Ant1	Low	2402	AV	2310.000	-47.92	≤-41.20	PASS
				AV	2385.785	-47.3	≤-41.20	PASS
				AV	2390.000	-47.62	≤-41.20	PASS
				Peak	2310.000	-40.3	≤-21.20	PASS
				Peak	2339.375	-38.5	≤-21.20	PASS
				Peak	2390.000	-40.45	≤-21.20	PASS
		High	2480	AV	2483.500	-44	≤-41.20	PASS
				AV	2483.520	-44	≤-41.20	PASS
				AV	2500.000	-47.28	≤-41.20	PASS
				Peak	2483.500	-39.02	≤-21.20	PASS
				Peak	2487.760	-37.92	≤-21.20	PASS
				Peak	2500.000	-40.52	≤-21.20	PASS
BLE_2M	Ant1	Low	2402	AV	2310.000	-47.64	≤-41.20	PASS
				AV	2352.920	-46.77	≤-41.20	PASS
				AV	2390.000	-47.09	≤-41.20	PASS
				Peak	2310.000	-41.36	≤-21.20	PASS
				Peak	2370.560	-37.46	≤-21.20	PASS
				Peak	2390.000	-40.93	≤-21.20	PASS
		High	2480	AV	2483.500	-41.32	≤-41.20	PASS
				AV	2483.520	-41.32	≤-41.20	PASS
				AV	2500.000	-46.78	≤-41.20	PASS
				Peak	2483.500	-37.51	≤-21.20	PASS
				Peak	2483.520	-37.51	≤-21.20	PASS
				Peak	2500.000	-39.75	≤-21.20	PASS

Note：

1. The Antenna Gain is compensated in the graph with 2dBi and Antenna Gain which is Higher.
2. The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

Test Graphs

BLE_1M_Ant1_Low_2402_AV

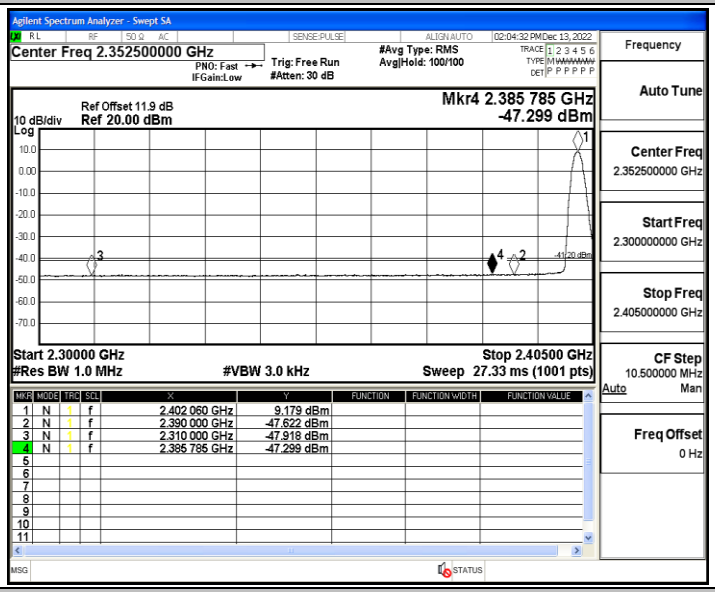

BLE_1M_Ant1_Low_2402_Peak

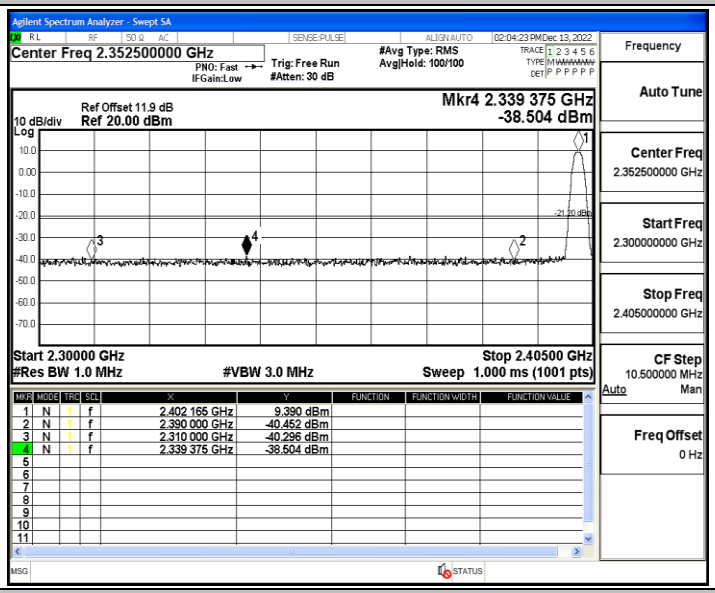

BLE_1M_Ant1_High_2480_AV

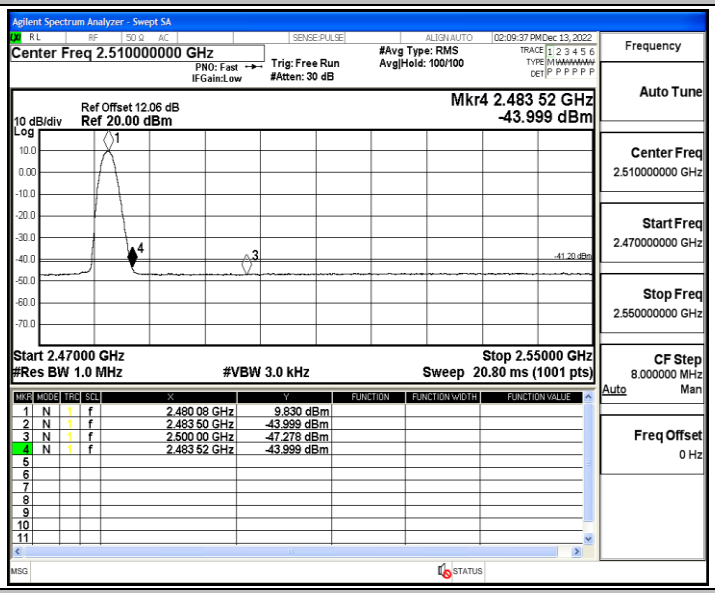

BLE_1M_Ant1_High_2480_Peak

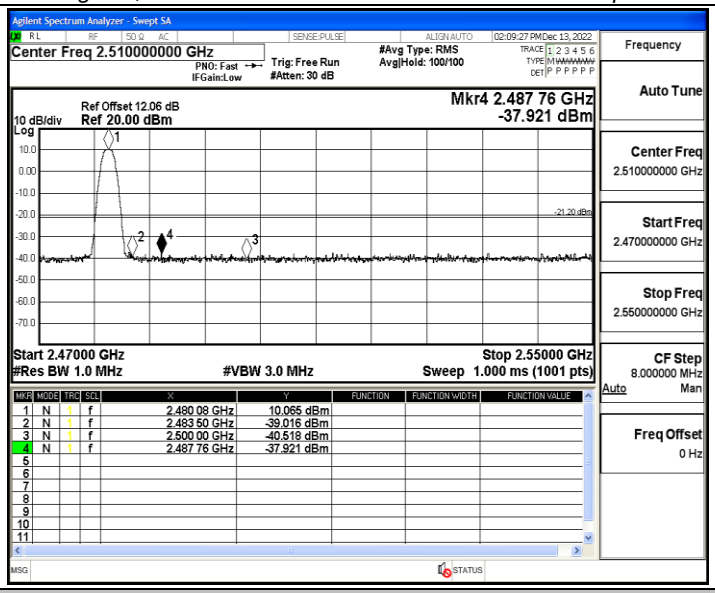

BLE_2M_Ant1_Low_2402_AV

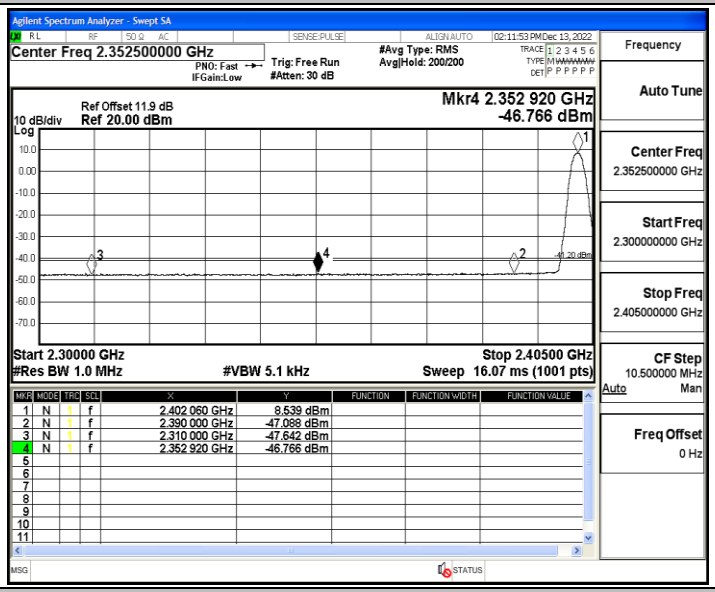

BLE_2M_Ant1_Low_2402_Peak

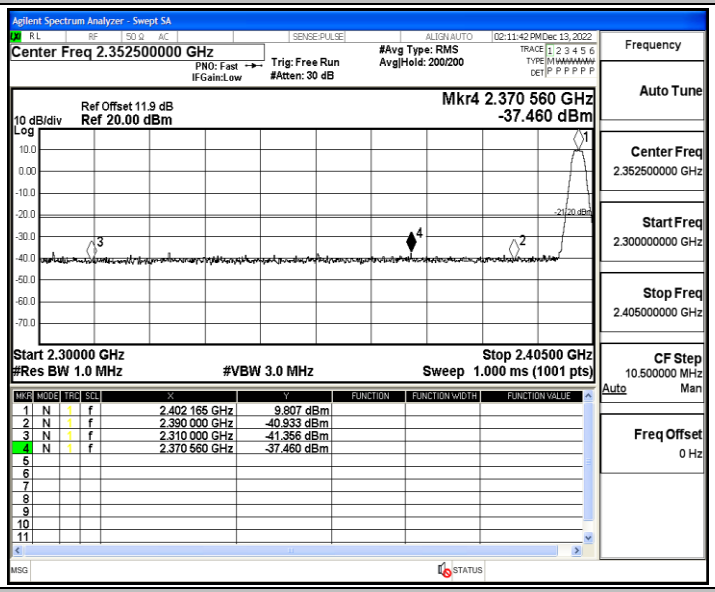

BLE_2M_Ant1_High_2480_AV

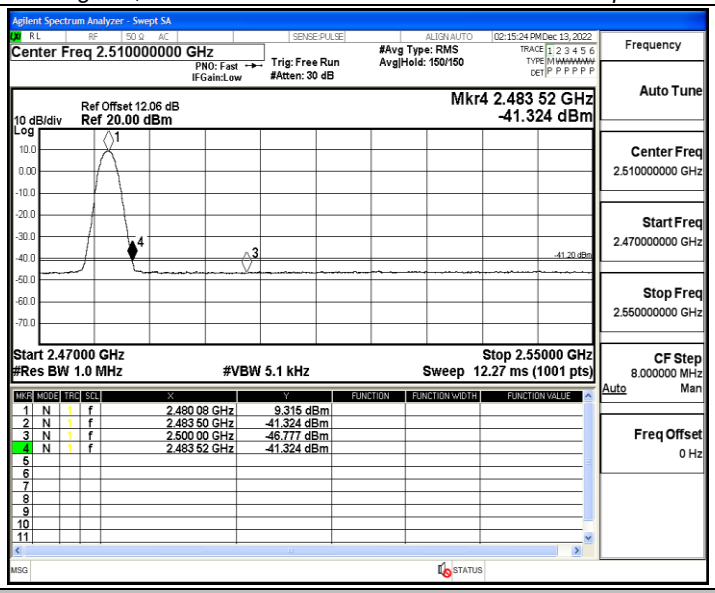
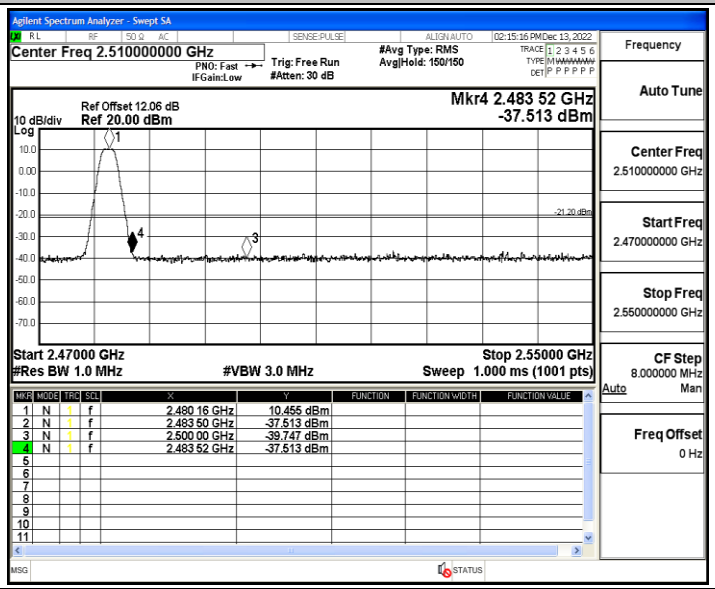
BLE_2M_Ant1_High_2480_Peak