



TEST REPORT

Application No.: GZCR2112021534AT
Applicant: ASAP Technology(Jiangxi) Co., Ltd.
Address of Applicant: Ji'an Industrial Park, Ji'an, Jiangxi 343100, China
Manufacturer: ASAP Technology(Jiangxi) Co., Ltd.
Address of Manufacturer: Ji'an Industrial Park, Ji'an, Jiangxi 343100, China
Equipment Under Test (EUT):
EUT Name: Wireless Charger
Model No.: WIABLK100007866, WIAWHT100008483 ♣
♣ Please refer to section 2 of this report which indicates which model was actually tested and which were electrically identical.
Trade Mark: Onn.
Standard(s) : 47 CFR Part 15, Subpart C
Date of Receipt: 2021-11-24
Date of Test: 2021-11-24 to 2021-12-21
Date of Issue: 2021-12-24

| | |
|---------------------|--------------|
| Test Result: | Pass* |
|---------------------|--------------|

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian

Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No. 198 Kexhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| Revision Record | | | | |
|-----------------|---------|------------|----------|----------|
| Version | Chapter | Date | Modifier | Remark |
| 01 | | 2021-12-24 | | Original |
| | | | | |
| | | | | |

| | | | |
|-------------------------|---|--|--|
| Authorized for issue by | | | |
| Tested By |  | | |
| | Curry Wu/Project Engineer | | |
| Reviewed By |  | | |
| | Ricky Liu/Reviewer | | |

2 Test Summary

| Radio Spectrum Technical Requirement | | | | |
|--------------------------------------|---------------------------|--------|----------------------------------|--------|
| Item | Standard | Method | Requirement | Result |
| Antenna Requirement | 47 CFR Part 15, Subpart C | N/A | 47 CFR Part 15, Subpart C 15.203 | Pass |

| Radio Spectrum Matter Part | | | | |
|---|---------------------------|-----------------------------------|---|--------|
| Item | Standard | Method | Requirement | Result |
| 20dB Bandwidth | 47 CFR Part 15, Subpart C | ANSI C63.10 (2013) Section 6.9.2 | 47 CFR Part 15, Subpart C 15.215 | Pass |
| Conducted Emissions at AC Mains Power Port (150kHz-30MHz) | | ANSI C63.10 (2013) Section 6.2 | 47 CFR Part 15, Subpart C 15.207 | Pass |
| Radiated Emissions (30MHz-1GHz) | | ANSI C63.10 (2013) Section 6.5 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |
| Radiated Emissions (9kHz-30MHz) | | ANSI C63.10 (2013) Section 6.4 | 47 CFR Part 15, Subpart C 15.205 & 15.209 | Pass |
| Restricted band | | ANSI C63.10 (2013) Section 6.10.5 | 47 CFR Part 15, Subpart C 15.205 | Pass |

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

Declaration of EUT Family Grouping:

Model No.: WIABLK100007866, WIAWHT100008483

Only the model WIABLK100007866 was tested fully, and the model WIAWHT100008483 was performed the Radiated Emissions (30MHz-1GHz) and Conducted Emissions at AC Mains Power Port (150kHz-30MHz) test for discrepancy. Since according to the declaration from the applicant, the electrical circuit design, PCB layout, components used and internal wiring and functions were identical for the above models, with only difference on enclosure color, enclosure material and model No..



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No. 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

3 Contents

| | Page |
|---|-----------|
| 1 Cover Page | 1 |
| 2 Test Summary..... | 3 |
| 3 Contents | 4 |
| 4 General Information..... | 6 |
| 4.1 Details of E.U.T. | 6 |
| 4.2 Description of Support Units..... | 6 |
| 4.3 Measurement Uncertainty | 7 |
| 4.4 Test Location | 8 |
| 4.5 Test Facility..... | 8 |
| 4.6 Deviation from Standards..... | 9 |
| 4.7 Abnormalities from Standard Conditions..... | 9 |
| 5 Equipment List | 10 |
| 6 Radio Spectrum Technical Requirement..... | 12 |
| 6.1 Antenna Requirement | 12 |
| 6.1.1 Test Requirement: | 12 |
| 6.1.2 Conclusion | 12 |
| 7 Radio Spectrum Matter Test Results..... | 13 |
| 7.1 20dB Bandwidth | 13 |
| 7.1.1 E.U.T. Operation..... | 13 |
| 7.1.2 Test Mode Description | 13 |
| 7.1.3 Test Setup Diagram | 13 |
| 7.1.4 Measurement Procedure and Data..... | 14 |
| 7.2 Conducted Emissions at AC Mains Power Port (150kHz-30MHz) | 15 |
| 7.2.1 E.U.T. Operation..... | 15 |
| 7.2.2 Test Mode Description | 15 |
| 7.2.3 Test Setup Diagram | 15 |
| 7.2.4 Measurement Procedure and Data..... | 16 |
| 7.3 Radiated Emissions (30MHz-1GHz) | 21 |
| 7.3.1 E.U.T. Operation..... | 21 |
| 7.3.2 Test Mode Description | 21 |
| 7.3.3 Test Setup Diagram | 21 |
| 7.3.4 Measurement Procedure and Data..... | 22 |
| 7.4 Radiated Emissions (9kHz-30MHz) | 27 |
| 7.4.1 E.U.T. Operation..... | 28 |
| 7.4.2 Test Mode Description | 28 |
| 7.4.3 Test Setup Diagram | 28 |
| 7.4.4 Measurement Procedure and Data..... | 28 |
| 7.5 Restricted band..... | 33 |
| 7.5.1 E.U.T. Operation..... | 33 |
| 7.5.2 Test Mode Description | 33 |
| 7.5.3 Test Setup Diagram | 33 |
| 7.5.4 Measurement Procedure and Data..... | 34 |

| | | |
|---|---|----|
| 8 | Test Setup Photo | 35 |
| 9 | EUT Constructional Details (EUT Photos) | 37 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply: Input: DC 5-12V 1.5A Max.
Output: 10W Max.
Main test sample:
Adapter Model: WIABLK100007866
Input: 100-240V~50/60Hz 0.5A
Output: DC 5V/3A, 9V/2A, 12V/1.5A

Difference test sample:
Adapter Model: WIAWHT100008483
Input: 100-240V~50/60Hz 0.5A
Output: DC 5V/3A, 9V/2A, 12V/1.5A

Cable(s): USB cable: 100cm shielded

Operation Frequency: 111.2KHz-148.4KHz

Modulation Type: Load modulation

Antenna Type: Loop antenna

Remark: 1 Since according to the declaration from the applicant, the electrical circuit design, PCB layout, components used and internal wiring and functions were identical for the above adapter models, with only difference on color.
2 Tests were conducted in all load modes and the worst case mode was reported in each test item.

4.2 Description of Support Units

| Description | Manufacturer | Model No. | Serial No. |
|--------------|--------------|-----------|------------------|
| Mobile Phone | Nexus | A1863 | REF. No.SEA16J00 |
| Mobile Phone | SAMSUNG | GT-I9500 | REF. No.SEA16P00 |
| iPhone 8 | Apple | MRA58K | REF. No.SEA16Q00 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.3 Measurement Uncertainty

| Test Item | Measurement Uncertainty |
|---|-----------------------------|
| 20dB Bandwidth | +/-3% |
| Conducted Emissions at AC Mains Power Port (150kHz-30MHz) | 3.12dB |
| Radiated Emissions (30MHz-1GHz) | 5.06dB (3m) 4.46dB (10m) |
| Radiated Emissions (9kHz-30MHz) | ± 4.5dB |
| Restricted band | ± 3% |
| <p>Remark:</p> <p>The U_{lab} (lab Uncertainty) is less than U_{CISPR} (CISPR Uncertainty), so the test results</p> <ul style="list-style-type: none"> – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit. | |

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
 Guangzhou Branch Testing Center EEC Laboratory

No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

5 Equipment List

| 20dB Bandwidth | | | | | |
|-----------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| EMI Test Receiver(1Hz-8GHz) | Rohde & Schwarz | ESW8 | EMC2220 | 2021-05-26 | 2022-05-25 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2021-11-01 | 2023-10-31 |

| Conducted Emissions at AC Mains Power Port (150kHz-30MHz) | | | | | |
|---|-------------------|----------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| Shielding Room | ChangZhou ZhongYu | 8m x 3m x 3.8m | EMC0306 | N/A | N/A |
| Two-Line V-Network | Rohde & Schwarz | ENV216 | EMC0118 | 2021-01-08 | 2022-01-06 |
| Two-Line V-Network-GZ | Rohde & Schwarz | ENV216 | EMC2135 | 2021-09-24 | 2022-09-23 |
| Coaxial Cable | HangTianXing | 2m | EMC0107 | 2020-09-09 | 2022-09-08 |
| Test Software E3c | Audix | Ver. 5.4.1221b | GZE100-62 | N/A | N/A |
| EMI Test Receiver(9kHz-3.6GHz) | Rohde & Schwarz | ESR4 | EMC2221 | 2021-06-01 | 2022-05-31 |

| Radiated Emissions (30MHz-1GHz) | | | | | |
|--|--------------------------------|---------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| Chamber cable | HangTianXing | N/A | EMC0542 | 2020-09-09 | 2022-09-08 |
| Trilog Broadband Antenna(25MHz-1GHz)-Lab | SCHWARZBECK MESS-ELEKTRONIK | VULB 9168 | SEM003-18 | 2019-02-22 | 2022-02-22 |
| Amplifier(9kHz-1.3GHz) | HP | 8447F | EMC2065 | 2021-05-19 | 2022-05-18 |
| 10m Semi-Anechoic Chamber | ETS | N/A | EMC0530 | 2019-10-20 | 2022-10-19 |
| Test Software E3 | Audix | Ver.6.120110a | GZE100-61 | N/A | N/A |
| EMI Test Receiver(1Hz-8GHz) | Rohde & Schwarz | ESW8 | EMC2220 | 2021-05-26 | 2022-05-25 |

| Radiated Emissions (9kHz-30MHz) | | | | | |
|---------------------------------|-----------------|---------------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| Chamber cable | HangTianXing | N/A | EMC0542 | 2020-09-09 | 2022-09-08 |
| Amplifier(9kHz-1.3GHz) | HP | 8447F | EMC2065 | 2021-05-19 | 2022-05-18 |
| Active Loop Antenna-RED | ETS-Lindgren | 6502 | EMC2190 | 2019-12-27 | 2021-12-26 |
| 10m Semi-Anechoic Chamber | ETS | N/A | EMC0530 | 2019-10-20 | 2022-10-19 |
| Test Software E3 | Audix | Ver.6.120110a | GZE100-61 | N/A | N/A |
| EMI Test Receiver(1Hz-8GHz) | Rohde & Schwarz | ESW8 | EMC2220 | 2021-05-26 | 2022-05-25 |

| Restricted band | | | | | |
|-----------------------------|-----------------|----------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| EMI Test Receiver(1Hz-8GHz) | Rohde & Schwarz | ESW8 | EMC2220 | 2021-05-26 | 2022-05-25 |
| 6dB Attenuator | HP | 8491A | EMC2062 | 2020-04-15 | 2022-04-14 |
| MI CABLE | SGS-EMC | 0.8M | EMC2136 | 2021-11-01 | 2023-10-31 |

| General used equipment | | | | | |
|------------------------|--------------|----------|--------------|------------|--------------|
| Equipment | Manufacturer | Model No | Inventory No | Cal Date | Cal Due Date |
| DMM | Fluke | 73 | EMC0006 | 2021-07-05 | 2022-07-05 |
| DMM | Fluke | 73 | EMC0007 | 2021-07-05 | 2022-07-05 |

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that use an unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement.

Please refer to internal photos.

7 Radio Spectrum Matter Test Results

7.1 20dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.215
Test Method: ANSI C63.10 (2013) Section 6.9.2
Limit:

7.1.1 E.U.T. Operation


Operating Environment:

Temperature: 23.8 °C Humidity: 56.3 % RH Atmospheric Pressure: 1003 mbar

7.1.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Pre-scan | 00 | Charge mode_Keep the EUT charging(5W) |
| Pre-scan | 01 | Charge mode_Keep the EUT charging(7.5W) |
| Final test | 02 | Charge mode_Keep the EUT charging(10W) |


7.1.3 Test Setup Diagram

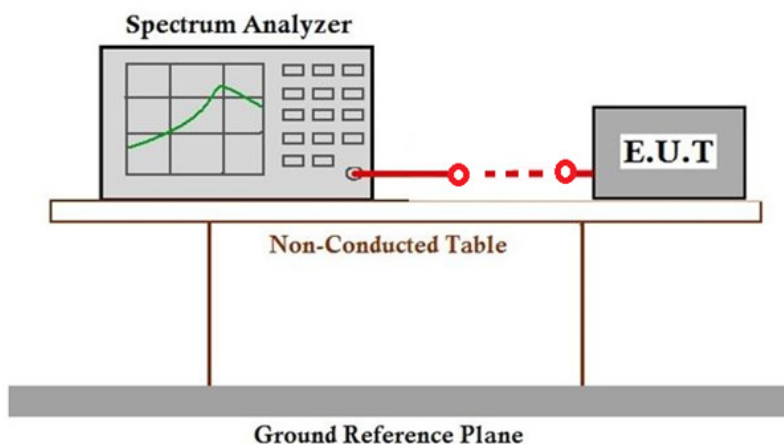

7.1.4 Measurement Procedure and Data

Mode 02:

| Test Frequency(kHz) | 20dB bandwidth(kHz) | Limit(kHz) | Results |
|---------------------|---------------------|------------|---------|
| 116.7 | 0.026 | N/A | Pass |

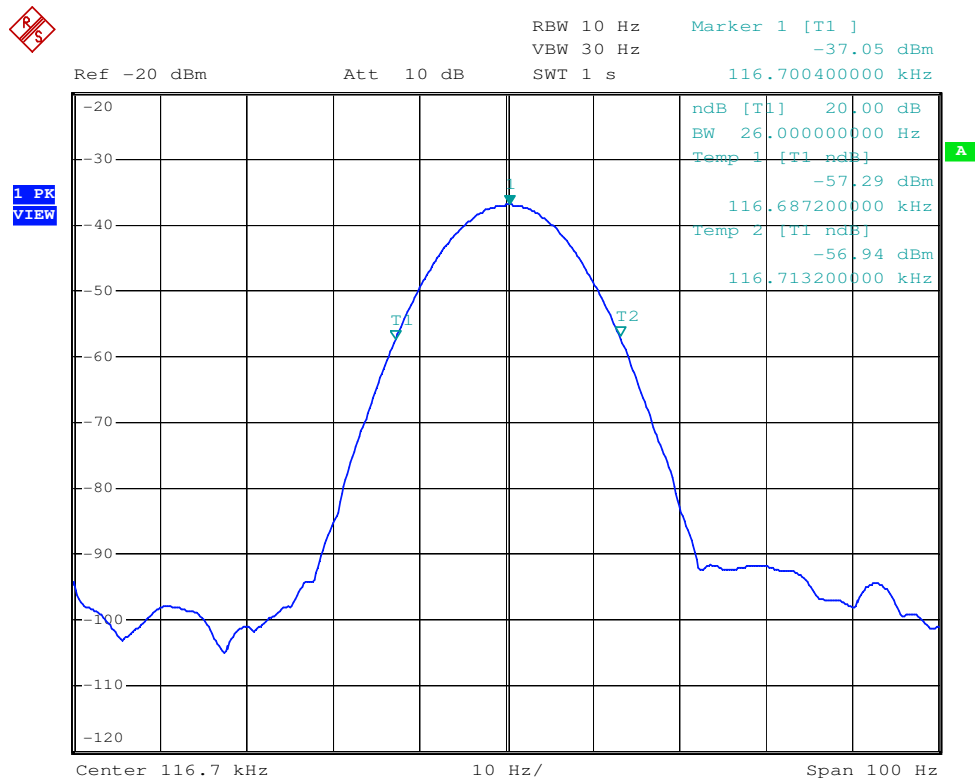

Remark: all models of the EUTs have been tested, then found the test result of WIABLK100007866 is worse, so record this result in this item.

7.2 Conducted Emissions at AC Mains Power Port (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) | |
|----------------------------|-----------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.7 °C


Humidity: 56.9 % RH

Atmospheric Pressure: 1003 mbar

7.2.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Pre-scan | 00 | Charge mode_Keep the EUT charging(5W) |
| Pre-scan | 01 | Charge mode_Keep the EUT charging(7.5W) |
| Final test | 02 | Charge mode_Keep the EUT charging(10W) |

7.2.3 Test Setup Diagram

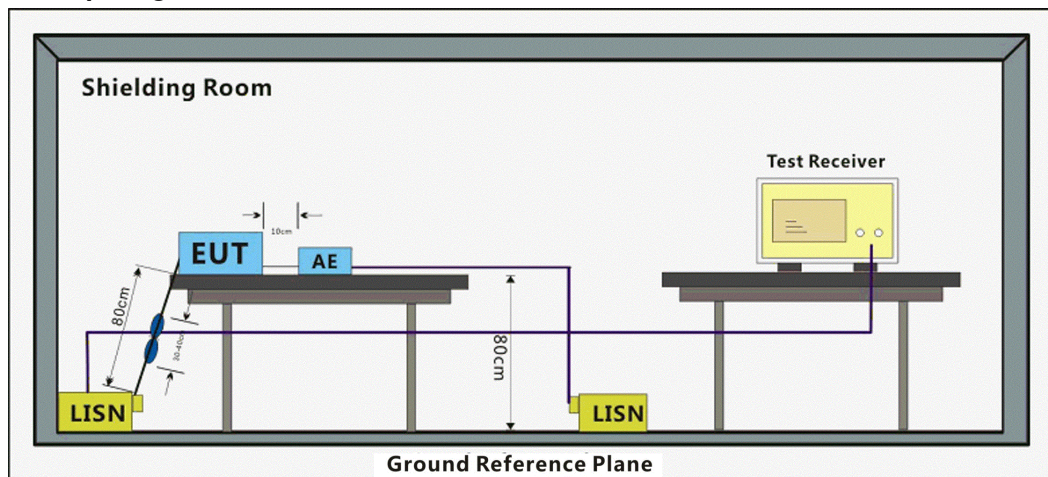

7.2.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test model: WIABLK100007866

Test Mode: 02; Line: Live line

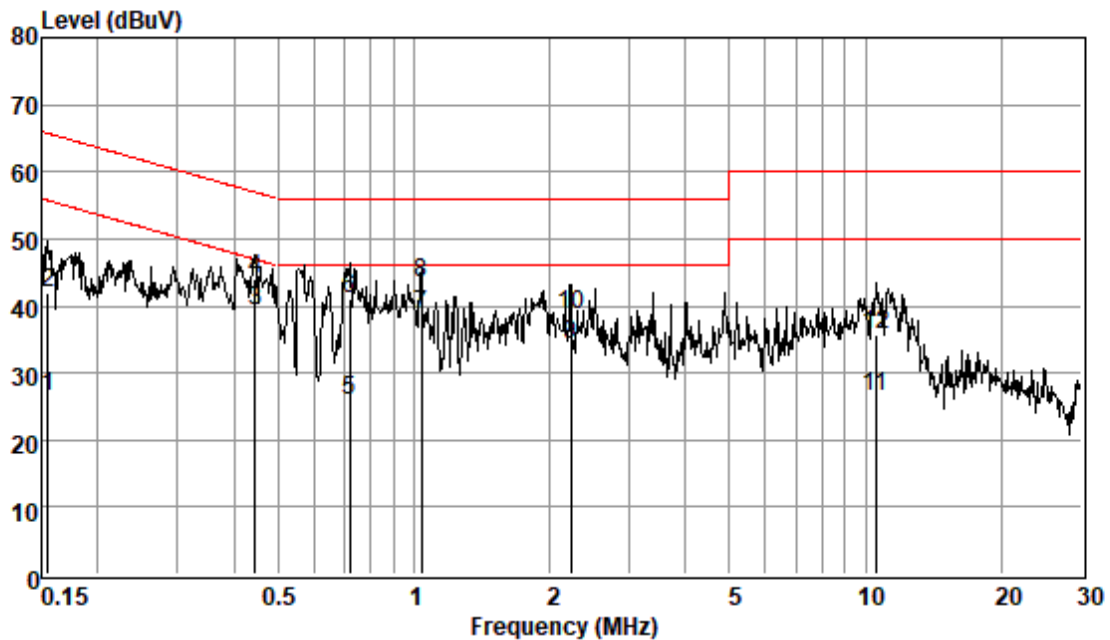Pol : LINE
Mode :
Model :

| Frequency MHz | Read Level dBuV | Cable Loss dB | LISN Factor dB | Measured Level dBuV | Limit Line dBuV | Over Limit dB | Remark |
|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0.15 | 16.78 | 0.06 | 9.62 | 26.46 | 55.74 | -29.28 | Average |
| 0.15 | 32.26 | 0.06 | 9.62 | 41.94 | 65.74 | -23.80 | QP |
| 0.44 | 29.62 | 0.06 | 9.62 | 39.30 | 46.98 | -7.68 | Average |
| 0.44 | 34.27 | 0.06 | 9.62 | 43.95 | 56.98 | -13.03 | QP |
| 0.72 | 16.18 | 0.07 | 9.63 | 25.88 | 46.00 | -20.12 | Average |
| 0.72 | 31.25 | 0.07 | 9.63 | 40.95 | 56.00 | -15.05 | QP |
| 1.04 | 29.00 | 0.07 | 9.62 | 38.69 | 46.00 | -7.31 | Average |
| 1.04 | 33.67 | 0.07 | 9.62 | 43.36 | 56.00 | -12.64 | QP |
| 2.22 | 24.57 | 0.13 | 9.62 | 34.32 | 46.00 | -11.68 | Average |
| 2.22 | 28.97 | 0.13 | 9.62 | 38.72 | 56.00 | -17.28 | QP |
| 10.51 | 16.64 | 0.24 | 9.70 | 26.58 | 50.00 | -23.42 | Average |
| 10.51 | 25.81 | 0.24 | 9.70 | 35.75 | 60.00 | -24.25 | QP |


Test Mode: 02; Line: Neutral Line

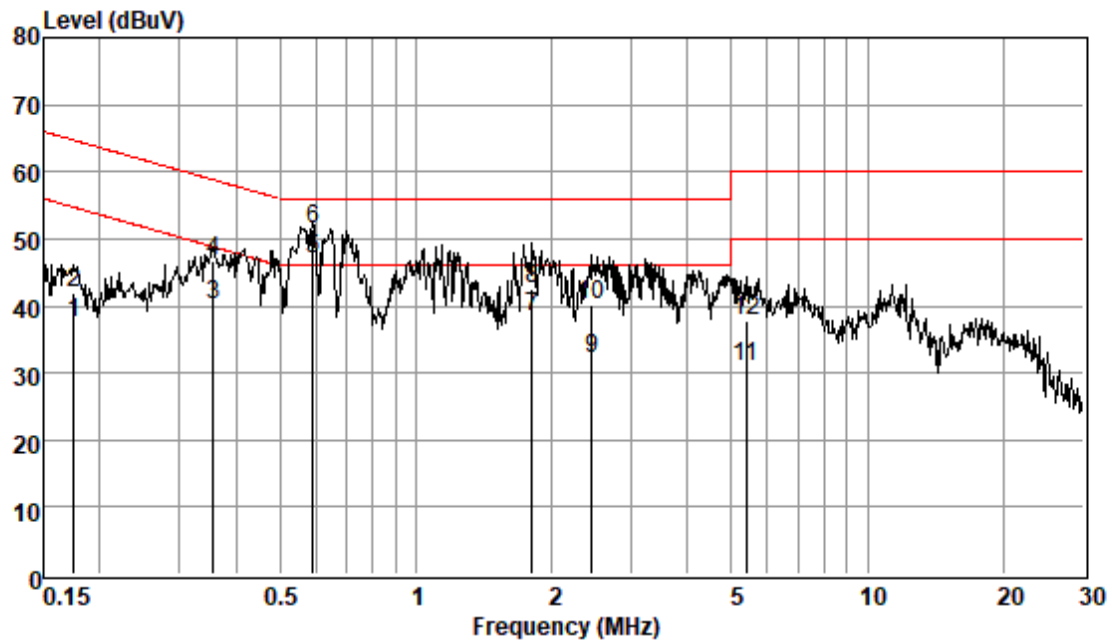Pol : NEUTRAL
Mode :
Model :

| Frequency MHz | Read Level dBuV | Cable Loss dB | LISN Factor dB | Measured Level dBuV | Limit Line dBuV | Over Limit dB | Remark |
|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0.17 | 27.73 | 0.06 | 9.55 | 37.34 | 54.72 | -17.38 | Average |
| 0.17 | 32.26 | 0.06 | 9.55 | 41.87 | 64.72 | -22.85 | QP |
| 0.36 | 30.53 | 0.06 | 9.54 | 40.13 | 48.83 | -8.70 | Average |
| 0.36 | 37.22 | 0.06 | 9.54 | 46.82 | 58.83 | -12.01 | QP |
| 0.59 | 37.41 | 0.07 | 9.54 | 47.02 | 46.00 | 1.02 | Average |
| 0.59 | 41.84 | 0.07 | 9.54 | 51.45 | 56.00 | -4.55 | QP |
| 1.81 | 28.67 | 0.11 | 9.54 | 38.32 | 46.00 | -7.68 | Average |
| 1.81 | 32.86 | 0.11 | 9.54 | 42.51 | 56.00 | -13.49 | QP |
| 2.45 | 22.46 | 0.13 | 9.54 | 32.13 | 46.00 | -13.87 | Average |
| 2.45 | 30.51 | 0.13 | 9.54 | 40.18 | 56.00 | -15.82 | QP |
| 5.39 | 21.25 | 0.19 | 9.56 | 31.00 | 50.00 | -19.00 | Average |
| 5.39 | 28.12 | 0.19 | 9.56 | 37.87 | 60.00 | -22.13 | QP |

Test model: WIAWHT100008483


Test Mode: 02; Line: Live line

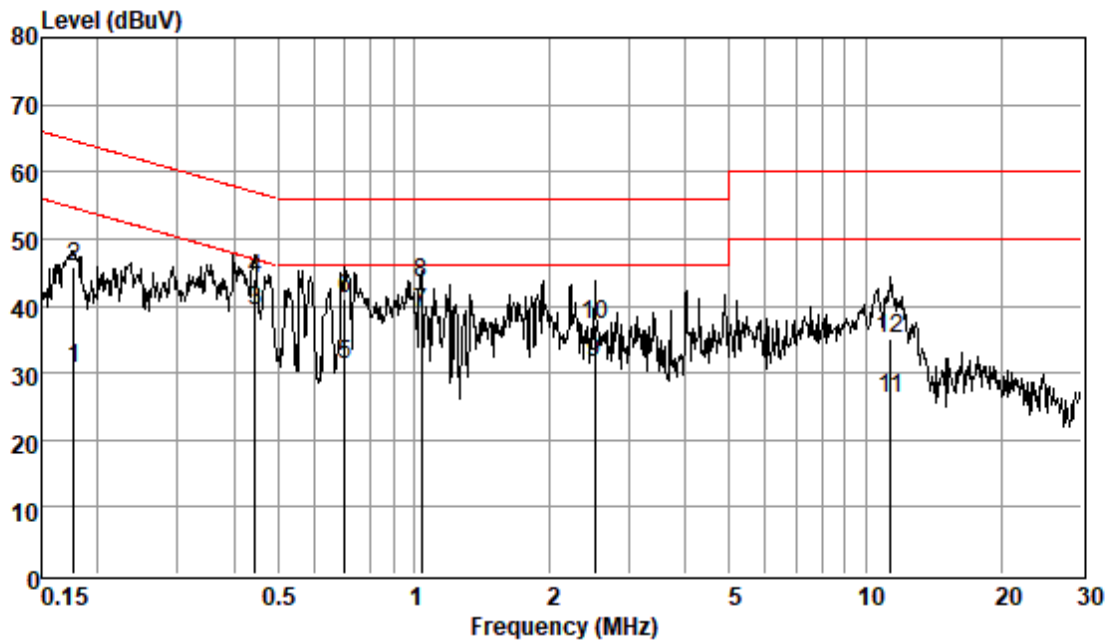

Pol : LINE
Mode :
Model :

| Frequenc MHz | Read Level dBuV | Cable Loss dB | LISN Factor dB | Measured Level dBuV | Limit Line dBuV | Over Limit dB | Remark |
|-----------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0.18 | 20.86 | 0.06 | 9.62 | 30.54 | 54.64 | -24.10 | Average |
| 0.18 | 36.04 | 0.06 | 9.62 | 45.72 | 64.64 | -18.92 | QP |
| 0.44 | 29.68 | 0.06 | 9.62 | 39.36 | 46.98 | -7.62 | Average |
| 0.44 | 34.26 | 0.06 | 9.62 | 43.94 | 56.98 | -13.04 | QP |
| 0.70 | 21.45 | 0.07 | 9.63 | 31.15 | 46.00 | -14.85 | Average |
| 0.70 | 31.26 | 0.07 | 9.63 | 40.96 | 56.00 | -15.04 | QP |
| 1.04 | 29.27 | 0.07 | 9.62 | 38.96 | 46.00 | -7.04 | Average |
| 1.04 | 33.69 | 0.07 | 9.62 | 43.38 | 56.00 | -12.62 | QP |
| 2.51 | 21.83 | 0.13 | 9.62 | 31.58 | 46.00 | -14.42 | Average |
| 2.51 | 27.57 | 0.13 | 9.62 | 37.32 | 56.00 | -18.68 | QP |
| 11.38 | 16.34 | 0.26 | 9.70 | 26.30 | 50.00 | -23.70 | Average |
| 11.38 | 25.10 | 0.26 | 9.70 | 35.06 | 60.00 | -24.94 | QP |

Test Mode: 02; Line: Neutral Line

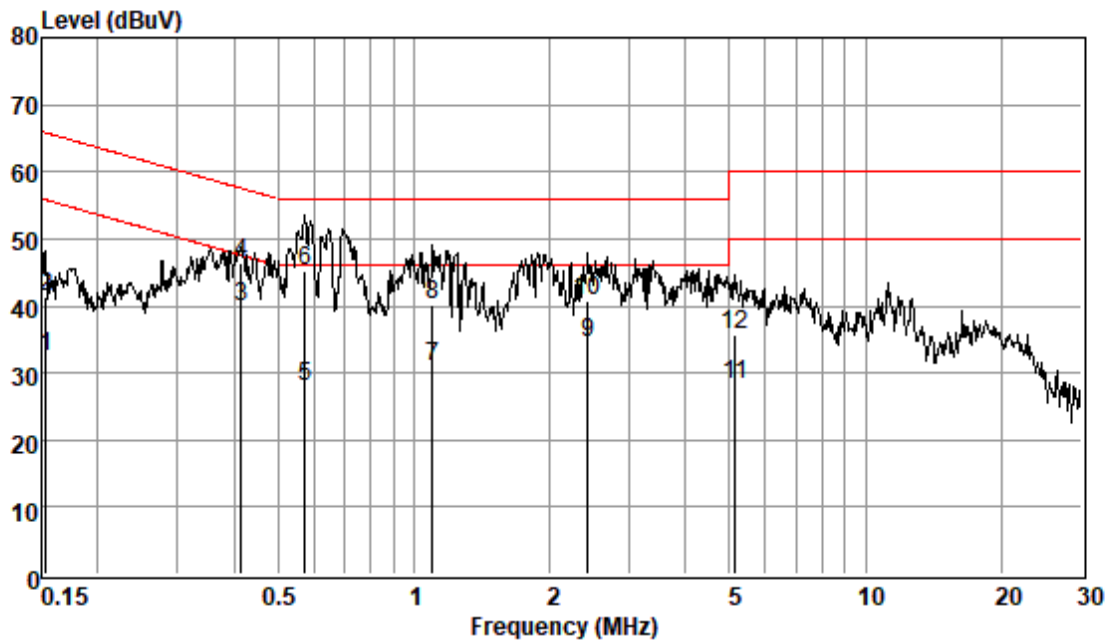

Pol : NEUTRAL
Mode :
Model :

| Frequency MHz | Read Level dBuV | Cable Loss dB | LISN Factor dB | Measured Level dBuV | Limit Line dBuV | Over Limit dB | Remark |
|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 0.15 | 22.86 | 0.06 | 9.55 | 32.47 | 55.82 | -23.35 | Average |
| 0.15 | 31.70 | 0.06 | 9.55 | 41.31 | 65.82 | -24.51 | QP |
| 0.41 | 30.16 | 0.06 | 9.56 | 39.78 | 47.55 | -7.77 | Average |
| 0.41 | 36.91 | 0.06 | 9.56 | 46.53 | 57.55 | -11.02 | QP |
| 0.57 | 18.44 | 0.07 | 9.54 | 28.05 | 46.00 | -17.95 | Average |
| 0.57 | 35.64 | 0.07 | 9.54 | 45.25 | 56.00 | -10.75 | QP |
| 1.10 | 21.18 | 0.08 | 9.55 | 30.81 | 46.00 | -15.19 | Average |
| 1.10 | 30.55 | 0.08 | 9.55 | 40.18 | 56.00 | -15.82 | QP |
| 2.42 | 24.87 | 0.13 | 9.54 | 34.54 | 46.00 | -11.46 | Average |
| 2.42 | 31.11 | 0.13 | 9.54 | 40.78 | 56.00 | -15.22 | QP |
| 5.14 | 18.38 | 0.18 | 9.56 | 28.12 | 50.00 | -21.88 | Average |
| 5.14 | 26.02 | 0.18 | 9.56 | 35.76 | 60.00 | -24.24 | QP |

7.3 Radiated Emissions (30MHz-1GHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.5

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 30-88 | 100 | 3 |
| 88-216 | 150 | 3 |
| 216-960 | 200 | 3 |
| Above 960 | 500 | 3 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23.7 °C


Humidity: 56.1 % RH

Atmospheric Pressure: 1003 mbar

7.3.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Pre-scan | 00 | Charge mode_Keep the EUT charging(5W) |
| Pre-scan | 01 | Charge mode_Keep the EUT charging(7.5W) |
| Final test | 02 | Charge mode_Keep the EUT charging(10W) |

7.3.3 Test Setup Diagram

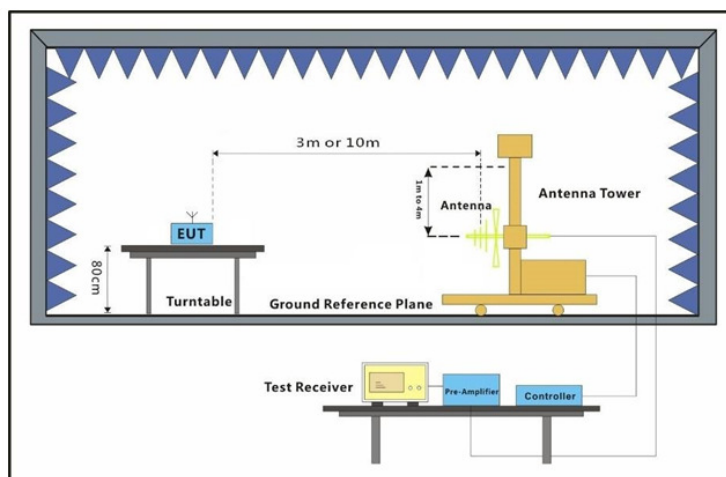


7.3.4 Measurement Procedure and Data

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark: Level=Read Level+Cable Loss+Antenna Factor-Preamplifier Factor

Test model: WIABLK100007866

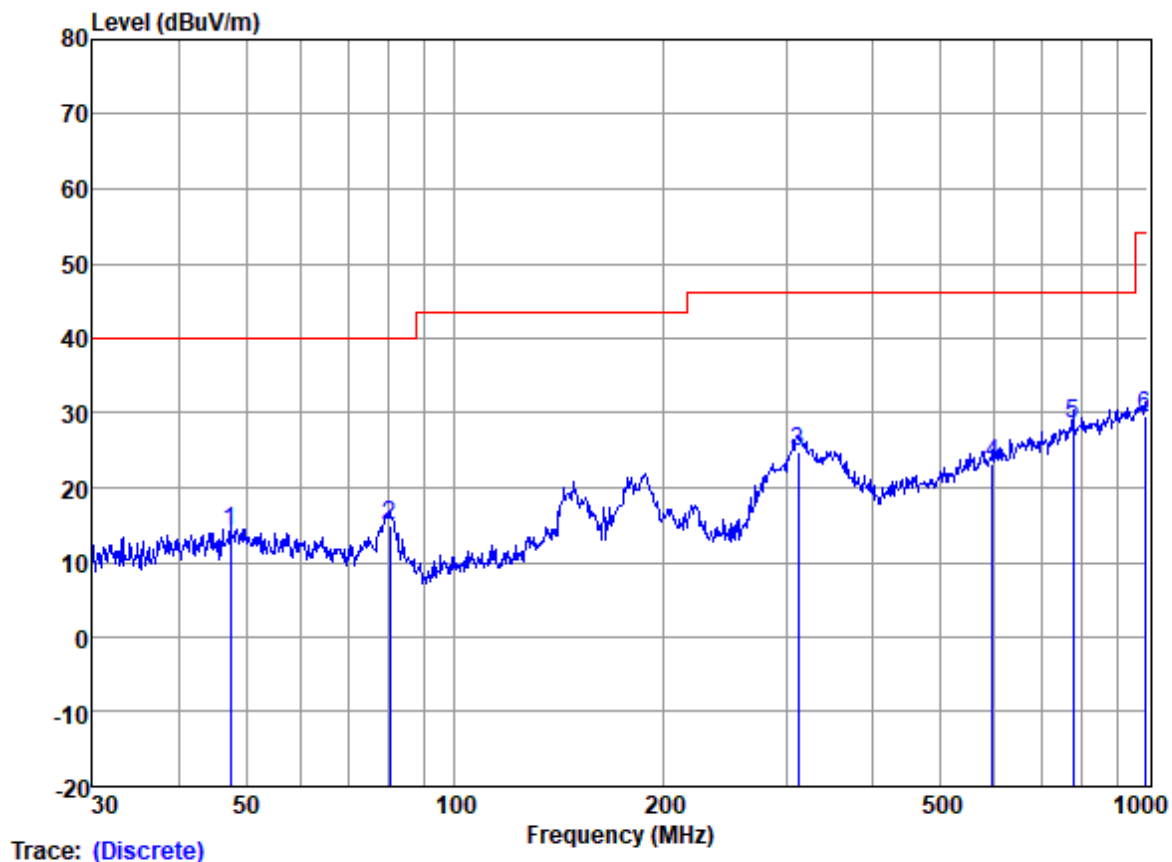


Site : SGS
Job :
Model :
Power :
Test Mode :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|--------|------------|----------------|------------|---------------|----------------|------------|------------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dBuV | | |
| 1 | 47.49 | 26.30 | 13.98 | 1.13 | 27.17 | 14.24 | 40.00 | -25.76 | HORIZONTAL | QP |
| 2 | 80.64 | 31.67 | 8.79 | 1.48 | 27.10 | 14.84 | 40.00 | -25.16 | HORIZONTAL | QP |
| 3 | 312.18 | 34.22 | 14.00 | 3.26 | 26.61 | 24.87 | 46.00 | -21.13 | HORIZONTAL | QP |
| 4 | 595.13 | 26.71 | 19.70 | 5.10 | 28.20 | 23.31 | 46.00 | -22.69 | HORIZONTAL | QP |
| 5 | 779.61 | 28.09 | 22.30 | 6.11 | 28.05 | 28.45 | 46.00 | -17.55 | HORIZONTAL | QP |
| 6 | 989.54 | 25.75 | 24.20 | 7.37 | 27.67 | 29.65 | 54.00 | -24.35 | HORIZONTAL | QP |

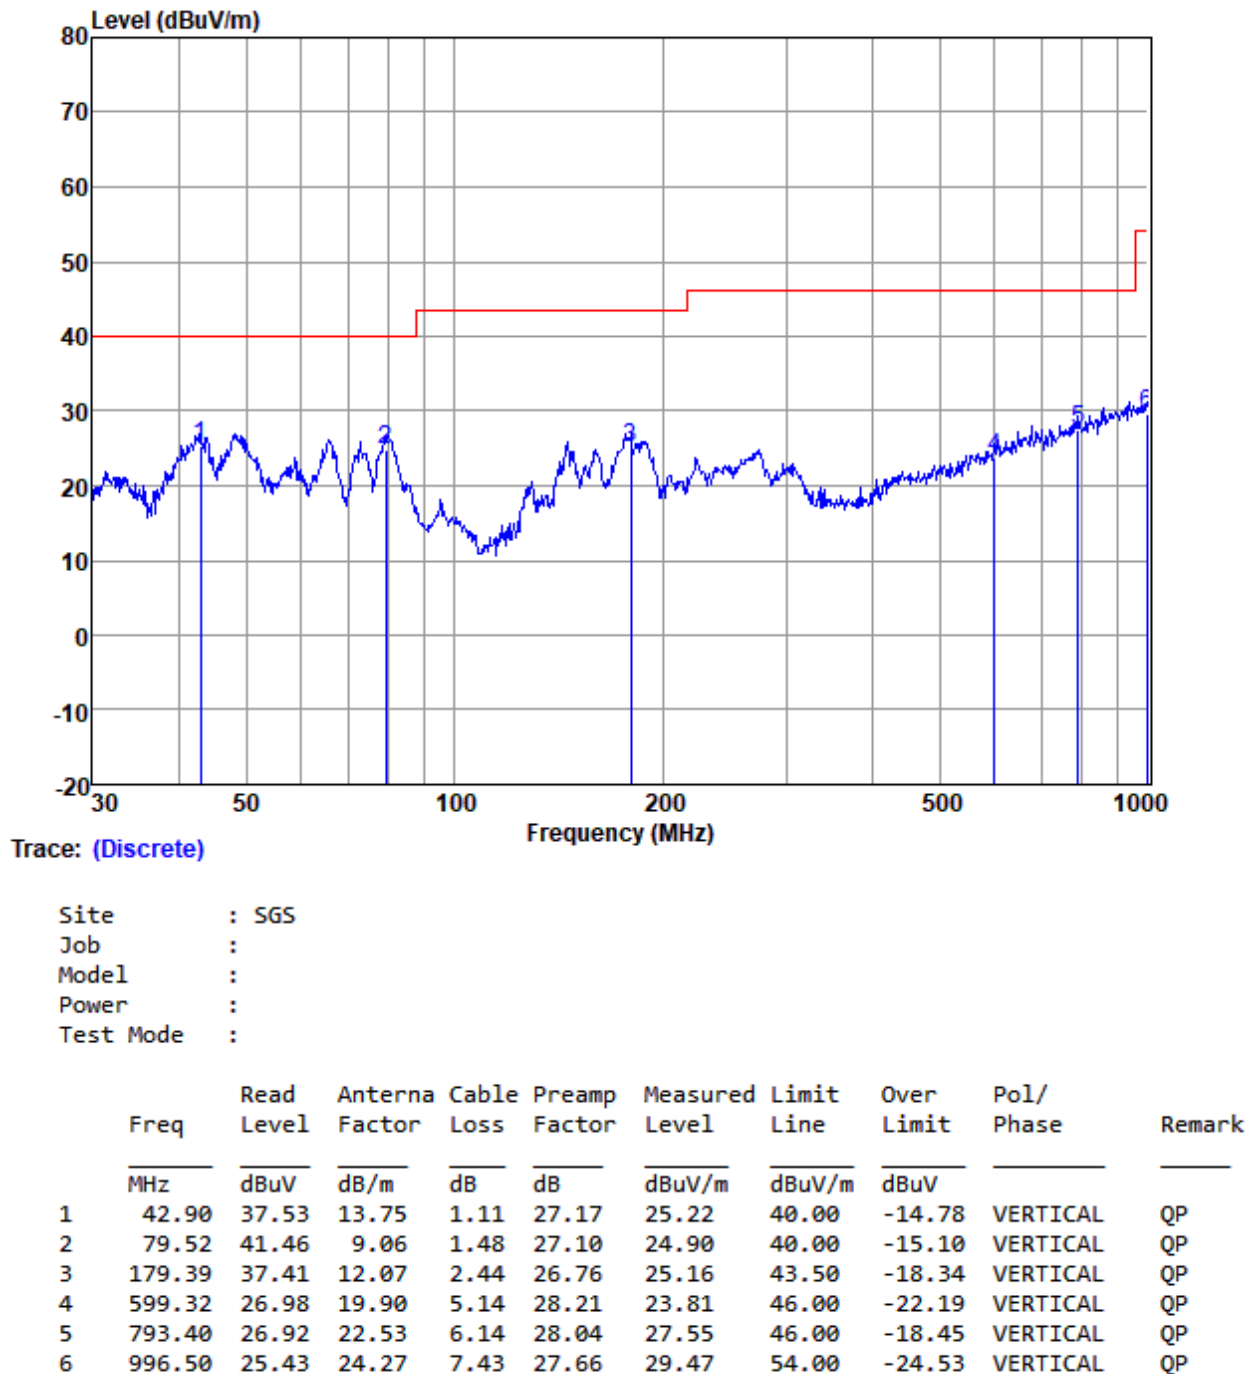


Test model: WIAWHT100008483

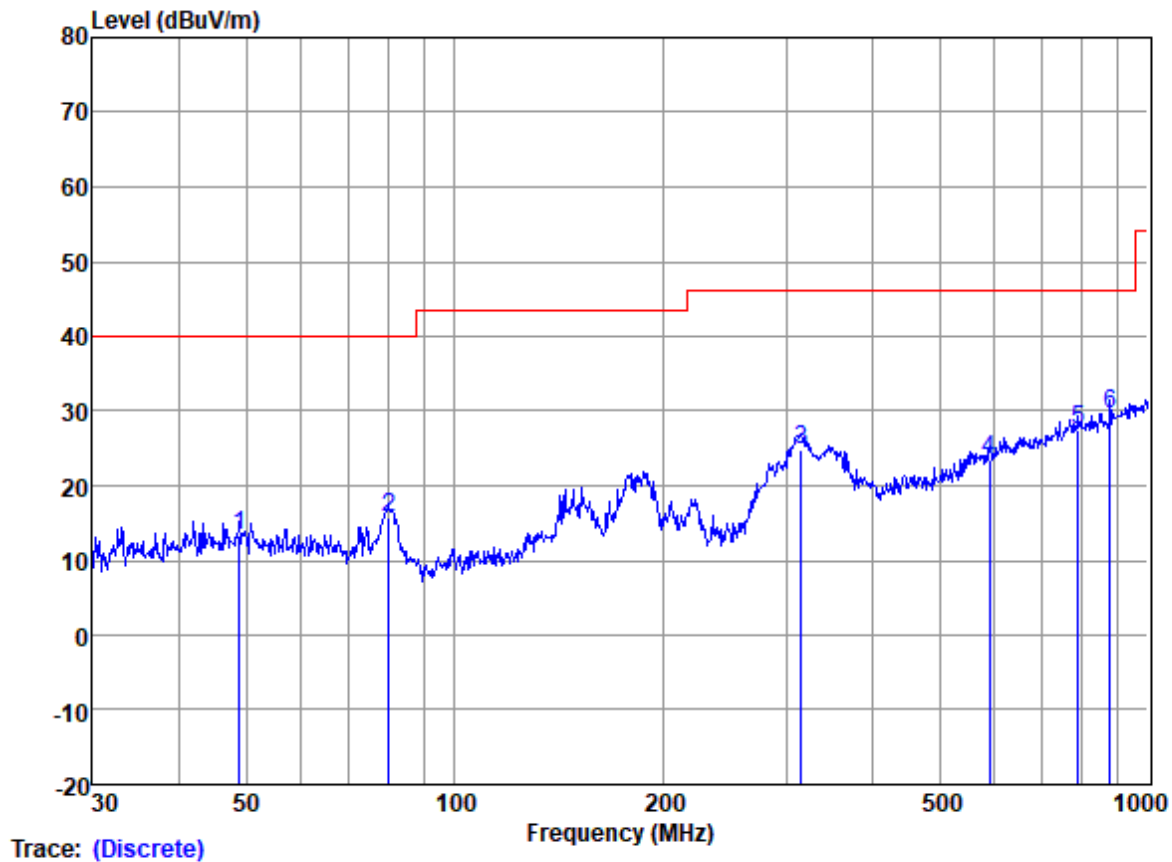

Site : SGS
Job :
Model :
Power :
Test Mode :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|--------|------------|----------------|------------|---------------|----------------|------------|------------|------------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dBuV | | |
| 1 | 48.84 | 25.49 | 13.96 | 1.14 | 27.17 | 13.42 | 40.00 | -26.58 | HORIZONTAL | QP |
| 2 | 80.36 | 32.45 | 8.84 | 1.48 | 27.10 | 15.67 | 40.00 | -24.33 | HORIZONTAL | QP |
| 3 | 315.48 | 34.14 | 14.10 | 3.29 | 26.63 | 24.90 | 46.00 | -21.10 | HORIZONTAL | QP |
| 4 | 590.97 | 27.08 | 19.50 | 5.10 | 28.20 | 23.48 | 46.00 | -22.52 | HORIZONTAL | QP |
| 5 | 793.40 | 26.91 | 22.53 | 6.14 | 28.04 | 27.54 | 46.00 | -18.46 | HORIZONTAL | QP |
| 6 | 881.41 | 27.72 | 23.00 | 6.79 | 27.87 | 29.64 | 46.00 | -16.36 | HORIZONTAL | QP |

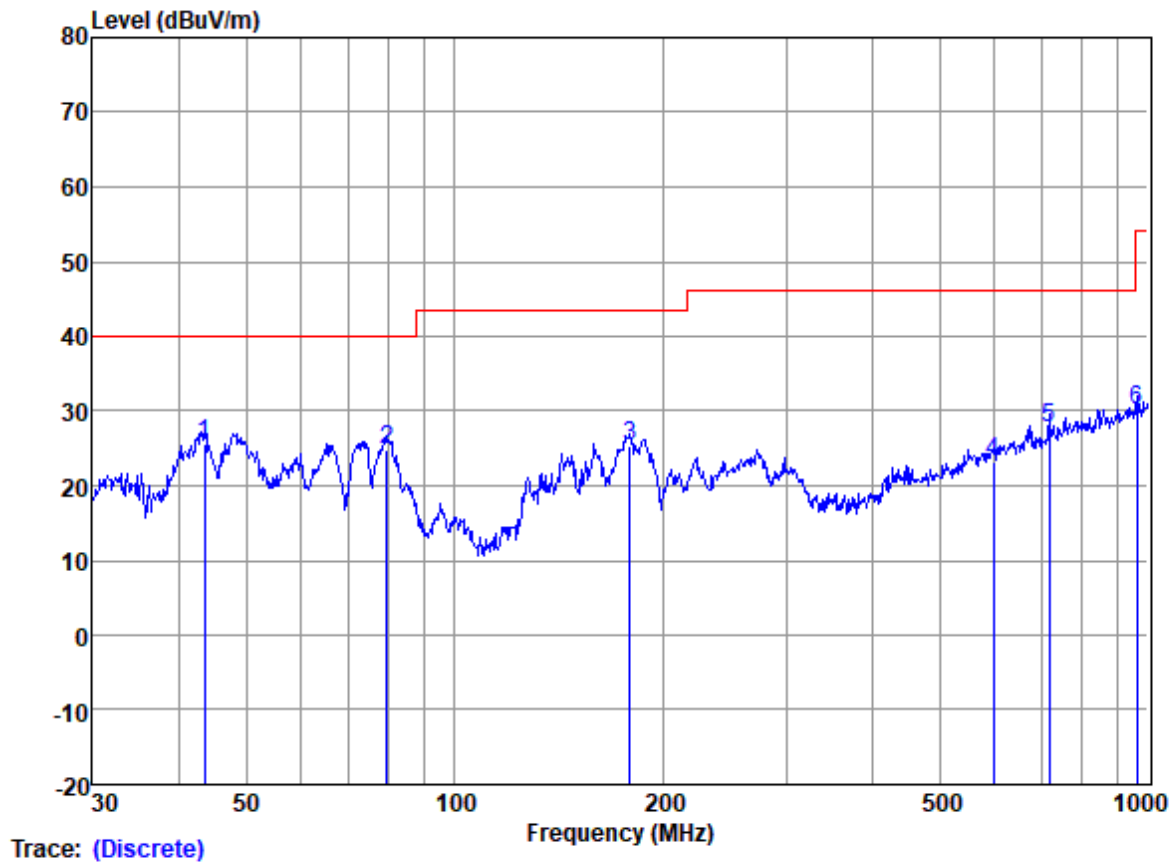

Site : SGS
Job :
Model :
Power :
Test Mode :

| | Freq | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|--------|------------|----------------|------------|---------------------|----------------|------------|------------|-----------|--------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dBuV | | |
| 1 | 43.51 | 37.98 | 13.78 | 1.12 | 27.17 | 25.71 | 40.00 | -14.29 | VERTICAL | QP |
| 2 | 79.80 | 41.56 | 8.98 | 1.48 | 27.10 | 24.92 | 40.00 | -15.08 | VERTICAL | QP |
| 3 | 178.76 | 37.40 | 12.13 | 2.44 | 26.76 | 25.21 | 43.50 | -18.29 | VERTICAL | QP |
| 4 | 597.22 | 26.59 | 19.80 | 5.14 | 28.21 | 23.32 | 46.00 | -22.68 | VERTICAL | QP |
| 5 | 719.20 | 28.42 | 21.50 | 5.86 | 28.14 | 27.64 | 46.00 | -18.36 | VERTICAL | QP |
| 6 | 962.16 | 26.74 | 23.90 | 7.25 | 27.72 | 30.17 | 54.00 | -23.83 | VERTICAL | QP |

7.4 Radiated Emissions (9kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2013) Section 6.4

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490 | 2400/F(kHz) | 300 |
| 0.490-1.705 | 24000/F(kHz) | 30 |
| 1.705-30.0 | 30 | 30 |

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

If field strength is measured at only a single point, then that point shall be at the radial from the EUT that produces the maximum emission at the frequency being measured, as described in 5.4. If that point is closer to the EUT than $\lambda/2\pi$ and the limit distance is greater than $\lambda/2\pi$, the measurement shall be extrapolated to the limit distance by conservatively presuming that the field strength decreases at a 40 dB/decade of distance rate to the $\lambda/2\pi$ distance, and at a 20 dB/decade of distance rate beyond $\lambda/2\pi$. This shall be accomplished using Equation (2):

$$FS_{(10m)} = FS_{(30/300m)} + 40\log\{d_{(near\ field)}/d_{(10m)}\} + 20\log\{d_{(30/300m)}/d_{(near\ field)}\} \quad (2)$$

If the single point measured is at a distance greater than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (3):

$$FS_{(10m)} = FS_{(30/300m)} + 20\log\{d_{(30/300m)}/d_{(10m)}\} \quad (3)$$

If both the single point and the limit distance are equal to or closer to the EUT than $\lambda/2\pi$, then extrapolation to the limit distance shall be calculated using Equation (4):

$$FS_{(10m)} = FS_{(30/300m)} + 40\log\{d_{(30/300m)}/d_{(10m)}\} \quad (4)$$

Remark:

$$d_{near\ field} = 47.77 / f_{MHz}$$

where f_{MHz} is the frequency of the emission being measured in MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 23.5 °C Humidity: 56.5 % RH Atmospheric Pressure: 1003 mbar

7.4.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Pre-scan | 00 | Charge mode_Keep the EUT charging(5W) |
| Pre-scan | 01 | Charge mode_Keep the EUT charging(7.5W) |
| Final test | 02 | Charge mode_Keep the EUT charging(10W) |


7.4.3 Test Setup Diagram

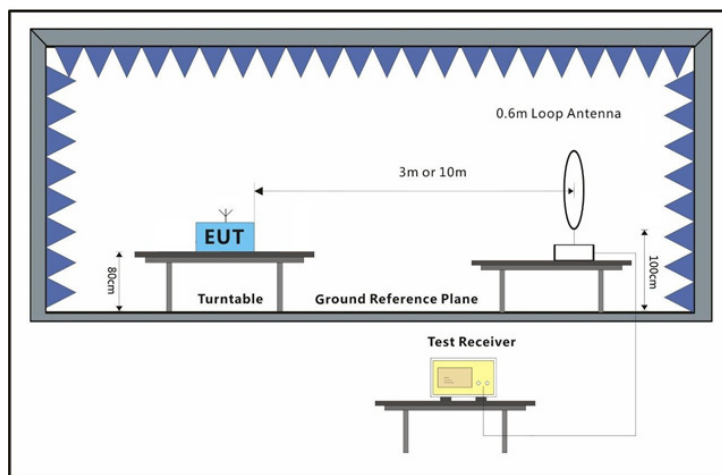

7.4.4 Measurement Procedure and Data

For testing performed with the loop antenna, the center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

Test model: WIABLK100007866

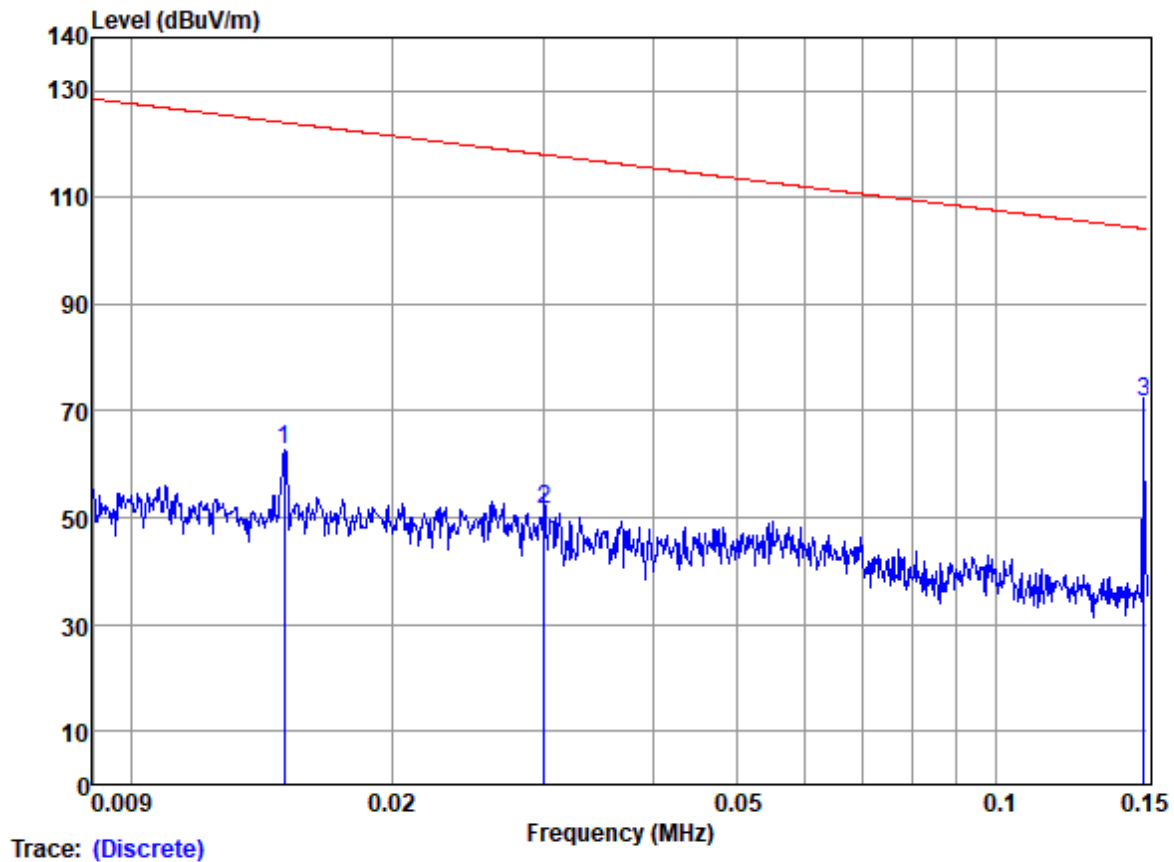


Site : SGS
Job :
Model :
Power :
Test Mode :


| | Freq | Read Level | Antenna Factor | Cable Loss | Preamplifier Factor | Measured Level | Limit Line | Over Limit | Pol/Phase | Remark |
|---|-------|------------|----------------|------------|---------------------|----------------|------------|------------|------------|---------|
| | MHz | dBuV | dB/m | dB | dB | dBuV/m | dBuV/m | dBuV | | |
| 1 | 0.015 | 77.15 | 13.95 | 0.05 | 28.27 | 62.88 | 124.07 | -61.19 | HORIZONTAL | Average |
| 2 | 0.030 | 67.72 | 12.59 | 0.05 | 28.81 | 51.55 | 118.06 | -66.51 | HORIZONTAL | Average |
| 3 | 0.148 | 90.26 | 10.65 | 0.05 | 29.46 | 71.50 | 104.18 | -32.68 | HORIZONTAL | Average |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

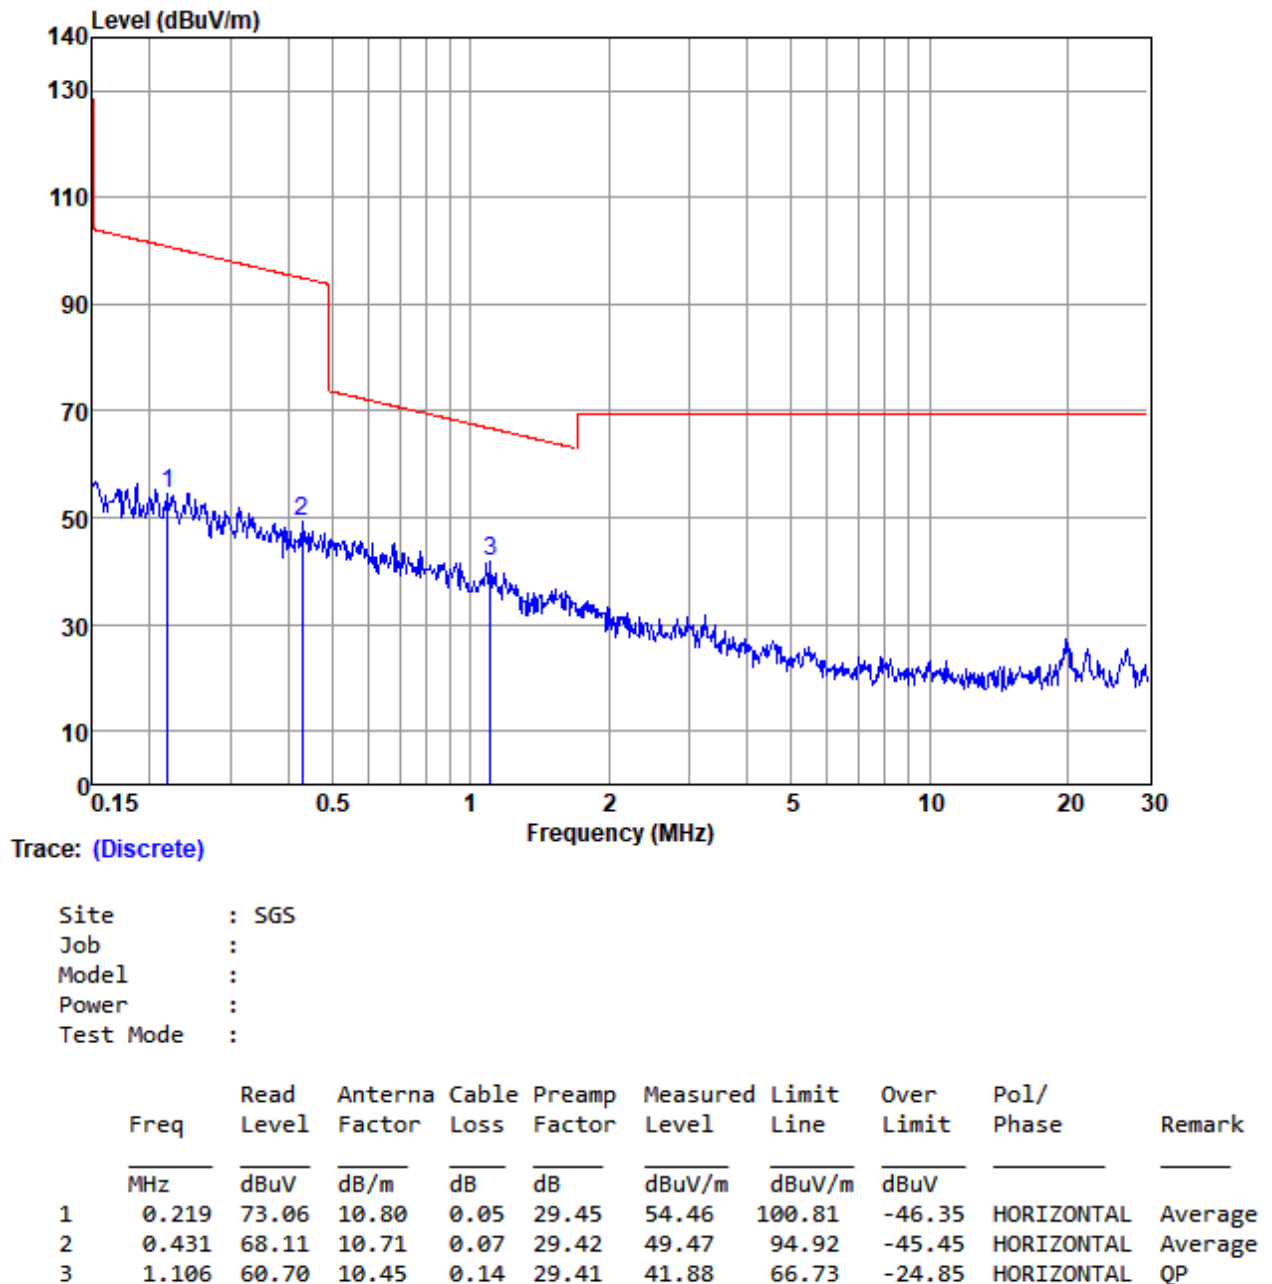

Test model: WIAWHT100008483

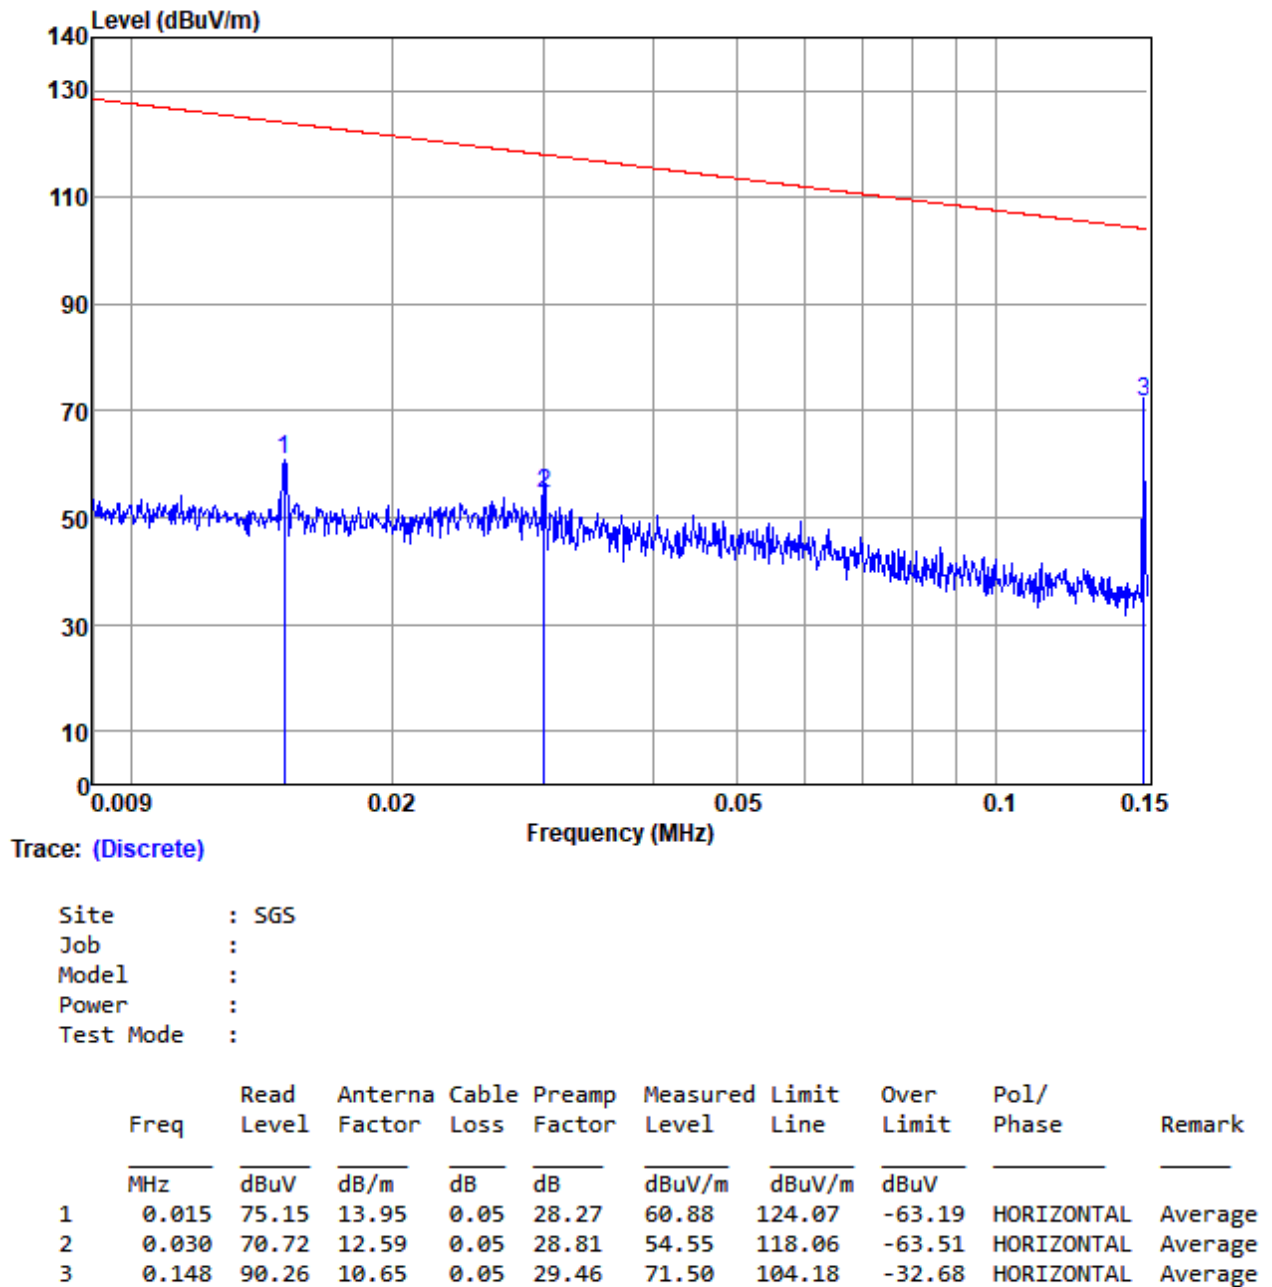

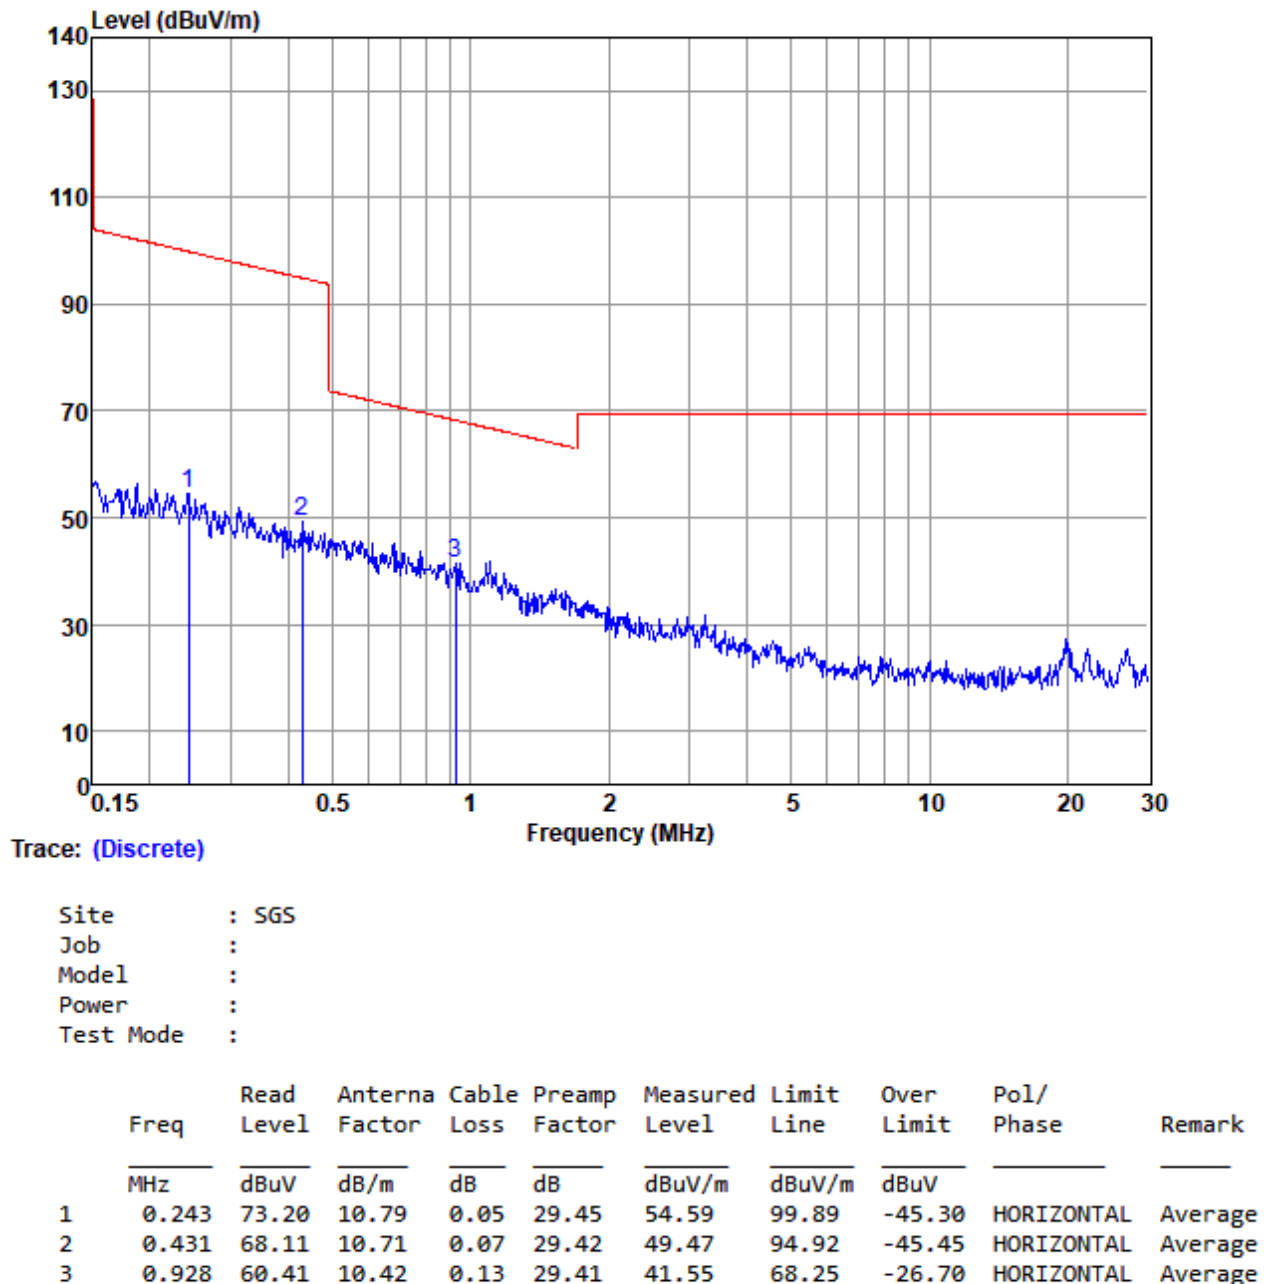

7.5 Restricted band

Test Requirement 47 CFR Part 15, Subpart C 15.205

Test Method: ANSI C63.10 (2013) Section 6.10.5

Limit:

The fundamental wave can't fall in the restricted band 90KHz-110KHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23.2 °C


Humidity: 56.8 % RH

Atmospheric Pressure: 1003 mbar


7.5.2 Test Mode Description

| Pre-scan / Final test | Mode Code | Description |
|--------------------------|--------------|---|
| Pre-scan | 00 | Charge mode_Keep the EUT charging(5W) |
| Pre-scan | 01 | Charge mode_Keep the EUT charging(7.5W) |
| Final test | 02 | Charge mode_Keep the EUT charging(10W) |

7.5.3 Test Setup Diagram

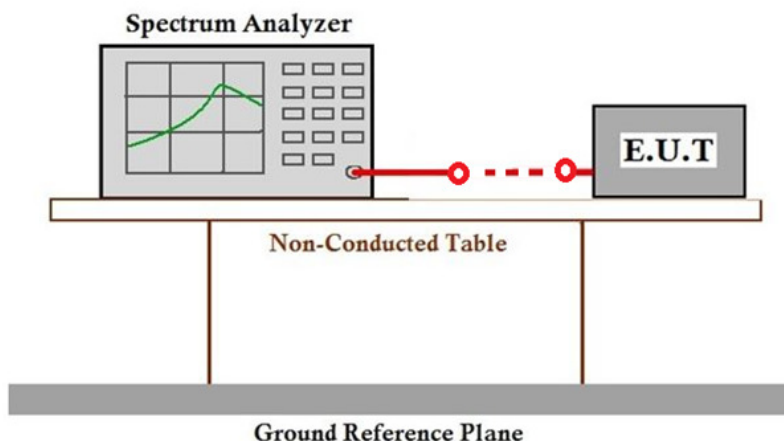

7.5.4 Measurement Procedure and Data

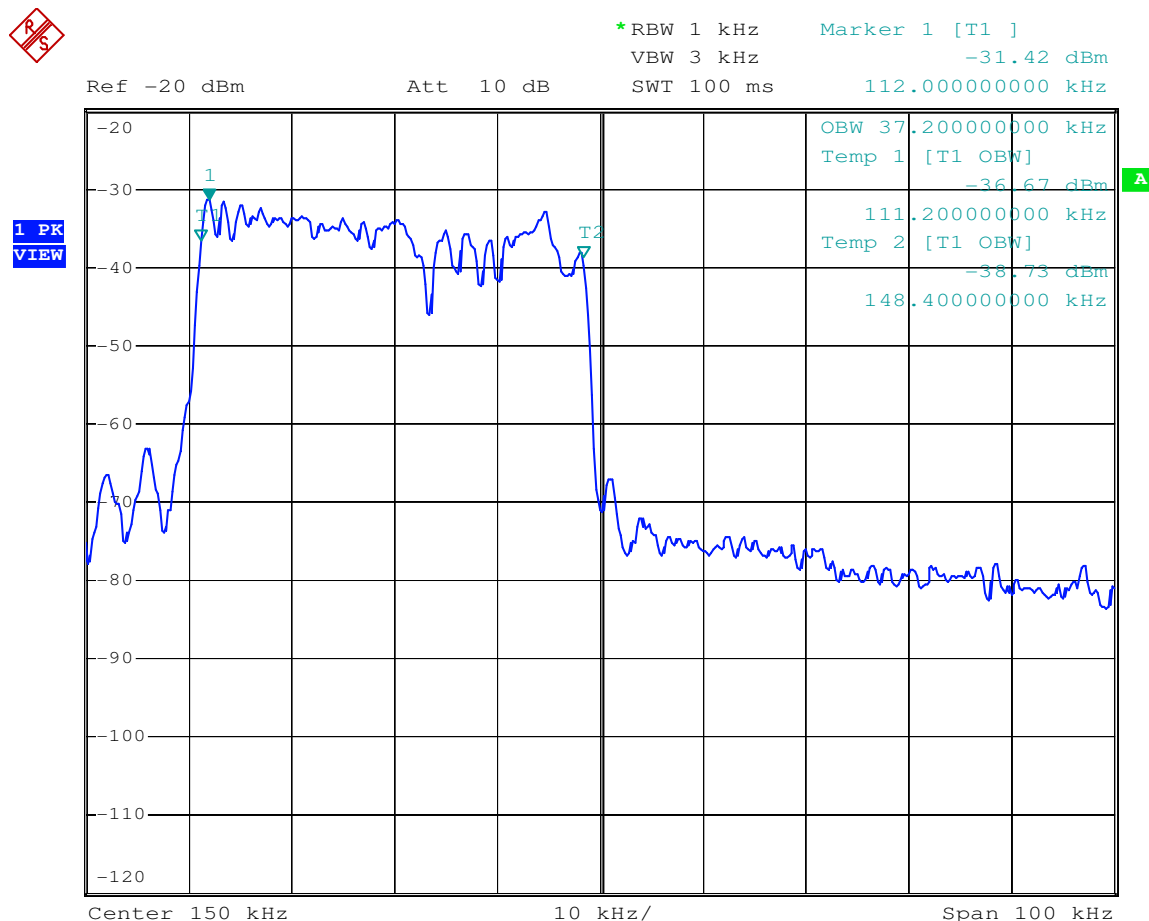


Remark: all models of the EUTs have been tested, then found the test result of WIABLK100007866 is worse, so record this result in this item.

8 Test Setup Photo


Conducted Emissions at AC Mains Power Port (150kHz-30MHz)



Radiated Emissions (30MHz-1GHz)

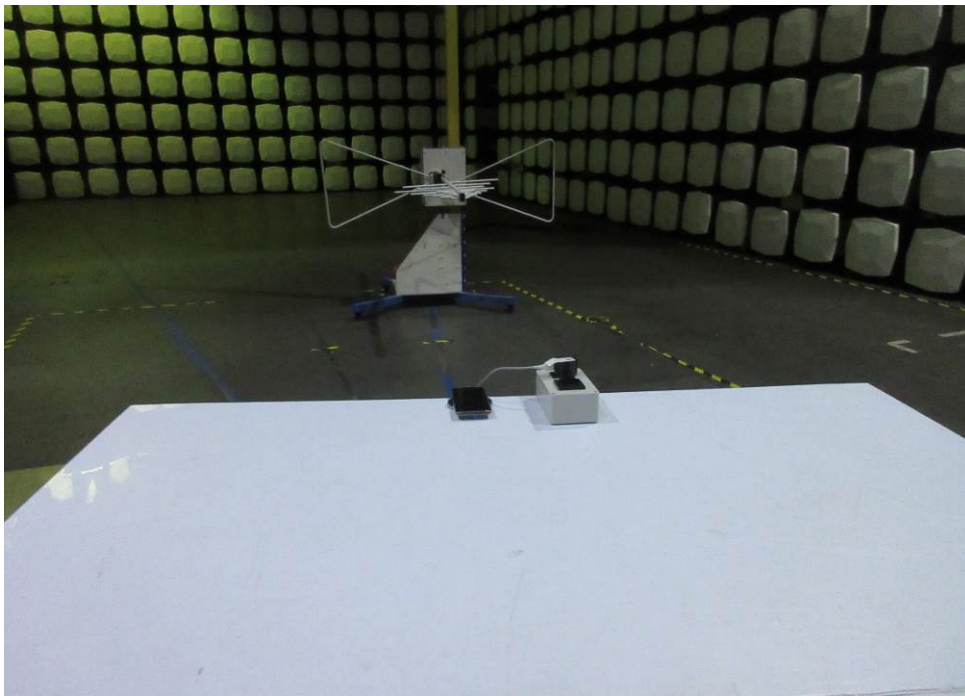

Radiated Emissions (9kHz-30MHz)

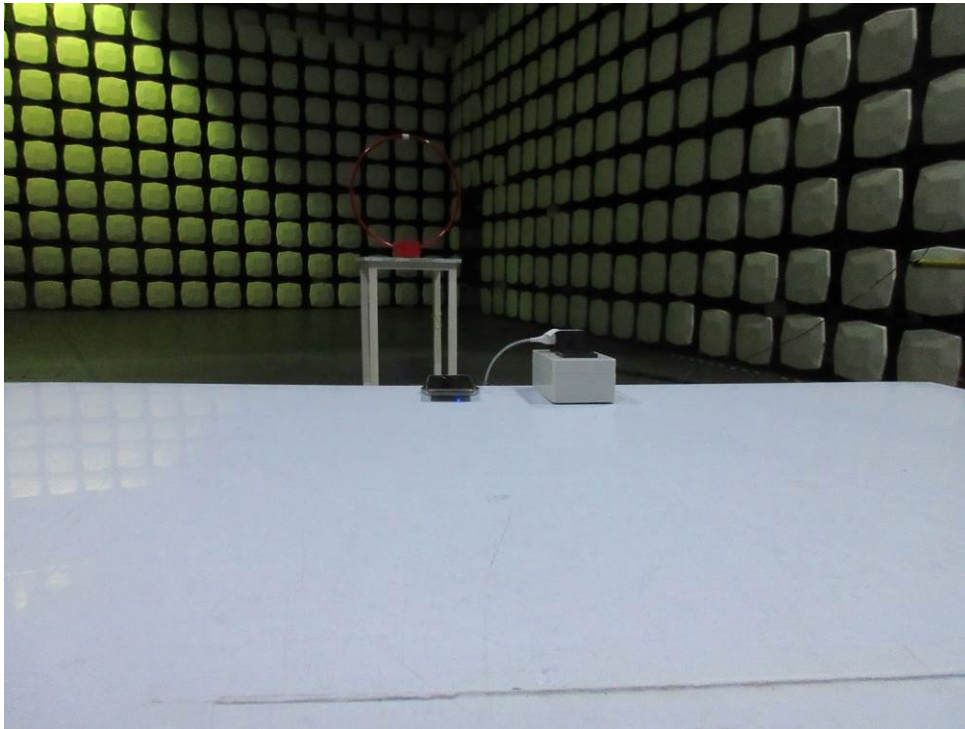

9 EUT Constructional Details (EUT Photos)

Refer to Appendix – External and Internal Photos for GZCR2112021534AT

- End of the Report -



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com