

## 8.3 MAXIMUM PEAK POWER DENSITY

### 8.3.1 Applicable Standard

According to FCC Part 15.407(a)(1) for UNII Band I

According to FCC Part 15.407(a)(2) for UNII Band II-A and UNII Band II-C

According to FCC Part 15.407(a)(3) for UNII Band III

According to 789033 D02 Section II(F)

### 8.3.2 Conformance Limit

#### ■ For the band 5.15-5.25 GHz

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### ■ For the 5.25-5.35 GHz and 5.47-5.725 GHz

(b) (2) the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### ■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1.

#### 8.3.4 Test Procedure

Methods refer to FCC KDB 789033.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set  $RBW \geq 1/T$ , where T is defined in section II.B.I.a).
- b) Set  $VBW \geq 3 RBW$ .
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/RBW)$  to the measured result, whereas  $RBW (< 500 \text{ KHz})$  is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/RBW)$  to the measured result, whereas  $RBW (< 1 \text{ MHz})$  is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections.

5.c) and 5.d) above, since  $RBW=100 \text{ KHz}$  is available on nearly all spectrum analyzers.

### 8.3.5 Test Results

Temperature : 25°C                      ATM Pressure: 1011 mbar  
Humidity : 45 %                      Test Engineer: XXH

**For 802.11a, Output Power Limit as below.**


Frequency [MHz]	Limit[dBm/MHz]
5150~5250MHz Band	11
5250~5350MHz Band	11
5470~5725MHz Band	11
5725~5850MHz Band	30

**For others, Output Power Limit as below.**

Frequency [MHz]	Limit[dBm/MHz]
5150~5250MHz Band	9.62
5250~5350MHz Band	9.62
5470~5725MHz Band	9.62
5725~5850MHz Band	28.62

TestMode	Antenna	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	2.38	≤11.00	PASS
11A	Ant1	5200	2.18	≤11.00	PASS
11A	Ant1	5240	2.38	≤11.00	PASS
11A	Ant1	5745	-3.69	≤30.00	PASS
11A	Ant1	5785	-2.94	≤30.00	PASS
11A	Ant1	5825	-2.57	≤30.00	PASS
11N20SISO	Ant1	5180	2.66	≤11.00	PASS
11N20SISO	Ant1	5200	2.39	≤11.00	PASS
11N20SISO	Ant1	5240	2.43	≤11.00	PASS
11N20SISO	Ant1	5745	-3.54	≤30.00	PASS
11N20SISO	Ant1	5785	-3.18	≤30.00	PASS
11N20SISO	Ant1	5825	-2.67	≤30.00	PASS
11N40SISO	Ant1	5190	-1.22	≤11.00	PASS
11N40SISO	Ant1	5230	-0.68	≤11.00	PASS
11N40SISO	Ant1	5755	-6.95	≤30.00	PASS
11N40SISO	Ant1	5795	-6.69	≤30.00	PASS
11AC20SISO	Ant1	5180	3.08	≤11.00	PASS
11AC20SISO	Ant1	5200	2.00	≤11.00	PASS
11AC20SISO	Ant1	5240	2.41	≤11.00	PASS
11AC20SISO	Ant1	5745	-3.79	≤30.00	PASS
11AC20SISO	Ant1	5785	-3.36	≤30.00	PASS
11AC20SISO	Ant1	5825	-2.80	≤30.00	PASS
11AC40SISO	Ant1	5190	-0.80	≤11.00	PASS
11AC40SISO	Ant1	5230	-0.52	≤11.00	PASS
11AC40SISO	Ant1	5755	-6.22	≤30.00	PASS
11AC40SISO	Ant1	5795	-6.08	≤30.00	PASS
11AC80SISO	Ant1	5210	-1.64	≤11.00	PASS
11AC80SISO	Ant1	5775	-8.29	≤30.00	PASS

## Test Graphs

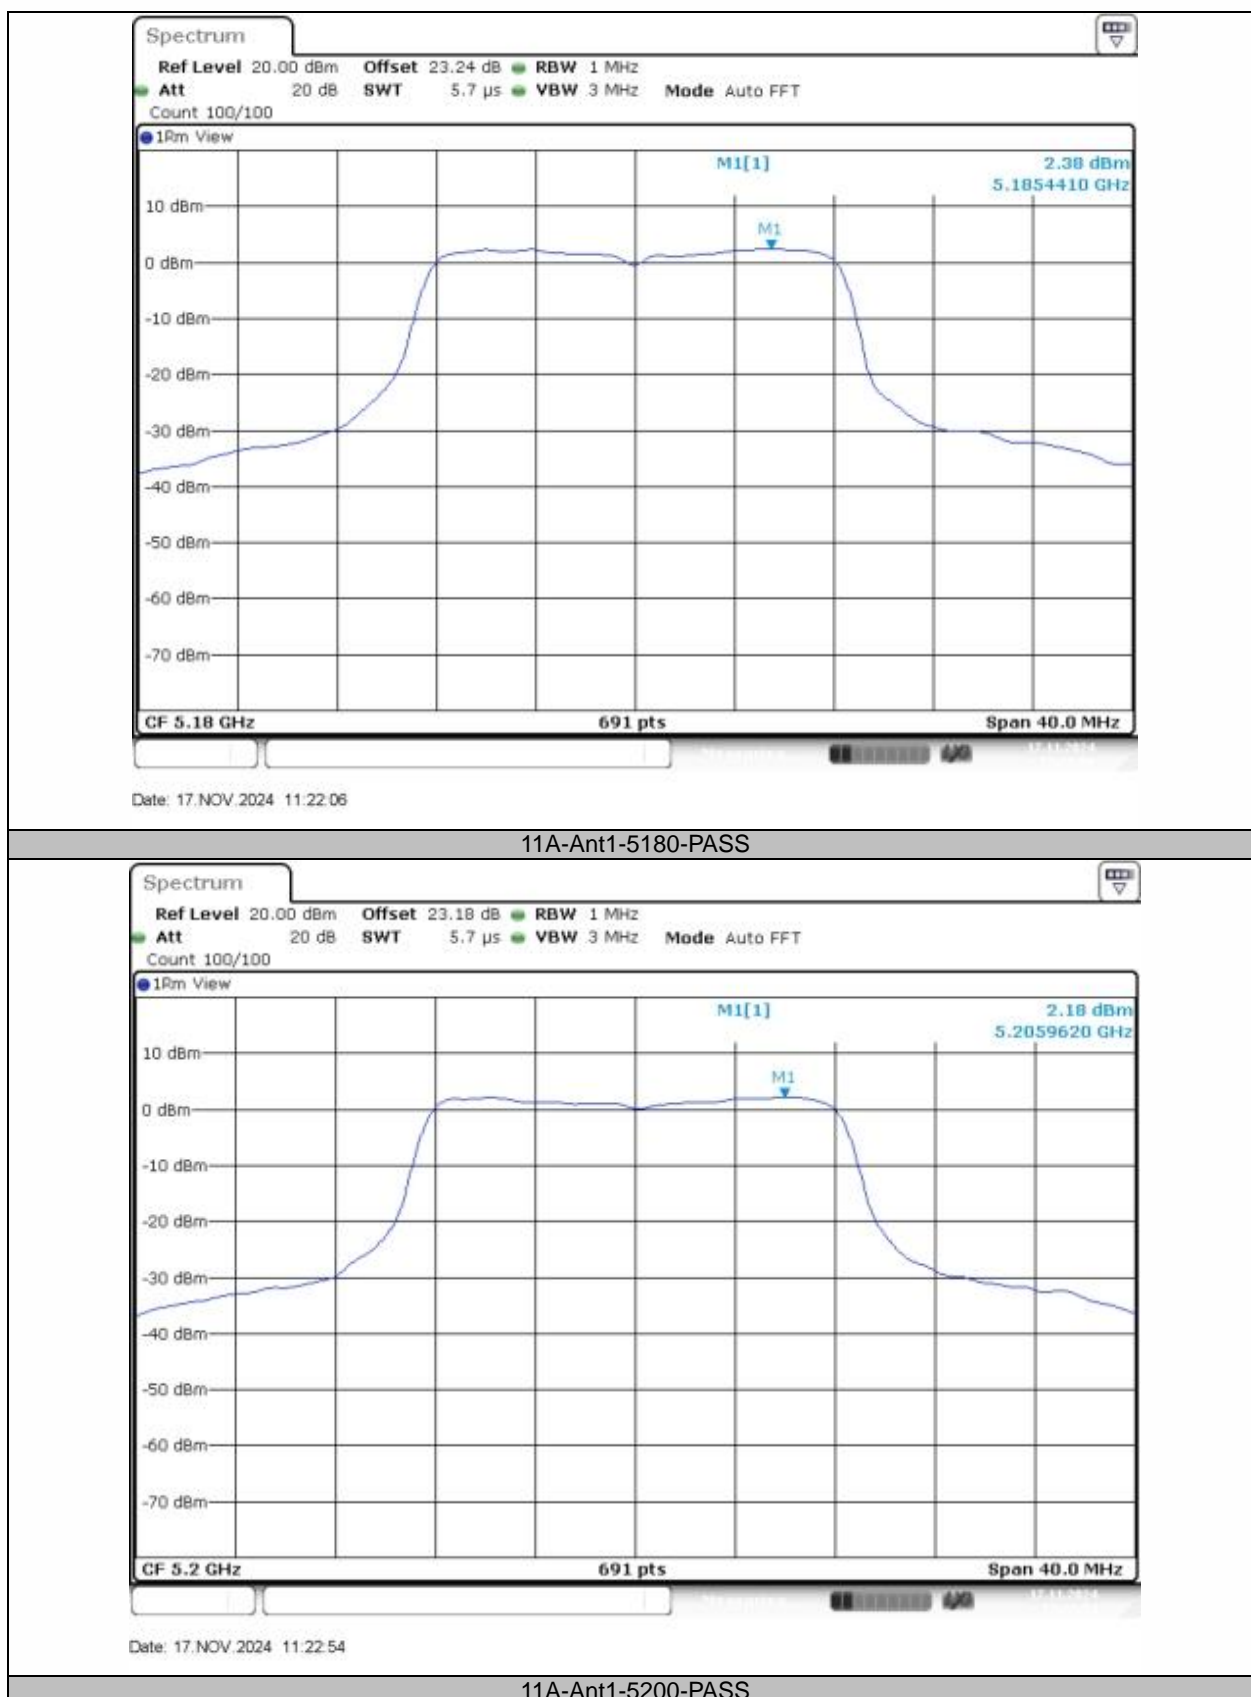




11A-Ant1-5240-PASS



11A-Ant1-5745-PASS



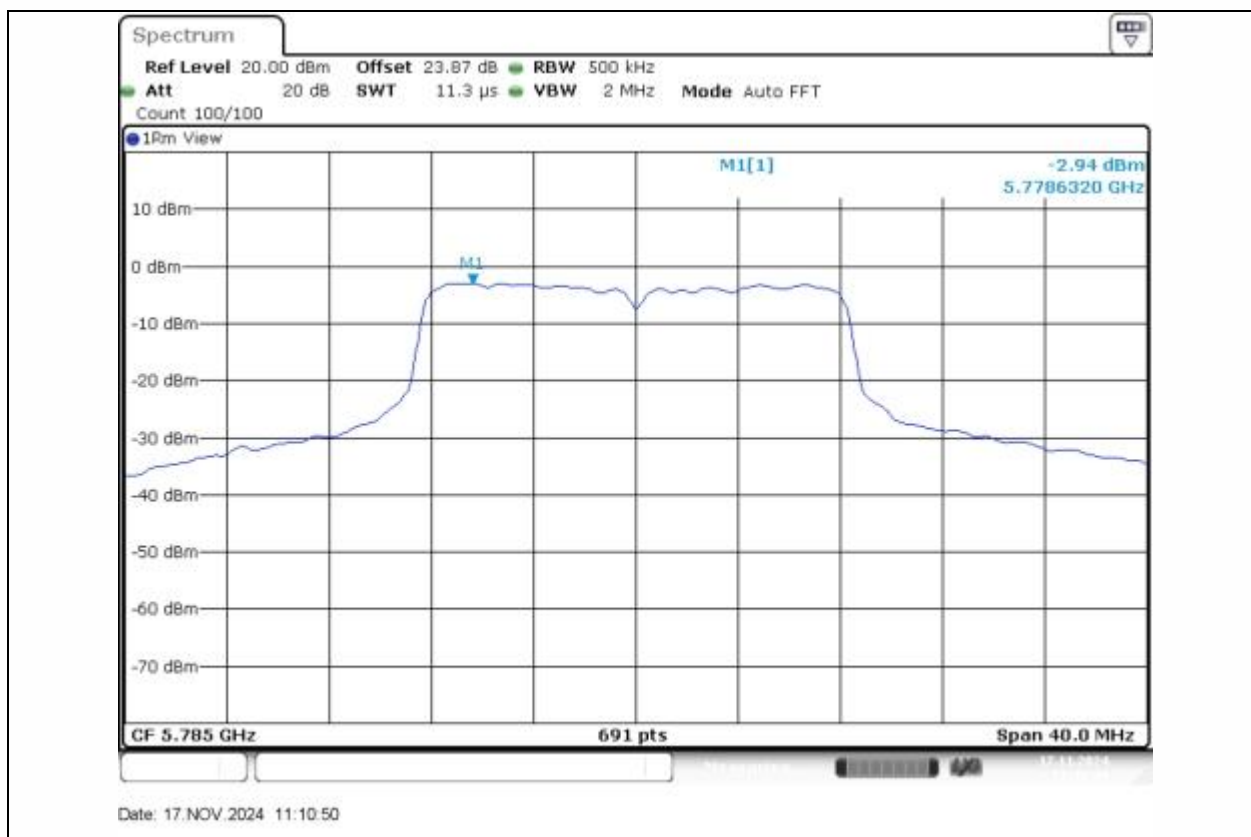

11A-Ant1-5785-PASS



11A-Ant1-5825-PASS




11N20SISO-Ant1-5180-PASS



11N20SISO-Ant1-5200-PASS




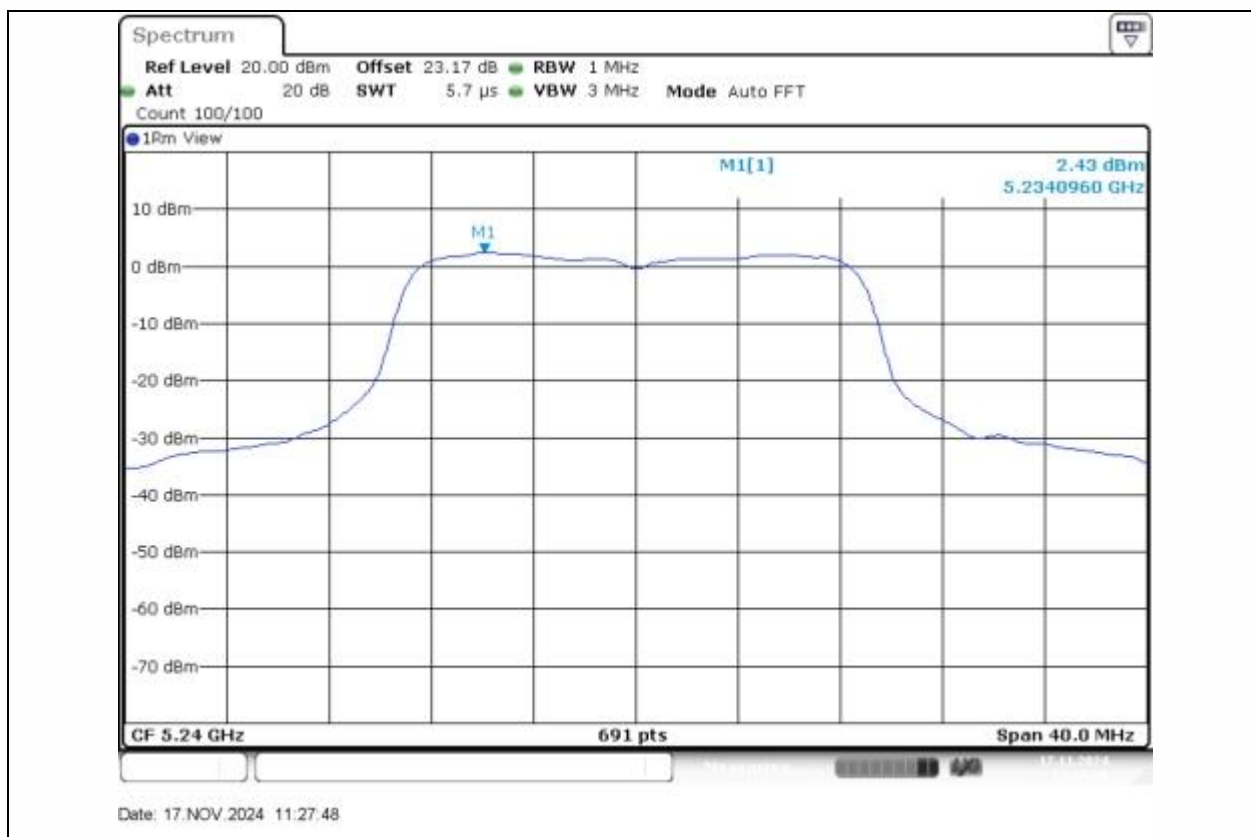

11N20SISO-Ant1-5240-PASS




11N20SISO-Ant1-5745-PASS

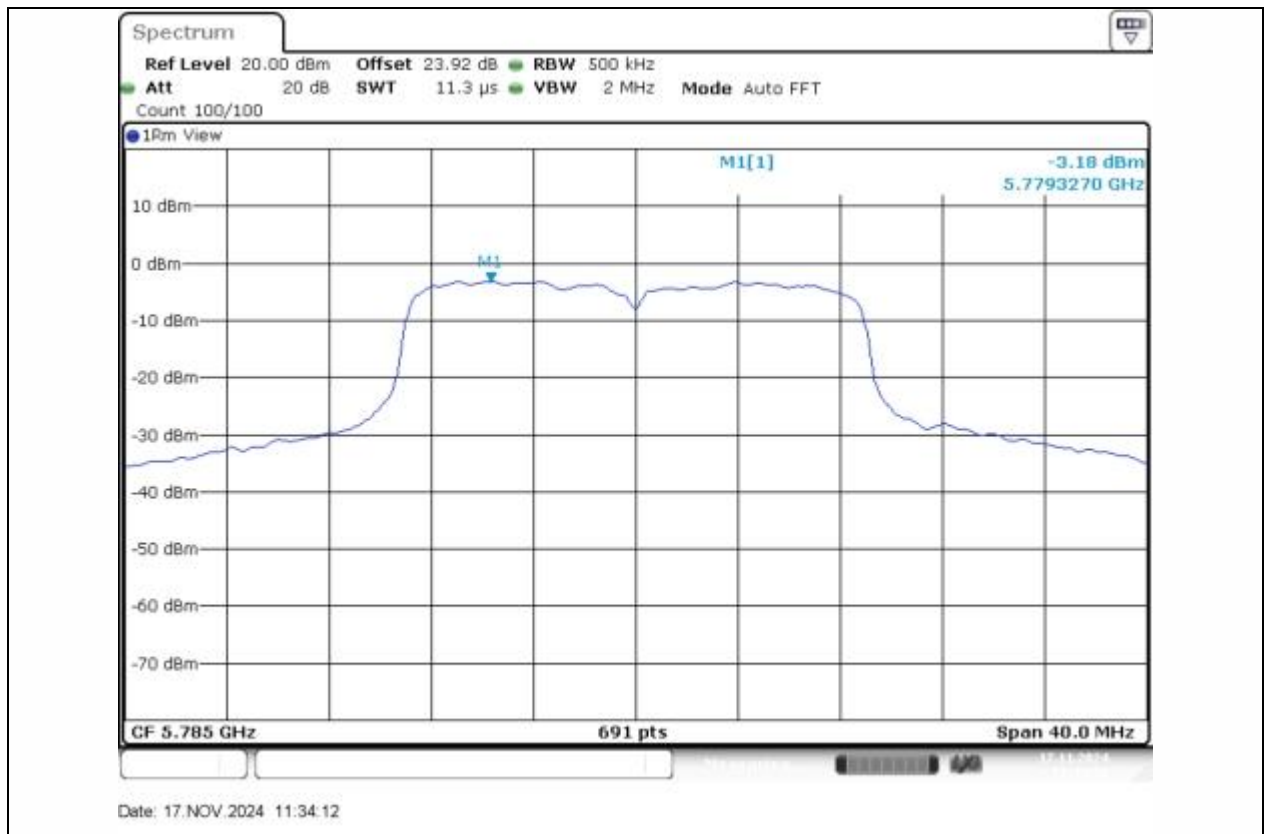

11N20SISO-Ant1-5785-PASS



11N20SISO-Ant1-5825-PASS

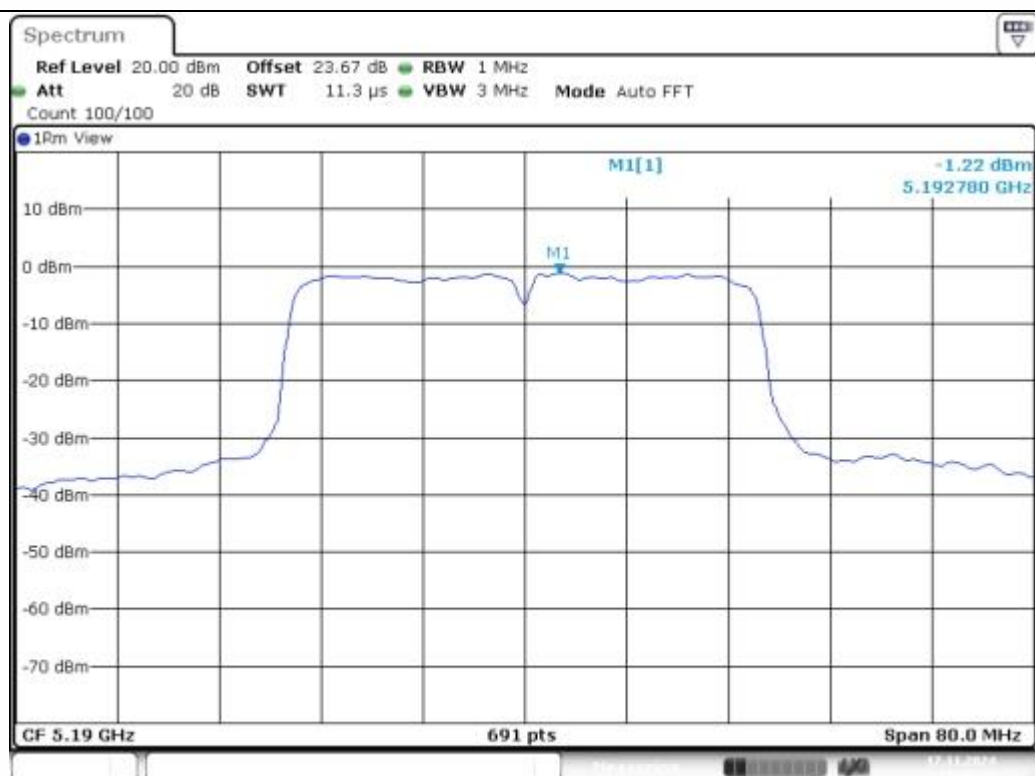


Date: 17.NOV.2024 11:40:30

11N40SISO-Ant1-5190-PASS



Date: 17.NOV.2024 11:42:18


11N40SISO-Ant1-5230-PASS

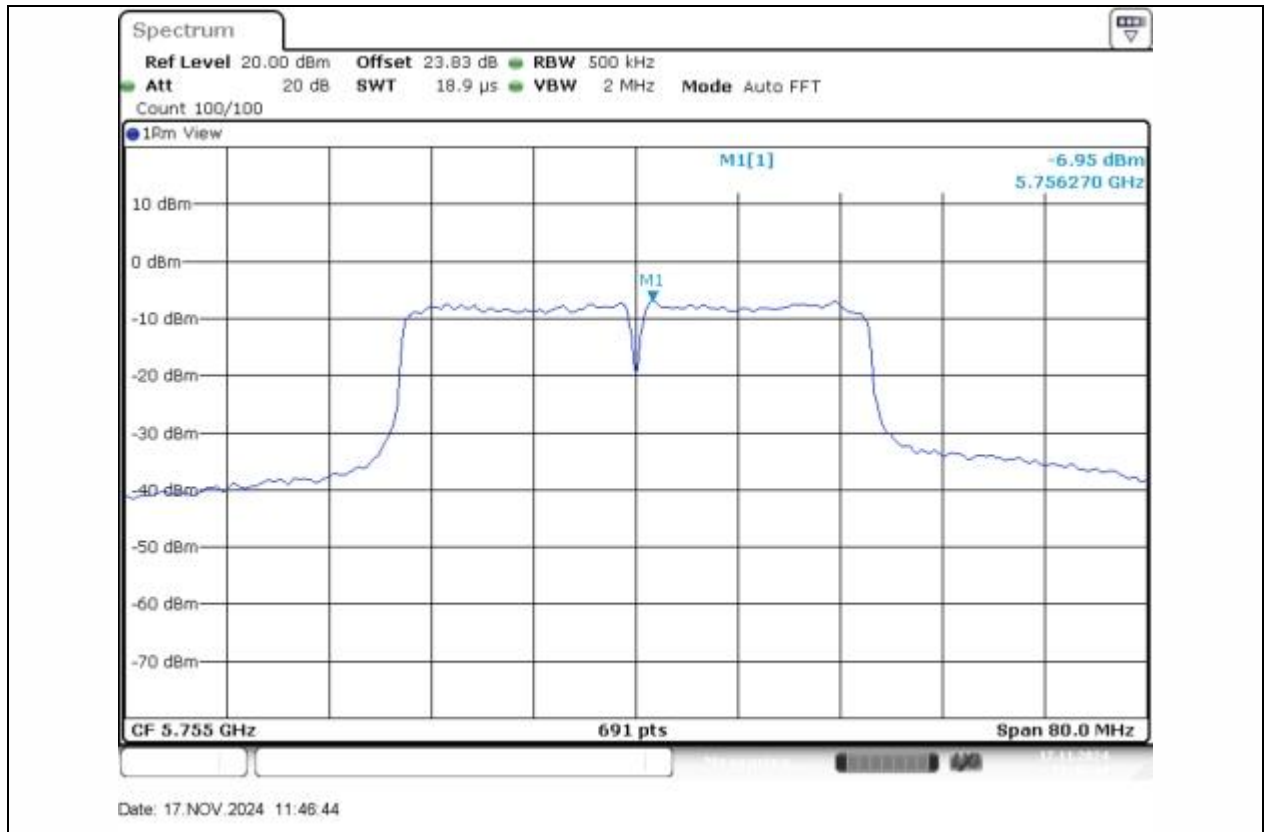

11N40SISO-Ant1-5755-PASS




11N40SISO-Ant1-5795-PASS

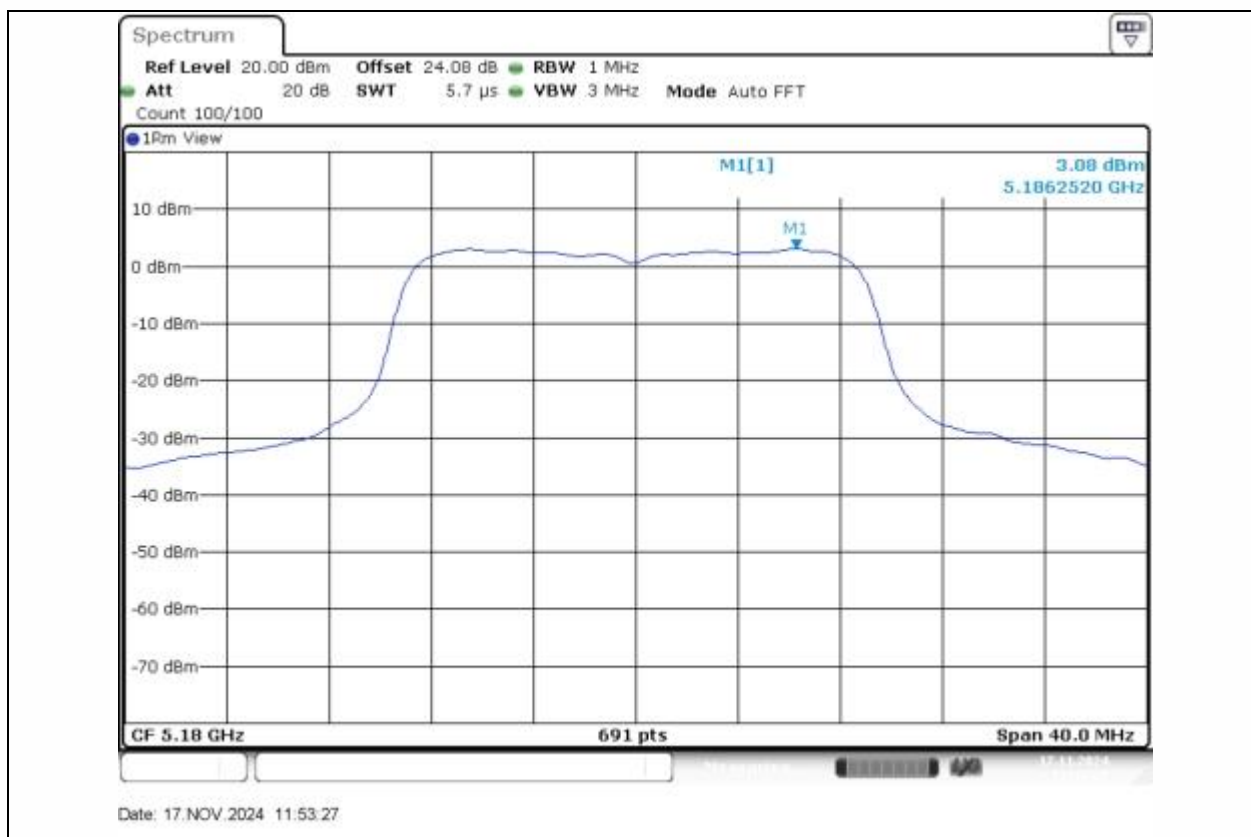

11AC20SISO-Ant1-5180-PASS



11AC20SISO-Ant1-5200-PASS

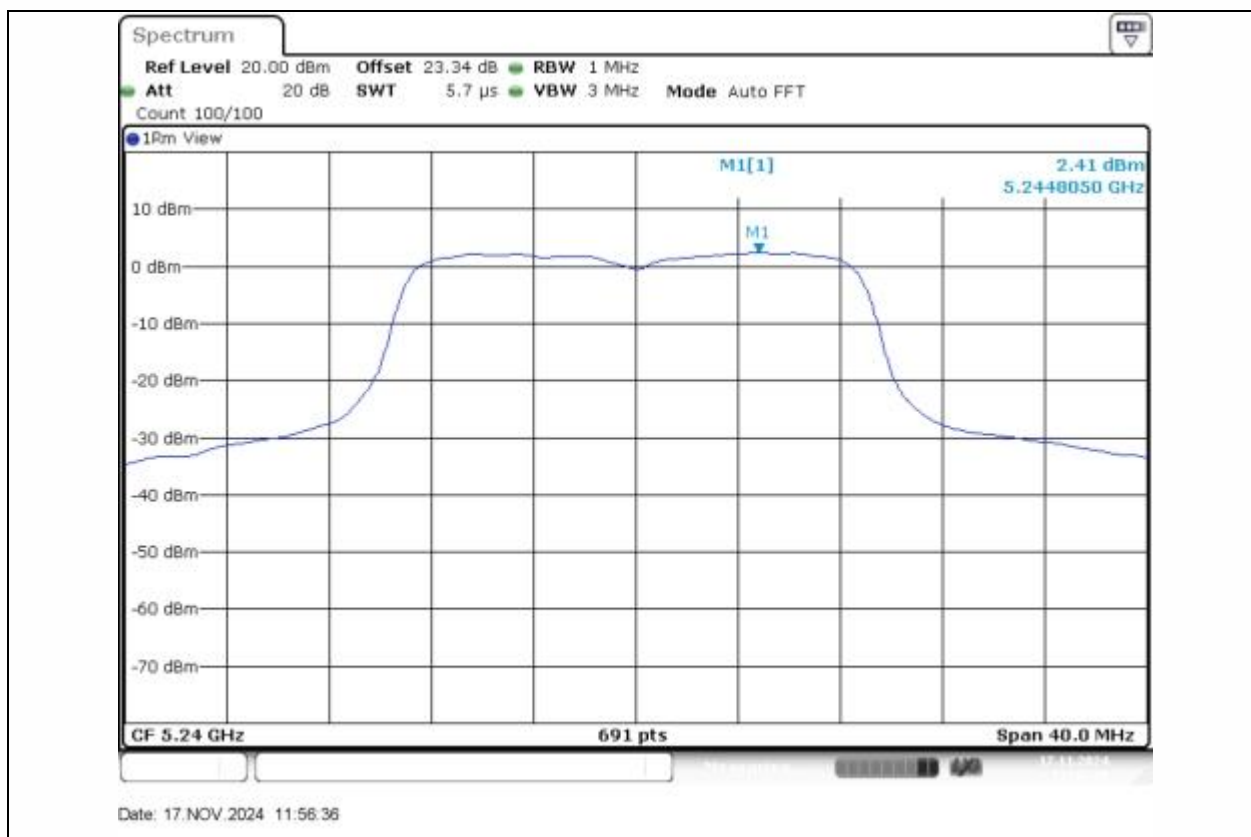


11AC20SISO-Ant1-5240-PASS



11AC20SISO-Ant1-5745-PASS



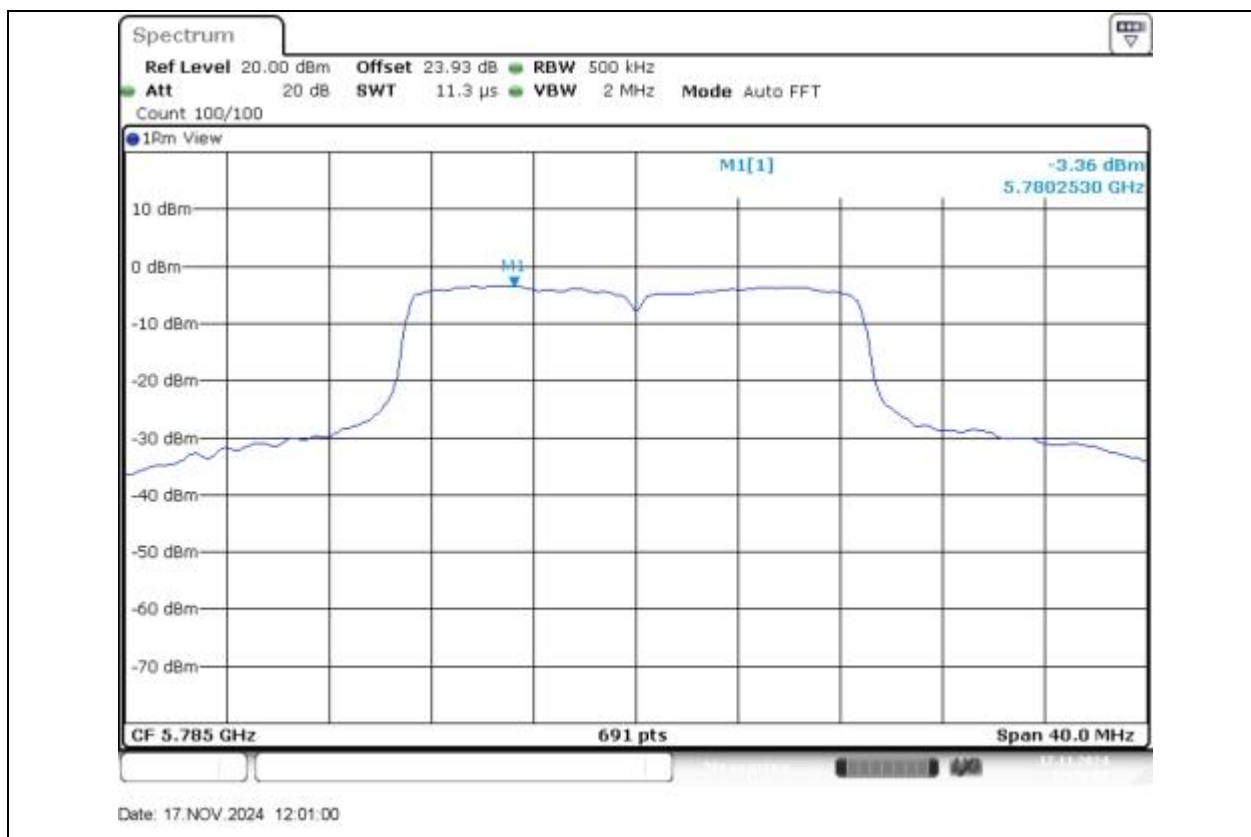

11AC20SISO-Ant1-5785-PASS



11AC20SISO-Ant1-5825-PASS




Date: 17.NOV.2024 12:06:09

11AC40SISO-Ant1-5190-PASS



Date: 17.NOV.2024 12:08:17


11AC40SISO-Ant1-5230-PASS

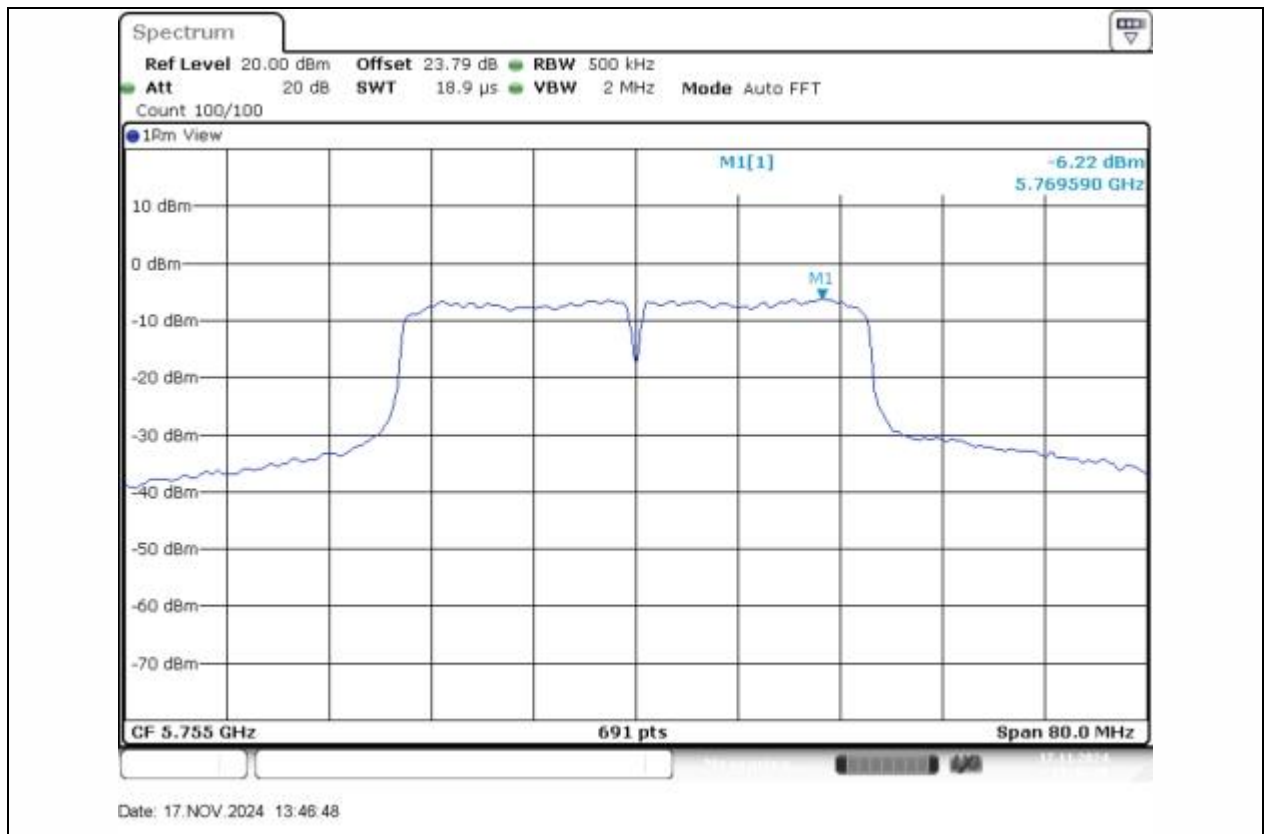

11AC40SISO-Ant1-5755-PASS




11AC40SISO-Ant1-5795-PASS

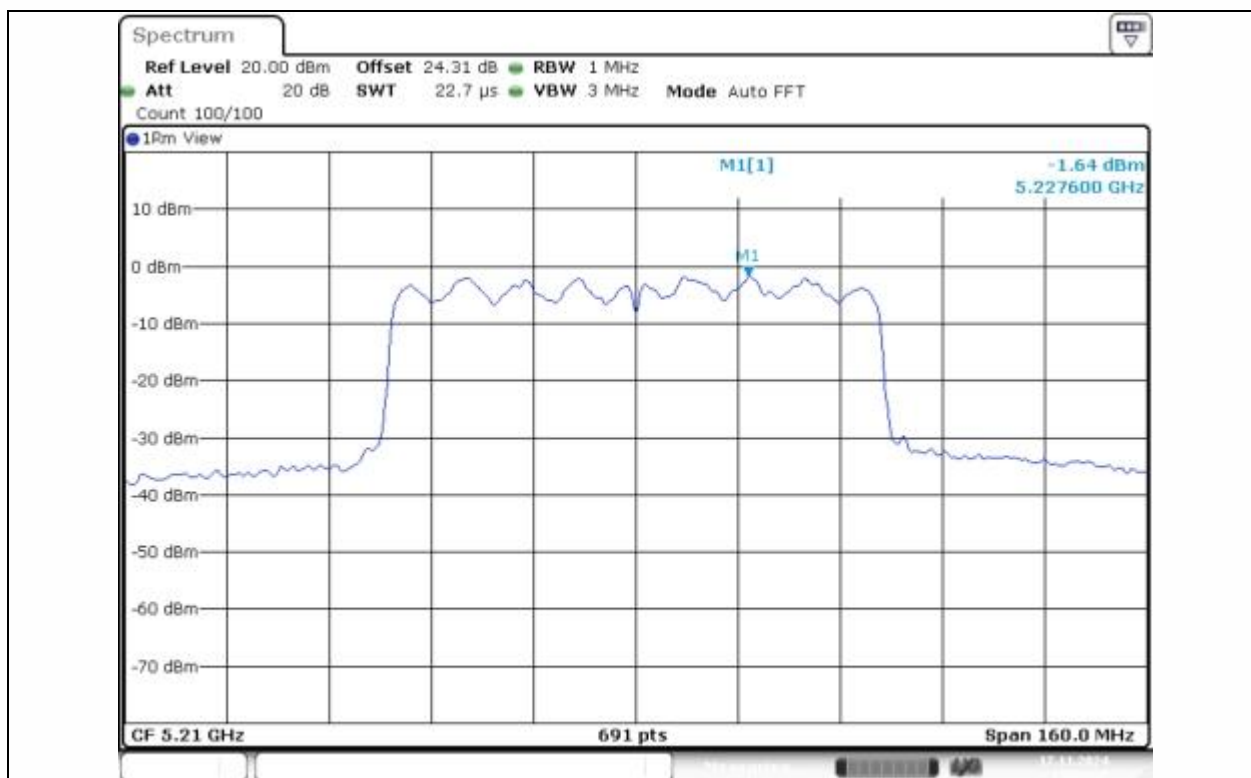

Date: 17.NOV.2024 13:52:47

11AC80SISO-Ant1-5210-PASS

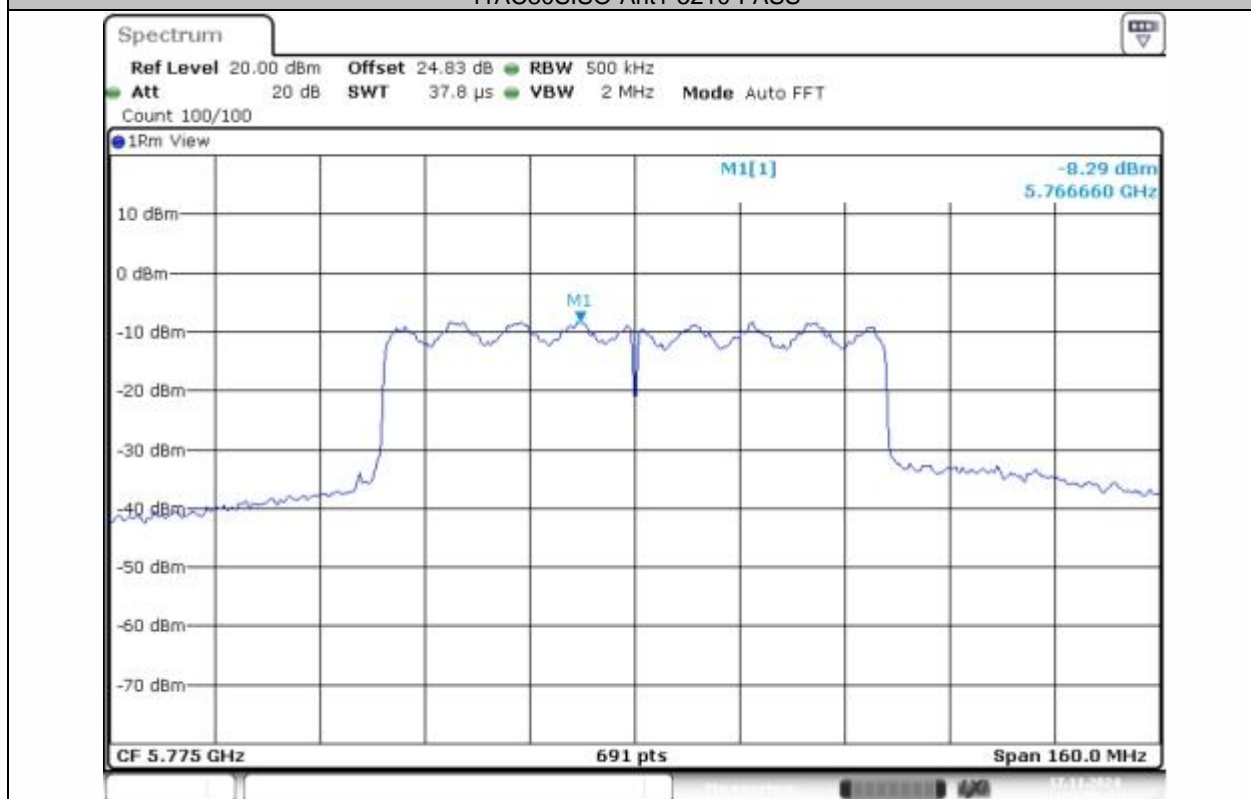

Date: 17.NOV.2024 13:55:48

11AC80SISO-Ant1-5775-PASS

## 8.4 UNDESIRABLE RADIATED SPURIOUS EMISSION

### 8.4.1 Applicable Standard

According to FCC Part 15.407 (b)  
According to 789033 D02 Section II(G)

### 8.4.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength ( $\mu\text{V/m}$ )	Field Strength (dB $\mu\text{V/m}$ )	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ( $\mu\text{V/m}$ )	300
0.490-1.705	2400/F(KHz)	20 log ( $\mu\text{V/m}$ )	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			



- Remark:
1. Emission level in dBuV/m=20 log (uV/m)
  2. Measurement was performed at an antenna to the closed point of EUT distance of     meters.
  3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of  $\xi$  15.205, and the emissions located in restricted bands also comply with 15.209 limit.

#### 8.4.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2.

#### 8.4.4 Test Procedure

##### ■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for  $f < 1$  GHz(30MHz to 1GHz), 200Hz for  $f < 150$ KHz(9KHz to 150KHz), 9KHz for  $< 30$ MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

##### ■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW  $\geq$  3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

##### ■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle  $\geq$  98 percent, set  $VBW \leq RBW/100$  (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is  $< 98$  percent, set  $VBW \geq 1/T$ , where  $T$  is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.



Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged).

#### ■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

##### Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

#### 8.4.5 Test Results

##### Pass

Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	45 %	Test Engineer:	CZF

All of the configurations or modes are tested, the data of the worst case is recorded as below.

☒ For Undesirable radiated Spurious Emission in U-NII – 1

☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All of the configurations or modes are tested, the data of the worst case is recorded in the report.

Test mode: 802.11a Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7879.94	V	55.49	-39.74	-27	12.74
9886.94	V	59.36	-35.87	-27	8.87
17311.1	V	62.64	-32.59	-27	5.59
10057.0	H	58.98	-36.25	-27	9.25
12616.8	H	61.62	-33.61	-27	6.61
16945.4	H	61.86	-33.37	-27	6.37

Test mode: 802.11a Frequency(MHz): 5200

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8483.74	V	56.09	-39.14	-27	12.14
9954.97	V	59.30	-35.93	-27	8.93
16715.8	V	62.13	-33.1	-27	6.1
8662.33	H	55.48	-39.75	-27	12.75
10065.5	H	59.25	-35.98	-27	8.98
17039.0	H	61.95	-33.28	-27	6.28

Test mode: 802.11a Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8679.33	V	56.14	-39.09	-27	12.09
10703.3	V	58.57	-36.66	-27	9.66
17574.7	V	62.44	-32.79	-27	5.79
8679.33	H	55.65	-39.58	-27	12.58
11375.1	H	58.48	-36.75	-27	9.75
17022.0	H	62.21	-33.02	-27	6.02

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3)  $EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$

d is the measurement distance in 3 meters

Test mode: 802.11a		Frequency(MHz): 5180			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7879.94	V	55.49	74.00	18.51	peak
9886.94	V	59.36	74.00	14.64	peak
17311.1	V	62.64	74.00	11.36	peak
7879.94	V	39.76	54.00	14.24	AVG
9886.94	V	41.59	54.00	12.41	AVG
17311.1	V	44.59	54.00	9.41	AVG
10057.0	H	58.98	74.00	15.02	peak
12616.8	H	61.62	74.00	12.38	peak
16945.4	H	61.86	74.00	12.14	peak
10057.0	H	46.77	54.00	7.23	AVG
12616.8	H	46.77	54.00	7.23	AVG
16945.4	H	46.11	54.00	7.89	AVG

Test mode: 802.11a		Frequency(MHz): 5200			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
8483.74	V	56.09	74.00	17.91	peak
9954.97	V	59.30	74.00	14.70	peak
16715.8	V	62.13	74.00	11.87	peak
8483.74	V	40.13	54.00	13.87	AVG
9954.97	V	42.10	54.00	11.90	AVG
16715.8	V	44.85	54.00	9.15	AVG
8662.33	H	55.48	74.00	18.52	peak
10065.5	H	59.25	74.00	14.75	peak
17039.0	H	61.95	74.00	12.05	peak
8662.33	H	42.35	54.00	11.65	AVG
10065.5	H	42.58	54.00	11.42	AVG
17039.0	H	46.31	54.00	7.69	AVG

Test mode: 802.11a		Frequency(MHz): 5240			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
8679.33	V	56.14	74.00	17.86	peak
10703.3	V	58.57	74.00	15.43	peak
17574.7	V	62.44	74.00	11.56	peak
8679.33	V	42.36	54.00	11.64	AVG
10703.3	V	45.62	54.00	8.38	AVG
17574.7	V	46.73	54.00	7.27	AVG
8679.33	H	55.65	74.00	18.35	peak
11375.1	H	58.48	74.00	15.52	peak
17022.0	H	62.21	74.00	11.79	peak
8679.33	H	42.70	54.00	11.30	AVG
11375.1	H	43.61	54.00	10.39	AVG
17022.0	H	46.69	54.00	7.31	AVG

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Test mode: 802.11ac(20) Frequency(MHz): 5180

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5149.83	H	55.95	-39.28	-27	Pass
5148.86	V	60.46	-34.77	-27	Pass

Test mode: 802.11ac(20) Frequency(MHz): 5240

Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5352.42	H	52.09	-43.14	-27	Pass
5352.24	V	52.34	-42.89	-27	Pass

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp  
(4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
d is the measurement distance in 3 meters

Test mode: 802.11ac(20) Frequency(MHz): 5180


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
5148.86	V	60.46	74.00	13.54	peak
5148.86	V	45.53	54.00	8.47	AVG
5149.83	H	55.95	74.00	18.05	peak
5149.83	H	40.45	54.00	13.55	AVG

Test mode: 802.11ac(20) Frequency(MHz): 5240


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
5352.24	V	52.34	74.00	21.66	peak
5352.24	V	39.40	54.00	14.60	AVG
5352.42	H	52.09	74.00	21.91	peak
5352.42	H	39.95	54.00	14.05	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp  
(4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


Test Model U-NII - 1  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐802.11a ☒802.11ac(HT20) ☐802.11n(HT40)  
☒5180 ☐5200 ☐5240 Ant.Pol H

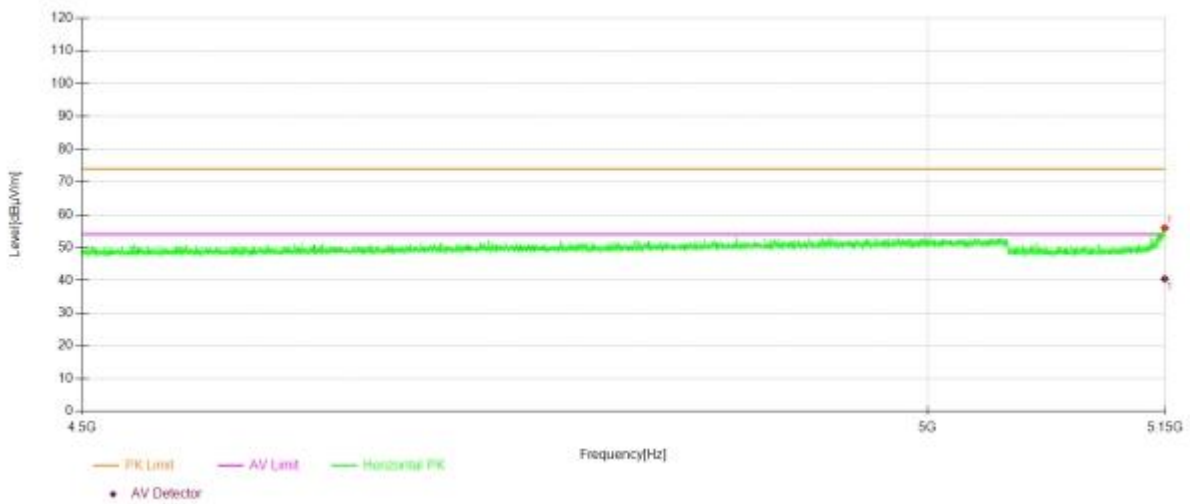


Test Model U-NII - 1  
Undesirable radiated Spurious Emission in Restricted Band (5100-5150MHz)  
☐802.11a ☒802.11ac(HT20) ☐802.11n(HT40)  
☒5180 ☐5200 ☐5240 Ant.Pol V

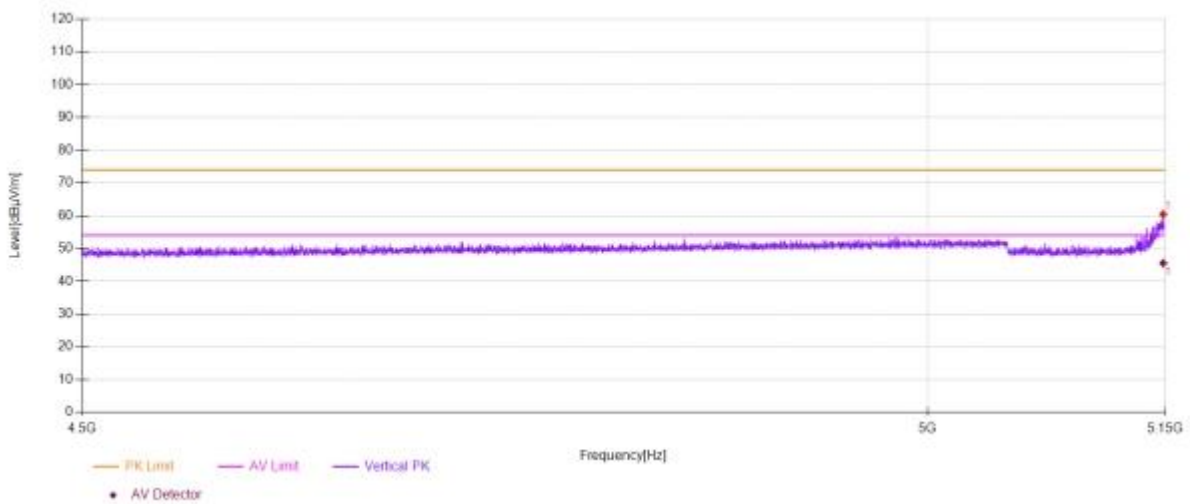

U-NII - 1				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )			
	<input type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11 ac(HT20)	<input type="checkbox"/> 802.11n(HT40)	
	<input type="checkbox"/> 5180	<input type="checkbox"/> 5200	<input checked="" type="checkbox"/> 5240	Ant.Pol H

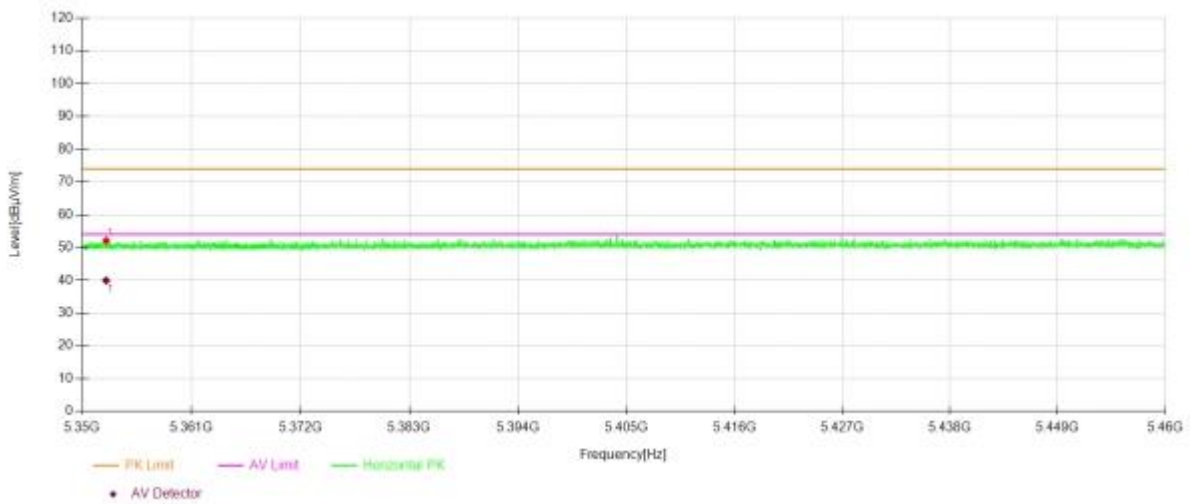

U-NII - 1				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (5350-5400MHz )			
	<input type="checkbox"/> 802.11a	<input checked="" type="checkbox"/> 802.11 ac(HT20)	<input type="checkbox"/> 802.11n(HT40)	
	<input type="checkbox"/> 5180	<input type="checkbox"/> 5200	<input checked="" type="checkbox"/> 5240	Ant.Pol V

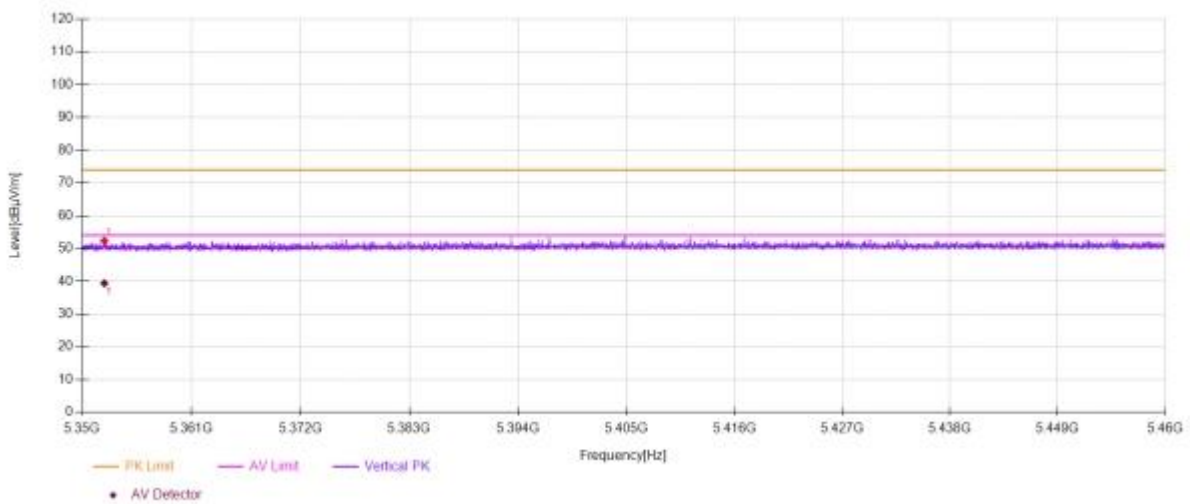



☒ For Undesirable radiated Spurious Emission in U-NII -3

☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

All of the configurations or modes are tested, the data of the worst case is recorded in the report.

Test mode:		Frequency(MHz): 5745			
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
7888.44	V	55.40	-39.83	-27	12.83
9886.94	V	59.12	-36.11	-27	9.11
16528.7	V	62.02	-33.21	-27	6.21
8143.57	H	55.52	-39.71	-27	12.71
11383.6	H	59.13	-36.1	-27	9.1
16843.4	H	62.59	-32.64	-27	5.64

Test mode:		Frequency(MHz): 5785			
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8713.35	V	56.10	-39.13	-27	12.13
9988.99	V	59.84	-35.39	-27	8.39
17277.1	V	62.01	-33.22	-27	6.22
8415.70	H	55.78	-39.45	-27	12.45
10074.0	H	59.67	-35.56	-27	8.56
17566.2	H	61.53	-33.7	-27	6.7

Test mode:		Frequency(MHz): 5825			
Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8007.50	V	55.19	-40.04	-27	13.04
10091.0	V	58.90	-36.33	-27	9.33
17821.4	V	62.53	-32.7	-27	5.7
8398.69	H	55.36	-39.87	-27	12.87
9988.99	H	58.52	-36.71	-27	9.71
16554.27	H	60.20	-35.03	-27	8.03

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and AV Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

Test mode: 802.11a		Frequency(MHz): 5745			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7888.44	V	55.40	74.00	18.60	peak
9886.94	V	59.12	74.00	14.88	peak
16528.7	V	62.02	74.00	11.98	peak
7888.44	V	39.74	54.00	14.26	AVG
9886.94	V	41.37	54.00	12.63	AVG
16528.7	V	45.06	54.00	8.94	AVG
8143.57	H	55.52	74.00	18.48	peak
11383.6	H	59.13	74.00	14.87	peak
16843.4	H	62.59	74.00	11.41	peak
8143.57	H	40.73	54.00	13.27	AVG
11383.6	H	43.59	54.00	10.41	AVG
16843.4	H	44.53	54.00	9.47	AVG

Test mode: 802.11a		Frequency(MHz): 5785			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
8713.35	V	56.10	74.00	17.90	peak
9988.99	V	59.84	74.00	14.16	peak
17277.1	V	62.01	74.00	11.99	peak
8713.35	V	42.61	54.00	11.39	AVG
9988.99	V	41.92	54.00	12.08	AVG
17277.1	V	44.89	54.00	9.11	AVG
8415.70	H	55.78	74.00	18.22	peak
10074.0	H	59.67	74.00	14.33	peak
17566.2	H	61.53	74.00	12.47	peak
8415.70	H	40.61	54.00	13.39	AVG
10074.0	H	42.19	54.00	11.81	AVG
17566.2	H	47.14	54.00	6.86	AVG

Test mode: 802.11a		Frequency(MHz): 5825			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
8007.50	V	55.19	74.00	18.81	peak
10091.0	V	58.90	74.00	15.10	peak
17821.4	V	62.53	74.00	11.47	peak
8007.50	V	40.00	54.00	14.00	AVG
10091.0	V	43.20	54.00	10.80	AVG
17821.41	V	46.45	54.00	7.55	AVG
8398.69	H	55.36	74.00	18.64	peak
9988.99	H	58.52	74.00	15.48	peak
16554.2	H	60.20	74.00	13.80	peak
8398.69	H	40.89	54.00	13.11	AVG
9988.99	H	41.44	54.00	12.56	AVG
16554.2	H	44.72	54.00	9.28	AVG

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
  - (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
  - (3) Correct Factor= Ant\_F + Cab\_L - Preamp
  - (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


☒ Undesirable radiated Spurious Emission in band edge

Test mode:		Frequency:			
802.11ac(20)		5745			
Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5724.81	H	80.79	-14.44	-27	PASS
5724.68	V	74.76	-20.47	-27	PASS


Test mode:		Frequency:			
802.11ac(20)		5825			
Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5850.18	H	77.26	-17.97	-27	PASS
5850.31	V	74.31	-20.92	-27	PASS

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.  
 (3) Correct Factor= Ant\_F + Cab\_L - Preamp  
 (4) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77  
 d is the measurement distance in 3 meters

U-NII -3				
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge	
	<input type="checkbox"/> 802.11a	<input type="checkbox"/> 802.11n(HT20)	<input checked="" type="checkbox"/> 802.11 ac (VHT20)	
	<input checked="" type="checkbox"/> 5745		Ant.Pol	H

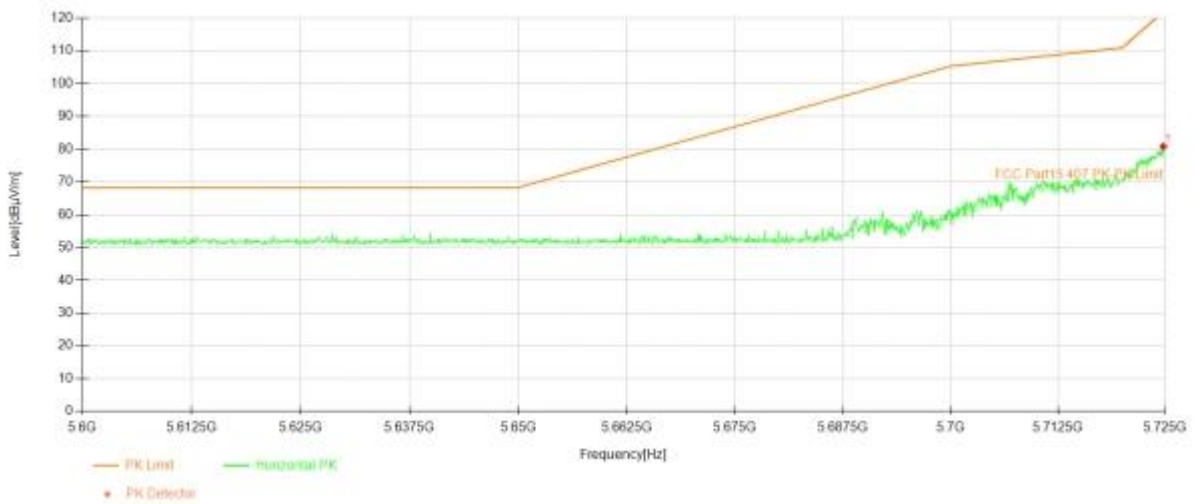


U-NII -3				
Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge	
	<input type="checkbox"/> 802.11a	<input type="checkbox"/> 802.11n(HT20)	<input checked="" type="checkbox"/> 802.11 ac (VHT20)	
	<input checked="" type="checkbox"/> 5745		Ant.Pol	V

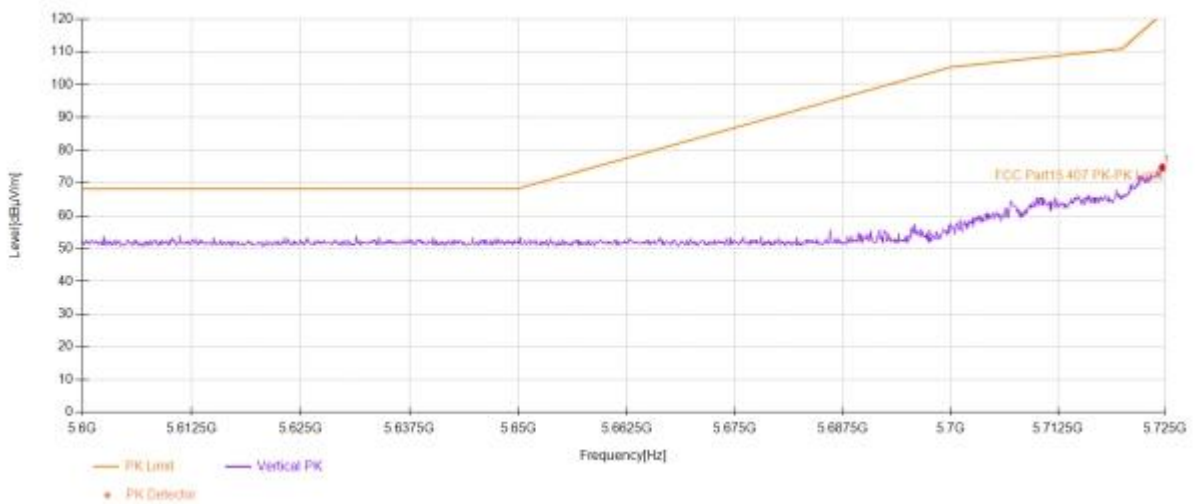


U-NII -3

Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	<input type="checkbox"/> 802.11a	<input type="checkbox"/> 802.11n(HT20)	<input checked="" type="checkbox"/> 802.11 ac (VHT20)
	<input checked="" type="checkbox"/> 5825		Ant.Pol H

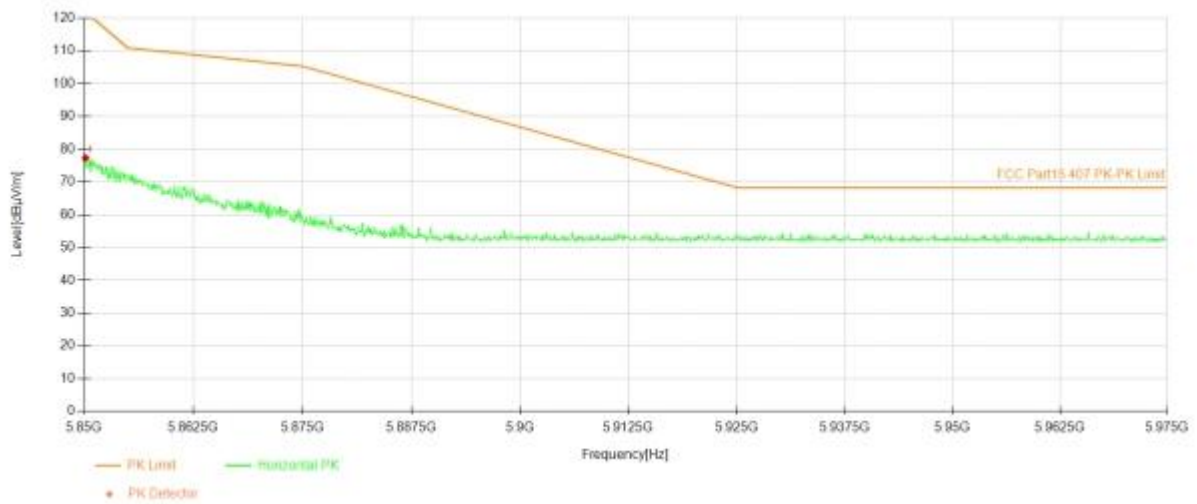

U-NII -3


Test Model	Undesirable radiated	Undesirable radiated	Spurious Emission in Band Edge
	<input type="checkbox"/> 802.11a	<input type="checkbox"/> 802.11n(HT20)	<input checked="" type="checkbox"/> 802.11 ac (VHT20)
	<input checked="" type="checkbox"/> 5825		Ant.Pol V

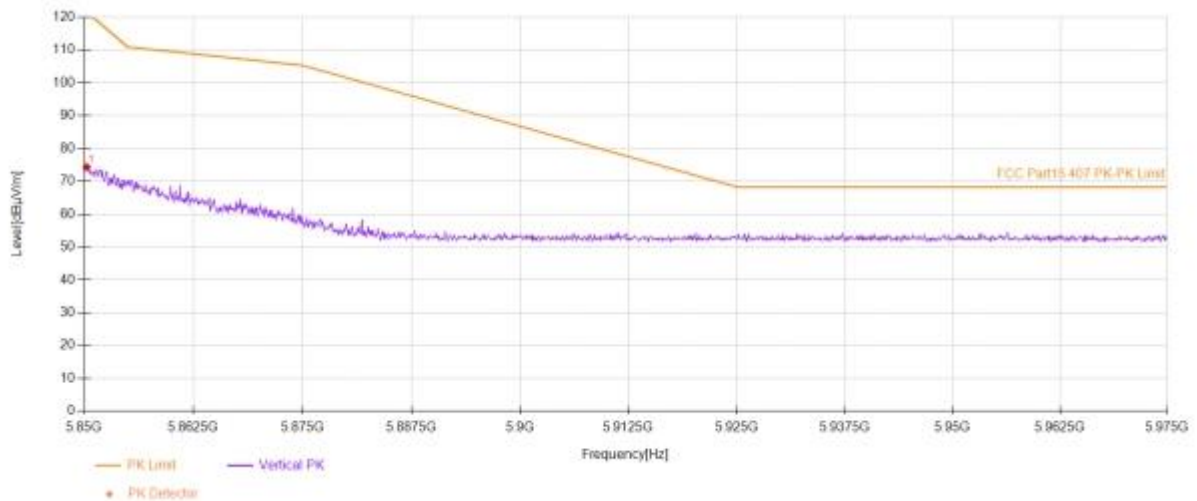

## Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

All of the configurations or modes are tested, the data of the worst case is recorded as below.


Test mode: 802.11a Frequency(MHz): 5180

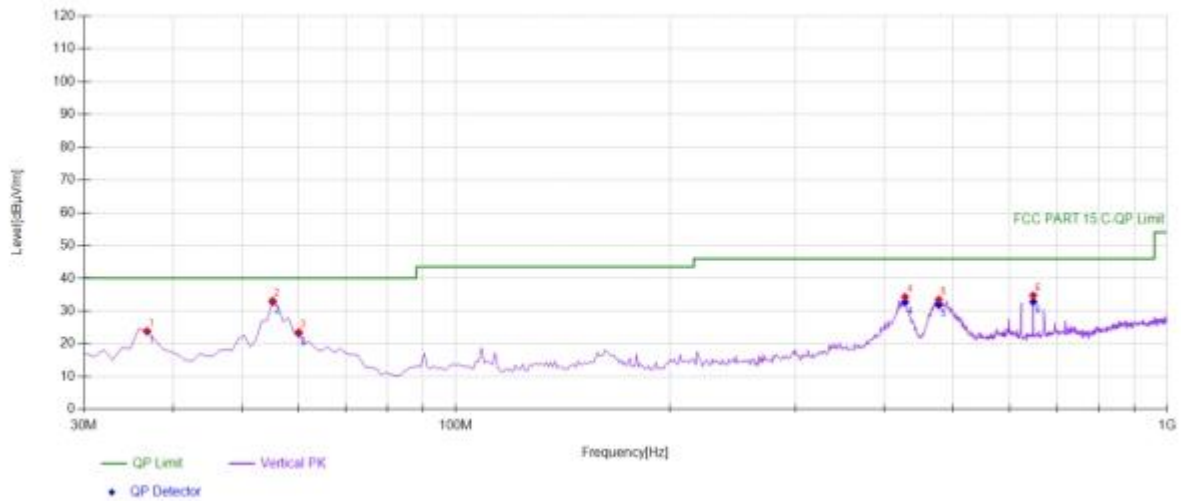

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	41.75	-17.91	23.84	PK	40.00	16.16	Vertical
2	55.2452	49.95	-16.80	33.15	PK	40.00	6.85	Vertical
3	60.1001	41.05	-17.46	23.59	PK	40.00	16.41	Vertical
4	428.098	45.95	-11.62	34.33	PK	46.00	11.67	Vertical
5	477.617	43.66	-10.19	33.47	PK	46.00	12.53	Vertical
6	648.508	42.07	-7.29	34.78	PK	46.00	11.22	Vertical

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.82	40.00	16.18
2	55.2452	-16.80	32.81	40.00	7.19
3	60.1001	-17.46	23.25	40.00	16.75
4	428.0981	-11.62	32.70	46.00	13.30
5	477.6176	-10.19	31.84	46.00	14.16
6	648.5085	-7.29	32.83	46.00	13.17



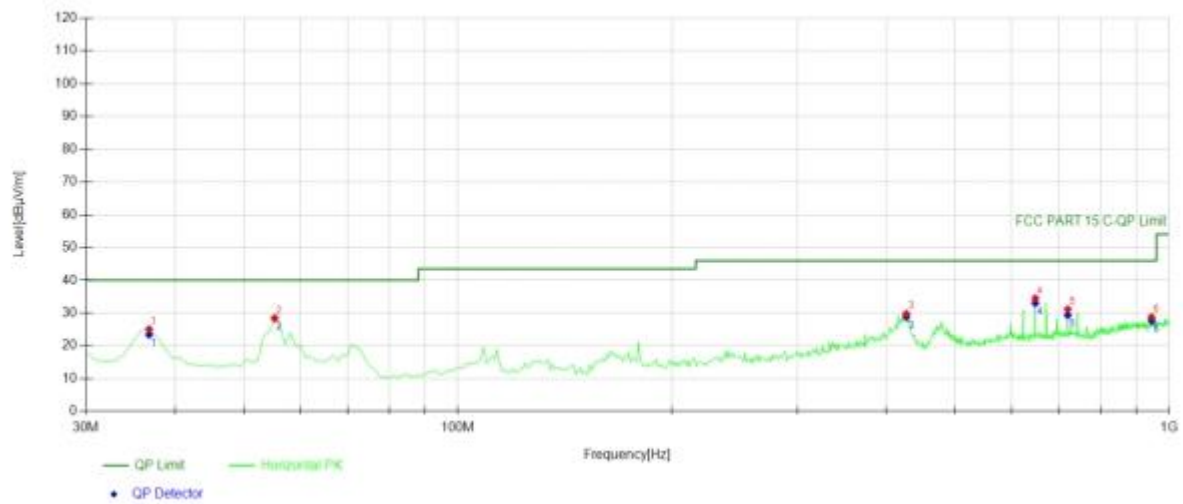


## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	43.01	-17.91	25.10	PK	40.00	14.90	Horizontal
2	55.2452	45.24	-16.80	28.44	PK	40.00	11.56	Horizontal
3	427.127	41.44	-11.65	29.79	PK	46.00	16.21	Horizontal
4	648.508	41.80	-7.29	34.51	PK	46.00	11.49	Horizontal
5	720.360	37.35	-6.19	31.16	PK	46.00	14.84	Horizontal
6	944.654	32.07	-3.28	28.79	PK	46.00	17.21	Horizontal

## Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.43	40.00	16.57
2	55.2452	-16.80	28.44	40.00	11.56
3	427.1271	-11.65	28.90	46.00	17.10
4	648.5085	-7.29	33.05	46.00	12.95
5	720.3604	-6.19	29.38	46.00	16.62
6	944.6547	-3.28	27.72	46.00	18.28

Test mode: 802.11a Frequency(MHz): 5200

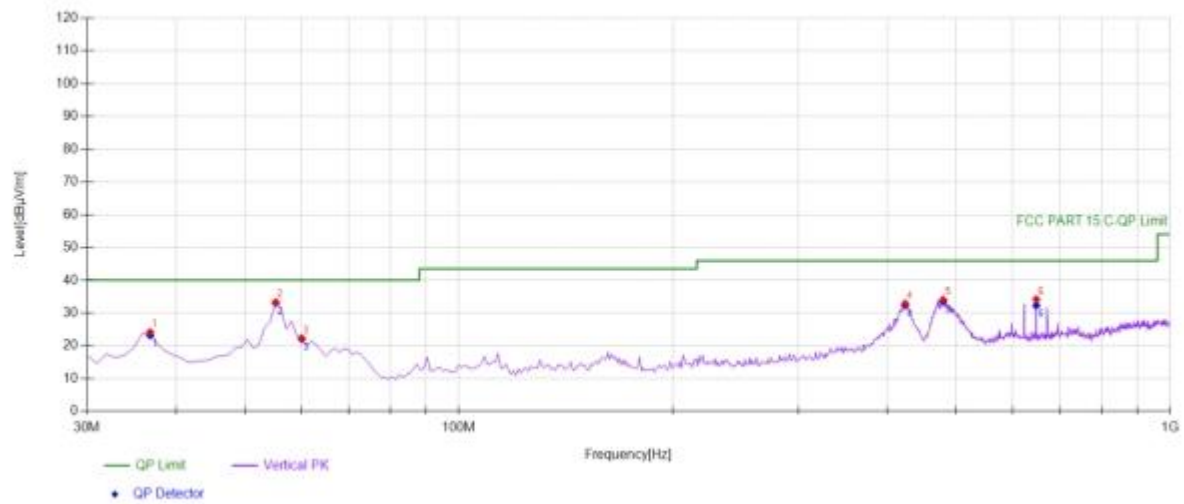


## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	42.09	-17.91	24.18	PK	40.00	15.82	Vertical
2	55.2452	50.13	-16.80	33.33	PK	40.00	6.67	Vertical
3	60.1001	39.78	-17.46	22.32	PK	40.00	17.68	Vertical
4	424.214	44.65	-11.74	32.91	PK	46.00	13.09	Vertical
5	479.559	44.26	-10.17	34.09	PK	46.00	11.91	Vertical
6	648.508	41.47	-7.29	34.18	PK	46.00	11.82	Vertical

## Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	23.23	40.00	16.77
2	55.2452	-16.80	33.10	40.00	6.90
3	60.1001	-17.46	22.09	40.00	17.91
4	424.2142	-11.74	32.35	46.00	13.65
5	479.5596	-10.17	33.53	46.00	12.47
6	648.5085	-7.29	32.34	46.00	13.66

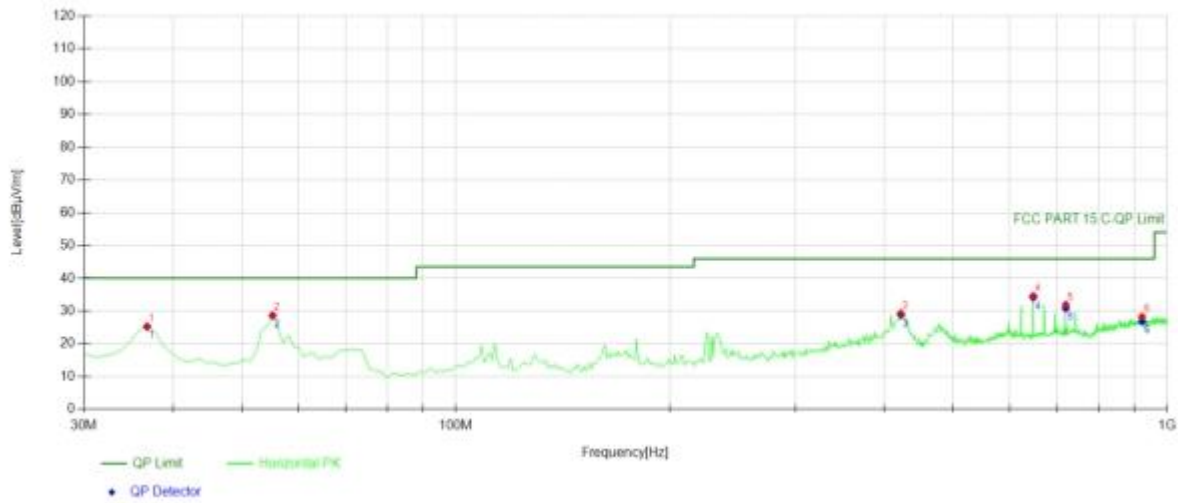


## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	43.29	-17.91	25.38	PK	40.00	14.62	Horizontal
2	55.2452	45.56	-16.80	28.76	PK	40.00	11.24	Horizontal
3	422.272	41.17	-11.81	29.36	PK	46.00	16.64	Horizontal
4	648.508	41.97	-7.29	34.68	PK	46.00	11.32	Horizontal
5	720.360	38.16	-6.19	31.97	PK	46.00	14.03	Horizontal
6	922.322	31.38	-3.11	28.27	PK	46.00	17.73	Horizontal

## Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	25.18	40.00	14.82
2	55.2452	-16.80	28.56	40.00	11.44
3	422.2723	-11.81	28.83	46.00	17.17
4	648.5085	-7.29	34.15	46.00	11.85
5	720.3604	-6.19	30.87	46.00	15.13
6	922.3223	-3.11	26.85	46.00	19.15

Test mode: 802.11a Frequency(MHz): 5240

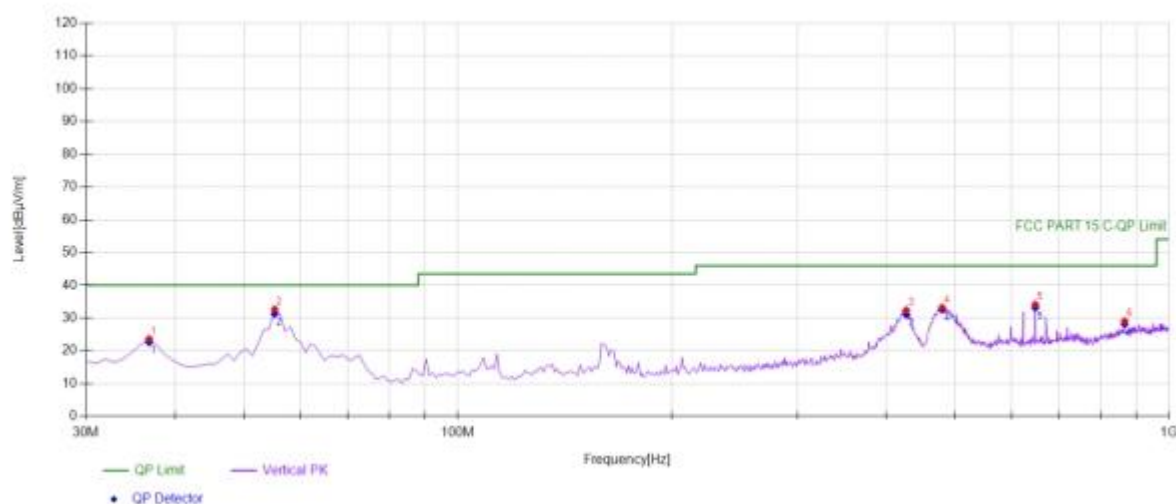


## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	36.7968	41.54	-17.91	23.63	PK	40.00	16.37	Vertical
2	55.2452	49.48	-16.80	32.68	PK	40.00	7.32	Vertical
3	427.127	44.05	-11.65	32.40	PK	46.00	13.60	Vertical
4	479.559	43.36	-10.17	33.19	PK	46.00	12.81	Vertical
5	648.508	41.43	-7.29	34.14	PK	46.00	11.86	Vertical
6	866.006	32.87	-3.80	29.07	PK	46.00	16.93	Vertical

## Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	36.7968	-17.91	22.62	40.00	17.38
2	55.2452	-16.80	31.34	40.00	8.66
3	427.1271	-11.65	31.06	46.00	14.94
4	479.5596	-10.17	32.57	46.00	13.43
5	648.5085	-7.29	33.19	46.00	12.81
6	866.006	-3.80	28.12	46.00	17.88

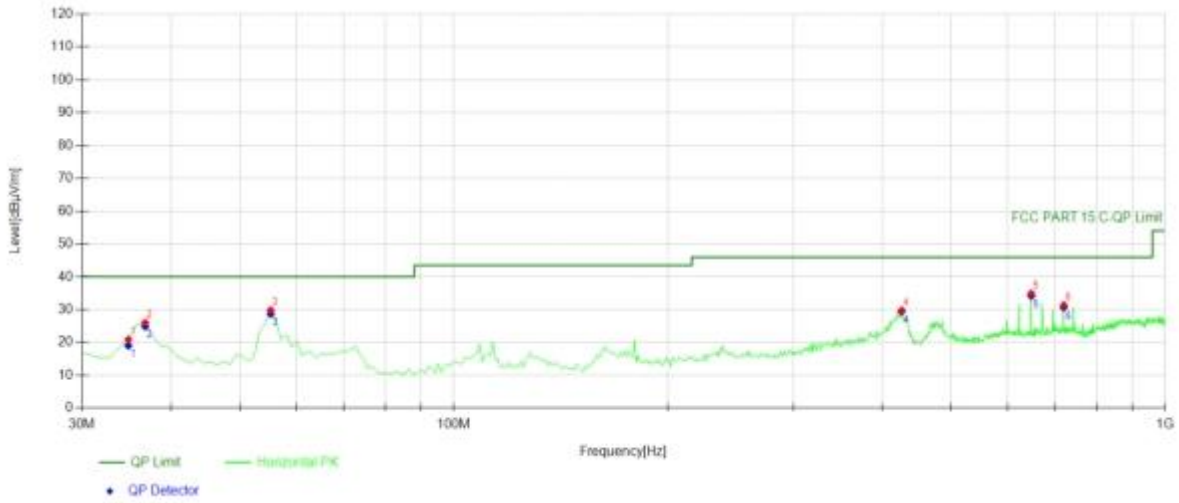

## Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	39.08	-18.16	20.92	PK	40.00	19.08	Horizontal
2	36.7968	43.93	-17.91	26.02	PK	40.00	13.98	Horizontal
3	55.2452	46.66	-16.80	29.86	PK	40.00	10.14	Horizontal
4	426.156	41.53	-11.68	29.85	PK	46.00	16.15	Horizontal
5	648.508	42.23	-7.29	34.94	PK	46.00	11.06	Horizontal
6	720.360	37.60	-6.19	31.41	PK	46.00	14.59	Horizontal

## Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	34.8549	-18.16	19.07	40.00	20.93
2	36.7968	-17.91	24.89	40.00	15.11
3	55.2452	-16.80	28.73	40.00	11.27
4	426.1562	-11.68	29.44	46.00	16.56
5	648.5085	-7.29	34.20	46.00	11.80
6	720.3604	-6.19	30.67	46.00	15.33

## 8.5 POWER LINE CONDUCTED EMISSIONS

### 8.5.1 Applicable Standard

According to FCC Part 15.207(a)

### 8.5.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 8.5.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

### 8.5.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

### 8.5.5 Test Results

**PASS.**



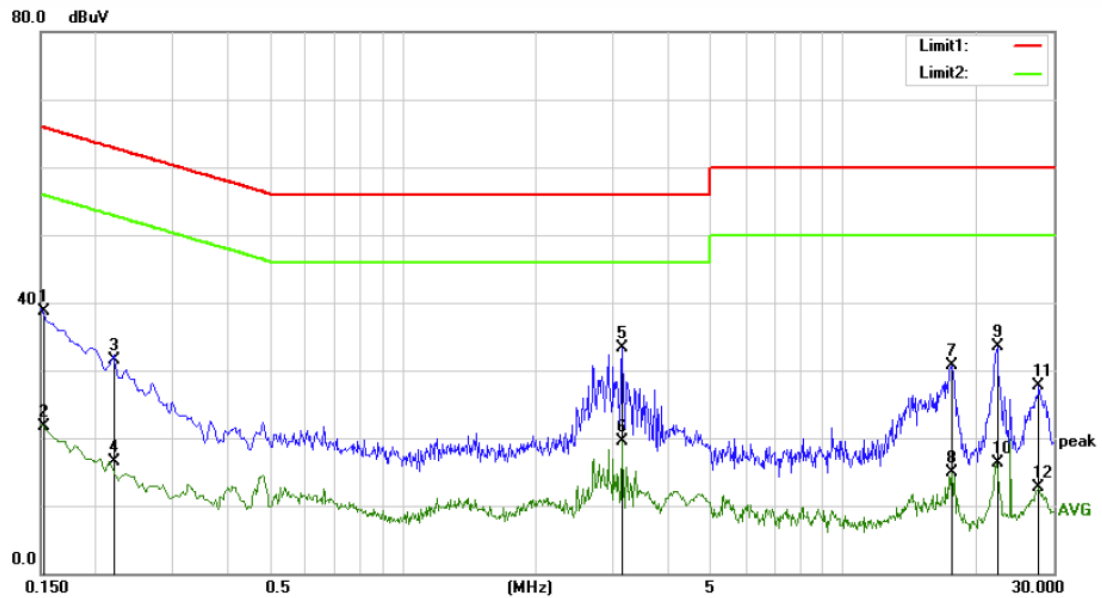

Site: Conduction 2#

Phase: **L1**

Temperature: 23.3

Limit: (CE)FCC PART 15 class B\_QP


Power: DC 5V FROM adapter

Humidity: 47 %

Mode: 5G WiFi mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1524	28.04	10.67	38.71	65.87	-27.16	QP	
2		0.1524	10.97	10.67	21.64	55.87	-34.23	AVG	
3		0.2208	20.77	10.65	31.42	62.79	-31.37	QP	
4		0.2208	5.76	10.65	16.41	52.79	-36.38	AVG	
5	*	3.1450	22.88	10.52	33.40	56.00	-22.60	QP	
6		3.1450	9.00	10.52	19.52	46.00	-26.48	AVG	
7		17.6300	19.77	10.93	30.70	60.00	-29.30	QP	
8		17.6300	4.02	10.93	14.95	50.00	-35.05	AVG	
9		22.3800	22.30	11.21	33.51	60.00	-26.49	QP	
10		22.3800	5.19	11.21	16.40	50.00	-33.60	AVG	
11		27.7300	16.39	11.27	27.66	60.00	-32.34	QP	
12		27.7300	1.47	11.27	12.74	50.00	-37.26	AVG	

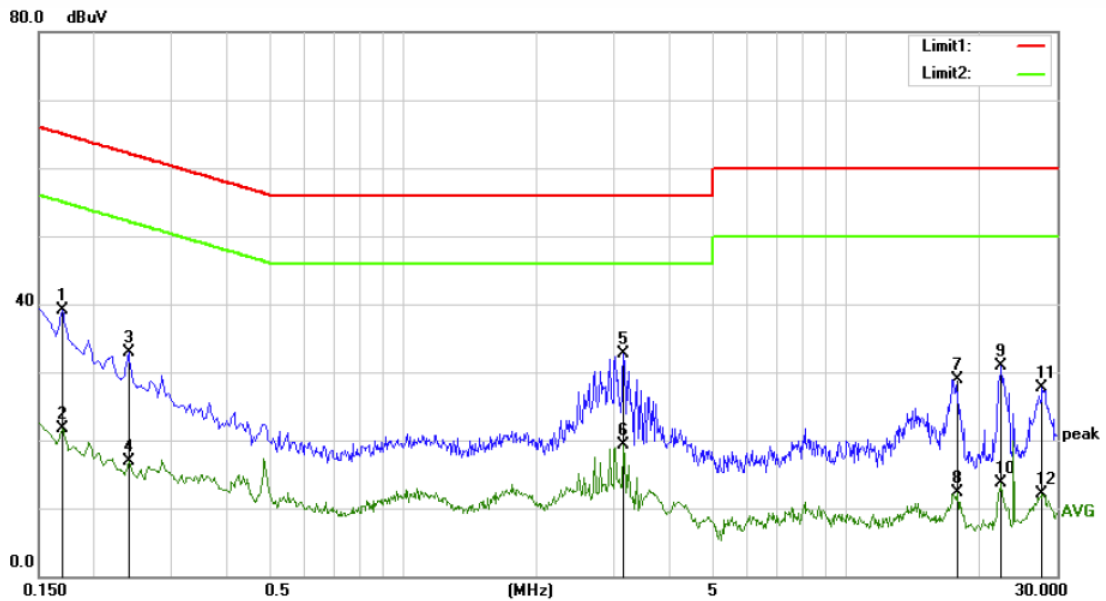

Site Conduction 2#

Phase: **N**

Temperature: 23.3

Limit: (CE)FCC PART 15 class B\_QP

Power: DC 5V FROM adapter

Humidity: 47 %

Mode: 5G WiFi mode

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	28.45	10.66	39.11	64.96	-25.85	QP	
2		0.1700	11.00	10.66	21.66	54.96	-33.30	AVG	
3		0.2400	22.23	10.65	32.88	62.10	-29.22	QP	
4		0.2400	6.31	10.65	16.96	52.10	-35.14	AVG	
5	*	3.1500	22.14	10.52	32.66	56.00	-23.34	QP	
6		3.1500	8.78	10.52	19.30	46.00	-26.70	AVG	
7		17.9050	17.85	10.96	28.81	60.00	-31.19	QP	
8		17.9050	1.39	10.96	12.35	50.00	-37.65	AVG	
9		22.4300	19.61	11.21	30.82	60.00	-29.18	QP	
10		22.4300	2.51	11.21	13.72	50.00	-36.28	AVG	
11		27.7300	16.46	11.27	27.73	60.00	-32.27	QP	
12		27.7300	0.83	11.27	12.10	50.00	-37.90	AVG	

## 8.6 ANTENNA APPLICATION

### 8.6.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 8.6.2 Result

#### PASS

Temperature : 25°C      ATM Pressure: 1011 mbar  
Humidity : 45 %      Test Engineer: XXH

The EUT is integrated antenna, the antenna gain as below:

Ant: 3.34dBi

- ☒ Antennas use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

Which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission:

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---

## 声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。  
1. This report is invalid without the signature of the authorized approver and "special seal for testing".
2. 未经许可本报告不得部分复制。  
2. This report shall not be copied partly without authorization.
3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。  
3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.
4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。  
4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.
5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。  
5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.
6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。  
6. Objections shall be raised within 20 days from the date receiving the report.