

FCC Test Report

Product Name	USB Z-Wave Dongle
Model No.	WD6020, WD6030
FCC ID.	SW8WD60305

Applicant	GOODWAY TECHNOLOGY CO., LTD.
Address	3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan

Date of Receipt	May 15, 2014
Issued Date	Jun 05, 2014
Report No.	1450374R-RFUSP66V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Jun 05, 2014


Report No. : 1450374R-RFUSP66V00



Product Name	USB Z-Wave Dongle
Applicant	GOODWAY TECHNOLOGY CO., LTD.
Address	3F, No. 135, Ln. 235, Baociao Rd., Sindian Dist., New Taipei City 231, Taiwan
Manufacturer	GOODWAY TECHNOLOGY CO., LTD.
Model No.	WD6020, WD6030
FCC ID.	SW8WD60305
EUT Rated Voltage	DC 5V (Power by USB)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	GOODWAY
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.10: 2009
Test Result	Complied

Documented By

:



(Senior Adm. Specialist / Jinn Chen)

Tested By

:



(Engineer / Jack Hsu)

Approved By

:



(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description	4
1.2. Operation Description	5
1.3. Tested System Details	6
1.4. Configuration of Test System.....	6
1.5. EUT Exercise Software.....	6
1.6. Test Facility	7
2. Conducted Emission	8
2.1. Test Equipment	8
2.2. Test Setup.....	8
2.3. Limits	9
2.4. Test Procedure	9
2.5. Uncertainty.....	9
2.6. Test Result of Conducted Emission	10
3. Radiated Emission	12
3.1. Test Equipment	12
3.2. Test Setup.....	13
3.3. Limits	14
3.4. Test Procedure.....	15
3.5. Uncertainty.....	15
3.6. Test Result of Radiated Emission	16
4. Band Edge.....	22
4.1. Test Equipment	22
4.2. Test Setup.....	22
4.3. Limit.....	23
4.4. Test Procedure.....	23
4.5. Uncertainty.....	23
4.6. Test Result of Band Edge.....	24
5. EMI Reduction Method During Compliance Testing	26
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	USB Z-Wave Dongle
Trade Name	GOODWAY
FCC ID.	SW8WD60305
Model No.	WD6020, WD6030
Frequency Range	908.42MHz
Type of Modulation	FSK
Number of Channels	1
Channel Control	Auto
Antenna Type	Chip Antenna

Center Frequency of Each Channel:

Channel	Frequency
Channel 1:	908.42MHz

Note:

1. The EUT is an USB Z-Wave Dongle with a built-in 908.42MHz Z-Wave transceiver.
2. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. The different of each model is shown as below:

Model Number	Description	Remark
WD6020	mini-USB	Mechanism and circuits are the same
WD6030	micro-USB	

Pre Test Mode	WD6020- mini-USB
	WD6030- micro-USB

Final Test Mode	WD6030- micro-USB	Mode 1: Transmit
-----------------	-------------------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PPT	N/A	Non-shielded, 0.8m

Signal Cable Type	Signal cable Description
A USB Cable	Non-shielded, 1.8m

1.4. Configuration of Test System

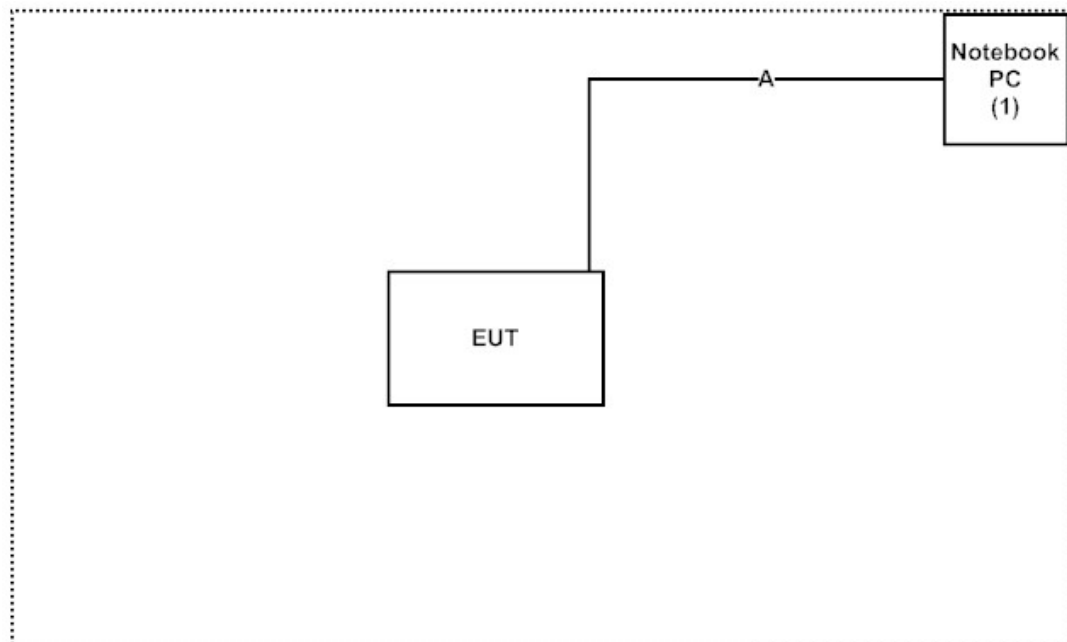

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4.
- (2) Execute program "Z-wave programmer V.246" on the notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start transmits continually.
- (5) Verify that the EUT works correctly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://tw.quietek.com/modules/myalbum/>
The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
Registration Number: 92195

Site Name: Quietek Corporation
Site Address: No.5-22, Ruishukeng Linkou Dist., New Taipei City
24451, Taiwan, R.O.C.
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2013	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.8 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

2.2. Test Setup

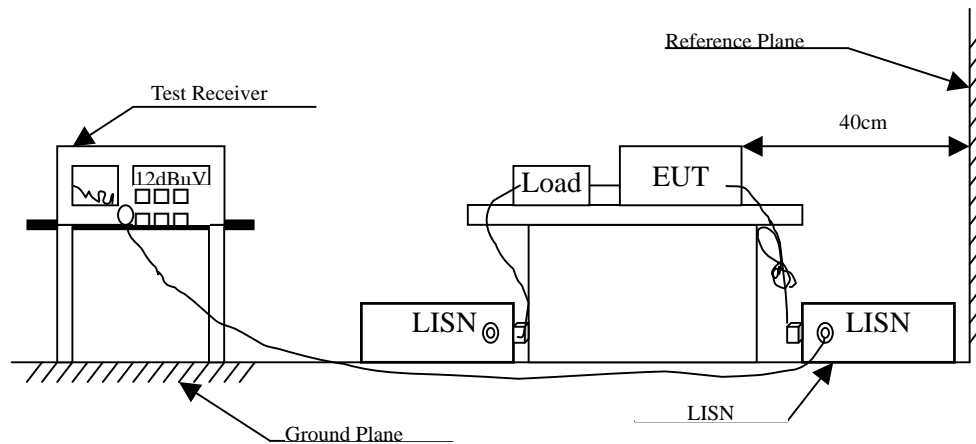

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : USB Z-Wave Dongle
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 1					
Quasi-Peak					
0.181	9.724	40.960	50.684	-14.430	65.114
0.240	9.680	35.010	44.690	-18.739	63.429
0.302	9.650	28.510	38.160	-23.497	61.657
0.361	9.650	22.000	31.650	-28.321	59.971
1.880	9.680	19.230	28.910	-27.090	56.000
3.888	9.700	22.940	32.640	-23.360	56.000
Average					
0.181	9.724	31.760	41.484	-13.630	55.114
0.240	9.680	27.740	37.420	-16.009	53.429
0.302	9.650	10.270	19.920	-31.737	51.657
0.361	9.650	15.190	24.840	-25.131	49.971
1.880	9.680	16.240	25.920	-20.080	46.000
3.888	9.700	17.180	26.880	-19.120	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : USB Z-Wave Dongle
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.181	9.732	40.920	50.652	-14.462	65.114
0.244	9.689	35.340	45.029	-18.285	63.314
0.298	9.660	24.020	33.680	-28.091	61.771
0.353	9.655	10.950	20.605	-39.595	60.200
3.822	9.700	26.010	35.710	-20.290	56.000
15.466	10.000	8.840	18.840	-41.160	60.000
Average					
0.181	9.732	32.030	41.762	-13.352	55.114
0.244	9.689	26.810	36.499	-16.815	53.314
0.298	9.660	19.500	29.160	-22.611	51.771
0.353	9.655	3.310	12.965	-37.235	50.200
3.822	9.700	19.630	29.330	-16.670	46.000
15.466	10.000	3.060	13.060	-36.940	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment


The following test equipment are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> Site # 3	X Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2013
	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	X Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	X Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Below 1GHz

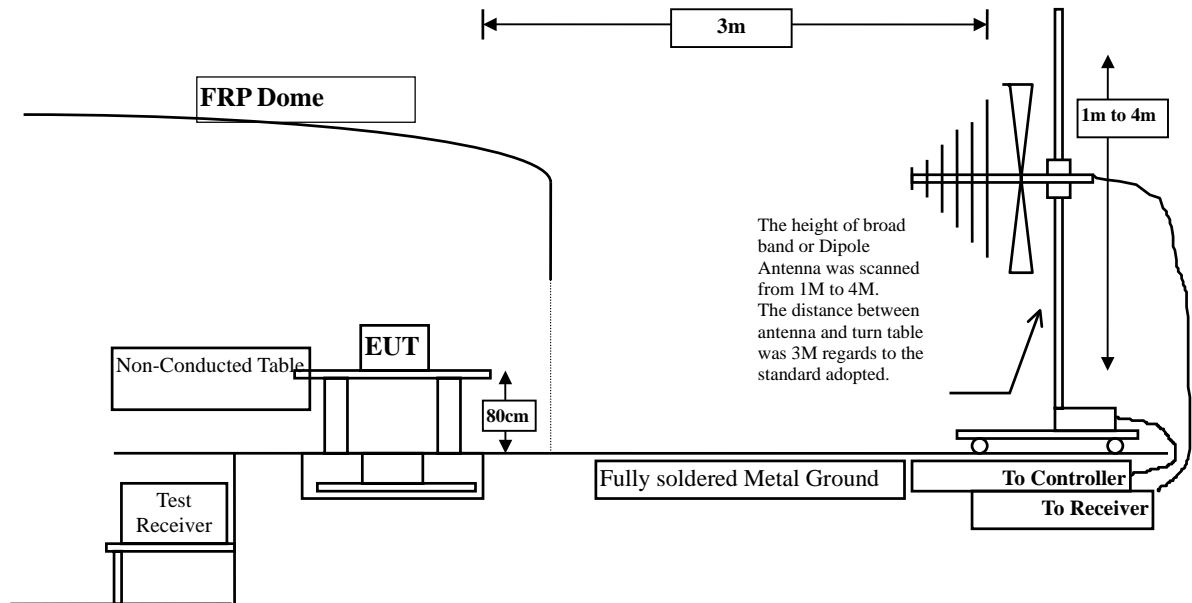

Above 1GHz

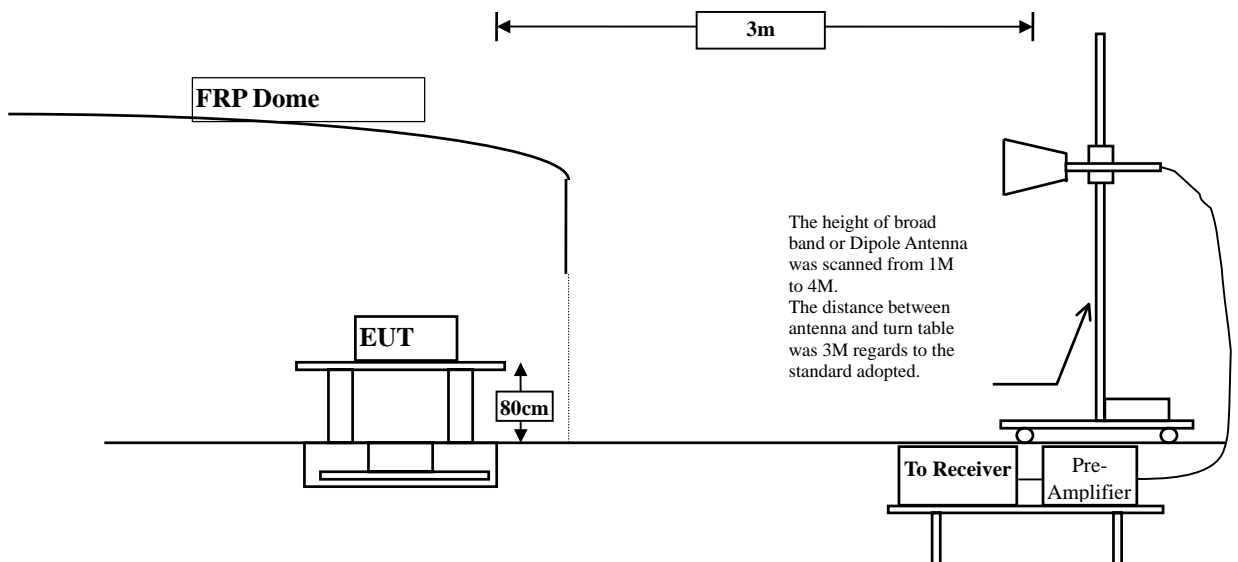

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

Remarks : 1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks : 1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

3.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : USB Z-Wave Dongle
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (X-axis)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Quasi-Peak:					
908.420	-7.938	63.490	55.552	-38.448	94.000
--					
Vertical					
Quasi-Peak:					
908.420	-6.828	62.370	55.542	-38.458	94.000
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : USB Z-Wave Dongle
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Y-asix)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Quasi-Peak:					
908.420	-7.938	66.750	58.812	-35.188	94.000
--					
Vertical					
Quasi-Peak:					
908.420	-6.828	65.790	58.962	-35.038	94.000
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : USB Z-Wave Dongle
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (Z-asix)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Quasi-Peak:					
908.420	-7.938	60.510	52.572	-41.428	94.000
--					
Vertical					
Quasi-Peak:					
908.420	-6.828	54.290	47.462	-46.538	94.000
--					

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna Factor + Cable Loss – PreAMP.

Product : USB Z-Wave Dongle
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
MHz	Factor	Level	Level		
	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
Peak Detector:					
1816.840	-4.390	48.150	43.760	-30.240	74.000
2725.260	-1.075	56.290	55.214	-18.786	74.000
3633.680	-0.395	48.150	47.755	-26.245	74.000
4542.100	1.901	41.050	42.952	-31.048	74.000
5450.520	4.228	40.230	44.458	-29.542	74.000
6358.940	6.502	41.050	47.552	-26.448	74.000
7267.360	11.106	35.150	46.256	-27.744	74.000
8175.780	14.925	39.260	54.185	-19.815	74.000
9048.200	13.087	39.220	52.308	-21.692	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : USB Z-Wave Dongle
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Vertical					
Peak Detector:					
1816.840	-2.613	48.050	45.437	-28.563	74.000
2725.260	-1.228	49.260	48.032	-25.968	74.000
3633.680	0.379	49.260	49.639	-24.361	74.000
4542.100	5.407	48.260	53.667	-20.333	74.000
5450.520	5.976	42.550	48.525	-25.475	74.000
6358.940	7.975	45.230	53.206	-20.794	74.000
7267.360	11.925	38.660	50.585	-23.415	74.000
8175.780	14.925	39.630	54.555	-19.445	74.000
9084.200	13.021	40.360	53.381	-20.619	74.000

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : USB Z-Wave Dongle
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
Horizontal					
111.480	-7.914	35.009	27.095	-16.405	43.500
191.020	-10.040	36.779	26.739	-16.761	43.500
361.740	-1.549	37.229	35.680	-10.320	46.000
458.740	0.833	37.725	38.558	-7.442	46.000
540.220	2.551	38.135	40.686	-5.314	46.000
716.760	3.537	36.592	40.129	-5.871	46.000
Vertical					
92.080	-3.339	32.067	28.728	-14.772	43.500
161.920	-6.696	37.021	30.326	-13.174	43.500
295.780	-7.455	37.503	30.048	-15.952	46.000
390.840	-3.099	37.602	34.503	-11.497	46.000
526.640	-0.423	38.620	38.197	-7.803	46.000
738.100	-0.324	37.002	36.678	-9.322	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

4. Band Edge


4.1. Test Equipment

The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Site # 3	X Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2013
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2013
	X Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2013
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/ 925975	Mar, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2013
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

4.2. Test Setup

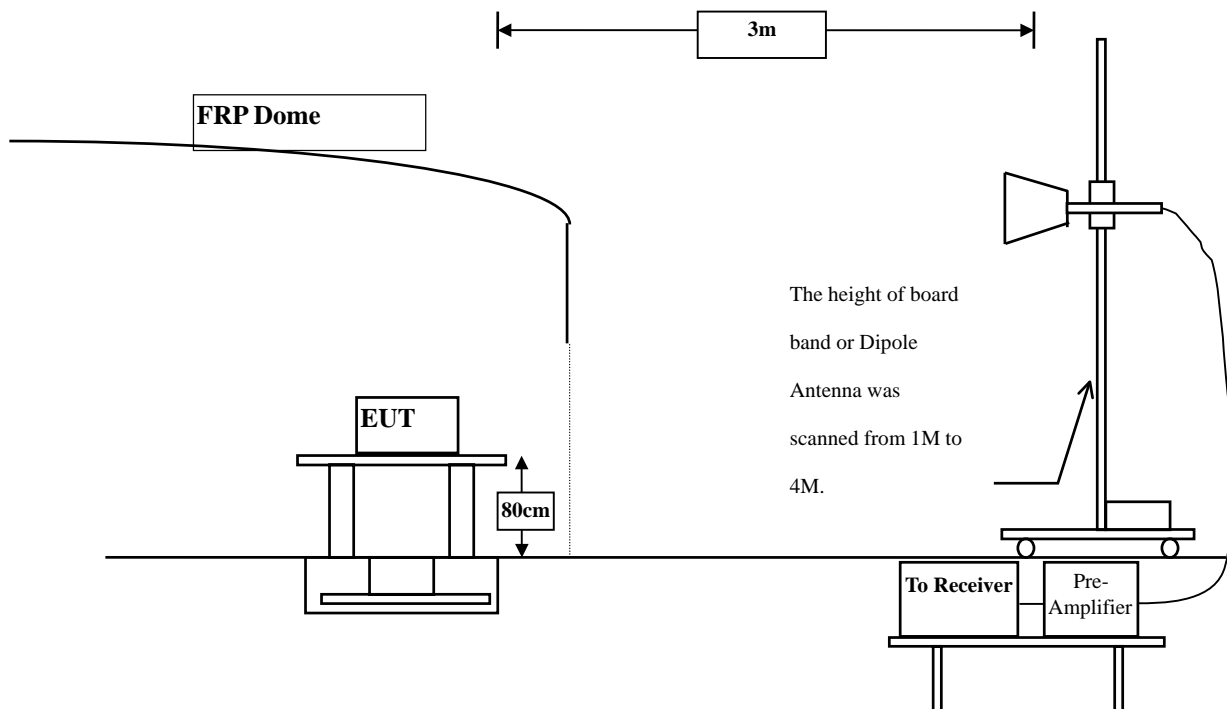

4.3. Limit

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter (R&S Test Receiver ESCS 30)is 120 kHz, above 1GHz are 1 MHz.

4.5. Uncertainty

Radiated is ± 3.9 dB.


4.6. Test Result of Band Edge

Product : USB Z-Wave Dongle
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

RF Radiated Measurement (Horizontal):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	-7.979	29.310	21.331	46.000	Pass
02(Quasi-Peak)	928.000	-7.830	27.230	19.400	46.000	Pass

Figure Channel 01: Horizontal (Quasi-Peak)

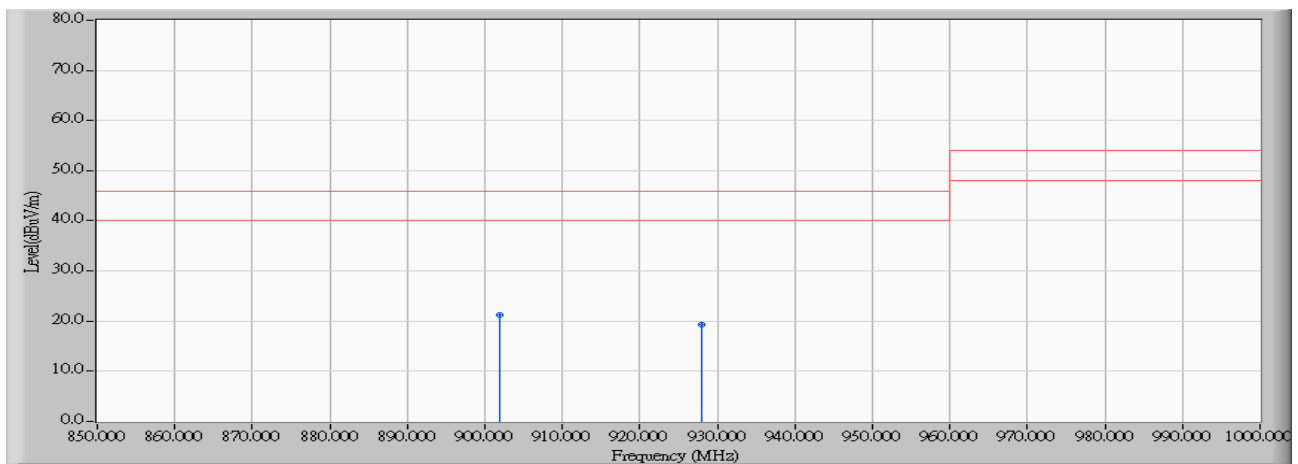

Note:


1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

Product : USB Z-Wave Dongle
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

RF Radiated Measurement (Vertical):

No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Result
01(Quasi-Peak)	902.000	-6.829	30.210	23.381	46.000	Pass
02(Quasi-Peak)	928.000	-6.850	28.730	21.880	46.000	Pass

Figure Channel 01: Vertical (Quasi-Peak)

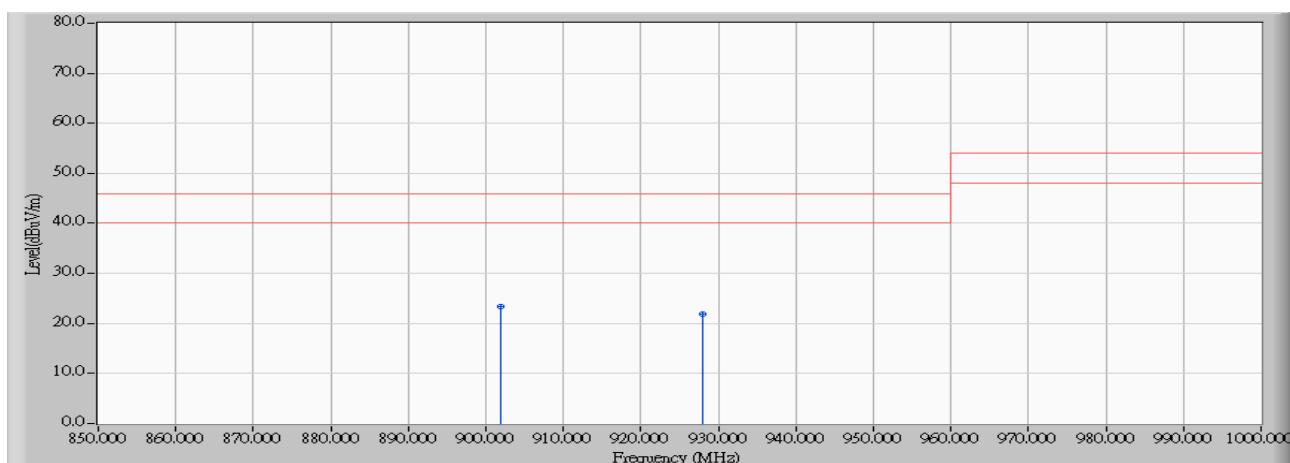

Note:

1. Quasi-Peak measurements: RBW=100kHz,VBW=1MHz,Sweep: Auto.
2. “ * ”, means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor.

5. EMI Reduction Method During Compliance Testing

No modification was made during testing.