

TEST REPORT

Applicant Name : VTech Telecommunications Ltd
Address : 23/F Tai Ping Ind Center Block 1 57 Ting Kok Rd Tai Po NT,
Hong Kong
Report Number : SZNS211213-64525E-RF-00
FCC ID: EW780-H0FH-13
Test Standard (s)
FCC PART 15.407

Sample Description

Product Type: SIP Cordless Hotel Telephone
Model No.: NG-S3411W
Multiple Model(s) No.: N/A
Trade Mark: vtech
Date Received: 2021/12/31
Report Date: 2022/03/03

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Black Ding
EMC Engineer

Approved By:



Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
DUTY CYCLE	9
EQUIPMENT MODIFICATIONS	9
SUPPORT EQUIPMENT LIST AND DETAILS	9
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC §15.247 (I) & §1.1307 (B) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	15
APPLICABLE STANDARD	15
RESULT	16
FCC §15.203 – ANTENNA REQUIREMENT.....	17
APPLICABLE STANDARD	17
ANTENNA CONNECTOR CONSTRUCTION	17
FCC §15.407 (B) (6) §15.207 (A) – CONDUCTED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER SETUP.....	18
TEST PROCEDURE	18
CORRECTED FACTOR & MARGIN CALCULATION	19
TEST DATA	19
§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION	24
APPLICABLE STANDARD	24
EUT SETUP	24
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	25
TEST PROCEDURE	25
FACTOR & MARGIN CALCULATION	26
TEST DATA	26
FCC §15.407(A),(E) – 26 DB & 6DB EMISSION BANDWIDTH.....	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST DATA	56

FCC §15.407(A) – CONDUCTED TRANSMITTER OUTPUT POWER.....	57
APPLICABLE STANDARD	57
TEST PROCEDURE	57
TEST DATA	58
FCC §15.407(A) - POWER SPECTRAL DENSITY	59
TEST PROCEDURE	59
TEST DATA	60
APPENDIX	61
APPENDIX A1: EMISSION BANDWIDTH	61
APPENDIX A2: OCCUPIED CHANNEL BANDWIDTH	77
APPENDIX A3: MIN EMISSION BANDWIDTH.....	99
APPENDIX B: MAXIMUM CONDUCTED OUTPUT POWER	105
APPENDIX C: MAXIMUM POWER SPECTRAL DENSITY	107
APPENDIX D: DUTY CYCLE.....	129

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	5G Wi-Fi: 5150-5250MHz; 5250-5350MHz; 5470-5725MHz; 5725-5850MHz
Mode	802.11a/n20/n40/ac20/ac40/ac80
Maximum Conducted Average Output Power	5150-5250 MHz: 14.29dBm 5250-5350MHz: 15.1dBm 5470-5725MHz: 14.75dBm 5725-5850 MHz: 13.54dBm
Modulation Technique	OFDM
Antenna Specification*	Antenna gain:2.0dBi (It is provided by the manufacturer)
Voltage Range	DC 5.0V from adapter or DC 48V from POE
Sample serial number	SZNS211213-64525E-RF-S5 for Conducted and Radiated Emissions SZNS211213-64525E-RF-S6 for RF Conducted Test (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: VT07EUS05200 Input: AC 100-120V~50-60Hz, 0.5A Output: DC 5.0V, 2.0A, 10.0W

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF Frequency		0.082×10^{-7}
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	9kHz - 30MHz	2.66dB
	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
	26.5GHz - 40GHz	4.72dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The device supports 5G Wi-Fi 802.11a/n20/n40/ac20/ac40/ac80 modes.

For 5150-5250MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a/n20/ac20 mode: channel 36, 40, 48 were tested; For 802.11n40/ac40 mode: channel 38, 46 were tested. For 802.11ac80 mode, channel 42 was tested.

For 5250-5350MHz Band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	60	5300
54	5270	62	5310
56	5280	64	5320
58	5290	/	/

For 802.11a/n20/ac20 mode: channel 52, 56, 64 were tested; For 802.11n40/ac40 mode: channel 54, 62 were tested. For 802.11ac80 mode, channel 58 was tested.

For 5470-5725MHz Band, 18 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	120	5600
102	5510	122	5610
104	5520	124	5620
106	5530	126	5630
108	5540	128	5640
110	5550	132	5660
112	5560	134	5670
116	5580	136	5680
118	5590	140	5700

For 802.11a/n20/ac20 mode: channel 100, 116, 140 were tested; For 802.11n40/ac40 mode: channel 102, 110, 134 were tested. For 802.11ac80 mode, channel 106, 122 was tested.

For 5725-5850MHz Band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n20/ac20 mode: channel 149, 157, 165 were tested; For 802.11n40/ac40 mode: channel 151, 159 were tested. For 802.11ac80mode, channel 155 was tested.

EUT Exercise Software

“Tera Term”* exercise software was used. The software and power level was provided by the applicant.

The worst case was performed under:

U-NII	Mode	Frequency (MHz)	Data Rate	Power Level*
5150 – 5250MHz	802.11 a	5180	6Mbps	Default
		5200	6Mbps	Default
		5240	6Mbps	Default
	802.11 n20	5180	MCS0	Default
		5200	MCS0	Default
		5240	MCS0	Default
	802.11 n40	5190	MCS0	Default
		5230	MCS0	Default
	802.11 ac20	5180	MCS0	Default
		5200	MCS0	Default
		5240	MCS0	Default
	802.11 ac40	5190	MCS0	Default
		5230	MCS0	Default
	802.11 ac80	5210	MCS0	41

U-NII	Mode	Frequency (MHz)	Data Rate	Power Level*
5250 – 5350MHz	802.11 a	5260	6Mbps	Default
		5280	6Mbps	Default
		5320	6Mbps	Default
	802.11 n20	5260	MCS0	Default
		5280	MCS0	Default
		5320	MCS0	Default
	802.11 n40	5270	MCS0	Default
		5310	MCS0	Default
	802.11 ac20	5260	MCS0	Default
		5280	MCS0	Default
		5320	MCS0	Default
	802.11 ac40	5270	MCS0	Default
		5310	MCS0	Default
	802.11 ac80	5290	MCS0	41

U-NII	Mode	Frequency (MHz)	Data Rate set	Power Level*
5470 – 5725MHz	802.11 a	5500	6Mbps	43
		5580	6Mbps	43
		5700	6Mbps	41
	802.11 n20	5500	MCS0	41
		5580	MCS0	41
		5700	MCS0	41
	802.11 n40	5510	MCS0	41
		5550	MCS0	41
		5670	MCS0	41
	802.11 ac20	5500	MCS0	43
		5580	MCS0	43
		5700	MCS0	41
	802.11 ac40	5510	MCS0	41
		5550	MCS0	41
		5670	MCS0	41
	802.11 ac80	5530	MCS0	41
		5610	MCS0	41

U-NII	Mode	Frequency (MHz)	Data Rate	Power Level*
5725 – 5850MHz	802.11 a	5745	6Mbps	45
		5785	6Mbps	45
		5825	6Mbps	45
	802.11 n20	5745	MCS0	39
		5785	MCS0	39
		5825	MCS0	39
	802.11 n40	5755	MCS0	39
		5795	MCS0	39
	802.11 ac20	5745	MCS0	43
		5785	MCS0	43
		5825	MCS0	43
	802.11 ac40	5755	MCS0	39
		5795	MCS0	39
	802.11 ac80	5775	MCS0	43

The worse-case data rates are determined to be as follows for each mode based upon investigations by measuring the output power and PSD across all data rated bandwidths, and modulations.

Duty cycle

Test Result: Pass. Please refer to the Appendix.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HUAWEI	Router	WS5100	A4933FEF1D01
N/A	IP PBX	MY PBX	M02YS09010133
VTech	Handset	NG-S3411W	Unknown
YEALINK	POE	YLPOE30	SU10551


External I/O Cable

Cable Description	Length (m)	From Port	To
Un-shielded un-detachable DC cable	2.0	Adapter	EUT
Un-shielded detachable RJ11 cable	8.0	IP PBX	EUT
Un-shielded detachable RJ45 cable	8.0	EUT/POE	Router
Un-shielded un-detachable DC cable	1.5	Router	Adapter
Un-shielded un-detachable AC cable	1.5	IP PBX	AC mains
Un-shielded detachable RJ45 cable	1.0	POE	EUT


Block Diagram of Test Setup

Conducted Emission:

Adapter:

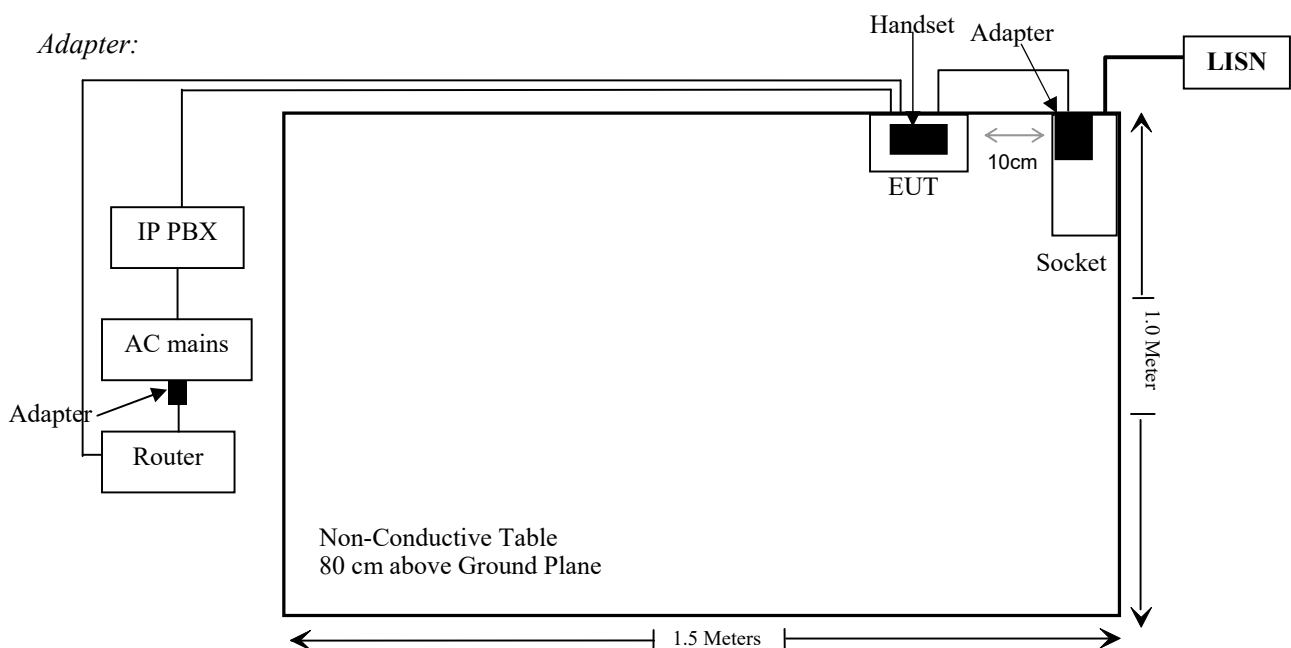


POE:

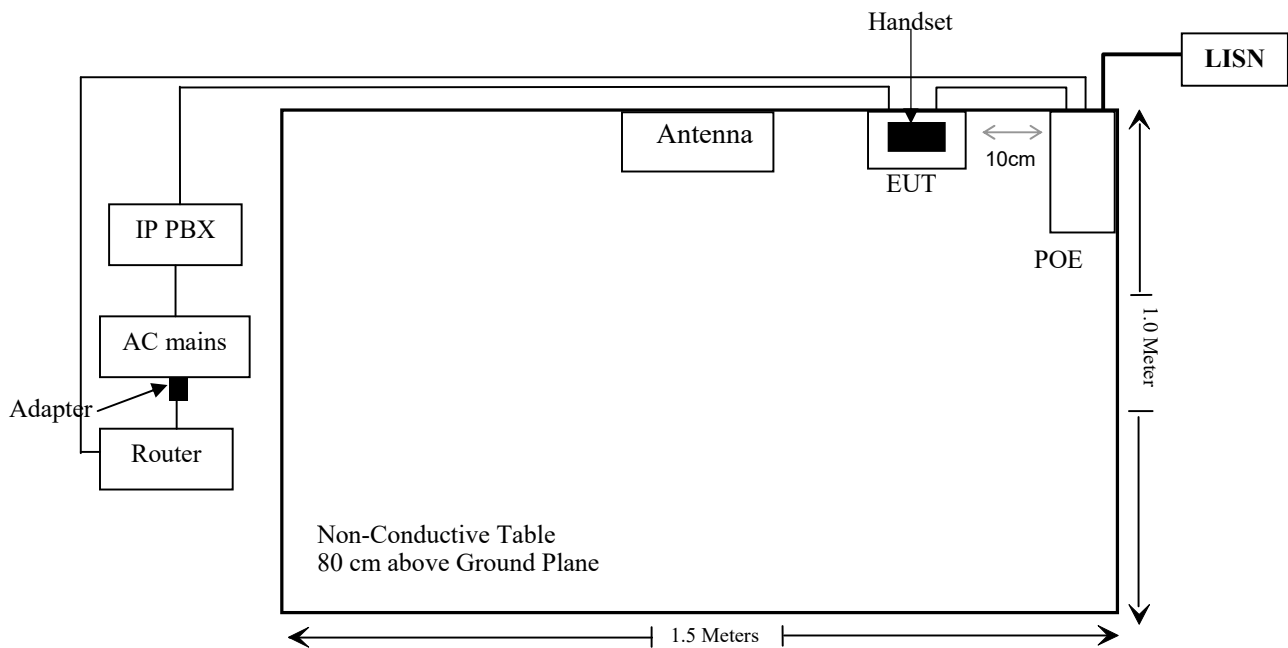


For Radiated emission:

Adapter:

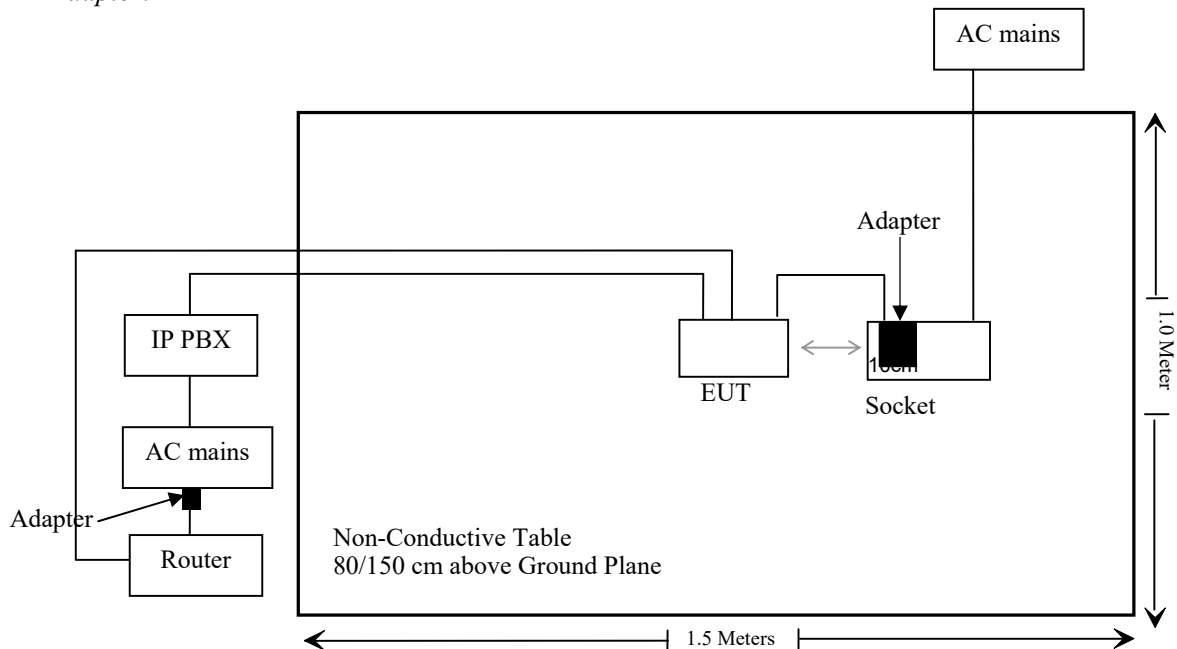

POE:

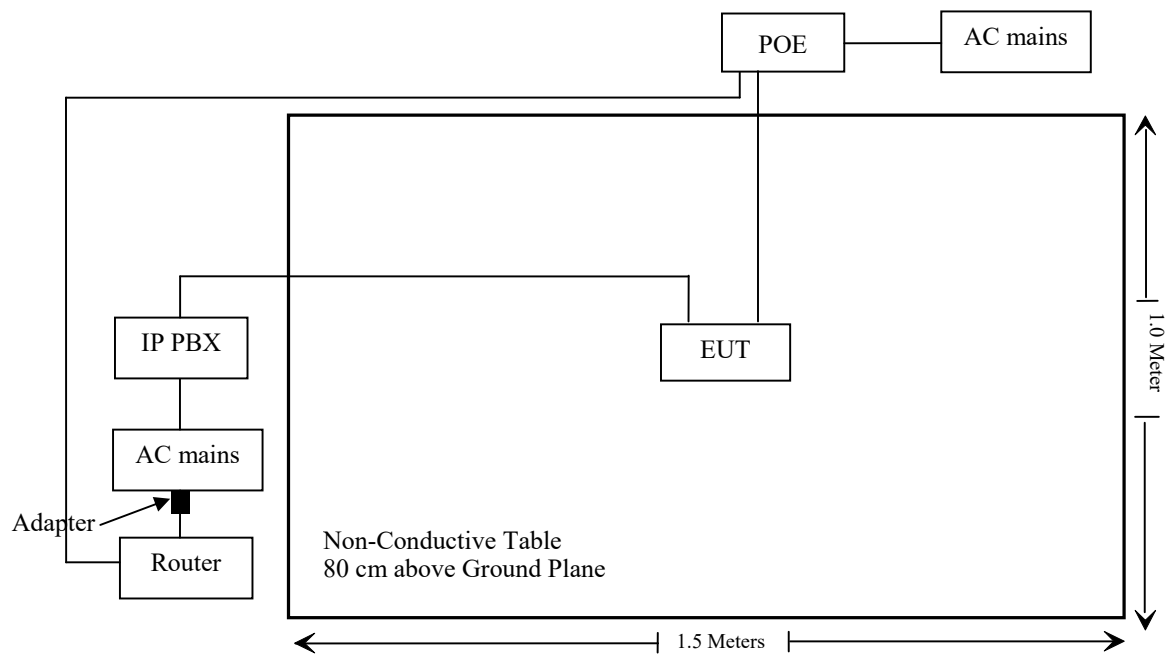

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307 (b) (1) & §2.1091	Maximum Permissible exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.407(b)(9)& §15.207(a)	Conducted Emissions	Compliant
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliant
§15.407(a) (e)	26 dB Emission Bandwidth & 6dB Bandwidth	Compliant
§15.407(a)	Conducted Transmitter Output Power	Compliant
§15.407 (a)	Power Spectral Density	Compliant
§15.407 (h)	Transmit Power Control (TPC)	Not Applicable
§15.407 (h)	Dynamic Frequency Selection (DFS)	Compliant*

Not Applicable: the EUT has no TPC function which was declared by the applicant.

Compliant*: Please refer to the DFS report: SZNS211213-64525E-RFD.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted emission test					
Rohde& Schwarz	EMI Test Receiver	ESCI	100784	2021/12/13	2022/12/12
Rohde & Schwarz	L.I.S.N.	ENV216	101314	2021/12/13	2022/12/12
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2021/12/13	2022/12/12
Unknown	RF Coaxial Cable	No.17	N0350	2021/12/14	2022/12/13
Conducted Emission Test Software: e3 19821b (V9)					
Radiated emission test					
Rohde& Schwarz	Test Receiver	ESR	102725	2021/12/13	2022/12/12
Rohde&Schwarz	Spectrum Analyzer	FSV40	101949	2021/12/13	2022/12/12
SONOMA INSTRUMENT	Amplifier	310 N	186131	2021/11/09	2022/11/08
A.H. Systems, inc.	Preamplifier	PAM-0118P	135	2021/11/09	2022/11/08
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2021/11/11	2022/11/10
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2021/07/06	2024/07/05
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	No.10	N050	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.11	N1000	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.12	N040	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.13	N300	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.14	N800	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.15	N600	2021/12/14	2022/12/13
Unknown	RF Coaxial Cable	No.16	N650	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.15/5.35g-45	075	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.47/5.725G-45	075	2021/12/14	2022/12/13
CD	Band Reject Filter	BRM-5.725/5.875G-45	065	2021/12/14	2022/12/13
Radiated Emission Test Software: e3 19821b (V9)					
RF conducted test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2021/12/13	2022/12/12
Tonscend	RF Control Unit	JS0806-2	19G8060182	2021/07/06	2022/07/05
Unknown	RF Coaxial Cable	No.16	N200	2021/12/14	2022/12/13

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §1.1307 (b) (3) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemption from further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2 f$.
1,500-100,000	$19.2 R^2$.

R is the minimum separation distance in meters

f = frequency in MHz

For multiple RF sources: Multiple RF sources are exempt if:

in the case of fixed RF sources operating in the same time-averaging period, or of multiple mobile or portable RF sources within a device operating in the same time averaging period, if the sum of the fractional contributions to the applicable thresholds is less than or equal to 1 as indicated in the following equation:

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1$$

Result

Mode	Frequency (MHz)	Tune up conducted power	Antenna Gain		ERP		Evaluation Distance (m)	ERP Limit (W)
		(dBm)	(dBi)	(dBd)	(dBm)	(W)		
DECT	1920- 1930	20.4	-0.23	-2.38	18.02	0.063	0.2	0.768
2.4G Wi-Fi	2412-2462	18.0	2	-0.15	17.85	0.061	0.2	0.768
5G Wi-Fi	5150-5250	14.5	2	-0.15	14.35	0.027	0.2	0.768
5G Wi-Fi	5250-5350	15.5	2	-0.15	15.35	0.034	0.2	0.768
5G Wi-Fi	5470-5725	15.0	2	-0.15	14.85	0.031	0.2	0.768
5G Wi-Fi	5725-5850	14.0	2	-0.15	13.85	0.024	0.2	0.768

Note: 1. The antenna gain and tune up conducted power was declared by the applicant.

2. The Wi-Fi and DECT can transmit at same time, the 2.4G Wi-Fi & 5G Wi-Fi cannot transmit Simultaneously

Simultaneous transmitting consideration (worst case):

The ratio= $ERP_{DECT}/limit + ERP_{Wi-Fi}/limit = 0.063/0.768 + 0.061/0.768 = 0.161 < 1.0$, so simultaneous exposure is compliant.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.407 (a), if the transmitting antennas of directional gain greater than 6dBi are used, the transmit power and power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antennas arrangement for 5G Wi-Fi which were permanently attached. Please refer to the EUT photos.

Type	Antenna Gain	Impedance	Frequency Range
PCB	2.0dBi	50 Ω	5150-5850MHz


Result: Compliant.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207, §15.407(b) (6)

EUT Setup

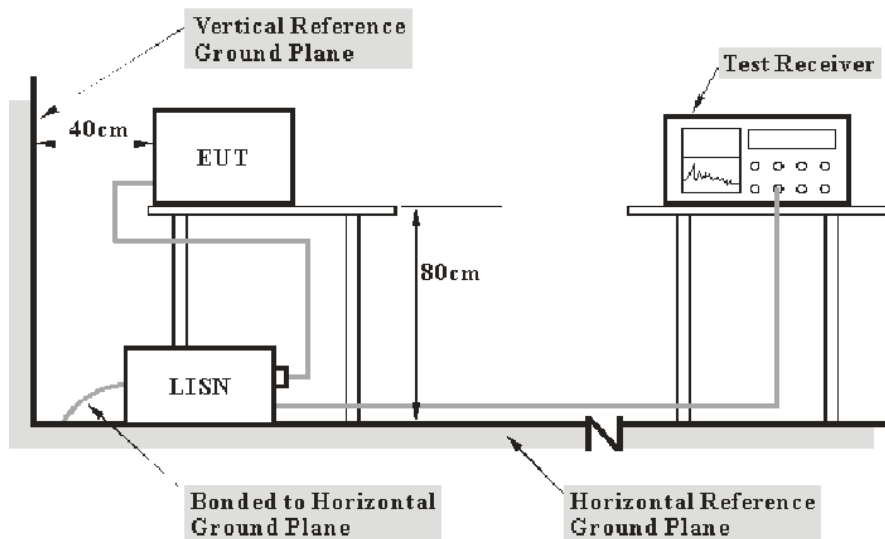

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and Average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read level} + \text{Factor}\end{aligned}$$

Test Data

Environmental Conditions


Temperature:	22 °C
Relative Humidity:	57%
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2022-01-04.

EUT operation mode: Transmitting (worst case is 802.11a, 5280MHz)


Powered by Adapter:

AC 120V/60 Hz, Line:

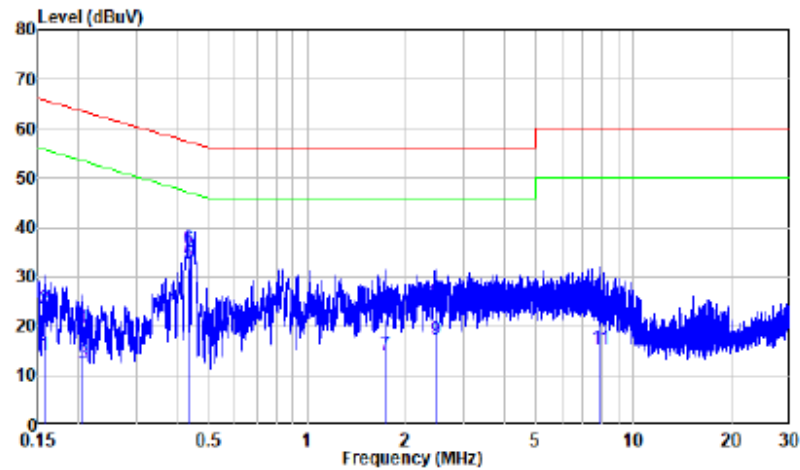

Site : Shielding Room
 Condition: Line
 Mode : 5G WIFI
 Model : NG-S3411W
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.157	9.88	4.27	14.15	55.62	-41.47	Average
2	0.157	9.88	13.65	23.53	65.62	-42.09	QP
3	0.205	9.88	2.65	12.45	53.41	-40.96	Average
4	0.205	9.88	9.87	19.67	63.41	-43.74	QP
5	0.432	9.88	22.88	32.68	47.22	-14.54	Average
6	0.432	9.88	25.96	35.76	57.22	-21.46	QP
7	1.723	9.90	4.37	14.27	46.00	-31.73	Average
8	1.723	9.90	11.52	21.42	56.00	-34.58	QP
9	2.464	9.92	7.38	17.30	46.00	-28.70	Average
10	2.464	9.92	14.88	24.80	56.00	-31.20	QP
11	7.914	10.08	5.19	15.27	50.00	-34.73	Average
12	7.914	10.08	12.17	22.25	60.00	-37.75	QP

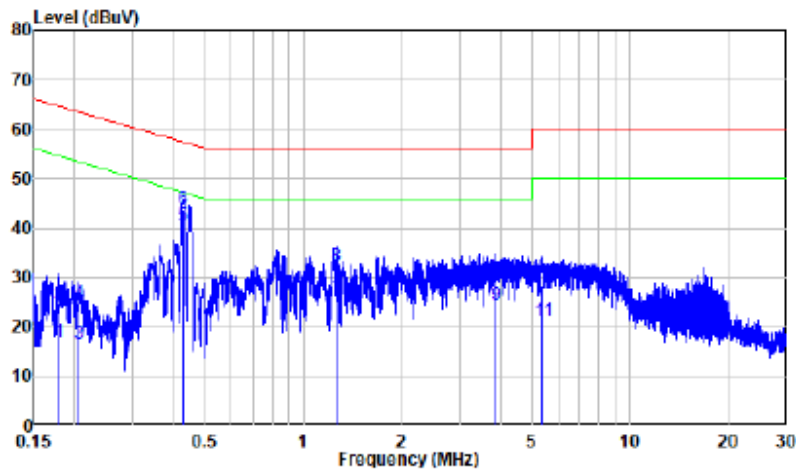
AC 120V/60 Hz, Neutral:

Site : Shielding Room
 Condition: Neutral
 Mode : 5G WIFI
 Model : NG-S3411W
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.179	9.96	7.06	17.02	54.52	-37.50	Average
2	0.179	9.96	14.79	24.75	64.52	-39.77	QP
3	0.205	10.00	6.61	16.61	53.41	-36.80	Average
4	0.205	10.00	14.66	24.66	63.41	-38.75	QP
5	0.429	9.92	30.51	40.43	47.28	-6.85	Average
6	0.429	9.92	33.81	43.73	57.28	-13.55	QP
7	1.257	9.91	15.79	25.70	46.00	-20.30	Average
8	1.257	9.91	22.39	32.30	56.00	-23.70	QP
9	3.891	10.04	14.56	24.60	46.00	-21.40	Average
10	3.891	10.04	19.67	29.91	56.00	-26.09	QP
11	5.394	10.05	11.08	21.13	50.00	-28.87	Average
12	5.394	10.05	18.20	28.25	60.00	-31.75	QP


Powered by POE:

AC 120V/60 Hz, Line:

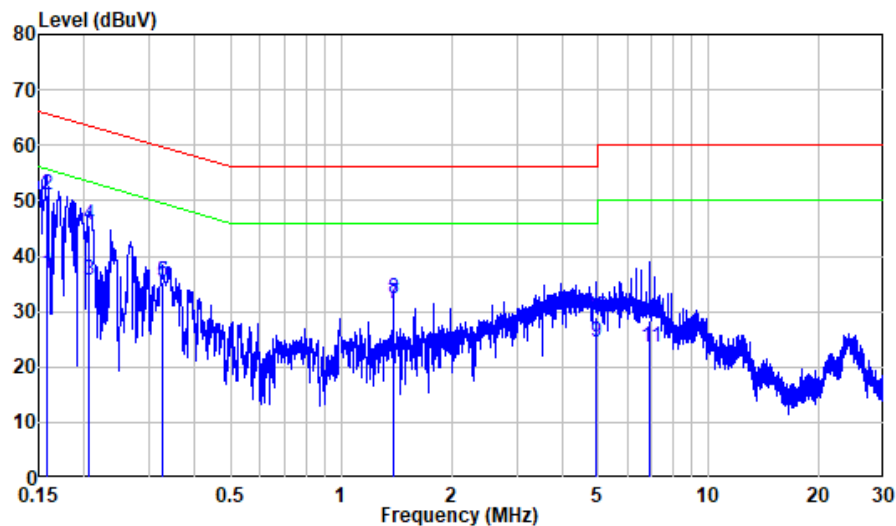

Site : Shielding Room
Condition: Line
Mode : TX
Model : NG-S3411W
Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.158	9.80	27.13	36.93	55.59	-18.66	Average
2	0.158	9.80	41.08	50.88	65.59	-14.71	QP
3	0.206	9.80	25.80	35.60	53.36	-17.76	Average
4	0.206	9.80	35.65	45.45	63.36	-17.91	QP
5	0.326	9.80	25.41	35.21	49.56	-14.35	Average
6	0.326	9.80	25.45	35.25	59.56	-24.31	QP
7	1.386	9.81	21.62	31.43	46.00	-14.57	Average
8	1.386	9.81	22.50	32.31	56.00	-23.69	QP
9	4.955	9.85	14.70	24.55	46.00	-21.45	Average
10	4.955	9.85	19.12	28.97	56.00	-27.03	QP
11	6.937	9.87	13.72	23.59	50.00	-26.41	Average
12	6.937	9.87	18.53	28.40	60.00	-31.60	QP

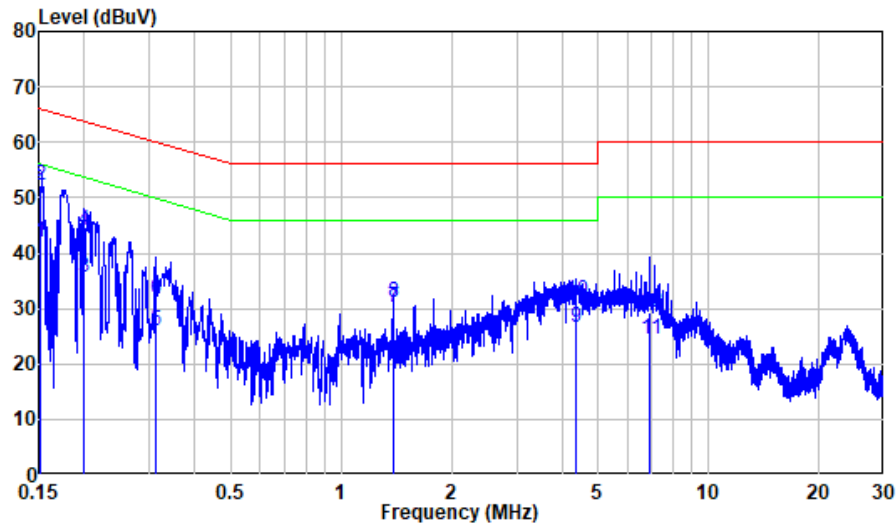AC 120V/60 Hz, Neutral:

Site : Shielding Room
 Condition: Neutral
 Mode : TX
 Model : NG-S3411W
 Power : AC 120V 60Hz

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dBuV	dBuV	dB	
1	0.151	9.80	32.20	42.00	55.92	-13.92	Average
2	0.151	9.80	42.49	52.29	65.92	-13.63	QP
3	0.200	9.80	25.68	35.48	53.62	-18.14	Average
4	0.200	9.80	34.30	44.10	63.62	-19.52	QP
5	0.311	9.80	16.09	25.89	49.93	-24.04	Average
6	0.311	9.80	21.82	31.62	59.93	-28.31	QP
7	1.386	9.81	20.31	30.12	46.00	-15.88	Average
8	1.386	9.81	21.26	31.07	56.00	-24.93	QP
9	4.352	9.86	16.82	26.68	46.00	-19.32	Average
10	4.352	9.86	21.64	31.50	56.00	-24.50	QP
11	6.928	9.97	14.51	24.48	50.00	-25.52	Average
12	6.928	9.97	19.37	29.34	60.00	-30.66	QP

§15.205 & §15.209 & §15.407(B)– UNDESIRABLE EMISSION

Applicable Standard

FCC §15.407 (b); §15.209; §15.205;


(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

EUT Setup

Below 1 GHz:

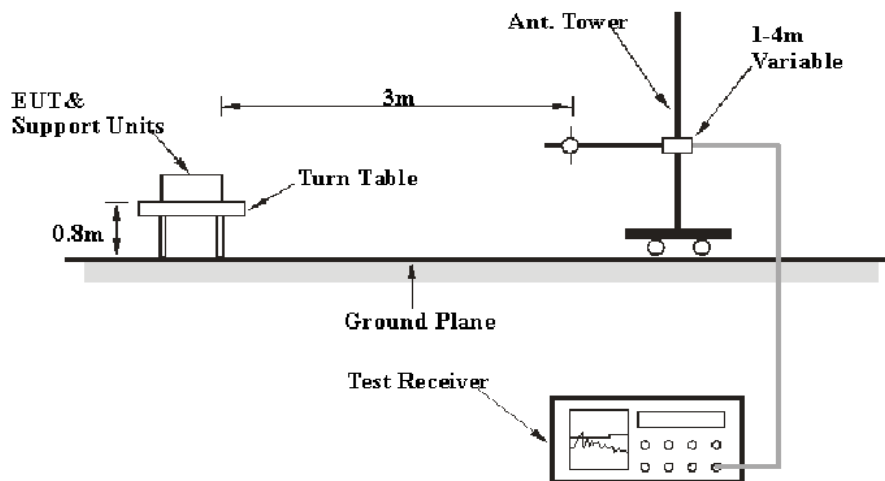

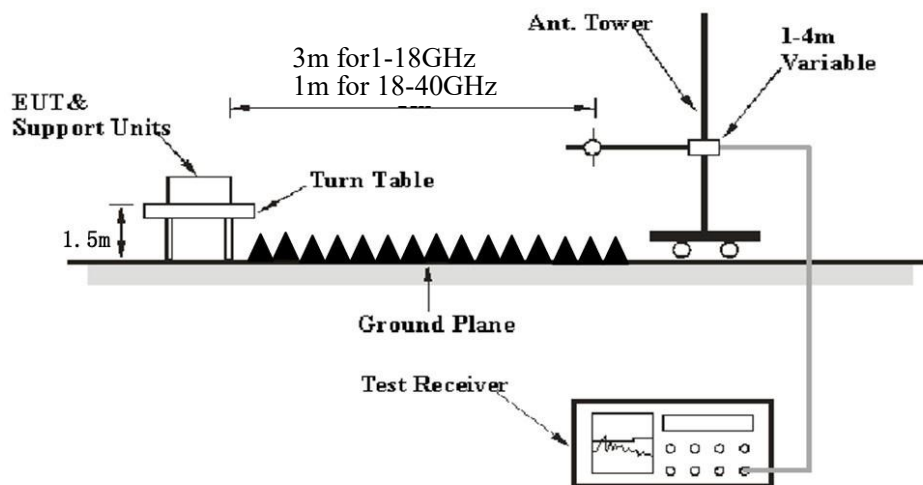Above 1 GHz:

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC 15.209 and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1MHz	10 Hz ^{Note 1}	/	Average
	1MHz	> 1/T ^{Note 2}	/	Average

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure**Radiated Spurious Emission**

During the radiated emission test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all the installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to ANSI C63.10-2013,9.4: For field strength measurements made at other than the distance at which the applicable limit is specified, extrapolate the measured field strength to the field strength at the distance specified by the limit using an inverse distance correction factor (20 dB/decade of distance). In some cases, a different distance correction factor may be required;

$$E_{\text{SpecLimit}} = E_{\text{Meas}} + 20 \log \left(\frac{d_{\text{Meas}}}{d_{\text{SpecLimit}}} \right)$$

where

$E_{\text{SpecLimit}}$	is the field strength of the emission at the distance specified by the limit, in dBμV/m
E_{Meas}	is the field strength of the emission at the measurement distance, in dBμV/m
d_{Meas}	is the measurement distance, in m
$d_{\text{SpecLimit}}$	is the distance specified by the limit, in m

So the extrapolation factor of 1m is $20 \cdot \log(1/3) = -9.5$ dB, for 18-40GHz range, the limit of 1m distance was added by 9.5dB from limit of 3m to compared with the result measurement at 1m distance.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit/Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned} \text{Over Limit/Margin} &= \text{Level / Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions

Temperature:	19~21 °C
Relative Humidity:	58~62 %
ATM Pressure:	101 kPa


The testing was performed by Bin Duan on 2022-01-04 for below 1GHz and by Chao Mo on 2022-01-11 for above 1GHz.

EUT operation mode: Transmitting(Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

30 MHz – 1 GHz: (worst case is 802.11a, 5280MHz)

Note: When the test result of peak was less than the limit of QP more than 6dB, just peak value were recorded.


Powered by adapter:

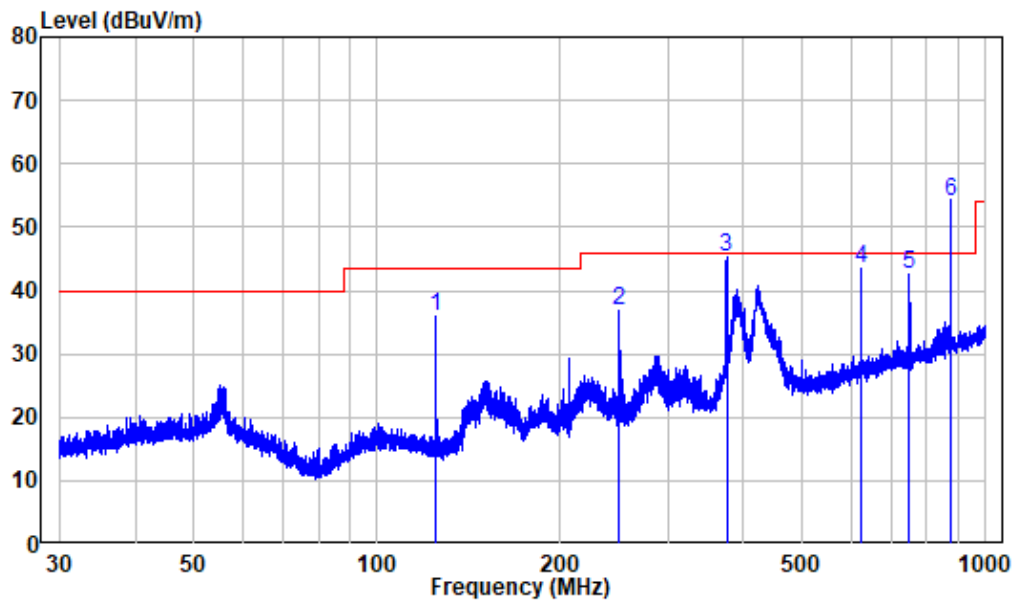Horizontal

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS211213-64525E-RF
Test Mode: 5G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	125.007	-14.31	50.38	36.07	43.50	-7.43	Peak
2	249.972	-10.74	47.56	36.82	46.00	-9.18	Peak
3	375.116	-7.28	52.48	45.20	46.00	-0.80	QP
4	625.078	-2.35	45.79	43.44	46.00	-2.56	QP
5	750.108	-0.87	43.34	42.47	46.00	-3.53	QP
6	875.247	1.18	52.80	53.98	46.00	7.98	QP*

Vertical

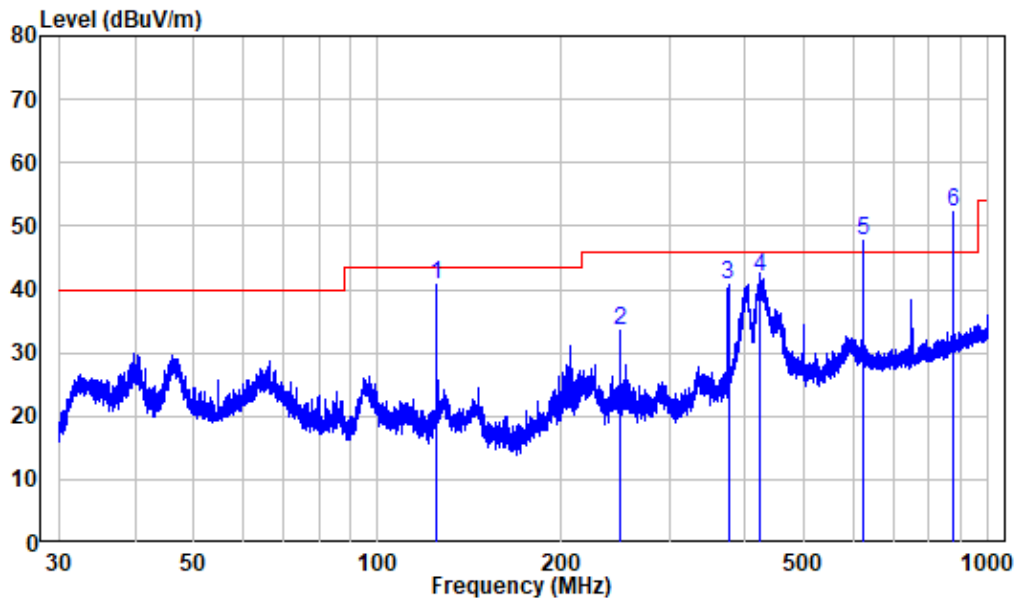

Site : chamber

Condition: 3m VERTICAL


Job No. : SZNS211213-64525E-RF

Test Mode: 5G WIFI

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	125.007	-14.31	55.05	40.74	43.50	-2.76	QP
2	249.972	-10.74	44.37	33.63	46.00	-12.37	Peak
3	375.116	-7.28	47.90	40.62	46.00	-5.38	QP
4	422.243	-6.01	48.00	41.99	46.00	-4.01	QP
5	625.078	-2.35	49.91	47.56	46.00	1.56	QP *
6	875.247	1.18	51.00	52.18	46.00	6.18	QP *

Powered by POE:


Horizontal

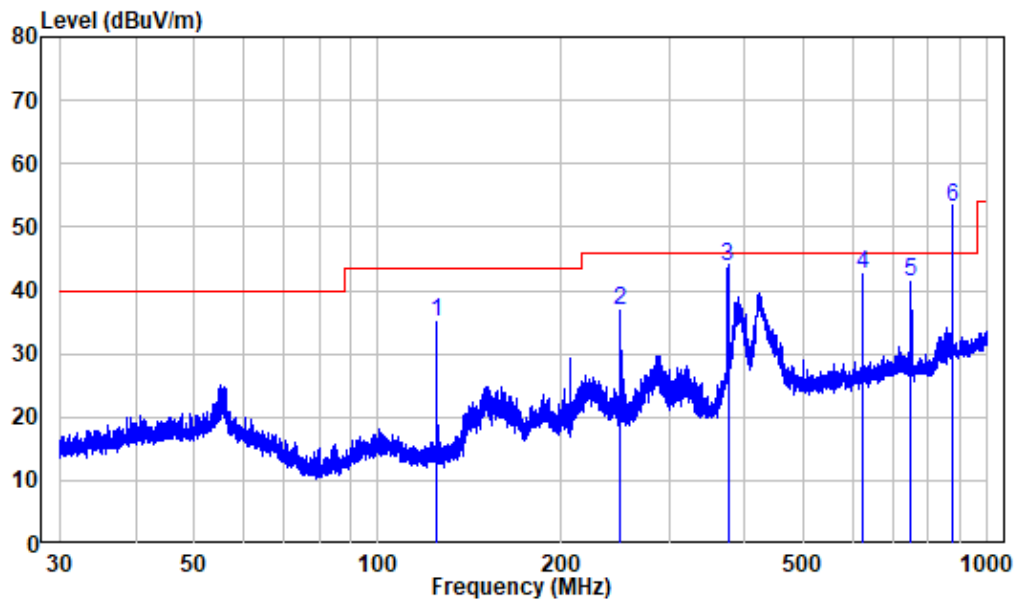

Site : chamber
Condition: 3m HORIZONTAL
Job No. : SZNS211213-64525E-RF
Test Mode: 5G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	125.007	-14.31	49.38	35.07	43.50	-8.43	Peak
2	249.972	-10.74	47.56	36.82	46.00	-9.18	Peak
3	375.116	-7.28	51.01	43.73	46.00	-2.27	QP
4	625.078	-2.35	44.79	42.44	46.00	-3.56	QP
5	750.108	-0.87	42.34	41.47	46.00	-4.53	QP
6	875.247	1.18	52.10	53.28	46.00	7.28	QP *

Vertical

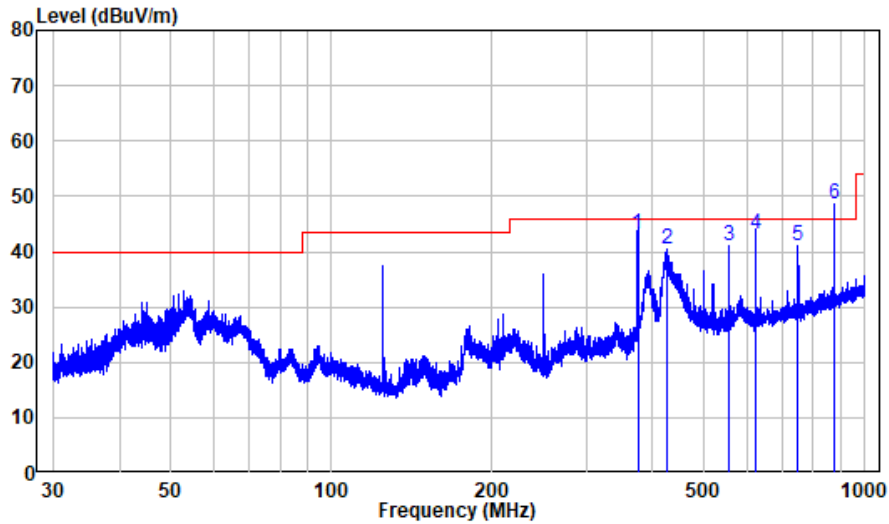

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS211213-64525E-RF
 Test Mode: 5G WIFI Transmitting

	Freq	Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz						
1	375.116	-7.28	50.58	43.30	46.00	-2.70	QP
2	425.028	-5.86	46.41	40.55	46.00	-5.45	QP
3	556.530	-4.10	45.18	41.08	46.00	-4.92	QP
4	625.078	-2.35	45.49	43.14	46.00	-2.86	QP
5	750.108	-0.87	41.97	41.10	46.00	-4.90	QP
6	875.247	1.18	47.30	48.48	46.00	2.48	QP *

Note *: The data recorded above represents the worst case for all supported operating modes, there were no spurious emission in the range 30MHz -1GHz over the limit in §15.209 caused by radio, the emission list at above table was investigated and was not caused by the radio, the emission was present when the radio was disabled, so those emission not judged under the radio regulation.

Above 1GHz:

5150-5250 MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a									
5180 MHz									
4500	64.18	PK	301	1.1	H	-4.72	59.46	74	-14.54
4500	50.19	Ave.	301	1.1	H	-4.72	45.47	54	-8.53
4500	64.3	PK	79	2.3	V	-4.72	59.58	74	-14.42
4500	50.28	Ave.	79	2.3	V	-4.72	45.56	54	-8.44
5150	63.15	PK	90	2.5	H	-2.73	60.42	74	-13.58
5150	50.71	Ave.	90	2.5	H	-2.73	47.98	54	-6.02
5150	64.19	PK	125	1.9	V	-2.73	61.46	74	-12.54
5150	51.47	Ave.	125	1.9	V	-2.73	48.74	54	-5.26
10360	42.75	PK	137	1.5	H	8.12	50.87	68.2	-17.33
10360	41.96	PK	105	2	V	8.12	50.08	68.2	-18.12
5200 MHz									
10400	42.57	PK	350	1.9	H	8.24	50.81	68.2	-17.39
10400	42.13	PK	215	1.1	V	8.24	50.37	68.2	-17.83
5240 MHz									
5350	64.32	PK	228	1.3	H	-2.33	61.99	74	-12.01
5350	51.3	Ave.	228	1.3	H	-2.33	48.97	54	-5.03
5350	64.5	PK	100	1.7	V	-2.33	62.17	74	-11.83
5350	51.05	Ave.	100	1.7	V	-2.33	48.72	54	-5.28
5460	63.96	PK	77	1.9	H	-2.26	61.7	74	-12.3
5460	51.12	Ave.	77	1.9	H	-2.26	48.86	54	-5.14
5460	63.4	PK	301	1.3	V	-2.26	61.14	74	-12.86
5460	51.07	Ave.	301	1.3	V	-2.26	48.81	54	-5.19
10480	41.81	PK	266	2	H	8.56	50.37	68.2	-17.83
10480	41.31	PK	158	2.4	V	8.56	49.87	68.2	-18.33

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
5180 MHz									
4500	64.22	PK	130	1.3	H	-4.72	59.5	74	-14.5
4500	50.34	Ave.	130	1.3	H	-4.72	45.62	54	-8.38
4500	64.31	PK	245	1.6	V	-4.72	59.59	74	-14.41
4500	50.54	Ave.	245	1.6	V	-4.72	45.82	54	-8.18
5150	62.8	PK	250	1.6	H	-2.73	60.07	74	-13.93
5150	50.5	Ave.	250	1.6	H	-2.73	47.77	54	-6.23
5150	63.26	PK	327	1.7	V	-2.73	60.53	74	-13.47
5150	50.31	Ave.	327	1.7	V	-2.73	47.58	54	-6.42
10360	42.38	PK	348	1.6	H	8.12	50.5	68.2	-17.7
10360	41.87	PK	217	1.6	V	8.12	49.99	68.2	-18.21
5200 MHz									
10400	42.5	PK	267	2.2	H	8.24	50.74	68.2	-17.46
10400	41.99	PK	120	1.2	V	8.24	50.23	68.2	-17.97
5240 MHz									
5350	64.44	PK	59	1	H	-2.33	62.11	74	-11.89
5350	50.96	Ave.	59	1	H	-2.33	48.63	54	-5.37
5350	64.07	PK	103	1.1	V	-2.33	61.74	74	-12.26
5350	51.17	Ave.	103	1.1	V	-2.33	48.84	54	-5.16
5460	63.99	PK	335	1.6	H	-2.26	61.73	74	-12.27
5460	50.98	Ave.	335	1.6	H	-2.26	48.72	54	-5.28
5460	64.07	PK	17	1.6	V	-2.26	61.81	74	-12.19
5460	51.05	Ave.	17	1.6	V	-2.26	48.79	54	-5.21
10480	42.07	PK	61	2	H	8.56	50.63	68.2	-17.57
10480	41.23	PK	280	1.1	V	8.56	49.79	68.2	-18.41

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11N40									
5190 MHz									
4500	64.42	PK	108	2.4	H	-4.72	59.7	74	-14.3
4500	50.25	Ave.	108	2.4	H	-4.72	45.53	54	-8.47
4500	64.43	PK	15	1.2	V	-4.72	59.71	74	-14.29
4500	50.15	Ave.	15	1.2	V	-4.72	45.43	54	-8.57
5150	63.76	PK	235	1.7	H	-2.73	61.03	74	-12.97
5150	52.41	Ave.	235	1.7	H	-2.73	49.68	54	-4.32
5150	63.47	PK	154	1	V	-2.73	60.74	74	-13.26
5150	50.77	Ave.	154	1	V	-2.73	48.04	54	-5.96
10380	42.54	PK	162	2	H	8.18	50.72	68.2	-17.48
10380	42.22	PK	338	1.3	V	8.18	50.4	68.2	-17.8
5230 MHz									
5350	64.16	PK	273	2.4	H	-2.33	61.83	74	-12.17
5350	51.88	Ave.	273	2.4	H	-2.33	49.55	54	-4.45
5350	64.7	PK	17	2	V	-2.33	62.37	74	-11.63
5350	51.64	Ave.	17	2	V	-2.33	49.31	54	-4.69
5460	63.96	PK	237	1.2	H	-2.26	61.7	74	-12.3
5460	51.47	Ave.	237	1.2	H	-2.26	49.21	54	-4.79
5460	63.59	PK	71	1.5	V	-2.26	61.33	74	-12.67
5460	51.47	Ave.	71	1.5	V	-2.26	49.21	54	-4.79
10460	41.79	PK	127	1.2	H	8.47	50.26	68.2	-17.94
10460	41.44	PK	222	1.4	V	8.47	49.91	68.2	-18.29

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac20									
5180 MHz									
4500	64.26	PK	245	2.1	H	-4.72	59.54	74	-14.46
4500	50.31	Ave.	245	2.1	H	-4.72	45.59	54	-8.41
4500	63.88	PK	325	2.4	V	-4.72	59.16	74	-14.84
4500	50.53	Ave.	325	2.4	V	-4.72	45.81	54	-8.19
5150	63.93	PK	283	2	H	-2.73	61.2	74	-12.8
5150	51.52	Ave.	283	2	H	-2.73	48.79	54	-5.21
5150	63.36	PK	214	2.2	V	-2.73	60.63	74	-13.37
5150	50.94	Ave.	214	2.2	V	-2.73	48.21	54	-5.79
10360	42.51	PK	359	1.3	H	8.12	50.63	68.2	-17.57
10360	42.24	PK	104	1.2	V	8.12	50.36	68.2	-17.84
5200 MHz									
10400	42.41	PK	323	1.2	H	8.24	50.65	68.2	-17.55
10400	42.05	PK	192	2.3	V	8.24	50.29	68.2	-17.91
5240 MHz									
5350	64.16	PK	305	1.9	H	-2.33	61.83	74	-12.17
5350	51.72	Ave.	305	1.9	H	-2.33	49.39	54	-4.61
5350	64.21	PK	231	1.9	V	-2.33	61.88	74	-12.12
5350	51.7	Ave.	231	1.9	V	-2.33	49.37	54	-4.63
5460	63.44	PK	230	2.4	H	-2.26	61.18	74	-12.82
5460	51.2	Ave.	230	2.4	H	-2.26	48.94	54	-5.06
5460	63.59	PK	1	1.8	V	-2.26	61.33	74	-12.67
5460	51.13	Ave.	1	1.8	V	-2.26	48.87	54	-5.13
10480	42.17	PK	121	1.1	H	8.56	50.73	68.2	-17.47
10480	41.41	PK	272	1.3	V	8.56	49.97	68.2	-18.23

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac40									
5190 MHz									
4500	64.1	PK	284	1.9	H	-4.72	59.38	74	-14.62
4500	50.6	Ave.	284	1.9	H	-4.72	45.88	54	-8.12
4500	64.49	PK	36	2.1	V	-4.72	59.77	74	-14.23
4500	51.06	Ave.	36	2.1	V	-4.72	46.34	54	-7.66
5150	64.15	PK	280	1.8	H	-2.73	61.42	74	-12.58
5150	52.41	Ave.	280	1.8	H	-2.73	49.68	54	-4.32
5150	63.15	PK	47	1.6	V	-2.73	60.42	74	-13.58
5150	51.13	Ave.	47	1.6	V	-2.73	48.4	54	-5.6
10380	42.29	PK	193	1.3	H	8.18	50.47	68.2	-17.73
10380	41.84	PK	317	1.9	V	8.18	50.02	68.2	-18.18
5230 MHz									
5350	64.51	PK	48	1.8	H	-2.33	62.18	74	-11.82
5350	51.65	Ave.	48	1.8	H	-2.33	49.32	54	-4.68
5350	64.04	PK	40	2.5	V	-2.33	61.71	74	-12.29
5350	51.57	Ave.	40	2.5	V	-2.33	49.24	54	-4.76
5460	63.31	PK	33	2.3	H	-2.26	61.05	74	-12.95
5460	51.44	Ave.	33	2.3	H	-2.26	49.18	54	-4.82
5460	63.19	PK	194	1.5	V	-2.26	60.93	74	-13.07
5460	51.21	Ave.	194	1.5	V	-2.26	48.95	54	-5.05
10460	42.13	PK	167	1.5	H	8.47	50.6	68.2	-17.6
10460	41.6	PK	96	1.8	V	8.47	50.07	68.2	-18.13

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac80									
5210 MHz									
4500	64.24	PK	212	2.4	H	-4.72	59.52	74	-14.48
4500	50.69	Ave.	212	2.4	H	-4.72	45.97	54	-8.03
4500	64.21	PK	343	1.8	V	-4.72	59.49	74	-14.51
4500	50.56	Ave.	343	1.8	V	-4.72	45.84	54	-8.16
5150	66.63	PK	223	2.1	H	-2.73	63.9	74	-10.1
5150	55.35	Ave.	223	2.1	H	-2.73	52.62	54	-1.38
5150	64.04	PK	246	1.2	V	-2.73	61.31	74	-12.69
5150	51.84	Ave.	246	1.2	V	-2.73	49.11	54	-4.89
5350	64.56	PK	140	2	H	-2.33	62.23	74	-11.77
5350	51.5	Ave.	140	2	H	-2.33	49.17	54	-4.83
5350	63.95	PK	142	2.5	V	-2.33	61.62	74	-12.38
5350	51.57	Ave.	142	2.5	V	-2.33	49.24	54	-4.76
5460	63.71	PK	175	1.6	H	-2.26	61.45	74	-12.55
5460	51.4	Ave.	175	1.6	H	-2.26	49.14	54	-4.86
5460	63.29	PK	138	2.4	V	-2.26	61.03	74	-12.97
5460	51.43	Ave.	138	2.4	V	-2.26	49.17	54	-4.83
10420	42.32	PK	136	1.3	H	8.32	50.64	68.2	-17.56
10420	42.02	PK	32	2	V	8.32	50.34	68.2	-17.86

5250-5350 MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a									
5260 MHz									
4500	63.81	PK	348	1.4	H	-4.72	59.09	74	-14.91
4500	50.53	Ave.	348	1.4	H	-4.72	45.81	54	-8.19
4500	64.52	PK	39	1.8	V	-4.72	59.8	74	-14.2
4500	50.48	Ave.	39	1.8	V	-4.72	45.76	54	-8.24
5150	63.4	PK	336	2.2	H	-2.73	60.67	74	-13.33
5150	50.52	Ave.	336	2.2	H	-2.73	47.79	54	-6.21
5150	63.38	PK	214	1.3	V	-2.73	60.65	74	-13.35
5150	50.27	Ave.	214	1.3	V	-2.73	47.54	54	-6.46
10520	40.89	PK	33	1.4	H	8.65	49.54	68.2	-18.66
10520	40.68	PK	303	1.2	V	8.65	49.33	68.2	-18.87
5280 MHz									
10560	41.22	PK	208	1.4	H	8.69	49.91	68.2	-18.29
10560	41.65	PK	154	1.4	V	8.69	50.34	68.2	-17.86
5320 MHz									
5350	64.25	PK	299	2.1	H	-2.33	61.92	74	-12.08
5350	51.26	Ave.	299	2.1	H	-2.33	48.93	54	-5.07
5350	64.72	PK	357	2.4	V	-2.33	62.39	74	-11.61
5350	51.25	Ave.	357	2.4	V	-2.33	48.92	54	-5.08
5460	63.82	PK	276	1	H	-2.26	61.56	74	-12.44
5460	51.04	Ave.	276	1	H	-2.26	48.78	54	-5.22
5460	63.29	PK	8	1.5	V	-2.26	61.03	74	-12.97
5460	50.63	Ave.	8	1.5	V	-2.26	48.37	54	-5.63
10640	41.44	PK	316	1.8	H	8.92	50.36	74	-23.64
10640	41.22	PK	325	1.2	V	8.92	50.14	74	-23.86

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
5260 MHz									
4500	63.82	PK	109	1.8	H	-4.72	59.1	74	-14.9
4500	50.35	Ave.	109	1.8	H	-4.72	45.63	54	-8.37
4500	63.68	PK	303	1.5	V	-4.72	58.96	74	-15.04
4500	50.41	Ave.	303	1.5	V	-4.72	45.69	54	-8.31
5150	63.41	PK	67	1.6	H	-2.73	60.68	74	-13.32
5150	50.29	Ave.	67	1.6	H	-2.73	47.56	54	-6.44
5150	63.24	PK	58	1.1	V	-2.73	60.51	74	-13.49
5150	50.28	Ave.	58	1.1	V	-2.73	47.55	54	-6.45
10520	40.86	PK	21	2.1	H	8.65	49.51	68.2	-18.69
10520	40.85	PK	124	2.3	V	8.65	49.5	68.2	-18.7
5280 MHz									
10560	41.31	PK	65	1.7	H	8.69	50	68.2	-18.2
10560	41.51	PK	353	1	V	8.69	50.2	68.2	-18
5320 MHz									
5350	64.16	PK	172	1.5	H	-2.33	61.83	74	-12.17
5350	51.39	Ave.	172	1.5	H	-2.33	49.06	54	-4.94
5350	64.06	PK	21	2.4	V	-2.33	61.73	74	-12.27
5350	50.93	Ave.	21	2.4	V	-2.33	48.6	54	-5.4
5460	64	PK	187	1.3	H	-2.26	61.74	74	-12.26
5460	50.79	Ave.	187	1.3	H	-2.26	48.53	54	-5.47
5460	63.65	PK	164	1.1	V	-2.26	61.39	74	-12.61
5460	50.71	Ave.	164	1.1	V	-2.26	48.45	54	-5.55
10640	41.58	PK	109	2.2	H	8.92	50.5	74	-23.5
10640	41.51	PK	267	1.7	V	8.92	50.43	74	-23.57

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n40									
5270 MHz									
4500	63.91	PK	78	1.7	H	-4.72	59.19	74	-14.81
4500	50.65	Ave.	78	1.7	H	-4.72	45.93	54	-8.07
4500	63.65	PK	189	2.2	V	-4.72	58.93	74	-15.07
4500	50.65	Ave.	189	2.2	V	-4.72	45.93	54	-8.07
5150	63.77	PK	326	2.4	H	-2.73	61.04	74	-12.96
5150	50.83	Ave.	326	2.4	H	-2.73	48.1	54	-5.9
5150	63.16	PK	11	1.9	V	-2.73	60.43	74	-13.57
5150	50.28	Ave.	11	1.9	V	-2.73	47.55	54	-6.45
10540	40.8	PK	187	2	H	8.65	49.45	68.2	-18.75
10540	40.95	PK	137	2.5	V	8.65	49.6	68.2	-18.6
5310 MHz									
5350	66.02	PK	109	2.4	H	-2.33	63.69	74	-10.31
5350	52.54	Ave.	109	2.4	H	-2.33	50.21	54	-3.79
5350	64.06	PK	264	1.8	V	-2.33	61.73	74	-12.27
5350	51.21	Ave.	264	1.8	V	-2.33	48.88	54	-5.12
5460	63.26	PK	142	2.4	H	-2.26	61	74	-13
5460	50.88	Ave.	142	2.4	H	-2.26	48.62	54	-5.38
5460	63.97	PK	234	1.1	V	-2.26	61.71	74	-12.29
5460	51.11	Ave.	234	1.1	V	-2.26	48.85	54	-5.15
10620	41.48	PK	94	1.2	H	8.89	50.37	74	-23.63
10620	41.25	PK	14	2.3	V	8.89	50.14	74	-23.86

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac20									
5260 MHz									
4500	64.16	PK	216	2	H	-4.72	59.44	74	-14.56
4500	50.22	Ave.	216	2	H	-4.72	45.5	54	-8.5
4500	63.72	PK	351	2.4	V	-4.72	59	74	-15
4500	50.3	Ave.	351	2.4	V	-4.72	45.58	54	-8.42
5150	63.95	PK	173	1	H	-2.73	61.22	74	-12.78
5150	50.33	Ave.	173	1	H	-2.73	47.6	54	-6.4
5150	64.03	PK	350	2.4	V	-2.73	61.3	74	-12.7
5150	50.41	Ave.	350	2.4	V	-2.73	47.68	54	-6.32
10520	40.63	PK	282	1.4	H	8.65	49.28	68.2	-18.92
10520	40.75	PK	2	1.1	V	8.65	49.4	68.2	-18.8
5280 MHz									
10560	41.44	PK	261	1.1	H	8.69	50.13	68.2	-18.07
10560	41.61	PK	295	1.2	V	8.69	50.3	68.2	-17.9
5320 MHz									
5350	64.16	PK	261	2.2	H	-2.33	61.83	74	-12.17
5350	51.28	Ave.	261	2.2	H	-2.33	48.95	54	-5.05
5350	64.83	PK	107	1.4	V	-2.33	62.5	74	-11.5
5350	51.38	Ave.	107	1.4	V	-2.33	49.05	54	-4.95
5460	63.4	PK	265	1.2	H	-2.26	61.14	74	-12.86
5460	50.74	Ave.	265	1.2	H	-2.26	48.48	54	-5.52
5460	63.28	PK	32	2	V	-2.26	61.02	74	-12.98
5460	50.68	Ave.	32	2	V	-2.26	48.42	54	-5.58
10640	41.4	PK	349	1.2	H	8.92	50.32	74	-23.68
10640	41.22	PK	246	1.5	V	8.92	50.14	74	-23.86

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac40									
5270 MHz									
4500	63.93	PK	41	2.3	H	-4.72	59.21	74	-14.79
4500	50.98	Ave.	41	2.3	H	-4.72	46.26	54	-7.74
4500	63.68	PK	243	1.7	V	-4.72	58.96	74	-15.04
4500	50.73	Ave.	243	1.7	V	-4.72	46.01	54	-7.99
5150	63.9	PK	36	2	H	-2.73	61.17	74	-12.83
5150	50.67	Ave.	36	2	H	-2.73	47.94	54	-6.06
5150	63.75	PK	265	1.7	V	-2.73	61.02	74	-12.98
5150	50.29	Ave.	265	1.7	V	-2.73	47.56	54	-6.44
10540	40.73	PK	342	1.7	H	8.65	49.38	68.2	-18.82
10540	40.76	PK	67	1.7	V	8.65	49.41	68.2	-18.79
5310 MHz									
5350	65.97	PK	241	1.4	H	-2.33	63.64	74	-10.36
5350	52.5	Ave.	241	1.4	H	-2.33	50.17	54	-3.83
5350	64.2	PK	268	2	V	-2.33	61.87	74	-12.13
5350	51.22	Ave.	268	2	V	-2.33	48.89	54	-5.11
5460	63.35	PK	169	1.6	H	-2.26	61.09	74	-12.91
5460	51.06	Ave.	169	1.6	H	-2.26	48.8	54	-5.2
5460	63.76	PK	340	1.3	V	-2.26	61.5	74	-12.5
5460	50.93	Ave.	340	1.3	V	-2.26	48.67	54	-5.33
10620	40.53	PK	21	1.6	H	8.89	49.42	74	-24.58
10620	40.74	PK	78	1.9	V	8.89	49.63	74	-24.37

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac80									
5290 MHz									
4500	64.53	PK	17	1.4	H	-4.72	59.81	74	-14.19
4500	51.34	Ave.	17	1.4	H	-4.72	46.62	54	-7.38
4500	64.12	PK	336	1.8	V	-4.72	59.4	74	-14.6
4500	51.11	Ave.	336	1.8	V	-4.72	46.39	54	-7.61
5150	63.69	PK	210	2.4	H	-2.73	60.96	74	-13.04
5150	51.2	Ave.	210	2.4	H	-2.73	48.47	54	-5.53
5150	63.47	PK	146	2.4	V	-2.73	60.74	74	-13.26
5150	51.36	Ave.	146	2.4	V	-2.73	48.63	54	-5.37
5350	69.56	PK	44	1.3	H	-2.33	67.23	74	-6.77
5350	54.61	Ave.	44	1.3	H	-2.33	52.28	54	-1.72
5350	64	PK	227	1.8	V	-2.33	61.67	74	-12.33
5350	52.08	Ave.	227	1.8	V	-2.33	49.75	54	-4.25
5460	64.09	PK	269	2.2	H	-2.26	61.83	74	-12.17
5460	51.56	Ave.	269	2.2	H	-2.26	49.3	54	-4.7
5460	63.79	PK	128	2.4	V	-2.26	61.53	74	-12.47
5460	51.17	Ave.	128	2.4	V	-2.26	48.91	54	-5.09
10580	41.55	PK	97	2.5	H	8.77	50.32	68.2	-17.88
10580	41.63	PK	132	1.5	V	8.77	50.4	68.2	-17.8

5470-5725MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a									
5500 MHz									
5460	64.49	PK	311	1.2	H	-2.26	62.23	74	-11.77
5460	50.43	Ave.	311	1.2	H	-2.26	48.17	54	-5.83
5460	63.71	PK	131	1.9	V	-2.26	61.45	74	-12.55
5460	50.34	Ave.	131	1.9	V	-2.26	48.08	54	-5.92
5470	67.01	PK	359	2.1	H	-2.22	64.79	68.2	-3.41
5470	65.56	PK	74	1.4	V	-2.22	63.34	68.2	-4.86
11000	41.57	PK	157	1.3	H	9.67	51.24	74	-22.76
11000	46.45	PK	80	2.3	V	9.67	56.12	74	-17.88
11000	32.93	Ave.	80	2.3	V	9.67	42.6	54	-11.4
5580 MHz									
11160	40.8	PK	220	1.7	H	8.68	49.48	74	-24.52
11160	42.75	PK	216	1.3	V	8.68	51.43	74	-22.57
5700 MHz									
5725	67.07	PK	152	2.4	H	-1.96	65.11	68.2	-3.09
5725	66.58	PK	279	1	V	-1.96	64.62	68.2	-3.58
5745	64.15	PK	48	1.9	H	-1.91	62.24	68.2	-5.96
5745	63.79	PK	265	1.4	V	-1.91	61.88	68.2	-6.32
11400	44.29	PK	157	1.8	H	7.26	51.55	74	-22.45
11400	46.58	PK	16	2.2	V	7.26	53.84	74	-20.16

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
5500 MHz									
5460	63.67	PK	69	1.7	H	-2.26	61.41	74	-12.59
5460	50.39	Ave.	69	1.7	H	-2.26	48.13	54	-5.87
5460	63.58	PK	235	2.4	V	-2.26	61.32	74	-12.68
5460	50.31	Ave.	235	2.4	V	-2.26	48.05	54	-5.95
5470	65.93	PK	7	1.5	H	-2.22	63.71	68.2	-4.49
5470	64.87	PK	259	1.9	V	-2.22	62.65	68.2	-5.55
11000	39.16	PK	14	1.4	H	9.67	48.83	74	-25.17
11000	41.03	PK	104	2.1	V	9.67	50.7	74	-23.3
5580 MHz									
11160	40.53	PK	50	2	H	8.68	49.21	74	-24.79
11160	42.08	PK	229	1.7	V	8.68	50.76	74	-23.24
5700 MHz									
5725	67.07	PK	215	2.1	H	-1.96	65.11	68.2	-3.09
5725	66.49	PK	123	1.1	V	-1.96	64.53	68.2	-3.67
5745	64.33	PK	202	1.8	H	-1.91	62.42	68.2	-5.78
5745	64.25	PK	14	1.4	V	-1.91	62.34	68.2	-5.86
11400	43.12	PK	47	1.9	H	7.26	50.38	74	-23.62
11400	44.24	PK	106	1.2	V	7.26	51.5	74	-22.5
802.11n40									
5510 MHz									
5460	64.4	PK	284	2.2	H	-2.26	62.14	74	-11.86
5460	50.67	Ave.	284	2.2	H	-2.26	48.41	54	-5.59
5460	64.23	PK	319	2.3	V	-2.26	61.97	74	-12.03
5460	50.59	Ave.	319	2.3	V	-2.26	48.33	54	-5.67
5470	67.12	PK	94	2	H	-2.22	64.9	68.2	-3.3
5470	65.41	PK	269	2	V	-2.22	63.19	68.2	-5.01
11020	38.95	PK	142	2	H	9.57	48.52	74	-25.48
11020	40.07	PK	320	1.9	V	9.57	49.64	74	-24.36
5550 MHz									
11100	38.88	PK	359	1.1	H	9.12	48	74	-26
11100	40.06	PK	267	1.2	V	9.12	49.18	74	-24.82
5670 MHz									
5725	66.17	PK	195	1.4	H	-1.96	64.21	68.2	-3.99
5725	65.81	PK	15	1.3	V	-1.96	63.85	68.2	-4.35
5745	64.65	PK	268	2	H	-1.91	62.74	68.2	-5.46
5745	64.38	PK	206	2.3	V	-1.91	62.47	68.2	-5.73
11340	41.52	PK	274	1.9	H	7.67	49.19	74	-24.81
11340	42.64	PK	175	1.5	V	7.67	50.31	74	-23.69

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac20									
5500 MHz									
5460	63.81	PK	338	2.1	H	-2.26	61.55	74	-12.45
5460	50.48	Ave.	338	2.1	H	-2.26	48.22	54	-5.78
5460	63.6	PK	355	1.9	V	-2.26	61.34	74	-12.66
5460	50.43	Ave.	355	1.9	V	-2.26	48.17	54	-5.83
5470	66.82	PK	216	1.4	H	-2.22	64.6	68.2	-3.6
5470	65.54	PK	240	2.4	V	-2.22	63.32	68.2	-4.88
11000	39.34	PK	191	1.8	H	9.67	49.01	74	-24.99
11000	43.66	PK	27	2.5	V	9.67	53.33	74	-20.67
5580 MHz									
11160	40.45	PK	279	1.5	H	8.68	49.13	74	-24.87
11160	43.06	PK	350	1.5	V	8.68	51.74	74	-22.26
5700 MHz									
5725	67.13	PK	69	2.2	H	-1.96	65.17	68.2	-3.03
5725	66.34	PK	106	2.3	V	-1.96	64.38	68.2	-3.82
5745	63.65	PK	169	2.5	H	-1.91	61.74	68.2	-6.46
5745	63.53	PK	173	1.4	V	-1.91	61.62	68.2	-6.58
11400	42.75	PK	118	2.1	H	7.26	50.01	74	-23.99
11400	45.29	PK	85	1.3	V	7.26	52.55	74	-21.45
802.11ac40									
5510 MHz									
5460	64.09	PK	164	1.1	H	-2.26	61.83	74	-12.17
5460	50.64	Ave.	164	1.1	H	-2.26	48.38	54	-5.62
5460	63.92	PK	149	1.9	V	-2.26	61.66	74	-12.34
5460	50.57	Ave.	149	1.9	V	-2.26	48.31	54	-5.69
5470	66.97	PK	37	2.1	H	-2.22	64.75	68.2	-3.45
5470	65.35	PK	58	2.3	V	-2.22	63.13	68.2	-5.07
11020	38.83	PK	100	1.6	H	9.57	48.4	74	-25.6
11020	39.91	PK	69	1.7	V	9.57	49.48	74	-24.52
5550 MHz									
11100	38.97	PK	112	1.3	H	9.12	48.09	74	-25.91
11100	39.93	PK	97	1	V	9.12	49.05	74	-24.95
5670 MHz									
5725	66.67	PK	354	1.8	H	-1.96	64.71	68.2	-3.49
5725	65.76	PK	59	1.3	V	-1.96	63.8	68.2	-4.4
5745	64.55	PK	186	1.3	H	-1.91	62.64	68.2	-5.56
5745	64.33	PK	109	1.5	V	-1.91	62.42	68.2	-5.78
11340	41.28	PK	357	1.9	H	7.67	48.95	74	-25.05
11340	42.64	PK	200	2.4	V	7.67	50.31	74	-23.69

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac80									
5530 MHz									
5460	64.11	PK	327	1.9	H	-2.26	61.85	74	-12.15
5460	50.64	Ave.	327	1.9	H	-2.26	48.38	54	-5.62
5460	63.9	PK	251	1.3	V	-2.26	61.64	74	-12.36
5460	50.49	Ave.	251	1.3	V	-2.26	48.23	54	-5.77
5470	67.3	PK	126	1.3	H	-2.22	65.08	68.2	-3.12
5470	66.45	PK	140	1	V	-2.22	64.23	68.2	-3.97
11060	38.7	PK	292	1.1	H	9.37	48.07	74	-25.93
11060	39.63	PK	284	1.5	V	9.37	49	74	-25
5610 MHz									
5725	66.79	PK	328	2.1	H	-1.96	64.83	68.2	-3.37
5725	65.9	PK	281	2.3	V	-1.96	63.94	68.2	-4.26
5745	64.26	PK	33	2.2	H	-1.91	62.35	68.2	-5.85
5745	64.03	PK	327	1.7	V	-1.91	62.12	68.2	-6.08
11220	40.84	PK	350	2	H	8.33	49.17	74	-24.83
11220	41.75	PK	15	1.7	V	8.33	50.08	74	-23.92

5725-5850 MHz:

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11a									
5745 MHz									
5650	65.69	PK	219	2.5	H	-1.95	63.74	68.2	-4.46
5700	66.13	PK	255	2.1	H	-2.02	64.11	105.2	-41.09
5720	66.82	PK	169	1	H	-1.97	64.85	110.8	-45.95
5725	75.29	PK	332	1.5	H	-1.96	73.33	122.2	-48.87
5650	65.48	PK	91	1.2	V	-1.95	63.53	68.2	-4.67
5700	66.22	PK	104	2.1	V	-2.02	64.2	105.2	-41
5720	66.65	PK	220	1.1	V	-1.97	64.68	110.8	-46.12
5725	74.07	PK	124	2.1	V	-1.96	72.11	122.2	-50.09
11490	44.68	PK	127	2.4	H	6.63	51.31	74	-22.69
11490	47.27	PK	321	1.2	V	6.63	53.9	74	-20.1
5785 MHz									
11570	44.9	PK	240	2.3	H	6.59	51.49	74	-22.51
11570	46.01	PK	240	1.2	V	6.59	52.6	74	-21.4
5825 MHz									
5850	67.72	PK	306	1	H	-1.81	65.91	122.2	-56.29
5855	66.87	PK	49	1.7	H	-1.82	65.05	110.8	-45.75
5875	67.1	PK	38	2.5	H	-1.84	65.26	105.2	-39.94
5925	66.56	PK	280	2.2	H	-1.82	64.74	68.2	-3.46
5850	67.16	PK	103	1.4	V	-1.81	65.35	122.2	-56.85
5855	66.94	PK	247	2	V	-1.82	65.12	110.8	-45.68
5875	67.03	PK	221	1.1	V	-1.84	65.19	105.2	-40.01
5925	66.47	PK	357	1.7	V	-1.82	64.65	68.2	-3.55
11650	43.52	PK	246	1.4	H	6.77	50.29	74	-23.71
11650	44.16	PK	13	1.6	V	6.77	50.93	74	-23.07

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n20									
5745 MHz									
5850	66.9	PK	235	1.5	H	-1.81	65.09	122.2	-57.11
5855	67.3	PK	164	1.5	H	-1.82	65.48	110.8	-45.32
5875	66.54	PK	326	1.2	H	-1.84	64.7	105.2	-40.5
5925	66.54	PK	280	2.5	H	-1.82	64.72	68.2	-3.48
5850	66.73	PK	352	2.2	V	-1.81	64.92	122.2	-57.28
5855	67.12	PK	122	2.5	V	-1.82	65.3	110.8	-45.5
5875	66.65	PK	138	1.4	V	-1.84	64.81	105.2	-40.39
5925	66.46	PK	31	1.6	V	-1.82	64.64	68.2	-3.56
11490	42.71	PK	252	1.1	H	6.63	49.34	74	-24.66
11490	43.85	PK	183	2.5	V	6.63	50.48	74	-23.52
5785 MHz									
11570	43.57	PK	15	2.2	H	6.59	50.16	74	-23.84
11570	44.28	PK	114	1.7	V	6.59	50.87	74	-23.13
5825 MHz									
5850	66.9	PK	219	1.8	H	-1.81	65.09	122.2	-57.11
5855	61.7	PK	312	1.2	H	-1.82	59.88	105.2	-45.32
5875	72.14	PK	77	1.4	H	-1.84	70.3	110.8	-40.5
5925	66.54	PK	196	1.4	H	-1.82	64.72	68.2	-3.48
5850	66.73	PK	217	2	V	-1.81	64.92	122.2	-57.28
5855	61.52	PK	67	1.3	V	-1.82	59.7	105.2	-45.5
5875	72.25	PK	93	1.4	V	-1.84	70.41	110.8	-40.39
5925	66.46	PK	294	1.3	V	-1.82	64.64	68.2	-3.56
11650	42.75	PK	183	1.6	H	6.77	49.52	74	-24.48
11650	43.18	PK	307	2	V	6.77	49.95	74	-24.05

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11n40									
5755 MHz									
5650	65.39	PK	65	1.9	H	-1.95	63.44	68.2	-4.76
5700	65.97	PK	331	1.4	H	-2.02	63.95	105.2	-41.25
5720	69.08	PK	134	2	H	-1.97	67.11	110.8	-43.69
5725	70.49	PK	221	2.5	H	-1.96	68.53	122.2	-53.67
5650	65.31	PK	43	2.3	V	-1.95	63.36	68.2	-4.84
5700	66.16	PK	275	1.2	V	-2.02	64.14	105.2	-41.06
5720	68.7	PK	67	1.1	V	-1.97	66.73	110.8	-44.07
5725	69.84	PK	312	2.5	V	-1.96	67.88	122.2	-54.32
11510	43.4	PK	137	2.2	H	6.59	49.99	74	-24.01
11510	43.92	PK	61	2.1	V	6.59	50.51	74	-23.49
5795 MHz									
5850	66.8	PK	87	2	H	-1.81	64.99	122.2	-57.21
5855	67.06	PK	34	2.2	H	-1.82	65.24	110.8	-45.56
5875	67.16	PK	321	1.8	H	-1.84	65.32	105.2	-39.88
5925	66.52	PK	159	2	H	-1.82	64.7	68.2	-3.5
5850	66.74	PK	151	1.8	V	-1.81	64.93	122.2	-57.27
5855	67.11	PK	226	1.4	V	-1.82	65.29	110.8	-45.51
5875	67.08	PK	308	2.3	V	-1.84	65.24	105.2	-39.96
5925	66.44	PK	128	1.7	V	-1.82	64.62	68.2	-3.58
11590	43.86	PK	171	1.9	H	6.57	50.43	74	-23.57
11590	44.3	PK	322	1.7	V	6.57	50.87	74	-23.13

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac20									
5745 MHz									
5650	65.5	PK	41	2.4	H	-1.95	63.55	68.2	-4.65
5700	66.46	PK	99	1.8	H	-2.02	64.44	105.2	-40.76
5720	66.94	PK	236	2.1	H	-1.97	64.97	110.8	-45.83
5725	73.37	PK	115	2.2	H	-1.96	71.41	122.2	-50.79
5650	65.33	PK	40	1.7	V	-1.95	63.38	68.2	-4.82
5700	66.37	PK	351	1.8	V	-2.02	64.35	105.2	-40.85
5720	66.84	PK	242	1.6	V	-1.97	64.87	110.8	-45.93
5725	72.19	PK	213	2.4	V	-1.96	70.23	122.2	-51.97
11490	42.98	PK	183	1.1	H	6.63	49.61	74	-24.39
11490	44.62	PK	359	2.4	V	6.63	51.25	74	-22.75
5785 MHz									
11570	43.67	PK	48	1.8	H	6.59	50.26	74	-23.74
11570	45.06	PK	77	1.5	V	6.59	51.65	74	-22.35
5825 MHz									
5850	67.02	PK	277	1.3	H	-1.81	65.21	122.2	-56.99
5855	67.35	PK	143	1.6	H	-1.82	65.53	110.8	-45.27
5875	67.89	PK	307	1.2	H	-1.84	66.05	105.2	-39.15
5925	66.74	PK	125	1.9	H	-1.82	64.92	68.2	-3.28
5850	66.93	PK	43	1.7	V	-1.81	65.12	122.2	-57.08
5855	67.21	PK	138	2.4	V	-1.82	65.39	110.8	-45.41
5875	67.62	PK	143	1.7	V	-1.84	65.78	105.2	-39.42
5925	66.58	PK	178	1.1	V	-1.82	64.76	68.2	-3.44
11650	42.73	PK	183	1.6	H	6.77	49.5	74	-24.5
11650	43.84	PK	24	2.2	V	6.77	50.61	74	-23.39

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac40									
5755 MHz									
5650	65.32	PK	162	1.6	H	-1.95	63.37	68.2	-4.83
5700	65.96	PK	4	2.4	H	-2.02	63.94	105.2	-41.26
5720	68.25	PK	194	2	H	-1.97	66.28	110.8	-44.52
5725	70.41	PK	330	1.6	H	-1.96	68.45	122.2	-53.75
5650	65.19	PK	298	1.9	V	-1.95	63.24	68.2	-4.96
5700	65.79	PK	141	1	V	-2.02	63.77	105.2	-41.43
5720	68.08	PK	232	1.9	V	-1.97	66.11	110.8	-44.69
5725	69.64	PK	301	2.2	V	-1.96	67.68	122.2	-54.52
11510	43.59	PK	177	1.2	H	6.59	50.18	74	-23.82
11510	44.02	PK	85	1.4	V	6.59	50.61	74	-23.39
5795 MHz									
5850	67.01	PK	204	1.1	H	-1.81	65.2	122.2	-57
5855	66.98	PK	265	1.8	H	-1.82	65.16	110.8	-45.64
5875	66.89	PK	38	2	H	-1.84	65.05	105.2	-40.15
5925	66.55	PK	146	1	H	-1.82	64.73	68.2	-3.47
5850	66.87	PK	315	1.1	V	-1.81	65.06	122.2	-57.14
5855	66.91	PK	297	1.4	V	-1.82	65.09	110.8	-45.71
5875	67.08	PK	340	2.2	V	-1.84	65.24	105.2	-39.96
5925	66.45	PK	152	2.4	V	-1.82	64.63	68.2	-3.57
11590	44.29	PK	115	1.9	H	6.57	50.86	74	-23.14
11590	44.52	PK	160	2.1	V	6.57	51.09	74	-22.91

Frequency (MHz)	Receiver		Turntable Angle Degree	Rx Antenna		Factor (dB/m)	Absolute Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave		Height (m)	Polar (H/V)				
802.11ac80									
5775 MHz									
5650	65.85	PK	204	1.5	H	-1.95	63.9	68.2	-4.3
5700	68.38	PK	116	1.5	H	-2.02	66.36	105.2	-38.84
5720	70.61	PK	28	1.7	H	-1.97	68.64	110.8	-42.16
5725	72.83	PK	299	2	H	-1.96	70.87	122.2	-51.33
5650	65.71	PK	37	2.3	V	-1.95	63.76	68.2	-4.44
5700	68.16	PK	154	1.5	V	-2.02	66.14	105.2	-39.06
5720	69.9	PK	269	2.4	V	-1.97	67.93	110.8	-42.87
5725	71.84	PK	39	2.3	V	-1.96	69.88	122.2	-52.32
5850	69.9	PK	138	1	H	-1.81	68.09	122.2	-54.11
5855	69.07	PK	181	1.5	H	-1.82	67.25	110.8	-43.55
5875	66.97	PK	68	1	H	-1.84	65.13	105.2	-40.07
5925	66.68	PK	180	2.5	H	-1.82	64.86	68.2	-3.34
5850	69.24	PK	6	2.5	V	-1.81	67.43	122.2	-54.77
5855	68.43	PK	106	2	V	-1.82	66.61	110.8	-44.19
5875	66.78	PK	234	1.3	V	-1.84	64.94	105.2	-40.26
5925	66.5	PK	262	1.8	V	-1.82	64.68	68.2	-3.52
11550	43.92	PK	107	1.8	H	6.61	50.53	74	-23.47
11550	44.27	PK	258	2.4	V	6.61	50.88	74	-23.12

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit


The other spurious emission which is in the noise floor level was not recorded.

When the test result of peak was less than the limit of average, just peak values were recorded.


Pre-scan with 802.11a, 5500MHz

1GHz-18GHz


Horizontal

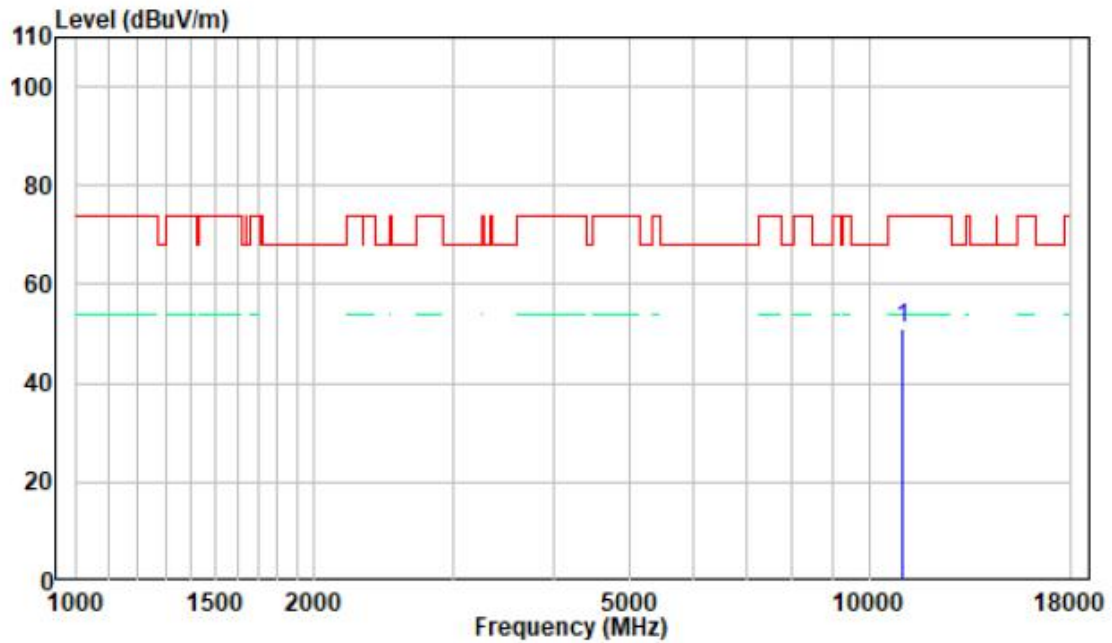


Vertical

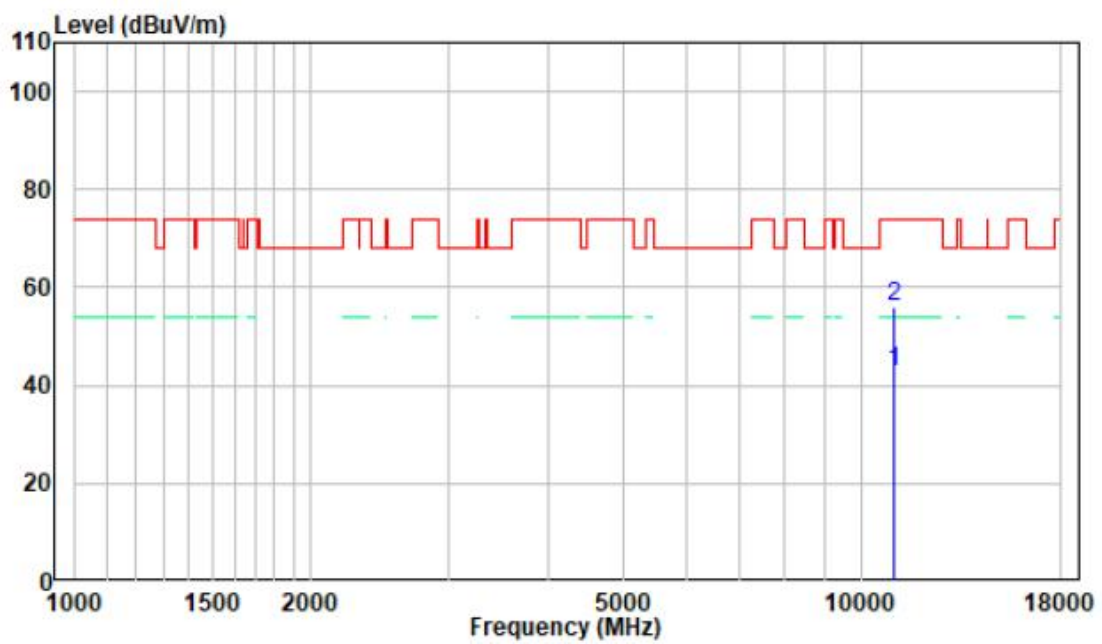

18GHz-40GHz
Horizontal

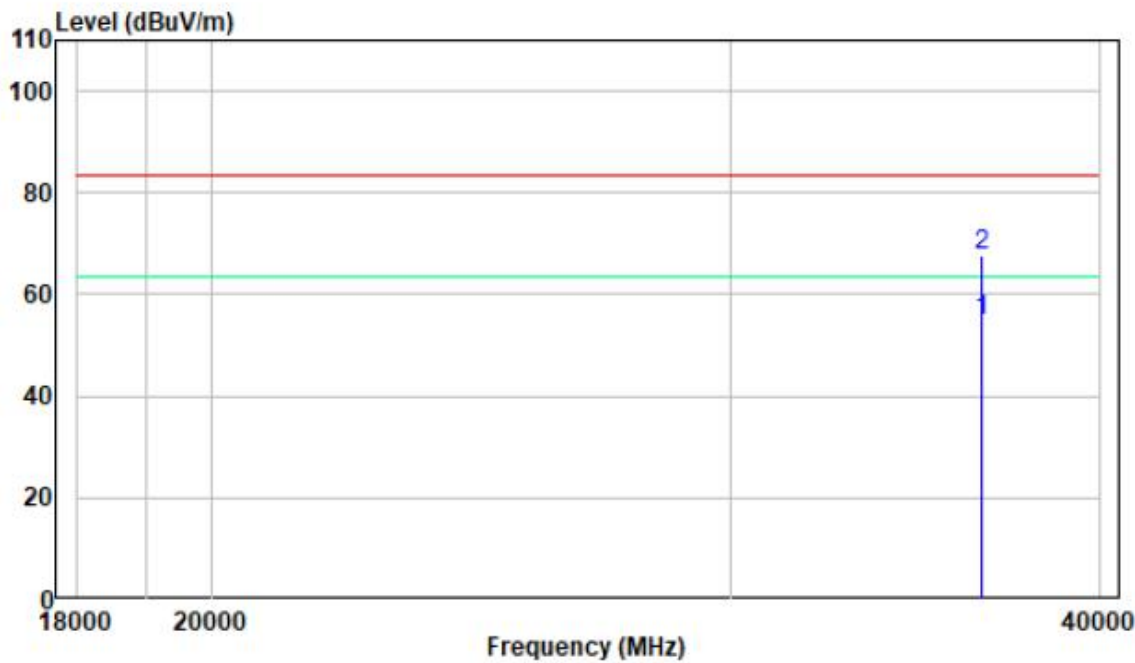

Vertical

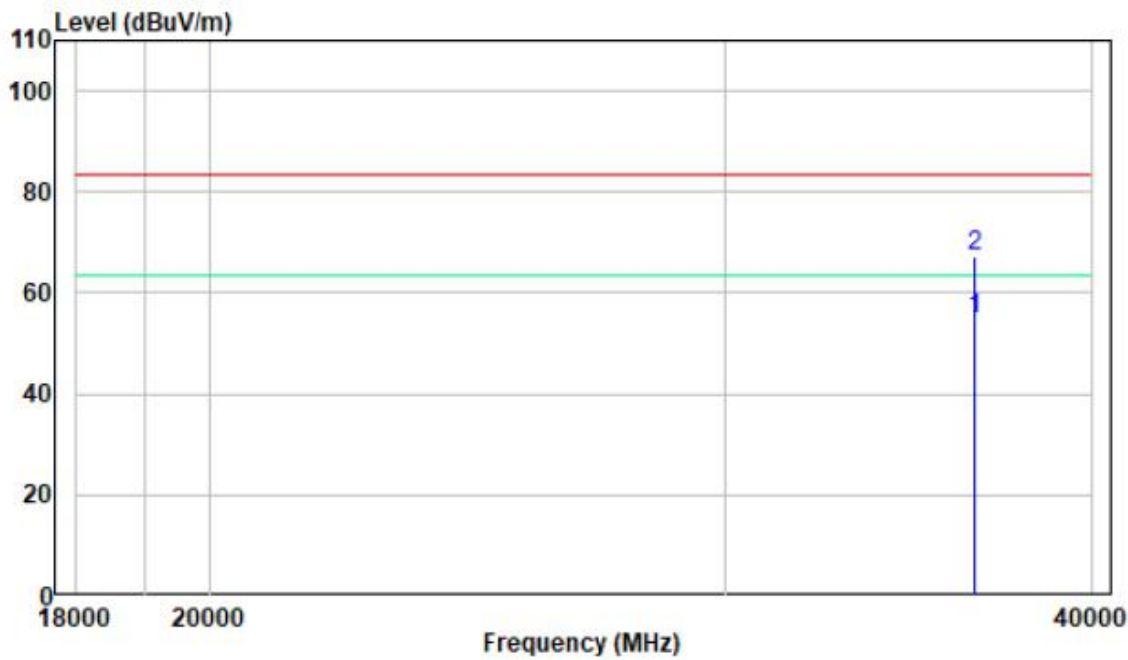

FCC §15.407(a),(e) – 26 dB & 6dB EMISSION BANDWIDTH

Applicable Standard

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Test Procedure


1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data**Environmental Conditions**

Temperature:	25.2~27 °C
Relative Humidity:	51~57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding from 2021-12-23 to 2022-02-28.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) – CONDUCTED TRANSMITTER OUTPUT POWER

Applicable Standard

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

- c. Place the EUT on a bench and set it in transmitting mode.
- d. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
- e. Add a correction factor to the display.



Note: the RF Control Unit has a built-in power sensor

Test Data**Environmental Conditions**

Temperature:	25.2~27 °C
Relative Humidity:	51~57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding on 2021-12-23.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

FCC §15.407(a) - POWER SPECTRAL DENSITY

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $\text{RBW} \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $\text{VBW} \geq 3 \text{ RBW}$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500 \text{ kHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/\text{RBW})$ to the measured result, whereas $\text{RBW} (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.



Test Data**Environmental Conditions**

Temperature:	25.2~27 °C
Relative Humidity:	51~57 %
ATM Pressure:	101.0 kPa

The testing was performed by Black Ding from 2021-12-23 to 2022-03-11.

EUT operation mode: Transmitting

Test Result: Pass

Please refer to the Appendix.

APPENDIX

Appendix A1: Emission Bandwidth Test Result

Test Mode	Antenna	Channel	26db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	21.080	---	PASS
		5200	20.440	---	PASS
		5240	21.160	---	PASS
		5260	21.120	---	PASS
		5280	20.680	---	PASS
		5320	21.040	---	PASS
		5500	20.600	---	PASS
		5580	21.320	---	PASS
11N20SISO	Ant1	5700	20.600	---	PASS
		5180	21.400	---	PASS
		5200	21.000	---	PASS
		5240	20.880	---	PASS
		5260	21.280	---	PASS
		5280	20.960	---	PASS
		5320	20.880	---	PASS
		5500	21.160	---	PASS
11N40SISO	Ant1	5580	21.040	---	PASS
		5700	21.080	---	PASS
		5190	43.280	---	PASS
		5230	42.080	---	PASS
		5270	41.760	---	PASS
		5310	43.200	---	PASS
11AC20SISO	Ant1	5510	42.240	---	PASS
		5550	42.640	---	PASS
		5670	42.400	---	PASS
		5180	20.920	---	PASS
		5200	21.400	---	PASS
		5240	20.920	---	PASS
		5260	22.000	---	PASS
		5280	20.840	---	PASS
11AC40SISO	Ant1	5320	21.120	---	PASS
		5500	21.520	---	PASS
		5580	21.600	---	PASS
		5700	20.880	---	PASS
		5190	43.600	---	PASS
		5230	42.240	---	PASS
11AC80SISO	Ant1	5270	43.120	---	PASS
		5310	43.040	---	PASS
		5510	43.360	---	PASS
		5550	42.960	---	PASS
		5670	42.080	---	PASS
		5210	84.800	---	PASS
	Ant1	5290	86.560	---	PASS
		5530	83.360	---	PASS
		5610	83.520	---	PASS

Test Graphs



11A_Ant1_5260



11A_Ant1_5280



11A_Ant1_5320




11A_Ant1_5500





11A_Ant1_5580





11A_Ant1_5700

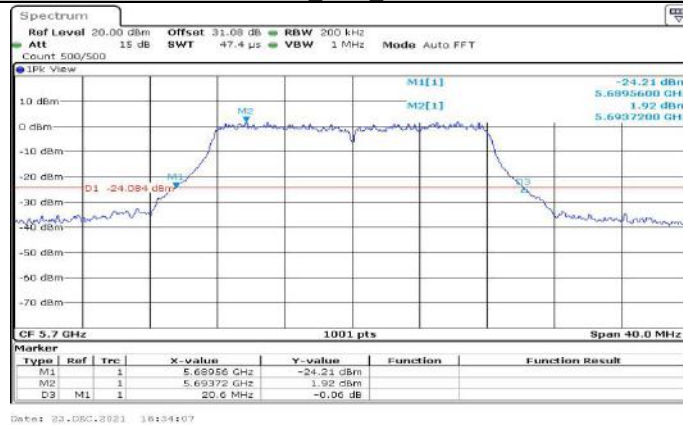

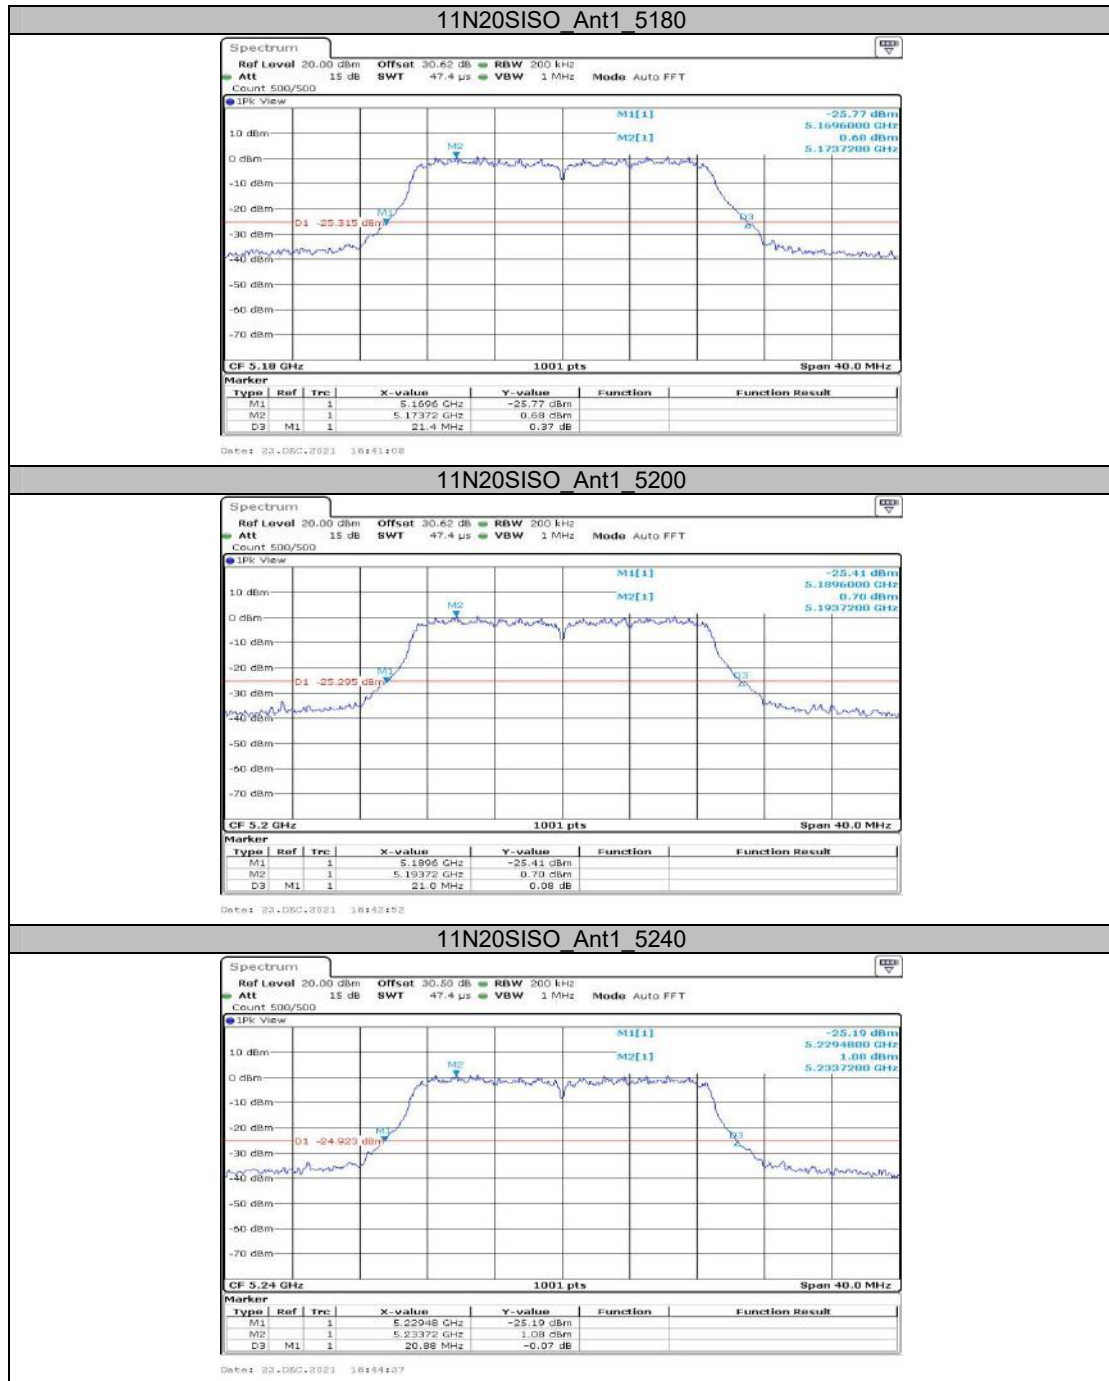


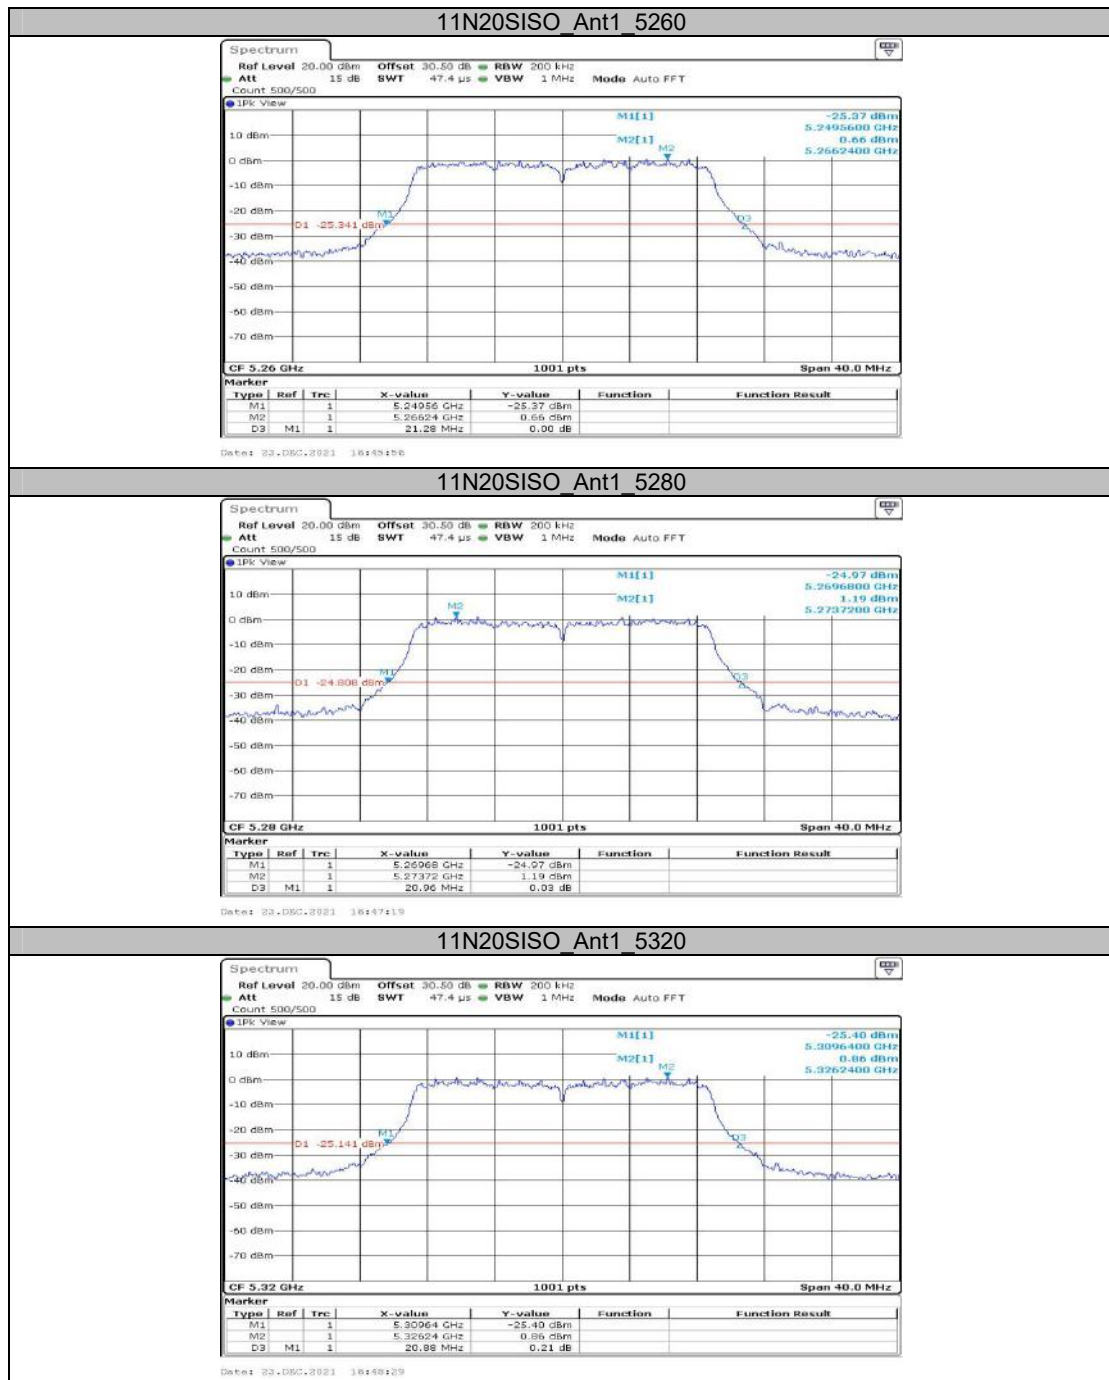

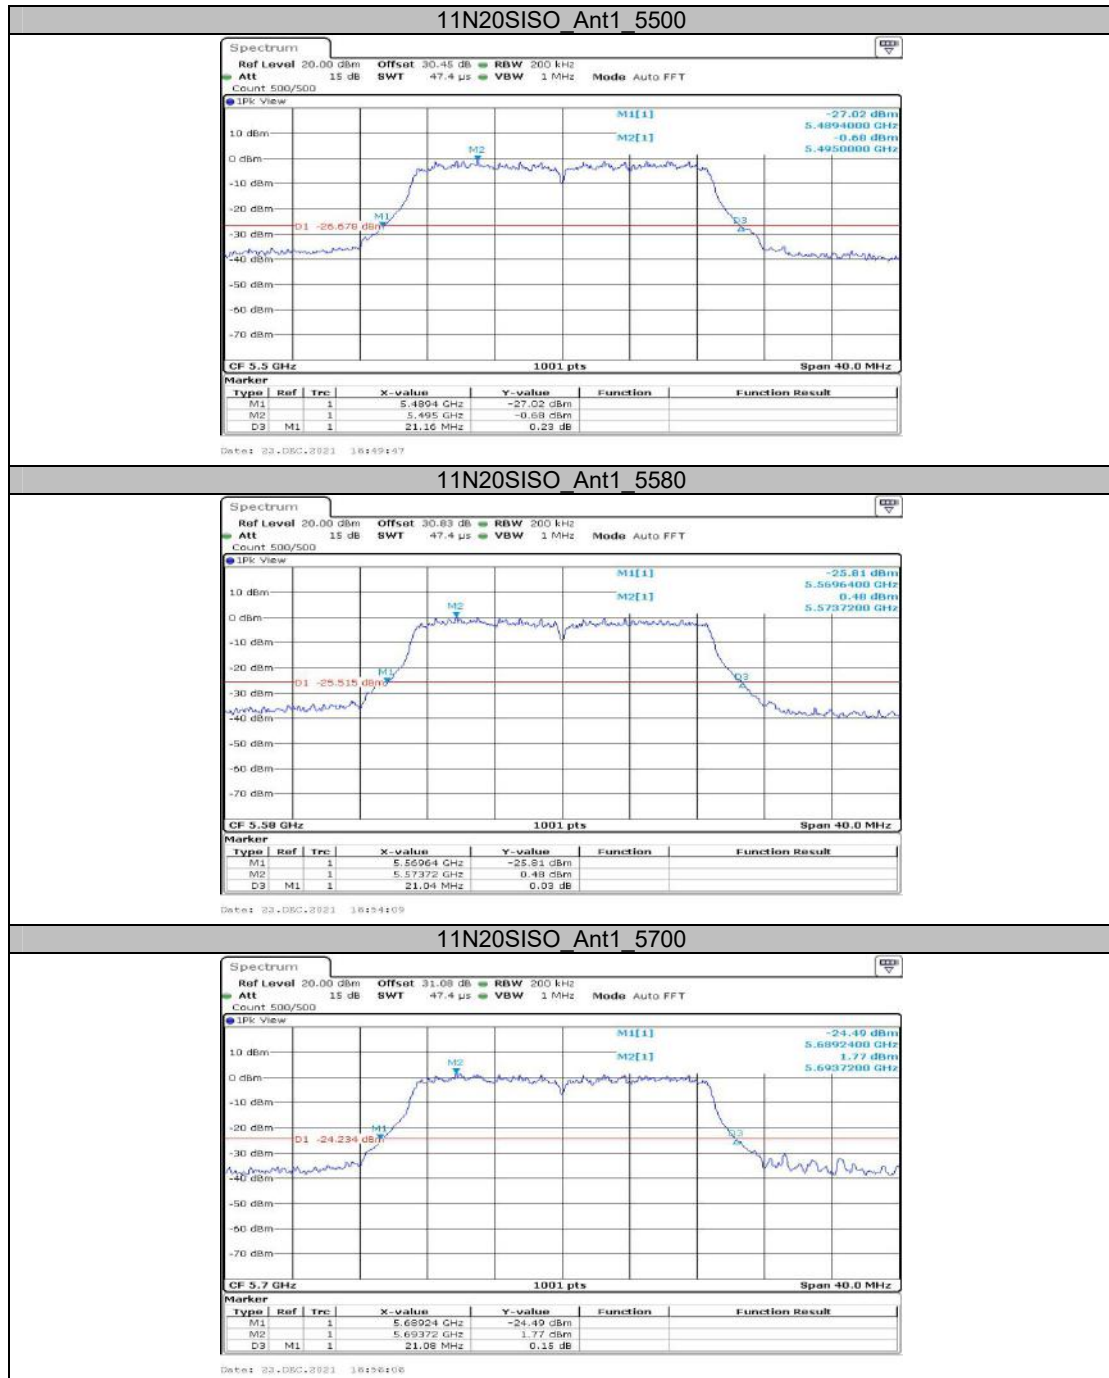

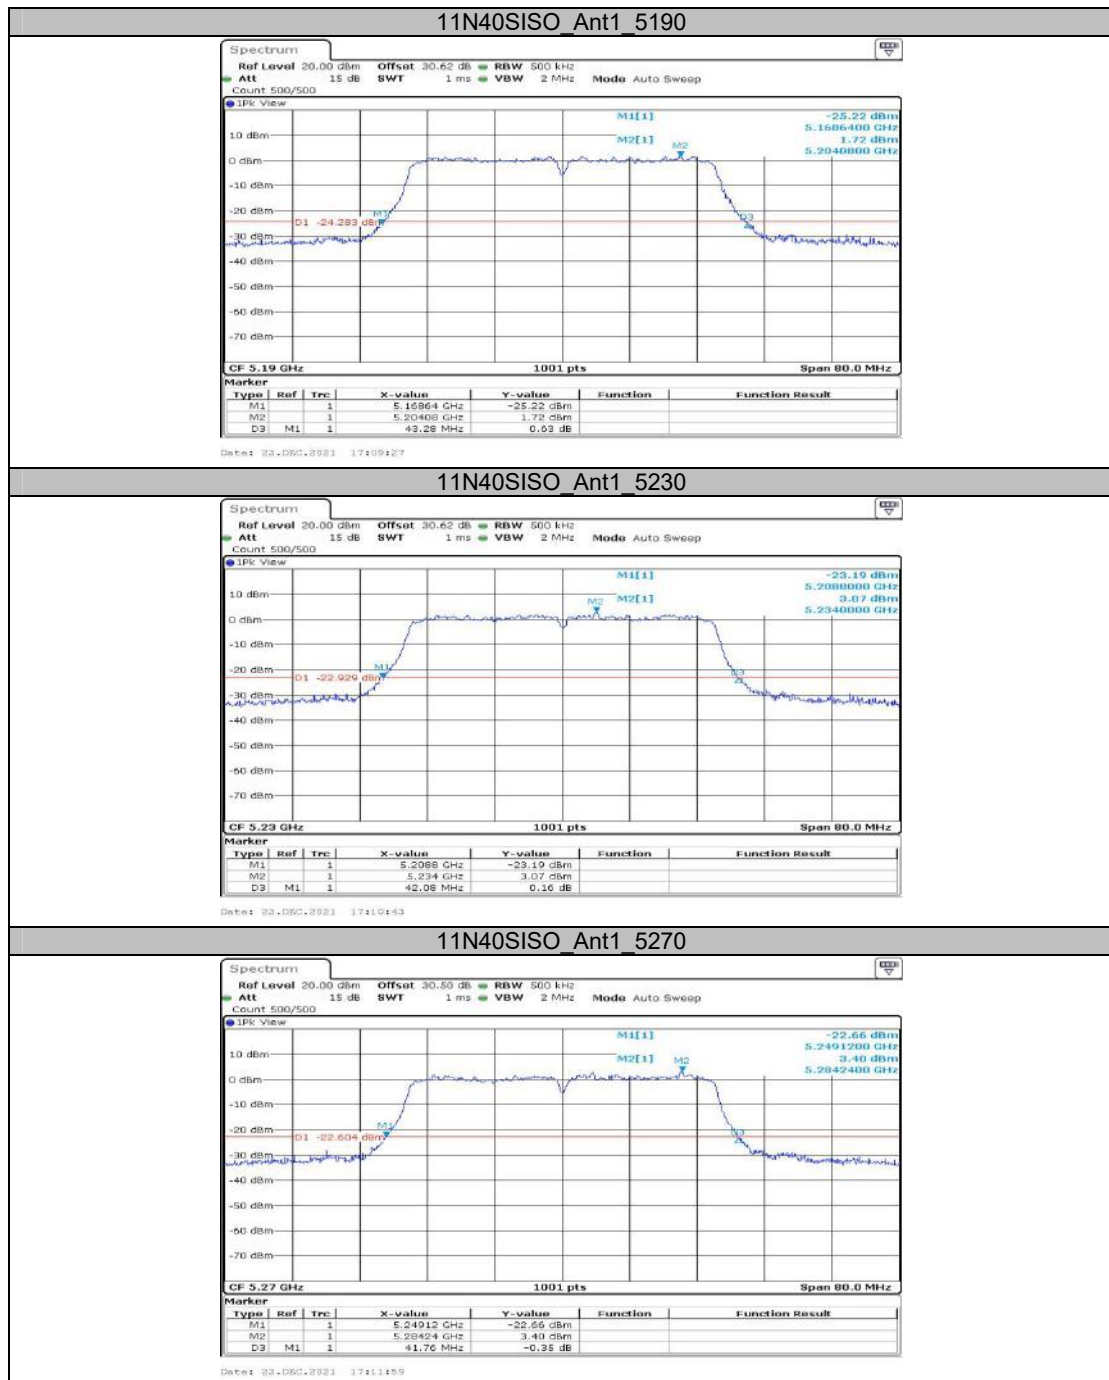


11N40SISO Ant1 5310

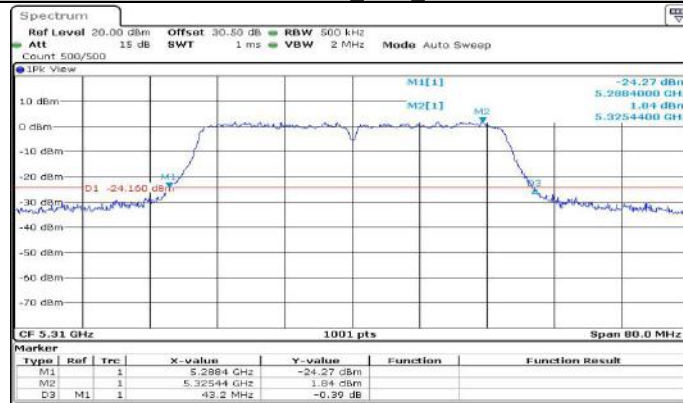


Date: 22.DEC.2023 17:13:14

11N40SISO Ant1 5510

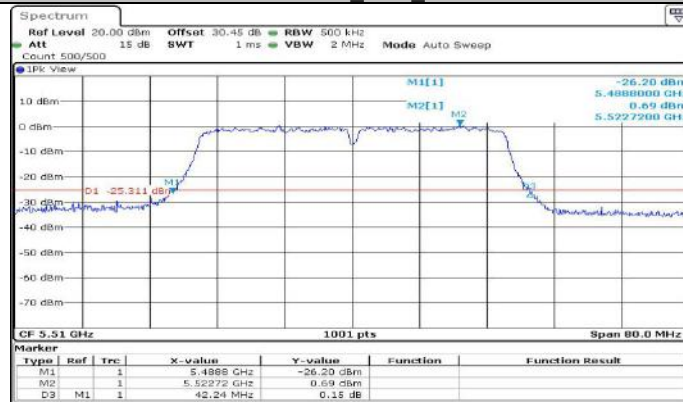


Date: 22.DEC.2023 17:14:02

11N40SISO Ant1 5550

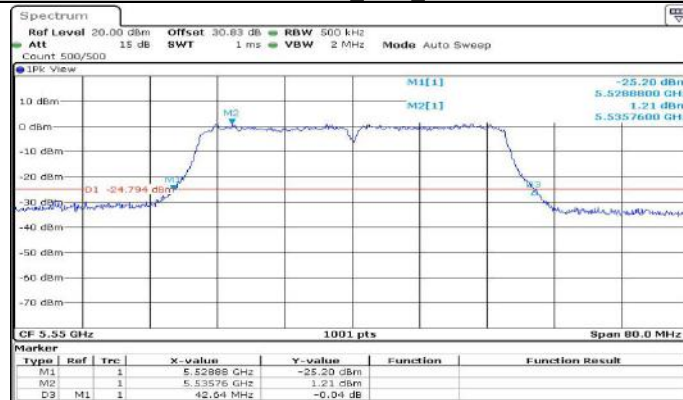


Date: 22.DEC.2023 17:15:13

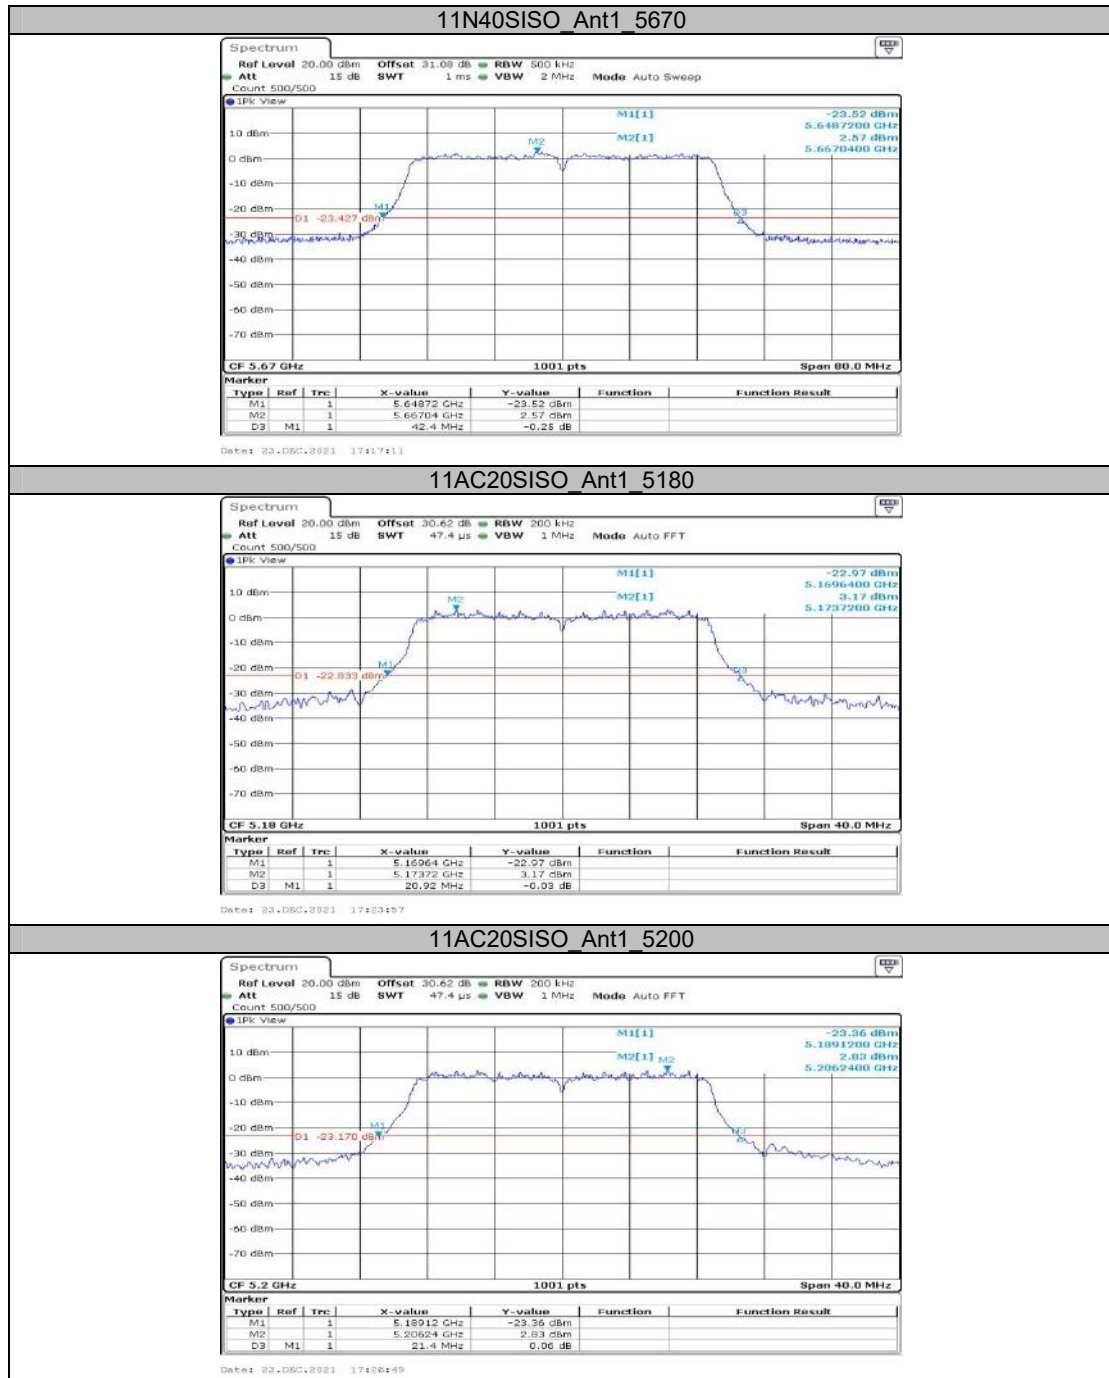


11AC20SISO Ant1 5240





11AC20SISO Ant1 5260

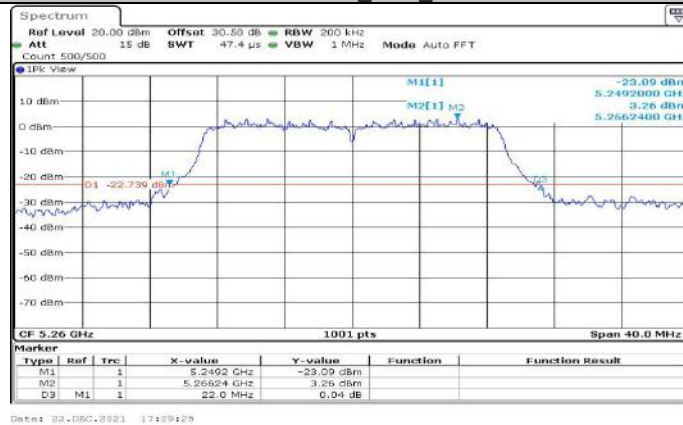



11AC20SISO Ant1 5280

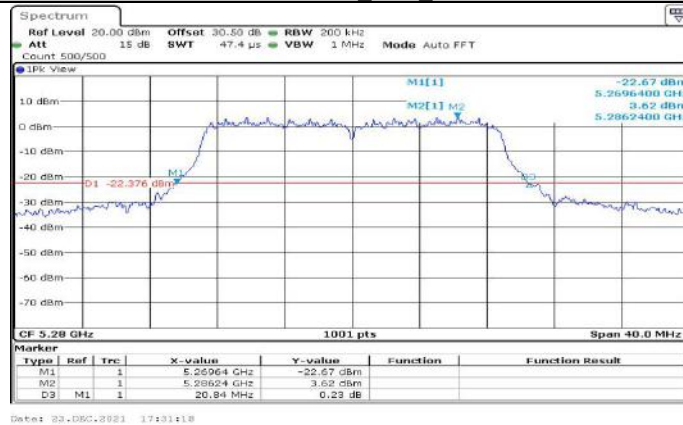


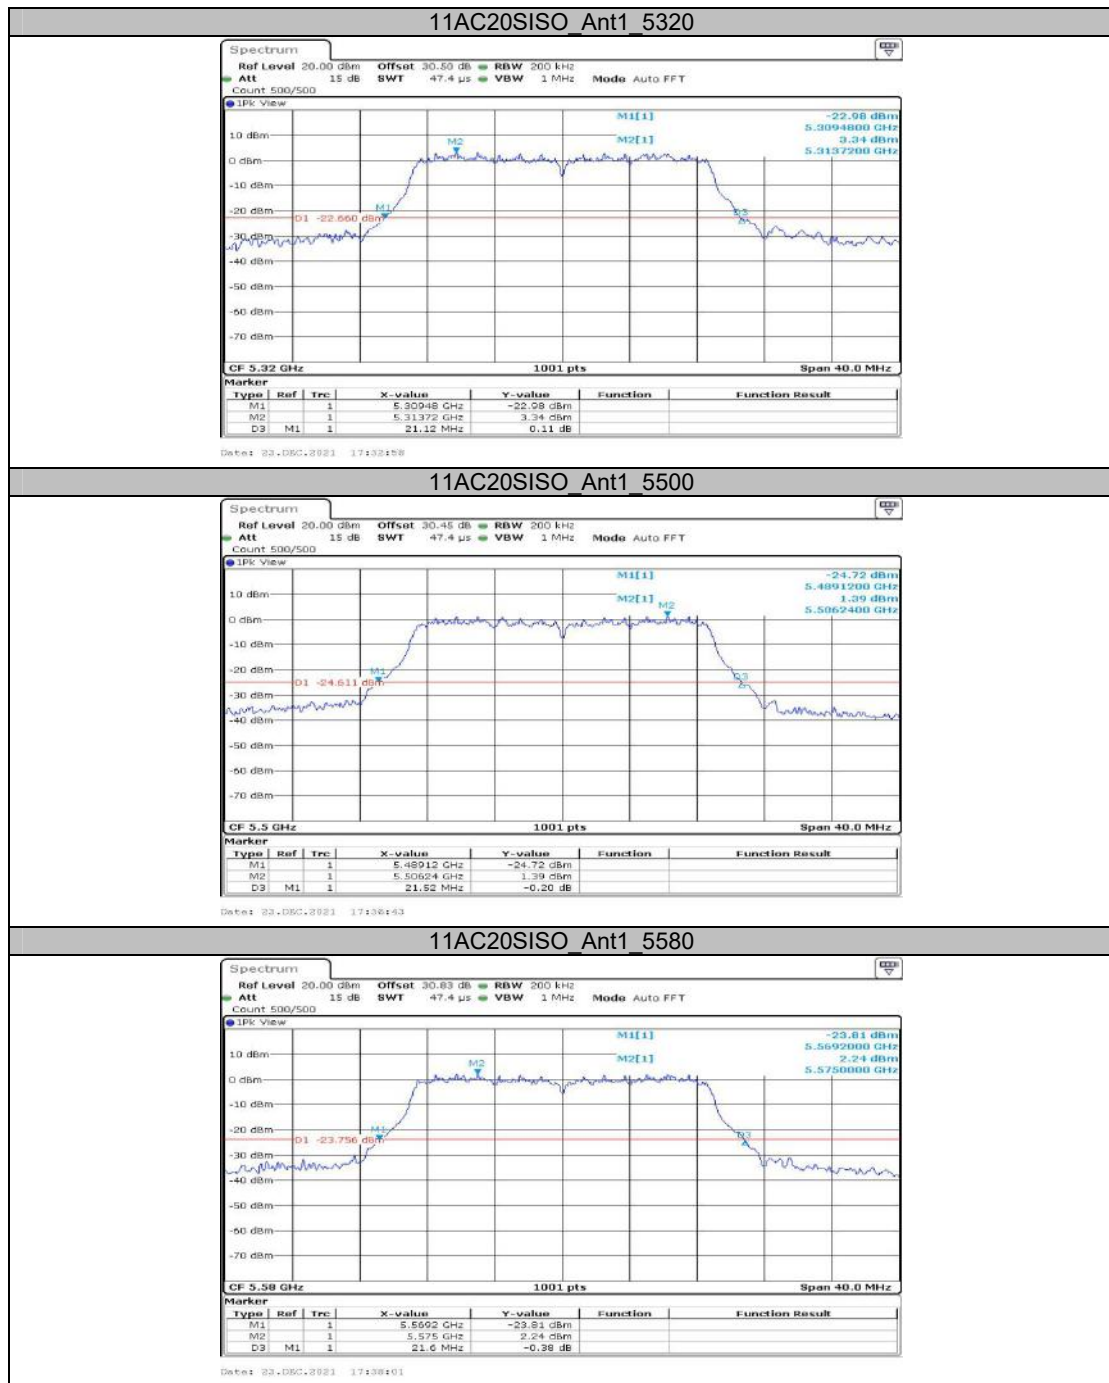

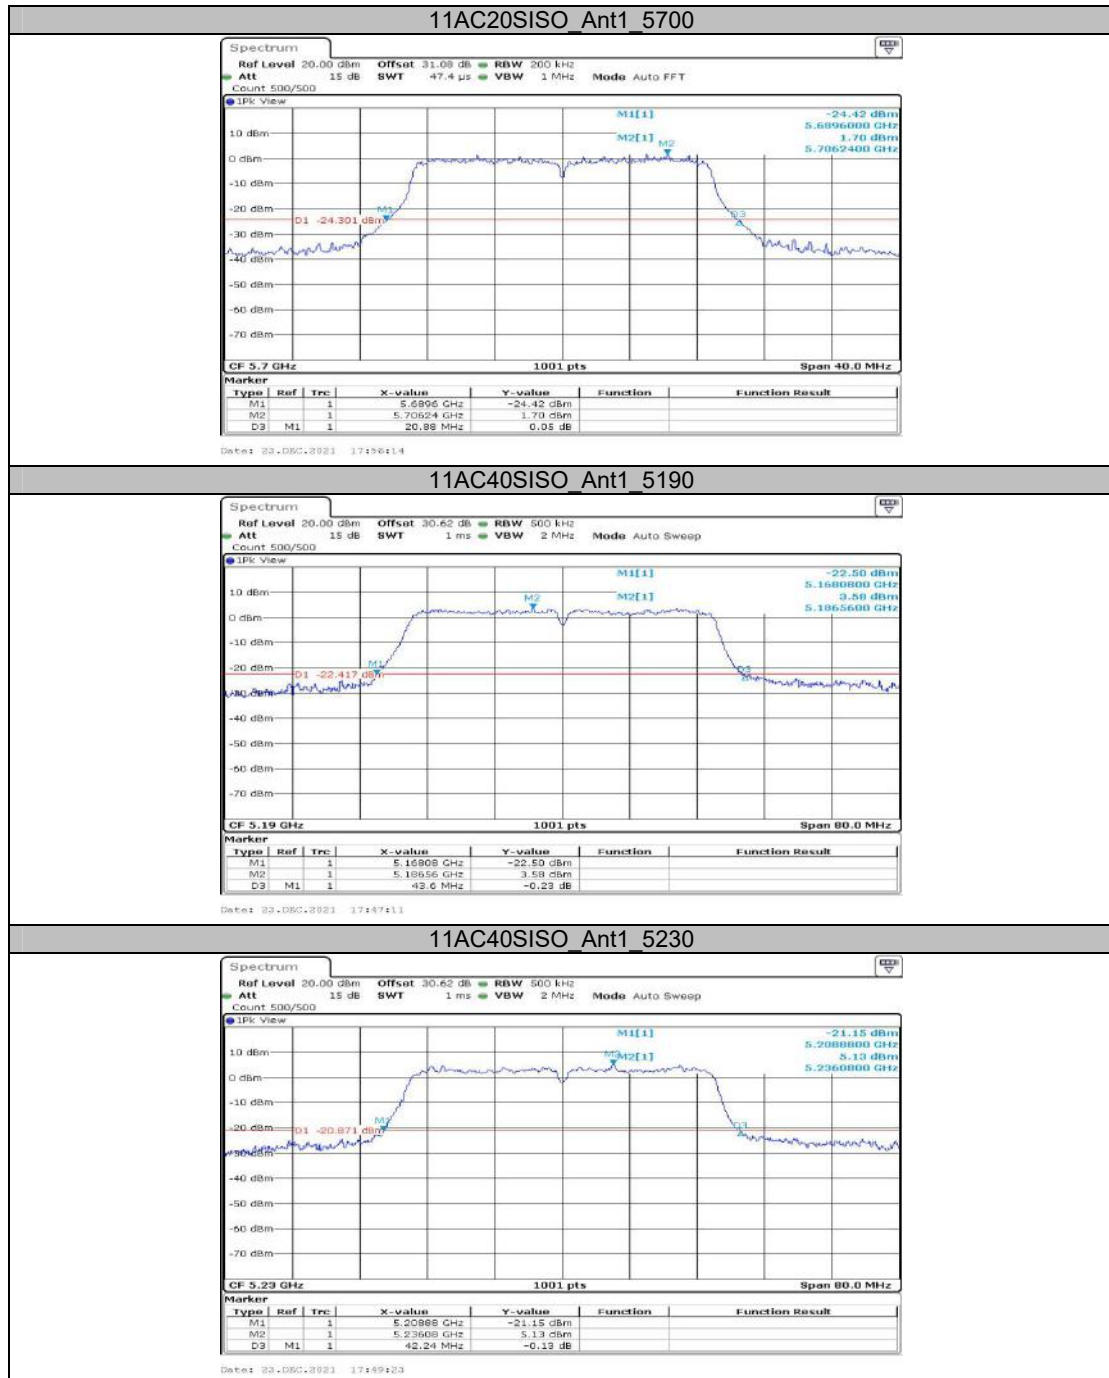

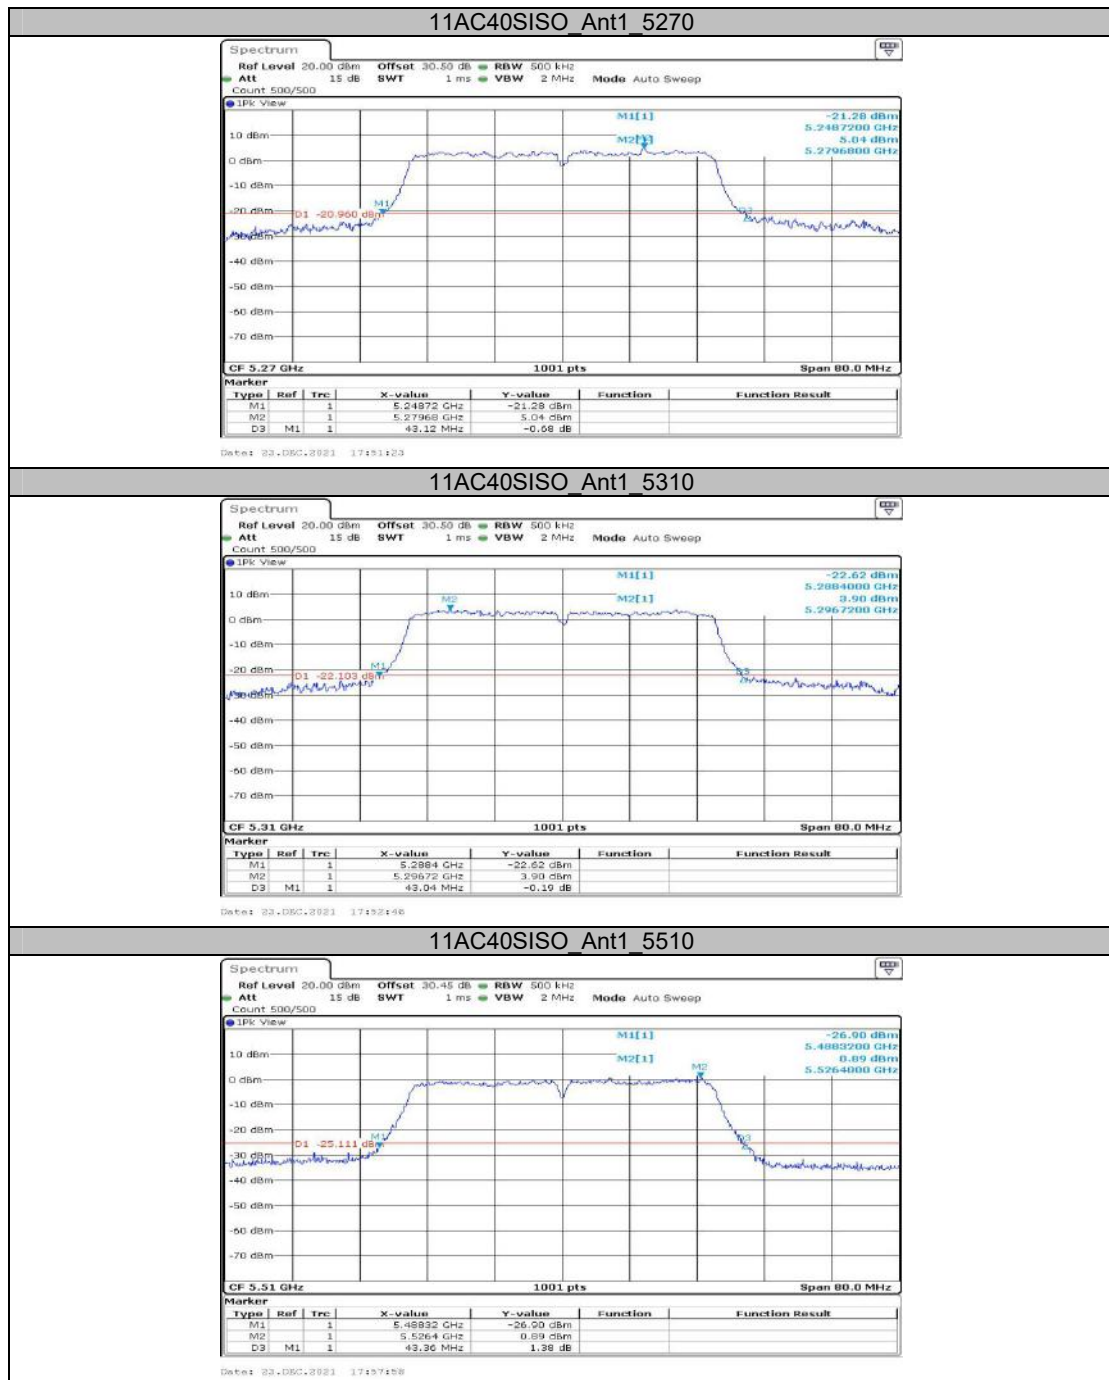

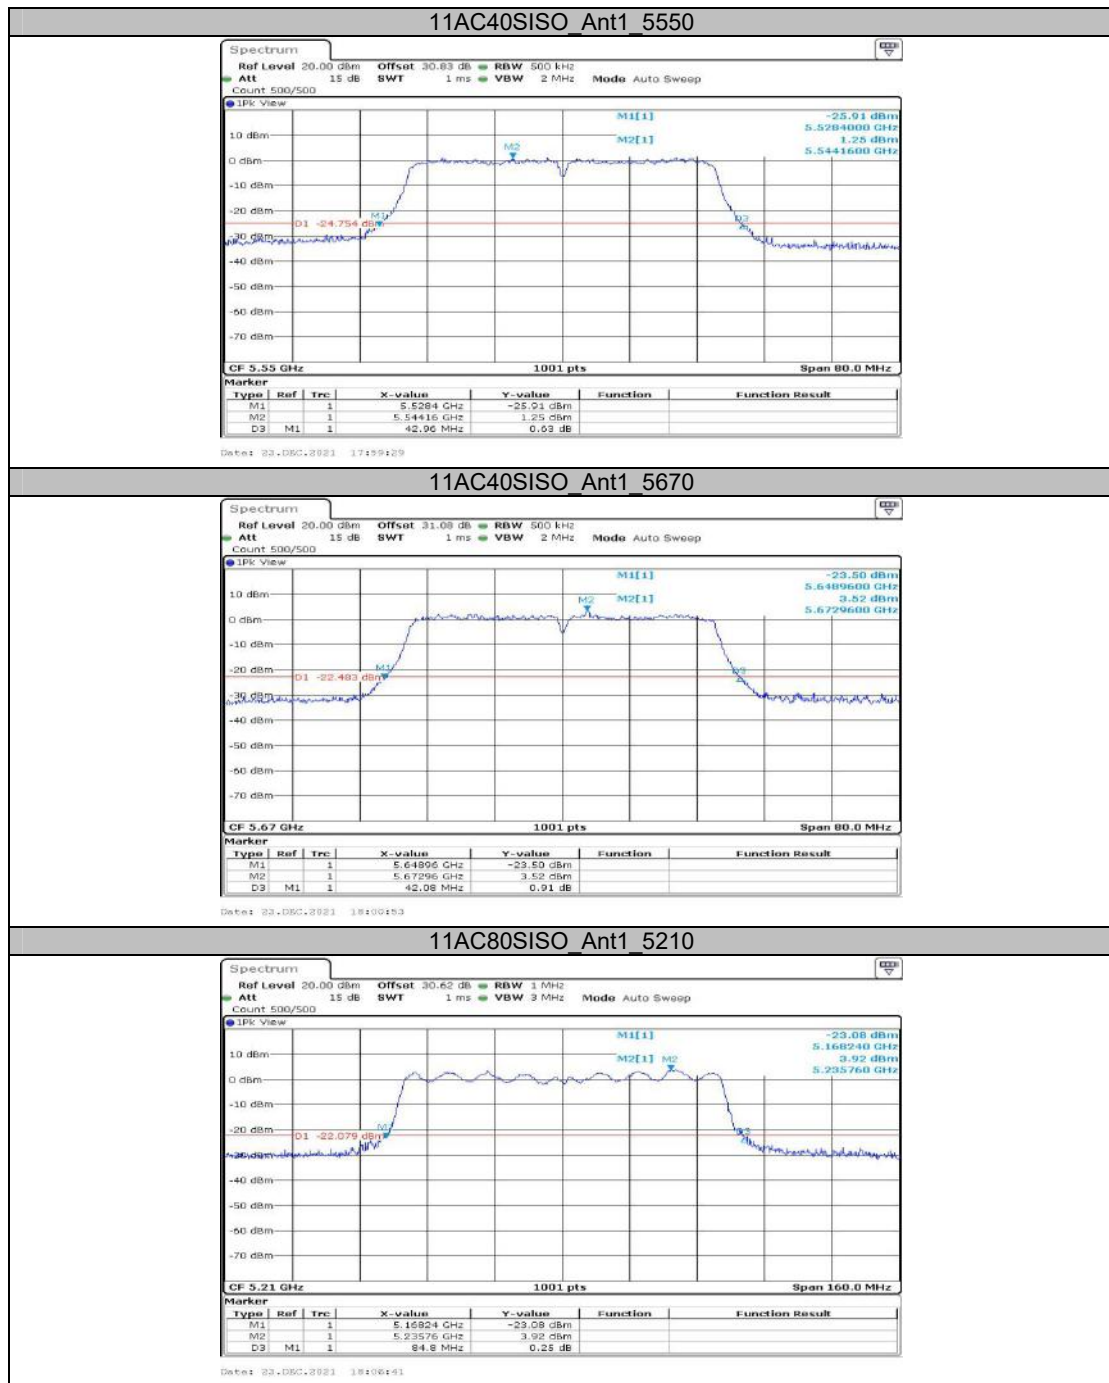

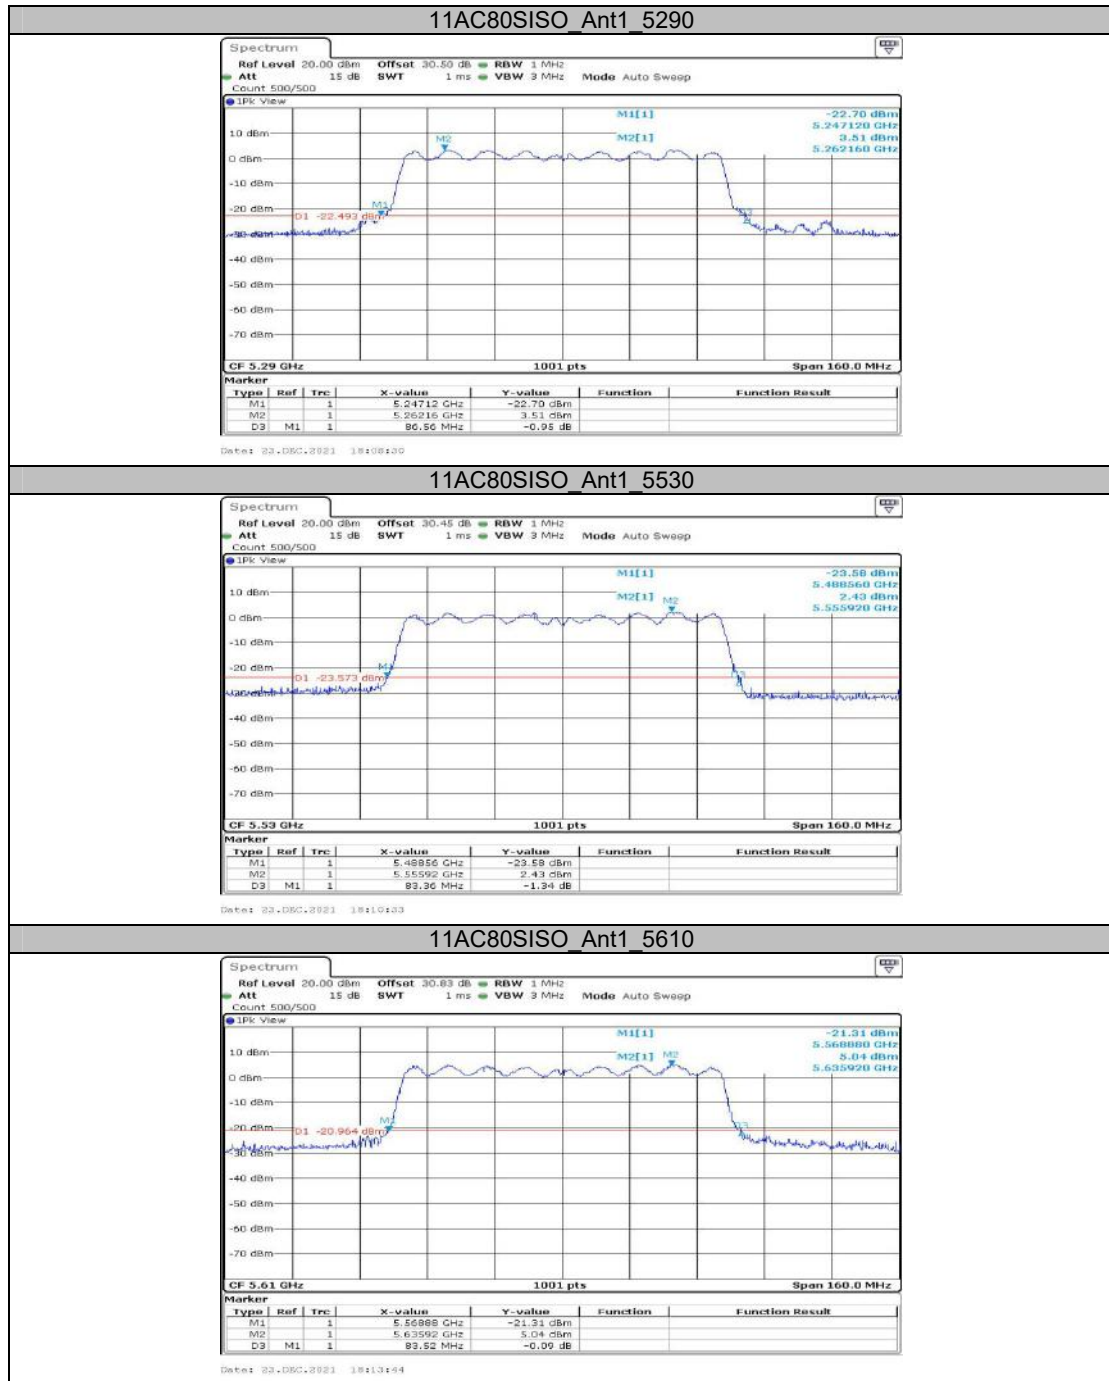


Appendix A2: Occupied channel bandwidth Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	17.502	---	PASS
		5200	17.702	---	PASS
		5240	17.702	---	PASS
		5260	17.782	---	PASS
		5280	17.662	---	PASS
		5320	17.622	---	PASS
		5500	17.542	---	PASS
		5580	17.782	---	PASS
		5700	17.463	---	PASS
		5745	17.622	---	PASS
		5785	17.383	---	PASS
		5825	17.463	---	PASS
11N20SISO	Ant1	5180	18.302	---	PASS
		5200	18.342	---	PASS
		5240	18.342	---	PASS
		5260	18.462	---	PASS
		5280	18.342	---	PASS
		5320	18.222	---	PASS
		5500	18.422	---	PASS
		5580	18.382	---	PASS
		5700	18.422	---	PASS
		5745	18.581	---	PASS
		5785	18.382	---	PASS
		5825	18.422	---	PASS
11N40SISO	Ant1	5190	36.683	---	PASS
		5230	36.923	---	PASS
		5270	36.843	---	PASS
		5310	36.923	---	PASS
		5510	36.923	---	PASS
		5550	36.763	---	PASS
		5670	36.923	---	PASS
		5755	37.323	---	PASS
11AC20SISO	Ant1	5180	18.422	---	PASS
		5200	18.462	---	PASS
		5240	18.222	---	PASS
		5260	18.501	---	PASS
		5280	18.382	---	PASS
		5320	18.501	---	PASS
		5500	18.422	---	PASS
		5580	18.422	---	PASS
		5700	18.262	---	PASS
		5745	18.382	---	PASS
		5785	18.302	---	PASS
		5825	18.462	---	PASS
11AC40SISO	Ant1	5190	36.923	---	PASS
		5230	36.843	---	PASS
		5270	36.843	---	PASS
		5310	37.003	---	PASS
		5510	37.163	---	PASS
		5550	36.923	---	PASS
		5670	36.843	---	PASS
		5755	37.083	---	PASS
		5795	37.083	---	PASS

11AC80SISO	Ant1	5210	76.244	---	PASS
		5290	76.404	---	PASS
		5530	76.723	---	PASS
		5610	76.404	---	PASS
		5775	76.723	---	PASS

Note: EUT not operating any part of OBW fall within 5250-5350MHz and 5470-5725MHz range.

Test Graphs

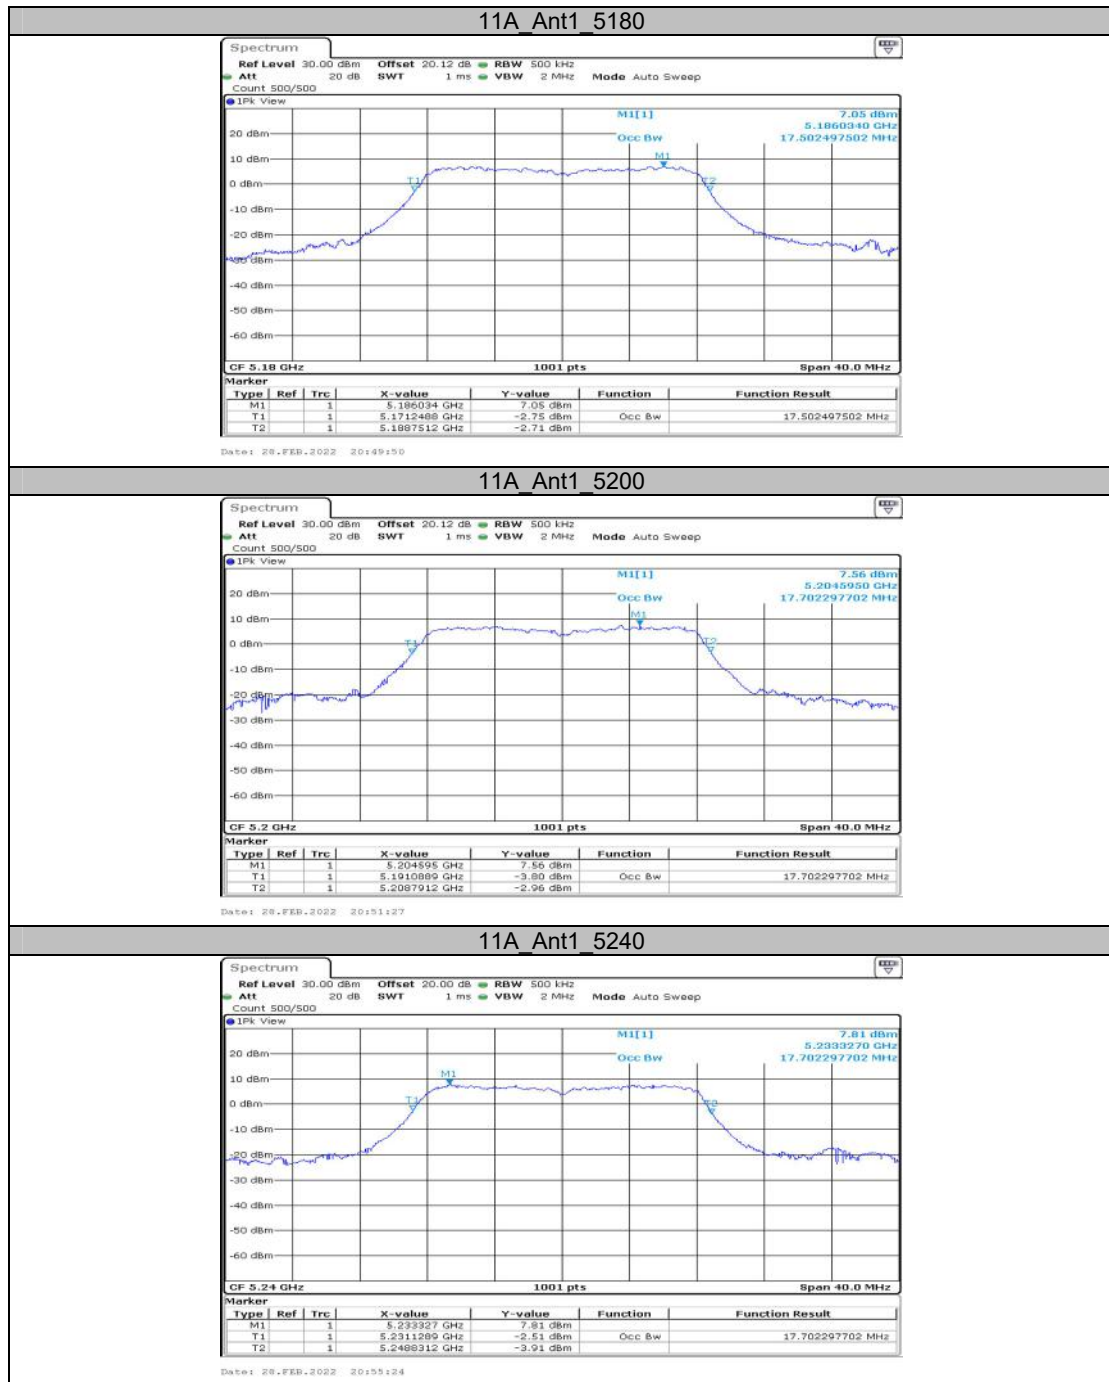

11A Ant1 5260



11A Ant1 5280



11A Ant1 5320



11A Ant1 5500



11A Ant1 5580



11A Ant1 5700



11A Ant1 5745



Date: 23-DEC-2021 16:35:44

11A Ant1 5785



Date: 23-DEC-2021 16:37:29

11A Ant1 5825



Date: 23-DEC-2021 16:39:49

11N20SISO Ant1 5180





11N20SISO Ant1 5200



11N20SISO Ant1 5240



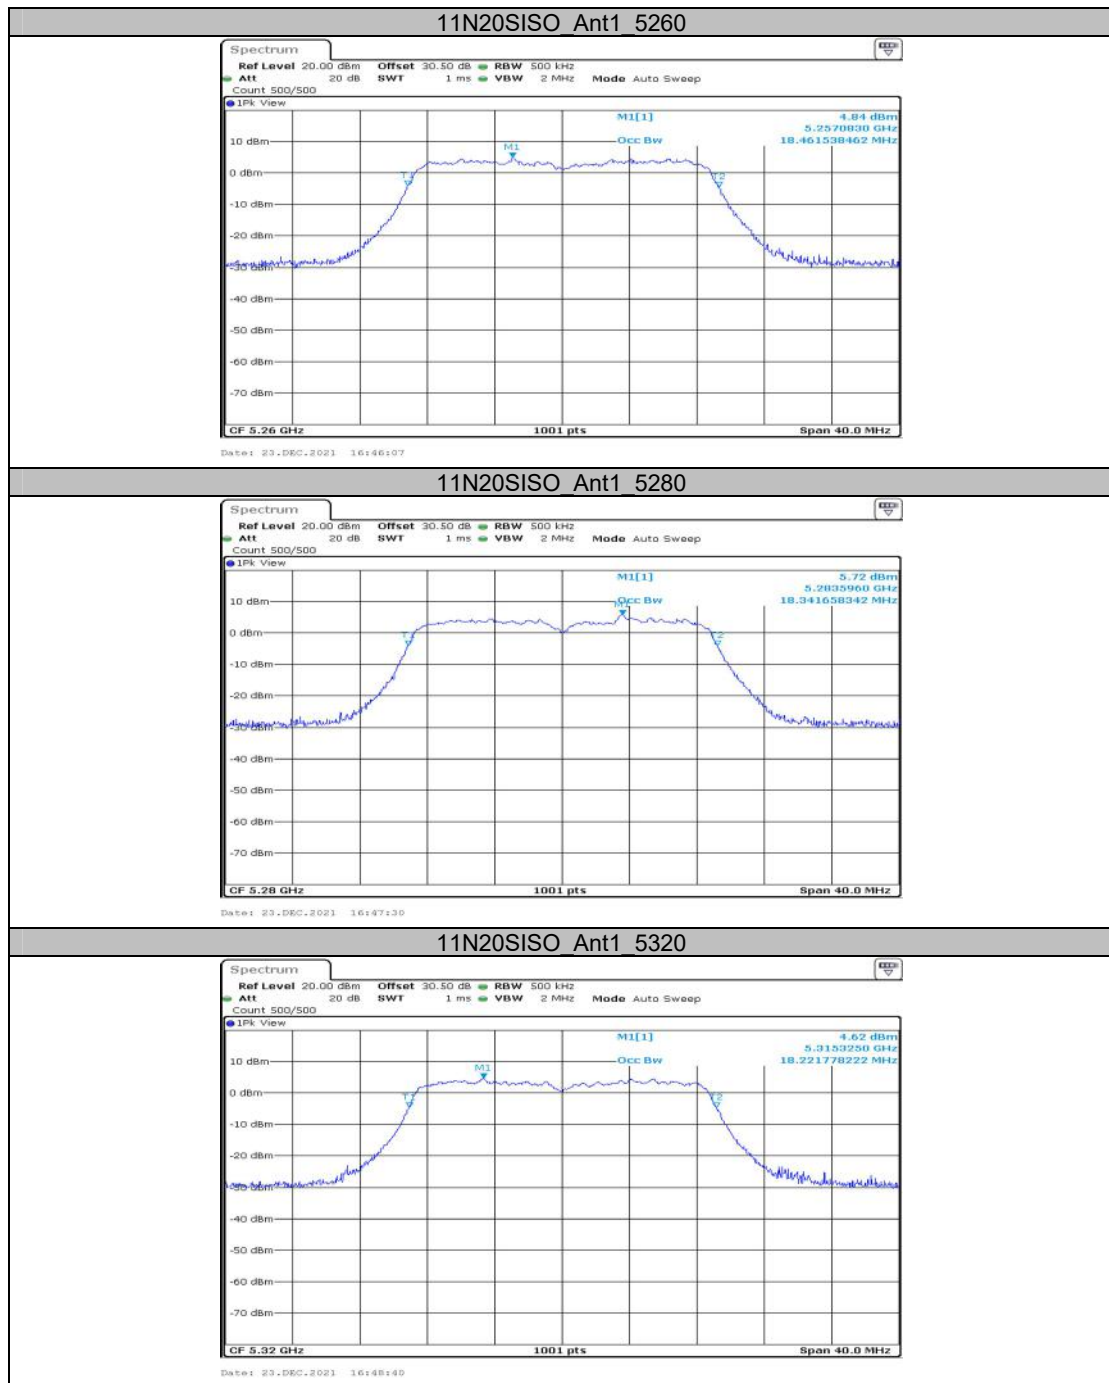

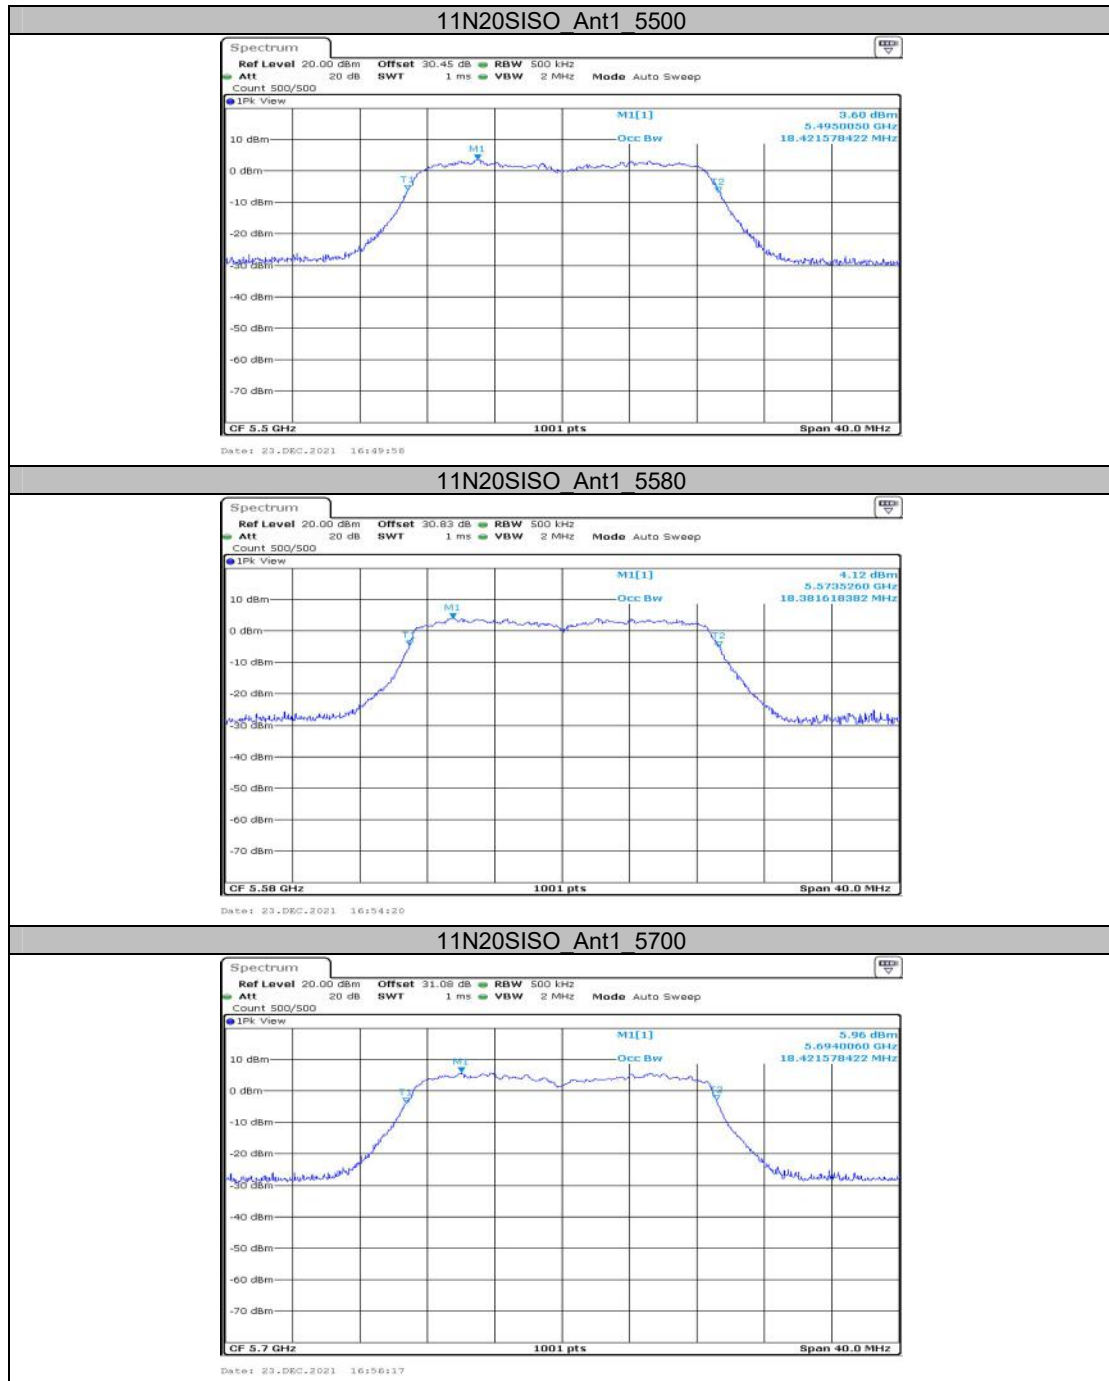

11N20SISO Ant1 5745




11N20SISO Ant1 5785



11N20SISO Ant1 5825




11N40SISO Ant1 5190

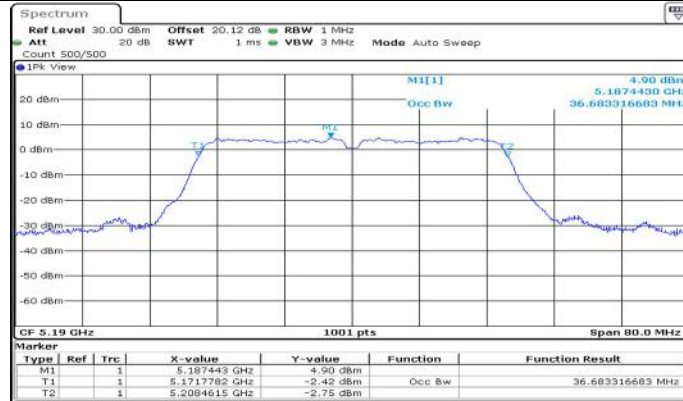


Date: 20.FEB.2022 21:07:41

11N40SISO Ant1 5230

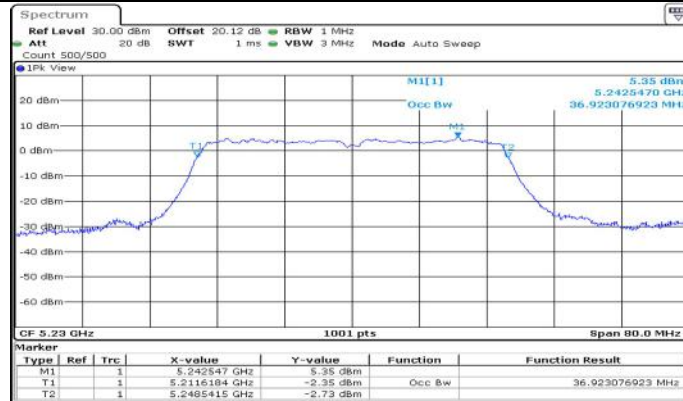


Date: 20.FEB.2022 21:09:57

11N40SISO Ant1 5270

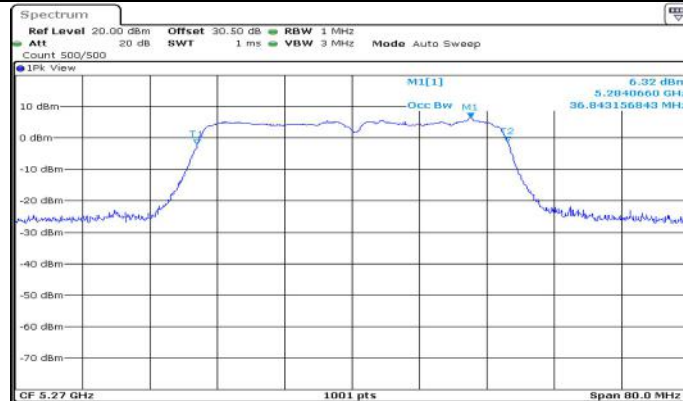

Date: 20.DEC.2021 17:12:09

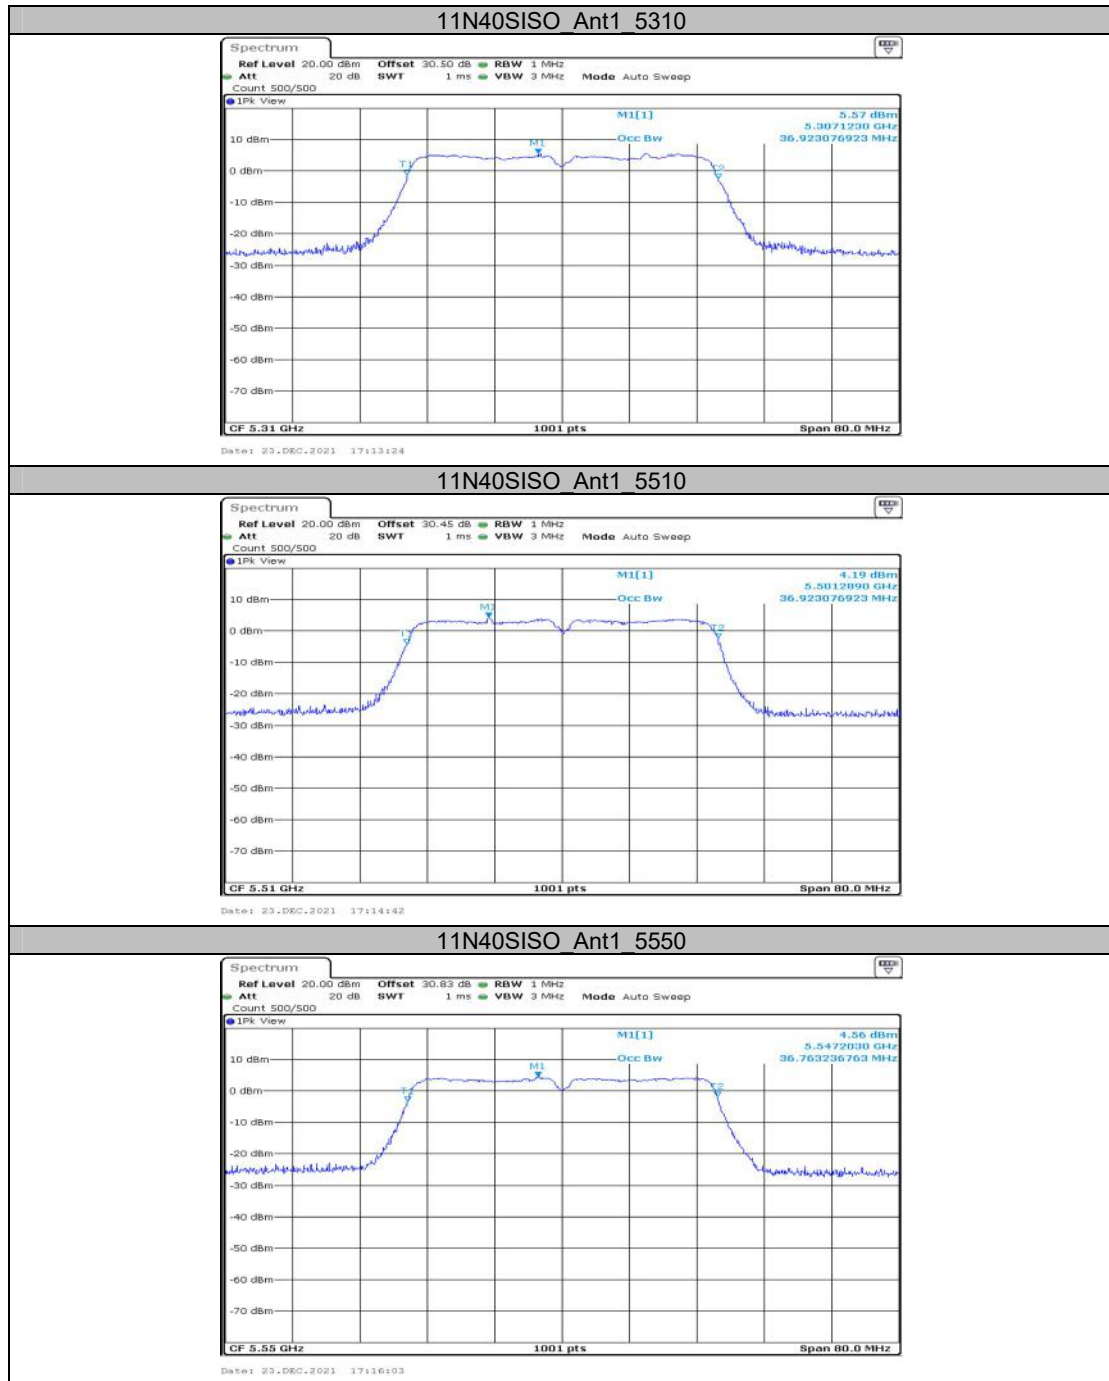

11N40SISO Ant1 5670



11N40SISO Ant1 5755



11N40SISO Ant1 5795



11AC20SISO Ant1 5180





11AC20SISO Ant1 5200





11AC20SISO Ant1 5240




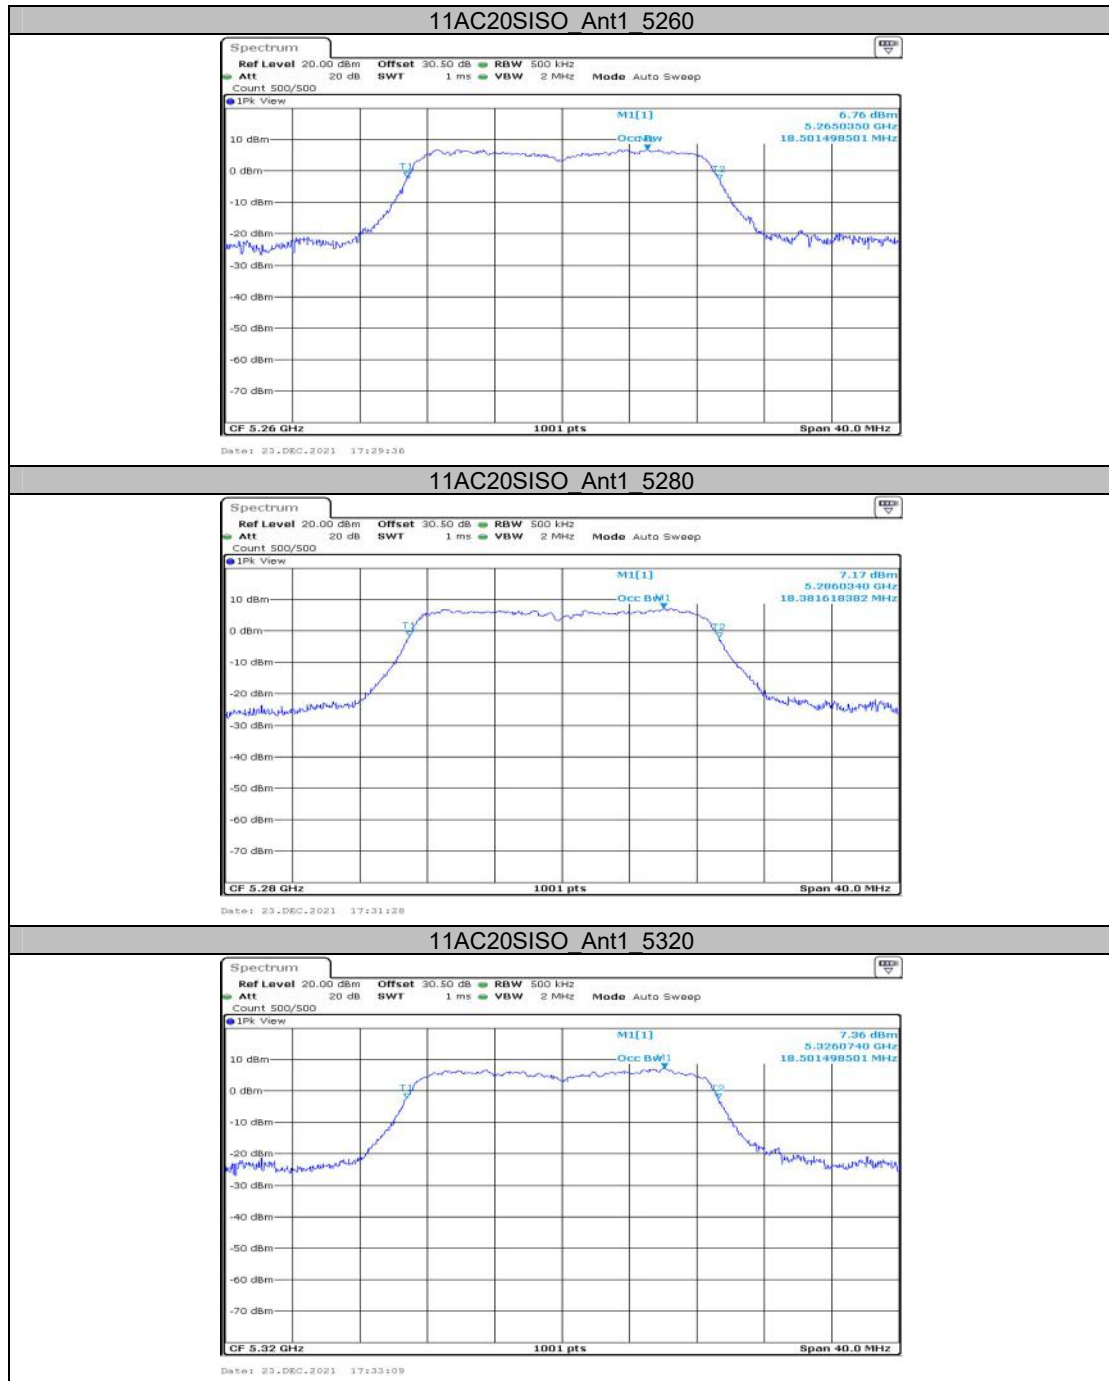


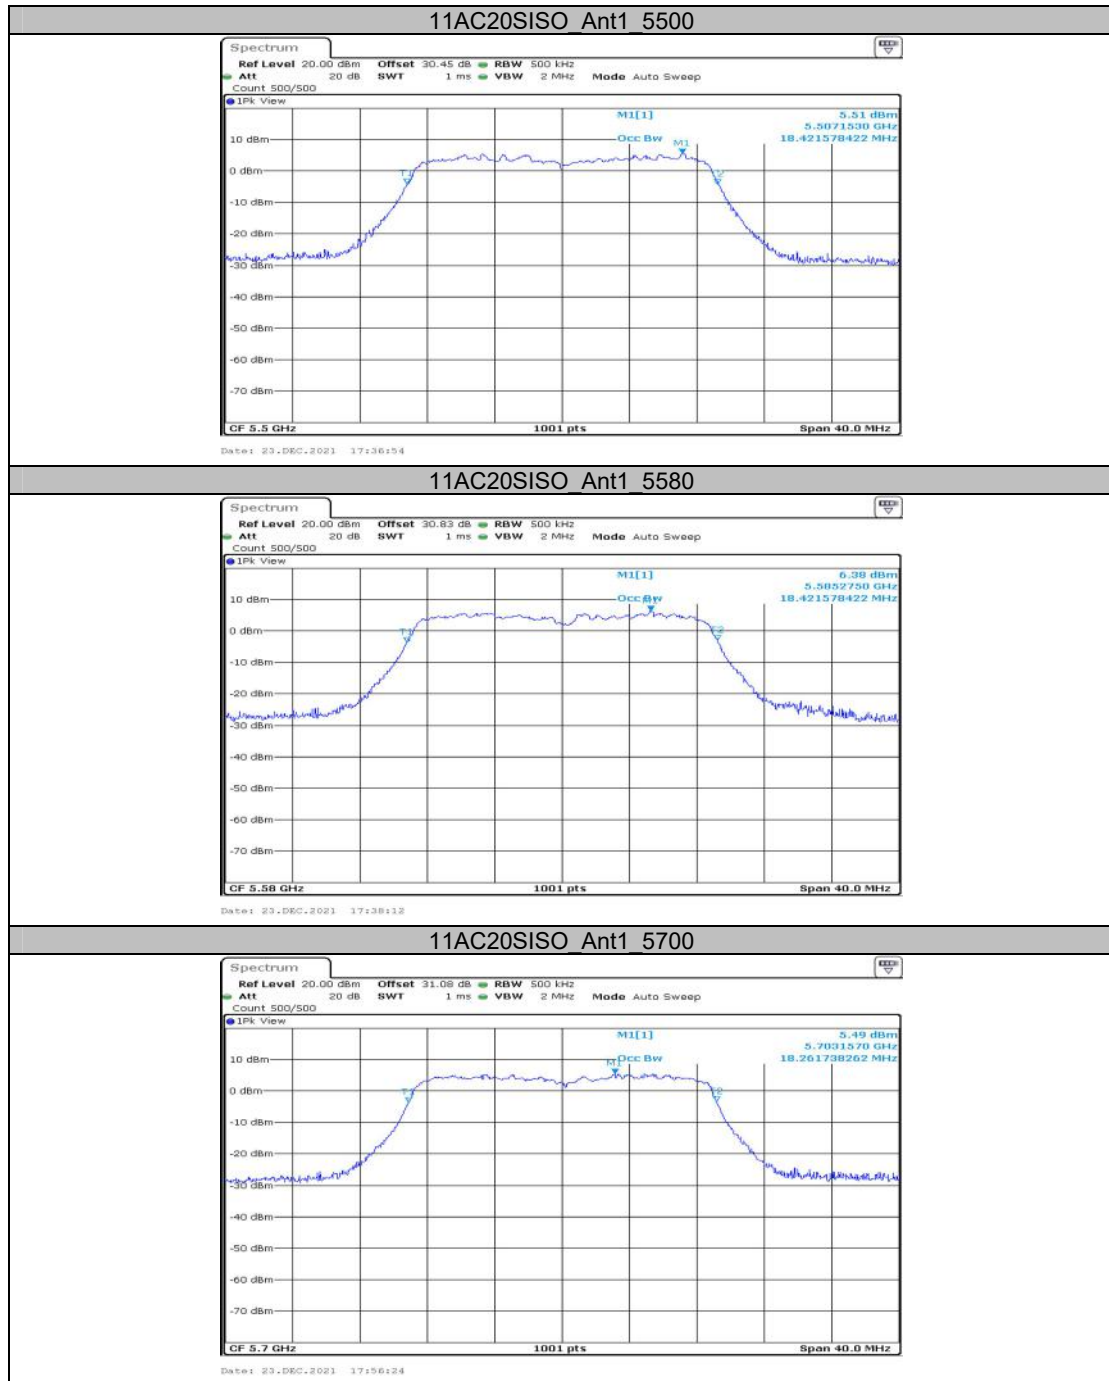

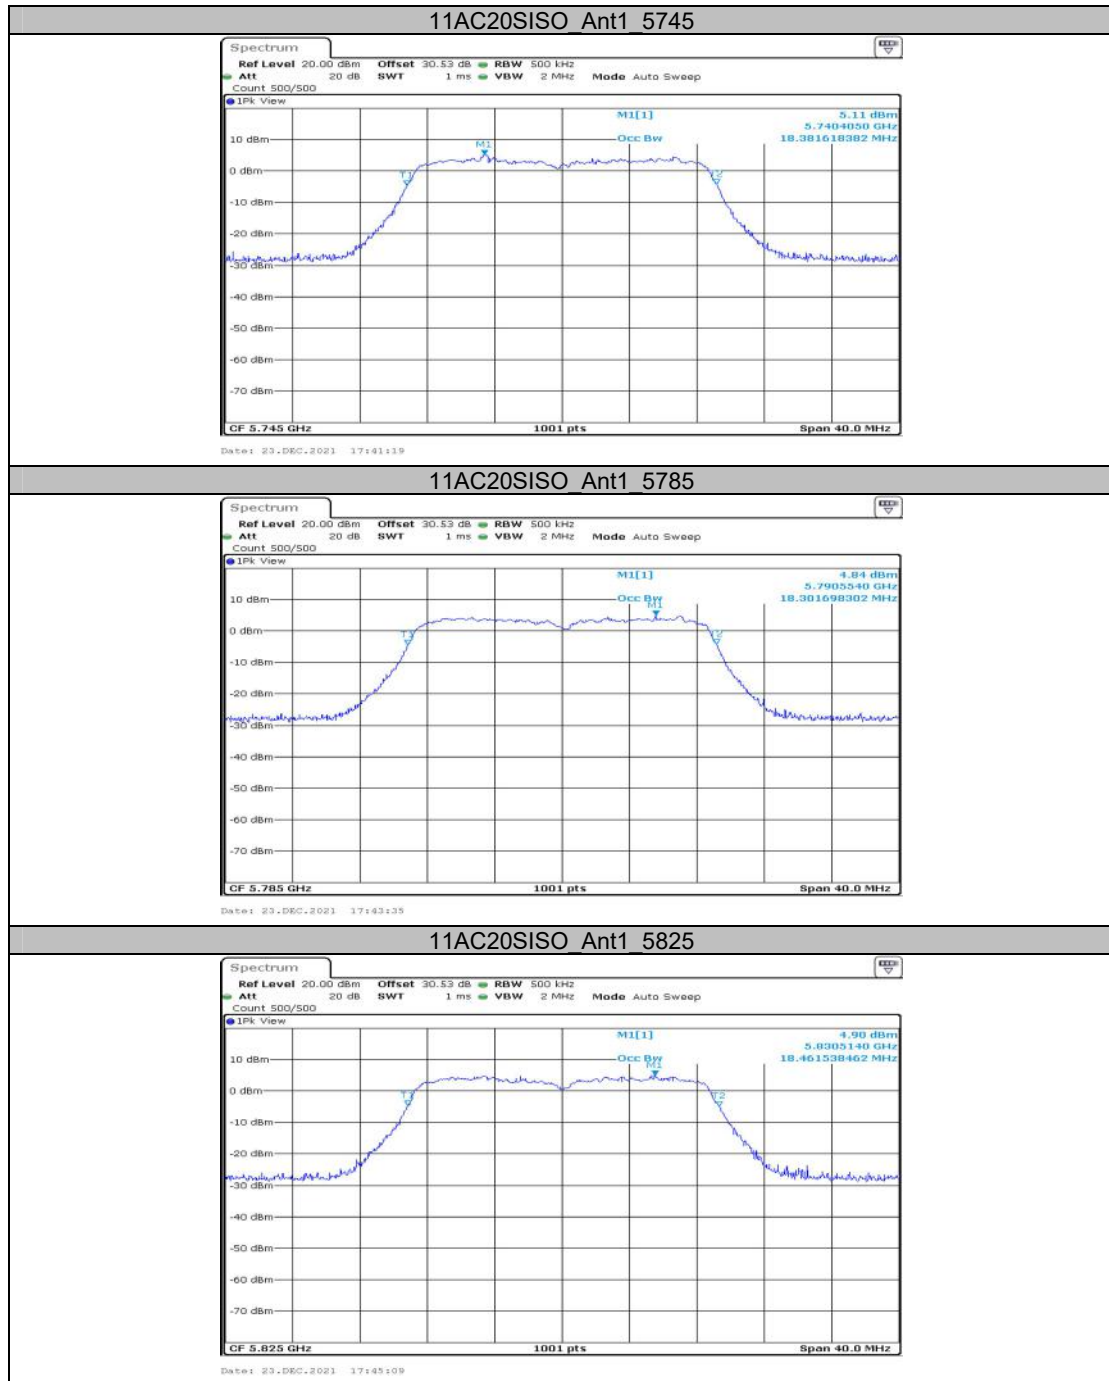

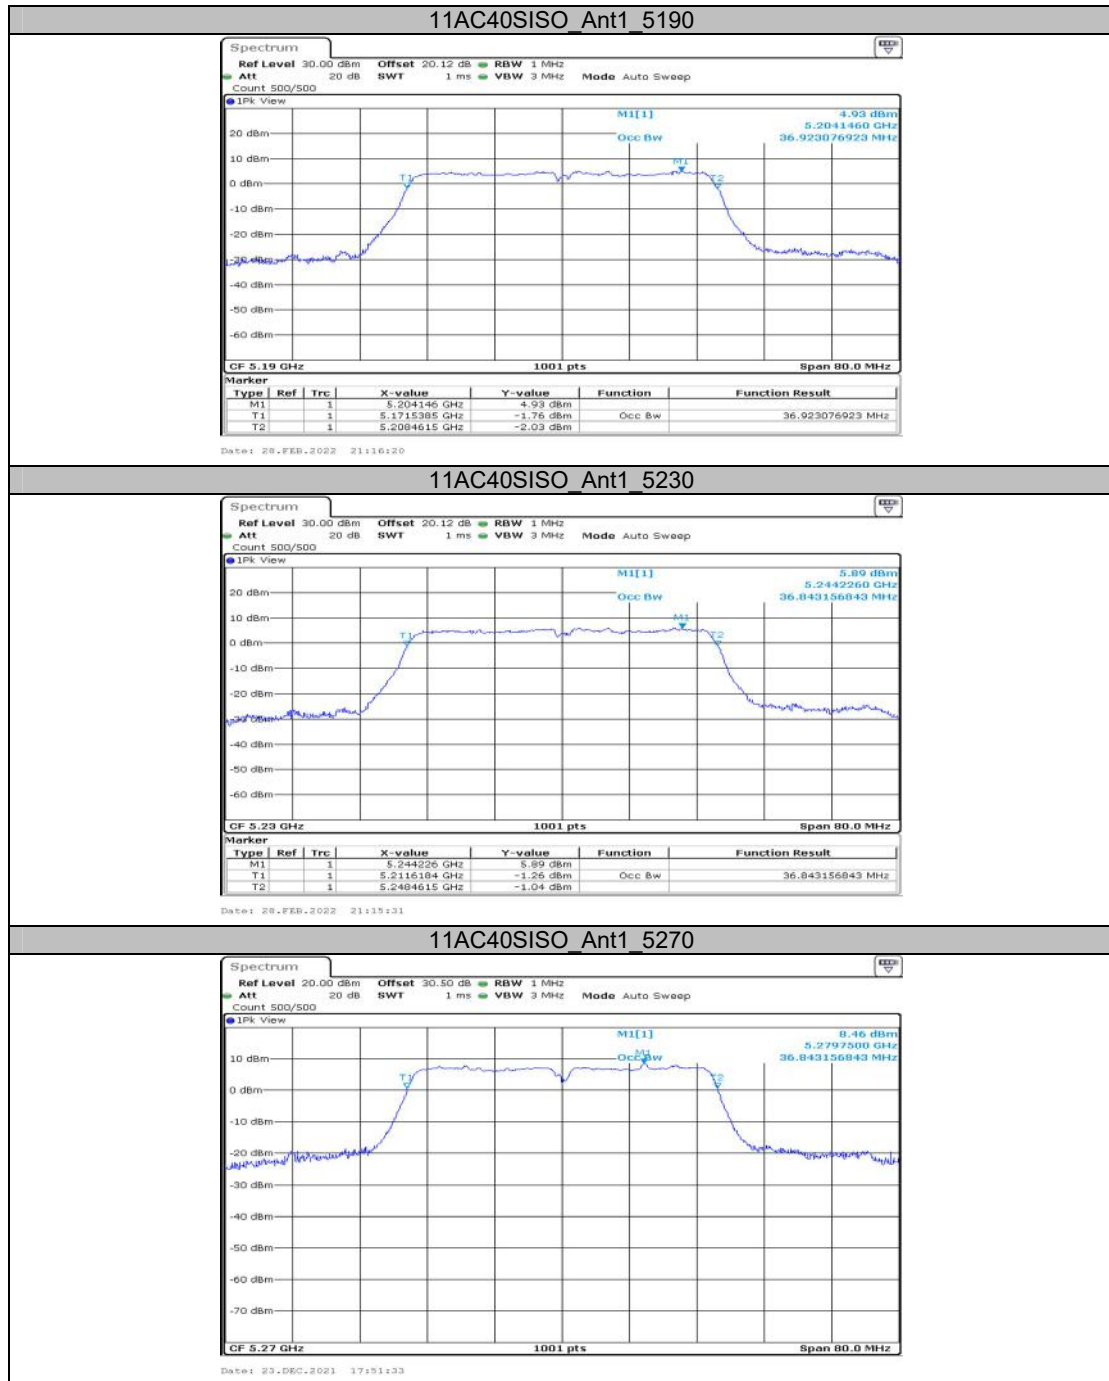

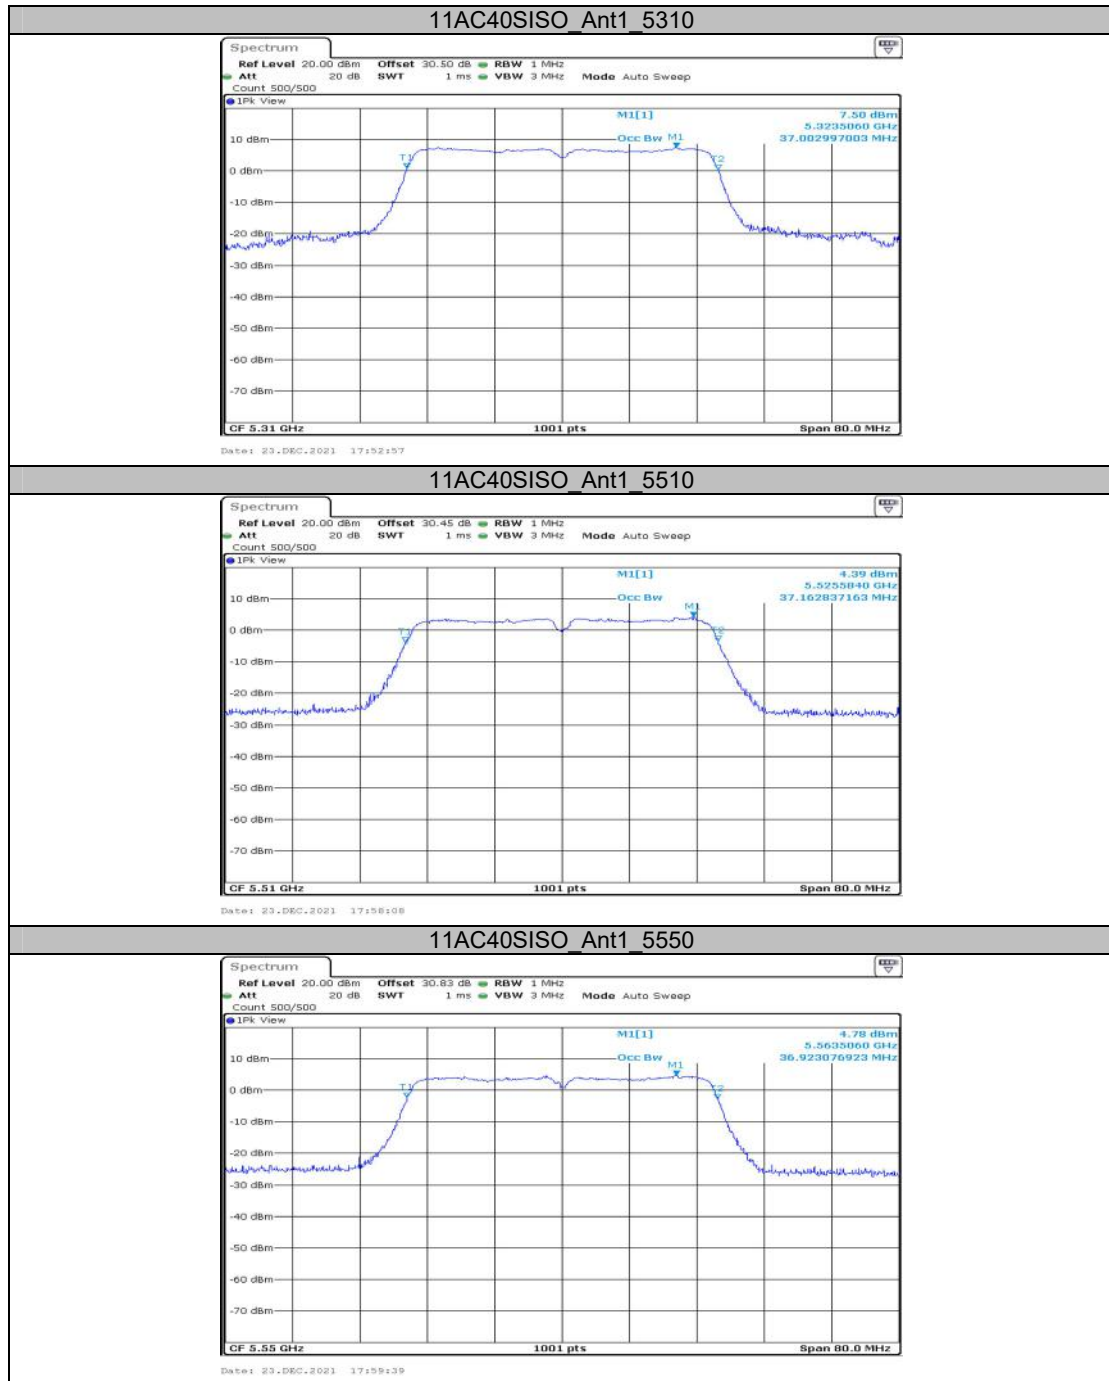

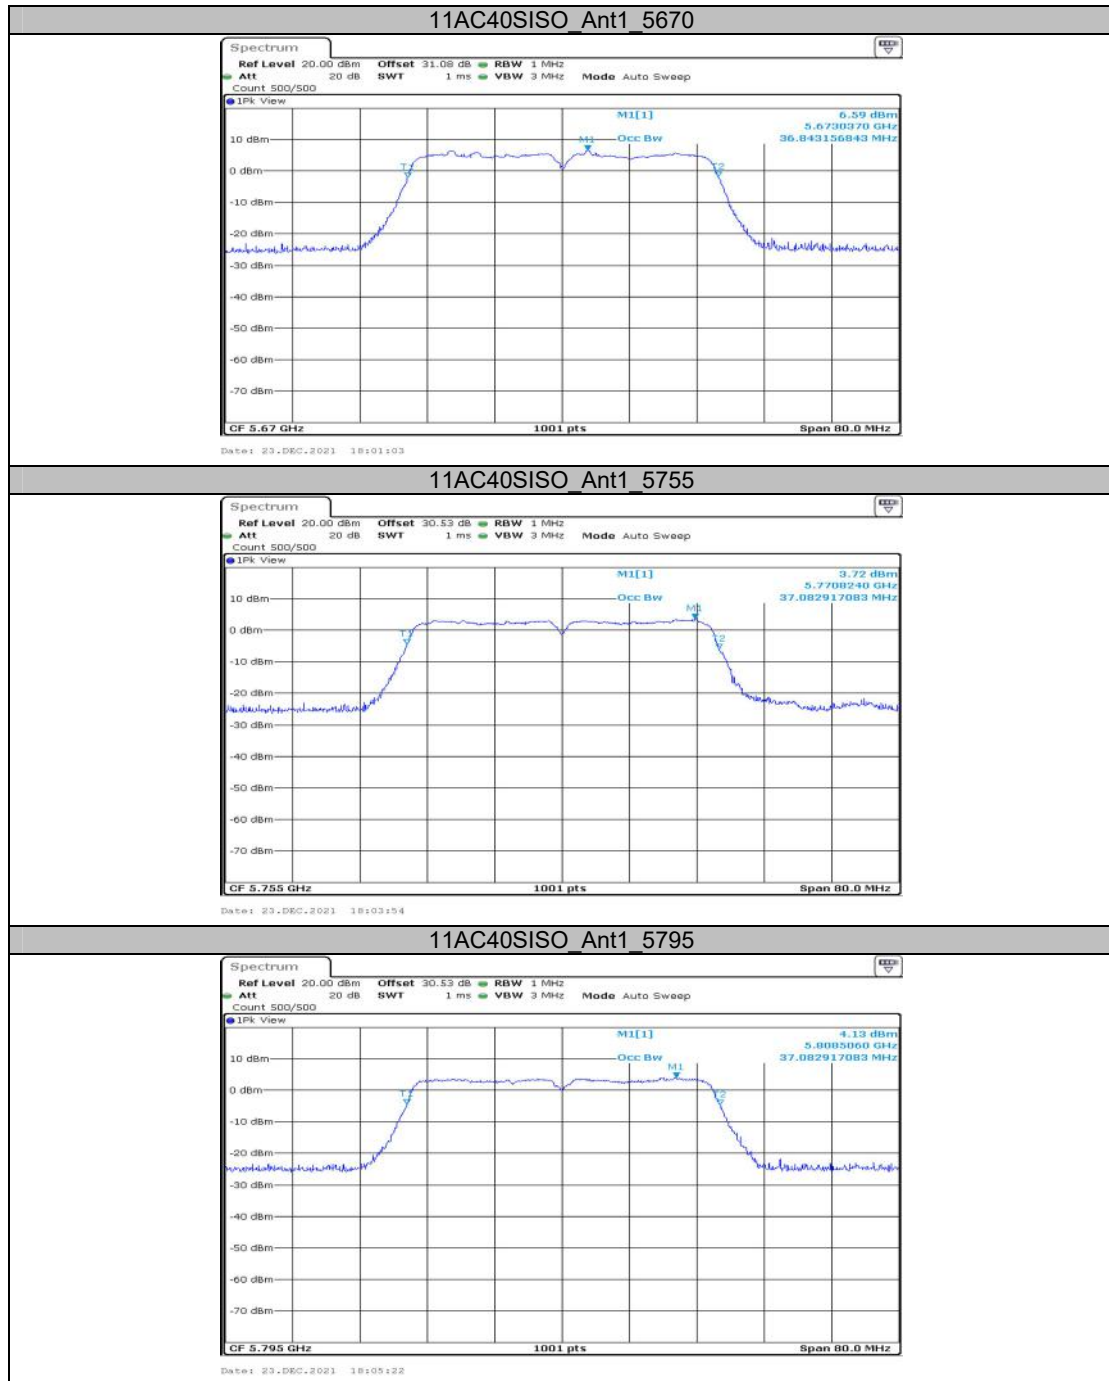

11AC80SISO Ant1 5210




11AC80SISO Ant1 5290



11AC80SISO Ant1 5530



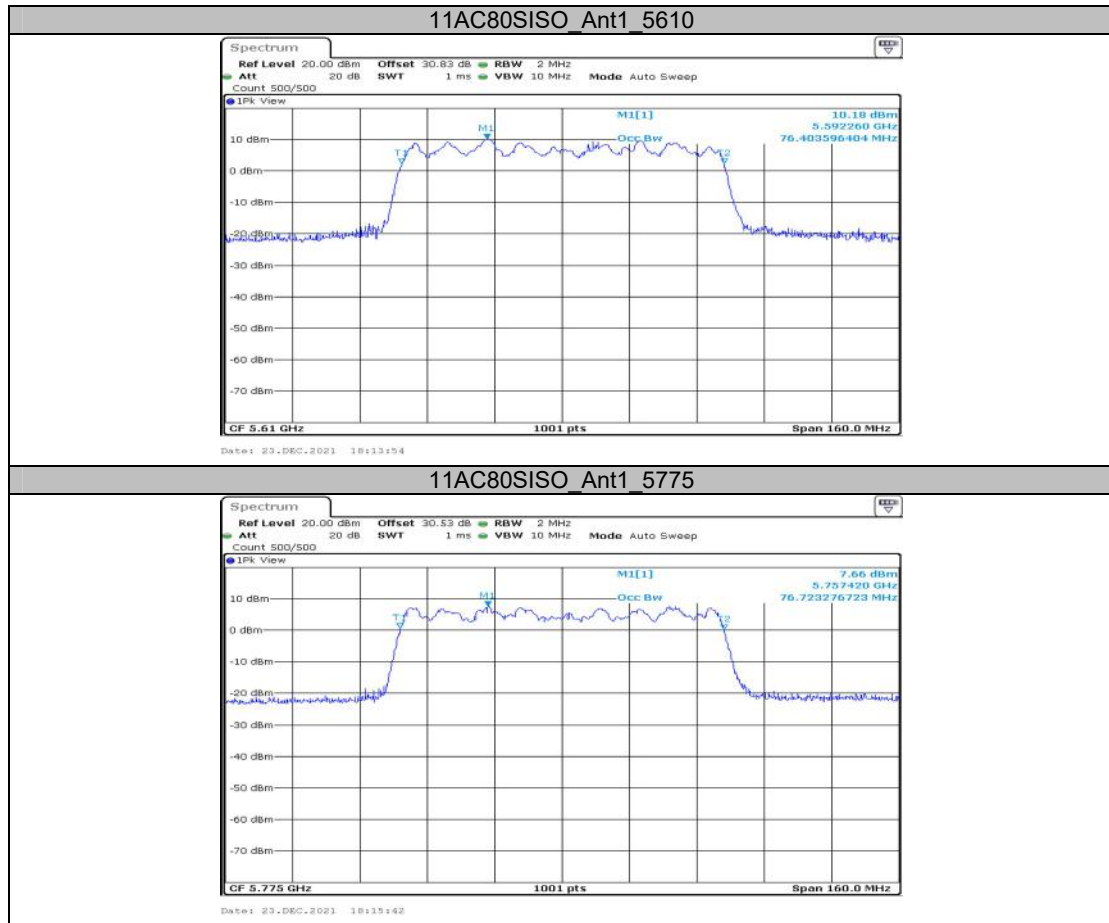


**Appendix A3: Min emission bandwidth
Test Result**

Test Mode	Antenna	Channel	6db EBW [MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.400	0.5	PASS
		5785	16.400	0.5	PASS
		5825	16.400	0.5	PASS
11N20SISO	Ant1	5745	17.600	0.5	PASS
		5785	17.160	0.5	PASS
		5825	17.400	0.5	PASS
11N40SISO	Ant1	5755	35.360	0.5	PASS
		5795	35.840	0.5	PASS
11AC20SISO	Ant1	5745	17.360	0.5	PASS
		5785	17.200	0.5	PASS
		5825	17.640	0.5	PASS
11AC40SISO	Ant1	5755	35.840	0.5	PASS
		5795	35.600	0.5	PASS
11AC80SISO	Ant1	5775	75.520	0.5	PASS


Test Graphs




11N20SISO Ant1 5745

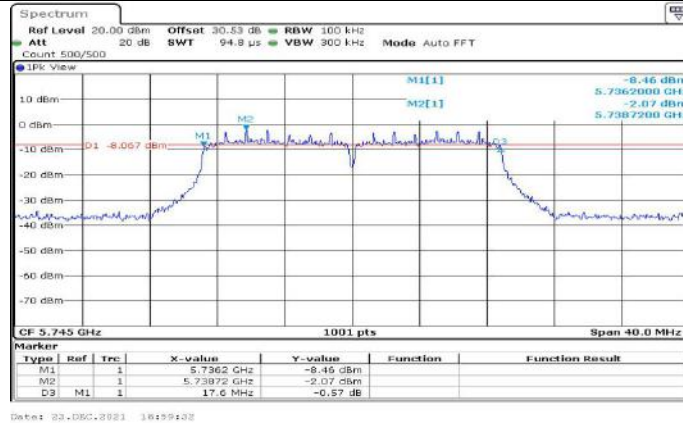


11N20SISO Ant1 5785

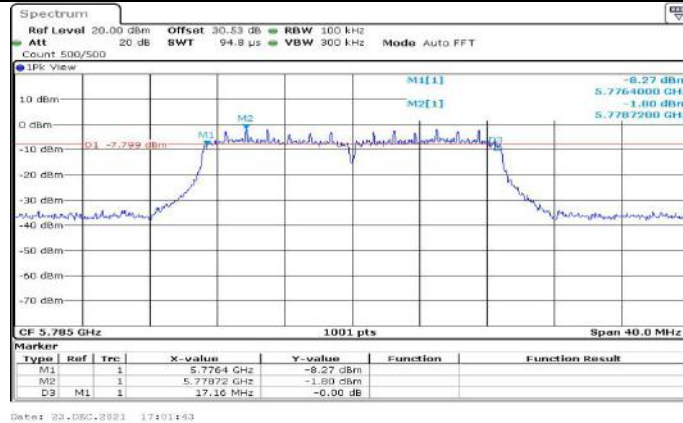


11N20SISO Ant1 5825

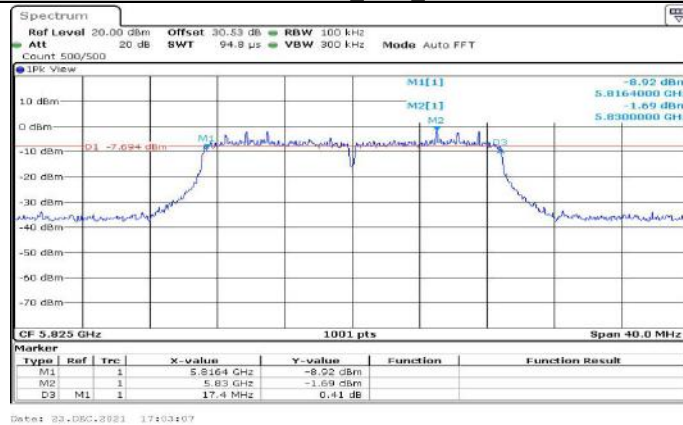


11N40SISO Ant1 5755

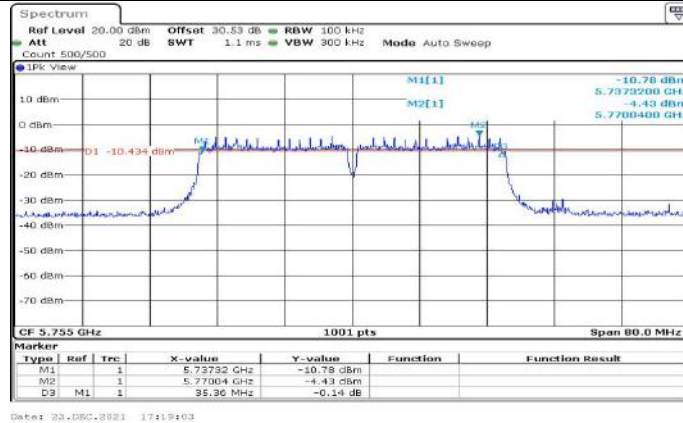


11N40SISO Ant1 5795

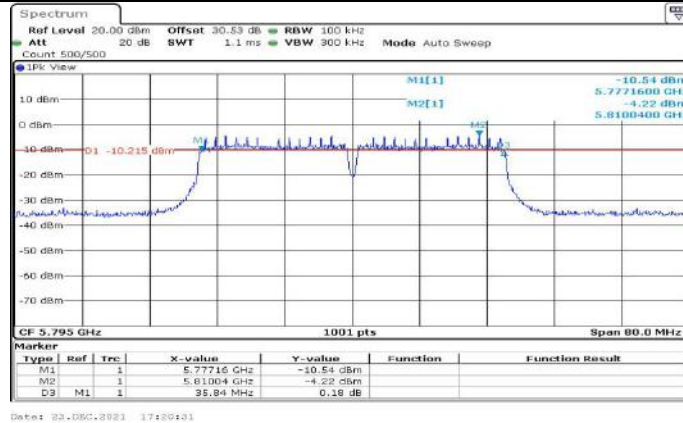

11AC20SISO Ant1 5745

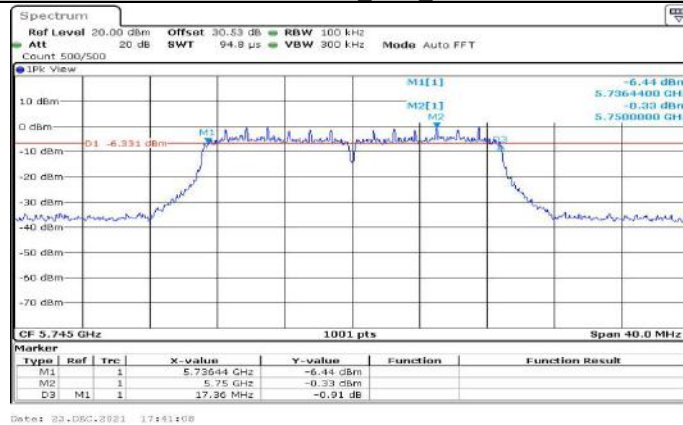


11AC20SISO Ant1 5785

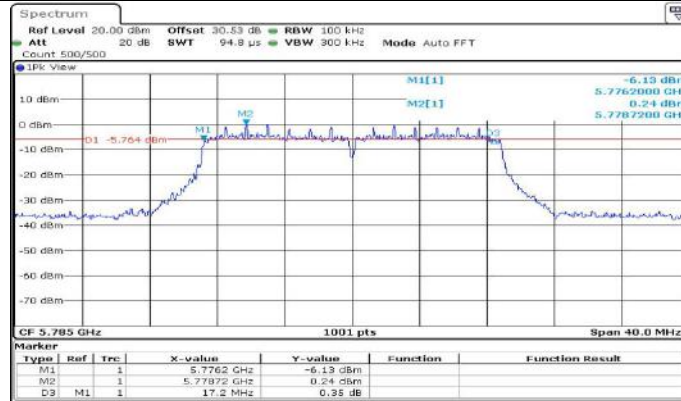


Date: 22-Dec-2023 17:43:23

11AC20SISO Ant1 5825

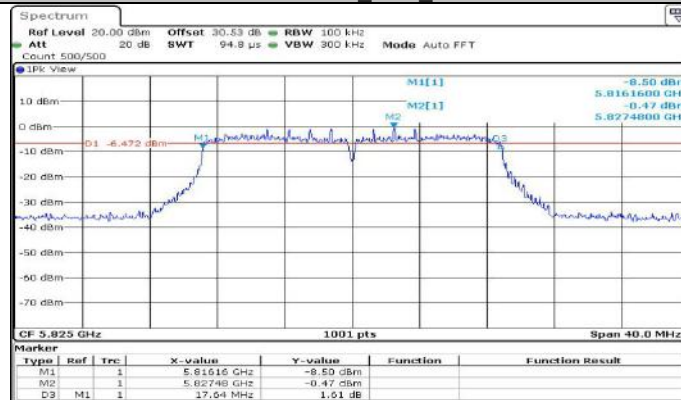


Date: 22-Dec-2023 17:44:59

11AC40SISO Ant1 5755

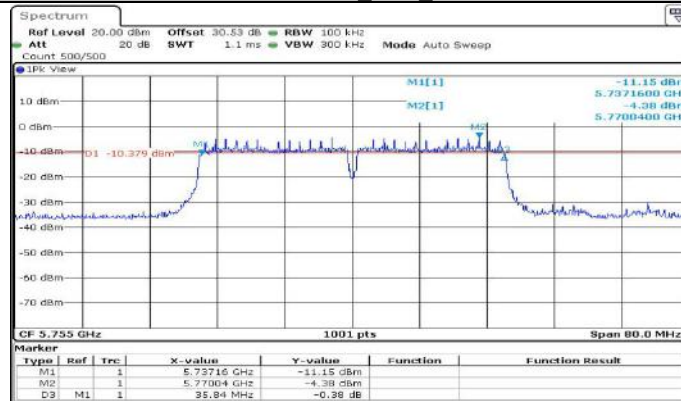

Date: 22-Dec-2023 18:03:04

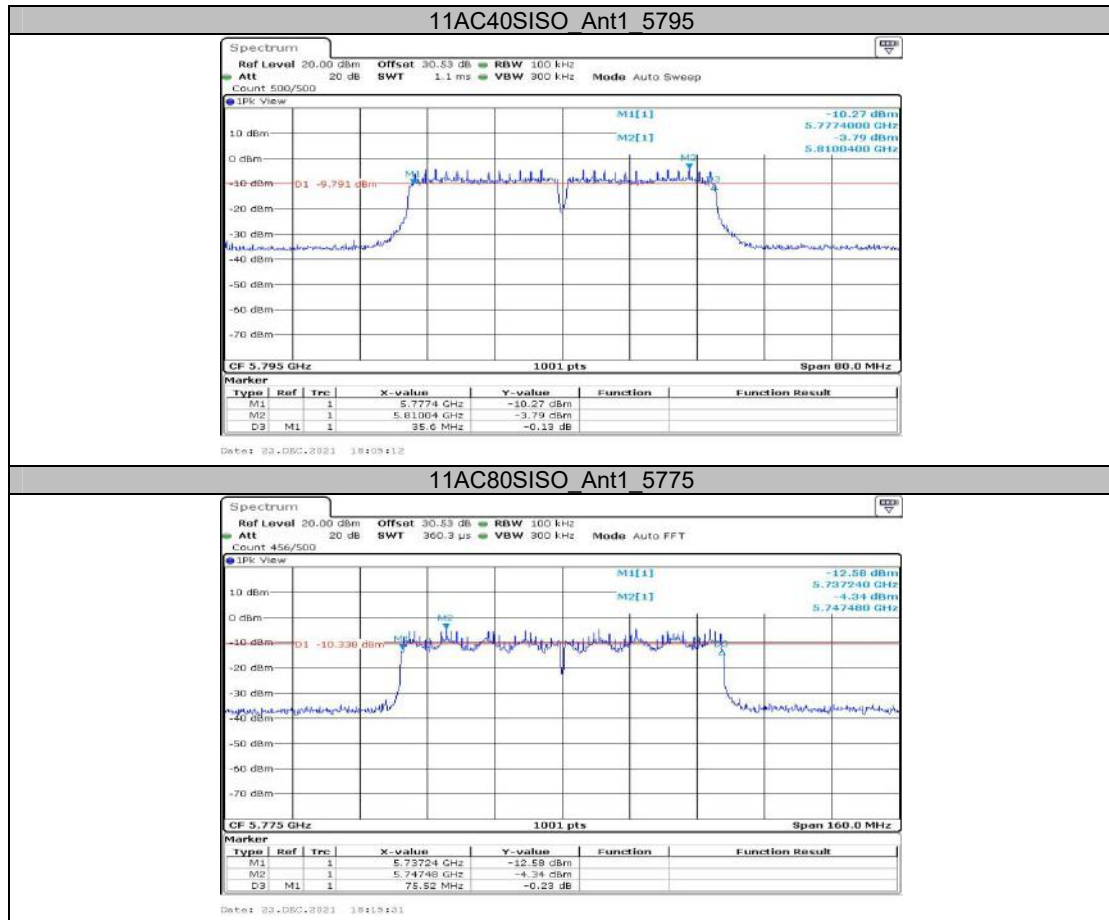

Appendix B: Maximum conducted output power Test Result

Test Mode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	13.57	≤23.98	PASS
		5200	14.29	≤23.98	PASS
		5240	14.27	≤23.98	PASS
		5260	14.16	≤23.98	PASS
		5280	14.54	≤23.98	PASS
		5320	14.55	≤23.98	PASS
		5500	13.34	≤23.98	PASS
		5580	13.26	≤23.98	PASS
		5700	13.44	≤23.98	PASS
		5745	12.23	≤30	PASS
		5785	12.08	≤30	PASS
		5825	12.34	≤30	PASS
11N20SISO	Ant1	5180	10.94	≤23.98	PASS
		5200	12.04	≤23.98	PASS
		5240	11.27	≤23.98	PASS
		5260	12.40	≤23.98	PASS
		5280	12.24	≤23.98	PASS
		5320	12.27	≤23.98	PASS
		5500	10.75	≤23.98	PASS
		5580	11.60	≤23.98	PASS
		5700	13.19	≤23.98	PASS
		5745	10.72	≤30	PASS
		5785	10.84	≤30	PASS
		5825	10.56	≤30	PASS
11N40SISO	Ant1	5190	12.66	≤23.98	PASS
		5230	12.88	≤23.98	PASS
		5270	12.96	≤23.98	PASS
		5310	12.87	≤23.98	PASS
		5510	11.39	≤23.98	PASS
		5550	11.70	≤23.98	PASS
		5670	12.87	≤23.98	PASS
		5755	11.31	≤30	PASS
11AC20SISO	Ant1	5795	11.44	≤30	PASS
		5180	11.50	≤23.98	PASS
		5200	11.88	≤23.98	PASS
		5240	12.19	≤23.98	PASS
		5260	14.49	≤23.98	PASS
		5280	14.08	≤23.98	PASS
		5320	14.23	≤23.98	PASS
		5500	12.67	≤23.98	PASS
		5580	13.38	≤23.98	PASS
		5700	13.01	≤23.98	PASS
		5745	12.58	≤30	PASS
		5785	12.81	≤30	PASS
		5825	12.61	≤30	PASS
11AC40SISO	Ant1	5190	12.28	≤23.98	PASS
		5230	12.53	≤23.98	PASS
		5270	15.10	≤23.98	PASS
		5310	14.87	≤23.98	PASS
		5510	11.20	≤23.98	PASS
		5550	11.78	≤23.98	PASS
		5670	12.87	≤23.98	PASS


11AC80SISO	Ant1	5755	11.31	≤30	PASS
		5795	11.60	≤30	PASS
		5210	12.58	≤23.98	PASS
		5290	13.38	≤23.98	PASS
		5530	11.98	≤23.98	PASS
		5610	14.75	≤23.98	PASS
		5775	13.54	≤30	PASS

Appendix C: Maximum power spectral density Test Result


Test Mode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	7.20	≤11	PASS
		5200	7.61	≤11	PASS
		5240	7.58	≤11	PASS
		5260	7.81	≤11	PASS
		5280	7.86	≤11	PASS
		5320	7.96	≤11	PASS
		5500	4.63	≤11	PASS
		5580	5.63	≤11	PASS
		5700	6.01	≤11	PASS
		5745	3.54	≤30	PASS
		5785	3.75	≤30	PASS
11N20SISO	Ant1	5825	3.91	≤30	PASS
		5180	5.33	≤11	PASS
		5200	5.57	≤11	PASS
		5240	6.00	≤11	PASS
		5260	5.50	≤11	PASS
		5280	6.62	≤11	PASS
		5320	5.16	≤11	PASS
		5500	4.24	≤11	PASS
		5580	4.61	≤11	PASS
		5700	6.32	≤11	PASS
		5745	1.68	≤30	PASS
11N40SISO	Ant1	5785	2.33	≤30	PASS
		5825	1.64	≤30	PASS
		5190	2.61	≤11	PASS
		5230	3.46	≤11	PASS
		5270	4.62	≤11	PASS
		5310	3.05	≤11	PASS
		5510	1.56	≤11	PASS
		5550	2.04	≤11	PASS
		5670	3.36	≤11	PASS
		5755	-0.33	≤30	PASS
		5795	0.19	≤30	PASS
11AC20SISO	Ant1	5180	7.23	≤11	PASS
		5200	7.56	≤11	PASS
		5240	7.82	≤11	PASS
		5260	7.99	≤11	PASS
		5280	7.72	≤11	PASS
		5320	7.94	≤11	PASS
		5500	6.06	≤11	PASS
		5580	6.79	≤11	PASS
		5700	6.40	≤11	PASS
		5745	4.01	≤30	PASS
		5785	3.69	≤30	PASS
11AC40SISO	Ant1	5825	4.11	≤30	PASS
		5190	4.80	≤11	PASS
		5230	5.81	≤11	PASS
		5270	6.00	≤11	PASS
		5310	4.99	≤11	PASS
		5510	1.62	≤11	PASS
		5550	2.35	≤11	PASS
		5670	4.21	≤11	PASS
		5755	-0.42	≤30	PASS
		5795	-0.20	≤30	PASS
11AC80SISO	Ant1	5210	1.66	≤11	PASS
		5290	1.81	≤11	PASS

		5530	0.33	≤11	PASS
		5610	3.11	≤11	PASS
		5775	0.86	≤30	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2.The Duty Cycle Factor is compensated in the graph.

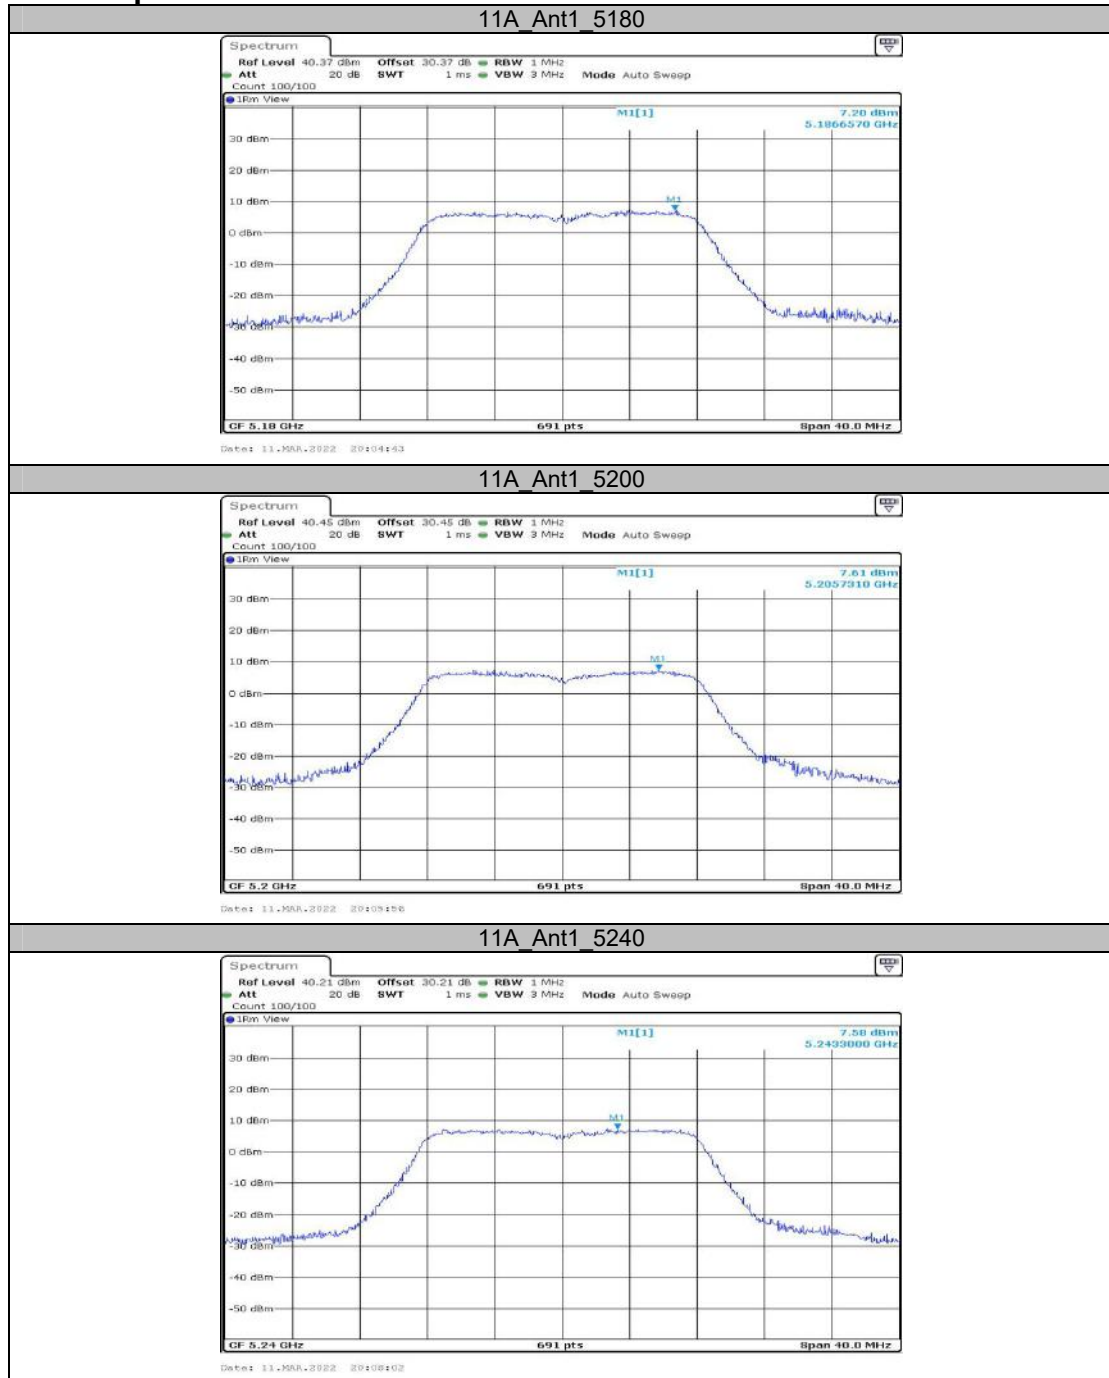
Test Graphs

11A_Ant1_5260

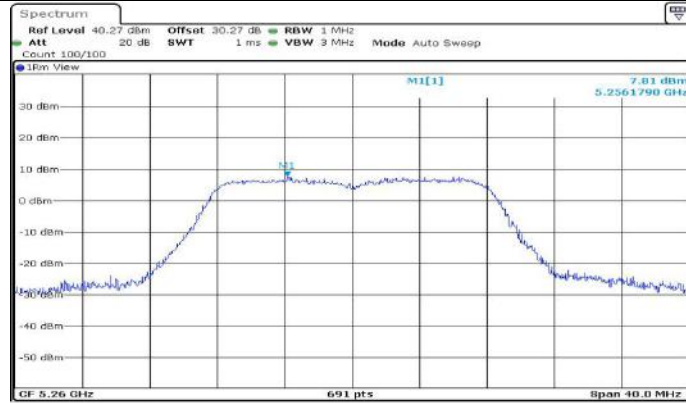


Date: 11-MAR-2022 20:10:42

11A_Ant1_5280

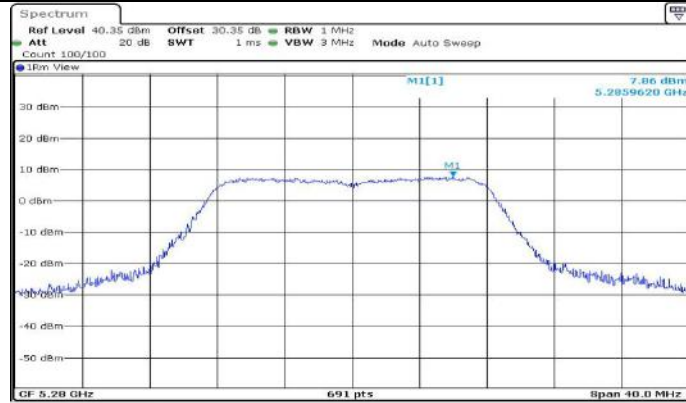


Date: 11-MAR-2022 20:12:23

11A_Ant1_5320

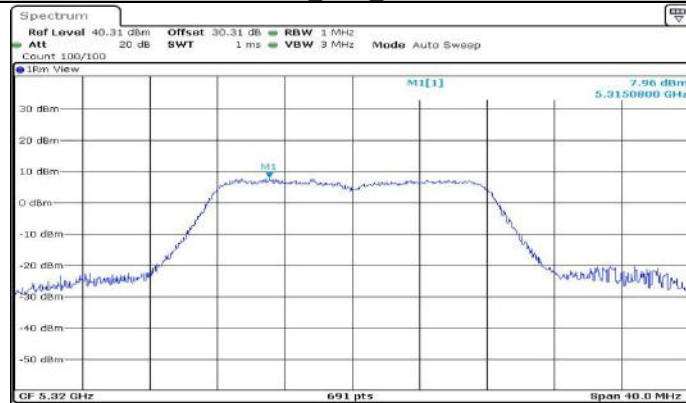


Date: 11-MAR-2022 20:13:04

11A_Ant1_5500

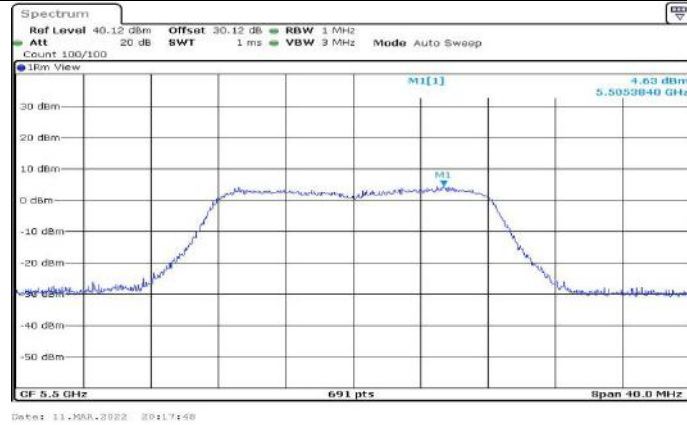


11A_Ant1_5580

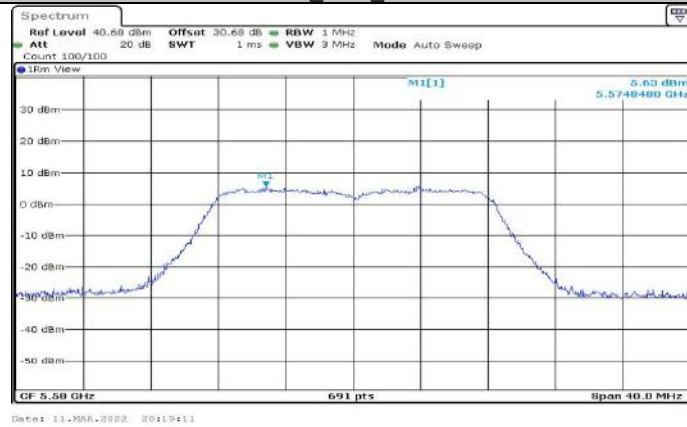

11A_Ant1_5700



11A_Ant1_5745

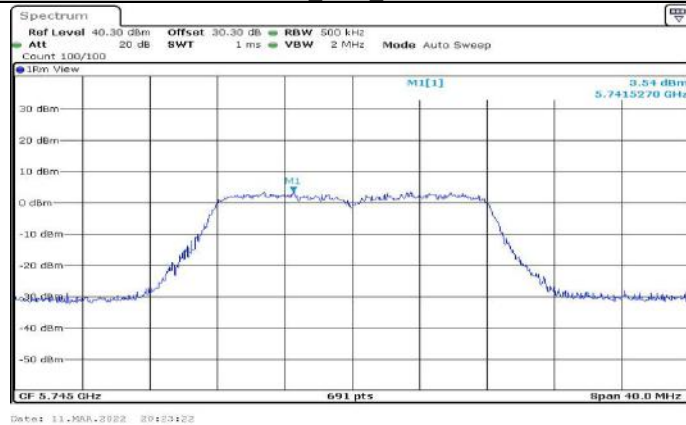


11A_Ant1_5785




11A_Ant1_5825



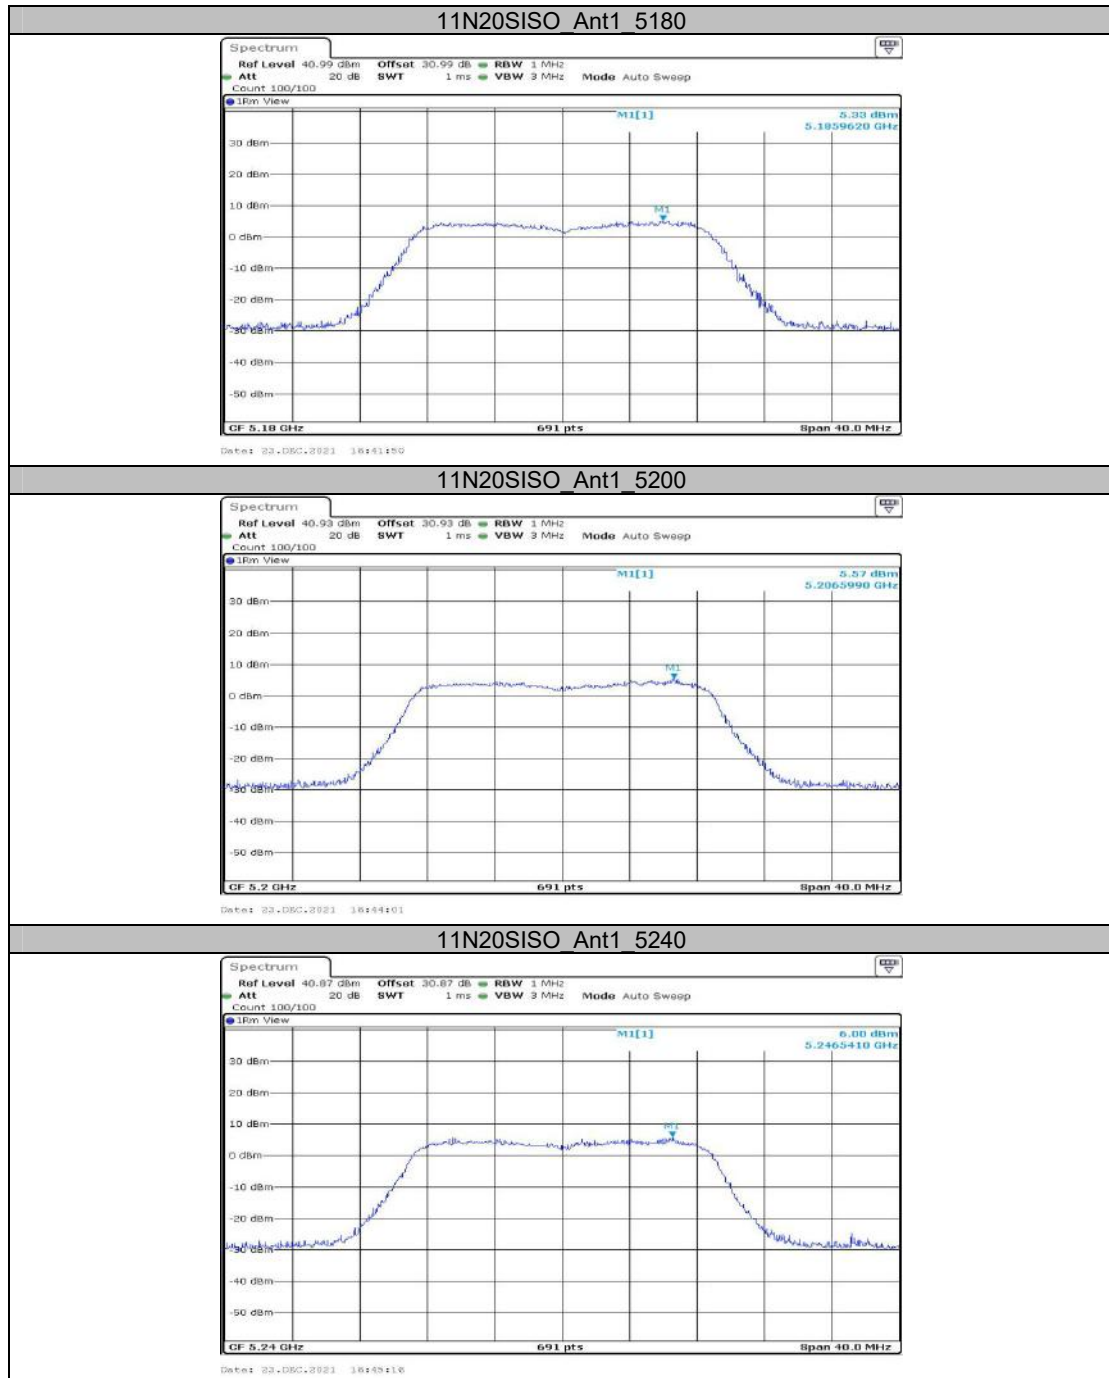

11N20SISO Ant1 5260

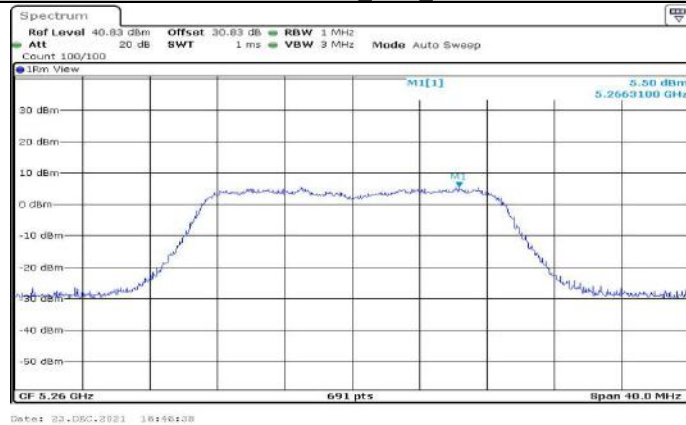



11N20SISO Ant1 5280





11N20SISO Ant1 5320




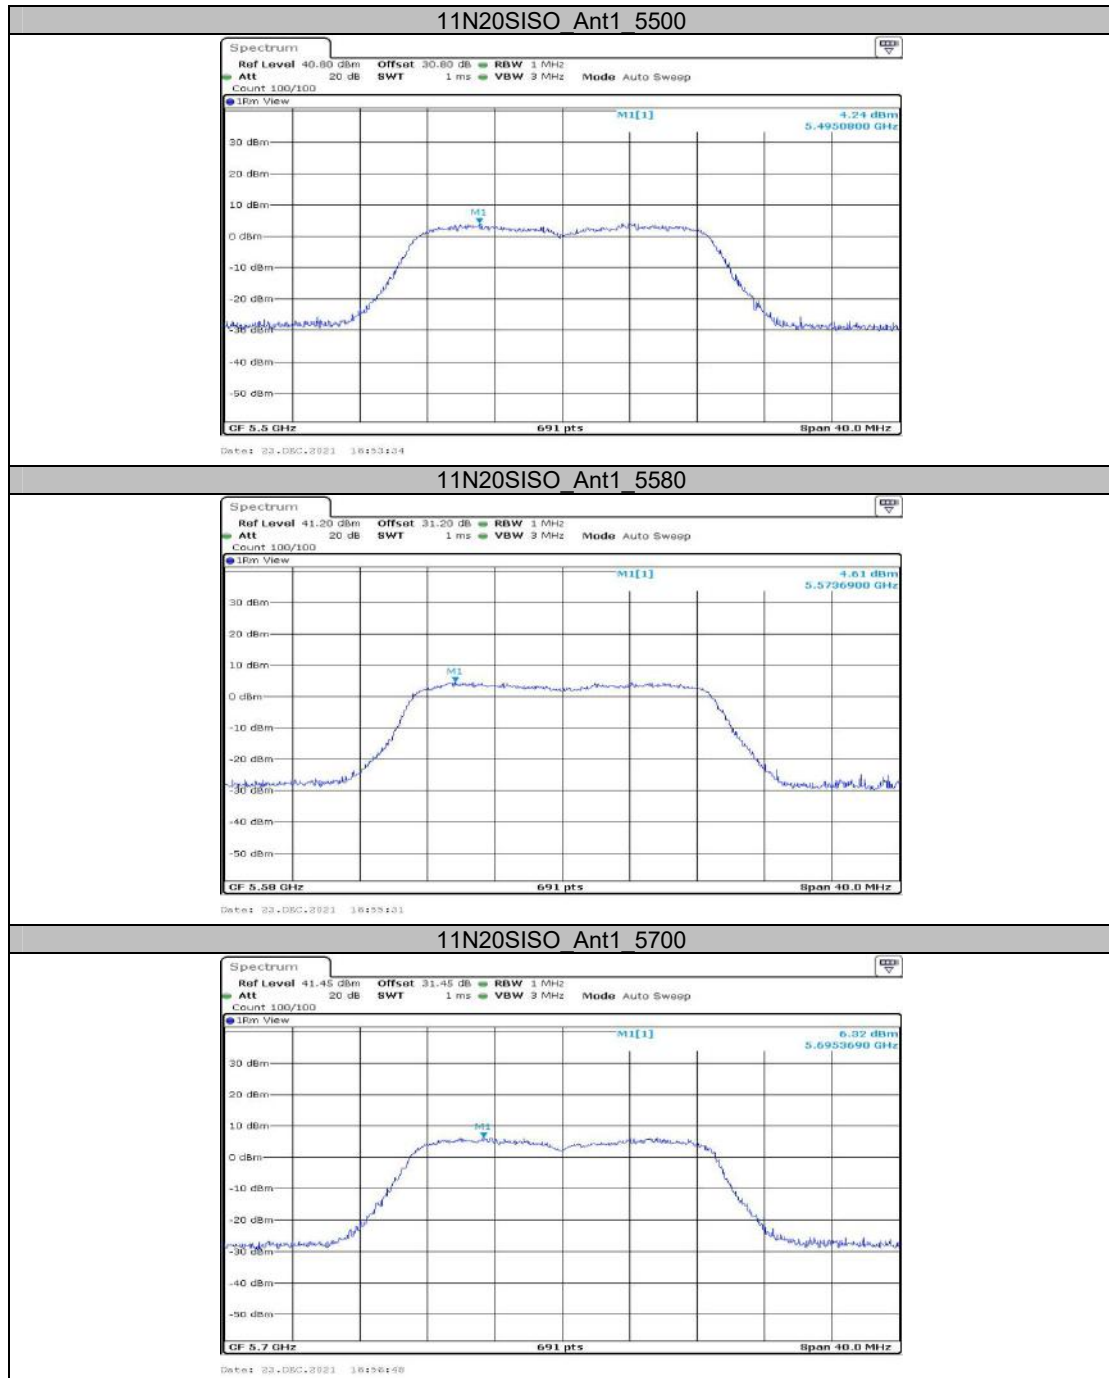


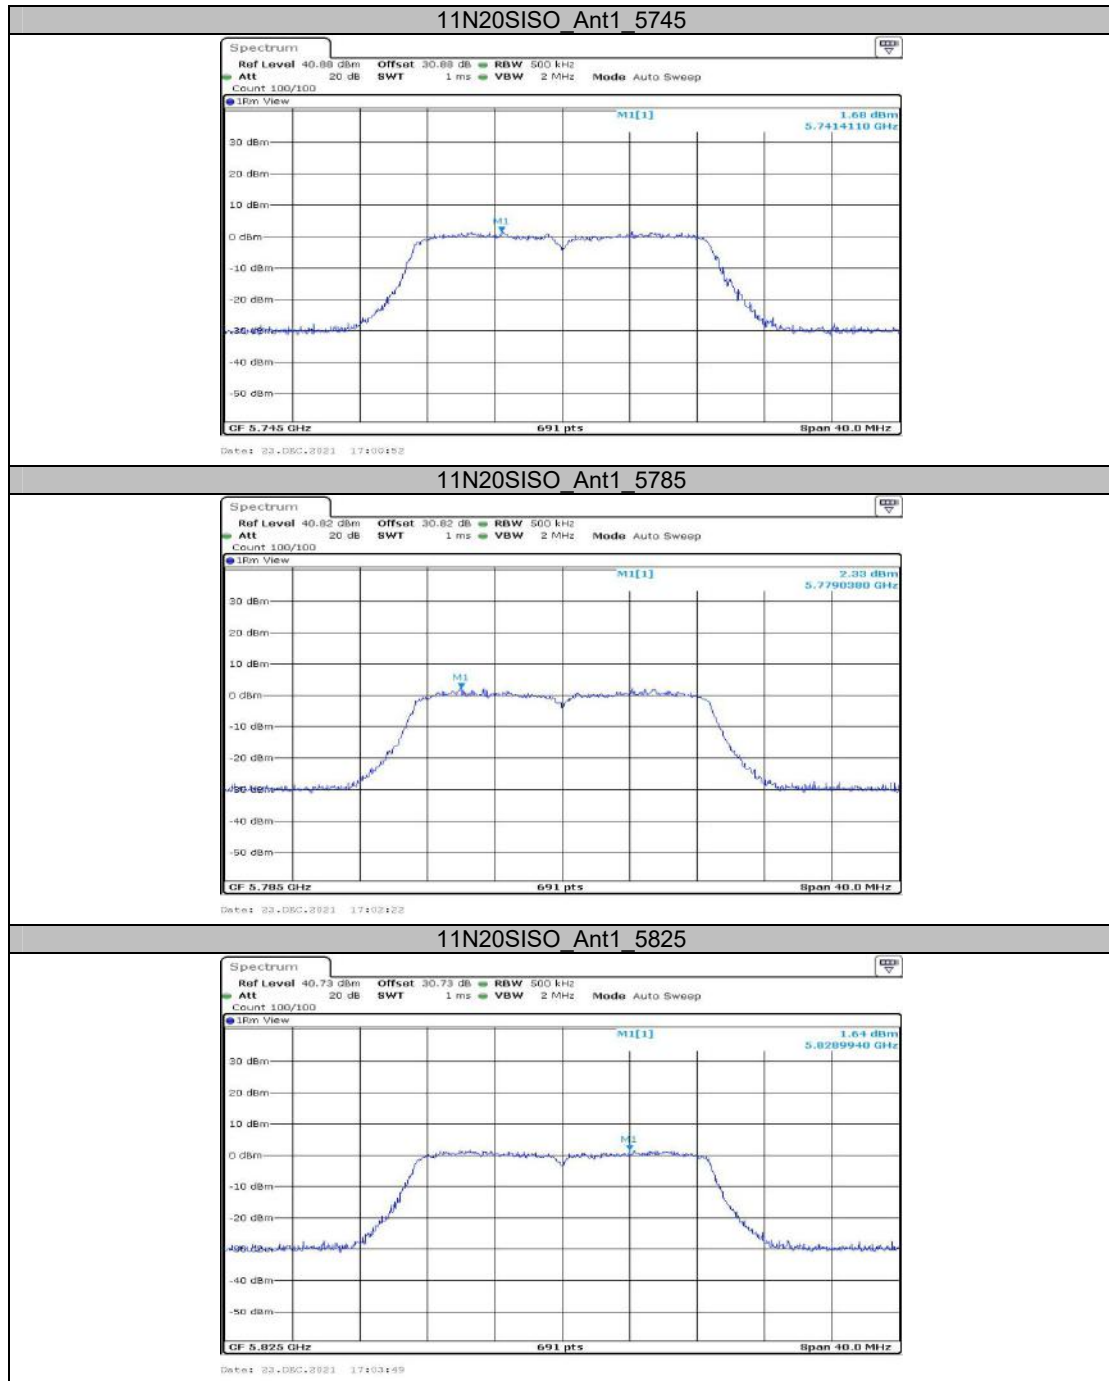


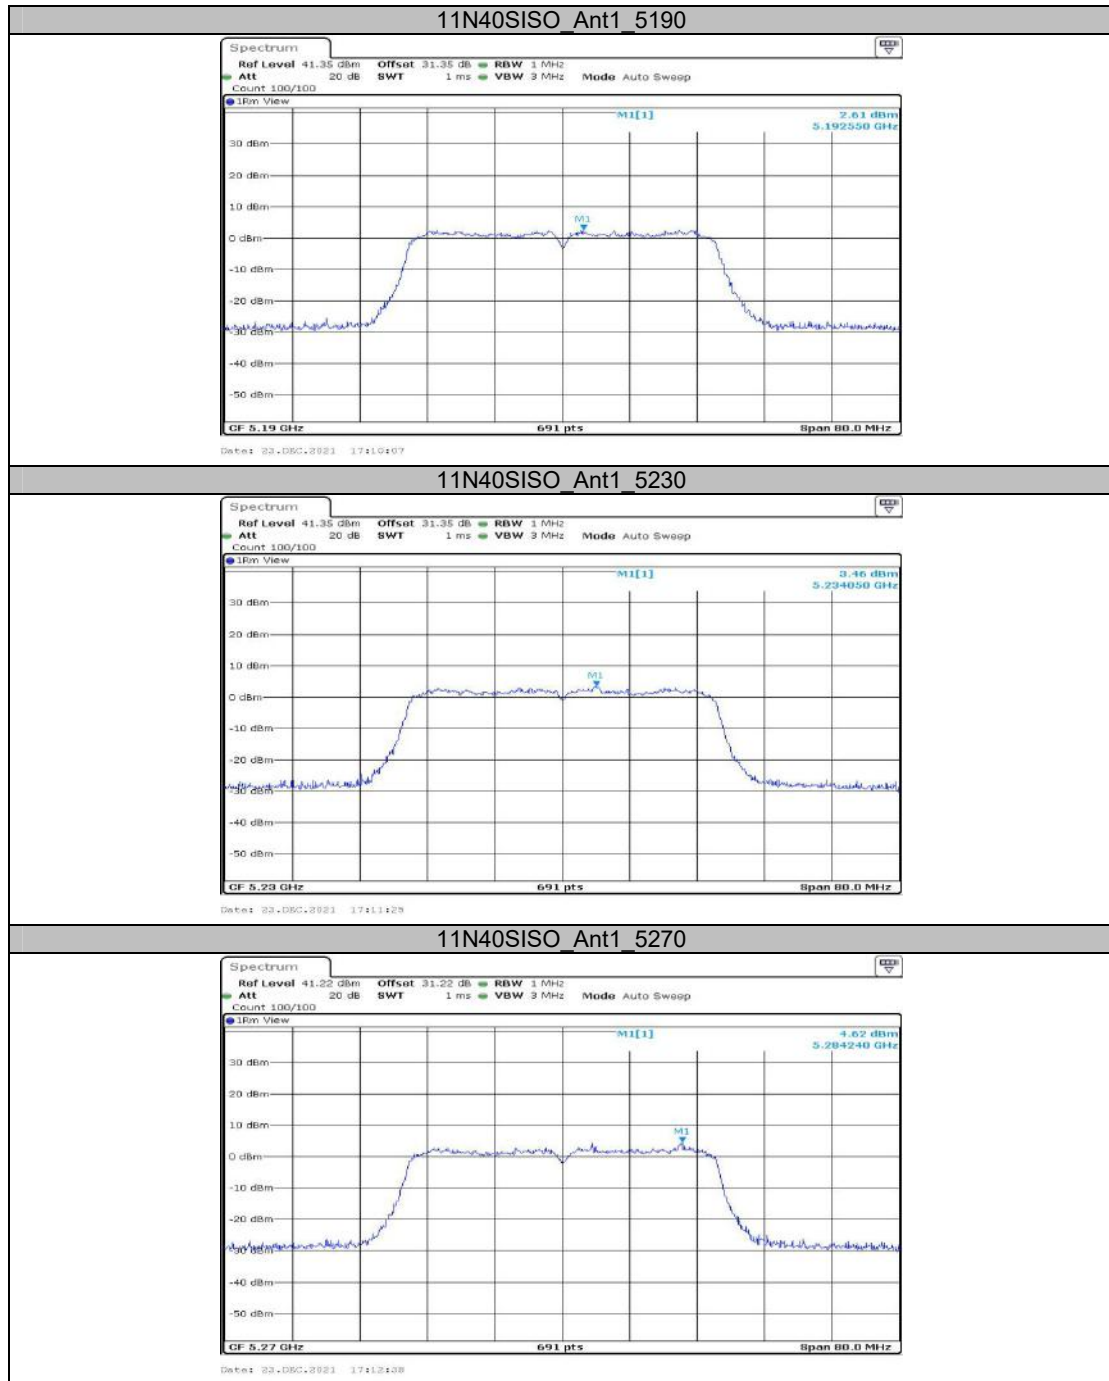


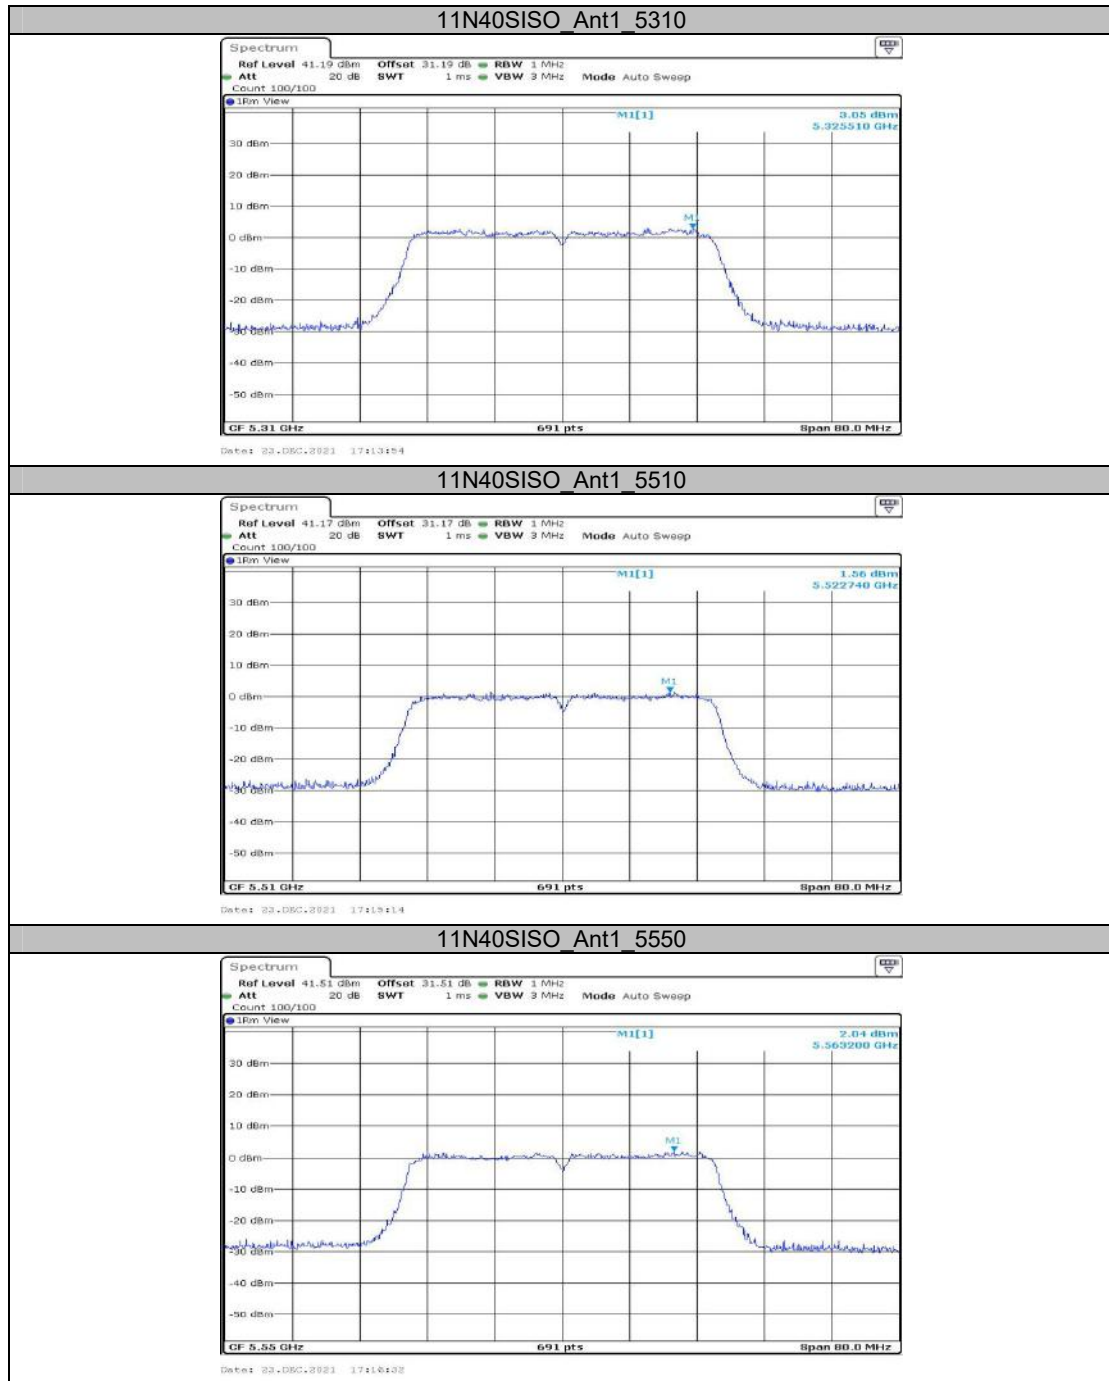


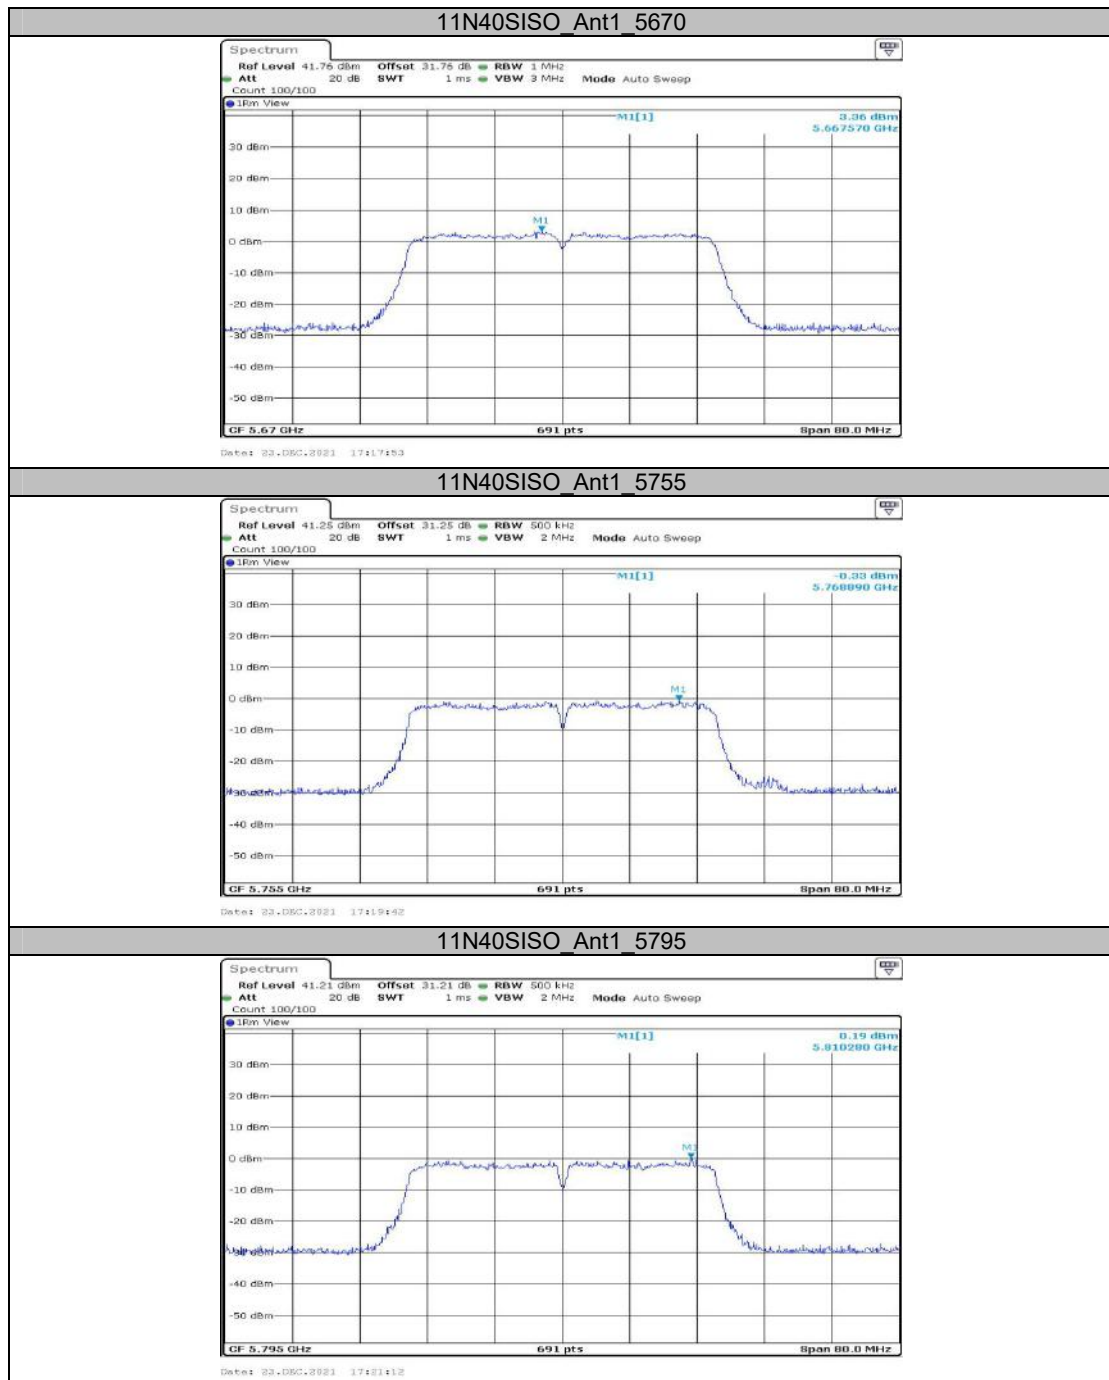


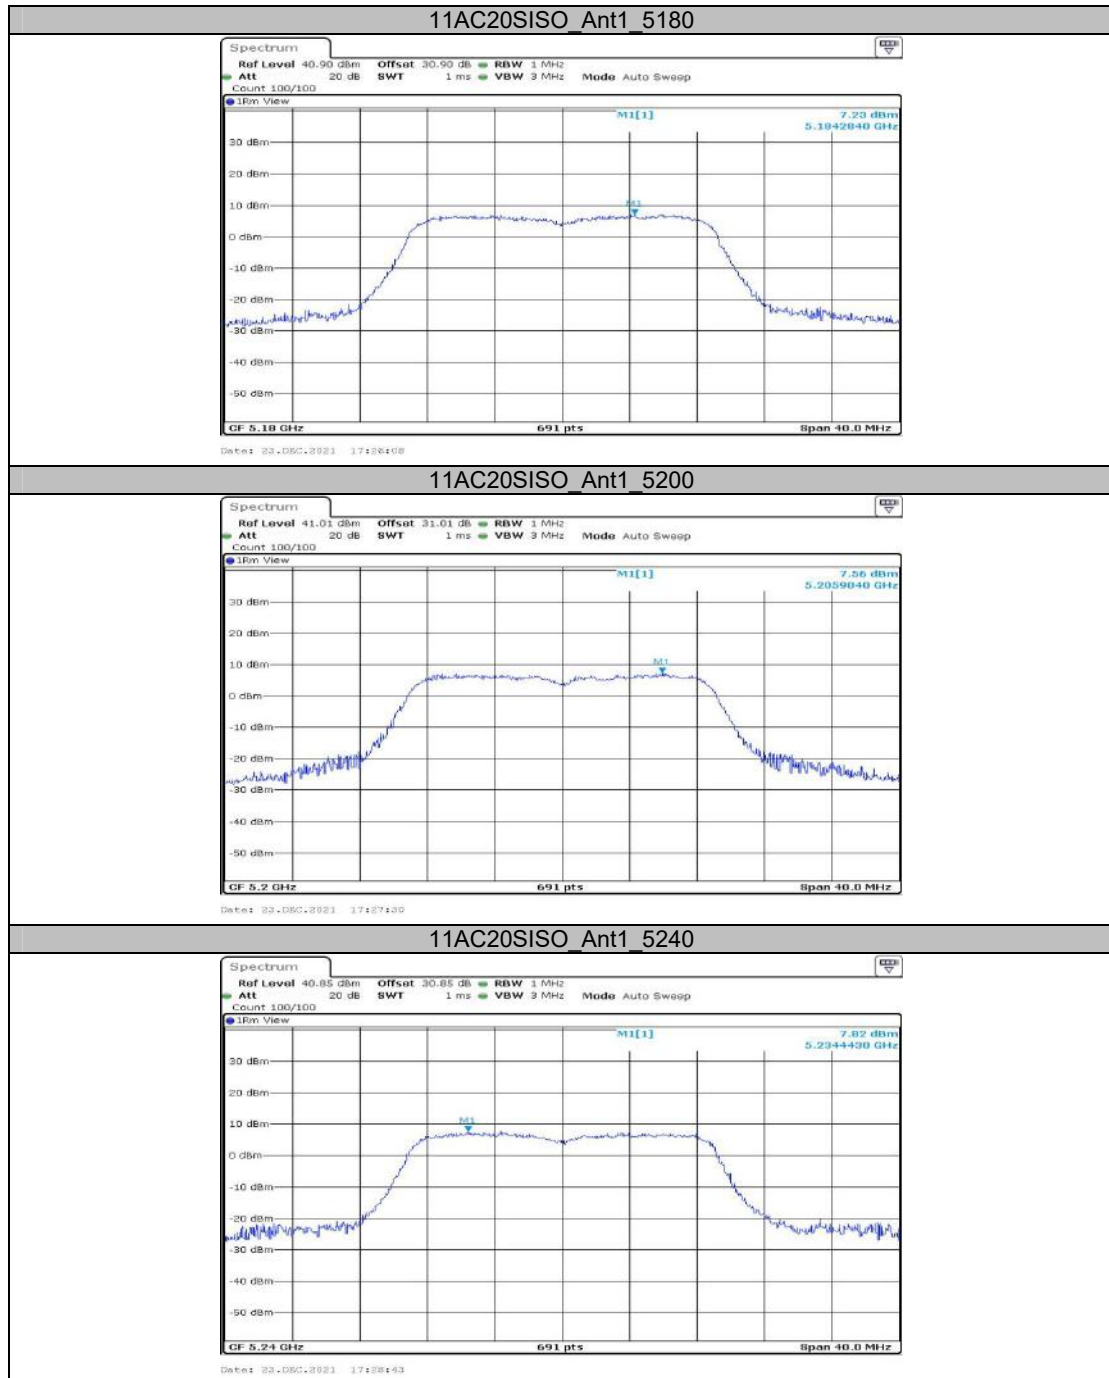


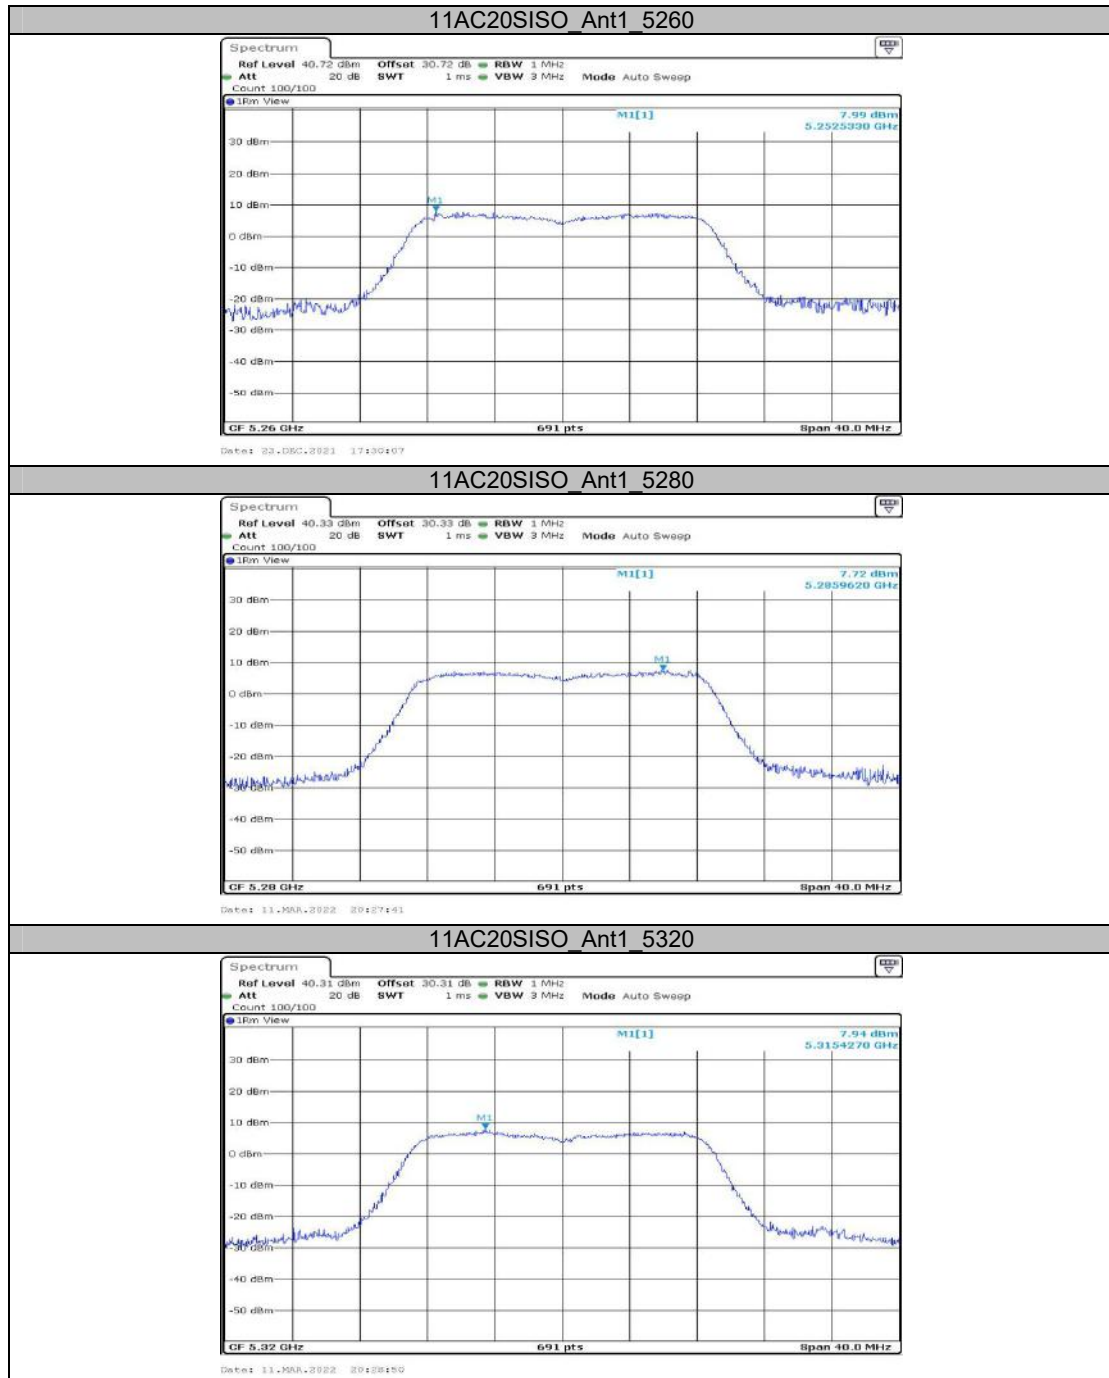


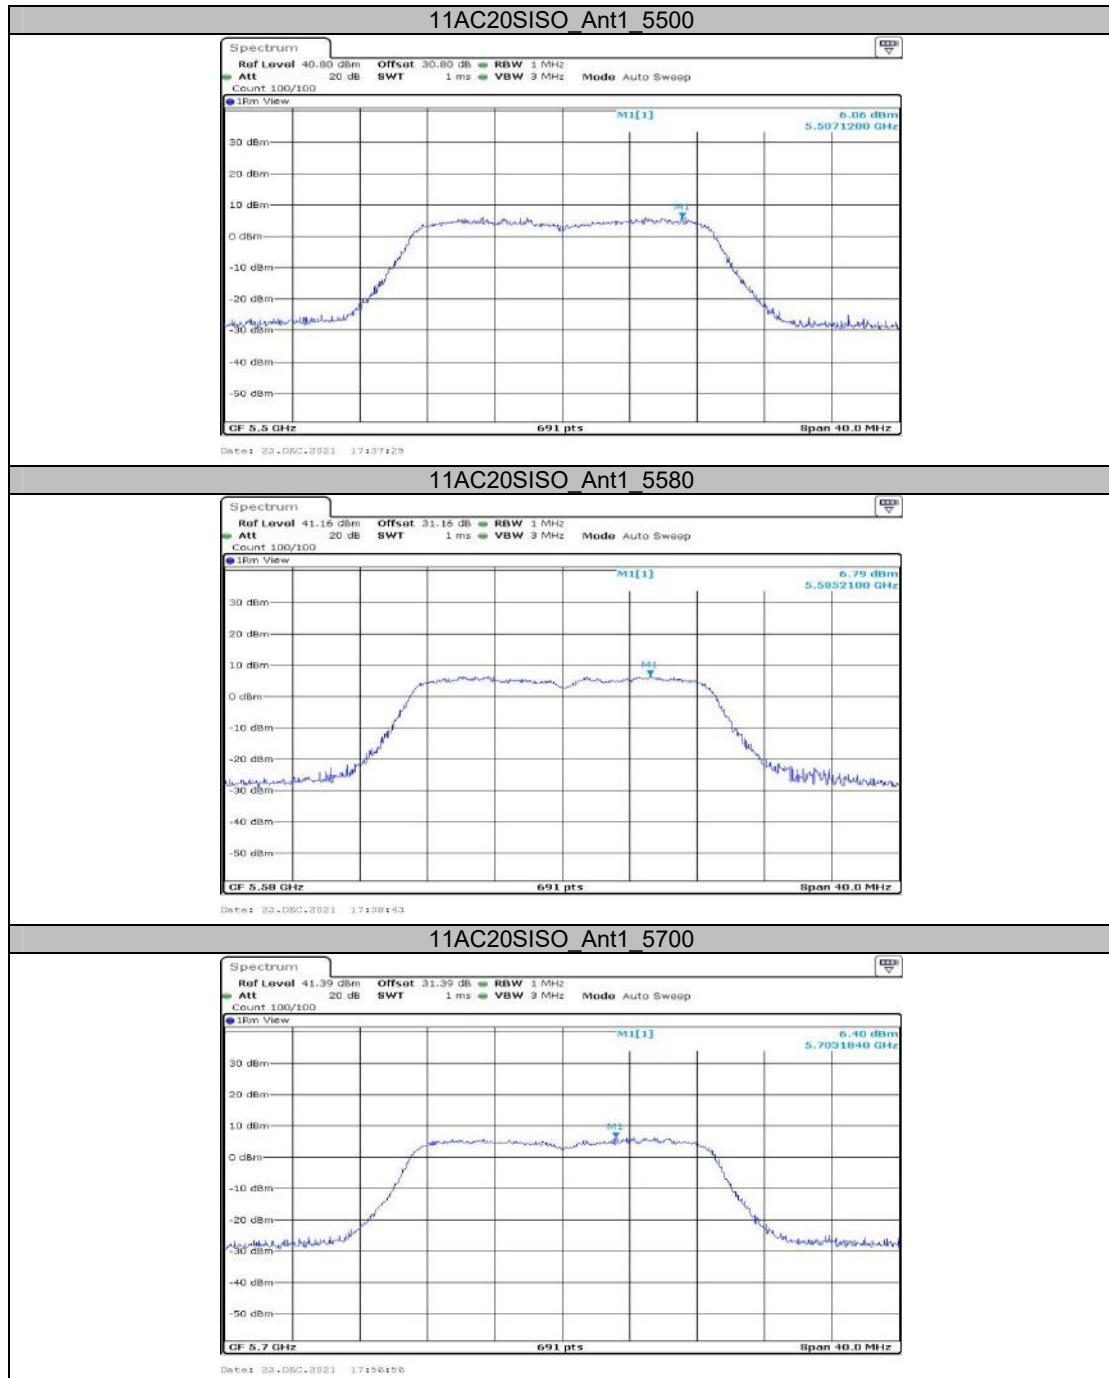


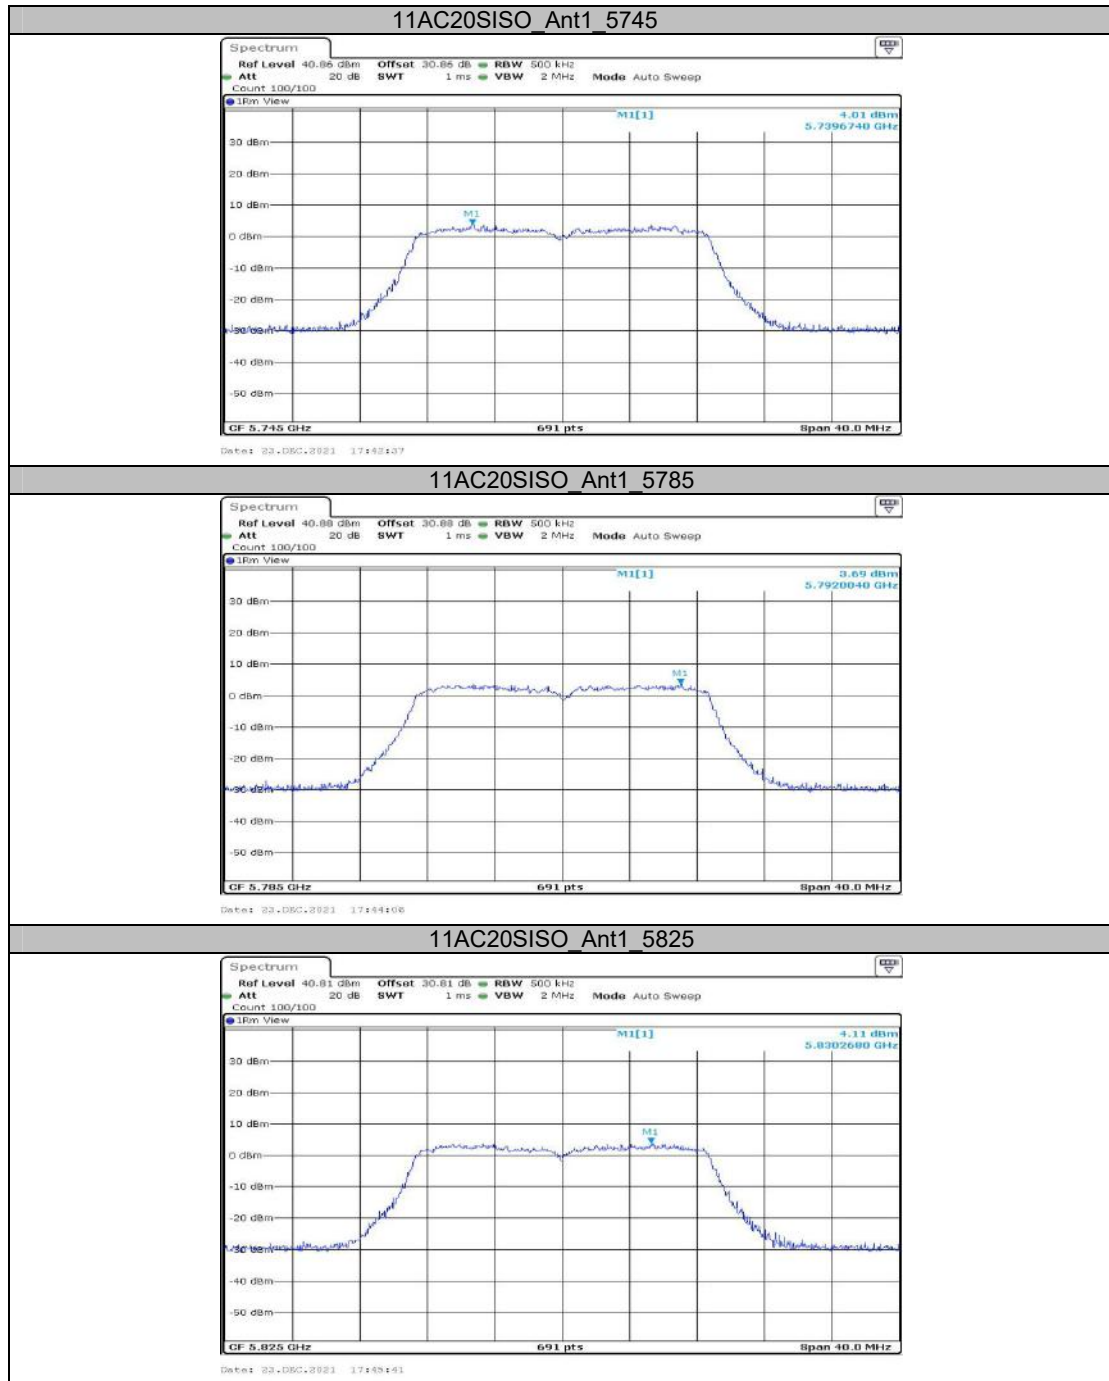


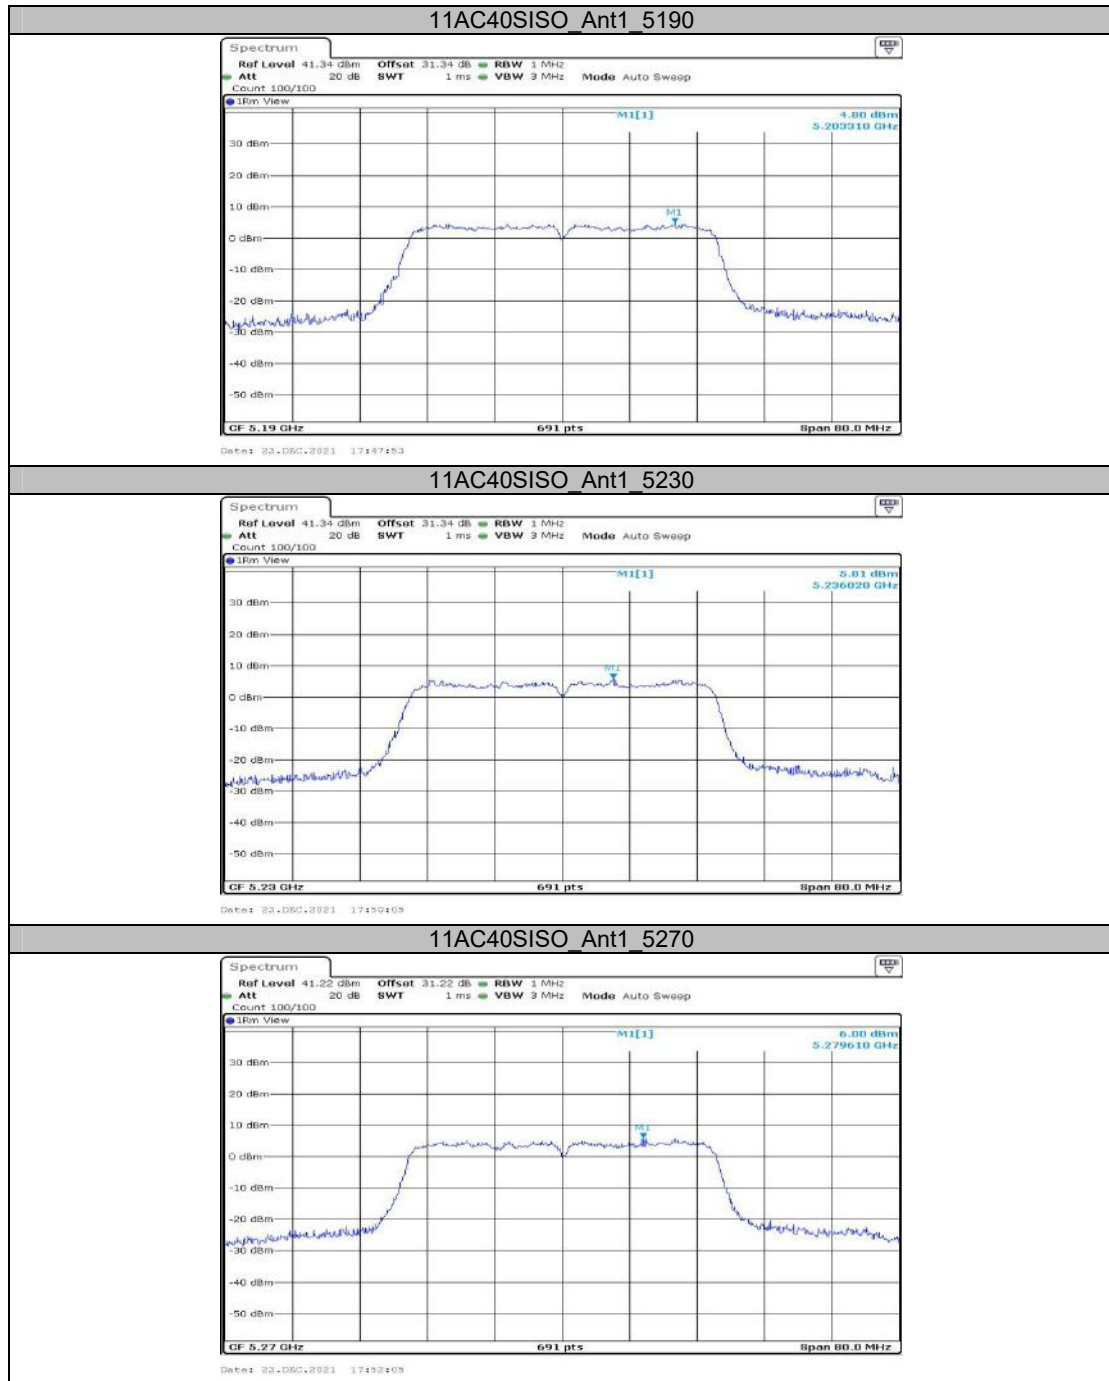

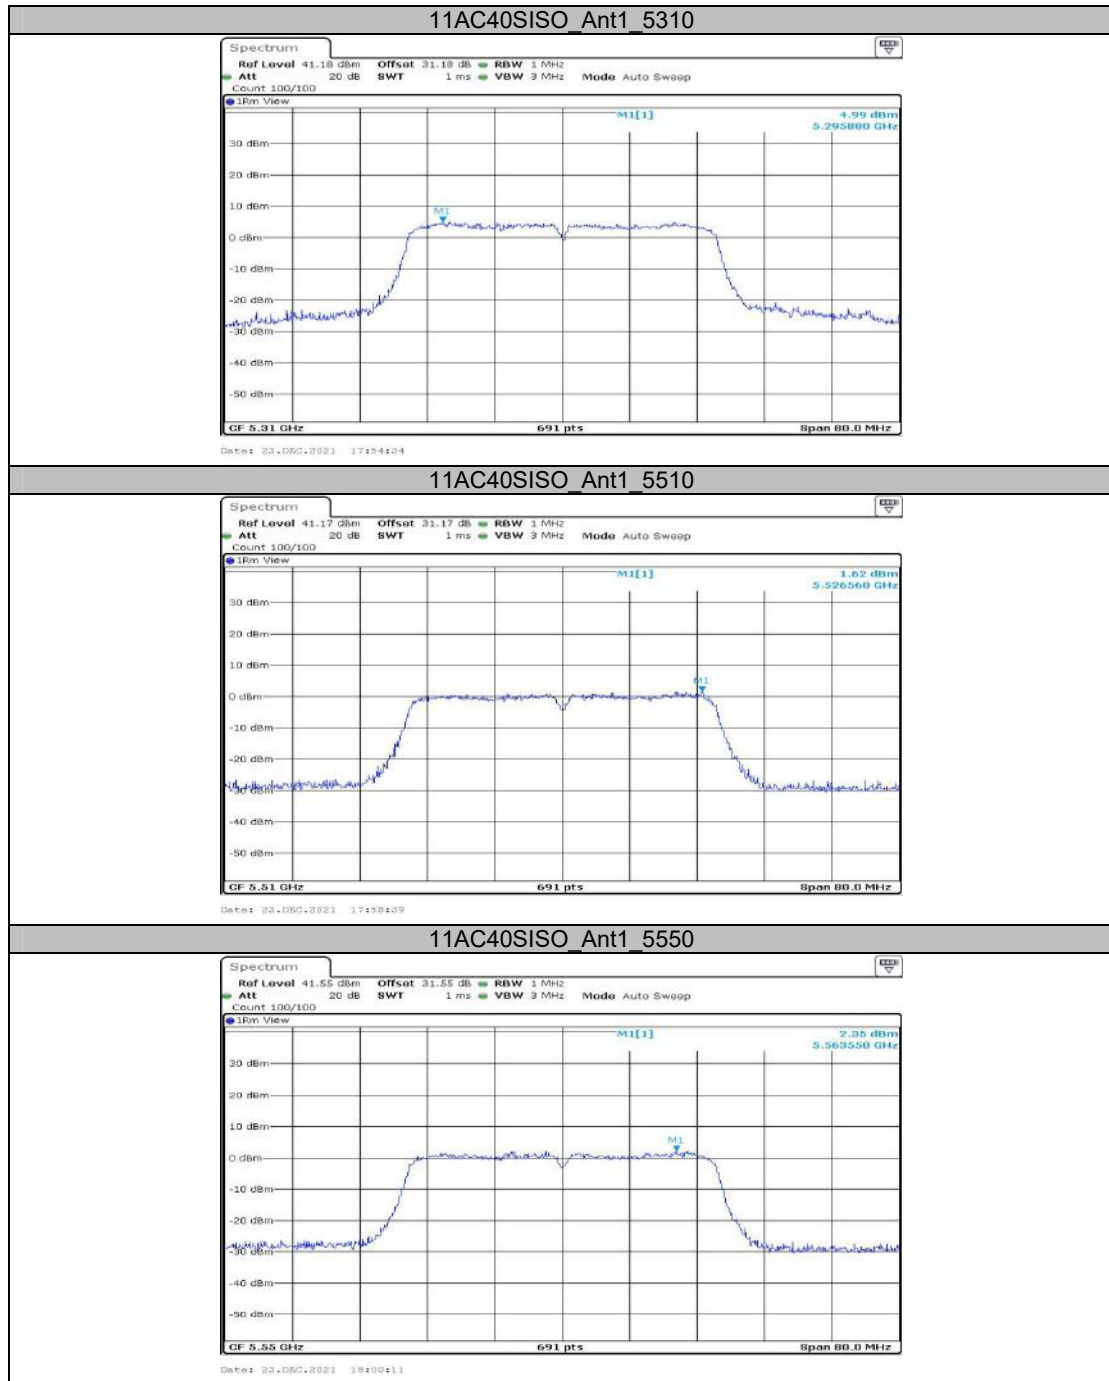

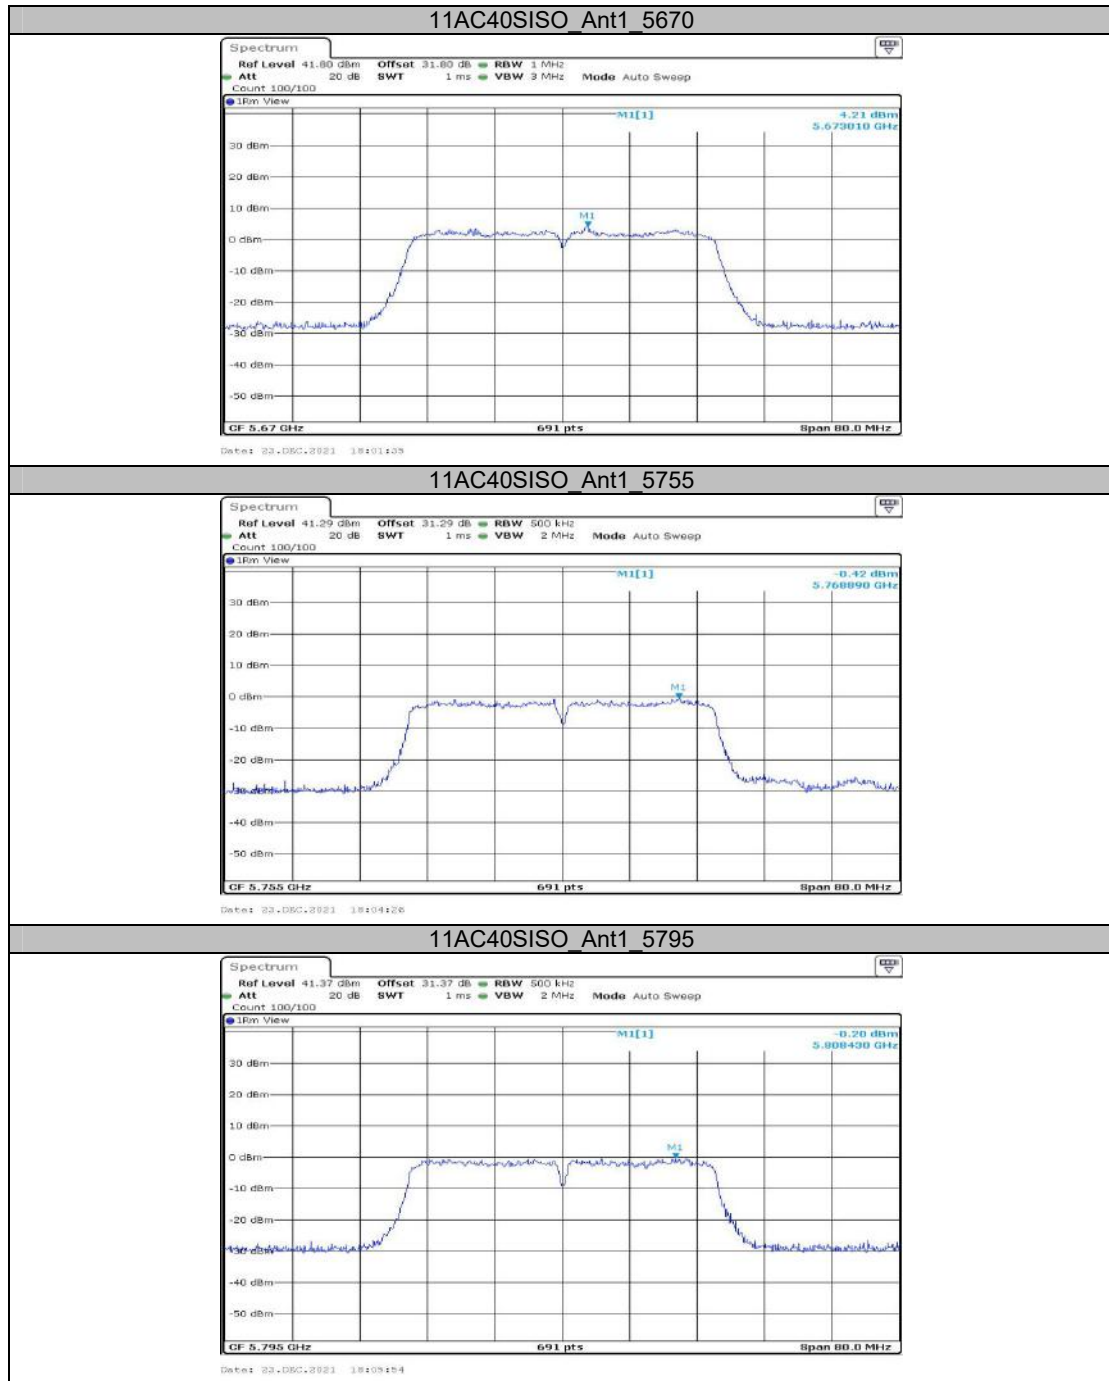

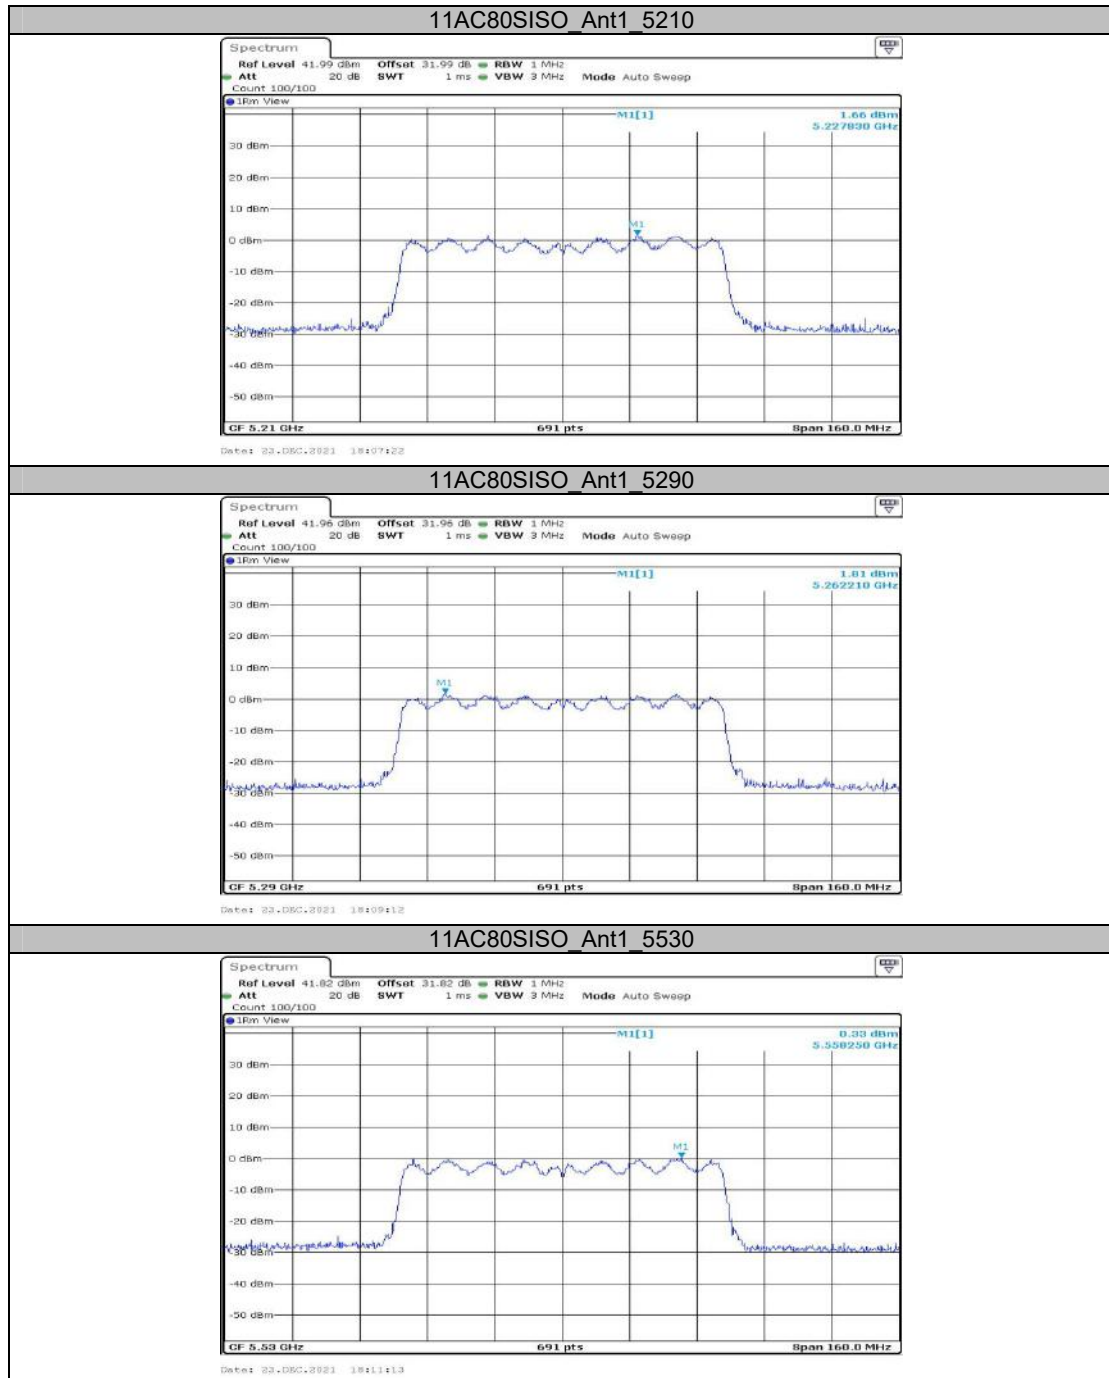


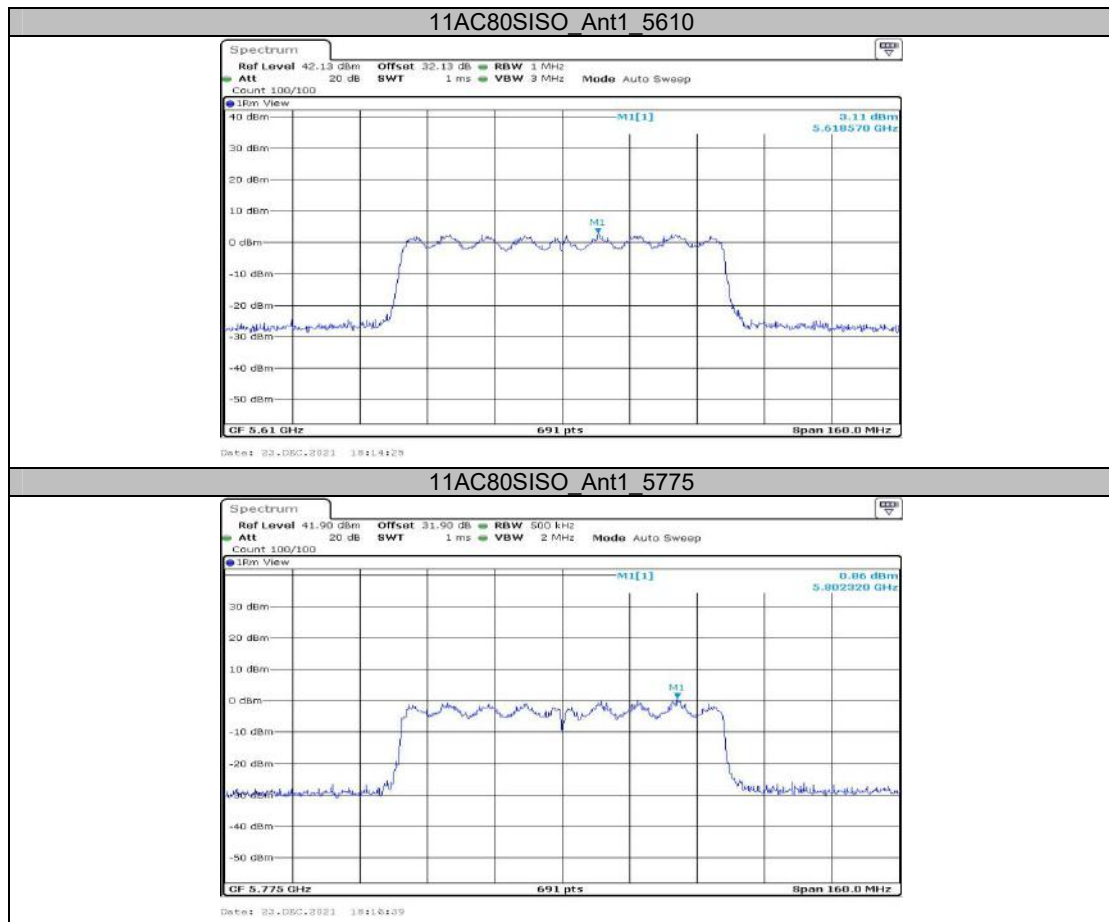

Appendix D: Duty Cycle Test Result


Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5200	2.05	2.21	92.76
		5280	2.05	2.22	92.34
		5580	2.05	2.22	92.34
		5785	2.05	2.20	93.18
11N20SISO	Ant1	5200	1.91	2.05	93.17
		5280	1.91	2.02	94.55
		5580	1.91	2.08	91.83
		5785	1.91	2.04	93.63
11N40SISO	Ant1	5190	0.93	1.10	84.55
		5270	0.94	1.11	84.68
		5550	0.94	1.10	85.45
		5670	0.94	1.10	85.45
11AC20SISO	Ant1	5755	0.94	1.11	84.68
		5200	1.92	2.10	91.43
		5260	1.92	2.02	95.05
		5280	1.92	2.07	92.75
11AC40SISO	Ant1	5580	1.92	2.07	92.75
		5785	1.92	2.08	92.31
		5190	0.95	1.12	84.82
		5270	0.95	1.12	84.82
11AC80SISO	Ant1	5550	0.94	1.11	84.68
		5755	0.94	1.12	83.93
		5210	0.46	0.63	73.02
		5290	0.45	0.63	71.43
		5530	0.46	0.63	73.02
		5775	0.46	0.63	73.02

Test Graphs

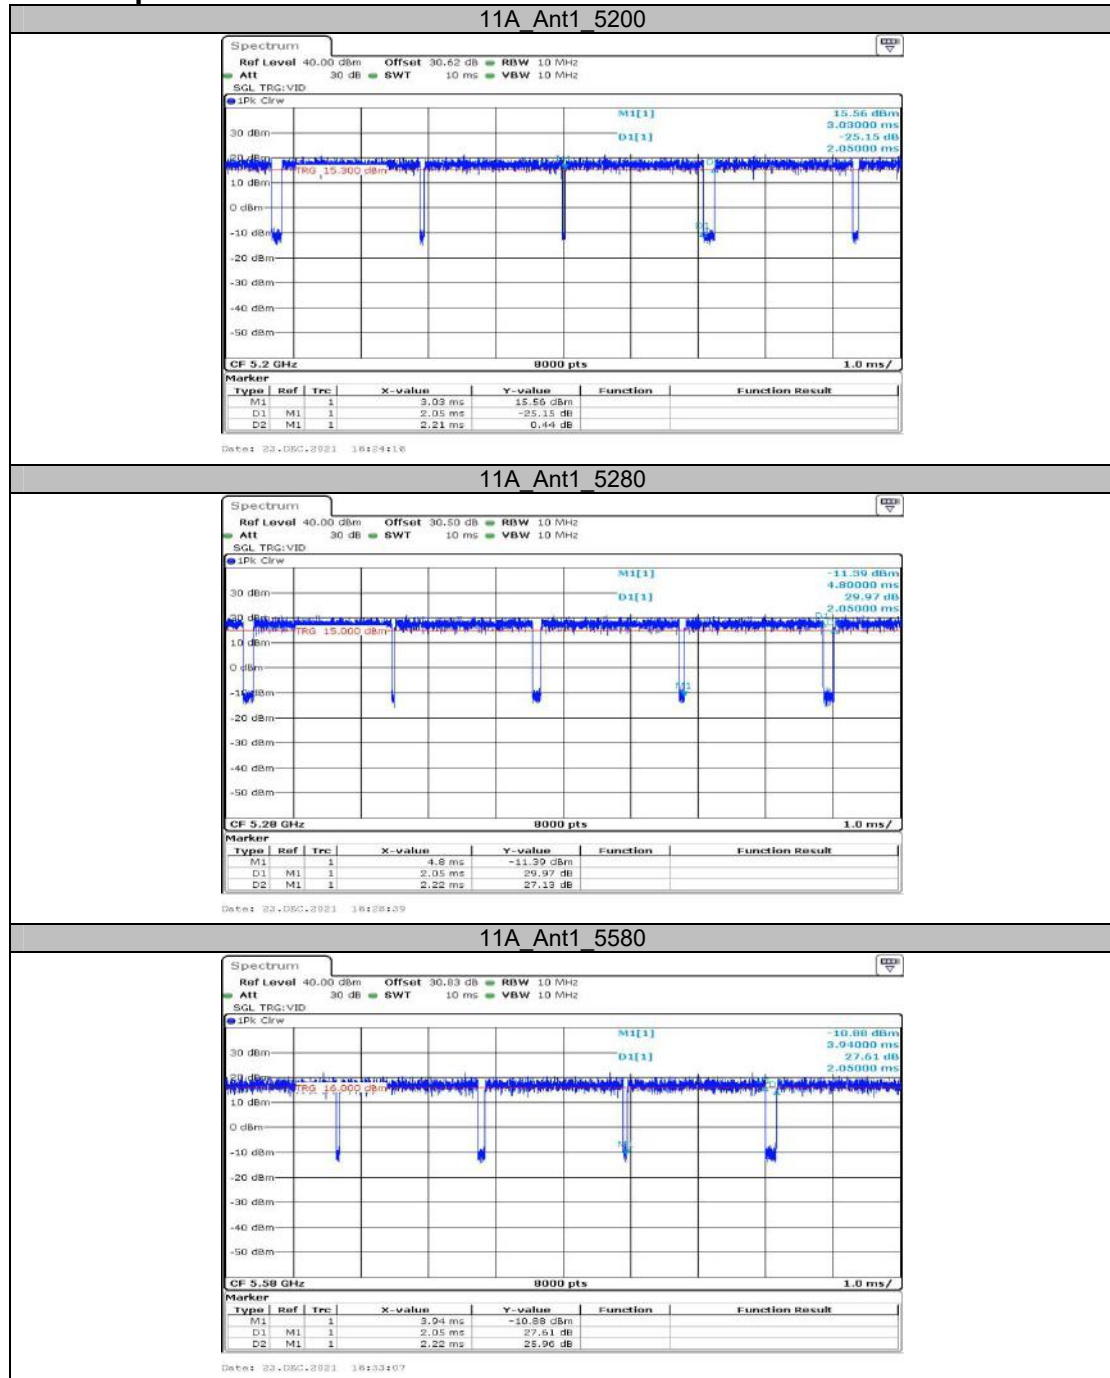





11N20SISO Ant1 5580

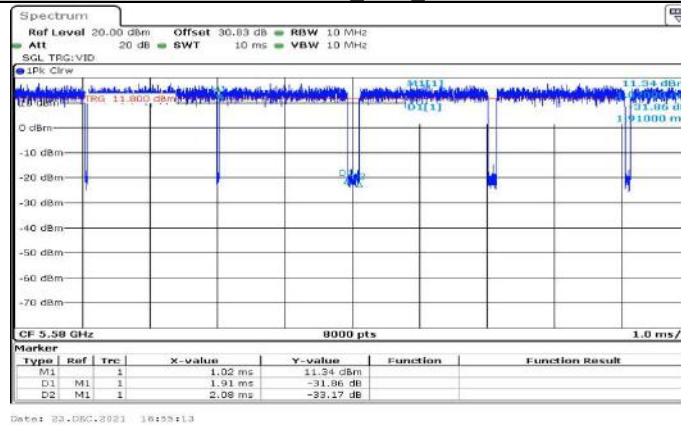



11N20SISO Ant1 5785

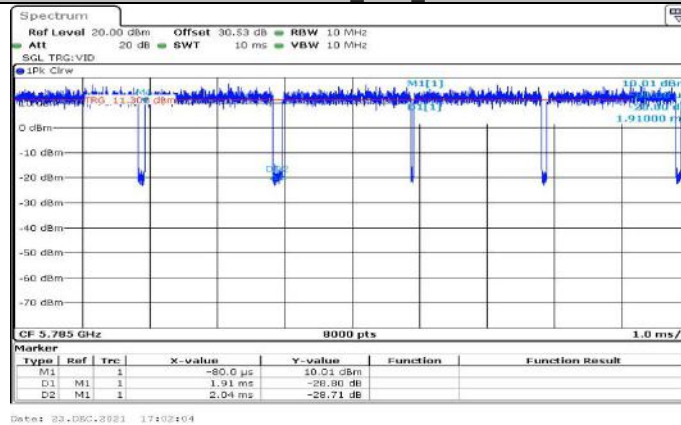


11N40SISO Ant1 5190

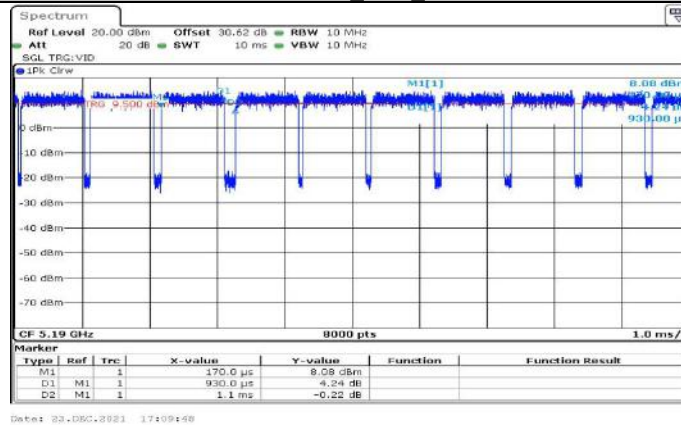


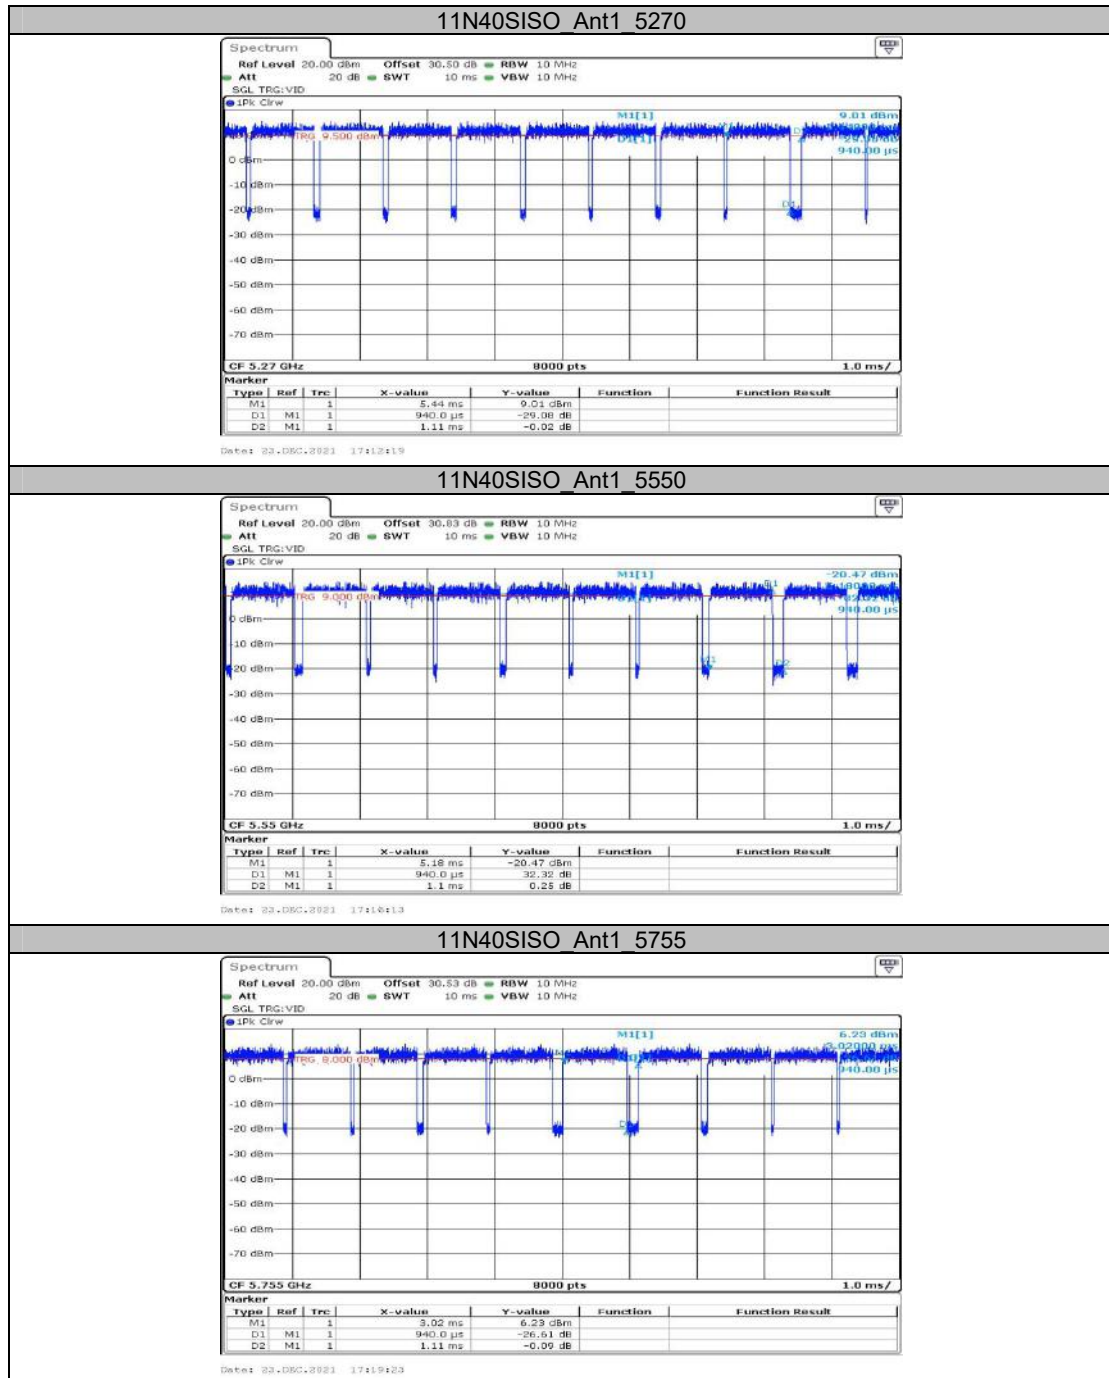

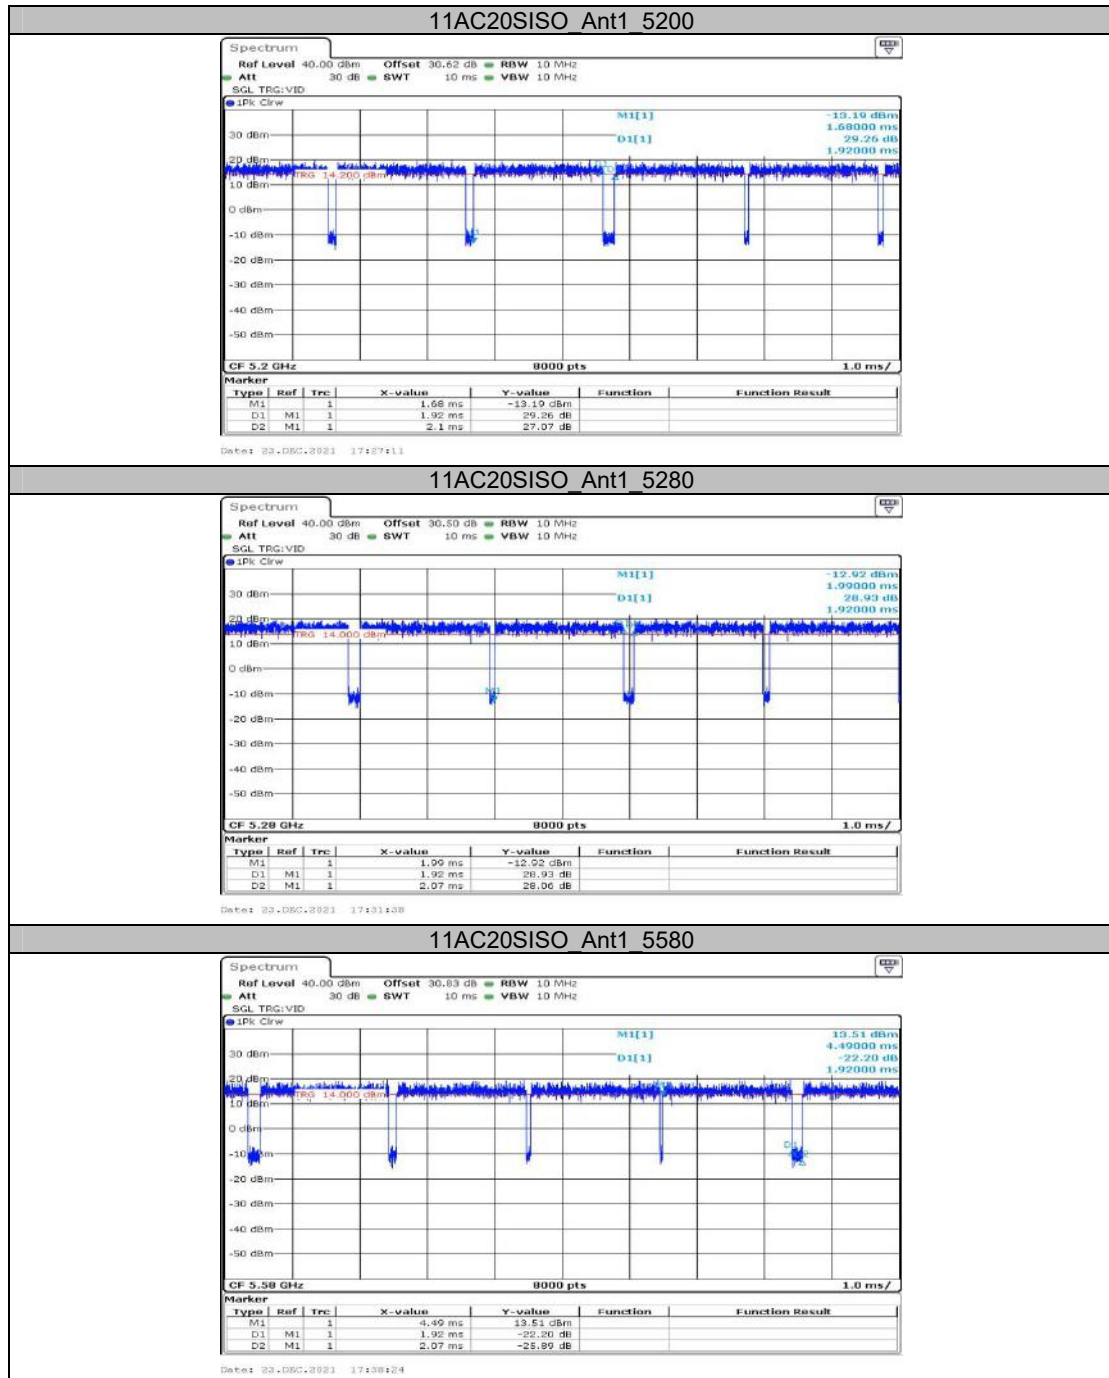

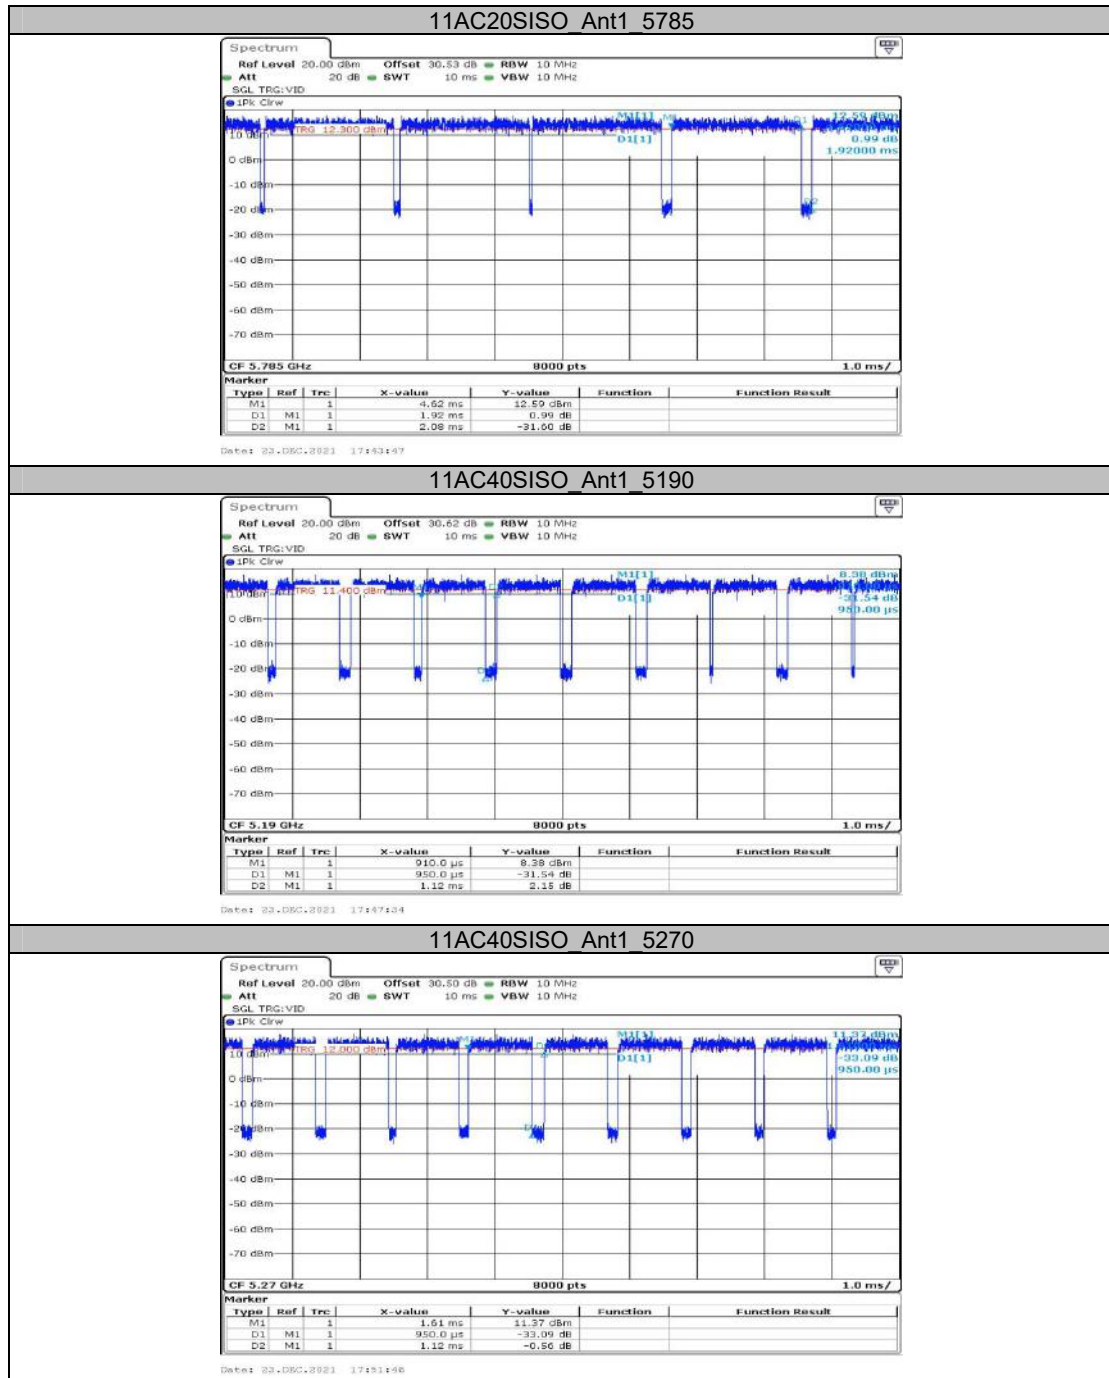


11AC40SISO Ant1 5550

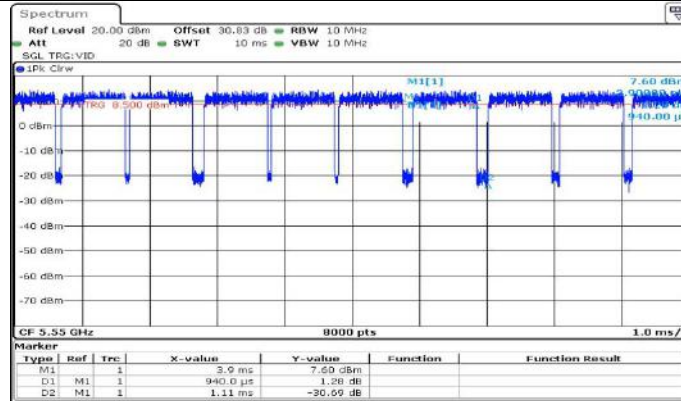


Date: 22-DEC-2023 17:59:22

11AC40SISO Ant1 5755

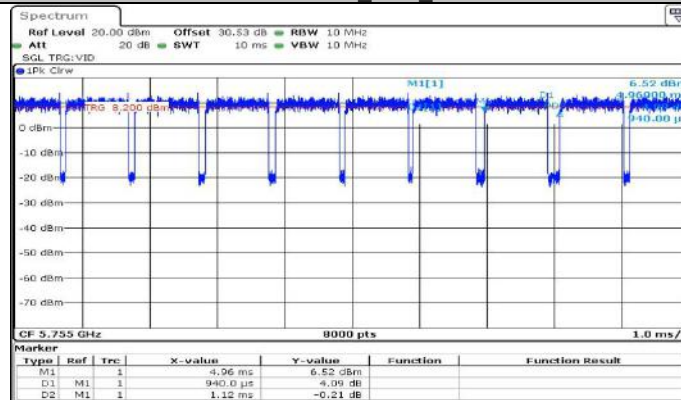


Date: 22-DEC-2023 18:04:07

11AC80SISO Ant1 5210

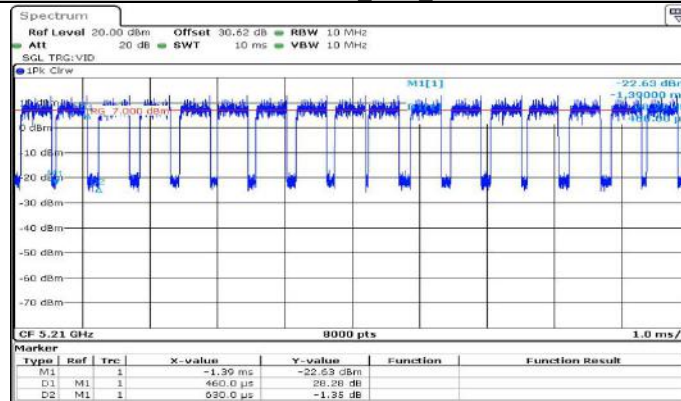

Date: 22-DEC-2023 18:07:04

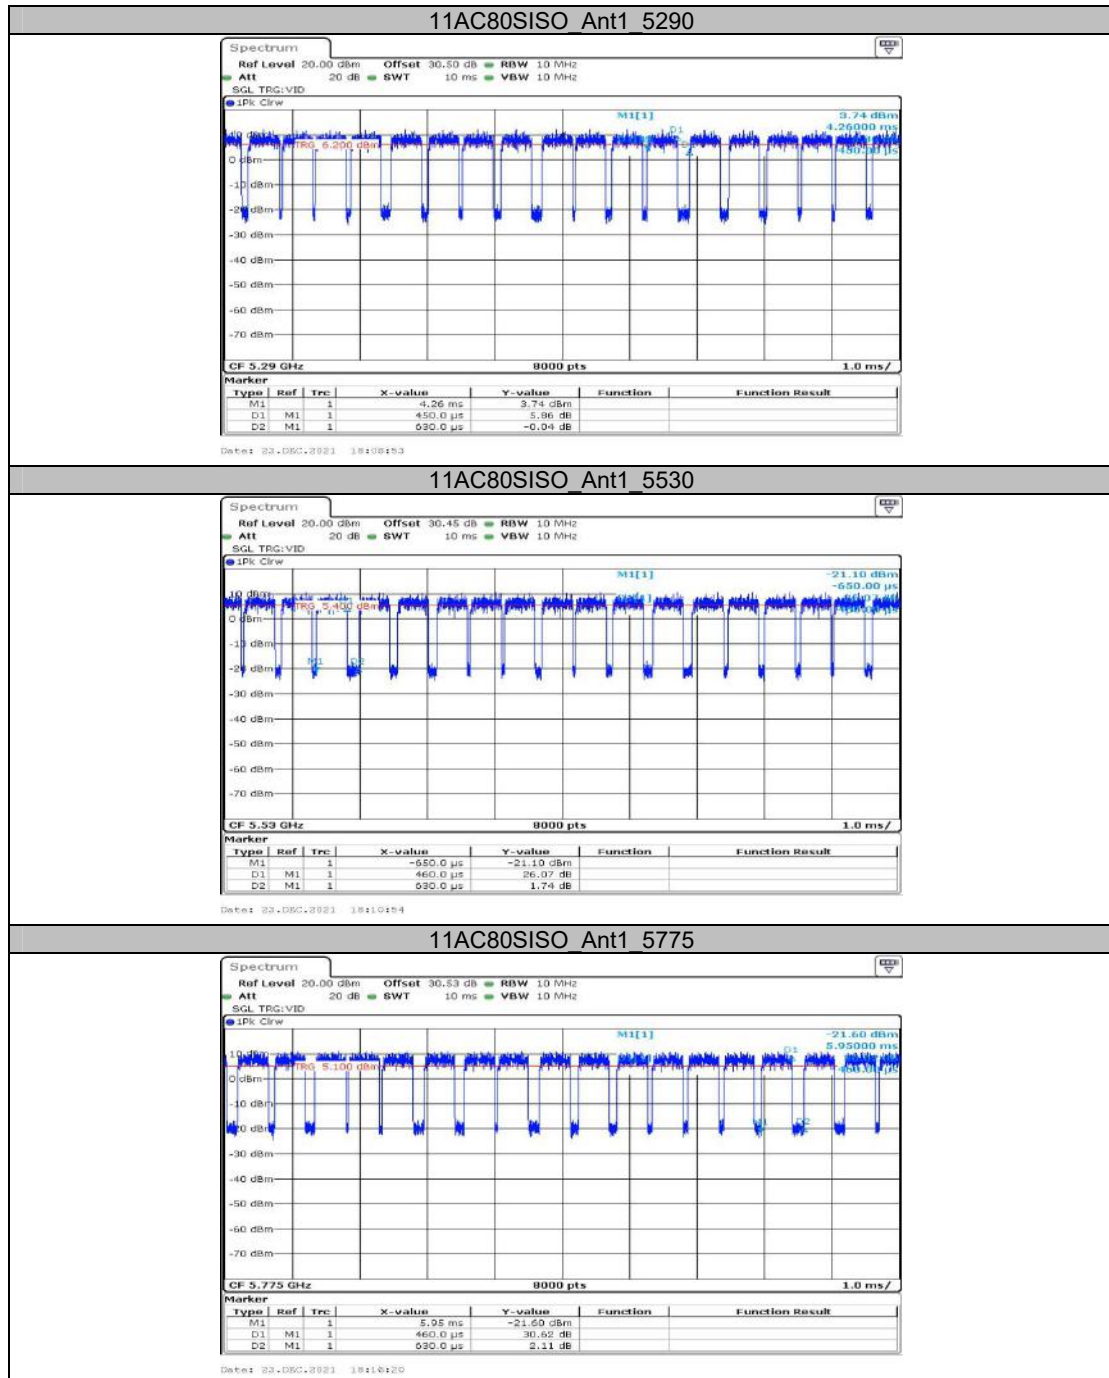

***** END OF REPORT *****