

Report No.: FL880825-06



FCC RADIO TEST REPORT

FCC ID : Z8H89FT0047

Equipment : ePMP 5GHz Force 300 CSM RADIO/ePMP 3000L 5GHz

Access Point Radio/cnVision Hub FLEXr Connectorized

Brand Name : Cambium Networks

Model Name : ePMP 5GHz Force 300 CSM RADIO/ePMP 3000L 5GHz

Access Point Radio/cnVision Hub FLEXr Connectorized

Model Number : C050910P021A/C050910P121A

Applicant : Cambium Networks Inc.

3800 Golf Road, Suite 360 Rolling Meadows, IL 60008, USA

Manufacturer : Cambium Networks, Ltd.

Ashburton, TQ13 7UP, UK

Standard : 47 CFR FCC Part 90 Subpart Y

The product was received on Jan. 15, 2019, and testing was started from Dec. 27, 2019 and completed on Jan. 06, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI/TIA-603-D-2010, 47 CFR FCC Part 90 Subpart Y, ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Page Number

: 1 of 22

: Feb. 24, 2020

TEL: 886-3-656-9065 FAX: 886-3-656-9085

TABLE OF CONTENTS

Summary of Test Result	5
1.1 Product Information	
	5
1.2 Applicable Standards	
· / pp	8
1.3 Testing Information	8
1.4 Measurement Uncertainty	8
2 Test Configuration	9
2.1 Test Channel Mode	9
2.2 Worst Case Modulation Configuration	9
2.3 EUT Operation during Test	10
2.4 Accessories	10
2.5 Support Equipment	10
2.6 Test Setup Diagram	11
3 Test Result	12
3.1 Maximum Conducted Output Power and Peak Power Spectral Density Measurement	12
3.2 Peak Excursion Measurement	15
3.3 Occupied Bandwidth and Emission Mask Measurement	16
3.4 Transmitter Conducted Unwanted Emissions Measurement	18
3.5 Transmitter Radiated Unwanted Emissions Measurement	19
3.6 Frequency Stability Measurement	21
4 Test Equipment and Calibration Data	22
Appendix A. Maximum Conducted Output Power / Peak Power Spectral Density	

Appendix B. Peak Excursion

Appendix C. Occupied Bandwidth / Emission Mask

Appendix D. Transmitter Conducted Unwanted Emissions

Appendix E. Transmitter Radiated Unwanted Emissions

Appendix F. Frequency Stability

Appendix G. Test Photos

Photographs of EUT v01

TEL: 886-3-656-9065 FAX: 886-3-656-9085

Report Template No.: CB-A16_3 Ver1.0

Page Number : 2 of 22

: Feb. 24, 2020 Issued Date

Report Version : 01

Report No.: FL880825-06

History of this test report

Report No.: FL880825-06

Report No.	Version	Description	Issued Date
FL880825-06	01	Initial issue of report	Feb. 24, 2020
_			

TEL: 886-3-656-9065 Page Number : 3 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

Summary of Test Result

Report No.: FL880825-06

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1046/90.1215(a)	Maximum Conducted Output Power / Peak Power Spectral Density	PASS	-
3.2	90.1215	Peak Excursion	PASS	-
3.3	2.1049/90.210(m)	Occupied Bandwidth / Emission Mask	PASS	-
3.4	2.1051/90.210(m)	Transmitter Conducted Unwanted Emissions	PASS	-
3.5	2.1053/90.210(m)	Transmitter Radiated Unwanted Emissions	PASS	-
3.6	2.1055/90.213(a)	Frequency Stability	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Cindy Peng

TEL: 886-3-656-9065 Page Number : 4 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

1 General Description

1.1 Product Information

1.1.1 Specification Information

RF General Information					
Frequency Range (MHz) Modulaton Ch. Frequency (MHz) Channel Bandwidth (MHz)					
4940-4990	QPSK	4950-4980	20		

Report No.: FL880825-06

Band	Mode	Modulation	BWch (MHz)	Nant
4.9G	11j	QPSK	20	2

Channel Bandwidth	Carrier Frequency (MHz)	Carrier Frequency (MHz)
20 MHz	4950	4980

TEL: 886-3-656-9065 Page Number : 5 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

1.1.2 Antenna Information

Set	Ant.	Port	Brand	P/N	Туре	Connector	Gain (dBi)
	4	1	Cambium	C050900D007B	Dish	Reversed-SMA	25
1	1	2	Cambium	C050900D007B	Dish	Reversed-SMA	25
Set	Ant.	Port	Brand	P/N	Туре	Connector	Gain (dBi)
	0	1	ANATEL	C050900D021	Array	Reversed-SMA	17
	2 2	2	ANATEL	C050900D021	Array	Reversed-SMA	17
Set	Ant.	Port	Brand	Model Name	Туре	Connector	Gain (dBi)
3	3	1	ABRACON	APAMS-121	Dipole	Reversed-SMA	2
3	4	2	ABRACON	APAMS-121	Dipole	Reversed-SMA	2

Report No.: FL880825-06

Note 1:

Set	Support Function								
Set	5GHz Band 1 5GHz Band 2 5GHz Band 3 5GHz Band 4 4.9GHz								
1	V	V	V	V	V				
2	X	V	V	V	V				
3	X	V	V	V	V				

Note 2: The above information was declared by manufacturer.

Note 3: The EUT has three sets of antenna.

Note 4: Set 1 antenna has one antenna, and it has two connectors and the array gain is 0dBi.

Note 5: Set 2 antenna has one antenna, and it has two connectors and the array gain is 0dBi.

Note 6: Set 3 antenna contains two antennas, and the array gain is 0dBi.

For 2TX/2RX function:

Port 1 and Port 2 can be used as transmitting/receiving antenna.

Port 1 and Port 2 could transmit/receive simultaneously.

1.1.3 Mode Test Duty Cycle

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11j	0.986	0.07	4.961m	300

Note:

DC is Duty Cycle.

DCF is Duty Cycle Factor.

TEL: 886-3-656-9065 Page Number : 6 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

1.1.4 EUT Operational Condition

EUT Power Type	From	From PoE				
Test Software Version	QSPR v5.0-00086					
Device Type		Low power device	\boxtimes	High power device		

Report No.: FL880825-06

Note: The above information was declared by manufacturer.

1.1.5 Table for Multiple Listing

The equipment names/model names in the following table are all refer to the identical product.

EUT	Equipment Name / Model Name	Model Number	GPS Function	WIFI Filter Function
1	ePMP 5GHz Force 300 CSM RADIO	C050910P021A	No	Yes
2	ePMP 3000L 5GHz Access Point Radio	C050910P121A	Yes	Yes
-	cnVision Hub FLEXr Connectorized	C050910P121A	Yes	Yes

Note: "model: cnVision Hub FLEXr Connectorized" is same as "model: ePMP 3000L 5GHz Access Point Radio", just for different marketing use.

From the above models, EUT 1 was selected as representative model for the test and its data was recorded in this report.

1.1.6 Table for Class III Change

This product is an extension of original one reported under Sporton project number: 880825-04. Below is the table for the change of the product with respect to the original one.

	Modifications	Performance Checking
1.	Adding 4.9G function, and supports 20 MHz bandwidth only.	All test items.
2.	Adding one equipment name/model name "cnVision Hub FLEXr	
	Connectorized".	
3.	Adding two model number "C050910P021A/C050910P121A".	It does not need to test.
4.	Changing the manufacturer's company to "Cambium Networks, Ltd.".	
5.	Changing the manufacturer address to "Ashburton, TQ13 7UP, UK"	

TEL: 886-3-656-9065 Page Number : 7 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

Report No.: FL880825-06

- 47 CFR FCC Part 90 Subpart Y
- ANSI/TIA-603-D-2010
- FCC KDB 552295 D01v03
- FCC KDB 662911 D01 v02r01
- FCC KDB 412172 D01 v01r01
- FCC KDB 971168 D01 v03r01

1.3 Testing Information

Testing Location					
	HWA YA ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)				
		TEL	:	886-3-327-3456 FAX : 886-3-327-0973	
\boxtimes	JHUBEI	ADD	:	No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.	
		TEL	:	886-3-656-9065 FAX : 886-3-656-9085	

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH02-CB	Brian Sun	24~25°C / 61~64%	Dec. 27, 2019~Jan. 06, 2020
Radiated	03CH01-CB	Gino Huang	24~25°C / 61~64%	Dec. 30, 2019~Dec. 31, 2019

Test site Designation No. TW0006 with FCC

Test site registered number IC 4086D with Industry Canada.

1.4 Measurement Uncertainty

Test Items	Uncertainty	Remark
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Conducted Emission	2.4 dB	Confidence levels of 95%

TEL: 886-3-656-9065 Page Number : 8 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

2 Test Configuration

2.1 Test Channel Mode

Mode	Power Setting
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-
4950MHz	19
4980MHz	19

Report No.: FL880825-06

2.2 Worst Case Modulation Configuration

The Worst Case Mode for Following Conformance Tests		
Tests Item	Maximum Conducted Output Power / Peak Power Spectral Density Peak Excursion Occupied Bandwidth / Emission Mask Transmitter Conducted Unwanted Emissions Frequency Tolerance	
Test Condition	Conducted measurement at transmit chains	
Operating Mode		
1	EUT 1 + Set 1 antenna	

Th	The Worst Case Mode for Following Conformance Tests		
Tests Item	Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX (Cabinet)		
	t X axis, Y axis and Z axis position for Transmitter Radiated Unwanted Emissions as found at Y axis. So the measurement will follow this same test configuration.		
1	EUT 1 at Y axis + Set 1 antenna		
Operating Mode > 1GHz	CTX (Cabinet)		
	t X axis, Y axis and Z axis position for Transmitter Radiated Unwanted Emissions as found at Y axis. So the measurement will follow this same test configuration.		
1	EUT 1 at Y axis + Set 1 antenna		

Note1: Only the highest gain antenna "Set 1 antenna" was selected and recorded in the report.

Note2: For Transmitter Radiated Unwanted Emissions test, only the highest power carrier frequency "20MHz / 4950MHz" was tested and recorded in the report.

Note3: The EUT was powered by PoE, and the PoE was for measurement only, would not be marked.

Equipment	Brand Name	Model Name	FCC ID
PoE	Cambium Networks	NTE-P15-30IN	N/A

TEL: 886-3-656-9065 Page Number : 9 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

2.3 EUT Operation during Test

During the test, "QSPR v5.0-00086" under WIN 7 was executed the test program to control the EUT continuously transmit RF signal.

Report No.: FL880825-06

2.4 Accessories


N/A

2.5 Support Equipment

	Support Equipment					
No.	No. Equipment Brand Name Model Name FCC ID					
Α	Notebook	DELL	E4300	N/A		
В	PoE	Cambium Networks	NTE-P15-30IN	N/A		

TEL: 886-3-656-9065 Page Number : 10 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

2.6 Test Setup Diagram

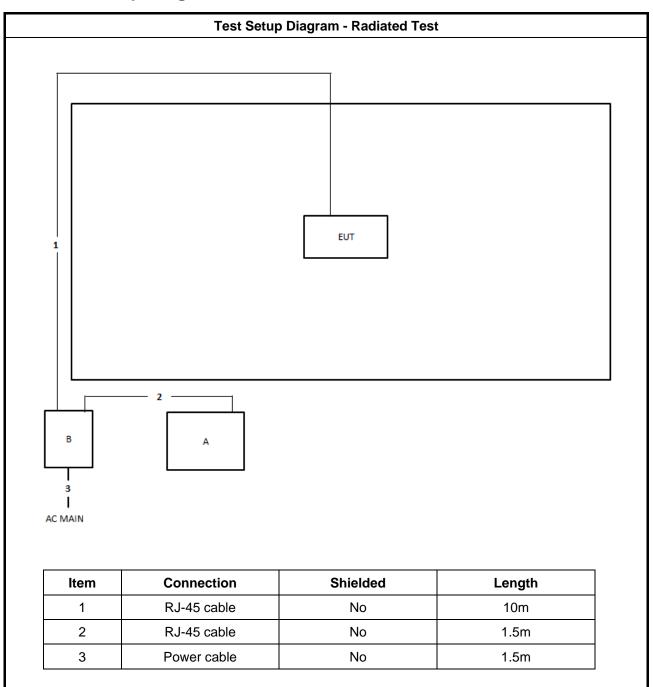

Report No.: FL880825-06

TEL: 886-3-656-9065 Page Number : 11 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3 Test Result

3.1 Maximum Conducted Output Power and Peak Power Spectral Density Measurement

Report No.: FL880825-06

3.1.1 Limit of Maximum Conducted Output Power and Peak Power Spectral Density

Maximum Conducted Output Power Limit:

The transmitting power of stations operating in the 4940-4990 MHz band must not exceed the maximum limits in this table.

Channel Bandwidth (MU=)	Low Power Device	High Power Device	
Channel Bandwidth (MHz)	Peak Transmitter Power (dBm)	Peak Transmitter Power (dBm)	
1	7.0	20.0	
5	14.0	27.0	
10	17.0	30.0	
15	18.8	31.8	
20	20.0	33.0	

Peak Power Spectral Density Limit:

- 1. High power devices are also limited to a peak power spectral density of 21 dBm per one MHz. High power devices using channel bandwidths other than those listed above are permitted; however, they are limited to peak power spectral density of 21 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi. However, high power point-to-point and point-to-multipoint operations (both fixed and temporary-fixed rapid deployment) may employ transmitting antennas with directional gain up to 26 dBi without any corresponding reduction in the maximum conducted output power or spectral density. Corresponding reduction in the maximum conducted output power and peak power spectral density should be the amount in decibels that the directional gain of the antenna exceeds 26 dBi.
- 2. Low power devices are also limited to a peak power spectral density of 8 dBm per one MHz. Low power devices using channel bandwidths other than those listed above are permitted; however, they are limited to a peak power spectral density of 8 dBm/MHz. If transmitting antennas of directional gain greater than 9 dBi are used, both the maximum conducted output power and the peak power spectral density should be reduced by the amount in decibels that the directional gain of the antenna exceeds 9 dBi.

TEL: 886-3-656-9065 Page Number : 12 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

Maximum Conducted Output Power Definition:

The maximum conducted output power is measured as a conducted emission over any interval of continuous transmission using instrumentation calibrated in terms of an RMS-equivalent voltage. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true maximum conducted output power measurement conforming to the definitions in this paragraph for the emission in question.

Report No.: FL880825-06

3.1.2 Measuring Instruments and Setting

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

Spectrum Parameters	Setting
Detector	Peak
Center Frequency	Low / middle / high channels
RBW / VBW	1MHz / 3MHz

3.1.3 Test Procedures for Maximum Conducted Output Power


Using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

3.1.4 Test Procedures for Peak Power Density

- 1. The EUT transmitter output was connected through an appropriate 50 ohm attenuator to a spectrum analyzer. Resolution bandwidth was set to 1MHz and video bandwidth was set to a value greater than the resolution bandwidth. Instrument limited resolution bandwidth less than channel emission bandwidth; so as to obtain a true peak measurement shall be calculated by total channel power within channel bandwidth.
- 2. Peak search was used to find peak power spectral density within channel bandwidth and the spectrum analyzer integrated measurement plot was taken.

TEL: 886-3-656-9065 Page Number : 13 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.1.5 Test Setup

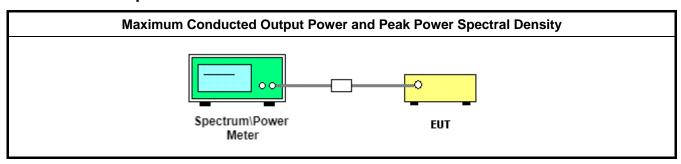

Report No.: FL880825-06

3.1.6 Test Deviation

There is no deviation with the original standard.

3.1.7 Test Result of Maximum Conducted Output Power

Refer as Appendix A

3.1.8 Test Result of Peak Power Spectral Density (PSD)

Refer as Appendix A

TEL: 886-3-656-9065 Page Number : 14 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.2 Peak Excursion Measurement

3.2.1 Limit of Peak Excursion

13 dB


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Testing a single output port is sufficient to demonstrate compliance with the peak excursion.

3.2.4 Test Setup



Report No.: FL880825-06

3.2.5 Test Deviation

There is no deviation with the original standard.

3.2.6 Test Result of Peak Excursion

Refer as Appendix B

TEL: 886-3-656-9065 Page Number : 15 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.3 Occupied Bandwidth and Emission Mask Measurement

3.3.1 Limit of Occupied Bandwidth and Emission Mask

Emission Mask M: For high power transmitters (greater than 20 dBm) operating in the 4940-4990 MHz frequency band, the power spectral density of the emissions must be attenuated below the output power of the transmitter as follows:

Report No.: FL880825-06

- (1) On any frequency removed from the assigned frequency between 0–45% of the authorized bandwidth (BW): 0 dB
- (2) On any frequency removed from the assigned frequency between 45–50% of the authorized bandwidth: 568 log (% of (BW)/45) dB.
- (3) On any frequency removed from the assigned frequency between 50–55% of the authorized bandwidth: 26 + 145 log (% of (BW)/50) dB.
- (4) On any frequency removed from the assigned frequency between 55–100% of the authorized bandwidth: 32 + 31 log (% of (BW)/55) dB attenuation.
- (5) On any frequency removed from the assigned frequency between 100–150% of the authorized bandwidth: 40 + 57 log (% of (BW)/100) dB attenuation.
- (6) On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 or 55+ 10 log (P) dB, whichever is the lesser attenuation. (P in watts)

The zero dB reference is measured relative to the highest average power of the fundamental emission measured across the designated channel bandwidth using a resolution bandwidth of at least 1% of the occupied bandwidth of the fundamental emission and a video bandwidth of 30 kHz. The power spectral density is the power measured within the resolution bandwidth of the measurement device divided by the resolution bandwidth of the measurement device. Emission levels are also based on the use of measurement instrumentation employing a resolution bandwidth of at least one percent of the occupied bandwidth.

3.3.2 Measuring Instruments and Setting

Please refer to section 4 in this report. The following table is the setting of the spectrum.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth of the signal
RBW	at least 1% of the occupied bandwidth
VBW	BW=3 x RBW, Mask=30kHz
Detector	Peak
Trace	Max Hold

TEL: 886-3-656-9065 Page Number : 16 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020


3.3.3 Test Procedures

1. The EUT transmitter was connected to a spectrum analyzer through an appropriate 50 ohm attenuator. Used measurement function of spectrum to measure the 99% occupied bandwidth.

Report No.: FL880825-06

2. The reference level for the mask was set using the highest average power of the fundamental emission measured across the channel bandwidth using a RBW of at least 1% of the occupied bandwidth of the fundamental emission and a VBW of 30 kHz.

3.3.4 Test Setup

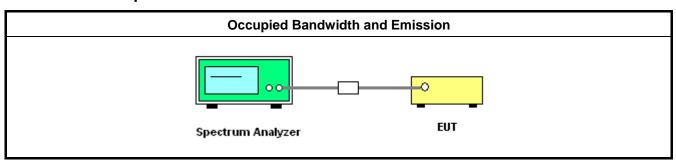

3.3.5 Test Deviation

There is no deviation with the original standard.

3.3.6 Test Result of 99% Occupied Bandwidth (OBW)

Refer as Appendix C

3.3.7 Test Result of Emission Mask

Refer as Appendix C

TEL: 886-3-656-9065 Page Number : 17 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.4 Transmitter Conducted Unwanted Emissions Measurement

3.4.1 Limit of Transmitter Conducted Unwanted Emission

On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 or 55+ 10 log (P) dB, whichever is the lesser attenuation. (P=Average transmit power in watt)

Report No.: FL880825-06


3.4.2 Measuring Instruments and Setting

Spectrum Parameter	Setting
Detector	RMS (Average)
Frequency Range	9kHz – 40GHz

3.4.3 Test Procedures

- 1. The EUT transmitter was connected to a spectrum analyzer through an appropriate 50 ohm attenuator. The spectrum analyzer resolution bandwidth was set to 1 MHz, and the video bandwidth was set to 1 MHz.
- 2. Find spurious emissions under 50 or 55+ 10 log (P) dB limit, whichever is the lesser attenuation and the spectrum analyzer integrated measurement plot was taken.

3.4.4 Test Setup Layout

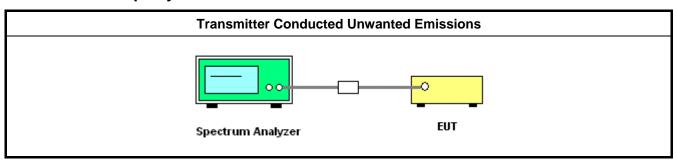

3.4.5 Test Deviation

There is no deviation with the original standard.

3.4.6 Test Result of Transmitter Conducted Unwanted Emissions

Refer as Appendix D

TEL: 886-3-656-9065 Page Number : 18 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.5 Transmitter Radiated Unwanted Emissions Measurement

3.5.1 Limit of Transmitter Radiated Unwanted Emissions

On any frequency removed from the assigned frequency above 150% of the authorized bandwidth: 50 or 55+ 10 log (P) dB, whichever is the lesser attenuation. (P=Average transmit power in watt)

Report No.: FL880825-06

3.5.2 Measuring Instruments and Setting

Please refer to section 4 in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameter	Setting
Detector	RMS (Average)
Frequency Range	30MHz – 40GHz
RBW / VBW	1 MHz / 3MHz

3.5.3 Test Procedures

- 1. The EUT was placed on the top of the turntable in anechoic chamber.
- A spectrum analyzer was used RBW of 1 MHz and VBW of 3 MHz for the final measurements utilizing an RMS detector at the frequencies with spurious emissions amplitudes.
- 3. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find spurious emissions reading.
- 4. Spurious emissions field strength level equal to spurious emissions reading on spectrum analyzer+ Corrected Reading (Antenna Factor + Cable Loss Preamp Factor).
- 5. Final radiated spurious emissions may be converted from spurious emissions field strength level 95.2 dB

TEL: 886-3-656-9065 Page Number : 19 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.5.4 Test Setup

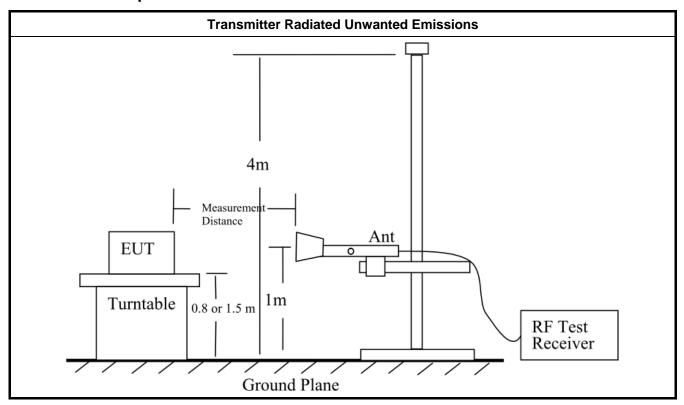

Report No.: FL880825-06

3.5.5 Test Deviation

There is no deviation with the original standard.

3.5.6 Results of Transmitter Radiated Unwanted Emissions

Refer as Appendix E

TEL: 886-3-656-9065 Page Number : 20 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency band. For equipment authorization purposes, this is a reporting requirement only.

Report No.: FL880825-06

3.6.2 Measuring Instruments and Setting


Please refer to section 4 in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Detector	Peak
RBW / VBW	10 kHz / 30kHz

3.6.3 Test Procedures

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. EUT have transmitted absence of modulation signal and fixed channel.
- 3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
- 4. Set RBW = 10 kHz, VBW = 10 kHz with frequency counter function.
- 5. fc is declaring of carrier channel frequency. Then the frequency error formula is (fc-f)/fc × 106 ppm.
- 6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value and extreme temperature rule is -30°C~60°C.

3.6.4 Test Setup

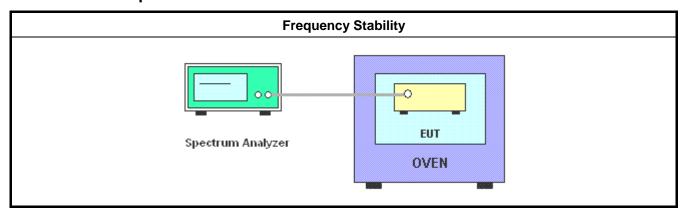

3.6.5 Test Deviation

There is no deviation with the original standard.

3.6.6 Test Result of Frequency Stability

Refer as Appendix F

TEL: 886-3-656-9065 Page Number : 21 of 22 FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112 & N-6-06	2888 & AT-N0611	30MHz ~ 1GHz	Oct. 12, 2019	Oct. 11, 2020	Radiation (03CH01-CB)
Horn Antenna	ETS-LINDGR EN	3115	00075790	750MHz ~ 18GHz	Nov. 04, 2019	Nov. 03, 2020	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 27, 2019	Jun. 26, 2020	Radiation (03CH01-CB)
Pre-Amplifier	EMCI	EMC330N	980332	20MHz ~ 3GHz	May 01, 2019	Apr. 30, 2020	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 08, 2019	Jan. 07, 2020	Radiation (03CH01-CB)
Pre-Amplifier	MITEQ	TTA1840-35 -HG	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Jan. 31, 2019	Jan. 30, 2020	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 15, 2019	May 14, 2020	Radiation (03CH01-CB)
RF Cable-low	Woken	RG402	Low Cable-16+17	30 MHz ~ 1 GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16	1 GHz ~ 18 GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-16+17	1 GHz ~ 18 GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH01-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	101027	9kHz~40GHz	Jul. 02, 2019	Jul. 01, 2020	Conducted (TH02-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-C2SP	TBN-1010206	-20~150 degree	Mar. 04. 2019	Mar. 03. 2020	Conducted (TH02-CB)
Power Sensor	Anritsu	MA2411B	1126203	300MHz~40GHz	Sep. 11, 2019	Sep. 10, 2020	Conducted (TH02-CB)
Power Meter	Anritsu	ML2495A	1210004	300MHz~40GHz	Sep. 11, 2019	Sep. 10, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-01	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-02	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-3	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-04	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)
RF Cable-high	Woken	RG402	High Cable-05	1 GHz – 26.5 GHz	Oct. 07, 2019	Oct. 06, 2020	Conducted (TH02-CB)

Report No.: FL880825-06

Note: Calibration Interval of instruments listed above is one year.

TEL: 886-3-656-9065 Page Number : 22 of 22
FAX: 886-3-656-9085 Issued Date : Feb. 24, 2020



Average Power Result

Appendix A.1

Summary

Mode	Power	Power
	(dBm)	(W)
4.94-4.99GHz	·	-
802.11j_20MHz_Nss1_2TX	19.73	0.094



Average Power Result

Appendix A.1

Result

Mode	Result	DG	Port 1	Port 2	Power	Power Lim.
		(dBi)	(dBm)	(dBm)	(dBm)	(dBm)
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-	-	-	-	-	-
4950MHz	Pass	25.00	16.76	16.67	19.73	33.00
4980MHz	Pass	25.00	16.67	16.54	19.62	33.00

DG = Directional Gain; **Port n** = Port n output power



PSD Result Appendix A.2

Summary

Cammary	
Mode	PD
	(dBm/MHz)
4.94-4.99GHz	·
802.11j_20MHz_Nss1_2TX	6.69




PSD Result Appendix A.2

Result

Mode	Result	DG	Port 1	Port 2	PD	PD Limit
		(dBi)	(dBm/MHz)	(dBm/MHz)	(dBm/MHz)	(dBm/MHz)
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-	-	-	-	-	-
4950MHz	Pass	25.00	3.91	3.58	6.66	21.00
4980MHz	Pass	25.00	3.91	4.06	6.69	21.00

DG = Directional Gain;PD = trace bin-by-bin of each transmits port summing can be performed maximum power density;Port X = Port Xpower density;

PSD Result Appendix A.2

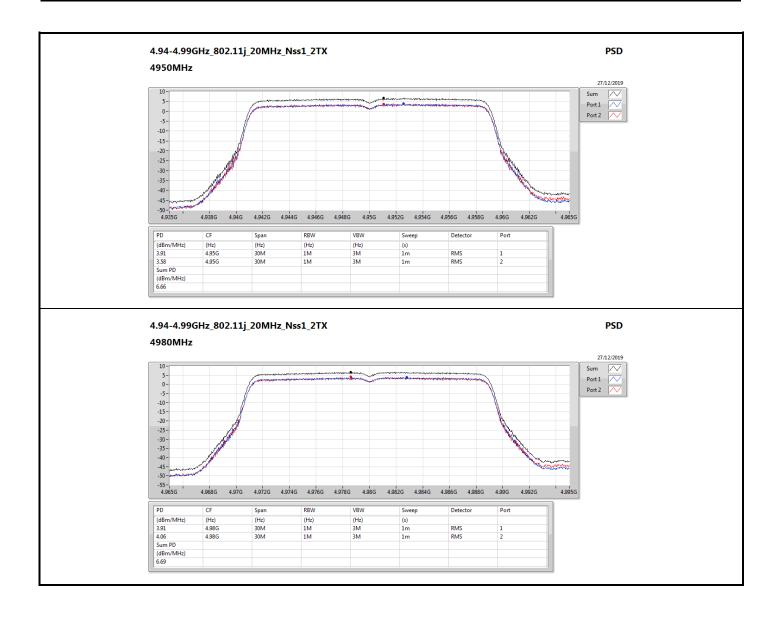



Peak to Average Power Ratio (PAPR) Result

Appendix B

Summary

Mode	Result	Freq (MHz)	Limit (dB)	0.1%	Port
4.94-4.99GHz	-	-	-	-	-
802.11j_20MHz_Nss1_2TX	Pass	4980	13.00	7.42	1




Peak to Average Power Ratio (PAPR) Result

Appendix B

Result

Mode	Result	Freq	Limit	0.1%	Port
		(MHz)	(dB)		
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-	-	-	-	-
4950MHz	Pass	4950	13.00	7.31	1
4980MHz	Pass	4980	13.00	7.42	1



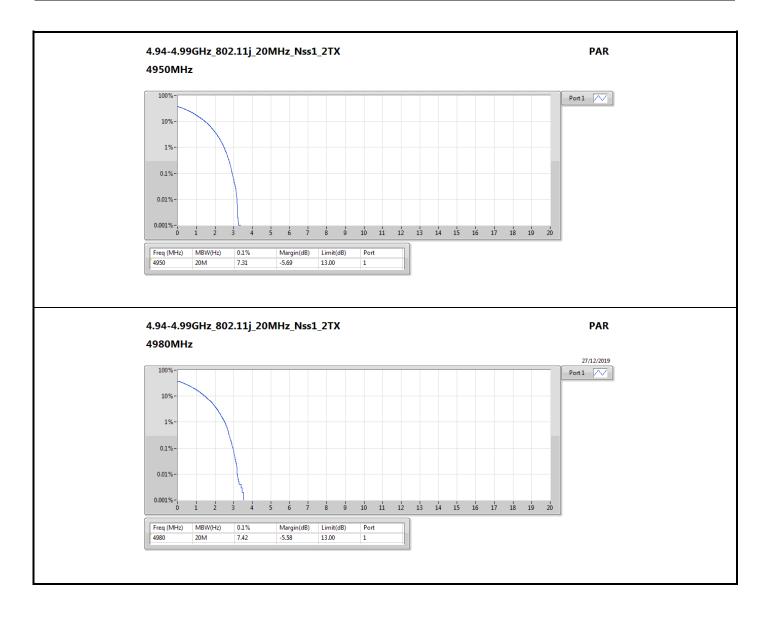

: 3 of 3



EBW Result Appendix C.1

Summary

Mode	Max-NdB	Max-OBW	ITU-Code	Min-NdB	Min-OBW
	(Hz)	(Hz)		(Hz)	(Hz)
4.94-4.99GHz	-	-	-	-	-
802.11j_20MHz_Nss1_2TX	20.075M	17.574M	17M61D1D	19.925M	17.568M

Max-N dB = Maximum 26dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth; **Min-N dB** = Minimum 26dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;



EBW Result Appendix C.1

Result


Mode	Result	Limit	Port 1-NdB	Port 1-OBW	Port 2-NdB	Port 2-OBW
		(Hz)	(Hz)	(Hz)	(Hz)	(Hz)
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-	•		-	-	-
4950MHz	Pass	Inf	20.075M	17.574M	19.925M	17.57M
4980MHz	Pass	Inf	20.05M	17.571M	20.05M	17.568M

Port X-N dB = Port X 26dB down bandwidth; Port X-OBW = Port X 99% occupied bandwidth;


Page No.

: 2 of 3

EBW Result Appendix C.1

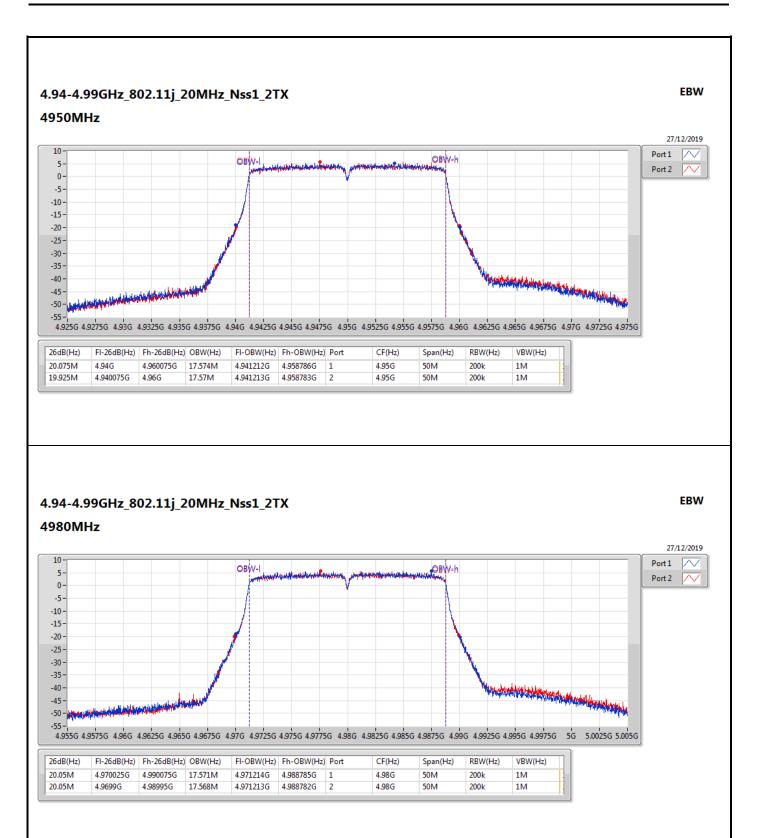

Mask Result Appendix C.2

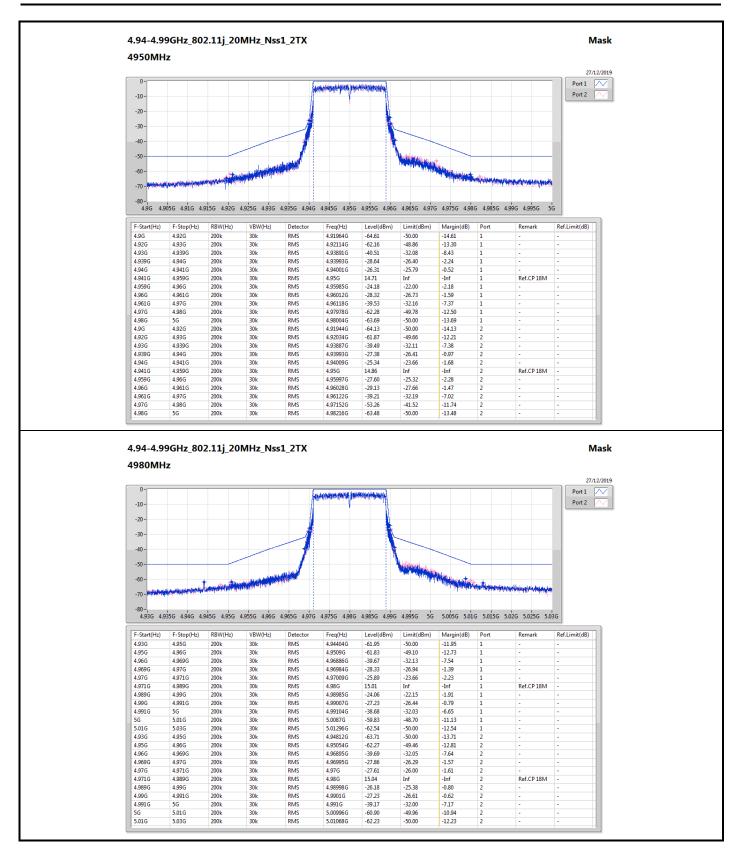



CSE-TX-Sum Result Appendix D

Summary

Mode	Result	F-Start (Hz)	F-Stop (Hz)	RBW (Hz)	VBW (Hz)	Detector	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Remark	Ref.Limit (dB)
4.94-4.99GHz	ē	=	ē	÷	ē	-	-	ē	9	9	ē	=
802.11j_20MHz_Nss1_2TX	Pass	4.991G	13.618G	1M	3M	RMS	6.59886G	-55.18	-30.27	-24.91	-	-




CSE-TX-Sum Result Appendix D

Result

Mode	Result	F-Start	F-Stop	RBW	VBW	Detector	Freq	Level	Limit	Margin	Remark	Ref.Limit
		(Hz)	(Hz)	(Hz)	(Hz)		(Hz)	(dBm)	(dBm)	(dB)		(dB)
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-	-	-	-	-	-	-	-	-	-	-	-
4950MHz	Pass	9k	150k	200	1k	RMS	116.865k	-72.45	-30.27	-42.18	-	-
4950MHz	Pass	150k	30M	10k	30k	RMS	164.925k	-68.74	-30.27	-38.47	-	-
4950MHz	Pass	30M	1.5G	1M	3M	RMS	1.4932G	-62.88	-30.27	-32.61	-	-
4950MHz	Pass	1.5G	4.909G	1M	3M	RMS	4.81781G	-58.17	-30.27	-27.90	-	-
4950MHz	Pass	4.909G	4.91G	200k	620k	RMS	4.9095G	-58.60	-30.27	-28.33	-	-
4950MHz	Pass	4.99G	4.991G	200k	620k	RMS	4.9905G	-57.31	-30.27	-27.04	-	-
4950MHz	Pass	4.991G	13.618G	1M	3M	RMS	6.59886G	-55.18	-30.27	-24.91	ē	-
4950MHz	Pass	13.618G	40G	1M	3M	RMS	38.59516G	-66.95	-30.27	-36.68	-	-
4965MHz												
4980MHz	Pass	9k	150k	200	1k	RMS	122.294k	-72.36	-30.38	-41.98	-	-
4980MHz	Pass	150k	30M	10k	30k	RMS	157.462k	-69.78	-30.38	-39.40	-	-
4980MHz	Pass	30M	1.5G	1M	3M	RMS	1.27289G	-62.84	-30.38	-32.46	-	-
4980MHz	Pass	1.5G	4.939G	1M	3M	RMS	4.939G	-57.51	-30.38	-27.13	-	-
4980MHz	Pass	4.939G	4.94G	200k	620k	RMS	4.9395G	-58.18	-30.38	-27.80	-	-
4980MHz	Pass	5.02G	5.021G	200k	620k	RMS	5.0205G	-56.55	-30.38	-26.17	-	-
4980MHz	Pass	5.021G	13.618G	1M	3M	RMS	5.021G	-55.95	-30.38	-25.57	-	-
4980MHz	Pass	13.618G	40G	1M	3M	RMS	38.64133G	-66.97	-30.38	-36.59	-	-


Page No.



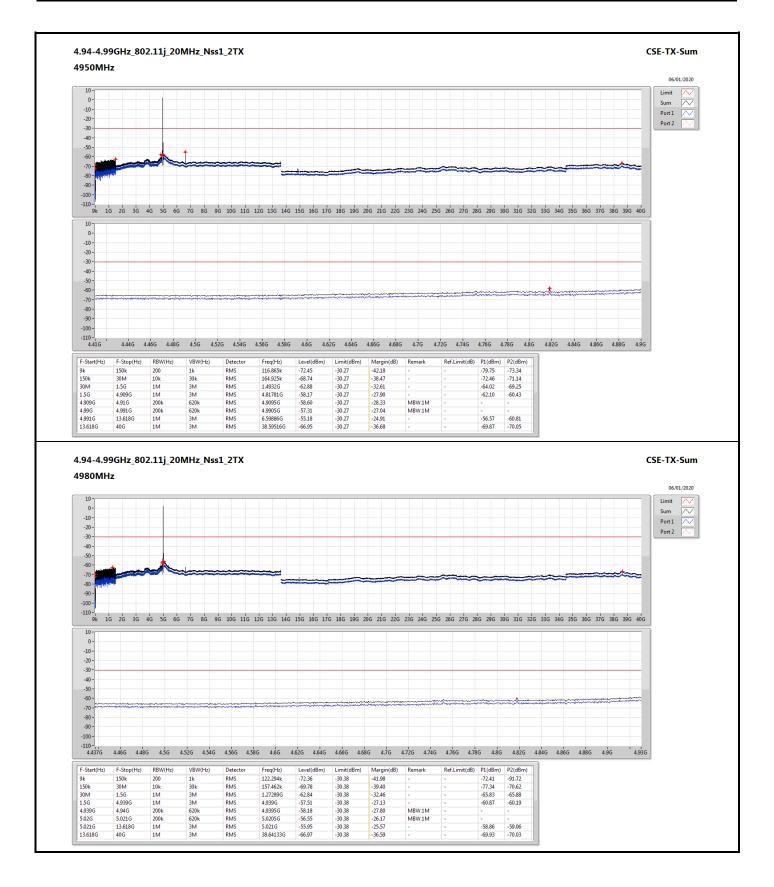

RSE below 1GHz Result

RSE below 1GHz Result										
Operating Mode	1	1 Polarization Vertical								
Operating Function	СТХ									




Freq	Level	Limit	Limit	Level	Factor	A/Pos	1/Pos	Pol/Phase
MHz	dBm	dBm	dB	dBm	dB	cm	deg	
55.22	-54.62	-30.38	-24.24	-46.09	-8.53	300	360	VERTICAL
249.22	-61.54	-30.38	-31.16	-65.34	3.80	300	360	VERTICAL
375.32	-63.12	-30.38	-32.74	-64.60	1.48	300	360	VERTICAL
625.58	-62.56	-30.38	-32.18	-68.85	6.29	300	360	VERTICAL
780.78	-58.39	-30.38	-28.01	-66.29	7.90	300	360	VERTICAL
841.89	-56.25	-30.38	-25.87	-63.37	7.12	300	360	VERTICAL
	MHz 55.22 249.22 375.32 625.58 780.78	MHz dBm 55.22 -54.62 249.22 -61.54 375.32 -63.12 625.58 -62.56 780.78 -58.39	Freq Level Line MHz dBm dBm 55.22 -54.62 -30.38 249.22 -61.54 -30.38 375.32 -63.12 -30.38 625.58 -62.56 -30.38 780.78 -58.39 -30.33	Freq Level Line Limit MHz dBm dBm dB 55.22 -54.62 -30.38 -24.24 249.22 -61.54 -30.38 -31.16 375.32 -63.12 -30.38 -32.74 625.58 -62.56 -30.38 -32.18 780.78 -58.39 -30.38 -28.01	Freq Level Line Limit Level	Freq Level Line Limit Level Factor MHz dBm dBm dB dBm dB dBm dB 55.22 -54.62 -30.38 -24.24 -46.09 -8.53 249.22 -61.54 -30.38 -31.16 -65.34 3.80 375.32 -63.12 -30.38 -32.74 -64.60 1.48 625.58 -62.56 -30.38 -32.78 -68.85 6.29 780.78 -58.39 -30.38 -28.01 -66.29 7.90	Freq Level Line Limit Level Factor MHz dBm dBm dB dBm dB dBm dB cm 55.22 -54.62 -30.38 -24.24 -46.09 -8.53 300 249.22 -61.54 -30.38 -31.16 -65.34 3.80 300 375.32 -63.12 -30.38 -32.74 -64.60 1.48 300 625.58 -62.56 -30.38 -32.78 -68.85 6.29 300 780.78 -58.39 -30.38 -28.01 -66.29 7.90 300	Freq Level Line Limit Level Factor MHz dBm dBm dB dBm dB cm deg 55.22 -54.62 -30.38 -24.24 -46.09 -8.53 300 360 249.22 -61.54 -30.38 -31.16 -65.34 3.80 300 360 375.32 -63.12 -30.38 -32.74 -64.60 1.48 300 360 625.58 -62.56 -30.38 -32.78 -68.85 6.29 300 360 780.78 -58.39 -30.38 -28.01 -66.29 7.90 300 360

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

RSE below 1GHz Result

RSE below 1GHz Result									
Operating Mode	1 Polarization Horizontal								
Operating Function	СТХ								



	Freq	Level		Limit		Factor	A/POS	1/205	Pol/Phase
	MHz	dBm	dBm	dB	dBm	dB	cm	deg	
1	89.17	-59.26	-30.38	-28.88	-56.98	-2.28	300	360	HORIZONTAL
2	114.39	-63.16	-30.38	-32.78	-61.36	-1.80	300	360	HORIZONTAL
3	249.22	-72.34	-30.38	-41.96	-66.95	-5.39	300	360	HORIZONTAL
4	375.32	-65.40	-30.38	-35.02	-67.83	2.43	300	360	HORIZONTAL
5	499.48	-65.63	-30.38	-35.25	-73.52	7.89	300	360	HORIZONTAL
6	625.58	-71.94	-30.38	-41.56	-73.41	1.47	300	360	HORIZONTAL

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



Configurations	20MHz / 4950MHz / Port 1 + Port 2

Horizontal

	Freq	Level	Limit Line		Read Level		A/Pos	T/Pos	Pol/Phase
	MHz	dBm	dBm	dB	dBm	dB	cm	deg	
1	2423.08	-60.64	-30.38	-30.26	-67.53	6.89	179	186	HORIZONTAL
2	5759.62	-45.53	-30.38	-15.15	-66.03	20.50	176	169	HORIZONTAL
3	9987.18	-51.15	-30.38	-20.77	-72.81	21.66	207	245	HORIZONTAL
4	12009.62	-48.18	-30.38	-17.80	-72.57	24.39	207	302	HORIZONTAL
5	16157.05	-40.90	-30.38	-10.52	-71.68	30.78	178	236	HORIZONTAL
6	17673.08	-44.04	-30.38	-13.66	-72.36	28.32	165	156	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit			A/Pos	T/Pos	Pol/Phase
	MHz	dBm	dBm	dB	dBm	dB	cm	deg	
1	2423.08	-55.15	-30.38	-24.77	-66.87	11.72	184	221	VERTICAL
2	5764.42	-40.71	-30.38	-10.33	-63.18	22.47	181	259	VERTICAL
3	9982.05	-47.88	-30.38	-17.50	-73.15	25.27	189	318	VERTICAL
4	12021.63	-48.42	-30.38	-18.04	-72.61	24.19	200	22	VERTICAL
5	16195.51	-43.40	-30.38	-13.02	-71.85	28.45	176	88	VERTICAL
6	17658.65	-41.72	-30.38	-11.34	-71.76	30.04	155	29	VERTICAL

Note:

The measured Level is calculated using:

Factor: Transmit Antenna Gain + Signal Generator Level - SA reading - Transmit Cable Loss.

Level= Read Level + Factor.



Frequency Stability Result

Appendix F

Summary

Mode	Result	Ch	Center	FI	Fh	ppm	Limit	Port	Remark
		(Hz)	(Hz)	(Hz)	(Hz)		(FI,Fh,ppm)		
4.94-4.99GHz	-	-	-	-	-	-	-	-	-
802.11j_20MHz_Nss1_2TX	Pass	4.98G	4.980021G	4.979702G	4.980341G	4.316	4.94G,4.99G,Inf	1	-



Appendix F

Page No.



Result

Mode	Result	Ch	Center	FI	Fh	ppm	Limit	Port	Remark
		(Hz)	(Hz)	(Hz)	(Hz)		(FI,Fh,ppm)		
4.94-4.99GHz_802.11j_20MHz_Nss1_2TX	-	-	-	-	-	-	-	-	-
4950MHz30°C	Pass	4.95G	4.950021G	4.949702G	4.95034G	4.255	4.94G,4.99G,Inf	1	-
4950MHz10°C	Pass	4.95G	4.95002G	4.949701G	4.950339G	4.019	4.94G,4.99G,Inf	1	-
4950MHz_0°C	Pass	4.95G	4.950021G	4.949702G	4.95034G	4.189	4.94G,4.99G,Inf	1	-
4950MHz_10°C	Pass	4.95G	4.950021G	4.949702G	4.95034G	4.19	4.94G,4.99G,Inf	1	-
4950MHz_20°C	Pass	4.95G	4.950021G	4.949701G	4.95034G	4.148	4.94G,4.99G,Inf	1	-
4950MHz_30°C	Pass	4.95G	4.95002G	4.949701G	4.950339G	4.061	4.94G,4.99G,Inf	1	-
4950MHz_40°C	Pass	4.95G	4.950021G	4.949702G	4.95034G	4.283	4.94G,4.99G,Inf	1	-
4950MHz_50°C	Pass	4.95G	4.950021G	4.949702G	4.95034G	4.228	4.94G,4.99G,Inf	1	-
4950MHz_60°C	Pass	4.95G	4.95002G	4.949701G	4.950339G	4.045	4.94G,4.99G,Inf	1	-
4950MHz_126.5V	Pass	4.95G	4.950021G	4.949702G	4.95034G	4.208	4.94G,4.99G,Inf	1	-
4950MHz_110V	Pass	4.95G	4.95002G	4.949701G	4.950339G	4.095	4.94G,4.99G,Inf	1	-
4950MHz_93.5V	Pass	4.95G	4.950022G	4.949702G	4.950341G	4.358	4.94G,4.99G,Inf	1	-
4980MHz30°C	Pass	4.98G	4.980021G	4.979702G	4.980341G	4.316	4.94G,4.99G,Inf	1	-
4980MHz10°C	Pass	4.98G	4.98002G	4.979701G	4.980339G	4.022	4.94G,4.99G,Inf	1	-
4980MHz_0°C	Pass	4.98G	4.980022G	4.979703G	4.980341G	4.36	4.94G,4.99G,Inf	1	-
4980MHz_10°C	Pass	4.98G	4.980021G	4.979702G	4.98034G	4.16	4.94G,4.99G,Inf	1	-
4980MHz_20°C	Pass	4.98G	4.980021G	4.979702G	4.98034G	4.193	4.94G,4.99G,Inf	1	-
4980MHz_30°C	Pass	4.98G	4.980022G	4.979703G	4.98034G	4.357	4.94G,4.99G,Inf	1	-
4980MHz_40°C	Pass	4.98G	4.98002G	4.979701G	4.980339G	3.961	4.94G,4.99G,Inf	1	-
4980MHz_50°C	Pass	4.98G	4.98002G	4.979701G	4.980339G	4.084	4.94G,4.99G,Inf	1	-
4980MHz_60°C	Pass	4.98G	4.980021G	4.979702G	4.98034G	4.235	4.94G,4.99G,Inf	1	-
4980MHz_126.5V	Pass	4.98G	4.980019G	4.9797G	4.980339G	3.906	4.94G,4.99G,Inf	1	-
4980MHz_110V	Pass	4.98G	4.980021G	4.979702G	4.98034G	4.198	4.94G,4.99G,Inf	1	-
4980MHz_93.5V	Pass	4.98G	4.980022G	4.979703G	4.980341G	4.37	4.94G,4.99G,Inf	1	-