

M04

V.202403



IPS
Screen



IP67 Ingress
Protection Rating



Bluetooth
Unlock



UART/CAN/SIF
communication
protocol



Tempered
Glass



26K True
Color Display



Projected
Navigation




Animated UI

Notes: Mapbox pay for use.



M04

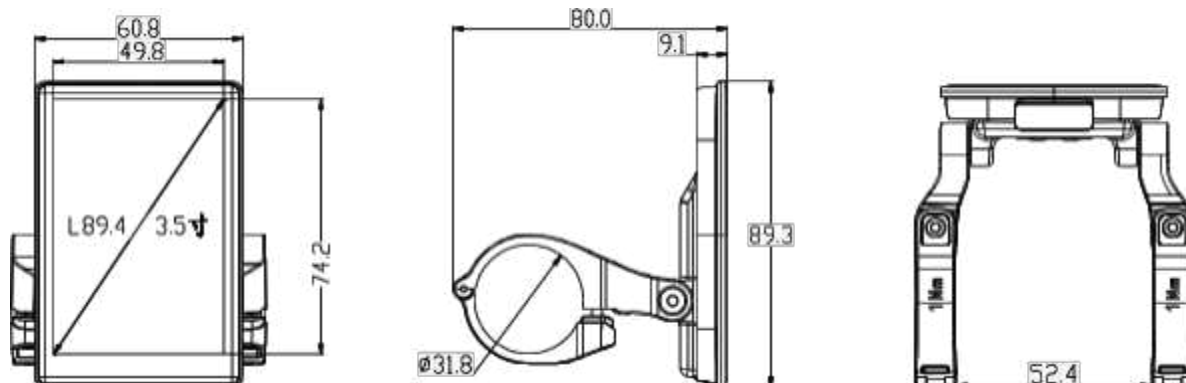

General Parameters

Dimensions	Length*width*height	89.3 * 60.8 * 9.1 (mm)
	Screen Size	3.5"
	Holder Diameter	22.2 / 25.4 / 31.8 (mm)
Screen	Type	IPS
	Color	RGB
	Image Resolution	320*480PX
Connector	Type	M5 Waterproof Connector
	Length	20 cm
General Feature	Operating Voltage	12V ~ 60V
	Operating Temperature	-20 °C - +70 °C
	Ingress Protection Rating	IP67
	Weight	92g
	Communication Protocol	UART/CAN/SIF
Other Feature	Bluetooth	5.2 + BLE
	Type-C interface	Support
	Light Sensor	Support
Certification	RoHS/CE/FCC/ISO13849	Support Customization
Operating frequency bands	Bluetooth	2402-2480MHZ
Output power	Bluetooth	4.52dBm

Display Items

Current Speed
Max Speed
Average Speed
Single Mileage
ODO
Remaining Mileage
Error Code
Battery Capacity
PAS
Walk Assjst

Parameters Setup

Backlight Brightness
Unit Switch
Speed limit
Wheel Diameter
Battery Voltage Switch
Power Off Timer
Data Reset
Password Setting
English, German, French, Chinese & customization

§ 15.19 Labeling requirements.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

§ 15.21 Changes or modification warning.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

OR/The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device has also been tested against this SAR limit.

§ 15.105 Information to the user.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

RF exposure statement

RF exposure information: The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of d=20 cm between the device and the human body. To maintain compliance with RF exposure requirement, use product that maintain a 20cm distance between the device and human body

Icon fully illuminated style



CAN communication



Bluetooth connected icon, (scan device QR code to connect)



Brake icon, signal source CAN , ID=0X1FFFC821



Switch malfunction, signal source CAN , ID=0X1FFFC825



Controller malfunction, signal source CAN , ID=0X1FFFC825



Energy recovery level, signal source CAN , ID=0X1FFFC821



Battery level, battery level indicator, signal source CAN , ID=0X1FFFC840

ID=0X1FFFC825



Brake power-off mode, signal source CAN ,
ID=0X1FFFC821



Motor fault indicator light, signal source CAN ,
ID=0X1FFFC825



Battery fault display light, signal source CAN , ID=0X1FFFC825



During charging, signal source CAN , ID=0X1FFFC41



Follow the motor fault display



Low temperature and high temperature indicator lights, signal source CAN , ID=0X1FFFC825



Power reduction indication, signal source CAN , ID=0X1FFF C825



Battery information, signal source CAN , ID=0X1FFFC840



High beam, signal source: circuit detection



Position light, signal source: circuit detection



Low beam, signal source: circuit detection



Speed display, signal source CAN , ID=0X1FFFC820



Left turn, signal source: circuit detection



Driving status, signal source CAN , ID=0X1FFFC821



Right turn, signal source: circuit detection



Display real-time speed, signal source CAN , ID=0X1FFFC822



Display gear, signal source CAN , ID=0X1FFFC821



Total mileage, software calculation (accumulated each time)



Single mileage, signal source CAN, ID=0X1FFFC822