

FCC PART 15 SUBPART C

EMI MEASUREMENT AND TEST REPORT



For

High Tech Computer, Corp.

23, Hsin Hua Rd.
Taoyuan, Taiwan, R.O.C

FCC ID: NM8DEXTROUS

2003-08-29

This Report Concerns: <input checked="" type="checkbox"/> Original Report	Equipment Type: Pocket PC with WLAN Card and Bluetooth
Test Engineer Ming Jing 	
Report No.: R0308114	
Test Date: 2003-08-19	
Reviewed By: Ling Zhang 	
Prepared By: Bay Area Compliance Laboratory Corporation (BACL) 230 Commercial Street Sunnyvale, CA 94085 Tel: (408) 732-9162 Fax: (408) 732 9164	

Note: This test report is specially limited to the above client company and product model only. It may not be duplicated without prior written consent of Bay Area Compliance Laboratory Corporation. This report **must not** be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

TABLE OF CONTENTS

1 - GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 OBJECTIVE	4
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	4
1.4 TEST METHODOLOGY	5
1.5 TEST FACILITY	5
1.6 TEST EQUIPMENT LIST	6
2 - SYSTEM TEST CONFIGURATION.....	7
2.1 JUSTIFICATION	7
2.2 EUT EXERCISE SOFTWARE.....	7
2.3 SPECIAL ACCESSORIES.....	7
2.4 SCHEMATICS / BLOCK DIAGRAM	7
2.5 EQUIPMENT MODIFICATIONS.....	7
2.6 CONFIGURATION OF TEST SYSTEM	7
2.7 TEST SETUP BLOCK DIAGRAM	8
3 - SUMMARY OF TEST RESULTS	9
4 - CONDUCTED OUTPUT POWER MEASUREMENT	10
4.1 STANDARD APPLICABLE.....	10
4.2 MEASUREMENT PROCEDURE	10
4.3 TEST EQUIPMENT	10
4.4 MEASUREMENT RESULT	10
5 - 6 DB BANDWIDTH.....	13
5.1 STANDARD APPLICABLE.....	13
5.2 MEASUREMENT PROCEDURE	13
5.3 TEST EQUIPMENT	13
5.4 MEASUREMENT RESULT	13
6 - 20DB BANDWIDTH.....	15
6.1 STANDARD APPLICABLE.....	15
6.2 MEASUREMENT PROCEDURE	15
6.3 MEASUREMENT RESULT	15
6.4 PLOT OF CHANNEL BANDWIDTH.....	15
7 - SPURIOUS EMISSION AT ANTENNA TERMINAL.....	17
7.1 STANDARD APPLICABLE.....	17
7.2 MEASUREMENT PROCEDURE	17
7.3 TEST EQUIPMENT	18
7.4 MEASUREMENT RESULT	18
8 - PEAK POWER SPECTRAL DENSITY.....	25
8.1 STANDARD APPLICABLE.....	25
8.2 MEASUREMENT PROCEDURE	25
8.3 TEST EQUIPMENT	25
8.4 MEASUREMENT RESULTS.....	25
8.5 PLOT OF PEAK POWER SPECTRAL DENSITY	25
9 - 100 KHZ BANDWIDTH OF BAND EDGES.....	27
9.1 STANDARD APPLICABLE.....	27
9.2 MEASUREMENT PROCEDURE	27
9.3 TEST EQUIPMENT	27
9.4 MEASURE RESULTS.....	27
10 - ANTENNA REQUIREMENT.....	32
10.1 STANDARD APPLICABLE.....	32
10.2 ANTENNA CONNECTED CONSTRUCTION.....	32

11 - SPURIOUS RADIATED EMISSION	33
11.1 MEASUREMENT UNCERTAINTY.....	33
11.2 EUT SETUP	33
11.3 SPECTRUM ANALYZER SETUP	33
11.4 TEST PROCEDURE	33
11.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	34
11.6 TEST EQUIPMENT	34
11.7 SUMMARY OF TEST RESULTS.....	34
12 - CONDUCTED EMISSIONS	44
12.1 MEASUREMENT UNCERTAINTY.....	44
12.2 EUT SETUP	44
12.3 SPECTRUM ANALYZER SETUP	44
12.4 TEST PROCEDURE	44
12.5 TEST EQUIPMENT	44
12.6 SUMMARY OF TEST RESULTS.....	45
12.7 CONDUCTED EMISSIONS TEST DATA	45
12.8 PLOT OF CONDUCTED EMISSIONS TEST DATA.....	45
13 - NUMBER OF HOPPING FREQUENCY USED	48
13.1 STANDARD APPLICABLE.....	48
13.2 MEASUREMENT PROCEDURE	48
13.3 MEASUREMENT PROCEDURE	48
13.4 PLOTS OF NUMBER OF HOPPING FREQUENCY.....	48
14 - HOPPING CHANNEL SEPARATION.....	49
14.1 STANDARD APPLICABLE.....	49
14.2 MEASUREMENT PROCEDURE	49
14.3 MEASUREMENT DATA.....	49
15 - DWELL TIME.....	51
15.1 STANDARD APPLICABLE.....	51
15.2 MEASUREMENT PROCEDURE	51
15.3 MEASUREMENT RESULTS.....	51
15.4 PLOTS OF DWELL TIME.....	51

1 - GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

The *High Tech Computer, Corp.*'s Model: *PE2080B* or the "EUT" as referred to in this report is a pocket PC with WLAN and bluetooth card.

The frequency range for both WLAN transmitter is 2412 - 2462 MHz and bluetooth card 2402 – 2480 MHz. The conducted output power for WLAN transmitter is 0.035W; for bluetooth card is 0.002W.

The EUT also comes with the following accessories:

1. Delta Electronics AC/DC Adapter, M/N: ADP-10SB, Serial #: AMW0317210045.
2. HP Charging Adapter, Part No.: 253652-B21, Serial #: SPS254089-001.
3. Samsung Battery/Battery Charger, M/N: CH PJT, Serial #: ASW523A2.

** The test data gathered are from typical production samples provided by the manufacturer.*

1.2 Objective

This type approval report is prepared on behalf of *High Tech Computer, Corp.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commissions rules.

The objective of the manufacturer is to demonstrate compliance with FCC rules for the WLAN card:

- Output Power
- Antenna Requirements
- 6 dB Bandwidth
- power density
- 100 kHz Bandwidth of Band Edges Measurement
- Conducted and Spurious Radiated Emission

For the bluetooth card:

- Maximum Peak Output Power
- Hopping Channel Separation
- Number of Hopping Frequency Used
- 20 dB Bandwidth
- Dwell Time on Each Channel
- 100 kHz Bandwidth of Band Edge
- Conducted Emission
- Spurious Emission
- Radiated Emission
- Antenna Requirement
- RF Exposure Limit

1.3 Related Submittal(s)/Grant(s)

No related Submittal(s)/Grant(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-1992, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz and FCC97114 for Direct Sequence SS.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratory, Corp. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

1.5 Test Facility

The Open Area Test site used by BACL to collect radiated and conducted emission measurement data is located in the back parking lot of the building at 230 Commercial Street, Sunnyvale, California, USA.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports has been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997 and Article 8 of the VCCI regulations on December 25, 1997. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-1992.

The Federal Communications Commission and Voluntary Control Council for Interference has the reports on file and is listed under FCC file 31040/SIT 1300F2 and VCCI Registration No.: C-1298 and R-1234.

The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200167-0). The scope of the accreditation covers the FCC Method – 47 CFR Part – Digital Devices, CISPER 22: 1997: Electromagnetic Interference – Limits and Methods of Measurement of Information Technology Equipment test methods.

1.6 Test Equipment List

Manufacturer	Description	Model	Serial Number	Cal. Due Date
HP	Spectrum Analyzer	8568B	2517A01610	2003-10-30
HP	Amplifier	8447E	2944A07030	2004-06-28
HP	Quasi-Peak Adapter	85650A	2521A00718	2004-03-08
Com-Power	Biconical Antenna	AB-100	14012	2003-09-05
Com-Power	Log Periodic Antenna	AL-100	16005	2004-08-23
Com-Power	Log Periodic Antenna	AB-900	15049	2004-05-01
Agilent	Spectrum Analyzer (9KHz – 40GHz)	8564E	3943A01781	2004-08-01
Agilent	Spectrum Analyzer (9KHz – 50GHz)	8565EC	3946A00131	2004-05-03
HP	Amplifier (1-26.5GHz)	8449B	3147A00400	2004-03-14
A.H.System	Horn Antenna (700MHz-18GHz)	SAS-200/571	261	2004-05-31

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. certifies that all calibration has been performed using suitable standards traceable to the NIST.

2 - SYSTEM TEST CONFIGURATION

2.1 Justification

The host system was configured for testing in a typical fashion (as normally used by a typical user).

The EUT was tested in the normal (native) operating mode to represent *worst-case* results during the final qualification test.

2.2 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components in a manner similar to a typical use. The test software, provided by the customer, is started the Windows terminal program under the Windows 98/2000/ME/XP operating system.

Once loaded, set the Tx channel to low, mid and high for testing.

2.3 Special Accessories

As shown in section 2.7, all interface cables used for compliance testing are shielded. The notebook and the peripherals featured shielded metal connectors.

2.4 Schematics / Block Diagram

Please refer to Appendix A.

2.5 Equipment Modifications


No modifications were made by BACL to ensure the EUT to comply with the applicable limits and requirements.

2.6 Configuration of Test System



EUT

2.7 Test Setup Block Diagram

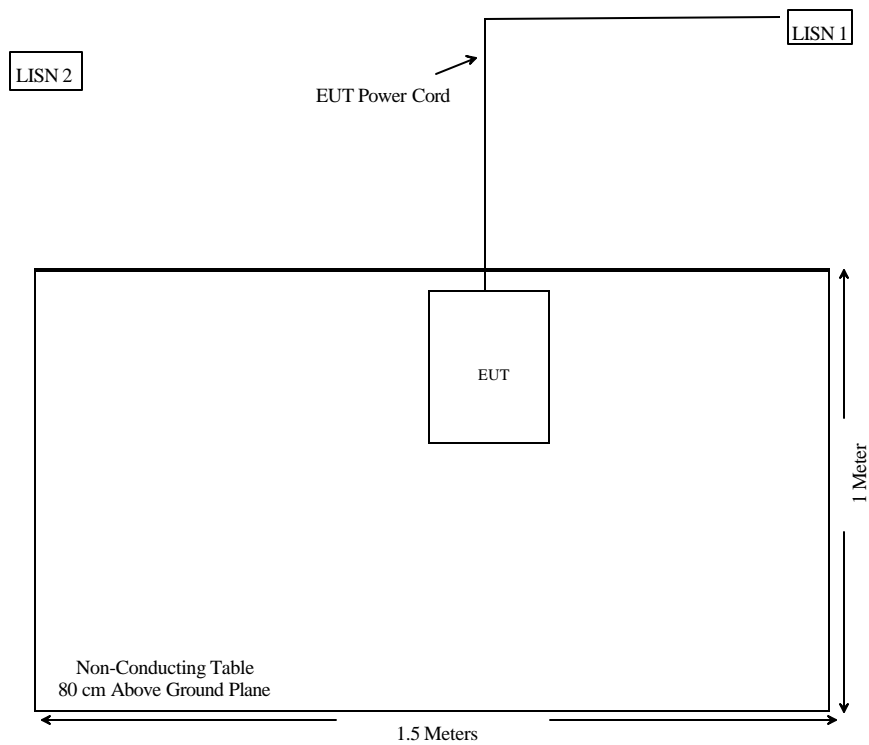

3 - SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT	REFERENCE
§ 15.203	Antenna Requirement	Compliant	Section 10
§ 15.205	Restricted Bands	Compliant	Section 11
§ 15.207 (a)	Conducted Emission	Compliant	Section 12
WLAN Transmitter			
§ 15.209 (a)	Radiated Emission	Compliant	Section 11
§ 15.209 (a)	Spurious Emission	Compliant	Section 7
§ 15.247 (a) (2)	6 dB Bandwidth	Compliant	Section 5
§ 15.247 (b) (3)	Maximum Peak Output Power	Compliant	Section 4
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Compliant	Section 9
§ 15.247 (d)	Peak Power Spectral Density	Compliant	Section 8
Bluetooth Transmitter			
§ 15.247 (a) (1) (i)	Number of Hopping Frequencies Used	Compliant	Section 13
§ 15.209 (a)	Radiated Emission	Compliant	Section 11
§ 15.209 (f)	Spurious Emission	Compliant	Section 10
§ 15.247 (a) (1)	Hopping Channel Separation	Compliant	Section 14
§ 15.247 (a) (1) (i)	Dwell Time of Each Frequency within a 10 Second Period	Compliant	Section 15
§ 15.247 (a) (1) (ii)	20dB Bandwidth	Compliant	Section 6
§ 15.247 (b) (2)	Maximum Peak Output Power	Compliant	Section 4
§ 15.247 (c)	100 kHz Bandwidth of Frequency Band Edge	Compliant	Section 9
§ 15.247 (g)	Full and complete compliance with applicable requirements for FHSS. Compliance with the definition of frequency hopping system, distribute transmission over minimum number of hopping channel	Compliant	Technical Manual
§ 15.247 (h)	Limitation on avoidance on hopping on occupied channel	Compliant	Technical Manual

4 - CONDUCTED OUTPUT POWER MEASUREMENT

4.1 Standard Applicable

According to §15.247(b) (3), for systems using digital modulation in 2400-2483.5 MHz: 1 Watt

According to §15.247(b) (1), for frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all direct sequence systems, the maximum peak output power of the transmitter shall not exceed 1 Watt.

4.2 Measurement Procedure

1. Place the EUT on the turntable and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Spectrum Analyzer.
3. The peak power will be obtained by adding the bandwidth correction factor, $10\log(\text{BW 6dB} / \text{RBW})$ to the peak power reading at $\text{RBW} = 2.0 \text{ MHz}$ of the spectrum analyzer.

4.3 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8564E	Spectrum Analyzer	2003-12-06

4.4 Measurement Result




DTS transmitter:




Frequency (MHz)	Peak Output Power (dBm)	Correction Factor (dB)	Corrected Power (dBm)	Output Power (W)	Standard (W)	Result
2412	7.17	7.8	14.97	0.031	$\leq 1 \text{ W}$	Compliant
2437	7.67	7.8	15.47	0.035	$\leq 1 \text{ W}$	Compliant
2462	7.67	7.8	15.47	0.035	$\leq 1 \text{ W}$	Compliant

Note: Correction Factor = $10 \log (\text{BW6dB}/\text{RBW}) = 7.8 \text{ dB}$

DSS transmitter:

Frequency (MHz)	Peak Output Power (dBm)	Output Power (W)	Standard (W)	Result
2402	3.00	0.0020	$\leq 1 \text{ W}$	Compliant
2441	3.00	0.0020	$\leq 1 \text{ W}$	Compliant
2480	2.17	0.0016	$\leq 1 \text{ W}$	Compliant

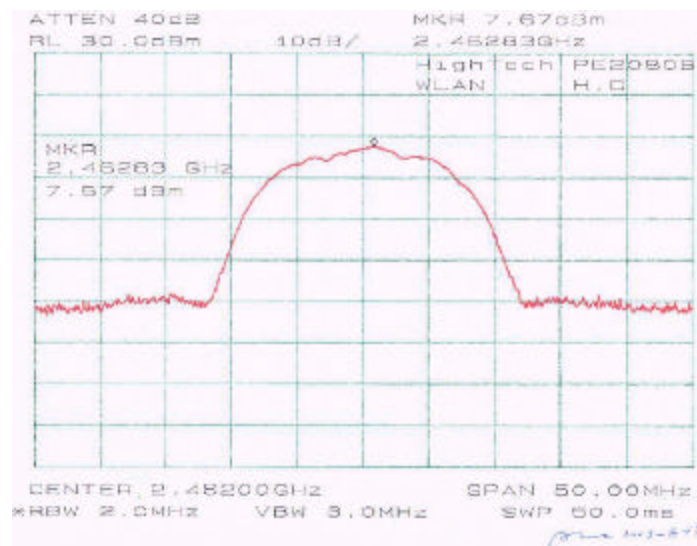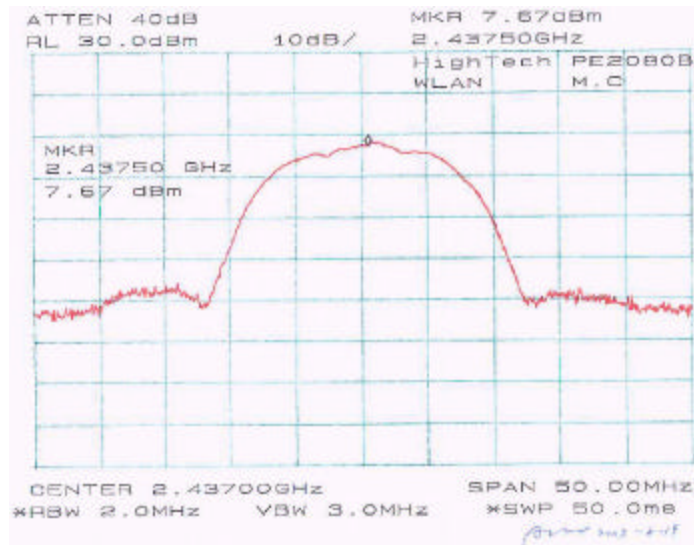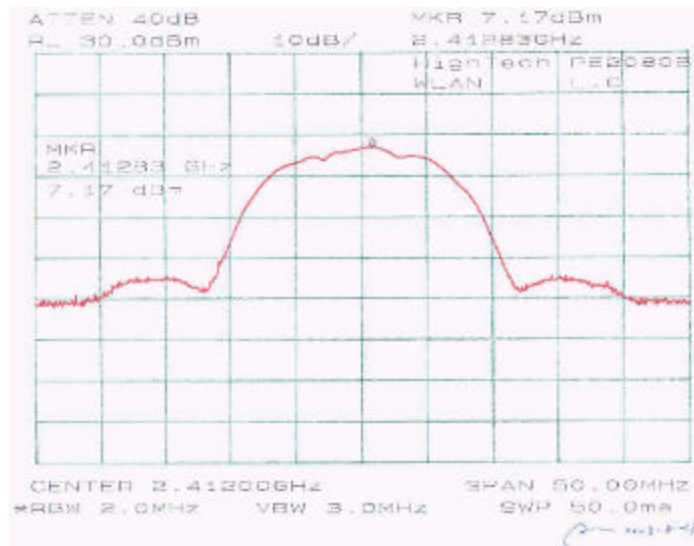

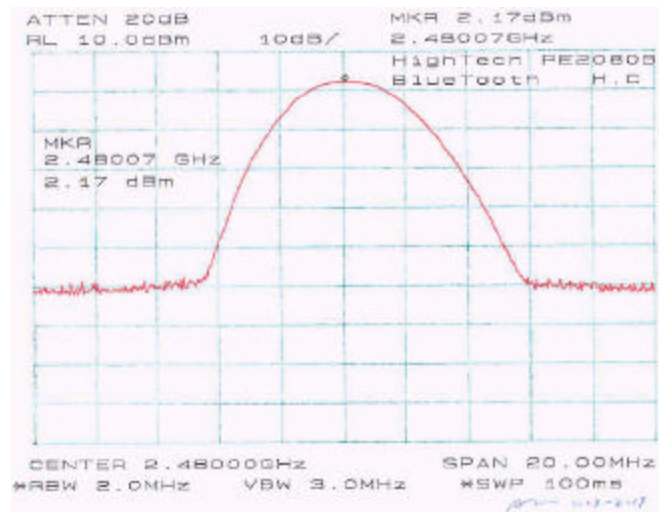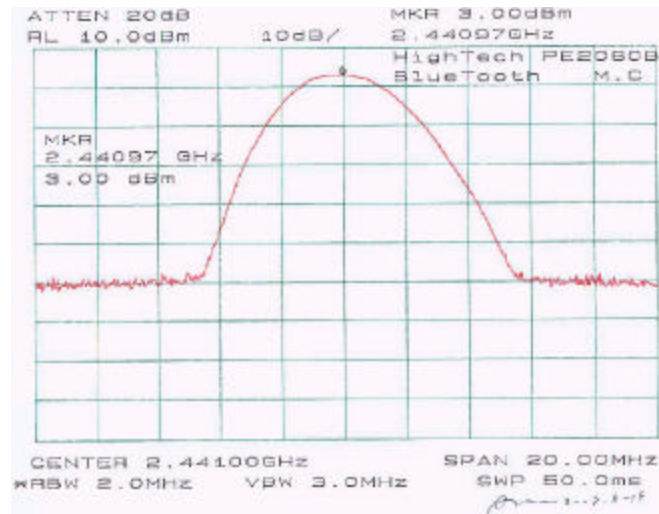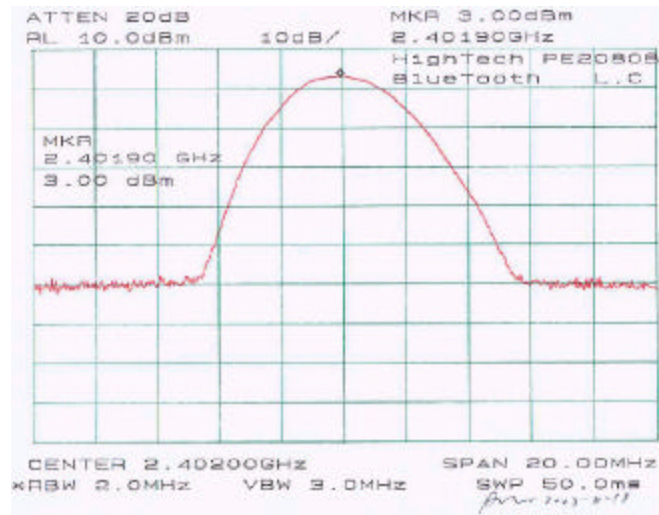

5 – 6 DB BANDWIDTH

5.1 Standard Applicable

According to §15.247(a)(2), for systems using digital modulation techniques operate in 2400 – 2483.5MHz, the minimum 6dB bandwidth shall be at least 500 kHz.

5.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.




5.3 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8564E	Spectrum Analyzer	2003-12-06

5.4 Measurement Result

Please refer to following pages for plots of 6 dB Bandwidth.

Frequency (MHz)	Measured (MHz)	Standard (kHz)	Result
2412	12.25	≥ 500	Compliant
2437	12.33	≥ 500	Compliant
2462	12.17	≥ 500	Compliant

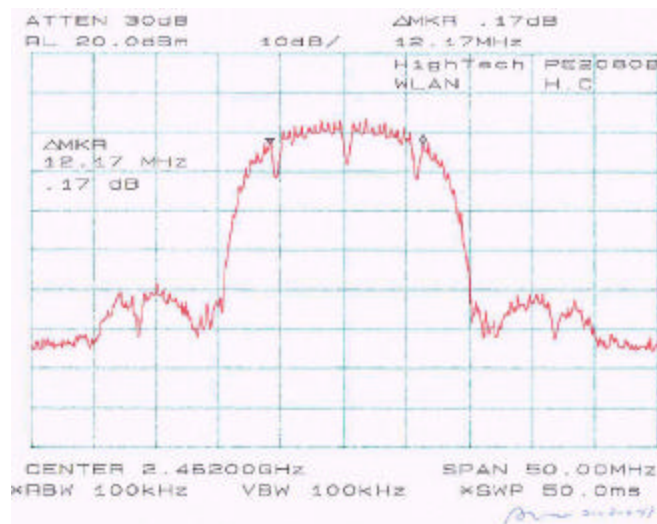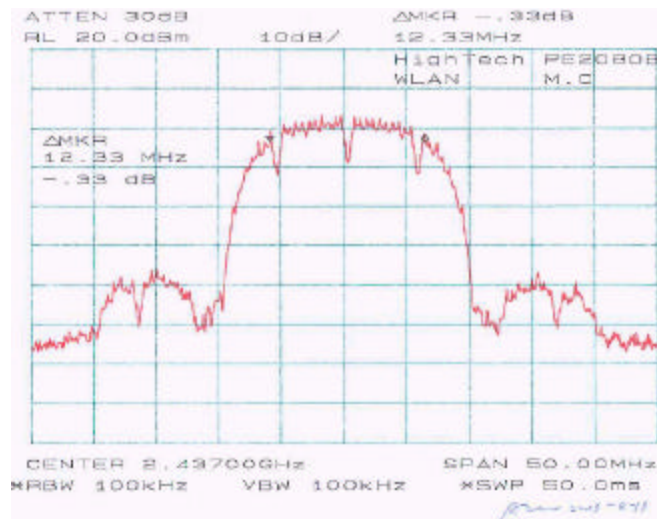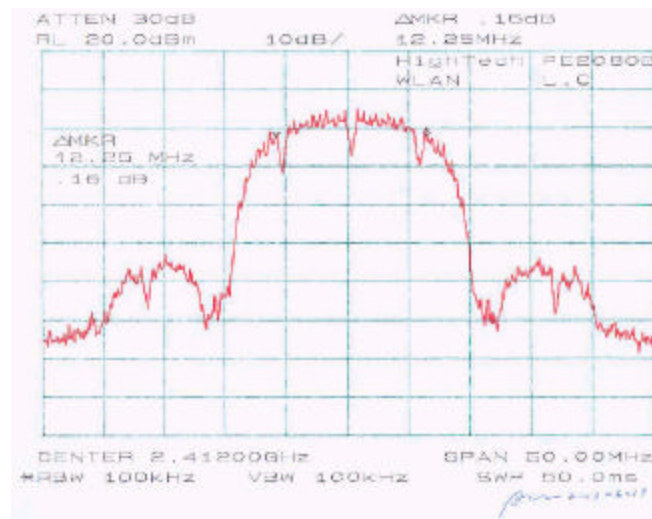

6 – 20dB BANDWIDTH

6.1 Standard Applicable

According to §15.247(a)(1)(ii), the maximum 20dB bandwidth of the hopping channel is 1MHz.

6.2 Measurement Procedure




5. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
6. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
7. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
8. Repeat above procedures until all frequencies measured were complete.

6.3 Measurement Result

Frequency (MHz)	Measurement (kHz)	Standard	Result
2402	950	$\leq 1\text{MHz}$	Compliant
2441	975	$\leq 1\text{MHz}$	Compliant
2480	975	$\leq 1\text{MHz}$	Compliant

6.4 Plot of Channel Bandwidth

Please refer to attached plots.

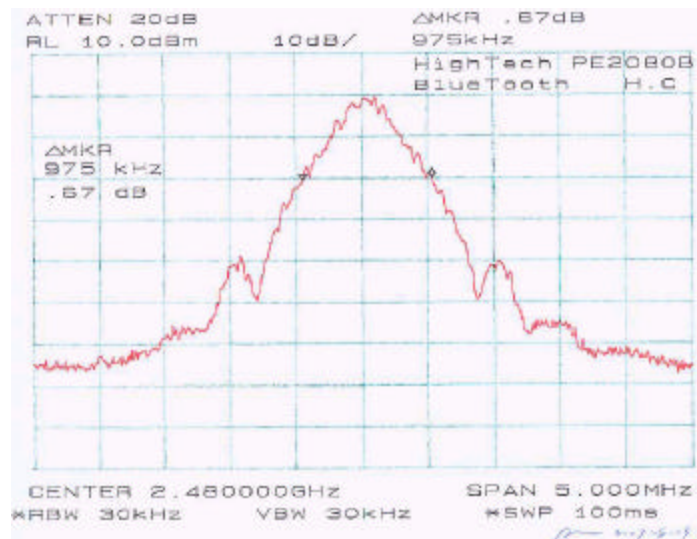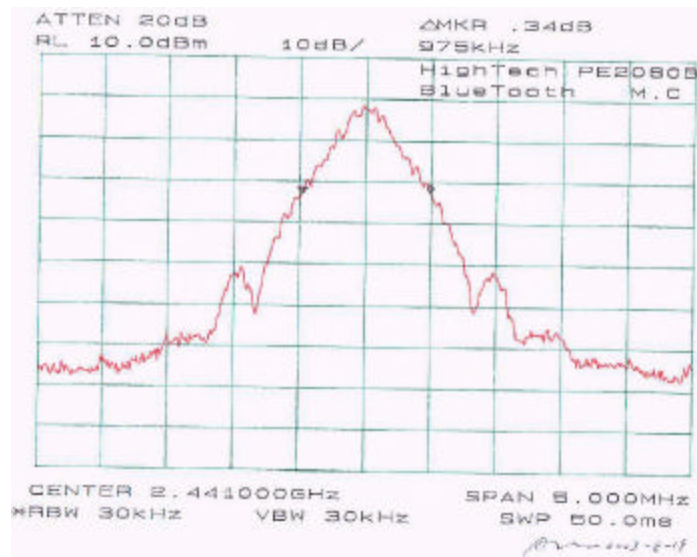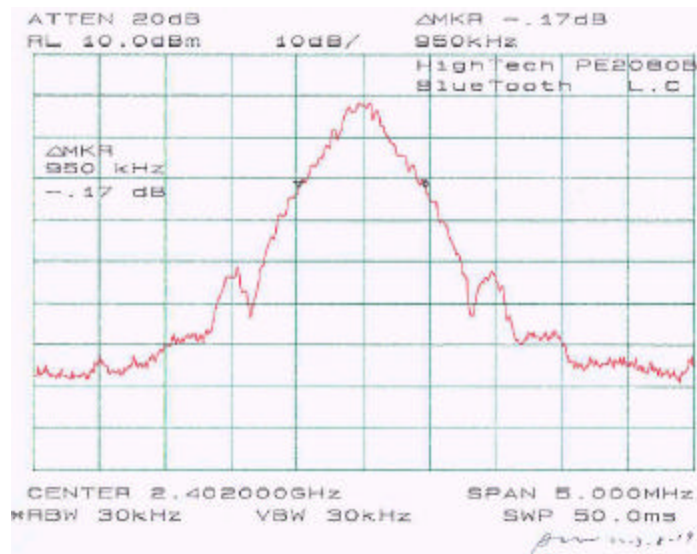

7 - SPURIOUS EMISSION AT ANTENNA TERMINAL

7.1 Standard Applicable

According to §15.209 (a), except as provided elsewhere in the subpart of 15.209, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Measurement	
	Field strength (microvolts/meter)	distance (meters)
0.009-0.490.....	2400/F(kHz)	300
0.490-1.705.....	24000/F(kHz)	30
1.705-30.0.....	30	30
30-88.....	100 **	3
88-216.....	150 **	3
216-960.....	200 **	3
Above 960.....	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

According to §15.209 (f) and §15.33(a), in some cases the emissions from an intentional radiator must be measured to beyond the tenth harmonic of the highest fundamental frequency designed to be emitted by the intentional radiator because of the incorporation of a digital device. If measurements above the tenth harmonic are so required, the radiated emissions above the tenth harmonic shall comply with the general radiated emission limits applicable to the incorporated digital device, as shown in §15.109 and as based on the frequency of the emission being measured, or, except for emissions contained in the restricted frequency bands shown in §15.205, the limit on spurious emissions specified for the intentional radiator, whichever is the higher limit.

7.2 Measurement Procedure



1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the SA on Max-Hold Mode, and then keep the EUT in transmitting mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.



7.3 Test Equipment



Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8564E	Spectrum Analyzer	2003-12-06

7.4 Measurement Result



Please refer to following pages for plots of spurious emission.

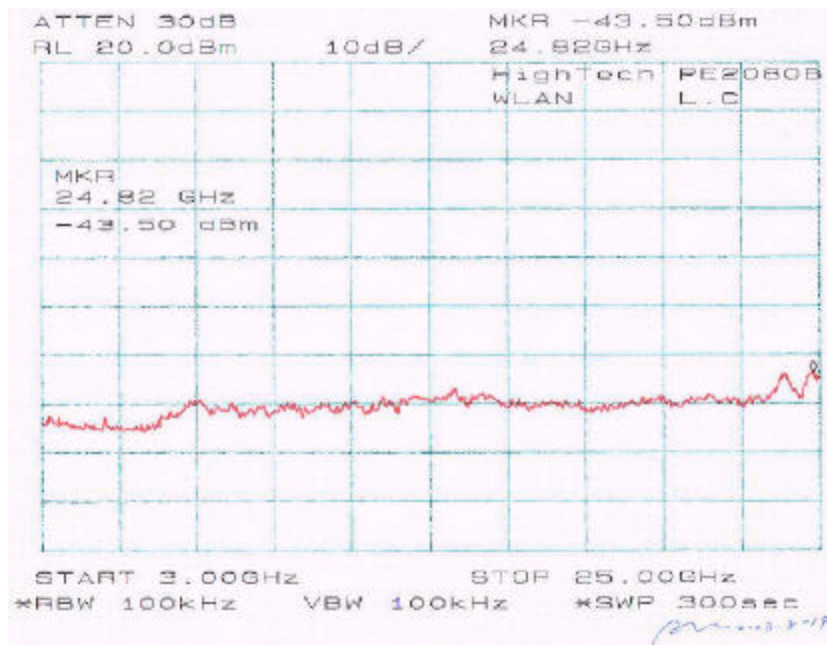
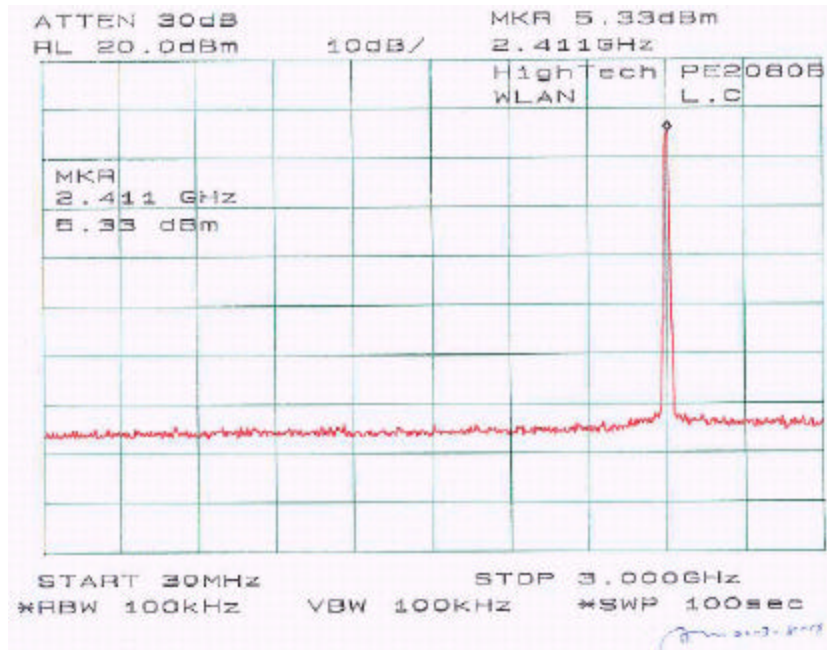
For DTS:

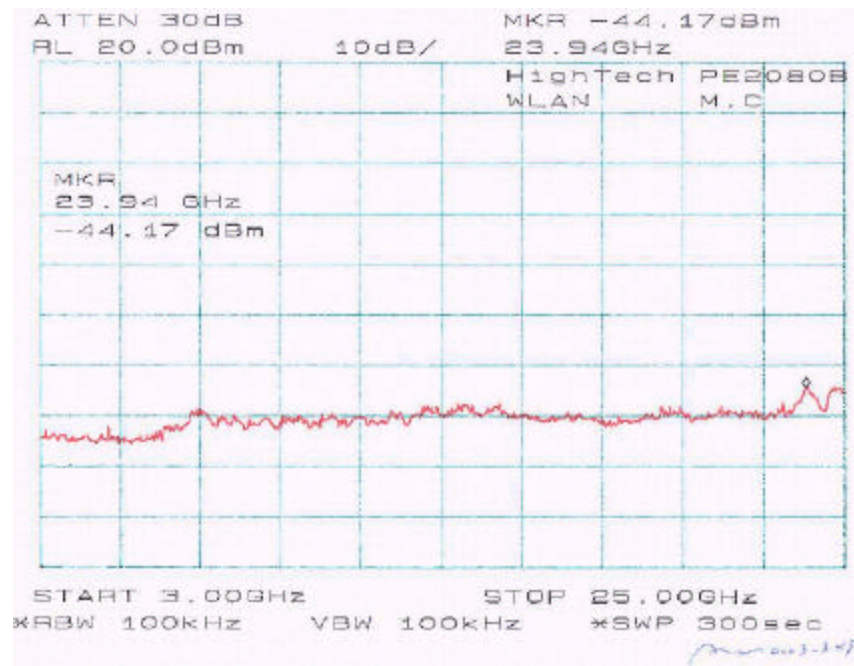
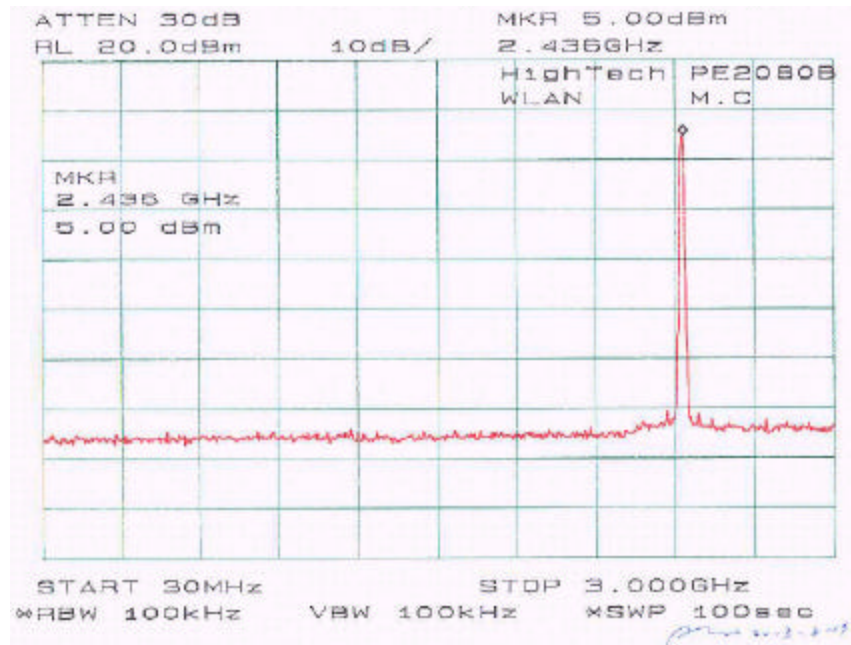


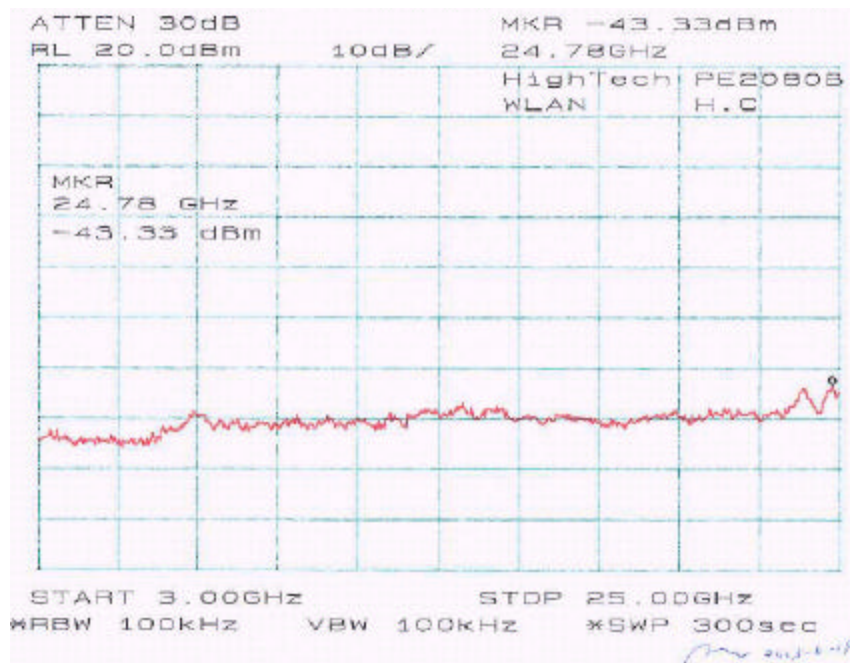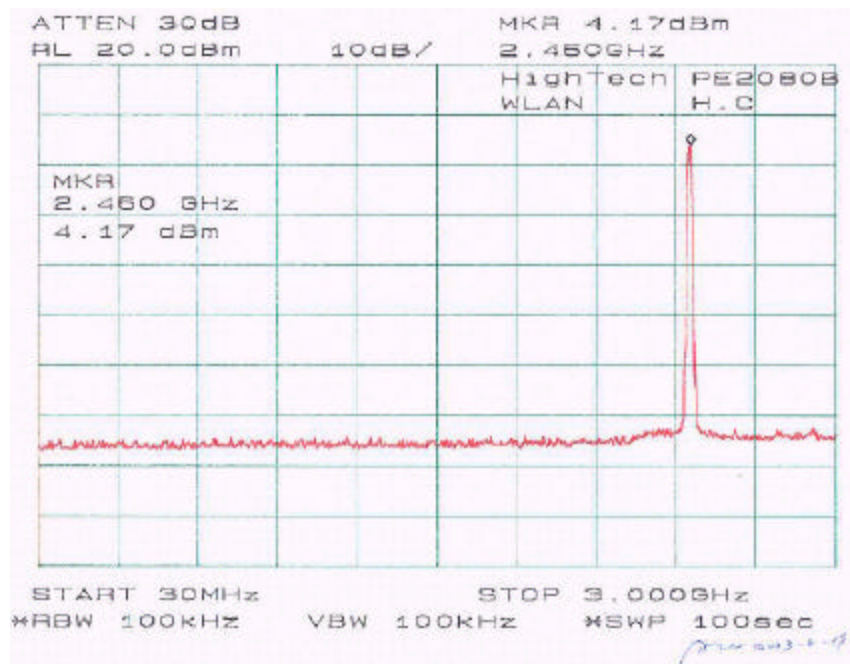

For DSS:

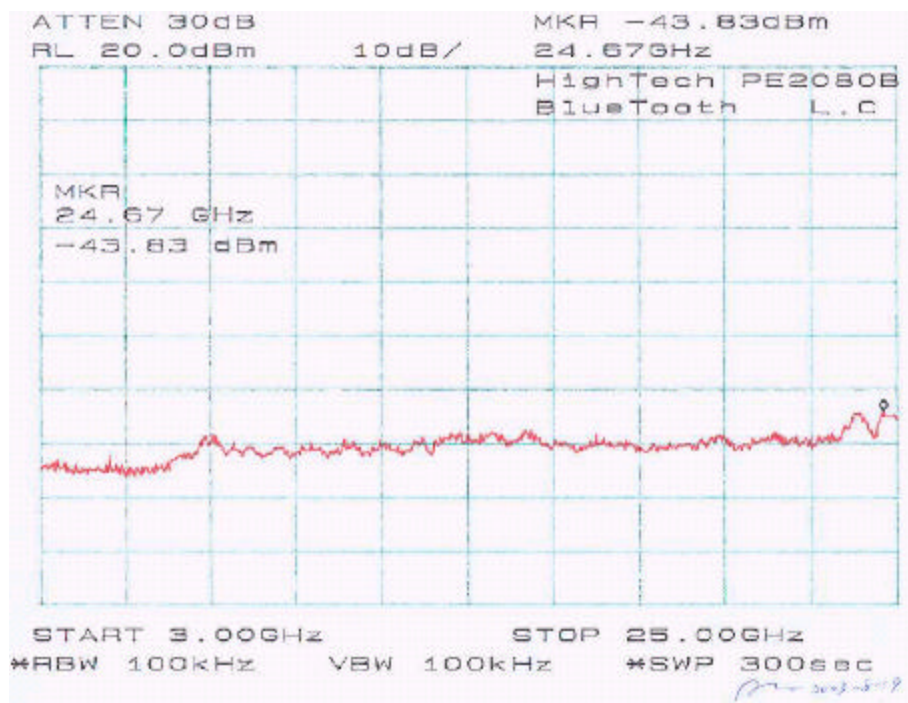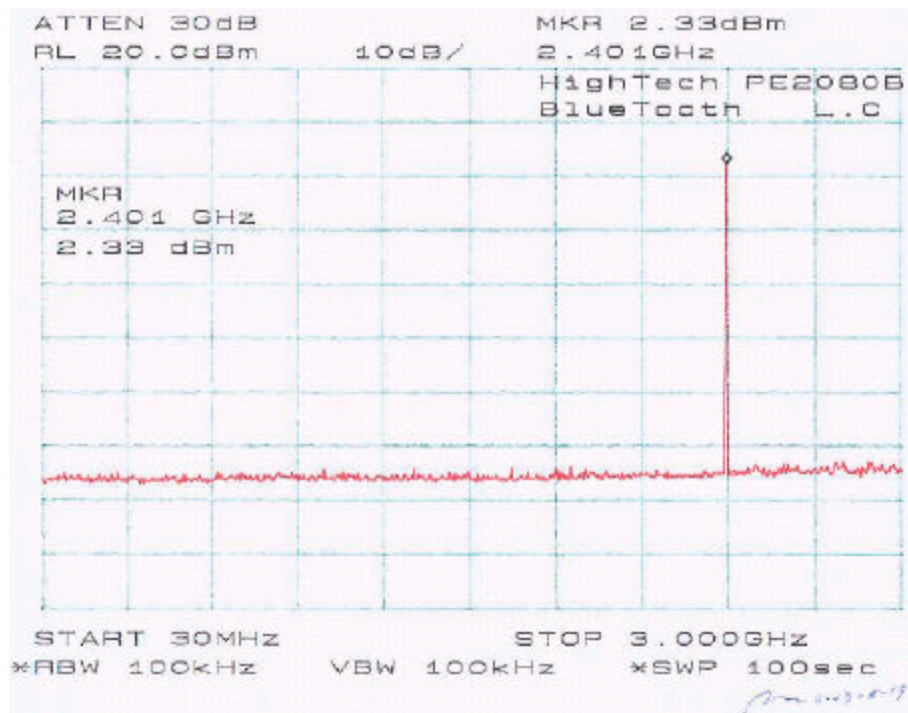

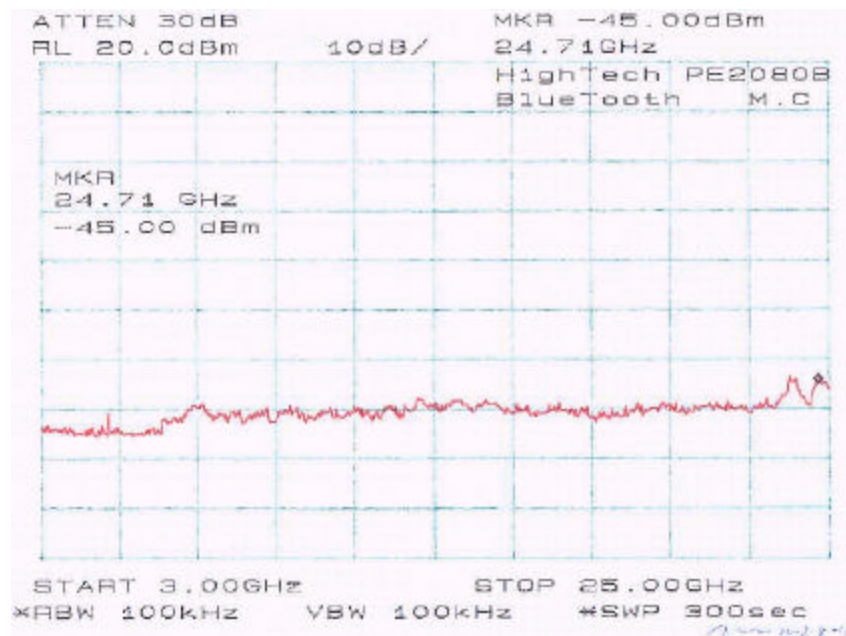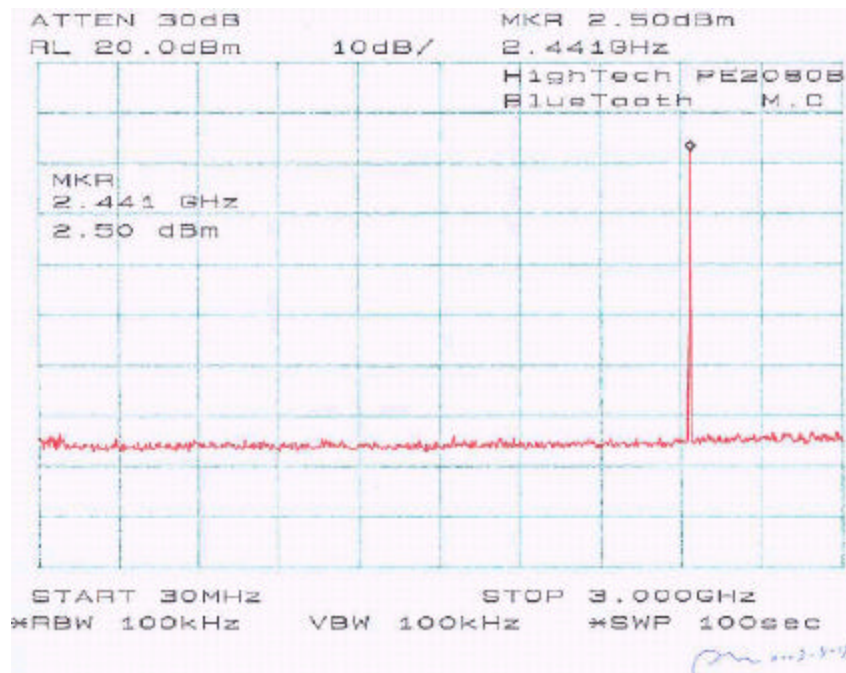

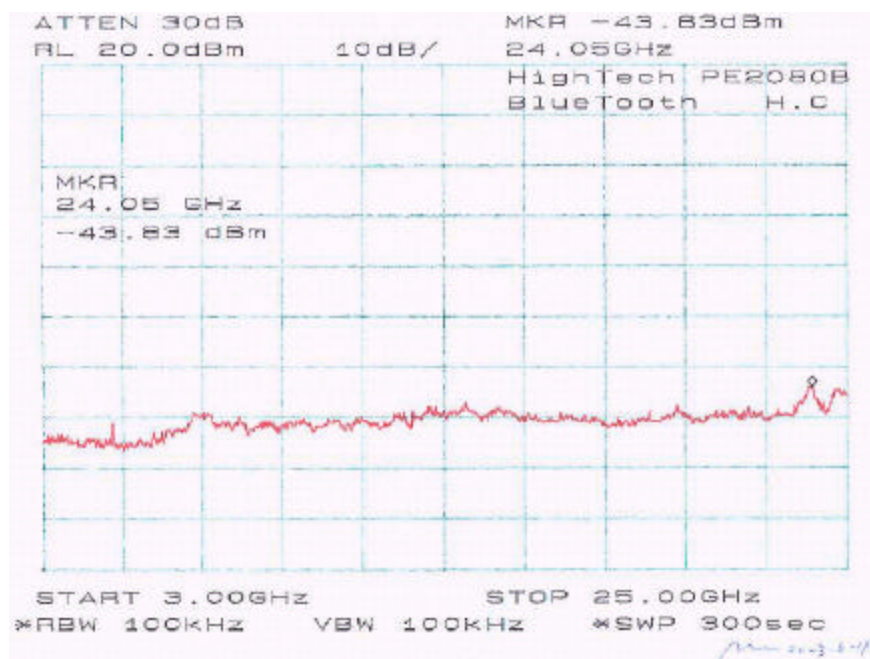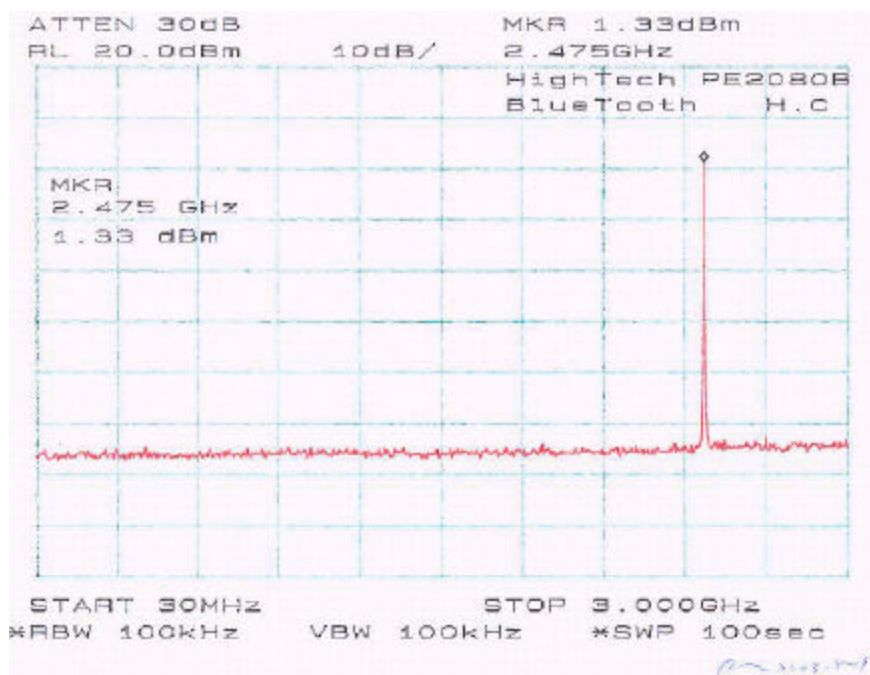

8 - PEAK POWER SPECTRAL DENSITY

8.1 Standard Applicable

According to §15.247 (d), digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 6MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Repeat above procedures until all frequencies measured were complete.

8.3 Test Equipment




Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8564E	Spectrum Analyzer	2003-12-06

8.4 Measurement Results

Frequency (MHz)	Peak Power Spectral Density	Standard (dBm)	Result
2412	-8.50	≤ 8	Compliant
2442	-8.17	≤ 8	Compliant
2462	-9.17	≤ 8	Compliant

8.5 Plot of Peak Power Spectral Density

Please refer to following pages for plots of peak power spectral density.

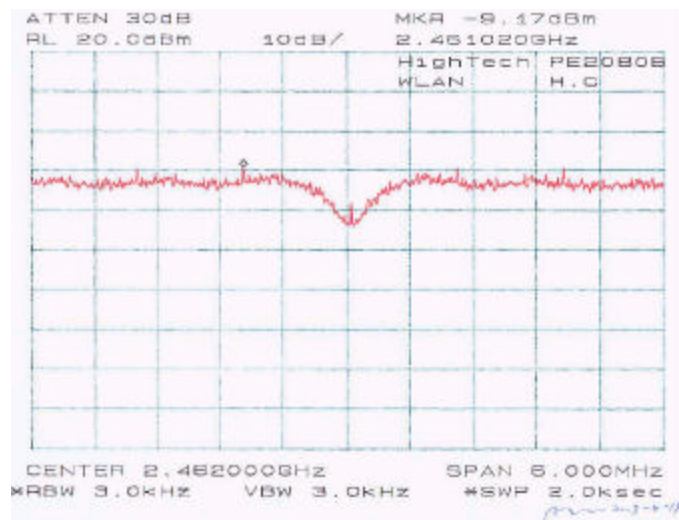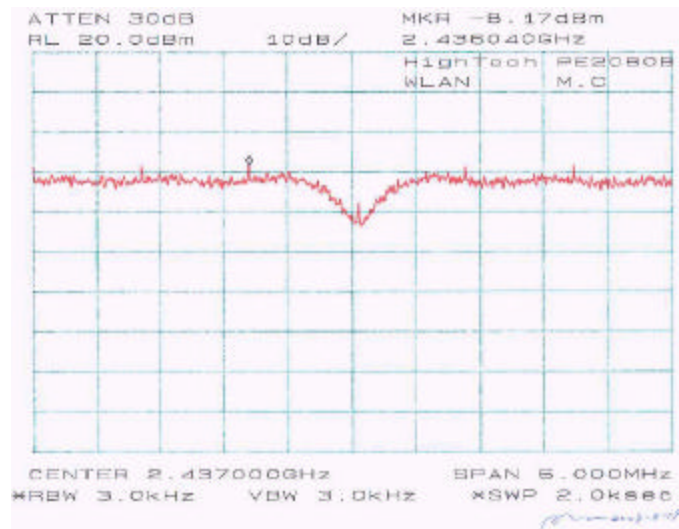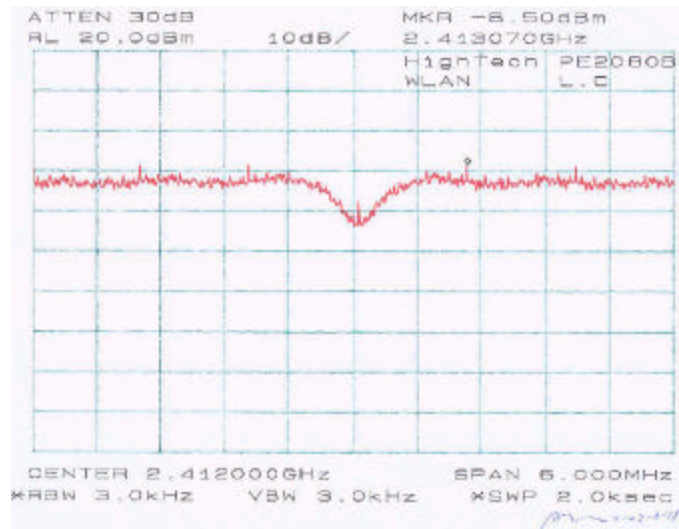

9 - 100 KHZ BANDWIDTH OF BAND EDGES

9.1 Standard Applicable

According to §15.247(c), in *any* 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) see §15.205(c)).

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



9.3 Test Equipment



Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8564E	Spectrum Analyzer	2003-12-06

9.4 Measure Results



Please refer to following pages for plots of band edge.



For DTS:

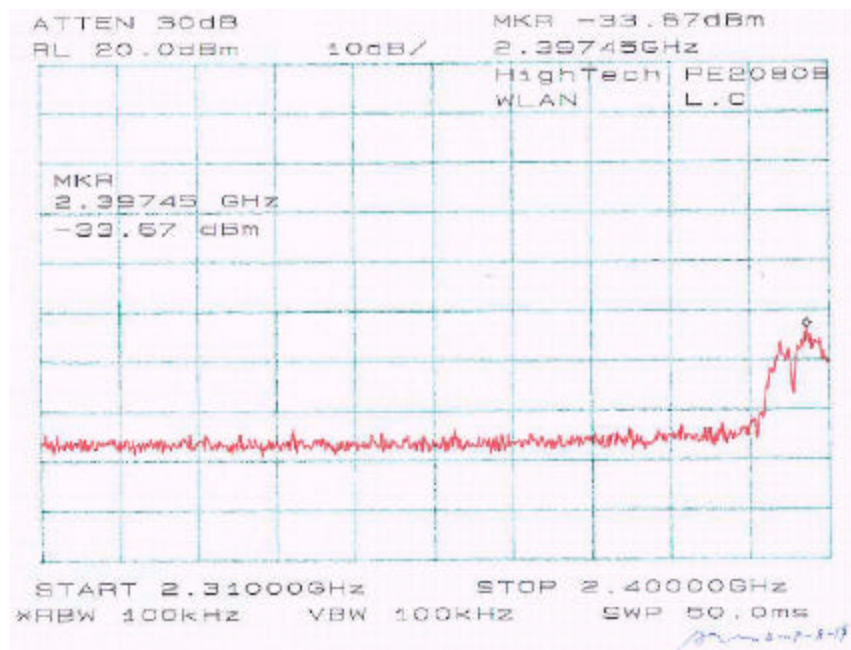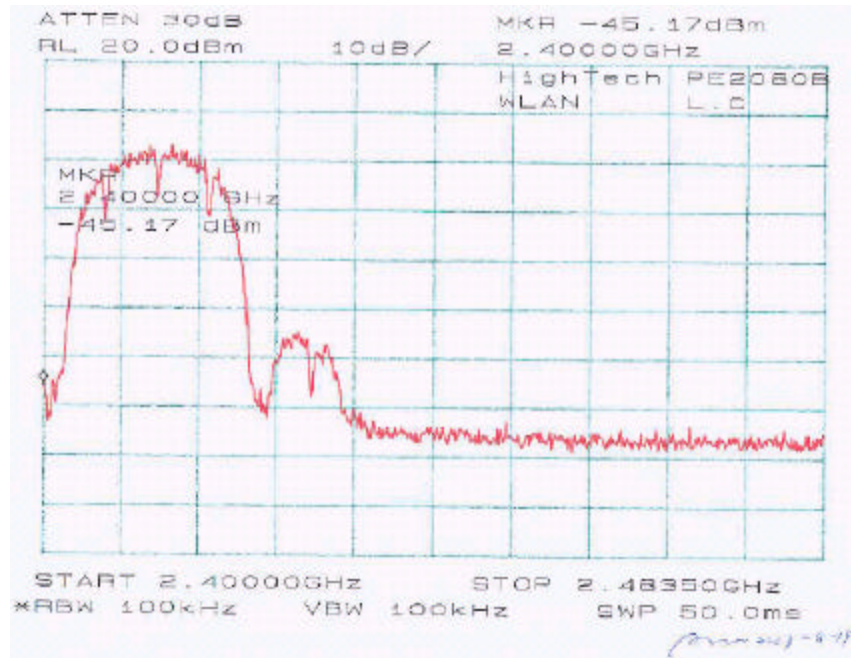

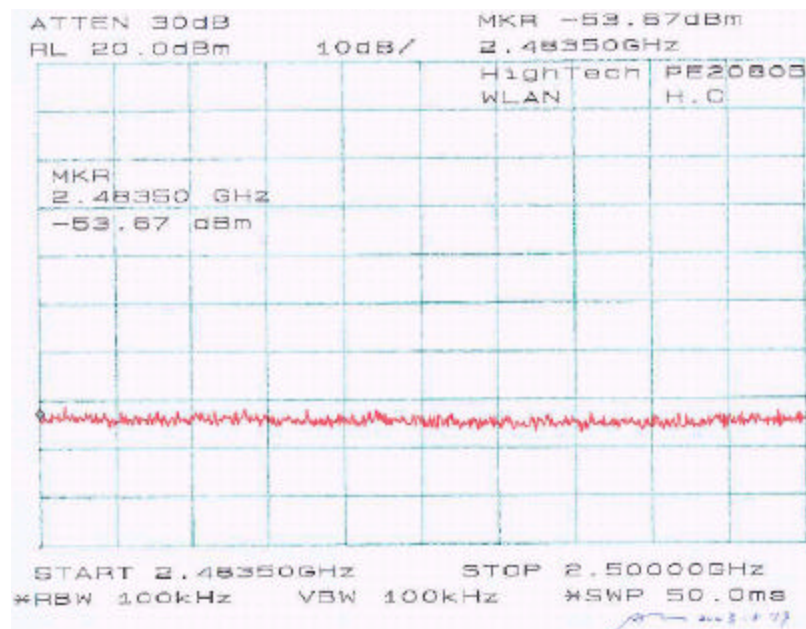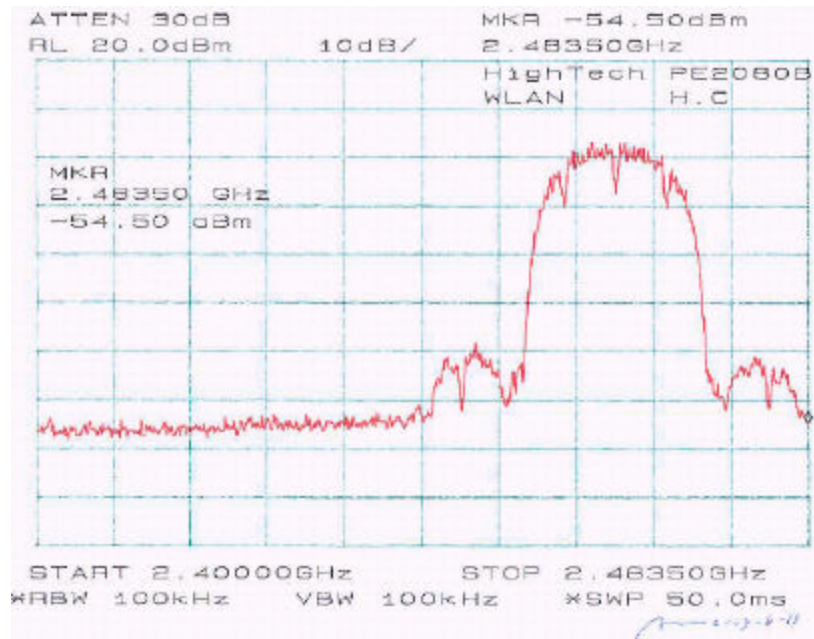

For DSS:

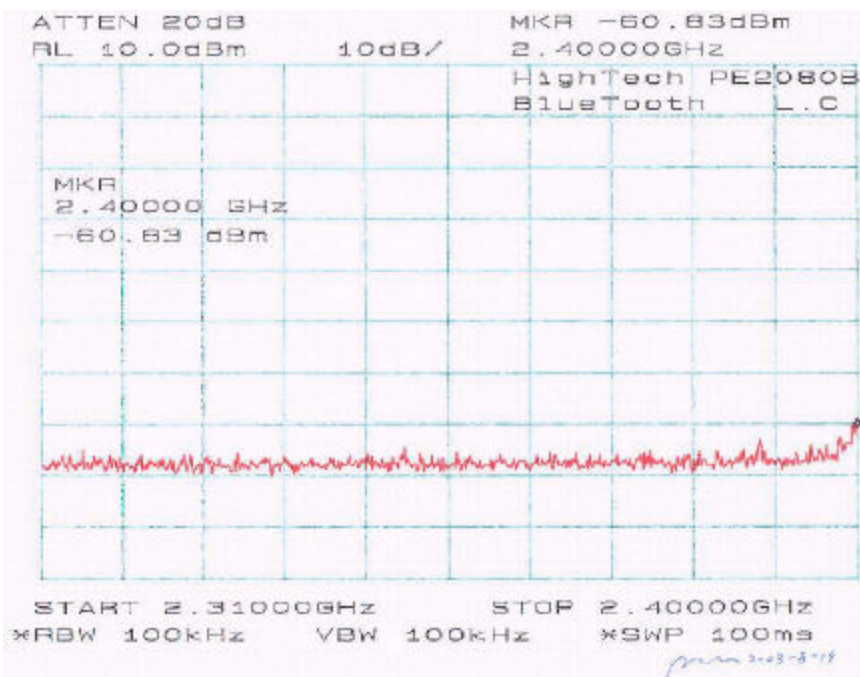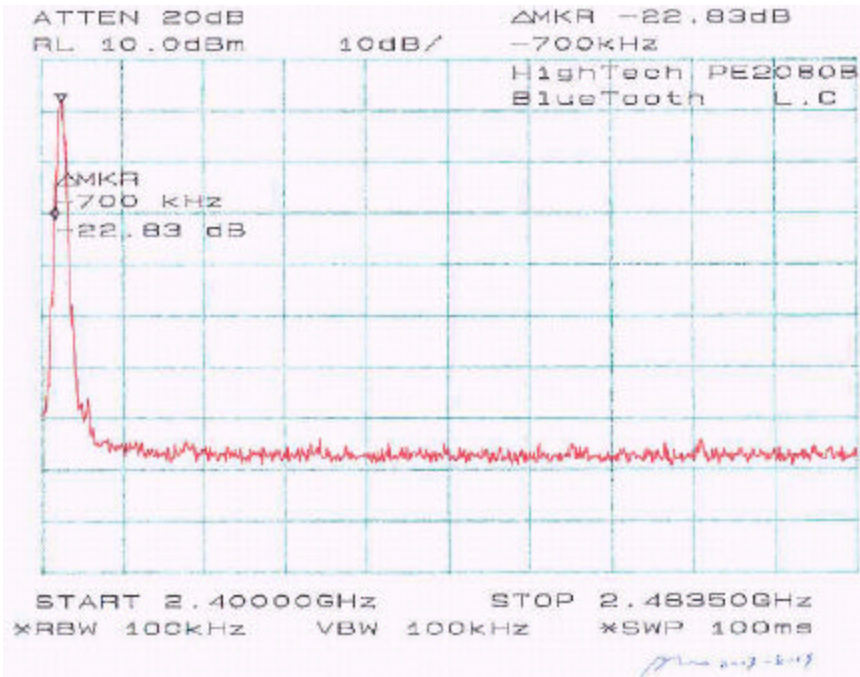

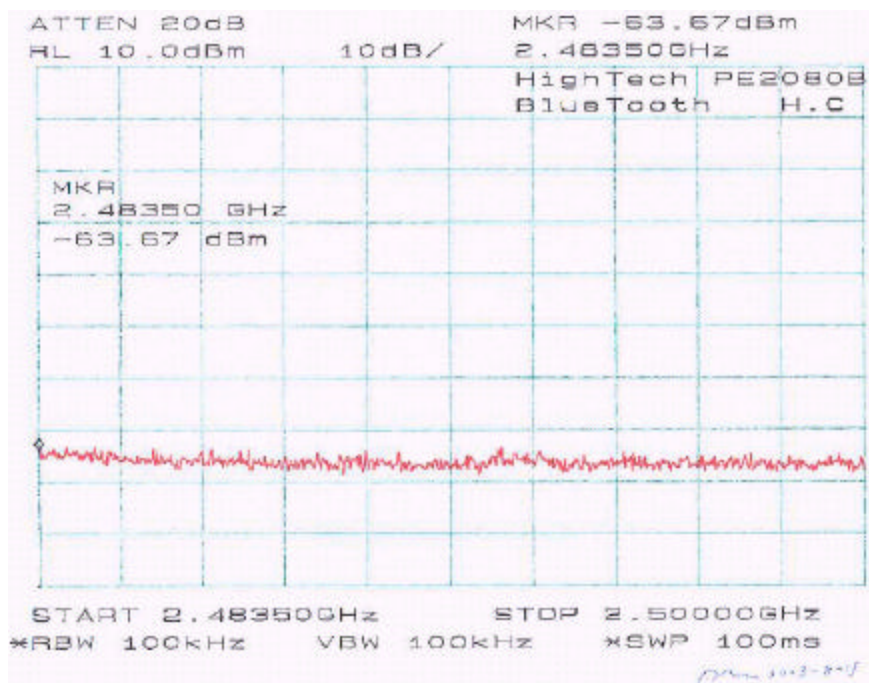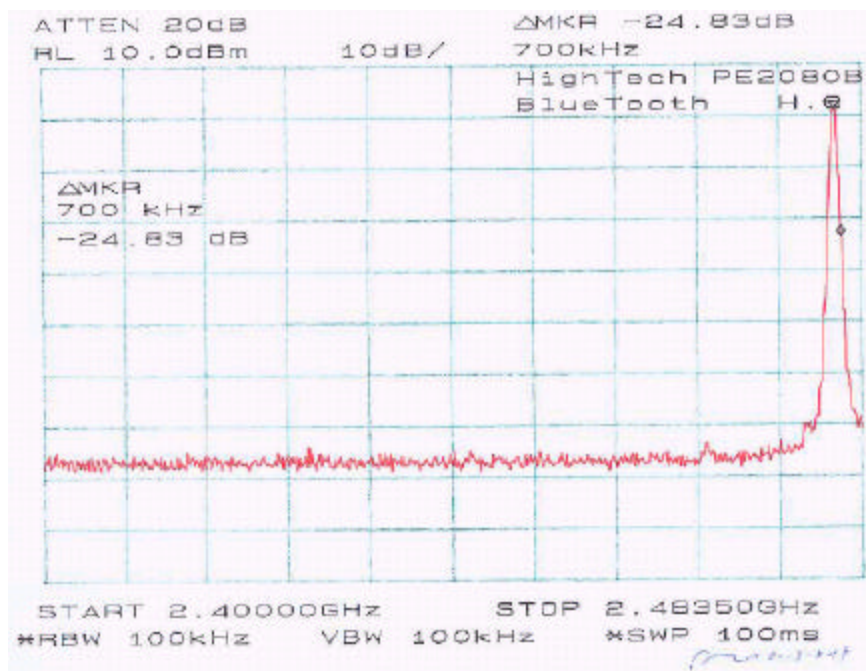

10 - ANTENNA REQUIREMENT

10.1 Standard Applicable

For intentional device, according to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to § 15.247 (1), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

10.2 Antenna Connected Construction

The directional gain of the antenna for both WLAN and Bluetooth used for transmitting is 0dBi, and the antenna connectors are designed with permanent attachment and no consideration of replacement.

11 - SPURIOUS RADIATED EMISSION

11.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at BACL is ± 4.0 dB.

11.2 EUT Setup

The radiated emission tests were performed in the open area 3-meter test site, using the setup in accordance with the ANSI C63.4-1992. The specification used was the FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 120Vac/60Hz power source.

The EUT was test in 3 orthogonal.

11.3 Spectrum Analyzer Setup

According to FCC Rules, 47 CFR §15.33 (a) (1), the system was tested to 25GHz.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
Below 30MHz	10kHz	10kHz
30 – 1000MHz	100kHz	100kHz
Above 1000MHz	1MHz	1MHz

11.4 Test Procedure

For the radiated emissions test, the Host PC system power cord was connected to the AC floor outlet since the power supply used in the EUT did not provide an accessory power outlet.

Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dBμV of specification limits), and are distinguished with a "Qp" in the data table.

11.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Subpart C. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Subpart C Limit}$$

11.6 Test Equipment

Manufacturer	Model No.	Serial No.	Calibration Due Date
HP	8564E	Spectrum Analyzer	2003-12-06

11.7 Summary of Test Results

According to the data in section 10.8, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.207 and 15.247, and had the worst margin of:

WLAN Transmitter, DTS:

Vertical Plan:

-2.5 dB at **7236.00 MHz** in the **Vertical** polarization, Low Channel

-2.6 dB at **7311.00 MHz** in the **Vertical** polarization, Middle Channel

-2.7 dB at **7386.00 MHz** in the **Vertical** polarization, High Channel

-12.4 dB at **572.44 MHz** in the **Vertical** polarization, Unintentional Emission

Horizontal Plan:

-2.7 dB at **7236.00 MHz** in the **Vertical** polarization, Low Channel

-2.7 dB at **7311.00 MHz** in the **Vertical** polarization, Middle Channel

-7.0 dB at **7386.00 MHz** in the **Vertical** polarization, High Channel

-11.8 dB at **572.44 MHz** in the **Vertical** polarization, Unintentional Emission

Bluetooth Transmitter, DSS:

Vertical Plan:

- 10.9 dB** at **7206.00 MHz** in the **Horizontal** polarization, Low Channel
- 11.1 dB** at **7326.00 MHz** in the **Horizontal** polarization, Middle Channel
- 11.3 dB** at **7440.00 MHz** in the **Horizontal** polarization, High Channel
- 12.6 dB** at **572.44.00 MHz** in the **Vertical** polarization, Unintentional Emission

Horizontal Plan:

- 11.1 dB** at **7206.00 MHz** in the **Horizontal** polarization, Low Channel
- 11.4 dB** at **7323.00 MHz** in the **Horizontal** polarization, Middle Channel
- 11.5 dB** at **7440.00 MHz** in the **Horizontal** polarization, High Channel
- 12.2 dB** at **572.44.00 MHz** in the **Vertical** polarization, Unintentional Emission

11.7.1 Test Data, WLAN (DTS) Transmitter, 1 – 25 GHz**EUT operating in vertical plan and turning 360 degree**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments		Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB		Amp. DB	Corr. Ampl. dBμV/m
Low Channel											
2412.00	105.4	Fund/Peak	30	1.5	v	28.1	3.4	35.2	101.7		
2412.00	104.9	Fund/Peak	0	1.5	h	28.1	3.4	35.2	101.2		
2412.00	101.3	Fund/Ave	30	1.5	v	28.1	3.4	35.2	97.6		
2412.00	101.2	Fund/Ave	0	1.5	h	28.1	3.4	35.2	97.5		
7236.00	44.3	Ave	180	1.5	v	35.1	5.6	33.5	51.5	54	-2.5
7236.00	31.0	Ave	250	1.3	h	35.1	5.6	33.5	38.2	54	-15.8
4824.00	32.6	Ave	180	1.5	v	32.5	4.9	33.0	37.0	54	-17.0
4824.00	32.2	Ave	210	1.6	h	32.5	4.9	33.0	36.6	54	-17.4
7236.00	44.7	Peak	180	1.5	v	35.1	5.6	33.5	51.9	74	-22.1
4824.00	45.2	Peak	180	1.5	v	32.5	4.9	33.0	49.6	74	-24.4
4824.00	44.9	Peak	210	1.6	h	32.5	4.9	33.0	49.3	74	-24.7
7236.00	31.9	Peak	250	1.3	h	35.1	5.6	33.5	39.1	74	-34.9
Middle Channel											
2437.00	102.6	Fund/Peak	270	1.2	v	28.1	3.4	35.2	98.9		
2437.00	104.6	Fund/Peak	330	1.5	h	28.1	3.4	35.2	100.9		
2437.00	98.3	Fund/Ave	270	1.2	v	28.1	3.4	35.2	94.6		
2437.00	101.5	Fund/Ave	330	1.5	h	28.1	3.4	35.2	97.8		
7311.00	44.2	Ave	90	1.5	v	35.1	5.6	33.5	51.4	54	-2.6
7311.00	30.8	Ave	60	1.2	h	35.1	5.6	33.5	38.0	54	-16.0
4874.00	32.5	Ave	30	1.2	v	32.5	4.9	33.0	36.9	54	-17.1
4874.00	32.1	Ave	270	1.5	h	32.5	4.9	33.0	36.5	54	-17.5
7311.00	44.6	Peak	90	1.5	v	35.1	5.6	33.5	51.8	74	-22.2
4874.00	45.1	Peak	30	1.2	v	32.5	4.9	33.0	49.5	74	-24.5
4874.00	44.7	Peak	270	1.5	h	32.5	4.9	33.0	49.1	74	-24.9
7311.00	31.7	Peak	60	1.2	h	35.1	5.6	33.5	38.9	74	-35.1

High Channel											
2462.00	101.2	Fund/Peak	270	1.5	v	28.1	3.4	35.2	97.5		
2462.00	104.5	Fund/Peak	0	1.5	h	28.1	3.4	35.2	100.8		
2462.00	97.5	Fund/Ave	270	1.5	v	28.1	3.4	35.2	93.8		
2462.00	100.3	Fund/Ave	0	1.5	h	28.1	3.4	35.2	96.6		
7386.00	44.1	Ave	30	1.5	v	35.1	5.6	33.5	51.3	54	-2.7
7386.00	30.6	Ave	330	1.5	h	35.1	5.6	33.5	37.8	54	-16.2
4924.00	32.4	Ave	0	1.4	v	32.5	4.9	33.0	36.8	54	-17.2
4924.00	32.0	Ave	150	1.4	h	32.5	4.9	33.0	36.4	54	-17.6
7386.00	44.5	Peak	30	1.5	v	35.1	5.6	33.5	51.7	74	-22.3
4924.00	44.9	Peak	0	1.4	v	32.5	4.9	33.0	49.3	74	-24.7
4924.00	44.6	Peak	150	1.4	h	32.5	4.9	33.0	49.0	74	-25.0
7386.00	31.6	Peak	330	1.5	h	35.1	5.6	33.5	38.8	74	-35.2

Indicated			Table	Antenna		Correction Factor			FCC 15 Subpart B	
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m	Degree	Meter	H/V	dBμV/m	dBμV/m	dB	dBμV/m	dBμV/m	dB
572.44	36.3	15	1.8	v	19.3	3.0	25.0	33.6	46	-12.4
110.74	43.1	180	1.2	h	11.3	1.5	25.0	30.9	43.5	-12.6
357.95	38.7	30	1.2	v	15.5	2.3	25.0	31.5	46	-14.5
228.01	42.1	210	1.5	v	11.8	2.2	25.0	31.1	46	-14.9
328.49	37.8	320	1.5	v	15.5	2.3	25.0	30.6	46	-15.4
167.21	39.6	70	1.6	h	13.0	1.8	25.0	29.4	46	-16.6

Note:

AVG = average

EUT operating in Horizontal plan and turning 360 degree

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel											
2412.00	104.4	Fund/Peak	60	1.5	v	28.1	3.4	35.2	100.7		
2412.00	103.8	Fund/Peak	15	1.5	h	28.1	3.4	35.2	100.1		
2412.00	100.4	Fund/Ave	60	1.5	v	28.1	3.4	35.2	96.7		
2412.00	100.1	Fund/Ave	15	1.5	h	28.1	3.4	35.2	96.4		
7236.00	44.1	Ave	210	1.5	v	35.1	5.6	33.5	51.3	54	-2.7
7236.00	31.2	Ave	260	1.3	h	35.1	5.6	33.5	38.4	54	-15.6
4824.00	32.4	Ave	120	1.5	v	32.5	4.9	33.0	36.8	54	-17.2
4824.00	32.1	Ave	180	1.6	h	32.5	4.9	33.0	36.5	54	-17.5
7236.00	44.3	Peak	210	1.5	v	35.1	5.6	33.5	51.5	74	-22.5
4824.00	44.9	Peak	120	1.5	v	32.5	4.9	33.0	49.3	74	-24.7
4824.00	44.6	Peak	180	1.6	h	32.5	4.9	33.0	49.0	74	-25.0
7236.00	31.7	Peak	260	1.3	h	35.1	5.6	33.5	38.9	74	-35.1
Middle Channel											
2437.00	102.3	Fund/Peak	230	1.2	v	28.1	3.4	35.2	98.6		
2437.00	104.4	Fund/Peak	310	1.5	h	28.1	3.4	35.2	100.7		
2437.00	98.1	Fund/Ave	230	1.2	v	28.1	3.4	35.2	94.4		
2437.00	101.2	Fund/Ave	310	1.5	h	28.1	3.4	35.2	97.5		
7311.00	44.1	Ave	30	1.5	v	35.1	5.6	33.5	51.3	54	-2.7
7311.00	30.7	Ave	0	1.2	h	35.1	5.6	33.5	37.9	54	-16.1
4874.00	32.3	Ave	60	1.2	v	32.5	4.9	33.0	36.7	54	-17.3
4874.00	32.0	Ave	110	1.5	h	32.5	4.9	33.0	36.4	54	-17.6
7311.00	44.5	Peak	30	1.5	v	35.1	5.6	33.5	51.7	74	-22.3
4874.00	44.9	Peak	60	1.2	v	32.5	4.9	33.0	49.3	74	-24.7
4874.00	44.6	Peak	110	1.5	h	32.5	4.9	33.0	49.0	74	-25.0
7311.00	31.4	Peak	0	1.2	h	35.1	5.6	33.5	38.6	74	-35.4

High Channel											
2462.00	109.8	Fund/Peak	270	1.5	v	28.1	3.4	35.2	106.1		
2462.00	104.1	Fund/Peak	0	1.5	h	28.1	3.4	35.2	100.4		
2462.00	97.2	Fund/Ave	270	1.5	v	28.1	3.4	35.2	93.5		
2462.00	99.8	Fund/Ave	0	1.5	h	28.1	3.4	35.2	96.1		
7386.00	39.8	Ave	270	1.5	v	35.1	5.6	33.5	47.0	54	-7.0
7386.00	30.4	Ave	310	1.5	h	35.1	5.6	33.5	37.6	54	-16.4
4924.00	32.2	Ave	15	1.4	v	32.5	4.9	33.0	36.6	54	-17.4
4924.00	31.9	Ave	90	1.4	h	32.5	4.9	33.0	36.3	54	-17.7
7386.00	44.1	Peak	270	1.5	v	35.1	5.6	33.5	51.3	74	-22.7
4924.00	44.6	Peak	15	1.4	v	32.5	4.9	33.0	49.0	74	-25.0
4924.00	44.3	Peak	90	1.4	h	32.5	4.9	33.0	48.7	74	-25.3
7386.00	31.5	Peak	310	1.5	h	35.1	5.6	33.5	38.7	74	-35.3

Indicated			Table	Antenna		Correction Factor			FCC 15 Subpart B	
Frequency	Ampl.	Direction	Height	Polar	Antenna	Cable Loss	Amp.	Corr. Ampl.	Limit	Margin
MHz	dBμV/m	Degree	Meter	H/V	dBμV/m	dBμV/m	dB	dBμV/m	dBμV/m	dB
572.44	36.9	0	1.8	v	19.3	3.0	25.0	34.2	46	-11.8
110.74	43.3	210	1.2	h	11.3	1.5	25.0	31.1	43.5	-12.4
357.95	38.2	30	1.2	v	15.5	2.3	25.0	31.0	46	-15.0
328.49	37.6	310	1.5	v	15.5	2.3	25.0	30.4	46	-15.6
167.21	39.7	90	1.6	h	13.0	1.8	25.0	29.5	46	-16.5
228.01	2.5	180	1.5	v	11.8	2.2	25.0	-8.5	46	-54.5

Note:

AVG = average

11.7.2 Test Data, Bluetooth (DSS) Transmitter, 1 – 25 GHz**EUT operating in Vertical plan and turning 360 degree**

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel											
2402.00	97.1	Fund/Peak	30	1.5	v	28.1	3.4	35.2	93.4		
2402.00	97.3	Fund/Peak	0	1.8	h	28.1	3.4	35.2	93.6		
2402.00	89.7	Fund/Ave	30	1.5	v	28.1	3.4	35.2	85.9		
2402.00	97.1	Fund/Ave	0	1.8	h	28.1	3.4	35.2	93.4		
7206.00	35.9	Ave	220	1.5	h	35.1	5.6	33.5	43.1	54	-10.9
7206.00	35.5	Ave	45	1.5	v	35.1	5.6	33.5	42.7	54	-11.3
4804.00	32.7	Ave	90	1.5	v	32.5	4.9	33.0	37.1	54	-16.9
4804.00	31.9	Ave	120	1.2	h	32.5	4.9	33.0	36.3	54	-17.7
7206.00	46.7	Peak	220	1.5	h	35.1	5.6	33.5	53.9	74	-20.1
7206.00	46.2	Peak	45	1.5	v	35.1	5.6	33.5	53.4	74	-20.6
4804.00	44.5	Peak	90	1.5	v	32.5	4.9	33.0	48.9	74	-25.1
4804.00	43.5	Peak	120	1.2	h	32.5	4.9	33.0	47.9	74	-26.1
Middle Channel											
2442.00	94.1	Fund/Peak	270	1.8	v	28.1	3.4	35.2	90.4		
2442.00	95.2	Fund/Peak	310	1.5	h	28.1	3.4	35.2	91.5		
2442.00	83.7	Fund/Ave	270	1.8	v	28.1	3.4	35.2	80.0		
2442.00	84.8	Fund/Ave	310	1.5	h	28.1	3.4	35.2	81.1		
7326.00	35.7	Ave	310	1.5	h	35.1	5.6	33.5	42.9	54	-11.1
7326.00	35.2	Ave	180	1.5	v	35.1	5.6	33.5	42.4	54	-11.6
4884.00	32.5	Ave	150	1.5	v	32.5	4.9	33.0	36.9	54	-17.1
4884.00	31.7	Ave	30	1.2	h	32.5	4.9	33.0	36.1	54	-17.9
7326.00	46.4	Peak	310	1.5	h	35.1	5.6	33.5	53.6	74	-20.4
7326.00	45.9	Peak	180	1.5	v	35.1	5.6	33.5	53.1	74	-20.9
4884.00	44.1	Peak	150	1.5	v	32.5	4.9	33.0	48.5	74	-25.5
4884.00	43.2	Peak	30	1.2	h	32.5	4.9	33.0	47.6	74	-26.4

High Channel											
2480.00	95.4	Fund/Peak	180	1.5	v	28.1	3.4	35.2	91.7		
2480.00	93.3	Fund/Peak	110	1.5	h	28.1	3.4	35.2	89.6		
2480.00	95.2	Fund/Ave	180	1.5	v	28.1	3.4	35.2	91.5		
2480.00	93.1	Fund/Ave	110	1.5	h	28.1	3.4	35.2	89.4		
7440.00	35.5	Ave	110	1.2	h	35.1	5.6	33.5	42.7	54	-11.3
7440.00	35.3	Ave	90	1.5	v	35.1	5.6	33.5	42.5	54	-11.5
4960.00	32.9	Ave	0	1.6	v	32.5	4.9	33.0	37.3	54	-16.7
4960.00	31.5	Ave	15	1.8	h	32.5	4.9	33.0	35.9	54	-18.1
7440.00	46.3	Peak	90	1.5	v	35.1	5.6	33.5	53.5	74	-20.5
7440.00	46.1	Peak	110	1.2	h	35.1	5.6	33.5	53.3	74	-20.7
4960.00	44.3	Peak	0	1.6	v	32.5	4.9	33.0	48.7	74	-25.3
4960.00	43.1	Peak	15	1.8	h	32.5	4.9	33.0	47.5	74	-26.5

Frequency MHz	Indicated		Table Height Meter	Antenna		Correction Factor			FCC 15 Subpart B	
	Ampl. dBμV/m	Direction Degree		Polar H/V	Antenna dBμV/m	Cable Loss dBμV/m	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
572.44	36.1	0	1.5	v	19.3	3.0	25.0	33.4	46	-12.6
110.74	42.7	150	1.5	h	11.3	1.5	25.0	30.5	43.5	-13.0
167.21	39.4	90	1.6	h	13.0	1.8	25.0	29.2	43.5	-14.3
357.95	38.4	30	1.2	v	15.5	2.3	25.0	31.2	46	-14.8
228.01	41.7	230	1.5	v	11.8	2.2	25.0	30.7	46	-15.3
328.49	37.3	310	1.8	v	15.5	2.3	25.0	30.1	46	-15.9

Note:

AVG = average

EUT operating in Horizontal plan and turning 360 degree

INDICATED			TABLE	ANTENNA		CORRECTION FACTOR			CORRECTED AMPLITUDE	FCC 15 SUBPART C	
Frequency MHz	Ampl. dBμV/m	Comments	Angle Degree	Height Meter	Polar H/ V	Antenna dBμV/m	Cable DB	Amp. DB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
Low Channel											
2402.00	96.8	Fund/Peak	60	1.5	v	28.1	3.4	35.2	93.1		
2402.00	97.1	Fund/Peak	90	1.8	h	28.1	3.4	35.2	93.4		
2402.00	89.5	Fund/Ave	60	1.5	v	28.1	3.4	35.2	85.8		
2402.00	89.7	Fund/Ave	90	1.8	h	28.1	3.4	35.2	86.0		
7206.00	35.7	Ave	230	1.5	h	35.1	5.6	33.5	42.9	54	-11.1
7206.00	35.4	Ave	210	1.5	v	35.1	5.6	33.5	42.6	54	-11.4
4804.00	32.5	Ave	120	1.5	v	32.5	4.9	33.0	36.9	54	-17.1
4804.00	31.7	Ave	150	1.2	h	32.5	4.9	33.0	36.1	54	-17.9
7206.00	46.5	Peak	230	1.5	h	35.1	5.6	33.5	53.7	74	-20.3
7206.00	46.1	Peak	210	1.5	v	35.1	5.6	33.5	53.3	74	-20.7
4804.00	44.3	Peak	120	1.5	v	32.5	4.9	33.0	48.7	74	-25.3
4804.00	43.2	Peak	150	1.2	h	32.5	4.9	33.0	47.6	74	-26.4
Middle Channel											
2441.00	93.9	Fund/Peak	180	1.8	v	28.1	3.4	35.2	90.2		
2441.00	95.1	Fund/Peak	210	1.5	h	28.1	3.4	35.2	91.4		
2441.00	83.6	Fund/Ave	180	1.8	v	28.1	3.4	35.2	79.9		
2441.00	84.7	Fund/Ave	210	1.5	h	28.1	3.4	35.2	81.0		
7323.00	35.4	Ave	30	1.5	h	35.1	5.6	33.5	42.6	54	-11.4
7323.00	35.1	Ave	0	1.5	v	35.1	5.6	33.5	42.3	54	-11.7
4882.00	32.3	Ave	60	1.5	v	32.5	4.9	33.0	36.7	54	-17.3
4882.00	31.5	Ave	90	1.2	h	32.5	4.9	33.0	35.9	54	-18.1
7323.00	46.2	Peak	30	1.5	h	35.1	5.6	33.5	53.4	74	-20.6
7323.00	45.9	Peak	0	1.5	v	35.1	5.6	33.5	53.1	74	-20.9
4882.00	43.9	Peak	60	1.5	v	32.5	4.9	33.0	48.3	74	-25.7
4882.00	43.1	Peak	90	1.2	h	32.5	4.9	33.0	47.5	74	-26.5

High Channel											
2480.00	95.3	Fund/Peak	120	1.5	v	28.1	3.4	35.2	91.6		
2480.00	93.1	Fund/Peak	90	1.5	h	28.1	3.4	35.2	89.4		
2480.00	84.9	Fund/Ave	120	1.5	v	28.1	3.4	35.2	81.2		
2480.00	82.8	Fund/Ave	90	1.5	h	28.1	3.4	35.2	79.1		
7440.00	35.3	Ave	150	1.2	h	35.1	5.6	33.5	42.5	54	-11.5
7440.00	35.1	Ave	120	1.5	v	35.1	5.6	33.5	42.3	54	-11.7
4960.00	32.7	Ave	60	1.6	v	32.5	4.9	33.0	37.1	54	-16.9
4960.00	31.2	Ave	30	1.8	h	32.5	4.9	33.0	35.6	54	-18.4
7440.00	46.3	Peak	150	1.2	h	35.1	5.6	33.5	53.5	74	-20.5
7440.00	46.1	Peak	120	1.5	v	35.1	5.6	33.5	53.3	74	-20.7
4960.00	44.1	Peak	60	1.6	v	32.5	4.9	33.0	48.5	74	-25.5
4960.00	42.9	Peak	30	1.8	h	32.5	4.9	33.0	47.3	74	-26.7

Frequency MHz	Indicated		Table Height Meter	Antenna		Correction Factor			FCC 15 Subpart B	
	Ampl. dBμV/m	Direction Degree		Polar H/V	Antenna dBμV/m	Cable Loss dBμV/m	Amp. dB	Corr. Ampl. dBμV/m	Limit dBμV/m	Margin dB
572.44	36.5	60	1.5	v	19.3	3.0	25.0	33.8	46	-12.2
110.74	42.5	180	1.5	h	11.3	1.5	25.0	30.3	43.5	-13.2
167.21	39.3	110	1.6	h	13.0	1.8	25.0	29.1	43.5	-14.4
357.95	38.6	15	1.2	v	15.5	2.3	25.0	31.4	46	-14.6
228.01	41.9	270	1.5	v	11.8	2.2	25.0	30.9	46	-15.1
328.49	37.2	330	1.8	v	15.5	2.3	25.0	30.0	46	-16.0

Note:

AVG = average

12 - CONDUCTED EMISSIONS

12.1 Measurement Uncertainty

All measurements involve certain levels of uncertainties. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at BACL is ± 2.4 dB.

12.2 EUT Setup

The measurement was performed in the shielded room, using the same setup per ANSI C63.4-1992 measurement procedure. The specification used was FCC 15 Subpart C limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The host PC system was connected with 120Vac/60Hz power source.

12.3 Spectrum Analyzer Setup

The spectrum analyzer was set with the following configurations during the conduction test:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed.....	Auto
IF Bandwidth.....	10 kHz
Video Bandwidth	10 kHz
Quasi-Peak Adapter Bandwidth.....	9 kHz
Quasi-Peak Adapter Mode.....	Normal

12.4 Test Procedure

During the conducted emission test, the power cord of the host system was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of each modes tested to ensure EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within -4 dB μ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

12.5 Test Equipment

Manufacturer	Description	Serial No.	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	1147 8007 07	2003-12-03

12.6 Summary of Test Results

According to the data in section 11.7, the EUT complies with the FCC Conducted margin for a Class B device, with the *worst* margin reading of:

-7.7 dB μ V at 0.190 MHz in the Neutral mode

12.7 Conducted Emissions Test Data

Frequency MHz	LINE CONDUCTED EMISSIONS			FCC PART 15 CLASS B	
	Amplitude dB μ V	Detector Qp/Ave/Peak	Phase Line/Neutral	Limit dB μ V	Margin dB
0.190	45.3	AVG	Neutral	53	-7.7
0.150	46.2	AVG	Line	56	-9.8
0.150	54.7	QP	Line	66	-11.3
0.190	49.8	QP	Neutral	63	-13.2
1.760	31.7	AVG	Neutral	46	-14.3
0.775	28.5	AVG	Line	46	-17.5
1.760	38.1	QP	Neutral	56	-17.9
0.775	37.0	QP	Line	56	-19.0
5.220	27.8	AVG	Line	50	-22.2
5.220	34.6	QP	Neutral	60	-25.4
5.220	33.9	QP	Line	60	-26.1
5.220	18.2	AVG	Neutral	50	-31.8

12.8 Plot of Conducted Emissions Test Data

Plot(s) of Conducted Emissions Test Data is presented hereinafter as reference.

Bay Area Compliance Laboratory Corp
CLASS B


22. Aug 08 15:04

EUT: PE2080
Manuf: HTC
Op Cond: Normal
Operator: Benjamin
Comment: L

Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	
150k	1M	5k	9k	QP+AV	20ms	10dB LN	OFF	
1M	3M	10k	9k	QP+AV	1ms	10dB LN	OFF	
3M	30M	100k	9k	QP+AV	1ms	10dB LN	OFF	

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

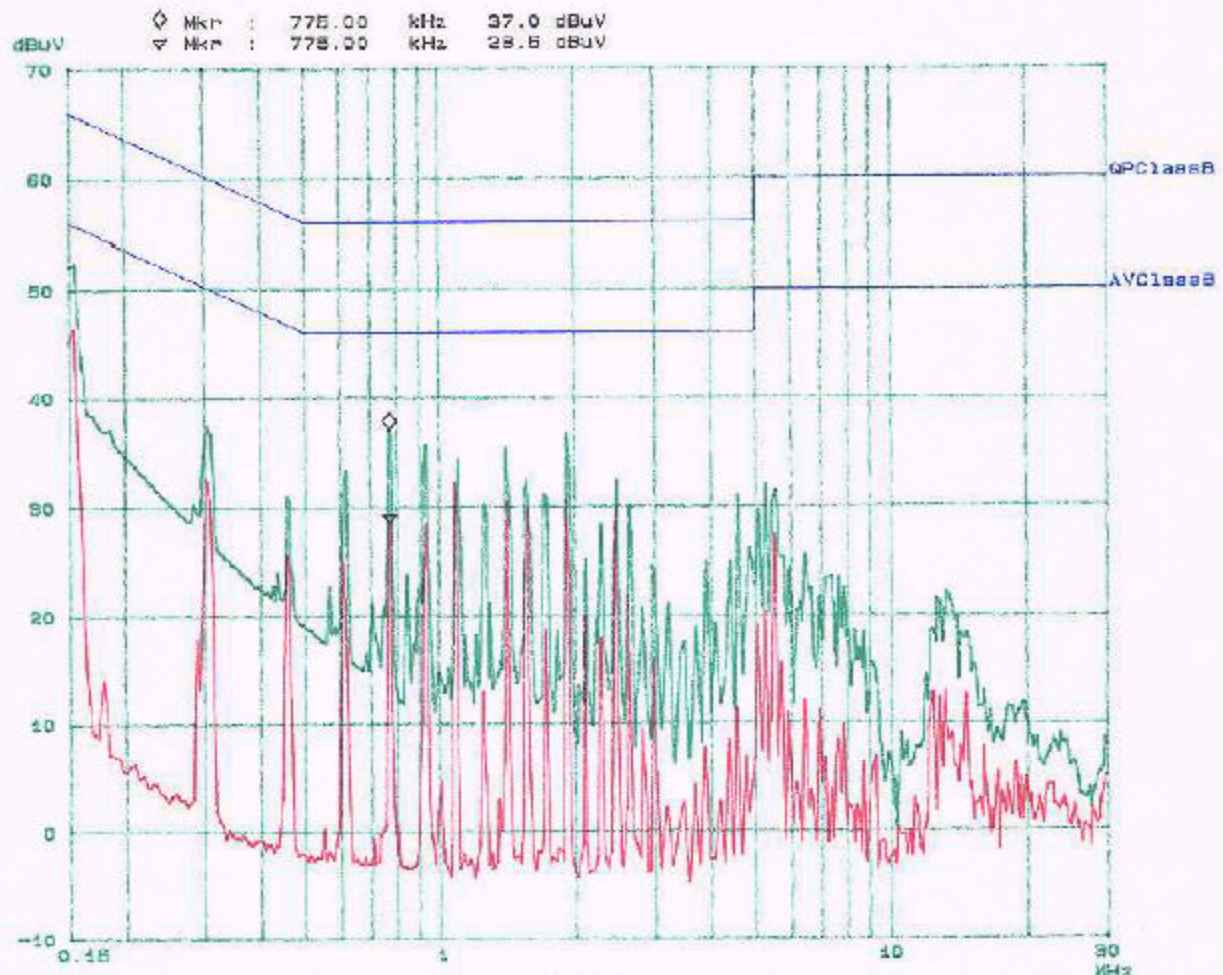

PAGE 1

Ben 2008-8-18

Bay Area Compliance Laboratory Corp
CLASS B


22. Aug 03 19:59

EUT: PR2080
Manuf: HTC
Op Cond: Normal
Operator: Benjamin
Comment: N

Scan Settings (3 Ranges)

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp
150k	1M	5k	9k	QP+AV	20ms	10dB LN	OFF
1M	3M	10k	9k	QP+AV	1ms	10dB LN	OFF
3M	30M	100k	9k	QP+AV	1ms	10dB LN	OFF

Final Measurements: x QP / + AV
Meas Time: 1 s
Subranges: 25
Acc Margin: 6dB

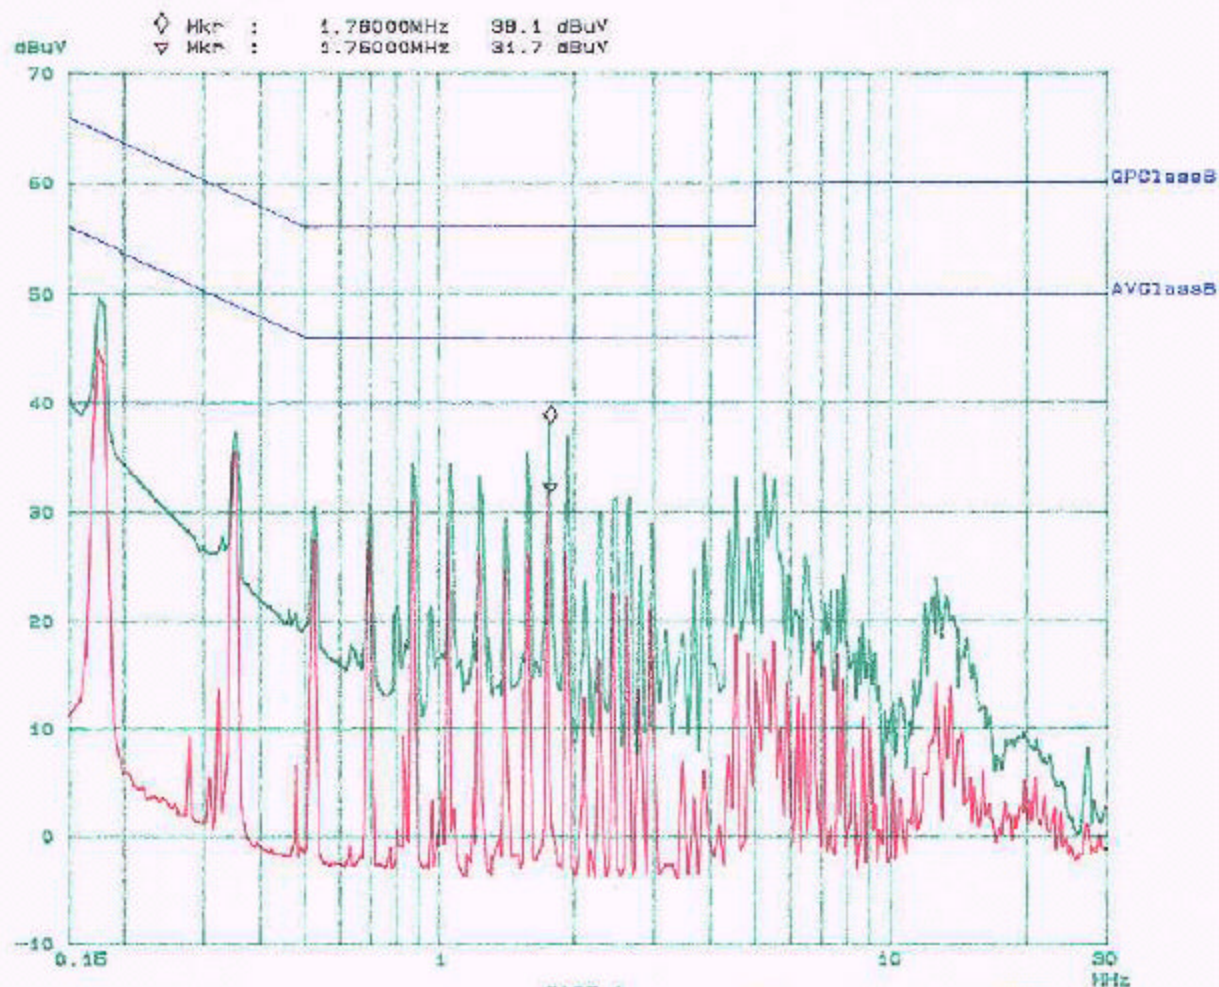

13 - NUMBER OF HOPPING FREQUENCY USED

13.1 Standard Applicable

According to §15.247(a)(1)(iii), frequency hopping systems operating in the 2400-2483.5Mhz band shall use at least 75 hopping frequencies.

13.2 Measurement Procedure


6. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
7. Position the EUT on a bench without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
8. Set the SA on Max-Hold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
9. Set the SA on View mode and then plot the result on SA screen.
10. Repeat above procedures until all frequencies measured were complete.

13.3 Measurement Procedure

Measurement	Standard	Result
79	75	Compliant

13.4 Plots of Number of Hopping Frequency

Please refer to the attached plots.

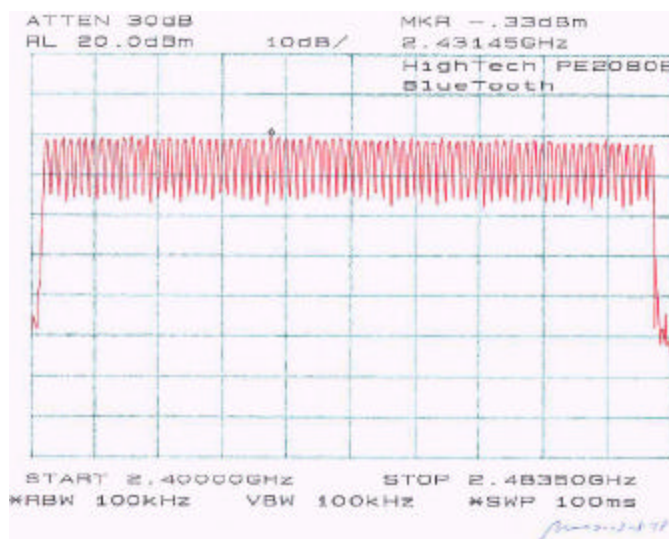

14 - HOPPING CHANNEL SEPARATION

14.1 Standard Applicable




According to §15.247(a)(1), frequency hopping system shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies.

14.2 Measurement Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on a bench without connection to measurement instrument Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the Max-Hold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function, and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

14.3 Measurement Data

Please refer to the attached plots.

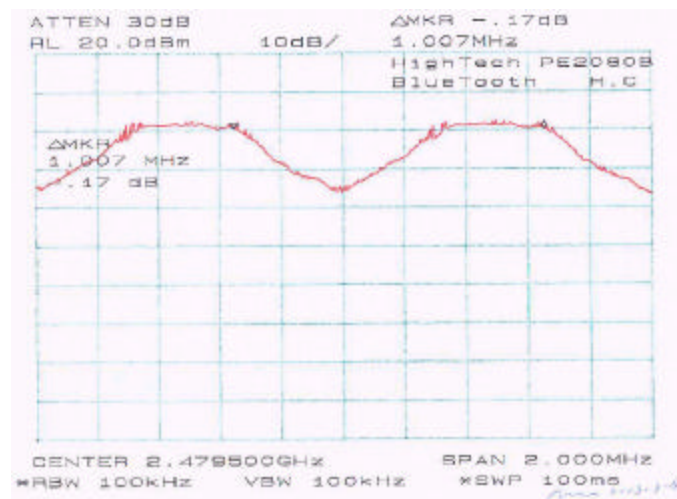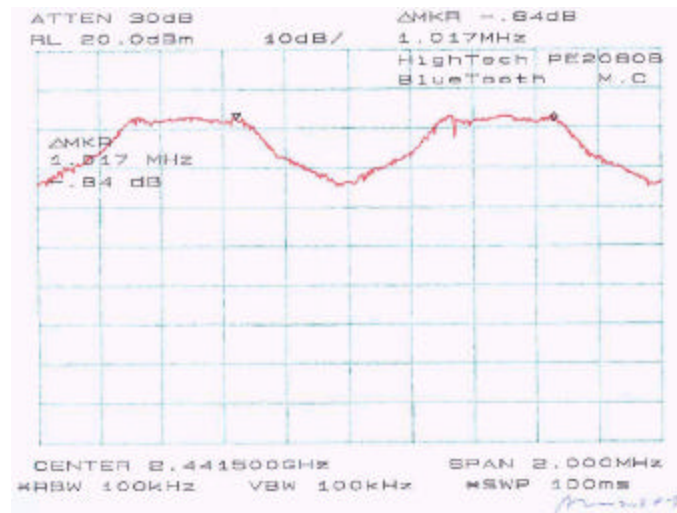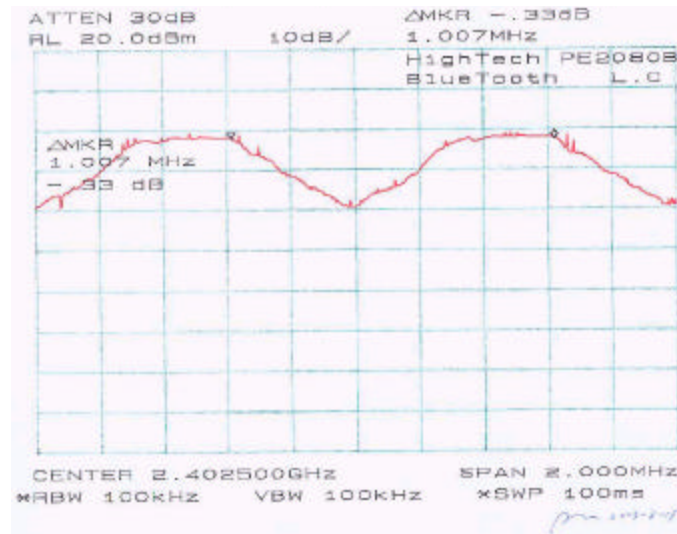

15 - DWELL TIME

15.1 Standard Applicable

According to §15.247 (a)(1)(iii), the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

15.2 Measurement Procedure

5. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
6. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
7. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
8. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
9. Repeat above procedures until all frequencies measured were complete.

15.3 Measurement Results

Low Channel: $4 \times 2.9083 \times 0.0316 = 0.37s < 0.4s$

Mid Channel: $4 \times 2.9250 \times 0.0316 = 0.37s < 0.4s$

High Channel: $4 \times 2.9167 \times 0.0316 = 0.37s < 0.4s$

15.4 Plots of Dwell Time

Please refer the following plots.

