



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2450V2-882\_Feb18**

## CALIBRATION CERTIFICATE

Object **D2450V2 - SN:882**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

BN ✓  
 03-02-2018

Calibration date: **February 07, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)    | Dec-18                 |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)    | Oct-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Claudio Leubler** **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: February 7, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                        |             |
|-------------------------------------|------------------------|-------------|
| <b>DASY Version</b>                 | DASY5                  | V52.10.0    |
| <b>Extrapolation</b>                | Advanced Extrapolation |             |
| <b>Phantom</b>                      | Modular Flat Phantom   |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                  | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm      |             |
| <b>Frequency</b>                    | 2450 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 39.2           | 1.80 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 37.9 $\pm$ 6 % | 1.87 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 13.4 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>52.2 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 6.22 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>24.5 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Body TSL parameters

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Body TSL parameters</b>             | 22.0 °C             | 52.7           | 1.95 mho/m           |
| <b>Measured Body TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 51.4 $\pm$ 6 % | 2.04 mho/m $\pm$ 6 % |
| <b>Body TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | Condition          |                                                |
| SAR measured                                                | 250 mW input power | 12.9 W/kg                                      |
| SAR for nominal Body TSL parameters                         | normalized to 1W   | <b>50.2 W/kg <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                                |
| SAR measured                                                  | 250 mW input power | 5.98 W/kg                                      |
| SAR for nominal Body TSL parameters                           | normalized to 1W   | <b>23.6 W/kg <math>\pm</math> 16.5 % (k=2)</b> |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                               |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | $52.0\ \Omega + 1.3\ j\Omega$ |
| Return Loss                          | - 32.6 dB                     |

### Antenna Parameters with Body TSL

|                                      |                               |
|--------------------------------------|-------------------------------|
| Impedance, transformed to feed point | $48.8\ \Omega + 3.7\ j\Omega$ |
| Return Loss                          | - 28.1 dB                     |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.156 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | October 06, 2011 |

## DASY5 Validation Report for Head TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:882**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 37.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.88, 7.88, 7.88); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 112.2 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 27.1 W/kg

**SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.22 W/kg**

Maximum value of SAR (measured) = 21.6 W/kg

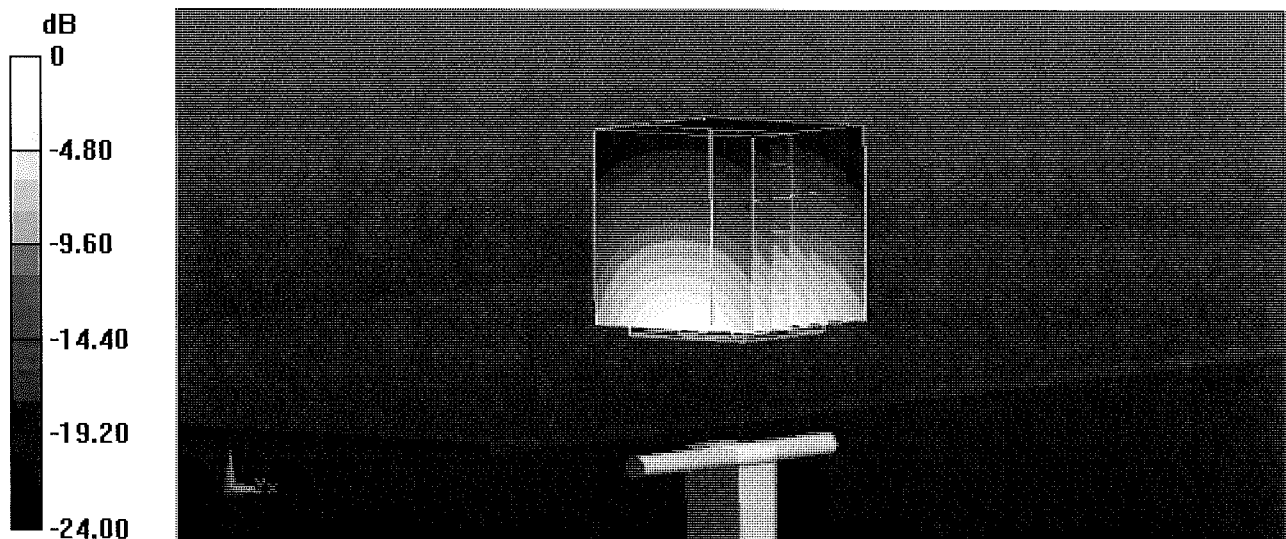


0 dB = 21.6 W/kg = 13.34 dBW/kg

# Impedance Measurement Plot for Head TSL

7 Feb 2018 15:38:37  
 [CH1] S11 1 U FS 1: 52.023  $\Omega$  1.2734  $\Omega$  82.724  $\mu\text{H}$  2 450.000 000 MHz


\*  
 Del  
 CA

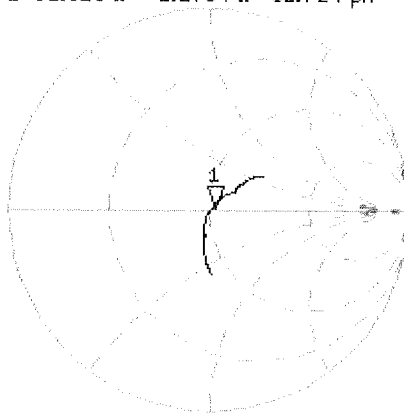

Avg  
 16  
 H1d

CH2 S11 LOG 5 dB/ REF -20 dB 1: -32.606 dB 2 450.000 000 MHz

CA  
 Avg  
 16  
 H1d

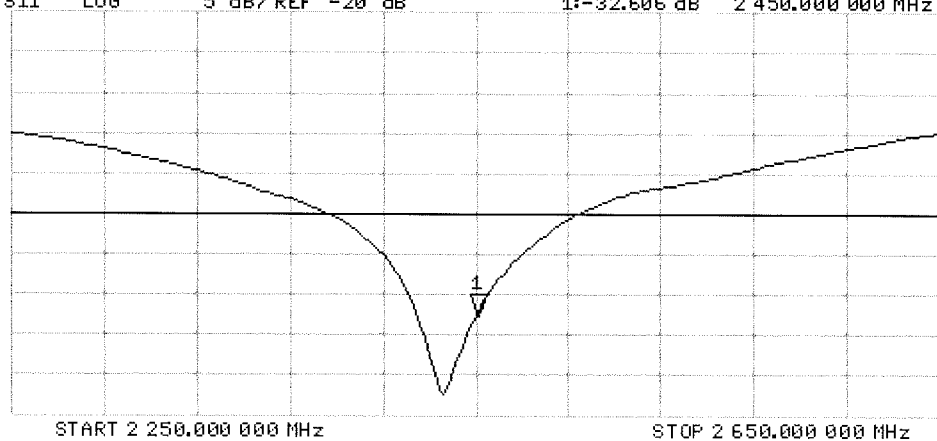

## DASY5 Validation Report for Body TSL

Date: 07.02.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:882**

Communication System: UID 0 - CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 51.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.01, 8.01, 8.01); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 107.8 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 25.9 W/kg

**SAR(1 g) = 12.9 W/kg; SAR(10 g) = 5.98 W/kg**

Maximum value of SAR (measured) = 21.2 W/kg

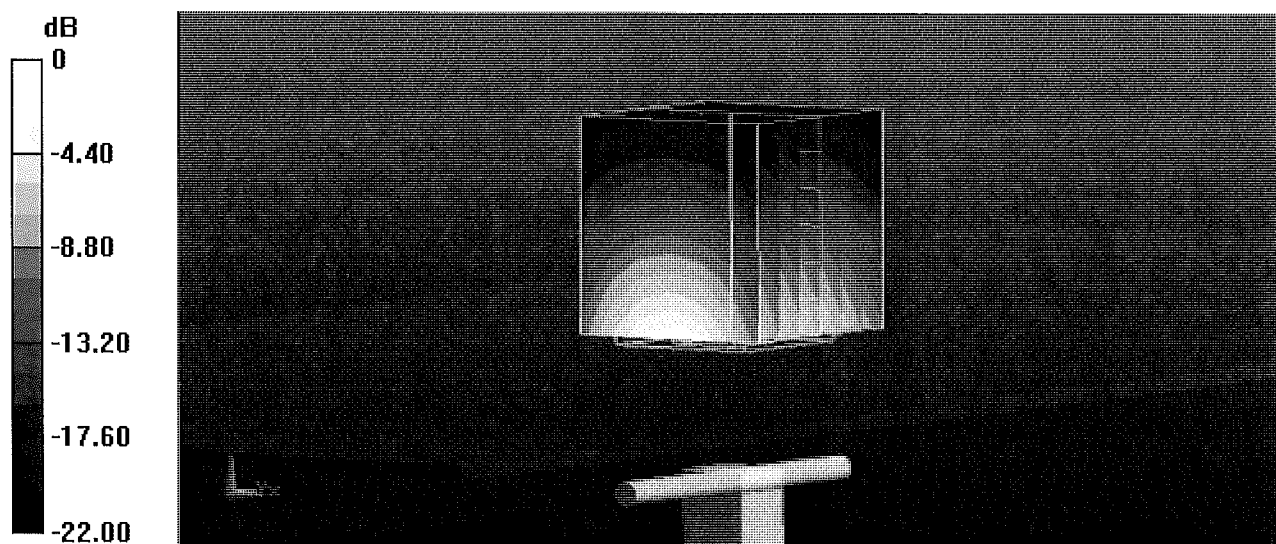

Impedance Measurement Plot for Body TSL

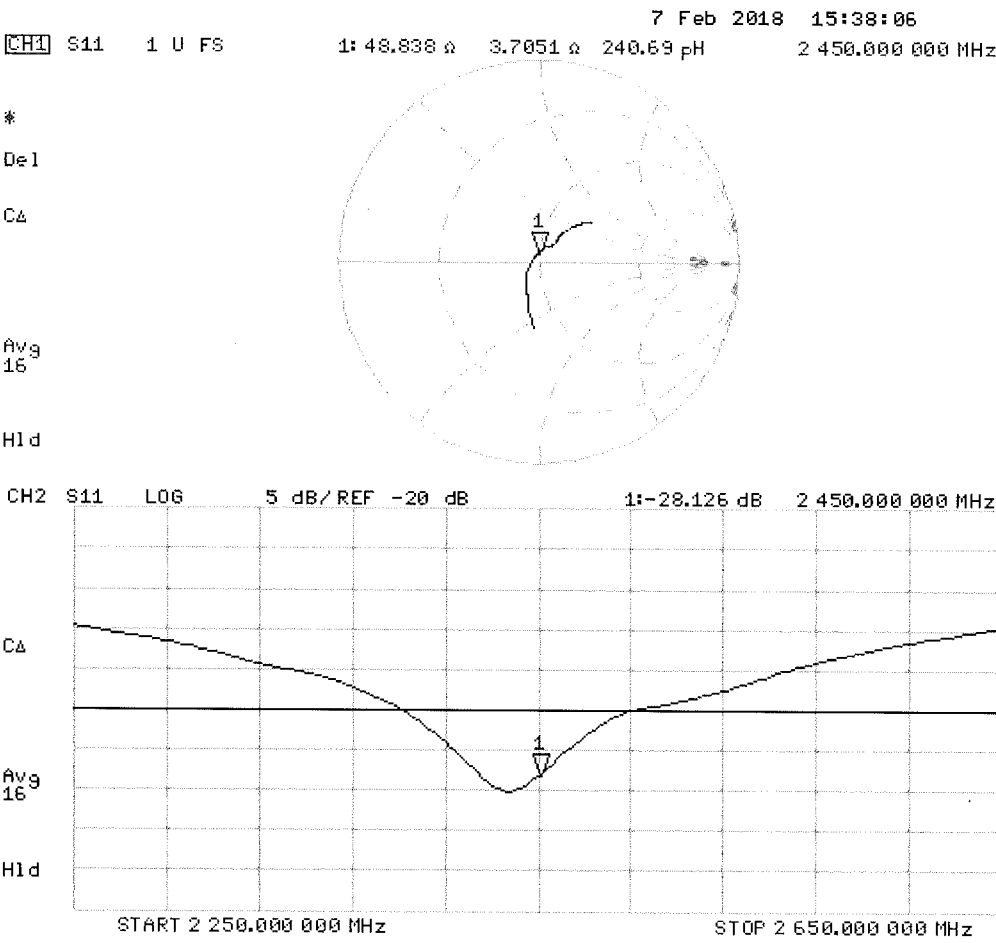





Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1191\_Sep16**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1191**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

*BNV*  
*09-28-2016*  
*Extended*  
*09/2017*  
*SC*

Calibration date: **September 21, 2016**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)         | Apr-17                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)         | Apr-17                 |
| Reference Probe EX3DV4      | SN: 3503           | 30-Jun-16 (No. EX3-3503_Jun16)    | Jun-17                 |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)    | Dec-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Leif Klysner** *Leif Klysner*  
 Name: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** *Katja Pokovic*  
 Name: **Katja Pokovic** Technical Manager

Signature

Issued: September 22, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- b) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- c) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                                                                      |                                  |
|-------------------------------------|----------------------------------------------------------------------|----------------------------------|
| <b>DASY Version</b>                 | DASY5                                                                | V52.8.8                          |
| <b>Extrapolation</b>                | Advanced Extrapolation                                               |                                  |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0                                            |                                  |
| <b>Distance Dipole Center - TSL</b> | 10 mm                                                                | with Spacer                      |
| <b>Zoom Scan Resolution</b>         | dx, dy = 4.0 mm, dz = 1.4 mm                                         | Graded Ratio = 1.4 (Z direction) |
| <b>Frequency</b>                    | 5250 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5750 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|                                                | Temperature         | Permittivity   | Conductivity         |
|------------------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>             | 22.0 °C             | 35.9           | 4.71 mho/m           |
| <b>Measured Head TSL parameters</b>            | (22.0 $\pm$ 0.2) °C | 34.5 $\pm$ 6 % | 4.59 mho/m $\pm$ 6 % |
| <b>Head TSL temperature change during test</b> | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5250 MHz

|                                                             |                    |                                                |
|-------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | Condition          |                                                |
| SAR measured                                                | 100 mW input power | 7.96 W/kg                                      |
| SAR for nominal Head TSL parameters                         | normalized to 1W   | <b>78.9 W/kg <math>\pm</math> 19.9 % (k=2)</b> |

|                                                               |                    |                                                |
|---------------------------------------------------------------|--------------------|------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                |
| SAR measured                                                  | 100 mW input power | 2.29 W/kg                                      |
| SAR for nominal Head TSL parameters                           | normalized to 1W   | <b>22.6 W/kg <math>\pm</math> 19.5 % (k=2)</b> |

## Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.0 ± 6 %   | 4.93 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5600 MHz

|                                                       |                    |                            |
|-------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                            |
| SAR measured                                          | 100 mW input power | 8.45 W/kg                  |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 83.6 W / kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.41 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.8 W/kg ± 19.5 % (k=2) |

## Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.4         | 5.22 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 33.8 ± 6 %   | 5.08 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

## SAR result with Head TSL at 5750 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.99 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 79.1 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.27 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.4 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.36 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.4 ± 6 %   | 5.52 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5250 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.74 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 77.0 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.17 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.6 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.8 ± 6 %   | 6.00 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5600 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.96 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 79.2 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.24 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 22.2 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.3         | 5.94 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.5 ± 6 %   | 6.21 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5750 MHz

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 100 mW input power | 7.65 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 76.1 W/kg ± 19.9 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 100 mW input power | 2.14 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.2 W/kg ± 19.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 55.7 $\Omega$ - 4.3 j $\Omega$ |
| Return Loss                          | - 23.4 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 58.3 $\Omega$ - 3.2 j $\Omega$ |
| Return Loss                          | - 21.8 dB                      |

### Antenna Parameters with Head TSL at 5750 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 58.1 $\Omega$ + 4.8 j $\Omega$ |
| Return Loss                          | - 21.2 dB                      |

### Antenna Parameters with Body TSL at 5250 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 56.1 $\Omega$ - 3.7 j $\Omega$ |
| Return Loss                          | - 23.4 dB                      |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 58.9 $\Omega$ - 1.7 j $\Omega$ |
| Return Loss                          | - 21.7 dB                      |

### Antenna Parameters with Body TSL at 5750 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 59.5 $\Omega$ + 6.9 j $\Omega$ |
| Return Loss                          | - 19.4 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.204 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                 |
|-----------------|-----------------|
| Manufactured by | SPEAG           |
| Manufactured on | August 28, 2003 |

## DASY5 Validation Report for Head TSL

Date: 21.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.59$  S/m;  $\epsilon_r = 34.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.93$  S/m;  $\epsilon_r = 34$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.08$  S/m;  $\epsilon_r = 33.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.42, 5.42, 5.42); Calibrated: 30.06.2016, ConvF(4.89, 4.89, 4.89); Calibrated: 30.06.2016, ConvF(4.85, 4.85, 4.85); Calibrated: 30.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 68.49 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.6 W/kg

**SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.29 W/kg**

Maximum value of SAR (measured) = 18.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.34 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 32.9 W/kg

**SAR(1 g) = 8.45 W/kg; SAR(10 g) = 2.41 W/kg**

Maximum value of SAR (measured) = 20.0 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm


Reference Value = 67.15 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 32.3 W/kg

**SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.27 W/kg**


Maximum value of SAR (measured) = 19.3 W/kg



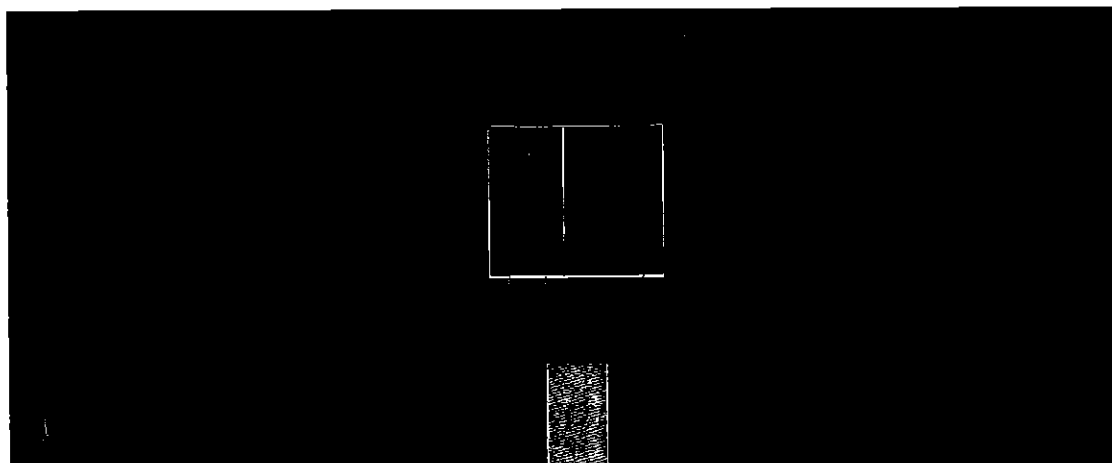

0 dB = 18.2 W/kg = 12.60 dBW/kg

Impedance Measurement Plot for Head TSL

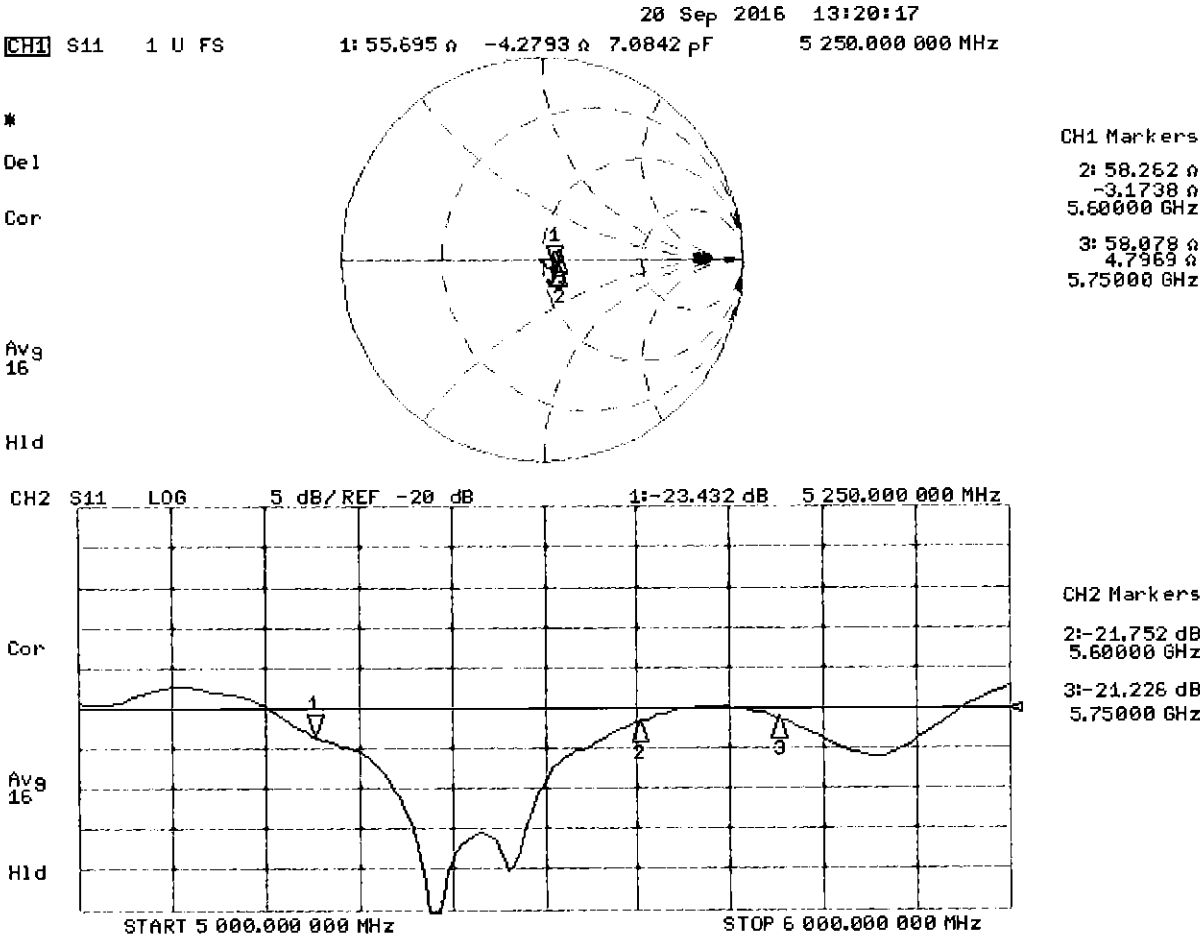

## DASY5 Validation Report for Body TSL

Date: 20.09.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1191**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 5.52$  S/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5600$  MHz;  $\sigma = 6$  S/m;  $\epsilon_r = 46.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>, Medium parameters used:  $f = 5750$  MHz;  $\sigma = 6.21$  S/m;  $\epsilon_r = 46.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(4.85, 4.85, 4.85); Calibrated: 30.06.2016, ConvF(4.35, 4.35, 4.35); Calibrated: 30.06.2016, ConvF(4.3, 4.3, 4.3); Calibrated: 30.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.49 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 29.1 W/kg

**SAR(1 g) = 7.74 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 17.7 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.85 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.5 W/kg

**SAR(1 g) = 7.96 W/kg; SAR(10 g) = 2.24 W/kg**

Maximum value of SAR (measured) = 18.8 W/kg



**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.21 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 7.65 W/kg; SAR(10 g) = 2.14 W/kg**

Maximum value of SAR (measured) = 18.5 W/kg

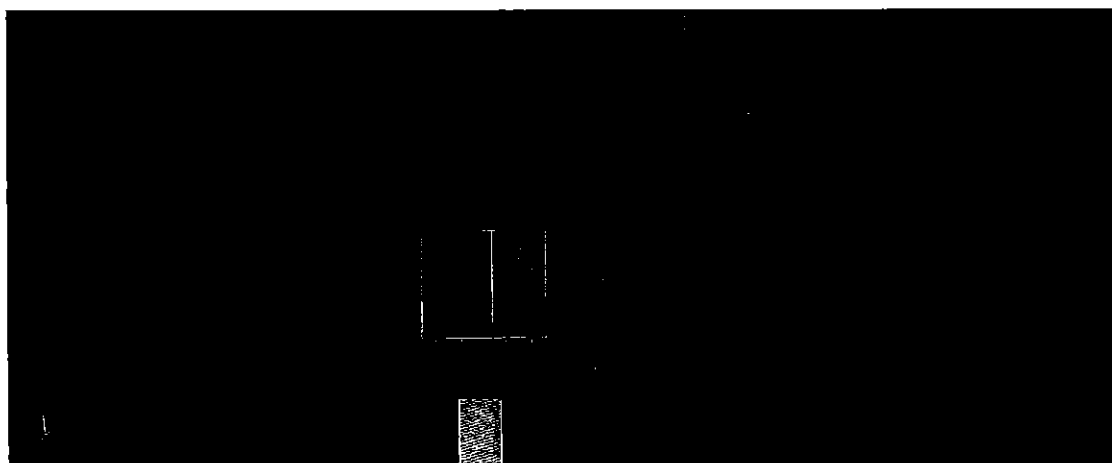


0 dB = 17.7 W/kg = 12.48 dBW/kg

# Impedance Measurement Plot for Body TSL

20 Sep 2016 13:19:13  
 CH1 S11 1 U FS 1: 56.143  $\Omega$  -3.6992  $\Omega$  8.1950 pF 5 250.000 000 MHz


\*  
 Del  
 Cor  
 Avg  
 16  
 H1d

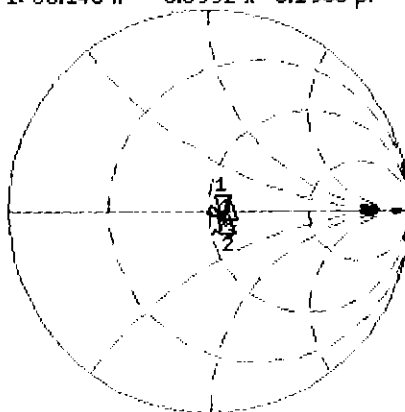

CH1 Markers  
 2: 58.887  $\Omega$   
 -1.6504  $\Omega$   
 5.60000 GHz  
 3: 59.510  $\Omega$   
 6.9121  $\Omega$   
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -23.406 dB 5 250.000 000 MHz

Cor  
 Avg  
 16  
 H1d

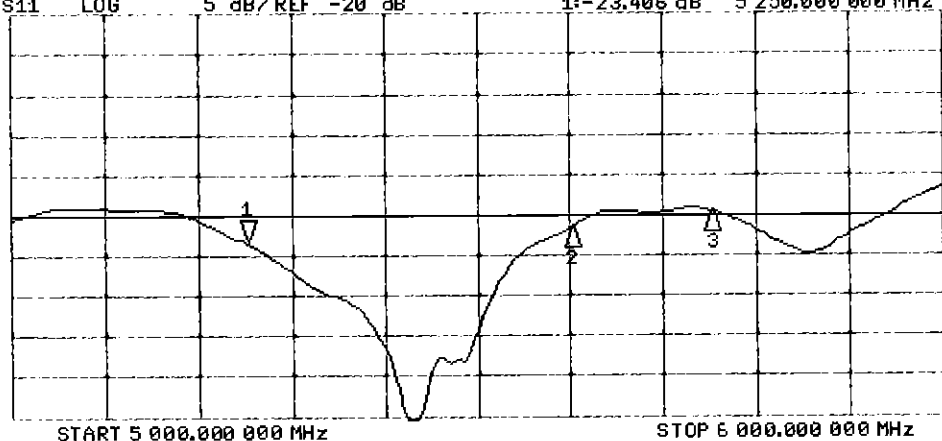

CH2 Markers  
 2: -21.616 dB  
 5.60000 GHz  
 3: -19.400 dB  
 5.75000 GHz

# Certification of Calibration

Object D5GHzV2 – SN: 1191

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.


Extension Calibration date: 9/19/2017

Description: SAR Validation Dipole at 5250, 5600, and 5750 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 1551G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight              | 772D      | Dual Directional Coupler                                | CBT        | N/A          | CBT        | MY52180215    |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 10/26/2016 | Annual       | 10/26/2017 | US39170118    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 5/10/2017  | Annual       | 5/10/2018  | 1070          |
| SPEAG                 | EX3DV4    | SAR Probe                                               | 1/13/2017  | Annual       | 1/13/2018  | 3589          |
| SPEAG                 | EX3DV4    | SAR Probe                                               | 2/13/2017  | Annual       | 2/13/2018  | 3914          |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 1/16/2017  | Annual       | 1/16/2018  | 1466          |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 2/9/2017   | Annual       | 2/9/2018   | 665           |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1339018       |
| Anritsu               | ML2495A   | Power Meter                                             | 10/16/2015 | Biennial     | 10/16/2017 | 941001        |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 2/28/2017  | Annual       | 2/28/2018  | MY47420800    |
| Seekonk               | NC-100    | Torque Wrench                                           | 11/6/2015  | Biennial     | 11/6/2017  | N/A           |
| MiniCircuits          | VLF-6000+ | Low Pass Filter                                         | CBT        | N/A          | CBT        | N/A           |
| Narda                 | 4014C-6   | 4 - 8 GHz SMA 6 dB Directional Coupler                  | CBT        | N/A          | CBT        | N/A           |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature                                                                             |
|----------------|------------------|--------------------------|---------------------------------------------------------------------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            |  |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager |  |

# DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:


1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

| Frequency (MHz) | Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (10 W/kg @ 17.0 dBm) | Measured Head SAR (10g W/kg @ 17.0 dBm) | Deviation 1g (%) | Certificate SAR Target Head (10g W/kg @ 17.0 dBm) | Measured Head SAR (10g W/kg @ 17.0 dBm) | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|-----------------|------------------|----------------|-----------------------------------|--------------------------------------------------|-----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 6250            | 9/21/2016        | 9/19/2017      | 1.204                             | 3.95                                             | 3.70                                    | -6.21%           | 1.13                                              | 1.05                                    | -7.08%            | 55.7                                  | 53.4                               | 2.3                   | -4.3                                       | -6.4                                    | 2.1                        | -23.4                             | -26.9                          | -15.00%       | PASS      |
| 5600            | 9/21/2016        | 9/19/2017      | 1.204                             | 4.18                                             | 4.03                                    | -3.59%           | 1.19                                              | 1.13                                    | -5.04%            | 58.3                                  | 55.6                               | 2.7                   | -3.2                                       | -1.2                                    | 2.0                        | -21.8                             | -26.1                          | -19.80%       | PASS      |
| 8750            | 9/21/2016        | 9/19/2017      | 1.204                             | 3.95                                             | 3.94                                    | -0.38%           | 1.12                                              | 1.10                                    | -1.79%            | 58.1                                  | 57.4                               | 0.7                   | 4.8                                        | 3.2                                     | 1.6                        | -21.2                             | -21.0                          | 0.90%         | PASS      |



| Frequency (MHz) | Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (10 W/kg @ 17.0 dBm) | Measured Body SAR (10g W/kg @ 17.0 dBm) | Deviation 1g (%) | Certificate SAR Target Body (10g W/kg @ 17.0 dBm) | Measured Body SAR (10g W/kg @ 17.0 dBm) | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
|-----------------|------------------|----------------|-----------------------------------|--------------------------------------------------|-----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 6250            | 9/21/2016        | 9/19/2017      | 1.204                             | 3.85                                             | 3.80                                    | -1.30%           | 1.08                                              | 1.06                                    | -1.85%            | 55.1                                  | 54.0                               | 2.1                   | -3.7                                       | -3.3                                    | 0.4                        | -23.4                             | -26.0                          | -11.10%       | PASS      |
| 5600            | 9/21/2016        | 9/19/2017      | 1.204                             | 3.95                                             | 4.06                                    | 2.53%            | 1.11                                              | 1.13                                    | 1.80%             | 58.9                                  | 56.5                               | 2.4                   | -1.7                                       | 0.5                                     | 2.2                        | -21.7                             | -24.5                          | -12.80%       | PASS      |
| 8750            | 9/21/2016        | 9/19/2017      | 1.204                             | 3.81                                             | 3.66                                    | -3.81%           | 1.06                                              | 1.02                                    | -3.77%            | 59.5                                  | 58.0                               | 1.5                   | 6.9                                        | 5.2                                     | 1.7                        | -19.4                             | -21.1                          | -8.70%        | PASS      |

Impedance & Return-Loss Measurement Plot for Head TSL

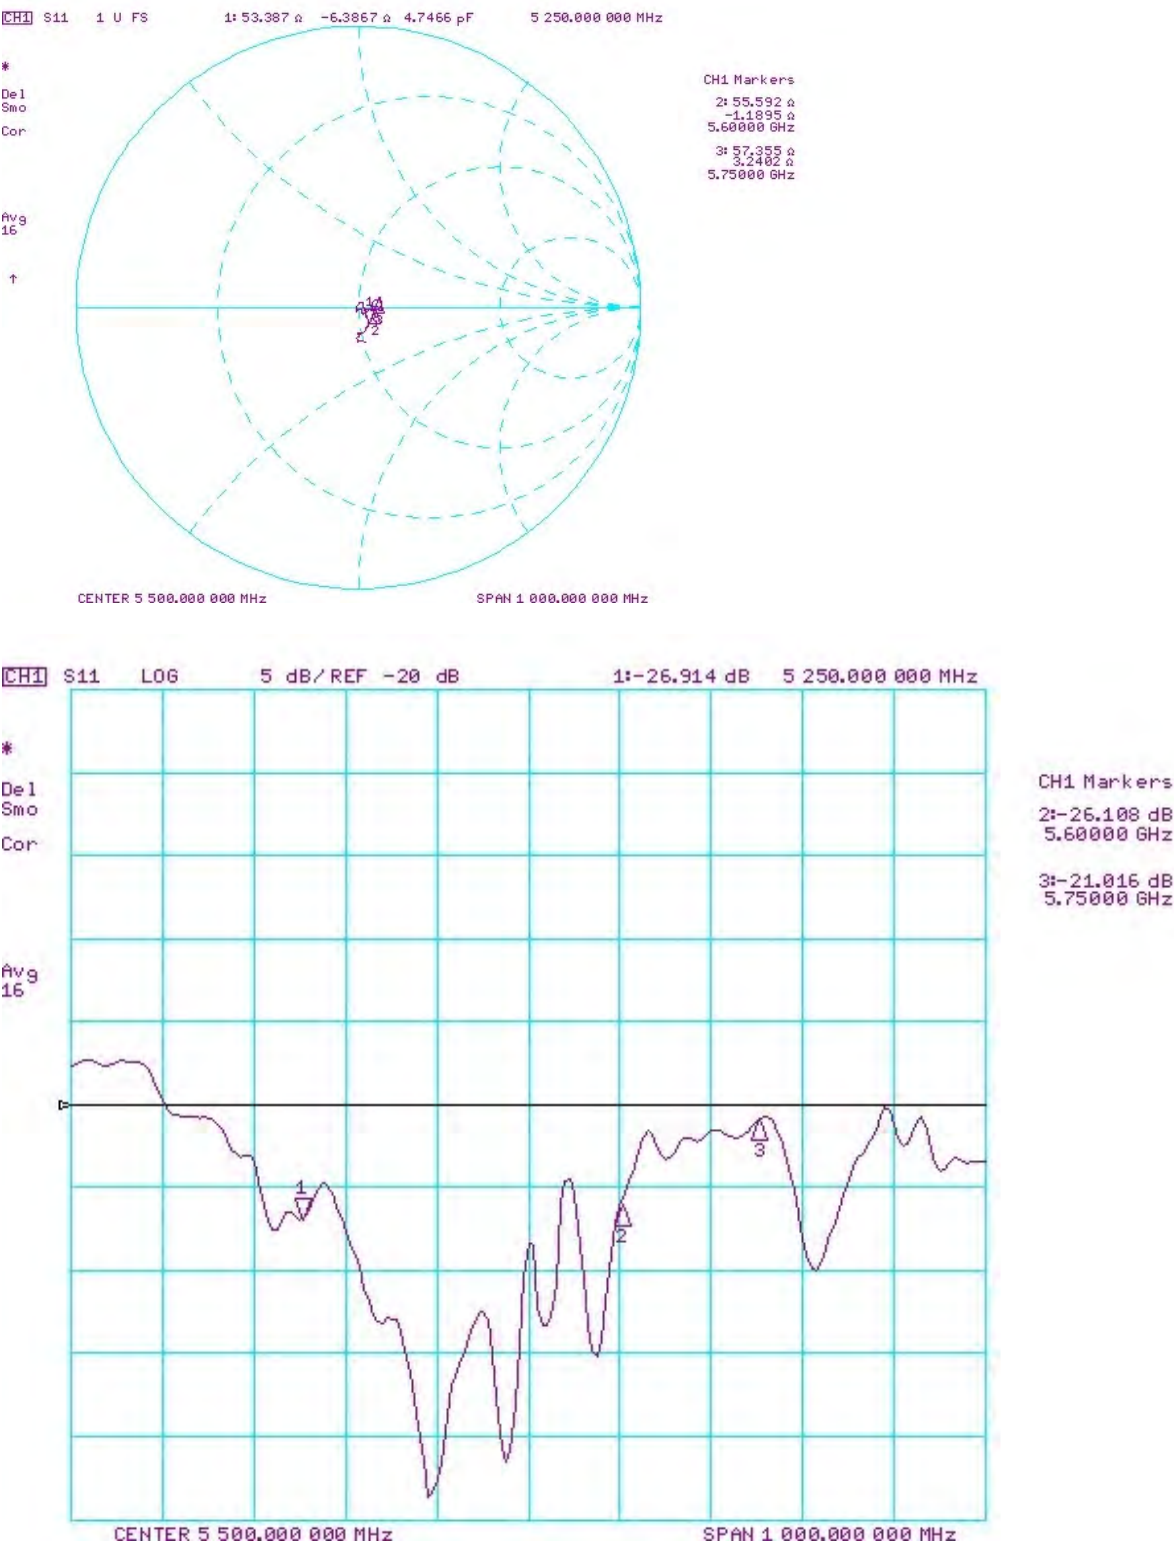



Impedance & Return-Loss Measurement Plot for Body TSL

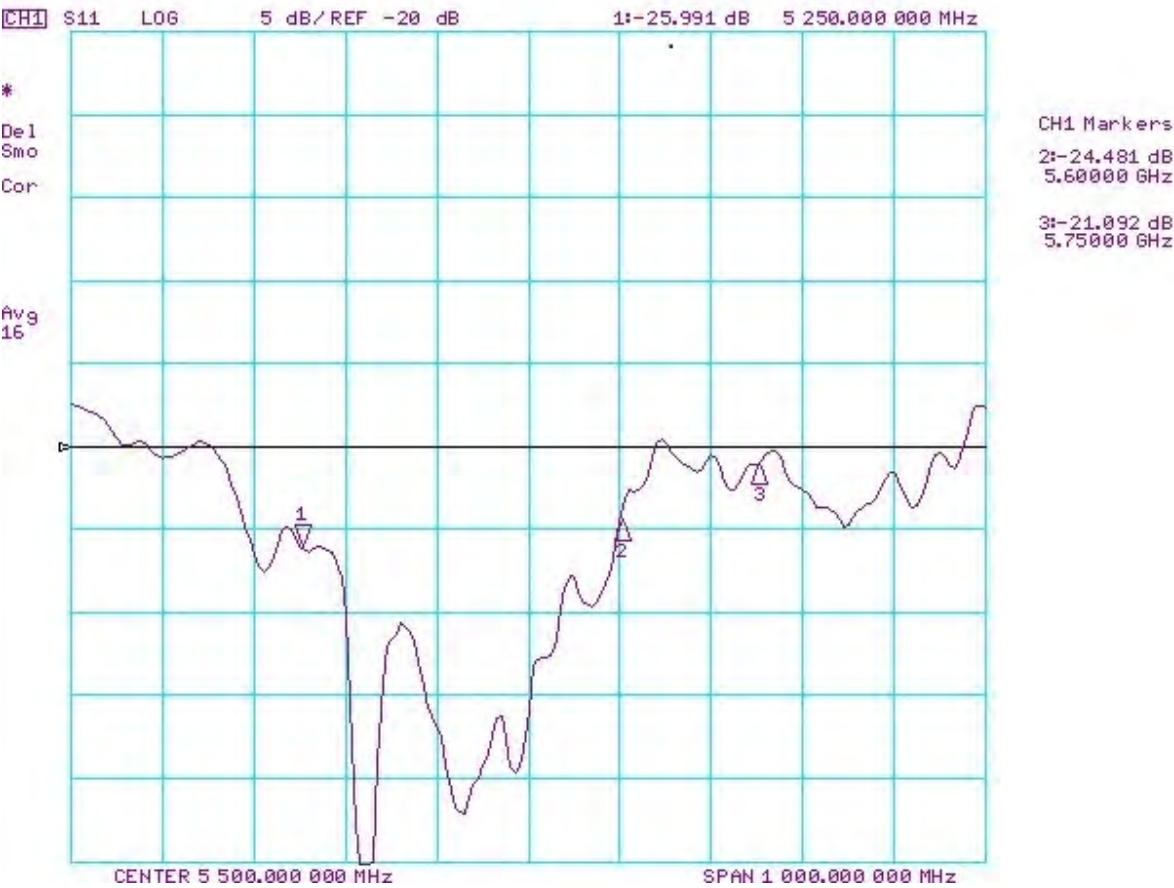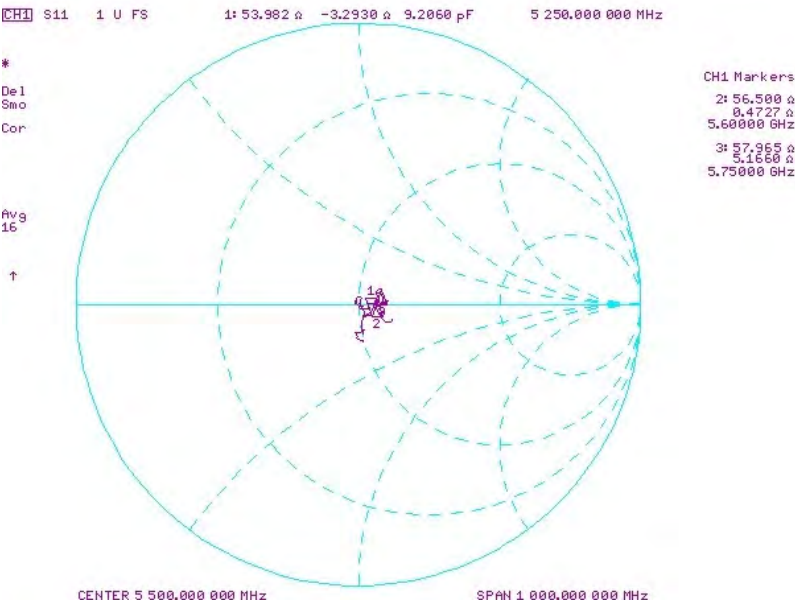



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d047\_Jul16**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d047**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 13, 2016**

BNV  
7/16/2016

Extended  
7/2017  
SCV

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289)   | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)         | Apr-17                 |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)         | Apr-17                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)         | Apr-17                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)         | Apr-17                 |
| Reference Probe EX3DV4      | SN: 7349           | 15-Jun-16 (No. EX3-7349_Jun16)    | Jun-17                 |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)    | Dec-16                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Jeton Kastrati** Name: **Jeton Kastrati** Function: **Laboratory Technician** Signature:

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager** Signature:

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 835 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.5           | 0.90 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 40.6 $\pm$ 6 % | 0.94 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.37 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 9.13 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.53 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.95 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.2           | 0.97 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 54.9 $\pm$ 6 % | 1.01 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.47 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 9.57 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.60 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 6.24 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.8 $\Omega$ - 5.9 j $\Omega$ |
| Return Loss                          | - 24.5 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 45.8 $\Omega$ - 8.2 j $\Omega$ |
| Return Loss                          | - 20.3 dB                      |

### General Antenna Parameters and Design

|                                  |         |
|----------------------------------|---------|
| Electrical Delay (one direction) | None ns |
|----------------------------------|---------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                 |
|-----------------|-----------------|
| Manufactured by | SPEAG           |
| Manufactured on | August 16, 2006 |

## DASY5 Validation Report for Head TSL

Date: 13.07.201

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d047**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 40.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.72, 9.72, 9.72); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 60.98 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.56 W/kg

**SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.53 W/kg**

Maximum value of SAR (measured) = 3.17 W/kg

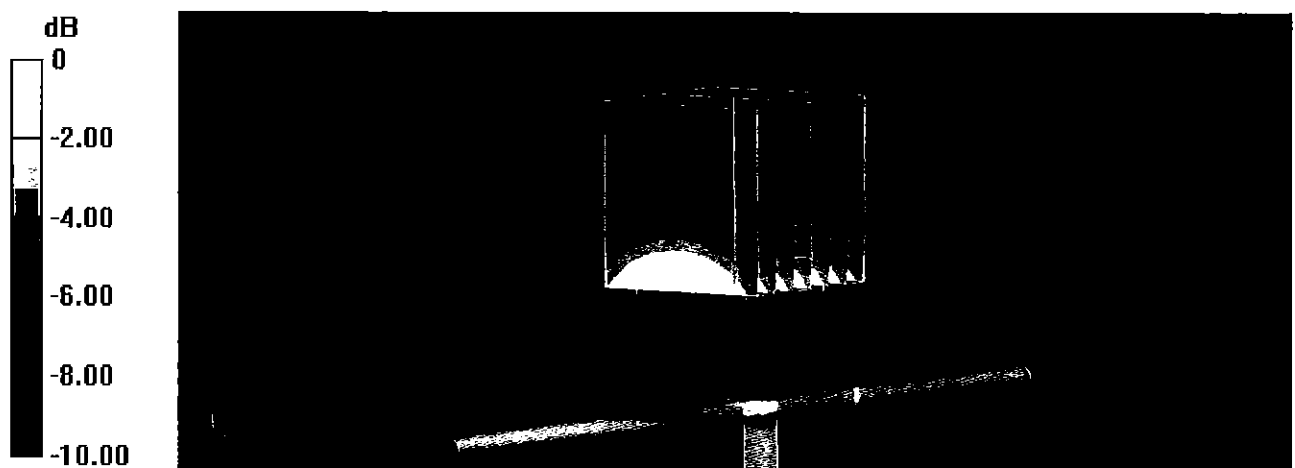


0 dB = 3.17 W/kg = 5.01 dBW/kg

# Impedance Measurement Plot for Head TSL

13 Jul 2016 12:00:27  
 CH1 S11 1 U FS 1: 49.820  $\Omega$  -5.9316  $\Omega$  32.134 pF 835.000 000 MHz

\*  
 Del  
 CA

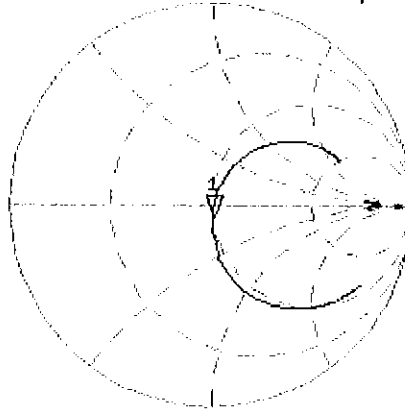

Avg  
 16


H1 d

CH2 S11 LOG 5 dB/REF -20 dB 1:-24.525 dB 835.000 000 MHz

CA

Avg  
 16

H1 d

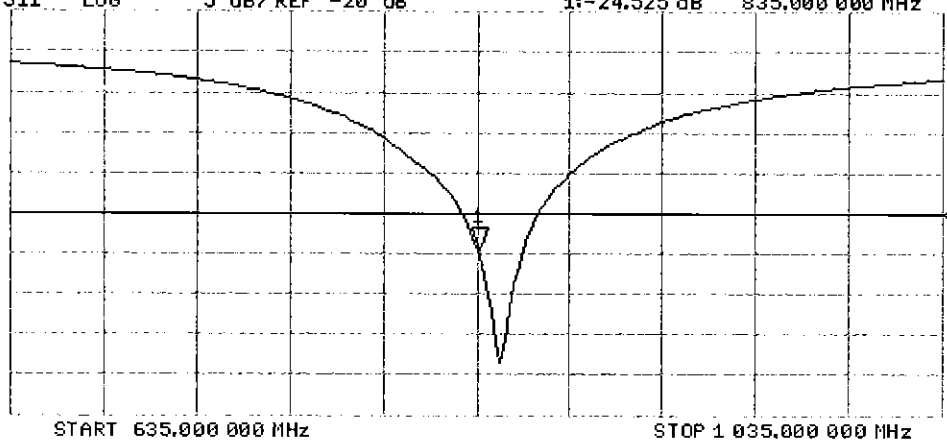

## DASY5 Validation Report for Body TSL

Date: 13.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d047**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 1.01 \text{ S/m}$ ;  $\epsilon_r = 54.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.73, 9.73, 9.73); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### Dipole Calibration for Body Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.88 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 2.47 W/kg; SAR(10 g) = 1.6 W/kg**


Maximum value of SAR (measured) = 3.27 W/kg



0 dB = 3.27 W/kg = 5.15 dBW/kg



Impedance Measurement Plot for Body TSL

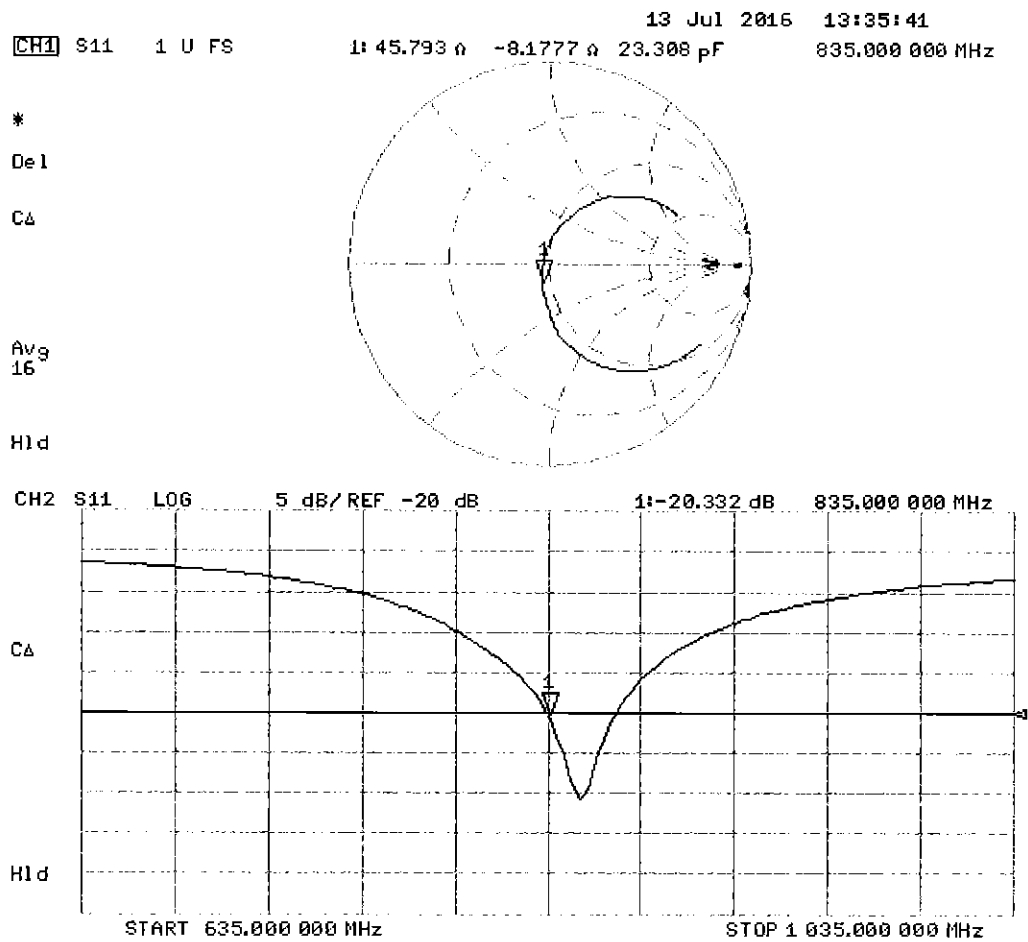

# Certification of Calibration

Object D835V2 – SN: 4d047

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 13, 2017

Description: SAR Validation Dipole at 835 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 1551G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 10/26/2016 | Annual       | 10/26/2017 | US39170118    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 3/8/2017   | Annual       | 3/8/2018   | 1368          |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 3/13/2017  | Annual       | 3/13/2018  | 1415          |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 5/10/2017  | Annual       | 5/10/2018  | 1070          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 3/14/2017  | Annual       | 3/14/2018  | 3209          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 3/14/2017  | Annual       | 3/14/2018  | 3319          |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1339018       |
| Anritsu               | ML2495A   | Power Meter                                             | 10/16/2015 | Biennial     | 10/16/2017 | 941001        |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 2/28/2017  | Annual       | 2/28/2018  | MY47420800    |
| Seekonk               | NC-100    | Torque Wrench                                           | 11/6/2015  | Biennial     | 11/6/2017  | N/A           |
| Mini-Circuits         | NLP-2950+ | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |
| Pasternack            | PE2208-6  | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature               |
|----------------|------------------|--------------------------|-------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            | <i>BRODIE HALFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>              |

# DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.



The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:

| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 23.0 dBm | Measured Head SAR (1g) W/kg @ 23.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 23.0 dBm | Measured Head SAR (10g) W/kg @ 23.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--------------------------------------------------|----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 7/13/2016        | 7/13/2017      | 0                                 | 1.83                                             | 1.95                                   | 6.79%            | 1.19                                              | 1.28                                    | 7.56%             | 49.8                                  | 50.8                               | 1                     | -5.9                                       | -2.3                                    | 3.6                        | -24.5                             | -26.2                          | -15.10%       | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 23.0 dBm | Measured Body SAR (1g) W/kg @ 23.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 23.0 dBm | Measured Body SAR (10g) W/kg @ 23.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 7/13/2016        | 7/13/2017      | 0                                 | 1.91                                             | 1.99                                   | 3.97%            | 1.25                                              | 1.31                                    | 4.97%             | 45.8                                  | 46.3                               | 0.5                   | -8.2                                       | -6.7                                    | 1.5                        | -20.3                             | -22.5                          | -10.80%       | PASS      |

Impedance & Return-Loss Measurement Plot for Head TSL

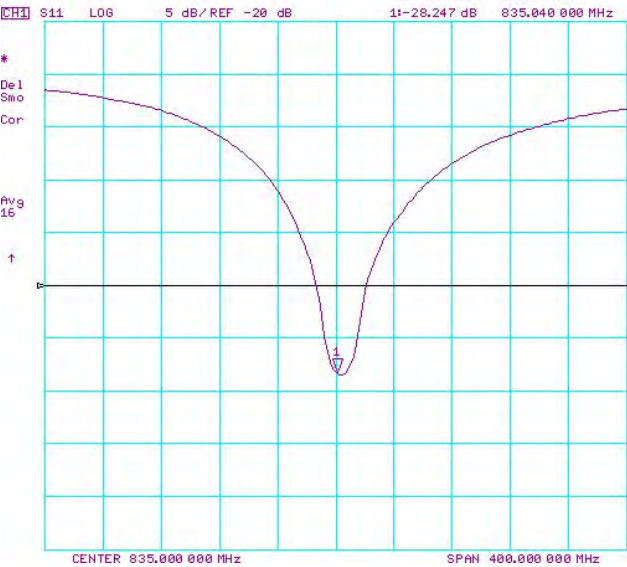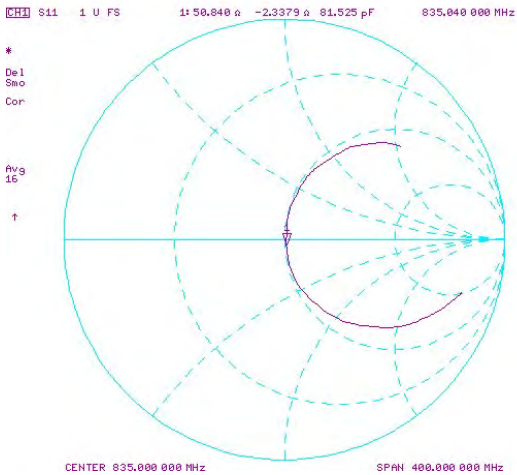

Impedance & Return-Loss Measurement Plot for Body TSL

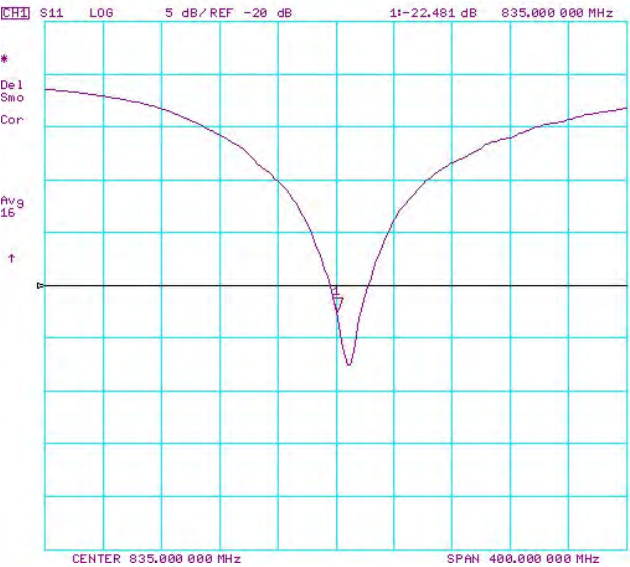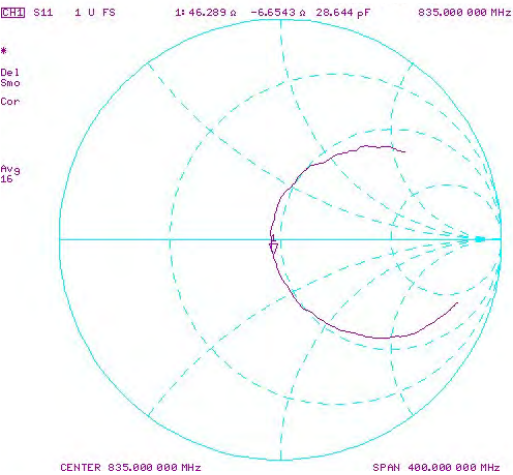



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1750V2-1148\_May17**

## CALIBRATION CERTIFICATE

Object **D1750V2 - SN:1148**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **May 09, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522) | Apr-18                |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)       | Apr-18                |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)       | Apr-18                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)       | Apr-18                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)       | Apr-18                |
| Reference Probe EX3DV4      | SN: 7349           | 31-Dec-16 (No. EX3-7349_Dec16)  | Dec-17                |
| DAE4                        | SN: 601            | 28-Mar-17 (No. DAE4-601_Mar17)  | Mar-18                |

| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | SN: GB37480704 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A     | SN: US37292783 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A     | SN: MY41092317 | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06   | SN: 100972     | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

Calibrated by: **Claudio Leubler** Name  
**Laboratory Technician** Function

Approved by: **Katja Pokovic** Name  
**Technical Manager** Function

Signature

Issued: May 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.0    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1750 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 40.1           | 1.37 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.0 $\pm$ 6 % | 1.36 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 9.11 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 36.4 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 4.83 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 19.3 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 53.4           | 1.49 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 53.7 $\pm$ 6 % | 1.47 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 9.17 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 37.0 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 4.93 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 19.8 W/kg $\pm$ 16.5 % (k=2) |



## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.8 $\Omega$ - 0.7 j $\Omega$ |
| Return Loss                          | - 42.9 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 45.7 $\Omega$ - 0.5 j $\Omega$ |
| Return Loss                          | - 26.9 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.223 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 30, 2014 |

## DASY5 Validation Report for Head TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 39$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.46, 8.46, 8.46); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**



Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 105.4 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.5 W/kg

**SAR(1 g) = 9.11 W/kg; SAR(10 g) = 4.83 W/kg**

Maximum value of SAR (measured) = 13.9 W/kg

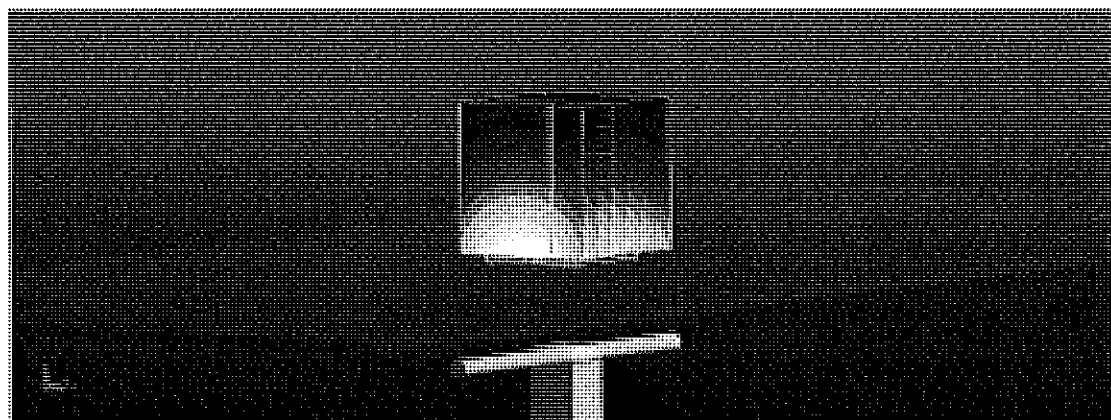

0 dB = 13.9 W/kg = 11.43 dBW/kg

## Impedance Measurement Plot for Head TSL


9 May 2017 14:43:11  
[CH1] S11 1 U FS 1: 49.777  $\Omega$  -683.59 m $\Omega$  133.04 pF 1 750.000 000 MHz

\*  
De1

CA

AVG  
16

H1d

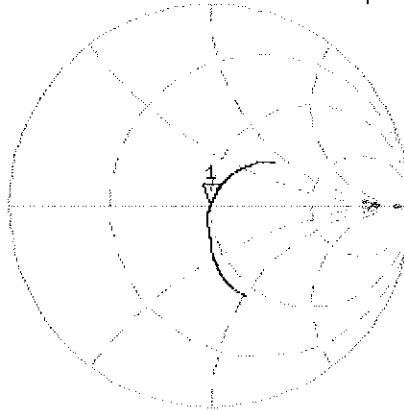


CH2 S11 LOG 5 dB/REF -20 dB 1: -42.893 dB 1 750.000 000 MHz

CA

AVG  
16

H1d

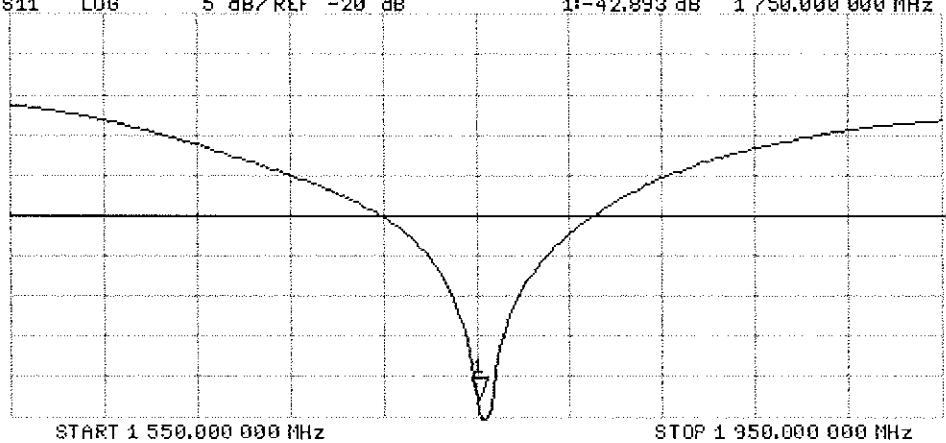

## DASY5 Validation Report for Body TSL

Date: 09.05.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: D1750V2 - SN:1148**

Communication System: UID 0 - CW; Frequency: 1750 MHz

Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.25, 8.25, 8.25); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1442); SEMCAD X 14.6.10(7413)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.49 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 15.9 W/kg

**SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.93 W/kg**

Maximum value of SAR (measured) = 13.1 W/kg


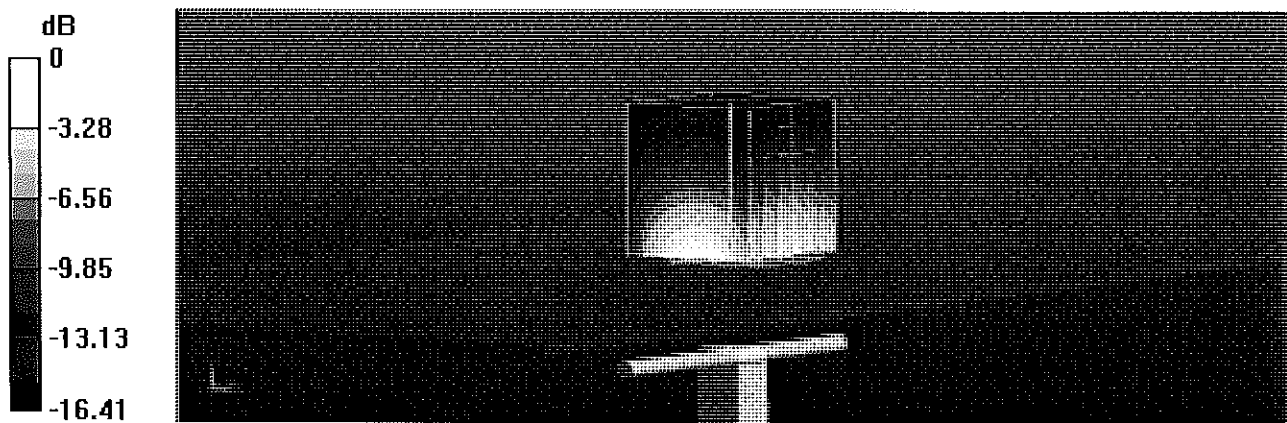


0 dB = 13.1 W/kg = 11.17 dBW/kg

Impedance Measurement Plot for Body TSL

9 May 2017 14:42:25  
[CH1] S11 1 U FS 1: 45.707  $\Omega$  -513.67  $m\Omega$  177.05 pF 1 750.000 000 MHz

\*  
De1  
CA  
Avg  
16  
H1d

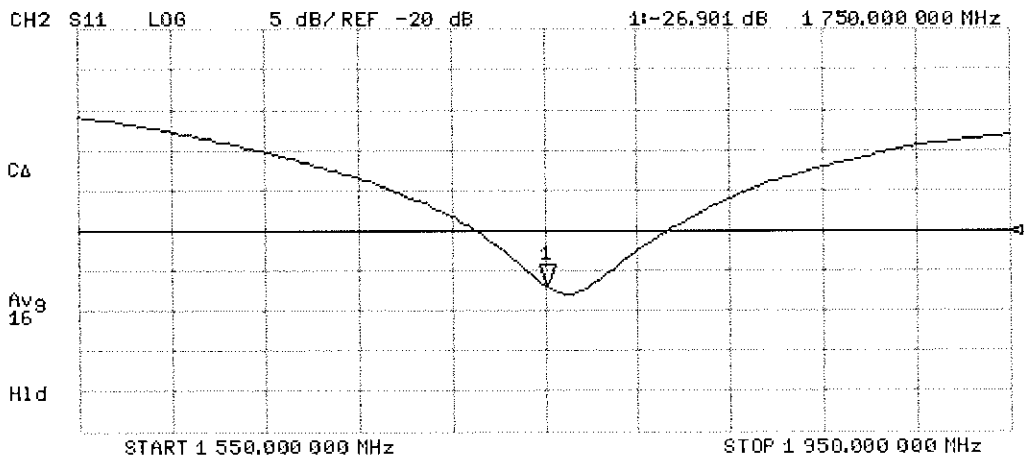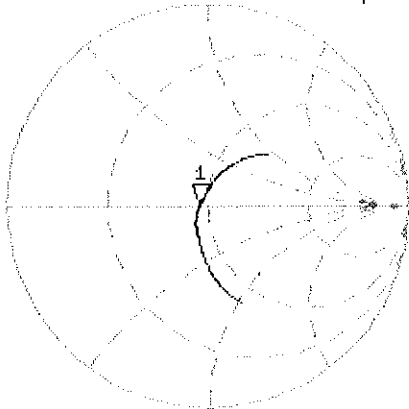

# Certification of Calibration

Object D1750V2 – SN: 1148

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.


Extended Calibration date: May 09, 2018

Description: SAR Validation Dipole at 1750 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 15S1G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight              | 772D      | Dual Directional Coupler                                | CBT        | N/A          | CBT        | MY52180215    |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 2/9/2018   | Annual       | 2/9/2019   | 1272          |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 6/21/2017  | Annual       | 6/21/2018  | 1333          |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 9/12/2017  | Annual       | 9/12/2018  | 1091          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 9/18/2017  | Annual       | 9/18/2018  | 3287          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 2/13/2018  | Annual       | 2/13/2019  | 3213          |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 3/2/2018   | Annual       | 3/2/2019   | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 3/2/2018   | Annual       | 3/2/2019   | 1339018       |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 4/18/2018  | Annual       | 4/18/2019  | MY47420800    |
| Mini-Circuits         | NLP-2950+ | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |
| Pasternack            | PE2209-10 | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 9/14/2017  | Annual       | 9/14/2018  | US39170118    |
| Pasternack            | NC-100    | Torque Wrench                                           | 4/18/2018  | Annual       | 4/18/2019  | 1445          |
| Anritsu               | ML2495A   | Power Meter                                             | 10/22/2017 | Annual       | 10/22/2018 | 941001        |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature                                                                             |
|----------------|------------------|--------------------------|---------------------------------------------------------------------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            |  |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager |  |

# DIPOLE CALIBRATION EXTENSION



Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:

1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:


| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--------------------------------------------------|----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 5/9/2017         | 5/9/2018       | 1.223                             | 3.64                                             | 3.55                                   | -1.37%           | 1.93                                              | 1.91                                    | -1.04%            | 49.8                                  | 49.0                               | 0.8                   | -0.7                                       | 0.1                                     | 0.8                        | -42.9                             | -38.7                          | 9.90%         | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 5/9/2017         | 5/9/2018       | 1.223                             | 3.7                                              | 3.88                                   | 4.86%            | 1.98                                              | 2.06                                    | 4.04%             | 45.7                                  | 45.4                               | 0.3                   | -0.5                                       | -2.6                                    | 2.1                        | -26.9                             | -25.0                          | 7.20%         | PASS      |

## Impedance & Return-Loss Measurement Plot for Head TSL

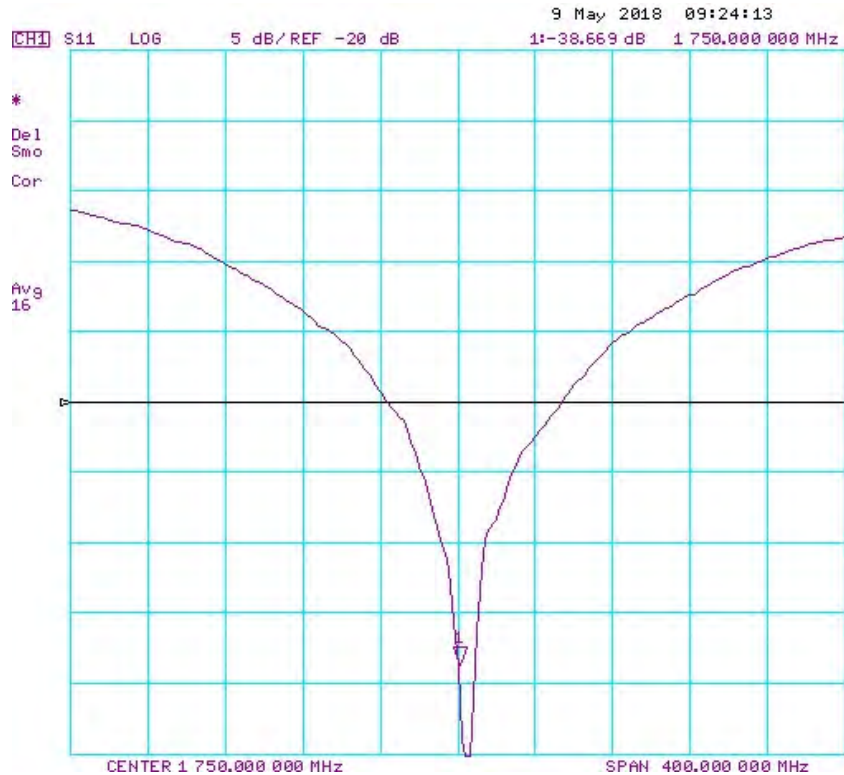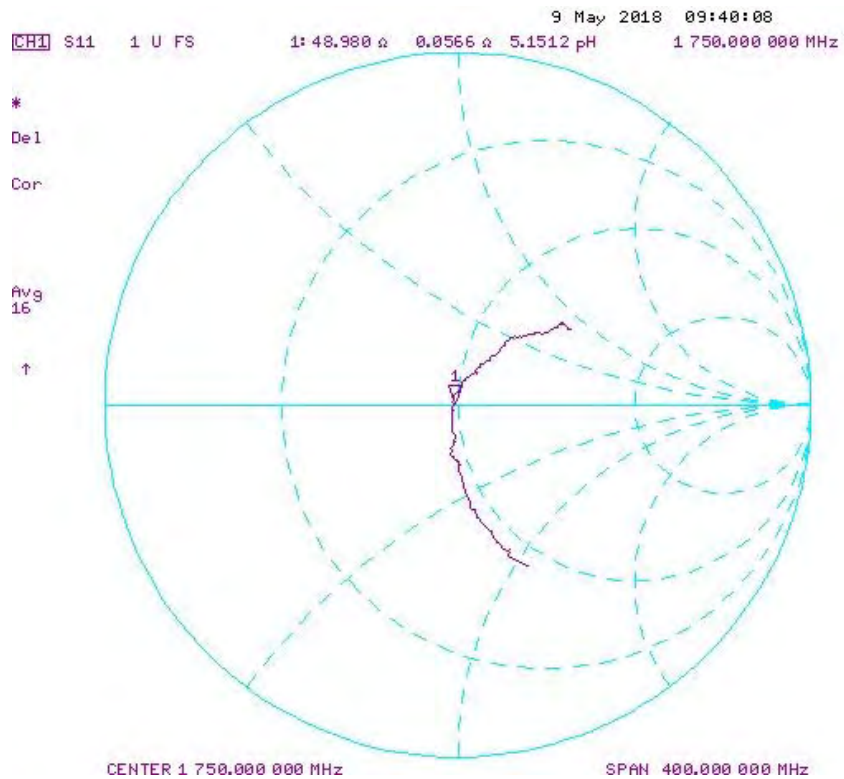



## Impedance & Return-Loss Measurement Plot for Body TSL

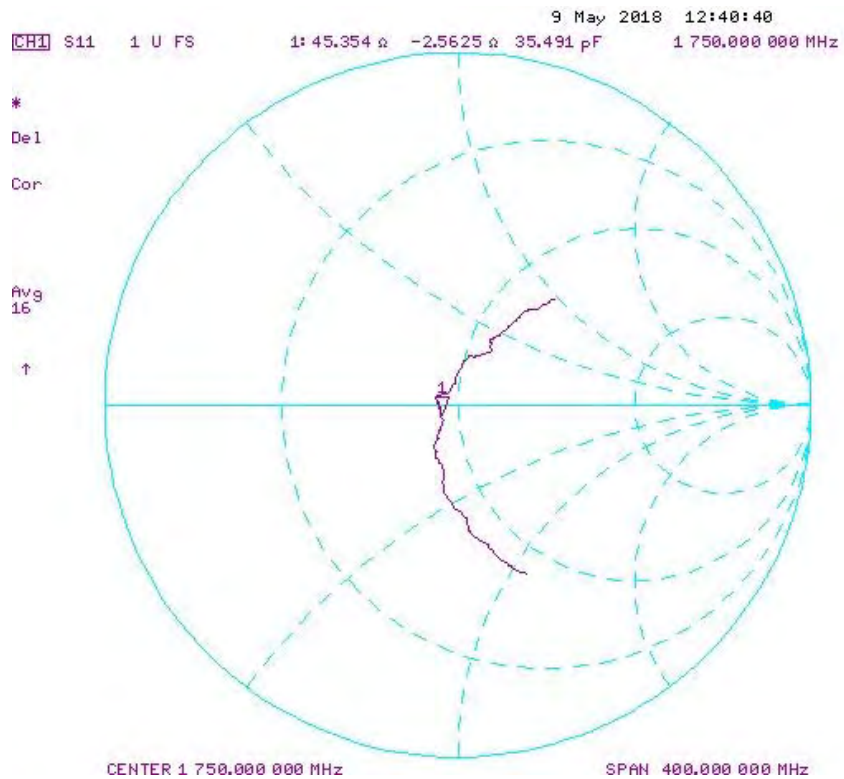



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D2600V2-1126\_Jul17**

## CALIBRATION CERTIFICATE

Object **D2600V2 - SN:1126**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

BNV  
8/3/2017

Calibration date: **July 10, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 31-May-17 (No. EX3-7349_May17)    | May-18                 |
| DAE4                        | SN: 601            | 28-Mar-17 (No. DAE4-601_Mar17)    | Mar-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

Calibrated by: **Jeton Kastrati** **Laboratory Technician**

Approved by: **Katja Pokovic** **Technical Manager**

Signature

Issued: July 11, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.0    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 2600 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 39.0           | 1.96 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 37.2 $\pm$ 6 % | 2.04 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 14.5 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 56.4 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.40 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 25.2 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 52.5           | 2.16 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 51.6 $\pm$ 6 % | 2.22 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 13.8 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 54.3 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 6.16 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 24.4 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.8 $\Omega$ - 7.7 j $\Omega$ |
| Return Loss                          | - 21.8 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 44.8 $\Omega$ - 5.8 j $\Omega$ |
| Return Loss                          | - 21.7 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.154 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | October 22, 2015 |

## DASY5 Validation Report for Head TSL

Date: 10.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1126**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.04$  S/m;  $\epsilon_r = 37.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.96, 7.96, 7.96); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 113.2 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.3 W/kg

**SAR(1 g) = 14.5 W/kg; SAR(10 g) = 6.4 W/kg**


Maximum value of SAR (measured) = 24.0 W/kg

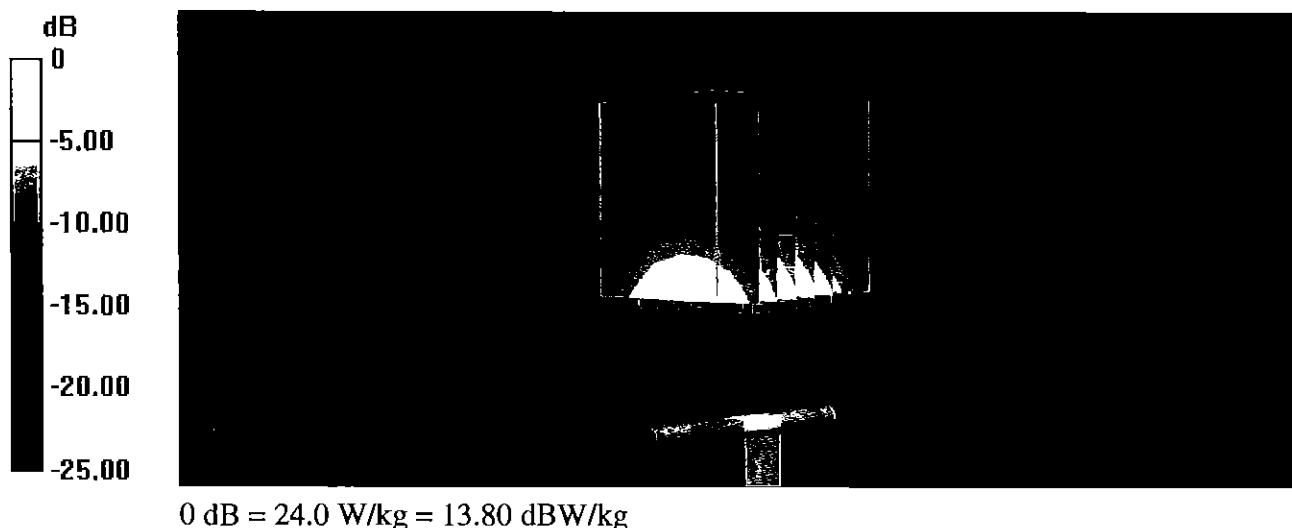

# Impedance Measurement Plot for Head TSL


10 Jul 2017 14:28:06  
 CH1 S11 1 U FS 2: 47.771  $\Omega$  -7.6934  $\Omega$  7.9567 pF 2 600.000 000 MHz

\*  
 De1  
 CA  
 Avg  
 16  
 H1d

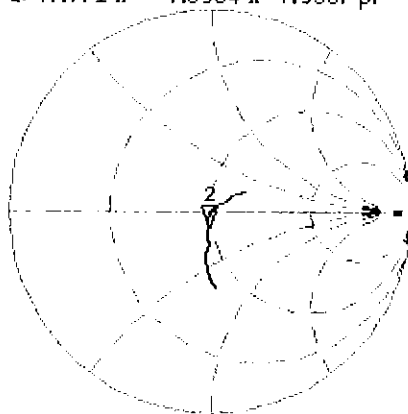

CH2 S11 LOG 5 dB/REF -20 dB 2:-21.756 dB 2 600.000 000 MHz

CA  
 Avg  
 16  
 H1d

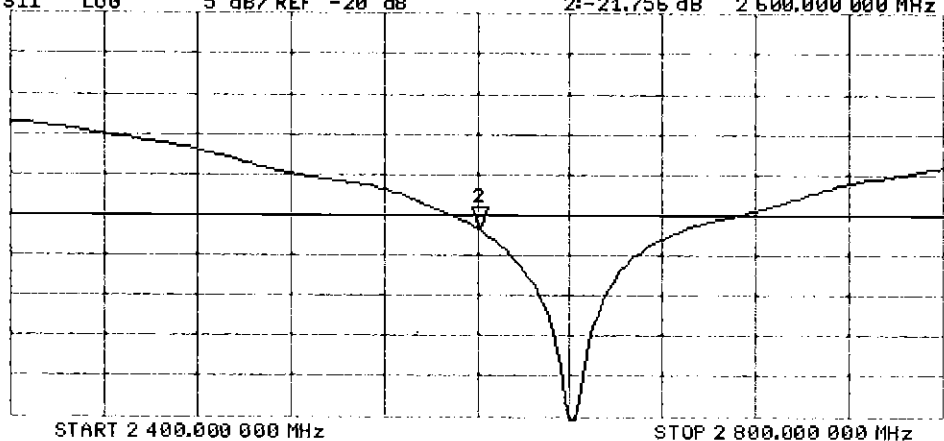

## DASY5 Validation Report for Body TSL

Date: 10.07.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN:1126**

Communication System: UID 0 - CW; Frequency: 2600 MHz

Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.22$  S/m;  $\epsilon_r = 51.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.94, 7.94, 7.94); Calibrated: 31.05.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.8 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 28.9 W/kg

**SAR(1 g) = 13.8 W/kg; SAR(10 g) = 6.16 W/kg**

Maximum value of SAR (measured) = 22.2 W/kg

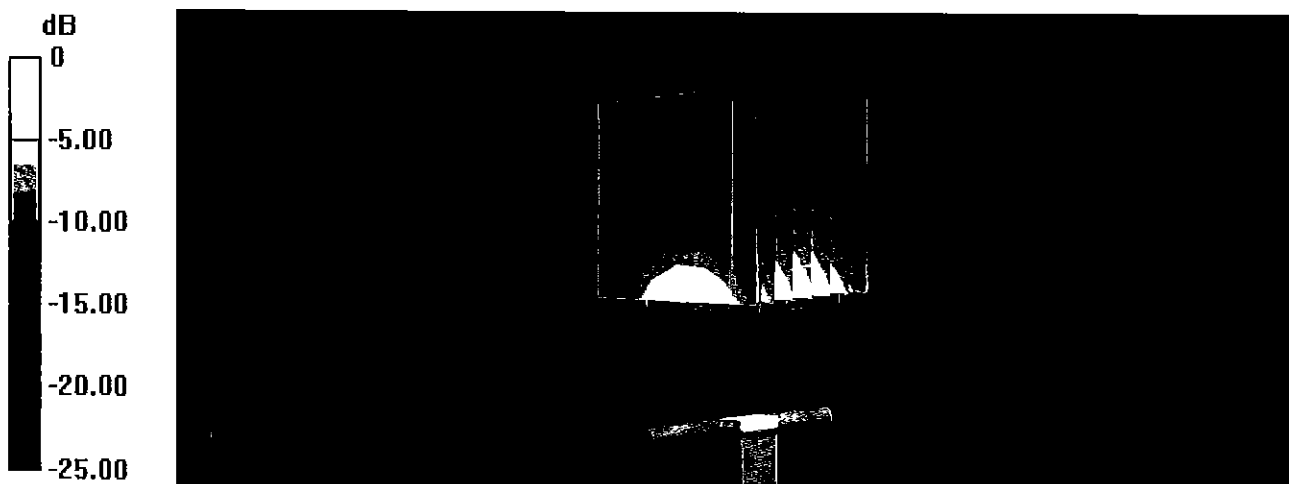


0 dB = 22.2 W/kg = 13.46 dBW/kg



# Impedance Measurement Plot for Body TSL

10 Jul 2017 14:27:30  
 CH1 S11 1 U FS 2: 44.785  $\Omega$  -5.8145  $\Omega$  10.528 pF 2 600.000 000 MHz

\*  
 Del  
 CA

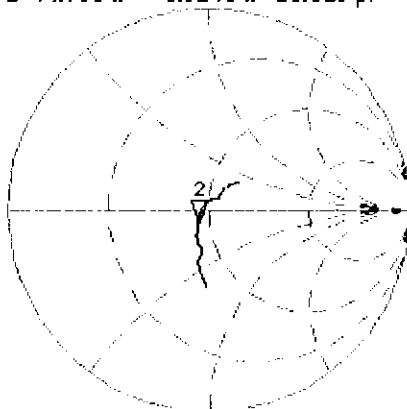

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 2:-21.696 dB 2 600.000 000 MHz

CA

Avg  
 16

H1d

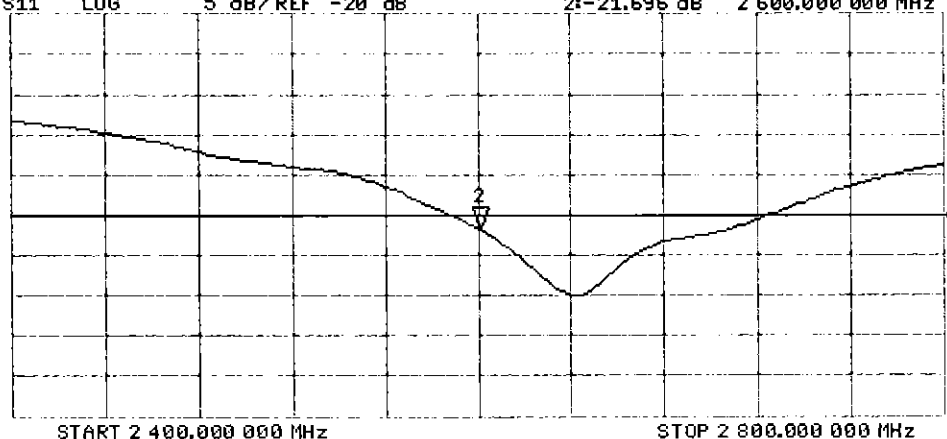



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D5GHzV2-1237\_Aug17**

## CALIBRATION CERTIFICATE

Object **D5GHzV2 - SN:1237**

Calibration procedure(s) **QA CAL-22.v2**  
**Calibration procedure for dipole validation kits between 3-6 GHz**

PMV  
 8/27/17

Calibration date: **August 15, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 3503           | 31-Dec-16 (No. EX3-3503_Dec16)    | Dec-17                 |
| DAE4                        | SN: 601            | 28-Mar-17 (No. DAE4-601_Mar17)    | Mar-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

Calibrated by: **Johannes Kurikka** Function: **Laboratory Technician**

Signature

Approved by: **Katja Pokovic** Technical Manager

*[Signature of Johannes Kurikka]*  
*[Signature of Katja Pokovic]*

Issued: August 16, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                                                                      |                                  |
|------------------------------|----------------------------------------------------------------------|----------------------------------|
| DASY Version                 | DASY5                                                                | V52.10.0                         |
| Extrapolation                | Advanced Extrapolation                                               |                                  |
| Phantom                      | Modular Flat Phantom V5.0                                            |                                  |
| Distance Dipole Center - TSL | 10 mm                                                                | with Spacer                      |
| Zoom Scan Resolution         | dx, dy = 4.0 mm, dz = 1.4 mm                                         | Graded Ratio = 1.4 (Z direction) |
| Frequency                    | 5250 MHz $\pm$ 1 MHz<br>5600 MHz $\pm$ 1 MHz<br>5750 MHz $\pm$ 1 MHz |                                  |

## Head TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 35.9           | 4.71 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 34.7 $\pm$ 6 % | 4.49 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL at 5250 MHz

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 100 mW input power | 8.14 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 80.7 W/kg $\pm$ 19.9 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 100 mW input power | 2.33 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.0 W/kg $\pm$ 19.5 % (k=2) |

### Head TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.5         | 5.07 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.2 ± 6 %   | 4.84 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5600 MHz

|                                                       |                    |                            |
|-------------------------------------------------------|--------------------|----------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                            |
| SAR measured                                          | 100 mW input power | 8.33 W/kg                  |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 82.5 W / kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.38 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 23.5 W/kg ± 19.5 % (k=2) |

### Head TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Head TSL parameters             | 22.0 °C         | 35.4         | 5.22 mho/m       |
| Measured Head TSL parameters            | (22.0 ± 0.2) °C | 34.0 ± 6 %   | 4.99 mho/m ± 6 % |
| Head TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Head TSL at 5750 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 8.10 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 80.2 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.31 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 22.8 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5250 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.9         | 5.36 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 47.0 ± 6 %   | 5.46 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5250 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.75 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 76.9 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.17 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.5 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5600 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.5         | 5.77 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.4 ± 6 %   | 5.93 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5600 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.91 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 78.5 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.23 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 22.1 W/kg ± 19.5 % (k=2) |

### Body TSL parameters at 5750 MHz

The following parameters and calculations were applied.

|                                         | Temperature     | Permittivity | Conductivity     |
|-----------------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters             | 22.0 °C         | 48.3         | 5.94 mho/m       |
| Measured Body TSL parameters            | (22.0 ± 0.2) °C | 46.2 ± 6 %   | 6.13 mho/m ± 6 % |
| Body TSL temperature change during test | < 0.5 °C        | ----         | ----             |

### SAR result with Body TSL at 5750 MHz

|                                                       |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                          |
| SAR measured                                          | 100 mW input power | 7.77 W/kg                |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 77.1 W/kg ± 19.9 % (k=2) |

|                                                         |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                          |
| SAR measured                                            | 100 mW input power | 2.16 W/kg                |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 21.4 W/kg ± 19.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL at 5250 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.9 $\Omega$ - 5.3 j $\Omega$ |
| Return Loss                          | - 25.5 dB                      |

### Antenna Parameters with Head TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.9 $\Omega$ + 2.3 j $\Omega$ |
| Return Loss                          | - 30.7 dB                      |

### Antenna Parameters with Head TSL at 5750 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 55.6 $\Omega$ - 0.5 j $\Omega$ |
| Return Loss                          | - 25.5 dB                      |

### Antenna Parameters with Body TSL at 5250 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 46.9 $\Omega$ - 4.2 j $\Omega$ |
| Return Loss                          | - 25.4 dB                      |

### Antenna Parameters with Body TSL at 5600 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 50.2 $\Omega$ + 3.0 j $\Omega$ |
| Return Loss                          | - 30.4 dB                      |

### Antenna Parameters with Body TSL at 5750 MHz

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.4 $\Omega$ + 0.2 j $\Omega$ |
| Return Loss                          | - 29.7 dB                      |

## General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.194 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

## Additional EUT Data

|                 |              |
|-----------------|--------------|
| Manufactured by | SPEAG        |
| Manufactured on | May 04, 2015 |



## DASY5 Validation Report for Head TSL

Date: 15.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.49$  S/m;  $\epsilon_r = 34.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5600$  MHz;  $\sigma = 4.84$  S/m;  $\epsilon_r = 34.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>,  
Medium parameters used:  $f = 5750$  MHz;  $\sigma = 4.99$  S/m;  $\epsilon_r = 34$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.58, 5.58, 5.58); Calibrated: 31.12.2016, ConvF(5.09, 5.09, 5.09); Calibrated: 31.12.2016, ConvF(5.02, 5.02, 5.02); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (front); Type: QD 000 P50 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5250 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.08 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.6 W/kg

**SAR(1 g) = 8.14 W/kg; SAR(10 g) = 2.33 W/kg**

Maximum value of SAR (measured) = 19.2 W/kg

**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.04 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 32.7 W/kg

**SAR(1 g) = 8.33 W/kg; SAR(10 g) = 2.38 W/kg**

Maximum value of SAR (measured) = 19.8 W/kg



**Dipole Calibration for Head Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 69.11 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 32.4 W/kg

**SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.31 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

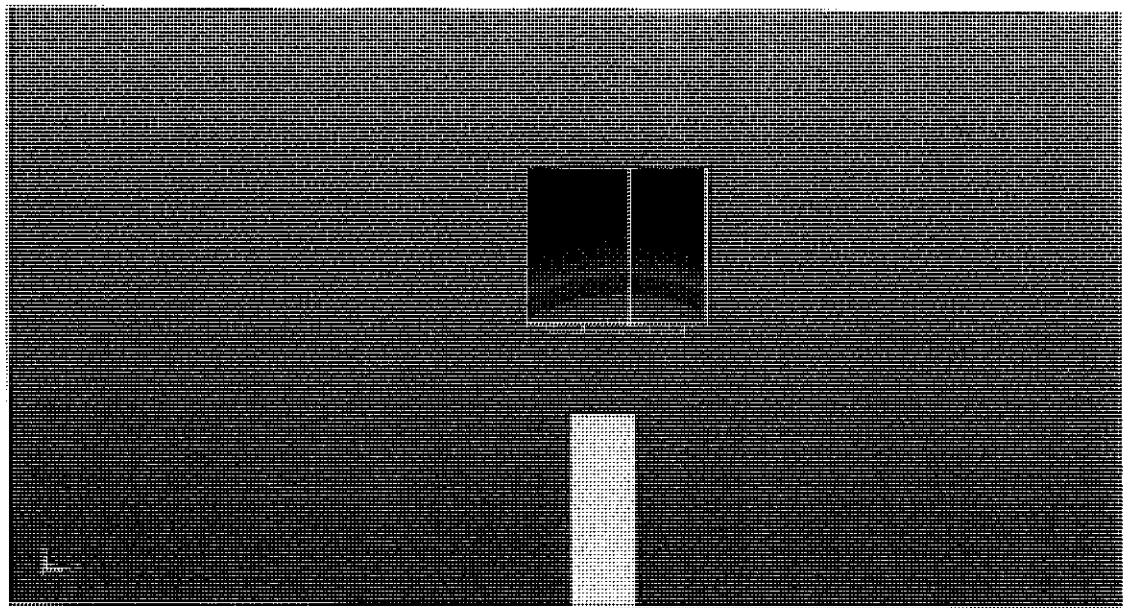


0 dB = 19.2 W/kg = 12.83 dBW/kg

# Impedance Measurement Plot for Head TSL

9 Aug 2017 12:04:29  
 CH1 S11 1 U FS 1: 49.920  $\Omega$  -5.3223  $\Omega$  5.6959 pF 5 250.000 000 MHz


\*  
 Del  
 Cor  
 Avg  
 16  
 H1d

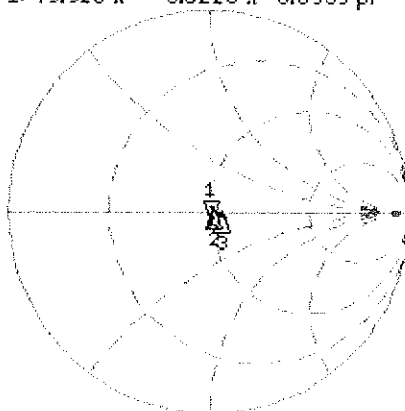

CH1 Markers  
 2: 51.904  $\Omega$   
 2.3008  $\Omega$   
 5.60000 GHz  
 3: 55.609  $\Omega$   
 -492.19 m $\Omega$   
 5.75000 GHz

CH2 S11 LOG 5 dB/ REF -20 dB 1: -25.482 dB 5 250.000 000 MHz

Cor  
 Avg  
 16  
 H1d

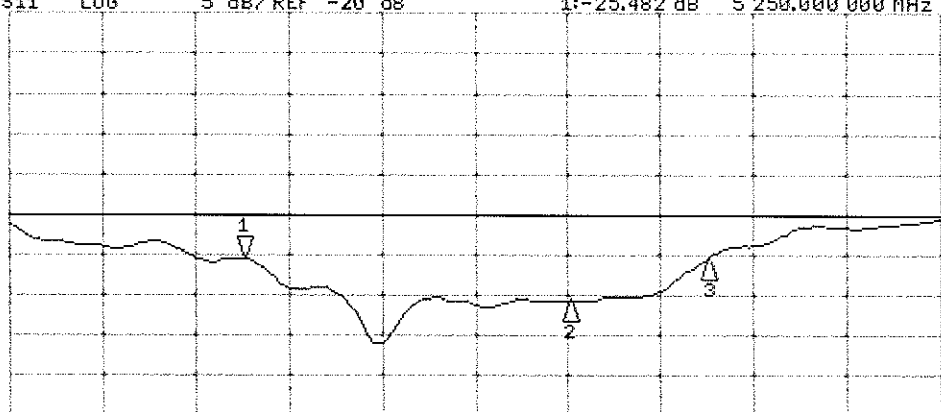

CH2 Markers  
 2: -30.654 dB  
 5.60000 GHz  
 3: -25.460 dB  
 5.75000 GHz

START 5 000.000 000 MHz

STOP 6 000.000 000 MHz

## DASY5 Validation Report for Body TSL

Date: 08.08.2017

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1237**

Communication System: UID 0 - CW; Frequency: 5250 MHz, Frequency: 5600 MHz, Frequency: 5750 MHz  
Medium parameters used:  $f = 5250 \text{ MHz}$ ;  $\sigma = 5.46 \text{ S/m}$ ;  $\epsilon_r = 47$ ;  $\rho = 1000 \text{ kg/m}^3$ ,  
Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.93 \text{ S/m}$ ;  $\epsilon_r = 46.4$ ;  $\rho = 1000 \text{ kg/m}^3$ ,  
Medium parameters used:  $f = 5750 \text{ MHz}$ ;  $\sigma = 6.13 \text{ S/m}$ ;  $\epsilon_r = 46.2$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section  
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3503; ConvF(5.14, 5.14, 5.14); Calibrated: 31.12.2016, ConvF(4.57, 4.57, 4.57); Calibrated: 31.12.2016, ConvF(4.51, 4.51, 4.51); Calibrated: 31.12.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 28.03.2017
- Phantom: Flat Phantom 5.0 (back); Type: QD 000 P50 AA; Serial: 1002
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5250MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.87 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.9 W/kg

**SAR(1 g) = 7.75 W/kg; SAR(10 g) = 2.17 W/kg**

Maximum value of SAR (measured) = 18.4 W/kg

**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.11 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 33.0 W/kg

**SAR(1 g) = 7.91 W/kg; SAR(10 g) = 2.23 W/kg**

Maximum value of SAR (measured) = 19.3 W/kg



**Dipole Calibration for Body Tissue/Pin=100mW, dist=10mm, f=5750 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 63.64 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 33.8 W/kg

**SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.16 W/kg**

Maximum value of SAR (measured) = 19.1 W/kg

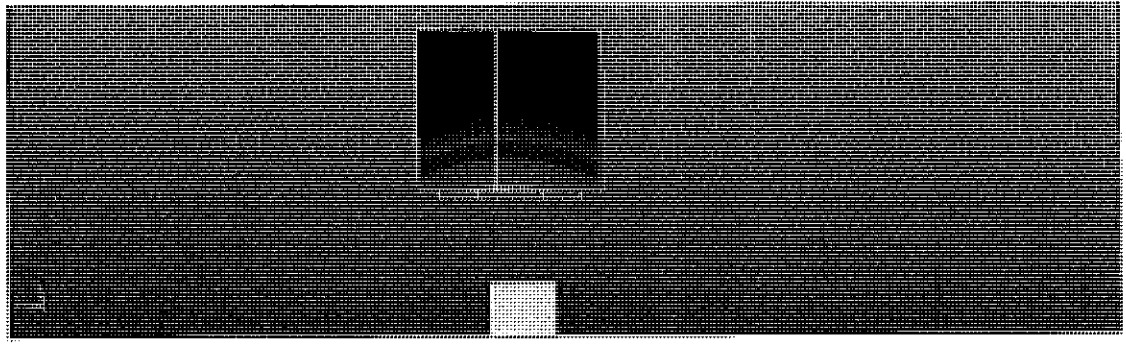


0 dB = 18.4 W/kg = 12.65 dBW/kg

# Impedance Measurement Plot for Body TSL

8 Aug 2017 15:23:50  
 CH1 S11 1 U FS 1: 46.885  $\Omega$  -4.1973  $\Omega$  7.2226 pF 5 250.000 000 MHz


\*  
 De1  
 Cor  
 Avg  
 16  
 H1d

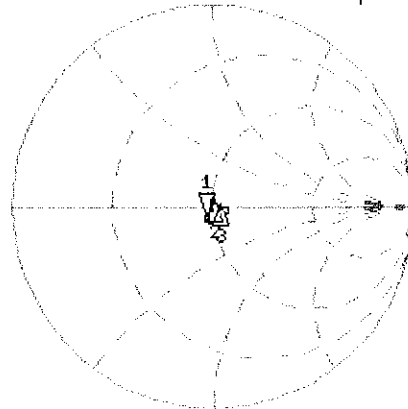

CH1 Markers  
 2: 50.184  $\Omega$   
 3: 0.215  $\Omega$   
 5.60000 GHz  
 3: 53.363  $\Omega$   
 0.1719  $\Omega$   
 5.75000 GHz

CH2 S11 LOG 5 dB/REF -20 dB 1: -25.364 dB 5 250.000 000 MHz

Cor  
 Avg  
 16  
 H1d

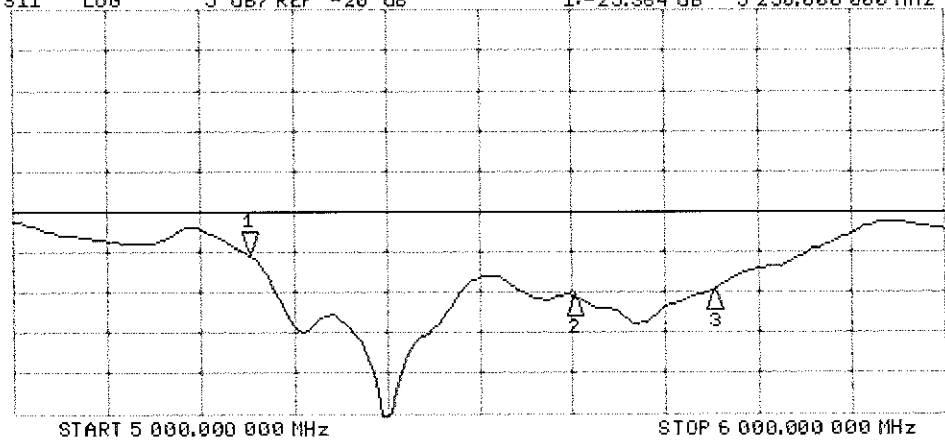

CH2 Markers  
 2: -30.389 dB  
 5.60000 GHz  
 3: -29.742 dB  
 5.75000 GHz



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D1900V2-5d080\_Jul16**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN:5d080**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **July 08, 2016**

*BN ✓*  
*7/16/2016*  
*Extended*  
*7/20/17*  
*SC ✓*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 06-Apr-16 (No. 217-02288/02289) | Apr-17                |
| Power sensor NRP-Z91        | SN: 103244         | 06-Apr-16 (No. 217-02288)       | Apr-17                |
| Power sensor NRP-Z91        | SN: 103245         | 06-Apr-16 (No. 217-02289)       | Apr-17                |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 05-Apr-16 (No. 217-02292)       | Apr-17                |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 05-Apr-16 (No. 217-02295)       | Apr-17                |
| Reference Probe EX3DV4      | SN: 7349           | 15-Jun-16 (No. EX3-7349_Jun16)  | Jun-17                |
| DAE4                        | SN: 601            | 30-Dec-15 (No. DAE4-601_Dec15)  | Dec-16                |

| Secondary Standards       | ID #           | Check Date (in house)             | Scheduled Check        |
|---------------------------|----------------|-----------------------------------|------------------------|
| Power meter EPM-442A      | SN: GB37480704 | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A     | SN: US37292783 | 07-Oct-15 (No. 217-02222)         | In house check: Oct-16 |
| Power sensor HP 8481A     | SN: MY41092317 | 07-Oct-15 (No. 217-02223)         | In house check: Oct-16 |
| RF generator R&S SMT-06   | SN: 100972     | 15-Jun-15 (in house check Jun-15) | In house check: Oct-16 |
| Network Analyzer HP 8753E | SN: US37390585 | 18-Oct-01 (in house check Oct-15) | In house check: Oct-16 |

Calibrated by: **Jeton Kastrati** Name: **Jeton Kastrati** Function: **Laboratory Technician** Signature: *[Signature]*

Approved by: **Katja Pokovic** Name: **Katja Pokovic** Function: **Technical Manager** Signature: *[Signature]*

Issued: July 13, 2016

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.8.8     |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 10 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5 mm      |             |
| Frequency                    | 1900 MHz $\pm$ 1 MHz   |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 40.0           | 1.40 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 39.8 $\pm$ 6 % | 1.38 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 9.76 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 39.3 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.10 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 20.5 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 53.3           | 1.52 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 52.7 $\pm$ 6 % | 1.51 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 9.75 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 39.1 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 5.17 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 20.7 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $52.1 \Omega + 5.3 j\Omega$ |
| Return Loss                          | - 25.1 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $47.4 \Omega + 6.8 j\Omega$ |
| Return Loss                          | - 22.6 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.192 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |               |
|-----------------|---------------|
| Manufactured by | SPEAG         |
| Manufactured on | June 28, 2006 |

## DASY5 Validation Report for Head TSL

Date: 08.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d080**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 39.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(7.99, 7.99, 7.99); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 106.6 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 18.4 W/kg

**SAR(1 g) = 9.76 W/kg; SAR(10 g) = 5.1 W/kg**

Maximum value of SAR (measured) = 15.0 W/kg

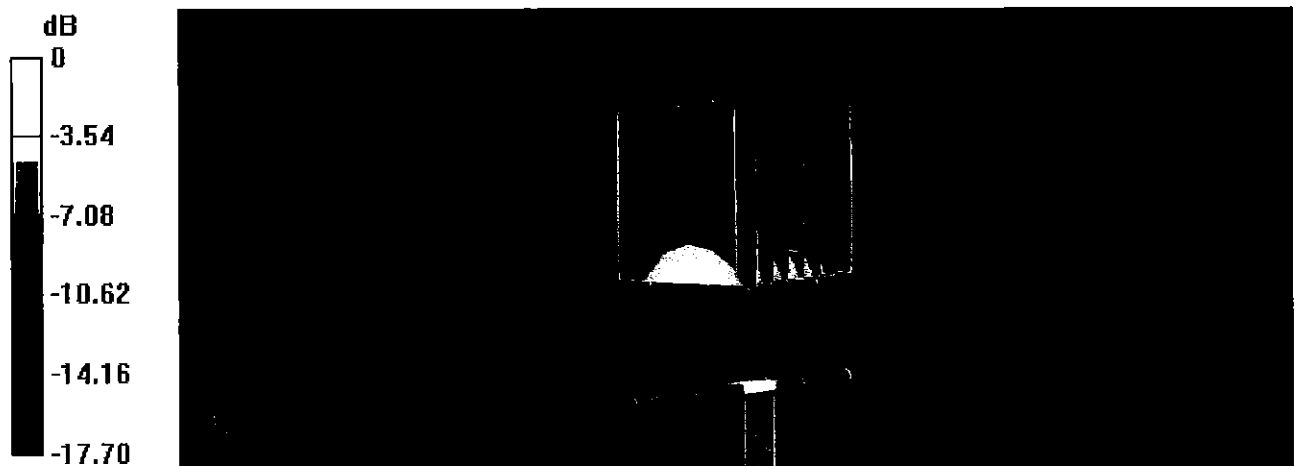


0 dB = 15.0 W/kg = 11.76 dBW/kg

Impedance Measurement Plot for Head TSL


8 Jul 2016 16:18:04  
CH1 S11 1 U FS 1: 52.143  $\Omega$  5.2500  $\Omega$  439.78  $\mu\text{H}$  1 900.000 000 MHz

\*  
Del  
Cor  
  
Avg  
16  
  
H1d

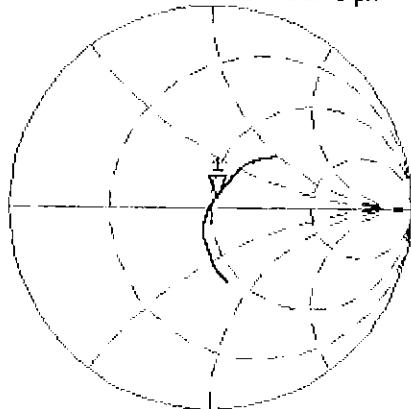

CH2 S11 LOG 5 dB/REF -20 dB 1:-25.118 dB 1 900.000 000 MHz

Cor  
  
Avg  
16  
  
H1d

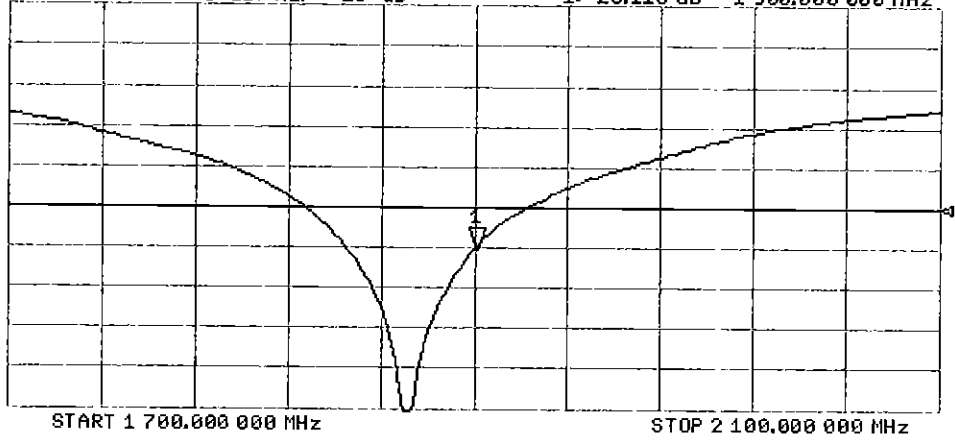

## DASY5 Validation Report for Body TSL

Date: 08.07.2016

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d080**

Communication System: UID 0 - CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.51$  S/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(8.03, 8.03, 8.03); Calibrated: 15.06.2016;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.8(1258); SEMCAD X 14.6.10(7372)

### **Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.1 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 17.1 W/kg

**SAR(1 g) = 9.75 W/kg; SAR(10 g) = 5.17 W/kg**

Maximum value of SAR (measured) = 14.7 W/kg

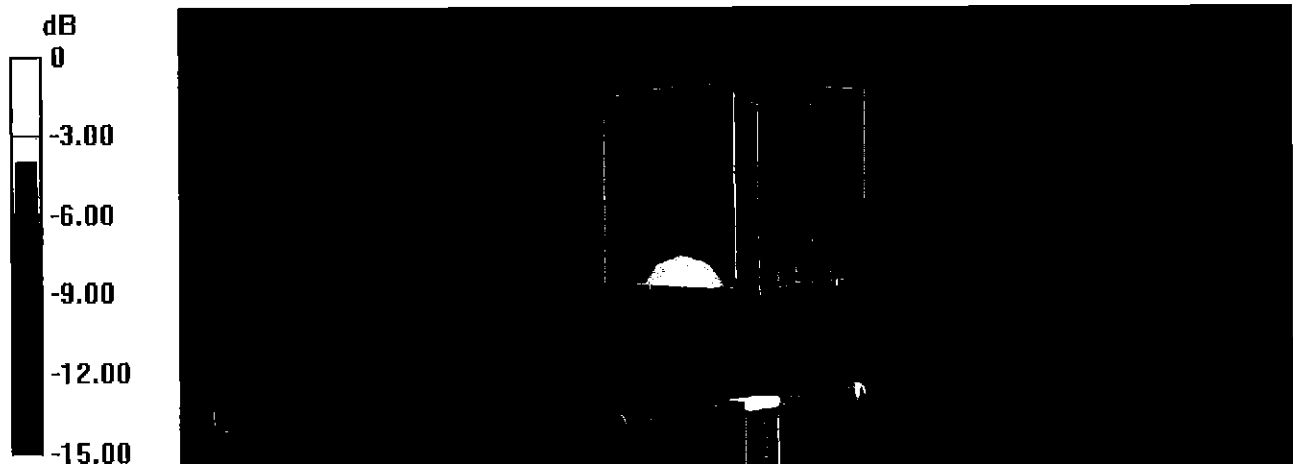


0 dB = 14.7 W/kg = 11.67 dBW/kg

# Impedance Measurement Plot for Body TSL

8 Jul 2016 16:16:56  
 CH1 S11 1 U FS 1: 47.412  $\Omega$  6.7422  $\Omega$  564.78  $\mu\text{H}$  1 900.000 000 MHz

\*  
 Del  
 Cor

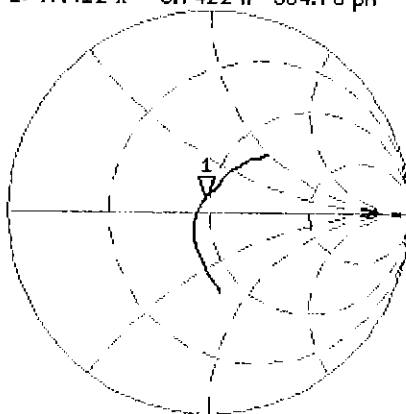

Avg  
 16


H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-22.620 dB 1 900.000 000 MHz

Cor

Avg  
 16

H1d

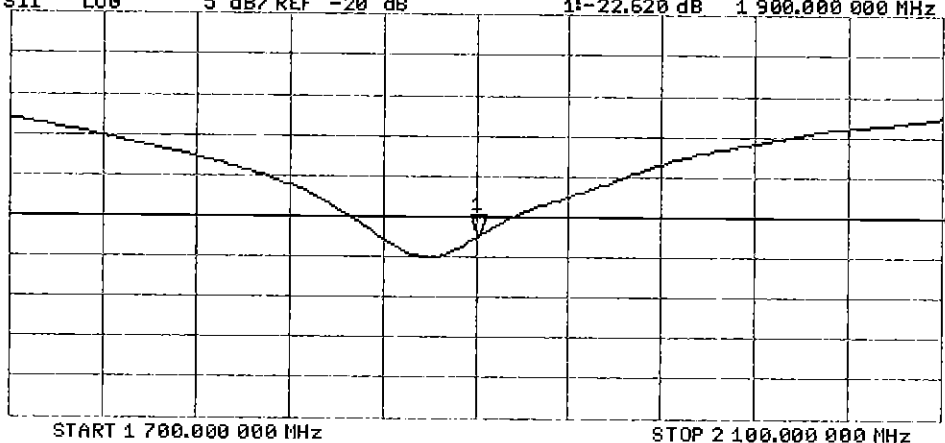

# Certification of Calibration

Object D1900V2 – SN: 5d080

Calibration procedure(s) Procedure for Calibration Extension for SAR Dipoles.

Calibration date: July 06, 2017

Description: SAR Validation Dipole at 1900 MHz.

## Calibration Equipment used:

| Manufacturer          | Model     | Description                                             | Cal Date   | Cal Interval | Cal Due    | Serial Number |
|-----------------------|-----------|---------------------------------------------------------|------------|--------------|------------|---------------|
| Control Company       | 4040      | Therm./Clock/Humidity Monitor                           | 3/31/2017  | Biennial     | 3/31/2019  | 170232394     |
| Control Company       | 4352      | Ultra Long Stem Thermometer                             | 5/2/2017   | Biennial     | 5/2/2019   | 170330156     |
| Amplifier Research    | 1551G6    | Amplifier                                               | CBT        | N/A          | CBT        | 433971        |
| Narda                 | 4772-3    | Attenuator (3dB)                                        | CBT        | N/A          | CBT        | 9406          |
| Keysight Technologies | 85033E    | Standard Mechanical Calibration Kit (DC to 9GHz, 3.5mm) | 6/1/2017   | Annual       | 6/1/2018   | MY53401181    |
| Agilent               | 8753ES    | S-Parameter Network Analyzer                            | 10/26/2016 | Annual       | 10/26/2017 | US39170118    |
| Mini-Circuits         | BW-N20W5+ | DC to 18 GHz Precision Fixed 20 dB Attenuator           | CBT        | N/A          | CBT        | N/A           |
| SPEAG                 | DAE4      | Dasy Data Acquisition Electronics                       | 3/13/2017  | Annual       | 3/13/2018  | 1415          |
| SPEAG                 | DAK-3.5   | Dielectric Assessment Kit                               | 5/10/2017  | Annual       | 5/10/2018  | 1070          |
| SPEAG                 | ES3DV3    | SAR Probe                                               | 3/14/2017  | Annual       | 3/14/2018  | 3209          |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1207364       |
| Anritsu               | MA2411B   | Pulse Power Sensor                                      | 2/10/2017  | Annual       | 2/10/2018  | 1339018       |
| Anritsu               | ML2495A   | Power Meter                                             | 10/16/2015 | Biennial     | 10/16/2017 | 941001        |
| Agilent               | N5182A    | MXG Vector Signal Generator                             | 2/28/2017  | Annual       | 2/28/2018  | MY47420800    |
| Seekonk               | NC-100    | Torque Wrench                                           | 11/6/2015  | Biennial     | 11/6/2017  | N/A           |
| Mini-Circuits         | NLP-2950+ | Low Pass Filter DC to 2700 MHz                          | CBT        | N/A          | CBT        | N/A           |
| Pasternack            | PE2209-10 | Bidirectional Coupler                                   | CBT        | N/A          | CBT        | N/A           |

Measurement Uncertainty =  $\pm 23\%$  (k=2)

|                | Name             | Function                 | Signature               |
|----------------|------------------|--------------------------|-------------------------|
| Calibrated By: | Brodie Halfoster | Test Engineer            | <i>BRODIE HALFOSTER</i> |
| Approved By:   | Kaitlin O'Keefe  | Senior Technical Manager | <i>KOK</i>              |

# DIPOLE CALIBRATION EXTENSION

Per KDB 865664 D01, calibration intervals of up to three years may be considered for reference dipoles when it is demonstrated that the SAR target, impedance and return loss of a dipole have remained stable according to the following requirements:


1. The measured SAR does not deviate more than 10% from the target on the calibration certificate.
2. The return-loss does not deviate more than 20% from the previous measurement and meets the required 20dB minimum return-loss requirement.
3. The measurement of real or imaginary parts of impedance does not deviate more than 5Ω from the previous measurement.

The following dipole was checked to pass the above 3 requirements to have 2-year calibration period from the calibration date:



| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Head (1g) W/kg @ 20.0 dBm | Measured Head SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Head (10g) W/kg @ 20.0 dBm | Measured Head SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Head (Ohm) Real | Measured Impedance Head (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Head (Ohm) Imaginary | Measured Impedance Head (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Head (dB) | Measured Return Loss Head (dB) | Deviation (%) | PASS/FAIL |
|------------------|----------------|-----------------------------------|--------------------------------------------------|----------------------------------------|------------------|---------------------------------------------------|-----------------------------------------|-------------------|---------------------------------------|------------------------------------|-----------------------|--------------------------------------------|-----------------------------------------|----------------------------|-----------------------------------|--------------------------------|---------------|-----------|
| 7/8/2016         | 7/6/2017       | 1.192                             | 3.93                                             | 3.86                                   | -1.78%           | 2.05                                              | 2                                       | -2.44%            | 52.1                                  | 52.9                               | 0.8                   | 5.3                                        | 4.7                                     | 0.6                        | -25.1                             | -25.6                          | -2.00%        | PASS      |
| Calibration Date | Extension Date | Certificate Electrical Delay (ns) | Certificate SAR Target Body (1g) W/kg @ 20.0 dBm | Measured Body SAR (1g) W/kg @ 20.0 dBm | Deviation 1g (%) | Certificate SAR Target Body (10g) W/kg @ 20.0 dBm | Measured Body SAR (10g) W/kg @ 20.0 dBm | Deviation 10g (%) | Certificate Impedance Body (Ohm) Real | Measured Impedance Body (Ohm) Real | Difference (Ohm) Real | Certificate Impedance Body (Ohm) Imaginary | Measured Impedance Body (Ohm) Imaginary | Difference (Ohm) Imaginary | Certificate Return Loss Body (dB) | Measured Return Loss Body (dB) | Deviation (%) | PASS/FAIL |
| 7/8/2016         | 7/6/2017       | 1.192                             | 3.91                                             | 4.05                                   | 3.58%            | 2.07                                              | 2.11                                    | 1.93%             | 47.4                                  | 48.5                               | 1.1                   | 6.8                                        | 5.1                                     | 1.7                        | -22.6                             | -25.5                          | -12.80%       | PASS      |



Impedance & Return-Loss Measurement Plot for Head TSL

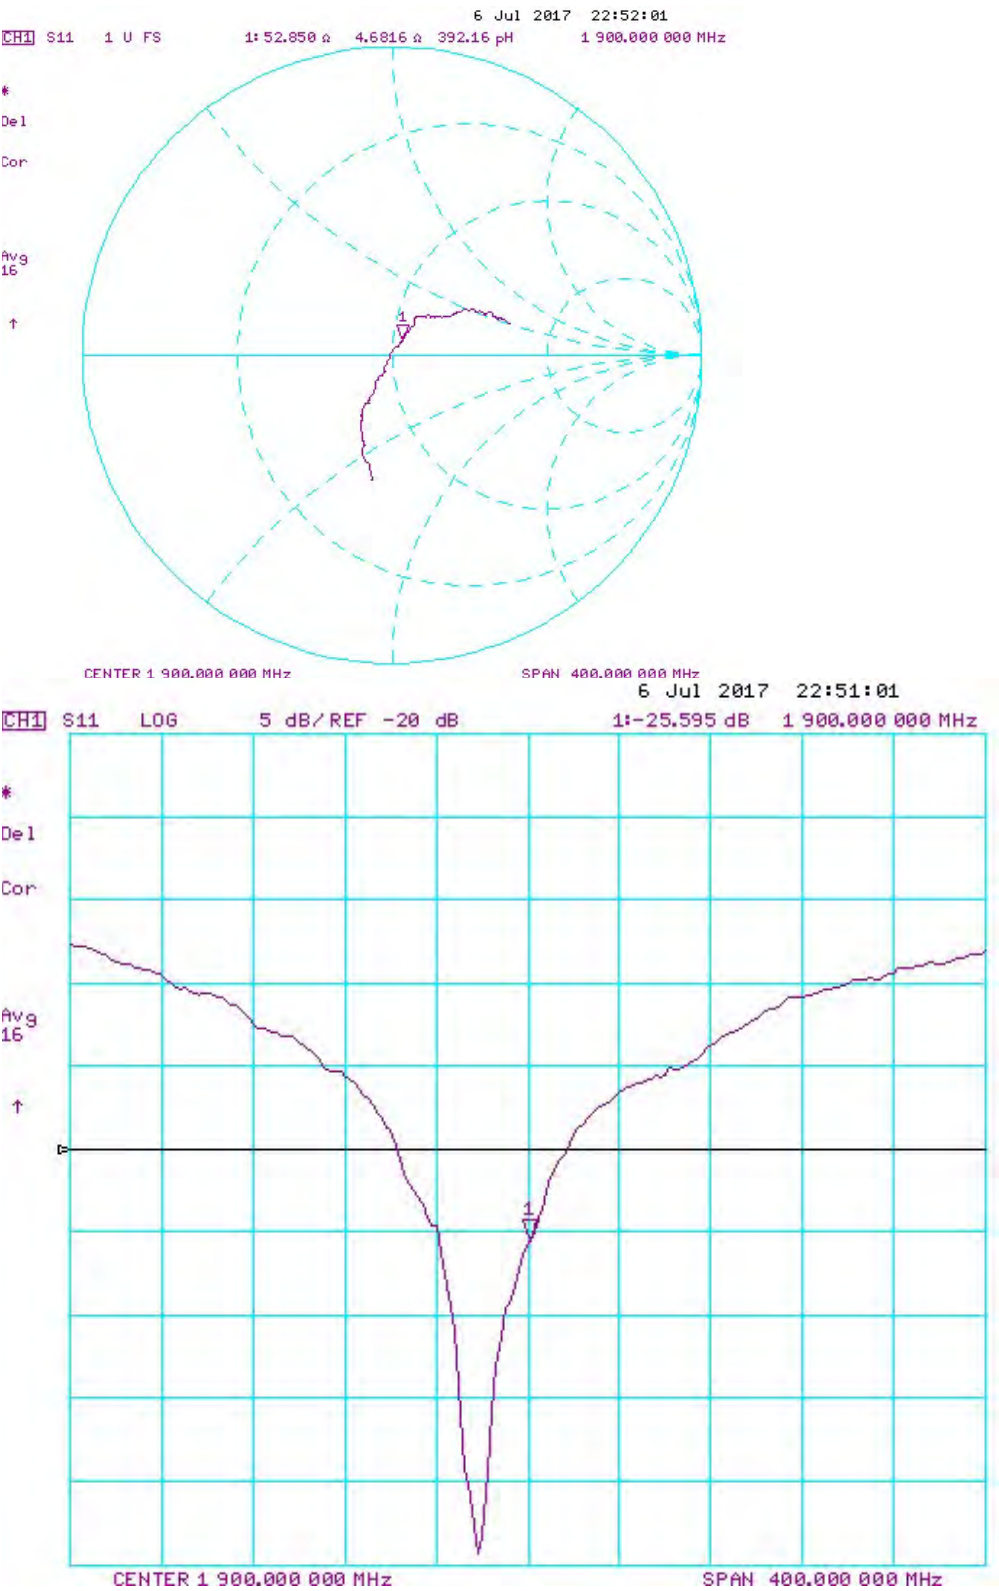

Impedance & Return-Loss Measurement Plot for Body TSL

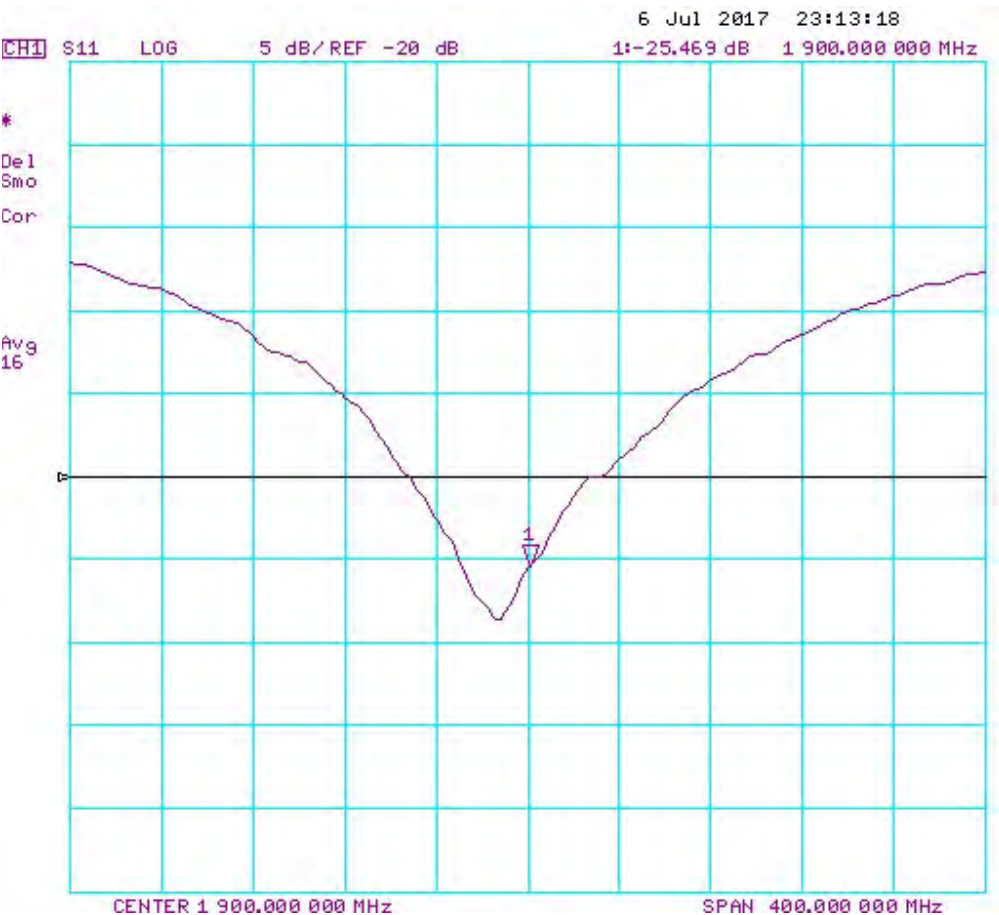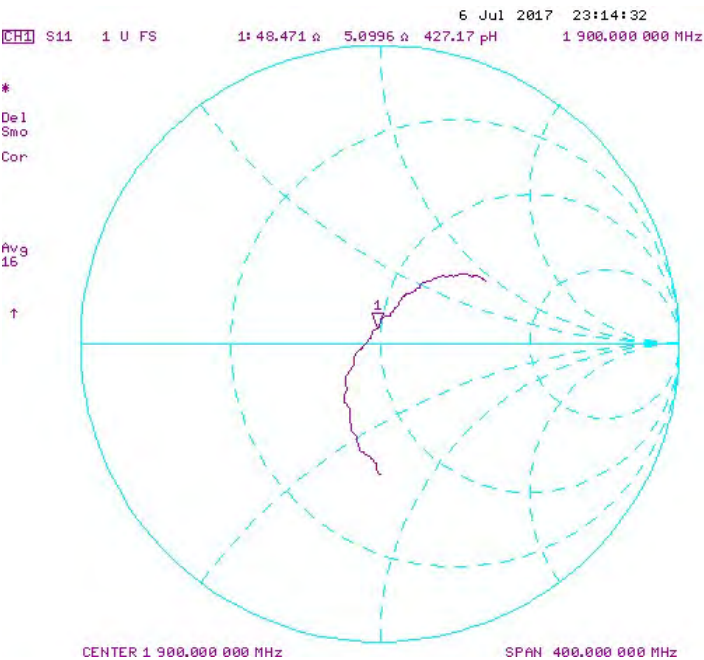



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003\_Jan18**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

*BN*  
*01-25-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|-----------------------------|--------------------|-----------------------------------|------------------------|
| Power meter NRP             | SN: 104778         | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103244         | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91        | SN: 103245         | 04-Apr-17 (No. 217-02522)         | Apr-18                 |
| Reference 20 dB Attenuator  | SN: 5058 (20k)     | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Type-N mismatch combination | SN: 5047.2 / 06327 | 07-Apr-17 (No. 217-02529)         | Apr-18                 |
| Reference Probe EX3DV4      | SN: 7349           | 30-Dec-17 (No. EX3-7349_Dec17)    | Dec-18                 |
| DAE4                        | SN: 601            | 26-Oct-17 (No. DAE4-601_Oct17)    | Oct-18                 |
| Secondary Standards         | ID #               | Check Date (in house)             | Scheduled Check        |
| Power meter EPM-442A        | SN: GB37480704     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: US37292783     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| Power sensor HP 8481A       | SN: MY41092317     | 07-Oct-15 (in house check Oct-16) | In house check: Oct-18 |
| RF generator R&S SMT-06     | SN: 100972         | 15-Jun-15 (in house check Oct-16) | In house check: Oct-18 |
| Network Analyzer HP 8753E   | SN: US37390585     | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

Calibrated by: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

*Leif Klysner*

*Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                              |                        |             |
|------------------------------|------------------------|-------------|
| DASY Version                 | DASY5                  | V52.10.0    |
| Extrapolation                | Advanced Extrapolation |             |
| Phantom                      | Modular Flat Phantom   |             |
| Distance Dipole Center - TSL | 15 mm                  | with Spacer |
| Zoom Scan Resolution         | dx, dy, dz = 5.0 mm    |             |
| Frequency                    | 750 MHz $\pm$ 1 MHz    |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Head TSL parameters             | 22.0 °C             | 41.9           | 0.89 mho/m           |
| Measured Head TSL parameters            | (22.0 $\pm$ 0.2) °C | 40.9 $\pm$ 6 % | 0.90 mho/m $\pm$ 6 % |
| Head TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Head TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.10 W/kg                    |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 8.28 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.37 W/kg                    |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.42 W/kg $\pm$ 16.5 % (k=2) |

## Body TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| Nominal Body TSL parameters             | 22.0 °C             | 55.5           | 0.96 mho/m           |
| Measured Body TSL parameters            | (22.0 $\pm$ 0.2) °C | 55.0 $\pm$ 6 % | 0.96 mho/m $\pm$ 6 % |
| Body TSL temperature change during test | < 0.5 °C            | ----           | ----                 |

## SAR result with Body TSL

|                                                       |                    |                              |
|-------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                              |
| SAR measured                                          | 250 mW input power | 2.15 W/kg                    |
| SAR for nominal Body TSL parameters                   | normalized to 1W   | 8.58 W/kg $\pm$ 17.0 % (k=2) |

|                                                         |                    |                              |
|---------------------------------------------------------|--------------------|------------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                              |
| SAR measured                                            | 250 mW input power | 1.43 W/kg                    |
| SAR for nominal Body TSL parameters                     | normalized to 1W   | 5.71 W/kg $\pm$ 16.5 % (k=2) |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 53.8 $\Omega$ - 2.1 j $\Omega$ |
| Return Loss                          | - 27.6 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 49.2 $\Omega$ - 6.2 j $\Omega$ |
| Return Loss                          | - 24.0 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.043 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                  |
|-----------------|------------------|
| Manufactured by | SPEAG            |
| Manufactured on | January 21, 2009 |

## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

|         |                  |                             |
|---------|------------------|-----------------------------|
| Phantom | SAM Head Phantom | For usage with cSAR3DV2-R/L |
|---------|------------------|-----------------------------|

### SAR result with SAM Head (Top)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 1.98 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 7.94 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.33 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.32 W/kg ± 16.9 % (k=2) |

### SAR result with SAM Head (Mouth)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 2.05 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 8.22 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.38 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.52 W/kg ± 16.9 % (k=2) |

### SAR result with SAM Head (Neck)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 2.01 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 8.06 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.38 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 5.52 W/kg ± 16.9 % (k=2) |

### SAR result with SAM Head (Ear)

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                          | 250 mW input power | 1.67 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 6.70 W/kg ± 17.5 % (k=2) |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | condition          |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR measured                                            | 250 mW input power | 1.15 W/kg                |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 4.60 W/kg ± 16.9 % (k=2) |

## DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

**SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg**

Maximum value of SAR (measured) = 2.80 W/kg

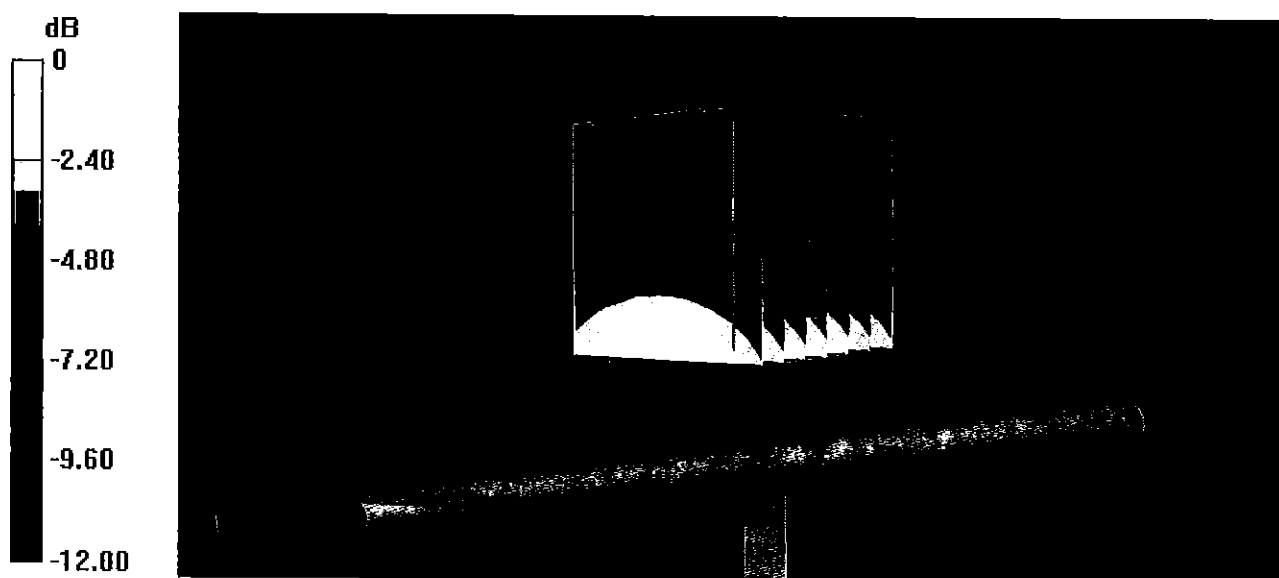


0 dB = 2.80 W/kg = 4.47 dBW/kg



Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07  
CH1 S11 1 U FS 1: 53.754  $\Omega$  -2.0996  $\Omega$  101.07 pF 750.000 000 MHz


\*  
Del  
CA

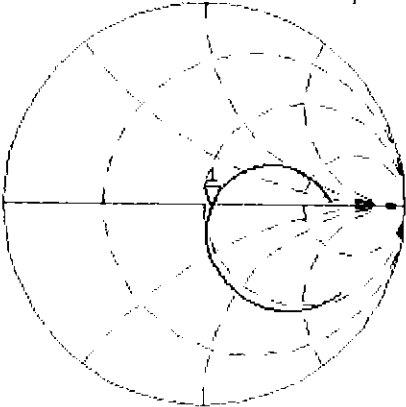

Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.643 dB 750.000 000 MHz

CA  
Avg  
16  
H1d

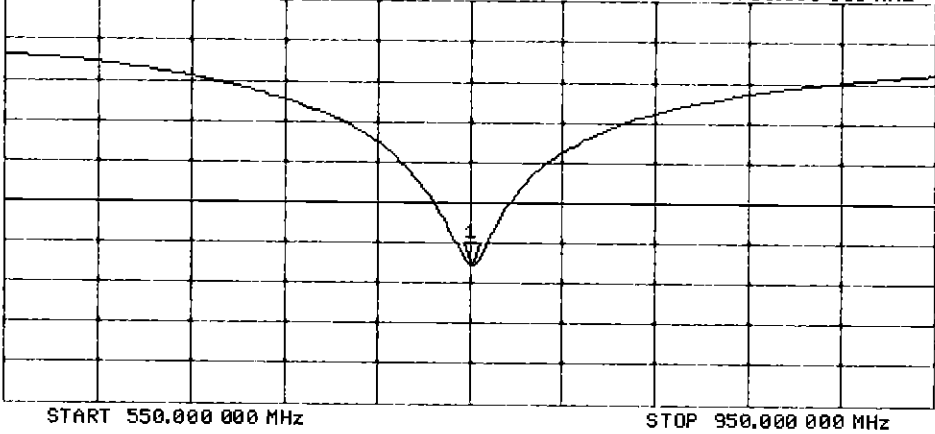

## DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.96 \text{ S/m}$ ;  $\epsilon_r = 55$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW,  $d=15\text{mm}$ /Zoom Scan (7x8x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 57.31 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 3.17 W/kg

**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg**

Maximum value of SAR (measured) = 2.83 W/kg

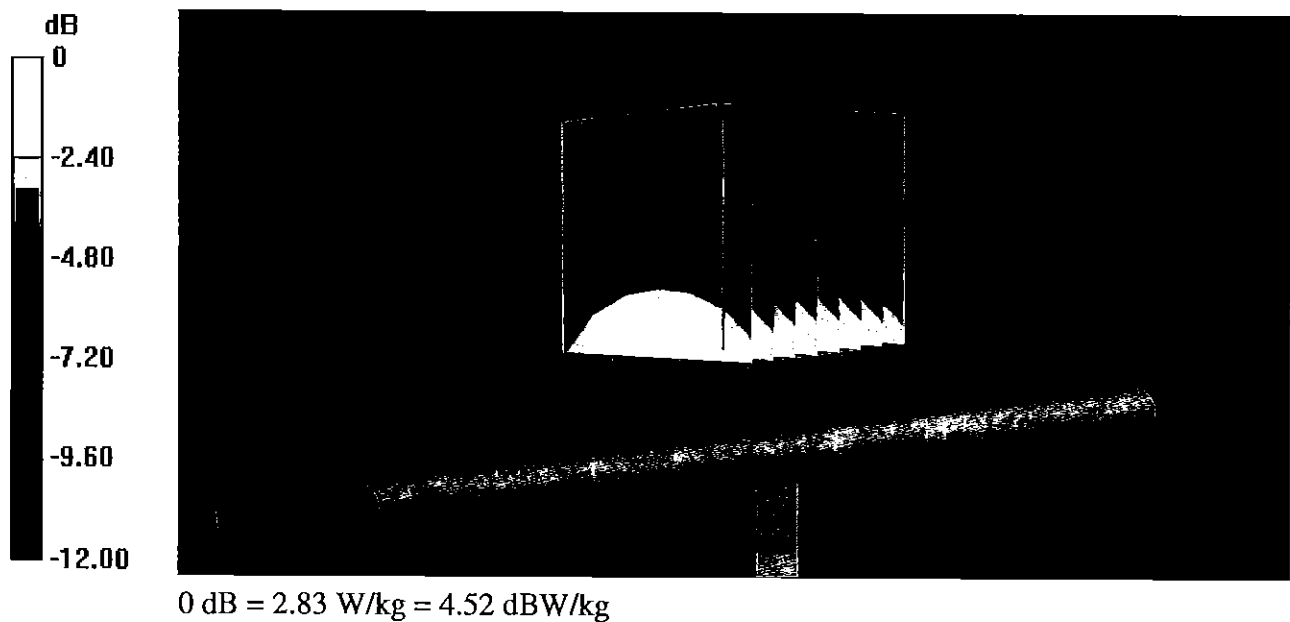

Impedance Measurement Plot for Body TSL

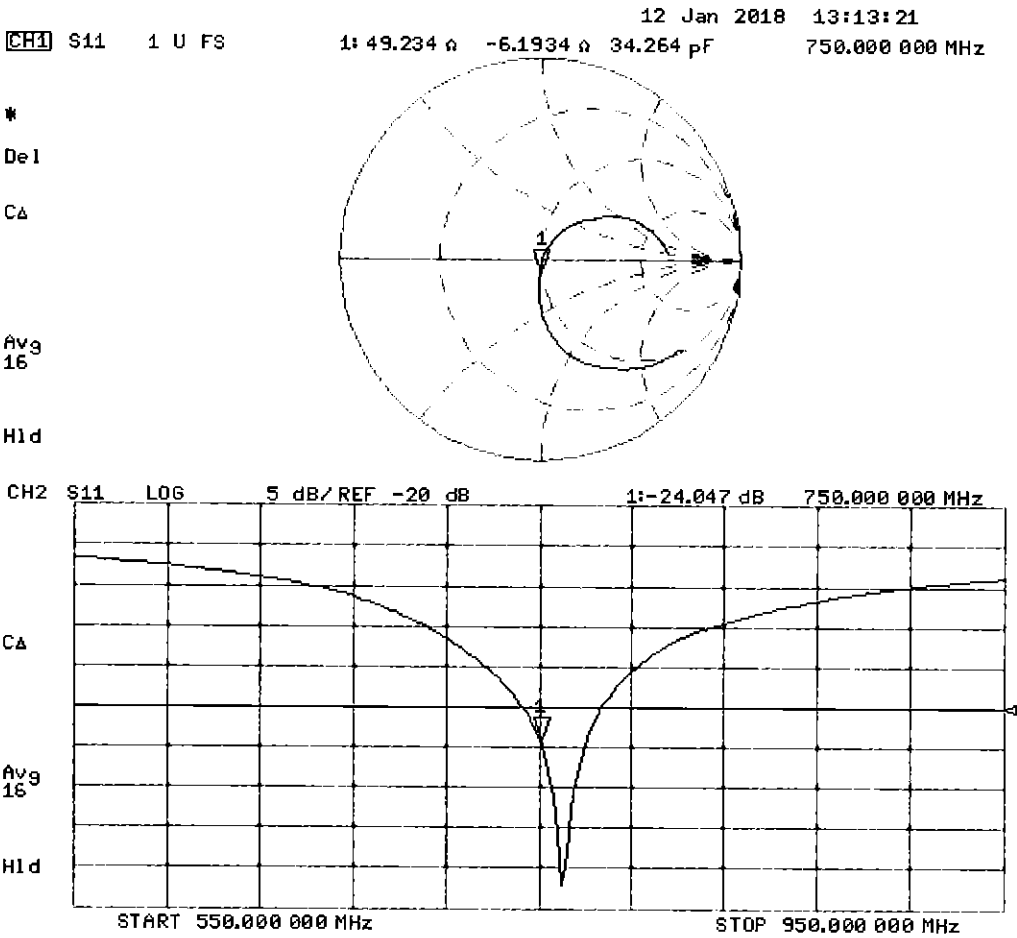

## DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 44.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**SAM Head/Top/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg**

Maximum value of SAR (measured) = 2.58 W/kg

**SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

**SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.62 W/kg

**SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.56 W/kg


**SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg**

Maximum value of SAR (measured) = 2.11 W/kg

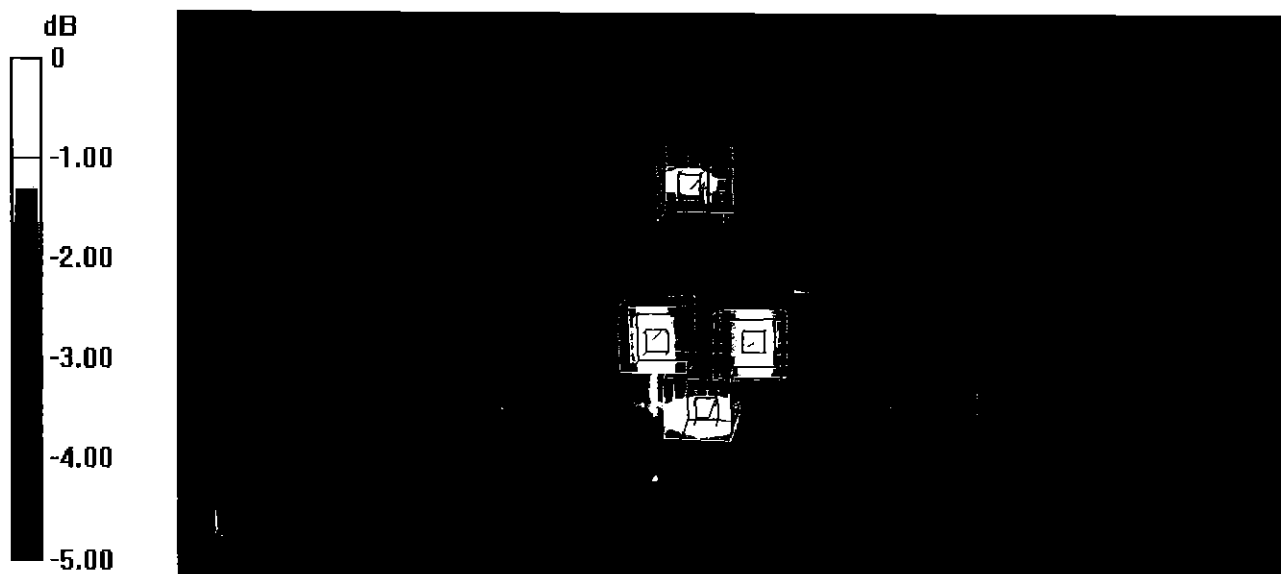

0 dB = 2.58 W/kg = 4.12 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3213\_Feb18**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3213**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

*Ben ✓  
03-02-2018*

Calibration date: **February 13, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 30-Dec-17 (No. ES3-3013_Dec17)    | Dec-18                 |
| DAE4                       | SN: 660          | 21-Dec-17 (No. DAE4-660_Dec17)    | Dec-18                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

|                                                                                                                 |                              |                                          |                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------|------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by:                                                                                                  | Name<br><b>Michael Weber</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:                                                                                                    | Name<br><b>Katja Pokovic</b> | Function<br><b>Technical Manager</b>     | Signature<br> |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                              |                                          | Issued: February 13, 2018                                                                          |



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below **ConvF**).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of **ConvF**.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3213

Manufactured: October 14, 2008  
Calibrated: February 13, 2018

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3213

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.43     | 1.32     | 1.29     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 100.3    | 104.3    | 100.0    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 219.3    | $\pm 2.7 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 219.1    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 213.7    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms} \cdot \text{V}^{-2}$ | T2<br>$\text{ms} \cdot \text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|---------------------------------------|---------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 55.43    | 404.4    | 36.34                       | 28.23                                 | 1.967                                 | 5.10     | 0.398                 | 0.555                 | 1.011 |
| Y | 56.36    | 406.4    | 35.71                       | 28.34                                 | 2.153                                 | 5.10     | 1.040                 | 0.438                 | 1.013 |
| Z | 52.80    | 385.3    | 36.34                       | 28.19                                 | 1.829                                 | 5.10     | 0.000                 | 0.541                 | 1.011 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3213

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 41.9                               | 0.89                            | 6.75    | 6.75    | 6.75    | 0.64               | 1.30                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 6.42    | 6.42    | 6.42    | 0.48               | 1.50                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 5.45    | 5.45    | 5.45    | 0.52               | 1.41                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 5.30    | 5.30    | 5.30    | 0.79               | 1.17                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 4.94    | 4.94    | 4.94    | 0.59               | 1.37                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 4.72    | 4.72    | 4.72    | 0.80               | 1.21                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 4.53    | 4.53    | 4.53    | 0.72               | 1.33                    | ± 12.0 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3213

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 6.30    | 6.30    | 6.30    | 0.80               | 1.13                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 6.20    | 6.20    | 6.20    | 0.41               | 1.66                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 5.10    | 5.10    | 5.10    | 0.37               | 1.82                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 4.88    | 4.88    | 4.88    | 0.59               | 1.51                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 4.62    | 4.62    | 4.62    | 0.80               | 1.30                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 4.53    | 4.53    | 4.53    | 0.80               | 1.25                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 4.33    | 4.33    | 4.33    | 0.80               | 1.25                    | ± 12.0 %  |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

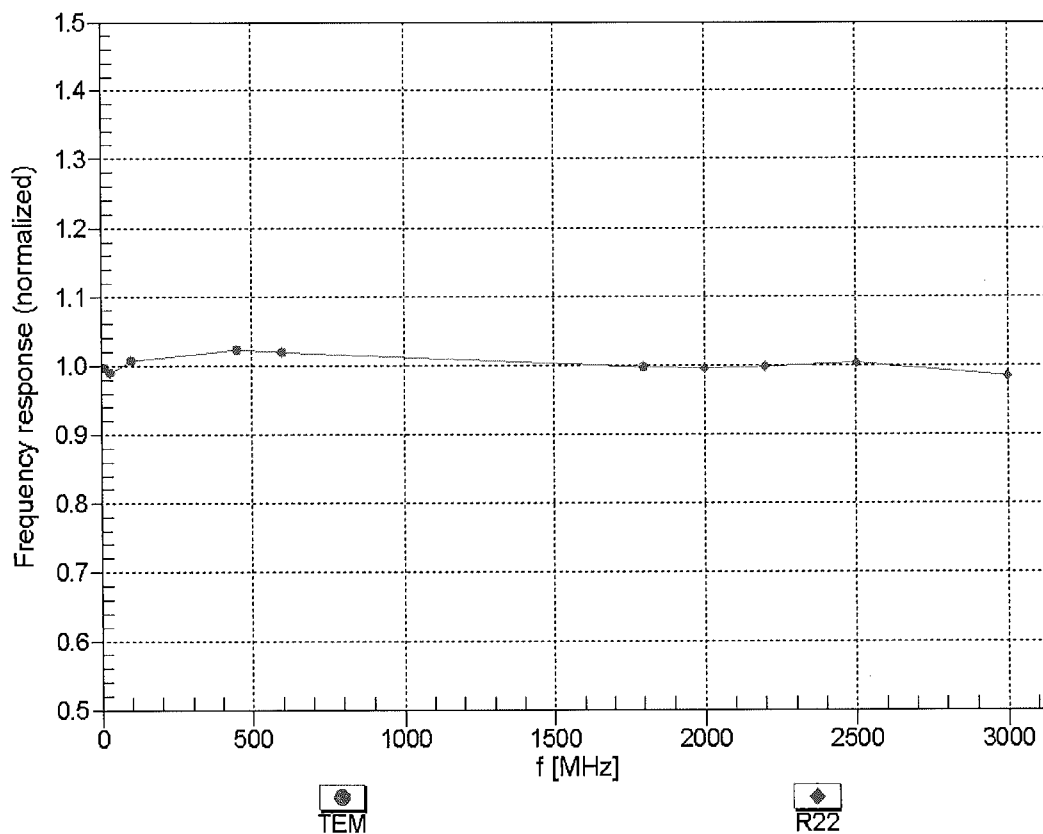



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM

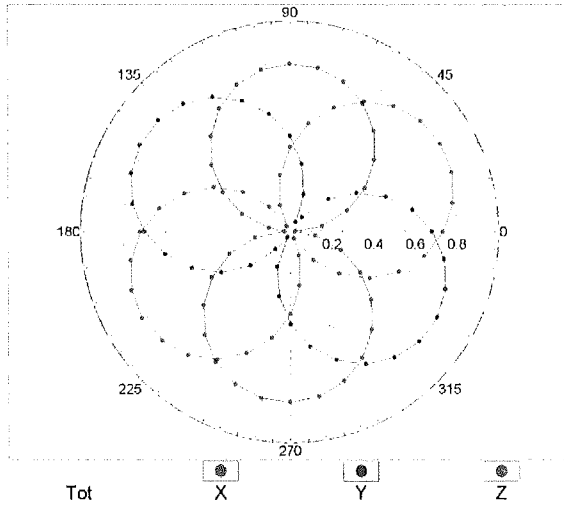


f=1800 MHz,R22

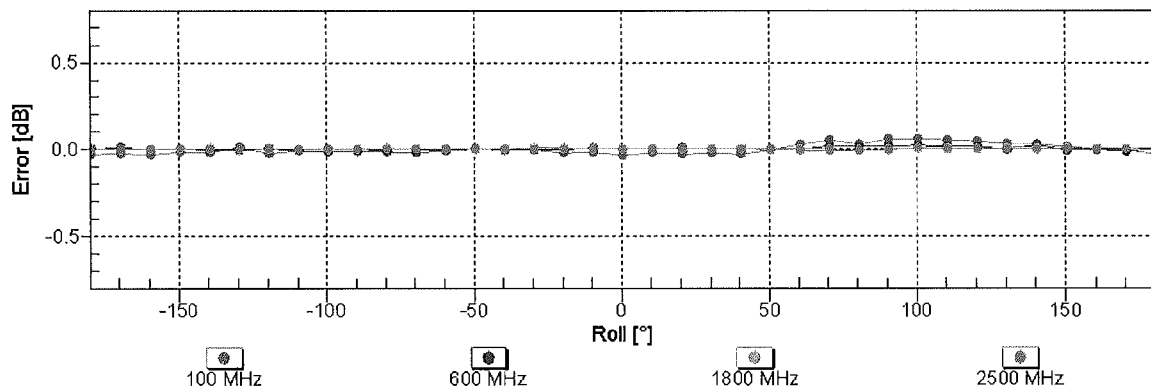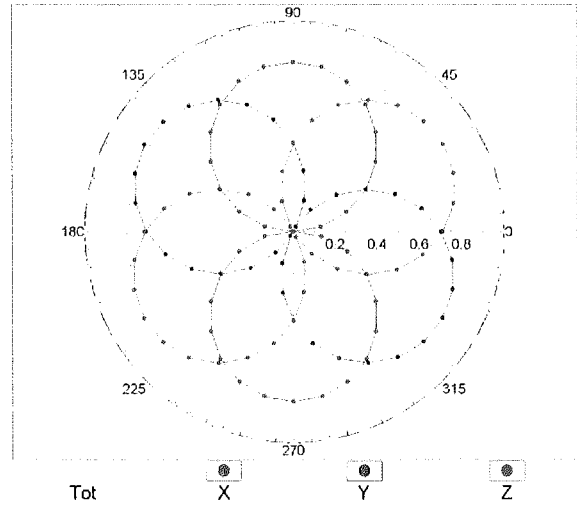


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$ )

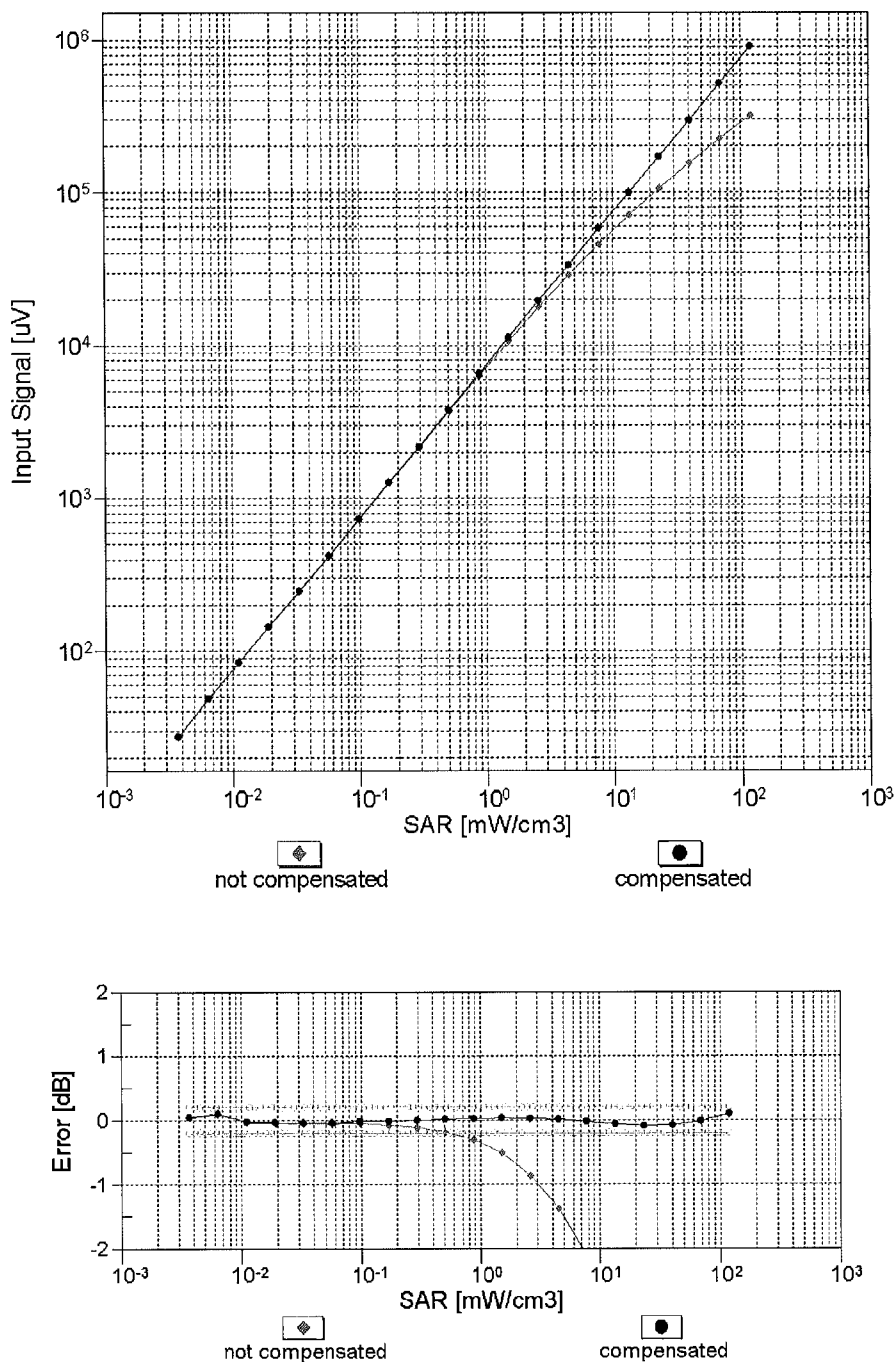



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

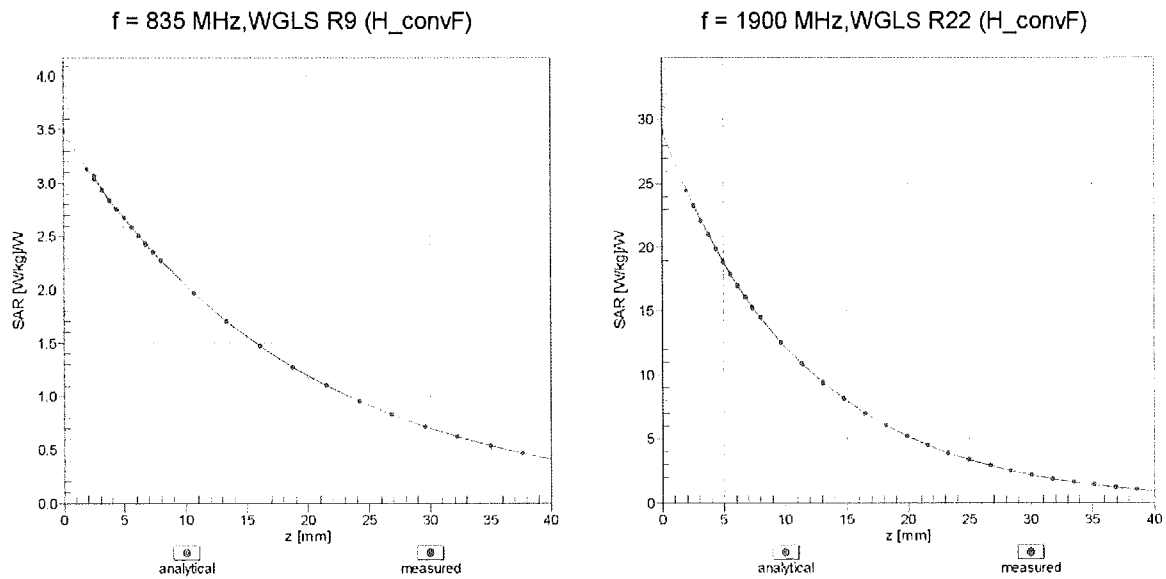

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

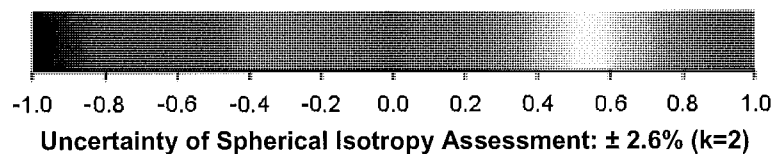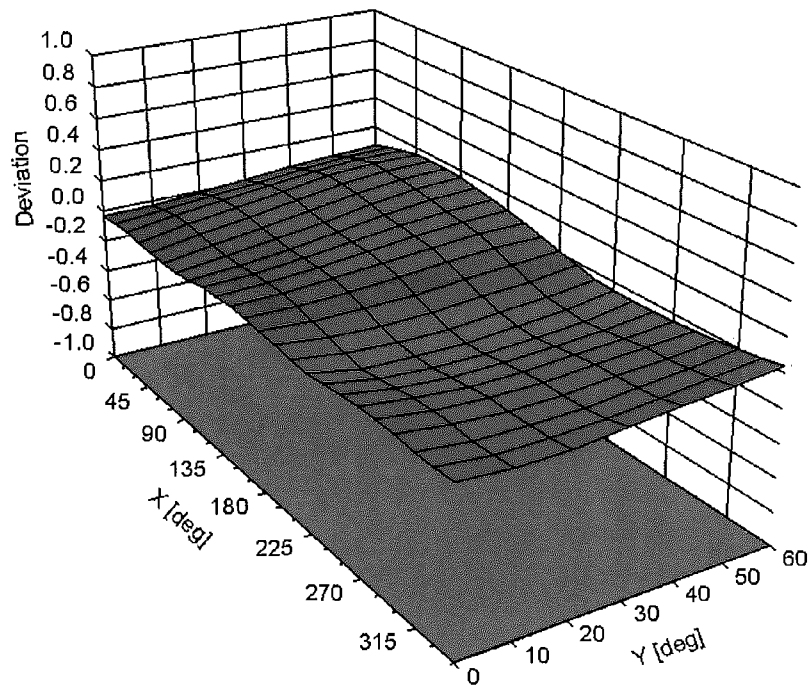

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3213

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 100.6      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |



**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00                   | 1.00  | 0.00    | 219.3    | $\pm 2.7 \%$                     |
|               |                                               | Y | 0.00    | 0.00                   | 1.00  |         | 219.1    |                                  |
|               |                                               | Z | 0.00    | 0.00                   | 1.00  |         | 213.7    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 7.64    | 78.36                  | 17.77 | 10.00   | 25.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 8.93    | 80.69                  | 18.99 |         | 25.0     |                                  |
|               |                                               | Z | 7.43    | 77.97                  | 17.46 |         | 25.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 0.94    | 65.73                  | 13.94 | 0.00    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.08    | 67.98                  | 15.48 |         | 150.0    |                                  |
|               |                                               | Z | 0.93    | 65.52                  | 13.77 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.23    | 64.18                  | 15.06 | 0.41    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.29    | 65.11                  | 15.84 |         | 150.0    |                                  |
|               |                                               | Z | 1.22    | 64.10                  | 14.97 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.06    | 67.01                  | 17.27 | 1.46    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 5.11    | 67.24                  | 17.46 |         | 150.0    |                                  |
|               |                                               | Z | 5.03    | 67.01                  | 17.25 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 58.23   | 111.57                 | 29.90 | 9.39    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 38.28   | 105.54                 | 28.67 |         | 50.0     |                                  |
|               |                                               | Z | 83.35   | 116.76                 | 31.01 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 42.41   | 106.55                 | 28.63 | 9.57    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 31.06   | 102.12                 | 27.76 |         | 50.0     |                                  |
|               |                                               | Z | 55.17   | 110.35                 | 29.43 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 100.00  | 116.42                 | 29.15 | 6.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 117.64                 | 29.89 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 115.95                 | 28.84 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 22.66   | 114.16                 | 43.61 | 12.57   | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 32.36   | 125.54                 | 47.77 |         | 50.0     |                                  |
|               |                                               | Z | 20.92   | 112.18                 | 42.96 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 22.06   | 107.62                 | 37.21 | 9.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 29.09   | 114.84                 | 39.79 |         | 60.0     |                                  |
|               |                                               | Z | 22.32   | 108.24                 | 37.43 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 100.00  | 114.90                 | 27.59 | 4.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 116.49                 | 28.47 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 114.42                 | 27.29 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 114.37                 | 26.58 | 3.55    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 116.53                 | 27.70 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 113.85                 | 26.28 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 13.21   | 95.56                  | 31.98 | 7.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 16.23   | 100.64                 | 33.98 |         | 80.0     |                                  |
|               |                                               | Z | 13.05   | 95.55                  | 31.99 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 100.00  | 114.59                 | 27.76 | 5.30    | 70.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 116.05                 | 28.60 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 114.06                 | 27.44 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 100.00  | 112.38                 | 24.24 | 1.88    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 116.66                 | 26.24 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 111.54                 | 23.82 |         | 100.0    |                                  |

|           |                                                     |   |        |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 100.00 | 112.51 | 23.27 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 119.82 | 26.49 |       | 100.0 |         |
|           |                                                     | Z | 100.00 | 111.35 | 22.74 |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 19.77  | 98.57  | 26.87 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 22.51  | 101.06 | 27.89 |       | 70.0  |         |
|           |                                                     | Z | 20.62  | 99.03  | 26.84 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 5.26   | 81.87  | 19.91 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 7.30   | 87.04  | 22.01 |       | 100.0 |         |
|           |                                                     | Z | 5.17   | 81.44  | 19.55 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 2.97   | 75.56  | 17.30 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.02   | 80.17  | 19.40 |       | 100.0 |         |
|           |                                                     | Z | 2.90   | 75.11  | 16.93 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 25.61  | 102.92 | 28.18 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 28.89  | 105.33 | 29.15 |       | 70.0  |         |
|           |                                                     | Z | 27.23  | 103.63 | 28.21 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 5.03   | 81.31  | 19.68 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 7.01   | 86.52  | 21.80 |       | 100.0 |         |
|           |                                                     | Z | 4.92   | 80.81  | 19.30 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 3.05   | 76.11  | 17.60 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.14   | 80.86  | 19.74 |       | 100.0 |         |
|           |                                                     | Z | 2.97   | 75.64  | 17.22 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 1.52   | 68.64  | 14.11 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.86   | 71.69  | 15.85 |       | 150.0 |         |
|           |                                                     | Z | 1.44   | 68.18  | 13.70 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 115.25 | 28.83 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 116.43 | 29.57 |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 114.73 | 28.50 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.00   | 111.44 | 0.10  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.00   | 116.05 | 0.75  |       | 150.0 |         |
|           |                                                     | Z | 0.00   | 113.36 | 0.21  |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 15.69  | 90.02  | 25.55 | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 13.84  | 87.79  | 25.13 |       | 25.0  |         |
|           |                                                     | Z | 17.52  | 91.95  | 25.99 |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 19.88  | 94.41  | 25.54 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 17.39  | 92.41  | 25.24 |       | 40.0  |         |
|           |                                                     | Z | 22.32  | 96.16  | 25.89 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 15.96  | 91.92  | 25.75 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 16.02  | 92.06  | 26.04 |       | 50.0  |         |
|           |                                                     | Z | 16.84  | 92.83  | 25.91 |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 9.21   | 88.16  | 28.55 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 10.78  | 91.87  | 30.15 |       | 100.0 |         |
|           |                                                     | Z | 9.04   | 87.96  | 28.49 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.36   | 66.07  | 16.00 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.46   | 67.28  | 16.91 |       | 110.0 |         |
|           |                                                     | Z | 1.35   | 65.96  | 15.91 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 52.62  | 119.34 | 30.14 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 130.86 | 33.40 |       | 110.0 |         |
|           |                                                     | Z | 47.54  | 117.73 | 29.68 |       | 110.0 |         |

|           |                                                |   |       |       |       |      |       |         |
|-----------|------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 7.64  | 91.52 | 25.20 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 11.51 | 98.81 | 27.78 |      | 110.0 |         |
|           |                                                | Z | 7.56  | 91.41 | 25.11 |      | 110.0 |         |
| 10062-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 4.79  | 66.76 | 16.54 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.84  | 66.99 | 16.73 |      | 100.0 |         |
|           |                                                | Z | 4.76  | 66.76 | 16.52 |      | 100.0 |         |
| 10063-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 4.82  | 66.91 | 16.68 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.87  | 67.15 | 16.87 |      | 100.0 |         |
|           |                                                | Z | 4.79  | 66.91 | 16.65 |      | 100.0 |         |
| 10064-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 5.14  | 67.25 | 16.96 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.20  | 67.49 | 17.14 |      | 100.0 |         |
|           |                                                | Z | 5.10  | 67.24 | 16.93 |      | 100.0 |         |
| 10065-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 5.04  | 67.27 | 17.12 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.10  | 67.51 | 17.31 |      | 100.0 |         |
|           |                                                | Z | 5.00  | 67.25 | 17.09 |      | 100.0 |         |
| 10066-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 5.09  | 67.39 | 17.35 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.15  | 67.65 | 17.54 |      | 100.0 |         |
|           |                                                | Z | 5.06  | 67.37 | 17.32 |      | 100.0 |         |
| 10067-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.41  | 67.60 | 17.83 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.47  | 67.85 | 18.03 |      | 100.0 |         |
|           |                                                | Z | 5.38  | 67.60 | 17.82 |      | 100.0 |         |
| 10068-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 5.53  | 67.90 | 18.19 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.60  | 68.19 | 18.41 |      | 100.0 |         |
|           |                                                | Z | 5.49  | 67.88 | 18.16 |      | 100.0 |         |
| 10069-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 5.62  | 67.88 | 18.39 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.69  | 68.17 | 18.62 |      | 100.0 |         |
|           |                                                | Z | 5.57  | 67.88 | 18.36 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 5.20  | 67.23 | 17.66 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.25  | 67.48 | 17.85 |      | 100.0 |         |
|           |                                                | Z | 5.17  | 67.24 | 17.64 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.24  | 67.75 | 17.96 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.31  | 68.03 | 18.18 |      | 100.0 |         |
|           |                                                | Z | 5.21  | 67.74 | 17.94 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.36  | 68.08 | 18.38 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.44  | 68.38 | 18.61 |      | 100.0 |         |
|           |                                                | Z | 5.33  | 68.07 | 18.36 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 5.39  | 68.13 | 18.62 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.47  | 68.45 | 18.87 |      | 100.0 |         |
|           |                                                | Z | 5.36  | 68.12 | 18.60 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.52  | 68.55 | 19.10 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.61  | 68.93 | 19.38 |      | 90.0  |         |
|           |                                                | Z | 5.48  | 68.52 | 19.07 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.53  | 68.37 | 19.24 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.62  | 68.75 | 19.52 |      | 90.0  |         |
|           |                                                | Z | 5.50  | 68.36 | 19.22 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.57  | 68.46 | 19.34 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.66  | 68.84 | 19.63 |      | 90.0  |         |
|           |                                                | Z | 5.54  | 68.44 | 19.32 |      | 90.0  |         |

|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 0.76   | 64.13  | 11.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.90   | 66.35  | 12.99 |      | 150.0 |         |
|           |                                                     | Z | 0.73   | 63.81  | 11.00 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 1.73   | 62.47  | 7.53  | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 1.91   | 63.29  | 8.22  |      | 80.0  |         |
|           |                                                     | Z | 1.67   | 62.23  | 7.30  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 100.00 | 116.51 | 29.21 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 117.72 | 29.95 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 116.03 | 28.90 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 1.73   | 66.45  | 14.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.84   | 67.58  | 15.67 |      | 150.0 |         |
|           |                                                     | Z | 1.71   | 66.38  | 14.75 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 1.70   | 66.40  | 14.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.81   | 67.56  | 15.65 |      | 150.0 |         |
|           |                                                     | Z | 1.68   | 66.33  | 14.71 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 22.00  | 107.50 | 37.17 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 28.88  | 114.61 | 39.71 |      | 60.0  |         |
|           |                                                     | Z | 22.27  | 108.13 | 37.40 |      | 60.0  |         |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.03   | 69.43  | 16.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.22   | 70.56  | 16.70 |      | 150.0 |         |
|           |                                                     | Z | 2.99   | 69.29  | 15.96 |      | 150.0 |         |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.23   | 67.20  | 15.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.33   | 67.78  | 16.01 |      | 150.0 |         |
|           |                                                     | Z | 3.20   | 67.12  | 15.56 |      | 150.0 |         |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.34   | 67.17  | 15.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.42   | 67.69  | 16.08 |      | 150.0 |         |
|           |                                                     | Z | 3.31   | 67.10  | 15.66 |      | 150.0 |         |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 8.49   | 78.45  | 21.33 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.79   | 79.00  | 21.62 |      | 65.0  |         |
|           |                                                     | Z | 8.39   | 78.42  | 21.32 |      | 65.0  |         |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 8.27   | 76.76  | 21.53 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.57   | 77.41  | 21.89 |      | 65.0  |         |
|           |                                                     | Z | 8.21   | 76.79  | 21.53 |      | 65.0  |         |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 8.13   | 76.44  | 21.71 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 7.83   | 75.63  | 21.42 |      | 65.0  |         |
|           |                                                     | Z | 7.93   | 76.10  | 21.55 |      | 65.0  |         |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 2.67   | 68.71  | 15.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.83   | 69.80  | 16.55 |      | 150.0 |         |
|           |                                                     | Z | 2.63   | 68.57  | 15.78 |      | 150.0 |         |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 2.89   | 66.95  | 15.47 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.98   | 67.57  | 15.91 |      | 150.0 |         |
|           |                                                     | Z | 2.86   | 66.87  | 15.40 |      | 150.0 |         |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.17   | 67.76  | 15.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.32   | 68.94  | 16.22 |      | 150.0 |         |
|           |                                                     | Z | 2.13   | 67.62  | 15.34 |      | 150.0 |         |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.56   | 67.34  | 15.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.66   | 68.04  | 16.08 |      | 150.0 |         |
|           |                                                     | Z | 2.53   | 67.28  | 15.48 |      | 150.0 |         |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 3.02 | 66.95 | 15.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.10 | 67.51 | 15.95 |      | 150.0 |         |
|           |                                                | Z | 2.98 | 66.88 | 15.48 |      | 150.0 |         |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 2.72 | 67.49 | 15.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.81 | 68.13 | 16.19 |      | 150.0 |         |
|           |                                                | Z | 2.68 | 67.45 | 15.64 |      | 150.0 |         |
| 10114-CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.17 | 67.15 | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.21 | 67.35 | 16.50 |      | 150.0 |         |
|           |                                                | Z | 5.15 | 67.16 | 16.34 |      | 150.0 |         |
| 10115-CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.53 | 67.49 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.58 | 67.70 | 16.70 |      | 150.0 |         |
|           |                                                | Z | 5.48 | 67.42 | 16.49 |      | 150.0 |         |
| 10116-CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.30 | 67.42 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.34 | 67.62 | 16.57 |      | 150.0 |         |
|           |                                                | Z | 5.27 | 67.41 | 16.40 |      | 150.0 |         |
| 10117-CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.15 | 67.08 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.20 | 67.30 | 16.50 |      | 150.0 |         |
|           |                                                | Z | 5.12 | 67.04 | 16.30 |      | 150.0 |         |
| 10118-CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.63 | 67.73 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.66 | 67.91 | 16.81 |      | 150.0 |         |
|           |                                                | Z | 5.59 | 67.70 | 16.64 |      | 150.0 |         |
| 10119-CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.27 | 67.36 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.31 | 67.56 | 16.55 |      | 150.0 |         |
|           |                                                | Z | 5.24 | 67.35 | 16.38 |      | 150.0 |         |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.38 | 67.18 | 15.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.47 | 67.70 | 16.01 |      | 150.0 |         |
|           |                                                | Z | 3.35 | 67.11 | 15.59 |      | 150.0 |         |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.50 | 67.27 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.59 | 67.74 | 16.15 |      | 150.0 |         |
|           |                                                | Z | 3.47 | 67.21 | 15.77 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 1.93 | 67.51 | 15.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.09 | 68.84 | 15.93 |      | 150.0 |         |
|           |                                                | Z | 1.89 | 67.35 | 14.89 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.38 | 67.70 | 15.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.51 | 68.61 | 15.82 |      | 150.0 |         |
|           |                                                | Z | 2.34 | 67.60 | 15.02 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.24 | 66.02 | 13.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.36 | 66.87 | 14.53 |      | 150.0 |         |
|           |                                                | Z | 2.19 | 65.88 | 13.71 |      | 150.0 |         |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 1.22 | 64.47 | 11.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.37 | 66.07 | 12.76 |      | 150.0 |         |
|           |                                                | Z | 1.15 | 64.01 | 11.10 |      | 150.0 |         |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 2.40 | 68.51 | 13.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.25 | 72.57 | 15.44 |      | 150.0 |         |
|           |                                                | Z | 2.13 | 67.36 | 12.68 |      | 150.0 |         |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 2.86 | 70.85 | 14.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 4.17 | 75.98 | 16.98 |      | 150.0 |         |
|           |                                                | Z | 2.50 | 69.50 | 13.83 |      | 150.0 |         |

|           |                                            |   |      |       |       |      |       |         |
|-----------|--------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 2.90 | 67.00 | 15.51 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.99 | 67.62 | 15.95 |      | 150.0 |         |
|           |                                            | Z | 2.86 | 66.92 | 15.44 |      | 150.0 |         |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 3.02 | 66.99 | 15.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.11 | 67.55 | 15.98 |      | 150.0 |         |
|           |                                            | Z | 2.99 | 66.93 | 15.52 |      | 150.0 |         |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 8.96 | 80.66 | 22.26 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 9.32 | 81.32 | 22.60 |      | 65.0  |         |
|           |                                            | Z | 9.00 | 80.93 | 22.35 |      | 65.0  |         |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 7.88 | 76.96 | 21.35 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.23 | 77.73 | 21.78 |      | 65.0  |         |
|           |                                            | Z | 7.82 | 76.98 | 21.33 |      | 65.0  |         |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 8.28 | 77.78 | 22.03 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.58 | 78.42 | 22.39 |      | 65.0  |         |
|           |                                            | Z | 8.24 | 77.86 | 22.04 |      | 65.0  |         |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.21 | 68.11 | 15.68 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.36 | 69.30 | 16.45 |      | 150.0 |         |
|           |                                            | Z | 2.17 | 67.96 | 15.57 |      | 150.0 |         |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.56 | 67.35 | 15.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.66 | 68.05 | 16.10 |      | 150.0 |         |
|           |                                            | Z | 2.53 | 67.29 | 15.50 |      | 150.0 |         |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 1.77 | 67.43 | 14.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.94 | 68.94 | 15.78 |      | 150.0 |         |
|           |                                            | Z | 1.72 | 67.23 | 14.58 |      | 150.0 |         |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 2.05 | 66.34 | 13.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.19 | 67.38 | 14.58 |      | 150.0 |         |
|           |                                            | Z | 2.00 | 66.16 | 13.59 |      | 150.0 |         |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 2.72 | 67.54 | 15.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.82 | 68.17 | 16.23 |      | 150.0 |         |
|           |                                            | Z | 2.68 | 67.50 | 15.68 |      | 150.0 |         |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.14 | 66.71 | 14.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.28 | 67.74 | 14.81 |      | 150.0 |         |
|           |                                            | Z | 2.09 | 66.52 | 13.84 |      | 150.0 |         |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 2.72 | 68.07 | 15.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.84 | 68.89 | 16.38 |      | 150.0 |         |
|           |                                            | Z | 2.69 | 68.00 | 15.76 |      | 150.0 |         |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 2.91 | 66.88 | 15.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.00 | 67.45 | 15.91 |      | 150.0 |         |
|           |                                            | Z | 2.88 | 66.82 | 15.43 |      | 150.0 |         |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 3.02 | 67.01 | 15.60 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.11 | 67.54 | 16.00 |      | 150.0 |         |
|           |                                            | Z | 2.99 | 66.96 | 15.54 |      | 150.0 |         |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 3.77 | 69.87 | 19.29 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.99 | 71.07 | 20.04 |      | 150.0 |         |
|           |                                            | Z | 3.62 | 69.43 | 19.11 |      | 150.0 |         |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 4.72 | 72.88 | 19.79 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.23 | 74.95 | 20.86 |      | 150.0 |         |
|           |                                            | Z | 4.39 | 72.04 | 19.48 |      | 150.0 |         |

|           |                                            |   |       |        |       |      |       |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 5.18  | 74.86  | 20.97 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.75  | 76.97  | 22.01 |      | 150.0 |         |
|           |                                            | Z | 4.80  | 74.00  | 20.67 |      | 150.0 |         |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 3.27  | 70.16  | 19.42 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.60  | 72.33  | 20.65 |      | 150.0 |         |
|           |                                            | Z | 3.01  | 68.98  | 18.94 |      | 150.0 |         |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 4.60  | 76.17  | 21.67 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.62  | 80.32  | 23.51 |      | 150.0 |         |
|           |                                            | Z | 3.98  | 74.14  | 20.96 |      | 150.0 |         |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 3.81  | 72.17  | 19.05 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.54  | 75.67  | 20.74 |      | 150.0 |         |
|           |                                            | Z | 3.36  | 70.59  | 18.47 |      | 150.0 |         |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 30.28 | 111.82 | 34.48 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 76.86 | 130.98 | 39.85 |      | 65.0  |         |
|           |                                            | Z | 23.60 | 107.83 | 33.49 |      | 65.0  |         |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 34.72 | 108.92 | 31.80 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 74.54 | 122.99 | 35.68 |      | 65.0  |         |
|           |                                            | Z | 31.06 | 107.91 | 31.67 |      | 65.0  |         |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 26.76 | 102.85 | 29.55 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 50.48 | 114.18 | 32.83 |      | 65.0  |         |
|           |                                            | Z | 23.63 | 101.61 | 29.31 |      | 65.0  |         |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 3.23  | 69.86  | 19.18 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.55  | 72.01  | 20.41 |      | 150.0 |         |
|           |                                            | Z | 2.98  | 68.71  | 18.72 |      | 150.0 |         |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 4.60  | 76.19  | 21.68 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.63  | 80.35  | 23.53 |      | 150.0 |         |
|           |                                            | Z | 3.98  | 74.16  | 20.97 |      | 150.0 |         |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 3.26  | 70.01  | 19.27 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.58  | 72.16  | 20.50 |      | 150.0 |         |
|           |                                            | Z | 3.00  | 68.84  | 18.80 |      | 150.0 |         |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 4.55  | 75.95  | 21.56 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.56  | 80.06  | 23.39 |      | 150.0 |         |
|           |                                            | Z | 3.95  | 73.96  | 20.86 |      | 150.0 |         |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 4.17  | 74.04  | 20.23 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.04  | 77.87  | 21.99 |      | 150.0 |         |
|           |                                            | Z | 3.65  | 72.28  | 19.60 |      | 150.0 |         |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 3.80  | 72.10  | 19.00 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.52  | 75.59  | 20.69 |      | 150.0 |         |
|           |                                            | Z | 3.36  | 70.53  | 18.43 |      | 150.0 |         |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 3.25  | 69.99  | 19.27 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.58  | 72.15  | 20.49 |      | 150.0 |         |
|           |                                            | Z | 3.00  | 68.83  | 18.80 |      | 150.0 |         |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 4.54  | 75.93  | 21.54 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.55  | 80.04  | 23.38 |      | 150.0 |         |
|           |                                            | Z | 3.94  | 73.93  | 20.85 |      | 150.0 |         |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 3.79  | 72.07  | 18.99 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.51  | 75.56  | 20.68 |      | 150.0 |         |
|           |                                            | Z | 3.35  | 70.51  | 18.42 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 3.26 | 70.03 | 19.29 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.59 | 72.19 | 20.51 |      | 150.0 |         |
|           |                                               | Z | 3.01 | 68.87 | 18.82 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 4.56 | 76.00 | 21.58 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.57 | 80.12 | 23.42 |      | 150.0 |         |
|           |                                               | Z | 3.96 | 74.00 | 20.89 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 3.81 | 72.14 | 19.03 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.54 | 75.64 | 20.72 |      | 150.0 |         |
|           |                                               | Z | 3.37 | 70.57 | 18.45 |      | 150.0 |         |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 3.27 | 70.08 | 19.34 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.60 | 72.24 | 20.57 |      | 150.0 |         |
|           |                                               | Z | 3.02 | 68.91 | 18.87 |      | 150.0 |         |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 4.71 | 76.65 | 21.94 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.78 | 80.88 | 23.80 |      | 150.0 |         |
|           |                                               | Z | 4.07 | 74.57 | 21.23 |      | 150.0 |         |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 3.89 | 72.56 | 19.29 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.65 | 76.13 | 21.00 |      | 150.0 |         |
|           |                                               | Z | 3.43 | 70.95 | 18.70 |      | 150.0 |         |
| 10193-CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.57 | 66.50 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.61 | 66.73 | 16.23 |      | 150.0 |         |
|           |                                               | Z | 4.54 | 66.49 | 16.01 |      | 150.0 |         |
| 10194-CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.75 | 66.84 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.80 | 67.09 | 16.35 |      | 150.0 |         |
|           |                                               | Z | 4.71 | 66.82 | 16.14 |      | 150.0 |         |
| 10195-CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.79 | 66.87 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.84 | 67.11 | 16.37 |      | 150.0 |         |
|           |                                               | Z | 4.76 | 66.85 | 16.15 |      | 150.0 |         |
| 10196-CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.58 | 66.58 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.63 | 66.82 | 16.26 |      | 150.0 |         |
|           |                                               | Z | 4.54 | 66.56 | 16.03 |      | 150.0 |         |
| 10197-CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 4.77 | 66.86 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.82 | 67.11 | 16.37 |      | 150.0 |         |
|           |                                               | Z | 4.73 | 66.84 | 16.15 |      | 150.0 |         |
| 10198-CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 4.80 | 66.89 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.85 | 67.13 | 16.38 |      | 150.0 |         |
|           |                                               | Z | 4.76 | 66.87 | 16.17 |      | 150.0 |         |
| 10219-CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.52 | 66.58 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.58 | 66.83 | 16.22 |      | 150.0 |         |
|           |                                               | Z | 4.49 | 66.56 | 15.99 |      | 150.0 |         |
| 10220-CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 4.76 | 66.85 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.81 | 67.09 | 16.36 |      | 150.0 |         |
|           |                                               | Z | 4.72 | 66.82 | 16.14 |      | 150.0 |         |
| 10221-CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 4.80 | 66.82 | 16.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.86 | 67.06 | 16.37 |      | 150.0 |         |
|           |                                               | Z | 4.77 | 66.80 | 16.16 |      | 150.0 |         |
| 10222-CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.13 | 67.08 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.18 | 67.32 | 16.50 |      | 150.0 |         |
|           |                                               | Z | 5.10 | 67.04 | 16.29 |      | 150.0 |         |



|           |                                           |   |       |        |       |      |       |         |
|-----------|-------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10223-CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.46  | 67.35  | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.51  | 67.58  | 16.66 |      | 150.0 |         |
|           |                                           | Z | 5.42  | 67.30  | 16.45 |      | 150.0 |         |
| 10224-CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.17  | 67.18  | 16.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.22  | 67.40  | 16.46 |      | 150.0 |         |
|           |                                           | Z | 5.14  | 67.14  | 16.27 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 2.80  | 65.74  | 15.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.87  | 66.19  | 15.45 |      | 150.0 |         |
|           |                                           | Z | 2.77  | 65.70  | 14.98 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 37.38 | 110.41 | 32.30 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 81.50 | 124.82 | 36.22 |      | 65.0  |         |
|           |                                           | Z | 33.47 | 109.42 | 32.18 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 29.60 | 104.69 | 30.14 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 53.65 | 115.37 | 33.21 |      | 65.0  |         |
|           |                                           | Z | 27.65 | 104.42 | 30.19 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 32.41 | 113.60 | 35.07 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 69.82 | 129.54 | 39.59 |      | 65.0  |         |
|           |                                           | Z | 28.33 | 111.82 | 34.72 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 34.78 | 108.94 | 31.81 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 74.32 | 122.93 | 35.67 |      | 65.0  |         |
|           |                                           | Z | 31.14 | 107.94 | 31.68 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 27.87 | 103.54 | 29.74 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 50.12 | 114.03 | 32.79 |      | 65.0  |         |
|           |                                           | Z | 25.97 | 103.21 | 29.78 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 30.34 | 112.17 | 34.60 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 64.44 | 127.76 | 39.06 |      | 65.0  |         |
|           |                                           | Z | 26.54 | 110.39 | 34.24 |      | 65.0  |         |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 34.78 | 108.95 | 31.81 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 74.45 | 122.97 | 35.68 |      | 65.0  |         |
|           |                                           | Z | 31.13 | 107.95 | 31.68 |      | 65.0  |         |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 27.88 | 103.55 | 29.75 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 50.22 | 114.08 | 32.80 |      | 65.0  |         |
|           |                                           | Z | 25.97 | 103.22 | 29.78 |      | 65.0  |         |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 28.47 | 110.69 | 34.07 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 59.28 | 125.81 | 38.45 |      | 65.0  |         |
|           |                                           | Z | 24.97 | 108.97 | 33.72 |      | 65.0  |         |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 34.92 | 109.04 | 31.84 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 75.02 | 123.12 | 35.72 |      | 65.0  |         |
|           |                                           | Z | 31.25 | 108.03 | 31.71 |      | 65.0  |         |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 28.18 | 103.71 | 29.79 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 50.93 | 114.30 | 32.85 |      | 65.0  |         |
|           |                                           | Z | 26.26 | 103.39 | 29.82 |      | 65.0  |         |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 30.66 | 112.40 | 34.66 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 65.75 | 128.19 | 39.17 |      | 65.0  |         |
|           |                                           | Z | 26.79 | 110.61 | 34.30 |      | 65.0  |         |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 34.79 | 108.97 | 31.82 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 74.62 | 123.02 | 35.69 |      | 65.0  |         |
|           |                                           | Z | 31.13 | 107.96 | 31.69 |      | 65.0  |         |

|           |                                            |   |       |        |       |      |      |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 27.87 | 103.57 | 29.75 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 50.30 | 114.13 | 32.82 |      | 65.0 |         |
|           |                                            | Z | 25.95 | 103.23 | 29.78 |      | 65.0 |         |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 30.53 | 112.33 | 34.64 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 65.39 | 128.09 | 39.15 |      | 65.0 |         |
|           |                                            | Z | 26.68 | 110.54 | 34.28 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 11.82 | 86.67  | 27.53 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 13.66 | 90.07  | 29.00 |      | 65.0 |         |
|           |                                            | Z | 11.24 | 86.07  | 27.33 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 11.41 | 85.92  | 27.17 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 13.45 | 89.74  | 28.82 |      | 65.0 |         |
|           |                                            | Z | 10.57 | 84.73  | 26.73 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 9.24  | 83.16  | 27.04 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.64 | 86.64  | 28.68 |      | 65.0 |         |
|           |                                            | Z | 8.64  | 81.99  | 26.56 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 9.03  | 80.20  | 20.72 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.95  | 81.82  | 21.52 |      | 65.0 |         |
|           |                                            | Z | 8.70  | 79.77  | 20.42 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 8.84  | 79.62  | 20.45 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.72  | 81.20  | 21.24 |      | 65.0 |         |
|           |                                            | Z | 8.49  | 79.13  | 20.13 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 8.67  | 82.28  | 21.37 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.40  | 83.61  | 22.04 |      | 65.0 |         |
|           |                                            | Z | 8.57  | 82.11  | 21.15 |      | 65.0 |         |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 7.23  | 77.21  | 20.08 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.59  | 77.99  | 20.54 |      | 65.0 |         |
|           |                                            | Z | 7.13  | 77.07  | 19.88 |      | 65.0 |         |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 7.20  | 76.70  | 19.86 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.57  | 77.51  | 20.35 |      | 65.0 |         |
|           |                                            | Z | 7.09  | 76.52  | 19.65 |      | 65.0 |         |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 9.92  | 84.79  | 23.00 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.62 | 85.95  | 23.57 |      | 65.0 |         |
|           |                                            | Z | 10.01 | 85.03  | 22.98 |      | 65.0 |         |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 8.21  | 79.48  | 22.35 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.54  | 80.13  | 22.71 |      | 65.0 |         |
|           |                                            | Z | 8.20  | 79.60  | 22.34 |      | 65.0 |         |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 7.75  | 77.32  | 21.20 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.11  | 78.10  | 21.64 |      | 65.0 |         |
|           |                                            | Z | 7.70  | 77.35  | 21.14 |      | 65.0 |         |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 9.77  | 84.02  | 23.49 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.31 | 84.92  | 23.94 |      | 65.0 |         |
|           |                                            | Z | 9.89  | 84.42  | 23.60 |      | 65.0 |         |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 7.68  | 76.36  | 21.13 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.00  | 77.10  | 21.55 |      | 65.0 |         |
|           |                                            | Z | 7.63  | 76.40  | 21.10 |      | 65.0 |         |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 8.06  | 77.17  | 21.76 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.36  | 77.82  | 22.13 |      | 65.0 |         |
|           |                                            | Z | 8.03  | 77.25  | 21.75 |      | 65.0 |         |

|           |                                             |   |       |       |       |      |      |         |
|-----------|---------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 8.65  | 80.28 | 22.35 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.02  | 80.99 | 22.72 |      | 65.0 |         |
|           |                                             | Z | 8.68  | 80.54 | 22.43 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 7.67  | 77.22 | 18.70 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.58  | 78.99 | 19.61 |      | 65.0 |         |
|           |                                             | Z | 7.24  | 76.45 | 18.22 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 7.44  | 76.40 | 18.29 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.29  | 78.12 | 19.18 |      | 65.0 |         |
|           |                                             | Z | 6.99  | 75.59 | 17.78 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 7.04  | 78.52 | 19.29 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.71  | 79.96 | 20.05 |      | 65.0 |         |
|           |                                             | Z | 6.74  | 77.86 | 18.83 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 7.62  | 78.03 | 20.88 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.97  | 78.76 | 21.31 |      | 65.0 |         |
|           |                                             | Z | 7.55  | 78.00 | 20.76 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 7.62  | 77.74 | 20.79 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.97  | 78.46 | 21.21 |      | 65.0 |         |
|           |                                             | Z | 7.55  | 77.69 | 20.65 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 9.43  | 83.76 | 22.98 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.04 | 84.84 | 23.52 |      | 65.0 |         |
|           |                                             | Z | 9.50  | 84.03 | 22.99 |      | 65.0 |         |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 8.20  | 79.43 | 22.31 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.53  | 80.09 | 22.68 |      | 65.0 |         |
|           |                                             | Z | 8.18  | 79.55 | 22.30 |      | 65.0 |         |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 7.75  | 77.31 | 21.19 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.10  | 78.09 | 21.64 |      | 65.0 |         |
|           |                                             | Z | 7.69  | 77.34 | 21.14 |      | 65.0 |         |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 9.70  | 83.85 | 23.41 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.24 | 84.77 | 23.87 |      | 65.0 |         |
|           |                                             | Z | 9.81  | 84.24 | 23.51 |      | 65.0 |         |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 7.88  | 76.96 | 21.35 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.22  | 77.73 | 21.78 |      | 65.0 |         |
|           |                                             | Z | 7.82  | 76.99 | 21.33 |      | 65.0 |         |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 8.27  | 77.77 | 22.03 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.58  | 78.42 | 22.39 |      | 65.0 |         |
|           |                                             | Z | 8.23  | 77.85 | 22.03 |      | 65.0 |         |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 8.94  | 80.62 | 22.25 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.31  | 81.28 | 22.59 |      | 65.0 |         |
|           |                                             | Z | 8.98  | 80.89 | 22.34 |      | 65.0 |         |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 8.36  | 76.49 | 21.55 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.63  | 77.08 | 21.88 |      | 65.0 |         |
|           |                                             | Z | 8.31  | 76.53 | 21.55 |      | 65.0 |         |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 8.29  | 76.07 | 21.45 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.55  | 76.65 | 21.78 |      | 65.0 |         |
|           |                                             | Z | 8.24  | 76.11 | 21.45 |      | 65.0 |         |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 8.43  | 77.83 | 21.33 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.69  | 78.31 | 21.60 |      | 65.0 |         |
|           |                                             | Z | 8.42  | 77.98 | 21.39 |      | 65.0 |         |

|           |                                                                    |   |       |       |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.55  | 65.90 | 14.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.63  | 66.48 | 15.31 |      | 150.0 |         |
|           |                                                                    | Z | 2.53  | 65.88 | 14.78 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 1.52  | 66.64 | 14.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.66  | 68.17 | 15.66 |      | 150.0 |         |
|           |                                                                    | Z | 1.50  | 66.49 | 14.49 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 4.62  | 67.49 | 12.27 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.00  | 68.49 | 13.05 |      | 50.0  |         |
|           |                                                                    | Z | 4.42  | 66.98 | 11.81 |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 8.56  | 79.12 | 19.84 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 9.04  | 80.04 | 20.47 |      | 50.0  |         |
|           |                                                                    | Z | 8.20  | 78.37 | 19.32 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 8.72  | 79.33 | 19.94 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 9.22  | 80.28 | 20.58 |      | 50.0  |         |
|           |                                                                    | Z | 8.35  | 78.58 | 19.43 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 1.31  | 66.62 | 12.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.55  | 69.01 | 14.40 |      | 150.0 |         |
|           |                                                                    | Z | 1.25  | 66.21 | 12.49 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 0.75  | 63.97 | 11.28 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.88  | 66.12 | 12.85 |      | 150.0 |         |
|           |                                                                    | Z | 0.72  | 63.66 | 10.91 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 0.85  | 66.24 | 12.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.08  | 69.81 | 15.02 |      | 150.0 |         |
|           |                                                                    | Z | 0.81  | 65.82 | 12.39 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 1.07  | 69.43 | 14.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.49  | 74.49 | 17.52 |      | 150.0 |         |
|           |                                                                    | Z | 1.02  | 68.94 | 14.36 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 11.66 | 86.40 | 24.85 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 11.94 | 86.89 | 25.26 |      | 50.0  |         |
|           |                                                                    | Z | 12.14 | 87.13 | 24.94 |      | 50.0  |         |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 2.68  | 68.79 | 15.92 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.84  | 69.89 | 16.60 |      | 150.0 |         |
|           |                                                                    | Z | 2.64  | 68.65 | 15.84 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 1.50  | 66.36 | 13.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.68  | 68.07 | 14.56 |      | 150.0 |         |
|           |                                                                    | Z | 1.44  | 66.01 | 13.05 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 2.99  | 70.93 | 15.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 3.88  | 74.74 | 17.20 |      | 150.0 |         |
|           |                                                                    | Z | 2.71  | 70.03 | 14.84 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 2.29  | 66.50 | 12.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.73  | 68.87 | 13.94 |      | 150.0 |         |
|           |                                                                    | Z | 2.09  | 65.76 | 12.08 |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 5.48  | 67.66 | 18.50 | 4.17 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 5.78  | 68.84 | 19.23 |      | 80.0  |         |
|           |                                                                    | Z | 5.37  | 67.36 | 18.28 |      | 80.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.94  | 68.12 | 19.14 | 4.96 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 6.22  | 69.31 | 19.91 |      | 80.0  |         |
|           |                                                                    | Z | 5.87  | 68.03 | 19.05 |      | 80.0  |         |

|           |                                                                     |   |       |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.76  | 68.09 | 19.15 | 4.96  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.07  | 69.41 | 19.99 |       | 80.0  |         |
|           |                                                                     | Z | 5.69  | 67.97 | 19.02 |       | 80.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.43  | 67.45 | 18.35 | 4.17  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.68  | 68.54 | 19.05 |       | 80.0  |         |
|           |                                                                     | Z | 5.37  | 67.37 | 18.26 |       | 80.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 7.18  | 77.42 | 24.28 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 9.01  | 83.08 | 27.04 |       | 50.0  |         |
|           |                                                                     | Z | 7.00  | 76.95 | 23.93 |       | 50.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 5.96  | 70.23 | 20.82 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.58  | 72.76 | 22.30 |       | 50.0  |         |
|           |                                                                     | Z | 5.86  | 69.99 | 20.61 |       | 50.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 6.41  | 73.34 | 22.47 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.70  | 73.58 | 22.50 |       | 50.0  |         |
|           |                                                                     | Z | 6.29  | 73.03 | 22.22 |       | 50.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 6.49  | 73.92 | 22.75 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.78  | 74.12 | 22.76 |       | 50.0  |         |
|           |                                                                     | Z | 6.37  | 73.60 | 22.50 |       | 50.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 6.06  | 70.55 | 21.00 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.71  | 73.17 | 22.53 |       | 50.0  |         |
|           |                                                                     | Z | 5.95  | 70.29 | 20.78 |       | 50.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 5.95  | 70.41 | 20.82 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.61  | 73.05 | 22.35 |       | 50.0  |         |
|           |                                                                     | Z | 6.20  | 72.46 | 22.04 |       | 50.0  |         |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.02  | 68.11 | 15.62 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 3.19  | 69.13 | 16.23 |       | 150.0 |         |
|           |                                                                     | Z | 2.98  | 67.98 | 15.55 |       | 150.0 |         |
| 10313-AAA | iDEN 1:3                                                            | X | 6.80  | 77.50 | 18.05 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 7.71  | 79.38 | 18.97 |       | 70.0  |         |
|           |                                                                     | Z | 6.80  | 77.56 | 18.00 |       | 70.0  |         |
| 10314-AAA | iDEN 1:6                                                            | X | 9.17  | 84.53 | 23.10 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 10.17 | 86.19 | 23.87 |       | 30.0  |         |
|           |                                                                     | Z | 9.47  | 85.21 | 23.28 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.09  | 63.63 | 14.71 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.15  | 64.55 | 15.51 |       | 150.0 |         |
|           |                                                                     | Z | 1.08  | 63.56 | 14.63 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.67  | 66.69 | 16.26 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.72  | 66.94 | 16.46 |       | 150.0 |         |
|           |                                                                     | Z | 4.64  | 66.69 | 16.24 |       | 150.0 |         |
| 10317-AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.67  | 66.69 | 16.26 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.72  | 66.94 | 16.46 |       | 150.0 |         |
|           |                                                                     | Z | 4.64  | 66.69 | 16.24 |       | 150.0 |         |
| 10400-AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 4.75  | 66.92 | 16.17 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.81  | 67.18 | 16.37 |       | 150.0 |         |
|           |                                                                     | Z | 4.72  | 66.89 | 16.14 |       | 150.0 |         |
| 10401-AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.45  | 67.19 | 16.39 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.49  | 67.37 | 16.55 |       | 150.0 |         |
|           |                                                                     | Z | 5.44  | 67.22 | 16.40 |       | 150.0 |         |

|           |                                                                                 |   |        |        |       |      |       |         |
|-----------|---------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                             | X | 5.72   | 67.54  | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.76   | 67.75  | 16.56 |      | 150.0 |         |
|           |                                                                                 | Z | 5.68   | 67.48  | 16.38 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                      | X | 1.31   | 66.62  | 12.89 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.55   | 69.01  | 14.40 |      | 115.0 |         |
|           |                                                                                 | Z | 1.25   | 66.21  | 12.49 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                      | X | 1.31   | 66.62  | 12.89 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.55   | 69.01  | 14.40 |      | 115.0 |         |
|           |                                                                                 | Z | 1.25   | 66.21  | 12.49 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                            | X | 25.28  | 103.83 | 26.72 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                 | Y | 100.00 | 122.83 | 31.28 |      | 100.0 |         |
|           |                                                                                 | Z | 15.62  | 98.87  | 25.67 |      | 100.0 |         |
| 10410-AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | X | 100.00 | 120.77 | 30.63 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                 | Y | 100.00 | 121.50 | 31.09 |      | 80.0  |         |
|           |                                                                                 | Z | 100.00 | 121.84 | 30.99 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                       | X | 0.97   | 62.31  | 13.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.01   | 63.10  | 14.65 |      | 150.0 |         |
|           |                                                                                 | Z | 0.96   | 62.25  | 13.81 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                   | X | 4.57   | 66.54  | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.62   | 66.78  | 16.29 |      | 150.0 |         |
|           |                                                                                 | Z | 4.54   | 66.53  | 16.07 |      | 150.0 |         |
| 10417-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                       | X | 4.57   | 66.54  | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.62   | 66.78  | 16.29 |      | 150.0 |         |
|           |                                                                                 | Z | 4.54   | 66.53  | 16.07 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)   | X | 4.55   | 66.67  | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.61   | 66.92  | 16.30 |      | 150.0 |         |
|           |                                                                                 | Z | 4.53   | 66.67  | 16.08 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)  | X | 4.58   | 66.63  | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.63   | 66.88  | 16.30 |      | 150.0 |         |
|           |                                                                                 | Z | 4.55   | 66.63  | 16.09 |      | 150.0 |         |
| 10422-AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                    | X | 4.70   | 66.66  | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.75   | 66.89  | 16.33 |      | 150.0 |         |
|           |                                                                                 | Z | 4.67   | 66.65  | 16.12 |      | 150.0 |         |
| 10423-AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                 | X | 4.89   | 67.00  | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.94   | 67.25  | 16.46 |      | 150.0 |         |
|           |                                                                                 | Z | 4.85   | 66.98  | 16.24 |      | 150.0 |         |
| 10424-AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                 | X | 4.80   | 66.94  | 16.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.85   | 67.19  | 16.42 |      | 150.0 |         |
|           |                                                                                 | Z | 4.76   | 66.92  | 16.20 |      | 150.0 |         |
| 10425-AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                     | X | 5.43   | 67.40  | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.46   | 67.59  | 16.64 |      | 150.0 |         |
|           |                                                                                 | Z | 5.40   | 67.39  | 16.48 |      | 150.0 |         |
| 10426-AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                   | X | 5.43   | 67.42  | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.47   | 67.60  | 16.64 |      | 150.0 |         |
|           |                                                                                 | Z | 5.40   | 67.41  | 16.48 |      | 150.0 |         |

|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.43   | 67.37  | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.47   | 67.57  | 16.62 |      | 150.0 |         |
|           |                                                                | Z | 5.41   | 67.36  | 16.45 |      | 150.0 |         |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.15   | 69.76  | 17.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.19   | 69.88  | 17.76 |      | 150.0 |         |
|           |                                                                | Z | 4.12   | 69.84  | 17.60 |      | 150.0 |         |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.26   | 67.02  | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.33   | 67.32  | 16.31 |      | 150.0 |         |
|           |                                                                | Z | 4.22   | 67.00  | 16.02 |      | 150.0 |         |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.56   | 66.95  | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.62   | 67.22  | 16.37 |      | 150.0 |         |
|           |                                                                | Z | 4.52   | 66.93  | 16.13 |      | 150.0 |         |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 4.81   | 66.98  | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.87   | 67.22  | 16.44 |      | 150.0 |         |
|           |                                                                | Z | 4.78   | 66.96  | 16.22 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.20   | 70.38  | 17.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.25   | 70.53  | 17.68 |      | 150.0 |         |
|           |                                                                | Z | 4.16   | 70.46  | 17.47 |      | 150.0 |         |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 120.59 | 30.55 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 100.00 | 121.33 | 31.01 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 121.65 | 30.91 |      | 80.0  |         |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.54   | 66.87  | 15.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.62   | 67.29  | 15.69 |      | 150.0 |         |
|           |                                                                | Z | 3.49   | 66.83  | 15.25 |      | 150.0 |         |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 4.09   | 66.78  | 15.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.15   | 67.09  | 16.16 |      | 150.0 |         |
|           |                                                                | Z | 4.05   | 66.76  | 15.87 |      | 150.0 |         |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.36   | 66.75  | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.42   | 67.03  | 16.26 |      | 150.0 |         |
|           |                                                                | Z | 4.33   | 66.74  | 16.01 |      | 150.0 |         |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.56   | 66.71  | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.61   | 66.97  | 16.29 |      | 150.0 |         |
|           |                                                                | Z | 4.53   | 66.69  | 16.06 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.43   | 67.01  | 14.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.53   | 67.50  | 15.37 |      | 150.0 |         |
|           |                                                                | Z | 3.37   | 66.93  | 14.84 |      | 150.0 |         |
| 10456-AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.29   | 67.98  | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.32   | 68.16  | 16.79 |      | 150.0 |         |
|           |                                                                | Z | 6.26   | 67.96  | 16.65 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.79   | 65.17  | 15.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.83   | 65.41  | 16.01 |      | 150.0 |         |
|           |                                                                | Z | 3.78   | 65.16  | 15.77 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 3.84   | 69.59  | 16.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.91   | 69.84  | 17.18 |      | 150.0 |         |
|           |                                                                | Z | 3.81   | 69.69  | 16.86 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 5.05   | 67.70  | 17.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.09   | 67.77  | 17.90 |      | 150.0 |         |
|           |                                                                | Z | 5.00   | 67.75  | 17.77 |      | 150.0 |         |

|           |                                                                   |   |        |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 0.79   | 65.91  | 14.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 0.92   | 68.57  | 16.19 |      | 150.0 |         |
|           |                                                                   | Z | 0.78   | 65.69  | 14.19 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 124.09 | 32.24 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 125.81 | 33.13 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 125.28 | 32.66 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 82.18  | 106.66 | 24.50 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 110.22 | 25.68 |      | 80.0  |         |
|           |                                                                   | Z | 90.90  | 108.32 | 24.86 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 13.11  | 84.75  | 18.36 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 107.13 | 24.20 |      | 80.0  |         |
|           |                                                                   | Z | 11.64  | 83.97  | 18.10 |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 122.05 | 31.13 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 123.91 | 32.10 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.17 | 31.52 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 34.70  | 96.83  | 22.08 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 109.74 | 25.45 |      | 80.0  |         |
|           |                                                                   | Z | 33.97  | 97.14  | 22.15 |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 8.66   | 80.23  | 16.95 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 88.88  | 105.43 | 23.71 |      | 80.0  |         |
|           |                                                                   | Z | 7.53   | 79.24  | 16.62 |      | 80.0  |         |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 122.26 | 31.23 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 124.12 | 32.19 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.40 | 31.62 |      | 80.0  |         |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 42.56  | 99.17  | 22.68 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 109.90 | 25.52 |      | 80.0  |         |
|           |                                                                   | Z | 42.79  | 99.79  | 22.82 |      | 80.0  |         |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 8.79   | 80.40  | 17.00 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 94.78  | 106.12 | 23.86 |      | 80.0  |         |
|           |                                                                   | Z | 7.65   | 79.43  | 16.67 |      | 80.0  |         |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 122.29 | 31.23 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 124.15 | 32.20 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.43 | 31.63 |      | 80.0  |         |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 42.39  | 99.09  | 22.65 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 109.85 | 25.49 |      | 80.0  |         |
|           |                                                                   | Z | 42.62  | 99.70  | 22.79 |      | 80.0  |         |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 8.75   | 80.33  | 16.97 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 95.63  | 106.16 | 23.85 |      | 80.0  |         |
|           |                                                                   | Z | 7.61   | 79.36  | 16.63 |      | 80.0  |         |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 122.26 | 31.22 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 124.13 | 32.18 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.40 | 31.61 |      | 80.0  |         |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 41.57  | 98.89  | 22.60 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 109.86 | 25.49 |      | 80.0  |         |
|           |                                                                   | Z | 41.71  | 99.48  | 22.73 |      | 80.0  |         |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 8.66   | 80.23  | 16.94 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 92.76  | 105.86 | 23.79 |      | 80.0  |         |
|           |                                                                   | Z | 7.52   | 79.25  | 16.60 |      | 80.0  |         |



|           |                                                                     |   |        |        |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 36.02  | 97.20  | 22.15 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 100.00 | 109.70 | 25.42 |      | 80.0 |         |
|           |                                                                     | Z | 35.46  | 97.58  | 22.24 |      | 80.0 |         |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 8.55   | 80.07  | 16.88 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 89.69  | 105.45 | 23.69 |      | 80.0 |         |
|           |                                                                     | Z | 7.42   | 79.08  | 16.54 |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 12.76  | 92.36  | 25.32 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 18.65  | 98.88  | 27.57 |      | 80.0 |         |
|           |                                                                     | Z | 13.95  | 94.12  | 25.81 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 12.57  | 87.00  | 22.01 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 19.95  | 93.91  | 24.32 |      | 80.0 |         |
|           |                                                                     | Z | 12.93  | 87.73  | 22.15 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 10.42  | 83.70  | 20.62 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 16.05  | 89.97  | 22.81 |      | 80.0 |         |
|           |                                                                     | Z | 10.45  | 84.04  | 20.63 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 4.39   | 75.05  | 18.02 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.40   | 78.13  | 19.40 |      | 80.0 |         |
|           |                                                                     | Z | 4.23   | 74.62  | 17.69 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 7.31   | 79.21  | 19.52 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 9.15   | 82.68  | 20.99 |      | 80.0 |         |
|           |                                                                     | Z | 7.17   | 79.05  | 19.31 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.75   | 77.88  | 19.05 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 8.31   | 81.08  | 20.44 |      | 80.0 |         |
|           |                                                                     | Z | 6.55   | 77.60  | 18.79 |      | 80.0 |         |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 4.80   | 76.47  | 19.36 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.70   | 79.15  | 20.55 |      | 80.0 |         |
|           |                                                                     | Z | 4.72   | 76.35  | 19.21 |      | 80.0 |         |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.16   | 71.40  | 17.03 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.57   | 72.84  | 17.80 |      | 80.0 |         |
|           |                                                                     | Z | 4.07   | 71.21  | 16.82 |      | 80.0 |         |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.14   | 70.99  | 16.86 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.52   | 72.34  | 17.60 |      | 80.0 |         |
|           |                                                                     | Z | 4.04   | 70.79  | 16.64 |      | 80.0 |         |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 4.95   | 75.43  | 19.57 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.59   | 77.40  | 20.48 |      | 80.0 |         |
|           |                                                                     | Z | 4.87   | 75.36  | 19.51 |      | 80.0 |         |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.39   | 71.05  | 17.97 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.67   | 72.07  | 18.53 |      | 80.0 |         |
|           |                                                                     | Z | 4.33   | 71.01  | 17.90 |      | 80.0 |         |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.47   | 70.81  | 17.90 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.74   | 71.76  | 18.43 |      | 80.0 |         |
|           |                                                                     | Z | 4.41   | 70.77  | 17.83 |      | 80.0 |         |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 4.94   | 73.38  | 18.92 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.38   | 74.76  | 19.60 |      | 80.0 |         |
|           |                                                                     | Z | 4.87   | 73.32  | 18.89 |      | 80.0 |         |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.67   | 70.17  | 17.91 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.91   | 70.97  | 18.36 |      | 80.0 |         |
|           |                                                                     | Z | 4.62   | 70.13  | 17.86 |      | 80.0 |         |

|           |                                                                      |   |      |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.74 | 70.00 | 17.86 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.96 | 70.77 | 18.30 |      | 80.0 |         |
|           |                                                                      | Z | 4.68 | 69.97 | 17.81 |      | 80.0 |         |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.42 | 74.96 | 19.36 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.98 | 76.57 | 20.11 |      | 80.0 |         |
|           |                                                                      | Z | 5.33 | 74.86 | 19.31 |      | 80.0 |         |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.74 | 70.64 | 18.10 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.99 | 71.49 | 18.58 |      | 80.0 |         |
|           |                                                                      | Z | 4.68 | 70.58 | 18.06 |      | 80.0 |         |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.80 | 70.29 | 18.01 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.03 | 71.08 | 18.45 |      | 80.0 |         |
|           |                                                                      | Z | 4.74 | 70.24 | 17.97 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 3.26 | 70.91 | 15.58 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.08 | 73.99 | 17.07 |      | 80.0 |         |
|           |                                                                      | Z | 3.04 | 70.05 | 15.01 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.52 | 65.21 | 12.20 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 2.96 | 67.17 | 13.35 |      | 80.0 |         |
|           |                                                                      | Z | 2.32 | 64.31 | 11.53 |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.46 | 64.66 | 11.82 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 2.87 | 66.51 | 12.93 |      | 80.0 |         |
|           |                                                                      | Z | 2.25 | 63.75 | 11.14 |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 4.75 | 75.65 | 19.32 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.48 | 77.92 | 20.36 |      | 80.0 |         |
|           |                                                                      | Z | 4.68 | 75.58 | 19.22 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.26 | 71.24 | 17.39 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.61 | 72.46 | 18.05 |      | 80.0 |         |
|           |                                                                      | Z | 4.19 | 71.15 | 17.24 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.30 | 71.03 | 17.26 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.65 | 72.20 | 17.90 |      | 80.0 |         |
|           |                                                                      | Z | 4.23 | 70.93 | 17.11 |      | 80.0 |         |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 4.89 | 75.24 | 19.48 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.52 | 77.21 | 20.39 |      | 80.0 |         |
|           |                                                                      | Z | 4.81 | 75.16 | 19.42 |      | 80.0 |         |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.37 | 70.96 | 17.92 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.66 | 71.99 | 18.49 |      | 80.0 |         |
|           |                                                                      | Z | 4.31 | 70.92 | 17.85 |      | 80.0 |         |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.44 | 70.72 | 17.85 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.72 | 71.68 | 18.38 |      | 80.0 |         |
|           |                                                                      | Z | 4.39 | 70.68 | 17.78 |      | 80.0 |         |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 5.37 | 74.82 | 19.29 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.93 | 76.44 | 20.05 |      | 80.0 |         |
|           |                                                                      | Z | 5.29 | 74.72 | 19.25 |      | 80.0 |         |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.72 | 70.58 | 18.07 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.98 | 71.44 | 18.54 |      | 80.0 |         |
|           |                                                                      | Z | 4.67 | 70.52 | 18.02 |      | 80.0 |         |

|           |                                                                     |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.78 | 70.23 | 17.97 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.02 | 71.02 | 18.41 |      | 80.0  |         |
|           |                                                                     | Z | 4.72 | 70.18 | 17.93 |      | 80.0  |         |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 5.48 | 73.02 | 18.63 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.87 | 74.15 | 19.19 |      | 80.0  |         |
|           |                                                                     | Z | 5.41 | 72.94 | 18.60 |      | 80.0  |         |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.18 | 70.13 | 17.99 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.40 | 70.84 | 18.39 |      | 80.0  |         |
|           |                                                                     | Z | 5.12 | 70.07 | 17.96 |      | 80.0  |         |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.21 | 69.83 | 17.92 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.42 | 70.49 | 18.29 |      | 80.0  |         |
|           |                                                                     | Z | 5.15 | 69.78 | 17.89 |      | 80.0  |         |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 5.85 | 74.74 | 19.13 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.39 | 76.18 | 19.80 |      | 80.0  |         |
|           |                                                                     | Z | 5.76 | 74.62 | 19.09 |      | 80.0  |         |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.10 | 70.52 | 18.13 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.34 | 71.31 | 18.56 |      | 80.0  |         |
|           |                                                                     | Z | 5.03 | 70.43 | 18.08 |      | 80.0  |         |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.08 | 70.03 | 18.00 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.29 | 70.75 | 18.40 |      | 80.0  |         |
|           |                                                                     | Z | 5.02 | 69.96 | 17.96 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 0.93 | 62.43 | 13.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.97 | 63.29 | 14.71 |      | 150.0 |         |
|           |                                                                     | Z | 0.92 | 62.37 | 13.81 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 0.48 | 66.52 | 14.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.65 | 71.79 | 17.60 |      | 150.0 |         |
|           |                                                                     | Z | 0.47 | 66.19 | 14.01 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 0.76 | 63.81 | 14.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.83 | 65.38 | 15.37 |      | 150.0 |         |
|           |                                                                     | Z | 0.75 | 63.68 | 13.95 |      | 150.0 |         |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.56 | 66.61 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.61 | 66.85 | 16.27 |      | 150.0 |         |
|           |                                                                     | Z | 4.53 | 66.60 | 16.05 |      | 150.0 |         |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 4.76 | 66.88 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.82 | 67.13 | 16.41 |      | 150.0 |         |
|           |                                                                     | Z | 4.73 | 66.86 | 16.18 |      | 150.0 |         |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.61 | 66.83 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.67 | 67.09 | 16.32 |      | 150.0 |         |
|           |                                                                     | Z | 4.57 | 66.81 | 16.09 |      | 150.0 |         |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.54 | 66.82 | 16.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.60 | 67.09 | 16.31 |      | 150.0 |         |
|           |                                                                     | Z | 4.51 | 66.79 | 16.07 |      | 150.0 |         |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.60 | 66.88 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.65 | 67.13 | 16.37 |      | 150.0 |         |
|           |                                                                     | Z | 4.56 | 66.87 | 16.15 |      | 150.0 |         |

|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.47 | 66.73 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.52 | 66.99 | 16.21 |      | 150.0 |         |
|           |                                                            | Z | 4.44 | 66.72 | 15.98 |      | 150.0 |         |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.55 | 66.81 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.60 | 67.07 | 16.35 |      | 150.0 |         |
|           |                                                            | Z | 4.51 | 66.79 | 16.12 |      | 150.0 |         |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.52 | 65.83 | 15.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.57 | 66.08 | 15.92 |      | 150.0 |         |
|           |                                                            | Z | 4.49 | 65.82 | 15.70 |      | 150.0 |         |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.70 | 66.21 | 15.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.76 | 66.48 | 16.07 |      | 150.0 |         |
|           |                                                            | Z | 4.66 | 66.20 | 15.85 |      | 150.0 |         |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.61 | 66.17 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.67 | 66.44 | 16.02 |      | 150.0 |         |
|           |                                                            | Z | 4.58 | 66.15 | 15.78 |      | 150.0 |         |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.63 | 66.19 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.69 | 66.46 | 16.05 |      | 150.0 |         |
|           |                                                            | Z | 4.60 | 66.17 | 15.82 |      | 150.0 |         |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.63 | 66.19 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.69 | 66.46 | 16.05 |      | 150.0 |         |
|           |                                                            | Z | 4.60 | 66.17 | 15.82 |      | 150.0 |         |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.63 | 66.31 | 15.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.69 | 66.59 | 16.07 |      | 150.0 |         |
|           |                                                            | Z | 4.59 | 66.28 | 15.83 |      | 150.0 |         |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.48 | 66.15 | 15.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.55 | 66.44 | 16.01 |      | 150.0 |         |
|           |                                                            | Z | 4.45 | 66.12 | 15.75 |      | 150.0 |         |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.64 | 66.22 | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.70 | 66.49 | 16.03 |      | 150.0 |         |
|           |                                                            | Z | 4.60 | 66.20 | 15.80 |      | 150.0 |         |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 5.17 | 66.38 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.22 | 66.61 | 16.12 |      | 150.0 |         |
|           |                                                            | Z | 5.14 | 66.36 | 15.93 |      | 150.0 |         |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.24 | 66.55 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.29 | 66.77 | 16.19 |      | 150.0 |         |
|           |                                                            | Z | 5.21 | 66.54 | 16.01 |      | 150.0 |         |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 5.11 | 66.49 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.16 | 66.73 | 16.15 |      | 150.0 |         |
|           |                                                            | Z | 5.07 | 66.46 | 15.95 |      | 150.0 |         |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 5.17 | 66.48 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.22 | 66.71 | 16.14 |      | 150.0 |         |
|           |                                                            | Z | 5.14 | 66.45 | 15.95 |      | 150.0 |         |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.27 | 66.54 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.32 | 66.77 | 16.22 |      | 150.0 |         |
|           |                                                            | Z | 5.23 | 66.49 | 16.02 |      | 150.0 |         |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 5.19 | 66.52 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.24 | 66.75 | 16.22 |      | 150.0 |         |
|           |                                                            | Z | 5.16 | 66.50 | 16.03 |      | 150.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)  | X | 5.16 | 66.38 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.21 | 66.61 | 16.15 |      | 150.0 |         |
|           |                                                    | Z | 5.13 | 66.35 | 15.95 |      | 150.0 |         |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)  | X | 5.32 | 66.47 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.37 | 66.69 | 16.20 |      | 150.0 |         |
|           |                                                    | Z | 5.29 | 66.44 | 16.02 |      | 150.0 |         |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)  | X | 5.41 | 66.52 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.45 | 66.73 | 16.24 |      | 150.0 |         |
|           |                                                    | Z | 5.38 | 66.51 | 16.07 |      | 150.0 |         |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)  | X | 5.47 | 66.50 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.51 | 66.71 | 16.11 |      | 150.0 |         |
|           |                                                    | Z | 5.45 | 66.47 | 15.93 |      | 150.0 |         |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)  | X | 5.69 | 66.97 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.73 | 67.17 | 16.28 |      | 150.0 |         |
|           |                                                    | Z | 5.66 | 66.95 | 16.12 |      | 150.0 |         |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)  | X | 5.56 | 66.76 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.60 | 66.98 | 16.21 |      | 150.0 |         |
|           |                                                    | Z | 5.52 | 66.71 | 16.02 |      | 150.0 |         |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)  | X | 5.64 | 66.85 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.69 | 67.07 | 16.24 |      | 150.0 |         |
|           |                                                    | Z | 5.60 | 66.78 | 16.04 |      | 150.0 |         |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)  | X | 6.00 | 68.11 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.04 | 68.30 | 16.83 |      | 150.0 |         |
|           |                                                    | Z | 5.95 | 68.00 | 16.63 |      | 150.0 |         |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)  | X | 5.58 | 66.74 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.62 | 66.95 | 16.20 |      | 150.0 |         |
|           |                                                    | Z | 5.55 | 66.72 | 16.03 |      | 150.0 |         |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)  | X | 5.58 | 66.77 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.63 | 67.00 | 16.18 |      | 150.0 |         |
|           |                                                    | Z | 5.55 | 66.74 | 16.00 |      | 150.0 |         |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)  | X | 5.49 | 66.55 | 15.92 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.53 | 66.77 | 16.08 |      | 150.0 |         |
|           |                                                    | Z | 5.46 | 66.52 | 15.90 |      | 150.0 |         |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)  | X | 5.58 | 66.61 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.63 | 66.83 | 16.14 |      | 150.0 |         |
|           |                                                    | Z | 5.55 | 66.57 | 15.96 |      | 150.0 |         |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.88 | 66.89 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.92 | 67.10 | 16.21 |      | 150.0 |         |
|           |                                                    | Z | 5.86 | 66.86 | 16.04 |      | 150.0 |         |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 6.03 | 67.23 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.07 | 67.43 | 16.35 |      | 150.0 |         |
|           |                                                    | Z | 6.00 | 67.20 | 16.19 |      | 150.0 |         |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.04 | 67.26 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.08 | 67.46 | 16.36 |      | 150.0 |         |
|           |                                                    | Z | 6.02 | 67.23 | 16.20 |      | 150.0 |         |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 6.01 | 67.18 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.06 | 67.39 | 16.35 |      | 150.0 |         |
|           |                                                    | Z | 5.98 | 67.14 | 16.17 |      | 150.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)              | X | 6.07 | 67.37 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.12 | 67.58 | 16.46 |      | 150.0 |         |
|           |                                                                 | Z | 6.04 | 67.31 | 16.27 |      | 150.0 |         |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)              | X | 6.06 | 67.18 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.10 | 67.40 | 16.41 |      | 150.0 |         |
|           |                                                                 | Z | 6.03 | 67.14 | 16.23 |      | 150.0 |         |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)              | X | 5.98 | 67.16 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.02 | 67.38 | 16.43 |      | 150.0 |         |
|           |                                                                 | Z | 5.95 | 67.13 | 16.26 |      | 150.0 |         |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)              | X | 6.14 | 67.65 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.18 | 67.88 | 16.69 |      | 150.0 |         |
|           |                                                                 | Z | 6.10 | 67.57 | 16.48 |      | 150.0 |         |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)              | X | 6.53 | 68.40 | 16.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.57 | 68.59 | 17.00 |      | 150.0 |         |
|           |                                                                 | Z | 6.44 | 68.19 | 16.75 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 4.91 | 66.77 | 16.29 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.96 | 67.01 | 16.49 |      | 150.0 |         |
|           |                                                                 | Z | 4.88 | 66.76 | 16.26 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.15 | 67.23 | 16.61 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.20 | 67.46 | 16.79 |      | 150.0 |         |
|           |                                                                 | Z | 5.11 | 67.20 | 16.58 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.98 | 67.08 | 16.43 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.04 | 67.33 | 16.62 |      | 150.0 |         |
|           |                                                                 | Z | 4.94 | 67.05 | 16.40 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 5.00 | 67.42 | 16.74 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.05 | 67.64 | 16.92 |      | 150.0 |         |
|           |                                                                 | Z | 4.96 | 67.39 | 16.72 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.90 | 66.88 | 16.22 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.96 | 67.15 | 16.44 |      | 150.0 |         |
|           |                                                                 | Z | 4.87 | 66.87 | 16.19 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.95 | 67.46 | 16.77 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.00 | 67.68 | 16.94 |      | 150.0 |         |
|           |                                                                 | Z | 4.91 | 67.46 | 16.76 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.99 | 67.34 | 16.73 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.04 | 67.57 | 16.91 |      | 150.0 |         |
|           |                                                                 | Z | 4.95 | 67.33 | 16.71 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.25 | 64.93 | 15.40 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.32 | 65.99 | 16.25 |      | 130.0 |         |
|           |                                                                 | Z | 1.24 | 64.84 | 15.31 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.27 | 65.48 | 15.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.35 | 66.62 | 16.60 |      | 130.0 |         |
|           |                                                                 | Z | 1.26 | 65.38 | 15.63 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 2.10 | 81.92 | 20.57 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 6.18 | 99.59 | 26.88 |      | 130.0 |         |
|           |                                                                 | Z | 1.98 | 81.02 | 20.18 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 1.40 | 70.72 | 18.14 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.59 | 73.16 | 19.61 |      | 130.0 |         |
|           |                                                                 | Z | 1.38 | 70.53 | 18.01 |      | 130.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.72 | 66.64 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.77 | 66.88 | 16.58 |      | 130.0 |         |
|           |                                                                 | Z | 4.69 | 66.63 | 16.36 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.74 | 66.78 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.79 | 67.02 | 16.63 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 66.78 | 16.41 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.96 | 67.10 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 5.01 | 67.33 | 16.80 |      | 130.0 |         |
|           |                                                                 | Z | 4.92 | 67.08 | 16.59 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.85 | 67.23 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.90 | 67.46 | 16.88 |      | 130.0 |         |
|           |                                                                 | Z | 4.81 | 67.21 | 16.67 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.63 | 66.62 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.70 | 66.91 | 16.30 |      | 130.0 |         |
|           |                                                                 | Z | 4.60 | 66.59 | 16.04 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.68 | 66.64 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.74 | 66.93 | 16.33 |      | 130.0 |         |
|           |                                                                 | Z | 4.64 | 66.62 | 16.06 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.75 | 67.28 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.81 | 67.52 | 16.83 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 67.26 | 16.61 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.59 | 66.41 | 15.89 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.65 | 66.72 | 16.14 |      | 130.0 |         |
|           |                                                                 | Z | 4.55 | 66.37 | 15.85 |      | 130.0 |         |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.72 | 66.64 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.77 | 66.88 | 16.58 |      | 130.0 |         |
|           |                                                                 | Z | 4.69 | 66.63 | 16.36 |      | 130.0 |         |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.74 | 66.78 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.79 | 67.02 | 16.63 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 66.78 | 16.41 |      | 130.0 |         |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 4.96 | 67.10 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 5.01 | 67.33 | 16.80 |      | 130.0 |         |
|           |                                                                 | Z | 4.92 | 67.08 | 16.59 |      | 130.0 |         |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 4.85 | 67.23 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.90 | 67.46 | 16.88 |      | 130.0 |         |
|           |                                                                 | Z | 4.81 | 67.21 | 16.67 |      | 130.0 |         |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.63 | 66.62 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.70 | 66.91 | 16.30 |      | 130.0 |         |
|           |                                                                 | Z | 4.60 | 66.59 | 16.04 |      | 130.0 |         |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.68 | 66.64 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.74 | 66.93 | 16.33 |      | 130.0 |         |
|           |                                                                 | Z | 4.64 | 66.62 | 16.06 |      | 130.0 |         |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 4.75 | 67.28 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.81 | 67.52 | 16.83 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 67.26 | 16.61 |      | 130.0 |         |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.59 | 66.41 | 15.89 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.65 | 66.72 | 16.14 |      | 130.0 |         |
|           |                                                                 | Z | 4.55 | 66.37 | 15.85 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.87 | 66.69 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.92 | 66.92 | 16.67 |      | 130.0 |         |
|           |                                                       | Z | 4.84 | 66.69 | 16.46 |      | 130.0 |         |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.03 | 67.03 | 16.61 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.08 | 67.26 | 16.79 |      | 130.0 |         |
|           |                                                       | Z | 5.00 | 67.02 | 16.59 |      | 130.0 |         |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.96 | 66.97 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.01 | 67.21 | 16.70 |      | 130.0 |         |
|           |                                                       | Z | 4.92 | 66.95 | 16.48 |      | 130.0 |         |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 5.01 | 67.11 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.06 | 67.34 | 16.83 |      | 130.0 |         |
|           |                                                       | Z | 4.97 | 67.10 | 16.62 |      | 130.0 |         |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.98 | 67.08 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.04 | 67.32 | 16.74 |      | 130.0 |         |
|           |                                                       | Z | 4.94 | 67.06 | 16.53 |      | 130.0 |         |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.92 | 67.08 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.98 | 67.33 | 16.75 |      | 130.0 |         |
|           |                                                       | Z | 4.88 | 67.06 | 16.53 |      | 130.0 |         |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.87 | 67.00 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.93 | 67.26 | 16.65 |      | 130.0 |         |
|           |                                                       | Z | 4.83 | 66.97 | 16.42 |      | 130.0 |         |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.85 | 67.21 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.90 | 67.45 | 16.87 |      | 130.0 |         |
|           |                                                       | Z | 4.81 | 67.18 | 16.66 |      | 130.0 |         |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.55 | 67.30 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.59 | 67.50 | 16.88 |      | 130.0 |         |
|           |                                                       | Z | 5.52 | 67.28 | 16.71 |      | 130.0 |         |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.76 | 67.97 | 17.04 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.80 | 68.15 | 17.19 |      | 130.0 |         |
|           |                                                       | Z | 5.71 | 67.90 | 16.99 |      | 130.0 |         |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.61 | 67.58 | 16.85 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.65 | 67.77 | 17.00 |      | 130.0 |         |
|           |                                                       | Z | 5.57 | 67.54 | 16.83 |      | 130.0 |         |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.69 | 67.58 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.73 | 67.78 | 16.94 |      | 130.0 |         |
|           |                                                       | Z | 5.66 | 67.57 | 16.76 |      | 130.0 |         |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.77 | 67.85 | 17.03 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.81 | 68.03 | 17.18 |      | 130.0 |         |
|           |                                                       | Z | 5.73 | 67.82 | 17.01 |      | 130.0 |         |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.55 | 67.27 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.60 | 67.47 | 16.89 |      | 130.0 |         |
|           |                                                       | Z | 5.52 | 67.24 | 16.71 |      | 130.0 |         |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.69 | 67.68 | 16.94 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.73 | 67.87 | 17.10 |      | 130.0 |         |
|           |                                                       | Z | 5.66 | 67.69 | 16.94 |      | 130.0 |         |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.43 | 67.03 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.48 | 67.26 | 16.66 |      | 130.0 |         |
|           |                                                       | Z | 5.41 | 67.03 | 16.47 |      | 130.0 |         |



|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.70 | 65.95 | 16.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.75 | 66.19 | 16.26 |      | 130.0 |         |
|           |                                                   | Z | 4.67 | 65.95 | 16.05 |      | 130.0 |         |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.89 | 66.37 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.95 | 66.62 | 16.43 |      | 130.0 |         |
|           |                                                   | Z | 4.86 | 66.36 | 16.22 |      | 130.0 |         |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.78 | 66.23 | 16.09 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.84 | 66.50 | 16.29 |      | 130.0 |         |
|           |                                                   | Z | 4.75 | 66.21 | 16.06 |      | 130.0 |         |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.83 | 66.38 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.89 | 66.63 | 16.43 |      | 130.0 |         |
|           |                                                   | Z | 4.80 | 66.36 | 16.22 |      | 130.0 |         |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.75 | 66.21 | 16.10 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.81 | 66.47 | 16.30 |      | 130.0 |         |
|           |                                                   | Z | 4.72 | 66.18 | 16.07 |      | 130.0 |         |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.77 | 66.37 | 16.14 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.83 | 66.65 | 16.36 |      | 130.0 |         |
|           |                                                   | Z | 4.73 | 66.35 | 16.12 |      | 130.0 |         |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.78 | 66.28 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.84 | 66.57 | 16.26 |      | 130.0 |         |
|           |                                                   | Z | 4.74 | 66.25 | 16.02 |      | 130.0 |         |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.71 | 66.42 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.77 | 66.68 | 16.44 |      | 130.0 |         |
|           |                                                   | Z | 4.67 | 66.39 | 16.22 |      | 130.0 |         |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.76 | 66.06 | 15.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.82 | 66.34 | 16.11 |      | 130.0 |         |
|           |                                                   | Z | 4.72 | 66.04 | 15.87 |      | 130.0 |         |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.36 | 66.52 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.40 | 66.73 | 16.47 |      | 130.0 |         |
|           |                                                   | Z | 5.33 | 66.49 | 16.29 |      | 130.0 |         |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.42 | 66.67 | 16.35 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.47 | 66.87 | 16.51 |      | 130.0 |         |
|           |                                                   | Z | 5.40 | 66.69 | 16.36 |      | 130.0 |         |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.31 | 66.69 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.36 | 66.91 | 16.54 |      | 130.0 |         |
|           |                                                   | Z | 5.28 | 66.66 | 16.36 |      | 130.0 |         |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.34 | 66.55 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.39 | 66.77 | 16.41 |      | 130.0 |         |
|           |                                                   | Z | 5.31 | 66.53 | 16.23 |      | 130.0 |         |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.44 | 66.61 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.49 | 66.85 | 16.50 |      | 130.0 |         |
|           |                                                   | Z | 5.40 | 66.57 | 16.30 |      | 130.0 |         |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.41 | 66.65 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.46 | 66.85 | 16.61 |      | 130.0 |         |
|           |                                                   | Z | 5.38 | 66.63 | 16.44 |      | 130.0 |         |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.43 | 66.83 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.47 | 67.03 | 16.69 |      | 130.0 |         |
|           |                                                   | Z | 5.41 | 66.83 | 16.53 |      | 130.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)  | X | 5.31 | 66.37 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.36 | 66.60 | 16.37 |      | 130.0 |         |
|           |                                                    | Z | 5.28 | 66.35 | 16.18 |      | 130.0 |         |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)  | X | 5.51 | 66.60 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.55 | 66.80 | 16.53 |      | 130.0 |         |
|           |                                                    | Z | 5.48 | 66.57 | 16.35 |      | 130.0 |         |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)  | X | 5.96 | 67.84 | 17.04 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.00 | 68.03 | 17.20 |      | 130.0 |         |
|           |                                                    | Z | 5.91 | 67.77 | 17.00 |      | 130.0 |         |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)  | X | 5.63 | 66.56 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.67 | 66.76 | 16.40 |      | 130.0 |         |
|           |                                                    | Z | 5.61 | 66.54 | 16.24 |      | 130.0 |         |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)  | X | 5.91 | 67.22 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.95 | 67.40 | 16.68 |      | 130.0 |         |
|           |                                                    | Z | 5.89 | 67.20 | 16.54 |      | 130.0 |         |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)  | X | 5.69 | 66.73 | 16.24 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.74 | 66.95 | 16.40 |      | 130.0 |         |
|           |                                                    | Z | 5.67 | 66.70 | 16.22 |      | 130.0 |         |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)  | X | 5.78 | 66.80 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.82 | 67.01 | 16.42 |      | 130.0 |         |
|           |                                                    | Z | 5.76 | 66.81 | 16.27 |      | 130.0 |         |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)  | X | 6.42 | 68.87 | 17.30 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.45 | 69.07 | 17.46 |      | 130.0 |         |
|           |                                                    | Z | 6.35 | 68.76 | 17.24 |      | 130.0 |         |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)  | X | 6.17 | 68.24 | 17.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.22 | 68.45 | 17.31 |      | 130.0 |         |
|           |                                                    | Z | 6.11 | 68.14 | 17.12 |      | 130.0 |         |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)  | X | 5.86 | 67.20 | 16.67 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.89 | 67.37 | 16.79 |      | 130.0 |         |
|           |                                                    | Z | 5.84 | 67.20 | 16.66 |      | 130.0 |         |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)  | X | 5.75 | 66.86 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.80 | 67.09 | 16.49 |      | 130.0 |         |
|           |                                                    | Z | 5.72 | 66.81 | 16.30 |      | 130.0 |         |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)  | X | 5.73 | 66.86 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.78 | 67.07 | 16.54 |      | 130.0 |         |
|           |                                                    | Z | 5.70 | 66.82 | 16.36 |      | 130.0 |         |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)  | X | 5.63 | 66.29 | 15.85 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.69 | 66.55 | 16.05 |      | 130.0 |         |
|           |                                                    | Z | 5.60 | 66.24 | 15.82 |      | 130.0 |         |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.06 | 66.98 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.09 | 67.16 | 16.51 |      | 130.0 |         |
|           |                                                    | Z | 6.04 | 66.95 | 16.36 |      | 130.0 |         |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.23 | 67.40 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.27 | 67.58 | 16.70 |      | 130.0 |         |
|           |                                                    | Z | 6.21 | 67.38 | 16.55 |      | 130.0 |         |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.23 | 67.37 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.27 | 67.56 | 16.67 |      | 130.0 |         |
|           |                                                    | Z | 6.21 | 67.35 | 16.52 |      | 130.0 |         |

|           |                                                        |   |        |        |       |       |       |         |
|-----------|--------------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10639-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)     | X | 6.21   | 67.31  | 16.55 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.25   | 67.51  | 16.69 |       | 130.0 |         |
|           |                                                        | Z | 6.18   | 67.27  | 16.52 |       | 130.0 |         |
| 10640-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)     | X | 6.23   | 67.39  | 16.53 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.28   | 67.61  | 16.69 |       | 130.0 |         |
|           |                                                        | Z | 6.20   | 67.33  | 16.50 |       | 130.0 |         |
| 10641-AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)     | X | 6.24   | 67.19  | 16.45 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.28   | 67.39  | 16.60 |       | 130.0 |         |
|           |                                                        | Z | 6.22   | 67.18  | 16.44 |       | 130.0 |         |
| 10642-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)     | X | 6.29   | 67.45  | 16.73 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.33   | 67.63  | 16.87 |       | 130.0 |         |
|           |                                                        | Z | 6.26   | 67.41  | 16.72 |       | 130.0 |         |
| 10643-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)     | X | 6.13   | 67.18  | 16.51 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.18   | 67.38  | 16.66 |       | 130.0 |         |
|           |                                                        | Z | 6.11   | 67.15  | 16.49 |       | 130.0 |         |
| 10644-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)     | X | 6.35   | 67.83  | 16.86 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.40   | 68.06  | 17.03 |       | 130.0 |         |
|           |                                                        | Z | 6.30   | 67.74  | 16.80 |       | 130.0 |         |
| 10645-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)     | X | 6.89   | 68.98  | 17.38 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.90   | 69.10  | 17.50 |       | 130.0 |         |
|           |                                                        | Z | 6.83   | 68.87  | 17.33 |       | 130.0 |         |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)  | X | 48.50  | 125.76 | 41.37 | 9.30  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 90.47  | 140.91 | 45.72 |       | 60.0  |         |
|           |                                                        | Z | 50.32  | 127.46 | 41.96 |       | 60.0  |         |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 48.77  | 126.82 | 41.82 | 9.30  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 98.14  | 143.92 | 46.67 |       | 60.0  |         |
|           |                                                        | Z | 49.92  | 128.24 | 42.34 |       | 60.0  |         |
| 10648-AAA | CDMA2000 (1x Advanced)                                 | X | 0.66   | 62.51  | 9.96  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                        | Y | 0.73   | 63.91  | 11.18 |       | 150.0 |         |
|           |                                                        | Z | 0.63   | 62.25  | 9.61  |       | 150.0 |         |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)         | X | 4.17   | 68.03  | 16.99 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.34   | 68.67  | 17.39 |       | 80.0  |         |
|           |                                                        | Z | 4.13   | 68.01  | 16.93 |       | 80.0  |         |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)        | X | 4.68   | 67.42  | 17.15 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.82   | 67.93  | 17.48 |       | 80.0  |         |
|           |                                                        | Z | 4.65   | 67.40  | 17.11 |       | 80.0  |         |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)        | X | 4.64   | 67.10  | 17.16 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.76   | 67.59  | 17.48 |       | 80.0  |         |
|           |                                                        | Z | 4.61   | 67.07  | 17.13 |       | 80.0  |         |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)        | X | 4.70   | 67.12  | 17.21 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.82   | 67.61  | 17.53 |       | 80.0  |         |
|           |                                                        | Z | 4.67   | 67.08  | 17.17 |       | 80.0  |         |
| 10658-AAA | Pulse Waveform (200Hz, 10%)                            | X | 17.27  | 91.20  | 23.98 | 10.00 | 50.0  | ± 9.6 % |
|           |                                                        | Y | 16.02  | 90.22  | 23.99 |       | 50.0  |         |
|           |                                                        | Z | 18.59  | 92.23  | 24.12 |       | 50.0  |         |
| 10659-AAA | Pulse Waveform (200Hz, 20%)                            | X | 100.00 | 114.98 | 28.67 | 6.99  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 100.00 | 116.21 | 29.42 |       | 60.0  |         |
|           |                                                        | Z | 100.00 | 114.43 | 28.33 |       | 60.0  |         |

|           |                             |   |        |        |       |      |       |         |
|-----------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| 10660-AAA | Pulse Waveform (200Hz, 40%) | X | 100.00 | 112.03 | 25.82 | 3.98 | 80.0  | ± 9.6 % |
|           |                             | Y | 100.00 | 113.99 | 26.86 |      | 80.0  |         |
|           |                             | Z | 100.00 | 111.43 | 25.48 |      | 80.0  |         |
| 10661-AAA | Pulse Waveform (200Hz, 60%) | X | 100.00 | 111.06 | 24.05 | 2.22 | 100.0 | ± 9.6 % |
|           |                             | Y | 100.00 | 114.62 | 25.75 |      | 100.0 |         |
|           |                             | Z | 100.00 | 110.31 | 23.67 |      | 100.0 |         |
| 10662-AAA | Pulse Waveform (200Hz, 80%) | X | 100.00 | 108.64 | 21.32 | 0.97 | 120.0 | ± 9.6 % |
|           |                             | Y | 100.00 | 117.33 | 25.06 |      | 120.0 |         |
|           |                             | Z | 100.00 | 107.31 | 20.72 |      | 120.0 |         |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3332\_Aug17**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3332**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**



Calibration date: **August 14, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 31-Dec-16 (No. ES3-3013_Dec16)    | Dec-17                 |
| DAE4                       | SN: 660          | 7-Dec-16 (No. DAE4-660_Dec16)     | Dec-17                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

|                |                               |                                          |                                                                                                    |
|----------------|-------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by: | Name<br><b>Jeton Kastrati</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | Name<br><b>Katja Pokovic</b>  | Function<br><b>Technical Manager</b>     | Signature<br> |
|                |                               |                                          | Issued: August 16, 2017                                                                            |

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

## Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C, D** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3332

Manufactured: January 24, 2012  
Calibrated: August 14, 2017

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 1.00     | 0.93     | 0.88     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 104.0    | 103.0    | 103.0    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 192.0    | $\pm 3.5 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 194.3    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 179.9    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms} \cdot \text{V}^{-2}$ | T2<br>$\text{ms} \cdot \text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|---------------------------------------|---------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 76.72    | 548.9    | 35.46                       | 56.44                                 | 4.600                                 | 5.1      | 0.000                 | 0.903                 | 1.011 |
| Y | 44.78    | 323.3    | 35.85                       | 29.01                                 | 2.529                                 | 5.1      | 0.000                 | 0.546                 | 1.009 |
| Z | 38.01    | 268.3    | 34.56                       | 26.38                                 | 1.777                                 | 5.1      | 0.096                 | 0.424                 | 1.004 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 41.9                               | 0.89                            | 6.81    | 6.81    | 6.81    | 0.72               | 1.31                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 6.64    | 6.64    | 6.64    | 0.80               | 1.21                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 5.56    | 5.56    | 5.56    | 0.80               | 1.20                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 5.33    | 5.33    | 5.33    | 0.76               | 1.26                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 4.99    | 4.99    | 4.99    | 0.70               | 1.36                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 4.68    | 4.68    | 4.68    | 0.63               | 1.48                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 4.56    | 4.56    | 4.56    | 0.80               | 1.23                    | ± 12.0 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 6.54    | 6.54    | 6.54    | 0.55               | 1.43                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 6.47    | 6.47    | 6.47    | 0.71               | 1.27                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 5.16    | 5.16    | 5.16    | 0.80               | 1.22                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 4.95    | 4.95    | 4.95    | 0.54               | 1.56                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 4.74    | 4.74    | 4.74    | 0.80               | 1.30                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 4.55    | 4.55    | 4.55    | 0.80               | 1.17                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 4.43    | 4.43    | 4.43    | 0.80               | 1.12                    | ± 12.0 %  |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

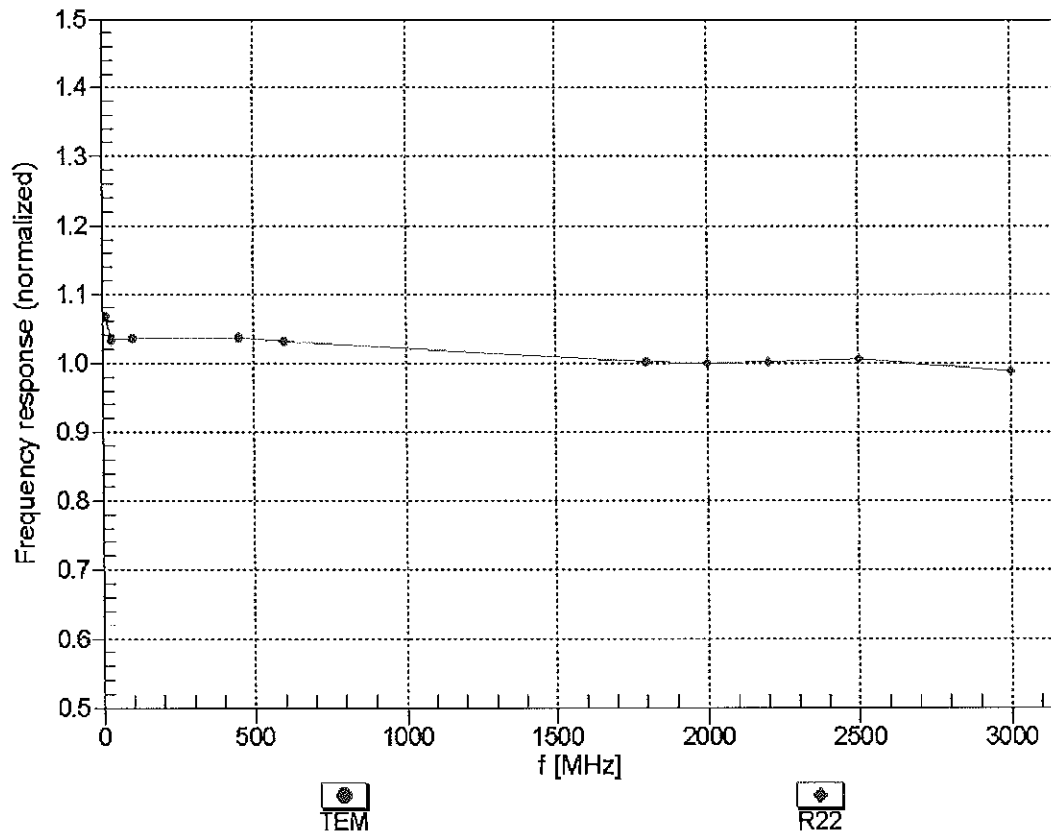



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

$f=600$  MHz, TEM

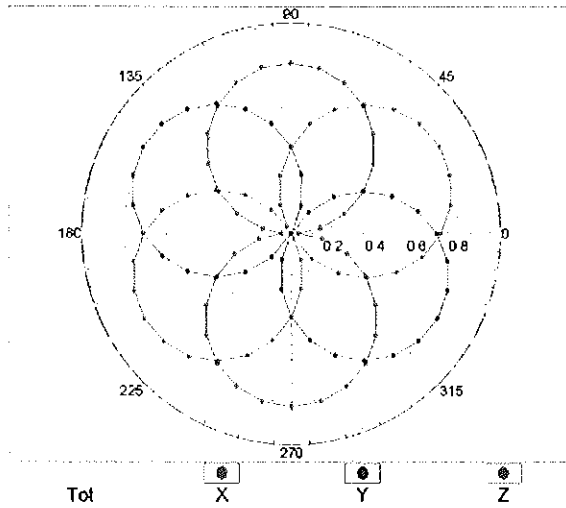


$f=1800$  MHz, R22

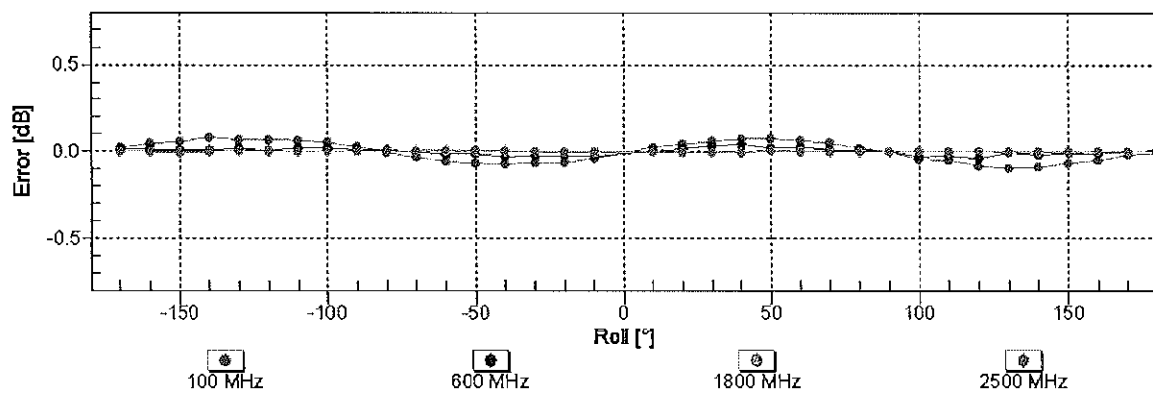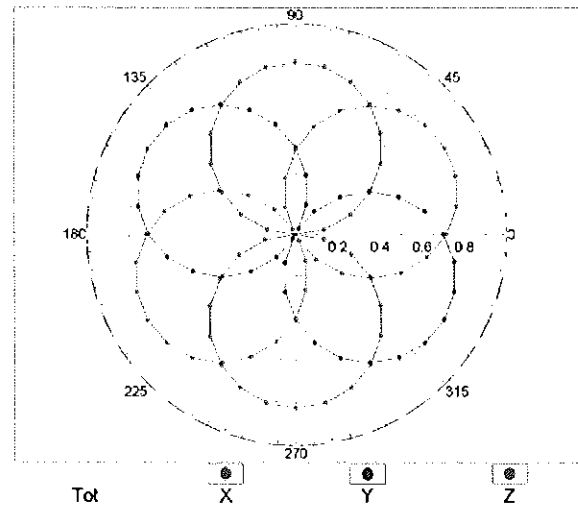


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$ )

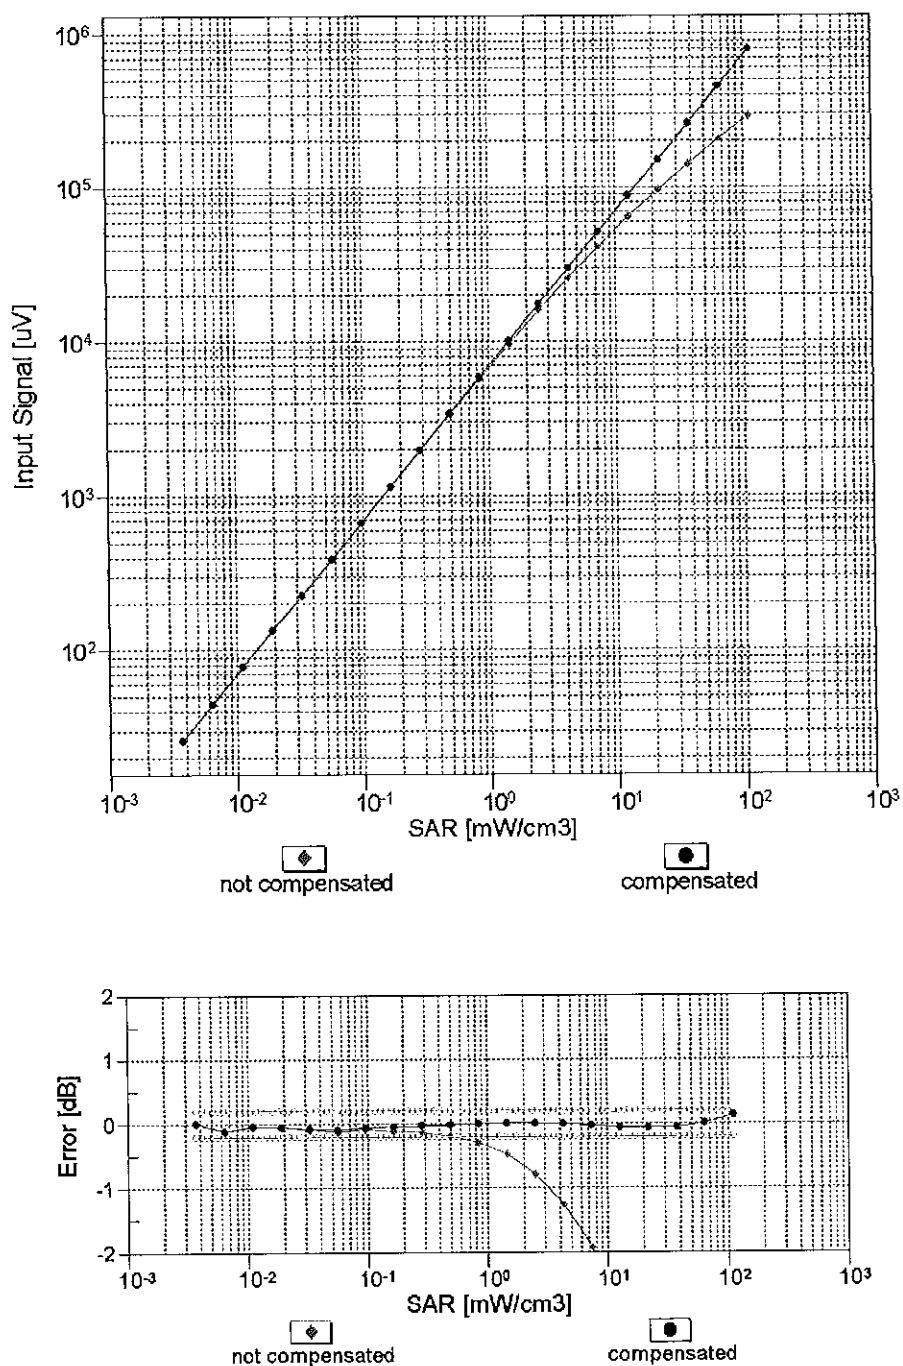



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

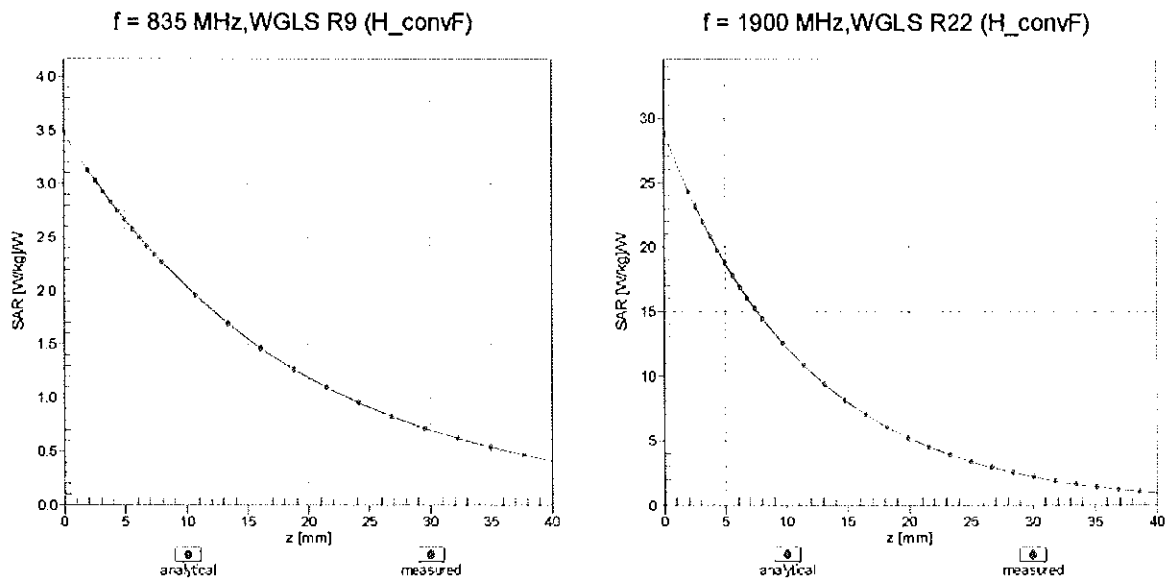

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

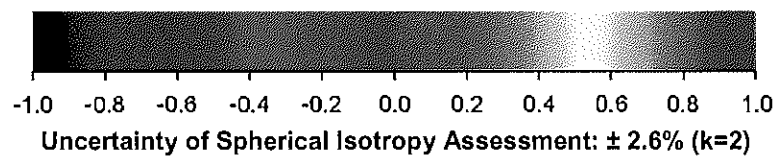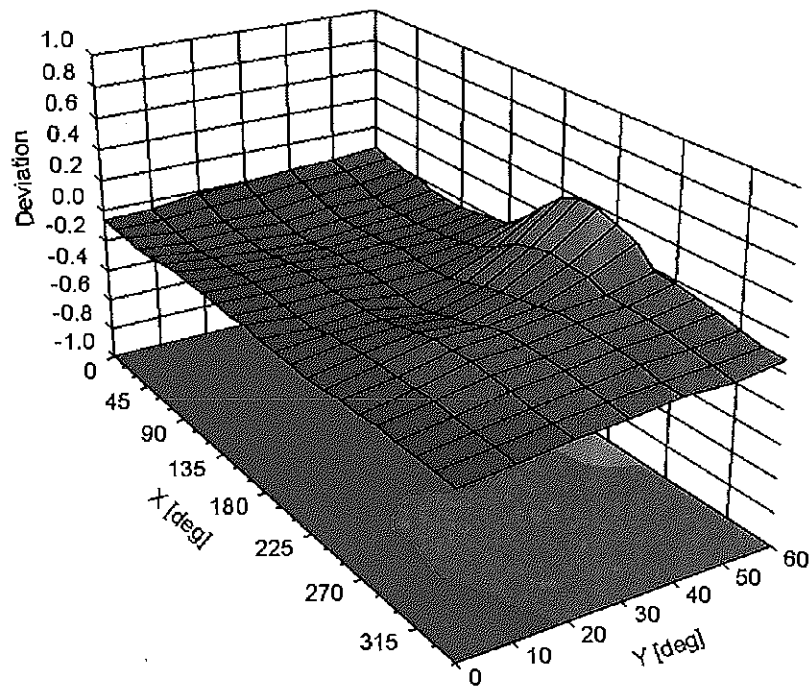

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3332

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 50         |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB/μV | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00       | 1.00  | 0.00    | 192.0    | ± 3.5 %                          |
|               |                                               | Y | 0.00    | 0.00       | 1.00  |         | 194.3    |                                  |
|               |                                               | Z | 0.00    | 0.00       | 1.00  |         | 179.9    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 9.02    | 77.08      | 18.94 | 10.00   | 25.0     | ± 9.6 %                          |
|               |                                               | Y | 12.19   | 85.73      | 21.41 |         | 25.0     |                                  |
|               |                                               | Z | 23.02   | 95.31      | 23.86 |         | 25.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 1.60    | 76.05      | 19.77 | 0.00    | 150.0    | ± 9.6 %                          |
|               |                                               | Y | 1.08    | 68.15      | 15.73 |         | 150.0    |                                  |
|               |                                               | Z | 1.25    | 71.36      | 17.60 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.52    | 68.53      | 17.98 | 0.41    | 150.0    | ± 9.6 %                          |
|               |                                               | Y | 1.33    | 65.39      | 16.06 |         | 150.0    |                                  |
|               |                                               | Z | 1.37    | 66.35      | 16.79 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.37    | 67.71      | 17.82 | 1.46    | 150.0    | ± 9.6 %                          |
|               |                                               | Y | 5.07    | 67.50      | 17.57 |         | 150.0    |                                  |
|               |                                               | Z | 4.99    | 67.81      | 17.71 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 11.16   | 81.48      | 22.11 | 9.39    | 50.0     | ± 9.6 %                          |
|               |                                               | Y | 61.59   | 115.23     | 32.13 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 122.78     | 33.35 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 11.07   | 81.20      | 22.06 | 9.57    | 50.0     | ± 9.6 %                          |
|               |                                               | Y | 43.11   | 109.07     | 30.52 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 122.63     | 33.33 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 12.88   | 85.34      | 22.06 | 6.56    | 60.0     | ± 9.6 %                          |
|               |                                               | Y | 100.00  | 120.15     | 31.36 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 120.25     | 30.99 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 19.49   | 99.22      | 36.41 | 12.57   | 50.0     | ± 9.6 %                          |
|               |                                               | Y | 15.67   | 100.74     | 38.44 |         | 50.0     |                                  |
|               |                                               | Z | 29.43   | 124.69     | 47.97 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 18.92   | 96.32      | 32.19 | 9.56    | 60.0     | ± 9.6 %                          |
|               |                                               | Y | 17.33   | 101.02     | 35.08 |         | 60.0     |                                  |
|               |                                               | Z | 24.89   | 113.23     | 39.81 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 24.19   | 95.70      | 24.33 | 4.80    | 80.0     | ± 9.6 %                          |
|               |                                               | Y | 100.00  | 119.30     | 30.03 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 120.36     | 30.17 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 115.36     | 28.49 | 3.55    | 100.0    | ± 9.6 %                          |
|               |                                               | Y | 100.00  | 119.83     | 29.45 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 122.10     | 30.18 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 16.27   | 93.78      | 30.32 | 7.80    | 80.0     | ± 9.6 %                          |
|               |                                               | Y | 11.67   | 92.24      | 30.90 |         | 80.0     |                                  |
|               |                                               | Z | 13.37   | 97.80      | 33.46 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 15.68   | 88.86      | 22.54 | 5.30    | 70.0     | ± 9.6 %                          |
|               |                                               | Y | 100.00  | 118.49     | 29.99 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 118.88     | 29.80 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 100.00  | 116.01     | 27.12 | 1.88    | 100.0    | ± 9.6 %                          |
|               |                                               | Y | 100.00  | 121.13     | 28.42 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 126.03     | 30.32 |         | 100.0    |                                  |



|           |                                                     |   |        |        |        |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|--------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 100.00 | 119.38 | 27.36  | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 126.54 | 29.58  |       | 100.0 |         |
|           |                                                     | Z | 100.00 | 136.16 | 33.43  |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 13.27  | 88.21  | 24.10  | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 20.91  | 99.02  | 27.13  |       | 70.0  |         |
|           |                                                     | Z | 58.05  | 115.59 | 31.27  |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 16.18  | 96.67  | 25.44  | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 10.83  | 91.57  | 22.94  |       | 100.0 |         |
|           |                                                     | Z | 52.78  | 113.06 | 28.24  |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 12.45  | 95.04  | 24.79  | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 5.49   | 83.70  | 20.10  |       | 100.0 |         |
|           |                                                     | Z | 18.62  | 100.06 | 24.56  |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 14.34  | 89.63  | 24.62  | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 26.79  | 103.24 | 28.41  |       | 70.0  |         |
|           |                                                     | Z | 95.10  | 123.67 | 33.30  |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 15.98  | 96.45  | 25.32  | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 9.62   | 89.98  | 22.43  |       | 100.0 |         |
|           |                                                     | Z | 37.04  | 108.35 | 27.08  |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 13.91  | 96.94  | 25.41  | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 5.69   | 84.50  | 20.47  |       | 100.0 |         |
|           |                                                     | Z | 19.52  | 101.18 | 25.01  |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 3.28   | 80.46  | 20.53  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.92   | 73.09  | 15.89  |       | 150.0 |         |
|           |                                                     | Z | 3.08   | 80.13  | 18.22  |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 11.60  | 82.51  | 21.10  | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 118.83 | 31.00  |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 118.47 | 30.39  |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.02   | 128.88 | 9.05   | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.00   | 96.92  | 0.26   |       | 150.0 |         |
|           |                                                     | Z | 0.02   | 60.00  | 140.78 |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 10.75  | 78.30  | 22.86  | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 15.61  | 90.30  | 26.65  |       | 25.0  |         |
|           |                                                     | Z | 32.75  | 104.57 | 30.45  |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 10.92  | 80.23  | 22.15  | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 20.87  | 96.36  | 27.22  |       | 40.0  |         |
|           |                                                     | Z | 64.62  | 115.72 | 32.06  |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 11.51  | 81.76  | 22.84  | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 15.28  | 90.93  | 25.77  |       | 50.0  |         |
|           |                                                     | Z | 25.94  | 101.11 | 28.65  |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 14.19  | 91.88  | 29.00  | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 8.68   | 86.53  | 28.09  |       | 100.0 |         |
|           |                                                     | Z | 9.12   | 89.51  | 29.70  |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 2.01   | 72.72  | 19.70  | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.51   | 67.62  | 17.16  |       | 110.0 |         |
|           |                                                     | Z | 1.56   | 68.78  | 17.99  |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 100.00 | 126.29 | 32.07  | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 132.71 | 34.39  |       | 110.0 |         |
|           |                                                     | Z | 100.00 | 137.07 | 36.21  |       | 110.0 |         |

|           |                                                |   |       |        |       |      |       |         |
|-----------|------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 36.66 | 112.50 | 30.92 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 11.07 | 98.15  | 27.76 |      | 110.0 |         |
|           |                                                | Z | 22.12 | 112.16 | 32.18 |      | 110.0 |         |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 5.03  | 67.33  | 17.05 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.77  | 67.19  | 16.82 |      | 100.0 |         |
|           |                                                | Z | 4.70  | 67.51  | 16.97 |      | 100.0 |         |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 5.09  | 67.56  | 17.23 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.81  | 67.36  | 16.96 |      | 100.0 |         |
|           |                                                | Z | 4.74  | 67.68  | 17.11 |      | 100.0 |         |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 5.47  | 67.93  | 17.49 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.10  | 67.63  | 17.20 |      | 100.0 |         |
|           |                                                | Z | 5.00  | 67.90  | 17.32 |      | 100.0 |         |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 5.40  | 68.08  | 17.70 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.02  | 67.68  | 17.39 |      | 100.0 |         |
|           |                                                | Z | 4.92  | 67.92  | 17.50 |      | 100.0 |         |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 5.49  | 68.31  | 17.98 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.08  | 67.82  | 17.62 |      | 100.0 |         |
|           |                                                | Z | 4.97  | 68.04  | 17.73 |      | 100.0 |         |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.84  | 68.47  | 18.45 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.42  | 68.13  | 18.14 |      | 100.0 |         |
|           |                                                | Z | 5.31  | 68.42  | 18.28 |      | 100.0 |         |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 6.07  | 69.08  | 18.91 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.53  | 68.32  | 18.44 |      | 100.0 |         |
|           |                                                | Z | 5.39  | 68.51  | 18.54 |      | 100.0 |         |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 6.13  | 68.90  | 19.06 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.61  | 68.37  | 18.66 |      | 100.0 |         |
|           |                                                | Z | 5.48  | 68.58  | 18.76 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 5.56  | 68.08  | 18.26 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.22  | 67.75  | 17.96 |      | 100.0 |         |
|           |                                                | Z | 5.14  | 68.03  | 18.10 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.71  | 68.87  | 18.66 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.28  | 68.28  | 18.29 |      | 100.0 |         |
|           |                                                | Z | 5.18  | 68.53  | 18.42 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.93  | 69.43  | 19.17 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.43  | 68.68  | 18.74 |      | 100.0 |         |
|           |                                                | Z | 5.32  | 68.95  | 18.89 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 6.04  | 69.75  | 19.56 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.49  | 68.80  | 18.99 |      | 100.0 |         |
|           |                                                | Z | 5.38  | 69.07  | 19.15 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 6.35  | 70.65  | 20.23 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.63  | 69.18  | 19.44 |      | 90.0  |         |
|           |                                                | Z | 5.49  | 69.37  | 19.56 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 6.37  | 70.50  | 20.38 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.68  | 69.10  | 19.63 |      | 90.0  |         |
|           |                                                | Z | 5.56  | 69.34  | 19.78 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 6.43  | 70.65  | 20.50 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.73  | 69.22  | 19.75 |      | 90.0  |         |
|           |                                                | Z | 5.61  | 69.48  | 19.91 |      | 90.0  |         |

|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 1.62   | 75.66  | 18.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.87   | 66.71  | 12.69 |      | 150.0 |         |
|           |                                                     | Z | 1.13   | 71.02  | 14.45 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 3.53   | 66.20  | 10.93 | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 2.19   | 64.40  | 9.18  |      | 80.0  |         |
|           |                                                     | Z | 1.96   | 64.15  | 8.74  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 12.79  | 85.25  | 22.06 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 120.23 | 31.42 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 120.31 | 31.04 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 2.06   | 70.06  | 17.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.88   | 68.31  | 15.96 |      | 150.0 |         |
|           |                                                     | Z | 2.04   | 70.38  | 16.98 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 2.02   | 70.12  | 17.47 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.84   | 68.27  | 15.94 |      | 150.0 |         |
|           |                                                     | Z | 2.00   | 70.37  | 16.98 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 18.80  | 96.14  | 32.13 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 17.28  | 100.91 | 35.04 |      | 60.0  |         |
|           |                                                     | Z | 24.81  | 113.10 | 39.77 |      | 60.0  |         |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.84   | 73.61  | 18.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.15   | 70.58  | 16.91 |      | 150.0 |         |
|           |                                                     | Z | 3.25   | 71.69  | 17.61 |      | 150.0 |         |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.58   | 69.11  | 16.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.26   | 67.74  | 16.10 |      | 150.0 |         |
|           |                                                     | Z | 3.26   | 68.29  | 16.47 |      | 150.0 |         |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.66   | 68.88  | 16.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.36   | 67.71  | 16.19 |      | 150.0 |         |
|           |                                                     | Z | 3.36   | 68.23  | 16.52 |      | 150.0 |         |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 9.75   | 77.78  | 20.81 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.78   | 79.16  | 21.83 |      | 65.0  |         |
|           |                                                     | Z | 9.34   | 81.38  | 22.82 |      | 65.0  |         |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 9.87   | 77.22  | 21.49 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.42   | 77.09  | 21.77 |      | 65.0  |         |
|           |                                                     | Z | 8.44   | 78.16  | 22.31 |      | 65.0  |         |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 9.19   | 75.82  | 21.15 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.07   | 76.20  | 21.66 |      | 65.0  |         |
|           |                                                     | Z | 8.27   | 77.70  | 22.41 |      | 65.0  |         |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 3.37   | 72.69  | 18.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.75   | 69.90  | 16.77 |      | 150.0 |         |
|           |                                                     | Z | 2.82   | 71.09  | 17.51 |      | 150.0 |         |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 3.26   | 68.97  | 16.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.91   | 67.66  | 16.01 |      | 150.0 |         |
|           |                                                     | Z | 2.92   | 68.36  | 16.42 |      | 150.0 |         |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.79   | 71.81  | 17.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.23   | 69.12  | 16.39 |      | 150.0 |         |
|           |                                                     | Z | 2.31   | 70.62  | 17.23 |      | 150.0 |         |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.96   | 69.58  | 17.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.63   | 68.64  | 16.31 |      | 150.0 |         |
|           |                                                     | Z | 2.69   | 69.84  | 16.85 |      | 150.0 |         |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 3.36 | 68.71 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.03 | 67.66 | 16.06 |      | 150.0 |         |
|           |                                                | Z | 3.04 | 68.35 | 16.45 |      | 150.0 |         |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 3.10 | 69.46 | 17.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.78 | 68.78 | 16.44 |      | 150.0 |         |
|           |                                                | Z | 2.83 | 69.92 | 16.93 |      | 150.0 |         |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.34 | 67.65 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.17 | 67.50 | 16.64 |      | 150.0 |         |
|           |                                                | Z | 5.08 | 67.64 | 16.74 |      | 150.0 |         |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.80 | 68.17 | 17.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.44 | 67.60 | 16.69 |      | 150.0 |         |
|           |                                                | Z | 5.33 | 67.71 | 16.77 |      | 150.0 |         |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.47 | 67.90 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.25 | 67.68 | 16.65 |      | 150.0 |         |
|           |                                                | Z | 5.17 | 67.85 | 16.77 |      | 150.0 |         |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.34 | 67.65 | 16.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.12 | 67.32 | 16.56 |      | 150.0 |         |
|           |                                                | Z | 5.07 | 67.59 | 16.73 |      | 150.0 |         |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.79 | 68.04 | 16.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.52 | 67.82 | 16.81 |      | 150.0 |         |
|           |                                                | Z | 5.42 | 67.93 | 16.89 |      | 150.0 |         |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.44 | 67.84 | 16.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.24 | 67.66 | 16.65 |      | 150.0 |         |
|           |                                                | Z | 5.17 | 67.84 | 16.77 |      | 150.0 |         |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.72 | 68.86 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.39 | 67.72 | 16.10 |      | 150.0 |         |
|           |                                                | Z | 3.39 | 68.26 | 16.45 |      | 150.0 |         |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.82 | 68.79 | 16.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.51 | 67.83 | 16.27 |      | 150.0 |         |
|           |                                                | Z | 3.51 | 68.36 | 16.60 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 2.57 | 71.96 | 17.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.01 | 69.21 | 16.02 |      | 150.0 |         |
|           |                                                | Z | 2.13 | 71.18 | 16.95 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.89 | 70.53 | 17.42 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.49 | 69.45 | 15.95 |      | 150.0 |         |
|           |                                                | Z | 2.62 | 71.11 | 16.52 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.69 | 68.52 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.23 | 66.92 | 14.20 |      | 150.0 |         |
|           |                                                | Z | 2.23 | 67.85 | 14.42 |      | 150.0 |         |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 2.07 | 72.06 | 16.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.17 | 64.90 | 11.31 |      | 150.0 |         |
|           |                                                | Z | 1.08 | 64.84 | 10.72 |      | 150.0 |         |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 4.64 | 77.66 | 18.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.89 | 66.33 | 11.57 |      | 150.0 |         |
|           |                                                | Z | 1.28 | 62.78 | 8.70  |      | 150.0 |         |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 5.86 | 81.36 | 20.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.26 | 68.50 | 12.73 |      | 150.0 |         |
|           |                                                | Z | 1.39 | 63.59 | 9.24  |      | 150.0 |         |

|           |                                            |   |       |       |       |      |       |         |
|-----------|--------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 3.27  | 69.03 | 16.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.92  | 67.72 | 16.06 |      | 150.0 |         |
|           |                                            | Z | 2.93  | 68.43 | 16.47 |      | 150.0 |         |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 3.37  | 68.76 | 16.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.04  | 67.71 | 16.11 |      | 150.0 |         |
|           |                                            | Z | 3.05  | 68.41 | 16.50 |      | 150.0 |         |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 9.88  | 78.98 | 21.39 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 9.54  | 82.00 | 22.98 |      | 65.0  |         |
|           |                                            | Z | 10.52 | 85.01 | 24.21 |      | 65.0  |         |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 9.59  | 77.49 | 21.44 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.05  | 77.33 | 21.53 |      | 65.0  |         |
|           |                                            | Z | 8.15  | 78.63 | 22.11 |      | 65.0  |         |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 9.88  | 78.01 | 21.96 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.51  | 78.32 | 22.28 |      | 65.0  |         |
|           |                                            | Z | 8.64  | 79.68 | 22.87 |      | 65.0  |         |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.88  | 72.43 | 18.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.28  | 69.53 | 16.65 |      | 150.0 |         |
|           |                                            | Z | 2.36  | 71.01 | 17.47 |      | 150.0 |         |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.96  | 69.57 | 17.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.63  | 68.66 | 16.33 |      | 150.0 |         |
|           |                                            | Z | 2.70  | 69.87 | 16.88 |      | 150.0 |         |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 2.50  | 72.75 | 18.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.86  | 69.32 | 15.77 |      | 150.0 |         |
|           |                                            | Z | 2.00  | 71.53 | 16.72 |      | 150.0 |         |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 2.58  | 69.56 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.07  | 67.52 | 14.21 |      | 150.0 |         |
|           |                                            | Z | 2.11  | 68.66 | 14.46 |      | 150.0 |         |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 3.11  | 69.51 | 17.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.79  | 68.85 | 16.49 |      | 150.0 |         |
|           |                                            | Z | 2.84  | 70.00 | 16.99 |      | 150.0 |         |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.70  | 69.94 | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.17  | 67.94 | 14.47 |      | 150.0 |         |
|           |                                            | Z | 2.21  | 69.05 | 14.68 |      | 150.0 |         |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 3.17  | 70.70 | 17.47 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.80  | 69.22 | 16.63 |      | 150.0 |         |
|           |                                            | Z | 2.84  | 70.27 | 17.24 |      | 150.0 |         |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 3.25  | 68.62 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.93  | 67.68 | 16.03 |      | 150.0 |         |
|           |                                            | Z | 2.94  | 68.43 | 16.42 |      | 150.0 |         |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 3.34  | 68.54 | 16.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.04  | 67.85 | 16.15 |      | 150.0 |         |
|           |                                            | Z | 3.05  | 68.62 | 16.54 |      | 150.0 |         |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 4.29  | 71.19 | 20.11 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.58  | 69.86 | 19.45 |      | 150.0 |         |
|           |                                            | Z | 3.34  | 69.55 | 19.26 |      | 150.0 |         |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 5.65  | 74.34 | 20.64 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.34  | 72.64 | 19.86 |      | 150.0 |         |
|           |                                            | Z | 3.97  | 72.28 | 19.65 |      | 150.0 |         |

|           |                                            |   |       |        |       |      |       |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.08  | 75.90  | 21.58 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.83  | 75.01  | 21.26 |      | 150.0 |         |
|           |                                            | Z | 4.38  | 74.50  | 20.98 |      | 150.0 |         |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 4.41  | 74.54  | 21.42 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.96  | 68.83  | 19.02 |      | 150.0 |         |
|           |                                            | Z | 2.72  | 67.99  | 18.57 |      | 150.0 |         |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 6.70  | 80.82  | 23.44 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.91  | 74.17  | 21.18 |      | 150.0 |         |
|           |                                            | Z | 3.42  | 72.70  | 20.49 |      | 150.0 |         |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 5.50  | 76.54  | 20.93 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.29  | 70.45  | 18.57 |      | 150.0 |         |
|           |                                            | Z | 2.94  | 69.58  | 18.14 |      | 150.0 |         |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 25.76 | 101.07 | 30.32 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 18.45 | 102.75 | 32.10 |      | 65.0  |         |
|           |                                            | Z | 20.86 | 107.70 | 33.85 |      | 65.0  |         |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 19.21 | 92.24  | 26.33 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 26.29 | 105.14 | 31.12 |      | 65.0  |         |
|           |                                            | Z | 28.49 | 108.55 | 32.12 |      | 65.0  |         |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 17.46 | 89.68  | 25.13 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 21.35 | 100.13 | 29.12 |      | 65.0  |         |
|           |                                            | Z | 22.92 | 103.28 | 30.05 |      | 65.0  |         |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 4.34  | 74.12  | 21.15 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.93  | 68.55  | 18.79 |      | 150.0 |         |
|           |                                            | Z | 2.70  | 67.77  | 18.36 |      | 150.0 |         |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 6.71  | 80.84  | 23.45 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.92  | 74.20  | 21.19 |      | 150.0 |         |
|           |                                            | Z | 3.42  | 72.72  | 20.50 |      | 150.0 |         |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 4.38  | 74.32  | 21.26 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.95  | 68.69  | 18.87 |      | 150.0 |         |
|           |                                            | Z | 2.71  | 67.87  | 18.43 |      | 150.0 |         |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 6.59  | 80.50  | 23.29 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.89  | 74.02  | 21.09 |      | 150.0 |         |
|           |                                            | Z | 3.41  | 72.61  | 20.43 |      | 150.0 |         |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 6.03  | 78.45  | 22.01 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.58  | 72.24  | 19.76 |      | 150.0 |         |
|           |                                            | Z | 3.16  | 71.11  | 19.23 |      | 150.0 |         |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 5.47  | 76.42  | 20.86 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.28  | 70.40  | 18.53 |      | 150.0 |         |
|           |                                            | Z | 2.94  | 69.55  | 18.12 |      | 150.0 |         |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 4.38  | 74.30  | 21.25 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.95  | 68.67  | 18.87 |      | 150.0 |         |
|           |                                            | Z | 2.71  | 67.86  | 18.43 |      | 150.0 |         |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 6.58  | 80.48  | 23.29 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.88  | 74.00  | 21.08 |      | 150.0 |         |
|           |                                            | Z | 3.40  | 72.59  | 20.42 |      | 150.0 |         |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 5.46  | 76.40  | 20.85 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.28  | 70.38  | 18.52 |      | 150.0 |         |
|           |                                            | Z | 2.93  | 69.53  | 18.11 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 4.39 | 74.34 | 21.27 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 2.96 | 68.71 | 18.89 |      | 150.0 |         |
|           |                                               | Z | 2.72 | 67.89 | 18.44 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 6.61 | 80.55 | 23.32 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.90 | 74.06 | 21.11 |      | 150.0 |         |
|           |                                               | Z | 3.42 | 72.64 | 20.45 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 5.49 | 76.46 | 20.88 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.29 | 70.44 | 18.55 |      | 150.0 |         |
|           |                                               | Z | 2.95 | 69.59 | 18.14 |      | 150.0 |         |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 4.40 | 74.38 | 21.31 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 2.97 | 68.77 | 18.95 |      | 150.0 |         |
|           |                                               | Z | 2.73 | 67.95 | 18.51 |      | 150.0 |         |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 6.86 | 81.30 | 23.70 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.01 | 74.64 | 21.46 |      | 150.0 |         |
|           |                                               | Z | 3.49 | 73.09 | 20.74 |      | 150.0 |         |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 5.63 | 76.95 | 21.16 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.36 | 70.82 | 18.81 |      | 150.0 |         |
|           |                                               | Z | 3.00 | 69.90 | 18.37 |      | 150.0 |         |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.76 | 66.98 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.53 | 66.89 | 16.29 |      | 150.0 |         |
|           |                                               | Z | 4.48 | 67.27 | 16.46 |      | 150.0 |         |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.98 | 67.40 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.70 | 67.19 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.63 | 67.53 | 16.59 |      | 150.0 |         |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 5.02 | 67.38 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.74 | 67.22 | 16.44 |      | 150.0 |         |
|           |                                               | Z | 4.67 | 67.55 | 16.61 |      | 150.0 |         |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.79 | 67.12 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.53 | 66.94 | 16.30 |      | 150.0 |         |
|           |                                               | Z | 4.47 | 67.29 | 16.46 |      | 150.0 |         |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 5.00 | 67.41 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.71 | 67.21 | 16.43 |      | 150.0 |         |
|           |                                               | Z | 4.64 | 67.54 | 16.60 |      | 150.0 |         |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 5.02 | 67.39 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.74 | 67.23 | 16.45 |      | 150.0 |         |
|           |                                               | Z | 4.67 | 67.55 | 16.61 |      | 150.0 |         |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.75 | 67.15 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.48 | 66.96 | 16.27 |      | 150.0 |         |
|           |                                               | Z | 4.43 | 67.33 | 16.43 |      | 150.0 |         |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 5.00 | 67.42 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.70 | 67.17 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.63 | 67.50 | 16.58 |      | 150.0 |         |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 5.03 | 67.33 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.75 | 67.16 | 16.44 |      | 150.0 |         |
|           |                                               | Z | 4.68 | 67.49 | 16.60 |      | 150.0 |         |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.32 | 67.70 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.10 | 67.32 | 16.56 |      | 150.0 |         |
|           |                                               | Z | 5.04 | 67.57 | 16.71 |      | 150.0 |         |

|           |                                           |   |       |        |       |      |       |         |
|-----------|-------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.69  | 67.90  | 16.90 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.41  | 67.62  | 16.73 |      | 150.0 |         |
|           |                                           | Z | 5.32  | 67.79  | 16.83 |      | 150.0 |         |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.40  | 67.86  | 16.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.14  | 67.44  | 16.54 |      | 150.0 |         |
|           |                                           | Z | 5.08  | 67.68  | 16.69 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 3.04  | 66.91  | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.80  | 66.45  | 15.40 |      | 150.0 |         |
|           |                                           | Z | 2.79  | 67.13  | 15.62 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 19.62 | 92.68  | 26.54 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 28.14 | 106.53 | 31.60 |      | 65.0  |         |
|           |                                           | Z | 30.74 | 110.09 | 32.63 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 17.31 | 89.65  | 25.20 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 25.62 | 103.45 | 30.17 |      | 65.0  |         |
|           |                                           | Z | 27.71 | 106.63 | 31.05 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 25.12 | 101.14 | 30.46 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 22.85 | 107.40 | 33.58 |      | 65.0  |         |
|           |                                           | Z | 23.56 | 110.42 | 34.69 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 19.21 | 92.22  | 26.33 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 26.37 | 105.18 | 31.14 |      | 65.0  |         |
|           |                                           | Z | 28.56 | 108.58 | 32.13 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 16.99 | 89.27  | 25.02 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.08 | 102.25 | 29.76 |      | 65.0  |         |
|           |                                           | Z | 25.76 | 105.25 | 30.60 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 24.47 | 100.57 | 30.23 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 21.54 | 106.10 | 33.13 |      | 65.0  |         |
|           |                                           | Z | 22.10 | 109.02 | 34.22 |      | 65.0  |         |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 19.21 | 92.23  | 26.33 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 26.35 | 105.17 | 31.13 |      | 65.0  |         |
|           |                                           | Z | 28.56 | 108.59 | 32.14 |      | 65.0  |         |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 16.99 | 89.29  | 25.03 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.05 | 102.24 | 29.76 |      | 65.0  |         |
|           |                                           | Z | 25.73 | 105.25 | 30.60 |      | 65.0  |         |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 23.75 | 99.87  | 29.94 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 20.44 | 104.88 | 32.66 |      | 65.0  |         |
|           |                                           | Z | 20.94 | 107.73 | 33.73 |      | 65.0  |         |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 19.23 | 92.26  | 26.34 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 26.43 | 105.24 | 31.16 |      | 65.0  |         |
|           |                                           | Z | 28.68 | 108.68 | 32.16 |      | 65.0  |         |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 17.05 | 89.34  | 25.04 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 24.28 | 102.38 | 29.79 |      | 65.0  |         |
|           |                                           | Z | 26.05 | 105.43 | 30.64 |      | 65.0  |         |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 24.65 | 100.72 | 30.28 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 21.67 | 106.26 | 33.17 |      | 65.0  |         |
|           |                                           | Z | 22.28 | 109.22 | 34.28 |      | 65.0  |         |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 19.21 | 92.24  | 26.33 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 26.34 | 105.18 | 31.13 |      | 65.0  |         |
|           |                                           | Z | 28.55 | 108.60 | 32.14 |      | 65.0  |         |



|           |                                            |   |       |        |       |      |      |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 17.00 | 89.31  | 25.04 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 24.00 | 102.22 | 29.75 |      | 65.0 |         |
|           |                                            | Z | 25.68 | 105.23 | 30.60 |      | 65.0 |         |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 24.60 | 100.69 | 30.26 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 21.61 | 106.21 | 33.16 |      | 65.0 |         |
|           |                                            | Z | 22.24 | 109.18 | 34.27 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 14.83 | 87.15  | 27.43 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 11.87 | 87.25  | 27.69 |      | 65.0 |         |
|           |                                            | Z | 12.27 | 89.81  | 28.71 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 14.03 | 85.86  | 26.85 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 11.07 | 85.73  | 27.03 |      | 65.0 |         |
|           |                                            | Z | 11.88 | 89.15  | 28.39 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 12.50 | 85.61  | 27.61 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.91  | 82.53  | 26.67 |      | 65.0 |         |
|           |                                            | Z | 9.40  | 85.62  | 28.06 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 10.84 | 80.28  | 21.46 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.60  | 79.06  | 19.82 |      | 65.0 |         |
|           |                                            | Z | 7.30  | 76.79  | 18.14 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 10.80 | 80.00  | 21.33 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.32  | 78.30  | 19.47 |      | 65.0 |         |
|           |                                            | Z | 7.01  | 75.95  | 17.75 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 10.19 | 81.67  | 21.72 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.19  | 82.92  | 21.40 |      | 65.0 |         |
|           |                                            | Z | 10.28 | 85.26  | 21.82 |      | 65.0 |         |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 9.24  | 78.33  | 20.99 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.42  | 77.41  | 19.87 |      | 65.0 |         |
|           |                                            | Z | 7.44  | 78.18  | 19.81 |      | 65.0 |         |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 9.29  | 78.02  | 20.88 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.28  | 76.69  | 19.57 |      | 65.0 |         |
|           |                                            | Z | 7.17  | 77.21  | 19.40 |      | 65.0 |         |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 10.52 | 82.18  | 22.29 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.94 | 86.37  | 23.51 |      | 65.0 |         |
|           |                                            | Z | 13.59 | 90.89  | 24.82 |      | 65.0 |         |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 9.84  | 79.38  | 22.27 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.59  | 80.24  | 22.59 |      | 65.0 |         |
|           |                                            | Z | 8.91  | 81.95  | 23.17 |      | 65.0 |         |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 9.48  | 77.77  | 21.45 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.96  | 77.76  | 21.28 |      | 65.0 |         |
|           |                                            | Z | 8.06  | 79.03  | 21.69 |      | 65.0 |         |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 10.35 | 81.23  | 22.32 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.67 | 85.75  | 24.25 |      | 65.0 |         |
|           |                                            | Z | 12.80 | 90.26  | 25.85 |      | 65.0 |         |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 9.41  | 77.10  | 21.37 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.89  | 76.83  | 21.30 |      | 65.0 |         |
|           |                                            | Z | 7.98  | 78.11  | 21.82 |      | 65.0 |         |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 9.73  | 77.64  | 21.86 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.31  | 77.74  | 21.96 |      | 65.0 |         |
|           |                                            | Z | 8.42  | 79.03  | 22.48 |      | 65.0 |         |

|           |                                             |   |       |       |       |      |      |         |
|-----------|---------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 9.76  | 78.98 | 21.63 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.21  | 81.58 | 22.99 |      | 65.0 |         |
|           |                                             | Z | 10.10 | 84.50 | 24.17 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 10.36 | 79.33 | 20.55 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.89  | 75.10 | 17.29 |      | 65.0 |         |
|           |                                             | Z | 5.38  | 71.84 | 15.02 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 10.33 | 78.98 | 20.36 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.60  | 74.15 | 16.79 |      | 65.0 |         |
|           |                                             | Z | 5.14  | 70.90 | 14.50 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 9.84  | 80.89 | 21.06 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.93  | 77.80 | 18.67 |      | 65.0 |         |
|           |                                             | Z | 6.67  | 77.68 | 18.06 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 9.48  | 78.65 | 21.42 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.89  | 78.48 | 20.85 |      | 65.0 |         |
|           |                                             | Z | 8.05  | 79.67 | 21.05 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 9.52  | 78.48 | 21.39 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.84  | 78.08 | 20.70 |      | 65.0 |         |
|           |                                             | Z | 7.93  | 79.11 | 20.83 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 10.28 | 81.56 | 22.27 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.28 | 85.25 | 23.51 |      | 65.0 |         |
|           |                                             | Z | 12.40 | 89.51 | 24.85 |      | 65.0 |         |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 9.83  | 79.35 | 22.25 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.56  | 80.18 | 22.55 |      | 65.0 |         |
|           |                                             | Z | 8.88  | 81.87 | 23.12 |      | 65.0 |         |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 9.48  | 77.78 | 21.46 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.94  | 77.74 | 21.28 |      | 65.0 |         |
|           |                                             | Z | 8.05  | 79.01 | 21.68 |      | 65.0 |         |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 10.32 | 81.15 | 22.28 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 10.57 | 85.55 | 24.15 |      | 65.0 |         |
|           |                                             | Z | 12.63 | 90.00 | 25.74 |      | 65.0 |         |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 9.59  | 77.50 | 21.45 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.04  | 77.33 | 21.54 |      | 65.0 |         |
|           |                                             | Z | 8.14  | 78.63 | 22.11 |      | 65.0 |         |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 9.89  | 78.01 | 21.96 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.50  | 78.31 | 22.27 |      | 65.0 |         |
|           |                                             | Z | 8.64  | 79.67 | 22.86 |      | 65.0 |         |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 9.88  | 78.96 | 21.38 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.52  | 81.96 | 22.96 |      | 65.0 |         |
|           |                                             | Z | 10.50 | 84.95 | 24.19 |      | 65.0 |         |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 9.95  | 76.96 | 21.54 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.52  | 76.88 | 21.79 |      | 65.0 |         |
|           |                                             | Z | 8.53  | 77.92 | 22.30 |      | 65.0 |         |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 9.89  | 76.68 | 21.52 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.46  | 76.46 | 21.67 |      | 65.0 |         |
|           |                                             | Z | 8.45  | 77.44 | 22.15 |      | 65.0 |         |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 9.66  | 77.24 | 20.86 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.81  | 78.78 | 21.90 |      | 65.0 |         |
|           |                                             | Z | 9.16  | 80.58 | 22.73 |      | 65.0 |         |

|           |                                                                    |   |       |        |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.74  | 67.26  | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.61  | 66.92  | 15.38 |      | 150.0 |         |
|           |                                                                    | Z | 2.66  | 67.94  | 15.80 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 2.05  | 72.21  | 18.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.65  | 68.50  | 15.87 |      | 150.0 |         |
|           |                                                                    | Z | 1.80  | 70.74  | 17.08 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 8.03  | 72.61  | 16.76 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.31  | 69.07  | 13.45 |      | 50.0  |         |
|           |                                                                    | Z | 4.52  | 67.70  | 12.08 |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 10.53 | 79.27  | 21.29 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 8.21  | 77.64  | 19.35 |      | 50.0  |         |
|           |                                                                    | Z | 7.62  | 76.93  | 18.36 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 10.71 | 79.48  | 21.37 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 8.29  | 77.74  | 19.41 |      | 50.0  |         |
|           |                                                                    | Z | 7.68  | 77.01  | 18.42 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 2.46  | 75.92  | 18.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.45  | 69.17  | 13.90 |      | 150.0 |         |
|           |                                                                    | Z | 1.74  | 72.52  | 15.01 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 1.54  | 75.02  | 18.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.85  | 66.46  | 12.55 |      | 150.0 |         |
|           |                                                                    | Z | 1.09  | 70.54  | 14.22 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 2.85  | 86.00  | 22.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.20  | 72.00  | 15.52 |      | 150.0 |         |
|           |                                                                    | Z | 3.37  | 86.48  | 20.58 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 6.08  | 98.98  | 27.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.38  | 81.80  | 19.81 |      | 150.0 |         |
|           |                                                                    | Z | 91.77 | 132.75 | 32.89 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 11.42 | 82.00  | 23.75 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 13.54 | 88.04  | 25.23 |      | 50.0  |         |
|           |                                                                    | Z | 20.14 | 95.71  | 27.34 |      | 50.0  |         |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 3.39  | 72.81  | 18.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.76  | 70.00  | 16.84 |      | 150.0 |         |
|           |                                                                    | Z | 2.84  | 71.20  | 17.58 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 2.33  | 72.89  | 17.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.54  | 67.89  | 13.96 |      | 150.0 |         |
|           |                                                                    | Z | 1.61  | 69.51  | 14.40 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 4.61  | 76.96  | 19.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.70  | 70.48  | 14.61 |      | 150.0 |         |
|           |                                                                    | Z | 1.96  | 66.96  | 12.10 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 3.49  | 71.59  | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.91  | 65.24  | 11.36 |      | 150.0 |         |
|           |                                                                    | Z | 1.47  | 63.13  | 9.40  |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 6.59  | 70.34  | 20.04 | 4.17 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 5.68  | 68.74  | 18.85 |      | 80.0  |         |
|           |                                                                    | Z | 5.70  | 69.67  | 19.26 |      | 80.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 7.28  | 71.73  | 21.22 | 4.96 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 6.10  | 69.04  | 19.43 |      | 80.0  |         |
|           |                                                                    | Z | 6.04  | 69.77  | 19.77 |      | 80.0  |         |

|           |                                                                     |   |       |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 7.35  | 72.51 | 21.62 | 4.96  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.94  | 69.06 | 19.41 |       | 80.0  |         |
|           |                                                                     | Z | 5.89  | 69.82 | 19.76 |       | 80.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 6.69  | 70.97 | 20.39 | 4.17  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.59  | 68.42 | 18.66 |       | 80.0  |         |
|           |                                                                     | Z | 5.56  | 69.20 | 19.00 |       | 80.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 14.75 | 90.64 | 29.58 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 10.18 | 84.38 | 26.41 |       | 50.0  |         |
|           |                                                                     | Z | 10.30 | 85.54 | 26.72 |       | 50.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 9.44  | 79.58 | 25.56 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 7.33  | 75.98 | 23.40 |       | 50.0  |         |
|           |                                                                     | Z | 6.44  | 73.04 | 21.64 |       | 50.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 10.22 | 81.50 | 26.08 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 7.67  | 77.32 | 23.80 |       | 50.0  |         |
|           |                                                                     | Z | 7.49  | 77.77 | 23.93 |       | 50.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 10.67 | 82.66 | 26.55 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 7.93  | 78.29 | 24.23 |       | 50.0  |         |
|           |                                                                     | Z | 7.77  | 78.85 | 24.42 |       | 50.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 9.59  | 79.83 | 25.67 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 7.43  | 76.26 | 23.57 |       | 50.0  |         |
|           |                                                                     | Z | 6.50  | 73.23 | 21.79 |       | 50.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 9.69  | 80.24 | 25.70 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 7.48  | 76.59 | 23.59 |       | 50.0  |         |
|           |                                                                     | Z | 7.35  | 77.19 | 23.79 |       | 50.0  |         |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.76  | 71.88 | 17.62 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 3.12  | 69.22 | 16.46 |       | 150.0 |         |
|           |                                                                     | Z | 3.20  | 70.27 | 17.11 |       | 150.0 |         |
| 10313-AAA | IDEN 1:3                                                            | X | 8.04  | 75.55 | 17.71 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 8.89  | 81.65 | 20.17 |       | 70.0  |         |
|           |                                                                     | Z | 12.54 | 87.83 | 22.26 |       | 70.0  |         |
| 10314-AAA | IDEN 1:6                                                            | X | 10.06 | 79.94 | 21.38 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 12.66 | 89.89 | 25.48 |       | 30.0  |         |
|           |                                                                     | Z | 20.06 | 99.62 | 28.65 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.30  | 67.68 | 17.69 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.18  | 64.90 | 15.80 |       | 150.0 |         |
|           |                                                                     | Z | 1.23  | 65.94 | 16.59 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.90  | 67.26 | 16.78 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.64  | 67.10 | 16.54 |       | 150.0 |         |
|           |                                                                     | Z | 4.58  | 67.43 | 16.69 |       | 150.0 |         |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.90  | 67.26 | 16.78 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.64  | 67.10 | 16.54 |       | 150.0 |         |
|           |                                                                     | Z | 4.58  | 67.43 | 16.69 |       | 150.0 |         |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 5.01  | 67.47 | 16.66 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.68  | 67.24 | 16.42 |       | 150.0 |         |
|           |                                                                     | Z | 4.61  | 67.58 | 16.60 |       | 150.0 |         |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.58  | 67.43 | 16.66 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.46  | 67.62 | 16.70 |       | 150.0 |         |
|           |                                                                     | Z | 5.29  | 67.47 | 16.64 |       | 150.0 |         |

|           |                                                                                |   |        |        |       |      |       |         |
|-----------|--------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                            | X | 5.90   | 68.07  | 16.80 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.66   | 67.67  | 16.59 |      | 150.0 |         |
|           |                                                                                | Z | 5.60   | 67.87  | 16.71 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                     | X | 2.46   | 75.92  | 18.53 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.45   | 69.17  | 13.90 |      | 115.0 |         |
|           |                                                                                | Z | 1.74   | 72.52  | 15.01 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                     | X | 2.46   | 75.92  | 18.53 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.45   | 69.17  | 13.90 |      | 115.0 |         |
|           |                                                                                | Z | 1.74   | 72.52  | 15.01 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                           | X | 38.96  | 111.40 | 30.01 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                | Y | 96.63  | 125.46 | 32.24 |      | 100.0 |         |
|           |                                                                                | Z | 100.00 | 123.89 | 30.87 |      | 100.0 |         |
| 10410-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)                 | X | 79.33  | 113.95 | 29.40 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                | Y | 100.00 | 123.80 | 32.02 |      | 80.0  |         |
|           |                                                                                | Z | 100.00 | 124.20 | 31.74 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                      | X | 1.01   | 64.64  | 16.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 1.03   | 63.36  | 14.90 |      | 150.0 |         |
|           |                                                                                | Z | 1.08   | 64.37  | 15.69 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                  | X | 4.76   | 67.00  | 16.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.53   | 66.92  | 16.37 |      | 150.0 |         |
|           |                                                                                | Z | 4.48   | 67.28  | 16.53 |      | 150.0 |         |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                      | X | 4.76   | 67.00  | 16.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.53   | 66.92  | 16.37 |      | 150.0 |         |
|           |                                                                                | Z | 4.48   | 67.28  | 16.53 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)  | X | 4.74   | 67.14  | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.53   | 67.10  | 16.40 |      | 150.0 |         |
|           |                                                                                | Z | 4.48   | 67.49  | 16.59 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.77   | 67.10  | 16.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.55   | 67.04  | 16.39 |      | 150.0 |         |
|           |                                                                                | Z | 4.49   | 67.42  | 16.58 |      | 150.0 |         |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                   | X | 4.90   | 67.10  | 16.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.66   | 67.03  | 16.41 |      | 150.0 |         |
|           |                                                                                | Z | 4.60   | 67.38  | 16.58 |      | 150.0 |         |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                | X | 5.14   | 67.54  | 16.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.81   | 67.33  | 16.51 |      | 150.0 |         |
|           |                                                                                | Z | 4.74   | 67.65  | 16.67 |      | 150.0 |         |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                | X | 5.04   | 67.47  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.74   | 67.28  | 16.49 |      | 150.0 |         |
|           |                                                                                | Z | 4.66   | 67.61  | 16.65 |      | 150.0 |         |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                    | X | 5.61   | 67.86  | 16.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.36   | 67.59  | 16.69 |      | 150.0 |         |
|           |                                                                                | Z | 5.29   | 67.80  | 16.81 |      | 150.0 |         |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                  | X | 5.62   | 67.87  | 16.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.40   | 67.74  | 16.76 |      | 150.0 |         |
|           |                                                                                | Z | 5.31   | 67.91  | 16.86 |      | 150.0 |         |

|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.65   | 67.92  | 16.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.39   | 67.63  | 16.70 |      | 150.0 |         |
|           |                                                                | Z | 5.28   | 67.70  | 16.75 |      | 150.0 |         |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.50   | 70.33  | 18.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.28   | 71.46  | 18.38 |      | 150.0 |         |
|           |                                                                | Z | 4.28   | 72.32  | 18.56 |      | 150.0 |         |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.56   | 67.66  | 16.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.19   | 67.51  | 16.33 |      | 150.0 |         |
|           |                                                                | Z | 4.12   | 67.97  | 16.50 |      | 150.0 |         |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.83   | 67.55  | 16.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.50   | 67.35  | 16.43 |      | 150.0 |         |
|           |                                                                | Z | 4.43   | 67.74  | 16.61 |      | 150.0 |         |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 5.06   | 67.54  | 16.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.75   | 67.32  | 16.51 |      | 150.0 |         |
|           |                                                                | Z | 4.68   | 67.64  | 16.67 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.58   | 70.97  | 18.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.39   | 72.38  | 18.32 |      | 150.0 |         |
|           |                                                                | Z | 4.42   | 73.36  | 18.48 |      | 150.0 |         |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 73.07  | 112.66 | 29.06 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 100.00 | 123.60 | 31.93 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 123.98 | 31.64 |      | 80.0  |         |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.91   | 67.87  | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.47   | 67.50  | 15.53 |      | 150.0 |         |
|           |                                                                | Z | 3.41   | 68.08  | 15.62 |      | 150.0 |         |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 4.36   | 67.43  | 16.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.04   | 67.29  | 16.20 |      | 150.0 |         |
|           |                                                                | Z | 3.99   | 67.77  | 16.38 |      | 150.0 |         |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.59   | 67.37  | 16.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.32   | 67.18  | 16.33 |      | 150.0 |         |
|           |                                                                | Z | 4.27   | 67.58  | 16.51 |      | 150.0 |         |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.75   | 67.29  | 16.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.52   | 67.08  | 16.36 |      | 150.0 |         |
|           |                                                                | Z | 4.47   | 67.43  | 16.54 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.88   | 68.25  | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.34   | 67.60  | 15.06 |      | 150.0 |         |
|           |                                                                | Z | 3.25   | 68.08  | 15.03 |      | 150.0 |         |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.45   | 68.48  | 17.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.28   | 68.20  | 16.88 |      | 150.0 |         |
|           |                                                                | Z | 6.24   | 68.43  | 17.01 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.87   | 65.68  | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.81   | 65.57  | 16.07 |      | 150.0 |         |
|           |                                                                | Z | 3.81   | 65.98  | 16.26 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 3.63   | 67.17  | 15.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.13   | 66.82  | 14.32 |      | 150.0 |         |
|           |                                                                | Z | 2.97   | 66.93  | 13.99 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 4.79   | 65.36  | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.24   | 65.27  | 15.46 |      | 150.0 |         |
|           |                                                                | Z | 4.13   | 65.72  | 15.38 |      | 150.0 |         |

|           |                                                                   |   |        |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 1.54   | 79.74  | 21.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 0.95   | 69.06  | 16.64 |      | 150.0 |         |
|           |                                                                   | Z | 1.16   | 73.20  | 19.00 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 118.00 | 30.59 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 127.27 | 33.69 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 128.13 | 33.61 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 108.76 | 26.18 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 111.69 | 26.26 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 109.78 | 24.92 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 61.06  | 101.21 | 23.94 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 108.45 | 24.70 |      | 80.0  |         |
|           |                                                                   | Z | 9.38   | 82.48  | 17.38 |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 116.66 | 29.84 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 125.35 | 32.64 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 125.94 | 32.43 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 108.47 | 26.02 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 111.17 | 26.01 |      | 80.0  |         |
|           |                                                                   | Z | 44.16  | 100.58 | 22.73 |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 42.58  | 96.75  | 22.75 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 42.99  | 98.93  | 22.41 |      | 80.0  |         |
|           |                                                                   | Z | 5.89   | 77.61  | 15.84 |      | 80.0  |         |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 116.79 | 29.90 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 125.60 | 32.75 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.22 | 32.56 |      | 80.0  |         |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 108.56 | 26.07 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 111.35 | 26.09 |      | 80.0  |         |
|           |                                                                   | Z | 61.74  | 104.33 | 23.64 |      | 80.0  |         |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 43.83  | 97.08  | 22.83 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 46.06  | 99.70  | 22.59 |      | 80.0  |         |
|           |                                                                   | Z | 6.04   | 77.89  | 15.93 |      | 80.0  |         |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 116.81 | 29.90 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 125.63 | 32.76 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.25 | 32.56 |      | 80.0  |         |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 108.53 | 26.05 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 111.31 | 26.07 |      | 80.0  |         |
|           |                                                                   | Z | 61.64  | 104.26 | 23.61 |      | 80.0  |         |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 44.10  | 97.14  | 22.84 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 46.39  | 99.73  | 22.59 |      | 80.0  |         |
|           |                                                                   | Z | 6.02   | 77.83  | 15.90 |      | 80.0  |         |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 116.79 | 29.89 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 125.60 | 32.74 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.23 | 32.55 |      | 80.0  |         |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 108.54 | 26.05 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 111.32 | 26.07 |      | 80.0  |         |
|           |                                                                   | Z | 60.20  | 104.02 | 23.55 |      | 80.0  |         |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 43.66  | 97.03  | 22.81 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 44.87  | 99.39  | 22.51 |      | 80.0  |         |
|           |                                                                   | Z | 5.94   | 77.72  | 15.87 |      | 80.0  |         |

|           |                                                                     |   |        |        |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 108.43 | 26.00 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 100.00 | 111.14 | 25.99 |      | 80.0 |         |
|           |                                                                     | Z | 48.11  | 101.47 | 22.92 |      | 80.0 |         |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 43.04  | 96.84  | 22.76 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 43.24  | 98.94  | 22.39 |      | 80.0 |         |
|           |                                                                     | Z | 5.86   | 77.55  | 15.80 |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 18.43  | 95.26  | 26.62 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 47.63  | 113.17 | 30.89 |      | 80.0 |         |
|           |                                                                     | Z | 79.42  | 120.84 | 32.18 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 15.38  | 87.90  | 23.16 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 35.80  | 101.51 | 25.84 |      | 80.0 |         |
|           |                                                                     | Z | 33.10  | 99.76  | 24.57 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 14.20  | 86.14  | 22.35 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 23.64  | 94.76  | 23.60 |      | 80.0 |         |
|           |                                                                     | Z | 17.83  | 90.68  | 21.64 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 11.00  | 86.13  | 22.59 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.54   | 80.66  | 19.81 |      | 80.0 |         |
|           |                                                                     | Z | 10.00  | 86.91  | 21.46 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 11.81  | 84.53  | 22.26 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 9.59   | 82.56  | 20.08 |      | 80.0 |         |
|           |                                                                     | Z | 5.79   | 75.74  | 16.81 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 11.16  | 83.50  | 21.93 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 8.15   | 80.18  | 19.27 |      | 80.0 |         |
|           |                                                                     | Z | 5.05   | 73.86  | 16.10 |      | 80.0 |         |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 11.03  | 86.44  | 23.15 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.87   | 82.16  | 21.41 |      | 80.0 |         |
|           |                                                                     | Z | 9.87   | 88.59  | 23.41 |      | 80.0 |         |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.95   | 77.02  | 19.85 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.98   | 74.27  | 17.96 |      | 80.0 |         |
|           |                                                                     | Z | 5.53   | 76.50  | 18.48 |      | 80.0 |         |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.82   | 76.43  | 19.65 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.85   | 73.54  | 17.65 |      | 80.0 |         |
|           |                                                                     | Z | 5.25   | 75.41  | 18.04 |      | 80.0 |         |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 9.46   | 82.96  | 22.30 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.99   | 78.96  | 21.12 |      | 80.0 |         |
|           |                                                                     | Z | 6.82   | 82.33  | 22.47 |      | 80.0 |         |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 6.62   | 75.52  | 19.96 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.91   | 73.20  | 18.90 |      | 80.0 |         |
|           |                                                                     | Z | 5.11   | 74.84  | 19.54 |      | 80.0 |         |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 6.56   | 74.88  | 19.76 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.94   | 72.82  | 18.76 |      | 80.0 |         |
|           |                                                                     | Z | 5.10   | 74.33  | 19.33 |      | 80.0 |         |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 7.98   | 78.75  | 20.93 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.56   | 75.73  | 20.09 |      | 80.0 |         |
|           |                                                                     | Z | 5.84   | 77.68  | 21.00 |      | 80.0 |         |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 6.52   | 73.74  | 19.47 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.01   | 71.66  | 18.63 |      | 80.0 |         |
|           |                                                                     | Z | 5.04   | 72.68  | 19.10 |      | 80.0 |         |



|           |                                                                      |   |      |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.52 | 73.38 | 19.36 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.05 | 71.42 | 18.55 |      | 80.0 |         |
|           |                                                                      | Z | 5.05 | 72.38 | 18.97 |      | 80.0 |         |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 9.30 | 81.16 | 21.56 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 6.19 | 77.55 | 20.65 |      | 80.0 |         |
|           |                                                                      | Z | 6.63 | 79.81 | 21.68 |      | 80.0 |         |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.75 | 74.54 | 19.74 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.09 | 72.10 | 18.86 |      | 80.0 |         |
|           |                                                                      | Z | 5.10 | 73.07 | 19.34 |      | 80.0 |         |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.67 | 73.87 | 19.53 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.11 | 71.66 | 18.72 |      | 80.0 |         |
|           |                                                                      | Z | 5.11 | 72.57 | 19.16 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 9.58 | 84.00 | 21.43 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.27 | 74.12 | 16.39 |      | 80.0 |         |
|           |                                                                      | Z | 5.12 | 76.54 | 16.66 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.19 | 75.19 | 17.72 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 2.33 | 64.39 | 11.23 |      | 80.0 |         |
|           |                                                                      | Z | 1.83 | 62.54 | 9.68  |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.08 | 74.60 | 17.40 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 2.20 | 63.55 | 10.68 |      | 80.0 |         |
|           |                                                                      | Z | 1.70 | 61.64 | 9.07  |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 9.69 | 83.97 | 22.50 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 6.26 | 80.30 | 21.12 |      | 80.0 |         |
|           |                                                                      | Z | 7.99 | 85.23 | 22.80 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.73 | 76.14 | 19.79 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.97 | 73.89 | 18.33 |      | 80.0 |         |
|           |                                                                      | Z | 5.41 | 76.03 | 18.94 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.66 | 75.65 | 19.59 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.97 | 73.54 | 18.13 |      | 80.0 |         |
|           |                                                                      | Z | 5.36 | 75.51 | 18.67 |      | 80.0 |         |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 9.33 | 82.74 | 22.21 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.90 | 78.70 | 21.01 |      | 80.0 |         |
|           |                                                                      | Z | 6.71 | 82.03 | 22.35 |      | 80.0 |         |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.59 | 75.44 | 19.92 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.88 | 73.08 | 18.84 |      | 80.0 |         |
|           |                                                                      | Z | 5.07 | 74.71 | 19.47 |      | 80.0 |         |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.52 | 74.79 | 19.72 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.91 | 72.71 | 18.70 |      | 80.0 |         |
|           |                                                                      | Z | 5.07 | 74.21 | 19.27 |      | 80.0 |         |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 9.21 | 81.00 | 21.50 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 6.13 | 77.37 | 20.57 |      | 80.0 |         |
|           |                                                                      | Z | 6.56 | 79.62 | 21.60 |      | 80.0 |         |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 6.72 | 74.48 | 19.71 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.07 | 72.03 | 18.82 |      | 80.0 |         |
|           |                                                                      | Z | 5.08 | 73.01 | 19.31 |      | 80.0 |         |

|           |                                                                     |   |        |        |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.65   | 73.80  | 19.50 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.09   | 71.58  | 18.67 |      | 80.0  |         |
|           |                                                                     | Z | 5.09   | 72.48  | 19.12 |      | 80.0  |         |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 8.15   | 77.43  | 20.26 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.99   | 74.82  | 19.62 |      | 80.0  |         |
|           |                                                                     | Z | 6.17   | 76.24  | 20.35 |      | 80.0  |         |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.94   | 73.36  | 19.32 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.42   | 71.16  | 18.60 |      | 80.0  |         |
|           |                                                                     | Z | 5.37   | 71.81  | 18.97 |      | 80.0  |         |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.87   | 72.87  | 19.19 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.44   | 70.83  | 18.50 |      | 80.0  |         |
|           |                                                                     | Z | 5.39   | 71.45  | 18.85 |      | 80.0  |         |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 9.41   | 80.22  | 21.09 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.52   | 76.83  | 20.24 |      | 80.0  |         |
|           |                                                                     | Z | 6.84   | 78.58  | 21.10 |      | 80.0  |         |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 7.03   | 74.19  | 19.61 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.36   | 71.56  | 18.76 |      | 80.0  |         |
|           |                                                                     | Z | 5.31   | 72.21  | 19.14 |      | 80.0  |         |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 6.85   | 73.42  | 19.39 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.32   | 71.03  | 18.59 |      | 80.0  |         |
|           |                                                                     | Z | 5.27   | 71.61  | 18.94 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 0.98   | 65.05  | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.00   | 63.56  | 14.97 |      | 150.0 |         |
|           |                                                                     | Z | 1.05   | 64.66  | 15.82 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 100.00 | 168.11 | 45.87 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.67   | 71.83  | 18.15 |      | 150.0 |         |
|           |                                                                     | Z | 1.04   | 80.65  | 22.82 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 0.96   | 70.11  | 18.69 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.85   | 65.61  | 15.70 |      | 150.0 |         |
|           |                                                                     | Z | 0.93   | 67.57  | 17.12 |      | 150.0 |         |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.76   | 67.10  | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.53   | 67.01  | 16.35 |      | 150.0 |         |
|           |                                                                     | Z | 4.47   | 67.38  | 16.53 |      | 150.0 |         |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 5.02   | 67.44  | 16.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.70   | 67.22  | 16.46 |      | 150.0 |         |
|           |                                                                     | Z | 4.63   | 67.55  | 16.62 |      | 150.0 |         |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.86   | 67.45  | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.55   | 67.17  | 16.38 |      | 150.0 |         |
|           |                                                                     | Z | 4.48   | 67.50  | 16.54 |      | 150.0 |         |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.79   | 67.47  | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.48   | 67.16  | 16.36 |      | 150.0 |         |
|           |                                                                     | Z | 4.42   | 67.48  | 16.53 |      | 150.0 |         |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.82   | 67.32  | 16.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.55   | 67.29  | 16.46 |      | 150.0 |         |
|           |                                                                     | Z | 4.47   | 67.62  | 16.63 |      | 150.0 |         |

|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.69 | 67.31 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.44 | 67.17 | 16.32 |      | 150.0 |         |
|           |                                                            | Z | 4.39 | 67.59 | 16.54 |      | 150.0 |         |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.78 | 67.32 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.49 | 67.20 | 16.43 |      | 150.0 |         |
|           |                                                            | Z | 4.42 | 67.57 | 16.62 |      | 150.0 |         |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.72 | 66.35 | 16.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.49 | 66.26 | 16.02 |      | 150.0 |         |
|           |                                                            | Z | 4.45 | 66.66 | 16.22 |      | 150.0 |         |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.95 | 66.78 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.64 | 66.60 | 16.16 |      | 150.0 |         |
|           |                                                            | Z | 4.58 | 66.96 | 16.34 |      | 150.0 |         |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.86 | 66.80 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.57 | 66.56 | 16.10 |      | 150.0 |         |
|           |                                                            | Z | 4.51 | 66.93 | 16.29 |      | 150.0 |         |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.89 | 66.82 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.58 | 66.57 | 16.13 |      | 150.0 |         |
|           |                                                            | Z | 4.52 | 66.94 | 16.32 |      | 150.0 |         |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.89 | 66.82 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.58 | 66.57 | 16.13 |      | 150.0 |         |
|           |                                                            | Z | 4.52 | 66.94 | 16.32 |      | 150.0 |         |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.92 | 67.00 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.57 | 66.66 | 16.14 |      | 150.0 |         |
|           |                                                            | Z | 4.49 | 66.99 | 16.31 |      | 150.0 |         |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.76 | 66.93 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.43 | 66.51 | 16.07 |      | 150.0 |         |
|           |                                                            | Z | 4.37 | 66.85 | 16.25 |      | 150.0 |         |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.90 | 66.82 | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.59 | 66.64 | 16.13 |      | 150.0 |         |
|           |                                                            | Z | 4.53 | 67.03 | 16.33 |      | 150.0 |         |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 5.38 | 66.99 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.14 | 66.65 | 16.20 |      | 150.0 |         |
|           |                                                            | Z | 5.08 | 66.89 | 16.34 |      | 150.0 |         |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.47 | 67.13 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.21 | 66.87 | 16.30 |      | 150.0 |         |
|           |                                                            | Z | 5.13 | 67.05 | 16.42 |      | 150.0 |         |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 5.32 | 67.12 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.08 | 66.81 | 16.25 |      | 150.0 |         |
|           |                                                            | Z | 5.02 | 67.06 | 16.40 |      | 150.0 |         |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 5.39 | 67.07 | 16.42 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.13 | 66.76 | 16.23 |      | 150.0 |         |
|           |                                                            | Z | 5.08 | 67.03 | 16.39 |      | 150.0 |         |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.52 | 67.19 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.21 | 66.77 | 16.27 |      | 150.0 |         |
|           |                                                            | Z | 5.14 | 66.99 | 16.41 |      | 150.0 |         |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 5.40 | 67.10 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.15 | 66.79 | 16.30 |      | 150.0 |         |
|           |                                                            | Z | 5.07 | 66.96 | 16.41 |      | 150.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)  | X | 5.41 | 67.10 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.12 | 66.64 | 16.21 |      | 150.0 |         |
|           |                                                    | Z | 5.05 | 66.85 | 16.34 |      | 150.0 |         |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)  | X | 5.53 | 67.02 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.28 | 66.73 | 16.27 |      | 150.0 |         |
|           |                                                    | Z | 5.21 | 66.95 | 16.40 |      | 150.0 |         |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)  | X | 5.65 | 67.09 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.35 | 66.75 | 16.31 |      | 150.0 |         |
|           |                                                    | Z | 5.28 | 67.01 | 16.46 |      | 150.0 |         |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)  | X | 5.63 | 67.05 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.46 | 66.75 | 16.19 |      | 150.0 |         |
|           |                                                    | Z | 5.42 | 66.95 | 16.31 |      | 150.0 |         |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)  | X | 5.85 | 67.43 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.67 | 67.24 | 16.39 |      | 150.0 |         |
|           |                                                    | Z | 5.61 | 67.44 | 16.52 |      | 150.0 |         |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)  | X | 5.76 | 67.40 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.52 | 66.93 | 16.25 |      | 150.0 |         |
|           |                                                    | Z | 5.45 | 67.09 | 16.35 |      | 150.0 |         |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)  | X | 5.86 | 67.50 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.59 | 67.00 | 16.28 |      | 150.0 |         |
|           |                                                    | Z | 5.54 | 67.20 | 16.40 |      | 150.0 |         |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)  | X | 6.21 | 68.68 | 17.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.87 | 68.02 | 16.76 |      | 150.0 |         |
|           |                                                    | Z | 5.72 | 67.95 | 16.76 |      | 150.0 |         |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)  | X | 5.77 | 67.31 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.57 | 67.05 | 16.32 |      | 150.0 |         |
|           |                                                    | Z | 5.52 | 67.30 | 16.47 |      | 150.0 |         |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)  | X | 5.80 | 67.45 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.55 | 67.00 | 16.26 |      | 150.0 |         |
|           |                                                    | Z | 5.45 | 67.07 | 16.32 |      | 150.0 |         |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)  | X | 5.69 | 67.19 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.47 | 66.81 | 16.17 |      | 150.0 |         |
|           |                                                    | Z | 5.43 | 67.06 | 16.31 |      | 150.0 |         |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)  | X | 5.78 | 67.21 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.54 | 66.82 | 16.20 |      | 150.0 |         |
|           |                                                    | Z | 5.48 | 67.01 | 16.32 |      | 150.0 |         |
| 10554-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 6.03 | 67.43 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.89 | 67.12 | 16.28 |      | 150.0 |         |
|           |                                                    | Z | 5.84 | 67.28 | 16.38 |      | 150.0 |         |
| 10555-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 6.22 | 67.88 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.02 | 67.44 | 16.43 |      | 150.0 |         |
|           |                                                    | Z | 5.95 | 67.54 | 16.50 |      | 150.0 |         |
| 10556-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.20 | 67.79 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.04 | 67.49 | 16.44 |      | 150.0 |         |
|           |                                                    | Z | 5.99 | 67.66 | 16.55 |      | 150.0 |         |
| 10557-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 6.21 | 67.81 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.99 | 67.35 | 16.39 |      | 150.0 |         |
|           |                                                    | Z | 5.93 | 67.50 | 16.49 |      | 150.0 |         |

|           |                                                                 |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10558-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)              | X | 6.28   | 68.03  | 16.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.04   | 67.52  | 16.49 |      | 150.0 |         |
|           |                                                                 | Z | 5.95   | 67.59  | 16.55 |      | 150.0 |         |
| 10560-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)              | X | 6.28   | 67.87  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.03   | 67.35  | 16.44 |      | 150.0 |         |
|           |                                                                 | Z | 5.96   | 67.49  | 16.53 |      | 150.0 |         |
| 10561-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)              | X | 6.18   | 67.80  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.96   | 67.36  | 16.48 |      | 150.0 |         |
|           |                                                                 | Z | 5.90   | 67.49  | 16.57 |      | 150.0 |         |
| 10562-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)              | X | 6.37   | 68.38  | 17.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.06   | 67.66  | 16.63 |      | 150.0 |         |
|           |                                                                 | Z | 5.96   | 67.67  | 16.66 |      | 150.0 |         |
| 10563-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)              | X | 6.58   | 68.54  | 17.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.18   | 67.65  | 16.59 |      | 150.0 |         |
|           |                                                                 | Z | 6.05   | 67.62  | 16.60 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 5.11   | 67.26  | 16.76 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.86   | 67.10  | 16.52 |      | 150.0 |         |
|           |                                                                 | Z | 4.80   | 67.44  | 16.68 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.41   | 67.77  | 17.08 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.08   | 67.53  | 16.83 |      | 150.0 |         |
|           |                                                                 | Z | 5.00   | 67.82  | 16.97 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 5.23   | 67.67  | 16.93 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.92   | 67.38  | 16.66 |      | 150.0 |         |
|           |                                                                 | Z | 4.84   | 67.67  | 16.80 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 5.26   | 68.03  | 17.24 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.95   | 67.77  | 17.01 |      | 150.0 |         |
|           |                                                                 | Z | 4.87   | 68.04  | 17.15 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 5.14   | 67.36  | 16.67 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.84   | 67.19  | 16.45 |      | 150.0 |         |
|           |                                                                 | Z | 4.75   | 67.49  | 16.60 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 5.19   | 68.02  | 17.24 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.92   | 67.92  | 17.11 |      | 150.0 |         |
|           |                                                                 | Z | 4.86   | 68.27  | 17.29 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 5.23   | 67.81  | 17.17 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.94   | 67.74  | 17.02 |      | 150.0 |         |
|           |                                                                 | Z | 4.86   | 68.06  | 17.18 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.68   | 70.36  | 18.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.37   | 66.32  | 16.49 |      | 130.0 |         |
|           |                                                                 | Z | 1.41   | 67.39  | 17.29 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.75   | 71.47  | 19.28 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.40   | 67.01  | 16.89 |      | 130.0 |         |
|           |                                                                 | Z | 1.45   | 68.17  | 17.74 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 100.00 | 142.31 | 37.38 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 5.69   | 99.12  | 27.30 |      | 130.0 |         |
|           |                                                                 | Z | 66.26  | 143.73 | 39.41 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 3.57   | 87.71  | 25.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.70   | 74.22  | 20.29 |      | 130.0 |         |
|           |                                                                 | Z | 1.88   | 76.94  | 21.86 |      | 130.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.95 | 67.19 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.69 | 67.03 | 16.64 |      | 130.0 |         |
|           |                                                                 | Z | 4.63 | 67.35 | 16.80 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.98 | 67.35 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.72 | 67.20 | 16.72 |      | 130.0 |         |
|           |                                                                 | Z | 4.66 | 67.55 | 16.88 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 5.24 | 67.69 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.90 | 67.46 | 16.87 |      | 130.0 |         |
|           |                                                                 | Z | 4.82 | 67.76 | 17.01 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 5.14 | 67.89 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.81 | 67.63 | 16.98 |      | 130.0 |         |
|           |                                                                 | Z | 4.73 | 67.92 | 17.12 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.94 | 67.39 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.58 | 66.91 | 16.29 |      | 130.0 |         |
|           |                                                                 | Z | 4.50 | 67.21 | 16.45 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.98 | 67.29 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.62 | 66.97 | 16.32 |      | 130.0 |         |
|           |                                                                 | Z | 4.54 | 67.27 | 16.48 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 5.07 | 68.07 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.72 | 67.70 | 16.95 |      | 130.0 |         |
|           |                                                                 | Z | 4.65 | 68.04 | 17.12 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.90 | 67.13 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.51 | 66.68 | 16.07 |      | 130.0 |         |
|           |                                                                 | Z | 4.43 | 67.00 | 16.24 |      | 130.0 |         |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.95 | 67.19 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.69 | 67.03 | 16.64 |      | 130.0 |         |
|           |                                                                 | Z | 4.63 | 67.35 | 16.80 |      | 130.0 |         |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.98 | 67.35 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.72 | 67.20 | 16.72 |      | 130.0 |         |
|           |                                                                 | Z | 4.66 | 67.55 | 16.88 |      | 130.0 |         |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 5.24 | 67.69 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.90 | 67.46 | 16.87 |      | 130.0 |         |
|           |                                                                 | Z | 4.82 | 67.76 | 17.01 |      | 130.0 |         |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 5.14 | 67.89 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.81 | 67.63 | 16.98 |      | 130.0 |         |
|           |                                                                 | Z | 4.73 | 67.92 | 17.12 |      | 130.0 |         |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.94 | 67.39 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.58 | 66.91 | 16.29 |      | 130.0 |         |
|           |                                                                 | Z | 4.50 | 67.21 | 16.45 |      | 130.0 |         |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.98 | 67.29 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.62 | 66.97 | 16.32 |      | 130.0 |         |
|           |                                                                 | Z | 4.54 | 67.27 | 16.48 |      | 130.0 |         |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 5.07 | 68.07 | 17.23 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.72 | 67.70 | 16.95 |      | 130.0 |         |
|           |                                                                 | Z | 4.65 | 68.04 | 17.12 |      | 130.0 |         |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.90 | 67.13 | 16.49 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.51 | 66.68 | 16.07 |      | 130.0 |         |
|           |                                                                 | Z | 4.43 | 67.00 | 16.24 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 5.10 | 67.21 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.84 | 67.07 | 16.74 |      | 130.0 |         |
|           |                                                       | Z | 4.77 | 67.39 | 16.89 |      | 130.0 |         |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.29 | 67.56 | 17.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.98 | 67.40 | 16.87 |      | 130.0 |         |
|           |                                                       | Z | 4.90 | 67.69 | 17.01 |      | 130.0 |         |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 5.23 | 67.57 | 17.01 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.90 | 67.30 | 16.75 |      | 130.0 |         |
|           |                                                       | Z | 4.82 | 67.59 | 16.88 |      | 130.0 |         |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 5.28 | 67.68 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.96 | 67.47 | 16.91 |      | 130.0 |         |
|           |                                                       | Z | 4.88 | 67.75 | 17.04 |      | 130.0 |         |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 5.27 | 67.71 | 17.06 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.93 | 67.44 | 16.81 |      | 130.0 |         |
|           |                                                       | Z | 4.85 | 67.75 | 16.96 |      | 130.0 |         |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 5.21 | 67.70 | 17.06 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.86 | 67.44 | 16.81 |      | 130.0 |         |
|           |                                                       | Z | 4.78 | 67.74 | 16.97 |      | 130.0 |         |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 5.16 | 67.68 | 17.00 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.81 | 67.32 | 16.68 |      | 130.0 |         |
|           |                                                       | Z | 4.73 | 67.61 | 16.83 |      | 130.0 |         |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 5.15 | 67.96 | 17.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.80 | 67.55 | 16.95 |      | 130.0 |         |
|           |                                                       | Z | 4.72 | 67.82 | 17.08 |      | 130.0 |         |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.77 | 67.84 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.52 | 67.58 | 16.96 |      | 130.0 |         |
|           |                                                       | Z | 5.45 | 67.81 | 17.10 |      | 130.0 |         |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 6.05 | 68.67 | 17.52 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.68 | 68.13 | 17.21 |      | 130.0 |         |
|           |                                                       | Z | 5.58 | 68.26 | 17.30 |      | 130.0 |         |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.85 | 68.16 | 17.28 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.55 | 67.80 | 17.06 |      | 130.0 |         |
|           |                                                       | Z | 5.46 | 67.98 | 17.17 |      | 130.0 |         |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.99 | 68.30 | 17.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.68 | 67.95 | 17.06 |      | 130.0 |         |
|           |                                                       | Z | 5.60 | 68.17 | 17.19 |      | 130.0 |         |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 6.09 | 68.64 | 17.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.74 | 68.19 | 17.31 |      | 130.0 |         |
|           |                                                       | Z | 5.66 | 68.42 | 17.44 |      | 130.0 |         |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.79 | 67.86 | 17.16 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.59 | 67.76 | 17.08 |      | 130.0 |         |
|           |                                                       | Z | 5.54 | 68.06 | 17.25 |      | 130.0 |         |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.90 | 68.15 | 17.31 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.67 | 68.01 | 17.21 |      | 130.0 |         |
|           |                                                       | Z | 5.56 | 68.12 | 17.28 |      | 130.0 |         |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.65 | 67.59 | 16.91 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.37 | 67.19 | 16.65 |      | 130.0 |         |
|           |                                                       | Z | 5.33 | 67.51 | 16.83 |      | 130.0 |         |

|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.92 | 66.49 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.68 | 66.39 | 16.37 |      | 130.0 |         |
|           |                                                   | Z | 4.62 | 66.76 | 16.54 |      | 130.0 |         |
| 10608-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 5.16 | 66.93 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.85 | 66.77 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 4.77 | 67.10 | 16.69 |      | 130.0 |         |
| 10609-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 5.06 | 66.87 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.74 | 66.62 | 16.36 |      | 130.0 |         |
|           |                                                   | Z | 4.67 | 66.96 | 16.53 |      | 130.0 |         |
| 10610-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 5.11 | 67.01 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.79 | 66.78 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 4.72 | 67.11 | 16.69 |      | 130.0 |         |
| 10611-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 5.05 | 66.92 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.71 | 66.59 | 16.38 |      | 130.0 |         |
|           |                                                   | Z | 4.64 | 66.93 | 16.55 |      | 130.0 |         |
| 10612-AAA | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 5.07 | 67.04 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.72 | 66.76 | 16.43 |      | 130.0 |         |
|           |                                                   | Z | 4.64 | 67.09 | 16.61 |      | 130.0 |         |
| 10613-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 5.09 | 66.98 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.71 | 66.61 | 16.29 |      | 130.0 |         |
|           |                                                   | Z | 4.63 | 66.91 | 16.45 |      | 130.0 |         |
| 10614-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 5.02 | 67.21 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.67 | 66.81 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 4.59 | 67.11 | 16.69 |      | 130.0 |         |
| 10615-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 5.05 | 66.70 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.71 | 66.43 | 16.16 |      | 130.0 |         |
|           |                                                   | Z | 4.64 | 66.79 | 16.34 |      | 130.0 |         |
| 10616-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.58 | 67.10 | 16.74 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.33 | 66.79 | 16.55 |      | 130.0 |         |
|           |                                                   | Z | 5.25 | 67.00 | 16.67 |      | 130.0 |         |
| 10617-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.66 | 67.25 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.41 | 67.04 | 16.65 |      | 130.0 |         |
|           |                                                   | Z | 5.31 | 67.19 | 16.74 |      | 130.0 |         |
| 10618-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.54 | 67.29 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.29 | 67.03 | 16.66 |      | 130.0 |         |
|           |                                                   | Z | 5.22 | 67.24 | 16.78 |      | 130.0 |         |
| 10619-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.56 | 67.09 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.30 | 66.81 | 16.48 |      | 130.0 |         |
|           |                                                   | Z | 5.23 | 67.05 | 16.63 |      | 130.0 |         |
| 10620-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.71 | 67.30 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.38 | 66.84 | 16.54 |      | 130.0 |         |
|           |                                                   | Z | 5.30 | 67.04 | 16.67 |      | 130.0 |         |
| 10621-AAA | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.66 | 67.28 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.39 | 66.98 | 16.73 |      | 130.0 |         |
|           |                                                   | Z | 5.30 | 67.12 | 16.82 |      | 130.0 |         |
| 10622-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.65 | 67.37 | 16.94 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.40 | 67.13 | 16.80 |      | 130.0 |         |
|           |                                                   | Z | 5.30 | 67.22 | 16.87 |      | 130.0 |         |



|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)  | X | 5.58 | 67.14 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.28 | 66.65 | 16.43 |      | 130.0 |         |
|           |                                                    | Z | 5.18 | 66.78 | 16.52 |      | 130.0 |         |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)  | X | 5.72 | 67.10 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.47 | 66.85 | 16.60 |      | 130.0 |         |
|           |                                                    | Z | 5.38 | 67.03 | 16.70 |      | 130.0 |         |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)  | X | 6.05 | 67.87 | 17.19 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.77 | 67.66 | 17.06 |      | 130.0 |         |
|           |                                                    | Z | 5.49 | 67.24 | 16.87 |      | 130.0 |         |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)  | X | 5.80 | 67.08 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.63 | 66.82 | 16.50 |      | 130.0 |         |
|           |                                                    | Z | 5.57 | 66.99 | 16.60 |      | 130.0 |         |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)  | X | 6.05 | 67.56 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.90 | 67.51 | 16.81 |      | 130.0 |         |
|           |                                                    | Z | 5.83 | 67.67 | 16.91 |      | 130.0 |         |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)  | X | 5.89 | 67.33 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.66 | 66.90 | 16.43 |      | 130.0 |         |
|           |                                                    | Z | 5.58 | 67.01 | 16.51 |      | 130.0 |         |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)  | X | 6.01 | 67.46 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.74 | 67.00 | 16.48 |      | 130.0 |         |
|           |                                                    | Z | 5.68 | 67.19 | 16.60 |      | 130.0 |         |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)  | X | 6.66 | 69.52 | 17.74 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.23 | 68.64 | 17.29 |      | 130.0 |         |
|           |                                                    | Z | 5.99 | 68.32 | 17.17 |      | 130.0 |         |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)  | X | 6.51 | 69.16 | 17.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.05 | 68.21 | 17.27 |      | 130.0 |         |
|           |                                                    | Z | 5.91 | 68.16 | 17.27 |      | 130.0 |         |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)  | X | 6.07 | 67.76 | 17.04 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.87 | 67.57 | 16.97 |      | 130.0 |         |
|           |                                                    | Z | 5.81 | 67.79 | 17.10 |      | 130.0 |         |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)  | X | 6.04 | 67.71 | 16.86 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.71 | 67.04 | 16.54 |      | 130.0 |         |
|           |                                                    | Z | 5.62 | 67.14 | 16.61 |      | 130.0 |         |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)  | X | 6.01 | 67.64 | 16.89 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.69 | 67.06 | 16.60 |      | 130.0 |         |
|           |                                                    | Z | 5.63 | 67.23 | 16.71 |      | 130.0 |         |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)  | X | 5.88 | 66.99 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.57 | 66.39 | 16.00 |      | 130.0 |         |
|           |                                                    | Z | 5.49 | 66.55 | 16.11 |      | 130.0 |         |
| 10636-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.20 | 67.47 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.06 | 67.19 | 16.58 |      | 130.0 |         |
|           |                                                    | Z | 6.01 | 67.33 | 16.67 |      | 130.0 |         |
| 10637-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.43 | 68.00 | 16.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.23 | 67.63 | 16.79 |      | 130.0 |         |
|           |                                                    | Z | 6.14 | 67.69 | 16.84 |      | 130.0 |         |
| 10638-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.38 | 67.82 | 16.85 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.23 | 67.59 | 16.75 |      | 130.0 |         |
|           |                                                    | Z | 6.16 | 67.71 | 16.83 |      | 130.0 |         |

|           |                                                        |   |       |        |       |      |       |         |
|-----------|--------------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10639-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)     | X | 6.40  | 67.91  | 16.95 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.18  | 67.47  | 16.73 |      | 130.0 |         |
|           |                                                        | Z | 6.11  | 67.58  | 16.80 |      | 130.0 |         |
| 10640-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)     | X | 6.45  | 68.06  | 16.97 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.19  | 67.49  | 16.68 |      | 130.0 |         |
|           |                                                        | Z | 6.09  | 67.54  | 16.73 |      | 130.0 |         |
| 10641-AAB | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)     | X | 6.42  | 67.72  | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.26  | 67.48  | 16.70 |      | 130.0 |         |
|           |                                                        | Z | 6.18  | 67.60  | 16.78 |      | 130.0 |         |
| 10642-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)     | X | 6.51  | 68.09  | 17.16 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.27  | 67.64  | 16.94 |      | 130.0 |         |
|           |                                                        | Z | 6.19  | 67.74  | 17.01 |      | 130.0 |         |
| 10643-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)     | X | 6.33  | 67.78  | 16.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.13  | 67.39  | 16.71 |      | 130.0 |         |
|           |                                                        | Z | 6.05  | 67.49  | 16.79 |      | 130.0 |         |
| 10644-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)     | X | 6.62  | 68.66  | 17.38 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.24  | 67.74  | 16.91 |      | 130.0 |         |
|           |                                                        | Z | 6.11  | 67.69  | 16.91 |      | 130.0 |         |
| 10645-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)     | X | 6.82  | 68.76  | 17.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.42  | 67.94  | 16.97 |      | 130.0 |         |
|           |                                                        | Z | 6.29  | 67.89  | 16.97 |      | 130.0 |         |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)  | X | 22.37 | 99.45  | 32.18 | 9.30 | 60.0  | ± 9.6 % |
|           |                                                        | Y | 34.93 | 118.52 | 39.50 |      | 60.0  |         |
|           |                                                        | Z | 65.31 | 137.01 | 45.15 |      | 60.0  |         |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 23.87 | 101.54 | 32.95 | 9.30 | 60.0  | ± 9.6 % |
|           |                                                        | Y | 35.03 | 119.53 | 39.96 |      | 60.0  |         |
|           |                                                        | Z | 61.92 | 136.93 | 45.35 |      | 60.0  |         |
| 10648-AAA | CDMA2000 (1x Advanced)                                 | X | 1.11  | 70.04  | 15.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                        | Y | 0.68  | 63.85  | 10.64 |      | 150.0 |         |
|           |                                                        | Z | 0.72  | 65.39  | 11.21 |      | 150.0 |         |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)         | X | 5.43  | 70.91  | 18.53 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.44  | 69.41  | 17.59 |      | 80.0  |         |
|           |                                                        | Z | 4.46  | 70.35  | 17.94 |      | 80.0  |         |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)        | X | 5.75  | 69.79  | 18.37 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.85  | 68.29  | 17.59 |      | 80.0  |         |
|           |                                                        | Z | 4.80  | 68.81  | 17.83 |      | 80.0  |         |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)        | X | 5.63  | 69.47  | 18.36 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.81  | 67.88  | 17.59 |      | 80.0  |         |
|           |                                                        | Z | 4.76  | 68.31  | 17.81 |      | 80.0  |         |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)        | X | 5.69  | 69.55  | 18.41 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.87  | 67.81  | 17.62 |      | 80.0  |         |
|           |                                                        | Z | 4.82  | 68.18  | 17.82 |      | 80.0  |         |

<sup>F</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-3589\_Jan18**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:3589**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6  
Calibration procedure for dosimetric E-field probes**

*BNV*  
*01-24-2018*

Calibration date: **January 16, 2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 30-Dec-17 (No. ES3-3013_Dec17)    | Dec-18                 |
| DAE4                       | SN: 660          | 21-Dec-17 (No. DAE4-660_Dec17)    | Dec-18                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-17) | In house check: Oct-18 |

|                                                                                                                 |                               |                                   |                          |
|-----------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------|--------------------------|
| Calibrated by:                                                                                                  | Name<br><b>Jeton Kastrati</b> | Function<br>Laboratory Technician | Signature<br>            |
| Approved by:                                                                                                    | Name<br><b>Katja Pokovic</b>  | Technical Manager                 |                          |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory. |                               |                                   | Issued: January 16, 2018 |



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- NORM( $f$ )<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

---

# Probe EX3DV4

## SN:3589

Manufactured: March 30, 2006  
Calibrated: January 16, 2018

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.46     | 0.40     | 0.38     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 101.9    | 98.2     | 100.6    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 145.6    | $\pm 3.0 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 149.6    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 140.9    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms}\cdot\text{V}^{-2}$ | T2<br>$\text{ms}\cdot\text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|-------------------------------------|-------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 54.53    | 405.9    | 35.45                       | 27.61                               | 1.364                               | 5.100    | 0.831                 | 0.591                 | 1.009 |
| Y | 48.12    | 366.5    | 36.73                       | 22.62                               | 1.695                               | 5.057    | 0.000                 | 0.758                 | 1.010 |
| Z | 46.44    | 344.4    | 35.16                       | 24.05                               | 1.187                               | 5.077    | 1.521                 | 0.435                 | 1.010 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 5250                 | 35.9                               | 4.71                            | 4.69    | 4.69    | 4.69    | 0.35               | 1.80                    | ± 13.1 %  |
| 5600                 | 35.5                               | 5.07                            | 4.17    | 4.17    | 4.17    | 0.40               | 1.80                    | ± 13.1 %  |
| 5750                 | 35.4                               | 5.22                            | 4.42    | 4.42    | 4.42    | 0.40               | 1.80                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 5250                 | 48.9                               | 5.36                            | 4.22    | 4.22    | 4.22    | 0.35               | 1.90                    | ± 13.1 %  |
| 5600                 | 48.5                               | 5.77                            | 3.69    | 3.69    | 3.69    | 0.40               | 1.90                    | ± 13.1 %  |
| 5750                 | 48.3                               | 5.94                            | 3.97    | 3.97    | 3.97    | 0.40               | 1.90                    | ± 13.1 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.


<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.



## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

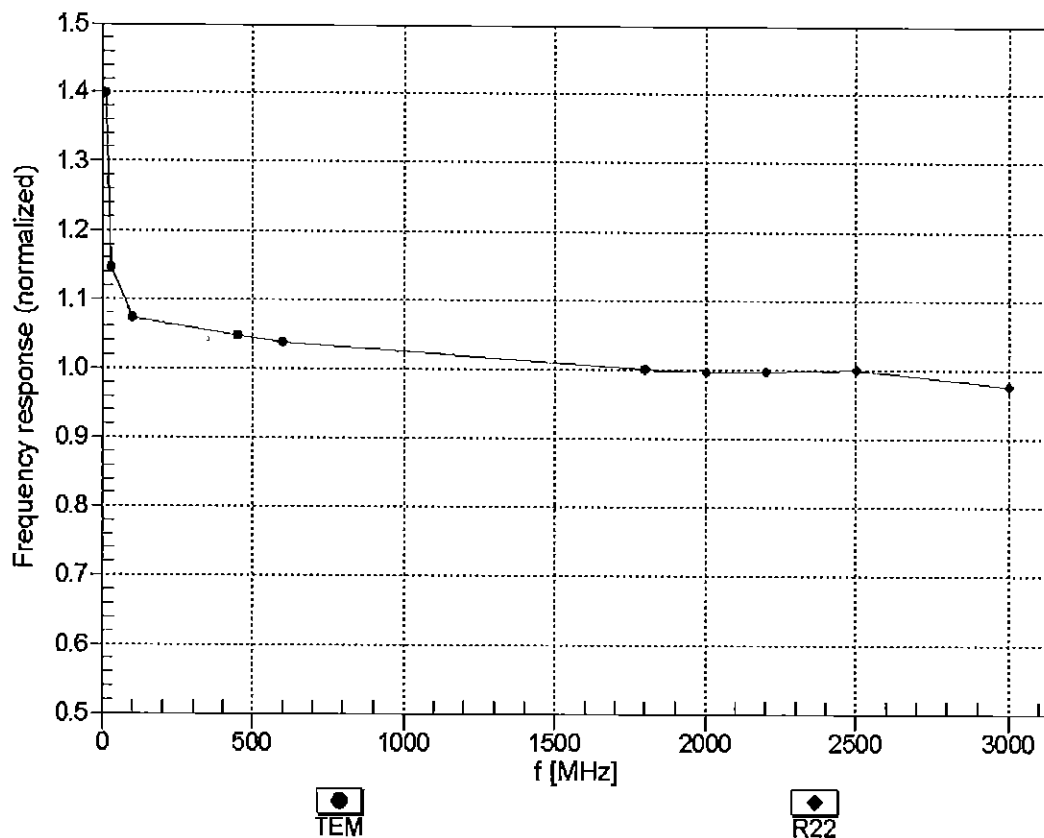



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


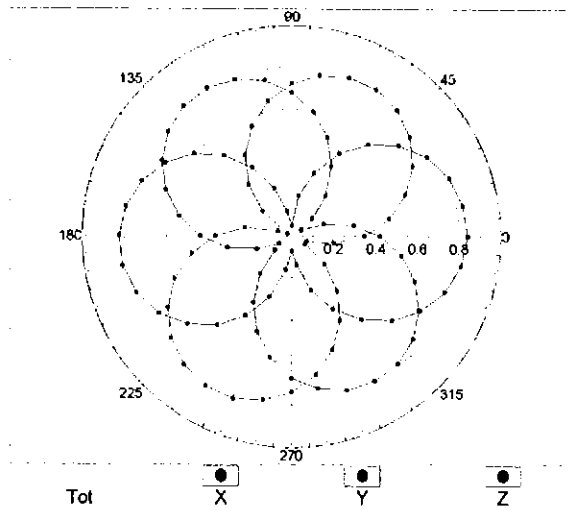


f=1800 MHz,R22

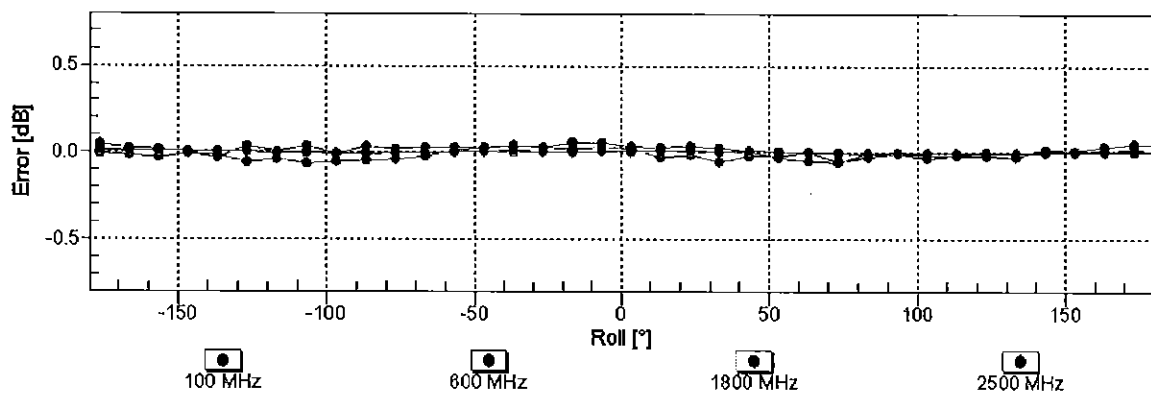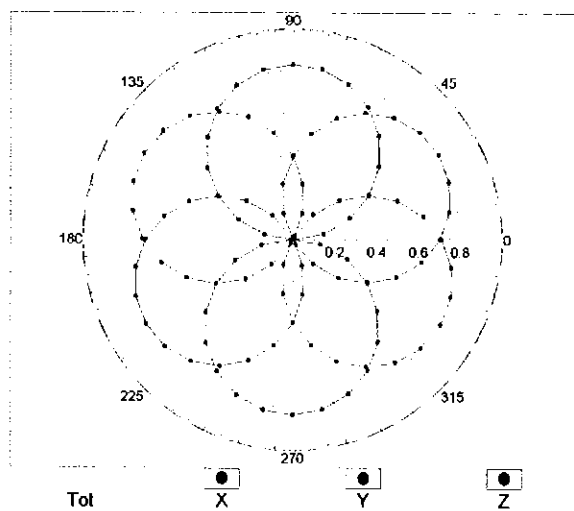


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

Dynamic Range f(SAR<sub>head</sub>)  
(TEM cell , f<sub>eval</sub>= 1900 MHz)

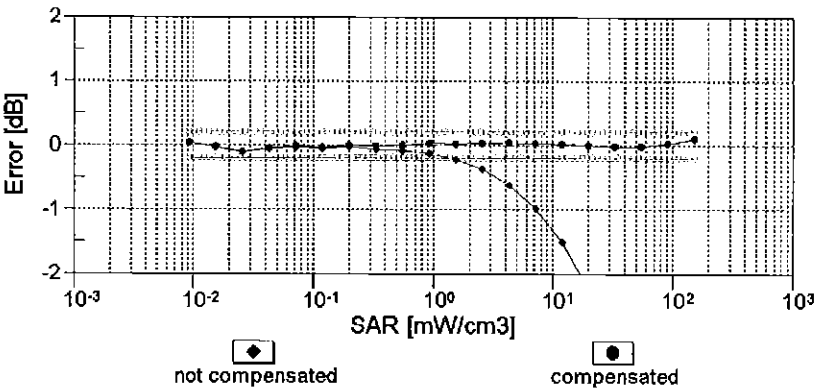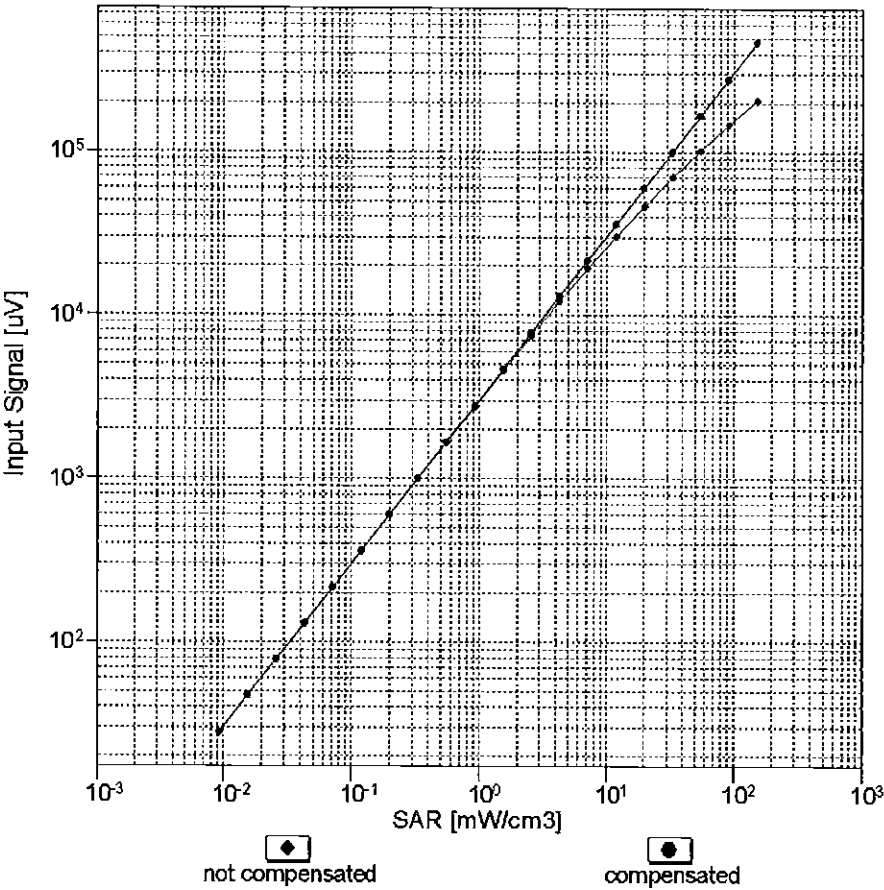



Uncertainty of Linearity Assessment: ± 0.6% (k=2)

## Conversion Factor Assessment

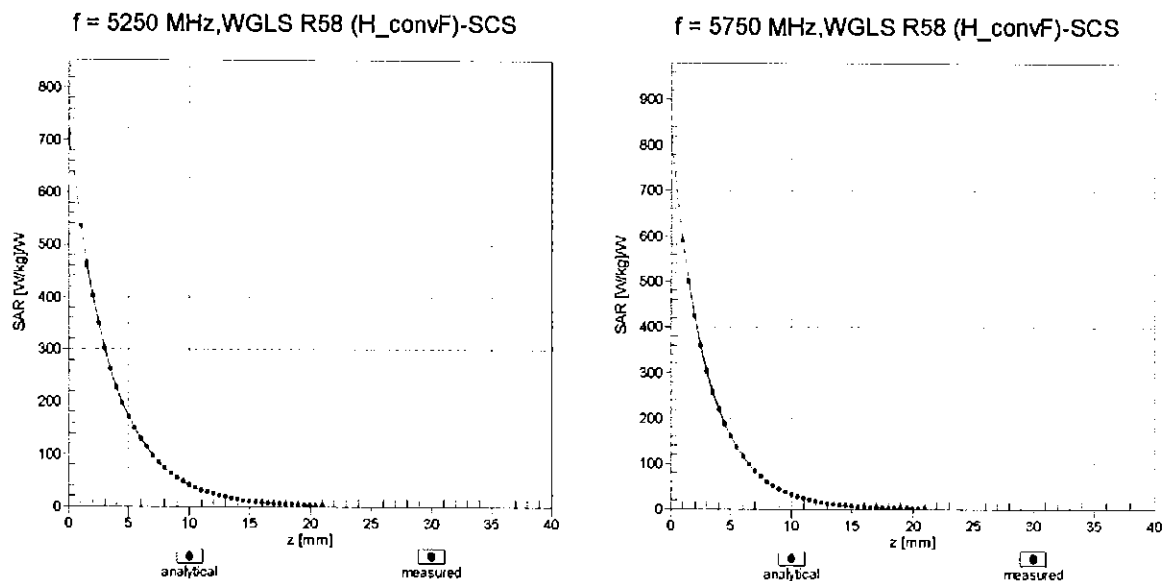

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

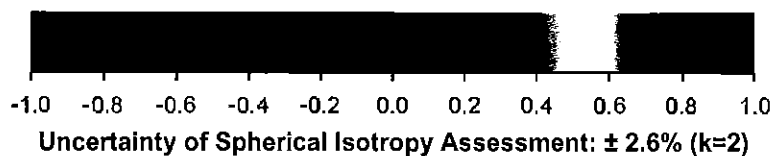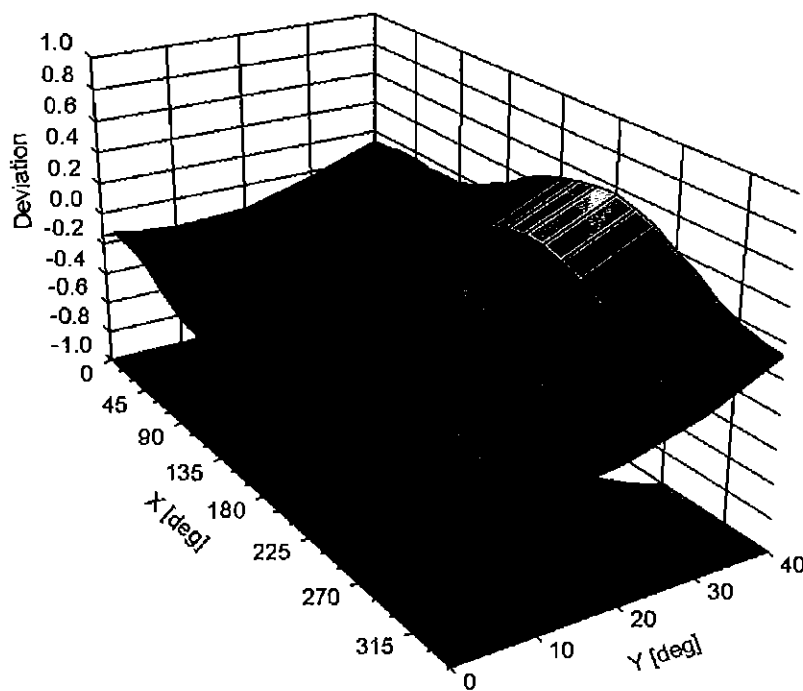

---

**DASY/EASY - Parameters of Probe: EX3DV4 - SN:3589****Other Probe Parameters**

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | -36.7      |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\mu$ V | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|-----------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00            | 1.00  | 0.00    | 145.6    | $\pm 3.0 \%$                     |
|               |                                               | Y | 0.00    | 0.00            | 1.00  |         | 149.6    |                                  |
|               |                                               | Z | 0.00    | 0.00            | 1.00  |         | 140.9    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 9.99    | 82.03           | 18.50 | 10.00   | 20.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 3.61    | 68.62           | 12.70 |         | 20.0     |                                  |
|               |                                               | Z | 6.12    | 76.04           | 15.89 |         | 20.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 1.07    | 68.14           | 15.72 | 0.00    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 0.81    | 64.60           | 12.95 |         | 150.0    |                                  |
|               |                                               | Z | 0.96    | 66.53           | 14.61 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.26    | 64.97           | 15.89 | 0.41    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.09    | 63.16           | 14.28 |         | 150.0    |                                  |
|               |                                               | Z | 1.20    | 64.25           | 15.26 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.02    | 66.95           | 17.30 | 1.46    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 4.84    | 66.53           | 16.88 |         | 150.0    |                                  |
|               |                                               | Z | 4.90    | 66.87           | 17.12 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 100.00  | 118.58          | 30.90 | 9.39    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 26.12   | 96.77           | 24.34 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 117.35          | 29.93 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 100.00  | 118.53          | 30.93 | 9.57    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 18.86   | 92.09           | 23.00 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 117.23          | 29.92 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 100.00  | 115.85          | 28.57 | 6.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 111.10          | 26.02 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 114.31          | 27.50 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 15.59   | 105.48          | 41.04 | 12.57   | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 4.26    | 66.41           | 22.61 |         | 50.0     |                                  |
|               |                                               | Z | 6.75    | 80.99           | 30.81 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 26.87   | 114.05          | 39.53 | 9.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 12.16   | 93.46           | 31.76 |         | 60.0     |                                  |
|               |                                               | Z | 17.01   | 103.53          | 36.03 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 100.00  | 115.28          | 27.52 | 4.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 108.67          | 24.10 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 113.48          | 26.36 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 115.90          | 27.07 | 3.55    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 106.89          | 22.60 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 113.76          | 25.79 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 13.97   | 98.08           | 33.11 | 7.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 8.37    | 85.77           | 27.91 |         | 80.0     |                                  |
|               |                                               | Z | 9.97    | 90.97           | 30.48 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 100.00  | 114.41          | 27.43 | 5.30    | 70.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 87.04   | 107.07          | 24.03 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 112.49          | 26.20 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 100.00  | 116.58          | 25.91 | 1.88    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 6.32    | 79.53           | 13.62 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 112.45          | 23.86 |         | 100.0    |                                  |

|           |                                                     |   |        |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 100.00 | 121.24 | 26.80 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 0.57   | 63.68  | 7.10  |       | 100.0 |         |
|           |                                                     | Z | 100.00 | 115.03 | 23.96 |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 100.00 | 126.01 | 34.21 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 9.48   | 86.17  | 21.89 |       | 70.0  |         |
|           |                                                     | Z | 36.97  | 108.65 | 29.12 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 12.93  | 96.17  | 24.85 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 2.97   | 73.87  | 15.92 |       | 100.0 |         |
|           |                                                     | Z | 6.70   | 85.72  | 20.80 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 5.17   | 84.55  | 21.02 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 1.93   | 70.01  | 14.08 |       | 100.0 |         |
|           |                                                     | Z | 3.33   | 77.79  | 17.83 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 100.00 | 126.30 | 34.35 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 11.77  | 89.53  | 23.03 |       | 70.0  |         |
|           |                                                     | Z | 64.78  | 117.54 | 31.43 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 11.80  | 94.89  | 24.44 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 2.82   | 73.30  | 15.67 |       | 100.0 |         |
|           |                                                     | Z | 6.03   | 84.36  | 20.32 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 5.40   | 85.48  | 21.44 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 1.96   | 70.41  | 14.34 |       | 100.0 |         |
|           |                                                     | Z | 3.42   | 78.42  | 18.17 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 2.08   | 73.52  | 16.75 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.21   | 66.59  | 12.35 |       | 150.0 |         |
|           |                                                     | Z | 1.63   | 70.60  | 14.79 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 114.16 | 27.98 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 18.08  | 89.51  | 20.47 |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 112.63 | 26.92 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.00   | 107.14 | 5.87  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.21   | 123.93 | 6.31  |       | 150.0 |         |
|           |                                                     | Z | 0.01   | 111.19 | 11.86 |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 69.67  | 114.61 | 31.81 | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 9.51   | 81.03  | 21.19 |       | 25.0  |         |
|           |                                                     | Z | 70.93  | 113.80 | 30.88 |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 100.00 | 119.03 | 31.49 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 11.04  | 84.08  | 20.83 |       | 40.0  |         |
|           |                                                     | Z | 100.00 | 117.60 | 30.41 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 34.83  | 106.19 | 29.98 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 10.33  | 84.00  | 22.00 |       | 50.0  |         |
|           |                                                     | Z | 26.35  | 100.92 | 27.85 |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 9.27   | 89.32  | 29.23 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 6.37   | 80.89  | 25.35 |       | 100.0 |         |
|           |                                                     | Z | 7.13   | 84.12  | 27.15 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.41   | 67.11  | 16.98 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.18   | 64.62  | 14.99 |       | 110.0 |         |
|           |                                                     | Z | 1.31   | 65.99  | 16.14 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 100.00 | 132.86 | 34.11 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 8.12   | 92.52  | 22.19 |       | 110.0 |         |
|           |                                                     | Z | 100.00 | 131.22 | 33.18 |       | 110.0 |         |

|           |                                                |   |       |        |       |      |       |         |
|-----------|------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 16.26 | 106.04 | 30.06 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 4.18  | 82.31  | 21.49 |      | 110.0 |         |
|           |                                                | Z | 7.27  | 92.62  | 25.78 |      | 110.0 |         |
| 10062-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 4.78  | 66.80  | 16.63 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.59  | 66.36  | 16.23 |      | 100.0 |         |
|           |                                                | Z | 4.66  | 66.72  | 16.47 |      | 100.0 |         |
| 10063-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 4.81  | 66.94  | 16.76 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.62  | 66.48  | 16.34 |      | 100.0 |         |
|           |                                                | Z | 4.69  | 66.85  | 16.59 |      | 100.0 |         |
| 10064-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 5.12  | 67.25  | 17.01 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.91  | 66.78  | 16.59 |      | 100.0 |         |
|           |                                                | Z | 4.97  | 67.11  | 16.82 |      | 100.0 |         |
| 10065-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 5.01  | 67.24  | 17.17 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.80  | 66.73  | 16.70 |      | 100.0 |         |
|           |                                                | Z | 4.87  | 67.07  | 16.96 |      | 100.0 |         |
| 10066-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 5.05  | 67.33  | 17.38 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.84  | 66.81  | 16.90 |      | 100.0 |         |
|           |                                                | Z | 4.90  | 67.15  | 17.15 |      | 100.0 |         |
| 10067-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.36  | 67.48  | 17.83 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.15  | 67.05  | 17.38 |      | 100.0 |         |
|           |                                                | Z | 5.21  | 67.38  | 17.63 |      | 100.0 |         |
| 10068-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 5.46  | 67.74  | 18.16 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.24  | 67.20  | 17.64 |      | 100.0 |         |
|           |                                                | Z | 5.29  | 67.50  | 17.90 |      | 100.0 |         |
| 10069-CAC | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 5.54  | 67.67  | 18.33 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.32  | 67.21  | 17.84 |      | 100.0 |         |
|           |                                                | Z | 5.37  | 67.50  | 18.08 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 5.14  | 67.13  | 17.66 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.96  | 66.70  | 17.22 |      | 100.0 |         |
|           |                                                | Z | 5.02  | 67.03  | 17.47 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.18  | 67.63  | 17.97 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.97  | 67.11  | 17.46 |      | 100.0 |         |
|           |                                                | Z | 5.03  | 67.45  | 17.74 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.28  | 67.91  | 18.36 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.07  | 67.38  | 17.83 |      | 100.0 |         |
|           |                                                | Z | 5.13  | 67.72  | 18.12 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 5.29  | 67.91  | 18.59 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.09  | 67.38  | 18.02 |      | 100.0 |         |
|           |                                                | Z | 5.15  | 67.72  | 18.32 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.40  | 68.27  | 19.03 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.18  | 67.65  | 18.40 |      | 90.0  |         |
|           |                                                | Z | 5.23  | 67.97  | 18.70 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.40  | 68.04  | 19.14 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.21  | 67.49  | 18.53 |      | 90.0  |         |
|           |                                                | Z | 5.25  | 67.79  | 18.84 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.43  | 68.12  | 19.24 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.24  | 67.58  | 18.64 |      | 90.0  |         |
|           |                                                | Z | 5.29  | 67.89  | 18.95 |      | 90.0  |         |



|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 0.92   | 67.03  | 13.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.59   | 62.42  | 9.51  |      | 150.0 |         |
|           |                                                     | Z | 0.75   | 64.90  | 11.66 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 1.45   | 61.55  | 6.80  | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 1.13   | 60.00  | 5.38  |      | 80.0  |         |
|           |                                                     | Z | 1.17   | 60.40  | 5.80  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 100.00 | 115.92 | 28.63 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 111.20 | 26.09 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 114.38 | 27.55 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 1.85   | 67.86  | 15.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.59   | 65.86  | 14.27 |      | 150.0 |         |
|           |                                                     | Z | 1.76   | 67.30  | 15.32 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 1.82   | 67.83  | 15.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.56   | 65.79  | 14.21 |      | 150.0 |         |
|           |                                                     | Z | 1.73   | 67.24  | 15.29 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 26.88  | 114.00 | 39.51 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 12.18  | 93.46  | 31.75 |      | 60.0  |         |
|           |                                                     | Z | 17.07  | 103.56 | 36.04 |      | 60.0  |         |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.25   | 70.85  | 16.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.82   | 68.69  | 15.58 |      | 150.0 |         |
|           |                                                     | Z | 3.04   | 69.96  | 16.42 |      | 150.0 |         |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.31   | 67.75  | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.05   | 66.63  | 15.24 |      | 150.0 |         |
|           |                                                     | Z | 3.18   | 67.32  | 15.73 |      | 150.0 |         |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.41   | 67.69  | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.17   | 66.67  | 15.38 |      | 150.0 |         |
|           |                                                     | Z | 3.28   | 67.31  | 15.84 |      | 150.0 |         |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 8.79   | 79.64  | 21.90 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 6.79   | 75.26  | 19.82 |      | 65.0  |         |
|           |                                                     | Z | 8.10   | 78.75  | 21.47 |      | 65.0  |         |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 8.30   | 77.30  | 21.84 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 7.10   | 74.52  | 20.35 |      | 65.0  |         |
|           |                                                     | Z | 7.59   | 76.13  | 21.24 |      | 65.0  |         |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 8.21   | 77.11  | 22.09 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 6.30   | 72.23  | 19.66 |      | 65.0  |         |
|           |                                                     | Z | 7.24   | 75.16  | 21.14 |      | 65.0  |         |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 2.85   | 70.02  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.45   | 67.95  | 15.38 |      | 150.0 |         |
|           |                                                     | Z | 2.64   | 69.18  | 16.23 |      | 150.0 |         |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 2.97   | 67.58  | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.71   | 66.39  | 15.06 |      | 150.0 |         |
|           |                                                     | Z | 2.83   | 67.15  | 15.62 |      | 150.0 |         |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.32   | 69.07  | 16.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.96   | 66.93  | 14.84 |      | 150.0 |         |
|           |                                                     | Z | 2.13   | 68.23  | 15.78 |      | 150.0 |         |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.68   | 68.33  | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.39   | 66.94  | 15.16 |      | 150.0 |         |
|           |                                                     | Z | 2.55   | 67.98  | 15.88 |      | 150.0 |         |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 3.09 | 67.53 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.84 | 66.45 | 15.17 |      | 150.0 |         |
|           |                                                | Z | 2.96 | 67.17 | 15.69 |      | 150.0 |         |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 2.84 | 68.42 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.55 | 67.17 | 15.36 |      | 150.0 |         |
|           |                                                | Z | 2.70 | 68.15 | 16.04 |      | 150.0 |         |
| 10114-CAC | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.16 | 67.17 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.01 | 66.82 | 16.13 |      | 150.0 |         |
|           |                                                | Z | 5.07 | 67.12 | 16.32 |      | 150.0 |         |
| 10115-CAC | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.50 | 67.45 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.30 | 66.98 | 16.23 |      | 150.0 |         |
|           |                                                | Z | 5.35 | 67.23 | 16.39 |      | 150.0 |         |
| 10116-CAC | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.27 | 67.41 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.10 | 67.01 | 16.16 |      | 150.0 |         |
|           |                                                | Z | 5.16 | 67.30 | 16.34 |      | 150.0 |         |
| 10117-CAC | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.14 | 67.12 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 4.97 | 66.67 | 16.08 |      | 150.0 |         |
|           |                                                | Z | 5.04 | 66.98 | 16.27 |      | 150.0 |         |
| 10118-CAC | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.57 | 67.61 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.39 | 67.20 | 16.35 |      | 150.0 |         |
|           |                                                | Z | 5.43 | 67.42 | 16.49 |      | 150.0 |         |
| 10119-CAC | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.24 | 67.35 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.08 | 66.96 | 16.14 |      | 150.0 |         |
|           |                                                | Z | 5.14 | 67.25 | 16.33 |      | 150.0 |         |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.45 | 67.69 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.20 | 66.67 | 15.30 |      | 150.0 |         |
|           |                                                | Z | 3.32 | 67.31 | 15.76 |      | 150.0 |         |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.57 | 67.75 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.33 | 66.82 | 15.50 |      | 150.0 |         |
|           |                                                | Z | 3.44 | 67.44 | 15.94 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 2.10 | 69.09 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.72 | 66.61 | 14.28 |      | 150.0 |         |
|           |                                                | Z | 1.90 | 68.15 | 15.38 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.57 | 69.15 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.19 | 67.18 | 14.56 |      | 150.0 |         |
|           |                                                | Z | 2.40 | 68.64 | 15.52 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.35 | 66.96 | 14.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.01 | 65.20 | 13.08 |      | 150.0 |         |
|           |                                                | Z | 2.16 | 66.27 | 13.86 |      | 150.0 |         |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 1.41 | 66.68 | 13.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 0.96 | 62.51 | 9.67  |      | 150.0 |         |
|           |                                                | Z | 1.12 | 64.29 | 11.10 |      | 150.0 |         |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 3.10 | 71.59 | 14.90 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.79 | 64.92 | 10.83 |      | 150.0 |         |
|           |                                                | Z | 2.43 | 68.48 | 12.61 |      | 150.0 |         |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 4.18 | 75.64 | 16.70 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.03 | 66.39 | 11.70 |      | 150.0 |         |
|           |                                                | Z | 3.22 | 71.87 | 14.21 |      | 150.0 |         |

|           |                                            |   |      |       |       |      |       |         |
|-----------|--------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 2.98 | 67.64 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.71 | 66.45 | 15.11 |      | 150.0 |         |
|           |                                            | Z | 2.84 | 67.21 | 15.66 |      | 150.0 |         |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 3.10 | 67.58 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.84 | 66.51 | 15.21 |      | 150.0 |         |
|           |                                            | Z | 2.97 | 67.23 | 15.73 |      | 150.0 |         |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 9.77 | 82.83 | 23.21 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 7.53 | 78.32 | 21.06 |      | 65.0  |         |
|           |                                            | Z | 8.80 | 81.58 | 22.62 |      | 65.0  |         |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 7.95 | 77.63 | 21.74 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 6.62 | 74.40 | 19.97 |      | 65.0  |         |
|           |                                            | Z | 7.17 | 76.26 | 20.98 |      | 65.0  |         |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 8.37 | 78.52 | 22.46 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 7.08 | 75.55 | 20.84 |      | 65.0  |         |
|           |                                            | Z | 7.65 | 77.37 | 21.81 |      | 65.0  |         |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.37 | 69.54 | 16.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.00 | 67.32 | 15.10 |      | 150.0 |         |
|           |                                            | Z | 2.18 | 68.65 | 16.05 |      | 150.0 |         |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.69 | 68.33 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.39 | 66.95 | 15.18 |      | 150.0 |         |
|           |                                            | Z | 2.55 | 67.99 | 15.90 |      | 150.0 |         |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 1.96 | 69.34 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.55 | 66.39 | 13.86 |      | 150.0 |         |
|           |                                            | Z | 1.74 | 68.16 | 15.11 |      | 150.0 |         |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 2.20 | 67.66 | 14.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.81 | 65.37 | 12.85 |      | 150.0 |         |
|           |                                            | Z | 1.99 | 66.75 | 13.83 |      | 150.0 |         |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 2.84 | 68.47 | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.55 | 67.23 | 15.41 |      | 150.0 |         |
|           |                                            | Z | 2.71 | 68.22 | 16.08 |      | 150.0 |         |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.32 | 68.16 | 15.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.90 | 65.77 | 13.13 |      | 150.0 |         |
|           |                                            | Z | 2.10 | 67.23 | 14.13 |      | 150.0 |         |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 2.81 | 68.83 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.51 | 67.36 | 15.34 |      | 150.0 |         |
|           |                                            | Z | 2.66 | 68.30 | 16.03 |      | 150.0 |         |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 2.99 | 67.51 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.74 | 66.42 | 15.12 |      | 150.0 |         |
|           |                                            | Z | 2.86 | 67.17 | 15.66 |      | 150.0 |         |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 3.10 | 67.61 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.85 | 66.59 | 15.25 |      | 150.0 |         |
|           |                                            | Z | 2.97 | 67.33 | 15.78 |      | 150.0 |         |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 3.94 | 70.56 | 19.62 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.62 | 69.51 | 18.92 |      | 150.0 |         |
|           |                                            | Z | 3.88 | 71.03 | 19.81 |      | 150.0 |         |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 5.13 | 74.04 | 20.28 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.50 | 72.11 | 19.19 |      | 150.0 |         |
|           |                                            | Z | 5.19 | 75.12 | 20.64 |      | 150.0 |         |

|           |                                            |   |       |        |       |      |       |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 5.71  | 76.34  | 21.57 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.08  | 74.75  | 20.72 |      | 150.0 |         |
|           |                                            | Z | 5.99  | 78.20  | 22.27 |      | 150.0 |         |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 3.58  | 71.57  | 20.04 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.13  | 69.16  | 18.69 |      | 150.0 |         |
|           |                                            | Z | 3.49  | 71.65  | 20.05 |      | 150.0 |         |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 5.52  | 78.92  | 22.69 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.42  | 74.92  | 20.91 |      | 150.0 |         |
|           |                                            | Z | 5.83  | 80.69  | 23.36 |      | 150.0 |         |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 4.37  | 73.98  | 19.76 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.54  | 70.32  | 17.92 |      | 150.0 |         |
|           |                                            | Z | 4.35  | 74.54  | 19.90 |      | 150.0 |         |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 31.66 | 113.22 | 34.95 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 9.38  | 89.05  | 26.85 |      | 65.0  |         |
|           |                                            | Z | 27.88 | 112.00 | 34.58 |      | 65.0  |         |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 63.77 | 119.68 | 34.61 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 15.75 | 94.23  | 26.84 |      | 65.0  |         |
|           |                                            | Z | 78.46 | 124.11 | 35.52 |      | 65.0  |         |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 43.93 | 111.32 | 31.85 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 9.41  | 84.90  | 23.38 |      | 65.0  |         |
|           |                                            | Z | 45.51 | 112.81 | 32.05 |      | 65.0  |         |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 3.52  | 71.19  | 19.77 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.08  | 68.79  | 18.41 |      | 150.0 |         |
|           |                                            | Z | 3.43  | 71.23  | 19.76 |      | 150.0 |         |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 5.53  | 78.94  | 22.70 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.42  | 74.94  | 20.92 |      | 150.0 |         |
|           |                                            | Z | 5.84  | 80.72  | 23.37 |      | 150.0 |         |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 3.56  | 71.37  | 19.87 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.11  | 68.97  | 18.52 |      | 150.0 |         |
|           |                                            | Z | 3.47  | 71.42  | 19.87 |      | 150.0 |         |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 5.45  | 78.64  | 22.56 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.37  | 74.68  | 20.78 |      | 150.0 |         |
|           |                                            | Z | 5.75  | 80.40  | 23.22 |      | 150.0 |         |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 4.88  | 76.27  | 21.07 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.91  | 72.36  | 19.22 |      | 150.0 |         |
|           |                                            | Z | 5.00  | 77.35  | 21.45 |      | 150.0 |         |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 4.35  | 73.89  | 19.70 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.53  | 70.24  | 17.87 |      | 150.0 |         |
|           |                                            | Z | 4.34  | 74.43  | 19.84 |      | 150.0 |         |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 3.55  | 71.35  | 19.86 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.11  | 68.95  | 18.51 |      | 150.0 |         |
|           |                                            | Z | 3.46  | 71.40  | 19.86 |      | 150.0 |         |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 5.44  | 78.62  | 22.55 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.36  | 74.65  | 20.76 |      | 150.0 |         |
|           |                                            | Z | 5.74  | 80.37  | 23.20 |      | 150.0 |         |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 4.34  | 73.86  | 19.69 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.53  | 70.21  | 17.86 |      | 150.0 |         |
|           |                                            | Z | 4.33  | 74.40  | 19.83 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 3.57 | 71.40 | 19.89 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.12 | 69.00 | 18.54 |      | 150.0 |         |
|           |                                               | Z | 3.48 | 71.45 | 19.88 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 5.46 | 78.70 | 22.58 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.38 | 74.73 | 20.80 |      | 150.0 |         |
|           |                                               | Z | 5.78 | 80.46 | 23.25 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 4.37 | 73.93 | 19.73 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.54 | 70.28 | 17.89 |      | 150.0 |         |
|           |                                               | Z | 4.35 | 74.48 | 19.86 |      | 150.0 |         |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 3.57 | 71.45 | 19.95 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.13 | 69.05 | 18.60 |      | 150.0 |         |
|           |                                               | Z | 3.49 | 71.53 | 19.95 |      | 150.0 |         |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 5.68 | 79.51 | 23.00 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.55 | 75.50 | 21.23 |      | 150.0 |         |
|           |                                               | Z | 6.06 | 81.46 | 23.73 |      | 150.0 |         |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 4.48 | 74.44 | 20.02 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.62 | 70.71 | 18.18 |      | 150.0 |         |
|           |                                               | Z | 4.49 | 75.08 | 20.20 |      | 150.0 |         |
| 10193-CAC | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.58 | 66.61 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.39 | 66.18 | 15.79 |      | 150.0 |         |
|           |                                               | Z | 4.47 | 66.55 | 16.02 |      | 150.0 |         |
| 10194-CAC | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.76 | 66.95 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.56 | 66.50 | 15.92 |      | 150.0 |         |
|           |                                               | Z | 4.64 | 66.85 | 16.15 |      | 150.0 |         |
| 10195-CAC | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.80 | 66.97 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.60 | 66.53 | 15.94 |      | 150.0 |         |
|           |                                               | Z | 4.68 | 66.88 | 16.17 |      | 150.0 |         |
| 10196-CAC | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.59 | 66.69 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.40 | 66.24 | 15.81 |      | 150.0 |         |
|           |                                               | Z | 4.47 | 66.60 | 16.04 |      | 150.0 |         |
| 10197-CAC | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 4.78 | 66.97 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.58 | 66.52 | 15.93 |      | 150.0 |         |
|           |                                               | Z | 4.65 | 66.87 | 16.16 |      | 150.0 |         |
| 10198-CAC | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 4.81 | 66.99 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.61 | 66.55 | 15.95 |      | 150.0 |         |
|           |                                               | Z | 4.68 | 66.90 | 16.18 |      | 150.0 |         |
| 10219-CAC | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.54 | 66.70 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.34 | 66.24 | 15.76 |      | 150.0 |         |
|           |                                               | Z | 4.42 | 66.61 | 16.00 |      | 150.0 |         |
| 10220-CAC | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 4.77 | 66.95 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.57 | 66.49 | 15.92 |      | 150.0 |         |
|           |                                               | Z | 4.64 | 66.84 | 16.15 |      | 150.0 |         |
| 10221-CAC | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 4.81 | 66.92 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.62 | 66.48 | 15.94 |      | 150.0 |         |
|           |                                               | Z | 4.69 | 66.83 | 16.16 |      | 150.0 |         |
| 10222-CAC | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.12 | 67.14 | 16.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.95 | 66.68 | 16.07 |      | 150.0 |         |
|           |                                               | Z | 5.01 | 66.99 | 16.27 |      | 150.0 |         |

|           |                                           |   |       |        |       |      |       |         |
|-----------|-------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10223-CAC | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.44  | 67.33  | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.25  | 66.92  | 16.22 |      | 150.0 |         |
|           |                                           | Z | 5.31  | 67.18  | 16.39 |      | 150.0 |         |
| 10224-CAC | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.17  | 67.24  | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 4.99  | 66.79  | 16.05 |      | 150.0 |         |
|           |                                           | Z | 5.06  | 67.10  | 16.25 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 2.86  | 66.19  | 15.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.63  | 65.32  | 14.64 |      | 150.0 |         |
|           |                                           | Z | 2.74  | 65.98  | 15.11 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 71.24 | 121.88 | 35.27 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 16.91 | 95.59  | 27.35 |      | 65.0  |         |
|           |                                           | Z | 92.42 | 127.27 | 36.40 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 50.30 | 113.83 | 32.60 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 15.15 | 92.51  | 25.87 |      | 65.0  |         |
|           |                                           | Z | 68.30 | 119.77 | 33.89 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 55.50 | 124.73 | 38.12 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 14.70 | 97.88  | 29.79 |      | 65.0  |         |
|           |                                           | Z | 38.30 | 118.72 | 36.53 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 63.93 | 119.72 | 34.63 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 15.85 | 94.32  | 26.88 |      | 65.0  |         |
|           |                                           | Z | 79.00 | 124.23 | 35.56 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 46.15 | 112.18 | 32.09 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 14.25 | 91.41  | 25.45 |      | 65.0  |         |
|           |                                           | Z | 59.72 | 117.30 | 33.19 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 50.49 | 122.68 | 37.51 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 13.80 | 96.56  | 29.30 |      | 65.0  |         |
|           |                                           | Z | 34.60 | 116.55 | 35.86 |      | 65.0  |         |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 64.00 | 119.75 | 34.64 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 15.83 | 94.31  | 26.87 |      | 65.0  |         |
|           |                                           | Z | 79.03 | 124.24 | 35.57 |      | 65.0  |         |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 46.17 | 112.21 | 32.10 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 14.23 | 91.39  | 25.44 |      | 65.0  |         |
|           |                                           | Z | 59.65 | 117.30 | 33.19 |      | 65.0  |         |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 46.07 | 120.60 | 36.84 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 13.04 | 95.31  | 28.79 |      | 65.0  |         |
|           |                                           | Z | 31.63 | 114.51 | 35.18 |      | 65.0  |         |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 64.33 | 119.85 | 34.67 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 15.85 | 94.34  | 26.88 |      | 65.0  |         |
|           |                                           | Z | 79.51 | 124.37 | 35.60 |      | 65.0  |         |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 46.79 | 112.40 | 32.14 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 14.34 | 91.49  | 25.47 |      | 65.0  |         |
|           |                                           | Z | 60.62 | 117.54 | 33.24 |      | 65.0  |         |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 51.22 | 123.00 | 37.59 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 13.84 | 96.65  | 29.32 |      | 65.0  |         |
|           |                                           | Z | 34.93 | 116.77 | 35.92 |      | 65.0  |         |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 64.07 | 119.77 | 34.64 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 15.80 | 94.29  | 26.87 |      | 65.0  |         |
|           |                                           | Z | 79.05 | 124.26 | 35.57 |      | 65.0  |         |

|           |                                            |   |       |        |       |      |      |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 46.17 | 112.22 | 32.10 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 14.20 | 91.37  | 25.44 |      | 65.0 |         |
|           |                                            | Z | 59.56 | 117.29 | 33.19 |      | 65.0 |         |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 51.02 | 122.93 | 37.57 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 13.80 | 96.60  | 29.31 |      | 65.0 |         |
|           |                                            | Z | 34.81 | 116.71 | 35.90 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 12.30 | 87.67  | 27.92 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.73  | 82.62  | 25.44 |      | 65.0 |         |
|           |                                            | Z | 11.99 | 88.11  | 27.90 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 12.00 | 87.14  | 27.64 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.11  | 78.88  | 23.86 |      | 65.0 |         |
|           |                                            | Z | 10.85 | 86.00  | 27.03 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 9.42  | 83.90  | 27.37 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.64  | 76.16  | 23.58 |      | 65.0 |         |
|           |                                            | Z | 8.16  | 81.56  | 26.26 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 10.44 | 82.93  | 21.79 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.79  | 75.71  | 18.18 |      | 65.0 |         |
|           |                                            | Z | 9.21  | 80.92  | 20.37 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 10.08 | 82.11  | 21.44 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.62  | 75.11  | 17.89 |      | 65.0 |         |
|           |                                            | Z | 8.78  | 79.92  | 19.95 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 11.42 | 87.52  | 23.40 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.98  | 76.83  | 18.54 |      | 65.0 |         |
|           |                                            | Z | 8.49  | 82.82  | 21.13 |      | 65.0 |         |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 7.75  | 79.05  | 20.99 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.69  | 73.82  | 18.06 |      | 65.0 |         |
|           |                                            | Z | 6.60  | 76.66  | 19.49 |      | 65.0 |         |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 7.60  | 78.24  | 20.65 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.66  | 73.30  | 17.84 |      | 65.0 |         |
|           |                                            | Z | 6.46  | 75.86  | 19.15 |      | 65.0 |         |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 12.84 | 89.97  | 24.97 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.45  | 80.54  | 20.84 |      | 65.0 |         |
|           |                                            | Z | 10.45 | 86.75  | 23.43 |      | 65.0 |         |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 8.59  | 80.97  | 23.10 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.88  | 77.02  | 21.00 |      | 65.0 |         |
|           |                                            | Z | 7.71  | 79.50  | 22.24 |      | 65.0 |         |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 7.91  | 78.24  | 21.71 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.42  | 74.62  | 19.67 |      | 65.0 |         |
|           |                                            | Z | 7.08  | 76.75  | 20.80 |      | 65.0 |         |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 11.43 | 87.56  | 24.93 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.91  | 81.04  | 22.00 |      | 65.0 |         |
|           |                                            | Z | 9.97  | 85.71  | 24.05 |      | 65.0 |         |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 7.70  | 76.94  | 21.48 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.48  | 73.90  | 19.75 |      | 65.0 |         |
|           |                                            | Z | 7.00  | 75.70  | 20.74 |      | 65.0 |         |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 8.12  | 77.80  | 22.14 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.90  | 74.95  | 20.52 |      | 65.0 |         |
|           |                                            | Z | 7.44  | 76.71  | 21.47 |      | 65.0 |         |

|           |                                             |   |       |       |       |      |      |         |
|-----------|---------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 9.27  | 82.17 | 23.21 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.25  | 77.88 | 21.10 |      | 65.0 |         |
|           |                                             | Z | 8.37  | 80.94 | 22.58 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 8.78  | 79.64 | 19.68 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.26  | 71.61 | 15.48 |      | 65.0 |         |
|           |                                             | Z | 6.86  | 75.83 | 17.39 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 8.34  | 78.50 | 19.16 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.12  | 70.92 | 15.09 |      | 65.0 |         |
|           |                                             | Z | 6.46  | 74.63 | 16.81 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 8.92  | 82.95 | 21.11 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 4.50  | 72.26 | 15.88 |      | 65.0 |         |
|           |                                             | Z | 6.02  | 76.94 | 18.10 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 8.07  | 79.69 | 21.71 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.15  | 75.00 | 19.12 |      | 65.0 |         |
|           |                                             | Z | 7.04  | 77.72 | 20.48 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 8.02  | 79.27 | 21.57 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.17  | 74.75 | 19.03 |      | 65.0 |         |
|           |                                             | Z | 7.00  | 77.32 | 20.33 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 11.37 | 87.81 | 24.60 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.29  | 80.02 | 21.07 |      | 65.0 |         |
|           |                                             | Z | 9.57  | 85.23 | 23.32 |      | 65.0 |         |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 8.58  | 80.91 | 23.06 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.86  | 76.94 | 20.95 |      | 65.0 |         |
|           |                                             | Z | 7.69  | 79.43 | 22.19 |      | 65.0 |         |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 7.90  | 78.22 | 21.71 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.41  | 74.61 | 19.67 |      | 65.0 |         |
|           |                                             | Z | 7.06  | 76.73 | 20.79 |      | 65.0 |         |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 11.30 | 87.33 | 24.83 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.82  | 80.82 | 21.90 |      | 65.0 |         |
|           |                                             | Z | 9.85  | 85.46 | 23.94 |      | 65.0 |         |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 7.95  | 77.63 | 21.74 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.61  | 74.40 | 19.97 |      | 65.0 |         |
|           |                                             | Z | 7.17  | 76.26 | 20.99 |      | 65.0 |         |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 8.37  | 78.51 | 22.45 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.07  | 75.53 | 20.83 |      | 65.0 |         |
|           |                                             | Z | 7.65  | 77.35 | 21.80 |      | 65.0 |         |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 9.74  | 82.78 | 23.19 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.51  | 78.28 | 21.05 |      | 65.0 |         |
|           |                                             | Z | 8.78  | 81.53 | 22.59 |      | 65.0 |         |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 8.35  | 76.91 | 21.81 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.25  | 74.40 | 20.43 |      | 65.0 |         |
|           |                                             | Z | 7.70  | 75.89 | 21.26 |      | 65.0 |         |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 8.25  | 76.41 | 21.67 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.21  | 74.02 | 20.34 |      | 65.0 |         |
|           |                                             | Z | 7.64  | 75.43 | 21.12 |      | 65.0 |         |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 8.73  | 79.00 | 21.90 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.29  | 75.91 | 20.32 |      | 65.0 |         |
|           |                                             | Z | 8.05  | 78.09 | 21.45 |      | 65.0 |         |



|           |                                                                    |   |       |       |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.62  | 66.51 | 15.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.40  | 65.49 | 14.41 |      | 150.0 |         |
|           |                                                                    | Z | 2.53  | 66.32 | 15.01 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 1.66  | 68.37 | 15.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.36  | 65.72 | 13.86 |      | 150.0 |         |
|           |                                                                    | Z | 1.53  | 67.34 | 15.09 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 4.01  | 66.28 | 11.28 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 3.27  | 63.73 | 9.40  |      | 50.0  |         |
|           |                                                                    | Z | 3.24  | 64.17 | 9.56  |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 10.72 | 83.49 | 21.29 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.37  | 71.76 | 15.68 |      | 50.0  |         |
|           |                                                                    | Z | 6.95  | 76.49 | 17.84 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 10.91 | 83.69 | 21.40 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.48  | 71.97 | 15.81 |      | 50.0  |         |
|           |                                                                    | Z | 7.09  | 76.71 | 17.97 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 1.63  | 69.96 | 14.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.04  | 64.71 | 11.14 |      | 150.0 |         |
|           |                                                                    | Z | 1.29  | 67.48 | 13.09 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 0.90  | 66.75 | 13.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.58  | 62.29 | 9.42  |      | 150.0 |         |
|           |                                                                    | Z | 0.74  | 64.70 | 11.54 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 1.21  | 71.81 | 16.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.65  | 64.19 | 10.77 |      | 150.0 |         |
|           |                                                                    | Z | 0.93  | 68.53 | 13.82 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 1.97  | 79.16 | 19.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.85  | 67.30 | 12.80 |      | 150.0 |         |
|           |                                                                    | Z | 1.50  | 75.07 | 17.10 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 12.27 | 88.66 | 25.82 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 8.75  | 80.85 | 21.80 |      | 50.0  |         |
|           |                                                                    | Z | 11.52 | 87.13 | 24.56 |      | 50.0  |         |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 2.86  | 70.12 | 16.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.47  | 68.04 | 15.44 |      | 150.0 |         |
|           |                                                                    | Z | 2.66  | 69.28 | 16.30 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 1.72  | 68.67 | 14.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.25  | 64.84 | 11.99 |      | 150.0 |         |
|           |                                                                    | Z | 1.45  | 66.83 | 13.43 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 3.76  | 73.98 | 16.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.44  | 68.23 | 13.44 |      | 150.0 |         |
|           |                                                                    | Z | 3.56  | 73.19 | 15.68 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 2.57  | 67.80 | 13.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.89  | 64.33 | 10.83 |      | 150.0 |         |
|           |                                                                    | Z | 2.25  | 66.42 | 11.95 |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 5.34  | 67.21 | 18.36 | 4.17 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 4.92  | 66.04 | 17.49 |      | 50.0  |         |
|           |                                                                    | Z | 5.00  | 66.39 | 17.73 |      | 50.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 5.75  | 67.51 | 18.91 | 4.96 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.39  | 66.46 | 18.07 |      | 50.0  |         |
|           |                                                                    | Z | 5.48  | 66.98 | 18.44 |      | 50.0  |         |

|           |                                                                     |   |       |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.55  | 67.40 | 18.88 | 4.96  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 5.18  | 66.25 | 17.96 |       | 50.0  |         |
|           |                                                                     | Z | 5.26  | 66.77 | 18.34 |       | 50.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.27  | 66.95 | 18.19 | 4.17  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 4.92  | 65.91 | 17.36 |       | 50.0  |         |
|           |                                                                     | Z | 5.02  | 66.46 | 17.74 |       | 50.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 6.02  | 73.68 | 22.76 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 5.62  | 72.10 | 21.29 |       | 35.0  |         |
|           |                                                                     | Z | 5.50  | 71.99 | 21.48 |       | 35.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 5.71  | 70.24 | 21.22 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 5.41  | 69.23 | 20.17 |       | 35.0  |         |
|           |                                                                     | Z | 5.36  | 69.27 | 20.36 |       | 35.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 5.75  | 70.97 | 21.43 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 5.41  | 69.78 | 20.28 |       | 35.0  |         |
|           |                                                                     | Z | 5.34  | 69.76 | 20.46 |       | 35.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 5.78  | 71.40 | 21.67 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 5.44  | 70.16 | 20.49 |       | 35.0  |         |
|           |                                                                     | Z | 5.37  | 70.16 | 20.68 |       | 35.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 5.81  | 70.57 | 21.41 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 5.47  | 69.45 | 20.31 |       | 35.0  |         |
|           |                                                                     | Z | 5.42  | 69.49 | 20.51 |       | 35.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 5.71  | 70.51 | 21.28 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 5.40  | 69.46 | 20.21 |       | 35.0  |         |
|           |                                                                     | Z | 5.35  | 69.48 | 20.40 |       | 35.0  |         |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.22  | 69.41 | 16.42 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 2.80  | 67.40 | 15.19 |       | 150.0 |         |
|           |                                                                     | Z | 3.01  | 68.61 | 15.98 |       | 150.0 |         |
| 10313-AAA | IDEN 1:3                                                            | X | 8.72  | 81.59 | 19.46 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 4.16  | 71.30 | 14.92 |       | 70.0  |         |
|           |                                                                     | Z | 6.60  | 78.28 | 18.09 |       | 70.0  |         |
| 10314-AAA | IDEN 1:6                                                            | X | 16.37 | 95.12 | 26.54 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 5.55  | 77.14 | 19.77 |       | 30.0  |         |
|           |                                                                     | Z | 11.38 | 90.04 | 24.85 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.13  | 64.52 | 15.64 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.98  | 62.76 | 14.03 |       | 150.0 |         |
|           |                                                                     | Z | 1.08  | 63.88 | 15.03 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.66  | 66.76 | 16.37 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.47  | 66.30 | 15.96 |       | 150.0 |         |
|           |                                                                     | Z | 4.54  | 66.67 | 16.21 |       | 150.0 |         |
| 10317-AAC | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.66  | 66.76 | 16.37 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.47  | 66.30 | 15.96 |       | 150.0 |         |
|           |                                                                     | Z | 4.54  | 66.67 | 16.21 |       | 150.0 |         |
| 10400-AAD | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 4.76  | 67.01 | 16.29 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.55  | 66.53 | 15.90 |       | 150.0 |         |
|           |                                                                     | Z | 4.62  | 66.89 | 16.13 |       | 150.0 |         |
| 10401-AAD | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.41  | 67.10 | 16.39 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.28  | 66.83 | 16.15 |       | 150.0 |         |
|           |                                                                     | Z | 5.32  | 67.06 | 16.30 |       | 150.0 |         |

|           |                                                                                 |   |        |        |       |      |       |         |
|-----------|---------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAD | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                             | X | 5.69   | 67.55  | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.51   | 67.10  | 16.14 |      | 150.0 |         |
|           |                                                                                 | Z | 5.58   | 67.39  | 16.32 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                      | X | 1.63   | 69.96  | 14.95 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.04   | 64.71  | 11.14 |      | 115.0 |         |
|           |                                                                                 | Z | 1.29   | 67.48  | 13.09 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                      | X | 1.63   | 69.96  | 14.95 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                 | Y | 1.04   | 64.71  | 11.14 |      | 115.0 |         |
|           |                                                                                 | Z | 1.29   | 67.48  | 13.09 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                            | X | 100.00 | 121.60 | 30.91 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                 | Y | 14.90  | 94.78  | 23.76 |      | 100.0 |         |
|           |                                                                                 | Z | 100.00 | 118.00 | 28.98 |      | 100.0 |         |
| 10410-AAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Conf=4) | X | 100.00 | 120.72 | 30.61 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                 | Y | 52.68  | 109.61 | 27.00 |      | 80.0  |         |
|           |                                                                                 | Z | 100.00 | 120.47 | 30.13 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                       | X | 1.00   | 63.11  | 14.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 0.88   | 61.69  | 13.34 |      | 150.0 |         |
|           |                                                                                 | Z | 0.97   | 62.68  | 14.28 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                   | X | 4.58   | 66.65  | 16.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.40   | 66.22  | 15.86 |      | 150.0 |         |
|           |                                                                                 | Z | 4.47   | 66.58  | 16.09 |      | 150.0 |         |
| 10417-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                       | X | 4.58   | 66.65  | 16.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.40   | 66.22  | 15.86 |      | 150.0 |         |
|           |                                                                                 | Z | 4.47   | 66.58  | 16.09 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)   | X | 4.57   | 66.80  | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.38   | 66.37  | 15.87 |      | 150.0 |         |
|           |                                                                                 | Z | 4.46   | 66.75  | 16.11 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble)  | X | 4.59   | 66.75  | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.41   | 66.32  | 15.88 |      | 150.0 |         |
|           |                                                                                 | Z | 4.48   | 66.69  | 16.11 |      | 150.0 |         |
| 10422-AAB | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                    | X | 4.71   | 66.75  | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.52   | 66.34  | 15.90 |      | 150.0 |         |
|           |                                                                                 | Z | 4.60   | 66.69  | 16.13 |      | 150.0 |         |
| 10423-AAB | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                 | X | 4.89   | 67.10  | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.69   | 66.65  | 16.02 |      | 150.0 |         |
|           |                                                                                 | Z | 4.76   | 67.00  | 16.24 |      | 150.0 |         |
| 10424-AAB | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                 | X | 4.81   | 67.04  | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 4.61   | 66.59  | 15.99 |      | 150.0 |         |
|           |                                                                                 | Z | 4.68   | 66.95  | 16.21 |      | 150.0 |         |
| 10425-AAB | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                     | X | 5.39   | 67.34  | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.22   | 66.97  | 16.22 |      | 150.0 |         |
|           |                                                                                 | Z | 5.27   | 67.22  | 16.38 |      | 150.0 |         |
| 10426-AAB | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                   | X | 5.39   | 67.34  | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                 | Y | 5.23   | 67.01  | 16.23 |      | 150.0 |         |
|           |                                                                                 | Z | 5.28   | 67.26  | 16.39 |      | 150.0 |         |

|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAB | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.41   | 67.34  | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.24   | 66.97  | 16.22 |      | 150.0 |         |
|           |                                                                | Z | 5.29   | 67.23  | 16.38 |      | 150.0 |         |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.30   | 70.55  | 18.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.12   | 70.52  | 17.85 |      | 150.0 |         |
|           |                                                                | Z | 4.23   | 71.03  | 18.16 |      | 150.0 |         |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.29   | 67.21  | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.05   | 66.67  | 15.77 |      | 150.0 |         |
|           |                                                                | Z | 4.14   | 67.11  | 16.06 |      | 150.0 |         |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.58   | 67.09  | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.37   | 66.61  | 15.90 |      | 150.0 |         |
|           |                                                                | Z | 4.44   | 66.99  | 16.15 |      | 150.0 |         |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 4.82   | 67.08  | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.62   | 66.63  | 16.01 |      | 150.0 |         |
|           |                                                                | Z | 4.69   | 66.98  | 16.23 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.41   | 71.40  | 18.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.20   | 71.25  | 17.73 |      | 150.0 |         |
|           |                                                                | Z | 4.35   | 71.94  | 18.12 |      | 150.0 |         |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 120.54 | 30.53 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 46.85  | 107.92 | 26.54 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 120.26 | 30.03 |      | 80.0  |         |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.60   | 67.27  | 15.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.31   | 66.43  | 14.88 |      | 150.0 |         |
|           |                                                                | Z | 3.42   | 67.06  | 15.30 |      | 150.0 |         |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 4.12   | 66.99  | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.90   | 66.44  | 15.61 |      | 150.0 |         |
|           |                                                                | Z | 3.98   | 66.89  | 15.92 |      | 150.0 |         |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.38   | 66.92  | 16.22 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.18   | 66.42  | 15.78 |      | 150.0 |         |
|           |                                                                | Z | 4.26   | 66.82  | 16.05 |      | 150.0 |         |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.57   | 66.85  | 16.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.38   | 66.38  | 15.84 |      | 150.0 |         |
|           |                                                                | Z | 4.46   | 66.75  | 16.09 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.51   | 67.52  | 15.42 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.17   | 66.45  | 14.38 |      | 150.0 |         |
|           |                                                                | Z | 3.30   | 67.16  | 14.86 |      | 150.0 |         |
| 10456-AAB | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.24   | 67.91  | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.09   | 67.55  | 16.40 |      | 150.0 |         |
|           |                                                                | Z | 6.14   | 67.78  | 16.54 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.80   | 65.28  | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.67   | 64.86  | 15.55 |      | 150.0 |         |
|           |                                                                | Z | 3.74   | 65.24  | 15.80 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 4.04   | 70.60  | 17.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.78   | 70.18  | 16.90 |      | 150.0 |         |
|           |                                                                | Z | 3.96   | 71.06  | 17.41 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 5.10   | 67.92  | 18.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.04   | 68.55  | 18.14 |      | 150.0 |         |
|           |                                                                | Z | 5.06   | 68.63  | 18.14 |      | 150.0 |         |

|           |                                                                   |   |        |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 0.93   | 69.01  | 16.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 0.67   | 64.78  | 13.34 |      | 150.0 |         |
|           |                                                                   | Z | 0.83   | 67.12  | 15.33 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 125.37 | 32.80 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 120.09 | 30.00 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 125.85 | 32.64 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 109.15 | 25.16 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 2.88   | 68.96  | 12.87 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.54 | 23.60 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 105.92 | 23.62 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.89   | 64.22  | 10.46 |      | 80.0  |         |
|           |                                                                   | Z | 16.73  | 86.00  | 17.87 |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 123.34 | 31.70 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 117.53 | 28.68 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.49 | 31.39 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 108.60 | 24.90 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 2.49   | 67.43  | 12.20 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 105.93 | 23.31 |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 99.93  | 105.40 | 23.38 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.76   | 63.52  | 10.09 |      | 80.0  |         |
|           |                                                                   | Z | 7.76   | 78.49  | 15.68 |      | 80.0  |         |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 123.57 | 31.81 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 117.78 | 28.79 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.77 | 31.51 |      | 80.0  |         |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 108.77 | 24.97 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 2.58   | 67.81  | 12.37 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.13 | 23.39 |      | 80.0  |         |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 105.42 | 23.38 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.76   | 63.54  | 10.10 |      | 80.0  |         |
|           |                                                                   | Z | 7.98   | 78.76  | 15.76 |      | 80.0  |         |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 123.60 | 31.81 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 117.78 | 28.78 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.80 | 31.51 |      | 80.0  |         |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 108.72 | 24.94 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 2.56   | 67.74  | 12.33 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.06 | 23.36 |      | 80.0  |         |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 99.99  | 105.37 | 23.35 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.76   | 63.49  | 10.07 |      | 80.0  |         |
|           |                                                                   | Z | 7.85   | 78.59  | 15.70 |      | 80.0  |         |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 123.57 | 31.80 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 117.75 | 28.77 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 123.76 | 31.50 |      | 80.0  |         |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 108.72 | 24.94 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 2.55   | 67.70  | 12.31 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.07 | 23.36 |      | 80.0  |         |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 105.38 | 23.36 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.75   | 63.48  | 10.06 |      | 80.0  |         |
|           |                                                                   | Z | 7.74   | 78.46  | 15.66 |      | 80.0  |         |

|           |                                                                     |   |        |        |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 108.56 | 24.86 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 2.48   | 67.39  | 12.17 |      | 80.0 |         |
|           |                                                                     | Z | 100.00 | 105.88 | 23.27 |      | 80.0 |         |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 99.93  | 105.32 | 23.33 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 1.75   | 63.43  | 10.04 |      | 80.0 |         |
|           |                                                                     | Z | 7.52   | 78.16  | 15.56 |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 24.99  | 103.36 | 28.63 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 10.71  | 88.94  | 23.39 |      | 80.0 |         |
|           |                                                                     | Z | 51.18  | 114.04 | 30.82 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 27.08  | 97.74  | 25.20 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 7.39   | 78.93  | 18.50 |      | 80.0 |         |
|           |                                                                     | Z | 49.11  | 104.52 | 26.12 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 20.64  | 93.00  | 23.51 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.77   | 75.21  | 16.85 |      | 80.0 |         |
|           |                                                                     | Z | 27.39  | 95.68  | 23.40 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 6.61   | 81.76  | 20.77 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 2.69   | 68.93  | 14.80 |      | 80.0 |         |
|           |                                                                     | Z | 4.28   | 75.68  | 17.93 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 11.30  | 85.70  | 21.82 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.71   | 72.93  | 16.32 |      | 80.0 |         |
|           |                                                                     | Z | 10.22  | 83.74  | 20.39 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 9.81   | 83.50  | 21.12 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.39   | 71.84  | 15.90 |      | 80.0 |         |
|           |                                                                     | Z | 8.50   | 81.12  | 19.54 |      | 80.0 |         |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 6.41   | 81.73  | 21.60 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.29   | 71.60  | 16.89 |      | 80.0 |         |
|           |                                                                     | Z | 4.73   | 77.46  | 19.61 |      | 80.0 |         |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.82   | 74.22  | 18.45 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.14   | 68.00  | 14.98 |      | 80.0 |         |
|           |                                                                     | Z | 3.94   | 71.61  | 16.84 |      | 80.0 |         |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.72   | 73.57  | 18.19 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.14   | 67.70  | 14.85 |      | 80.0 |         |
|           |                                                                     | Z | 3.89   | 71.06  | 16.60 |      | 80.0 |         |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 5.77   | 78.61  | 21.05 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.74   | 71.84  | 17.80 |      | 80.0 |         |
|           |                                                                     | Z | 4.64   | 75.66  | 19.71 |      | 80.0 |         |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.63   | 72.48  | 18.80 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.63   | 68.80  | 16.66 |      | 80.0 |         |
|           |                                                                     | Z | 4.11   | 71.03  | 17.91 |      | 80.0 |         |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.68   | 72.08  | 18.66 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.73   | 68.67  | 16.64 |      | 80.0 |         |
|           |                                                                     | Z | 4.18   | 70.76  | 17.81 |      | 80.0 |         |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 5.40   | 75.41  | 19.95 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.98   | 70.66  | 17.54 |      | 80.0 |         |
|           |                                                                     | Z | 4.61   | 73.35  | 18.98 |      | 80.0 |         |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.79   | 71.03  | 18.46 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.01   | 68.31  | 16.84 |      | 80.0 |         |
|           |                                                                     | Z | 4.35   | 69.91  | 17.78 |      | 80.0 |         |

|           |                                                                      |   |      |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.84 | 70.78 | 18.38 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.07 | 68.21 | 16.82 |      | 80.0 |         |
|           |                                                                      | Z | 4.41 | 69.73 | 17.72 |      | 80.0 |         |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 6.18 | 77.69 | 20.63 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.27 | 71.91 | 17.89 |      | 80.0 |         |
|           |                                                                      | Z | 5.10 | 75.11 | 19.51 |      | 80.0 |         |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.89 | 71.61 | 18.71 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.04 | 68.68 | 17.03 |      | 80.0 |         |
|           |                                                                      | Z | 4.41 | 70.35 | 18.00 |      | 80.0 |         |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.91 | 71.12 | 18.55 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.12 | 68.46 | 16.98 |      | 80.0 |         |
|           |                                                                      | Z | 4.46 | 69.99 | 17.89 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 5.03 | 77.46 | 18.40 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.85 | 64.41 | 11.81 |      | 80.0 |         |
|           |                                                                      | Z | 2.83 | 69.89 | 14.64 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.04 | 68.00 | 13.73 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.58 | 60.64 | 9.01  |      | 80.0 |         |
|           |                                                                      | Z | 1.87 | 62.71 | 10.38 |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.89 | 67.10 | 13.20 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.55 | 60.27 | 8.69  |      | 80.0 |         |
|           |                                                                      | Z | 1.80 | 62.06 | 9.91  |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.85 | 79.67 | 21.13 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.43 | 71.51 | 17.20 |      | 80.0 |         |
|           |                                                                      | Z | 4.56 | 76.29 | 19.51 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.71 | 73.38 | 18.53 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.37 | 68.44 | 15.69 |      | 80.0 |         |
|           |                                                                      | Z | 4.04 | 71.45 | 17.28 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.74 | 73.07 | 18.35 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.42 | 68.30 | 15.58 |      | 80.0 |         |
|           |                                                                      | Z | 4.07 | 71.20 | 17.12 |      | 80.0 |         |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 5.68 | 78.36 | 20.94 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.69 | 71.63 | 17.70 |      | 80.0 |         |
|           |                                                                      | Z | 4.57 | 75.41 | 19.60 |      | 80.0 |         |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.61 | 72.37 | 18.74 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.61 | 68.70 | 16.60 |      | 80.0 |         |
|           |                                                                      | Z | 4.08 | 70.92 | 17.85 |      | 80.0 |         |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 4.65 | 71.98 | 18.60 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.70 | 68.57 | 16.58 |      | 80.0 |         |
|           |                                                                      | Z | 4.15 | 70.65 | 17.75 |      | 80.0 |         |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 6.12 | 77.51 | 20.55 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.23 | 71.76 | 17.81 |      | 80.0 |         |
|           |                                                                      | Z | 5.05 | 74.93 | 19.43 |      | 80.0 |         |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 4.87 | 71.54 | 18.67 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 4.03 | 68.61 | 16.98 |      | 80.0 |         |
|           |                                                                      | Z | 4.39 | 70.28 | 17.95 |      | 80.0 |         |

|           |                                                                     |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.89 | 71.05 | 18.50 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.11 | 68.38 | 16.94 |      | 80.0  |         |
|           |                                                                     | Z | 4.44 | 69.91 | 17.84 |      | 80.0  |         |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 5.96 | 74.88 | 19.56 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.57 | 70.72 | 17.48 |      | 80.0  |         |
|           |                                                                     | Z | 5.19 | 73.07 | 18.73 |      | 80.0  |         |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.27 | 70.82 | 18.44 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.52 | 68.43 | 17.07 |      | 80.0  |         |
|           |                                                                     | Z | 4.83 | 69.75 | 17.85 |      | 80.0  |         |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.27 | 70.43 | 18.33 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.58 | 68.22 | 17.03 |      | 80.0  |         |
|           |                                                                     | Z | 4.86 | 69.45 | 17.77 |      | 80.0  |         |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 6.66 | 77.38 | 20.34 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.73 | 71.97 | 17.80 |      | 80.0  |         |
|           |                                                                     | Z | 5.58 | 74.94 | 19.30 |      | 80.0  |         |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.21 | 71.34 | 18.64 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.41 | 68.67 | 17.14 |      | 80.0  |         |
|           |                                                                     | Z | 4.74 | 70.10 | 17.99 |      | 80.0  |         |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.16 | 70.71 | 18.44 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.43 | 68.30 | 17.06 |      | 80.0  |         |
|           |                                                                     | Z | 4.73 | 69.61 | 17.84 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 0.96 | 63.31 | 14.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.84 | 61.78 | 13.32 |      | 150.0 |         |
|           |                                                                     | Z | 0.94 | 62.83 | 14.31 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 0.65 | 72.36 | 18.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.38 | 65.35 | 12.87 |      | 150.0 |         |
|           |                                                                     | Z | 0.52 | 68.34 | 15.90 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 0.82 | 65.48 | 15.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.66 | 62.90 | 13.28 |      | 150.0 |         |
|           |                                                                     | Z | 0.77 | 64.43 | 14.74 |      | 150.0 |         |
| 10518-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.57 | 66.72 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.39 | 66.29 | 15.83 |      | 150.0 |         |
|           |                                                                     | Z | 4.46 | 66.66 | 16.07 |      | 150.0 |         |
| 10519-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 4.77 | 66.98 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.57 | 66.53 | 15.96 |      | 150.0 |         |
|           |                                                                     | Z | 4.64 | 66.88 | 16.18 |      | 150.0 |         |
| 10520-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.62 | 66.95 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.42 | 66.47 | 15.86 |      | 150.0 |         |
|           |                                                                     | Z | 4.49 | 66.83 | 16.10 |      | 150.0 |         |
| 10521-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.56 | 66.96 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.35 | 66.45 | 15.84 |      | 150.0 |         |
|           |                                                                     | Z | 4.43 | 66.82 | 16.08 |      | 150.0 |         |
| 10522-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.61 | 67.00 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.41 | 66.56 | 15.94 |      | 150.0 |         |
|           |                                                                     | Z | 4.49 | 66.93 | 16.18 |      | 150.0 |         |



|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.49 | 66.88 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.29 | 66.41 | 15.77 |      | 150.0 |         |
|           |                                                            | Z | 4.37 | 66.81 | 16.03 |      | 150.0 |         |
| 10524-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.56 | 66.93 | 16.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.35 | 66.47 | 15.90 |      | 150.0 |         |
|           |                                                            | Z | 4.43 | 66.84 | 16.14 |      | 150.0 |         |
| 10525-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.53 | 65.97 | 15.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.34 | 65.51 | 15.50 |      | 150.0 |         |
|           |                                                            | Z | 4.42 | 65.91 | 15.75 |      | 150.0 |         |
| 10526-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.72 | 66.36 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.50 | 65.86 | 15.64 |      | 150.0 |         |
|           |                                                            | Z | 4.58 | 66.26 | 15.88 |      | 150.0 |         |
| 10527-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.63 | 66.33 | 15.97 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.42 | 65.81 | 15.57 |      | 150.0 |         |
|           |                                                            | Z | 4.50 | 66.22 | 15.82 |      | 150.0 |         |
| 10528-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.65 | 66.35 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.44 | 65.83 | 15.60 |      | 150.0 |         |
|           |                                                            | Z | 4.52 | 66.23 | 15.85 |      | 150.0 |         |
| 10529-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.65 | 66.35 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.44 | 65.83 | 15.60 |      | 150.0 |         |
|           |                                                            | Z | 4.52 | 66.23 | 15.85 |      | 150.0 |         |
| 10531-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.65 | 66.47 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.43 | 65.92 | 15.60 |      | 150.0 |         |
|           |                                                            | Z | 4.51 | 66.32 | 15.86 |      | 150.0 |         |
| 10532-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.51 | 66.33 | 15.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.29 | 65.76 | 15.53 |      | 150.0 |         |
|           |                                                            | Z | 4.37 | 66.17 | 15.79 |      | 150.0 |         |
| 10533-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.66 | 66.38 | 15.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.45 | 65.88 | 15.59 |      | 150.0 |         |
|           |                                                            | Z | 4.53 | 66.29 | 15.85 |      | 150.0 |         |
| 10534-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 5.17 | 66.46 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.99 | 66.00 | 15.72 |      | 150.0 |         |
|           |                                                            | Z | 5.06 | 66.33 | 15.92 |      | 150.0 |         |
| 10535-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.23 | 66.61 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.05 | 66.18 | 15.80 |      | 150.0 |         |
|           |                                                            | Z | 5.12 | 66.50 | 16.00 |      | 150.0 |         |
| 10536-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 5.11 | 66.59 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.92 | 66.11 | 15.74 |      | 150.0 |         |
|           |                                                            | Z | 4.99 | 66.46 | 15.96 |      | 150.0 |         |
| 10537-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 5.17 | 66.55 | 16.07 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.98 | 66.09 | 15.73 |      | 150.0 |         |
|           |                                                            | Z | 5.05 | 66.42 | 15.94 |      | 150.0 |         |
| 10538-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.27 | 66.59 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.07 | 66.11 | 15.79 |      | 150.0 |         |
|           |                                                            | Z | 5.13 | 66.43 | 15.99 |      | 150.0 |         |
| 10540-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 5.18 | 66.58 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.00 | 66.14 | 15.81 |      | 150.0 |         |
|           |                                                            | Z | 5.06 | 66.43 | 16.00 |      | 150.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)  | X | 5.16 | 66.47 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 4.98 | 66.00 | 15.74 |      | 150.0 |         |
|           |                                                    | Z | 5.04 | 66.33 | 15.94 |      | 150.0 |         |
| 10542-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)  | X | 5.31 | 66.52 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.13 | 66.08 | 15.80 |      | 150.0 |         |
|           |                                                    | Z | 5.20 | 66.40 | 15.99 |      | 150.0 |         |
| 10543-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)  | X | 5.39 | 66.55 | 16.15 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.21 | 66.12 | 15.85 |      | 150.0 |         |
|           |                                                    | Z | 5.27 | 66.42 | 16.03 |      | 150.0 |         |
| 10544-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)  | X | 5.46 | 66.58 | 16.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.30 | 66.13 | 15.73 |      | 150.0 |         |
|           |                                                    | Z | 5.37 | 66.45 | 15.92 |      | 150.0 |         |
| 10545-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)  | X | 5.66 | 66.96 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.49 | 66.55 | 15.89 |      | 150.0 |         |
|           |                                                    | Z | 5.55 | 66.83 | 16.06 |      | 150.0 |         |
| 10546-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)  | X | 5.54 | 66.82 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.36 | 66.33 | 15.79 |      | 150.0 |         |
|           |                                                    | Z | 5.43 | 66.63 | 15.98 |      | 150.0 |         |
| 10547-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)  | X | 5.62 | 66.87 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.43 | 66.37 | 15.81 |      | 150.0 |         |
|           |                                                    | Z | 5.50 | 66.68 | 15.99 |      | 150.0 |         |
| 10548-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)  | X | 5.86 | 67.74 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.67 | 67.27 | 16.23 |      | 150.0 |         |
|           |                                                    | Z | 5.69 | 67.44 | 16.35 |      | 150.0 |         |
| 10550-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)  | X | 5.56 | 66.80 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.39 | 66.36 | 15.82 |      | 150.0 |         |
|           |                                                    | Z | 5.46 | 66.66 | 16.01 |      | 150.0 |         |
| 10551-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)  | X | 5.57 | 66.85 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.40 | 66.39 | 15.80 |      | 150.0 |         |
|           |                                                    | Z | 5.46 | 66.70 | 15.98 |      | 150.0 |         |
| 10552-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)  | X | 5.49 | 66.65 | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.31 | 66.19 | 15.71 |      | 150.0 |         |
|           |                                                    | Z | 5.39 | 66.53 | 15.91 |      | 150.0 |         |
| 10553-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)  | X | 5.58 | 66.70 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.40 | 66.23 | 15.76 |      | 150.0 |         |
|           |                                                    | Z | 5.46 | 66.55 | 15.95 |      | 150.0 |         |
| 10554-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.86 | 66.94 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.71 | 66.51 | 15.83 |      | 150.0 |         |
|           |                                                    | Z | 5.78 | 66.81 | 16.01 |      | 150.0 |         |
| 10555-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.99 | 67.23 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.84 | 66.80 | 15.96 |      | 150.0 |         |
|           |                                                    | Z | 5.90 | 67.08 | 16.13 |      | 150.0 |         |
| 10556-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.01 | 67.27 | 16.26 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.86 | 66.85 | 15.98 |      | 150.0 |         |
|           |                                                    | Z | 5.92 | 67.13 | 16.14 |      | 150.0 |         |
| 10557-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.99 | 67.21 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.82 | 66.75 | 15.94 |      | 150.0 |         |
|           |                                                    | Z | 5.88 | 67.04 | 16.12 |      | 150.0 |         |

|           |                                                                 |   |      |        |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|--------|-------|------|-------|---------|
| 10558-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)              | X | 6.04 | 67.37  | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.87 | 66.91  | 16.04 |      | 150.0 |         |
|           |                                                                 | Z | 5.93 | 67.19  | 16.21 |      | 150.0 |         |
| 10560-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)              | X | 6.04 | 67.24  | 16.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.86 | 66.76  | 16.01 |      | 150.0 |         |
|           |                                                                 | Z | 5.93 | 67.06  | 16.18 |      | 150.0 |         |
| 10561-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)              | X | 5.96 | 67.19  | 16.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.79 | 66.74  | 16.03 |      | 150.0 |         |
|           |                                                                 | Z | 5.85 | 67.02  | 16.20 |      | 150.0 |         |
| 10562-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)              | X | 6.09 | 67.59  | 16.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.90 | 67.09  | 16.20 |      | 150.0 |         |
|           |                                                                 | Z | 5.95 | 67.34  | 16.36 |      | 150.0 |         |
| 10563-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)              | X | 6.40 | 68.10  | 16.74 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.09 | 67.26  | 16.25 |      | 150.0 |         |
|           |                                                                 | Z | 6.10 | 67.40  | 16.34 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 4.91 | 66.83  | 16.38 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.72 | 66.39  | 16.00 |      | 150.0 |         |
|           |                                                                 | Z | 4.79 | 66.74  | 16.23 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.15 | 67.28  | 16.70 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.95 | 66.86  | 16.35 |      | 150.0 |         |
|           |                                                                 | Z | 5.01 | 67.18  | 16.55 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.98 | 67.15  | 16.53 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.78 | 66.68  | 16.14 |      | 150.0 |         |
|           |                                                                 | Z | 4.85 | 67.02  | 16.37 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 5.01 | 67.53  | 16.87 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.81 | 67.10  | 16.52 |      | 150.0 |         |
|           |                                                                 | Z | 4.88 | 67.43  | 16.73 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.90 | 66.92  | 16.31 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.69 | 66.43  | 15.89 |      | 150.0 |         |
|           |                                                                 | Z | 4.76 | 66.79  | 16.13 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.96 | 67.60  | 16.92 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.77 | 67.21  | 16.59 |      | 150.0 |         |
|           |                                                                 | Z | 4.85 | 67.56  | 16.82 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 5.00 | 67.44  | 16.85 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.80 | 67.04  | 16.52 |      | 150.0 |         |
|           |                                                                 | Z | 4.87 | 67.38  | 16.73 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.29 | 65.85  | 16.32 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.10 | 63.71  | 14.50 |      | 130.0 |         |
|           |                                                                 | Z | 1.22 | 64.94  | 15.58 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.31 | 66.54  | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.11 | 64.23  | 14.81 |      | 130.0 |         |
|           |                                                                 | Z | 1.23 | 65.55  | 15.95 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 9.74 | 108.45 | 29.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.30 | 75.72  | 17.45 |      | 130.0 |         |
|           |                                                                 | Z | 2.64 | 87.43  | 23.09 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 1.61 | 74.07  | 20.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.18 | 69.07  | 17.08 |      | 130.0 |         |
|           |                                                                 | Z | 1.41 | 71.71  | 18.93 |      | 130.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.71 | 66.68 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.52 | 66.23 | 16.07 |      | 130.0 |         |
|           |                                                                 | Z | 4.60 | 66.59 | 16.31 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.74 | 66.84 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.55 | 66.40 | 16.14 |      | 130.0 |         |
|           |                                                                 | Z | 4.62 | 66.76 | 16.38 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.95 | 67.14 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.75 | 66.69 | 16.32 |      | 130.0 |         |
|           |                                                                 | Z | 4.81 | 67.03 | 16.54 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.85 | 67.32 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.65 | 66.85 | 16.42 |      | 130.0 |         |
|           |                                                                 | Z | 4.72 | 67.20 | 16.65 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.62 | 66.66 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.40 | 66.07 | 15.67 |      | 130.0 |         |
|           |                                                                 | Z | 4.48 | 66.45 | 15.94 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.67 | 66.65 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.45 | 66.12 | 15.69 |      | 130.0 |         |
|           |                                                                 | Z | 4.52 | 66.50 | 15.96 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.76 | 67.38 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.54 | 66.88 | 16.35 |      | 130.0 |         |
|           |                                                                 | Z | 4.62 | 67.26 | 16.61 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.57 | 66.41 | 15.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.35 | 65.82 | 15.45 |      | 130.0 |         |
|           |                                                                 | Z | 4.42 | 66.20 | 15.72 |      | 130.0 |         |
| 10583-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.71 | 66.68 | 16.48 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.52 | 66.23 | 16.07 |      | 130.0 |         |
|           |                                                                 | Z | 4.60 | 66.59 | 16.31 |      | 130.0 |         |
| 10584-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.74 | 66.84 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.55 | 66.40 | 16.14 |      | 130.0 |         |
|           |                                                                 | Z | 4.62 | 66.76 | 16.38 |      | 130.0 |         |
| 10585-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 4.95 | 67.14 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.75 | 66.69 | 16.32 |      | 130.0 |         |
|           |                                                                 | Z | 4.81 | 67.03 | 16.54 |      | 130.0 |         |
| 10586-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 4.85 | 67.32 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.65 | 66.85 | 16.42 |      | 130.0 |         |
|           |                                                                 | Z | 4.72 | 67.20 | 16.65 |      | 130.0 |         |
| 10587-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.62 | 66.66 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.40 | 66.07 | 15.67 |      | 130.0 |         |
|           |                                                                 | Z | 4.48 | 66.45 | 15.94 |      | 130.0 |         |
| 10588-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.67 | 66.65 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.45 | 66.12 | 15.69 |      | 130.0 |         |
|           |                                                                 | Z | 4.52 | 66.50 | 15.96 |      | 130.0 |         |
| 10589-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 4.76 | 67.38 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.54 | 66.88 | 16.35 |      | 130.0 |         |
|           |                                                                 | Z | 4.62 | 67.26 | 16.61 |      | 130.0 |         |
| 10590-AAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.57 | 66.41 | 15.96 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.35 | 65.82 | 15.45 |      | 130.0 |         |
|           |                                                                 | Z | 4.42 | 66.20 | 15.72 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.86 | 66.73 | 16.57 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.68 | 66.31 | 16.19 |      | 130.0 |         |
|           |                                                       | Z | 4.75 | 66.65 | 16.42 |      | 130.0 |         |
| 10592-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.03 | 67.07 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.82 | 66.64 | 16.32 |      | 130.0 |         |
|           |                                                       | Z | 4.89 | 66.98 | 16.55 |      | 130.0 |         |
| 10593-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.95 | 67.01 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.74 | 66.53 | 16.19 |      | 130.0 |         |
|           |                                                       | Z | 4.81 | 66.88 | 16.42 |      | 130.0 |         |
| 10594-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 5.00 | 67.16 | 16.74 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.80 | 66.71 | 16.35 |      | 130.0 |         |
|           |                                                       | Z | 4.87 | 67.05 | 16.58 |      | 130.0 |         |
| 10595-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.98 | 67.12 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.77 | 66.66 | 16.24 |      | 130.0 |         |
|           |                                                       | Z | 4.84 | 67.01 | 16.48 |      | 130.0 |         |
| 10596-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.91 | 67.13 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.70 | 66.64 | 16.23 |      | 130.0 |         |
|           |                                                       | Z | 4.77 | 67.00 | 16.48 |      | 130.0 |         |
| 10597-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.86 | 67.05 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.65 | 66.53 | 16.11 |      | 130.0 |         |
|           |                                                       | Z | 4.72 | 66.89 | 16.35 |      | 130.0 |         |
| 10598-AAB | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.85 | 67.29 | 16.80 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.64 | 66.79 | 16.39 |      | 130.0 |         |
|           |                                                       | Z | 4.71 | 67.14 | 16.62 |      | 130.0 |         |
| 10599-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.52 | 67.26 | 16.75 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.35 | 66.89 | 16.44 |      | 130.0 |         |
|           |                                                       | Z | 5.40 | 67.12 | 16.60 |      | 130.0 |         |
| 10600-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.66 | 67.69 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.48 | 67.29 | 16.61 |      | 130.0 |         |
|           |                                                       | Z | 5.51 | 67.49 | 16.75 |      | 130.0 |         |
| 10601-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.55 | 67.44 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.37 | 67.03 | 16.50 |      | 130.0 |         |
|           |                                                       | Z | 5.41 | 67.28 | 16.67 |      | 130.0 |         |
| 10602-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.63 | 67.42 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.47 | 67.07 | 16.43 |      | 130.0 |         |
|           |                                                       | Z | 5.52 | 67.35 | 16.62 |      | 130.0 |         |
| 10603-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.73 | 67.77 | 17.03 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.54 | 67.38 | 16.72 |      | 130.0 |         |
|           |                                                       | Z | 5.59 | 67.61 | 16.88 |      | 130.0 |         |
| 10604-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.52 | 67.21 | 16.74 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.37 | 66.89 | 16.47 |      | 130.0 |         |
|           |                                                       | Z | 5.43 | 67.20 | 16.66 |      | 130.0 |         |
| 10605-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.62 | 67.51 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.47 | 67.18 | 16.61 |      | 130.0 |         |
|           |                                                       | Z | 5.51 | 67.41 | 16.77 |      | 130.0 |         |
| 10606-AAB | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.41 | 67.01 | 16.51 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.20 | 66.48 | 16.11 |      | 130.0 |         |
|           |                                                       | Z | 5.26 | 66.76 | 16.30 |      | 130.0 |         |

|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAB | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.70 | 66.05 | 16.19 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.50 | 65.58 | 15.79 |      | 130.0 |         |
|           |                                                   | Z | 4.58 | 65.97 | 16.04 |      | 130.0 |         |
| 10608-AAB | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.90 | 66.46 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.68 | 65.97 | 15.95 |      | 130.0 |         |
|           |                                                   | Z | 4.76 | 66.35 | 16.20 |      | 130.0 |         |
| 10609-AAB | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.79 | 66.33 | 16.21 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.57 | 65.80 | 15.77 |      | 130.0 |         |
|           |                                                   | Z | 4.65 | 66.20 | 16.03 |      | 130.0 |         |
| 10610-AAB | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.84 | 66.49 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.62 | 65.97 | 15.94 |      | 130.0 |         |
|           |                                                   | Z | 4.70 | 66.36 | 16.20 |      | 130.0 |         |
| 10611-AAB | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.76 | 66.30 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.54 | 65.77 | 15.78 |      | 130.0 |         |
|           |                                                   | Z | 4.62 | 66.16 | 16.05 |      | 130.0 |         |
| 10612-AAB | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.77 | 66.46 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.54 | 65.90 | 15.81 |      | 130.0 |         |
|           |                                                   | Z | 4.62 | 66.31 | 16.09 |      | 130.0 |         |
| 10613-AAB | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.78 | 66.37 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.54 | 65.78 | 15.69 |      | 130.0 |         |
|           |                                                   | Z | 4.62 | 66.17 | 15.96 |      | 130.0 |         |
| 10614-AAB | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.71 | 66.54 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.49 | 65.99 | 15.94 |      | 130.0 |         |
|           |                                                   | Z | 4.57 | 66.38 | 16.21 |      | 130.0 |         |
| 10615-AAB | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.76 | 66.13 | 16.01 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.53 | 65.58 | 15.54 |      | 130.0 |         |
|           |                                                   | Z | 4.61 | 65.99 | 15.82 |      | 130.0 |         |
| 10616-AAB | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.34 | 66.54 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.15 | 66.08 | 16.02 |      | 130.0 |         |
|           |                                                   | Z | 5.22 | 66.40 | 16.23 |      | 130.0 |         |
| 10617-AAB | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.40 | 66.66 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.22 | 66.26 | 16.08 |      | 130.0 |         |
|           |                                                   | Z | 5.28 | 66.57 | 16.28 |      | 130.0 |         |
| 10618-AAB | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.29 | 66.72 | 16.45 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.11 | 66.26 | 16.09 |      | 130.0 |         |
|           |                                                   | Z | 5.17 | 66.59 | 16.31 |      | 130.0 |         |
| 10619-AAB | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.31 | 66.54 | 16.30 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.12 | 66.05 | 15.93 |      | 130.0 |         |
|           |                                                   | Z | 5.19 | 66.37 | 16.14 |      | 130.0 |         |
| 10620-AAB | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.42 | 66.61 | 16.38 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.21 | 66.11 | 16.00 |      | 130.0 |         |
|           |                                                   | Z | 5.27 | 66.42 | 16.21 |      | 130.0 |         |
| 10621-AAB | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.40 | 66.69 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.22 | 66.26 | 16.21 |      | 130.0 |         |
|           |                                                   | Z | 5.28 | 66.57 | 16.40 |      | 130.0 |         |
| 10622-AAB | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.40 | 66.82 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.23 | 66.42 | 16.28 |      | 130.0 |         |
|           |                                                   | Z | 5.29 | 66.72 | 16.47 |      | 130.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAB | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)  | X | 5.29 | 66.39 | 16.26 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.10 | 65.92 | 15.89 |      | 130.0 |         |
|           |                                                    | Z | 5.17 | 66.24 | 16.10 |      | 130.0 |         |
| 10624-AAB | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)  | X | 5.48 | 66.58 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.30 | 66.14 | 16.07 |      | 130.0 |         |
|           |                                                    | Z | 5.36 | 66.44 | 16.27 |      | 130.0 |         |
| 10625-AAB | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)  | X | 5.86 | 67.56 | 16.95 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.64 | 67.07 | 16.59 |      | 130.0 |         |
|           |                                                    | Z | 5.66 | 67.24 | 16.72 |      | 130.0 |         |
| 10626-AAB | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)  | X | 5.61 | 66.59 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.45 | 66.15 | 15.99 |      | 130.0 |         |
|           |                                                    | Z | 5.52 | 66.46 | 16.19 |      | 130.0 |         |
| 10627-AAB | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)  | X | 5.85 | 67.11 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.69 | 66.72 | 16.24 |      | 130.0 |         |
|           |                                                    | Z | 5.74 | 66.98 | 16.41 |      | 130.0 |         |
| 10628-AAB | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)  | X | 5.66 | 66.72 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.48 | 66.22 | 15.91 |      | 130.0 |         |
|           |                                                    | Z | 5.54 | 66.51 | 16.11 |      | 130.0 |         |
| 10629-AAB | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)  | X | 5.75 | 66.81 | 16.31 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.55 | 66.27 | 15.93 |      | 130.0 |         |
|           |                                                    | Z | 5.61 | 66.56 | 16.12 |      | 130.0 |         |
| 10630-AAB | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)  | X | 6.18 | 68.27 | 17.04 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.98 | 67.75 | 16.67 |      | 130.0 |         |
|           |                                                    | Z | 5.96 | 67.79 | 16.74 |      | 130.0 |         |
| 10631-AAB | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)  | X | 6.10 | 68.12 | 17.15 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.88 | 67.58 | 16.79 |      | 130.0 |         |
|           |                                                    | Z | 5.92 | 67.78 | 16.93 |      | 130.0 |         |
| 10632-AAB | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)  | X | 5.82 | 67.18 | 16.70 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.67 | 66.81 | 16.43 |      | 130.0 |         |
|           |                                                    | Z | 5.72 | 67.07 | 16.59 |      | 130.0 |         |
| 10633-AAB | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)  | X | 5.73 | 66.90 | 16.39 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.54 | 66.39 | 16.03 |      | 130.0 |         |
|           |                                                    | Z | 5.61 | 66.71 | 16.24 |      | 130.0 |         |
| 10634-AAB | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)  | X | 5.72 | 66.92 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.53 | 66.43 | 16.11 |      | 130.0 |         |
|           |                                                    | Z | 5.60 | 66.74 | 16.31 |      | 130.0 |         |
| 10635-AAB | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)  | X | 5.61 | 66.29 | 15.89 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.40 | 65.72 | 15.48 |      | 130.0 |         |
|           |                                                    | Z | 5.47 | 66.04 | 15.69 |      | 130.0 |         |
| 10636-AAC | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.02 | 66.96 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.87 | 66.52 | 16.09 |      | 130.0 |         |
|           |                                                    | Z | 5.93 | 66.81 | 16.27 |      | 130.0 |         |
| 10637-AAC | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.18 | 67.32 | 16.56 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.02 | 66.91 | 16.26 |      | 130.0 |         |
|           |                                                    | Z | 6.07 | 67.17 | 16.43 |      | 130.0 |         |
| 10638-AAC | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.18 | 67.31 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.02 | 66.87 | 16.22 |      | 130.0 |         |
|           |                                                    | Z | 6.08 | 67.16 | 16.40 |      | 130.0 |         |

|           |                                                        |   |        |        |       |       |       |         |
|-----------|--------------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10639-AAC | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)     | X | 6.17   | 67.29  | 16.57 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.00   | 66.82  | 16.24 |       | 130.0 |         |
|           |                                                        | Z | 6.05   | 67.10  | 16.42 |       | 130.0 |         |
| 10640-AAC | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)     | X | 6.18   | 67.33  | 16.53 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.00   | 66.82  | 16.18 |       | 130.0 |         |
|           |                                                        | Z | 6.05   | 67.09  | 16.35 |       | 130.0 |         |
| 10641-AAC | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)     | X | 6.20   | 67.15  | 16.46 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.05   | 66.75  | 16.16 |       | 130.0 |         |
|           |                                                        | Z | 6.10   | 67.02  | 16.33 |       | 130.0 |         |
| 10642-AAC | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)     | X | 6.26   | 67.46  | 16.78 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.09   | 67.01  | 16.47 |       | 130.0 |         |
|           |                                                        | Z | 6.15   | 67.28  | 16.64 |       | 130.0 |         |
| 10643-AAC | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)     | X | 6.09   | 67.13  | 16.52 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 5.92   | 66.67  | 16.19 |       | 130.0 |         |
|           |                                                        | Z | 5.98   | 66.95  | 16.36 |       | 130.0 |         |
| 10644-AAC | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)     | X | 6.28   | 67.70  | 16.83 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.07   | 67.13  | 16.44 |       | 130.0 |         |
|           |                                                        | Z | 6.12   | 67.37  | 16.60 |       | 130.0 |         |
| 10645-AAC | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)     | X | 6.69   | 68.48  | 17.16 | 0.46  | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.34   | 67.56  | 16.61 |       | 130.0 |         |
|           |                                                        | Z | 6.31   | 67.59  | 16.66 |       | 130.0 |         |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)  | X | 81.88  | 138.93 | 44.99 | 9.30  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 20.09  | 105.55 | 34.68 |       | 60.0  |         |
|           |                                                        | Z | 49.56  | 129.13 | 42.50 |       | 60.0  |         |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 77.69  | 138.77 | 45.14 | 9.30  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 19.01  | 105.10 | 34.68 |       | 60.0  |         |
|           |                                                        | Z | 43.65  | 127.19 | 42.16 |       | 60.0  |         |
| 10648-AAA | CDMA2000 (1x Advanced)                                 | X | 0.73   | 64.13  | 11.44 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                        | Y | 0.50   | 60.94  | 8.11  |       | 150.0 |         |
|           |                                                        | Z | 0.62   | 62.66  | 9.90  |       | 150.0 |         |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)         | X | 4.23   | 68.60  | 17.43 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 3.70   | 66.70  | 16.11 |       | 80.0  |         |
|           |                                                        | Z | 3.95   | 67.96  | 16.88 |       | 80.0  |         |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)        | X | 4.67   | 67.66  | 17.40 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.26   | 66.28  | 16.44 |       | 80.0  |         |
|           |                                                        | Z | 4.43   | 67.13  | 16.98 |       | 80.0  |         |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)        | X | 4.61   | 67.29  | 17.38 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.24   | 65.98  | 16.48 |       | 80.0  |         |
|           |                                                        | Z | 4.40   | 66.77  | 16.98 |       | 80.0  |         |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)        | X | 4.67   | 67.29  | 17.41 | 2.23  | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.30   | 65.98  | 16.52 |       | 80.0  |         |
|           |                                                        | Z | 4.46   | 66.74  | 17.01 |       | 80.0  |         |
| 10658-AAA | Pulse Waveform (200Hz, 10%)                            | X | 77.76  | 113.37 | 29.51 | 10.00 | 50.0  | ± 9.6 % |
|           |                                                        | Y | 8.85   | 80.14  | 18.93 |       | 50.0  |         |
|           |                                                        | Z | 55.85  | 107.32 | 27.27 |       | 50.0  |         |
| 10659-AAA | Pulse Waveform (200Hz, 20%)                            | X | 100.00 | 113.86 | 27.83 | 6.99  | 60.0  | ± 9.6 % |
|           |                                                        | Y | 15.18  | 87.15  | 19.66 |       | 60.0  |         |
|           |                                                        | Z | 100.00 | 112.04 | 26.63 |       | 60.0  |         |



|           |                             |   |        |        |       |      |       |         |
|-----------|-----------------------------|---|--------|--------|-------|------|-------|---------|
| 10660-AAA | Pulse Waveform (200Hz, 40%) | X | 100.00 | 112.50 | 25.83 | 3.98 | 80.0  | ± 9.6 % |
|           |                             | Y | 63.58  | 100.49 | 21.01 |      | 80.0  |         |
|           |                             | Z | 100.00 | 110.06 | 24.42 |      | 80.0  |         |
| 10661-AAA | Pulse Waveform (200Hz, 60%) | X | 100.00 | 114.00 | 25.19 | 2.22 | 100.0 | ± 9.6 % |
|           |                             | Y | 13.64  | 84.95  | 15.36 |      | 100.0 |         |
|           |                             | Z | 100.00 | 110.38 | 23.34 |      | 100.0 |         |
| 10662-AAA | Pulse Waveform (200Hz, 80%) | X | 100.00 | 118.57 | 25.30 | 0.97 | 120.0 | ± 9.6 % |
|           |                             | Y | 0.28   | 60.00  | 4.66  |      | 120.0 |         |
|           |                             | Z | 100.00 | 111.08 | 22.00 |      | 120.0 |         |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **EX3-7410\_Jul17**

## CALIBRATION CERTIFICATE

Object **EX3DV4 - SN:7410**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

*BN ✓*  
*8/3/2017*


Calibration date: **July 17, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 31-Dec-16 (No. ES3-3013_Dec16)    | Dec-17                 |
| DAE4                       | SN: 660          | 7-Dec-16 (No. DAE4-660_Dec16)     | Dec-17                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

|                |                               |                                          |                                                                                                    |
|----------------|-------------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by: | Name<br><b>Jeton Kastrati</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | Name<br><b>Katja Pokovic</b>  | Technical Manager                        |               |

Issued: July 17, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                    |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe EX3DV4

## SN:7410

Manufactured: November 24, 2015  
Calibrated: July 17, 2017

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7410

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.40     | 0.46     | 0.43     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 95.4     | 94.7     | 91.2     |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 130.7    | $\pm 3.5 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 146.7    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 132.5    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms}\cdot\text{V}^{-2}$ | T2<br>$\text{ms}\cdot\text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|-------------------------------------|-------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 41.43    | 313.6    | 36.54                       | 8.525                               | 0.381                               | 5.024    | 0.000                 | 0.467                 | 1.003 |
| Y | 41.67    | 315.5    | 36.57                       | 10.32                               | 0.000                               | 5.055    | 0.334                 | 0.426                 | 1.004 |
| Z | 51.58    | 393.9    | 37.05                       | 11.42                               | 0.427                               | 5.066    | 0.000                 | 0.561                 | 1.006 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7410

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 41.9                               | 0.89                            | 10.60   | 10.60   | 10.60   | 0.53               | 0.80                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 10.08   | 10.08   | 10.08   | 0.41               | 0.98                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 8.66    | 8.66    | 8.66    | 0.41               | 0.82                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 8.37    | 8.37    | 8.37    | 0.28               | 1.19                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 8.02    | 8.02    | 8.02    | 0.35               | 0.80                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 7.68    | 7.68    | 7.68    | 0.33               | 0.89                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 7.42    | 7.42    | 7.42    | 0.40               | 0.80                    | ± 12.0 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7410

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 10.19   | 10.19   | 10.19   | 0.33               | 1.02                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 9.95    | 9.95    | 9.95    | 0.50               | 0.80                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 8.32    | 8.32    | 8.32    | 0.39               | 0.86                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 7.98    | 7.98    | 7.98    | 0.44               | 0.86                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 7.85    | 7.85    | 7.85    | 0.44               | 0.84                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 7.69    | 7.69    | 7.69    | 0.37               | 0.89                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 7.43    | 7.43    | 7.43    | 0.28               | 0.99                    | ± 12.0 %  |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

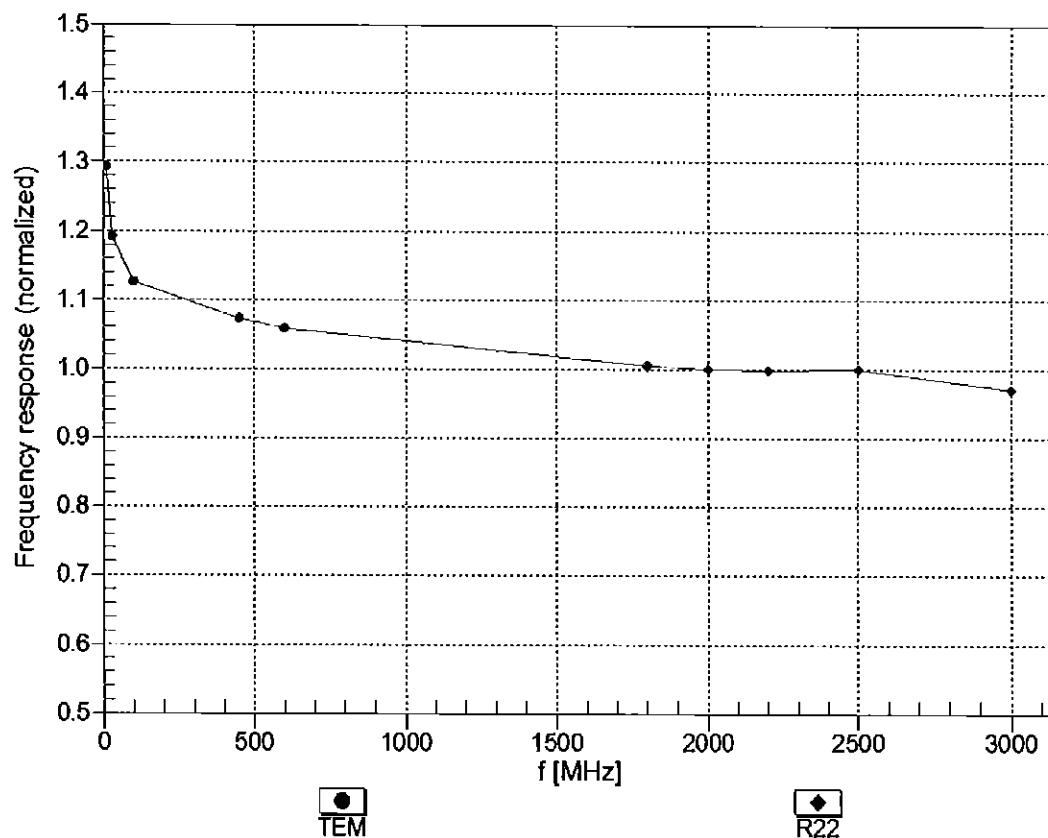


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )





## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

f=600 MHz,TEM

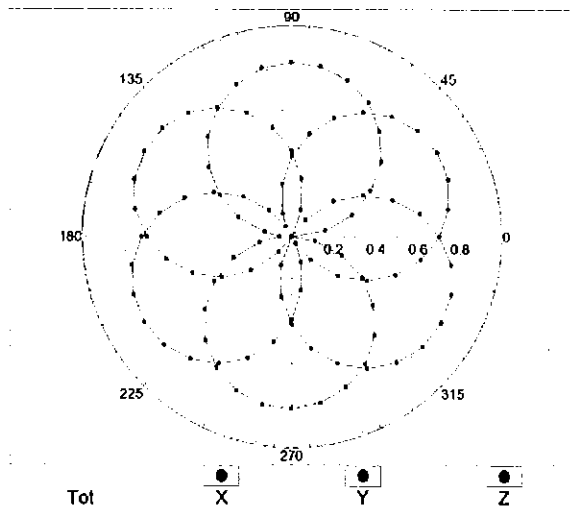


f=1800 MHz,R22

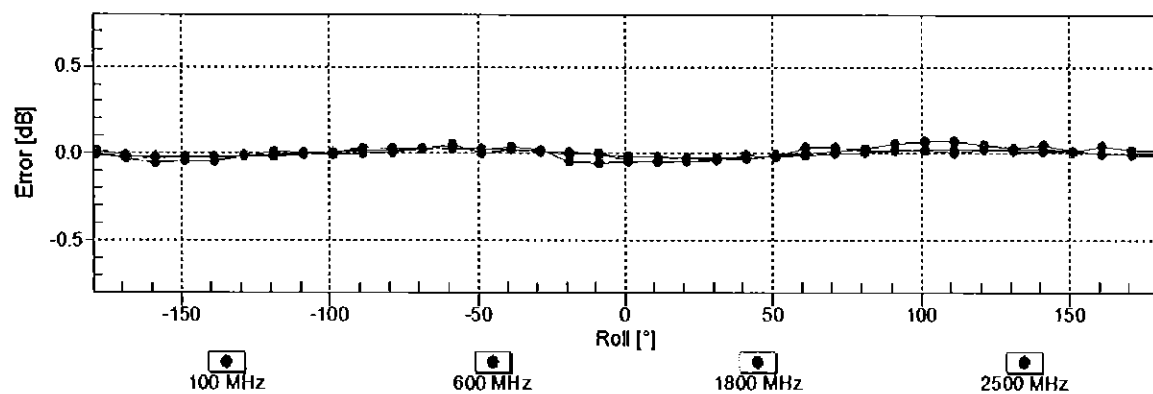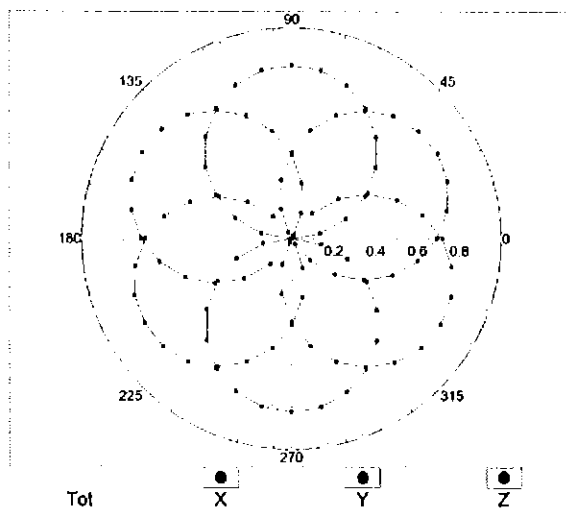


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell, $f_{\text{eval}} = 1900 \text{ MHz}$ )

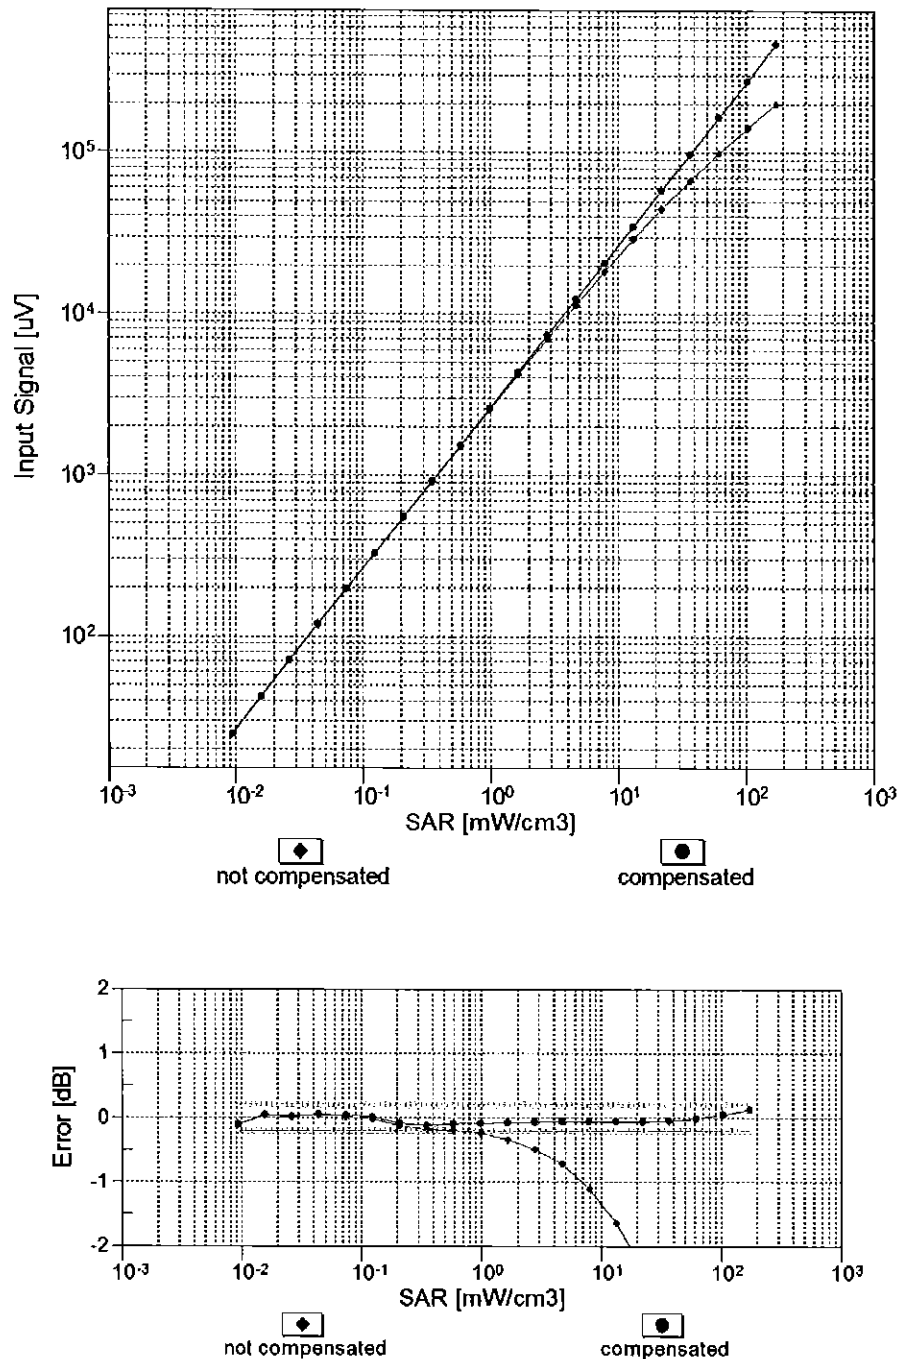



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

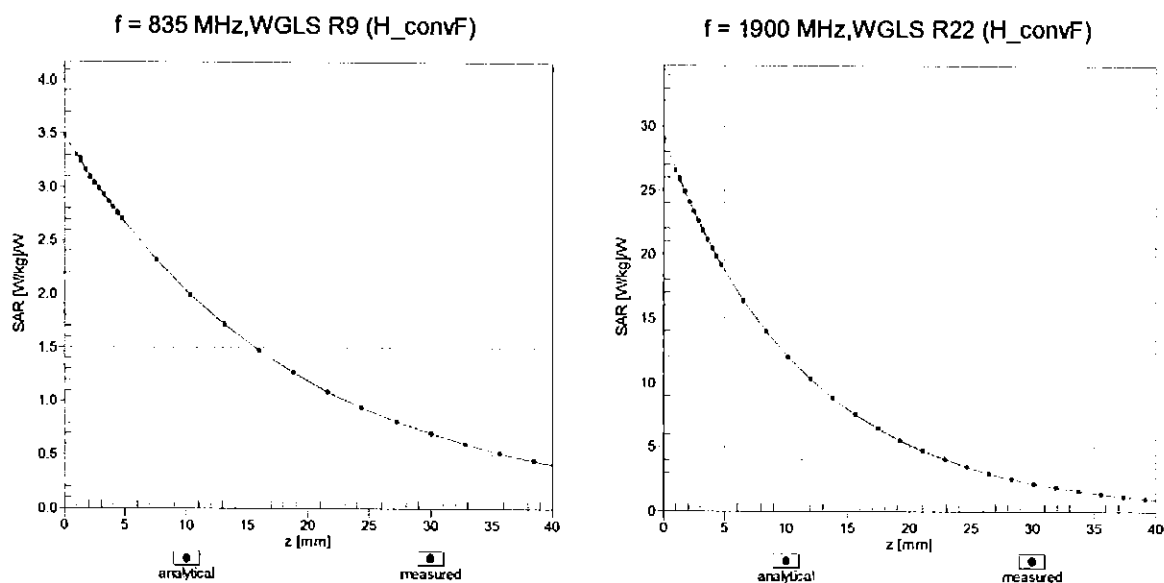

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

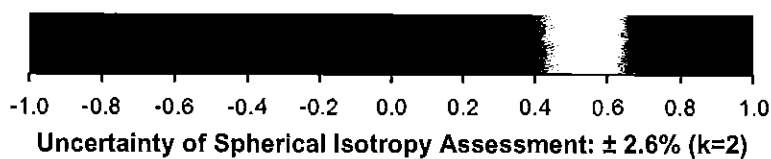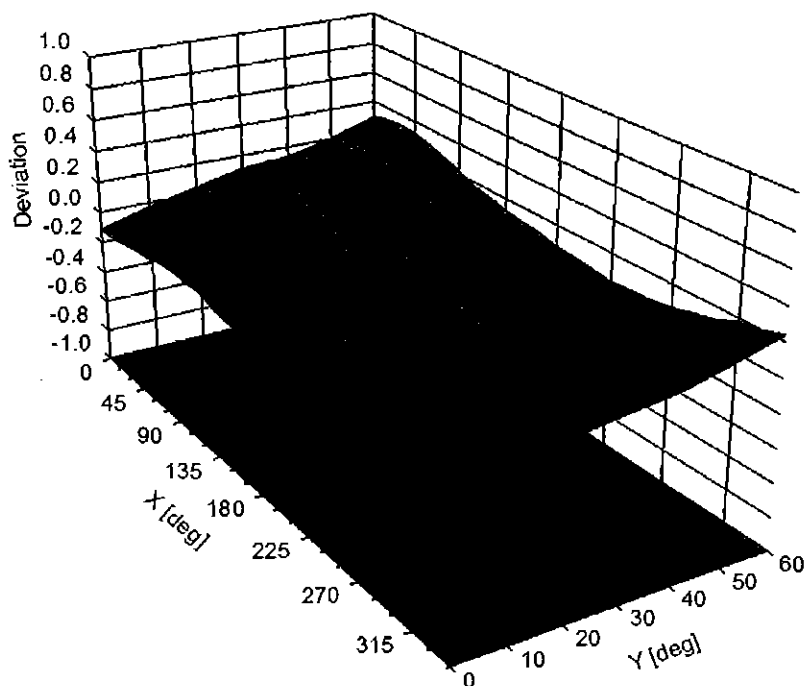

## DASY/EASY - Parameters of Probe: EX3DV4 - SN:7410

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 1.2        |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 9 mm       |
| Tip Diameter                                  | 2.5 mm     |
| Probe Tip to Sensor X Calibration Point       | 1 mm       |
| Probe Tip to Sensor Y Calibration Point       | 1 mm       |
| Probe Tip to Sensor Z Calibration Point       | 1 mm       |
| Recommended Measurement Distance from Surface | 1.4 mm     |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00                   | 1.00  | 0.00    | 130.7    | $\pm 3.5 \%$                     |
|               |                                               | Y | 0.00    | 0.00                   | 1.00  |         | 146.7    |                                  |
|               |                                               | Z | 0.00    | 0.00                   | 1.00  |         | 132.5    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 2.07    | 65.38                  | 9.86  | 10.00   | 20.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.71    | 64.71                  | 9.07  |         | 20.0     |                                  |
|               |                                               | Z | 3.44    | 71.14                  | 12.92 |         | 20.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 1.05    | 67.82                  | 15.62 | 0.00    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.11    | 68.91                  | 16.28 |         | 150.0    |                                  |
|               |                                               | Z | 1.02    | 66.59                  | 14.94 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.16    | 63.70                  | 15.28 | 0.41    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.18    | 64.10                  | 15.65 |         | 150.0    |                                  |
|               |                                               | Z | 1.17    | 63.41                  | 15.09 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 4.78    | 66.61                  | 17.05 | 1.46    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 4.80    | 66.74                  | 17.21 |         | 150.0    |                                  |
|               |                                               | Z | 4.93    | 66.52                  | 17.11 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 100.00  | 111.37                 | 25.72 | 9.39    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 111.58                 | 25.35 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 117.02                 | 28.59 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 100.00  | 110.83                 | 25.53 | 9.57    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 1707.76 | 142.54                 | 31.32 |         | 50.0     |                                  |
|               |                                               | Z | 100.00  | 116.46                 | 28.39 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 100.00  | 111.84                 | 24.81 | 6.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 114.48                 | 25.68 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 118.35                 | 28.09 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 3.46    | 65.17                  | 23.20 | 12.57   | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 5.27    | 82.06                  | 33.95 |         | 50.0     |                                  |
|               |                                               | Z | 3.61    | 65.78                  | 23.81 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 6.19    | 83.69                  | 29.67 | 9.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 7.27    | 90.43                  | 33.46 |         | 60.0     |                                  |
|               |                                               | Z | 7.46    | 87.49                  | 31.34 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 100.00  | 114.23                 | 25.06 | 4.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 119.65                 | 27.19 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 121.09                 | 28.48 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 118.39                 | 26.12 | 3.55    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 127.35                 | 29.74 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 125.00                 | 29.42 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 4.31    | 75.70                  | 25.15 | 7.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 4.62    | 78.76                  | 27.21 |         | 80.0     |                                  |
|               |                                               | Z | 5.10    | 78.80                  | 26.60 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 100.00  | 110.42                 | 23.70 | 5.30    | 70.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 113.76                 | 24.95 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 117.44                 | 27.22 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 100.00  | 118.50                 | 24.77 | 1.88    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 132.66                 | 30.37 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 126.29                 | 28.44 |         | 100.0    |                                  |

|           |                                                     |   |        |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 100.00 | 133.47 | 29.67 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 157.48 | 38.89 |       | 100.0 |         |
|           |                                                     | Z | 100.00 | 136.04 | 31.29 |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 8.66   | 91.15  | 24.16 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 61.92  | 124.81 | 33.89 |       | 70.0  |         |
|           |                                                     | Z | 18.44  | 105.53 | 29.79 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 2.66   | 76.47  | 17.66 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.91   | 85.76  | 21.28 |       | 100.0 |         |
|           |                                                     | Z | 3.14   | 79.12  | 19.77 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 1.87   | 72.76  | 15.96 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 2.71   | 78.22  | 18.36 |       | 100.0 |         |
|           |                                                     | Z | 2.01   | 73.50  | 17.25 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 12.89  | 97.56  | 26.18 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 133.04 | 35.90 |       | 70.0  |         |
|           |                                                     | Z | 33.52  | 115.95 | 32.67 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 2.40   | 75.20  | 17.16 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.17   | 83.65  | 20.57 |       | 100.0 |         |
|           |                                                     | Z | 2.91   | 78.15  | 19.38 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 1.89   | 73.11  | 16.24 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 2.73   | 78.67  | 18.67 |       | 100.0 |         |
|           |                                                     | Z | 2.03   | 73.85  | 17.51 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 1.93   | 73.30  | 15.79 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.16   | 74.82  | 16.50 |       | 150.0 |         |
|           |                                                     | Z | 1.82   | 71.39  | 15.74 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 108.18 | 23.51 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 108.75 | 23.44 |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 113.77 | 26.32 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.00   | 97.63  | 1.20  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.00   | 97.90  | 0.75  |       | 150.0 |         |
|           |                                                     | Z | 0.00   | 95.09  | 2.63  |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 29.38  | 92.85  | 22.01 | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 106.19 | 24.33 |       | 25.0  |         |
|           |                                                     | Z | 100.00 | 113.54 | 28.60 |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 92.32  | 108.50 | 25.07 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 108.13 | 24.14 |       | 40.0  |         |
|           |                                                     | Z | 100.00 | 114.66 | 27.93 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 28.80  | 103.53 | 27.62 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 125.87 | 33.73 |       | 50.0  |         |
|           |                                                     | Z | 90.56  | 125.80 | 34.77 |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 3.55   | 72.15  | 22.79 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 3.72   | 74.09  | 24.21 |       | 100.0 |         |
|           |                                                     | Z | 4.11   | 74.59  | 23.97 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.17   | 64.52  | 15.76 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.20   | 65.09  | 16.25 |       | 110.0 |         |
|           |                                                     | Z | 1.19   | 64.38  | 15.68 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 5.38   | 97.28  | 26.54 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 94.12  | 145.74 | 39.06 |       | 110.0 |         |
|           |                                                     | Z | 7.25   | 100.99 | 27.69 |       | 110.0 |         |

|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 2.03 | 75.84 | 20.79 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 2.53 | 80.86 | 23.32 |      | 110.0 |         |
|           |                                                | Z | 2.46 | 78.49 | 22.05 |      | 110.0 |         |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 4.60 | 66.68 | 16.54 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.62 | 66.77 | 16.65 |      | 100.0 |         |
|           |                                                | Z | 4.74 | 66.54 | 16.54 |      | 100.0 |         |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 4.61 | 66.74 | 16.62 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.63 | 66.85 | 16.75 |      | 100.0 |         |
|           |                                                | Z | 4.75 | 66.63 | 16.64 |      | 100.0 |         |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 4.88 | 66.97 | 16.83 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.90 | 67.08 | 16.96 |      | 100.0 |         |
|           |                                                | Z | 5.06 | 66.93 | 16.89 |      | 100.0 |         |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 4.74 | 66.82 | 16.90 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.76 | 66.95 | 17.05 |      | 100.0 |         |
|           |                                                | Z | 4.91 | 66.81 | 16.98 |      | 100.0 |         |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 4.74 | 66.80 | 17.04 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.77 | 66.94 | 17.21 |      | 100.0 |         |
|           |                                                | Z | 4.93 | 66.83 | 17.15 |      | 100.0 |         |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.03 | 66.98 | 17.46 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.05 | 67.14 | 17.66 |      | 100.0 |         |
|           |                                                | Z | 5.21 | 66.94 | 17.57 |      | 100.0 |         |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 5.05 | 66.91 | 17.63 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.07 | 67.08 | 17.84 |      | 100.0 |         |
|           |                                                | Z | 5.27 | 67.04 | 17.82 |      | 100.0 |         |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 5.12 | 66.93 | 17.81 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.15 | 67.10 | 18.04 |      | 100.0 |         |
|           |                                                | Z | 5.34 | 66.99 | 17.99 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 4.86 | 66.65 | 17.32 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.89 | 66.79 | 17.50 |      | 100.0 |         |
|           |                                                | Z | 5.01 | 66.60 | 17.41 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 4.82 | 66.89 | 17.50 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.84 | 67.05 | 17.70 |      | 100.0 |         |
|           |                                                | Z | 4.99 | 66.92 | 17.63 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 4.86 | 67.00 | 17.79 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.89 | 67.17 | 18.02 |      | 100.0 |         |
|           |                                                | Z | 5.04 | 67.03 | 17.94 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 4.85 | 66.87 | 17.91 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.86 | 67.04 | 18.15 |      | 100.0 |         |
|           |                                                | Z | 5.01 | 66.88 | 18.08 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 4.86 | 66.89 | 18.16 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 4.87 | 67.06 | 18.42 |      | 90.0  |         |
|           |                                                | Z | 5.04 | 67.00 | 18.40 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 4.88 | 66.70 | 18.29 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 4.89 | 66.85 | 18.55 |      | 90.0  |         |
|           |                                                | Z | 5.03 | 66.71 | 18.47 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 4.91 | 66.76 | 18.38 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 4.91 | 66.91 | 18.65 |      | 90.0  |         |
|           |                                                | Z | 5.05 | 66.76 | 18.56 |      | 90.0  |         |

|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 0.83   | 66.43  | 12.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.90   | 67.46  | 13.02 |      | 150.0 |         |
|           |                                                     | Z | 0.87   | 65.72  | 12.74 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 0.60   | 60.00  | 4.03  | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 1.74   | 63.67  | 4.99  |      | 80.0  |         |
|           |                                                     | Z | 0.50   | 57.10  | 2.51  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 100.00 | 111.84 | 24.82 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 100.00 | 114.47 | 25.69 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 118.36 | 28.12 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 1.87   | 68.36  | 15.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.92   | 68.79  | 16.27 |      | 150.0 |         |
|           |                                                     | Z | 1.83   | 67.16  | 15.53 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 1.83   | 68.30  | 15.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.88   | 68.76  | 16.25 |      | 150.0 |         |
|           |                                                     | Z | 1.79   | 67.10  | 15.49 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 6.23   | 83.81  | 29.72 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 7.34   | 90.66  | 33.54 |      | 60.0  |         |
|           |                                                     | Z | 7.51   | 87.64  | 31.39 |      | 60.0  |         |
| 10100-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.10   | 70.42  | 16.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.17   | 70.79  | 17.14 |      | 150.0 |         |
|           |                                                     | Z | 3.14   | 69.95  | 16.56 |      | 150.0 |         |
| 10101-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.21   | 67.53  | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.24   | 67.71  | 16.18 |      | 150.0 |         |
|           |                                                     | Z | 3.28   | 67.33  | 15.89 |      | 150.0 |         |
| 10102-CAC | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.31   | 67.53  | 16.15 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.34   | 67.67  | 16.26 |      | 150.0 |         |
|           |                                                     | Z | 3.39   | 67.31  | 16.00 |      | 150.0 |         |
| 10103-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 5.23   | 73.47  | 19.72 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 5.84   | 75.95  | 21.01 |      | 65.0  |         |
|           |                                                     | Z | 5.88   | 74.83  | 20.39 |      | 65.0  |         |
| 10104-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 5.46   | 71.98  | 19.77 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 5.63   | 73.01  | 20.49 |      | 65.0  |         |
|           |                                                     | Z | 6.00   | 73.07  | 20.39 |      | 65.0  |         |
| 10105-CAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 5.42   | 71.61  | 19.91 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 5.43   | 72.06  | 20.36 |      | 65.0  |         |
|           |                                                     | Z | 5.47   | 71.05  | 19.77 |      | 65.0  |         |
| 10108-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 2.70   | 69.72  | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.76   | 70.10  | 16.99 |      | 150.0 |         |
|           |                                                     | Z | 2.75   | 69.19  | 16.39 |      | 150.0 |         |
| 10109-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 2.86   | 67.48  | 15.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.89   | 67.67  | 16.11 |      | 150.0 |         |
|           |                                                     | Z | 2.94   | 67.16  | 15.80 |      | 150.0 |         |
| 10110-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.18   | 68.93  | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.24   | 69.40  | 16.63 |      | 150.0 |         |
|           |                                                     | Z | 2.24   | 68.24  | 15.99 |      | 150.0 |         |
| 10111-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.61   | 68.71  | 16.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.63   | 68.84  | 16.47 |      | 150.0 |         |
|           |                                                     | Z | 2.65   | 67.91  | 16.10 |      | 150.0 |         |



|           |                                                |   |      |       |       |      |       |         |
|-----------|------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10112-CAD | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 2.99 | 67.52 | 16.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.01 | 67.67 | 16.15 |      | 150.0 |         |
|           |                                                | Z | 3.06 | 67.16 | 15.86 |      | 150.0 |         |
| 10113-CAD | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 2.77 | 68.89 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.78 | 68.97 | 16.58 |      | 150.0 |         |
|           |                                                | Z | 2.81 | 68.06 | 16.24 |      | 150.0 |         |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.09 | 67.23 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.10 | 67.28 | 16.60 |      | 150.0 |         |
|           |                                                | Z | 5.19 | 67.11 | 16.46 |      | 150.0 |         |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.34 | 67.29 | 16.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.35 | 67.33 | 16.63 |      | 150.0 |         |
|           |                                                | Z | 5.51 | 67.33 | 16.58 |      | 150.0 |         |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.18 | 67.42 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.19 | 67.47 | 16.62 |      | 150.0 |         |
|           |                                                | Z | 5.30 | 67.34 | 16.50 |      | 150.0 |         |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.06 | 67.11 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.07 | 67.16 | 16.56 |      | 150.0 |         |
|           |                                                | Z | 5.16 | 66.99 | 16.42 |      | 150.0 |         |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.42 | 67.49 | 16.69 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.44 | 67.54 | 16.74 |      | 150.0 |         |
|           |                                                | Z | 5.60 | 67.55 | 16.70 |      | 150.0 |         |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.16 | 67.38 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.17 | 67.43 | 16.62 |      | 150.0 |         |
|           |                                                | Z | 5.27 | 67.27 | 16.48 |      | 150.0 |         |
| 10140-CAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.34 | 67.53 | 16.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.37 | 67.68 | 16.18 |      | 150.0 |         |
|           |                                                | Z | 3.42 | 67.31 | 15.91 |      | 150.0 |         |
| 10141-CAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.47 | 67.67 | 16.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.49 | 67.79 | 16.35 |      | 150.0 |         |
|           |                                                | Z | 3.55 | 67.42 | 16.09 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 1.97 | 69.09 | 15.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.03 | 69.63 | 16.28 |      | 150.0 |         |
|           |                                                | Z | 2.02 | 68.20 | 15.69 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 2.49 | 69.65 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.52 | 69.83 | 16.12 |      | 150.0 |         |
|           |                                                | Z | 2.51 | 68.62 | 15.86 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.16 | 66.67 | 13.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.21 | 66.99 | 14.22 |      | 150.0 |         |
|           |                                                | Z | 2.30 | 66.43 | 14.30 |      | 150.0 |         |
| 10145-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 1.07 | 64.11 | 10.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.11 | 64.57 | 11.01 |      | 150.0 |         |
|           |                                                | Z | 1.31 | 65.51 | 12.40 |      | 150.0 |         |
| 10146-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 1.34 | 62.65 | 9.02  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.43 | 63.27 | 9.42  |      | 150.0 |         |
|           |                                                | Z | 2.01 | 66.35 | 12.18 |      | 150.0 |         |
| 10147-CAD | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 1.45 | 63.47 | 9.57  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.57 | 64.27 | 10.06 |      | 150.0 |         |
|           |                                                | Z | 2.34 | 68.34 | 13.28 |      | 150.0 |         |

|           |                                            |   |      |       |       |      |       |         |
|-----------|--------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10149-CAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 2.87 | 67.55 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.90 | 67.73 | 16.15 |      | 150.0 |         |
|           |                                            | Z | 2.95 | 67.22 | 15.84 |      | 150.0 |         |
| 10150-CAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 3.00 | 67.58 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.02 | 67.73 | 16.20 |      | 150.0 |         |
|           |                                            | Z | 3.07 | 67.21 | 15.90 |      | 150.0 |         |
| 10151-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 5.65 | 76.57 | 21.08 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 6.17 | 78.83 | 22.29 |      | 65.0  |         |
|           |                                            | Z | 6.35 | 77.82 | 21.74 |      | 65.0  |         |
| 10152-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 4.98 | 71.84 | 19.37 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 5.18 | 73.09 | 20.20 |      | 65.0  |         |
|           |                                            | Z | 5.53 | 73.00 | 20.11 |      | 65.0  |         |
| 10153-CAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 5.35 | 72.93 | 20.23 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 5.53 | 74.06 | 20.99 |      | 65.0  |         |
|           |                                            | Z | 5.88 | 73.94 | 20.90 |      | 65.0  |         |
| 10154-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.24 | 69.40 | 16.63 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.29 | 69.81 | 16.88 |      | 150.0 |         |
|           |                                            | Z | 2.29 | 68.69 | 16.27 |      | 150.0 |         |
| 10155-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.62 | 68.74 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.64 | 68.87 | 16.49 |      | 150.0 |         |
|           |                                            | Z | 2.65 | 67.91 | 16.11 |      | 150.0 |         |
| 10156-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 1.81 | 69.21 | 15.68 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 1.88 | 69.80 | 16.04 |      | 150.0 |         |
|           |                                            | Z | 1.87 | 68.31 | 15.53 |      | 150.0 |         |
| 10157-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 2.01 | 67.27 | 13.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.06 | 67.66 | 14.24 |      | 150.0 |         |
|           |                                            | Z | 2.13 | 67.00 | 14.37 |      | 150.0 |         |
| 10158-CAD | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 2.78 | 68.97 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.79 | 69.05 | 16.63 |      | 150.0 |         |
|           |                                            | Z | 2.81 | 68.12 | 16.28 |      | 150.0 |         |
| 10159-CAD | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.12 | 67.76 | 14.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.17 | 68.10 | 14.50 |      | 150.0 |         |
|           |                                            | Z | 2.25 | 67.49 | 14.68 |      | 150.0 |         |
| 10160-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 2.73 | 68.96 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.78 | 69.27 | 16.76 |      | 150.0 |         |
|           |                                            | Z | 2.78 | 68.34 | 16.22 |      | 150.0 |         |
| 10161-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 2.89 | 67.56 | 16.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.92 | 67.72 | 16.12 |      | 150.0 |         |
|           |                                            | Z | 2.97 | 67.14 | 15.84 |      | 150.0 |         |
| 10162-CAC | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 3.00 | 67.76 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.03 | 67.89 | 16.24 |      | 150.0 |         |
|           |                                            | Z | 3.08 | 67.27 | 15.94 |      | 150.0 |         |
| 10166-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 3.29 | 68.55 | 18.62 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.39 | 69.14 | 19.00 |      | 150.0 |         |
|           |                                            | Z | 3.56 | 68.77 | 18.74 |      | 150.0 |         |
| 10167-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 3.85 | 70.83 | 18.84 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.06 | 71.87 | 19.39 |      | 150.0 |         |
|           |                                            | Z | 4.27 | 71.19 | 19.04 |      | 150.0 |         |

|           |                                            |   |       |       |       |      |       |         |
|-----------|--------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10168-CAD | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 4.31  | 73.34 | 20.36 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.51  | 74.19 | 20.77 |      | 150.0 |         |
|           |                                            | Z | 4.72  | 73.40 | 20.38 |      | 150.0 |         |
| 10169-CAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 2.65  | 67.07 | 17.95 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.76  | 67.90 | 18.46 |      | 150.0 |         |
|           |                                            | Z | 2.95  | 68.18 | 18.47 |      | 150.0 |         |
| 10170-CAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 3.35  | 71.83 | 19.98 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.58  | 73.08 | 20.56 |      | 150.0 |         |
|           |                                            | Z | 3.90  | 73.37 | 20.58 |      | 150.0 |         |
| 10171-AAC | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 2.80  | 68.11 | 17.24 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.01  | 69.49 | 17.99 |      | 150.0 |         |
|           |                                            | Z | 3.23  | 69.44 | 17.85 |      | 150.0 |         |
| 10172-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 3.65  | 76.31 | 22.99 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 5.48  | 85.89 | 27.40 |      | 65.0  |         |
|           |                                            | Z | 5.55  | 83.03 | 25.87 |      | 65.0  |         |
| 10173-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 6.66  | 85.15 | 24.55 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 10.56 | 95.03 | 28.43 |      | 65.0  |         |
|           |                                            | Z | 12.26 | 94.72 | 28.10 |      | 65.0  |         |
| 10174-CAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 4.93  | 79.32 | 21.92 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.98  | 90.91 | 26.48 |      | 65.0  |         |
|           |                                            | Z | 8.81  | 87.78 | 25.30 |      | 65.0  |         |
| 10175-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 2.62  | 66.79 | 17.70 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.73  | 67.64 | 18.24 |      | 150.0 |         |
|           |                                            | Z | 2.91  | 67.87 | 18.21 |      | 150.0 |         |
| 10176-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 3.35  | 71.86 | 19.99 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.58  | 73.10 | 20.58 |      | 150.0 |         |
|           |                                            | Z | 3.90  | 73.39 | 20.59 |      | 150.0 |         |
| 10177-CAF | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 2.64  | 66.92 | 17.79 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.75  | 67.76 | 18.31 |      | 150.0 |         |
|           |                                            | Z | 2.94  | 68.03 | 18.32 |      | 150.0 |         |
| 10178-CAD | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 3.33  | 71.68 | 19.88 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.56  | 72.95 | 20.49 |      | 150.0 |         |
|           |                                            | Z | 3.86  | 73.15 | 20.45 |      | 150.0 |         |
| 10179-CAD | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 3.04  | 69.83 | 18.46 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.27  | 71.21 | 19.16 |      | 150.0 |         |
|           |                                            | Z | 3.53  | 71.24 | 19.06 |      | 150.0 |         |
| 10180-CAD | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 2.79  | 68.06 | 17.20 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.00  | 69.44 | 17.95 |      | 150.0 |         |
|           |                                            | Z | 3.23  | 69.37 | 17.80 |      | 150.0 |         |
| 10181-CAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 2.64  | 66.91 | 17.79 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.74  | 67.75 | 18.31 |      | 150.0 |         |
|           |                                            | Z | 2.93  | 68.01 | 18.31 |      | 150.0 |         |
| 10182-CAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 3.32  | 71.66 | 19.87 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.55  | 72.93 | 20.48 |      | 150.0 |         |
|           |                                            | Z | 3.85  | 73.13 | 20.44 |      | 150.0 |         |
| 10183-AAB | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 2.79  | 68.04 | 17.19 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.00  | 69.42 | 17.94 |      | 150.0 |         |
|           |                                            | Z | 3.22  | 69.35 | 17.79 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 2.65 | 66.95 | 17.81 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 2.75 | 67.79 | 18.33 |      | 150.0 |         |
|           |                                               | Z | 2.95 | 68.05 | 18.33 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 3.34 | 71.72 | 19.91 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.57 | 72.99 | 20.51 |      | 150.0 |         |
|           |                                               | Z | 3.87 | 73.20 | 20.48 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 2.80 | 68.09 | 17.22 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.01 | 69.48 | 17.97 |      | 150.0 |         |
|           |                                               | Z | 3.23 | 69.41 | 17.82 |      | 150.0 |         |
| 10187-CAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 2.66 | 67.00 | 17.88 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 2.76 | 67.84 | 18.40 |      | 150.0 |         |
|           |                                               | Z | 2.95 | 68.09 | 18.39 |      | 150.0 |         |
| 10188-CAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 3.43 | 72.31 | 20.28 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.66 | 73.53 | 20.84 |      | 150.0 |         |
|           |                                               | Z | 4.00 | 73.86 | 20.87 |      | 150.0 |         |
| 10189-AAD | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 2.85 | 68.45 | 17.48 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.07 | 69.84 | 18.22 |      | 150.0 |         |
|           |                                               | Z | 3.30 | 69.81 | 18.09 |      | 150.0 |         |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.48 | 66.73 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.49 | 66.78 | 16.30 |      | 150.0 |         |
|           |                                               | Z | 4.58 | 66.49 | 16.16 |      | 150.0 |         |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.63 | 67.01 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.65 | 67.06 | 16.43 |      | 150.0 |         |
|           |                                               | Z | 4.76 | 66.82 | 16.28 |      | 150.0 |         |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.67 | 67.04 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.69 | 67.09 | 16.44 |      | 150.0 |         |
|           |                                               | Z | 4.80 | 66.85 | 16.30 |      | 150.0 |         |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.47 | 66.77 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.48 | 66.82 | 16.30 |      | 150.0 |         |
|           |                                               | Z | 4.59 | 66.56 | 16.19 |      | 150.0 |         |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 4.64 | 67.02 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.66 | 67.08 | 16.44 |      | 150.0 |         |
|           |                                               | Z | 4.78 | 66.84 | 16.30 |      | 150.0 |         |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 4.67 | 67.05 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.68 | 67.10 | 16.45 |      | 150.0 |         |
|           |                                               | Z | 4.81 | 66.86 | 16.31 |      | 150.0 |         |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.42 | 66.79 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.44 | 66.84 | 16.27 |      | 150.0 |         |
|           |                                               | Z | 4.54 | 66.57 | 16.15 |      | 150.0 |         |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 4.64 | 66.99 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.65 | 67.04 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.77 | 66.82 | 16.29 |      | 150.0 |         |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 4.68 | 66.98 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.69 | 67.03 | 16.44 |      | 150.0 |         |
|           |                                               | Z | 4.81 | 66.80 | 16.30 |      | 150.0 |         |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.03 | 67.11 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.04 | 67.15 | 16.55 |      | 150.0 |         |
|           |                                               | Z | 5.14 | 67.00 | 16.41 |      | 150.0 |         |

|           |                                           |   |       |       |       |      |       |         |
|-----------|-------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.33  | 67.33 | 16.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.34  | 67.38 | 16.68 |      | 150.0 |         |
|           |                                           | Z | 5.45  | 67.21 | 16.54 |      | 150.0 |         |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.07  | 67.22 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.09  | 67.26 | 16.53 |      | 150.0 |         |
|           |                                           | Z | 5.18  | 67.11 | 16.40 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 2.76  | 66.33 | 15.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.78  | 66.46 | 15.44 |      | 150.0 |         |
|           |                                           | Z | 2.85  | 65.93 | 15.34 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 7.05  | 86.26 | 25.03 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 11.33 | 96.43 | 28.97 |      | 65.0  |         |
|           |                                           | Z | 13.18 | 96.17 | 28.66 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 7.07  | 85.23 | 24.04 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 11.45 | 95.09 | 27.83 |      | 65.0  |         |
|           |                                           | Z | 12.76 | 94.16 | 27.40 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 4.84  | 82.15 | 25.37 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 6.17  | 88.64 | 28.46 |      | 65.0  |         |
|           |                                           | Z | 7.76  | 90.12 | 28.51 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 6.71  | 85.26 | 24.59 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.65 | 95.13 | 28.47 |      | 65.0  |         |
|           |                                           | Z | 12.36 | 94.84 | 28.14 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 6.68  | 84.20 | 23.61 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.65 | 93.73 | 27.33 |      | 65.0  |         |
|           |                                           | Z | 11.94 | 92.89 | 26.92 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 4.67  | 81.40 | 24.99 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 5.94  | 87.77 | 28.07 |      | 65.0  |         |
|           |                                           | Z | 7.43  | 89.17 | 28.10 |      | 65.0  |         |
| 10232-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 6.69  | 85.24 | 24.58 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.63 | 95.12 | 28.47 |      | 65.0  |         |
|           |                                           | Z | 12.34 | 94.82 | 28.14 |      | 65.0  |         |
| 10233-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 6.66  | 84.17 | 23.60 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.62 | 93.69 | 27.32 |      | 65.0  |         |
|           |                                           | Z | 11.91 | 92.86 | 26.91 |      | 65.0  |         |
| 10234-CAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 4.54  | 80.75 | 24.63 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 5.76  | 87.05 | 27.69 |      | 65.0  |         |
|           |                                           | Z | 7.17  | 88.32 | 27.68 |      | 65.0  |         |
| 10235-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 6.69  | 85.26 | 24.59 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.64 | 95.16 | 28.48 |      | 65.0  |         |
|           |                                           | Z | 12.35 | 94.85 | 28.15 |      | 65.0  |         |
| 10236-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 6.73  | 84.30 | 23.64 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.78 | 93.91 | 27.38 |      | 65.0  |         |
|           |                                           | Z | 12.05 | 93.03 | 26.96 |      | 65.0  |         |
| 10237-CAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 4.67  | 81.42 | 25.00 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 5.94  | 87.83 | 28.10 |      | 65.0  |         |
|           |                                           | Z | 7.43  | 89.21 | 28.12 |      | 65.0  |         |
| 10238-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 6.68  | 85.21 | 24.57 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 10.60 | 95.09 | 28.46 |      | 65.0  |         |
|           |                                           | Z | 12.31 | 94.79 | 28.13 |      | 65.0  |         |

|           |                                            |   |       |       |       |      |      |         |
|-----------|--------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10239-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 6.64  | 84.13 | 23.58 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 10.57 | 93.64 | 27.30 |      | 65.0 |         |
|           |                                            | Z | 11.87 | 92.82 | 26.90 |      | 65.0 |         |
| 10240-CAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 4.66  | 81.38 | 24.99 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.92  | 87.78 | 28.08 |      | 65.0 |         |
|           |                                            | Z | 7.41  | 89.16 | 28.10 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 6.49  | 77.69 | 23.88 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.06  | 80.22 | 25.34 |      | 65.0 |         |
|           |                                            | Z | 7.33  | 78.75 | 24.61 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 5.69  | 74.96 | 22.63 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.72  | 79.20 | 24.84 |      | 65.0 |         |
|           |                                            | Z | 6.48  | 76.10 | 23.39 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 5.22  | 73.93 | 23.04 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.37  | 75.23 | 24.06 |      | 65.0 |         |
|           |                                            | Z | 5.30  | 72.76 | 22.72 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 4.03  | 70.70 | 15.63 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 4.63  | 73.27 | 17.01 |      | 65.0 |         |
|           |                                            | Z | 5.80  | 76.12 | 19.17 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 3.94  | 70.12 | 15.32 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 4.47  | 72.48 | 16.60 |      | 65.0 |         |
|           |                                            | Z | 5.67  | 75.49 | 18.85 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 4.17  | 75.16 | 18.15 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.29  | 79.64 | 20.23 |      | 65.0 |         |
|           |                                            | Z | 5.81  | 80.17 | 21.10 |      | 65.0 |         |
| 10247-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 4.10  | 71.58 | 17.29 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 4.43  | 73.43 | 18.37 |      | 65.0 |         |
|           |                                            | Z | 4.92  | 74.07 | 19.21 |      | 65.0 |         |
| 10248-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 4.07  | 70.96 | 16.98 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 4.37  | 72.65 | 17.99 |      | 65.0 |         |
|           |                                            | Z | 4.90  | 73.42 | 18.88 |      | 65.0 |         |
| 10249-CAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 5.33  | 79.24 | 20.92 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.73  | 84.01 | 23.05 |      | 65.0 |         |
|           |                                            | Z | 6.62  | 82.34 | 22.76 |      | 65.0 |         |
| 10250-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 4.99  | 74.32 | 20.40 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.24  | 75.79 | 21.30 |      | 65.0 |         |
|           |                                            | Z | 5.59  | 75.60 | 21.35 |      | 65.0 |         |
| 10251-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 4.75  | 72.14 | 19.02 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 4.99  | 73.56 | 19.92 |      | 65.0 |         |
|           |                                            | Z | 5.35  | 73.44 | 20.02 |      | 65.0 |         |
| 10252-CAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 5.62  | 79.05 | 22.01 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 6.48  | 82.42 | 23.65 |      | 65.0 |         |
|           |                                            | Z | 6.49  | 80.72 | 22.96 |      | 65.0 |         |
| 10253-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 4.91  | 71.43 | 19.12 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.09  | 72.60 | 19.93 |      | 65.0 |         |
|           |                                            | Z | 5.40  | 72.41 | 19.86 |      | 65.0 |         |
| 10254-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 5.23  | 72.40 | 19.88 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 5.41  | 73.49 | 20.63 |      | 65.0 |         |
|           |                                            | Z | 5.73  | 73.30 | 20.57 |      | 65.0 |         |

|           |                                             |   |      |       |       |      |      |         |
|-----------|---------------------------------------------|---|------|-------|-------|------|------|---------|
| 10255-CAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 5.37 | 75.82 | 20.95 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.81 | 77.90 | 22.11 |      | 65.0 |         |
|           |                                             | Z | 5.98 | 76.90 | 21.60 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 2.95 | 66.44 | 12.43 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 3.25 | 68.14 | 13.47 |      | 65.0 |         |
|           |                                             | Z | 4.63 | 72.57 | 16.66 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 2.90 | 65.89 | 12.05 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 3.14 | 67.36 | 12.98 |      | 65.0 |         |
|           |                                             | Z | 4.49 | 71.73 | 16.18 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 2.90 | 69.51 | 14.64 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 3.44 | 72.54 | 16.25 |      | 65.0 |         |
|           |                                             | Z | 4.52 | 75.89 | 18.60 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 4.46 | 72.72 | 18.47 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 4.78 | 74.47 | 19.50 |      | 65.0 |         |
|           |                                             | Z | 5.19 | 74.62 | 19.97 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 4.49 | 72.43 | 18.33 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 4.79 | 74.08 | 19.32 |      | 65.0 |         |
|           |                                             | Z | 5.22 | 74.34 | 19.84 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 5.17 | 78.27 | 21.02 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.16 | 82.12 | 22.85 |      | 65.0 |         |
|           |                                             | Z | 6.14 | 80.53 | 22.44 |      | 65.0 |         |
| 10262-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 4.98 | 74.25 | 20.35 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.23 | 75.73 | 21.26 |      | 65.0 |         |
|           |                                             | Z | 5.58 | 75.55 | 21.31 |      | 65.0 |         |
| 10263-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 4.74 | 72.12 | 19.01 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 4.98 | 73.53 | 19.91 |      | 65.0 |         |
|           |                                             | Z | 5.34 | 73.42 | 20.01 |      | 65.0 |         |
| 10264-CAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 5.56 | 78.83 | 21.90 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.41 | 82.18 | 23.54 |      | 65.0 |         |
|           |                                             | Z | 6.42 | 80.51 | 22.86 |      | 65.0 |         |
| 10265-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 4.98 | 71.84 | 19.37 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.18 | 73.09 | 20.20 |      | 65.0 |         |
|           |                                             | Z | 5.53 | 73.00 | 20.12 |      | 65.0 |         |
| 10266-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 5.34 | 72.91 | 20.22 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.53 | 74.04 | 20.98 |      | 65.0 |         |
|           |                                             | Z | 5.88 | 73.92 | 20.89 |      | 65.0 |         |
| 10267-CAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 5.64 | 76.53 | 21.06 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 6.16 | 78.78 | 22.27 |      | 65.0 |         |
|           |                                             | Z | 6.34 | 77.78 | 21.72 |      | 65.0 |         |
| 10268-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 5.63 | 71.94 | 19.85 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.78 | 72.88 | 20.51 |      | 65.0 |         |
|           |                                             | Z | 6.14 | 72.88 | 20.41 |      | 65.0 |         |
| 10269-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 5.64 | 71.57 | 19.72 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.77 | 72.45 | 20.36 |      | 65.0 |         |
|           |                                             | Z | 6.12 | 72.44 | 20.27 |      | 65.0 |         |
| 10270-CAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 5.66 | 74.09 | 20.17 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 5.94 | 75.48 | 21.01 |      | 65.0 |         |
|           |                                             | Z | 6.22 | 75.05 | 20.69 |      | 65.0 |         |

|           |                                                                    |   |       |       |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.58  | 66.84 | 15.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.61  | 67.05 | 15.49 |      | 150.0 |         |
|           |                                                                    | Z | 2.61  | 66.19 | 15.19 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 1.62  | 68.33 | 15.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.68  | 69.01 | 16.23 |      | 150.0 |         |
|           |                                                                    | Z | 1.61  | 67.33 | 15.34 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 1.71  | 60.26 | 5.85  | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 1.46  | 60.00 | 5.35  |      | 50.0  |         |
|           |                                                                    | Z | 2.08  | 61.87 | 7.57  |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 3.48  | 68.77 | 13.21 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 3.86  | 71.42 | 14.38 |      | 50.0  |         |
|           |                                                                    | Z | 7.61  | 81.06 | 19.61 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 3.59  | 69.09 | 13.42 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 4.03  | 71.88 | 14.65 |      | 50.0  |         |
|           |                                                                    | Z | 7.80  | 81.31 | 19.76 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 1.38  | 68.75 | 13.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.49  | 69.81 | 14.11 |      | 150.0 |         |
|           |                                                                    | Z | 1.48  | 68.40 | 14.11 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 0.81  | 66.18 | 12.25 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.88  | 67.15 | 12.85 |      | 150.0 |         |
|           |                                                                    | Z | 0.85  | 65.51 | 12.62 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 1.25  | 72.63 | 15.60 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.48  | 75.02 | 16.70 |      | 150.0 |         |
|           |                                                                    | Z | 1.05  | 69.24 | 14.85 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 3.55  | 87.18 | 21.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 4.57  | 90.90 | 22.67 |      | 150.0 |         |
|           |                                                                    | Z | 1.55  | 74.98 | 17.80 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 10.90 | 87.79 | 24.10 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 17.38 | 97.96 | 27.91 |      | 50.0  |         |
|           |                                                                    | Z | 9.27  | 86.92 | 25.25 |      | 50.0  |         |
| 10297-AAB | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 2.71  | 69.84 | 16.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.77  | 70.21 | 17.06 |      | 150.0 |         |
|           |                                                                    | Z | 2.77  | 69.29 | 16.46 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 1.47  | 67.49 | 13.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.54  | 68.13 | 14.02 |      | 150.0 |         |
|           |                                                                    | Z | 1.61  | 67.49 | 14.26 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 1.91  | 66.04 | 11.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.08  | 67.06 | 12.49 |      | 150.0 |         |
|           |                                                                    | Z | 2.55  | 68.88 | 14.29 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 1.52  | 62.84 | 9.56  | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.60  | 63.32 | 9.89  |      | 150.0 |         |
|           |                                                                    | Z | 2.01  | 64.97 | 11.67 |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 4.49  | 64.94 | 17.15 | 4.17 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 4.51  | 65.12 | 17.33 |      | 50.0  |         |
|           |                                                                    | Z | 4.77  | 65.09 | 17.35 |      | 50.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 4.98  | 65.58 | 17.87 | 4.96 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 5.02  | 65.83 | 18.08 |      | 50.0  |         |
|           |                                                                    | Z | 5.23  | 65.61 | 18.00 |      | 50.0  |         |



|           |                                                                     |   |      |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 4.72 | 65.17 | 17.66 | 4.96  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 4.76 | 65.39 | 17.86 |       | 50.0  |         |
|           |                                                                     | Z | 4.98 | 65.24 | 17.83 |       | 50.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 4.56 | 65.16 | 17.23 | 4.17  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 4.60 | 65.38 | 17.42 |       | 50.0  |         |
|           |                                                                     | Z | 4.79 | 65.14 | 17.34 |       | 50.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 4.06 | 66.26 | 18.68 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 3.98 | 66.05 | 18.73 |       | 35.0  |         |
|           |                                                                     | Z | 4.32 | 66.47 | 19.19 |       | 35.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 4.43 | 65.65 | 18.52 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.40 | 65.62 | 18.63 |       | 35.0  |         |
|           |                                                                     | Z | 4.69 | 65.80 | 18.88 |       | 35.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 4.31 | 65.69 | 18.43 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.27 | 65.62 | 18.52 |       | 35.0  |         |
|           |                                                                     | Z | 4.59 | 65.95 | 18.85 |       | 35.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 4.28 | 65.86 | 18.56 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.24 | 65.78 | 18.65 |       | 35.0  |         |
|           |                                                                     | Z | 4.55 | 66.08 | 18.95 |       | 35.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 4.47 | 65.79 | 18.63 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.44 | 65.78 | 18.76 |       | 35.0  |         |
|           |                                                                     | Z | 4.75 | 66.03 | 19.03 |       | 35.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 4.38 | 65.69 | 18.49 | 6.02  | 35.0  | ± 9.6 % |
|           |                                                                     | Y | 4.34 | 65.63 | 18.59 |       | 35.0  |         |
|           |                                                                     | Z | 4.64 | 65.84 | 18.85 |       | 35.0  |         |
| 10311-AAB | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.08 | 69.08 | 16.47 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 3.14 | 69.40 | 16.66 |       | 150.0 |         |
|           |                                                                     | Z | 3.12 | 68.62 | 16.13 |       | 150.0 |         |
| 10313-AAA | iDEN 1:3                                                            | X | 2.89 | 72.65 | 16.29 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 4.19 | 78.79 | 18.89 |       | 70.0  |         |
|           |                                                                     | Z | 4.02 | 76.71 | 18.18 |       | 70.0  |         |
| 10314-AAA | iDEN 1:6                                                            | X | 5.30 | 83.78 | 23.47 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 6.55 | 89.94 | 26.15 |       | 30.0  |         |
|           |                                                                     | Z | 6.97 | 88.50 | 25.50 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.08 | 63.77 | 15.30 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.10 | 64.11 | 15.62 |       | 150.0 |         |
|           |                                                                     | Z | 1.08 | 63.32 | 14.99 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.51 | 66.68 | 16.32 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.53 | 66.78 | 16.42 |       | 150.0 |         |
|           |                                                                     | Z | 4.64 | 66.54 | 16.30 |       | 150.0 |         |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.51 | 66.68 | 16.32 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.53 | 66.78 | 16.42 |       | 150.0 |         |
|           |                                                                     | Z | 4.64 | 66.54 | 16.30 |       | 150.0 |         |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 4.61 | 67.03 | 16.35 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.63 | 67.11 | 16.42 |       | 150.0 |         |
|           |                                                                     | Z | 4.76 | 66.86 | 16.27 |       | 150.0 |         |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.34 | 67.18 | 16.51 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.36 | 67.26 | 16.59 |       | 150.0 |         |
|           |                                                                     | Z | 5.46 | 67.09 | 16.45 |       | 150.0 |         |

|           |                                                                                |   |        |        |       |      |       |         |
|-----------|--------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                            | X | 5.59   | 67.45  | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.60   | 67.49  | 16.57 |      | 150.0 |         |
|           |                                                                                | Z | 5.71   | 67.42  | 16.48 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                     | X | 1.38   | 68.75  | 13.54 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.49   | 69.81  | 14.11 |      | 115.0 |         |
|           |                                                                                | Z | 1.48   | 68.40  | 14.11 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                     | X | 1.38   | 68.75  | 13.54 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.49   | 69.81  | 14.11 |      | 115.0 |         |
|           |                                                                                | Z | 1.48   | 68.40  | 14.11 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                           | X | 17.35  | 99.43  | 24.90 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                | Y | 63.25  | 115.82 | 28.80 |      | 100.0 |         |
|           |                                                                                | Z | 11.61  | 93.88  | 24.12 |      | 100.0 |         |
| 10410-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)                 | X | 8.36   | 91.25  | 22.62 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                | Y | 100.00 | 127.16 | 32.13 |      | 80.0  |         |
|           |                                                                                | Z | 100.00 | 125.70 | 32.09 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                      | X | 1.03   | 63.22  | 14.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 1.04   | 63.49  | 15.13 |      | 150.0 |         |
|           |                                                                                | Z | 1.02   | 62.64  | 14.46 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                  | X | 4.48   | 66.75  | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.49   | 66.81  | 16.37 |      | 150.0 |         |
|           |                                                                                | Z | 4.59   | 66.53  | 16.22 |      | 150.0 |         |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                      | X | 4.48   | 66.75  | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.49   | 66.81  | 16.37 |      | 150.0 |         |
|           |                                                                                | Z | 4.59   | 66.53  | 16.22 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)  | X | 4.47   | 66.94  | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.48   | 67.00  | 16.41 |      | 150.0 |         |
|           |                                                                                | Z | 4.58   | 66.68  | 16.24 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.49   | 66.88  | 16.34 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.50   | 66.93  | 16.40 |      | 150.0 |         |
|           |                                                                                | Z | 4.60   | 66.63  | 16.24 |      | 150.0 |         |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                   | X | 4.60   | 66.86  | 16.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.61   | 66.91  | 16.41 |      | 150.0 |         |
|           |                                                                                | Z | 4.72   | 66.64  | 16.26 |      | 150.0 |         |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                | X | 4.74   | 67.14  | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.76   | 67.20  | 16.51 |      | 150.0 |         |
|           |                                                                                | Z | 4.89   | 66.97  | 16.38 |      | 150.0 |         |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                | X | 4.67   | 67.10  | 16.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.68   | 67.15  | 16.49 |      | 150.0 |         |
|           |                                                                                | Z | 4.81   | 66.91  | 16.35 |      | 150.0 |         |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                    | X | 5.29   | 67.34  | 16.60 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.30   | 67.39  | 16.66 |      | 150.0 |         |
|           |                                                                                | Z | 5.42   | 67.29  | 16.55 |      | 150.0 |         |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                  | X | 5.31   | 67.43  | 16.64 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.32   | 67.48  | 16.70 |      | 150.0 |         |
|           |                                                                                | Z | 5.43   | 67.30  | 16.56 |      | 150.0 |         |

|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.30   | 67.32  | 16.58 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.31   | 67.37  | 16.64 |      | 150.0 |         |
|           |                                                                | Z | 5.44   | 67.28  | 16.54 |      | 150.0 |         |
| 10430-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.41   | 72.30  | 18.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.28   | 71.61  | 18.44 |      | 150.0 |         |
|           |                                                                | Z | 4.35   | 70.84  | 18.35 |      | 150.0 |         |
| 10431-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.12   | 67.35  | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.14   | 67.43  | 16.34 |      | 150.0 |         |
|           |                                                                | Z | 4.27   | 67.06  | 16.22 |      | 150.0 |         |
| 10432-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.43   | 67.18  | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.45   | 67.24  | 16.44 |      | 150.0 |         |
|           |                                                                | Z | 4.58   | 66.95  | 16.29 |      | 150.0 |         |
| 10433-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 4.69   | 67.13  | 16.45 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.70   | 67.18  | 16.51 |      | 150.0 |         |
|           |                                                                | Z | 4.82   | 66.95  | 16.37 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.58   | 73.43  | 18.77 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.41   | 72.61  | 18.39 |      | 150.0 |         |
|           |                                                                | Z | 4.46   | 71.72  | 18.35 |      | 150.0 |         |
| 10435-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 7.84   | 90.24  | 22.26 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 100.00 | 126.90 | 32.00 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 125.48 | 31.98 |      | 80.0  |         |
| 10447-AAA | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.40   | 67.35  | 15.41 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.42   | 67.47  | 15.52 |      | 150.0 |         |
|           |                                                                | Z | 3.56   | 67.03  | 15.56 |      | 150.0 |         |
| 10448-AAA | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 3.98   | 67.14  | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.00   | 67.22  | 16.21 |      | 150.0 |         |
|           |                                                                | Z | 4.11   | 66.83  | 16.08 |      | 150.0 |         |
| 10449-AAA | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.26   | 67.02  | 16.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.28   | 67.08  | 16.34 |      | 150.0 |         |
|           |                                                                | Z | 4.38   | 66.77  | 16.19 |      | 150.0 |         |
| 10450-AAA | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.47   | 66.91  | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.48   | 66.96  | 16.37 |      | 150.0 |         |
|           |                                                                | Z | 4.58   | 66.71  | 16.22 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.25   | 67.38  | 14.88 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.28   | 67.53  | 15.01 |      | 150.0 |         |
|           |                                                                | Z | 3.46   | 67.22  | 15.21 |      | 150.0 |         |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.22   | 67.99  | 16.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.22   | 68.02  | 16.86 |      | 150.0 |         |
|           |                                                                | Z | 6.28   | 67.84  | 16.71 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.78   | 65.43  | 16.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.79   | 65.48  | 16.08 |      | 150.0 |         |
|           |                                                                | Z | 3.83   | 65.16  | 15.92 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 3.02   | 66.44  | 14.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.06   | 66.64  | 14.18 |      | 150.0 |         |
|           |                                                                | Z | 3.28   | 66.54  | 14.63 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 4.18   | 65.23  | 15.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.18   | 65.21  | 15.41 |      | 150.0 |         |
|           |                                                                | Z | 4.47   | 65.25  | 15.75 |      | 150.0 |         |

|           |                                                                   |   |       |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 0.93  | 68.87  | 16.62 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 1.00  | 70.16  | 17.38 |      | 150.0 |         |
|           |                                                                   | Z | 0.88  | 67.06  | 15.60 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 4.32  | 84.19  | 21.37 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 46.98 | 120.39 | 31.74 |      | 80.0  |         |
|           |                                                                   | Z | 70.92 | 123.84 | 32.55 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.93  | 61.17  | 8.92  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.50  | 66.22  | 11.48 |      | 80.0  |         |
|           |                                                                   | Z | 4.18  | 75.74  | 15.77 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 0.83  | 60.00  | 7.74  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.90  | 60.95  | 8.47  |      | 80.0  |         |
|           |                                                                   | Z | 1.89  | 66.55  | 11.77 |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 3.27  | 79.79  | 19.27 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 44.63 | 117.13 | 30.10 |      | 80.0  |         |
|           |                                                                   | Z | 63.16 | 119.86 | 30.88 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 0.88  | 60.65  | 8.58  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.28  | 64.64  | 10.73 |      | 80.0  |         |
|           |                                                                   | Z | 2.98  | 72.01  | 14.38 |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 0.83  | 60.00  | 7.69  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.85  | 60.44  | 8.16  |      | 80.0  |         |
|           |                                                                   | Z | 1.66  | 65.17  | 11.12 |      | 80.0  |         |
| 10467-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 3.54  | 80.96  | 19.70 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 60.93 | 121.68 | 31.18 |      | 80.0  |         |
|           |                                                                   | Z | 84.88 | 124.19 | 31.89 |      | 80.0  |         |
| 10468-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 0.89  | 60.80  | 8.68  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.33  | 65.06  | 10.94 |      | 80.0  |         |
|           |                                                                   | Z | 3.21  | 72.86  | 14.71 |      | 80.0  |         |
| 10469-AAB | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 0.83  | 60.00  | 7.69  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.85  | 60.46  | 8.17  |      | 80.0  |         |
|           |                                                                   | Z | 1.66  | 65.20  | 11.14 |      | 80.0  |         |
| 10470-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.54  | 80.99  | 19.71 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 63.11 | 122.20 | 31.29 |      | 80.0  |         |
|           |                                                                   | Z | 86.48 | 124.48 | 31.95 |      | 80.0  |         |
| 10471-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 0.88  | 60.76  | 8.65  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.32  | 64.98  | 10.89 |      | 80.0  |         |
|           |                                                                   | Z | 3.18  | 72.76  | 14.66 |      | 80.0  |         |
| 10472-AAB | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 0.83  | 60.00  | 7.68  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.84  | 60.42  | 8.13  |      | 80.0  |         |
|           |                                                                   | Z | 1.65  | 65.15  | 11.10 |      | 80.0  |         |
| 10473-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.52  | 80.93  | 19.68 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 62.71 | 122.07 | 31.26 |      | 80.0  |         |
|           |                                                                   | Z | 85.93 | 124.36 | 31.91 |      | 80.0  |         |
| 10474-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 0.88  | 60.74  | 8.64  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 1.31  | 64.94  | 10.87 |      | 80.0  |         |
|           |                                                                   | Z | 3.15  | 72.67  | 14.63 |      | 80.0  |         |
| 10475-AAB | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 0.83  | 60.00  | 7.68  | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 0.84  | 60.40  | 8.12  |      | 80.0  |         |
|           |                                                                   | Z | 1.64  | 65.11  | 11.08 |      | 80.0  |         |

|           |                                                                     |   |      |       |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10477-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 0.87 | 60.61 | 8.55  | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 1.27 | 64.59 | 10.69 |      | 80.0 |         |
|           |                                                                     | Z | 2.97 | 71.99 | 14.36 |      | 80.0 |         |
| 10478-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 0.83 | 60.00 | 7.67  | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 0.84 | 60.37 | 8.09  |      | 80.0 |         |
|           |                                                                     | Z | 1.63 | 65.04 | 11.04 |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 4.53 | 79.52 | 20.39 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 7.80 | 88.47 | 23.78 |      | 80.0 |         |
|           |                                                                     | Z | 5.78 | 82.49 | 22.28 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.53 | 72.09 | 15.68 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.36 | 79.96 | 18.76 |      | 80.0 |         |
|           |                                                                     | Z | 6.52 | 79.72 | 19.55 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 2.81 | 68.83 | 13.98 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 4.53 | 74.98 | 16.60 |      | 80.0 |         |
|           |                                                                     | Z | 5.48 | 76.73 | 18.13 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 2.20 | 68.90 | 15.09 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 2.93 | 73.22 | 17.16 |      | 80.0 |         |
|           |                                                                     | Z | 2.97 | 72.34 | 17.43 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.35 | 65.97 | 12.90 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.02 | 69.40 | 14.64 |      | 80.0 |         |
|           |                                                                     | Z | 4.23 | 73.30 | 17.24 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.28 | 65.32 | 12.60 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 2.83 | 68.32 | 14.18 |      | 80.0 |         |
|           |                                                                     | Z | 3.99 | 72.23 | 16.81 |      | 80.0 |         |
| 10485-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 2.68 | 71.36 | 17.35 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.27 | 74.89 | 19.08 |      | 80.0 |         |
|           |                                                                     | Z | 3.17 | 72.95 | 18.56 |      | 80.0 |         |
| 10486-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.64 | 67.61 | 15.00 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 2.99 | 69.69 | 16.14 |      | 80.0 |         |
|           |                                                                     | Z | 3.15 | 69.34 | 16.51 |      | 80.0 |         |
| 10487-AAB | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.64 | 67.21 | 14.79 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 2.96 | 69.13 | 15.87 |      | 80.0 |         |
|           |                                                                     | Z | 3.15 | 68.96 | 16.33 |      | 80.0 |         |
| 10488-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.00 | 70.76 | 18.02 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.34 | 72.92 | 19.20 |      | 80.0 |         |
|           |                                                                     | Z | 3.42 | 71.88 | 18.69 |      | 80.0 |         |
| 10489-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.07 | 67.95 | 16.69 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.24 | 69.09 | 17.42 |      | 80.0 |         |
|           |                                                                     | Z | 3.37 | 68.53 | 17.27 |      | 80.0 |         |
| 10490-AAB | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.16 | 67.82 | 16.63 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.32 | 68.90 | 17.33 |      | 80.0 |         |
|           |                                                                     | Z | 3.47 | 68.38 | 17.21 |      | 80.0 |         |
| 10491-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.29 | 69.57 | 17.67 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.53 | 71.04 | 18.54 |      | 80.0 |         |
|           |                                                                     | Z | 3.67 | 70.46 | 18.17 |      | 80.0 |         |
| 10492-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.43 | 67.31 | 16.78 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 3.55 | 68.11 | 17.34 |      | 80.0 |         |
|           |                                                                     | Z | 3.72 | 67.80 | 17.20 |      | 80.0 |         |

|           |                                                                      |   |      |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|------|-------|-------|------|------|---------|
| 10493-AAB | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.50 | 67.21 | 16.74 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.62 | 67.97 | 17.27 |      | 80.0 |         |
|           |                                                                      | Z | 3.79 | 67.69 | 17.16 |      | 80.0 |         |
| 10494-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 3.52 | 70.87 | 18.10 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.84 | 72.64 | 19.08 |      | 80.0 |         |
|           |                                                                      | Z | 3.98 | 72.03 | 18.67 |      | 80.0 |         |
| 10495-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.45 | 67.59 | 16.97 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.58 | 68.42 | 17.54 |      | 80.0 |         |
|           |                                                                      | Z | 3.75 | 68.20 | 17.40 |      | 80.0 |         |
| 10496-AAB | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.54 | 67.39 | 16.91 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.65 | 68.15 | 17.44 |      | 80.0 |         |
|           |                                                                      | Z | 3.83 | 67.94 | 17.32 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 1.43 | 63.58 | 11.40 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.80 | 66.67 | 13.09 |      | 80.0 |         |
|           |                                                                      | Z | 2.27 | 68.74 | 14.99 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.24 | 60.00 | 8.33  | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.23 | 60.00 | 8.51  |      | 80.0 |         |
|           |                                                                      | Z | 1.81 | 63.14 | 11.27 |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 1.26 | 60.00 | 8.18  | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 1.24 | 60.00 | 8.34  |      | 80.0 |         |
|           |                                                                      | Z | 1.76 | 62.56 | 10.83 |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 2.78 | 70.93 | 17.56 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.23 | 73.75 | 19.01 |      | 80.0 |         |
|           |                                                                      | Z | 3.21 | 72.13 | 18.47 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.86 | 67.97 | 15.75 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.13 | 69.65 | 16.71 |      | 80.0 |         |
|           |                                                                      | Z | 3.25 | 69.01 | 16.80 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 2.90 | 67.83 | 15.61 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.18 | 69.45 | 16.55 |      | 80.0 |         |
|           |                                                                      | Z | 3.31 | 68.90 | 16.69 |      | 80.0 |         |
| 10503-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 2.96 | 70.56 | 17.92 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.29 | 72.71 | 19.10 |      | 80.0 |         |
|           |                                                                      | Z | 3.38 | 71.68 | 18.59 |      | 80.0 |         |
| 10504-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.05 | 67.84 | 16.62 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.22 | 69.00 | 17.36 |      | 80.0 |         |
|           |                                                                      | Z | 3.35 | 68.44 | 17.21 |      | 80.0 |         |
| 10505-AAB | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 3.14 | 67.73 | 16.57 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.31 | 68.81 | 17.27 |      | 80.0 |         |
|           |                                                                      | Z | 3.45 | 68.28 | 17.16 |      | 80.0 |         |
| 10506-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 3.49 | 70.73 | 18.03 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.81 | 72.49 | 19.00 |      | 80.0 |         |
|           |                                                                      | Z | 3.95 | 71.88 | 18.59 |      | 80.0 |         |
| 10507-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 3.44 | 67.53 | 16.93 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.56 | 68.36 | 17.50 |      | 80.0 |         |
|           |                                                                      | Z | 3.73 | 68.13 | 17.36 |      | 80.0 |         |

|           |                                                                     |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10508-AAB | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.53 | 67.32 | 16.87 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 3.64 | 68.08 | 17.40 |      | 80.0  |         |
|           |                                                                     | Z | 3.82 | 67.87 | 17.27 |      | 80.0  |         |
| 10509-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 3.90 | 69.82 | 17.65 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.14 | 71.06 | 18.38 |      | 80.0  |         |
|           |                                                                     | Z | 4.30 | 70.72 | 18.09 |      | 80.0  |         |
| 10510-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.92 | 67.34 | 16.97 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.03 | 67.99 | 17.44 |      | 80.0  |         |
|           |                                                                     | Z | 4.22 | 67.93 | 17.34 |      | 80.0  |         |
| 10511-AAB | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.99 | 67.15 | 16.93 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.09 | 67.75 | 17.36 |      | 80.0  |         |
|           |                                                                     | Z | 4.28 | 67.68 | 17.27 |      | 80.0  |         |
| 10512-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 4.00 | 71.09 | 18.05 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 4.33 | 72.71 | 18.93 |      | 80.0  |         |
|           |                                                                     | Z | 4.49 | 72.31 | 18.60 |      | 80.0  |         |
| 10513-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.80 | 67.50 | 17.05 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 3.92 | 68.21 | 17.54 |      | 80.0  |         |
|           |                                                                     | Z | 4.11 | 68.20 | 17.45 |      | 80.0  |         |
| 10514-AAB | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.85 | 67.16 | 16.95 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 3.95 | 67.80 | 17.41 |      | 80.0  |         |
|           |                                                                     | Z | 4.13 | 67.78 | 17.32 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 0.99 | 63.41 | 14.95 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.00 | 63.71 | 15.22 |      | 150.0 |         |
|           |                                                                     | Z | 0.98 | 62.80 | 14.50 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 0.63 | 71.18 | 17.99 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.75 | 74.25 | 19.60 |      | 150.0 |         |
|           |                                                                     | Z | 0.56 | 68.07 | 16.15 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 0.84 | 65.39 | 15.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.87 | 66.03 | 16.14 |      | 150.0 |         |
|           |                                                                     | Z | 0.82 | 64.43 | 14.97 |      | 150.0 |         |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.47 | 66.84 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.48 | 66.90 | 16.36 |      | 150.0 |         |
|           |                                                                     | Z | 4.58 | 66.60 | 16.20 |      | 150.0 |         |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 4.63 | 67.03 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.64 | 67.09 | 16.46 |      | 150.0 |         |
|           |                                                                     | Z | 4.77 | 66.85 | 16.33 |      | 150.0 |         |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.49 | 66.98 | 16.32 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.50 | 67.04 | 16.38 |      | 150.0 |         |
|           |                                                                     | Z | 4.62 | 66.81 | 16.25 |      | 150.0 |         |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.42 | 66.97 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.43 | 67.03 | 16.37 |      | 150.0 |         |
|           |                                                                     | Z | 4.55 | 66.80 | 16.23 |      | 150.0 |         |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.48 | 67.10 | 16.40 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.49 | 67.16 | 16.47 |      | 150.0 |         |
|           |                                                                     | Z | 4.61 | 66.88 | 16.31 |      | 150.0 |         |

|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.38 | 67.02 | 16.28 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.40 | 67.08 | 16.35 |      | 150.0 |         |
|           |                                                            | Z | 4.49 | 66.74 | 16.15 |      | 150.0 |         |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.42 | 67.02 | 16.37 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.44 | 67.08 | 16.44 |      | 150.0 |         |
|           |                                                            | Z | 4.56 | 66.80 | 16.28 |      | 150.0 |         |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.44 | 66.11 | 15.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.45 | 66.16 | 16.04 |      | 150.0 |         |
|           |                                                            | Z | 4.54 | 65.84 | 15.87 |      | 150.0 |         |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.58 | 66.42 | 16.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.59 | 66.48 | 16.17 |      | 150.0 |         |
|           |                                                            | Z | 4.71 | 66.22 | 16.01 |      | 150.0 |         |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.51 | 66.39 | 16.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.52 | 66.45 | 16.12 |      | 150.0 |         |
|           |                                                            | Z | 4.63 | 66.17 | 15.95 |      | 150.0 |         |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.52 | 66.40 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.54 | 66.46 | 16.15 |      | 150.0 |         |
|           |                                                            | Z | 4.65 | 66.19 | 15.99 |      | 150.0 |         |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.52 | 66.40 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.54 | 66.46 | 16.15 |      | 150.0 |         |
|           |                                                            | Z | 4.65 | 66.19 | 15.99 |      | 150.0 |         |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.50 | 66.46 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.51 | 66.53 | 16.14 |      | 150.0 |         |
|           |                                                            | Z | 4.64 | 66.30 | 16.00 |      | 150.0 |         |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.37 | 66.32 | 16.01 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.39 | 66.39 | 16.08 |      | 150.0 |         |
|           |                                                            | Z | 4.50 | 66.15 | 15.93 |      | 150.0 |         |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.53 | 66.48 | 16.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.54 | 66.54 | 16.15 |      | 150.0 |         |
|           |                                                            | Z | 4.66 | 66.23 | 15.97 |      | 150.0 |         |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 5.07 | 66.45 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.09 | 66.50 | 16.19 |      | 150.0 |         |
|           |                                                            | Z | 5.19 | 66.33 | 16.06 |      | 150.0 |         |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.13 | 66.62 | 16.22 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.14 | 66.67 | 16.27 |      | 150.0 |         |
|           |                                                            | Z | 5.25 | 66.51 | 16.14 |      | 150.0 |         |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 5.01 | 66.59 | 16.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.03 | 66.64 | 16.24 |      | 150.0 |         |
|           |                                                            | Z | 5.12 | 66.45 | 16.09 |      | 150.0 |         |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 5.07 | 66.55 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.08 | 66.59 | 16.22 |      | 150.0 |         |
|           |                                                            | Z | 5.18 | 66.42 | 16.08 |      | 150.0 |         |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.14 | 66.54 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.15 | 66.59 | 16.25 |      | 150.0 |         |
|           |                                                            | Z | 5.27 | 66.46 | 16.14 |      | 150.0 |         |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 5.07 | 66.52 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.08 | 66.57 | 16.26 |      | 150.0 |         |
|           |                                                            | Z | 5.20 | 66.47 | 16.16 |      | 150.0 |         |



|           |                                                     |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)   | X | 5.05 | 66.41 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.06 | 66.46 | 16.20 |      | 150.0 |         |
|           |                                                     | Z | 5.17 | 66.33 | 16.08 |      | 150.0 |         |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)   | X | 5.21 | 66.51 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.22 | 66.55 | 16.26 |      | 150.0 |         |
|           |                                                     | Z | 5.33 | 66.41 | 16.13 |      | 150.0 |         |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)   | X | 5.27 | 66.52 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.28 | 66.56 | 16.29 |      | 150.0 |         |
|           |                                                     | Z | 5.41 | 66.45 | 16.18 |      | 150.0 |         |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)   | X | 5.40 | 66.53 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.42 | 66.58 | 16.18 |      | 150.0 |         |
|           |                                                     | Z | 5.49 | 66.45 | 16.06 |      | 150.0 |         |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)   | X | 5.59 | 66.98 | 16.30 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.60 | 67.03 | 16.36 |      | 150.0 |         |
|           |                                                     | Z | 5.69 | 66.88 | 16.22 |      | 150.0 |         |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)   | X | 5.45 | 66.68 | 16.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.46 | 66.73 | 16.22 |      | 150.0 |         |
|           |                                                     | Z | 5.56 | 66.67 | 16.13 |      | 150.0 |         |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)   | X | 5.52 | 66.76 | 16.20 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.53 | 66.80 | 16.25 |      | 150.0 |         |
|           |                                                     | Z | 5.63 | 66.71 | 16.14 |      | 150.0 |         |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)   | X | 5.72 | 67.56 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.74 | 67.62 | 16.64 |      | 150.0 |         |
|           |                                                     | Z | 5.92 | 67.73 | 16.62 |      | 150.0 |         |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)   | X | 5.50 | 66.81 | 16.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.51 | 66.85 | 16.30 |      | 150.0 |         |
|           |                                                     | Z | 5.59 | 66.68 | 16.14 |      | 150.0 |         |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)   | X | 5.47 | 66.72 | 16.16 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.48 | 66.77 | 16.22 |      | 150.0 |         |
|           |                                                     | Z | 5.59 | 66.72 | 16.13 |      | 150.0 |         |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)   | X | 5.41 | 66.62 | 16.12 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.42 | 66.66 | 16.16 |      | 150.0 |         |
|           |                                                     | Z | 5.50 | 66.51 | 16.03 |      | 150.0 |         |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)   | X | 5.48 | 66.60 | 16.14 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.49 | 66.65 | 16.19 |      | 150.0 |         |
|           |                                                     | Z | 5.59 | 66.56 | 16.08 |      | 150.0 |         |
| 10554-AAA | IEEE 1602.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.82 | 66.88 | 16.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.83 | 66.92 | 16.26 |      | 150.0 |         |
|           |                                                     | Z | 5.90 | 66.82 | 16.15 |      | 150.0 |         |
| 10555-AAA | IEEE 1602.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 5.94 | 67.15 | 16.33 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.95 | 67.20 | 16.38 |      | 150.0 |         |
|           |                                                     | Z | 6.03 | 67.13 | 16.28 |      | 150.0 |         |
| 10556-AAA | IEEE 1602.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 5.96 | 67.23 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.98 | 67.27 | 16.41 |      | 150.0 |         |
|           |                                                     | Z | 6.05 | 67.17 | 16.30 |      | 150.0 |         |
| 10557-AAA | IEEE 1602.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 5.92 | 67.10 | 16.31 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 5.93 | 67.14 | 16.36 |      | 150.0 |         |
|           |                                                     | Z | 6.02 | 67.08 | 16.27 |      | 150.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10558-AAA | IEEE 1602.11ac WiFi (160MHz, MCS4, 99pc duty cycle)             | X | 5.96 | 67.24 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.97 | 67.29 | 16.45 |      | 150.0 |         |
|           |                                                                 | Z | 6.07 | 67.25 | 16.37 |      | 150.0 |         |
| 10560-AAA | IEEE 1602.11ac WiFi (160MHz, MCS6, 99pc duty cycle)             | X | 5.95 | 67.10 | 16.36 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.97 | 67.14 | 16.41 |      | 150.0 |         |
|           |                                                                 | Z | 6.06 | 67.09 | 16.33 |      | 150.0 |         |
| 10561-AAA | IEEE 1602.11ac WiFi (160MHz, MCS7, 99pc duty cycle)             | X | 5.89 | 67.09 | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.90 | 67.14 | 16.45 |      | 150.0 |         |
|           |                                                                 | Z | 5.99 | 67.06 | 16.35 |      | 150.0 |         |
| 10562-AAA | IEEE 1602.11ac WiFi (160MHz, MCS8, 99pc duty cycle)             | X | 5.97 | 67.34 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.98 | 67.39 | 16.57 |      | 150.0 |         |
|           |                                                                 | Z | 6.12 | 67.47 | 16.55 |      | 150.0 |         |
| 10563-AAA | IEEE 1602.11ac WiFi (160MHz, MCS9, 99pc duty cycle)             | X | 6.05 | 67.24 | 16.43 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.06 | 67.29 | 16.49 |      | 150.0 |         |
|           |                                                                 | Z | 6.41 | 67.91 | 16.73 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 4.78 | 66.85 | 16.41 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.80 | 66.93 | 16.49 |      | 150.0 |         |
|           |                                                                 | Z | 4.91 | 66.67 | 16.35 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 4.99 | 67.29 | 16.74 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.01 | 67.35 | 16.80 |      | 150.0 |         |
|           |                                                                 | Z | 5.14 | 67.15 | 16.69 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 4.83 | 67.11 | 16.54 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.84 | 67.18 | 16.62 |      | 150.0 |         |
|           |                                                                 | Z | 4.98 | 66.99 | 16.50 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 4.87 | 67.55 | 16.94 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.87 | 67.57 | 16.98 |      | 150.0 |         |
|           |                                                                 | Z | 5.01 | 67.40 | 16.87 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.73 | 66.85 | 16.28 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.75 | 66.97 | 16.39 |      | 150.0 |         |
|           |                                                                 | Z | 4.88 | 66.73 | 16.25 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 4.84 | 67.72 | 17.05 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.85 | 67.73 | 17.08 |      | 150.0 |         |
|           |                                                                 | Z | 4.96 | 67.48 | 16.93 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 4.86 | 67.53 | 16.95 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 4.87 | 67.55 | 16.99 |      | 150.0 |         |
|           |                                                                 | Z | 5.00 | 67.32 | 16.86 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.13 | 63.98 | 15.42 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.15 | 64.46 | 15.85 |      | 130.0 |         |
|           |                                                                 | Z | 1.15 | 63.75 | 15.28 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.14 | 64.53 | 15.78 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.16 | 65.03 | 16.22 |      | 130.0 |         |
|           |                                                                 | Z | 1.16 | 64.27 | 15.61 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 1.37 | 80.51 | 21.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 2.18 | 89.24 | 25.44 |      | 130.0 |         |
|           |                                                                 | Z | 1.24 | 77.68 | 20.60 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 1.21 | 70.03 | 18.74 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.26 | 70.93 | 19.36 |      | 130.0 |         |
|           |                                                                 | Z | 1.21 | 69.23 | 18.24 |      | 130.0 |         |

|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.55 | 66.59 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.57 | 66.69 | 16.52 |      | 130.0 |         |
|           |                                                                 | Z | 4.69 | 66.45 | 16.40 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.58 | 66.78 | 16.50 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.60 | 66.87 | 16.60 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 66.62 | 16.47 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 4.76 | 67.04 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.78 | 67.12 | 16.75 |      | 130.0 |         |
|           |                                                                 | Z | 4.92 | 66.93 | 16.65 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.67 | 67.21 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.68 | 67.27 | 16.85 |      | 130.0 |         |
|           |                                                                 | Z | 4.82 | 67.09 | 16.76 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.41 | 66.37 | 16.00 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.44 | 66.52 | 16.15 |      | 130.0 |         |
|           |                                                                 | Z | 4.58 | 66.34 | 16.04 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.45 | 66.43 | 16.02 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.49 | 66.59 | 16.18 |      | 130.0 |         |
|           |                                                                 | Z | 4.62 | 66.36 | 16.05 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.57 | 67.26 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.58 | 67.33 | 16.82 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 67.12 | 16.69 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.34 | 66.11 | 15.76 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.38 | 66.30 | 15.94 |      | 130.0 |         |
|           |                                                                 | Z | 4.52 | 66.09 | 15.82 |      | 130.0 |         |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.55 | 66.59 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.57 | 66.69 | 16.52 |      | 130.0 |         |
|           |                                                                 | Z | 4.69 | 66.45 | 16.40 |      | 130.0 |         |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.58 | 66.78 | 16.50 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.60 | 66.87 | 16.60 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 66.62 | 16.47 |      | 130.0 |         |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 4.76 | 67.04 | 16.65 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.78 | 67.12 | 16.75 |      | 130.0 |         |
|           |                                                                 | Z | 4.92 | 66.93 | 16.65 |      | 130.0 |         |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 4.67 | 67.21 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.68 | 67.27 | 16.85 |      | 130.0 |         |
|           |                                                                 | Z | 4.82 | 67.09 | 16.76 |      | 130.0 |         |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.41 | 66.37 | 16.00 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.44 | 66.52 | 16.15 |      | 130.0 |         |
|           |                                                                 | Z | 4.58 | 66.34 | 16.04 |      | 130.0 |         |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.45 | 66.43 | 16.02 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.49 | 66.59 | 16.18 |      | 130.0 |         |
|           |                                                                 | Z | 4.62 | 66.36 | 16.05 |      | 130.0 |         |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 4.57 | 67.26 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.58 | 67.33 | 16.82 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 67.12 | 16.69 |      | 130.0 |         |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.34 | 66.11 | 15.76 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.38 | 66.30 | 15.94 |      | 130.0 |         |
|           |                                                                 | Z | 4.52 | 66.09 | 15.82 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.71 | 66.67 | 16.53 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.73 | 66.75 | 16.62 |      | 130.0 |         |
|           |                                                       | Z | 4.84 | 66.53 | 16.51 |      | 130.0 |         |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 4.84 | 66.99 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.86 | 67.07 | 16.75 |      | 130.0 |         |
|           |                                                       | Z | 5.00 | 66.87 | 16.64 |      | 130.0 |         |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 4.76 | 66.86 | 16.52 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.78 | 66.96 | 16.62 |      | 130.0 |         |
|           |                                                       | Z | 4.92 | 66.77 | 16.52 |      | 130.0 |         |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 4.82 | 67.05 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.84 | 67.13 | 16.78 |      | 130.0 |         |
|           |                                                       | Z | 4.97 | 66.94 | 16.68 |      | 130.0 |         |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 4.78 | 67.01 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.80 | 67.10 | 16.69 |      | 130.0 |         |
|           |                                                       | Z | 4.94 | 66.89 | 16.57 |      | 130.0 |         |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 4.71 | 66.98 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.73 | 67.08 | 16.69 |      | 130.0 |         |
|           |                                                       | Z | 4.87 | 66.88 | 16.57 |      | 130.0 |         |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.66 | 66.85 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.69 | 66.96 | 16.56 |      | 130.0 |         |
|           |                                                       | Z | 4.82 | 66.78 | 16.45 |      | 130.0 |         |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.65 | 67.11 | 16.73 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.67 | 67.18 | 16.81 |      | 130.0 |         |
|           |                                                       | Z | 4.81 | 67.03 | 16.73 |      | 130.0 |         |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.39 | 67.16 | 16.75 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.40 | 67.23 | 16.84 |      | 130.0 |         |
|           |                                                       | Z | 5.52 | 67.11 | 16.73 |      | 130.0 |         |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.51 | 67.57 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.53 | 67.67 | 17.03 |      | 130.0 |         |
|           |                                                       | Z | 5.67 | 67.58 | 16.94 |      | 130.0 |         |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.40 | 67.32 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.42 | 67.41 | 16.92 |      | 130.0 |         |
|           |                                                       | Z | 5.55 | 67.30 | 16.82 |      | 130.0 |         |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.53 | 67.48 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.55 | 67.58 | 16.92 |      | 130.0 |         |
|           |                                                       | Z | 5.64 | 67.31 | 16.73 |      | 130.0 |         |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.60 | 67.77 | 17.10 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.62 | 67.84 | 17.19 |      | 130.0 |         |
|           |                                                       | Z | 5.72 | 67.63 | 17.03 |      | 130.0 |         |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.48 | 67.44 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.50 | 67.51 | 17.01 |      | 130.0 |         |
|           |                                                       | Z | 5.52 | 67.07 | 16.74 |      | 130.0 |         |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.51 | 67.48 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.53 | 67.59 | 17.04 |      | 130.0 |         |
|           |                                                       | Z | 5.64 | 67.42 | 16.91 |      | 130.0 |         |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.24 | 66.77 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.27 | 66.88 | 16.54 |      | 130.0 |         |
|           |                                                       | Z | 5.39 | 66.79 | 16.45 |      | 130.0 |         |

|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.56 | 66.02 | 16.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.58 | 66.11 | 16.27 |      | 130.0 |         |
|           |                                                   | Z | 4.68 | 65.84 | 16.13 |      | 130.0 |         |
| 10608-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 4.71 | 66.38 | 16.33 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.74 | 66.48 | 16.43 |      | 130.0 |         |
|           |                                                   | Z | 4.87 | 66.25 | 16.30 |      | 130.0 |         |
| 10609-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.60 | 66.21 | 16.15 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.63 | 66.32 | 16.26 |      | 130.0 |         |
|           |                                                   | Z | 4.75 | 66.09 | 16.13 |      | 130.0 |         |
| 10610-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.66 | 66.38 | 16.32 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.68 | 66.48 | 16.42 |      | 130.0 |         |
|           |                                                   | Z | 4.81 | 66.25 | 16.30 |      | 130.0 |         |
| 10611-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.57 | 66.17 | 16.16 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.59 | 66.28 | 16.27 |      | 130.0 |         |
|           |                                                   | Z | 4.72 | 66.06 | 16.14 |      | 130.0 |         |
| 10612-AAA | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.57 | 66.31 | 16.20 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.59 | 66.44 | 16.32 |      | 130.0 |         |
|           |                                                   | Z | 4.73 | 66.20 | 16.18 |      | 130.0 |         |
| 10613-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.56 | 66.14 | 16.05 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.59 | 66.27 | 16.18 |      | 130.0 |         |
|           |                                                   | Z | 4.73 | 66.09 | 16.06 |      | 130.0 |         |
| 10614-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.53 | 66.39 | 16.32 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.55 | 66.47 | 16.42 |      | 130.0 |         |
|           |                                                   | Z | 4.68 | 66.29 | 16.31 |      | 130.0 |         |
| 10615-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.56 | 65.98 | 15.91 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.59 | 66.13 | 16.05 |      | 130.0 |         |
|           |                                                   | Z | 4.72 | 65.87 | 15.91 |      | 130.0 |         |
| 10616-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.20 | 66.41 | 16.36 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.22 | 66.48 | 16.45 |      | 130.0 |         |
|           |                                                   | Z | 5.34 | 66.37 | 16.34 |      | 130.0 |         |
| 10617-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.27 | 66.60 | 16.43 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.29 | 66.69 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 5.41 | 66.54 | 16.40 |      | 130.0 |         |
| 10618-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.17 | 66.64 | 16.47 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.19 | 66.72 | 16.55 |      | 130.0 |         |
|           |                                                   | Z | 5.29 | 66.54 | 16.42 |      | 130.0 |         |
| 10619-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.17 | 66.40 | 16.28 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.19 | 66.49 | 16.38 |      | 130.0 |         |
|           |                                                   | Z | 5.31 | 66.37 | 16.27 |      | 130.0 |         |
| 10620-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.25 | 66.42 | 16.34 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.27 | 66.52 | 16.44 |      | 130.0 |         |
|           |                                                   | Z | 5.40 | 66.41 | 16.34 |      | 130.0 |         |
| 10621-AAA | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.27 | 66.59 | 16.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.28 | 66.65 | 16.62 |      | 130.0 |         |
|           |                                                   | Z | 5.40 | 66.53 | 16.52 |      | 130.0 |         |
| 10622-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.27 | 66.70 | 16.60 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.28 | 66.78 | 16.68 |      | 130.0 |         |
|           |                                                   | Z | 5.41 | 66.70 | 16.60 |      | 130.0 |         |

|           |                                                     |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)   | X | 5.14 | 66.21 | 16.21 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.16 | 66.31 | 16.32 |      | 130.0 |         |
|           |                                                     | Z | 5.28 | 66.20 | 16.22 |      | 130.0 |         |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)   | X | 5.34 | 66.45 | 16.40 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.36 | 66.54 | 16.49 |      | 130.0 |         |
|           |                                                     | Z | 5.48 | 66.42 | 16.39 |      | 130.0 |         |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)   | X | 5.55 | 66.97 | 16.72 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.57 | 67.07 | 16.81 |      | 130.0 |         |
|           |                                                     | Z | 5.88 | 67.48 | 16.97 |      | 130.0 |         |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)   | X | 5.53 | 66.46 | 16.32 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.54 | 66.54 | 16.40 |      | 130.0 |         |
|           |                                                     | Z | 5.63 | 66.43 | 16.30 |      | 130.0 |         |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)   | X | 5.77 | 67.07 | 16.59 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.79 | 67.16 | 16.68 |      | 130.0 |         |
|           |                                                     | Z | 5.88 | 67.02 | 16.56 |      | 130.0 |         |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)   | X | 5.53 | 66.46 | 16.22 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.55 | 66.56 | 16.32 |      | 130.0 |         |
|           |                                                     | Z | 5.67 | 66.54 | 16.25 |      | 130.0 |         |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)   | X | 5.62 | 66.57 | 16.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.64 | 66.67 | 16.37 |      | 130.0 |         |
|           |                                                     | Z | 5.76 | 66.64 | 16.29 |      | 130.0 |         |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)   | X | 5.96 | 67.80 | 16.88 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.98 | 67.92 | 17.00 |      | 130.0 |         |
|           |                                                     | Z | 6.25 | 68.26 | 17.09 |      | 130.0 |         |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)   | X | 5.89 | 67.74 | 17.06 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.91 | 67.78 | 17.11 |      | 130.0 |         |
|           |                                                     | Z | 6.11 | 67.97 | 17.16 |      | 130.0 |         |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)   | X | 5.75 | 67.20 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.76 | 67.24 | 16.86 |      | 130.0 |         |
|           |                                                     | Z | 5.85 | 67.08 | 16.73 |      | 130.0 |         |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)   | X | 5.60 | 66.69 | 16.37 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.62 | 66.77 | 16.45 |      | 130.0 |         |
|           |                                                     | Z | 5.73 | 66.69 | 16.36 |      | 130.0 |         |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)   | X | 5.58 | 66.71 | 16.44 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.60 | 66.78 | 16.51 |      | 130.0 |         |
|           |                                                     | Z | 5.72 | 66.73 | 16.44 |      | 130.0 |         |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)   | X | 5.44 | 65.95 | 15.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.47 | 66.09 | 15.91 |      | 130.0 |         |
|           |                                                     | Z | 5.60 | 66.05 | 15.82 |      | 130.0 |         |
| 10636-AAA | IEEE 1602.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 5.96 | 66.83 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 5.97 | 66.90 | 16.49 |      | 130.0 |         |
|           |                                                     | Z | 6.05 | 66.82 | 16.40 |      | 130.0 |         |
| 10637-AAA | IEEE 1602.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.10 | 67.19 | 16.58 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 6.12 | 67.27 | 16.66 |      | 130.0 |         |
|           |                                                     | Z | 6.21 | 67.21 | 16.58 |      | 130.0 |         |
| 10638-AAA | IEEE 1602.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.10 | 67.17 | 16.54 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                     | Y | 6.12 | 67.25 | 16.63 |      | 130.0 |         |
|           |                                                     | Z | 6.21 | 67.17 | 16.54 |      | 130.0 |         |

|           |                                                        |   |       |        |       |      |       |         |
|-----------|--------------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10639-AAA | IEEE 1602.11ac WiFi (160MHz, MCS3, 90pc duty cycle)    | X | 6.07  | 67.09  | 16.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.09  | 67.17  | 16.63 |      | 130.0 |         |
|           |                                                        | Z | 6.19  | 67.14  | 16.56 |      | 130.0 |         |
| 10640-AAA | IEEE 1602.11ac WiFi (160MHz, MCS4, 90pc duty cycle)    | X | 6.06  | 67.06  | 16.47 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.08  | 67.16  | 16.57 |      | 130.0 |         |
|           |                                                        | Z | 6.19  | 67.15  | 16.51 |      | 130.0 |         |
| 10641-AAA | IEEE 1602.11ac WiFi (160MHz, MCS5, 90pc duty cycle)    | X | 6.13  | 67.06  | 16.49 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.15  | 67.15  | 16.59 |      | 130.0 |         |
|           |                                                        | Z | 6.23  | 67.02  | 16.46 |      | 130.0 |         |
| 10642-AAA | IEEE 1602.11ac WiFi (160MHz, MCS6, 90pc duty cycle)    | X | 6.16  | 67.29  | 16.78 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.17  | 67.34  | 16.84 |      | 130.0 |         |
|           |                                                        | Z | 6.28  | 67.31  | 16.78 |      | 130.0 |         |
| 10643-AAA | IEEE 1602.11ac WiFi (160MHz, MCS7, 90pc duty cycle)    | X | 6.00  | 66.97  | 16.51 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.02  | 67.06  | 16.61 |      | 130.0 |         |
|           |                                                        | Z | 6.11  | 66.97  | 16.50 |      | 130.0 |         |
| 10644-AAA | IEEE 1602.11ac WiFi (160MHz, MCS8, 90pc duty cycle)    | X | 6.09  | 67.26  | 16.67 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.12  | 67.36  | 16.77 |      | 130.0 |         |
|           |                                                        | Z | 6.29  | 67.52  | 16.80 |      | 130.0 |         |
| 10645-AAA | IEEE 1602.11ac WiFi (160MHz, MCS9, 90pc duty cycle)    | X | 6.23  | 67.33  | 16.67 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.26  | 67.42  | 16.77 |      | 130.0 |         |
|           |                                                        | Z | 6.72  | 68.38  | 17.18 |      | 130.0 |         |
| 10646-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)  | X | 7.97  | 91.85  | 31.39 | 9.30 | 60.0  | ± 9.6 % |
|           |                                                        | Y | 11.74 | 104.28 | 36.86 |      | 60.0  |         |
|           |                                                        | Z | 11.88 | 99.49  | 34.28 |      | 60.0  |         |
| 10647-AAB | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 7.13  | 89.84  | 30.79 | 9.30 | 60.0  | ± 9.6 % |
|           |                                                        | Y | 9.93  | 100.75 | 35.82 |      | 60.0  |         |
|           |                                                        | Z | 10.62 | 97.47  | 33.72 |      | 60.0  |         |
| 10648-AAA | CDMA2000 (1x Advanced)                                 | X | 0.64  | 63.39  | 10.24 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                        | Y | 0.67  | 63.88  | 10.62 |      | 150.0 |         |
|           |                                                        | Z | 0.72  | 63.48  | 11.02 |      | 150.0 |         |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



Accredited by the Swiss Accreditation Service (SAS)  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **ES3-3287\_Sep17**

## CALIBRATION CERTIFICATE

Object **ES3DV3 - SN:3287**

Calibration procedure(s) **QA CAL-01.v9, QA CAL-23.v5, QA CAL-25.v6**  
**Calibration procedure for dosimetric E-field probes**

Calibration date: **September 18, 2017**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID               | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|------------------|-----------------------------------|------------------------|
| Power meter NRP            | SN: 104778       | 04-Apr-17 (No. 217-02521/02522)   | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103244       | 04-Apr-17 (No. 217-02521)         | Apr-18                 |
| Power sensor NRP-Z91       | SN: 103245       | 04-Apr-17 (No. 217-02525)         | Apr-18                 |
| Reference 20 dB Attenuator | SN: S5277 (20x)  | 07-Apr-17 (No. 217-02528)         | Apr-18                 |
| Reference Probe ES3DV2     | SN: 3013         | 31-Dec-16 (No. ES3-3013_Dec16)    | Dec-17                 |
| DAE4                       | SN: 660          | 7-Dec-16 (No. DAE4-660_Dec16)     | Dec-17                 |
| Secondary Standards        | ID               | Check Date (in house)             | Scheduled Check        |
| Power meter E4419B         | SN: GB41293874   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: MY41498087   | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| Power sensor E4412A        | SN: 000110210    | 06-Apr-16 (in house check Jun-16) | In house check: Jun-18 |
| RF generator HP 8648C      | SN: US3642U01700 | 04-Aug-99 (in house check Jun-16) | In house check: Jun-18 |
| Network Analyzer HP 8753E  | SN: US37390585   | 18-Oct-01 (in house check Oct-16) | In house check: Oct-17 |

|                |                             |                                          |                                                                                                    |
|----------------|-----------------------------|------------------------------------------|----------------------------------------------------------------------------------------------------|
| Calibrated by: | Name<br><b>Leif Klysner</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovlc</b>        | <b>Technical Manager</b>                 |               |

Issued: September 19, 2017

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 0108**

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

### Glossary:

|                          |                                                                                                                                                         |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                                |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                               |
| ConvF                    | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                              |
| DCP                      | diode compression point                                                                                                                                 |
| CF                       | crest factor (1/duty_cycle) of the RF signal                                                                                                            |
| A, B, C, D               | modulation dependent linearization parameters                                                                                                           |
| Polarization $\phi$      | $\phi$ rotation around probe axis                                                                                                                       |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center),<br>i.e., $\vartheta = 0$ is normal to probe axis |
| Connector Angle          | information used in DASY system to align probe sensor X to the robot coordinate system                                                                  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not affect the  $E^2$ -field uncertainty inside TSL (see below ConvF).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* frequency\_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR**: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; D<sub>x,y,z</sub>; VR<sub>x,y,z</sub>**: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM<sub>x</sub> (no uncertainty required).

# Probe ES3DV3

## SN:3287

Manufactured: June 7, 2010  
Calibrated: September 18, 2017

Calibrated for DASY/EASY Systems  
(Note: non-compatible with DASY2 system!)

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Basic Calibration Parameters

|                                                           | Sensor X | Sensor Y | Sensor Z | Unc (k=2)     |
|-----------------------------------------------------------|----------|----------|----------|---------------|
| Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup> | 0.87     | 0.98     | 1.00     | $\pm 10.1 \%$ |
| DCP (mV) <sup>B</sup>                                     | 107.7    | 103.1    | 105.0    |               |

### Modulation Calibration Parameters

| UID | Communication System Name |   | A<br>dB | B<br>dB $\sqrt{\mu\text{V}}$ | C   | D<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-----|---------------------------|---|---------|------------------------------|-----|---------|----------|---------------------------|
| 0   | CW                        | X | 0.0     | 0.0                          | 1.0 | 0.00    | 191.5    | $\pm 3.3 \%$              |
|     |                           | Y | 0.0     | 0.0                          | 1.0 |         | 198.9    |                           |
|     |                           | Z | 0.0     | 0.0                          | 1.0 |         | 180.8    |                           |

Note: For details on UID parameters see Appendix.

### Sensor Model Parameters

|   | C1<br>fF | C2<br>fF | $\alpha$<br>$\text{V}^{-1}$ | T1<br>$\text{ms} \cdot \text{V}^{-2}$ | T2<br>$\text{ms} \cdot \text{V}^{-1}$ | T3<br>ms | T4<br>$\text{V}^{-2}$ | T5<br>$\text{V}^{-1}$ | T6    |
|---|----------|----------|-----------------------------|---------------------------------------|---------------------------------------|----------|-----------------------|-----------------------|-------|
| X | 54.28    | 378.7    | 33.99                       | 28.46                                 | 2.430                                 | 5.072    | 1.313                 | 0.408                 | 1.009 |
| Y | 59.16    | 422.2    | 35.13                       | 29.85                                 | 3.583                                 | 5.094    | 0.041                 | 0.732                 | 1.008 |
| Z | 43.70    | 307.8    | 34.40                       | 28.00                                 | 2.236                                 | 5.100    | 1.282                 | 0.347                 | 1.010 |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of Norm X,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 41.9                               | 0.89                            | 7.00    | 7.00    | 7.00    | 0.26               | 1.80                    | ± 12.0 %  |
| 835                  | 41.5                               | 0.90                            | 6.70    | 6.70    | 6.70    | 0.56               | 1.23                    | ± 12.0 %  |
| 1750                 | 40.1                               | 1.37                            | 5.57    | 5.57    | 5.57    | 0.53               | 1.28                    | ± 12.0 %  |
| 1900                 | 40.0                               | 1.40                            | 5.34    | 5.34    | 5.34    | 0.41               | 1.52                    | ± 12.0 %  |
| 2300                 | 39.5                               | 1.67                            | 4.94    | 4.94    | 4.94    | 0.42               | 1.57                    | ± 12.0 %  |
| 2450                 | 39.2                               | 1.80                            | 4.64    | 4.64    | 4.64    | 0.55               | 1.39                    | ± 12.0 %  |
| 2600                 | 39.0                               | 1.96                            | 4.44    | 4.44    | 4.44    | 0.58               | 1.43                    | ± 12.0 %  |

<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>C</sup> | Relative Permittivity <sup>F</sup> | Conductivity (S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha <sup>G</sup> | Depth <sup>G</sup> (mm) | Unc (k=2) |
|----------------------|------------------------------------|---------------------------------|---------|---------|---------|--------------------|-------------------------|-----------|
| 750                  | 55.5                               | 0.96                            | 6.71    | 6.71    | 6.71    | 0.45               | 1.38                    | ± 12.0 %  |
| 835                  | 55.2                               | 0.97                            | 6.56    | 6.56    | 6.56    | 0.80               | 1.05                    | ± 12.0 %  |
| 1750                 | 53.4                               | 1.49                            | 5.19    | 5.19    | 5.19    | 0.37               | 1.73                    | ± 12.0 %  |
| 1900                 | 53.3                               | 1.52                            | 5.00    | 5.00    | 5.00    | 0.47               | 1.51                    | ± 12.0 %  |
| 2300                 | 52.9                               | 1.81                            | 4.66    | 4.66    | 4.66    | 0.59               | 1.36                    | ± 12.0 %  |
| 2450                 | 52.7                               | 1.95                            | 4.47    | 4.47    | 4.47    | 0.55               | 1.20                    | ± 12.0 %  |
| 2600                 | 52.5                               | 2.16                            | 4.28    | 4.28    | 4.28    | 0.50               | 1.20                    | ± 12.0 %  |


<sup>C</sup> Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for ConvF assessments at 30, 64, 128, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 110 MHz.

<sup>F</sup> At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to ± 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

<sup>G</sup> Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

## Frequency Response of E-Field


(TEM-Cell:ifi110 EXX, Waveguide: R22)

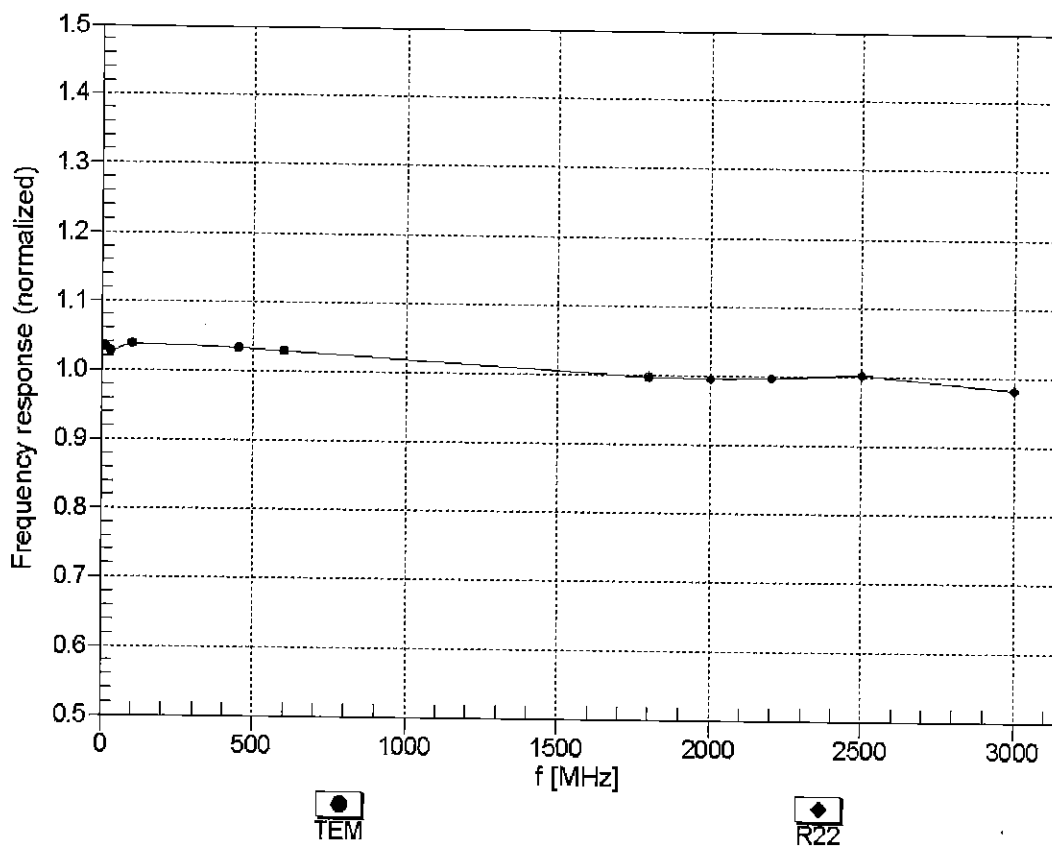



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

f=600 MHz,TEM


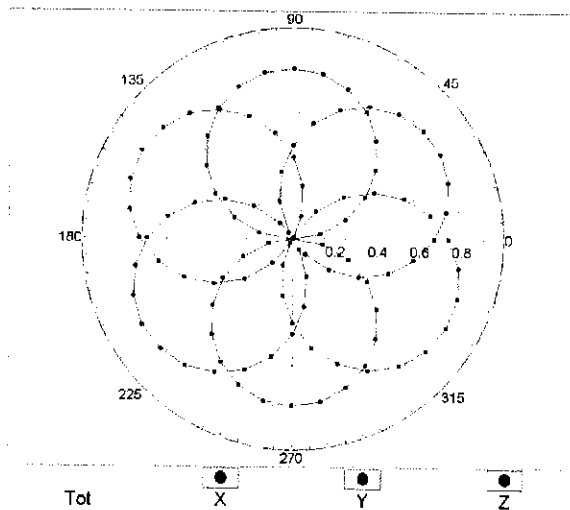


f=1800 MHz,R22

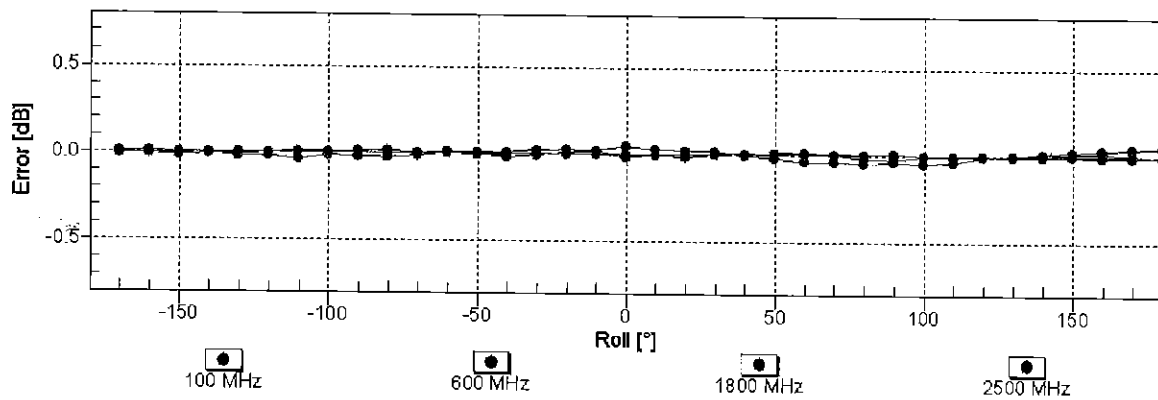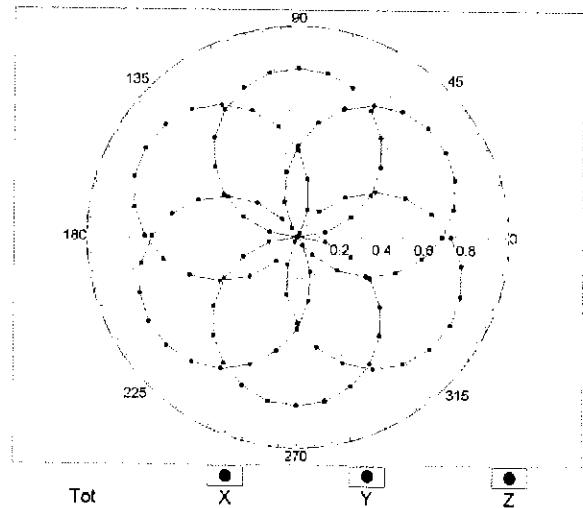

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )


# Dynamic Range $f(\text{SAR}_{\text{head}})$ (TEM cell , $f_{\text{eval}} = 1900 \text{ MHz}$ )

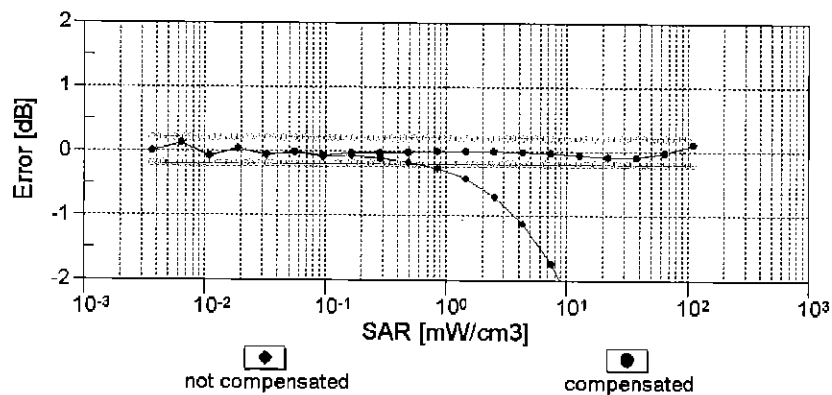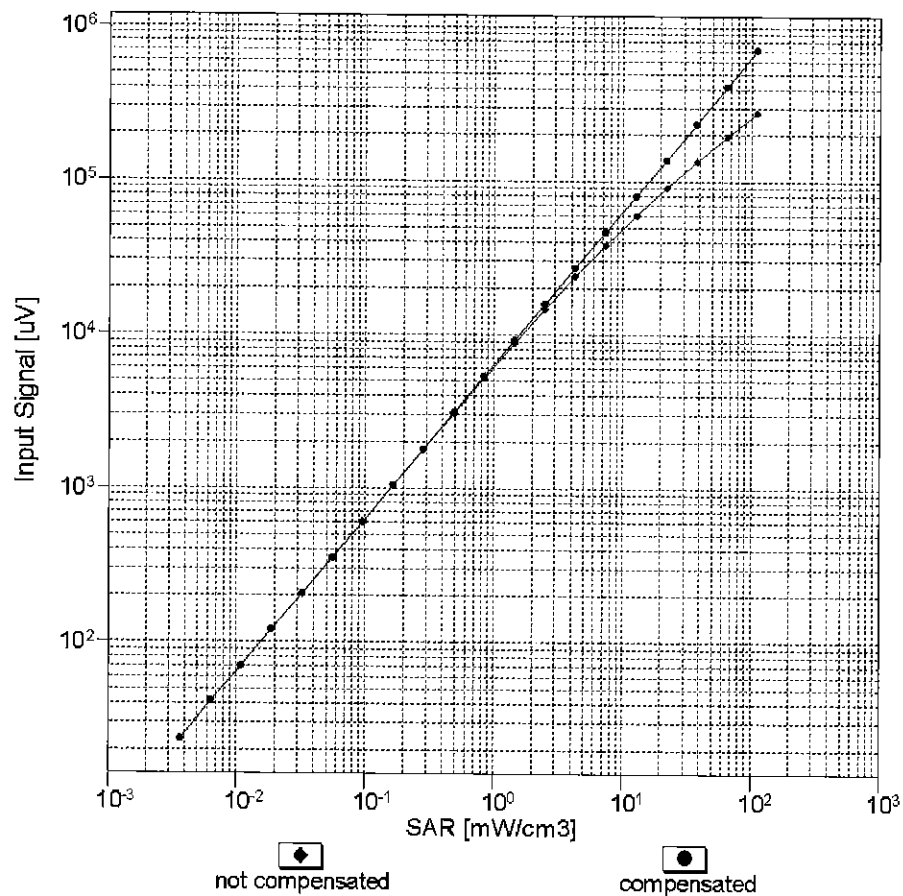

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )





## Conversion Factor Assessment

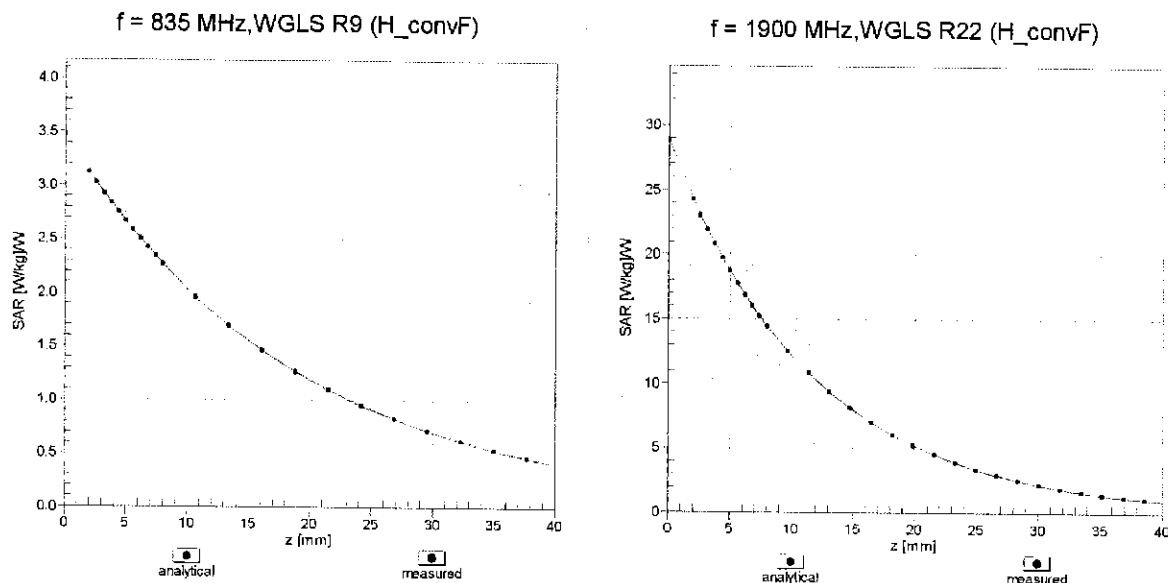

## Deviation from Isotropy in Liquid

Error ( $\phi, \theta$ ),  $f = 900 \text{ MHz}$

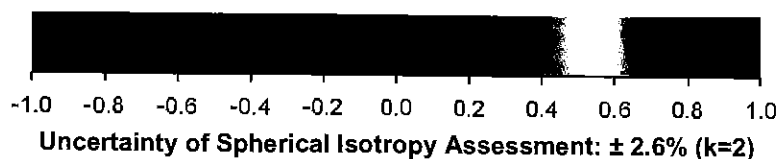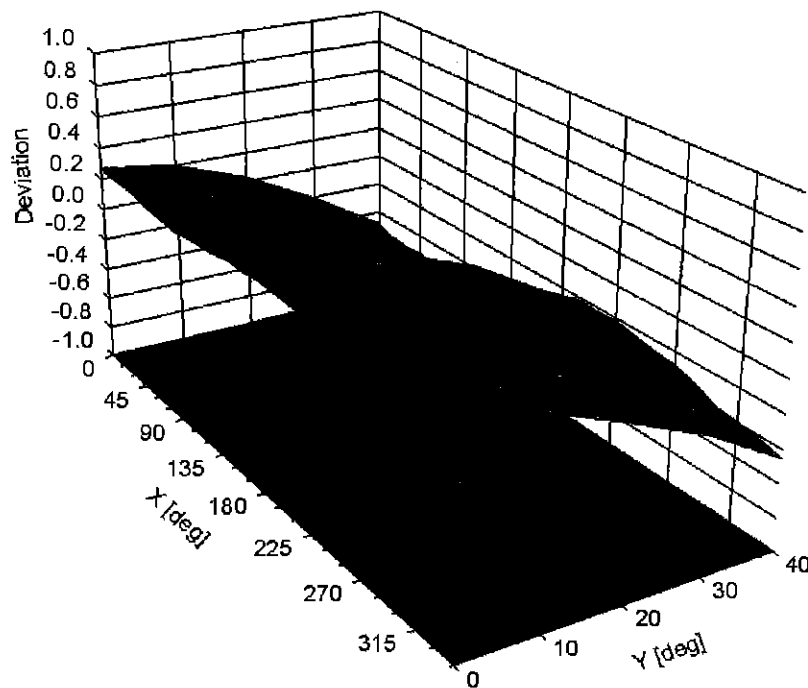

## DASY/EASY - Parameters of Probe: ES3DV3 - SN:3287

### Other Probe Parameters

|                                               |            |
|-----------------------------------------------|------------|
| Sensor Arrangement                            | Triangular |
| Connector Angle (°)                           | 89.6       |
| Mechanical Surface Detection Mode             | enabled    |
| Optical Surface Detection Mode                | disabled   |
| Probe Overall Length                          | 337 mm     |
| Probe Body Diameter                           | 10 mm      |
| Tip Length                                    | 10 mm      |
| Tip Diameter                                  | 4 mm       |
| Probe Tip to Sensor X Calibration Point       | 2 mm       |
| Probe Tip to Sensor Y Calibration Point       | 2 mm       |
| Probe Tip to Sensor Z Calibration Point       | 2 mm       |
| Recommended Measurement Distance from Surface | 3 mm       |

**Appendix: Modulation Calibration Parameters**

| UID           | Communication System Name                     |   | A<br>dB | B<br>dB $\sqrt{\mu V}$ | C     | D<br>dB | VR<br>mV | Max<br>Unc <sup>E</sup><br>(k=2) |
|---------------|-----------------------------------------------|---|---------|------------------------|-------|---------|----------|----------------------------------|
| 0             | CW                                            | X | 0.00    | 0.00                   | 1.00  | 0.00    | 191.5    | $\pm 3.3 \%$                     |
|               |                                               | Y | 0.00    | 0.00                   | 1.00  |         | 198.9    |                                  |
|               |                                               | Z | 0.00    | 0.00                   | 1.00  |         | 180.8    |                                  |
| 10010-<br>CAA | SAR Validation (Square, 100ms, 10ms)          | X | 10.31   | 82.54                  | 19.92 | 10.00   | 25.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 9.70    | 81.57                  | 20.65 |         | 25.0     |                                  |
|               |                                               | Z | 13.02   | 86.61                  | 21.44 |         | 25.0     |                                  |
| 10011-<br>CAB | UMTS-FDD (WCDMA)                              | X | 1.65    | 76.64                  | 20.39 | 0.00    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.11    | 68.31                  | 15.89 |         | 150.0    |                                  |
|               |                                               | Z | 1.20    | 70.53                  | 17.08 |         | 150.0    |                                  |
| 10012-<br>CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)      | X | 1.42    | 67.62                  | 17.77 | 0.41    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 1.35    | 65.44                  | 16.09 |         | 150.0    |                                  |
|               |                                               | Z | 1.35    | 66.18                  | 16.60 |         | 150.0    |                                  |
| 10013-<br>CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps) | X | 5.13    | 67.63                  | 17.69 | 1.46    | 150.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 5.21    | 67.37                  | 17.49 |         | 150.0    |                                  |
|               |                                               | Z | 5.05    | 67.67                  | 17.63 |         | 150.0    |                                  |
| 10021-<br>DAC | GSM-FDD (TDMA, GMSK)                          | X | 36.11   | 104.66                 | 28.70 | 9.39    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 17.06   | 92.75                  | 26.26 |         | 50.0     |                                  |
|               |                                               | Z | 74.47   | 117.68                 | 32.39 |         | 50.0     |                                  |
| 10023-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0)                   | X | 29.01   | 100.99                 | 27.69 | 9.57    | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 15.70   | 91.12                  | 25.76 |         | 50.0     |                                  |
|               |                                               | Z | 50.86   | 111.27                 | 30.76 |         | 50.0     |                                  |
| 10024-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1)                 | X | 100.00  | 118.25                 | 30.37 | 6.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 79.14   | 117.46                 | 31.45 |         | 60.0     |                                  |
|               |                                               | Z | 100.00  | 119.51                 | 30.92 |         | 60.0     |                                  |
| 10025-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0)                   | X | 18.01   | 104.77                 | 39.73 | 12.57   | 50.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 13.85   | 93.70                  | 35.01 |         | 50.0     |                                  |
|               |                                               | Z | 19.28   | 108.70                 | 41.83 |         | 50.0     |                                  |
| 10026-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1)                 | X | 22.37   | 106.73                 | 36.71 | 9.56    | 60.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 15.21   | 95.13                  | 32.50 |         | 60.0     |                                  |
|               |                                               | Z | 23.85   | 109.99                 | 38.29 |         | 60.0     |                                  |
| 10027-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2)               | X | 100.00  | 117.60                 | 29.16 | 4.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 119.86                 | 30.73 |         | 80.0     |                                  |
|               |                                               | Z | 100.00  | 118.96                 | 29.76 |         | 80.0     |                                  |
| 10028-<br>DAC | GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)             | X | 100.00  | 118.56                 | 28.79 | 3.55    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 119.98                 | 29.90 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 119.90                 | 29.38 |         | 100.0    |                                  |
| 10029-<br>DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2)               | X | 14.79   | 97.42                  | 32.53 | 7.80    | 80.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 11.52   | 89.75                  | 29.55 |         | 80.0     |                                  |
|               |                                               | Z | 14.18   | 97.61                  | 32.99 |         | 80.0     |                                  |
| 10030-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH1)           | X | 100.00  | 116.89                 | 29.16 | 5.30    | 70.0     | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 119.53                 | 30.94 |         | 70.0     |                                  |
|               |                                               | Z | 100.00  | 118.05                 | 29.66 |         | 70.0     |                                  |
| 10031-<br>CAA | IEEE 802.15.1 Bluetooth (GFSK, DH3)           | X | 100.00  | 122.60                 | 28.99 | 1.88    | 100.0    | $\pm 9.6 \%$                     |
|               |                                               | Y | 100.00  | 121.51                 | 28.91 |         | 100.0    |                                  |
|               |                                               | Z | 100.00  | 122.48                 | 28.93 |         | 100.0    |                                  |

|           |                                                     |   |        |        |       |       |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|-------|-------|---------|
| 10032-CAA | IEEE 802.15.1 Bluetooth (GFSK, DH5)                 | X | 100.00 | 133.16 | 32.27 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 126.43 | 29.83 |       | 100.0 |         |
|           |                                                     | Z | 100.00 | 130.02 | 30.96 |       | 100.0 |         |
| 10033-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH1)           | X | 32.57  | 106.74 | 29.49 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 13.39  | 91.56  | 25.42 |       | 70.0  |         |
|           |                                                     | Z | 28.98  | 104.37 | 28.55 |       | 70.0  |         |
| 10034-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH3)           | X | 45.93  | 114.88 | 30.10 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 7.50   | 87.12  | 22.45 |       | 100.0 |         |
|           |                                                     | Z | 20.04  | 100.44 | 25.46 |       | 100.0 |         |
| 10035-CAA | IEEE 802.15.1 Bluetooth (PI/4-DQPSK, DH5)           | X | 21.96  | 105.92 | 27.68 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.51   | 81.47  | 20.26 |       | 100.0 |         |
|           |                                                     | Z | 9.42   | 91.44  | 22.56 |       | 100.0 |         |
| 10036-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH1)               | X | 45.23  | 112.33 | 31.05 | 5.30  | 70.0  | ± 9.6 % |
|           |                                                     | Y | 15.39  | 94.09  | 26.30 |       | 70.0  |         |
|           |                                                     | Z | 38.95  | 109.34 | 29.96 |       | 70.0  |         |
| 10037-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH3)               | X | 39.94  | 112.82 | 29.55 | 1.88  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 7.15   | 86.45  | 22.19 |       | 100.0 |         |
|           |                                                     | Z | 17.08  | 98.28  | 24.84 |       | 100.0 |         |
| 10038-CAA | IEEE 802.15.1 Bluetooth (8-DPSK, DH5)               | X | 24.74  | 108.13 | 28.38 | 1.17  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 4.66   | 82.21  | 20.61 |       | 100.0 |         |
|           |                                                     | Z | 9.87   | 92.45  | 22.99 |       | 100.0 |         |
| 10039-CAB | CDMA2000 (1xRTT, RC1)                               | X | 7.01   | 92.94  | 24.21 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.15   | 73.76  | 17.15 |       | 150.0 |         |
|           |                                                     | Z | 2.61   | 77.73  | 17.80 |       | 150.0 |         |
| 10042-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Halfrate) | X | 100.00 | 117.06 | 30.06 | 7.78  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 33.54  | 102.85 | 27.66 |       | 50.0  |         |
|           |                                                     | Z | 100.00 | 118.08 | 30.50 |       | 50.0  |         |
| 10044-CAA | IS-91/EIA/TIA-553 FDD (FDMA, FM)                    | X | 0.00   | 127.60 | 2.39  | 0.00  | 150.0 | ± 9.6 % |
|           |                                                     | Y | 0.00   | 96.78  | 0.00  |       | 150.0 |         |
|           |                                                     | Z | 0.01   | 122.93 | 2.94  |       | 150.0 |         |
| 10048-CAA | DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)           | X | 13.06  | 86.13  | 24.73 | 13.80 | 25.0  | ± 9.6 % |
|           |                                                     | Y | 11.09  | 82.14  | 24.36 |       | 25.0  |         |
|           |                                                     | Z | 16.17  | 90.99  | 26.57 |       | 25.0  |         |
| 10049-CAA | DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)         | X | 16.50  | 91.24  | 25.09 | 10.79 | 40.0  | ± 9.6 % |
|           |                                                     | Y | 12.58  | 86.37  | 24.53 |       | 40.0  |         |
|           |                                                     | Z | 22.30  | 97.25  | 27.17 |       | 40.0  |         |
| 10056-CAA | UMTS-TDD (TD-SCDMA, 1.28 Mcps)                      | X | 15.28  | 90.62  | 25.52 | 9.03  | 50.0  | ± 9.6 % |
|           |                                                     | Y | 11.72  | 85.08  | 24.19 |       | 50.0  |         |
|           |                                                     | Z | 17.40  | 93.38  | 26.42 |       | 50.0  |         |
| 10058-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-1-2-3)                   | X | 10.69  | 91.04  | 29.62 | 6.55  | 100.0 | ± 9.6 % |
|           |                                                     | Y | 9.07   | 85.67  | 27.37 |       | 100.0 |         |
|           |                                                     | Z | 9.88   | 90.10  | 29.57 |       | 100.0 |         |
| 10059-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps)            | X | 1.68   | 70.66  | 19.16 | 0.61  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 1.55   | 67.69  | 17.16 |       | 110.0 |         |
|           |                                                     | Z | 1.56   | 68.66  | 17.81 |       | 110.0 |         |
| 10060-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps)          | X | 100.00 | 135.64 | 35.63 | 1.30  | 110.0 | ± 9.6 % |
|           |                                                     | Y | 100.00 | 131.50 | 34.05 |       | 110.0 |         |
|           |                                                     | Z | 100.00 | 134.30 | 35.03 |       | 110.0 |         |

|           |                                                |   |       |        |       |      |       |         |
|-----------|------------------------------------------------|---|-------|--------|-------|------|-------|---------|
| 10061-CAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)      | X | 54.02 | 125.97 | 35.38 | 2.04 | 110.0 | ± 9.6 % |
|           |                                                | Y | 8.96  | 93.29  | 26.14 |      | 110.0 |         |
|           |                                                | Z | 19.56 | 108.50 | 30.84 |      | 110.0 |         |
| 10062-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps)       | X | 4.87  | 67.49  | 17.06 | 0.49 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.91  | 67.10  | 16.78 |      | 100.0 |         |
|           |                                                | Z | 4.75  | 67.38  | 16.89 |      | 100.0 |         |
| 10063-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps)       | X | 4.91  | 67.64  | 17.19 | 0.72 | 100.0 | ± 9.6 % |
|           |                                                | Y | 4.96  | 67.27  | 16.93 |      | 100.0 |         |
|           |                                                | Z | 4.80  | 67.55  | 17.03 |      | 100.0 |         |
| 10064-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps)      | X | 5.22  | 67.92  | 17.42 | 0.86 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.29  | 67.61  | 17.19 |      | 100.0 |         |
|           |                                                | Z | 5.08  | 67.80  | 17.26 |      | 100.0 |         |
| 10065-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps)      | X | 5.13  | 67.94  | 17.58 | 1.21 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.21  | 67.67  | 17.37 |      | 100.0 |         |
|           |                                                | Z | 5.00  | 67.84  | 17.45 |      | 100.0 |         |
| 10066-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps)      | X | 5.18  | 68.06  | 17.79 | 1.46 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.27  | 67.81  | 17.60 |      | 100.0 |         |
|           |                                                | Z | 5.05  | 67.98  | 17.68 |      | 100.0 |         |
| 10067-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps)      | X | 5.49  | 68.19  | 18.21 | 2.04 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.60  | 67.98  | 18.05 |      | 100.0 |         |
|           |                                                | Z | 5.39  | 68.30  | 18.20 |      | 100.0 |         |
| 10068-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps)      | X | 5.62  | 68.50  | 18.55 | 2.55 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.76  | 68.37  | 18.43 |      | 100.0 |         |
|           |                                                | Z | 5.50  | 68.48  | 18.50 |      | 100.0 |         |
| 10069-CAB | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)      | X | 5.69  | 68.44  | 18.72 | 2.67 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.84  | 68.31  | 18.60 |      | 100.0 |         |
|           |                                                | Z | 5.58  | 68.54  | 18.73 |      | 100.0 |         |
| 10071-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 9 Mbps)  | X | 5.27  | 67.84  | 18.05 | 1.99 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.37  | 67.63  | 17.89 |      | 100.0 |         |
|           |                                                | Z | 5.20  | 67.92  | 18.02 |      | 100.0 |         |
| 10072-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 12 Mbps) | X | 5.34  | 68.42  | 18.38 | 2.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.45  | 68.23  | 18.22 |      | 100.0 |         |
|           |                                                | Z | 5.25  | 68.45  | 18.35 |      | 100.0 |         |
| 10073-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 18 Mbps) | X | 5.47  | 68.76  | 18.79 | 2.83 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.61  | 68.62  | 18.66 |      | 100.0 |         |
|           |                                                | Z | 5.40  | 68.87  | 18.81 |      | 100.0 |         |
| 10074-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 24 Mbps) | X | 5.51  | 68.83  | 19.02 | 3.30 | 100.0 | ± 9.6 % |
|           |                                                | Y | 5.66  | 68.73  | 18.92 |      | 100.0 |         |
|           |                                                | Z | 5.46  | 68.99  | 19.07 |      | 100.0 |         |
| 10075-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 36 Mbps) | X | 5.65  | 69.27  | 19.49 | 3.82 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.85  | 69.26  | 19.43 |      | 90.0  |         |
|           |                                                | Z | 5.60  | 69.37  | 19.53 |      | 90.0  |         |
| 10076-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 48 Mbps) | X | 5.67  | 69.08  | 19.61 | 4.15 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.87  | 69.08  | 19.56 |      | 90.0  |         |
|           |                                                | Z | 5.65  | 69.30  | 19.73 |      | 90.0  |         |
| 10077-CAB | IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps) | X | 5.72  | 69.19  | 19.72 | 4.30 | 90.0  | ± 9.6 % |
|           |                                                | Y | 5.92  | 69.19  | 19.67 |      | 90.0  |         |
|           |                                                | Z | 5.70  | 69.44  | 19.85 |      | 90.0  |         |

|           |                                                     |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10081-CAB | CDMA2000 (1xRTT, RC3)                               | X | 2.28   | 81.48  | 20.27 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.00   | 67.64  | 14.10 |      | 150.0 |         |
|           |                                                     | Z | 1.04   | 69.66  | 14.21 |      | 150.0 |         |
| 10082-CAB | IS-54 / IS-136 FDD (TDMA/FDM, PI/4-DQPSK, Fullrate) | X | 2.13   | 64.08  | 8.83  | 4.77 | 80.0  | ± 9.6 % |
|           |                                                     | Y | 2.57   | 65.34  | 10.16 |      | 80.0  |         |
|           |                                                     | Z | 2.13   | 64.35  | 9.02  |      | 80.0  |         |
| 10090-DAC | GPRS-FDD (TDMA, GMSK, TN 0-4)                       | X | 100.00 | 118.32 | 30.42 | 6.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 75.01  | 116.70 | 31.30 |      | 60.0  |         |
|           |                                                     | Z | 100.00 | 119.58 | 30.97 |      | 60.0  |         |
| 10097-CAB | UMTS-FDD (HSDPA)                                    | X | 2.20   | 71.50  | 18.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.90   | 67.97  | 16.04 |      | 150.0 |         |
|           |                                                     | Z | 1.97   | 69.50  | 16.62 |      | 150.0 |         |
| 10098-CAB | UMTS-FDD (HSUPA, Subtest 2)                         | X | 2.16   | 71.55  | 18.11 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 1.86   | 67.93  | 16.01 |      | 150.0 |         |
|           |                                                     | Z | 1.93   | 69.49  | 16.61 |      | 150.0 |         |
| 10099-DAC | EDGE-FDD (TDMA, 8PSK, TN 0-4)                       | X | 22.24  | 106.54 | 36.64 | 9.56 | 60.0  | ± 9.6 % |
|           |                                                     | Y | 15.16  | 95.02  | 32.46 |      | 60.0  |         |
|           |                                                     | Z | 23.72  | 109.80 | 38.22 |      | 60.0  |         |
| 10100-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 3.77   | 73.97  | 18.60 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.32   | 71.02  | 16.99 |      | 150.0 |         |
|           |                                                     | Z | 3.27   | 71.57  | 17.41 |      | 150.0 |         |
| 10101-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 3.50   | 69.24  | 17.00 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.39   | 67.99  | 16.16 |      | 150.0 |         |
|           |                                                     | Z | 3.29   | 68.22  | 16.35 |      | 150.0 |         |
| 10102-CAD | LTE-FDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 3.59   | 69.07  | 17.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.49   | 67.92  | 16.24 |      | 150.0 |         |
|           |                                                     | Z | 3.39   | 68.14  | 16.41 |      | 150.0 |         |
| 10103-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK)            | X | 9.27   | 79.88  | 21.95 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.43   | 77.27  | 20.93 |      | 65.0  |         |
|           |                                                     | Z | 9.22   | 80.33  | 22.26 |      | 65.0  |         |
| 10104-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM)          | X | 8.81   | 77.80  | 21.97 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 8.62   | 76.41  | 21.37 |      | 65.0  |         |
|           |                                                     | Z | 8.59   | 77.82  | 22.06 |      | 65.0  |         |
| 10105-CAD | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM)          | X | 8.19   | 76.36  | 21.65 | 3.98 | 65.0  | ± 9.6 % |
|           |                                                     | Y | 7.71   | 74.18  | 20.67 |      | 65.0  |         |
|           |                                                     | Z | 7.86   | 76.00  | 21.56 |      | 65.0  |         |
| 10108-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)            | X | 3.29   | 73.14  | 18.47 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.93   | 70.22  | 16.82 |      | 150.0 |         |
|           |                                                     | Z | 2.85   | 70.87  | 17.28 |      | 150.0 |         |
| 10109-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)          | X | 3.18   | 69.27  | 17.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 3.05   | 67.82  | 16.11 |      | 150.0 |         |
|           |                                                     | Z | 2.94   | 68.18  | 16.29 |      | 150.0 |         |
| 10110-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)             | X | 2.72   | 72.52  | 18.35 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.40   | 69.28  | 16.49 |      | 150.0 |         |
|           |                                                     | Z | 2.33   | 70.22  | 16.99 |      | 150.0 |         |
| 10111-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)           | X | 2.96   | 70.65  | 17.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                     | Y | 2.76   | 68.51  | 16.45 |      | 150.0 |         |
|           |                                                     | Z | 2.69   | 69.33  | 16.67 |      | 150.0 |         |

|           |                                                |   |       |       |       |      |       |         |
|-----------|------------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10112-CAE | LTE-FDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)     | X | 3.29  | 69.10 | 17.02 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.17  | 67.76 | 16.14 |      | 150.0 |         |
|           |                                                | Z | 3.06  | 68.15 | 16.32 |      | 150.0 |         |
| 10113-CAE | LTE-FDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)      | X | 3.11  | 70.58 | 17.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.92  | 68.59 | 16.56 |      | 150.0 |         |
|           |                                                | Z | 2.83  | 69.41 | 16.76 |      | 150.0 |         |
| 10114-CAB | IEEE 802.11n (HT Greenfield, 13.5 Mbps, BPSK)  | X | 5.26  | 67.86 | 16.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.25  | 67.40 | 16.53 |      | 150.0 |         |
|           |                                                | Z | 5.14  | 67.65 | 16.68 |      | 150.0 |         |
| 10115-CAB | IEEE 802.11n (HT Greenfield, 81 Mbps, 16-QAM)  | X | 5.60  | 68.11 | 16.98 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.62  | 67.73 | 16.70 |      | 150.0 |         |
|           |                                                | Z | 5.40  | 67.70 | 16.71 |      | 150.0 |         |
| 10116-CAB | IEEE 802.11n (HT Greenfield, 135 Mbps, 64-QAM) | X | 5.38  | 68.12 | 16.91 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.38  | 67.68 | 16.59 |      | 150.0 |         |
|           |                                                | Z | 5.23  | 67.82 | 16.70 |      | 150.0 |         |
| 10117-CAB | IEEE 802.11n (HT Mixed, 13.5 Mbps, BPSK)       | X | 5.24  | 67.79 | 16.84 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.25  | 67.40 | 16.55 |      | 150.0 |         |
|           |                                                | Z | 5.10  | 67.49 | 16.62 |      | 150.0 |         |
| 10118-CAB | IEEE 802.11n (HT Mixed, 81 Mbps, 16-QAM)       | X | 5.68  | 68.30 | 17.08 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.70  | 67.92 | 16.80 |      | 150.0 |         |
|           |                                                | Z | 5.48  | 67.91 | 16.83 |      | 150.0 |         |
| 10119-CAB | IEEE 802.11n (HT Mixed, 135 Mbps, 64-QAM)      | X | 5.35  | 68.04 | 16.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 5.35  | 67.63 | 16.58 |      | 150.0 |         |
|           |                                                | Z | 5.21  | 67.79 | 16.69 |      | 150.0 |         |
| 10140-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)     | X | 3.63  | 69.06 | 16.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.53  | 67.92 | 16.17 |      | 150.0 |         |
|           |                                                | Z | 3.42  | 68.16 | 16.33 |      | 150.0 |         |
| 10141-CAD | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)     | X | 3.75  | 69.06 | 17.04 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.65  | 67.98 | 16.31 |      | 150.0 |         |
|           |                                                | Z | 3.54  | 68.23 | 16.48 |      | 150.0 |         |
| 10142-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, QPSK)        | X | 2.58  | 73.34 | 18.51 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.18  | 69.29 | 16.31 |      | 150.0 |         |
|           |                                                | Z | 2.13  | 70.56 | 16.73 |      | 150.0 |         |
| 10143-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)      | X | 3.01  | 72.46 | 18.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.65  | 69.32 | 16.38 |      | 150.0 |         |
|           |                                                | Z | 2.60  | 70.44 | 16.44 |      | 150.0 |         |
| 10144-CAD | LTE-FDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)      | X | 2.64  | 69.45 | 16.13 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.44  | 67.23 | 14.90 |      | 150.0 |         |
|           |                                                | Z | 2.30  | 67.73 | 14.62 |      | 150.0 |         |
| 10145-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)      | X | 2.19  | 73.84 | 16.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 1.54  | 67.56 | 13.92 |      | 150.0 |         |
|           |                                                | Z | 1.24  | 66.10 | 11.96 |      | 150.0 |         |
| 10146-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)    | X | 6.00  | 80.94 | 18.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 2.97  | 71.15 | 15.11 |      | 150.0 |         |
|           |                                                | Z | 2.39  | 68.87 | 12.55 |      | 150.0 |         |
| 10147-CAE | LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)    | X | 13.14 | 91.59 | 22.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                | Y | 3.76  | 74.52 | 16.70 |      | 150.0 |         |
|           |                                                | Z | 3.21  | 72.37 | 14.16 |      | 150.0 |         |

|           |                                            |   |       |       |       |      |       |         |
|-----------|--------------------------------------------|---|-------|-------|-------|------|-------|---------|
| 10149-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 3.19  | 69.34 | 17.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.06  | 67.89 | 16.15 |      | 150.0 |         |
|           |                                            | Z | 2.95  | 68.25 | 16.34 |      | 150.0 |         |
| 10150-CAD | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 3.29  | 69.16 | 17.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.18  | 67.81 | 16.18 |      | 150.0 |         |
|           |                                            | Z | 3.07  | 68.20 | 16.36 |      | 150.0 |         |
| 10151-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)    | X | 10.08 | 82.65 | 23.10 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 9.04  | 79.65 | 21.96 |      | 65.0  |         |
|           |                                            | Z | 10.06 | 83.26 | 23.42 |      | 65.0  |         |
| 10152-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM)  | X | 8.50  | 78.17 | 21.88 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.23  | 76.54 | 21.20 |      | 65.0  |         |
|           |                                            | Z | 8.27  | 78.18 | 21.88 |      | 65.0  |         |
| 10153-CAD | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)  | X | 8.91  | 78.99 | 22.55 | 3.98 | 65.0  | ± 9.6 % |
|           |                                            | Y | 8.60  | 77.29 | 21.85 |      | 65.0  |         |
|           |                                            | Z | 8.71  | 79.10 | 22.58 |      | 65.0  |         |
| 10154-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 2.81  | 73.15 | 18.70 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.46  | 69.77 | 16.80 |      | 150.0 |         |
|           |                                            | Z | 2.38  | 70.62 | 17.23 |      | 150.0 |         |
| 10155-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 2.96  | 70.66 | 17.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.76  | 68.51 | 16.46 |      | 150.0 |         |
|           |                                            | Z | 2.69  | 69.35 | 16.69 |      | 150.0 |         |
| 10156-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 2.55  | 74.52 | 18.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.05  | 69.58 | 16.30 |      | 150.0 |         |
|           |                                            | Z | 2.00  | 70.89 | 16.58 |      | 150.0 |         |
| 10157-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 2.62  | 71.06 | 16.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.30  | 67.95 | 15.09 |      | 150.0 |         |
|           |                                            | Z | 2.17  | 68.55 | 14.74 |      | 150.0 |         |
| 10158-CAE | LTE-FDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 3.11  | 70.65 | 17.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.92  | 68.65 | 16.60 |      | 150.0 |         |
|           |                                            | Z | 2.84  | 69.48 | 16.81 |      | 150.0 |         |
| 10159-CAE | LTE-FDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 2.77  | 71.67 | 17.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.42  | 68.44 | 15.40 |      | 150.0 |         |
|           |                                            | Z | 2.27  | 68.98 | 14.99 |      | 150.0 |         |
| 10160-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, QPSK)    | X | 3.14  | 71.31 | 17.89 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 2.90  | 69.12 | 16.57 |      | 150.0 |         |
|           |                                            | Z | 2.85  | 69.90 | 17.00 |      | 150.0 |         |
| 10161-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 3.19  | 69.15 | 17.05 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.08  | 67.73 | 16.13 |      | 150.0 |         |
|           |                                            | Z | 2.97  | 68.19 | 16.30 |      | 150.0 |         |
| 10162-CAD | LTE-FDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 3.30  | 69.19 | 17.10 | 0.00 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.18  | 67.80 | 16.21 |      | 150.0 |         |
|           |                                            | Z | 3.08  | 68.34 | 16.41 |      | 150.0 |         |
| 10166-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 4.14  | 72.27 | 20.63 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.92  | 70.06 | 19.35 |      | 150.0 |         |
|           |                                            | Z | 3.85  | 71.64 | 20.32 |      | 150.0 |         |
| 10167-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 5.70  | 76.91 | 21.68 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.94  | 72.92 | 19.80 |      | 150.0 |         |
|           |                                            | Z | 5.14  | 76.11 | 21.32 |      | 150.0 |         |



|           |                                            |   |        |        |       |      |       |         |
|-----------|--------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10168-CAE | LTE-FDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 6.50   | 79.76  | 23.17 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.42   | 74.94  | 21.01 |      | 150.0 |         |
|           |                                            | Z | 5.85   | 78.93  | 22.82 |      | 150.0 |         |
| 10169-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 3.88   | 74.16  | 21.49 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.53   | 70.80  | 19.64 |      | 150.0 |         |
|           |                                            | Z | 3.37   | 71.79  | 20.43 |      | 150.0 |         |
| 10170-CAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 7.14   | 85.17  | 25.38 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.02   | 76.66  | 21.81 |      | 150.0 |         |
|           |                                            | Z | 5.41   | 80.65  | 23.72 |      | 150.0 |         |
| 10171-AAD | LTE-FDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 5.21   | 78.32  | 21.78 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.13   | 72.50  | 19.15 |      | 150.0 |         |
|           |                                            | Z | 4.25   | 75.40  | 20.64 |      | 150.0 |         |
| 10172-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)      | X | 82.16  | 130.26 | 39.09 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 17.62  | 97.94  | 29.93 |      | 65.0  |         |
|           |                                            | Z | 65.78  | 128.99 | 39.45 |      | 65.0  |         |
| 10173-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)    | X | 91.21  | 124.95 | 35.70 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 19.75  | 96.35  | 28.03 |      | 65.0  |         |
|           |                                            | Z | 100.00 | 129.35 | 37.29 |      | 65.0  |         |
| 10174-CAD | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM)    | X | 55.61  | 114.43 | 32.46 | 6.02 | 65.0  | ± 9.6 % |
|           |                                            | Y | 16.76  | 92.45  | 26.36 |      | 65.0  |         |
|           |                                            | Z | 70.56  | 121.14 | 34.65 |      | 65.0  |         |
| 10175-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)      | X | 3.81   | 73.71  | 21.19 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.48   | 70.45  | 19.37 |      | 150.0 |         |
|           |                                            | Z | 3.32   | 71.46  | 20.19 |      | 150.0 |         |
| 10176-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)    | X | 7.15   | 85.21  | 25.39 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 5.03   | 76.68  | 21.82 |      | 150.0 |         |
|           |                                            | Z | 5.42   | 80.68  | 23.74 |      | 150.0 |         |
| 10177-CAG | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, QPSK)       | X | 3.85   | 73.93  | 21.31 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.51   | 70.63  | 19.48 |      | 150.0 |         |
|           |                                            | Z | 3.35   | 71.61  | 20.27 |      | 150.0 |         |
| 10178-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)     | X | 7.01   | 84.77  | 25.21 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.96   | 76.40  | 21.67 |      | 150.0 |         |
|           |                                            | Z | 5.36   | 80.45  | 23.62 |      | 150.0 |         |
| 10179-CAE | LTE-FDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)    | X | 6.07   | 81.52  | 23.41 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.53   | 74.41  | 20.33 |      | 150.0 |         |
|           |                                            | Z | 4.79   | 77.92  | 22.06 |      | 150.0 |         |
| 10180-CAE | LTE-FDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)     | X | 5.18   | 78.18  | 21.70 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.12   | 72.40  | 19.09 |      | 150.0 |         |
|           |                                            | Z | 4.24   | 75.33  | 20.60 |      | 150.0 |         |
| 10181-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 3.84   | 73.91  | 21.30 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 3.51   | 70.61  | 19.47 |      | 150.0 |         |
|           |                                            | Z | 3.35   | 71.60  | 20.27 |      | 150.0 |         |
| 10182-CAD | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)    | X | 6.99   | 84.74  | 25.19 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.95   | 76.38  | 21.66 |      | 150.0 |         |
|           |                                            | Z | 5.35   | 80.42  | 23.61 |      | 150.0 |         |
| 10183-AAC | LTE-FDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 5.17   | 78.15  | 21.69 | 3.01 | 150.0 | ± 9.6 % |
|           |                                            | Y | 4.11   | 72.38  | 19.08 |      | 150.0 |         |
|           |                                            | Z | 4.23   | 75.30  | 20.59 |      | 150.0 |         |

|           |                                               |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10184-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, QPSK)          | X | 3.86 | 73.96 | 21.33 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.52 | 70.65 | 19.50 |      | 150.0 |         |
|           |                                               | Z | 3.36 | 71.64 | 20.29 |      | 150.0 |         |
| 10185-CAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)        | X | 7.04 | 84.85 | 25.24 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.98 | 76.45 | 21.70 |      | 150.0 |         |
|           |                                               | Z | 5.38 | 80.50 | 23.65 |      | 150.0 |         |
| 10186-AAD | LTE-FDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)        | X | 5.20 | 78.24 | 21.73 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.13 | 72.45 | 19.11 |      | 150.0 |         |
|           |                                               | Z | 4.25 | 75.38 | 20.62 |      | 150.0 |         |
| 10187-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)        | X | 3.87 | 74.02 | 21.39 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 3.53 | 70.69 | 19.55 |      | 150.0 |         |
|           |                                               | Z | 3.37 | 71.71 | 20.36 |      | 150.0 |         |
| 10188-CAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)      | X | 7.44 | 86.01 | 25.76 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.15 | 77.16 | 22.09 |      | 150.0 |         |
|           |                                               | Z | 5.58 | 81.30 | 24.05 |      | 150.0 |         |
| 10189-AAE | LTE-FDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)      | X | 5.39 | 78.94 | 22.10 | 3.01 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.22 | 72.89 | 19.39 |      | 150.0 |         |
|           |                                               | Z | 4.36 | 75.91 | 20.93 |      | 150.0 |         |
| 10193-CAB | IEEE 802.11n (HT Greenfield, 6.5 Mbps, BPSK)  | X | 4.67 | 67.32 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.67 | 66.82 | 16.30 |      | 150.0 |         |
|           |                                               | Z | 4.53 | 67.11 | 16.38 |      | 150.0 |         |
| 10194-CAB | IEEE 802.11n (HT Greenfield, 39 Mbps, 16-QAM) | X | 4.85 | 67.66 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.86 | 67.18 | 16.41 |      | 150.0 |         |
|           |                                               | Z | 4.69 | 67.40 | 16.51 |      | 150.0 |         |
| 10195-CAB | IEEE 802.11n (HT Greenfield, 65 Mbps, 64-QAM) | X | 4.89 | 67.68 | 16.77 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.90 | 67.20 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.73 | 67.43 | 16.52 |      | 150.0 |         |
| 10196-CAB | IEEE 802.11n (HT Mixed, 6.5 Mbps, BPSK)       | X | 4.68 | 67.41 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.68 | 66.91 | 16.33 |      | 150.0 |         |
|           |                                               | Z | 4.52 | 67.15 | 16.39 |      | 150.0 |         |
| 10197-CAB | IEEE 802.11n (HT Mixed, 39 Mbps, 16-QAM)      | X | 4.87 | 67.69 | 16.78 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.88 | 67.20 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.70 | 67.42 | 16.52 |      | 150.0 |         |
| 10198-CAB | IEEE 802.11n (HT Mixed, 65 Mbps, 64-QAM)      | X | 4.90 | 67.70 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.91 | 67.21 | 16.43 |      | 150.0 |         |
|           |                                               | Z | 4.73 | 67.45 | 16.54 |      | 150.0 |         |
| 10219-CAB | IEEE 802.11n (HT Mixed, 7.2 Mbps, BPSK)       | X | 4.63 | 67.43 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.63 | 66.93 | 16.29 |      | 150.0 |         |
|           |                                               | Z | 4.47 | 67.18 | 16.36 |      | 150.0 |         |
| 10220-CAB | IEEE 802.11n (HT Mixed, 43.3 Mbps, 16-QAM)    | X | 4.86 | 67.66 | 16.77 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.88 | 67.19 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.69 | 67.38 | 16.50 |      | 150.0 |         |
| 10221-CAB | IEEE 802.11n (HT Mixed, 72.2 Mbps, 64-QAM)    | X | 4.90 | 67.62 | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 4.91 | 67.14 | 16.42 |      | 150.0 |         |
|           |                                               | Z | 4.74 | 67.37 | 16.52 |      | 150.0 |         |
| 10222-CAB | IEEE 802.11n (HT Mixed, 15 Mbps, BPSK)        | X | 5.22 | 67.81 | 16.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                               | Y | 5.23 | 67.42 | 16.55 |      | 150.0 |         |
|           |                                               | Z | 5.08 | 67.50 | 16.62 |      | 150.0 |         |

|           |                                           |   |        |        |       |      |       |         |
|-----------|-------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10223-CAB | IEEE 802.11n (HT Mixed, 90 Mbps, 16-QAM)  | X | 5.53   | 67.97  | 16.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.59   | 67.74  | 16.73 |      | 150.0 |         |
|           |                                           | Z | 5.38   | 67.75  | 16.76 |      | 150.0 |         |
| 10224-CAB | IEEE 802.11n (HT Mixed, 150 Mbps, 64-QAM) | X | 5.26   | 67.91  | 16.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 5.27   | 67.51  | 16.52 |      | 150.0 |         |
|           |                                           | Z | 5.12   | 67.61  | 16.60 |      | 150.0 |         |
| 10225-CAB | UMTS-FDD (HSPA+)                          | X | 3.00   | 67.51  | 16.39 | 0.00 | 150.0 | ± 9.6 % |
|           |                                           | Y | 2.93   | 66.39  | 15.65 |      | 150.0 |         |
|           |                                           | Z | 2.82   | 66.88  | 15.63 |      | 150.0 |         |
| 10226-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)  | X | 100.00 | 126.81 | 36.25 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 20.60  | 97.21  | 28.37 |      | 65.0  |         |
|           |                                           | Z | 100.00 | 129.54 | 37.41 |      | 65.0  |         |
| 10227-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)  | X | 65.64  | 117.49 | 33.34 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 18.22  | 94.00  | 26.93 |      | 65.0  |         |
|           |                                           | Z | 85.61  | 124.65 | 35.59 |      | 65.0  |         |
| 10228-CAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)    | X | 79.85  | 130.36 | 39.26 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 20.21  | 101.07 | 31.01 |      | 65.0  |         |
|           |                                           | Z | 65.84  | 129.47 | 39.67 |      | 65.0  |         |
| 10229-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)    | X | 91.11  | 124.93 | 35.70 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 19.80  | 96.38  | 28.04 |      | 65.0  |         |
|           |                                           | Z | 100.00 | 129.35 | 37.29 |      | 65.0  |         |
| 10230-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)    | X | 60.15  | 115.83 | 32.84 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 17.60  | 93.31  | 26.65 |      | 65.0  |         |
|           |                                           | Z | 77.12  | 122.67 | 35.03 |      | 65.0  |         |
| 10231-CAB | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)      | X | 72.28  | 128.22 | 38.64 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 19.39  | 100.17 | 30.67 |      | 65.0  |         |
|           |                                           | Z | 59.87  | 127.39 | 39.07 |      | 65.0  |         |
| 10232-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)    | X | 91.25  | 124.96 | 35.71 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 19.78  | 96.37  | 28.04 |      | 65.0  |         |
|           |                                           | Z | 100.00 | 129.36 | 37.30 |      | 65.0  |         |
| 10233-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)    | X | 60.26  | 115.87 | 32.85 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 17.59  | 93.32  | 26.66 |      | 65.0  |         |
|           |                                           | Z | 77.19  | 122.70 | 35.04 |      | 65.0  |         |
| 10234-CAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)      | X | 65.41  | 125.97 | 37.96 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 18.62  | 99.23  | 30.29 |      | 65.0  |         |
|           |                                           | Z | 54.84  | 125.34 | 38.42 |      | 65.0  |         |
| 10235-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)   | X | 91.93  | 125.11 | 35.75 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 19.81  | 96.41  | 28.05 |      | 65.0  |         |
|           |                                           | Z | 100.00 | 129.37 | 37.30 |      | 65.0  |         |
| 10236-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)   | X | 61.00  | 116.05 | 32.90 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 17.69  | 93.40  | 26.68 |      | 65.0  |         |
|           |                                           | Z | 78.43  | 122.94 | 35.10 |      | 65.0  |         |
| 10237-CAD | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)     | X | 73.61  | 128.60 | 38.74 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 19.49  | 100.29 | 30.70 |      | 65.0  |         |
|           |                                           | Z | 60.90  | 127.76 | 39.16 |      | 65.0  |         |
| 10238-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)   | X | 91.47  | 125.02 | 35.72 | 6.02 | 65.0  | ± 9.6 % |
|           |                                           | Y | 19.78  | 96.38  | 28.04 |      | 65.0  |         |
|           |                                           | Z | 100.00 | 129.37 | 37.30 |      | 65.0  |         |

|           |                                            |   |       |        |       |      |      |         |
|-----------|--------------------------------------------|---|-------|--------|-------|------|------|---------|
| 10239-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)    | X | 60.36 | 115.92 | 32.87 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 17.58 | 93.32  | 26.66 |      | 65.0 |         |
|           |                                            | Z | 77.24 | 122.72 | 35.05 |      | 65.0 |         |
| 10240-CAD | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)      | X | 73.31 | 128.53 | 38.72 | 6.02 | 65.0 | ± 9.6 % |
|           |                                            | Y | 19.44 | 100.25 | 30.69 |      | 65.0 |         |
|           |                                            | Z | 60.69 | 127.70 | 39.15 |      | 65.0 |         |
| 10241-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM) | X | 14.22 | 90.30  | 28.70 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 11.91 | 84.78  | 26.56 |      | 65.0 |         |
|           |                                            | Z | 15.04 | 92.96  | 29.82 |      | 65.0 |         |
| 10242-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM) | X | 12.20 | 86.96  | 27.37 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 11.04 | 83.09  | 25.82 |      | 65.0 |         |
|           |                                            | Z | 14.66 | 92.40  | 29.55 |      | 65.0 |         |
| 10243-CAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)   | X | 9.46  | 83.32  | 26.91 | 6.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.15  | 80.79  | 25.71 |      | 65.0 |         |
|           |                                            | Z | 10.96 | 87.97  | 28.96 |      | 65.0 |         |
| 10244-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)   | X | 10.76 | 82.68  | 21.60 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.17  | 79.37  | 20.74 |      | 65.0 |         |
|           |                                            | Z | 9.65  | 80.90  | 20.36 |      | 65.0 |         |
| 10245-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)   | X | 10.44 | 81.95  | 21.29 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.07  | 78.96  | 20.54 |      | 65.0 |         |
|           |                                            | Z | 9.24  | 79.99  | 19.97 |      | 65.0 |         |
| 10246-CAB | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)     | X | 11.35 | 86.57  | 23.09 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.94  | 81.85  | 21.69 |      | 65.0 |         |
|           |                                            | Z | 10.01 | 84.49  | 21.88 |      | 65.0 |         |
| 10247-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)   | X | 8.24  | 79.27  | 21.01 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.74  | 77.28  | 20.43 |      | 65.0 |         |
|           |                                            | Z | 7.64  | 78.13  | 20.10 |      | 65.0 |         |
| 10248-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)   | X | 8.11  | 78.56  | 20.72 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 7.73  | 76.82  | 20.23 |      | 65.0 |         |
|           |                                            | Z | 7.48  | 77.39  | 19.79 |      | 65.0 |         |
| 10249-CAD | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)     | X | 12.62 | 88.79  | 24.56 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.64  | 83.20  | 22.76 |      | 65.0 |         |
|           |                                            | Z | 12.16 | 88.40  | 24.15 |      | 65.0 |         |
| 10250-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)  | X | 9.13  | 81.24  | 23.10 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.50  | 78.84  | 22.20 |      | 65.0 |         |
|           |                                            | Z | 8.86  | 81.11  | 22.89 |      | 65.0 |         |
| 10251-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)  | X | 8.47  | 78.74  | 21.83 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.10  | 76.89  | 21.13 |      | 65.0 |         |
|           |                                            | Z | 8.20  | 78.63  | 21.61 |      | 65.0 |         |
| 10252-CAD | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)    | X | 11.59 | 86.92  | 24.65 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 9.53  | 82.29  | 23.01 |      | 65.0 |         |
|           |                                            | Z | 11.63 | 87.60  | 24.87 |      | 65.0 |         |
| 10253-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)  | X | 8.27  | 77.55  | 21.65 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.04  | 76.02  | 21.02 |      | 65.0 |         |
|           |                                            | Z | 8.09  | 77.65  | 21.62 |      | 65.0 |         |
| 10254-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)  | X | 8.67  | 78.35  | 22.26 | 3.98 | 65.0 | ± 9.6 % |
|           |                                            | Y | 8.41  | 76.75  | 21.61 |      | 65.0 |         |
|           |                                            | Z | 8.50  | 78.49  | 22.25 |      | 65.0 |         |

|           |                                             |   |       |       |       |      |      |         |
|-----------|---------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10255-CAD | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)     | X | 9.69  | 82.20 | 23.16 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.77  | 79.29 | 22.03 |      | 65.0 |         |
|           |                                             | Z | 9.70  | 82.84 | 23.45 |      | 65.0 |         |
| 10256-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM) | X | 9.10  | 79.45 | 19.54 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.28  | 77.46 | 19.27 |      | 65.0 |         |
|           |                                             | Z | 7.50  | 76.38 | 17.64 |      | 65.0 |         |
| 10257-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM) | X | 8.71  | 78.44 | 19.07 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.14  | 76.86 | 18.96 |      | 65.0 |         |
|           |                                             | Z | 7.10  | 75.27 | 17.09 |      | 65.0 |         |
| 10258-CAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)   | X | 9.16  | 82.49 | 20.98 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 7.92  | 79.54 | 20.28 |      | 65.0 |         |
|           |                                             | Z | 7.29  | 78.75 | 18.94 |      | 65.0 |         |
| 10259-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)   | X | 8.59  | 79.95 | 21.73 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.03  | 77.80 | 21.03 |      | 65.0 |         |
|           |                                             | Z | 8.13  | 79.27 | 21.11 |      | 65.0 |         |
| 10260-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)   | X | 8.53  | 79.55 | 21.59 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.06  | 77.57 | 20.96 |      | 65.0 |         |
|           |                                             | Z | 8.06  | 78.82 | 20.93 |      | 65.0 |         |
| 10261-CAB | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)     | X | 11.51 | 87.11 | 24.32 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.26  | 82.24 | 22.68 |      | 65.0 |         |
|           |                                             | Z | 11.28 | 87.12 | 24.13 |      | 65.0 |         |
| 10262-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)   | X | 9.12  | 81.19 | 23.06 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.49  | 78.79 | 22.16 |      | 65.0 |         |
|           |                                             | Z | 8.84  | 81.05 | 22.85 |      | 65.0 |         |
| 10263-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)   | X | 8.46  | 78.73 | 21.82 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.09  | 76.88 | 21.13 |      | 65.0 |         |
|           |                                             | Z | 8.19  | 78.61 | 21.60 |      | 65.0 |         |
| 10264-CAD | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)     | X | 11.49 | 86.74 | 24.57 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.47  | 82.16 | 22.94 |      | 65.0 |         |
|           |                                             | Z | 11.51 | 87.39 | 24.78 |      | 65.0 |         |
| 10265-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)  | X | 8.50  | 78.18 | 21.88 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.22  | 76.54 | 21.21 |      | 65.0 |         |
|           |                                             | Z | 8.27  | 78.18 | 21.88 |      | 65.0 |         |
| 10266-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)  | X | 8.90  | 78.98 | 22.54 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.60  | 77.28 | 21.84 |      | 65.0 |         |
|           |                                             | Z | 8.71  | 79.09 | 22.57 |      | 65.0 |         |
| 10267-CAD | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)    | X | 10.06 | 82.61 | 23.09 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 9.03  | 79.62 | 21.95 |      | 65.0 |         |
|           |                                             | Z | 10.04 | 83.22 | 23.41 |      | 65.0 |         |
| 10268-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)  | X | 8.87  | 77.45 | 21.95 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.72  | 76.18 | 21.40 |      | 65.0 |         |
|           |                                             | Z | 8.67  | 77.54 | 22.05 |      | 65.0 |         |
| 10269-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)  | X | 8.77  | 76.99 | 21.83 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.66  | 75.80 | 21.31 |      | 65.0 |         |
|           |                                             | Z | 8.60  | 77.10 | 21.92 |      | 65.0 |         |
| 10270-CAD | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)    | X | 9.16  | 79.20 | 21.93 | 3.98 | 65.0 | ± 9.6 % |
|           |                                             | Y | 8.71  | 77.35 | 21.19 |      | 65.0 |         |
|           |                                             | Z | 9.06  | 79.57 | 22.19 |      | 65.0 |         |

|           |                                                                    |   |        |        |       |      |       |         |
|-----------|--------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10274-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.10)                          | X | 2.80   | 68.17  | 16.47 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.67   | 66.63  | 15.50 |      | 150.0 |         |
|           |                                                                    | Z | 2.65   | 67.51  | 15.70 |      | 150.0 |         |
| 10275-CAB | UMTS-FDD (HSUPA, Subtest 5, 3GPP Rel8.4)                           | X | 2.12   | 73.27  | 18.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.72   | 68.53  | 16.00 |      | 150.0 |         |
|           |                                                                    | Z | 1.76   | 70.05  | 16.72 |      | 150.0 |         |
| 10277-CAA | PHS (QPSK)                                                         | X | 5.32   | 68.96  | 13.42 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 6.41   | 71.20  | 15.49 |      | 50.0  |         |
|           |                                                                    | Z | 5.12   | 68.74  | 13.08 |      | 50.0  |         |
| 10278-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.5)                                 | X | 9.11   | 79.62  | 20.31 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 9.22   | 79.31  | 21.03 |      | 50.0  |         |
|           |                                                                    | Z | 8.20   | 77.78  | 19.21 |      | 50.0  |         |
| 10279-CAA | PHS (QPSK, BW 884MHz, Rolloff 0.38)                                | X | 9.25   | 79.80  | 20.39 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 9.36   | 79.46  | 21.09 |      | 50.0  |         |
|           |                                                                    | Z | 8.30   | 77.91  | 19.28 |      | 50.0  |         |
| 10290-AAB | CDMA2000, RC1, SO55, Full Rate                                     | X | 3.59   | 82.57  | 20.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.73   | 70.44  | 15.45 |      | 150.0 |         |
|           |                                                                    | Z | 1.75   | 72.09  | 15.26 |      | 150.0 |         |
| 10291-AAB | CDMA2000, RC3, SO55, Full Rate                                     | X | 2.13   | 80.55  | 19.92 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 0.98   | 67.37  | 13.95 |      | 150.0 |         |
|           |                                                                    | Z | 1.01   | 69.27  | 14.02 |      | 150.0 |         |
| 10292-AAB | CDMA2000, RC3, SO32, Full Rate                                     | X | 12.02  | 108.71 | 29.17 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.26   | 72.03  | 16.54 |      | 150.0 |         |
|           |                                                                    | Z | 1.93   | 79.12  | 18.49 |      | 150.0 |         |
| 10293-AAB | CDMA2000, RC3, SO3, Full Rate                                      | X | 100.00 | 144.61 | 38.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.90   | 78.46  | 19.68 |      | 150.0 |         |
|           |                                                                    | Z | 6.64   | 97.19  | 24.86 |      | 150.0 |         |
| 10295-AAB | CDMA2000, RC1, SO3, 1/8th Rate 25 fr.                              | X | 11.58  | 85.59  | 24.60 | 9.03 | 50.0  | ± 9.6 % |
|           |                                                                    | Y | 10.44  | 82.50  | 23.85 |      | 50.0  |         |
|           |                                                                    | Z | 13.98  | 88.93  | 25.45 |      | 50.0  |         |
| 10297-AAC | LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)                            | X | 3.31   | 73.28  | 18.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.94   | 70.32  | 16.89 |      | 150.0 |         |
|           |                                                                    | Z | 2.86   | 70.97  | 17.35 |      | 150.0 |         |
| 10298-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, QPSK)                             | X | 2.53   | 75.50  | 18.42 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 1.83   | 69.14  | 15.39 |      | 150.0 |         |
|           |                                                                    | Z | 1.69   | 69.62  | 14.84 |      | 150.0 |         |
| 10299-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)                           | X | 6.61   | 82.78  | 20.21 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 3.43   | 72.67  | 16.51 |      | 150.0 |         |
|           |                                                                    | Z | 3.82   | 74.80  | 16.21 |      | 150.0 |         |
| 10300-AAC | LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)                           | X | 3.24   | 71.51  | 15.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                    | Y | 2.57   | 67.68  | 13.54 |      | 150.0 |         |
|           |                                                                    | Z | 2.21   | 66.93  | 12.03 |      | 150.0 |         |
| 10301-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC)                 | X | 5.62   | 68.28  | 18.87 | 4.17 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 5.93   | 68.63  | 18.94 |      | 80.0  |         |
|           |                                                                    | Z | 5.89   | 69.91  | 19.47 |      | 80.0  |         |
| 10302-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, QPSK, PUSC, 3 CTRL symbols) | X | 6.17   | 69.25  | 19.82 | 4.96 | 80.0  | ± 9.6 % |
|           |                                                                    | Y | 6.38   | 69.08  | 19.58 |      | 80.0  |         |
|           |                                                                    | Z | 6.23   | 69.95  | 19.93 |      | 80.0  |         |

|           |                                                                     |   |       |       |       |       |       |         |
|-----------|---------------------------------------------------------------------|---|-------|-------|-------|-------|-------|---------|
| 10303-AAA | IEEE 802.16e WiMAX (31:15, 5ms, 10MHz, 64QAM, PUSC)                 | X | 6.02  | 69.32 | 19.87 | 4.96  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.26  | 69.22 | 19.66 |       | 80.0  |         |
|           |                                                                     | Z | 6.09  | 70.04 | 19.96 |       | 80.0  |         |
| 10304-AAA | IEEE 802.16e WiMAX (29:18, 5ms, 10MHz, 64QAM, PUSC)                 | X | 5.67  | 68.65 | 19.09 | 4.17  | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.85  | 68.42 | 18.82 |       | 80.0  |         |
|           |                                                                     | Z | 5.71  | 69.28 | 19.12 |       | 80.0  |         |
| 10305-AAA | IEEE 802.16e WiMAX (31:15, 10ms, 10MHz, 64QAM, PUSC, 15 symbols)    | X | 9.13  | 83.00 | 26.75 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 11.08 | 85.83 | 27.58 |       | 50.0  |         |
|           |                                                                     | Z | 11.97 | 88.64 | 28.23 |       | 50.0  |         |
| 10306-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 64QAM, PUSC, 18 symbols)    | X | 6.47  | 72.26 | 21.90 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.84  | 72.27 | 21.68 |       | 50.0  |         |
|           |                                                                     | Z | 6.81  | 73.77 | 22.17 |       | 50.0  |         |
| 10307-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, PUSC, 18 symbols)     | X | 6.58  | 73.04 | 22.08 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 8.34  | 78.37 | 24.64 |       | 50.0  |         |
|           |                                                                     | Z | 6.92  | 74.46 | 22.29 |       | 50.0  |         |
| 10308-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, PUSC)                | X | 6.66  | 73.56 | 22.34 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 8.60  | 79.30 | 25.04 |       | 50.0  |         |
|           |                                                                     | Z | 7.08  | 75.16 | 22.62 |       | 50.0  |         |
| 10309-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, 16QAM, AMC 2x3, 18 symbols) | X | 6.58  | 72.60 | 22.09 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.95  | 72.58 | 21.85 |       | 50.0  |         |
|           |                                                                     | Z | 6.90  | 74.05 | 22.35 |       | 50.0  |         |
| 10310-AAA | IEEE 802.16e WiMAX (29:18, 10ms, 10MHz, QPSK, AMC 2x3, 18 symbols)  | X | 6.50  | 72.56 | 21.95 | 6.02  | 50.0  | ± 9.6 % |
|           |                                                                     | Y | 6.87  | 72.52 | 21.70 |       | 50.0  |         |
|           |                                                                     | Z | 6.86  | 74.10 | 22.23 |       | 50.0  |         |
| 10311-AAC | LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)                            | X | 3.70  | 72.28 | 18.01 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 3.30  | 69.61 | 16.53 |       | 150.0 |         |
|           |                                                                     | Z | 3.23  | 70.11 | 16.90 |       | 150.0 |         |
| 10313-AAA | iDEN 1:3                                                            | X | 9.18  | 81.61 | 19.86 | 6.99  | 70.0  | ± 9.6 % |
|           |                                                                     | Y | 7.64  | 78.40 | 19.13 |       | 70.0  |         |
|           |                                                                     | Z | 9.78  | 83.14 | 20.58 |       | 70.0  |         |
| 10314-AAA | iDEN 1:6                                                            | X | 13.83 | 90.60 | 25.32 | 10.00 | 30.0  | ± 9.6 % |
|           |                                                                     | Y | 9.35  | 83.01 | 23.15 |       | 30.0  |         |
|           |                                                                     | Z | 14.01 | 91.81 | 25.99 |       | 30.0  |         |
| 10315-AAB | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 96pc duty cycle)           | X | 1.27  | 67.24 | 17.67 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.20  | 64.93 | 15.83 |       | 150.0 |         |
|           |                                                                     | Z | 1.21  | 65.68 | 16.36 |       | 150.0 |         |
| 10316-AAB | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 96pc duty cycle)       | X | 4.76  | 67.47 | 16.83 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.78  | 67.03 | 16.51 |       | 150.0 |         |
|           |                                                                     | Z | 4.63  | 67.31 | 16.62 |       | 150.0 |         |
| 10317-AAB | IEEE 802.11a WiFi 5 GHz (OFDM, 6 Mbps, 96pc duty cycle)             | X | 4.76  | 67.47 | 16.83 | 0.17  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.78  | 67.03 | 16.51 |       | 150.0 |         |
|           |                                                                     | Z | 4.63  | 67.31 | 16.62 |       | 150.0 |         |
| 10400-AAC | IEEE 802.11ac WiFi (20MHz, 64-QAM, 99pc duty cycle)                 | X | 4.86  | 67.74 | 16.77 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.87  | 67.24 | 16.40 |       | 150.0 |         |
|           |                                                                     | Z | 4.68  | 67.47 | 16.52 |       | 150.0 |         |
| 10401-AAC | IEEE 802.11ac WiFi (40MHz, 64-QAM, 99pc duty cycle)                 | X | 5.51  | 67.76 | 16.81 | 0.00  | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 5.52  | 67.36 | 16.52 |       | 150.0 |         |
|           |                                                                     | Z | 5.41  | 67.67 | 16.70 |       | 150.0 |         |

|           |                                                                                |   |        |        |       |      |       |         |
|-----------|--------------------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10402-AAC | IEEE 802.11ac WiFi (80MHz, 64-QAM, 99pc duty cycle)                            | X | 5.79   | 68.18  | 16.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.81   | 67.85  | 16.61 |      | 150.0 |         |
|           |                                                                                | Z | 5.64   | 67.83  | 16.63 |      | 150.0 |         |
| 10403-AAB | CDMA2000 (1xEV-DO, Rev. 0)                                                     | X | 3.59   | 82.57  | 20.48 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.73   | 70.44  | 15.45 |      | 115.0 |         |
|           |                                                                                | Z | 1.75   | 72.09  | 15.26 |      | 115.0 |         |
| 10404-AAB | CDMA2000 (1xEV-DO, Rev. A)                                                     | X | 3.59   | 82.57  | 20.48 | 0.00 | 115.0 | ± 9.6 % |
|           |                                                                                | Y | 1.73   | 70.44  | 15.45 |      | 115.0 |         |
|           |                                                                                | Z | 1.75   | 72.09  | 15.26 |      | 115.0 |         |
| 10406-AAB | CDMA2000, RC3, SO32, SCH0, Full Rate                                           | X | 100.00 | 122.57 | 31.18 | 0.00 | 100.0 | ± 9.6 % |
|           |                                                                                | Y | 18.35  | 99.60  | 26.20 |      | 100.0 |         |
|           |                                                                                | Z | 100.00 | 120.33 | 29.78 |      | 100.0 |         |
| 10410-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)                 | X | 100.00 | 120.29 | 30.51 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                                | Y | 100.00 | 120.68 | 31.13 |      | 80.0  |         |
|           |                                                                                | Z | 100.00 | 122.62 | 31.38 |      | 80.0  |         |
| 10415-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)                      | X | 1.09   | 65.33  | 16.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 1.03   | 63.31  | 14.91 |      | 150.0 |         |
|           |                                                                                | Z | 1.05   | 64.05  | 15.43 |      | 150.0 |         |
| 10416-AAA | IEEE 802.11g WiFi 2.4 GHz (ERP-OFDM, 6 Mbps, 99pc duty cycle)                  | X | 4.67   | 67.36  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.67   | 66.86  | 16.34 |      | 150.0 |         |
|           |                                                                                | Z | 4.53   | 67.14  | 16.45 |      | 150.0 |         |
| 10417-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 99pc duty cycle)                      | X | 4.67   | 67.36  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.67   | 66.86  | 16.34 |      | 150.0 |         |
|           |                                                                                | Z | 4.53   | 67.14  | 16.45 |      | 150.0 |         |
| 10418-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Long preamble)  | X | 4.66   | 67.53  | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.66   | 67.00  | 16.35 |      | 150.0 |         |
|           |                                                                                | Z | 4.52   | 67.33  | 16.49 |      | 150.0 |         |
| 10419-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 99pc duty cycle, Short preamble) | X | 4.68   | 67.47  | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.68   | 66.95  | 16.36 |      | 150.0 |         |
|           |                                                                                | Z | 4.54   | 67.26  | 16.48 |      | 150.0 |         |
| 10422-AAA | IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)                                   | X | 4.80   | 67.45  | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.81   | 66.96  | 16.37 |      | 150.0 |         |
|           |                                                                                | Z | 4.65   | 67.24  | 16.49 |      | 150.0 |         |
| 10423-AAA | IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)                                | X | 4.99   | 67.80  | 16.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.00   | 67.33  | 16.51 |      | 150.0 |         |
|           |                                                                                | Z | 4.80   | 67.54  | 16.59 |      | 150.0 |         |
| 10424-AAA | IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)                                | X | 4.90   | 67.76  | 16.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 4.91   | 67.27  | 16.47 |      | 150.0 |         |
|           |                                                                                | Z | 4.73   | 67.50  | 16.57 |      | 150.0 |         |
| 10425-AAA | IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)                                    | X | 5.49   | 68.02  | 16.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.50   | 67.62  | 16.64 |      | 150.0 |         |
|           |                                                                                | Z | 5.34   | 67.73  | 16.73 |      | 150.0 |         |
| 10426-AAA | IEEE 802.11n (HT Greenfield, 90 Mbps, 16-QAM)                                  | X | 5.49   | 68.02  | 16.94 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                                | Y | 5.51   | 67.65  | 16.65 |      | 150.0 |         |
|           |                                                                                | Z | 5.36   | 67.83  | 16.78 |      | 150.0 |         |



|           |                                                                |   |        |        |       |      |       |         |
|-----------|----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10427-AAA | IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)                 | X | 5.50   | 68.00  | 16.93 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.52   | 67.64  | 16.64 |      | 150.0 |         |
|           |                                                                | Z | 5.36   | 67.74  | 16.73 |      | 150.0 |         |
| 10430-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)                               | X | 4.54   | 72.09  | 19.09 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.40   | 70.73  | 18.36 |      | 150.0 |         |
|           |                                                                | Z | 4.26   | 71.56  | 18.37 |      | 150.0 |         |
| 10431-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)                              | X | 4.40   | 68.10  | 16.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.40   | 67.42  | 16.40 |      | 150.0 |         |
|           |                                                                | Z | 4.19   | 67.79  | 16.46 |      | 150.0 |         |
| 10432-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)                              | X | 4.68   | 67.87  | 16.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.69   | 67.31  | 16.44 |      | 150.0 |         |
|           |                                                                | Z | 4.50   | 67.59  | 16.53 |      | 150.0 |         |
| 10433-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)                              | X | 4.92   | 67.80  | 16.85 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.93   | 67.31  | 16.50 |      | 150.0 |         |
|           |                                                                | Z | 4.74   | 67.53  | 16.59 |      | 150.0 |         |
| 10434-AAA | W-CDMA (BS Test Model 1, 64 DPCH)                              | X | 4.73   | 73.25  | 19.23 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.51   | 71.54  | 18.38 |      | 150.0 |         |
|           |                                                                | Z | 4.38   | 72.53  | 18.34 |      | 150.0 |         |
| 10435-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 120.11 | 30.42 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                | Y | 100.00 | 120.53 | 31.07 |      | 80.0  |         |
|           |                                                                | Z | 100.00 | 122.42 | 31.29 |      | 80.0  |         |
| 10447-AAB | LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)                 | X | 3.76   | 68.51  | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.71   | 67.48  | 15.90 |      | 150.0 |         |
|           |                                                                | Z | 3.49   | 67.91  | 15.73 |      | 150.0 |         |
| 10448-AAB | LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)                | X | 4.23   | 67.89  | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.22   | 67.19  | 16.26 |      | 150.0 |         |
|           |                                                                | Z | 4.04   | 67.58  | 16.33 |      | 150.0 |         |
| 10449-AAB | LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)                | X | 4.49   | 67.72  | 16.75 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.48   | 67.13  | 16.34 |      | 150.0 |         |
|           |                                                                | Z | 4.32   | 67.42  | 16.43 |      | 150.0 |         |
| 10450-AAB | LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)                | X | 4.67   | 67.59  | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.66   | 67.07  | 16.35 |      | 150.0 |         |
|           |                                                                | Z | 4.52   | 67.31  | 16.45 |      | 150.0 |         |
| 10451-AAA | W-CDMA (BS Test Model 1, 64 DPCH, Clipping 44%)                | X | 3.71   | 68.96  | 16.29 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.63   | 67.76  | 15.64 |      | 150.0 |         |
|           |                                                                | Z | 3.37   | 68.05  | 15.28 |      | 150.0 |         |
| 10456-AAA | IEEE 802.11ac WiFi (160MHz, 64-QAM, 99pc duty cycle)           | X | 6.34   | 68.51  | 17.03 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 6.36   | 68.23  | 16.81 |      | 150.0 |         |
|           |                                                                | Z | 6.24   | 68.31  | 16.89 |      | 150.0 |         |
| 10457-AAA | UMTS-FDD (DC-HSDPA)                                            | X | 3.87   | 65.97  | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 3.87   | 65.48  | 16.06 |      | 150.0 |         |
|           |                                                                | Z | 3.81   | 65.79  | 16.17 |      | 150.0 |         |
| 10458-AAA | CDMA2000 (1xEV-DO, Rev. B, 2 carriers)                         | X | 4.35   | 72.54  | 18.72 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 4.10   | 70.59  | 17.78 |      | 150.0 |         |
|           |                                                                | Z | 4.02   | 71.83  | 17.67 |      | 150.0 |         |
| 10459-AAA | CDMA2000 (1xEV-DO, Rev. B, 3 carriers)                         | X | 5.25   | 68.89  | 18.60 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                | Y | 5.22   | 68.08  | 18.20 |      | 150.0 |         |
|           |                                                                | Z | 4.96   | 68.66  | 18.04 |      | 150.0 |         |

|           |                                                                   |   |        |        |       |      |       |         |
|-----------|-------------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10460-AAA | UMTS-FDD (WCDMA, AMR)                                             | X | 1.62   | 80.44  | 22.68 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                   | Y | 0.96   | 69.05  | 16.73 |      | 150.0 |         |
|           |                                                                   | Z | 1.09   | 72.04  | 18.32 |      | 150.0 |         |
| 10461-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 125.40 | 32.90 | 3.29 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 122.42 | 32.02 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 127.89 | 33.84 |      | 80.0  |         |
| 10462-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 109.25 | 25.21 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 110.42 | 26.29 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 110.45 | 25.54 |      | 80.0  |         |
| 10463-AAA | LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 100.00 | 106.10 | 23.70 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 31.87  | 95.11  | 22.04 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 107.01 | 23.88 |      | 80.0  |         |
| 10464-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 123.48 | 31.85 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 120.78 | 31.11 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 125.94 | 32.77 |      | 80.0  |         |
| 10465-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 108.73 | 24.95 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 57.38  | 103.50 | 24.59 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 109.93 | 25.28 |      | 80.0  |         |
| 10466-AAA | LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 105.62 | 23.47 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 19.30  | 89.18  | 20.39 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.51 | 23.65 |      | 80.0  |         |
| 10467-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 100.00 | 123.71 | 31.96 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 120.96 | 31.19 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.19 | 32.89 |      | 80.0  |         |
| 10468-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 108.89 | 25.03 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 68.69  | 105.73 | 25.14 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 110.12 | 25.37 |      | 80.0  |         |
| 10469-AAC | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 100.00 | 105.63 | 23.47 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 19.75  | 89.45  | 20.46 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.53 | 23.66 |      | 80.0  |         |
| 10470-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 123.74 | 31.96 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 120.98 | 31.20 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.22 | 32.89 |      | 80.0  |         |
| 10471-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 108.84 | 25.00 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 69.00  | 105.75 | 25.13 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 110.07 | 25.35 |      | 80.0  |         |
| 10472-AAC | LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 105.58 | 23.44 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 19.79  | 89.46  | 20.45 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.47 | 23.62 |      | 80.0  |         |
| 10473-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 123.71 | 31.95 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 100.00 | 120.96 | 31.18 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 126.20 | 32.88 |      | 80.0  |         |
| 10474-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 108.85 | 25.00 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 67.79  | 105.55 | 25.09 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 110.08 | 25.35 |      | 80.0  |         |
| 10475-AAC | LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 100.00 | 105.59 | 23.45 | 3.23 | 80.0  | ± 9.6 % |
|           |                                                                   | Y | 19.52  | 89.31  | 20.41 |      | 80.0  |         |
|           |                                                                   | Z | 100.00 | 106.49 | 23.63 |      | 80.0  |         |

|           |                                                                     |   |        |        |       |      |      |         |
|-----------|---------------------------------------------------------------------|---|--------|--------|-------|------|------|---------|
| 10477-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 108.68 | 24.92 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 60.00  | 104.00 | 24.69 |      | 80.0 |         |
|           |                                                                     | Z | 100.00 | 109.90 | 25.26 |      | 80.0 |         |
| 10478-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)    | X | 100.00 | 105.53 | 23.42 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 19.24  | 89.12  | 20.35 |      | 80.0 |         |
|           |                                                                     | Z | 100.00 | 106.43 | 23.60 |      | 80.0 |         |
| 10479-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 94.50  | 124.14 | 33.84 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 12.50  | 90.83  | 25.02 |      | 80.0 |         |
|           |                                                                     | Z | 100.00 | 124.95 | 33.67 |      | 80.0 |         |
| 10480-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 95.67  | 115.16 | 29.54 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 12.83  | 86.63  | 22.28 |      | 80.0 |         |
|           |                                                                     | Z | 100.00 | 114.83 | 28.84 |      | 80.0 |         |
| 10481-AAA | LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 58.64  | 107.02 | 27.16 | 3.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 11.35  | 84.25  | 21.22 |      | 80.0 |         |
|           |                                                                     | Z | 80.09  | 110.11 | 27.23 |      | 80.0 |         |
| 10482-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 12.89  | 91.14  | 23.86 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.25   | 79.51  | 20.15 |      | 80.0 |         |
|           |                                                                     | Z | 8.39   | 84.42  | 21.05 |      | 80.0 |         |
| 10483-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 18.92  | 92.85  | 24.00 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 8.58   | 80.90  | 20.47 |      | 80.0 |         |
|           |                                                                     | Z | 13.62  | 87.31  | 21.48 |      | 80.0 |         |
| 10484-AAA | LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 15.36  | 89.71  | 23.07 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 7.99   | 79.65  | 20.04 |      | 80.0 |         |
|           |                                                                     | Z | 10.91  | 84.16  | 20.49 |      | 80.0 |         |
| 10485-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 10.83  | 89.50  | 24.25 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.29   | 79.77  | 20.91 |      | 80.0 |         |
|           |                                                                     | Z | 8.35   | 85.48  | 22.54 |      | 80.0 |         |
| 10486-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.33   | 78.08  | 19.97 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.11   | 73.82  | 18.38 |      | 80.0 |         |
|           |                                                                     | Z | 5.40   | 75.74  | 18.50 |      | 80.0 |         |
| 10487-AAC | LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 6.09   | 77.15  | 19.61 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.06   | 73.33  | 18.18 |      | 80.0 |         |
|           |                                                                     | Z | 5.20   | 74.88  | 18.15 |      | 80.0 |         |
| 10488-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 7.97   | 83.54  | 22.89 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 6.02   | 77.67  | 20.60 |      | 80.0 |         |
|           |                                                                     | Z | 6.66   | 81.06  | 21.92 |      | 80.0 |         |
| 10489-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 5.54   | 75.17  | 19.93 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.05   | 72.55  | 18.77 |      | 80.0 |         |
|           |                                                                     | Z | 5.10   | 74.15  | 19.29 |      | 80.0 |         |
| 10490-AAC | LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)  | X | 5.52   | 74.58  | 19.72 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.10   | 72.20  | 18.66 |      | 80.0 |         |
|           |                                                                     | Z | 5.11   | 73.70  | 19.12 |      | 80.0 |         |
| 10491-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 6.68   | 78.67  | 21.27 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.75   | 75.05  | 19.71 |      | 80.0 |         |
|           |                                                                     | Z | 5.90   | 77.08  | 20.64 |      | 80.0 |         |
| 10492-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 5.47   | 73.05  | 19.35 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                     | Y | 5.22   | 71.31  | 18.50 |      | 80.0 |         |
|           |                                                                     | Z | 5.12   | 72.35  | 18.92 |      | 80.0 |         |

|           |                                                                      |   |       |       |       |      |      |         |
|-----------|----------------------------------------------------------------------|---|-------|-------|-------|------|------|---------|
| 10493-AAC | LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.48  | 72.72 | 19.22 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.27  | 71.08 | 18.43 |      | 80.0 |         |
|           |                                                                      | Z | 5.15  | 72.07 | 18.82 |      | 80.0 |         |
| 10494-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 7.90  | 81.45 | 22.09 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 6.41  | 76.92 | 20.25 |      | 80.0 |         |
|           |                                                                      | Z | 6.69  | 79.16 | 21.27 |      | 80.0 |         |
| 10495-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.61  | 73.73 | 19.62 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.32  | 71.86 | 18.72 |      | 80.0 |         |
|           |                                                                      | Z | 5.21  | 72.81 | 19.16 |      | 80.0 |         |
| 10496-AAC | LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.57  | 73.09 | 19.41 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.35  | 71.43 | 18.59 |      | 80.0 |         |
|           |                                                                      | Z | 5.21  | 72.31 | 18.99 |      | 80.0 |         |
| 10497-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 10.14 | 86.59 | 21.54 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.12  | 76.51 | 18.39 |      | 80.0 |         |
|           |                                                                      | Z | 5.35  | 77.20 | 17.46 |      | 80.0 |         |
| 10498-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 4.29  | 72.00 | 15.43 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.72  | 69.52 | 14.77 |      | 80.0 |         |
|           |                                                                      | Z | 2.43  | 65.17 | 11.54 |      | 80.0 |         |
| 10499-AAA | LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 3.97  | 70.70 | 14.77 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 3.61  | 68.83 | 14.36 |      | 80.0 |         |
|           |                                                                      | Z | 2.26  | 64.14 | 10.91 |      | 80.0 |         |
| 10500-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 8.79  | 85.79 | 23.33 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.95  | 78.30 | 20.59 |      | 80.0 |         |
|           |                                                                      | Z | 7.25  | 82.97 | 22.08 |      | 80.0 |         |
| 10501-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.90  | 76.65 | 19.85 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.06  | 73.18 | 18.47 |      | 80.0 |         |
|           |                                                                      | Z | 5.28  | 75.13 | 18.80 |      | 80.0 |         |
| 10502-AAA | LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.87  | 76.18 | 19.62 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.09  | 72.91 | 18.33 |      | 80.0 |         |
|           |                                                                      | Z | 5.26  | 74.71 | 18.58 |      | 80.0 |         |
| 10503-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)     | X | 7.83  | 83.24 | 22.77 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.94  | 77.45 | 20.51 |      | 80.0 |         |
|           |                                                                      | Z | 6.55  | 80.79 | 21.81 |      | 80.0 |         |
| 10504-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.51  | 75.05 | 19.87 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.02  | 72.46 | 18.72 |      | 80.0 |         |
|           |                                                                      | Z | 5.07  | 74.04 | 19.23 |      | 80.0 |         |
| 10505-AAC | LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)   | X | 5.49  | 74.47 | 19.66 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.07  | 72.10 | 18.60 |      | 80.0 |         |
|           |                                                                      | Z | 5.08  | 73.60 | 19.06 |      | 80.0 |         |
| 10506-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)    | X | 7.81  | 81.23 | 22.00 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 6.35  | 76.76 | 20.18 |      | 80.0 |         |
|           |                                                                      | Z | 6.62  | 78.99 | 21.19 |      | 80.0 |         |
| 10507-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)  | X | 5.58  | 73.65 | 19.59 | 2.23 | 80.0 | ± 9.6 % |
|           |                                                                      | Y | 5.30  | 71.80 | 18.69 |      | 80.0 |         |
|           |                                                                      | Z | 5.19  | 72.75 | 19.13 |      | 80.0 |         |

|           |                                                                     |   |      |        |       |      |       |         |
|-----------|---------------------------------------------------------------------|---|------|--------|-------|------|-------|---------|
| 10508-AAC | LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.55 | 73.01  | 19.36 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.33 | 71.35  | 18.55 |      | 80.0  |         |
|           |                                                                     | Z | 5.19 | 72.24  | 18.95 |      | 80.0  |         |
| 10509-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 7.03 | 77.40  | 20.60 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.25 | 74.54  | 19.35 |      | 80.0  |         |
|           |                                                                     | Z | 6.27 | 75.89  | 20.05 |      | 80.0  |         |
| 10510-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.86 | 72.49  | 19.18 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.70 | 71.14  | 18.49 |      | 80.0  |         |
|           |                                                                     | Z | 5.51 | 71.73  | 18.83 |      | 80.0  |         |
| 10511-AAC | LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.83 | 72.01  | 19.03 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.71 | 70.79  | 18.40 |      | 80.0  |         |
|           |                                                                     | Z | 5.52 | 71.35  | 18.71 |      | 80.0  |         |
| 10512-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)   | X | 8.18 | 80.50  | 21.58 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 6.82 | 76.59  | 19.98 |      | 80.0  |         |
|           |                                                                     | Z | 6.97 | 78.23  | 20.79 |      | 80.0  |         |
| 10513-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.86 | 73.15  | 19.44 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.65 | 71.64  | 18.67 |      | 80.0  |         |
|           |                                                                     | Z | 5.45 | 72.18  | 19.02 |      | 80.0  |         |
| 10514-AAC | LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9) | X | 5.75 | 72.41  | 19.20 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                                     | Y | 5.60 | 71.07  | 18.51 |      | 80.0  |         |
|           |                                                                     | Z | 5.40 | 71.58  | 18.82 |      | 80.0  |         |
| 10515-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 99pc duty cycle)           | X | 1.06 | 65.76  | 16.90 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 1.00 | 63.51  | 14.99 |      | 150.0 |         |
|           |                                                                     | Z | 1.02 | 64.32  | 15.55 |      | 150.0 |         |
| 10516-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 99pc duty cycle)         | X | 5.87 | 117.81 | 35.86 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.66 | 71.85  | 18.17 |      | 150.0 |         |
|           |                                                                     | Z | 0.94 | 79.02  | 21.78 |      | 150.0 |         |
| 10517-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 99pc duty cycle)          | X | 1.03 | 70.61  | 19.18 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 0.86 | 65.67  | 15.75 |      | 150.0 |         |
|           |                                                                     | Z | 0.90 | 67.08  | 16.71 |      | 150.0 |         |
| 10518-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 99pc duty cycle)           | X | 4.67 | 67.45  | 16.69 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.67 | 66.94  | 16.33 |      | 150.0 |         |
|           |                                                                     | Z | 4.52 | 67.23  | 16.44 |      | 150.0 |         |
| 10519-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 99pc duty cycle)          | X | 4.87 | 67.70  | 16.81 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.88 | 67.22  | 16.46 |      | 150.0 |         |
|           |                                                                     | Z | 4.69 | 67.43  | 16.54 |      | 150.0 |         |
| 10520-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 99pc duty cycle)          | X | 4.72 | 67.70  | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.73 | 67.19  | 16.39 |      | 150.0 |         |
|           |                                                                     | Z | 4.54 | 67.39  | 16.47 |      | 150.0 |         |
| 10521-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 99pc duty cycle)          | X | 4.66 | 67.72  | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.66 | 67.20  | 16.38 |      | 150.0 |         |
|           |                                                                     | Z | 4.48 | 67.38  | 16.46 |      | 150.0 |         |
| 10522-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 99pc duty cycle)          | X | 4.71 | 67.76  | 16.82 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                     | Y | 4.71 | 67.20  | 16.42 |      | 150.0 |         |
|           |                                                                     | Z | 4.54 | 67.51  | 16.56 |      | 150.0 |         |

|           |                                                            |   |      |       |       |      |       |         |
|-----------|------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10523-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 99pc duty cycle) | X | 4.59 | 67.65 | 16.68 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.58 | 67.09 | 16.28 |      | 150.0 |         |
|           |                                                            | Z | 4.43 | 67.41 | 16.42 |      | 150.0 |         |
| 10524-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 99pc duty cycle) | X | 4.66 | 67.69 | 16.79 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.66 | 67.15 | 16.40 |      | 150.0 |         |
|           |                                                            | Z | 4.48 | 67.43 | 16.53 |      | 150.0 |         |
| 10525-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 99pc duty cycle)          | X | 4.63 | 66.73 | 16.38 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.62 | 66.18 | 15.99 |      | 150.0 |         |
|           |                                                            | Z | 4.49 | 66.49 | 16.12 |      | 150.0 |         |
| 10526-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 99pc duty cycle)          | X | 4.82 | 67.13 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.82 | 66.58 | 16.14 |      | 150.0 |         |
|           |                                                            | Z | 4.64 | 66.83 | 16.26 |      | 150.0 |         |
| 10527-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 99pc duty cycle)          | X | 4.74 | 67.11 | 16.49 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.73 | 66.55 | 16.09 |      | 150.0 |         |
|           |                                                            | Z | 4.57 | 66.80 | 16.20 |      | 150.0 |         |
| 10528-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 99pc duty cycle)          | X | 4.76 | 67.13 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.75 | 66.57 | 16.12 |      | 150.0 |         |
|           |                                                            | Z | 4.58 | 66.81 | 16.23 |      | 150.0 |         |
| 10529-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 99pc duty cycle)          | X | 4.76 | 67.13 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.75 | 66.57 | 16.12 |      | 150.0 |         |
|           |                                                            | Z | 4.58 | 66.81 | 16.23 |      | 150.0 |         |
| 10531-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 99pc duty cycle)          | X | 4.77 | 67.27 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.76 | 66.71 | 16.15 |      | 150.0 |         |
|           |                                                            | Z | 4.56 | 66.89 | 16.24 |      | 150.0 |         |
| 10532-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 99pc duty cycle)          | X | 4.62 | 67.15 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.61 | 66.57 | 16.09 |      | 150.0 |         |
|           |                                                            | Z | 4.43 | 66.75 | 16.17 |      | 150.0 |         |
| 10533-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 99pc duty cycle)          | X | 4.77 | 67.17 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 4.76 | 66.59 | 16.10 |      | 150.0 |         |
|           |                                                            | Z | 4.59 | 66.88 | 16.23 |      | 150.0 |         |
| 10534-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 99pc duty cycle)          | X | 5.27 | 67.15 | 16.50 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.27 | 66.72 | 16.17 |      | 150.0 |         |
|           |                                                            | Z | 5.12 | 66.84 | 16.26 |      | 150.0 |         |
| 10535-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 99pc duty cycle)          | X | 5.34 | 67.31 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.34 | 66.86 | 16.23 |      | 150.0 |         |
|           |                                                            | Z | 5.19 | 67.03 | 16.35 |      | 150.0 |         |
| 10536-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 99pc duty cycle)          | X | 5.22 | 67.31 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.21 | 66.84 | 16.21 |      | 150.0 |         |
|           |                                                            | Z | 5.06 | 66.99 | 16.32 |      | 150.0 |         |
| 10537-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 99pc duty cycle)          | X | 5.27 | 67.26 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.28 | 66.82 | 16.20 |      | 150.0 |         |
|           |                                                            | Z | 5.12 | 66.94 | 16.29 |      | 150.0 |         |
| 10538-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 99pc duty cycle)          | X | 5.37 | 67.28 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.39 | 66.89 | 16.27 |      | 150.0 |         |
|           |                                                            | Z | 5.20 | 66.94 | 16.33 |      | 150.0 |         |
| 10540-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 99pc duty cycle)          | X | 5.29 | 67.28 | 16.59 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                            | Y | 5.29 | 66.84 | 16.26 |      | 150.0 |         |
|           |                                                            | Z | 5.13 | 66.94 | 16.35 |      | 150.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10541-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 99pc duty cycle)  | X | 5.26 | 67.15 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.27 | 66.73 | 16.20 |      | 150.0 |         |
|           |                                                    | Z | 5.11 | 66.82 | 16.27 |      | 150.0 |         |
| 10542-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 99pc duty cycle)  | X | 5.42 | 67.19 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.42 | 66.79 | 16.25 |      | 150.0 |         |
|           |                                                    | Z | 5.26 | 66.90 | 16.33 |      | 150.0 |         |
| 10543-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 99pc duty cycle)  | X | 5.49 | 67.21 | 16.57 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.51 | 66.80 | 16.27 |      | 150.0 |         |
|           |                                                    | Z | 5.32 | 66.91 | 16.36 |      | 150.0 |         |
| 10544-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)  | X | 5.57 | 67.22 | 16.46 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.56 | 66.82 | 16.16 |      | 150.0 |         |
|           |                                                    | Z | 5.45 | 66.92 | 16.24 |      | 150.0 |         |
| 10545-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 99pc duty cycle)  | X | 5.77 | 67.65 | 16.61 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.78 | 67.25 | 16.32 |      | 150.0 |         |
|           |                                                    | Z | 5.64 | 67.38 | 16.42 |      | 150.0 |         |
| 10546-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 99pc duty cycle)  | X | 5.65 | 67.48 | 16.55 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.65 | 67.10 | 16.26 |      | 150.0 |         |
|           |                                                    | Z | 5.50 | 67.09 | 16.30 |      | 150.0 |         |
| 10547-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 99pc duty cycle)  | X | 5.73 | 67.53 | 16.56 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.74 | 67.18 | 16.29 |      | 150.0 |         |
|           |                                                    | Z | 5.57 | 67.16 | 16.32 |      | 150.0 |         |
| 10548-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 99pc duty cycle)  | X | 6.02 | 68.59 | 17.06 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.08 | 68.34 | 16.83 |      | 150.0 |         |
|           |                                                    | Z | 5.80 | 68.04 | 16.74 |      | 150.0 |         |
| 10550-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 99pc duty cycle)  | X | 5.67 | 67.46 | 16.54 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.67 | 67.06 | 16.25 |      | 150.0 |         |
|           |                                                    | Z | 5.54 | 67.19 | 16.36 |      | 150.0 |         |
| 10551-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 99pc duty cycle)  | X | 5.68 | 67.52 | 16.53 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.69 | 67.13 | 16.25 |      | 150.0 |         |
|           |                                                    | Z | 5.53 | 67.15 | 16.30 |      | 150.0 |         |
| 10552-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 99pc duty cycle)  | X | 5.59 | 67.30 | 16.44 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.59 | 66.90 | 16.14 |      | 150.0 |         |
|           |                                                    | Z | 5.46 | 67.00 | 16.23 |      | 150.0 |         |
| 10553-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 99pc duty cycle)  | X | 5.68 | 67.34 | 16.48 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.68 | 66.95 | 16.20 |      | 150.0 |         |
|           |                                                    | Z | 5.53 | 67.00 | 16.26 |      | 150.0 |         |
| 10554-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 99pc duty cycle) | X | 5.97 | 67.57 | 16.52 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 5.97 | 67.21 | 16.26 |      | 150.0 |         |
|           |                                                    | Z | 5.86 | 67.27 | 16.32 |      | 150.0 |         |
| 10555-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 99pc duty cycle) | X | 6.11 | 67.88 | 16.66 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.11 | 67.54 | 16.39 |      | 150.0 |         |
|           |                                                    | Z | 5.98 | 67.57 | 16.45 |      | 150.0 |         |
| 10556-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 99pc duty cycle) | X | 6.13 | 67.93 | 16.67 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.13 | 67.56 | 16.40 |      | 150.0 |         |
|           |                                                    | Z | 6.01 | 67.63 | 16.48 |      | 150.0 |         |
| 10557-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 99pc duty cycle) | X | 6.10 | 67.85 | 16.65 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                    | Y | 6.11 | 67.51 | 16.40 |      | 150.0 |         |
|           |                                                    | Z | 5.97 | 67.50 | 16.43 |      | 150.0 |         |

|           |                                                                 |   |        |        |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10558-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 99pc duty cycle)              | X | 6.16   | 68.03  | 16.76 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.17   | 67.70  | 16.50 |      | 150.0 |         |
|           |                                                                 | Z | 6.01   | 67.66  | 16.53 |      | 150.0 |         |
| 10560-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 99pc duty cycle)              | X | 6.15   | 67.86  | 16.71 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.16   | 67.52  | 16.45 |      | 150.0 |         |
|           |                                                                 | Z | 6.00   | 67.50  | 16.49 |      | 150.0 |         |
| 10561-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 99pc duty cycle)              | X | 6.06   | 67.83  | 16.73 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.07   | 67.48  | 16.47 |      | 150.0 |         |
|           |                                                                 | Z | 5.94   | 67.50  | 16.52 |      | 150.0 |         |
| 10562-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 99pc duty cycle)              | X | 6.21   | 68.28  | 16.96 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.23   | 67.97  | 16.72 |      | 150.0 |         |
|           |                                                                 | Z | 6.03   | 67.79  | 16.67 |      | 150.0 |         |
| 10563-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 99pc duty cycle)              | X | 6.55   | 68.85  | 17.19 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 6.59   | 68.58  | 16.96 |      | 150.0 |         |
|           |                                                                 | Z | 6.12   | 67.71  | 16.59 |      | 150.0 |         |
| 10564-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 99pc duty cycle)  | X | 4.99   | 67.50  | 16.82 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.01   | 67.06  | 16.50 |      | 150.0 |         |
|           |                                                                 | Z | 4.85   | 67.32  | 16.61 |      | 150.0 |         |
| 10565-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 99pc duty cycle) | X | 5.24   | 67.95  | 17.13 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.26   | 67.54  | 16.83 |      | 150.0 |         |
|           |                                                                 | Z | 5.06   | 67.72  | 16.90 |      | 150.0 |         |
| 10566-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 99pc duty cycle) | X | 5.07   | 67.84  | 16.98 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.10   | 67.41  | 16.66 |      | 150.0 |         |
|           |                                                                 | Z | 4.90   | 67.58  | 16.73 |      | 150.0 |         |
| 10567-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 99pc duty cycle) | X | 5.11   | 68.24  | 17.33 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.13   | 67.80  | 17.01 |      | 150.0 |         |
|           |                                                                 | Z | 4.93   | 67.94  | 17.07 |      | 150.0 |         |
| 10568-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 99pc duty cycle) | X | 4.99   | 67.61  | 16.75 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.01   | 67.15  | 16.42 |      | 150.0 |         |
|           |                                                                 | Z | 4.83   | 67.42  | 16.55 |      | 150.0 |         |
| 10569-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 99pc duty cycle) | X | 5.06   | 68.33  | 17.39 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.07   | 67.85  | 17.05 |      | 150.0 |         |
|           |                                                                 | Z | 4.91   | 68.11  | 17.17 |      | 150.0 |         |
| 10570-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 99pc duty cycle) | X | 5.09   | 68.14  | 17.31 | 0.46 | 150.0 | ± 9.6 % |
|           |                                                                 | Y | 5.11   | 67.68  | 16.98 |      | 150.0 |         |
|           |                                                                 | Z | 4.92   | 67.93  | 17.09 |      | 150.0 |         |
| 10571-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)       | X | 1.50   | 68.95  | 18.38 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.40   | 66.38  | 16.51 |      | 130.0 |         |
|           |                                                                 | Z | 1.40   | 67.23  | 17.09 |      | 130.0 |         |
| 10572-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)       | X | 1.55   | 69.98  | 18.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.43   | 67.06  | 16.91 |      | 130.0 |         |
|           |                                                                 | Z | 1.44   | 67.99  | 17.53 |      | 130.0 |         |
| 10573-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)     | X | 100.00 | 153.35 | 41.94 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 5.15   | 96.81  | 26.53 |      | 130.0 |         |
|           |                                                                 | Z | 50.11  | 136.49 | 37.17 |      | 130.0 |         |
| 10574-AAA | IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)      | X | 2.59   | 83.81  | 24.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 1.75   | 74.27  | 20.26 |      | 130.0 |         |
|           |                                                                 | Z | 1.86   | 76.56  | 21.49 |      | 130.0 |         |



|           |                                                                 |   |      |       |       |      |       |         |
|-----------|-----------------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10575-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle)  | X | 4.81 | 67.37 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.84 | 66.96 | 16.62 |      | 130.0 |         |
|           |                                                                 | Z | 4.68 | 67.23 | 16.73 |      | 130.0 |         |
| 10576-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 9 Mbps, 90pc duty cycle)  | X | 4.84 | 67.54 | 16.99 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.86 | 67.12 | 16.68 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 67.40 | 16.79 |      | 130.0 |         |
| 10577-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 12 Mbps, 90pc duty cycle) | X | 5.05 | 67.83 | 17.14 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 5.09 | 67.44 | 16.86 |      | 130.0 |         |
|           |                                                                 | Z | 4.89 | 67.64 | 16.94 |      | 130.0 |         |
| 10578-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 18 Mbps, 90pc duty cycle) | X | 4.96 | 68.04 | 17.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.99 | 67.62 | 16.97 |      | 130.0 |         |
|           |                                                                 | Z | 4.79 | 67.80 | 17.04 |      | 130.0 |         |
| 10579-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 24 Mbps, 90pc duty cycle) | X | 4.73 | 67.38 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.76 | 66.96 | 16.31 |      | 130.0 |         |
|           |                                                                 | Z | 4.57 | 67.14 | 16.40 |      | 130.0 |         |
| 10580-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 36 Mbps, 90pc duty cycle) | X | 4.77 | 67.37 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.80 | 66.94 | 16.31 |      | 130.0 |         |
|           |                                                                 | Z | 4.61 | 67.21 | 16.43 |      | 130.0 |         |
| 10581-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 48 Mbps, 90pc duty cycle) | X | 4.86 | 68.14 | 17.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.89 | 67.70 | 16.92 |      | 130.0 |         |
|           |                                                                 | Z | 4.70 | 67.90 | 17.02 |      | 130.0 |         |
| 10582-AAA | IEEE 802.11g WiFi 2.4 GHz (DSSS-OFDM, 54 Mbps, 90pc duty cycle) | X | 4.67 | 67.12 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.71 | 66.71 | 16.10 |      | 130.0 |         |
|           |                                                                 | Z | 4.51 | 66.92 | 16.20 |      | 130.0 |         |
| 10583-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)       | X | 4.81 | 67.37 | 16.92 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.84 | 66.96 | 16.62 |      | 130.0 |         |
|           |                                                                 | Z | 4.68 | 67.23 | 16.73 |      | 130.0 |         |
| 10584-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)       | X | 4.84 | 67.54 | 16.99 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.86 | 67.12 | 16.68 |      | 130.0 |         |
|           |                                                                 | Z | 4.71 | 67.40 | 16.79 |      | 130.0 |         |
| 10585-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)      | X | 5.05 | 67.83 | 17.14 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 5.09 | 67.44 | 16.86 |      | 130.0 |         |
|           |                                                                 | Z | 4.89 | 67.64 | 16.94 |      | 130.0 |         |
| 10586-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)      | X | 4.96 | 68.04 | 17.27 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.99 | 67.62 | 16.97 |      | 130.0 |         |
|           |                                                                 | Z | 4.79 | 67.80 | 17.04 |      | 130.0 |         |
| 10587-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)      | X | 4.73 | 67.38 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.76 | 66.96 | 16.31 |      | 130.0 |         |
|           |                                                                 | Z | 4.57 | 67.14 | 16.40 |      | 130.0 |         |
| 10588-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)      | X | 4.77 | 67.37 | 16.62 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.80 | 66.94 | 16.31 |      | 130.0 |         |
|           |                                                                 | Z | 4.61 | 67.21 | 16.43 |      | 130.0 |         |
| 10589-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)      | X | 4.86 | 68.14 | 17.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.89 | 67.70 | 16.92 |      | 130.0 |         |
|           |                                                                 | Z | 4.70 | 67.90 | 17.02 |      | 130.0 |         |
| 10590-AAA | IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)      | X | 4.67 | 67.12 | 16.41 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                                 | Y | 4.71 | 66.71 | 16.10 |      | 130.0 |         |
|           |                                                                 | Z | 4.51 | 66.92 | 16.20 |      | 130.0 |         |

|           |                                                       |   |      |       |       |      |       |         |
|-----------|-------------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10591-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS0, 90pc duty cycle) | X | 4.95 | 67.39 | 16.99 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.98 | 67.01 | 16.71 |      | 130.0 |         |
|           |                                                       | Z | 4.83 | 67.26 | 16.81 |      | 130.0 |         |
| 10592-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS1, 90pc duty cycle) | X | 5.12 | 67.74 | 17.12 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.15 | 67.35 | 16.84 |      | 130.0 |         |
|           |                                                       | Z | 4.97 | 67.58 | 16.94 |      | 130.0 |         |
| 10593-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS2, 90pc duty cycle) | X | 5.04 | 67.68 | 17.02 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.08 | 67.30 | 16.74 |      | 130.0 |         |
|           |                                                       | Z | 4.89 | 67.49 | 16.82 |      | 130.0 |         |
| 10594-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS3, 90pc duty cycle) | X | 5.10 | 67.84 | 17.17 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.14 | 67.45 | 16.88 |      | 130.0 |         |
|           |                                                       | Z | 4.94 | 67.65 | 16.97 |      | 130.0 |         |
| 10595-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS4, 90pc duty cycle) | X | 5.07 | 67.81 | 17.07 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.11 | 67.42 | 16.78 |      | 130.0 |         |
|           |                                                       | Z | 4.91 | 67.63 | 16.88 |      | 130.0 |         |
| 10596-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS5, 90pc duty cycle) | X | 5.01 | 67.82 | 17.09 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.05 | 67.42 | 16.79 |      | 130.0 |         |
|           |                                                       | Z | 4.85 | 67.64 | 16.90 |      | 130.0 |         |
| 10597-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS6, 90pc duty cycle) | X | 4.96 | 67.75 | 16.98 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.00 | 67.35 | 16.69 |      | 130.0 |         |
|           |                                                       | Z | 4.80 | 67.53 | 16.77 |      | 130.0 |         |
| 10598-AAA | IEEE 802.11n (HT Mixed, 20MHz, MCS7, 90pc duty cycle) | X | 4.95 | 68.01 | 17.26 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 4.98 | 67.61 | 16.96 |      | 130.0 |         |
|           |                                                       | Z | 4.78 | 67.73 | 17.01 |      | 130.0 |         |
| 10599-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle) | X | 5.60 | 67.86 | 17.12 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.66 | 67.61 | 16.91 |      | 130.0 |         |
|           |                                                       | Z | 5.48 | 67.70 | 16.99 |      | 130.0 |         |
| 10600-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS1, 90pc duty cycle) | X | 5.78 | 68.39 | 17.36 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.85 | 68.19 | 17.17 |      | 130.0 |         |
|           |                                                       | Z | 5.62 | 68.16 | 17.20 |      | 130.0 |         |
| 10601-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS2, 90pc duty cycle) | X | 5.65 | 68.09 | 17.22 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.71 | 67.83 | 17.01 |      | 130.0 |         |
|           |                                                       | Z | 5.51 | 67.89 | 17.08 |      | 130.0 |         |
| 10602-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS3, 90pc duty cycle) | X | 5.73 | 68.07 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.79 | 67.82 | 16.93 |      | 130.0 |         |
|           |                                                       | Z | 5.63 | 68.04 | 17.07 |      | 130.0 |         |
| 10603-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS4, 90pc duty cycle) | X | 5.82 | 68.41 | 17.43 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.87 | 68.11 | 17.19 |      | 130.0 |         |
|           |                                                       | Z | 5.69 | 68.27 | 17.32 |      | 130.0 |         |
| 10604-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS5, 90pc duty cycle) | X | 5.61 | 67.82 | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.66 | 67.56 | 16.91 |      | 130.0 |         |
|           |                                                       | Z | 5.56 | 67.91 | 17.12 |      | 130.0 |         |
| 10605-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS6, 90pc duty cycle) | X | 5.73 | 68.17 | 17.30 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.77 | 67.87 | 17.07 |      | 130.0 |         |
|           |                                                       | Z | 5.62 | 68.08 | 17.21 |      | 130.0 |         |
| 10606-AAA | IEEE 802.11n (HT Mixed, 40MHz, MCS7, 90pc duty cycle) | X | 5.50 | 67.62 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                       | Y | 5.53 | 67.31 | 16.65 |      | 130.0 |         |
|           |                                                       | Z | 5.35 | 67.34 | 16.70 |      | 130.0 |         |

|           |                                                   |   |      |       |       |      |       |         |
|-----------|---------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10607-AAA | IEEE 802.11ac WiFi (20MHz, MCS0, 90pc duty cycle) | X | 4.80 | 66.75 | 16.64 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.81 | 66.30 | 16.32 |      | 130.0 |         |
|           |                                                   | Z | 4.67 | 66.60 | 16.45 |      | 130.0 |         |
| 10608-AAA | IEEE 802.11ac WiFi (20MHz, MCS1, 90pc duty cycle) | X | 5.00 | 67.18 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.02 | 66.72 | 16.48 |      | 130.0 |         |
|           |                                                   | Z | 4.84 | 66.98 | 16.61 |      | 130.0 |         |
| 10609-AAA | IEEE 802.11ac WiFi (20MHz, MCS2, 90pc duty cycle) | X | 4.89 | 67.06 | 16.67 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.91 | 66.60 | 16.34 |      | 130.0 |         |
|           |                                                   | Z | 4.73 | 66.84 | 16.45 |      | 130.0 |         |
| 10610-AAA | IEEE 802.11ac WiFi (20MHz, MCS3, 90pc duty cycle) | X | 4.94 | 67.21 | 16.82 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.96 | 66.76 | 16.50 |      | 130.0 |         |
|           |                                                   | Z | 4.78 | 66.99 | 16.61 |      | 130.0 |         |
| 10611-AAA | IEEE 802.11ac WiFi (20MHz, MCS4, 90pc duty cycle) | X | 4.86 | 67.03 | 16.68 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.89 | 66.59 | 16.36 |      | 130.0 |         |
|           |                                                   | Z | 4.70 | 66.81 | 16.46 |      | 130.0 |         |
| 10612-AAA | IEEE 802.11ac WiFi (20MHz, MCS5, 90pc duty cycle) | X | 4.88 | 67.21 | 16.74 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.90 | 66.74 | 16.40 |      | 130.0 |         |
|           |                                                   | Z | 4.71 | 66.99 | 16.53 |      | 130.0 |         |
| 10613-AAA | IEEE 802.11ac WiFi (20MHz, MCS6, 90pc duty cycle) | X | 4.89 | 67.11 | 16.63 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.91 | 66.65 | 16.30 |      | 130.0 |         |
|           |                                                   | Z | 4.71 | 66.83 | 16.39 |      | 130.0 |         |
| 10614-AAA | IEEE 802.11ac WiFi (20MHz, MCS7, 90pc duty cycle) | X | 4.83 | 67.31 | 16.87 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.85 | 66.84 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 4.66 | 67.02 | 16.61 |      | 130.0 |         |
| 10615-AAA | IEEE 802.11ac WiFi (20MHz, MCS8, 90pc duty cycle) | X | 4.86 | 66.85 | 16.46 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 4.89 | 66.40 | 16.13 |      | 130.0 |         |
|           |                                                   | Z | 4.70 | 66.67 | 16.26 |      | 130.0 |         |
| 10616-AAA | IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle) | X | 5.44 | 67.18 | 16.77 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.47 | 66.84 | 16.51 |      | 130.0 |         |
|           |                                                   | Z | 5.30 | 66.94 | 16.59 |      | 130.0 |         |
| 10617-AAA | IEEE 802.11ac WiFi (40MHz, MCS1, 90pc duty cycle) | X | 5.50 | 67.33 | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.52 | 66.94 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 5.38 | 67.17 | 16.68 |      | 130.0 |         |
| 10618-AAA | IEEE 802.11ac WiFi (40MHz, MCS2, 90pc duty cycle) | X | 5.40 | 67.39 | 16.87 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.42 | 67.02 | 16.59 |      | 130.0 |         |
|           |                                                   | Z | 5.27 | 67.18 | 16.70 |      | 130.0 |         |
| 10619-AAA | IEEE 802.11ac WiFi (40MHz, MCS3, 90pc duty cycle) | X | 5.42 | 67.21 | 16.71 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.44 | 66.85 | 16.44 |      | 130.0 |         |
|           |                                                   | Z | 5.28 | 66.96 | 16.53 |      | 130.0 |         |
| 10620-AAA | IEEE 802.11ac WiFi (40MHz, MCS4, 90pc duty cycle) | X | 5.51 | 67.25 | 16.78 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.56 | 66.94 | 16.53 |      | 130.0 |         |
|           |                                                   | Z | 5.36 | 66.98 | 16.59 |      | 130.0 |         |
| 10621-AAA | IEEE 802.11ac WiFi (40MHz, MCS5, 90pc duty cycle) | X | 5.50 | 67.33 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.53 | 67.00 | 16.68 |      | 130.0 |         |
|           |                                                   | Z | 5.36 | 67.10 | 16.76 |      | 130.0 |         |
| 10622-AAA | IEEE 802.11ac WiFi (40MHz, MCS6, 90pc duty cycle) | X | 5.51 | 67.50 | 17.01 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                   | Y | 5.53 | 67.13 | 16.73 |      | 130.0 |         |
|           |                                                   | Z | 5.38 | 67.30 | 16.85 |      | 130.0 |         |

|           |                                                    |   |      |       |       |      |       |         |
|-----------|----------------------------------------------------|---|------|-------|-------|------|-------|---------|
| 10623-AAA | IEEE 802.11ac WiFi (40MHz, MCS7, 90pc duty cycle)  | X | 5.39 | 67.03 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.41 | 66.69 | 16.40 |      | 130.0 |         |
|           |                                                    | Z | 5.25 | 66.80 | 16.48 |      | 130.0 |         |
| 10624-AAA | IEEE 802.11ac WiFi (40MHz, MCS8, 90pc duty cycle)  | X | 5.58 | 67.21 | 16.80 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.61 | 66.88 | 16.56 |      | 130.0 |         |
|           |                                                    | Z | 5.44 | 66.99 | 16.64 |      | 130.0 |         |
| 10625-AAA | IEEE 802.11ac WiFi (40MHz, MCS9, 90pc duty cycle)  | X | 5.99 | 68.31 | 17.39 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.04 | 68.02 | 17.17 |      | 130.0 |         |
|           |                                                    | Z | 5.71 | 67.69 | 17.04 |      | 130.0 |         |
| 10626-AAA | IEEE 802.11ac WiFi (80MHz, MCS0, 90pc duty cycle)  | X | 5.71 | 67.19 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.72 | 66.86 | 16.44 |      | 130.0 |         |
|           |                                                    | Z | 5.61 | 66.97 | 16.54 |      | 130.0 |         |
| 10627-AAA | IEEE 802.11ac WiFi (80MHz, MCS1, 90pc duty cycle)  | X | 5.96 | 67.77 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.99 | 67.46 | 16.69 |      | 130.0 |         |
|           |                                                    | Z | 5.86 | 67.59 | 16.81 |      | 130.0 |         |
| 10628-AAA | IEEE 802.11ac WiFi (80MHz, MCS2, 90pc duty cycle)  | X | 5.76 | 67.34 | 16.66 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.79 | 67.03 | 16.42 |      | 130.0 |         |
|           |                                                    | Z | 5.63 | 67.03 | 16.47 |      | 130.0 |         |
| 10629-AAA | IEEE 802.11ac WiFi (80MHz, MCS3, 90pc duty cycle)  | X | 5.85 | 67.42 | 16.69 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.87 | 67.09 | 16.44 |      | 130.0 |         |
|           |                                                    | Z | 5.71 | 67.12 | 16.51 |      | 130.0 |         |
| 10630-AAA | IEEE 802.11ac WiFi (80MHz, MCS4, 90pc duty cycle)  | X | 6.37 | 69.15 | 17.55 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.48 | 69.04 | 17.41 |      | 130.0 |         |
|           |                                                    | Z | 6.10 | 68.51 | 17.21 |      | 130.0 |         |
| 10631-AAA | IEEE 802.11ac WiFi (80MHz, MCS5, 90pc duty cycle)  | X | 6.23 | 68.84 | 17.58 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.30 | 68.64 | 17.40 |      | 130.0 |         |
|           |                                                    | Z | 6.00 | 68.26 | 17.26 |      | 130.0 |         |
| 10632-AAA | IEEE 802.11ac WiFi (80MHz, MCS6, 90pc duty cycle)  | X | 5.93 | 67.81 | 17.09 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.96 | 67.50 | 16.85 |      | 130.0 |         |
|           |                                                    | Z | 5.82 | 67.64 | 16.97 |      | 130.0 |         |
| 10633-AAA | IEEE 802.11ac WiFi (80MHz, MCS7, 90pc duty cycle)  | X | 5.83 | 67.50 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.88 | 67.25 | 16.56 |      | 130.0 |         |
|           |                                                    | Z | 5.69 | 67.21 | 16.59 |      | 130.0 |         |
| 10634-AAA | IEEE 802.11ac WiFi (80MHz, MCS8, 90pc duty cycle)  | X | 5.81 | 67.52 | 16.84 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.85 | 67.23 | 16.61 |      | 130.0 |         |
|           |                                                    | Z | 5.67 | 67.21 | 16.64 |      | 130.0 |         |
| 10635-AAA | IEEE 802.11ac WiFi (80MHz, MCS9, 90pc duty cycle)  | X | 5.70 | 66.87 | 16.25 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 5.74 | 66.58 | 16.02 |      | 130.0 |         |
|           |                                                    | Z | 5.55 | 66.58 | 16.07 |      | 130.0 |         |
| 10636-AAB | IEEE 802.11ac WiFi (160MHz, MCS0, 90pc duty cycle) | X | 6.12 | 67.55 | 16.76 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.14 | 67.26 | 16.54 |      | 130.0 |         |
|           |                                                    | Z | 6.03 | 67.32 | 16.61 |      | 130.0 |         |
| 10637-AAB | IEEE 802.11ac WiFi (160MHz, MCS1, 90pc duty cycle) | X | 6.28 | 67.94 | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.31 | 67.65 | 16.72 |      | 130.0 |         |
|           |                                                    | Z | 6.19 | 67.72 | 16.79 |      | 130.0 |         |
| 10638-AAB | IEEE 802.11ac WiFi (160MHz, MCS2, 90pc duty cycle) | X | 6.28 | 67.91 | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                    | Y | 6.31 | 67.62 | 16.68 |      | 130.0 |         |
|           |                                                    | Z | 6.18 | 67.68 | 16.75 |      | 130.0 |         |

|           |                                                        |   |        |        |       |      |       |         |
|-----------|--------------------------------------------------------|---|--------|--------|-------|------|-------|---------|
| 10639-AAB | IEEE 802.11ac WiFi (160MHz, MCS3, 90pc duty cycle)     | X | 6.27   | 67.88  | 16.93 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.30   | 67.62  | 16.73 |      | 130.0 |         |
|           |                                                        | Z | 6.15   | 67.59  | 16.75 |      | 130.0 |         |
| 10640-AAB | IEEE 802.11ac WiFi (160MHz, MCS4, 90pc duty cycle)     | X | 6.29   | 67.93  | 16.90 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.33   | 67.70  | 16.71 |      | 130.0 |         |
|           |                                                        | Z | 6.15   | 67.62  | 16.71 |      | 130.0 |         |
| 10641-AAB | IEEE 802.11ac WiFi (160MHz, MCS5, 90pc duty cycle)     | X | 6.30   | 67.74  | 16.81 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.32   | 67.44  | 16.59 |      | 130.0 |         |
|           |                                                        | Z | 6.22   | 67.59  | 16.72 |      | 130.0 |         |
| 10642-AAB | IEEE 802.11ac WiFi (160MHz, MCS6, 90pc duty cycle)     | X | 6.36   | 68.03  | 17.13 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.39   | 67.76  | 16.92 |      | 130.0 |         |
|           |                                                        | Z | 6.23   | 67.75  | 16.95 |      | 130.0 |         |
| 10643-AAB | IEEE 802.11ac WiFi (160MHz, MCS7, 90pc duty cycle)     | X | 6.19   | 67.72  | 16.88 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.22   | 67.45  | 16.67 |      | 130.0 |         |
|           |                                                        | Z | 6.09   | 67.50  | 16.74 |      | 130.0 |         |
| 10644-AAB | IEEE 802.11ac WiFi (160MHz, MCS8, 90pc duty cycle)     | X | 6.39   | 68.34  | 17.21 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.45   | 68.14  | 17.04 |      | 130.0 |         |
|           |                                                        | Z | 6.20   | 67.86  | 16.93 |      | 130.0 |         |
| 10645-AAB | IEEE 802.11ac WiFi (160MHz, MCS9, 90pc duty cycle)     | X | 6.86   | 69.27  | 17.61 | 0.46 | 130.0 | ± 9.6 % |
|           |                                                        | Y | 6.87   | 68.89  | 17.35 |      | 130.0 |         |
|           |                                                        | Z | 6.34   | 67.93  | 16.93 |      | 130.0 |         |
| 10646-AAD | LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,7)  | X | 58.91  | 128.47 | 41.72 | 9.30 | 60.0  | ± 9.6 % |
|           |                                                        | Y | 22.23  | 103.66 | 34.19 |      | 60.0  |         |
|           |                                                        | Z | 97.77  | 144.05 | 46.65 |      | 60.0  |         |
| 10647-AAC | LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,7) | X | 62.96  | 130.94 | 42.54 | 9.30 | 60.0  | ± 9.6 % |
|           |                                                        | Y | 22.84  | 105.02 | 34.74 |      | 60.0  |         |
|           |                                                        | Z | 100.00 | 145.78 | 47.28 |      | 60.0  |         |
| 10648-AAA | CDMA2000 (1x Advanced)                                 | X | 1.21   | 71.90  | 15.83 | 0.00 | 150.0 | ± 9.6 % |
|           |                                                        | Y | 0.81   | 64.89  | 12.16 |      | 150.0 |         |
|           |                                                        | Z | 0.74   | 65.22  | 11.47 |      | 150.0 |         |
| 10652-AAB | LTE-TDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)         | X | 4.72   | 70.40  | 18.28 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.59   | 69.04  | 17.59 |      | 80.0  |         |
|           |                                                        | Z | 4.50   | 69.96  | 17.82 |      | 80.0  |         |
| 10653-AAB | LTE-TDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)        | X | 5.05   | 69.01  | 18.05 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 5.03   | 68.18  | 17.58 |      | 80.0  |         |
|           |                                                        | Z | 4.88   | 68.67  | 17.76 |      | 80.0  |         |
| 10654-AAB | LTE-TDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)        | X | 4.97   | 68.58  | 18.01 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 4.96   | 67.84  | 17.57 |      | 80.0  |         |
|           |                                                        | Z | 4.83   | 68.24  | 17.75 |      | 80.0  |         |
| 10655-AAB | LTE-TDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)        | X | 5.02   | 68.56  | 18.04 | 2.23 | 80.0  | ± 9.6 % |
|           |                                                        | Y | 5.02   | 67.86  | 17.60 |      | 80.0  |         |
|           |                                                        | Z | 4.89   | 68.17  | 17.77 |      | 80.0  |         |

<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.