

Conducted test results

No.1-6998/23-01-12_TR1-A201-R1

February 05, 2024

Test Standard(s)	NA - NI
	FCC 15.247 - NI
	FCC 15.247, ISSED RSS247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Andreas Curette
Testing Manager
Radio Labs

Table of Content

NA # Terminal communication ~ Common	4
NA # Terminal communication ~ Common	5
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	6
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	9
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	13
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	15
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	18
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	23
NA # Terminal communication ~ Common	27
NA # Terminal communication ~ Common	28
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	29
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	32
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	36
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	38
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	41
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	46
NA # Terminal communication ~ Common	50
NA # Terminal communication ~ Common	51
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	52
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	55
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	59
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	61
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	64
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	69
NA # Terminal communication ~ Common	73
NA # Terminal communication ~ Common	74
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	75
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	79
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	81
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	84
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	89
NA # Terminal communication ~ Common	93
NA # Terminal communication ~ Common	94
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	95
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	99
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	101
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	104
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	109
NA # Terminal communication ~ Common	113
NA # Terminal communication ~ Common	114
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps	115

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps	119
FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps	121
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps	124
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps	129
NA # Terminal communication ~ Common	133

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:00:45
Ambit temp [°C] humidity [rel%]	27.2 34
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:00:52
Ambit temp [°C] humidity [rel%]	27.2 34
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x3F 0x87 0xFC
Output result	< HCI Command: ogf 0x3f, ocf 0x0087, plen 1 FC > HCI Event: 0x0e plen 4 01 87 FC 00

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x0034 0x00 0xFF 0x00 0x01
Output result	< HCI Command: ogf 0x08, ocf 0x0034, plen 4 00 FF 00 01 > HCI Event: 0x0e plen 4 01 34 20 00

Verdict

INFO

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	13.12.2023 13:00:58
Ambit temp [°C] humidity [rel%]	27.2 34
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2402 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.48	dBm	INFO
Ref. Frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.52 11.29 15
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

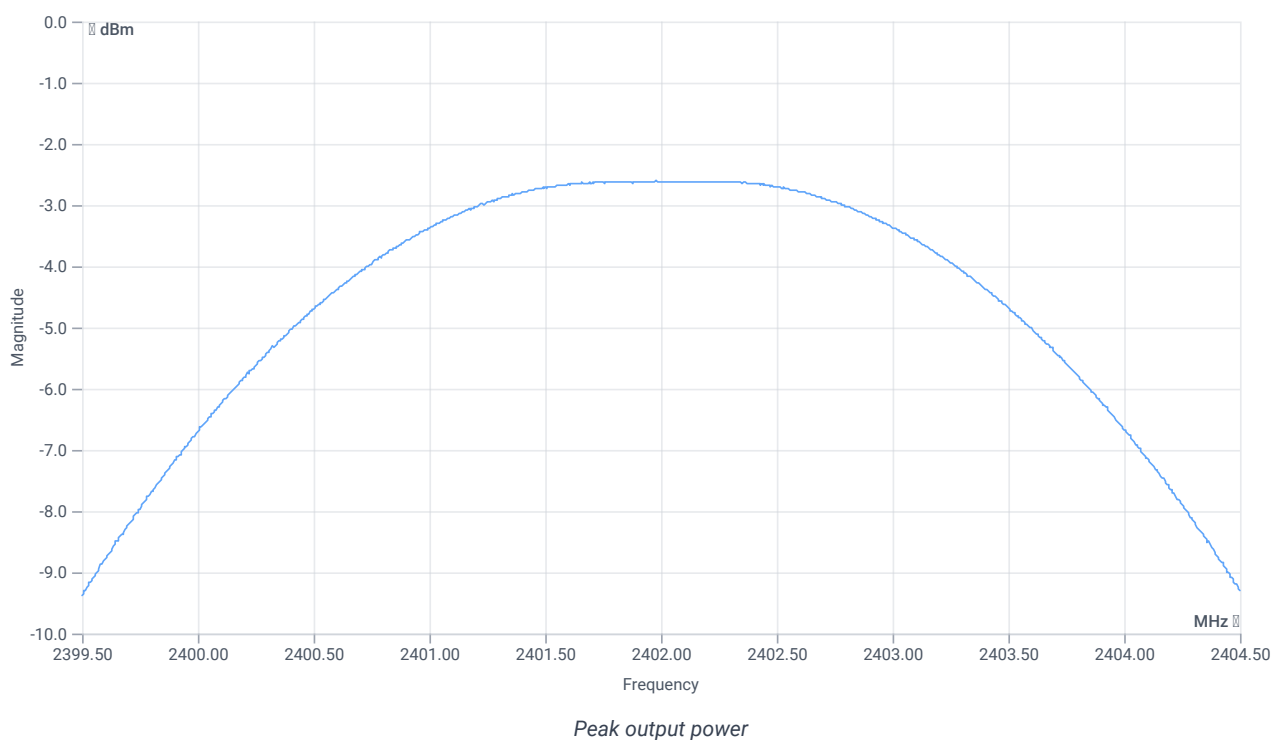

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	---	-2.61	dBm	INFO
Peak Power	---	---	0.548277	mW	INFO
Frequency at Peak	---	---	2401.98	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:01:29
Ambit temp [°C] humidity [rel%]	27.2 34
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2402 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.49	dBm	INFO
Ref. Frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.51 11.29 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS Bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	---	---	678	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.51 11.29 15
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

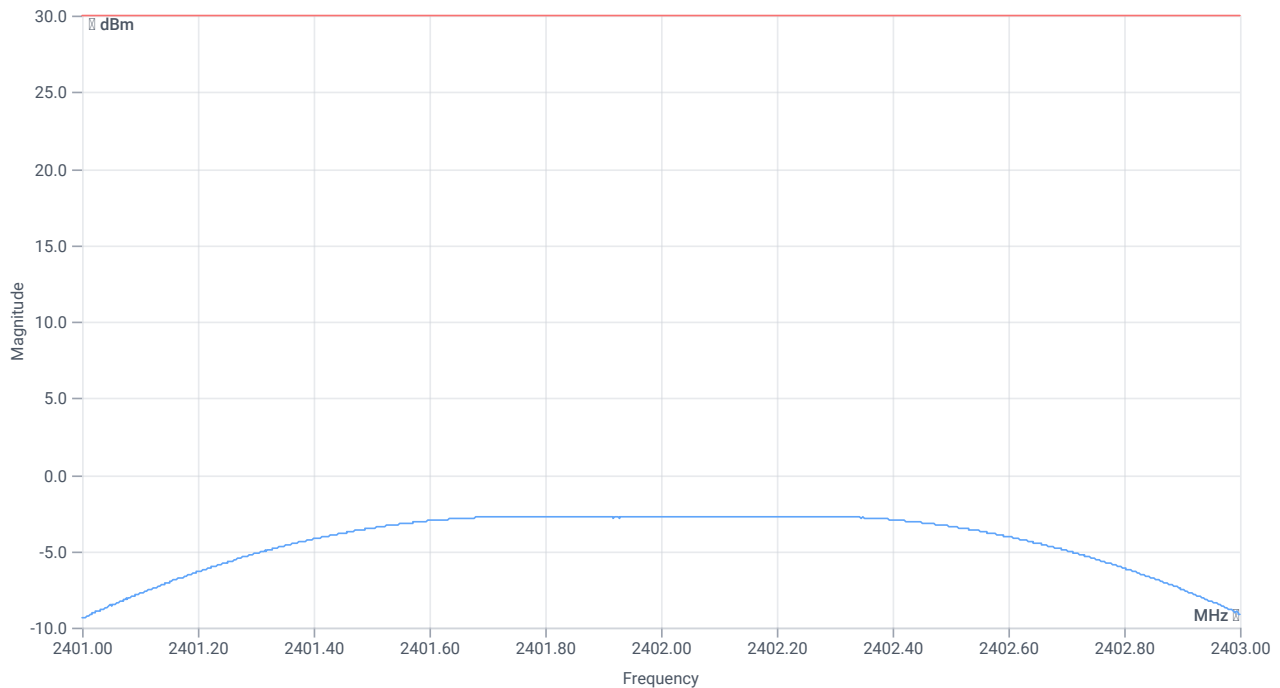

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30.00	-2.71	dBm	PASS
Peak Power	---	1000	0.535797	mW	PASS
Frequency at Peak	---	---	2402.23	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:02:14
Ambit temp [°C] humidity [rel%]	27.3 34
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2402 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.48	dBm	INFO
Ref. Frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.52 11.29 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

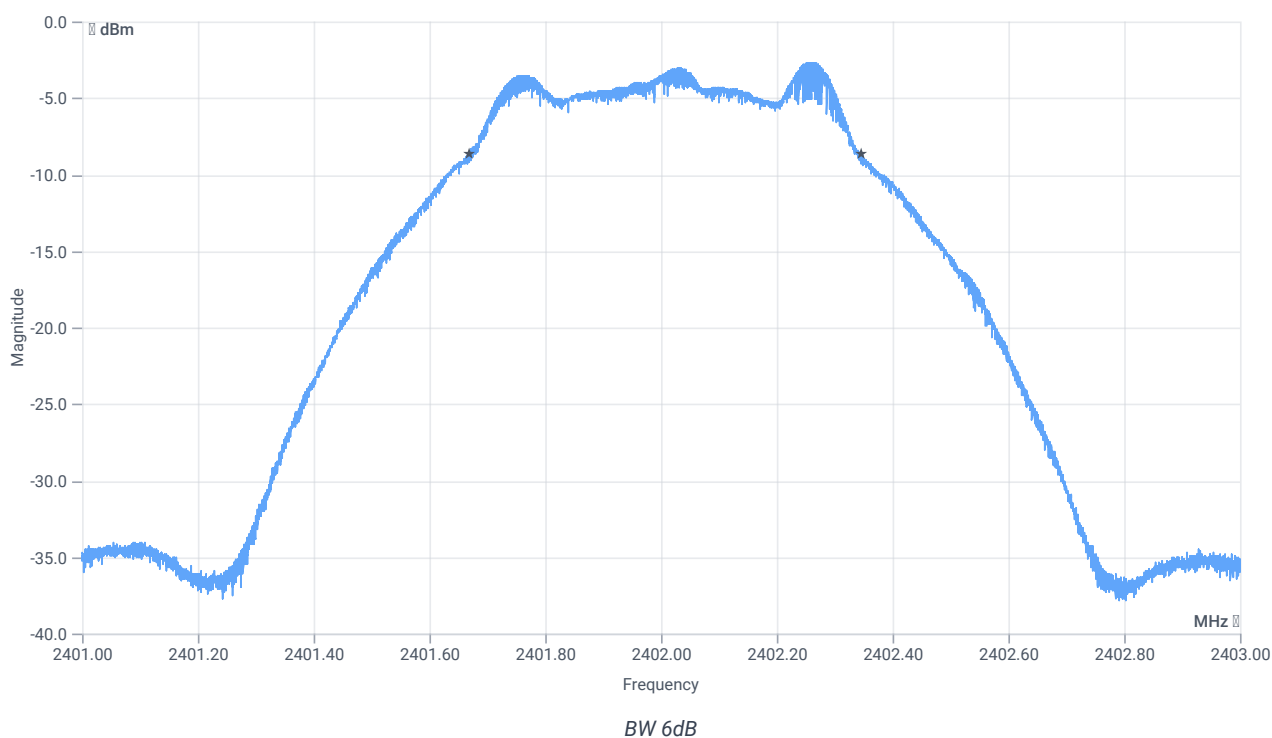

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	675	kHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:02:45
Ambit temp [°C] humidity [rel%]	27.3 34
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI


Test at TX 2402 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.46	dBm	INFO
Ref. Frequency	---	---	2402.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.54 11.29 10
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

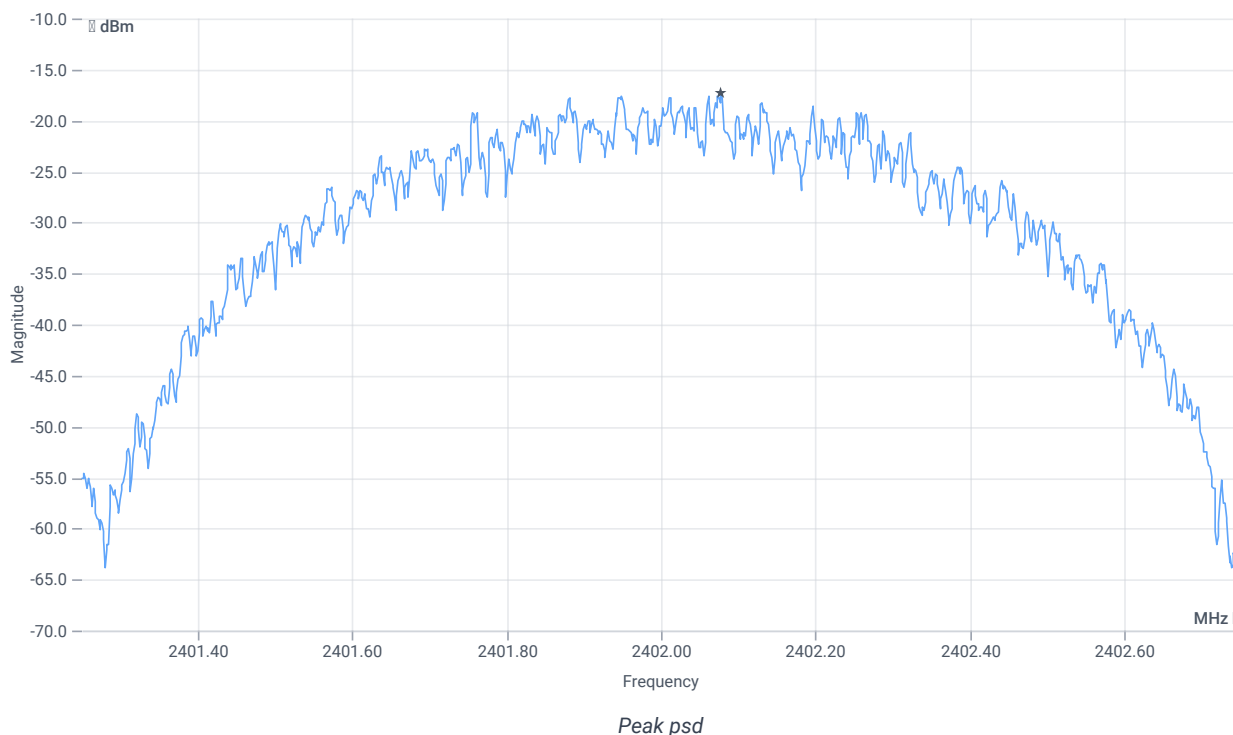

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-17.23	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	13.12.2023 13:03:26
Ambit temp [°C] humidity [rel%]	27.3 34
System version	4.7.1.4
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2402 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.50	dBm	INFO
Ref. Frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.50 11.29 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

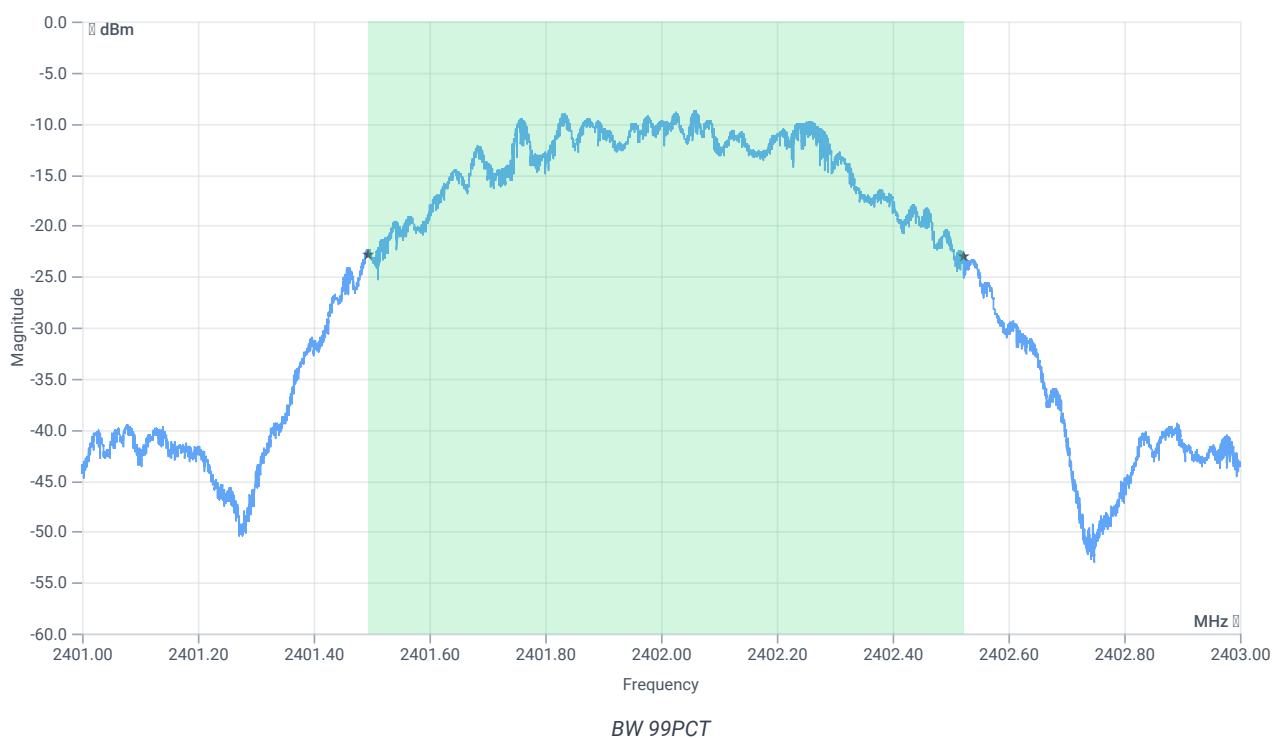


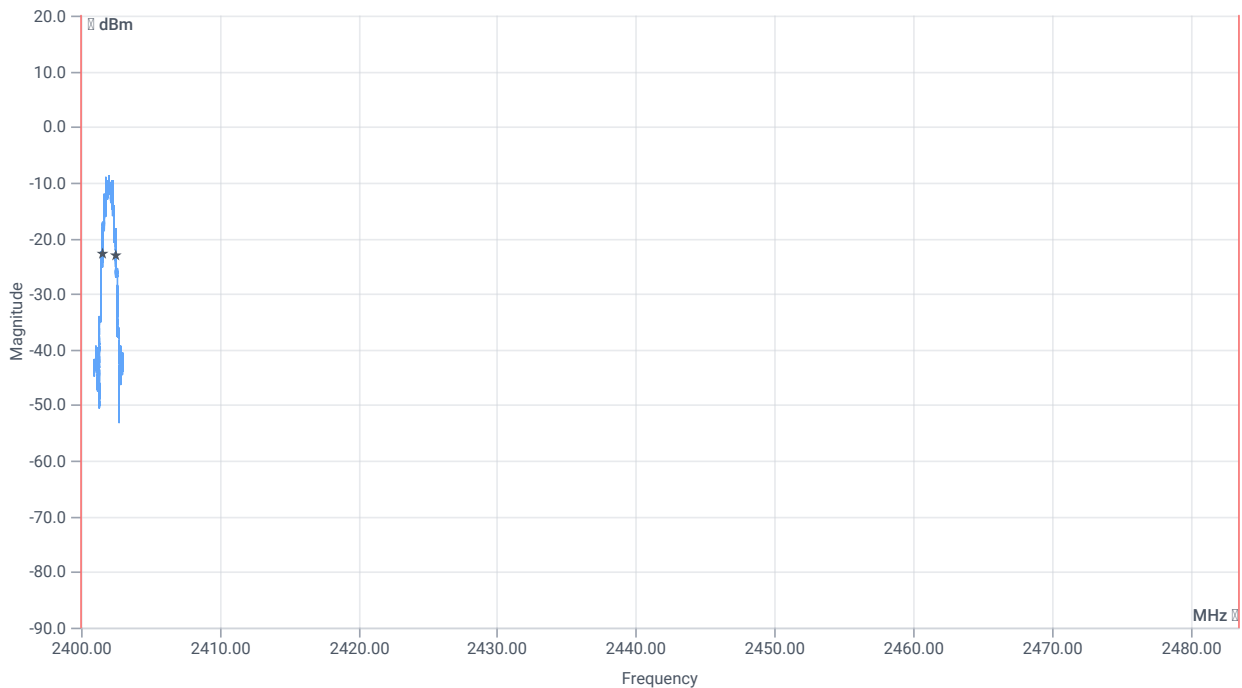


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1027.000	kHz	INFO
T1 99%	2400.000000	---	2401.4957	MHz	PASS
T2 99%	---	2483.500000	2402.5231	MHz	PASS

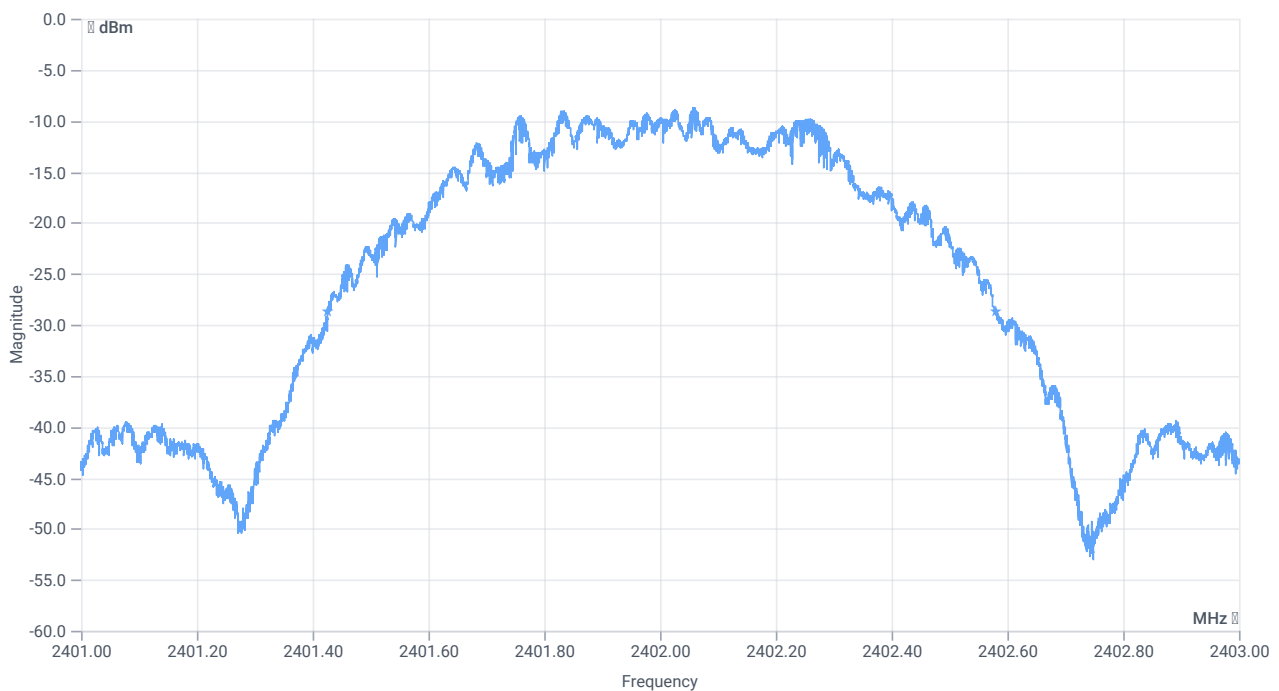

BW 20dB

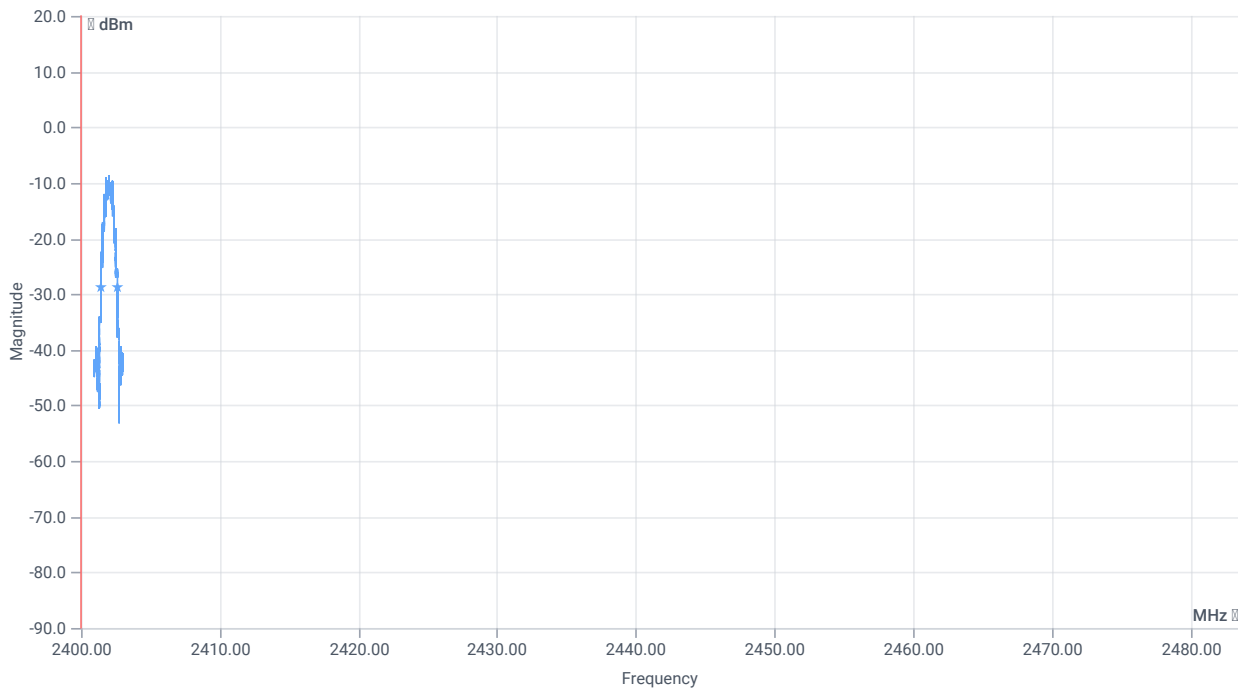

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1155	kHz	INFO
T1 20dB	2400.000000	---	2401.4258	MHz	PASS
T2 20dB	---	2483.500000	2402.5812	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	13.12.2023 13:04:06
Ambit temp [°C] humidity [rel%]	27.3 34
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI

Test at TX 2402 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.46	dBm	INFO
Ref. Frequency	---	---	2402.300	MHz	INFO

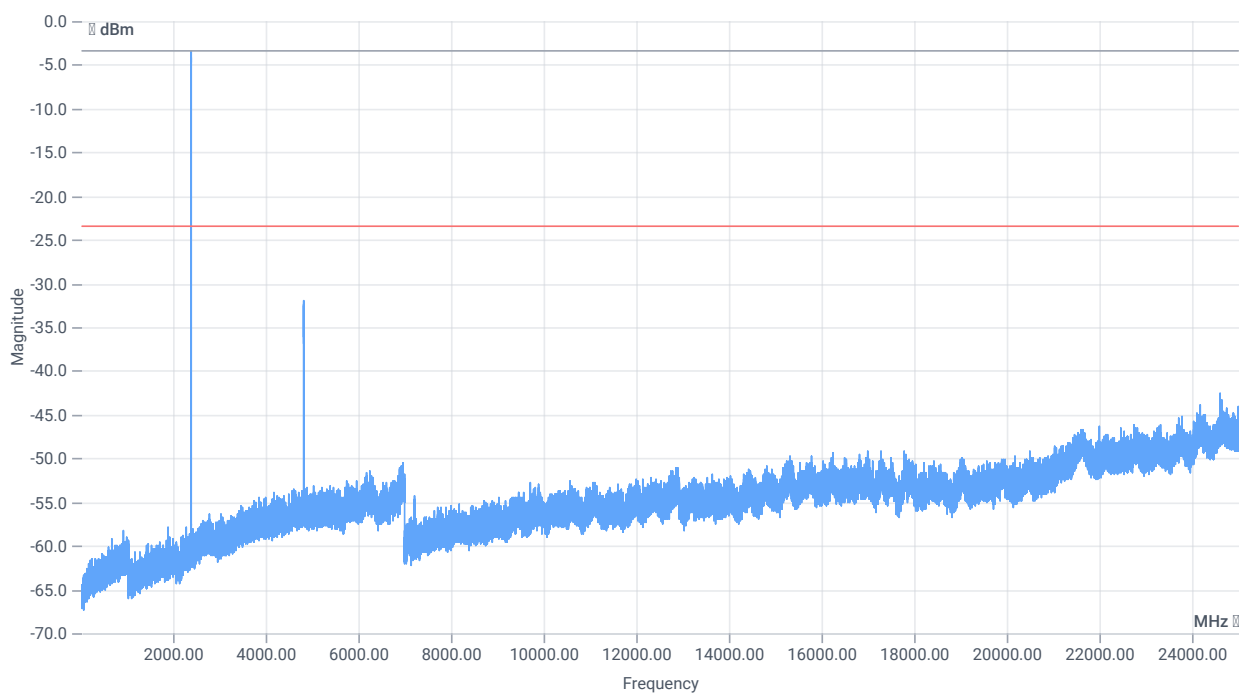

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.46 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

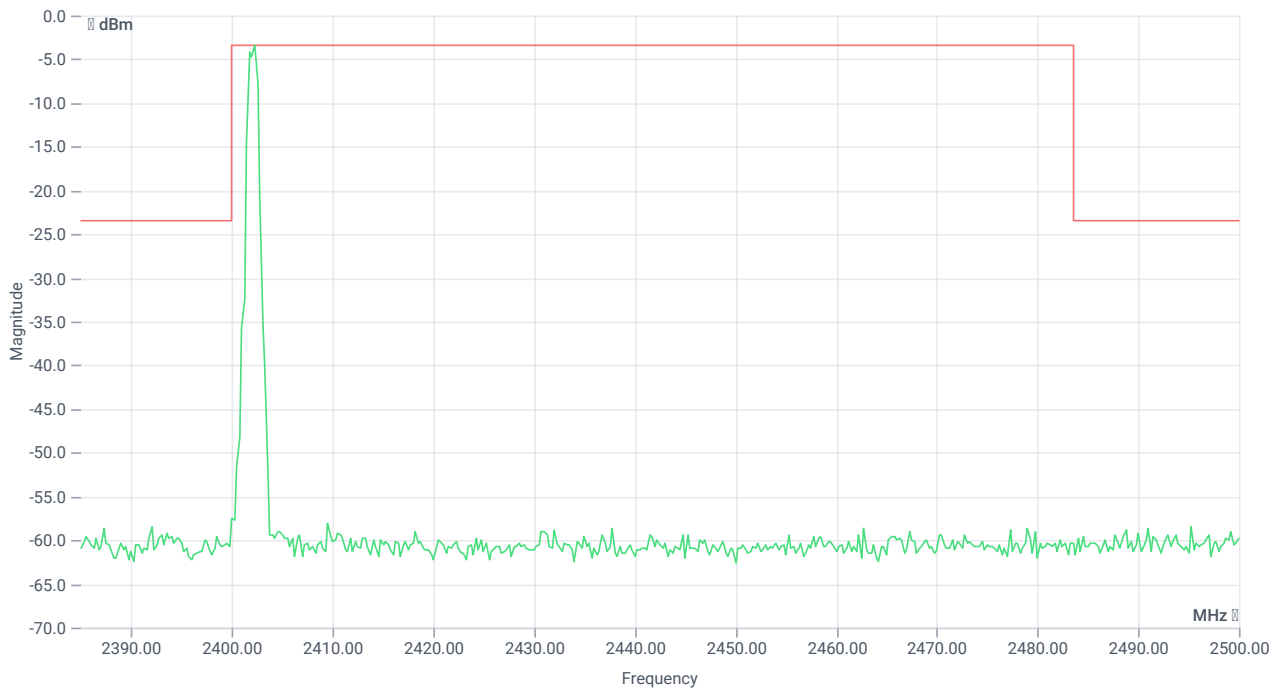

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2402.25 MHz	---	---	-3.40	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4804 MHz	0	---	8.52	dB	INFO

Verdict

PASS

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:10:53
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:10:59
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x3F 0x87 0xFC
Output result	< HCI Command: ogf 0x3f, ocf 0x0087, plen 1 FC > HCI Event: 0x0e plen 4 01 87 FC 00

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x0034 0x13 0xFF 0x00 0x01
Output result	< HCI Command: ogf 0x08, ocf 0x0034, plen 4 13 FF 00 01 > HCI Event: 0x0e plen 4 01 34 20 00

Verdict

INFO

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	13.12.2023 13:11:06
Ambit temp [°C] humidity [rel%]	27.4 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.18	dBm	INFO
Ref. Frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.82 11.36 15
Start [MHz] Stop [MHz]	2437.500 2442.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

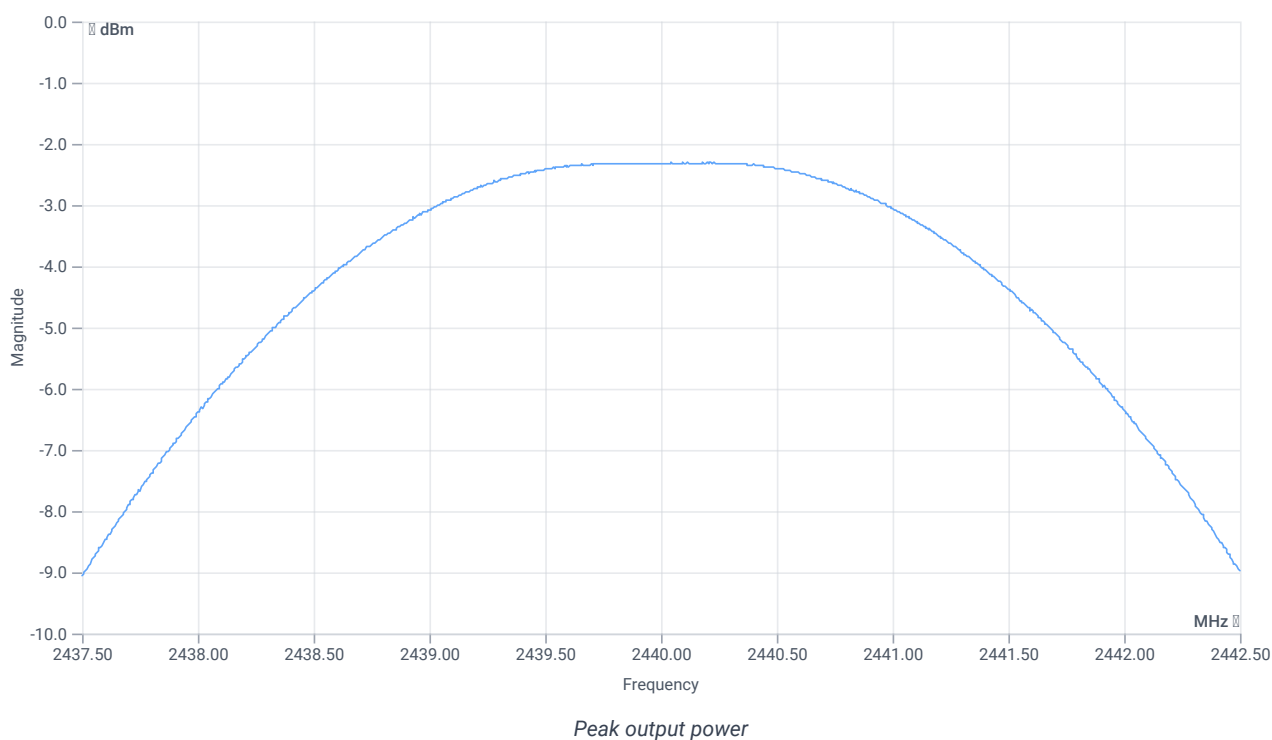

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	---	-2.3	dBm	INFO
Peak Power	---	---	0.588844	mW	INFO
Frequency at Peak	---	---	2440.115	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msp

References

TC start	13.12.2023 13:11:36
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msp
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msp
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.18	dBm	INFO
Ref. Frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.82 11.36 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS Bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	---	---	673	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.82 11.36 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

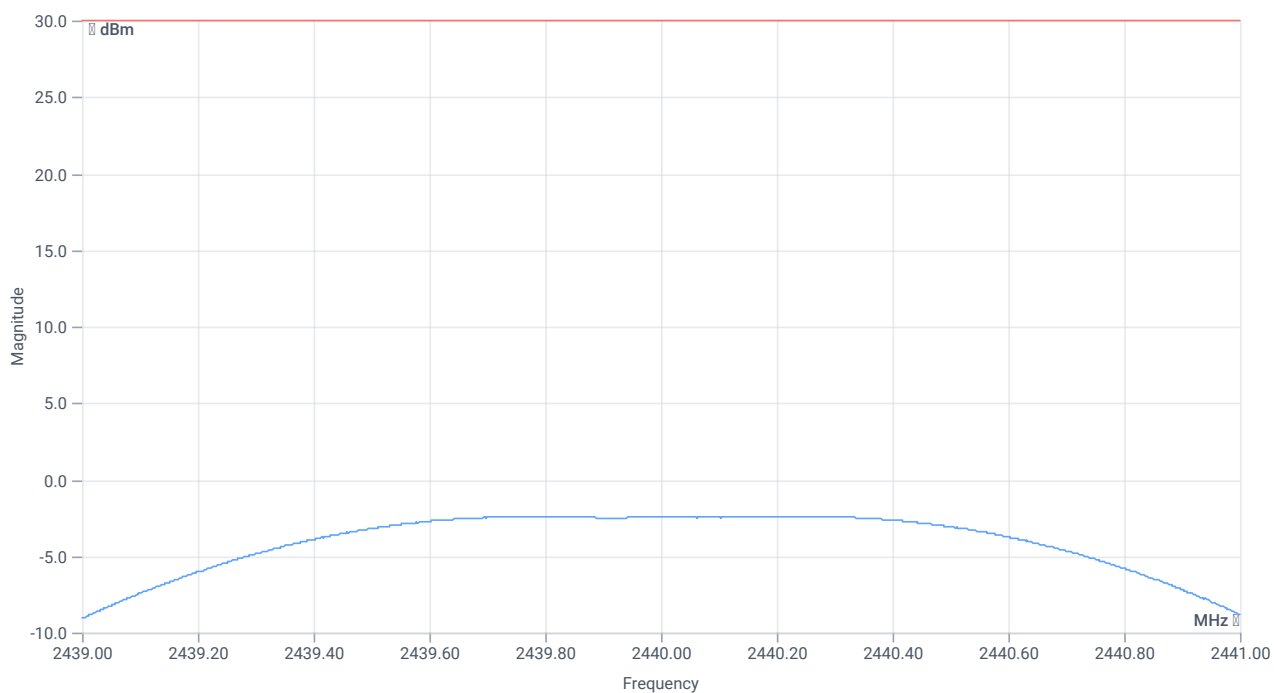

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30.00	-2.41	dBm	PASS
Peak Power	---	1000	0.574116	mW	PASS
Frequency at Peak	---	---	2440.258	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:12:21
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.18	dBm	INFO
Ref. Frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.82 11.36 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

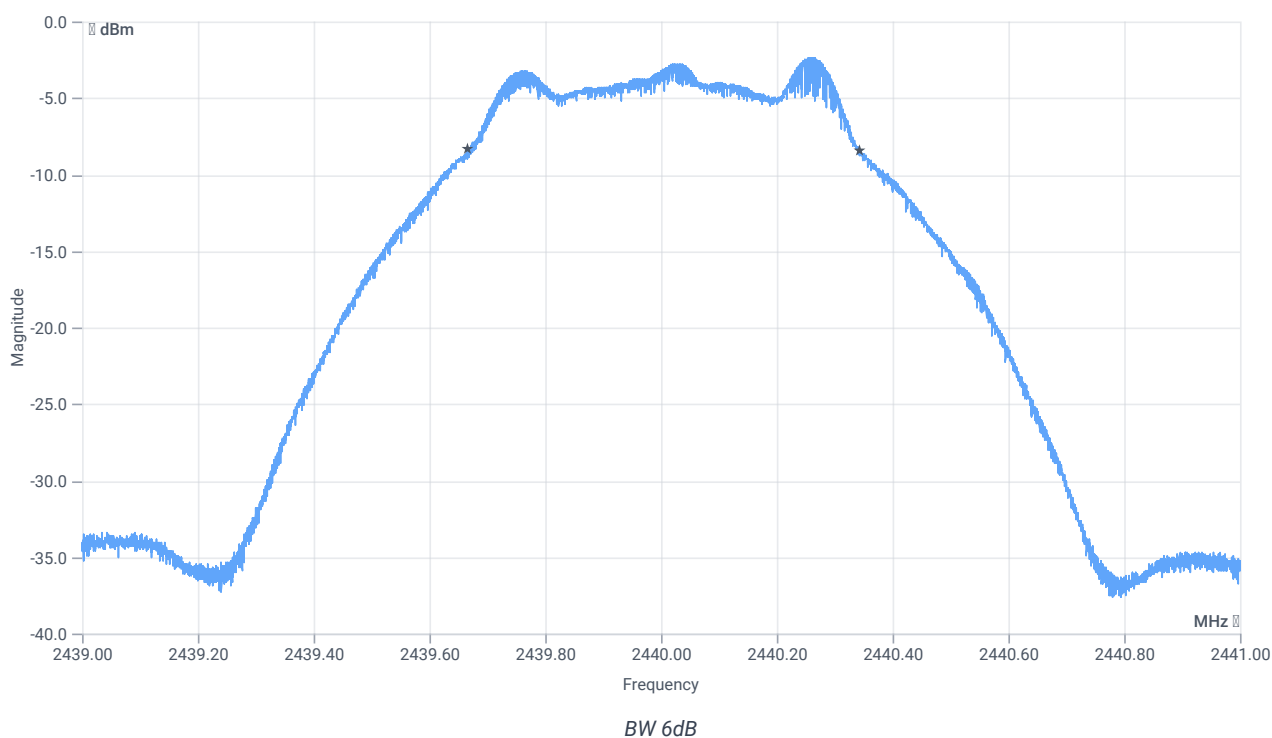

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	676	kHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:12:53
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI


Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.20	dBm	INFO
Ref. Frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.80 11.36 10
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

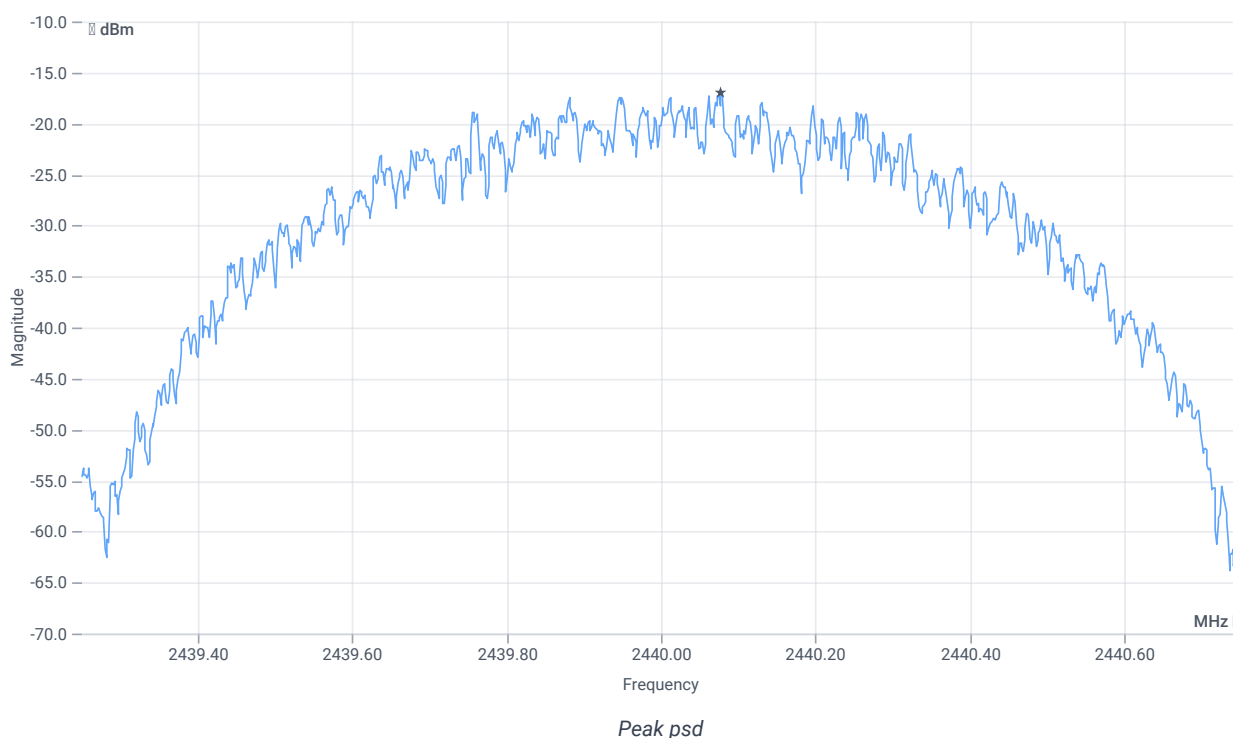

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-17	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	13.12.2023 13:13:34
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI


Test at TX 2440 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.20	dBm	INFO
Ref. Frequency	---	---	2440.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.80 11.36 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

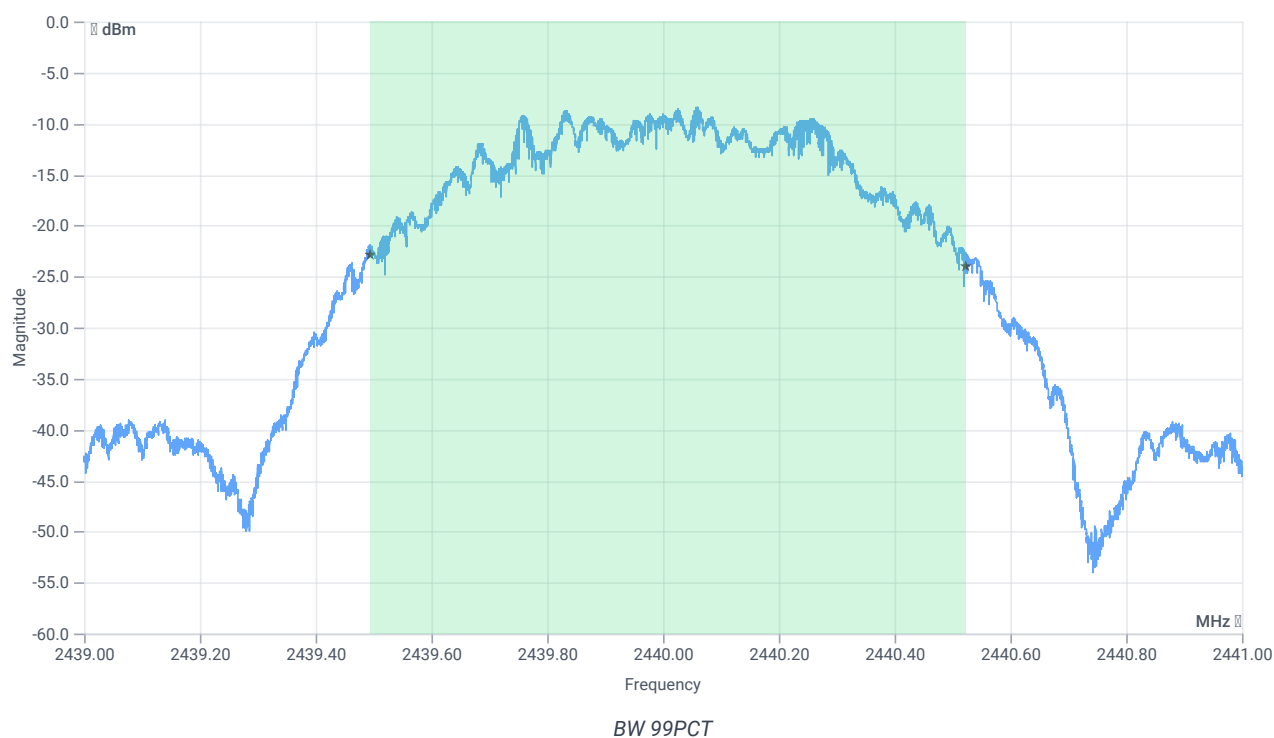


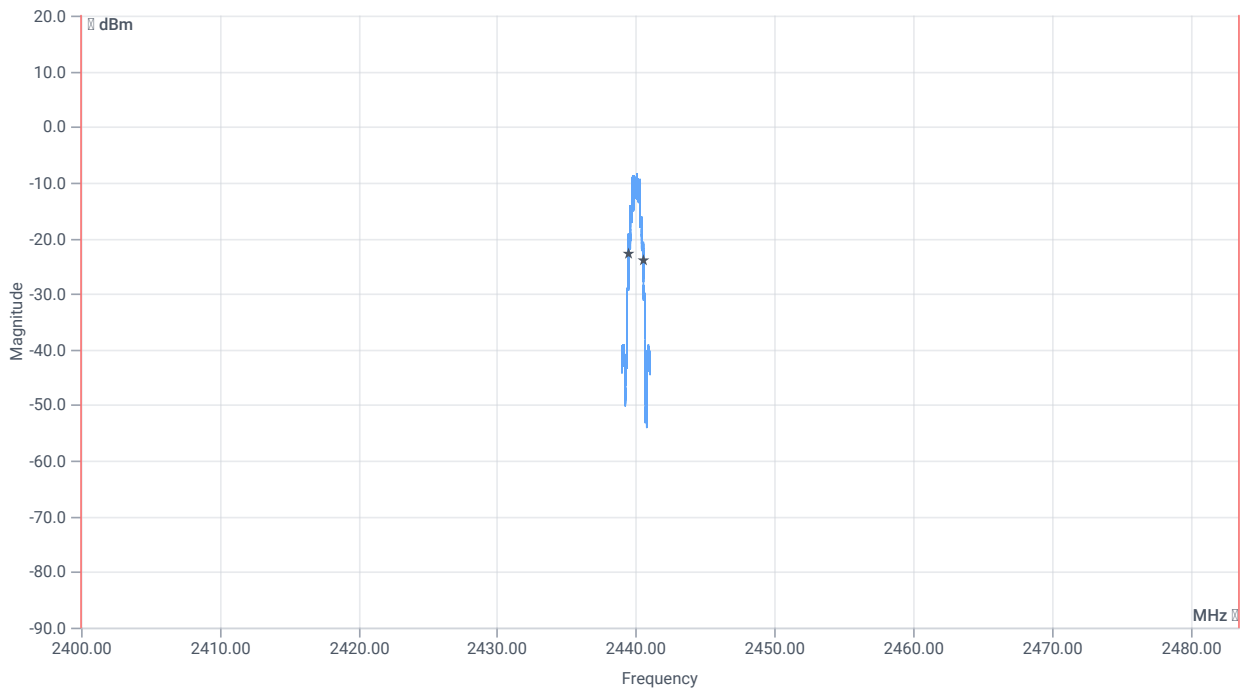


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1027.000	kHz	INFO
T1 99%	2400.000000	---	2439.4949	MHz	PASS
T2 99%	---	2483.500000	2440.5223	MHz	PASS

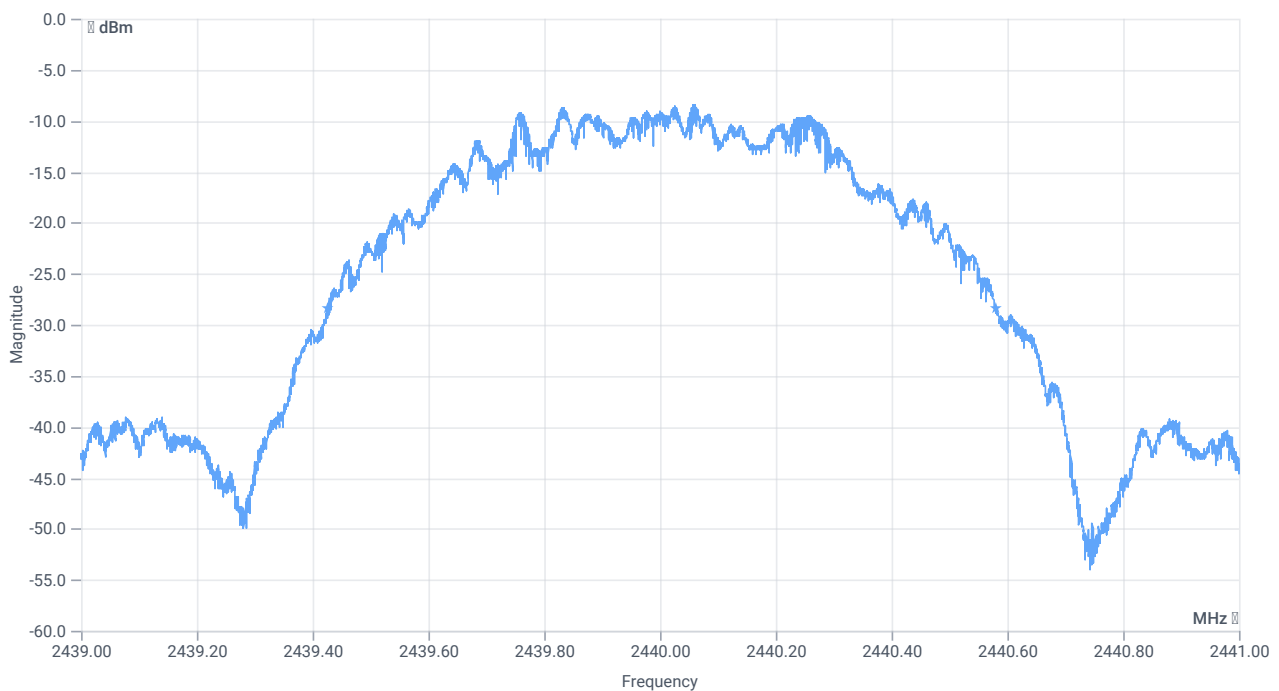

BW 20dB

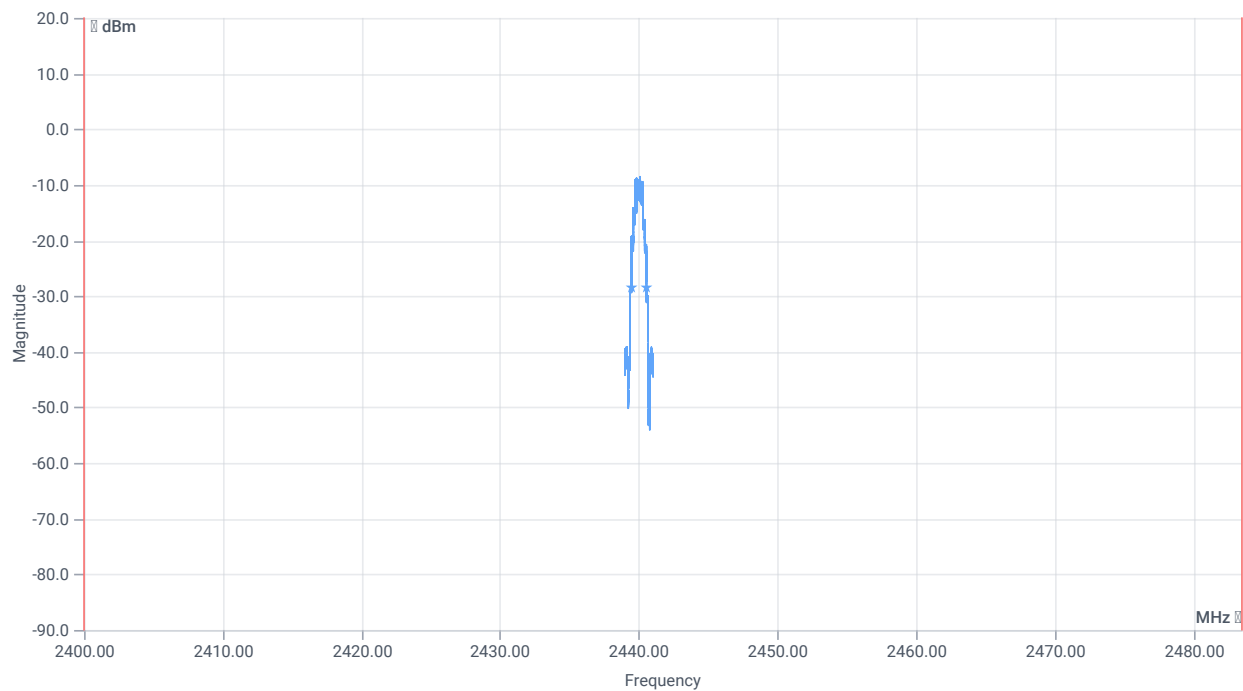

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1153	kHz	INFO
T1 20dB	2400.000000	---	2439.4258	MHz	PASS
T2 20dB	---	2483.500000	2440.5792	MHz	PASS

Verdict
PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	13.12.2023 13:14:13
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI

Test at TX 2440 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.23	dBm	INFO
Ref. Frequency	---	---	2440.300	MHz	INFO

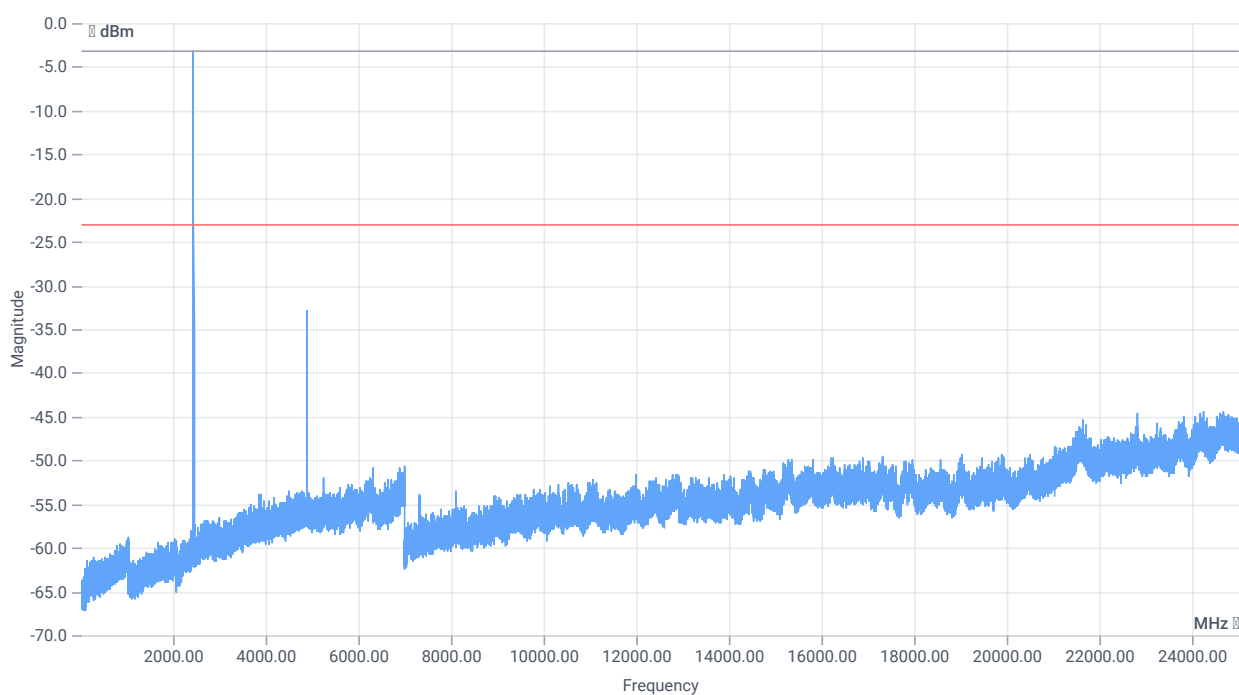

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.23 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

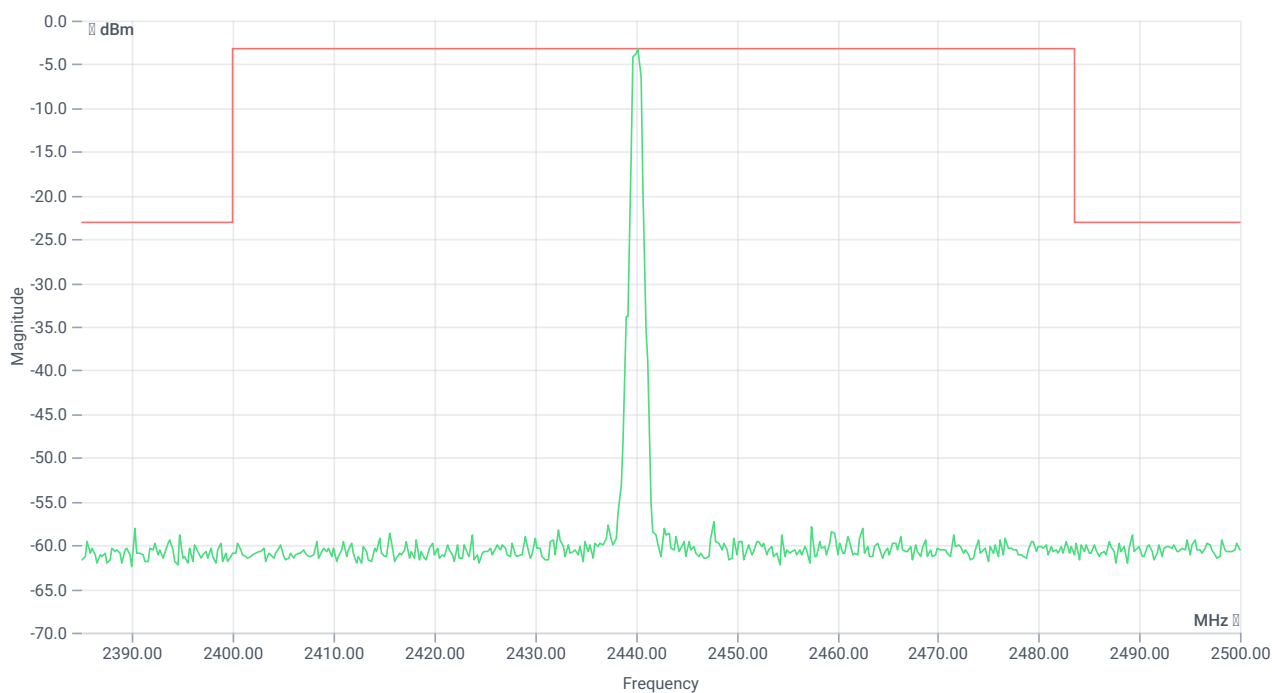

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2440.25 MHz	---	---	-3.17	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-134.89	dB	INFO

Verdict

PASS

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:21:00
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:21:07
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x3F 0x87 0xFC
Output result	< HCI Command: ogf 0x3f, ocf 0x0087, plen 1 FC > HCI Event: 0x0e plen 4 01 87 FC 00

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x0034 0x27 0xFF 0x00 0x01
Output result	< HCI Command: ogf 0x08, ocf 0x0034, plen 4 27 FF 00 01 > HCI Event: 0x0e plen 4 01 34 20 00

Verdict

INFO

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	13.12.2023 13:21:14
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2480 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.00	dBm	INFO
Ref. Frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.00 11.41 15
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

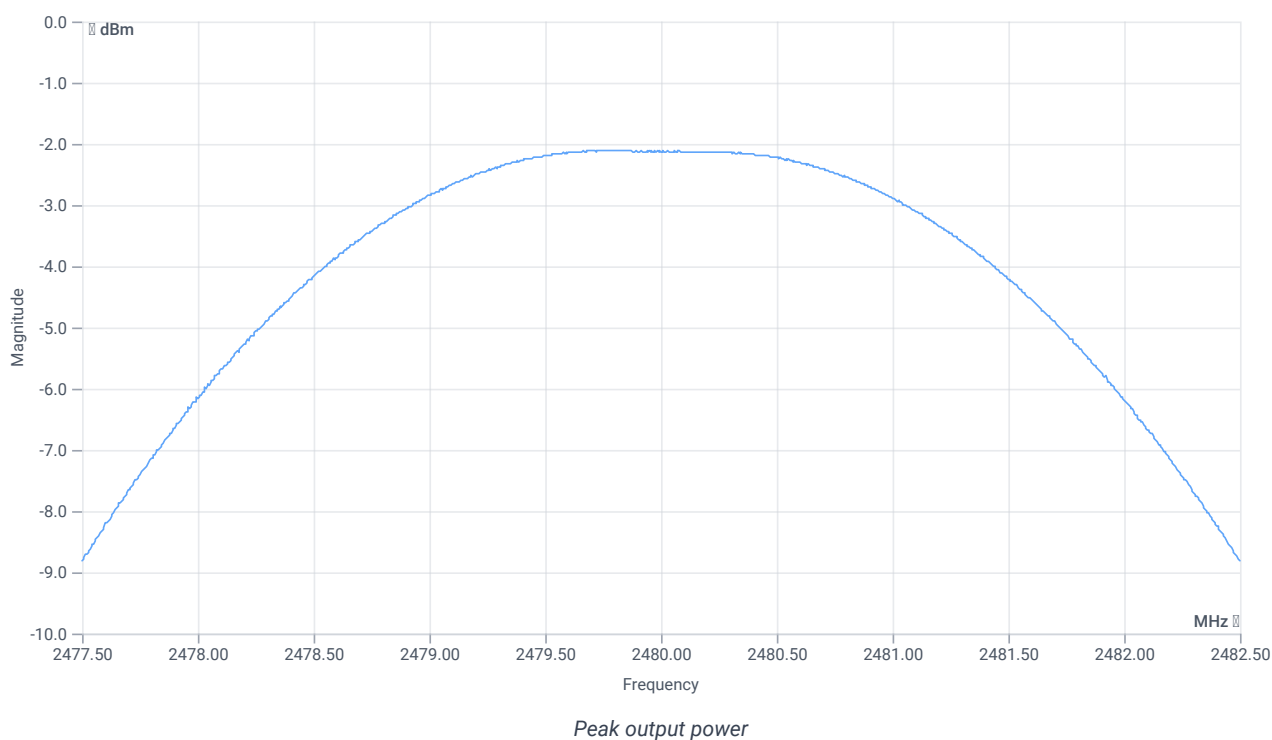

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	---	-2.11	dBm	INFO
Peak Power	---	---	0.615177	mW	INFO
Frequency at Peak	---	---	2479.795	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:21:44
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2480 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.02	dBm	INFO
Ref. Frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.98 11.41 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS Bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	---	---	674	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.98 11.41 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

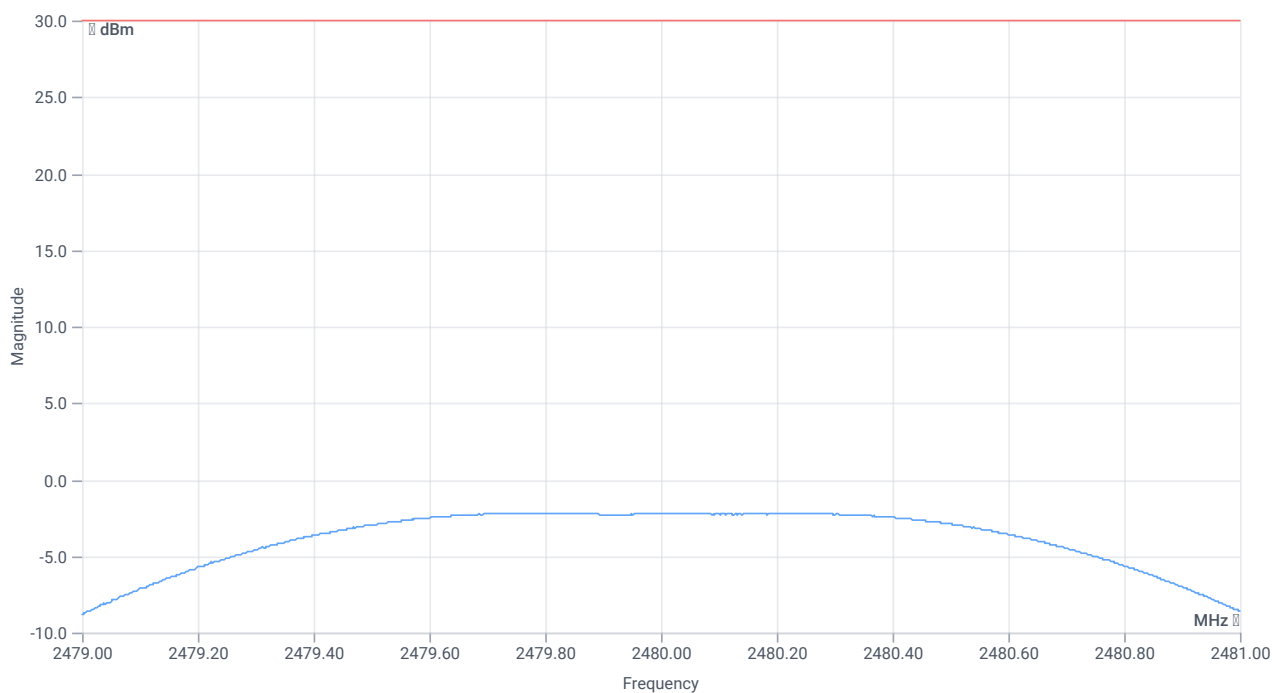

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30.00	-2.21	dBm	PASS
Peak Power	---	1000	0.601174	mW	PASS
Frequency at Peak	---	---	2479.752	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:22:29
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2480 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.04	dBm	INFO
Ref. Frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.96 11.41 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

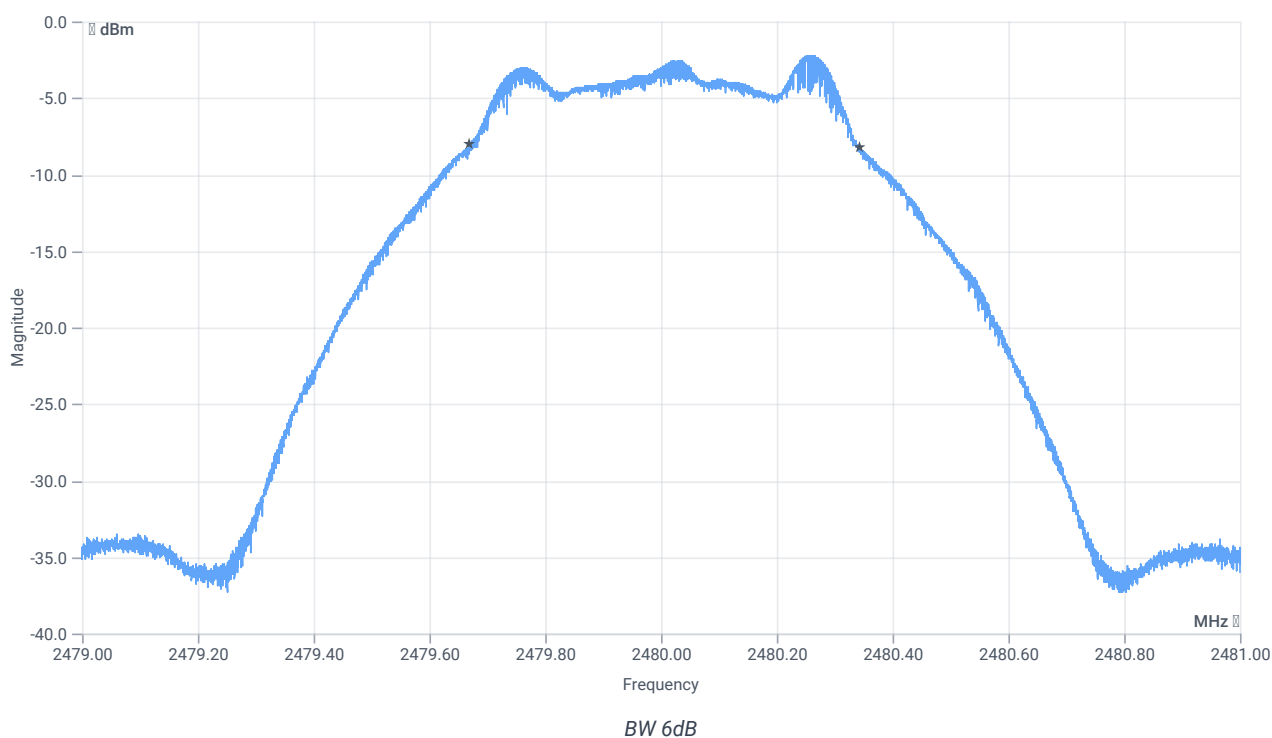

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	675	kHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	13.12.2023 13:23:00
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI


Test at TX 2480 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.05	dBm	INFO
Ref. Frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.95 11.41 10
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

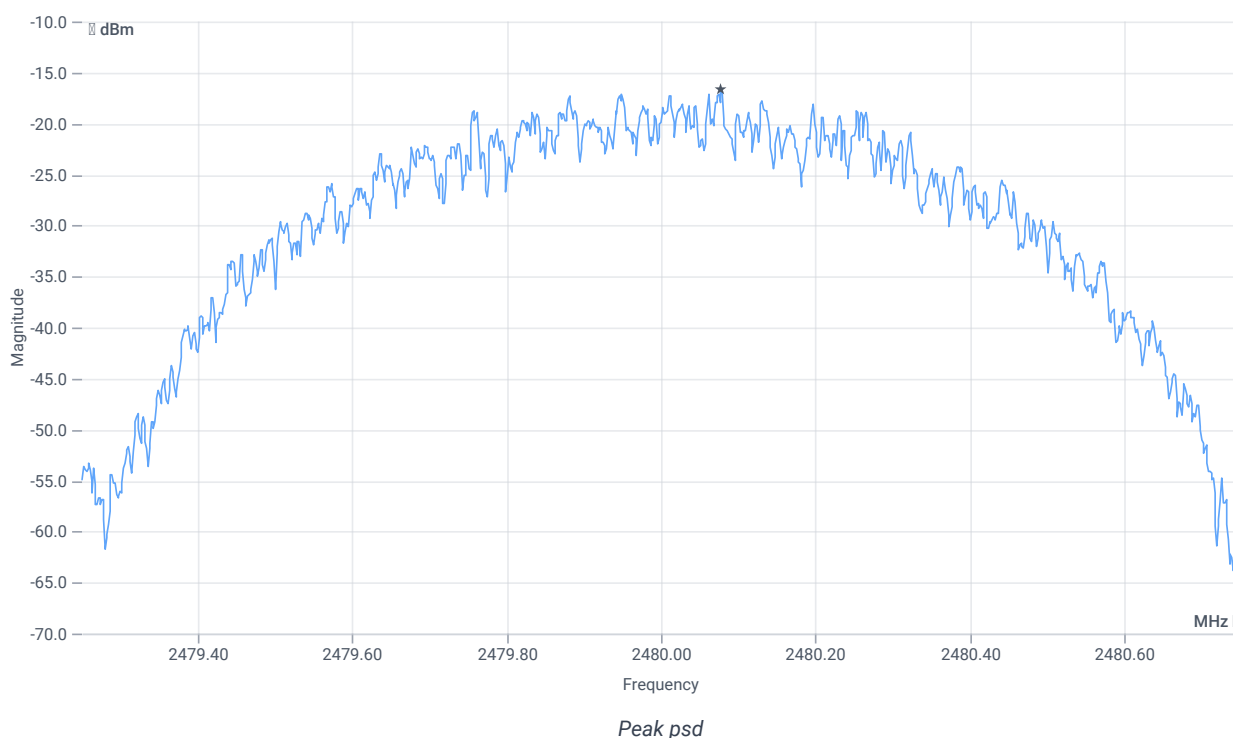

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-16.7	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	13.12.2023 13:23:41
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2480 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.03	dBm	INFO
Ref. Frequency	---	---	2480.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.97 11.41 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

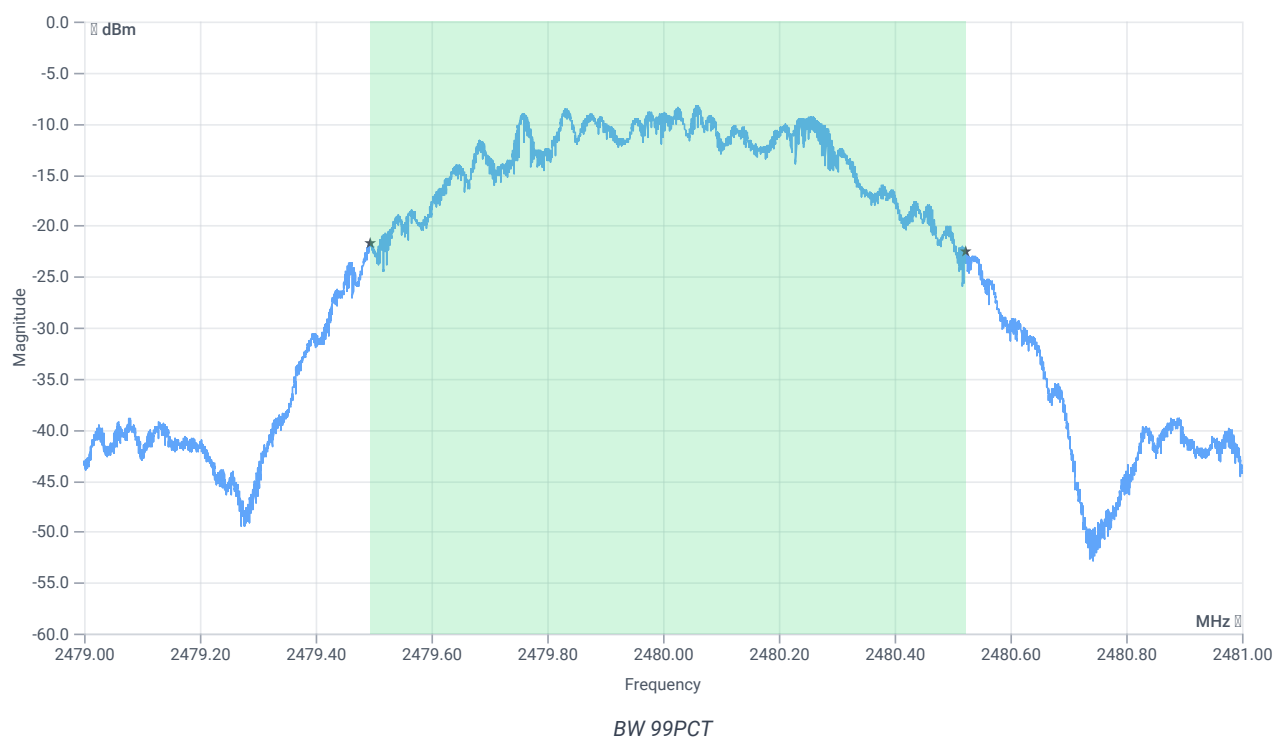


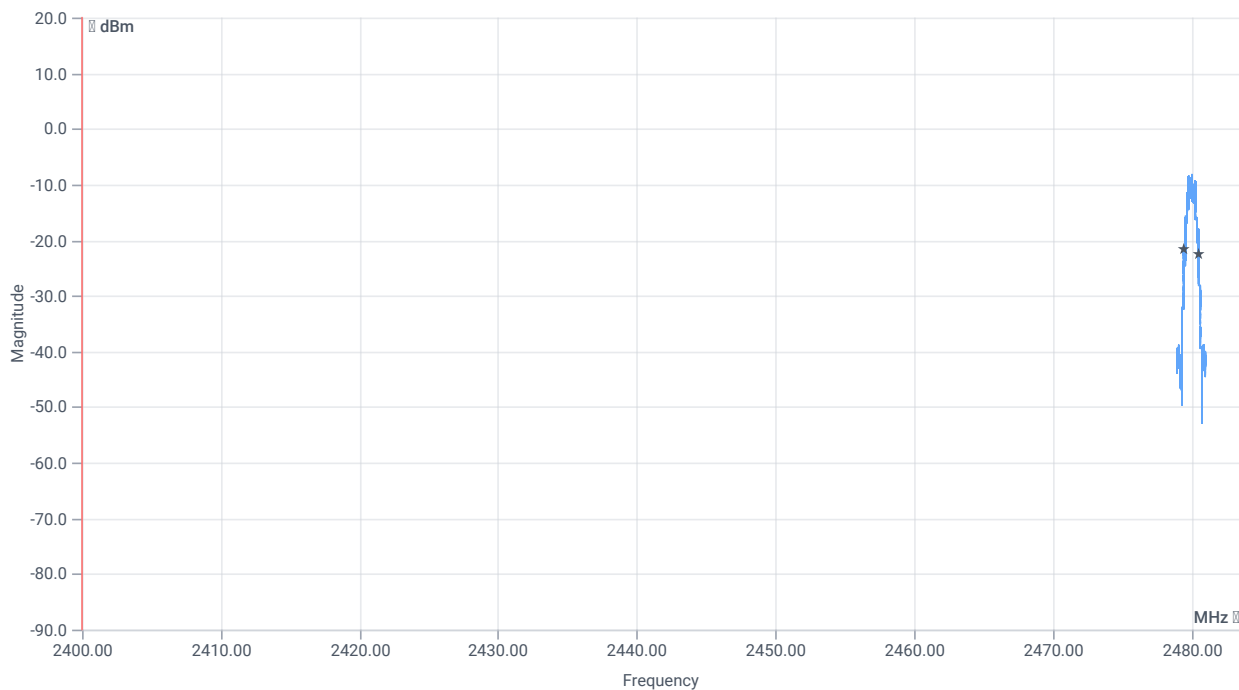


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1027.000	kHz	INFO
T1 99%	2400.000000	---	2479.4949	MHz	PASS
T2 99%	---	2483.500000	2480.5221	MHz	PASS

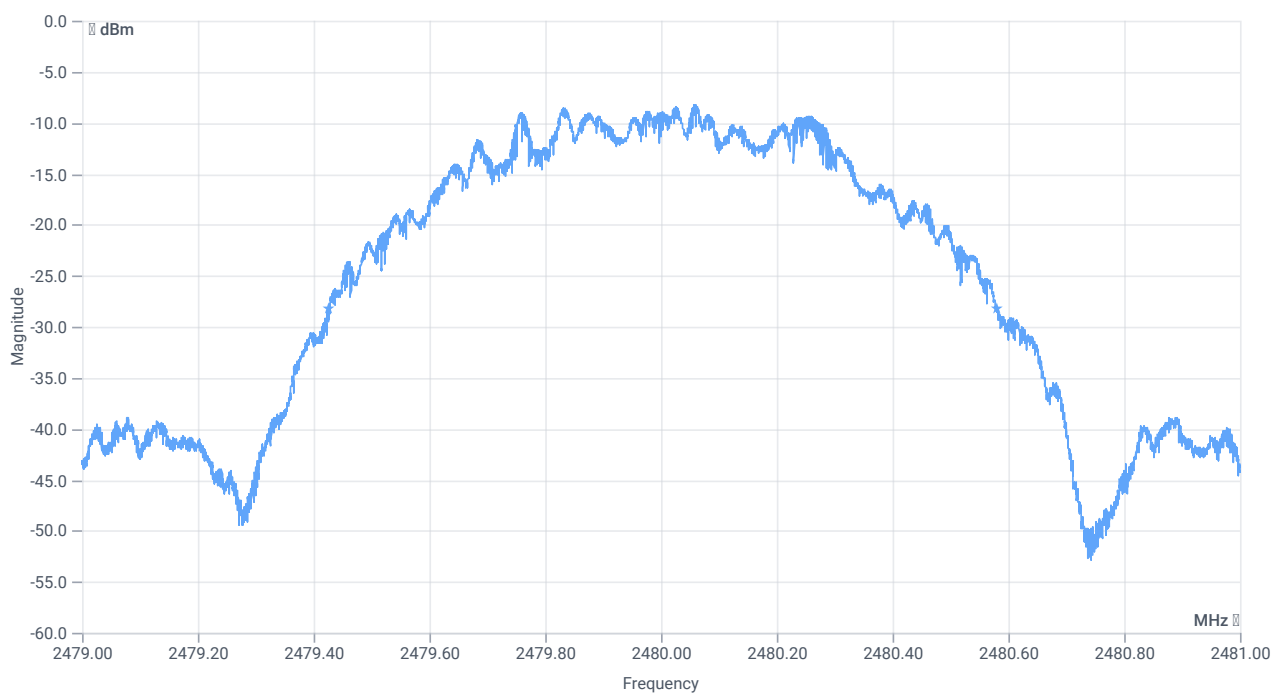

BW 20dB

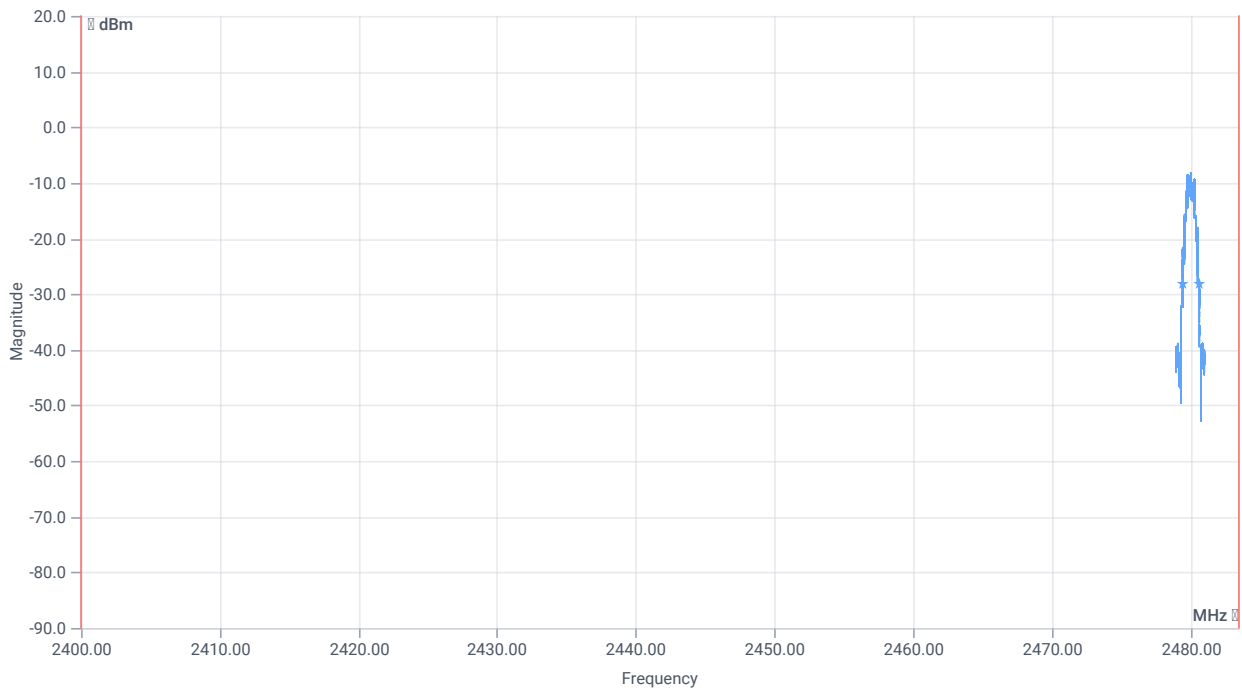

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1153	kHz	INFO
T1 20dB	2400.000000	---	2479.4258	MHz	PASS
T2 20dB	---	2483.500000	2480.5788	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	13.12.2023 13:24:21
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 1 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2480 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.05	dBm	INFO
Ref. Frequency	---	---	2480.300	MHz	INFO

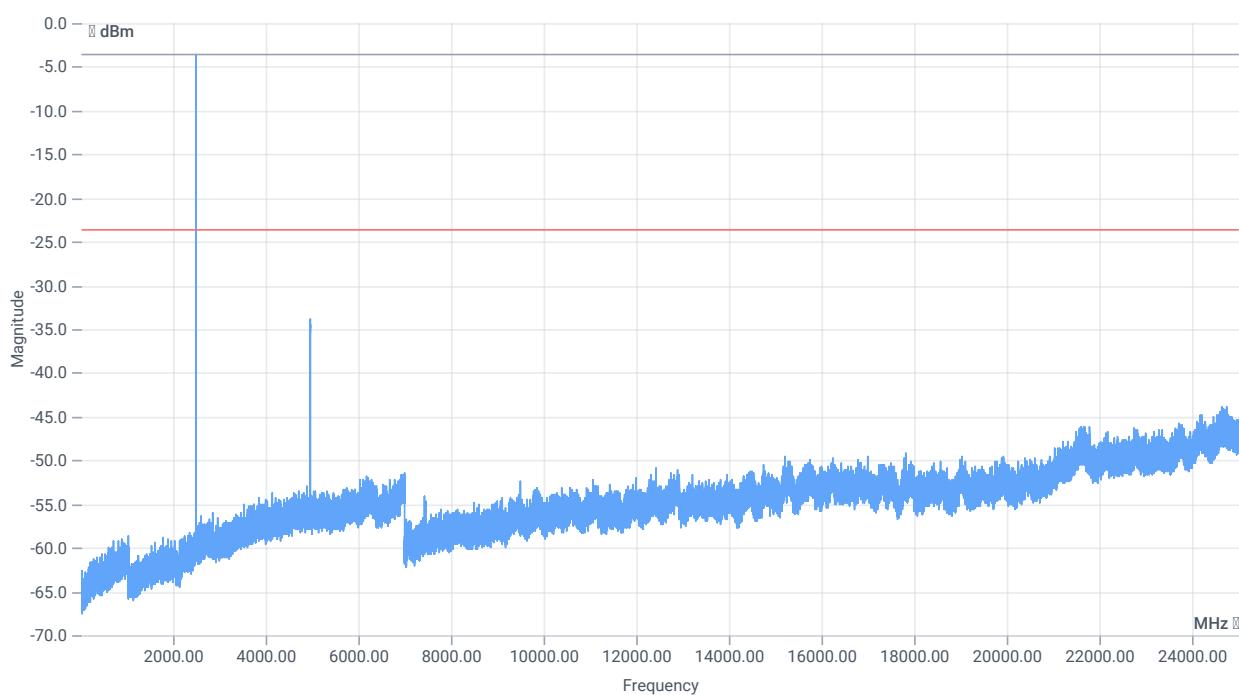

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.05 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

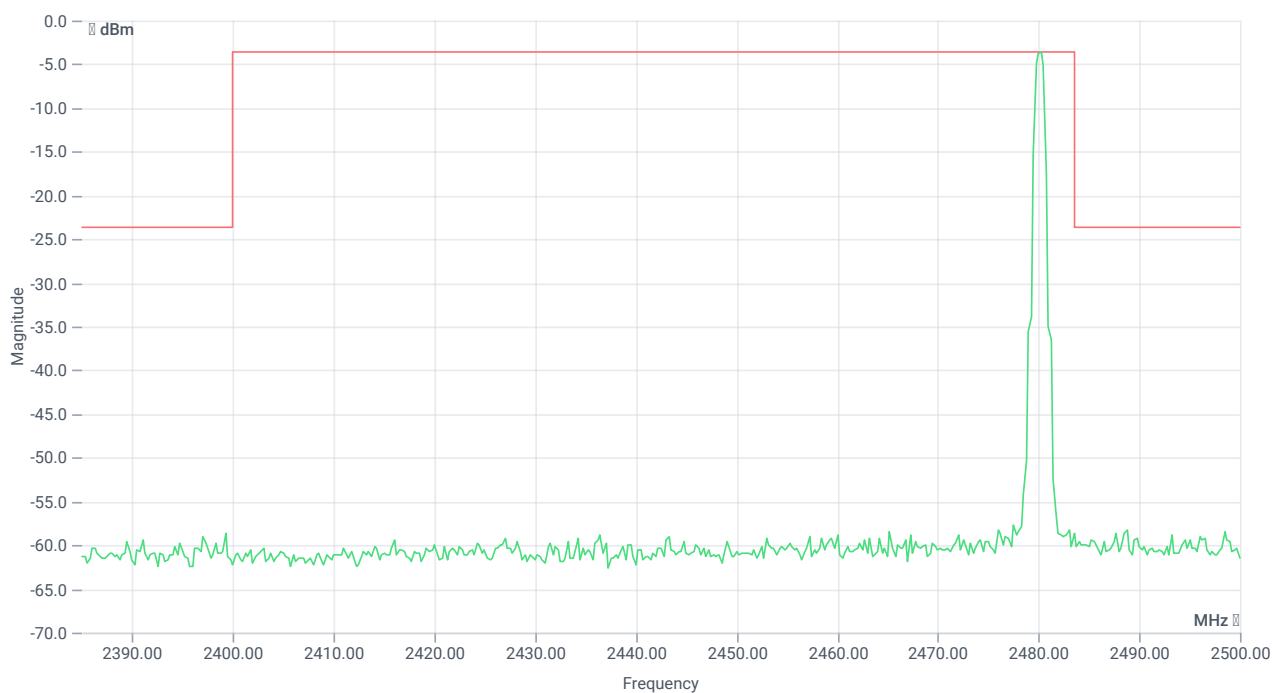

TX emissions band zoomed

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.25 MHz	---	---	-3.69	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4960 MHz	0	---	10.11	dB	INFO

Verdict

PASS

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:31:07
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:31:14
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x3F 0x87 0xFC
Output result	< HCI Command: ogf 0x3f, ocf 0x0087, plen 1 FC > HCI Event: 0x0e plen 4 01 87 FC 00

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x0034 0x01 0xFF 0x00 0x02
Output result	< HCI Command: ogf 0x08, ocf 0x0034, plen 4 01 FF 00 02 > HCI Event: 0x0e plen 4 01 34 20 00

Verdict

INFO

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:31:21
Ambit temp [°C] humidity [rel%]	27.5 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2404 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.43	dBm	INFO
Ref. Frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.57 11.3 10
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS Bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	---	---	1172	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.57 11.3 15
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

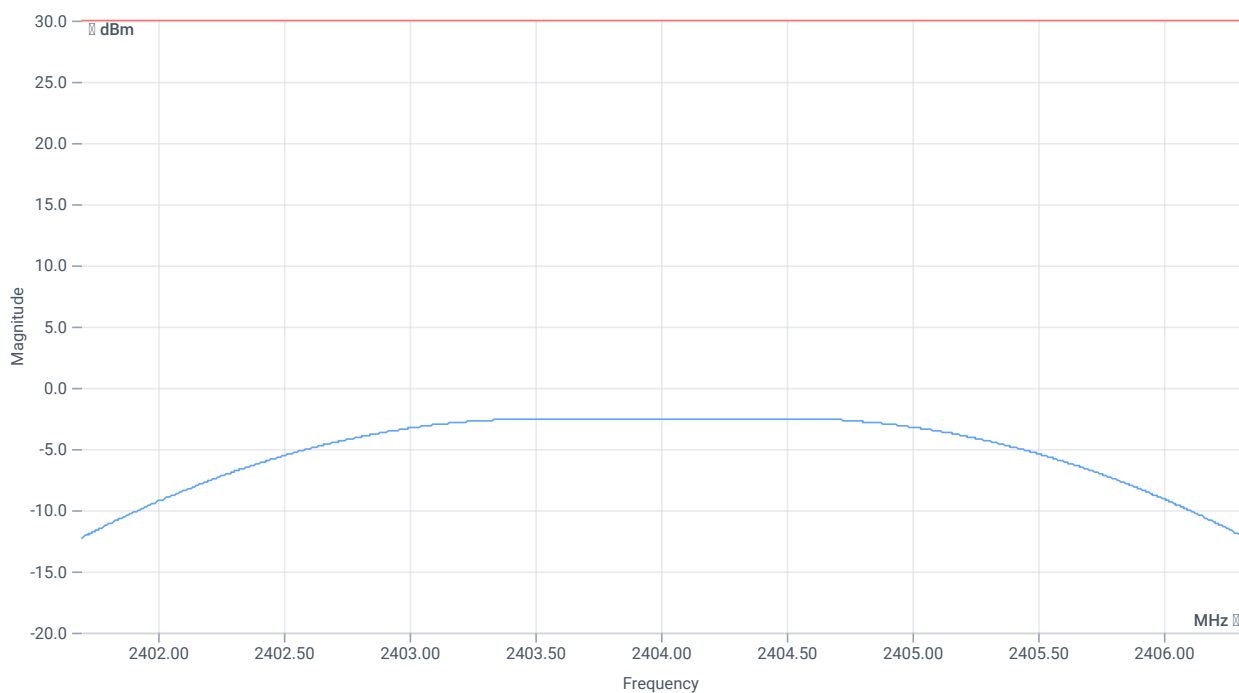

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30.00	-2.5	dBm	PASS
Peak Power	---	1000	0.562341	mW	PASS
Frequency at Peak	---	---	2404.528	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:32:05
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2404 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.46	dBm	INFO
Ref. Frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.54 11.3 10
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

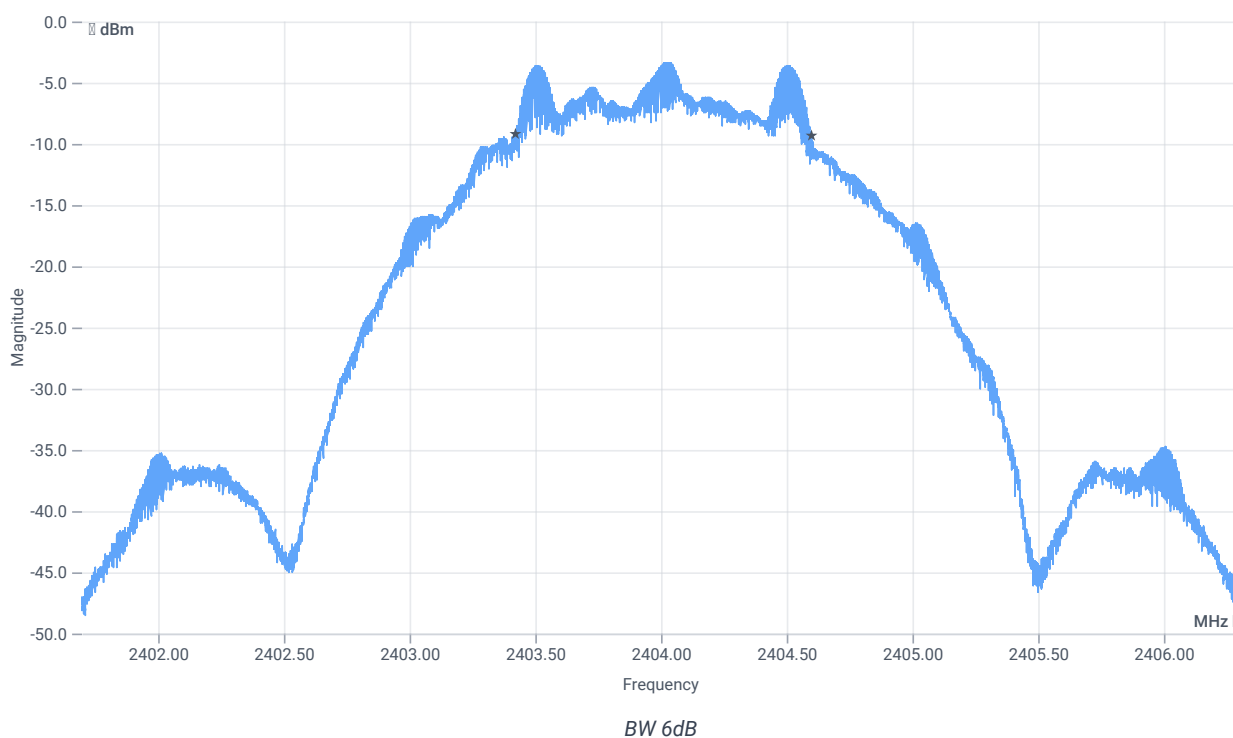

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	1174	kHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:32:37
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2404 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.44	dBm	INFO
Ref. Frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.56 11.3 10
Start [MHz] Stop [MHz]	2402.275 2405.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

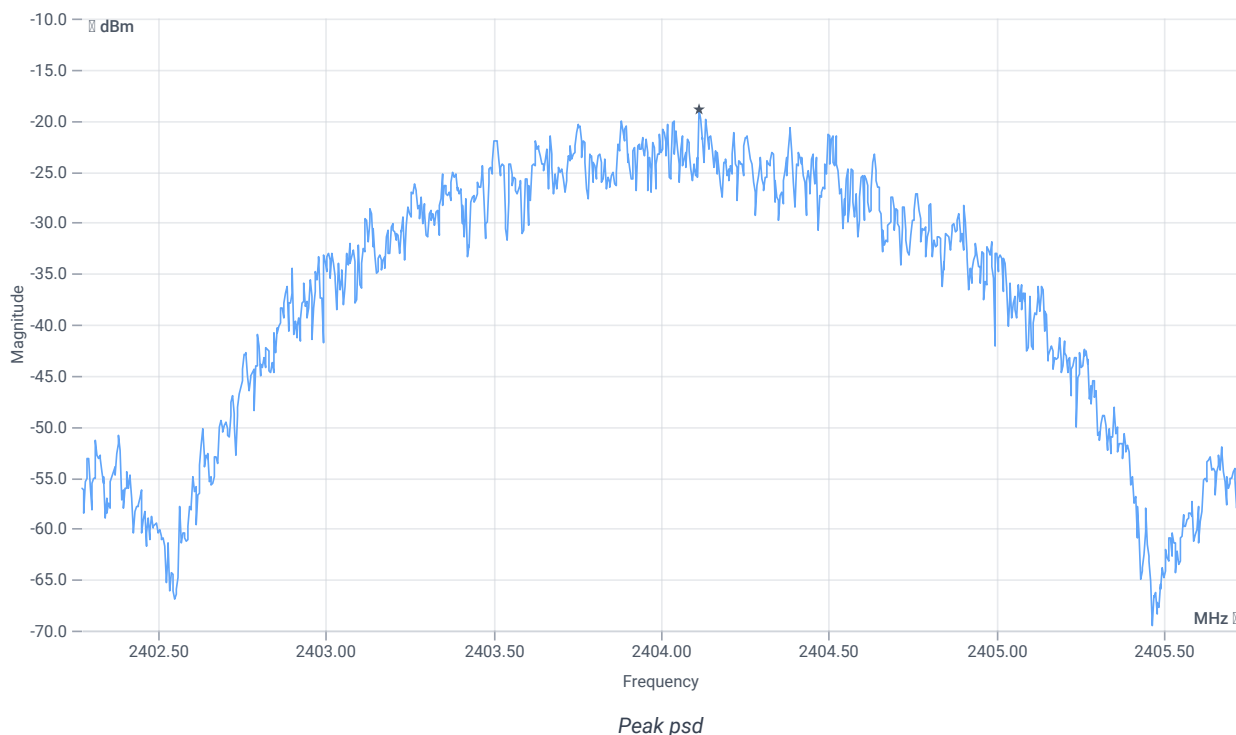

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-18.84	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	13.12.2023 13:33:18
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI


Test at TX 2404 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.33	dBm	INFO
Ref. Frequency	---	---	2404.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.67 11.3 10
Start [MHz] Stop [MHz]	2401.700 2406.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

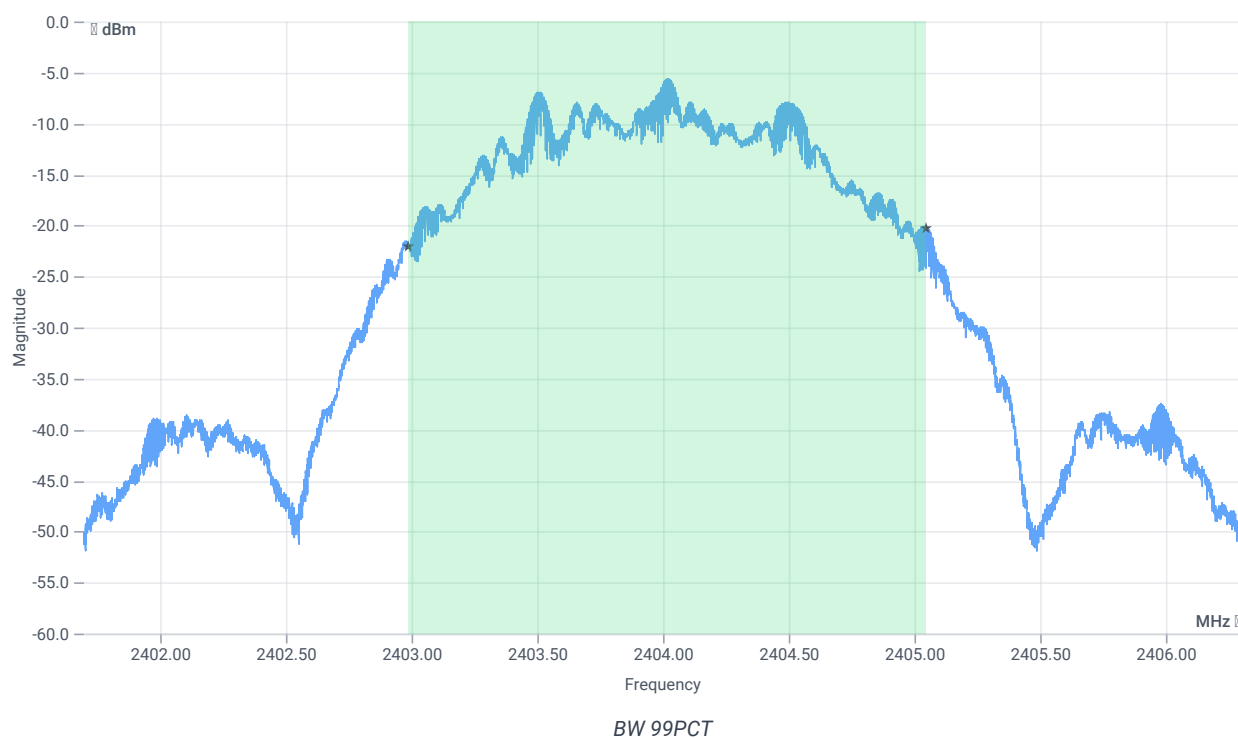


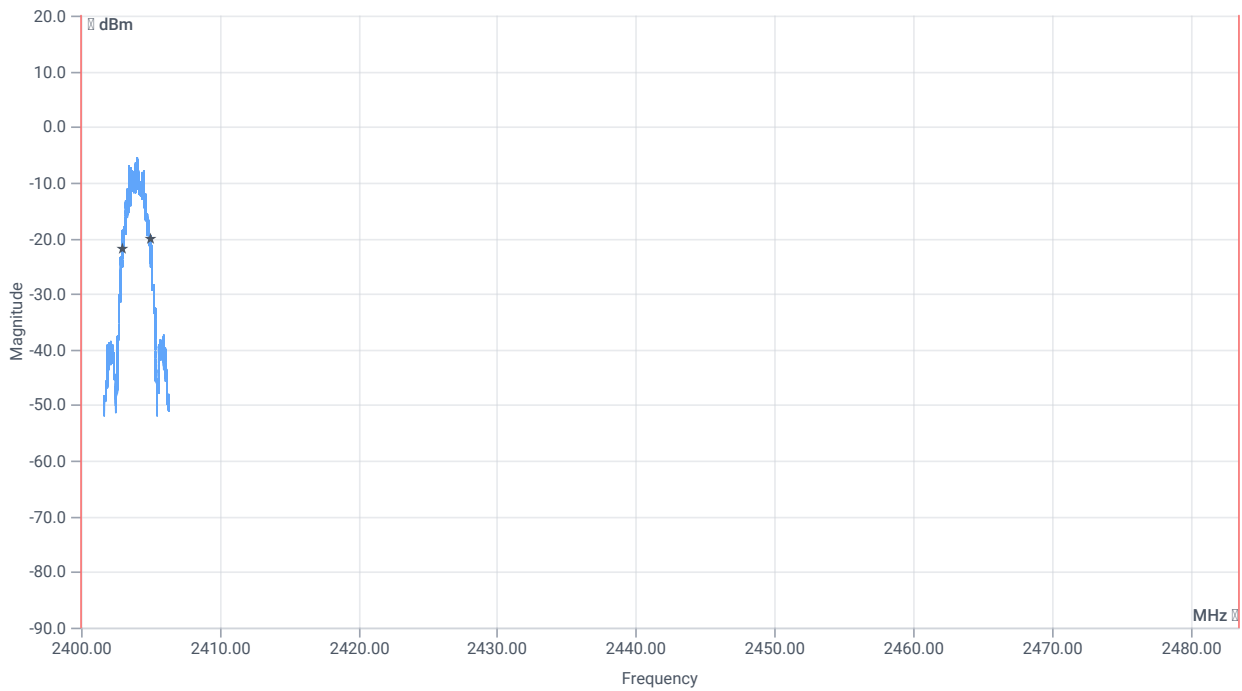


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2053.000	kHz	INFO
T1 99%	2400.000000	---	2402.9895	MHz	PASS
T2 99%	---	2483.500000	2405.0423	MHz	PASS

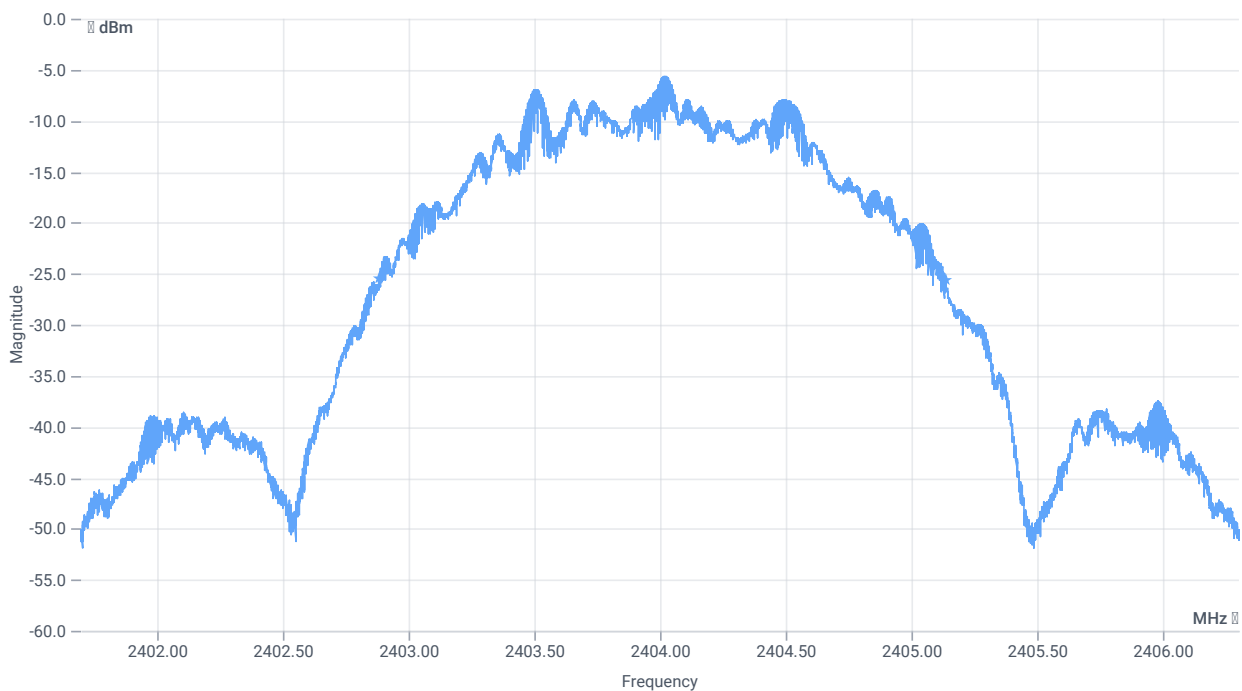

BW 20dB

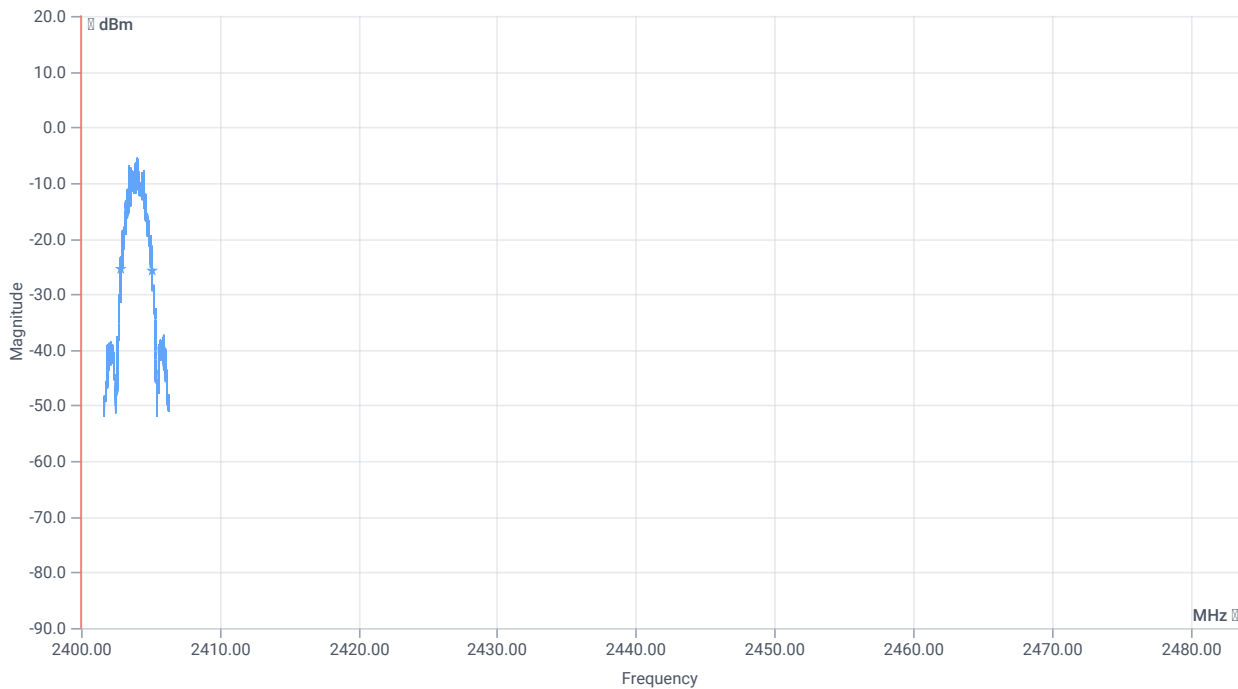

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2250	kHz	INFO
T1 20dB	2400.000000	---	2402.8840	MHz	PASS
T2 20dB	---	2483.500000	2405.1344	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	13.12.2023 13:33:57
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI

Test at TX 2404 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.45	dBm	INFO
Ref. Frequency	---	---	2404.500	MHz	INFO

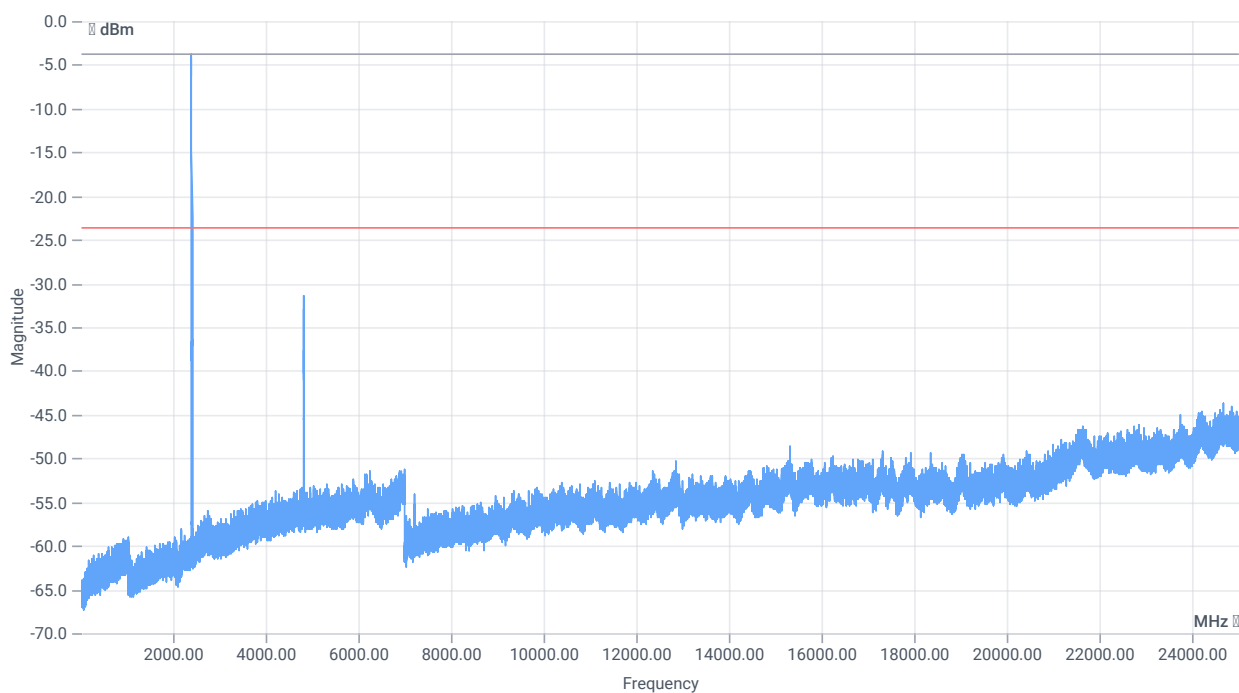

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.45 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

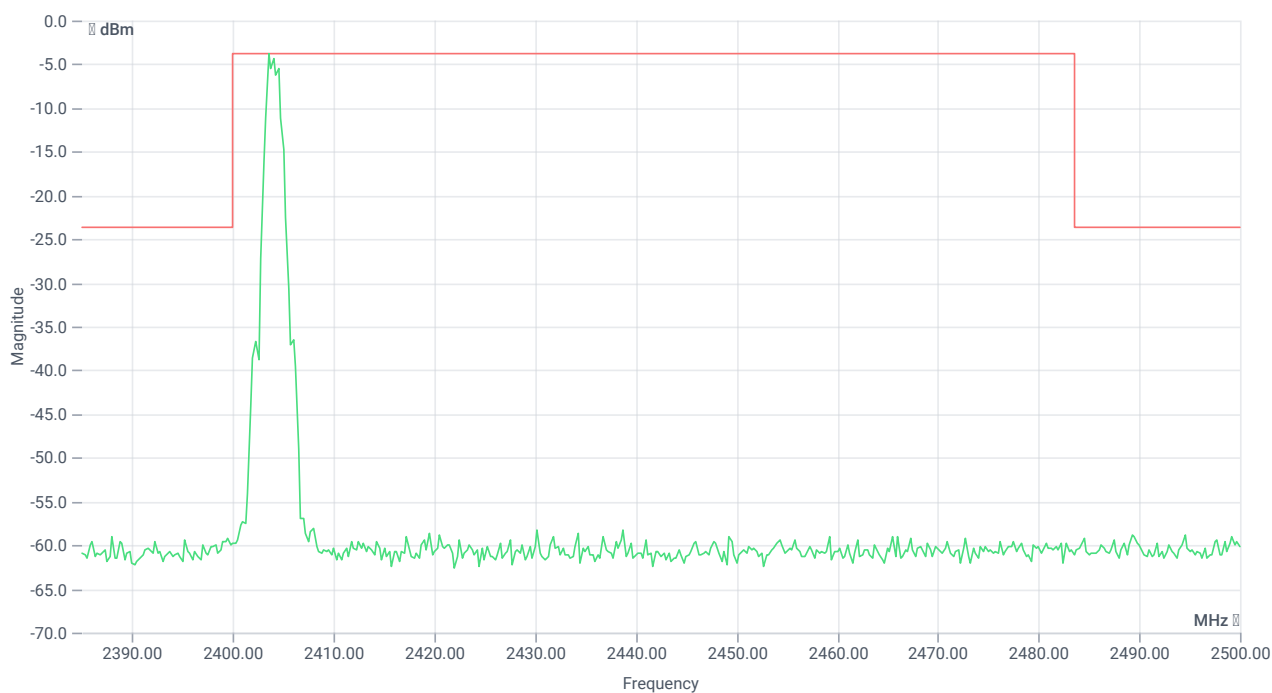

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2403.50 MHz	---	---	-3.73	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4809 MHz	0	---	7.64	dB	INFO

Verdict

PASS

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:40:44
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:40:50
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x3F 0x87 0xFC
Output result	< HCI Command: ogf 0x3f, ocf 0x0087, plen 1 FC > HCI Event: 0x0e plen 4 01 87 FC 00

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x0034 0x13 0xFF 0x00 0x02
Output result	< HCI Command: ogf 0x08, ocf 0x0034, plen 4 13 FF 00 02 > HCI Event: 0x0e plen 4 01 34 20 00

Verdict

INFO

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:40:57
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.22	dBm	INFO
Ref. Frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.78 11.36 10
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS Bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	---	---	1171	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.78 11.36 15
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

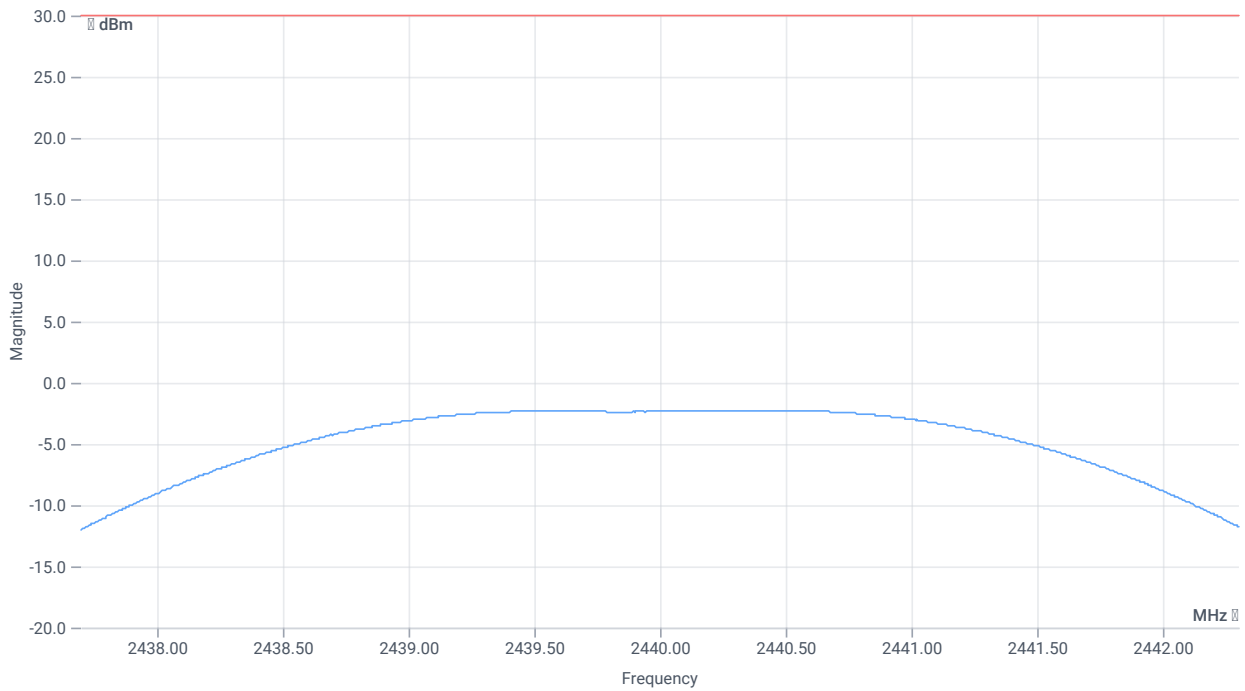

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30.00	-2.28	dBm	PASS
Peak Power	---	1000	0.591562	mW	PASS
Frequency at Peak	---	---	2440.501	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:41:42
Ambit temp [°C] humidity [rel%]	27.6 33
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.22	dBm	INFO
Ref. Frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.78 11.36 10
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

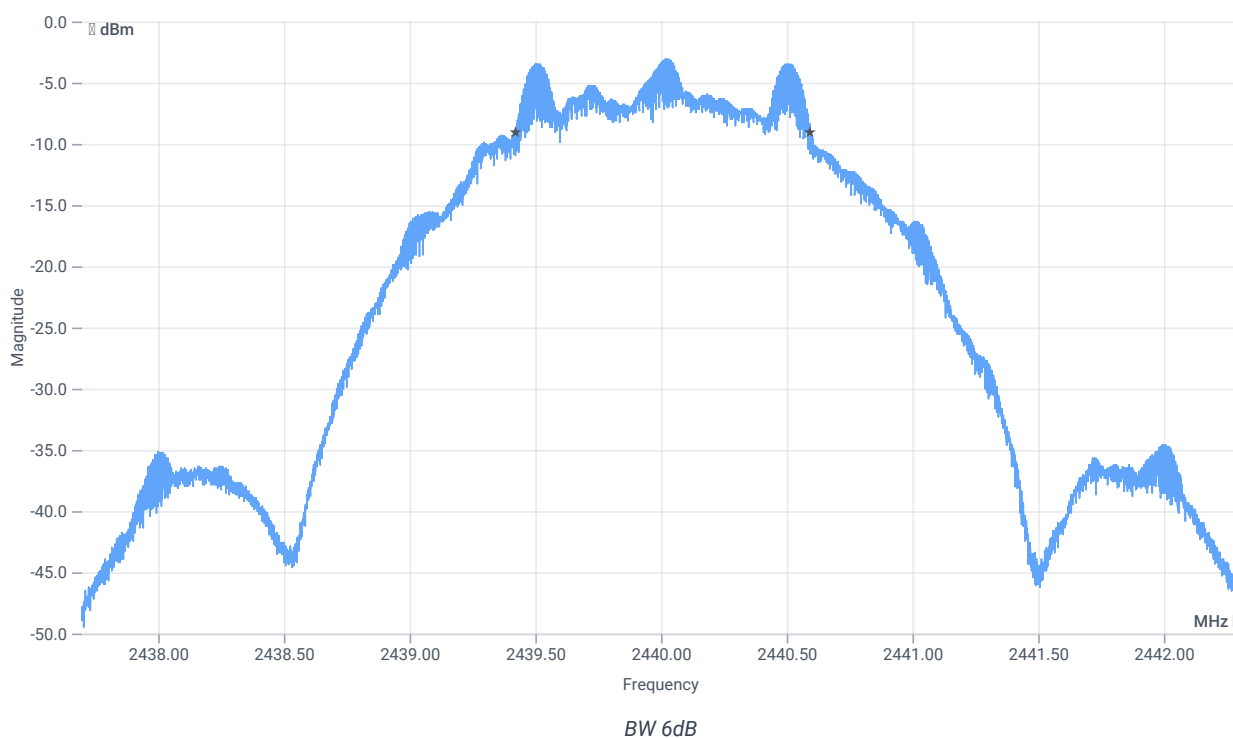

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	1169	kHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:42:14
Ambit temp [°C] humidity [rel%]	27.6 32
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI


Test at TX 2440 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.26	dBm	INFO
Ref. Frequency	---	---	2440.600	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.74 11.36 10
Start [MHz] Stop [MHz]	2438.275 2441.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

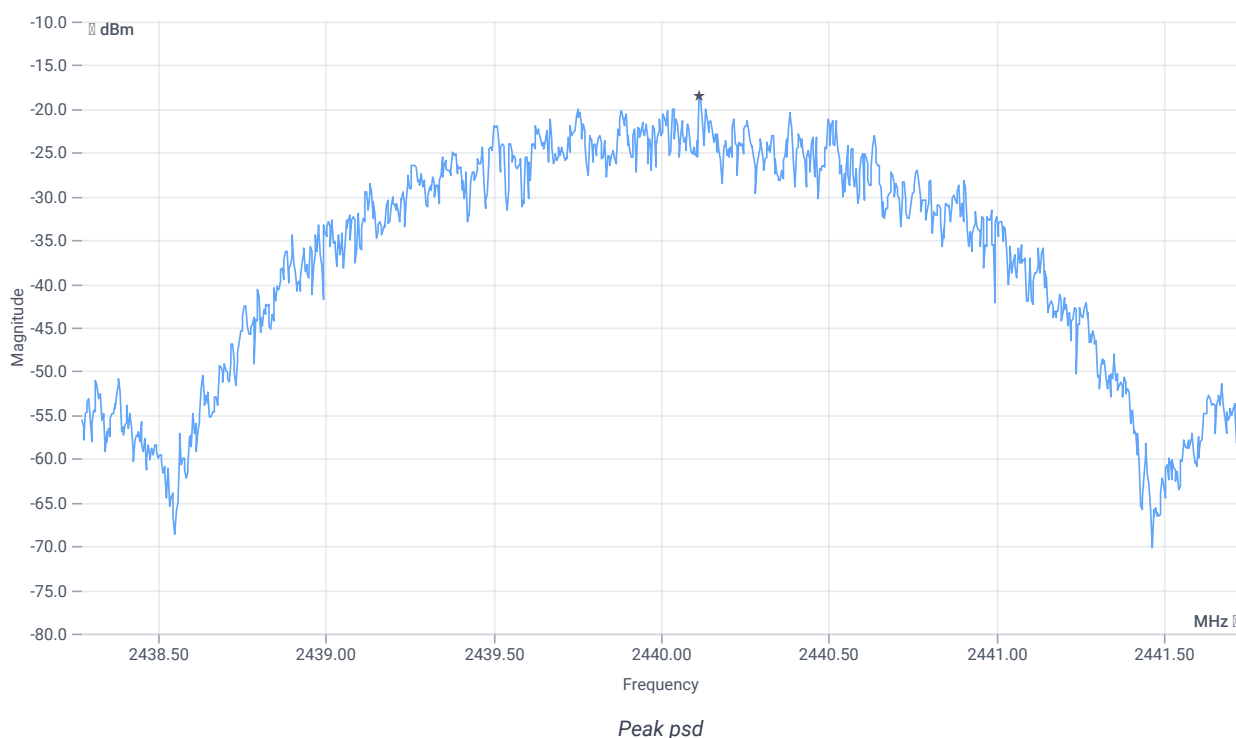

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-18.5	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	13.12.2023 13:42:55
Ambit temp [°C] humidity [rel%]	27.6 32
System version	4.7.1.4
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2440 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.09	dBm	INFO
Ref. Frequency	---	---	2440.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.91 11.36 10
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

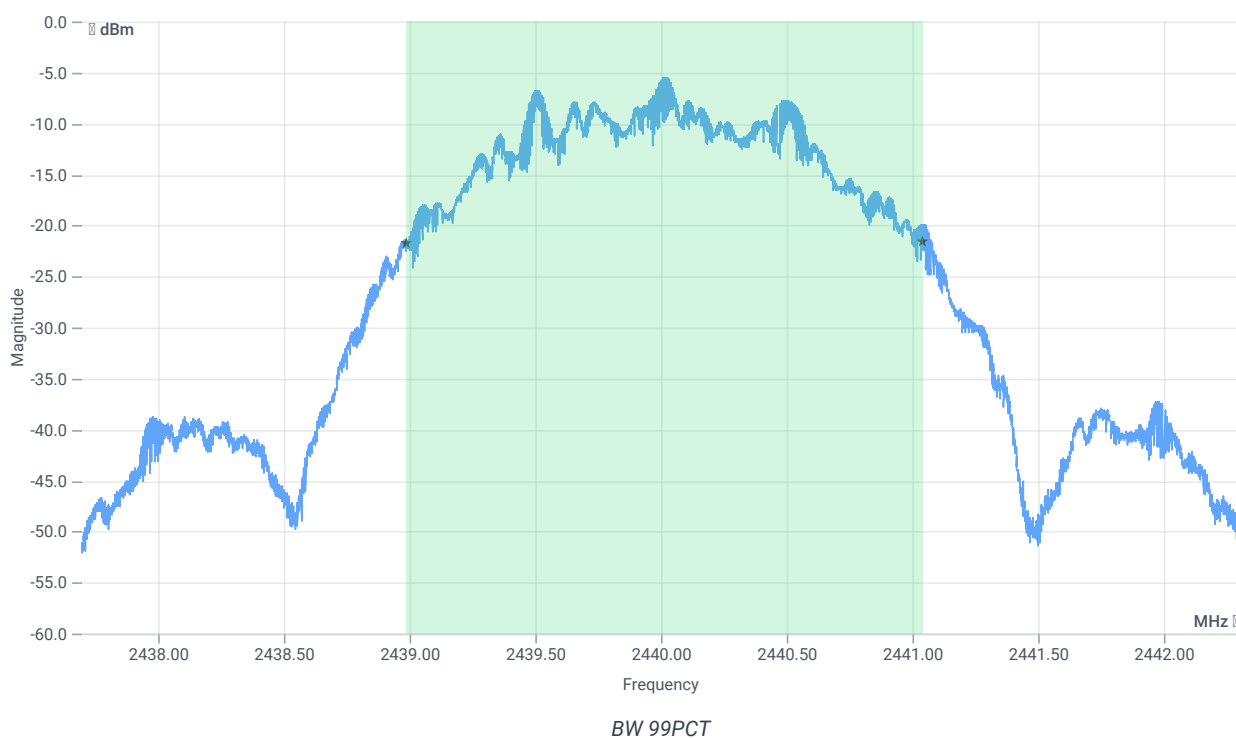


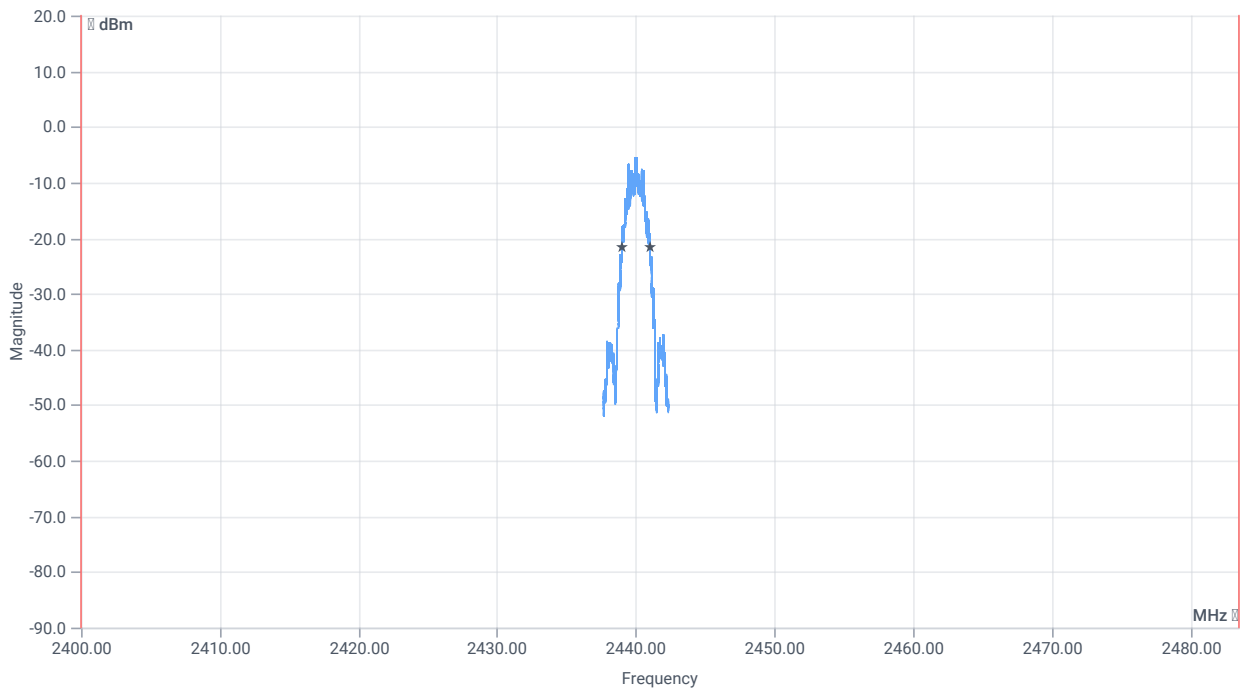


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2051.000	kHz	INFO
T1 99%	2400.000000	---	2438.9890	MHz	PASS
T2 99%	---	2483.500000	2441.0404	MHz	PASS

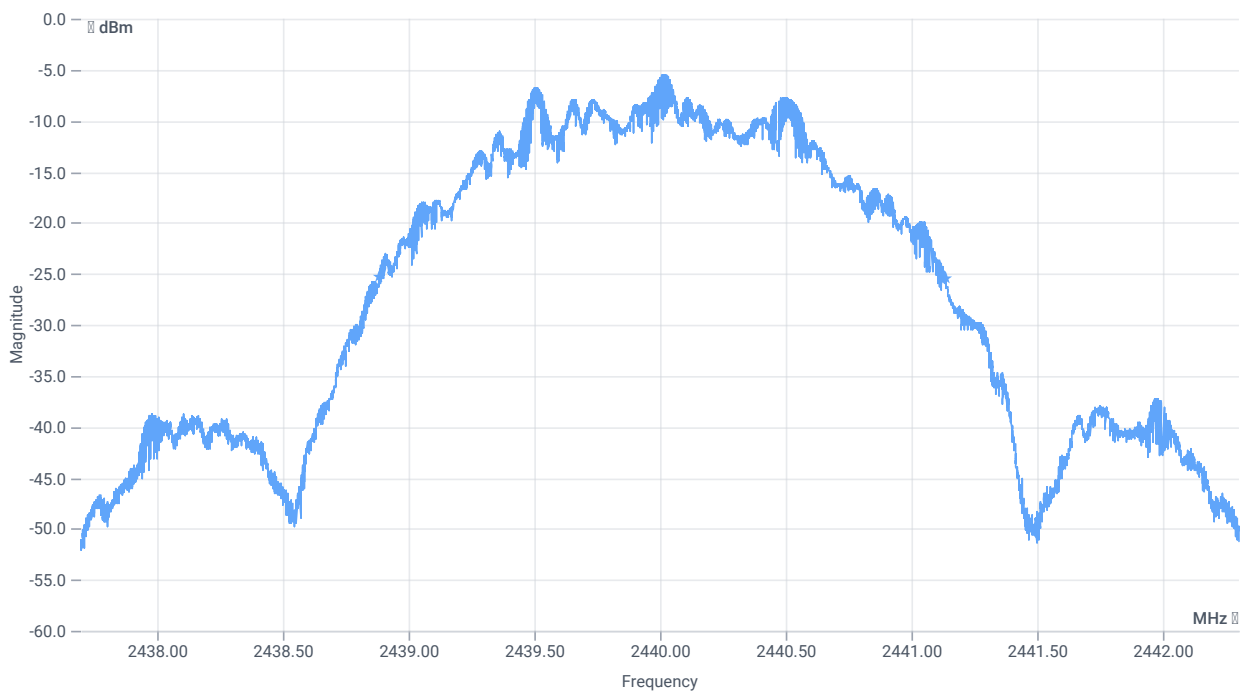

BW 20dB

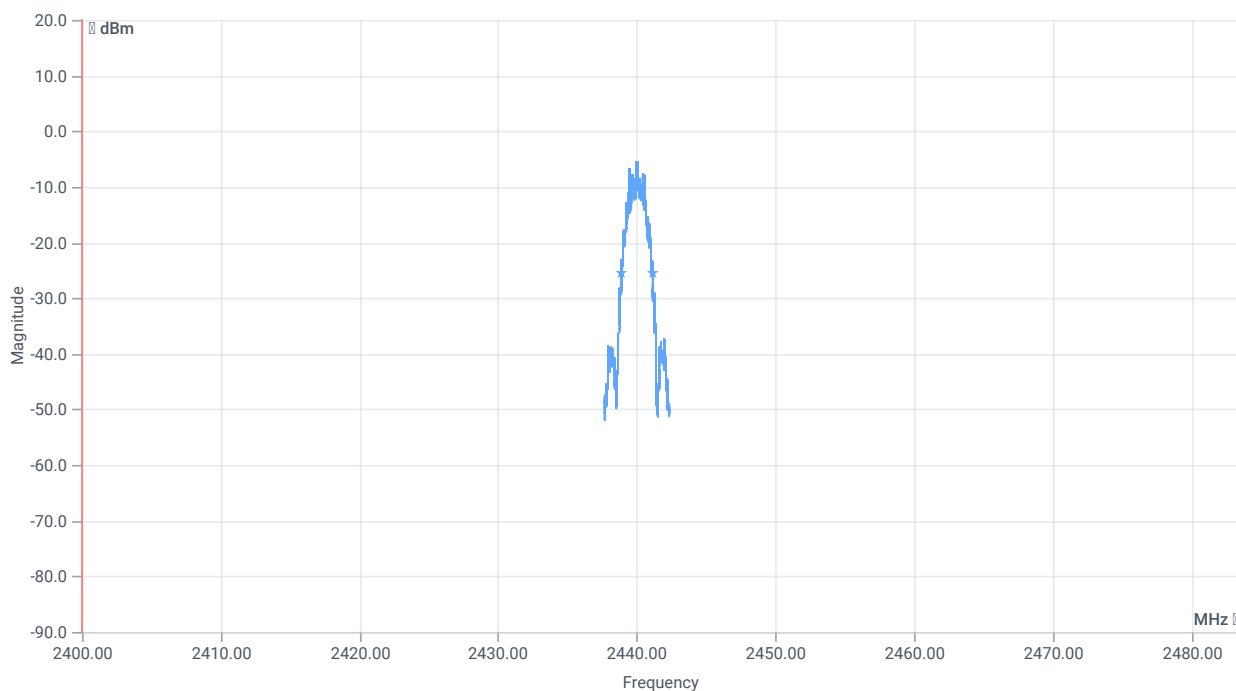

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2251	kHz	INFO
T1 20DB	2400.000000	---	2438.8836	MHz	PASS
T2 20dB	---	2483.500000	2441.1348	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	13.12.2023 13:43:35
Ambit temp [°C] humidity [rel%]	27.6 32
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2440 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.12	dBm	INFO
Ref. Frequency	---	---	2440.500	MHz	INFO

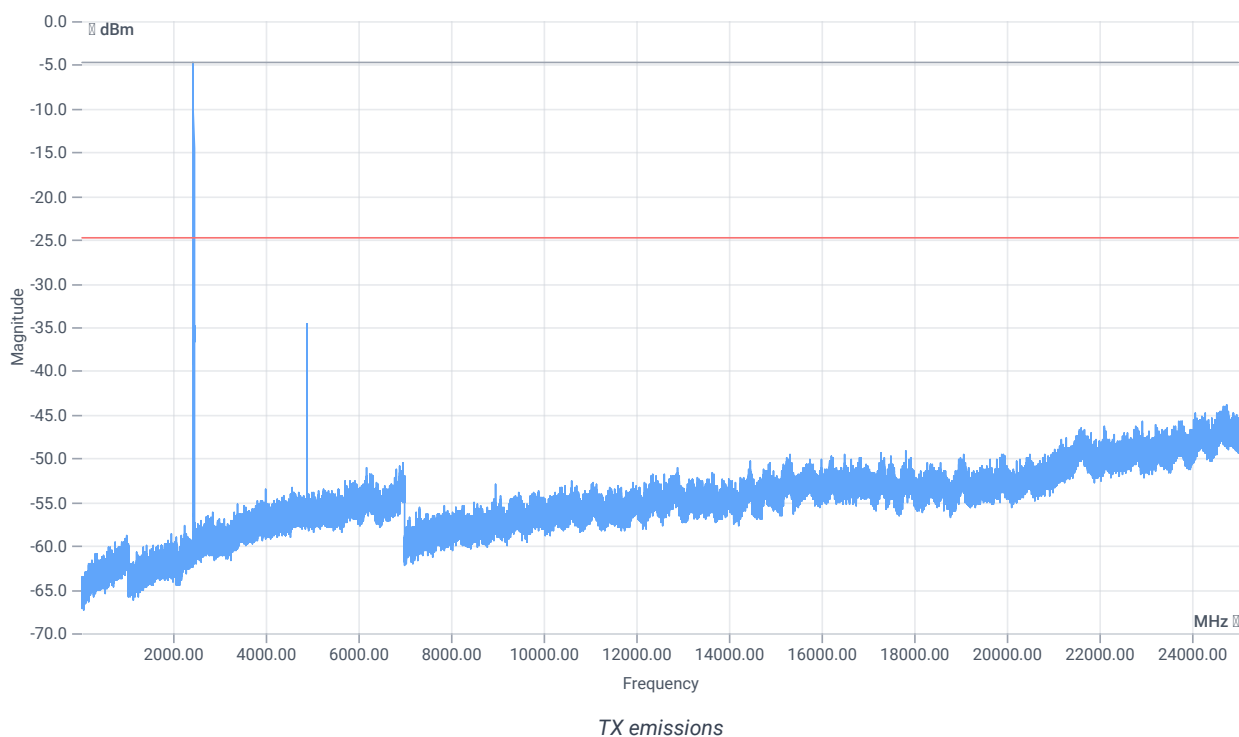

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.12 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

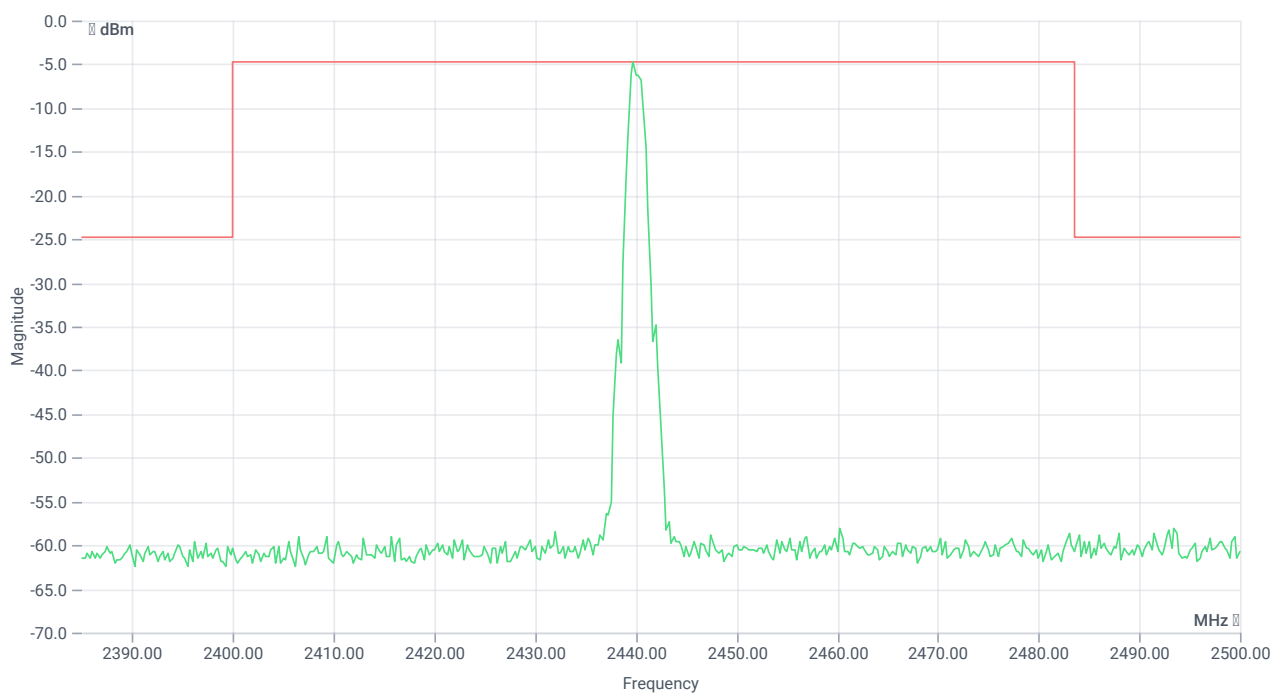

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2439.75 MHz	---	---	-4.78	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4880 MHz	0	---	9.91	dB	INFO

Verdict

PASS

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:50:21
Ambit temp [°C] humidity [rel%]	27.5 31
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

NA # Terminal communication ~ Common

References

TC start	13.12.2023 13:50:28
Ambit temp [°C] humidity [rel%]	27.5 31
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x3F 0x87 0xFC
Output result	< HCI Command: ogf 0x3f, ocf 0x0087, plen 1 FC > HCI Event: 0x0e plen 4 01 87 FC 00

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x0034 0x26 0xFF 0x00 0x02
Output result	< HCI Command: ogf 0x08, ocf 0x0034, plen 4 26 FF 00 02 > HCI Event: 0x0e plen 4 01 34 20 00

Verdict

INFO

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:50:34
Ambit temp [°C] humidity [rel%]	27.5 31
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 2478 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-1.88	dBm	INFO
Ref. Frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.12 11.4 10
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS Bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	---	---	1175	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	8.12 11.4 15
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	2.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

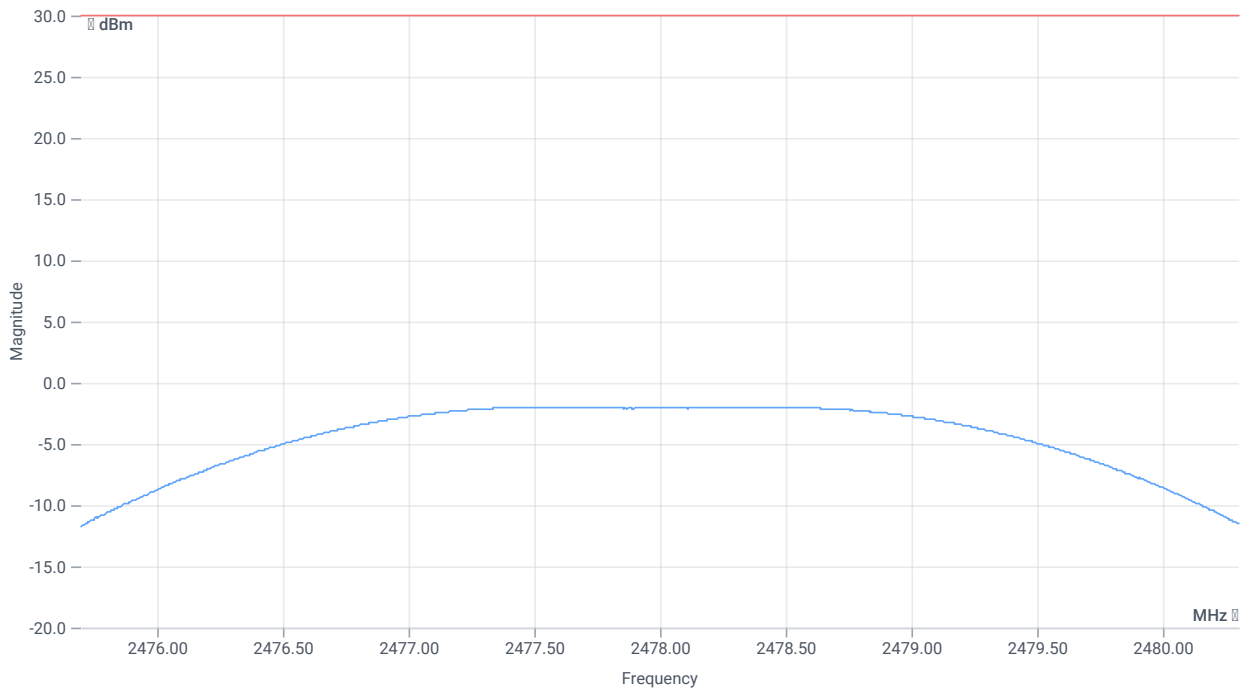

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30.00	-2	dBm	PASS
Peak Power	---	1000	0.630957	mW	PASS
Frequency at Peak	---	---	2477.545	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:51:19
Ambit temp [°C] humidity [rel%]	27.5 31
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2478 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-1.93	dBm	INFO
Ref. Frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.07 11.4 10
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

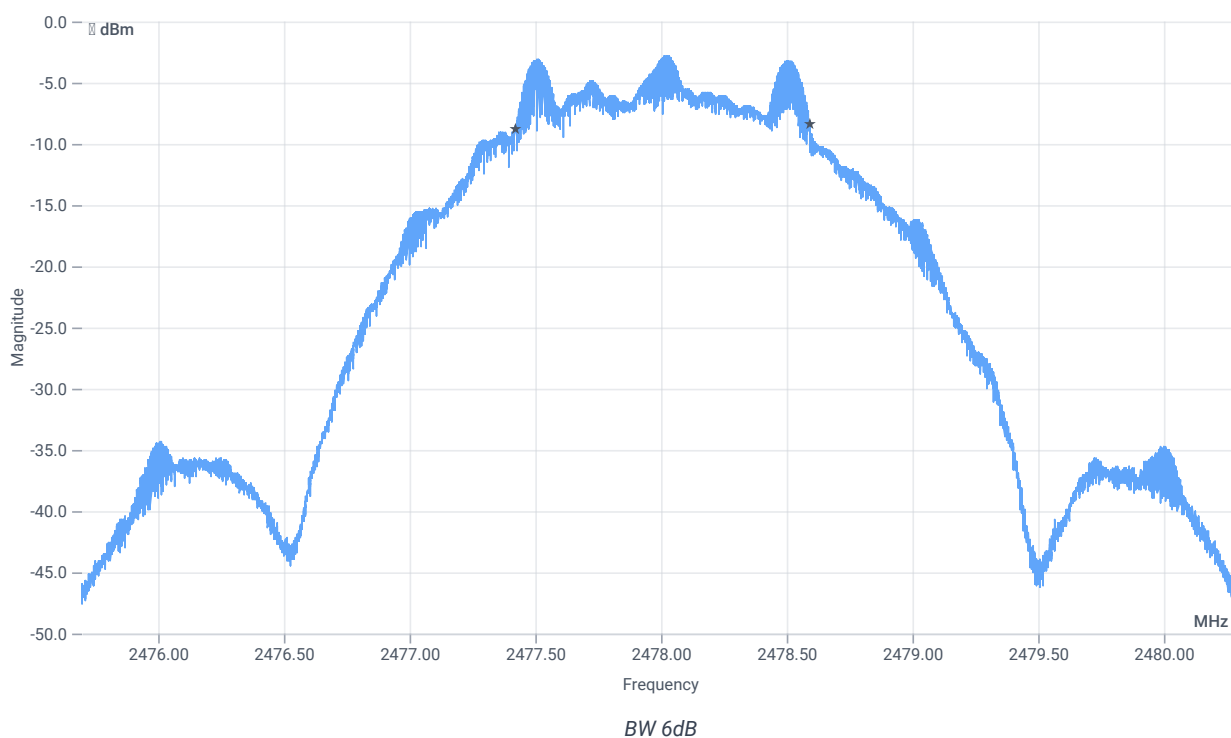

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS Bandwidth (6dB)	500	---	1172	kHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 2 Msps

References

TC start	13.12.2023 13:51:51
Ambit temp [°C] humidity [rel%]	27.4 31
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2478 MHz

RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-1.94	dBm	INFO
Ref. Frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.06 11.4 10
Start [MHz] Stop [MHz]	2476.275 2479.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

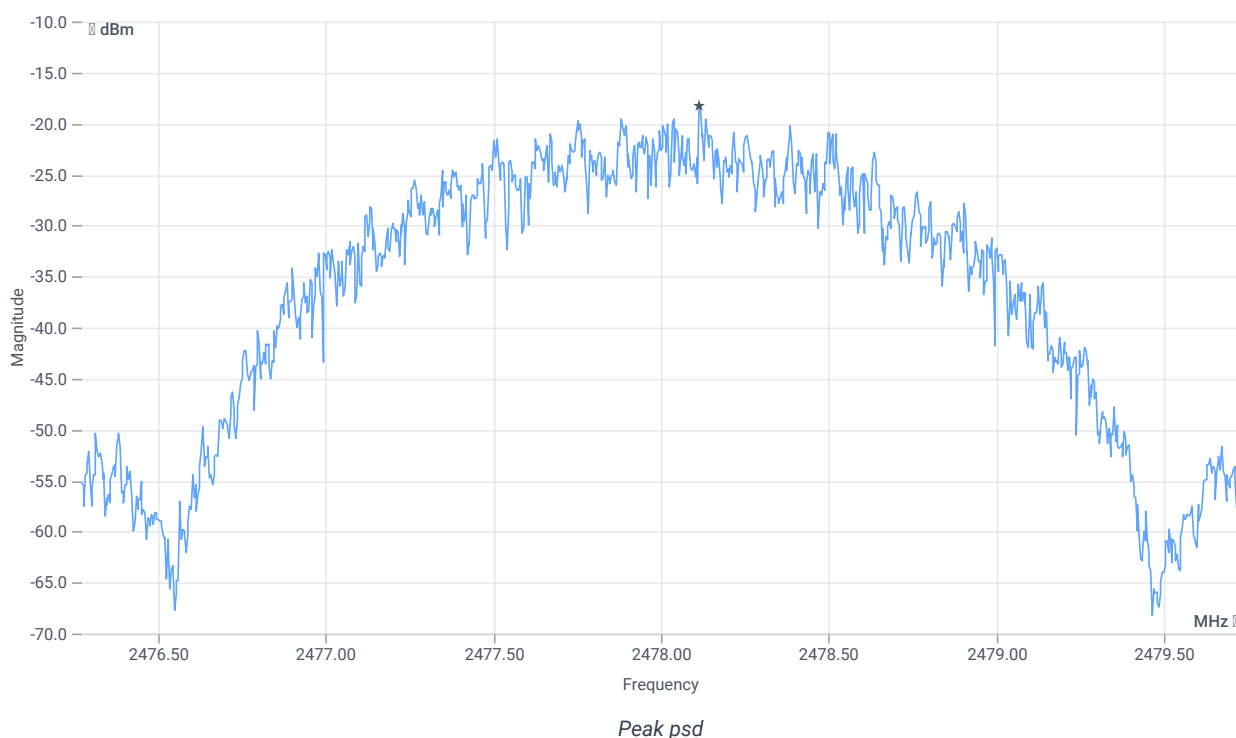

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-18.23	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 2 Msps

References

TC start	13.12.2023 13:52:32
Ambit temp [°C] humidity [rel%]	27.4 31
System version	4.7.1.4
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60

Equipment

Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 2478 MHz


RESULT: Reference Power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-1.82	dBm	INFO
Ref. Frequency	---	---	2478.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.18 11.4 10
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

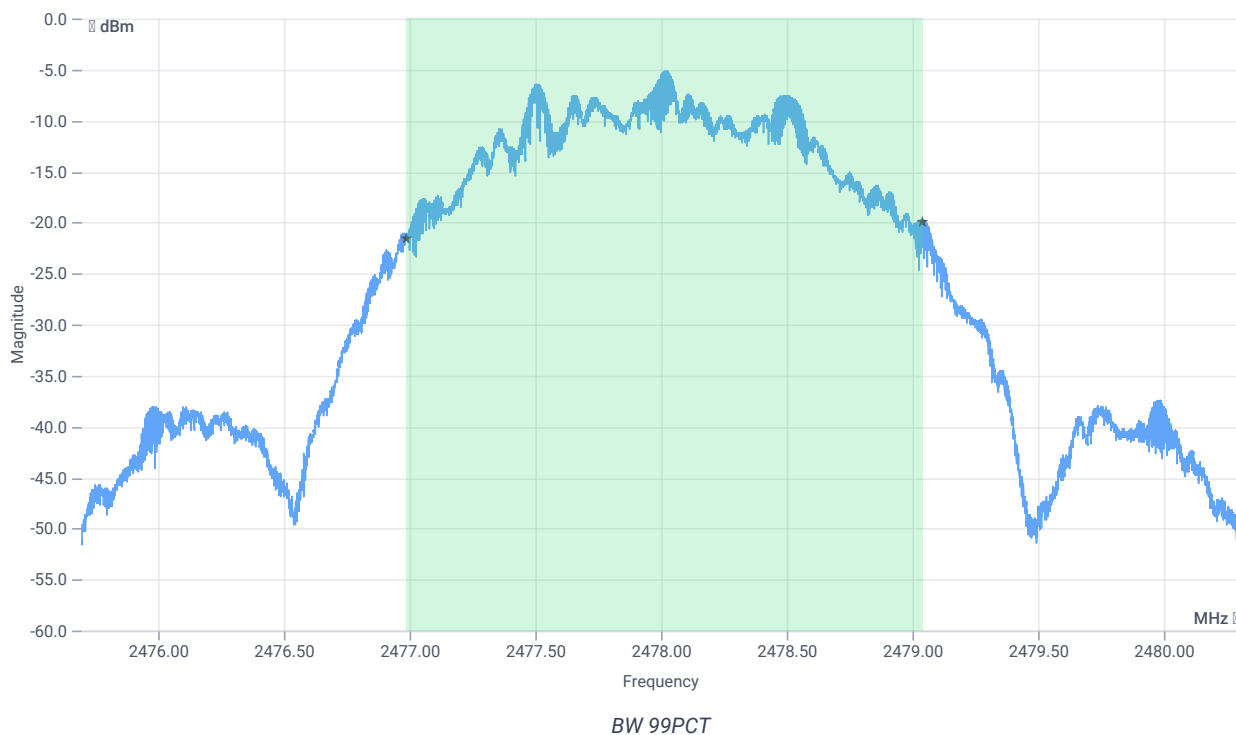


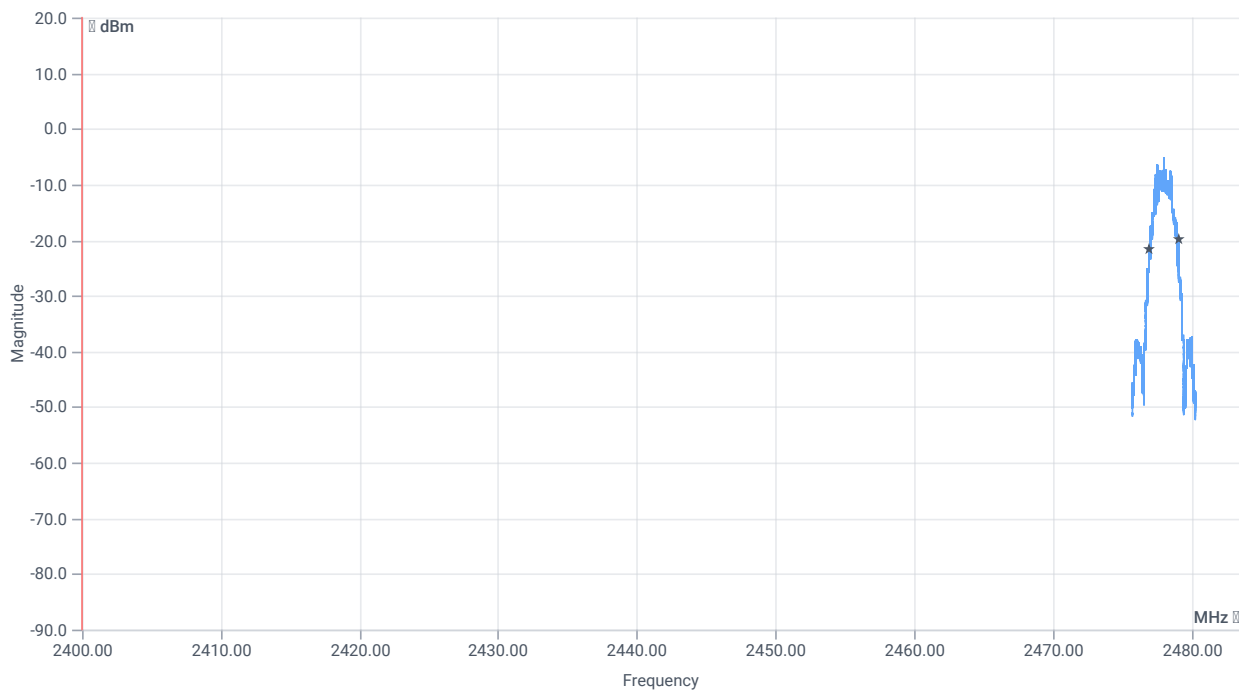


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	2051.000	kHz	INFO
T1 99%	2400.000000	---	2476.9881	MHz	PASS
T2 99%	---	2483.500000	2479.0390	MHz	PASS

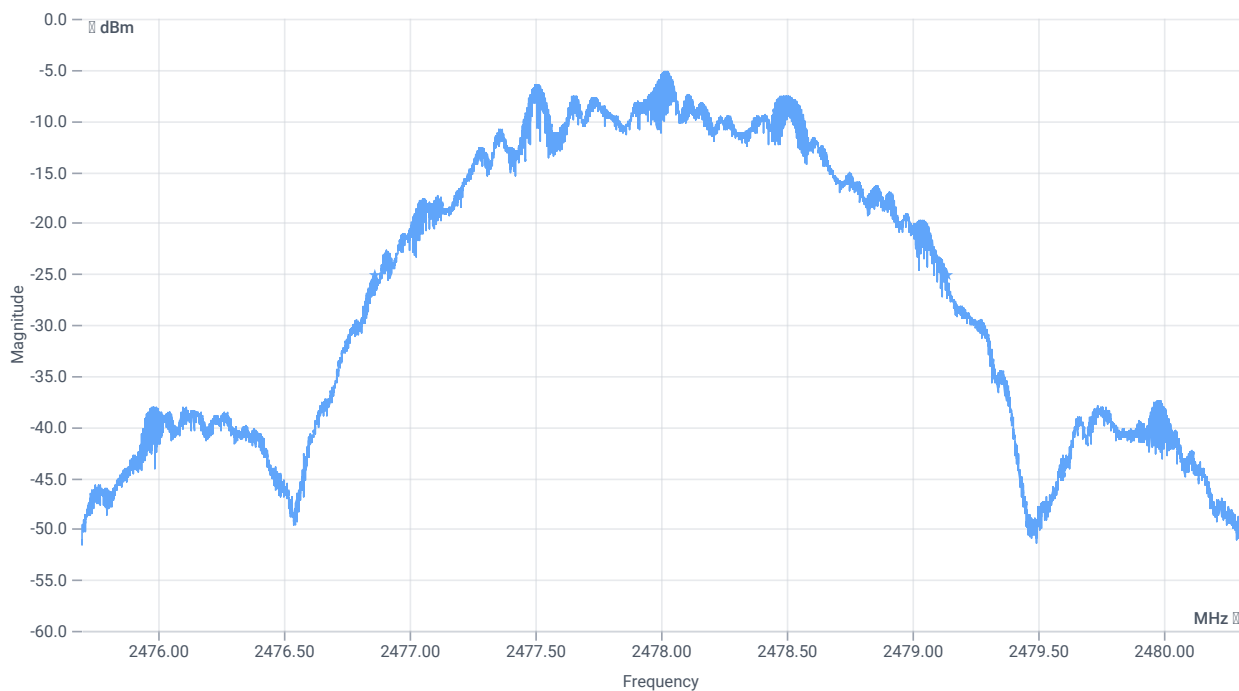

BW 20dB

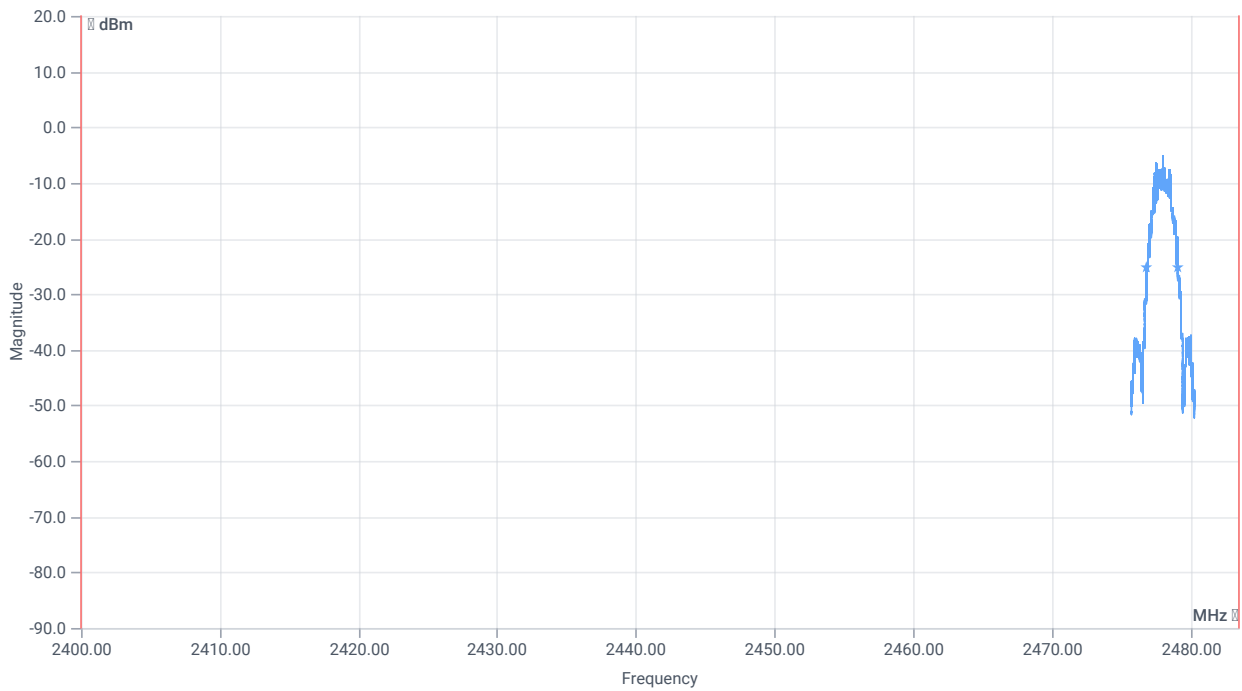

BW within Band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	2270	kHz	INFO
T1 20DB	2400.000000	---	2476.8652	MHz	PASS
T2 20dB	---	2483.500000	2479.1353	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 2 Msps

References

TC start	13.12.2023 13:53:11
Ambit temp [°C] humidity [rel%]	27.4 31
System version	4.7.1.4
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 2 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

Test Parameter

Technology to test	BT LE 2 Msps
Antenna port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2404
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path name type	EUT - SignalingUnit - SpectrumAnalyzer

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60


Equipment

Switch matrix, CTCadvanced, RSM-1 NI DAQ, 31534892, NI

Test at TX 2478 MHz

RESULT: Reference Power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	-2.05	dBm	INFO
Ref. Frequency	---	---	2478.500	MHz	INFO

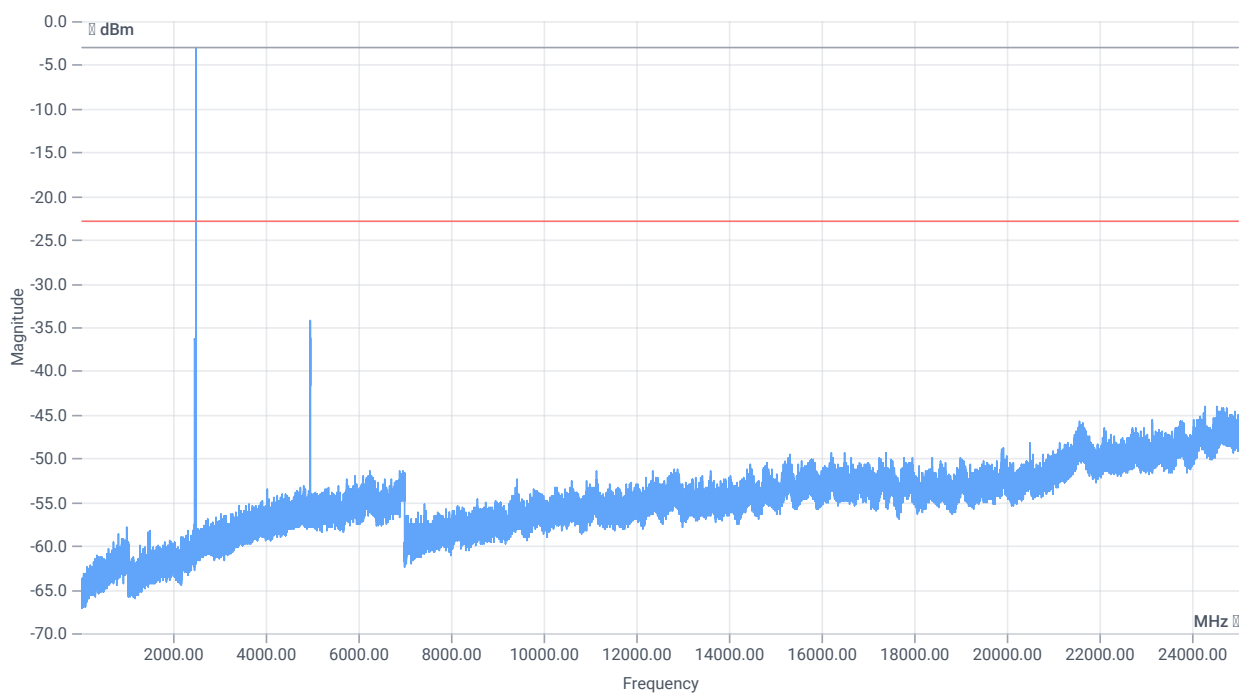

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.05 0 15
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 2001 SWE

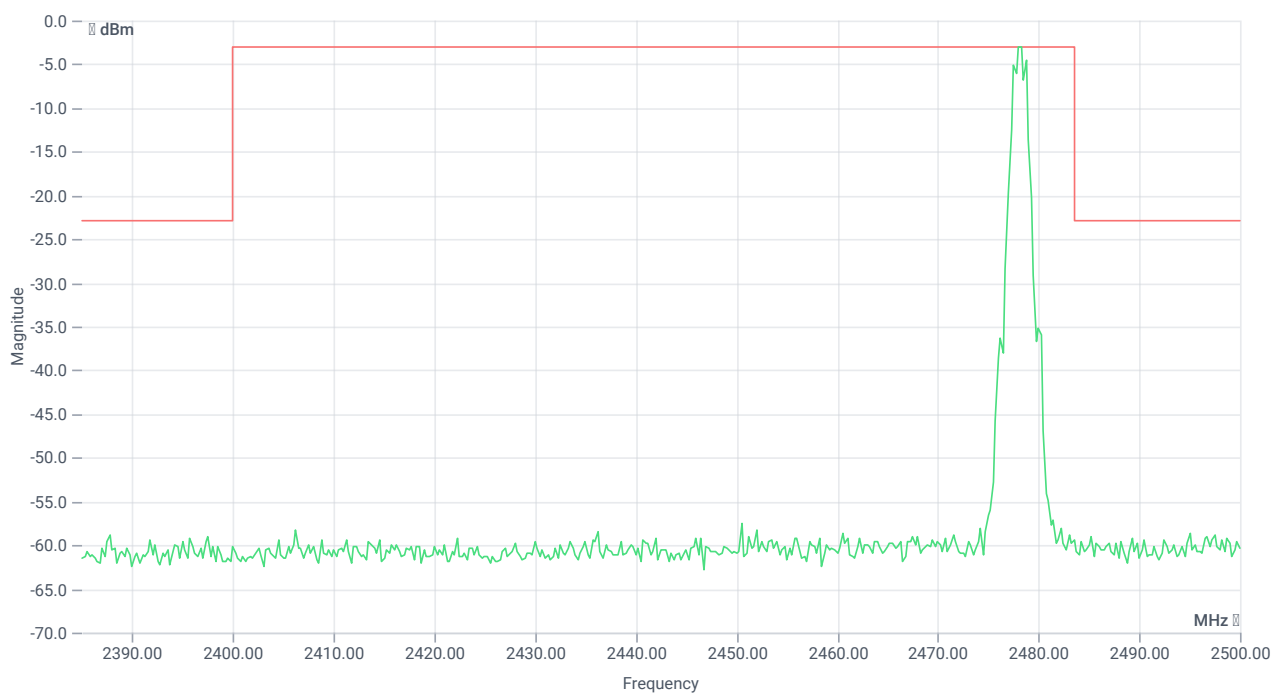

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2478.25 MHz	---	---	-2.97	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4955 MHz	0	---	11.26	dB	INFO

Verdict

PASS

NA # Terminal communication ~ Common

References

TC start	13.12.2023 14:12:37
Ambit temp [°C] humidity [rel%]	27.1 31
System version	4.7.1.4
Standard Version	NA NI
Method	
Description	Terminal communication SSH
Information	

Test Parameter

Command	hcitool -i hci0 cmd 0x08 0x001F
Output result	< HCI Command: ogf 0x08, ocf 0x001f, plen 0 > HCI Event: 0x0e plen 6 01 1F 20 00 00 00

Verdict

INFO

- END OF DOCUMENT -