

NOTES: (UNLESS OTHERWISE SPECIFIED)

- 1. LABEL BACKGROUND TO BE WHITE.
- 2. PRINTING TO BE BLACK.
- 3. ALL FONTS TO BE ARIAL NARROW.
- 4. UL LOGO TO BE PER UL STANDARDS.

REVISIONS

ER	REV	DESCRIPTION	DATE	APPROVAL
XXXXX	1	RELEASED FOR SAMPLES	4/23/15	
	2	ADDED QR CODE, SERIAL NUMBER DEFINITION AND MAC ID	5/11/15	
	3	ADDED PATENT NUMBER	5/12/15	

QR CODE THIS AREA

THE GENIE COMPANY

S/N: YYYYMMDDXXXXX

MAC ID: XXXXXXXXXXXXX

MODEL: ALDCM

FCC ID: B8QALDCM

IC: 2133A-ALDCM

PATENT #: 8,866,583

1-888-35-GENIE or WWW.GENIECOMPANY.COM

ASSEMBLED  
IN CHINA

UL


®

US

LISTED  
366G

2.125


.750

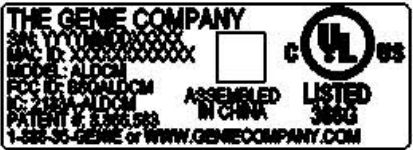

SCALE 1:1

P/N 39090A

PLOTTED: -

THE DRAWINGS AND ALL OTHER INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL PROPRIETARY PROPERTY OF OVERHEAD DOOR CORPORATION, INCLUDING ITS AFFILIATED SUBSIDIARIES AND AFFILIATES. THIS DRAWING INFORMATION, IN WHOLE OR IN PART, MAY NOT BE COPIED IN ANY MANNER OR DISCLOSED TO ANYONE WITHOUT PRIOR WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION. DISCLOSURE OF ANY DRAWING OR INFORMATION IS INTENDED NOT TO AND SHALL NOT OPERATE AS A LICENSE OR AUTHORIZATION TO USE IT FOR ANY PURPOSE WITHOUT SPECIFIC WRITTEN CONSENT OF OVERHEAD DOOR CORPORATION.	UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE		 A SUBSIDIARY OF OVERHEAD DOOR CORPORATION ALLIANCE, OHIO	
	INTERPRET DIMS & TOLS PER ASME Y14.5M	<u>TOLERANCES:</u> .X = ±.1 .XX = ±.01 .XXX = ±.005 ANGULAR = ±1°  <u>HOLES:</u> < Ø.251 = ±.003 Ø.251-Ø.500 = ±.003 > Ø.500 = ±.003	DRAWN	NEW	4/23/2015			
			CHECKED	-	-			
			APPROVED	-	-			
	ALL DIMS ARE IN INCHES  DO NOT SCALE	DIMS CIRCLED WITH SYMBOL 'C' ARE CRITICAL TO QUALITY DESIGN FEATURES & MUST MEET APPLICABLE IN-PROCESS INSPECTION STANDARDS.	MATERIAL		2 MIL MYLAR W/PSA		DESCRIPTION  LABEL. DCM	
			FINISH		1 MIL CLEAR MYLAR OVERLAY			
			ALL GEOMETRY GOVERNED BY 3D CAD DATABASE: 39090			SIZE	DWG NO.	
					B	39090		
					SCALE 2:1		SHEET 1 OF 1	

