



**EMC Technologies Pty Ltd**

A.C.N. 057 105 549

**57 Assembly Drive**

**Tullamarine Victoria Australia 3043**

**Ph: + 613 9335 3333**

**Fax: + 613 9338 9260**

email: melb@emctech.com.au

**SAR Test Report**

**Report Number: M040736\_SORIEL\_CALEXICO\_SAR**

**Test Sample:** Portable Tablet Computer Wireless LAN

**Model:** WM3B2200BG

**Tested For:** Fujitsu Australia Pty Ltd

**FCC ID:** EJE-WB0010

**IC:** 337J-WB0010

**Date of Issue:** 14<sup>th</sup> August 2004

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.

## CONTENTS

<b>1.0</b>	<b>General Information .....</b>	<b>3</b>
<b>2.0</b>	<b>Description of Device .....</b>	<b>4</b>
2.1	Description of Test Sample .....	4
2.1.1	<i>Summary of EUT Details .....</i>	<i>4</i>
2.1.2	<i>EUT Host Details .....</i>	<i>4</i>
2.2	Test sample Accessories .....	5
2.2.1	<i>Battery Types .....</i>	<i>5</i>
2.3	Test Signal, Frequency and Output Power .....	5
2.4	Battery Status .....	6
2.5	Details of Test Laboratory .....	7
2.5.1	<i>Location .....</i>	<i>7</i>
2.5.2	<i>Accreditations .....</i>	<i>7</i>
2.5.3	<i>Environmental Factors .....</i>	<i>8</i>
<b>3.0</b>	<b>DESCRIPTION OF SAR MEASUREMENT SYSTEM .....</b>	<b>8</b>
3.1	Probe Positioning System .....	8
3.2	E-Field Probe Type and Performance .....	8
3.3	Data Acquisition Electronics .....	8
3.4	Calibration and Validation Procedures and Data .....	8
3.4.1	<i>Validation Results @ 2450MHz .....</i>	<i>9</i>
3.4.2	<i>Deviation from reference validation values .....</i>	<i>9</i>
3.4.3	<i>Liquid Depth 15cm .....</i>	<i>10</i>
3.5	Phantom Properties (Size, Shape, Shell Thickness) .....	11
3.6	Tissue Material Properties .....	12
3.6.1	<i>Liquid Temperature and Humidity .....</i>	<i>12</i>
3.7	Simulated Tissue Composition Used for SAR Test .....	13
3.8	Device Holder for Laptops and P 10.1 Phantom .....	13
<b>4.0</b>	<b>SAR Measurement Procedure Using DASY4 .....</b>	<b>14</b>
<b>5.0</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>15</b>
<b>6.0</b>	<b>Equipment List and Calibration Details .....</b>	<b>17</b>
<b>7.0</b>	<b>OET Bulletin 65 – Supplement C Test Method .....</b>	<b>18</b>
7.1	Description of the Test Positions (Lap Top) .....	18
7.1.1	<i>“Tablet” Position Definition (0mm spacing) .....</i>	<i>18</i>
7.1.2	<i>“Lap Arm Held” Position (0mm spacing) .....</i>	<i>18</i>
7.2	List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes) .....	19
7.3	FCC RF Exposure Limits for Occupational/ Controlled Exposure .....	19
7.4	FCC RF Exposure Limits for Un-controlled/Non–occupational .....	19
<b>8.0</b>	<b>SAR measurement RESULTS .....</b>	<b>20</b>
<b>9.0</b>	<b>Compliance statement .....</b>	<b>21</b>
<b>APPENDIX A1</b>	<b>Test Sample Photographs .....</b>	<b>22</b>
<b>APPENDIX A2</b>	<b>Test Sample Photographs .....</b>	<b>23</b>
<b>APPENDIX A3</b>	<b>Test Sample Photographs .....</b>	<b>24</b>
<b>APPENDIX A4</b>	<b>Test setup Photographs .....</b>	<b>25</b>
<b>APPENDIX A5</b>	<b>Test Sample Photographs .....</b>	<b>26</b>
<b>APPENDIX B</b>	<b>Plots of the SAR Measurements .....</b>	<b>27</b>

**SAR EVALUATION**  
**Portable Tablet Computer Wireless LAN**  
**Model: WM3B2200BG**  
**Report Number: M040736\_SORIEL\_CALEXICO\_SAR**  
**FCC ID: EJE-WB0010**  
**IC: 337J-WB0010**

## 1.0 GENERAL INFORMATION

**Test Sample:** Portable Tablet Computer Wireless LAN and Bluetooth Module  
**Model Name:** Calexico  
**Interface Type:** Mini-PCI Module  
**Device Category:** Portable Transmitter  
**Test Device:** Production Unit  
**FCC ID:** EJE-WB0010  
**IC:** 337J-WB0010  
**RF exposure Category:** General Population/Uncontrolled  
  
**Manufacturer:** Fujitsu Limited

**Test Standard/s:**

1. Evaluating Compliance with FCC Guidelines For Human Exposure to Radiofrequency Electromagnetic Fields Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)
2. Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields. RSS-102 Issue 1 (Provisional) September 25, 1999

**Statement Of Compliance:** The Fujitsu Portable Tablet Computer Wireless LAN model WM3B2200BG complied\* with the FCC General public/uncontrolled RF exposure limits of 1.6mW/g per requirements of 47CFR2.1093(d). It also complied with IC RSS-102 requirements.  
\*. Refer to compliance statement section 9.

**Test Date:** 28<sup>th</sup> to 30<sup>th</sup> July 2004

**Tested for:** Fujitsu Australia Pty Ltd  
**Address:** 5 Lakeside Drive, Burwood East, Vic. 3151  
**Contact:** Praveen Rao  
**Phone:** +61 3 9845 4300

**Test Officer:**



**Peter Jakubiec**  
**Assoc Dip Elec Eng**

**Authorised Signature:**



**Aaron Sargent B.Eng**  
**EMR Engineer**

**SAR EVALUATION**  
**Portable Tablet Computer Wireless LAN**  
**Model: WM3B2200BG**  
**Report Number: M040736\_SORIEL\_CALEXICO\_SAR**

## 2.0 DESCRIPTION OF DEVICE

### 2.1 Description of Test Sample

The EUT is a Fujitsu LifeBook incorporating a Mini-PCI wireless LAN (WLAN) module Calexico (WM3B2200BG). The Calexico module is an OEM product. The Mini-PCI wireless LAN (WLAN) module was tested in the dedicated host, a LifeBook T Series "SORIEL".

#### 2.1.1 Summary of EUT Details

Operating Mode during Testing		: Crest Factor – DSSS/OFDM = 1.0
Modulation Schemes	802.11b	: Direct Sequence Spread Spectrum (DSSS)
	802.11g	: Orthogonal Frequency Division Multiplexing (OFDM)
Bluetooth (BT)	FHSS	: Frequency Hopping Spread Spectrum
Data Rates:		
802.11b	DBPSK	: Data Rate – 1Mbps
	DQPSK	: Data Rate – 2Mbps
	CCK	: Data Rate – 5.5Mbps, 11Mbps
802.11g	BPSK	: Data Rate - 6Mbps, 9Mbps
	QPSK	: Data Rate - 12Mbps, 18Mbps
	16QAM	: Data Rate - 24Mbps, 36Mbps
	64QAM	: Data Rate - 48Mbps, 54Mbps
Device Power Rating for test sample and identical production unit		: 802.11b - Peak Power is 18 dBm : 802.11g - Peak Power is 15 dBm : FHSS - Peak Power is 12 dBm
Device Dimensions (LxWxH)		: 295x245x37mm
Antenna type		: Monopole Ceramic chip YCE-5008
Applicable Head Configurations		: None
Applicable Body Configurations		1. Tablet Position 2. Lap Arm Held Position
Battery Options		: Standard Battery

#### 2.1.2 EUT Host Details

Test Sample:	LIFEBOOK ST Series
Model:	T4010
Codename:	Soriel
CPU Speed:	Dothan 2.1 GHz
Manufacturer:	Fujitsu Ltd.
LAN:	Giga-LAN/10/100Base-T
Modem:	MBH7MD33 / MBH7MD35
SDRAM:	256MB
LCD Screen:	12.1"XGA / 12.1" SXGA

This document shall not be copied or reproduced, except in full without the written permission of the Technical Director, EMC Technologies Pty. Ltd.

## 2.2 Test sample Accessories

### 2.2.1 Battery Types

One type of Fujitsu Lithium Ion Batteries is used to power the Portable Tablet Computer Model: T4010. SAR measurements were performed with the battery as shown below.

#### Standard Battery

Model	3UR18650F-2-FT-16
V/mAh	10.8V/2400 mAh
Cell No.	6

### 2.3 Test Signal, Frequency and Output Power

The Portable Tablet Computer Wireless LAN had a total of 11 channels (USA model) within the 2412 to 2462 MHz frequency band. The frequency range is 2412 MHz to 2462 MHz and the device operates in 802.11b and 802.11g modes. For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu. The fixed frequency channels used in the testing are shown in Table 1.

The Bluetooth module operates over 79 channels within the frequency range 2402 to 2480 MHz. It is possible for the Bluetooth module to operate simultaneously with the WLAN module (co-transmission). For the SAR measurements the device was operating in continuous transmit mode using programming codes supplied by Fujitsu. The tests were conducted with only the WLAN operating and also with the WLAN and Bluetooth module operating in co-transmission. The fixed frequency channels used in the testing are shown in Table 7. The Bluetooth interface utilizes dedicated antenna, for the purpose of this report labelled antenna "D".

The WLAN modules can be configured in a number of different data rates. It was found that the highest source based time averaged power was measured when using the lowest data rates available in each mode. This lowest data rate corresponds to 6Mbps in OFDM mode and 1Mbps in DSSS mode. Table 7 shows the data rates used in the SAR tests.

The frequency span of the 2450 MHz Band was more than 10MHz consequently; the SAR levels of the test sample were measured for lowest, centre and highest channels in DSSS mode. There were no wires or other connections to the Portable Tablet Computer during the SAR measurements.

At the beginning and completion of the SAR tests, conducted power of the device was measured after temporary modification of antenna connector inside the device's TX RX compartment. Measurements were performed with a calibrated Power Meter. The results of these measurements are listed in table 1.

**Table 1: Frequency and Output Power**

Modulation Mode	Channel	Channel Frequency MHz	Antenna	*Data Rate (Mbps)	Maximum Peak Output Power Measured
802.11b - DSSS	01	2412	Main	1	18.11
802.11b - DSSS	06	2437	Main	1	17.98
802.11b - DSSS	11	2462	Main	1	17.85
802.11g - OFDM	01	2412	Main	6	20.12
802.11g - OFDM	06	2437	Main	6	19.85
802.11g - OFDM	11	2462	Main	6	20.09
Bluetooth					
Channel 1	2402	FHSS	D	N/A	11.62
Channel 40	2441	FHSS	D	N/A	11.63
Channel 79	2480	FHSS	D	N/A	11.43

\*NOTE: The highest conducted power was measured in these data rates for each respective mode. i.e. DSSS & OFDM.

## 2.4 Battery Status

The device battery was fully charged prior to commencement of measurement. Each SAR test was completed within 30 minutes. The battery condition was monitored by measuring the RF field at a defined position inside the phantom before the commencement of each test and again after the completion of the test. It was not possible to perform conducted power measurements at the output of the device, at the beginning and end of each scan due to lack of a suitable antenna port. The uncertainty associated with the power drift was less than 12% and was included in the uncertainty budget.

## 2.5 Details of Test Laboratory

### 2.5.1 Location

EMC Technologies Pty Ltd - ACN/ABN: 82 057105 549  
57 Assembly Drive  
Tullamarine, (Melbourne) Victoria  
Australia 3043

**Telephone:** +61 3 9335 3333  
**Facsimile:** +61 3 9338 9260  
**email:** [melb@emctech.com.au](mailto:melb@emctech.com.au)  
**website:** [www.emctech.com.au](http://www.emctech.com.au)

### 2.5.2 Accreditations

EMC Technologies Pty. Ltd. is accredited by the National Association of Testing Authorities, Australia (NATA).  
**NATA Accredited Laboratory Number: 5292**

EMC Technologies Pty Ltd is NATA accredited for the following standards:

<b>AS/NZS 2772.1:</b>	RF and microwave radiation hazard measurement
<b>ACA:</b>	Radio communications (Electromagnetic Radiation - Human Exposure) Standard 2003
<b>FCC:</b>	Guidelines for Human Exposure to RF Electromagnetic Field OET 65C 01/01
<b>CENELEC:</b>	ES59005: 1998
<b>EN 50360: 2001</b>	Product standard to demonstrate the compliance of mobile phones with the basic restrictions related to human exposure to electromagnetic fields (300 MHz – 3 GHz)
<b>EN 50361: 2001</b>	Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz – 3GHz)
<b>IEEE 1528: 2003</b>	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head Due to Wireless Communications Devices: Measurement Techniques.

Refer to NATA website [www.nata.asn.au](http://www.nata.asn.au) for the full scope of accreditation.

### 2.5.3 Environmental Factors

The measurements were performed in a shielded room with no background network signals. The temperature in the laboratory was controlled to within  $21 \pm 1.0$  °C, the humidity was in the range 42% to 43%. The liquid parameters are measured daily prior to the commencement of each test. Tests were performed to check that reflections within the environment did not influence the SAR measurements. The noise floor of the DASY4 SAR measurement system using the SN1380 probe is less than  $5 \mu\text{V}$  in both air and liquid mediums.

## 3.0 DESCRIPTION OF SAR MEASUREMENT SYSTEM

### 3.1 Probe Positioning System

The measurements were performed with the state of the art automated near-field scanning system **DASY4 V4.2 Build 37** from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision 6-axis robot (working range greater than 1.1m), which positions the SAR measurement probes with a positional repeatability of better than  $\pm 0.02$  mm. The DASY4 fully complies with the OET65 C (01-01), IEEE 1528 and EN50361 SAR measurement requirements.

### 3.2 E-Field Probe Type and Performance

The SAR measurements were conducted with the dosimetric probe ET3DV6 Serial: 1380 (manufactured by SPEAG) designed in the classical triangular configuration and optimised for dosimetric evaluation. The probe has been calibrated and found to be accurate to better than  $\pm 0.25$  dB. The probe is suitable for measurements close to material discontinuity at the surface of the phantom. The sensors of the probe are directly loaded with Schottky diodes and connected via highly resistive lines (length = 300 mm) to the data acquisition unit.

### 3.3 Data Acquisition Electronics

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. The input impedance of the DAE3 box is  $200 \text{ M}\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80dB. Transmission to the PC-card is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

### 3.4 Calibration and Validation Procedures and Data

Prior to the SAR assessment, the system validation kit was used to verify that the DASY4 was operating within its specifications. The validation was performed at 2450 MHz with the SPEAG 2450V2 calibrated dipole.

The validation dipoles are highly symmetric and matched at the centre frequency for the specified liquid and distance to the phantom. The accurate distance between the liquid surface and the dipole centre is achieved with a distance holder that snaps onto the dipole.

System validation is performed by feeding a known power level into a reference dipole, set at a known distance from the phantom. The measured SAR is compared to the theoretically derived level.



### 3.4.1 Validation Results @ 2450MHz

The following table lists the dielectric properties of the tissue simulating liquid measured prior to SAR validation. The results of the validation are listed in columns 4 and 5. The forward power into the reference dipole for SAR validation was adjusted to 250 mW.

**Table 2: Validation Results (Dipole: SPEAG D2450V2 SN: 724)**

1. Validation Date	2. $\epsilon_r$ (measured)	3. $\sigma$ (mho/m) (measured)	4. Measured SAR 1g (mW/g)	5. Measured SAR 10g (mW/g)
28th July 2004	38.7	1.82	13.8	6.57
29th July 2004	38.5	1.83	13.1	6.29
30th July 2004	38.6	1.83	13.7	6.55

### 3.4.2 Deviation from reference validation values

The reference SAR values are derived using a reference dipole and flat section of the SAM phantom suitable for a centre frequency of 2450MHz. These reference SAR values are obtained from the IEEE Std 1528-2003 and are normalized to 1W.

The SPEAG calibration reference SAR value is the SAR validation result obtained in a specific dielectric liquid using the validation dipole (D2450V2) during calibration. The measured one-gram SAR should be within 10% of the expected target reference values shown in table 3 below.

**Table 3: Deviation from reference validation values**

Frequency and Date	Measured SAR 1g (mW/g)	Measured SAR 1g (Normalized to 1W)	SPEAG Calibration reference SAR Value 1g (mW/g)	Deviation From SPEAG Reference (1g)	IEEE Std 1528 reference SAR value 1g (mW/g)	Deviation From IEEE (1g)
2450MHz 28 July 04	13.8	55.2	55.6	- 0.72	52.4	5.34
2450MHz 29 July 04	13.1	52.4	55.6	- 5.76	52.4	0.00
2450MHz 30 July 04	13.7	54.8	55.6	- 1.44	52.4	4.58

NOTE: All reference validation values are referenced to 1W input power.

### 3.4.3 Liquid Depth 15cm

During the SAR measurement process the liquid level was maintained to a level of a least 15cm with a tolerance of 0.5cm.



Photo of liquid Depth in Flat Phantom

### 3.5 Phantom Properties (Size, Shape, Shell Thickness)

The phantom used during the validations was the SAM Phantom model: TP - 1060 from SPEAG. It has a single thickness of 2 mm and was filled with the required tissue simulating liquid. The SAM phantom support structures were all non-metallic and spaced more than one device width away in transverse directions.

For SAR testing in the body worn positions a Flat phantom AndreT P 10.1 was used. The phantom thickness is 2.0mm $\pm$ 0.2 mm and the phantom was filled with the required tissue simulating liquid. Table 4 provides a summary of the measured phantom properties. *Refer to Appendix C Part 4, for details of P 10.1 phantom dielectric properties and loss tangent.*

**Table 4: Phantom Properties (300MHz-2500MHz)**

Phantom Properties	Required	Measured
Thickness of flat section	2.0mm $\pm$ 0.2mm (bottom section)	2.12-2.20mm
Dielectric Constant	<5.0	4.603 @ 300MHz (worst-case frequency)
Loss Tangent	<0.05	0.0379 @ 2500MHz (worst-case frequency)

Depth of Phantom                      200mm  
Length of Flat Section                620mm  
Width of Flat Section                 540mm

P 10.1 Flat Phantom



P 10.1 Flat Phantom



### 3.6 Tissue Material Properties

The dielectric parameters of the tissue simulating liquid were measured prior to SAR assessment using the HP85070A dielectric probe kit and HP8714B Network Analyser. The actual dielectric parameters are shown in the following table.

**Table 5: Measured Brain Simulating Liquid Dielectric Values - Validation**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
2450 MHz Brain	38.5 to 38.7	39.2 $\pm$ 5% (37.2 to 41.2)	1.82 to 1.83	1.80 $\pm$ 5% (1.71 to 1.89)	1000

**Table 6: Measured Body Simulating Liquid Dielectric Values**

Frequency Band	$\epsilon_r$ (measured range)	$\epsilon_r$ (target)	$\sigma$ (mho/m) (measured range)	$\sigma$ (target)	$\rho$ kg/m <sup>3</sup>
2412 MHz Muscle	50.5 to 50.6	52.7 $\pm$ 5% (50.1 to 55.3)	1.93 to 1.94	1.95 $\pm$ 5% (1.85 to 2.05)	1000
2437 MHz Muscle	50.4 to 50.5	52.7 $\pm$ 5% (50.1 to 55.3)	1.96 to 1.97	1.95 $\pm$ 5% (1.85 to 2.05)	1000
2462 MHz Muscle	50.2 to 50.4	52.7 $\pm$ 5% (50.1 to 55.3)	1.99 to 2.01	1.95 $\pm$ 5% (1.85 to 2.05)	1000

**NOTE:** The brain and muscle liquid parameters were within the required tolerances of  $\pm 5\%$ .

#### 3.6.1 Liquid Temperature and Humidity

The humidity and dielectric/ambient temperatures were recorded during the assessment of the tissue material dielectric parameters. The difference between the ambient temperature of the liquid during the dielectric measurement and the temperature during tests was less than  $|2|^\circ\text{C}$ .

**Table 7: Temperature and Humidity recorded for each day**

Date	Ambient Temperature ( $^\circ\text{C}$ )	Liquid Temperature ( $^\circ\text{C}$ )	Humidity (%)
28th July 2004	20.4	19.4	42
29th July 2004	20.3	19.3	43
30th July 2004	20.5	19.8	42

### 3.7 Simulated Tissue Composition Used for SAR Test

The tissue simulating liquids are created prior to the SAR evaluation and often require slight modification each day to obtain the correct dielectric parameters.

**Table 8: Tissue Type: Brain @ 2450MHz**

Volume of Liquid: 30 Litres

Approximate Composition	% By Weight
Distilled Water	62.7
Salt	0.5
Triton X-100	36.8

\*Refer "OET Bulletin 65 97/01 P38"

**Table 9: Tissue Type: Muscle @ 2450MHz**

Volume of Liquid: 60 Litres

Approximate Composition	% By Weight
Distilled Water	73.2
Salt	0.04
DGBE	26.7

### 3.8 Device Holder for Laptops and P 10.1 Phantom

A low loss clamp was used to position the Laptop underneath the phantom surface. Small pieces of foam were then used to press the laptop flush against the phantom surface.

*Refer to Appendix A for photographs of device positioning*

## 4.0 SAR MEASUREMENT PROCEDURE USING DASY4

The SAR evaluation was performed with the SPEAG DASY4 system. A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the EUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 3.9 mm from the inner surface of the shell. The area covers the entire dimension of the EUT and the horizontal grid spacing is 15 mm x 15 mm. The actual Area Scan has dimensions of 81mm x 101mm surrounding the test device. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first “pre-scans” covered an area of 141 mm x 161 mm to ensure that the hotspot was correctly identified.
- c) Around this point, a volume of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:
  - (i) The data at the surface are extrapolated, since the centre of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
  - (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the “Not a knot”- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
  - (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
  - (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

## 5.0 MEASUREMENT UNCERTAINTY

The uncertainty analysis is based on the template listed in the IEEE Std 1528-2003 for both Handset SAR tests and Validation uncertainty. The measurement uncertainty of a specific device is evaluated independently and the total uncertainty for both evaluations (95% confidence level) must be less than 30%.

**Table 10: Uncertainty Budget for DASY4 Version V4.2 Build 37 – EUT SAR test @ 2450MHz**

a	b	c	D	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (%)	10g u <sub>i</sub> (%)	v <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration (k=1) (numerical calibration)	E.2.1	4.8	N	1	1	1	4.8	4.8	∞
Axial Isotropy	E.2.2	4.7	R	1.73	0.707	0.707	1.9	1.9	∞
Hemispherical Isotropy	E.2.2	9.6	R	1.73	0.707	0.707	3.9	3.9	∞
Boundary Effect	E.2.3	1	R	1.73	1	1	0.6	0.6	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	0.075	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	2.9	R	1.73	1	1	1.7	1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	1	R	1.73	1	1	0.6	0.6	∞
<b>Test Sample Related</b>									
Test Sample Positioning	E.4.2	6	N	1	1	1	6.0	6.0	11
Device Holder Uncertainty	E.4.1	3.6	N	1	1	1	3.6	3.6	7
Output Power Variation – SAR Drift Measurement	6.6.2	12	R	1.73	1	1	6.9	6.9	∞
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	5	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	10	N	1	0.64	0.43	6.4	4.3	5
Liquid Permittivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	5	N	1	0.6	0.49	3.0	2.5	5
Combined standard Uncertainty			RSS				14.6	13.6	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				±29.2	±27.19	

Estimated total measurement uncertainty for the DASY4 measurement system was  $\pm 14.6\%$ . The extended uncertainty ( $K = 2$ ) was assessed to be  $\pm 29.2\%$  based on 95% confidence level. The uncertainty is not added to the measurement result.

**Table 11: Uncertainty Budget for DASY4 Version V4.2Build 37 – Validation 2450MHz**

a	b	c	d	e= f(d,k)	f	g	h=cxf/e	i=cxg/e	k
Uncertainty Component	Sec.	Tol. (6%)	Prob. Dist.	Div.	C <sub>i</sub> (1g)	C <sub>i</sub> (10g)	1g u <sub>i</sub> (6%)	10g u <sub>i</sub> (6%)	V <sub>i</sub>
<b>Measurement System</b>									
Probe Calibration (k=1) (standard calibration)	E.2.1	4.4	N	1	1	1	4.4	4.4	∞
Axial Isotropy	E.2.2	4.7	R	1.73	1	1	2.7	2.7	∞
Hemispherical Isotropy	E.2.2	0	R	1.73	1	1	0.0	0.0	∞
Boundary Effect	E.2.3	8.3	R	1.73	1	1	4.8	4.8	∞
Linearity	E.2.4	4.7	R	1.73	1	1	2.7	2.7	∞
System Detection Limits	E.2.5	1	R	1.73	1	1	0.6	0.6	∞
Readout Electronics	E.2.6	1	N	1	1	1	1.0	1.0	∞
Response Time	E.2.7	0	R	1.73	1	1	0.0	0.0	∞
Integration Time	E.2.8	0	R	1.73	1	1	0.0	0.0	∞
RF Ambient Conditions	E.6.1	0.05	R	1.73	1	1	0.0	0.0	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.4	R	1.73	1	1	0.2	0.2	∞
Probe Positioning with respect to Phantom Shell	E.6.3	2.9	R	1.73	1	1	1.7	1.7	∞
Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	E.5	3.9	R	1.73	1	1	2.3	2.3	∞
<b>Test Sample Related</b>									
Test Sample Positioning		1	R	1.73	1	1	0.6	0.6	∞
Device Holder Uncertainty		4.7	R	1.73	1	1	2.7	2.7	∞
Output Power Variation – SAR Drift Measurement									
<b>Phantom and Tissue Parameters</b>									
Phantom Uncertainty (shape and thickness tolerances)	E.3.1	4	R	1.73	1	1	2.3	2.3	∞
Liquid Conductivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.43	1.7	1.2	∞
Liquid Conductivity – Measurement uncertainty	E.3.3	10	N	1.73	0.6	0.43	3.5	2.5	5
Liquid Permittivity – Deviation from target values	E.3.2	5	R	1.73	0.6	0.49	1.7	1.4	∞
Liquid Permittivity – Measurement uncertainty	E.3.3	5	N	1.73	0.6	0.49	1.7	1.4	5
Combined standard Uncertainty			RSS				10.0	9.5	154
Expanded Uncertainty (95% CONFIDENCE LEVEL)			k=2				±20.0	±19.1	

Estimated total measurement uncertainty for the DASY4 measurement system was ±10.0%. The extended uncertainty (K = 2) was assessed to be ±20.0% based on 95% confidence level. The uncertainty is not added to the Validation measurement result.



## 6.0 EQUIPMENT LIST AND CALIBRATION DETAILS

**Table 12: SPEAG DASY4 Version 4.2 Build 37**

<b>EQUIPMENT TYPE</b>	<b>Manufacturer</b>	<b>Model Number</b>	<b>Serial Number</b>	<b>Calibration Due</b>	<b>Used For this Test?</b>
Robot - Six Axes	Staubli	RX90BL	N/A	Not applicable	Yes
Robot Remote Control	SPEAG	CS7MB	RX90B	Not applicable	Yes
SAM Phantom	SPEAG	N/A	1260	Not applicable	Yes
SAM Phantom	SPEAG	N/A	1060	Not applicable	No
Flat Phantom	AndreT	10.1	P 10.1	Not Applicable	Yes
Flat Phantom	AndreT	9.1	P 9.1	Not Applicable	No
Flat Phantom	SPEAG	PO1A 6mm	1003	Not Applicable	No
Data Acquisition Electronics	SPEAG	DAE3 V1	359	09-July-2005	No
Data Acquisition Electronics	SPEAG	DAE3 V1	442	09-Sept - 04	Yes
Probe E-Field - Dummy	SPEAG	DP1	N/A	Not applicable	No
Probe E-Field	SPEAG	ET3DV6	1380	14-July-2005	Yes
Probe E-Field	SPEAG	ET3DV6	1377	19-Sept - 04	No
Probe E-Field	SPEAG	ES3DV6	3029	23-Sept - 04	No
Antenna Dipole 300 MHz	SPEAG	D300V2	1005	27- Nov-2005	No
Antenna Dipole 450 MHz	SPEAG	D450V2	1009	24-Jan-05	No
Antenna Dipole 900 MHz	SPEAG	D900V2	047	12-July-2006	No
Antenna Dipole 1640 MHz	SPEAG	D1640V2	314	25-May-2006	No
Antenna Dipole 1800 MHz	SPEAG	D1800V2	242	13-July-2006	No
Antenna Dipole 2450 MHz	SPEAG	D2450V2	724	9-Nov-2004	Yes
Antenna Dipole 5600 MHz	SPEAG	D5GHzV2	1008	05-Oct-2005	No
RF Amplifier	EIN	603L	N/A	In test	No
RF Amplifier	Mini-Circuits	ZHL-42	N/A	In test	Yes
RF Amplifier	Mini-Circuits	ZVE-8G	N/A	In test	No
Synthesized signal generator	Hewlett Packard	ESG-D3000A	GB37420238	*Not Required	Yes
RF Power Meter Dual	Hewlett Packard	437B	3125012786	26-May-05	Yes
RF Power Sensor 0.01 - 18 GHz	Hewlett Packard	8481H	1545A01634	27-May-05	Yes
RF Power Meter Dual	Gigatronics	8542B	1830125	15-Jan-05	Yes
RF Power Sensor	Gigatronics	80301A	1828805	15-Jan-05	Yes
RF Power Meter Dual	Hewlett Packard	435A	1733A05847	*Not Required	No
RF Power Sensor	Hewlett Packard	8482A	2349A10114	*Not Required	No
Network Analyser	Hewlett Packard	8714B	GB3510035	06-Sept-04	Yes
Network Analyser	Hewlett Packard	8753ES	JP39240130	06-August-2006	No
Dual Directional Coupler	Hewlett Packard	778D	1144 04700	In test	No
Dual Directional Coupler	NARDA	3022	75453	In test	Yes

This document shall not be copied or reproduced, except in full without the written permission of the Technical Director , EMC Technologies Pty. Ltd.

## 7.0 OET BULLETIN 65 – SUPPLEMENT C TEST METHOD

### 7.1 Description of the Test Positions (Lap Top)

Notebooks should be evaluated in normal use positions, typical for lap-held bottom-face only. However the number of positions will depend on the number of configurations the laptop can be operated in. The T Series laptop “SORIEL” can be used in either a conventional laptop position (see Appendix A1) or a Tablet configuration. The antenna location in the “SORIEL” is closest to the top of the screen when used in a conventional laptop configuration and due to the separation distances involved between the phantom and the laptop antenna, testing is not required in this position.

If used in the tablet position the antenna location is closest to the screen of the laptop. The T series tablets use interactive screen modes that allow the user to place their arms/hands on the tablet screen. To account for occasional exposure to the arms, SAR tests were performed with the tablet screen facing the phantom.

Therefore SAR measurements were performed with the front and back of the laptop facing the flat section of the AndreT Flat phantom (P 10.1). See Appendix A for photos of test positions.

#### 7.1.1 “Tablet” Position Definition (0mm spacing)

The device was tested in the 2.00 mm flat section of the AndreT Flat phantom P 10.1 for the “Tablet” position. The Transceiver was placed at the bottom of the phantom and suspended in such way that the back of the device was touching the phantom. This device orientation simulates the tablet’s normal use – being held on the lap of the user whilst in the tablet configuration. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case position.

#### 7.1.2 “Lap Arm Held” Position (0mm spacing)

The device was tested with the screen of the Tablet touching the flat phantom<sup>1</sup>. This orientation simulates use of the device in interactive or arm-held modes where the arm may be rested against the screen during normal use.

For this position, the Transceiver was placed at the bottom of the P 10.1 phantom and suspended in such way that the screen of the device was touching the phantom. A spacing of 0mm ensures that the SAR results are conservative and represent a worst-case assessment (with regards to SAR).

---

<sup>1</sup> TCB Workshop Notes 2003, Session 6 “Portable Transmitters”

This document shall not be copied or reproduced, except in full without the written permission of the Technical Director, EMC Technologies Pty. Ltd.

## 7.2 List of All Test Cases (Antenna In/Out, Test Frequencies, User Modes)

The device has a fixed antenna. Depending on the measured SAR level up to three test channels with the test sample operating at maximum power, as specified in section 2.3 were recorded. The following table represents the matrix used to determine what testing was required.

**Table 13: Testing configurations**

Phantom Configuration	*Device Mode	Antenna	Test Configurations		
			Channel (Low)	Channel (Middle)	Channel (High)
Lap-Arm Held	OFDM	Aux		X	
		Main		X	
	DSSS	Aux	X	X	X
		Main	X	X	X
Tablet	OFDM	Aux			
		Main			
	DSSS	Aux			
		Main			
Lap-Arm Held	DSSS	Aux	If Worst case		
(With Bluetooth)		Main			

### Legend

X Testing Required in this configuration

Testing not required in this configuration because SAR of middle channel is more than 3dB below the SAR limit.

## 7.3 FCC RF Exposure Limits for Occupational/ Controlled Exposure

Spatial Peak SAR Limits For:	
Partial-Body:	8.0 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	20.0 mW/g (averaged over 10g cube of tissue)

## 7.4 FCC RF Exposure Limits for Un-controlled/Non-occupational

Spatial Peak SAR Limits For:	
Partial-Body:	1.6 mW/g (averaged over any 1g cube of tissue)
Hands, Wrists, Feet and Ankles:	4.0 mW/g (averaged over 10g cube of tissue)

## 8.0 SAR MEASUREMENT RESULTS

The SAR values averaged over 1g tissue masses were determined for the sample device for all test configurations listed in section 7.2.

**Table 14: SAR MEASUREMENT RESULTS – DSSS Mode**

1. Test Position	2. Plot No.	3. Antenna	4. Test Channel	5. Test Freq (MHz)	6. Measured 1g SAR Results (mW/g)	7. Measured Drift (dB)
*Lap Arm Held	1	Main	6	2437	Pre-scan Only	-
*Lap Arm Held	2	Aux	6	2437	Pre-scan Only	-
Lap Arm Held	3	Aux	1	2412	0.500	-0.50
	4	Aux	6	2437	0.531	0.00
	5	Aux	11	2462	0.600	-0.20
	6	Main	1	2412	0.504	0.00
	7	Main	6	2437	0.438	0.30
	8	Main	11	2462	0.448	0.10
**Tablet	9	Aux	6	2437	Pre-scan Only	-
<b>WLAN with Bluetooth On</b>						
1. Test Position	2. Plot No.	3. Antenna	4. WLAN Test Channel	5. Bluetooth Frequency (MHz)	6. Measured 1g SAR Results (mW/g)	7. Measured Drift (dB)
Arm Held with	10	Aux	11	2402	0.573	0.00
Bluetooth On	11	Aux	11	2441	0.513	0.00
	12	Aux	11	2480	0.583	-0.10
	13	Main	01	2402	0.492	0.01
	14	Main	01	2441	0.484	0.20
	15	Main	01	2480	0.489	-0.10

\*This plot was used for identifying the “hotspot” only.

\*\*SAR results are within the noise floor of the DASY4 system and were not included.

NOTE: The measurement uncertainty of 29.2% for 2.45GHz was not added to the result.

**Table 15: SAR MEASUREMENT RESULTS – OFDM Mode**

1. Test Position	2. Plot No.	3. Antenna	4. Test Channel	5. Test Freq (MHz)	6. Measured 1g SAR Results (mW/g)	7. Measured Drift (dB)
Lap Arm Held	16	Main	6	2437	0.179	0.01

NOTE: The measurement uncertainty of 29.2% for 2.45GHz testing is not added to the result.

The highest SAR level recorded in the 2450MHz band was 0.600 mW/g as evaluated in a 1g cube of averaging mass. This value was obtained in Lap Arm Held position in DSSS mode, utilizing channel 11 (2462 MHz) and antenna Aux.

## 9.0 COMPLIANCE STATEMENT

The model WM3B2200BG, FCC ID: EJE-WB0010, IC: 337J-WB0010 Portable Tablet Computer Wireless LAN was found to comply with the FCC and RSS-102 SAR requirements.

The highest SAR level recorded was 0.600 mW/g for a 1g cube. This value was measured at 2462 MHz (channel 11) in the “Lap Arm Held” position in DSSS modulation mode at the antenna Aux without the Bluetooth module transmitting. This was below the limit of 1.6 mW/g for uncontrolled exposure, even taking into account the measurement uncertainty of 29.2 %.

## APPENDIX A1 TEST SAMPLE PHOTOGRAPHS

WM3B2200BG Host - Conventional Laptop Configuration



WM3B2200BG Host - Tablet Configuration



## APPENDIX A2 TEST SAMPLE PHOTOGRAPHS

Model: WM3B2200BG  
Front



Back



This document shall not be copied or reproduced, except in full without the written permission of the Technical Director , EMC Technologies Pty. Ltd.



## APPENDIX A3 TEST SAMPLE PHOTOGRAPHS

Battery 1



Battery 2





WM3B2200BG and the Bluetooth inside the Fujitsu Tablet Computer





## APPENDIX A4 TEST SETUP PHOTOGRAPHS

Tablet Position

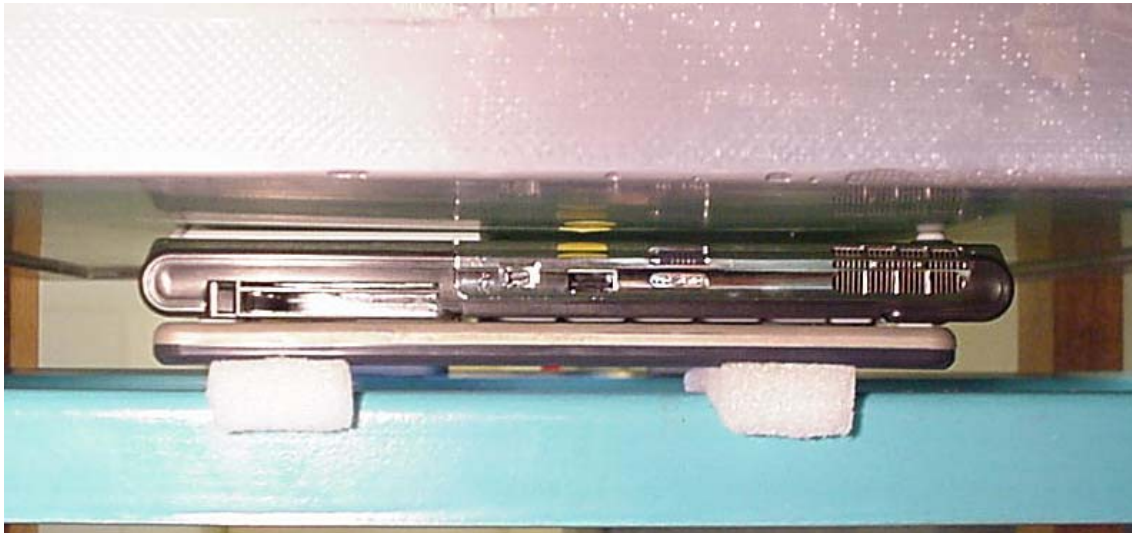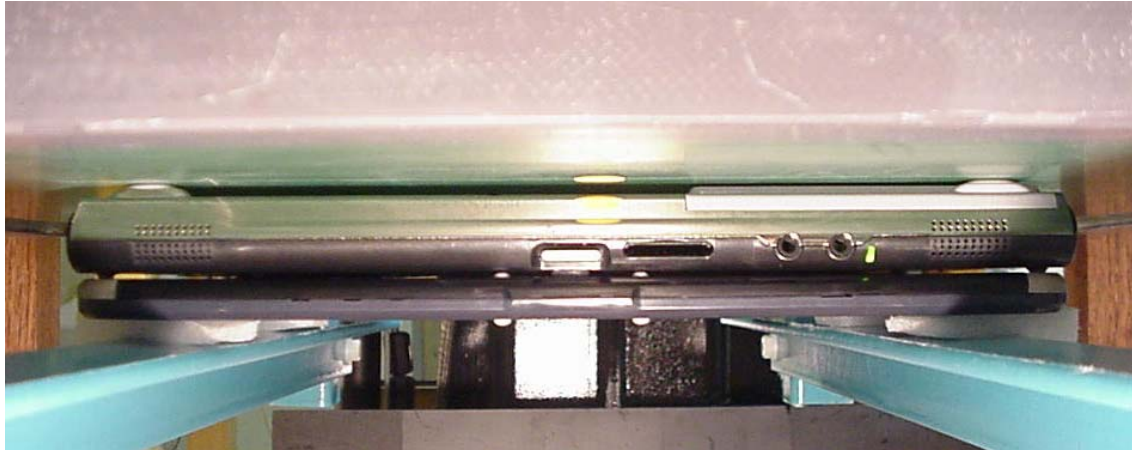

## APPENDIX A5 TEST SAMPLE PHOTOGRAPHS

Arm Held Position

