



Registration
No.910917

TEST REPORT FOR SAR TESTING

Report No.:SRTC2017-9004(F)-17101001(H)

Product Name: Mobile Phone

Product Model: Hisense L675 PRO

Applicant: Hisense International Co., Ltd.

Manufacturer: Hisense International Co., Ltd.

Specification: FCC Part 2.1093

IEEE Std 1528-2013

FCC RF Exposure KDB Procedures

FCC ID: 2ADOBL675PRO

The State Radio_monitoring_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-57996183 Fax: 86-10-57996388

Contents

1 GENERAL INFORMATION	2
1.1 Notes of the test report	2
1.2 Information about the testing laboratory	2
1.3 Applicant's details	2
1.4 Manufacturer's details.....	2
1.5 Test Environment.....	3
2 DESCRIPTION OF THE DEVICE UNDER TEST	4
2.1 Final Equipment Build Status.....	4
2.2 Support Equipment	5
3 REFERENCE SPECIFICATION	5
4 TEST CONDITIONS	6
4.1 Picture to demonstrate the required liquid depth	6
4.2 Test Signal, Frequencies and Output Power	6
4.3 SAR Measurement Set-up.....	6
4.4 Phantoms	7
4.5 Tissue Simulants	7
4.6 DESCRIPTION OF THE TEST PROCEDURE	8
5 RESULT SUMMAR.....	10
6 TEST RESULT	12
6.1 Manufacturing Tolerance	12
6.2 GSM Measurement result.....	19
6.3 WCDMA Measurement result	21
6.4 LTE Measurement result	24
6.5 Bluetooth Measurement result.....	54
6.6 Wi-Fi Measurement result.....	55
6.7 Standalone SAR Test Exclusion Considerations	57
6.8 RF exposure conditions	59
6.9 System Checking.....	61
6.10 SAR TEST RESULT	63
6.11 SAR Measurement Variability	90
6.12 Simultaneous Transmission SAR Analysis	91
7 MEASUREMENT UNCERTAINTY	93
8 TEST EQUIPMENTS.....	94
ANNEX A – TEST PLOTS	97
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS	243
ANNEX C – PHOTOGRAPH	262

1 GENERAL INFORMATION

1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio_monitoring_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	15th Building, No.30 ShixingStreet, Shijingshan District, Beijing,P.R.China
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Liu Jia
Tel:	+86 10 5799 6183
Fax:	+86 10 5799 6388
Email:	liujiaf@srtc.org.cn

1.3 Applicant's details

Company:	Hisense International Co., Ltd.
Address:	Floor 22, Hisense Tower, 17 Donghai Xi Road, Qingdao, 266071, China
City:	Qingdao
Country or Region:	P.R.China
Grantee Code:	2ADOB
Contacted person:	Zhang Kelin
Tel:	+86-532-55753242
Fax:	---
Email:	zhangkelin@hisense.com

1.4 Manufacturer's details

Company:	Hisense Communications Co., Ltd.
Address:	218 Qianwangang Road, Economic & Technological Development Zone, Qingdao, Shandong Province, P.R. China
City:	Qingdao
Country or Region:	P.R.China
Contacted person:	Li Xin
Tel:	+86-532-55755993
Fax:	---
Email:	linxin12@hisense.com

1.5 Test Environment

Date of Receipt of test sample at SRTC:	2017.05.02
Testing Start Date:	2017.05.02
Testing End Date:	2017.10.16

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	24.0	30.0

Normal Supply Voltage (V d.c.):	3.80
---------------------------------	------

2 DESCRIPTION OF THE DEVICE UNDER TEST

2.1 Final Equipment Build Status

Wireless Technology and Frequency Bands	GSM Band : GSM850/PCS1900 WCDMA Band: FDD2/4/5 LTE Band: FDD2/4/5/7 Wi-Fi Band: 2400MHz~2483.5MHz Bluetooth Band: 2400MHz~2483.5MHz
Mode	GSM ☒Voice (GMSK) ☒GPRS (GMSK) ☒EGPRS (GMSK/8PSK) WCDMA ☒UMTS Rel. 99 (Voice & Data) ☒HSDPA (Rel. 5) ☒HSUPA (Rel. 6) ☐HSPA+ (Rel.) ☐DC-HSDPA (Rel.) LTE ☒QPSK ☒16QAM Wi-Fi 2.4GHz ☒802.11b ☒802.11g ☒802.11n (20MHz) Bluetooth ☒BR(GFSK) ☒EDR($\pi/4$ DQPSK , 8-DPSK) ☒BLE(GFSK)
Duty Cycle	GSM Voice: 12.5%; GPRS: 12.5% (1 Slot), 25% (2 Slots), 37.5% (3 Slots), 50% (4 Slots) WCDMA: 100% Wi-Fi 802.11b/g/n: 100% Bluetooth: 32.25% (DH1), 66.68% (DH3), 77.52% (DH5)
GPRS Multi-Slot Class	☐Class 8 - One Up ☐Class 10 - Two Up ☒Class 12 - Four Up
Mobile Phone Capability	☐Class A - Mobile phones can be connected to both GPRS and GSM services simultaneously. ☒Class B - Mobile phones can be attached to both GPRS and GSM services, using one service at a time. ☐Class C - Mobile phones are attached to either GPRS or GSM voice service. You need to switch manually between services
DTM (Dual Transfer Mode)	Not Supported

2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

State of sample	Production unit
Headset	PY-1309102-05KD45/DONGGUAN HETONG INDUSTRIAL CO.,LTD
Batteries	Battery1 :LIW38238/TMB Battery2 :LIW38238/VEKEN
H/W Version S/W Version	V1.00 L1402.6.02.02.MX05
IMEI	Original sample:863721030069527 New sample1(color gray):866335031252110 New sample2(color golden):866335031252060
Notes	As the information described above, there is only one model of the batteries manufactured by two different companies. The relevant tests have been performed in order to verify in which combination case the EUT would have the worst features. So all the tests shown in this test report are performed when the EUT exercised by the battery TMB.

3 REFERENCE SPECIFICATION

Specification	Version	Title
Part 2.1093	Nov. 14, 2016	Radiofrequency radiation exposure evaluation: portable devices.
IEEE Std 1528	2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEEE Std 1528a	2005	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques Amendment 1: CAD File for Human Head Model (SAM Phantom)
KDB 447498 D01	v06	General RF Exposure Guidance
KDB 648474 D04	v01r03	Handset SAR
KDB 941225 D01	v03r01	3G SAR Procedures
KDB 941225 D06	v02r01	Hotspot Mode
KDB 248227 D01	v02r02	SAR meas for 802 11 a b g
KDB 865664 D01	v01r04	SAR Measurement 100 MHz to 6 GHz
KDB 865664 D02	v01r02	RF Exposure Reporting
KDB 941225 D05	v02r05	SAR for LTE Devices

4 TEST CONDITIONS

4.1 Picture to demonstrate the required liquid depth

The liquid depth in the used SAM phantoms



Liquid depth for SAR Measurement

4.2 Test Signal, Frequencies and Output Power

The device was put into operation by using a call tester. Communication between the device and the call tester was established by air link.

The device output power was set to maximum power level for all tests; a fully charged battery was used for every test sequence.

In all operating bands the measurements were performed on lowest, middle and highest channels.

4.3 SAR Measurement Set-up

The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length =300mm) to the data acquisition unit. A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors.

The PC consists of the Micron Pentium IV computer with Win7 system and SAR Measurement Software DASY5 Professional, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot.

A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card. The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines.

The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection

The robot uses its own controller with a built in VME-bus computer.

4.4 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin headed "SAM Phantom", manufactured by SPEAG. The phantom conforms to the requirements of IEEE 1528 - 2013.

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.

The SPEAG device holder (see Section 5.1) was used to position the device in all tests whilst a tripod was used to position the validation dipoles against the flat section of phantom.

4.5 Tissue Simulants

Recommended values for the dielectric parameters of the tissue simulants are given in IEEE 1528 - 2013 and FCC Supplement C to OET Bulletin 65. All tests were carried out using simulants whose dielectric parameters were within $\pm 5\%$ of the recommended values. All tests were carried out within 24 hours of measuring the dielectric parameters.

The depth of the tissue simulant was 15.0 ± 0.5 cm measured from the ear reference point during system checking and device measurements.

4.5.1 Tissue Simulant Recipes

The following recipe(s) were used for Head and Body tissue stimulant(s):

835MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	41.45	52.50
Sugar	56.00	45.0
Nacl	1.45	1.40
Cellulose	1.00	1.00
Preventol	0.10	0.10

1900MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	44.45	70.17
DGBE	55.24	29.44
Nacl	0.31	0.39

2450MHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	55.00	68.64
DGBE	45.00	31.37
Nacl	0.00	0.00

5GHz band

Ingredient	Head (% by weight)	Body (% by weight)
Water	65.52	---
Triton X-100	17.24	---
Diethylenglycol monohexylether	17.24	---

4.6 DESCRIPTION OF THE TEST PROCEDURE

4.6.1 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the Dasy system.



Device holder supplied by SPEAG

4.6.2 Test positions

4.6.2.1 Against Phantom Head

Measurements were made in “cheek” and “tilt” positions on both the left hand and right hand sides of the phantom.

The positions used in the measurements were according to IEEE 1528 - 2013 "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques".

4.6.2.2 Body Worn Configuration

The device was placed in the SPEAG holder below the flat section of the phantom. The distance between the device and the phantom was kept at the separation distance using a separate flat spacer that was removed before the start of the measurements. And the distance is 10mm. The device was oriented with its antenna facing the phantom since this orientation gives higher results.

4.6.3 Scan Procedure

First, area scans were used for determination of the field distribution and the approximate location of the local peak SAR values. The SAR distribution is scanned along the inside surface, at least for an area larger than the projection of the handset and antenna. The angle between the probe axis and the surface normal line is recommended but not required to be less than 30°. The SAR distribution is first measured on a 2-D coarse grid. The scan region should cover all areas that are exposed and encompassed by the projection of the handset. It is a 15 mm × 15 mm measurement grid used when two staggered one-dimensional cubic splines are used to estimate the maximum SAR location. Next, a zoom scan, a minimum of 7 x 7x7 points covering a volume of at least 30x30x30mm, was performed around the highest E-field value to determine the averaged SAR value. Drift was determined by measuring the same point at the start of the area scan and again at the end of the zoom scan.

4.6.4 SAR Averaging Methods

The maximum SAR value was averaged over a cube of tissue using interpolation and extrapolation.

The interpolation, extrapolation and maximum search routines within DASY5 are all based on the modified Quadratic Shepard's method (Robert J. Renka, "Multivariate Interpolation of Large Sets of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148).

The interpolation scheme combines a least-square fitted function method with a weighted average method. A trivariate 3-D / bivariate 2-D quadratic function is computed for each measurement point and fitted to neighbouring points by a least-square method. For the zoom scan, inverse distance weighting is incorporated to fit distant points more accurately. The interpolating function is finally calculated as a weighted average of the quadratics. In the zoom scan, the interpolation function is used to extrapolate the Peak SAR from the deepest measurement points to the inner surface of the phantom.

5 RESULT SUMMAR



The maximum reported SAR values for Head configuration and Body Worn configuration are given as follows. The device conforms to the requirements of the standard(s) when the maximum reported SAR value is less than or equal to the limit.

NOTE: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

Exposure Position	Frequency Band	1g-SAR Reported Result (W/kg)	Highest 1g-SAR Reported Result (W/kg)		Limit (W/kg)/1g	Result
Head	GSM 850	0.322	0.509			
	GSM 1900	0.269				
	WCDMA BAND 2	0.508				
	WCDMA BAND 4	0.509				
	WCDMA BAND 5	0.196				
	LTE Band 2	0.464				
	LTE Band 4	0.432				
	LTE Band 5	0.155				
	LTE Band 7	0.073				
Body(5mm)	GSM 850	0.953	1.012	1.012	1.60	PASS
	GSM 1900	0.981				
	WCDMA BAND 2	0.781				
	WCDMA BAND 4	1.012				
	WCDMA BAND 5	0.468				
	LTE Band 2	0.934				
	LTE Band 4	0.527				
	LTE Band 5	0.310				
	LTE Band 7	0.850				
Hotspot(5mm)	GSM 850	0.858	0.858			
	GSM 1900	0.569				
	WCDMA BAND 2	0.738				
	WCDMA BAND 4	0.538				
	WCDMA BAND 5	0.159				
	LTE Band 2	0.396				
	LTE Band 4	0.392				
	LTE Band 5	0.352				
	LTE Band 7	0.600				

Simultaneous Transmission Summary

Exposure Position	Frequency Band	1g-SAR Result(W/kg)	Highest 1g-SAR Result(W/kg)		Limit (W/kg)/1g	Result
Head	GSM & Wi-Fi	0.739	0.926	1.429	1.60	PASS
	WCDMA & Wi-Fi	0.926				
	LTE& Wi-Fi	0.881				
	GSM & Bluetooth	0.355				
	WCDMA & Bluetooth	0.542				
	LTE& Bluetooth	0.497				
Body(5mm)	GSM & Wi-Fi	1.398	1.429			
	WCDMA & Wi-Fi	1.429				
	LTE& Wi-Fi	1.351				
	GSM & Bluetooth	1.014				
	WCDMA & Bluetooth	1.045				
	LTE& Bluetooth	0.967				
Hotspot(5mm)	GSM & Wi-Fi	1.275	1.275			
	WCDMA & Wi-Fi	1.155				
	LTE& Wi-Fi	1.017				
	GSM & Bluetooth	0.891				
	WCDMA & Bluetooth	0.771				
	LTE& Bluetooth	0.633				

This Test Report Is Issued by: Mr. Peng Zhen 	Checked by: Ms. Liu Jia 
Tested by: Mr. Chang Tianyu 	Issued date: 2017.10.19

6 TEST RESULT

6.1 Manufacturing Tolerance

GSM

GSM 850			
Channel	Channel 128	Channel 189	Channel 251
Tolerance (dBm)	30.0~34.0	30.0~34.0	30.0~34.0
GSM 1900			
Channel	Channel 512	Channel 661	Channel 810
Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0

GSM 850 GPRS				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	30.0~34.0	30.0~34.0	30.0~34.0
2 Txslot	Tolerance (dBm)	28.0~32.0	28.0~32.0	28.0~32.0
3 Txslot	Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0
4 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0
GSM 850 EGPRS (GMSK)				
Channel		128	189	251
1 Txslot	Tolerance (dBm)	30.0~34.0	30.0~34.0	30.0~34.0
2 Txslot	Tolerance (dBm)	28.0~32.0	28.0~32.0	28.0~32.0
3 Txslot	Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0
4 Txslot	Tolerance (dBm)	25.0~29.0	25.0~29.0	25.0~29.0

GSM 1900 GPRS				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0
2 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
3 Txslot	Tolerance (dBm)	24.0~28.0	24.0~28.0	24.0~28.0
4 Txslot	Tolerance (dBm)	22.0~26.0	22.0~26.0	22.0~26.0
GSM 1900 EGPRS (GMSK)				
Channel		512	661	810
1 Txslot	Tolerance (dBm)	27.0~31.0	27.0~31.0	27.0~31.0
2 Txslot	Tolerance (dBm)	26.0~30.0	26.0~30.0	26.0~30.0
3 Txslot	Tolerance (dBm)	24.0~28.0	24.0~28.0	24.0~28.0
4 Txslot	Tolerance (dBm)	22.0~26.0	22.0~26.0	22.0~26.0

WCDMA

WCDMA Band2			
Channel	9262	9400	9538
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
WCDMA Band4			
Channel	1312	1412	1513
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
WCDMA Band5			
Channel	4132	4183	4233
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

HSDPA Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
HSDPA Band4				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
HSDPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0

HSUPA Band2				
Channel		9262	9400	9538
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	17.0~21.0	17.0~21.0	17.0~21.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

HSUPA Band4				
Channel		1312	1412	1513
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	17.0~21.0	17.0~21.0	17.0~21.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
HSUPA Band5				
Channel		4132	4183	4233
Sub test 1	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 2	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 3	Tolerance (dBm)	18.0~22.0	18.0~22.0	18.0~22.0
Sub test 4	Tolerance (dBm)	17.0~21.0	17.0~21.0	17.0~21.0
Sub test 5	Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Bluetooth

GFSK			
Channel	0	39	78
Tolerance (dBm)	-6.0~-2.0	-6.0~-2.0	-6.0~-2.0
$\pi/4$ DQPSK			
Channel	0	39	78
Tolerance (dBm)	-6.0~-2.0	-6.0~-2.0	-6.0~-2.0
8DPSK			
Channel	0	39	78
Tolerance (dBm)	-6.0~-2.0	-6.0~-2.0	-6.0~-2.0

Bluetooth (BLE)

GFSK			
Channel	0	39	78
Tolerance (dBm)	-2.0~2.0	-2.0~2.0	-2.0~2.0

Wi-Fi(2.4GHz)

802.11b			
Channel	1	6	11
Tolerance (dBm)	9.0~13.0	9.0~13.0	9.0~13.0
802.11g			
Channel	1	6	11
Tolerance (dBm)	8.0~12.0	8.0~12.0	8.0~12.0
802.11n HT20			
Channel	1	6	11
Tolerance (dBm)	8.0~12.0	8.0~12.0	8.0~12.0

LTE

Band 2

20BW 100%RB			
Channel	Channel 18700	Channel 18900	Channel 19100
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 50%RB			
Channel	Channel 18700	Channel 18900	Channel 19100
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 1RB			
Channel	Channel 18700	Channel 18900	Channel 19100
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 100%RB			
Channel	Channel 18675	Channel 18900	Channel 19125
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 50%RB			
Channel	Channel 18675	Channel 18900	Channel 19125
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 1RB			
Channel	Channel 18675	Channel 18900	Channel 19125
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 100%RB			
Channel	Channel 18650	Channel 18900	Channel 19150
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 50%RB			
Channel	Channel 18650	Channel 18900	Channel 19150
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 1RB			
Channel	Channel 18650	Channel 18900	Channel 19150
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 100%RB			
Channel	Channel 18625	Channel 18900	Channel 19175
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 50%RB			
Channel	Channel 18625	Channel 18900	Channel 19175
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 1RB			
Channel	Channel 18625	Channel 18900	Channel 19175
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 100%RB			
Channel	Channel 18615	Channel 18900	Channel 19185
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 50%RB			
Channel	Channel 18615	Channel 18900	Channel 19185
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 1RB			
Channel	Channel 18615	Channel 18900	Channel 19185
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 100%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 50%RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 1RB			
Channel	Channel 18607	Channel 18900	Channel 19193
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 4

20BW 100%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 50%RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 1RB			
Channel	Channel 20050	Channel 20175	Channel 20300
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 100%RB			
Channel	Channel 20250	Channel 20175	Channel 20325
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 50%RB			
Channel	Channel 20250	Channel 20175	Channel 20325
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 1RB			
Channel	Channel 20250	Channel 20175	Channel 20325
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 100%RB			
Channel	Channel 20000	Channel 20175	Channel 20350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 50%RB			
Channel	Channel 20000	Channel 20175	Channel 20350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 1RB			
Channel	Channel 20000	Channel 20175	Channel 20350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 100%RB			
Channel	Channel 19975	Channel 20175	Channel 20375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 50%RB			
Channel	Channel 19975	Channel 20175	Channel 20375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 1RB			
Channel	Channel 19975	Channel 20175	Channel 20375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 100%RB			
Channel	Channel 19965	Channel 20175	Channel 20385
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 50%RB			
Channel	Channel 19965	Channel 20175	Channel 20385
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 1RB			
Channel	Channel 19965	Channel 20175	Channel 20385
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 100%RB			
Channel	Channel 19957	Channel 20175	Channel 20393
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 50%RB			
Channel	Channel 19957	Channel 20175	Channel 20393
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 1RB			
Channel	Channel 19957	Channel 20175	Channel 20393
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band 5

10BW 100%RB			
Channel	Channel 20000	Channel 20175	Channel 20350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 50%RB			
Channel	Channel 20000	Channel 20175	Channel 20350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 1RB			
Channel	Channel 20000	Channel 20175	Channel 20350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 100%RB			
Channel	Channel 19975	Channel 20175	Channel 20375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 50%RB			
Channel	Channel 19975	Channel 20175	Channel 20375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 1RB			
Channel	Channel 19975	Channel 20175	Channel 20375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 100%RB			
Channel	Channel 19965	Channel 20175	Channel 20385
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 50%RB			
Channel	Channel 19965	Channel 20175	Channel 20385
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
3BW 1RB			
Channel	Channel 19965	Channel 20175	Channel 20385
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 100%RB			
Channel	Channel 19957	Channel 20175	Channel 20393
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 50%RB			
Channel	Channel 19957	Channel 20175	Channel 20393
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
1.4BW 1RB			
Channel	Channel 19957	Channel 20175	Channel 20393
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

Band7

20BW 100%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 50%RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
20BW 1RB			
Channel	Channel 20850	Channel 21100	Channel 21350
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 100%RB			
Channel	Channel 20825	Channel 21100	Channel 21375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 50%RB			
Channel	Channel 20825	Channel 21100	Channel 21375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
15BW 1RB			
Channel	Channel 20825	Channel 21100	Channel 21375
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 100%RB			
Channel	Channel 20800	Channel 21100	Channel 21400
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 50%RB			
Channel	Channel 20800	Channel 21100	Channel 21400
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
10BW 1RB			
Channel	Channel 20800	Channel 21100	Channel 21400
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 100%RB			
Channel	Channel 20775	Channel 21100	Channel 21425
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 50%RB			
Channel	Channel 20775	Channel 21100	Channel 21425
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0
5BW 1RB			
Channel	Channel 20775	Channel 21100	Channel 21425
Tolerance (dBm)	19.0~23.0	19.0~23.0	19.0~23.0

6.2 GSM Measurement result

GSM Measured Power

Mode	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
Measured Power(dBm)	32.91	32.94	32.92	29.97	29.98	29.91

GPRS Measured Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	32.91	32.94	32.92	29.97	29.98	29.91
3Downlink2uplinkPower(dBm)	31.11	30.97	30.92	27.44	27.46	27.53
2Downlink3uplinkPower(dBm)	29.28	29.15	29.10	26.12	26.09	26.12
1Downlink4uplinkPower(dBm)	28.30	28.17	28.11	25.00	25.01	24.99

GPRS Averaged Power

Mode	GPRS850			GPRS1900		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.88	23.91	23.89	20.94	20.95	20.88
3Downlink2uplinkPower(dBm)	25.09	24.95	24.90	21.42	21.44	21.51
2Downlink3uplinkPower(dBm)	25.02	24.89	24.84	21.86	21.83	21.86
1Downlink4uplinkPower(dBm)	25.29	25.16	25.10	21.99	22.00	21.98

Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink)= 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink)= 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots (1Downlink4uplink) for GPRS.

EGPRS Measured Power

Mode	EGPRS850 (GMSK)			EGPRS1900 (GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	32.91	32.94	32.92	29.97	29.98	29.91
	26.00	25.92	25.83	25.78	25.53	25.37
3Downlink2uplinkPower(dBm)	31.11	30.97	30.92	27.44	27.46	27.53
	25.31	25.82	25.56	25.41	25.12	25.19
2Downlink3uplinkPower(dBm)	29.28	29.15	29.10	26.12	26.09	26.12
	23.87	24.05	24.10	23.60	23.23	22.97
1Downlink4uplinkPower(dBm)	28.30	28.17	28.11	25.00	25.01	24.99
	21.68	21.63	21.66	20.65	20.48	20.80

EGPRS Averaged Power

Mode	EGPRS850 (GMSK)			EGPRS1900 (GMSK)		
	EGPRS850 (8PSK)			EGPRS1900 (8PSK)		
Channel	128	189	251	512	661	810
Frequency(MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
4Downlink1uplinkPower(dBm)	23.88	23.91	23.89	20.94	20.95	20.88
	16.97	16.89	16.80	16.75	16.50	16.34
3Downlink2uplinkPower(dBm)	25.09	24.95	24.90	21.42	21.44	21.51
	19.29	19.80	19.54	19.39	19.10	19.17
2Downlink3uplinkPower(dBm)	25.02	24.89	24.84	21.86	21.83	21.86
	19.61	19.79	19.84	19.34	18.97	18.71
1Downlink4uplinkPower(dBm)	25.29	25.16	25.10	21.99	22.00	21.98
	18.67	18.62	18.65	17.64	17.47	17.79

Division Factors (for Measured Power and Averaged Power):

To average the power, the division factor is as follows:

1TX-slot (4Downlink1uplink) = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots(3Downlink2uplink) = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots (2Downlink3uplink) = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots (1Downlink4uplink) = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots (1Downlink4uplink) for EGPRS (GMSK).

6.3 WCDMA Measurement result

The following procedures are according to FCC KDB Publication 941225 D01.

Release 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

Measured Results

Mode	Band2			Band4		
Channel	9262	9400	9538	1312	1412	1513
Frequency(MHz)	1852.4	1880	1907.6	1712.4	1732.4	1752.6
RB test mode1+64kRMC(dBm)	22.55	22.52	22.55	22.31	22.28	22.31
RB test mode1+12.2kRMC(dBm)	22.62	22.65	22.61	22.38	22.41	22.37
RB test mode1+144kRMC(dBm)	22.57	22.56	22.58	22.33	22.32	22.34
RB test mode1+384kRMC(dBm)	22.50	22.54	22.58	22.26	22.30	22.34
AMR Voice test mode+12.2kRMC(dBm)	22.52	22.56	22.56	22.28	22.32	22.32
Mode	Band5					
Channel	4132	4183	4233			
Frequency(MHz)	826.4	836.6	846.6			
RB test mode1+64kRMC(dBm)	22.39	22.45	22.52			
RB test mode1+12.2kRMC(dBm)	22.48	22.56	22.55			
RB test mode1+144kRMC(dBm)	22.41	22.36	22.37			
RB test mode1+384kRMC(dBm)	22.38	22.38	22.38			
AMR Voice test mode+12.2kRMC(dBm)	22.37	22.34	22.33			

HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	CM(dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$.

Note3: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Measured Results

Mode	HSDPA Band 2			HSDPA Band 4		
Channel	9262	9400	9538	1312	1412	1513
Frequency(MHz)	1852.4	1880	1907.6	1712.4	1732.4	1752.6
sub-test1(dBm)	21.10	21.10	21.20	20.80	20.80	20.90
sub-test2(dBm)	21.10	21.10	21.20	20.80	20.80	20.90
sub-test3(dBm)	20.60	20.60	20.80	20.30	20.30	20.50
sub-test4(dBm)	20.60	20.60	20.70	20.30	20.30	20.40
Mode	HSDPA Band 5					
Channel	4132	4183	4233			
Frequency(MHz)	826.4	836.6	846.6			
sub-test1(dBm)	20.70	20.80	20.90			
sub-test2(dBm)	20.80	20.80	20.90			
sub-test3(dBm)	20.20	20.40	20.40			
sub-test4(dBm)	20.30	20.40	20.40			

HSPA (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	2.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4	2	2.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	2.0	21	81

Note1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note2: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=10/15$ and $\beta_d=15/15$.

Note4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period(TF1,TF0) is achieved by setting the signaled gain factors for the reference TFC(TF1,TF1) to $\beta_c=14/15$ and $\beta_d=15/15$.

NOTE5: Testing UE using E-DPDCH Physical layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

NOTE6: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Measured Results

Mode	HSUPA Band 2			HSUPA Band 4		
Channel	9262	9400	9538	1312	1412	1513
Frequency(MHz)	1852.4	1880	1907.6	1712.4	1732.4	1752.6
sub-test1(dBm)	19.40	19.40	19.40	19.10	19.10	19.10
sub-test2(dBm)	19.30	19.30	19.40	19.00	19.00	19.10
sub-test3(dBm)	19.40	19.40	19.40	19.10	19.10	19.10
sub-test4(dBm)	18.80	18.80	18.90	18.50	18.50	18.60
sub-test5(dBm)	21.30	21.40	21.30	21.00	21.10	21.00
Mode	HSUPA Band 5					
Channel	4132	4183	4233			
Frequency(MHz)	826.4	836.6	846.6			
sub-test1(dBm)	19.00	19.10	18.50			
sub-test2(dBm)	19.00	19.10	18.50			
sub-test3(dBm)	19.00	19.10	18.60			
sub-test4(dBm)	18.50	18.50	18.10			
sub-test5(dBm)	20.90	20.50	21.00			

UMTS SAR was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01.

HSPA SAR was not required since the average output power of the HSPA subtests was not more than 0.25 dB higher than the RMC level and SAR was less than 1.2 W/kg.

6.4 LTE Measurement result

Band 2

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	1.4	18607	1850.7	QPSK	1	Low	21.37
						Mid	21.49
						High	21.32
					50%	Low	21.31
						Mid	21.02
						High	21.22
					100%	---	21.31
				16QAM	1	Low	21.21
						Mid	21.64
						High	21.19
					50%	Low	21.17
						Mid	21.90
						High	21.07
					100%	---	21.31
	3	18615	1851.5	QPSK	1	Low	21.09
						Mid	21.74
						High	21.10
					50%	Low	21.03
						Mid	21.10
						High	21.08
					100%	---	21.04
				16QAM	1	Low	21.95
						Mid	21.73
						High	21.92
					50%	Low	21.06
						Mid	21.12
						High	21.08
					100%	---	21.11

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	5	18625	1852.5	QPSK	1	Low	21.14
						Mid	21.75
						High	21.04
					50%	Low	21.07
						Mid	21.03
						High	21.09
					100%	---	21.99
				16QAM	1	Low	21.99
						Mid	21.75
						High	21.84
					50%	Low	21.05
						Mid	21.00
						High	21.03
					100%	---	21.01
	10	18650	1855	QPSK	1	Low	21.24
						Mid	21.25
						High	21.16
					50%	Low	21.06
						Mid	21.97
						High	21.03
					100%	---	21.99
				16QAM	1	Low	21.06
						Mid	21.31
						High	21.93
					50%	Low	21.09
						Mid	21.00
						High	21.03
					100%	---	20.96

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	15	18675	1857.5	QPSK	1	Low	21.30
						Mid	21.95
						High	21.18
					50%	Low	21.02
						Mid	21.98
						High	21.96
					100%	---	21.04
				16QAM	1	Low	21.10
						Mid	21.05
						High	21.98
					50%	Low	21.01
						Mid	20.97
						High	20.96
					100%	---	21.00
	20	18700	1860	QPSK	1	Low	22.50
						Mid	22.21
						High	22.17
					50%	Low	22.20
						Mid	21.96
						High	21.98
					100%	---	21.99
				16QAM	1	Low	21.12
						Mid	21.32
						High	21.94
					50%	Low	20.97
						Mid	20.95
						High	20.93
					100%	---	21.01

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	1.4	18900	1880	QPSK	1	Low	21.02
						Mid	21.11
						High	21.03
					50%	Low	21.80
						Mid	21.70
						High	21.88
					100%	---	21.92
				16QAM	1	Low	21.89
						Mid	21.28
						High	21.91
					50%	Low	21.89
						Mid	21.54
						High	21.78
					100%	---	20.97
	3	18900	1880	QPSK	1	Low	21.06
						Mid	21.50
						High	21.97
					50%	Low	21.93
						Mid	21.87
						High	21.88
					100%	---	21.88
				16QAM	1	Low	21.90
						Mid	21.76
						High	21.87
					50%	Low	20.98
						Mid	21.02
						High	21.03
					100%	---	20.96

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	5	18900	1880	QPSK	1	Low	21.06
						Mid	21.60
						High	21.97
					50%	Low	21.93
						Mid	21.87
						High	21.88
					100%	---	21.80
				16QAM	1	Low	21.94
						Mid	21.73
						High	21.85
					50%	Low	20.91
						Mid	20.87
						High	20.89
					100%	---	20.92
	10	18900	1880	QPSK	1	Low	21.15
						Mid	21.18
						High	21.07
					50%	Low	21.88
						Mid	21.86
						High	21.89
					100%	---	21.92
				16QAM	1	Low	21.97
						Mid	21.34
						High	21.91
					50%	Low	21.00
						Mid	20.95
						High	20.97
					100%	---	20.95

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	15	18900	1880	QPSK	1	Low	21.17
						Mid	21.85
						High	21.06
					50%	Low	21.97
						Mid	21.93
						High	21.92
					100%	---	21.92
				16QAM	1	Low	21.99
						Mid	21.01
						High	21.89
					50%	Low	20.97
						Mid	20.95
						High	20.96
					100%	---	20.96
	20	18900	1880	QPSK	1	Low	22.80
						Mid	22.07
						High	22.04
					50%	Low	22.50
						Mid	21.87
						High	21.88
					100%	---	21.88
				16QAM	1	Low	21.99
						Mid	21.28
						High	21.84
					50%	Low	20.92
						Mid	20.91
						High	20.88
					100%	---	20.95

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	1.4	19193	1909.3	QPSK	1	Low	21.83
						Mid	21.93
						High	21.83
					50%	Low	21.76
						Mid	21.50
						High	21.69
					100%	---	21.81
				16QAM	1	Low	21.67
						Mid	21.09
						High	21.69
					50%	Low	21.63
						Mid	21.37
						High	21.53
					100%	---	20.82
	3	19185	1908.5	QPSK	1	Low	21.72
						Mid	21.47
						High	21.78
					50%	Low	21.72
						Mid	21.79
						High	21.68
					100%	---	21.71
				16QAM	1	Low	21.59
						Mid	21.48
						High	21.62
					50%	Low	20.71
						Mid	20.83
						High	20.75
					100%	---	20.78

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	5	19175	1907.5	QPSK	1	Low	21.87
						Mid	21.49
						High	21.79
					50%	Low	21.81
						Mid	21.73
						High	21.79
					100%	---	21.70
				16QAM	1	Low	21.64
						Mid	21.50
						High	21.63
					50%	Low	20.77
						Mid	20.70
						High	20.76
					100%	---	20.73
	10	19150	1905	QPSK	1	Low	21.93
						Mid	21.97
						High	21.86
					50%	Low	21.85
						Mid	21.78
						High	21.79
					100%	---	21.71
				16QAM	1	Low	21.65
						Mid	21.03
						High	21.68
					50%	Low	20.82
						Mid	20.76
						High	20.77
					100%	---	20.68

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	15	19125	1902.5	QPSK	1	Low	21.99
						Mid	21.78
						High	21.90
					50%	Low	21.73
						Mid	21.66
						High	21.71
					100%	---	21.80
				16QAM	1	Low	21.78
						Mid	21.79
						High	21.73
					50%	Low	20.70
						Mid	20.63
						High	20.71
					100%	---	20.73
	20	19100	1900	QPSK	1	Low	22.20
						Mid	21.99
						High	21.90
					50%	Low	22.00
						Mid	21.74
						High	21.70
					100%	---	21.71
				16QAM	1	Low	21.88
						Mid	21.02
						High	21.66
					50%	Low	20.74
						Mid	20.68
						High	20.69
					100%	---	20.73

Band 4

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	1.4	19957	1710.7	QPSK	1	Low	21.47
						Mid	21.58
						High	21.45
					50%	Low	21.41
						Mid	21.10
						High	21.25
					100%	---	21.47
				16QAM	1	Low	21.31
						Mid	21.73
						High	21.31
					50%	Low	21.27
						Mid	20.99
						High	21.19
					100%	---	20.43
	3	19965	1711.5	QPSK	1	Low	21.36
						Mid	21.03
						High	21.41
					50%	Low	21.36
						Mid	21.43
						High	21.37
					100%	---	21.38
				16QAM	1	Low	21.26
						Mid	21.13
						High	21.26
					50%	Low	20.31
						Mid	20.39
						High	20.40
					100%	---	20.42

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	5	19975	1712.5	QPSK	1	Low	21.47
						Mid	21.10
						High	21.39
					50%	Low	21.39
						Mid	21.33
						High	21.38
					100%	---	21.27
				16QAM	1	Low	21.32
						Mid	21.18
						High	21.31
					50%	Low	20.32
						Mid	20.26
						High	20.30
					100%	---	20.28
	10	20000	1715	QPSK	1	Low	21.45
						Mid	21.51
						High	21.45
					50%	Low	21.32
						Mid	21.26
						High	21.31
					100%	---	21.29
				16QAM	1	Low	21.30
						Mid	21.68
						High	21.33
					50%	Low	20.32
						Mid	20.28
						High	20.26
					100%	---	20.25

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	15	20025	1717.5	QPSK	1	Low	21.43
						Mid	21.23
						High	21.49
					50%	Low	21.35
						Mid	21.31
						High	21.29
					100%	---	21.32
				16QAM	1	Low	21.33
						Mid	21.41
						High	21.36
					50%	Low	20.35
						Mid	20.36
						High	20.31
					100%	---	20.30
	20	20050	1720	QPSK	1	Low	21.80
						Mid	21.45
						High	21.46
					50%	Low	21.80
						Mid	21.31
						High	21.29
					100%	---	21.26
				16QAM	1	Low	21.35
						Mid	21.70
						High	21.31
					50%	Low	20.27
						Mid	20.26
						High	20.28
					100%	---	20.28

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	1.4	20175	1732.5	QPSK	1	Low	21.27
						Mid	21.39
						High	21.20
					50%	Low	21.21
						Mid	21.94
						High	21.10
					100%	---	21.23
				16QAM	1	Low	21.13
						Mid	21.54
						High	21.12
					50%	Low	21.08
						Mid	20.80
						High	20.99
					100%	---	20.21
	3	20175	1732.5	QPSK	1	Low	21.25
						Mid	21.85
						High	21.24
					50%	Low	21.20
						Mid	21.27
						High	21.25
					100%	---	21.20
				16QAM	1	Low	21.14
						Mid	21.96
						High	21.10
					50%	Low	20.21
						Mid	20.31
						High	20.25
					100%	---	20.26

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	5	20175	1732.5	QPSK	1	Low	21.31
						Mid	21.82
						High	21.23
					50%	Low	21.25
						Mid	21.14
						High	21.23
					100%	---	21.14
				16QAM	1	Low	21.19
						Mid	21.95
						High	21.07
					50%	Low	20.17
						Mid	20.10
						High	20.14
					100%	---	20.16
	10	20175	1732.5	QPSK	1	Low	21.40
						Mid	21.37
						High	21.31
					50%	Low	21.18
						Mid	21.11
						High	21.19
					100%	---	21.16
				16QAM	1	Low	21.26
						Mid	21.54
						High	21.12
					50%	Low	20.21
						Mid	20.14
						High	20.18
					100%	---	20.12

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	15	20175	1732.5	QPSK	1	Low	21.86
						Mid	21.06
						High	21.32
					50%	Low	21.18
						Mid	21.13
						High	21.14
					100%	---	21.16
				16QAM	1	Low	21.23
						Mid	21.22
						High	21.11
					50%	Low	20.14
						Mid	20.12
						High	20.09
					100%	---	20.14
	20	20175	1732.5	QPSK	1	Low	22.00
						Mid	21.36
						High	21.39
					50%	Low	22.00
						Mid	21.57
						High	21.58
					100%	---	21.54
				16QAM	1	Low	21.30
						Mid	21.52
						High	21.13
					50%	Low	20.18
						Mid	20.13
						High	20.09
					100%	---	20.19

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	1.4	20393	1754.3	QPSK	1	Low	21.38
						Mid	21.45
						High	21.37
					50%	Low	21.30
						Mid	21.02
						High	21.21
					100%	---	21.33
				16QAM	1	Low	21.25
						Mid	21.63
						High	21.23
					50%	Low	21.20
						Mid	20.88
						High	21.08
					100%	---	20.34
	3	20385	1753.5	QPSK	1	Low	21.37
						Mid	21.00
						High	21.40
					50%	Low	21.30
						Mid	21.34
						High	21.30
					100%	---	21.34
				16QAM	1	Low	21.27
						Mid	21.09
						High	21.26
					50%	Low	20.32
						Mid	20.39
						High	20.36
					100%	---	20.38

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	5	20375	1752.5	QPSK	1	Low	21.40
						Mid	21.99
						High	21.36
					50%	Low	21.38
						Mid	21.30
						High	21.29
					100%	---	21.20
				16QAM	1	Low	21.22
						Mid	21.09
						High	21.20
					50%	Low	20.27
						Mid	20.23
						High	20.25
					100%	---	20.26
	10	20350	1750	QPSK	1	Low	21.38
						Mid	21.46
						High	21.51
					50%	Low	21.23
						Mid	21.24
						High	21.23
					100%	---	21.25
				16QAM	1	Low	21.27
						Mid	21.62
						High	21.30
					50%	Low	20.29
						Mid	20.27
						High	20.33
					100%	---	20.26

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	15	20325	1747.5	QPSK	1	Low	21.73
						Mid	21.21
						High	21.53
					50%	Low	21.27
						Mid	21.25
						High	21.31
					100%	---	21.30
				16QAM	1	Low	21.21
						Mid	21.36
						High	21.37
					50%	Low	20.21
						Mid	20.23
						High	20.32
					100%	---	20.29
	20	20300	1745	QPSK	1	Low	21.50
						Mid	21.47
						High	21.50
					50%	Low	21.50
						Mid	21.29
						High	21.34
					100%	---	21.29
				16QAM	1	Low	21.25
						Mid	21.63
						High	21.34
					50%	Low	20.21
						Mid	20.23
						High	20.27
					100%	---	20.25

Band 5

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	1.4	20407	821.7	QPSK	1	Low	21.20
						Mid	21.20
						High	21.20
					50%	Low	21.20
						Mid	21.20
						High	21.20
					100%	---	21.20
				16QAM	1	Low	21.20
						Mid	21.20
						High	21.20
					50%	Low	21.20
						Mid	21.20
						High	21.10
					100%	---	21.10
	3	20415	825.5	QPSK	1	Low	21.30
						Mid	21.00
						High	21.00
					50%	Low	21.00
						Mid	21.00
						High	21.00
					100%	---	21.00
				16QAM	1	Low	21.00
						Mid	21.00
						High	21.00
					50%	Low	21.00
						Mid	21.00
						High	21.00
					100%	---	21.00

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	5	29425	826.5	QPSK	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.30
						Mid	21.30
						High	21.30
					50%	Low	21.30
						Mid	21.30
						High	21.20
					100%	---	21.20
	10	20450	829	QPSK	1	Low	22.00
						Mid	21.20
						High	21.10
					50%	Low	22.00
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	1.4	20525	836.5	QPSK	1	Low	21.20
						Mid	21.10
						High	21.10
					50%	Low	21.20
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.20
						Mid	21.20
						High	21.20
					50%	Low	21.20
						Mid	21.20
						High	21.20
					100%	---	21.20
	3	20525	836.5	QPSK	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	5	20525	836.5	QPSK	1	Low	21.30
						Mid	21.30
						High	21.30
					50%	Low	21.30
						Mid	21.30
						High	21.30
					100%	---	21.30
				16QAM	1	Low	21.50
						Mid	21.50
						High	21.50
					50%	Low	21.40
						Mid	21.40
						High	21.40
					100%	---	21.40
	10	20525	836.5	QPSK	1	Low	22.20
						Mid	21.20
						High	21.10
					50%	Low	22.30
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.00
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.00
						High	21.10
					100%	---	21.10

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	1.4	20643	848.3	QPSK	1	Low	21.50
						Mid	21.00
						High	21.60
					50%	Low	21.00
						Mid	21.10
						High	21.00
					100%	---	21.00
				16QAM	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10
	3	20635	847.5	QPSK	1	Low	21.00
						Mid	21.50
						High	21.60
					50%	Low	21.00
						Mid	21.70
						High	21.70
					100%	---	21.10
				16QAM	1	Low	21.00
						Mid	21.00
						High	21.00
					50%	Low	21.00
						Mid	21.00
						High	21.00
					100%	---	21.00

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	5	20625	846.5	QPSK	1	Low	21.20
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.20
						Mid	21.20
						High	21.20
					50%	Low	21.20
						Mid	21.20
						High	21.20
					100%	---	21.20
	10	20600	844	QPSK	1	Low	21.80
						Mid	21.10
						High	21.10
					50%	Low	22.00
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.00
						High	21.10
					100%	---	21.10

Band 7

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	5	20775	2502.5	QPSK	1	Low	21.40
						Mid	21.30
						High	21.40
					50%	Low	21.40
						Mid	21.30
						High	21.30
					100%	---	21.30
				16QAM	1	Low	20.60
						Mid	20.60
						High	21.10
					50%	Low	20.60
						Mid	20.50
						High	20.90
					100%	---	20.60
	10	20800	2505	QPSK	1	Low	21.20
						Mid	21.20
						High	21.20
					50%	Low	21.20
						Mid	21.20
						High	21.20
					100%	---	21.10
				16QAM	1	Low	21.20
						Mid	21.20
						High	21.20
					50%	Low	21.20
						Mid	21.20
						High	21.20
					100%	---	21.10

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Low Range	15	20825	2507.5	QPSK	1	Low	21.70
						Mid	21.70
						High	21.70
					50%	Low	21.70
						Mid	21.70
						High	21.70
					100%	---	21.70
				16QAM	1	Low	20.60
						Mid	20.80
						High	20.60
					50%	Low	21.40
						Mid	21.30
						High	21.30
					100%	---	21.40
	20	20850	2510	QPSK	1	Low	21.60
						Mid	21.60
						High	21.60
					50%	Low	21.40
						Mid	21.00
						High	21.00
					100%	---	21.80
				16QAM	1	Low	21.30
						Mid	21.30
						High	21.20
					50%	Low	21.30
						Mid	21.30
						High	21.30
					100%	---	21.30

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	5	21100	2535	QPSK	1	Low	21.50
						Mid	21.50
						High	21.50
					50%	Low	21.50
						Mid	21.50
						High	21.50
					100%	---	21.50
				16QAM	1	Low	20.80
						Mid	20.80
						High	20.60
					50%	Low	20.60
						Mid	20.80
						High	20.60
					100%	---	20.50
	10	21100	2535	QPSK	1	Low	21.70
						Mid	21.70
						High	21.70
					50%	Low	21.90
						Mid	21.00
						High	21.00
					100%	---	21.90
				16QAM	1	Low	21.00
						Mid	21.00
						High	21.00
					50%	Low	21.00
						Mid	21.10
						High	21.10
					100%	---	21.10

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
Mid Range	15	21100	2535	QPSK	1	Low	21.30
						Mid	21.20
						High	21.20
					50%	Low	21.30
						Mid	21.40
						High	21.20
					100%	---	21.10
				16QAM	1	Low	21.00
						Mid	21.00
						High	21.00
					50%	Low	21.00
						Mid	21.00
						High	21.10
					100%	---	21.10
	20	21100	2535	QPSK	1	Low	22.40
						Mid	22.30
						High	22.30
					50%	Low	22.50
						Mid	22.30
						High	22.30
					100%	---	22.10
				16QAM	1	Low	21.90
						Mid	21.90
						High	21.80
					50%	Low	21.80
						Mid	21.80
						High	21.80
					100%	---	21.70

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	5	21425	2567.5	QPSK	1	Low	21.10
						Mid	21.10
						High	21.10
					50%	Low	21.10
						Mid	21.10
						High	21.10
					100%	---	21.10
				16QAM	1	Low	21.30
						Mid	21.30
						High	21.30
					50%	Low	21.30
						Mid	21.20
						High	21.20
					100%	---	21.20
	10	21400	2565	QPSK	1	Low	21.80
						Mid	21.80
						High	21.80
					50%	Low	21.70
						Mid	21.70
						High	21.70
					100%	---	21.70
				16QAM	1	Low	21.70
						Mid	21.70
						High	21.70
					50%	Low	21.70
						Mid	21.80
						High	21.70
					100%	---	21.60

Test Frequency ID	Bandwidth (MHz)	NUL	Frequency of Uplink(MHz)	Modulation	RB Size	RB Offset	Test results (dBm)
High Range	15	21375	2562.5	QPSK	1	Low	21.30
						Mid	21.40
						High	21.40
					50%	Low	21.40
						Mid	21.40
						High	21.40
					100%	---	21.30
				16QAM	1	Low	21.40
						Mid	21.40
						High	21.40
					50%	Low	21.40
						Mid	21.40
						High	21.40
					100%	---	21.30
	20	21350	2560	QPSK	1	Low	22.00
						Mid	22.00
						High	22.00
					50%	Low	22.00
						Mid	22.00
						High	22.00
					100%	---	22.90
				16QAM	1	Low	21.30
						Mid	21.30
						High	21.30
					50%	Low	21.30
						Mid	21.30
						High	21.30
					100%	---	21.30

6.5 Bluetooth Measurement result

Modulation type	Test Result (dBm)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	-3.45	-4.58	-5.19
$\pi/4$ DQPSK	-3.27	-4.39	-5.36
8DPSK	-3.11	-4.59	-5.89
GFSK(BLE)	2402MHz(Ch0)	2440MHz(Ch19)	2480MHz(Ch39)
	1.31	1.14	1.18

Modulation type	Test Result (mW)		
	2402MHz(Ch0)	2441MHz(Ch39)	2480MHz(Ch78)
GFSK	0.45	0.35	0.30
$\pi/4$ DQPSK	0.47	0.36	0.29
8DPSK	0.49	0.35	0.26
GFSK(BLE)	2402MHz(Ch0)	2440MHz(Ch19)	2480MHz(Ch39)
	1.35	1.30	1.31

6.6 Wi-Fi Measurement result

Modulation type		Average power output (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	12.03	12.16	12.12
	2 Mbps	11.98	11.85	11.89
	5.5 Mbps	11.83	11.72	11.67
	11 Mbps	11.76	11.69	11.52
11g	6 Mbps	10.98	11.12	11.03
	9 Mbps	10.83	11.02	10.93
	12 Mbps	10.72	10.93	10.88
	18 Mbps	10.66	10.82	10.75
	24 Mbps	10.53	10.71	10.69
	36 Mbps	10.47	10.49	10.48
	48 Mbps	10.38	10.35	10.36
	54 Mbps	10.32	10.26	10.18
11n HT20	6.5 Mbps	10.81	10.92	10.85
	13 Mbps	10.72	10.73	10.72
	19.5 Mbps	10.64	10.48	10.53
	26 Mbps	10.52	10.27	10.39
	39 Mbps	10.44	10.04	10.27
	52 Mbps	10.12	9.89	10.17
	58.5 Mbps	9.63	9.72	9.92
	65 Mbps	9.22	9.42	9.71

Modulation type		Average power output (mW)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462MHz (Ch11)
11b	1 Mbps	15.96	16.44	16.29
	2 Mbps	15.78	15.31	15.45
	5.5 Mbps	15.24	14.86	14.69
	11 Mbps	15.00	14.76	14.19
11g	6 Mbps	12.53	12.94	12.68
	9 Mbps	12.11	12.65	12.39
	12 Mbps	11.80	12.39	12.25
	18 Mbps	11.64	12.08	11.89
	24 Mbps	11.30	11.78	11.72
	36 Mbps	11.14	11.19	11.17
	48 Mbps	10.91	10.84	10.86
	54 Mbps	10.76	10.62	10.42
11n HT20	6.5 Mbps	12.05	12.36	12.16
	13 Mbps	11.80	11.83	11.80
	19.5 Mbps	11.59	11.17	11.30
	26 Mbps	11.27	10.64	10.94
	39 Mbps	11.07	10.09	10.64
	52 Mbps	10.28	9.75	10.40
	58.5 Mbps	9.18	9.38	9.82
	65 Mbps	8.36	8.75	9.35

6.7 Standalone SAR Test Exclusion Considerations

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

According to the KDB447498 4.3.1 (1)

For 100 MHz to 6 GHz and test separation distances ≤ 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f} \text{ (GHz)}] \leq 3.0$ for 1-g SAR, where

- f (GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm, and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

This is equivalent to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (60 / \sqrt{f} \text{ (GHz)} \text{ mW})] \cdot [20 \text{ mm} / (\text{min. test separation distance, mm})] \leq 1.0$ for 1-g SAR; also see Appendix A for approximate exclusion threshold values at selected frequencies and distances.

According to the KDB447498 appendix A

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table.

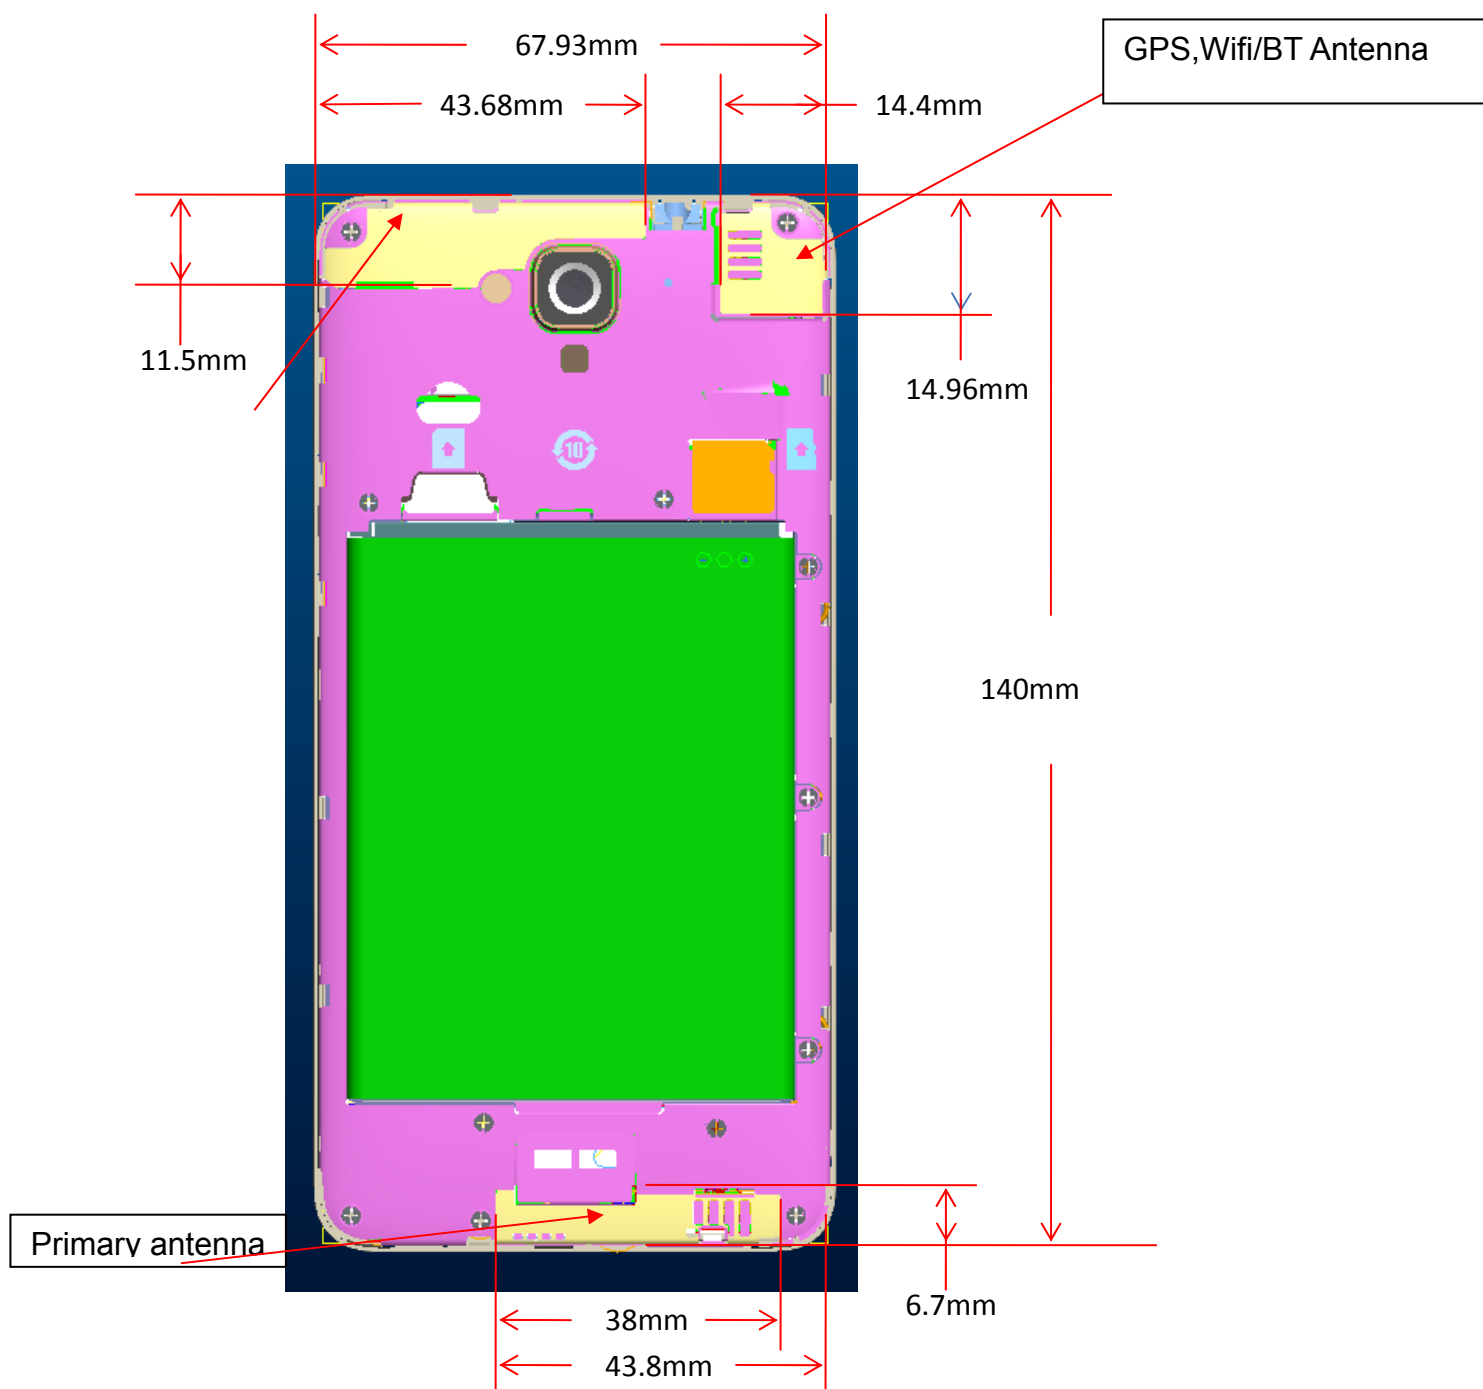
MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

Summary of Transmitters

Band/Mode	Max.RF output power (mW)	SAR test exclusion Threshold (mW)	SAR Required
(2.4~2.4835)GHz Bluetooth	1.35	19	No
(2.4~2.4835)GHz WLAN	16.44	19	No

6.8 RF exposure conditions

Refer to the follow picture“Antenna Locations & Separation Distances” for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.



6.8.1 Head Exposure Conditions

For WWAN,

Test Configurations	SAR Required	Note
Left Touch	yes	/
Left Tilt (15°)	yes	/
Right Touch	yes	/
Right Tilt (15°)	yes	/

6.8.2 Body-worn Accessory Exposure conditions

For WWAN

Test Configurations	SAR Required	Note
Rear	yes	/
Front	yes	/

For WiFi

Test Configurations	SAR Required	Note
Rear	yes	/
Front	yes	/

6.8.3 Hotspot Exposure Conditions

For WWAN

Test Configurations	Antenna-to-edge/surface	SAR Required
Rear	<25 mm	Yes
Front	<25 mm	Yes
Edge 1	135 mm	No
Edge 2	0 mm	Yes
Edge 3	25 mm	Yes
Edge 4	7 mm	Yes

For Wi-Fi

Test Configurations	Antenna-to-edge/surface	SAR Required
Rear	<25 mm	Yes
Front	<25 mm	Yes
Edge 1	0 mm	Yes
Edge 2	124 mm	No
Edge 3	53 mm	No
Edge 4	0 mm	Yes

6.9 System Checking

The manufacturer calibrates the probes annully. Dielectric parameters of the tissue simulants were measured every day using the dielectric probe kit and the network analyser. A system check measurement was made following the determination of the dielectric parameters of the simulant, using the dipole validation kit. A power level of 250 mW was supplied to the dipole antenna, which was placed under the flat section of the twin SAM phantom. The system checking results (dielectric parameters and SAR values) are given in the table below.

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
2017.05.02	D835V2	Head	1g	9.36	9.45	-0.95	±10
2017.05.02	D835V2	Body	1g	9.32	9.62	-3.12	±10
2017.05.03	D1900V2	Head	1g	39.28	40.70	-3.49	±10
2017.05.03	D1900V2	Body	1g	39.36	39.80	-1.11	±10
2017.05.04	D2450V2	Head	1g	52.48	51.20	1.95	±10
2017.05.04	D2450V2	Body	1g	51.72	50.80	1.81	±10

Date Tested	System dipole	T.S. Liquid	SAR measured (normalized to 1W)		Target (Ref.Value)	Delta (%)	Tolerance (%)
2017.10.15	D835V2	Head	1g	9.68	9.45	2.43	±10
2017.10.15	D835V2	Body	1g	9.12	9.62	-5.20	±10
2017.10.15	D1900V2	Head	1g	39.64	40.70	-2.60	±10
2017.10.15	D1900V2	Body	1g	37.76	39.80	-5.13	±10
2017.10.16	D2450V2	Head	1g	50.56	51.20	-1.25	±10
2017.10.16	D2450V2	Body	1g	52.44	50.80	3.23	±10

Plots of the system checking scans are given in Appendix A.

Tissue Simulants used in the Measurements

For the measurement of the following parameters the SPEAG DAKS-3.5 dielectric parameter probe is used, representing the open-ended coaxial probe measurement procedure.

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2017.05.02	Head 835	ϵ_r	42.11	41.50	-1.47	± 5
		σ [S/m]	0.91	0.90	1.11	± 5
2017.05.02	Body 835	ϵ_r	53.85	55.20	-2.45	± 5
		σ [S/m]	0.98	0.97	1.03	± 5
2017.05.03	Head 1900	ϵ_r	40.84	40.00	2.10	± 5
		σ [S/m]	1.41	1.40	0.71	± 5
2017.05.03	Body 1900	ϵ_r	52.18	53.30	-2.10	± 5
		σ [S/m]	1.53	1.52	0.66	± 5
2017.05.04	Head 2450	ϵ_r	39.21	39.20	0.03	± 5
		σ [S/m]	1.79	1.80	-0.56	± 5
2017.05.04	Body 2450	ϵ_r	52.04	52.70	-1.25	± 5
		σ [S/m]	1.97	1.95	1.03	± 5

Date Tested	Freq.(MHz)	Liquid parameters	measured	Target	Delta(%)	Tolerance(%)
2017.10.15	Head 835	ϵ_r	42.25	41.50	1.81	± 5
		σ [S/m]	0.89	0.90	-1.11	± 5
2017.10.15	Body 835	ϵ_r	53.73	55.20	-2.66	± 5
		σ [S/m]	0.99	0.97	2.06	± 5
2017.10.15	Head 1900	ϵ_r	40.77	40.00	1.93	± 5
		σ [S/m]	1.42	1.40	1.43	± 5
2017.10.15	Body 1900	ϵ_r	52.78	53.30	-0.98	± 5
		σ [S/m]	1.49	1.52	1.97	± 5
2017.10.16	Head 2450	ϵ_r	39.46	39.20	0.89	± 5
		σ [S/m]	1.83	1.80	1.67	± 5
2017.10.16	Body 2450	ϵ_r	52.44	52.70	-0.49	± 5
		σ [S/m]	1.94	1.95	-0.51	± 5

6.10 SAR TEST RESULT

In order to determine the largest value of the peak spatial-average SAR of a handset, all device positions, configurations, and operational modes should be tested for each frequency band according to Steps 1 to 3 below.

Step 1: The tests should be performed at the channel that is closest to the center of the transmit frequency band.

a) All device positions (cheek and tilt, for both left and right sides of the SAM phantom),
b) All configurations for each device position in a), e.g., antenna extended and retracted, and
c) All operational modes for each device position in item a) and configuration in item b) in each frequency band, e.g., analog and digital, If more than three frequencies need to be tested (i.e., $N_c > 3$), then all frequencies, configurations and modes shall be tested for all of the above test conditions.

Step 2: For the condition providing the highest peak spatial-average SAR determined in Step 1 for each frequency, perform all tests at all other test frequency channels, e.g., lowest and highest frequencies. In addition, for all other conditions (device position, configuration, and operational mode) where the peak spatial-average SAR value determined in Step 1 is within 3 dB of the applicable SAR limit, it is recommended that all other test frequencies should be tested as well.

Step 3: Examine all data to determine the largest value of the peak.

Note:

1. Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.

Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Reported SAR (W/kg) = Measured SAR (W/kg)* Scaling Factor

2. Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR ≤ 0.8 W/kg, other channels SAR testing are not necessary.

3. In the report the test position "Mobile phone screen Towards Ground" abbreviated as "TG", and "Mobile phone screen Towards Phantom" abbreviated as "TP".

The measured and reported Head/body SAR values for the test device are tabulated below:

Mode: GSM 850

fL(MHz)=824.2MHz

fM(MHz)=836.5MHz

fH(MHz)= 848.8MHz

SAR Values(Head,850MHz Band)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GSM	L	32.91	34	1.29	---	---
		M	32.94	34	1.28	0.076	0.098
		H	32.92	34	1.28	---	---
Left Tilted		L	32.91	34	1.29	---	---
		M	32.94	34	1.28	0.028	0.036
		H	32.92	34	1.28	---	---
Right cheek		L	32.91	34	1.29	---	---
		M	32.94	34	1.28	0.252	0.322
		H	32.92	34	1.28	---	---
Right Tilted		L	32.91	34	1.29	---	---
		M	32.94	34	1.28	0.128	0.163
		H	32.92	34	1.28	---	---

Mode: GSM850 (GSM/GPRS/EGPRS)

fL(MHz)=824.2MHz fM(MHz)=836.6MHz

fH(MHz)= 848.8MHz

SAR Values(body,850MHz Band)

Limit of SAR (W/kg) : <1.6W/kg (1g Average)

Test Case		Ch	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1 g Average	1g Average
TG	GSM With headset	L	32.91	34	1.29	---	---
		M	32.94	34	1.28	0.420	0.536
		H	32.92	34	1.28	---	---
	GPRS	L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.783	0.948
		H	28.11	29	1.23	---	---
	EGPRS	L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.787	0.953
		M(retest)	28.17	29	1.21	0.685	0.829
		H	28.11	29	1.23	---	---
TP	GSM With headset	L	32.91	34	1.29	---	---
		M	32.94	34	1.28	0.367	0.468
		H	32.92	34	1.28	---	---
	GPRS	L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.702	0.850
		H	28.11	29	1.23	---	---
	EGPRS	L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.705	0.853
		H	28.11	29	1.23	---	---
Hotspot EDGE 2	EGPRS	L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.382	0.462
		H	28.11	29	1.23	---	---
Hotspot EDGE 3		L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.709	0.858
		H	28.11	29	1.23	---	---
Hotspot EDGE 4		L	28.30	29	1.17	---	---
		M	28.17	29	1.21	0.343	0.415
		H	28.11	29	1.23	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: GSM1900

fL(MHz)=1850.2MHz fM(MHz)=1880.0MHz fH(MHz)=1909.8MHz

SAR Values(Head,1900MHz Band)

Limit of SAR (W/kg) : <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1g Average	1g Average
Left cheek	GSM	L	29.97	31	1.27	---	---
		M	29.98	31	1.26	0.213	0.269
		H	29.91	31	1.29	---	---
Left Tilted		L	29.97	31	1.27	---	---
		M	29.98	31	1.26	0.069	0.087
		H	29.91	31	1.29	---	---
Right cheek		L	29.97	31	1.27	---	---
		M	29.98	31	1.26	0.155	0.196
		H	29.91	31	1.29	---	---
Right Tilted		L	29.97	31	1.27	---	---
		M	29.98	31	1.26	0.056	0.071
		H	29.91	31	1.29	---	---

Mode: GSM1900 (GSM/GPRS/EGPRS)

fL(MHz)=1850.2MHz fM(MHz)=1880.0MHz fH(MHz)=1909.8MHz

SAR Values(body,1900MHz Band)

Limit of SAR (W/kg) :<1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1 g Average	1g Average
TG	GSM With headset	L	29.97	31	1.27	---	---
		M	29.98	31	1.26	0.523	0.661
		H	29.91	31	1.29	---	---
	GPRS	L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.757	0.951
		H	24.99	26	1.26	---	---
	EGPRS	L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.781	0.981
		M(retest)	25.01	26	1.26	0.726	0.915
		H	24.99	26	1.26	---	---
TP	GSM With headset	L	29.97	31	1.27	---	---
		M	29.98	31	1.26	0.213	0.269
		H	29.91	31	1.29	---	---
	GPRS	L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.418	0.525
		H	24.99	26	1.26	---	---
	EGPRS	L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.488	0.613
		H	24.99	26	1.26	---	---
Hotspot EDGE 2	EGPRS	L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.453	0.569
		H	24.99	26	1.26	---	---
Hotspot EDGE 3		L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.116	0.146
		H	24.99	26	1.26	---	---
Hotspot EDGE 4		L	25.00	26	1.26	---	---
		M	25.01	26	1.26	0.168	0.211
		H	24.99	26	1.26	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: WCDMA BAND2

fL(MHz)=1852.4MHz fM(MHz)=1880MHz fH(MHz)= 1907.6MHz

SAR Values(Head,WCDMA BAND2)

Limit of SAR (W/kg):<1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
position	mode					1 g Average	1g Average
Left cheek	VOICE	L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.372	0.508
		H	22.61	24	1.38	---	---
Left Tilted		L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.126	0.172
		H	22.61	24	1.38	---	---
Right cheek		L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.250	0.341
		H	22.61	24	1.38	---	---
Right Tilted		L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.087	0.118
		H	22.61	24	1.38	---	---

Mode: WCDMA BAND2

fL(MHz)=1852.4MHz fM(MHz)=1880MHz fH(MHz)= 1907.6MHz

SAR Values(body,WCDMA BAND2)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure e Conduc ted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	VOICE	L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.572	0.781
		M(retest)	22.65	24	1.36	0.491	0.725
	DATA	H	22.61	24	1.38	---	---
		L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.568	0.775
TP	VOICE	H	22.61	24	1.38	---	---
		L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.454	0.620
	DATA	H	22.61	24	1.38	---	---
		L	22.62	24	1.37	---	---
		M	22.65	24	1.36	0.418	0.570
Hotspot EDGE2	DATA	H	22.61	24	1.38	---	---
		M	22.65	24	1.36	0.541	0.738
		L	22.62	24	1.37	---	---
Hotspot EDGE3	DATA	H	22.61	24	1.38	---	---
		M	22.65	24	1.36	0.080	0.109
		L	22.62	24	1.37	---	---
Hotspot EDGE4	DATA	H	22.61	24	1.38	---	---
		M	22.65	24	1.36	0.382	0.521
		L	22.62	24	1.37	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: WCDMA BAND4

fL(MHz)=1712.4MHz

fM(MHz)=1732.4MHz

fH(MHz)= 1752.6MHz

SAR Values(Head,WCDMA BAND4)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	VOICE	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.353	0.509
		H	22.37	24	1.46	---	---
Left Tilted		L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.200	0.288
		H	22.37	24	1.46	---	---
Right cheek		L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.246	0.355
		H	22.37	24	1.46	---	---
Right Tilted		L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.170	0.245
		H	22.37	24	1.46	---	---

Mode: WCDMA BAND4

fL(MHz)=1712.4MHz fM(MHz)=1732.4MHz fH(MHz)= 1752.6MHz

SAR Values(body,WCDMA BAND4)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	VOICE	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.662	0.955
		H	22.37	24	1.46	---	---
	DATA	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.702	1.012
		M(retest)	22.41	24	1.44	0.638	0.919
		H	22.37	24	1.46	---	---
TP	VOICE	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.380	0.548
		H	22.37	24	1.46	---	---
	DATA	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.402	0.580
		H	22.37	24	1.46	---	---
Hotspot EDGE2	DATA	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.373	0.538
		H	22.37	24	1.46	---	---
Hotspot EDGE3	DATA	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.130	0.187
		H	22.37	24	1.46	---	---
Hotspot EDGE4	DATA	L	22.38	24	1.45	---	---
		M	22.41	24	1.44	0.186	0.268
		H	22.37	24	1.46	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: WCDMA BAND5

fL(MHz)=826.4MHz fM(MHz)=836.6MHz fH(MHz)= 846.6MHz

SAR Values(Head,WCDMA BAND5)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	VOCIE	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.135	0.188
		H	22.55	24	1.40	---	---
Left Tilted		L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.065	0.091
		H	22.55	24	1.40	---	---
Right cheek		L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.141	0.196
		H	22.55	24	1.40	---	---
Right Tilted		L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.098	0.137
		H	22.55	24	1.40	---	---

Mode: WCDMA BAND5

fL(MHz)=826.4MHz fM(MHz)=836.6MHz fH(MHz)= 846.6MHz

SAR Values(body,WCDMA BAND5)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	VOICE	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.336	0.468
		M(retest)	22.56	24	1.39	0.288	0.400
		H	22.55	24	1.40	---	---
	DATA	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.335	0.467
		H	22.55	24	1.40	---	---
TP	VOICE	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.280	0.390
		H	22.55	24	1.40	---	---
	DATA	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.330	0.460
		H	22.55	24	1.40	---	---
Hotspot EDGE2	DATA	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.011	0.016
		H	22.55	24	1.40	---	---
Hotspot EDGE3	DATA	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.114	0.159
		H	22.55	24	1.40	---	---
Hotspot EDGE4	DATA	L	22.48	24	1.42	---	---
		M	22.56	24	1.39	0.107	0.149
		H	22.55	24	1.40	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND2- 20BW-1RB

fL(MHz)=1860MHz fM(MHz)=1880MHz fH(MHz)= 1900MHz

SAR Values(Head,LTE BAND2)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	20 BW 1RB	L	22.50	23	1.12	0.327	0.367
		M	22.80	23	1.05	0.443	0.464
		H	22.20	23	1.20	0.333	0.400
Left Tilted		L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.107	0.112
		H	22.20	23	1.20	---	---
Right cheek		L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.189	0.198
		H	22.20	23	1.20	---	---
Right Tilted		L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.075	0.079
		H	22.20	23	1.20	---	---

Mode: LTE BAND2- 20BW-1RB

fL(MHz)=1860MHz fM(MHz)=1880MHz fH(MHz)= 1900MHz

SAR Values(body,LTE BAND2)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 1RB	L	22.50	23	1.12	0.708	0.794
		M	22.80	23	1.05	0.795	0.832
		M(retest)	22.80	23	1.05	0.723	0.748
		H	22.20	23	1.20	0.777	0.934
TP	20 BW 1RB	L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.472	0.494
		H	22.20	23	1.20	---	---
Hotspot EDGE 2	20 BW 1RB	L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.378	0.396
		H	22.20	23	1.20	---	---
Hotspot EDGE 3		L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.043	0.045
		H	22.20	23	1.20	---	---
Hotspot EDGE 4		L	22.50	23	1.12	---	---
		M	22.80	23	1.05	0.301	0.315
		H	22.20	23	1.20	---	---

Note: Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND2- 20BW-50%RB

fL(MHz)=1860MHz fM(MHz)=1880MHz fH(MHz)= 1900MHz

SAR Values(Head,LTE BAND2)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	20 BW 50%RB	L	22.20	23	1.20	---	---
		M	22.50	23	1.12	0.397	0.445
		H	22.00	23	1.26	---	---
Left Tilted		L	22.20	23	1.20	---	---
		M	22.50	23	1.12	0.096	0.108
		H	22.00	23	1.26	---	---
Right cheek		L	22.20	23	1.20	---	---
		M	22.50	23	1.12	0.147	0.165
		H	22.00	23	1.26	---	---
Right Tilted		L	22.20	23	1.20	---	---
		M	22.50	23	1.12	0.067	0.075
		H	22.00	23	1.26	---	---

Mode: LTE BAND2- 20BW-50%RB

fL(MHz)=1860MHz fM(MHz)=1880MHz fH(MHz)= 1900MHz

SAR Values(body,LTE BAND2)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 50%RB	L	22.20	23	1.20	---	---
		M	22.50	23	1.12	0.646	0.725
		H	22.00	23	1.26	---	---
TP	20 BW 50%RB	L	22.20	23	1.20	---	---
		M	22.50	23	1.12	0.382	0.429
		H	22.00	23	1.26	---	---
Hotspot EDGE 2	20 BW 50%RB	L	22.20	23	1.20	---	---
		M	22.50	23	1.12	---	---
		H	22.00	23	1.26	---	---
Hotspot EDGE 3		L	22.20	23	1.20	---	---
		M	22.50	23	1.12	---	---
		H	22.00	23	1.26	---	---
Hotspot EDGE 4		L	22.20	23	1.20	---	---
		M	22.50	23	1.12	---	---
		H	22.00	23	1.26	---	---

Note: The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND4- 20BW-1RB

fL(MHz)=1720.0MHz fM(MHz)=1732.5MHz fH(MHz)= 1745.0Mhz

SAR Values(Head,LTE BAND4)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	20BW 1RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.343	0.432
		H	21.50	1.50	1.41	---	---
Left Tilted		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.169	0.213
		H	21.50	1.50	1.41	---	---
Right cheek		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.170	0.214
		H	21.50	1.50	1.41	---	---
Right Tilted		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.138	0.174
		H	21.50	1.50	1.41	---	---

Mode: LTE BAND4- 20BW-1RB

fL(MHz)=1720.0MHz fM(MHz)=1732.5MHz fH(MHz)= 1745.0MHz

SAR Values(body,LTE BAND4)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 1RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.200	0.252
		H	21.50	1.50	1.41	---	---
TP	20 BW 1RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.340	0.428
		H	21.50	1.50	1.41	---	---
Hotspot EDGE 2	20 BW 1RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	---	---
		H	21.50	1.50	1.41	---	---
Hotspot EDGE 3		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	---	---
		H	21.50	1.50	1.41	---	---
Hotspot EDGE 4		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	---	---
		H	21.50	1.50	1.41	---	---

Note: The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND4- 20BW-50%RB

fL(MHz)=1720 MHz fM(MHz)=1732.5MHz fH(MHz)= 1745MHz

SAR Values(Head,LTE BAND4)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	20 BW 50%RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.280	0.352
		H	21.50	1.50	1.41	---	---
Left Tilted		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.136	0.171
		H	21.50	1.50	1.41	---	---
Right cheek		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.148	0.186
		H	21.50	1.50	1.41	---	---
Right Tilted		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.118	0.149
		H	21.50	1.50	1.41	---	---

Mode: LTE BAND4- 20BW-50%RB

fL(MHz)=1720 MHz fM(MHz)=1732.5MHz fH(MHz)= 1745MHz

SAR Values(body,LTE BAND4)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Note: The distance between the EUT and the phantom bottom is 10mm.

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 50%RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.419	0.527
		M(retest)	22.00	1.00	1.26	0.374	0.471
		H	21.50	1.50	1.41	---	---
TP	20 BW 50%RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.272	0.342
		H	21.50	1.50	1.41	---	---
Hotspot EDGE 2	20 BW 50%RB	L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.311	0.392
		H	21.50	1.50	1.41	---	---
Hotspot EDGE 3		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.116	0.146
		H	21.50	1.50	1.41	---	---
Hotspot EDGE 4		L	21.80	1.20	1.32	---	---
		M	22.00	1.00	1.26	0.153	0.193
		H	21.50	1.50	1.41	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

Mode: LTE BAND5- 10BW-1RB

fL(MHz)=829 MHz fM(MHz)=836.5MHz fH(MHz)= 844MHz

SAR Values(Head,LTE BAND5)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	10 BW 1RB	L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.102	0.123
		H	21.80	23	1.32	---	---
Left Tilted		L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.069	0.083
		H	21.80	23	1.32	---	---
Right cheek		L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.129	0.155
		H	21.80	23	1.32	---	---
Right Tilted		L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.074	0.088
		H	21.80	23	1.32	---	---

Mode: LTE BAND5- 10BW-1RB

fL(MHz)=829 MHz fM(MHz)=836.5MHz fH(MHz)= 844MHz

SAR Values(Head,LTE BAND5)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	10 BW 1RB	L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.258	0.310
		H	21.80	23	1.32	---	---
TP	10 BW 1RB	L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.167	0.201
		H	21.80	23	1.32	---	---
Hotspot EDGE 2	10 BW 1RB	L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.125	0.150
		H	21.80	23	1.32	---	---
Hotspot EDGE 3		L	22.00	23	1.26	---	---
		M	22.20	23	1.20	0.293	0.352
		M(retest)	22.20	23	1.20	0.216	0.325
H		21.80	23	1.32	---	---	
Hotspot EDGE 4		L	22.00	23	1.26	---	0.000
		M	22.20	23	1.20	0.062	0.075
		H	21.80	23	1.32	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND5- 10BW-50%RB

fL(MHz)=829 MHz fM(MHz)=836.5MHz fH(MHz)= 844MHz

SAR Values(Head,LTE BAND5)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	10 BW 50%RB	L	22.00	23	1.26	---	---
		M	22.30	23	1.17	0.102	0.120
		H	22.00	23	1.26	---	---
Left Tilted		L	22.00	23	1.26	---	---
		M	22.30	23	1.17	0.059	0.069
		H	22.00	23	1.26	---	---
Right cheek		L	22.00	23	1.26	---	---
		M	22.30	23	1.17	0.099	0.116
		H	22.00	23	1.26	---	---
Right Tilted		L	22.00	23	1.26	---	---
		M	22.30	23	1.17	0.054	0.064
		H	22.00	23	1.26	---	---

Mode: LTE BAND5- 10BW-50%RB

fL(MHz)=829 MHz fM(MHz)=836.5MHz fH(MHz)= 844MHz

SAR Values(Head,LTE BAND5)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	10 BW 50%RB	L	22.00	23	1.26	---	---
		M	22.30	23	1.17	0.174	0.204
		H	22.00	23	1.26	---	---
TP	10 BW 50%RB	L	22.00	23	1.26	---	---
		M	22.30	23	1.17	0.145	0.170
		H	22.00	23	1.26	---	---
Hotspot EDGE 2	10 BW 50%RB	L	22.00	23	1.26	---	---
		M	22.30	23	1.17	---	---
		H	22.00	23	1.26	---	---
Hotspot EDGE 3		L	22.00	23	1.26	---	---
		M	22.30	23	1.17	---	---
		H	22.00	23	1.26	---	---
Hotspot EDGE 4		L	22.00	23	1.26	---	---
		M	22.30	23	1.17	---	---
		H	22.00	23	1.26	---	---

Note: The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND7- 20BW-1RB

fL(MHz)=2510 MHz fM(MHz)=2535MHz fH(MHz)= 2560MHz

SAR Values(Head,LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	20 BW 1RB	L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.064	0.073
		H	22.00	23	1.26	---	---
Left Tilted		L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.027	0.031
		H	22.00	23	1.26	---	---
Right cheek		L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.034	0.039
		H	22.00	23	1.26	---	---
Right Tilted		L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.030	0.034
		H	22.00	23	1.26	---	---

Mode: LTE BAND7- 20BW-1RB

fL(MHz)=2510 MHz fM(MHz)=2535MHz fH(MHz)= 2560MHz

SAR Values(body,LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 1RB	L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.740	0.850
		M(retest)	22.40	23	1.15	0.663	0.762
		H	22.00	23	1.26	---	---
TP	20 BW 1 RB	L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.322	0.370
		H	22.00	23	1.26	---	---
Hotspot EDGE 2	20 BW 1RB	L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.523	0.600
		H	22.00	23	1.26	---	---
Hotspot EDGE 3		L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.050	0.057
		H	22.00	23	1.26	---	---
Hotspot EDGE 4		L	21.60	23	1.38	---	---
		M	22.40	23	1.15	0.019	0.021
		H	22.00	23	1.26	---	---

Note: The test result of variation product is better than the original test data. So the original test data retain and adopted as the final test result.

M is the original test data, M(retest) is the new test data(variation).

The distance between the EUT and the phantom bottom is 10mm.

Mode: LTE BAND7- 20BW-50%RB

fL(MHz)=2510 MHz fM(MHz)=2535MHz fH(MHz)= 2560MHz

SAR Values(Head,LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-uplimit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
Left cheek	20 BW 50%RB	L	21.40	23	1.45	---	---
		M	22.50	23	1.12	0.057	0.064
		H	22.00	23	1.26	---	---
Left Tilted		L	21.40	23	1.45	---	---
		M	22.50	23	1.12	0.020	0.022
		H	22.00	23	1.26	---	---
Right cheek		L	21.40	23	1.45	---	---
		M	22.50	23	1.12	0.029	0.033
		H	22.00	23	1.26	---	---
Right Tilted		L	21.40	23	1.45	---	---
		M	22.50	23	1.12	0.035	0.039
		H	22.00	23	1.26	---	---

Mode: LTE BAND7- 20BW-50%RB

fL(MHz)=2510 MHz fM(MHz)=2535MHz fH(MHz)= 2560MHz

SAR Values(body,LTE BAND7)

Limit of SAR (W/kg): <1.6W/kg(1g Average)

Test Case		CH	Measure Conducted Power (dBm)	Tune-up limit (dBm)	Scaling Factor	Measure Results (W/kg)	Reported Results (W/kg)
Position	mode					1 g Average	1g Average
TG	20 BW 50%RB	L	21.40	23	1.45	---	---
		M	22.50	23	1.12	0.613	0.688
		H	22.00	23	1.26	---	---
TP	20 BW 50%RB	L	21.40	23	1.45	---	---
		M	22.50	23	1.12	0.270	0.303
		H	22.00	23	1.26	---	---
Hotspot EDGE 2	20 BW 50%RB	L	21.40	23	1.45	---	---
		M	22.50	23	1.12	---	---
		H	22.00	23	1.26	---	---
Hotspot EDGE 3		L	21.40	23	1.45	---	---
		M	22.50	23	1.12	---	---
		H	22.00	23	1.26	---	---
Hotspot EDGE 4		L	21.40	23	1.45	---	---
		M	22.50	23	1.12	---	---
		H	22.00	23	1.26	---	---

Note: The distance between the EUT and the phantom bottom is 10mm.

6.11 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

6.11.1 The Highest Measured SAR configuration in Each Frequency Band

Frequency band(MHz)	Air interface	Head(w/kg)	Body(w/kg)
850	GSM850 WCDMA BAND5 LTE BAND5	<0.8	<0.8
1700	WCDMA BAND4 LTE BAND4	<0.8	<0.8
1900	GSM1900 WCDMA BAND2 LTE BAND2	<0.8	<0.8
2450	WiFi 802.11b/g/n LTE BAND7	<0.8	<0.8

6.12 Simultaneous Transmission SAR Analysis

According to the formula (KDB447498 4.3.2) the Wifi SAR as follow:

$[(\text{max.power of channel, including tune-up tolerance,mw})/(\text{min.test separation distance,mm})]$
 $[\sqrt{f(\text{GHz})}/x] \text{ W/kg}$ for test separation distances $\leq 50\text{mm}$.

Head:

min. test separation distance = 5mm

Body:

min. test separation distance = 10mm

Where $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.

The sum of SAR values for GSM & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
GSM	0.322	0.981
WiFi	0.417	0.417
Sum	0.739	1.398
Note	GSM850+WIFI RIGHT cheek	EGPRS1900+WIFI TG

According to the above tables, the sum of SAR values for GSM and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

The sum of SAR values for WCDMA & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
WCDMA	0.509	1.012
WiFi	0.417	0.417
Sum	0.926	1.429
Note	WCDMA BAND4+WIFI Left cheek	WCDMA BAND4+WIFI TG

According to the above tables, the sum of SAR values for GSM and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

The sum of SAR values for LTE & WiFi

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	0.464	0.934
WiFi	0.417	0.417
Sum	0.881	1.351
Note	LTE BAND2+WIFI Left cheek	LTE BAND2+WIFI TG

According to the above tables, the sum of SAR values for LTE and WiFi < 1.6W/kg. So simultaneous transmission SAR are not required for WiFi transmitter.

According to the formula (KDB447498 4.3.2) the Bluetooth SAR as follow:

$$\frac{[(\text{max.power of channel, including tune-up tolerance,mw})/(\text{min.test separation distance,mm})]}{[\sqrt{f(\text{GHz})/x}]} \text{ W/kg for test separation distances } \leq 50\text{mm}.$$

Head:

min. test separation distance = 5mm

Body:

min. test separation distance = 10mm

Where $x=7.5$ for 1-g SAR, and $x=18.75$ for 10-g SAR.

The sum of SAR values for GSM & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
GSM	0.322	0.981
Bluetooth	0.033	0.033
Sum	0.355	1.014
Note	GSM850+BT Right cheek	GSM1900+BT TG

According to the above tables, the sum of SAR values for GSM and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for WCDMA & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
WCDMA	0.509	1.012
Bluetooth	0.033	0.033
Sum	0.542	1.045
Note	WCDMA BAND4+WIFI Left cheek	WCDMA BAND4+WIFI TG

According to the above tables, the sum of SAR values for GSM and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

The sum of SAR values for LTE & Bluetooth

	MAXIMUM SAR VALUE FOR HEAD	MAXIMUM SAR VALUE FOR BODY
LTE	0.464	0.934
Bluetooth	0.033	0.033
Sum	0.497	0.967
Note	LTE BAND2+WIFI Left cheek	LTE BAND2+WIFI TG

According to the above tables, the sum of SAR values for LTE and Bluetooth < 1.6W/kg. So simultaneous transmission SAR are not required for Bluetooth transmitter.

7 MEASUREMENT UNCERTAINTY

DASY5 Uncertainty Budget								
Error description	Uncertainty value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std.Unc (1g).	Std.Unc. (10g)	(v_i) Veff
Measurement system								
Probe calibration	±6.0%	N	1	1	1	±6.0%	±6.0%	∞
Axial isotropy	±4.7%	R	√3	0.7	0.7	±1.9%	±1.9%	∞
Hemispherical isotropy	±9.6%	R	√3	0.7	0.7	±3.9%	±3.9%	∞
Boundary Effects	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Linearity	±4.7%	R	√3	1	1	±2.7%	±2.7%	∞
System detection limits	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Readout electronics	±0.3%	N	1	1	1	±0.3%	±0.3%	∞
Response time	±0.8%	R	√3	1	1	±0.5%	±0.5%	∞
Integration time	±2.6%	R	√3	1	1	±1.5%	±1.5%	∞
RF ambient noise	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
RF ambient reflections	±3.0%	R	√3	1	1	±1.7%	±1.7%	∞
Probe positioner	±0.4%	R	√3	1	1	±0.2%	±0.2%	∞
Probe positioning	±2.9%	R	√3	1	1	±1.7%	±1.7%	∞
Max.SAR Eval.	±1.0%	R	√3	1	1	±0.6%	±0.6%	∞
Test Sample Related								
Device holder	±3.6%	N	1	1	1	±3.6%	±3.6%	5
Device Positioning	±2.9%	N	1	1	1	±2.9%	±2.9%	145
Power drift	±5.0%	R	√3	1	1	±2.9%	±2.9%	∞
Phantom and Setup								
Phantom uncertainty	±4.0%	R	√3	1	1	±2.3%	±2.3%	∞
Liquid conductivity (target.)	±5.0%	R	√3	0.64	0.43	±1.8%	±1.2%	∞
Liquid conductivity (mea.)	±2.5%	R	√3	0.64	0.43	±0.9%	±0.6%	∞
Liquid Permittivity (target.)	±5.0%	R	√3	0.60	0.49	±1.7%	±1.4%	∞
Liquid Permittivity (mea.)	±2.5%	R	√3	0.60	0.49	±0.9%	±0.7%	∞
Combined std. Uncertainty						±10.9%	±10.7%	387
Expanded STD Uncertainty						±21.7%	±21.4%	

8 TEST EQUIPMENTS

The measurements were performed using an automated near-field scanning system, DASY5, manufactured by Schmid & Partner Engineering AG (SPEAG) in Switzerland. The SAR extrapolation algorithm used in all measurements was the 'advanced extrapolation' algorithm.

The following table lists calibration dates of SPEAG components which the initial certified product used:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
DAE	DAE4	720	2016.10.31	2017.10.30
DAE	DAE4	546	2016.08.22	2017.08.21
Dosimetric E-field Probe	EX3DV4	3708	2016.11.10	2017.11.09
Dosimetric E-field Probe	ES3DV3	3127	2016.08.29	2017.08.28
Dipole Validation Kit	D835V2	4d023	2016.10.24	2017.10.23
Dipole Validation Kit	D1900V2	5d113	2016.10.31	2017.10.30
Dipole Validation Kit	D2450V2	738	2016.10.25	2017.10.24

Additional test equipment used in testing:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2016.08.20	2017.08.19
Signal Generator	SML 03	103514	2016.08.20	2017.08.19
Power meter	E4417A	MY45101182	2016.08.20	2017.08.19
Power Sensor	E4412A	MY41502214	2016.08.20	2017.08.19
Power Sensor	E4412A	MY41502130	2016.08.20	2017.08.19
Power meter	E4417A	MY45101004	2016.08.20	2017.08.19
Power Sensor	E9300B	MY41496001	2016.08.20	2017.08.19
Power Sensor	E9300B	MY41496003	2016.08.20	2017.08.19
Communication Tester	8960	GB43194054	2016.08.20	2017.08.19
Communication Tester	CMU200	114666	2016.08.20	2017.08.19
Communication Tester	MT8820C	6201300660	2016.08.20	2017.08.19
Vector Network Analyzer	VNA R140	0011213	2016.08.20	2017.08.19
Dielectric Parameter Probe	DAKS-3.5	1042	2016.08.20	2017.08.19

We calibrated certain devices which expired. The following table lists the new calibration dates of the components , and all the new tests for this variant product within the new period of validity:

Test Equipment	Model	Serial Number	Calibration date	Calibration Due data
Signal Generator	E4428C	MY45280865	2017.08.20	2018.08.19
Signal Generator	SML 03	103514	2017.08.20	2018.08.19
Power meter	E4417A	MY45101182	2017.08.20	2018.08.19
Power Sensor	E4412A	MY41502214	2017.08.20	2018.08.19
Power Sensor	E4412A	MY41502130	2017.08.20	2018.08.19
Power meter	E4417A	MY45101004	2017.08.20	2018.08.19
Power Sensor	E9300B	MY41496001	2017.08.20	2018.08.19
Power Sensor	E9300B	MY41496003	2017.08.20	2018.08.19
Communication Tester	8960	GB43194054	2017.08.20	2018.08.19
Communication Tester	CMU200	114666	2017.08.20	2018.08.19
Communication Tester	MT8820C	6201300660	2017.08.20	2018.08.19

Detailed information of Isotropic E-field Probe Type ES3DV3

Construction	Symmetrical design with triangular core Interleaved sensors Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Dynamic Range	5 μ W/g to > 100 W/kg; Linearity: ± 0.2 dB
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of mobile phones

Detailed information of Isotropic E-field Probe Type EX3DV4

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	Calibration certificate in Appendix C
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Optical Surface Detection	± 0.3 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Dynamic Range	10 μ W/g to > 100 W/kg Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

ANNEX A – TEST PLOTS

Please refer to the attachment.

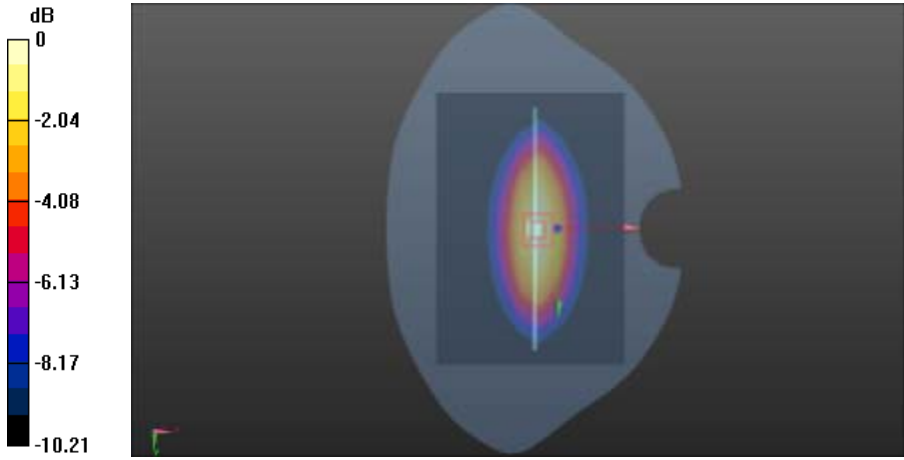
ANNEX B – RELEVANT PAGES FROM CALIBRATION REPORTS

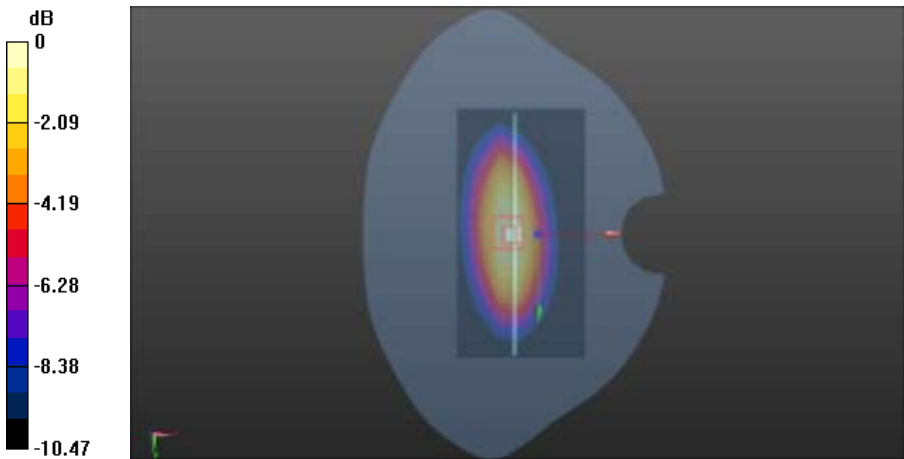
Please refer to the attachment.

ANNEX C – PHOTOGRAPH

Please refer to the attachment.

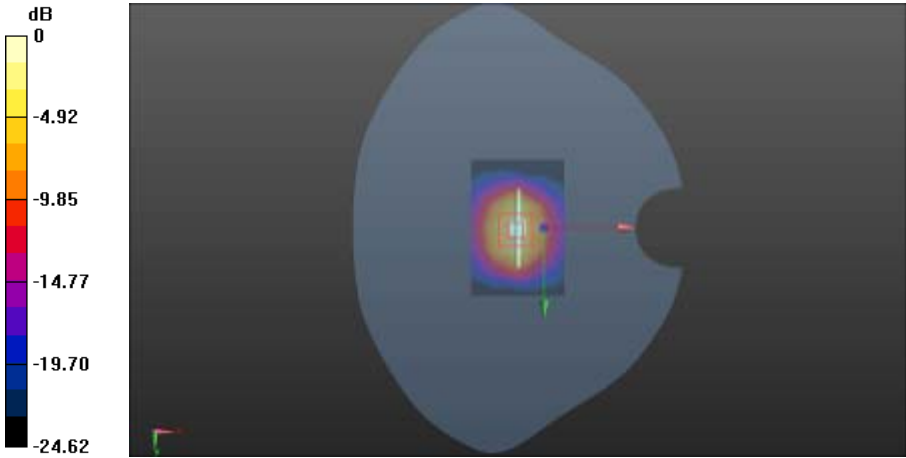
ANNEX A – TEST PLOTS

SYSTEM CHECKING SCANS	835MHz Head
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (extrapolated): $f = 835 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.108$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.97, 5.97, 5.97); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1559; Type: SAM; Serial: 1559 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 835MHz Head/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (10x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.98 W/kg System Performance Check at Frequencies 835MHz Head/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 54.113 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 3.55 W/kg SAR(1 g) = 2.34 W/kg; SAR(10 g) = 1.53 W/kg Maximum value of SAR (measured) = 2.98 W/kg	
	

SYSTEM CHECKING SCANS	835MHz Flat
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (extrapolated): $f = 835 \text{ MHz}$; $\sigma = 0.978 \text{ S/m}$; $\epsilon_r = 53.846$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.88, 5.88, 5.88); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -18.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1559; Type: SAM; Serial: 1559 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 835MHz Flat/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.55 W/kg System Performance Check at Frequencies 835MHz Flat/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 53.044 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 3.54 W/kg SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.53 W/kg Maximum value of SAR (measured) = 2.87 W/kg	
	

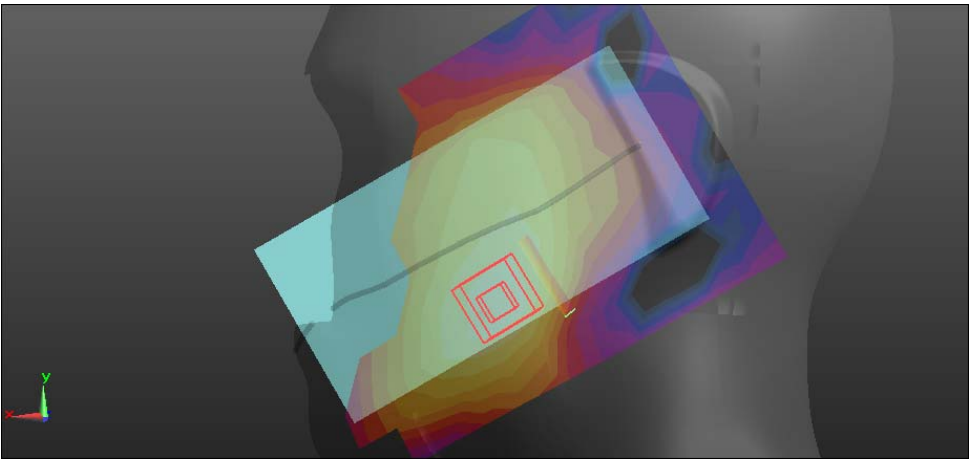
SYSTEM CHECKING SCANS	1900MHz Head
Communication System: UID 0, CW (0); Frequency: 1900 MHz Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ S/m}$; $\epsilon_r = 40.84$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.94, 4.94, 4.94); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1560; Type: SAM; Serial: 1560 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 1900MHz Head/d=10mm, Pin=250mW, dist=2.0mm (EX-Probe)/Area Scan (9x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 14.0 W/kg System Performance Check at Frequencies 1900MHz Head/d=10mm, Pin=250mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 95.996 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 20.8 W/kg SAR(1 g) = 9.82 W/kg; SAR(10 g) = 5.47 W/kg Maximum value of SAR (measured) = 15.9 W/kg	

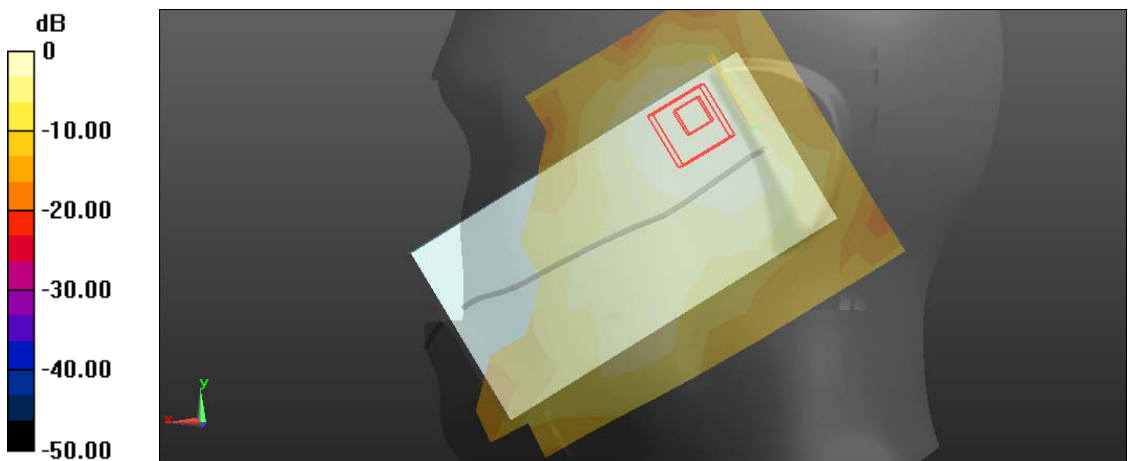
SYSTEM CHECKING SCANS	1900MHz Flat
Communication System: UID 0, CW (0); Frequency: 1900 MHz Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.53 \text{ S/m}$; $\epsilon_r = 52.184$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.67, 4.67, 4.67); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1560; Type: SAM; Serial: 1560 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 1900MHz Flat/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 14.7 W/kg System Performance Check at Frequencies 1900MHz Flat/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 91.541 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 19.2 W/kg SAR(1 g) = 9.84 W/kg; SAR(10 g) = 5.64 W/kg Maximum value of SAR (measured) = 14.5 W/kg	

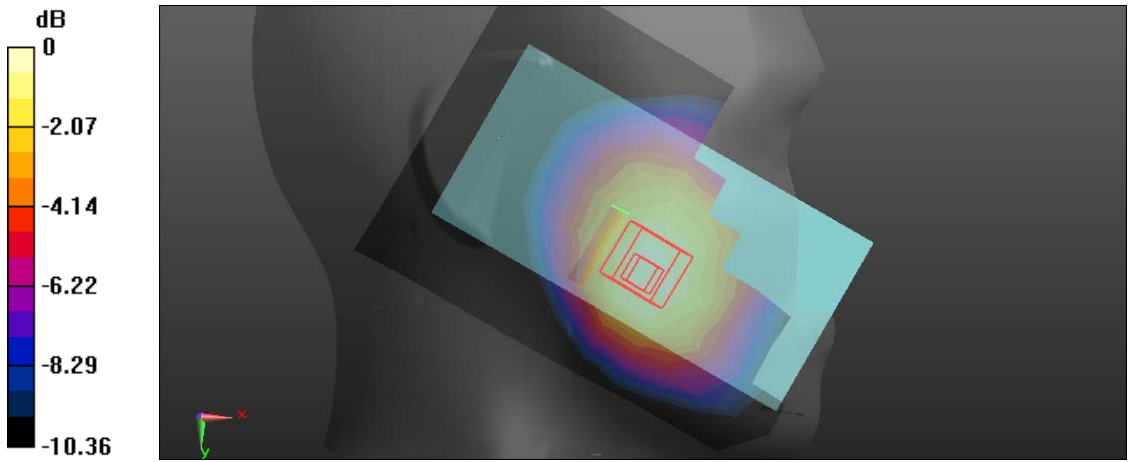
SYSTEM CHECKING SCANS	2450 MHz Head
Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.79 \text{ S/m}$; $\epsilon_r = 39.208$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.35, 4.35, 4.35); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2015/8/19 - Phantom: SAM 1659; Type: QD000P40CD; Serial: TP:1659 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 17.1 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 28.8 W/kg SAR(1 g) = 13.12 W/kg; SAR(10 g) = 5.92 W/kg Maximum value of SAR (measured) = 17.0 W/kg	
	

SYSTEM CHECKING SCANS	2450MHz Flat
Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.965 \text{ S/m}$; $\epsilon_r = 52.042$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.19, 4.19, 4.19); Calibrated: 8/29/2016; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2015/8/19 - Phantom: SAM 1659; Type: QD000P40CD; Serial: TP:1659 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164) System Performance Check at Frequencies 2450MHz Flat/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 17.1 W/kg System Performance Check at Frequencies 2450MHz Flat/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.3 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 28.0 W/kg SAR(1 g) = 12.93 W/kg; SAR(10 g) = 5.78 W/kg Maximum value of SAR (measured) = 17.4 W/kg	

GSM (850MHz/Head)

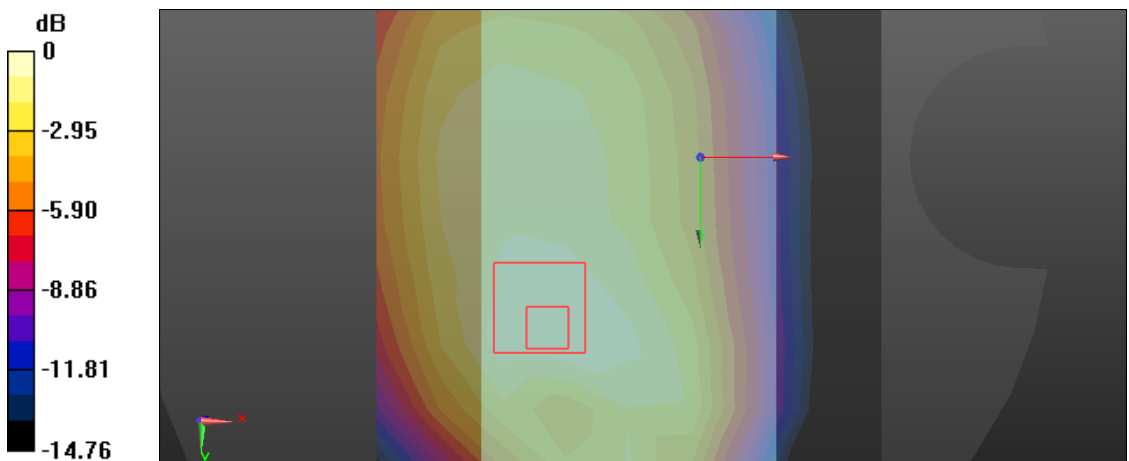
Left Side	Cheek
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL 850/850GSM HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0699 W/kg Head-Section Left HSL 850/850GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.323 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.144 W/kg SAR(1 g) = 0.076 W/kg; SAR(10 g) = 0.042 W/kg Maximum value of SAR (measured) = 0.0834 W/kg dB 0 -5.09 -10.18 -15.28 -20.37 -25.46  0 dB = 0.0834 W/kg = -10.79 dBW/kg	

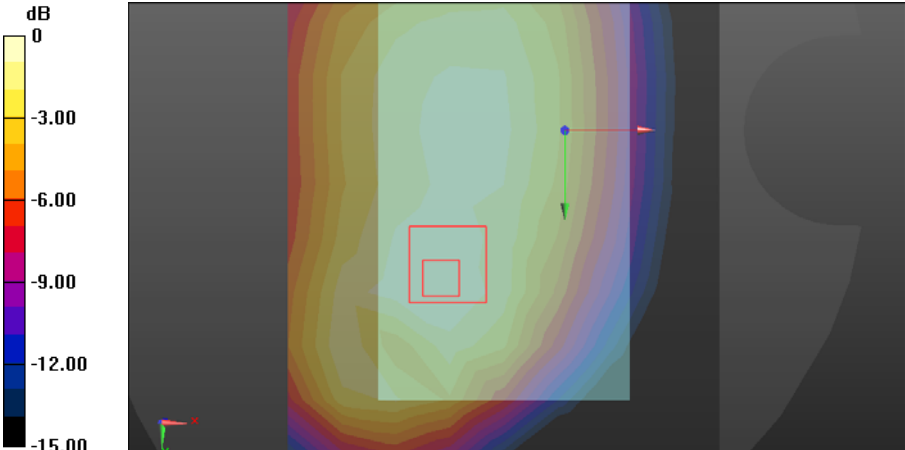
Left Side	Tilt
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL 850/850GSM HSL tilt M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0265 W/kg Head-Section Left HSL 850/850GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.598 V/m; Power Drift = -0.18 dB Peak SAR (extrapolated) = 0.0510 W/kg SAR(1 g) = 0.028 W/kg; SAR(10 g) = 0.016 W/kg Maximum value of SAR (measured) = 0.0303 W/kg  0 dB = 0.0303 W/kg = -15.19 dBW/kg	

Right Side	Cheek
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL 850/850GSM HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.258 W/kg Head-Section Right HSL 850/850GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.684 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 0.334 W/kg SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.191 W/kg Maximum value of SAR (measured) = 0.265 W/kg  0 dB = 0.265 W/kg = -5.77 dBW/kg	

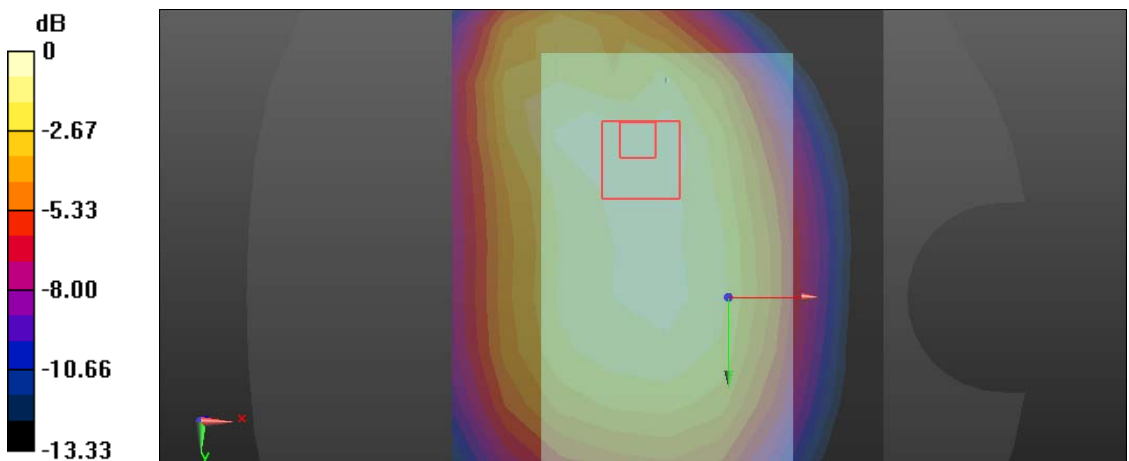
Right Side	Tilt
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL 850/850GSM HSL tilt M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.134 W/kg Head-Section Right HSL 850/850GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.250 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.156 W/kg SAR(1 g) = 0.128 W/kg; SAR(10 g) = 0.101 W/kg dB 0 -1.76 -3.51 -5.27 -7.02 -8.78 0 dB = 0.134 W/kg = -8.73 dBW/kg	

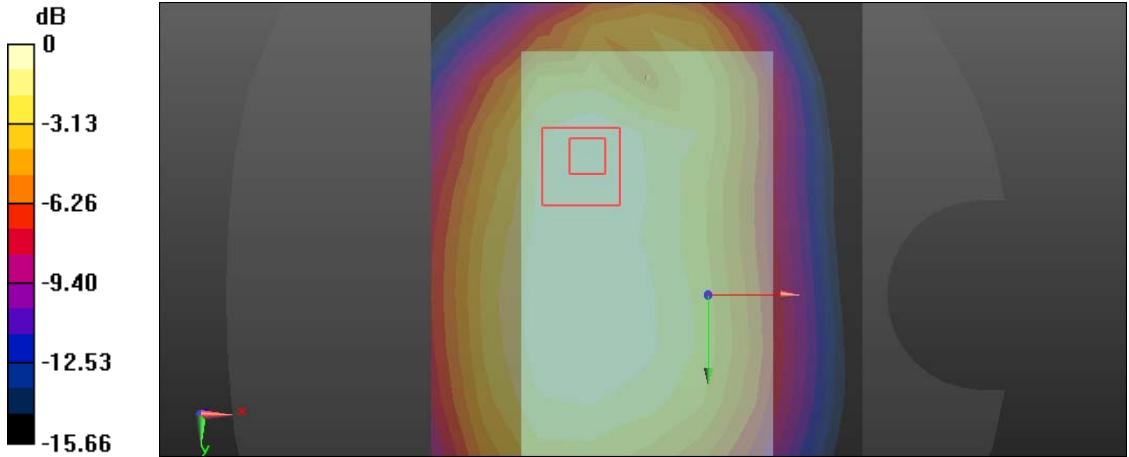
GSM with headset (850MHz/Flat)

FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TP/850GSM TP M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.378 W/kg Flat-Section MSL 850 TP/850GSM TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 15.66 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.536 W/kg SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.259 W/kg Maximum value of SAR (measured) = 0.392 W/kg	
 0 dB = 0.392 W/kg = -4.07 dBW/kg	

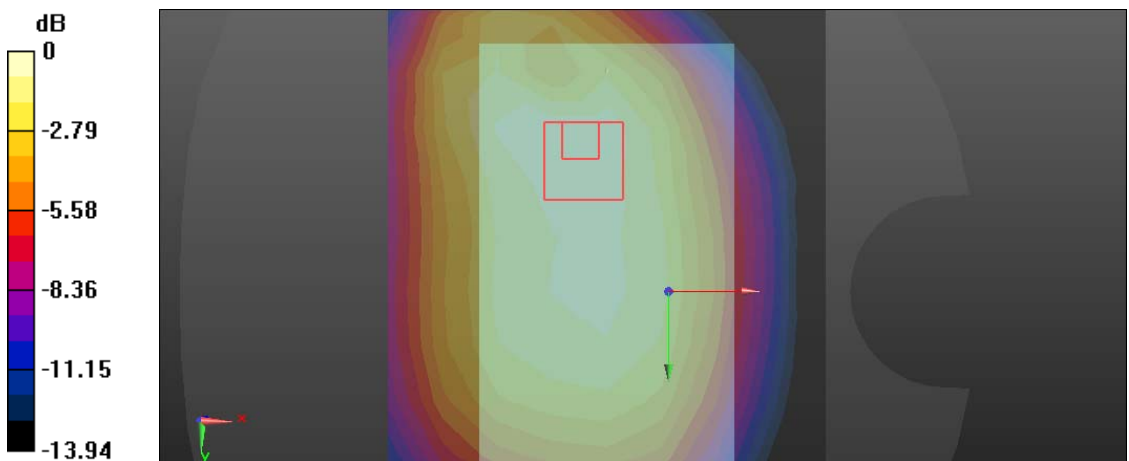
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TG/850GSM TG M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.447 W/kg Flat-Section MSL 850 TG/850GSM TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 19.99 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.591 W/kg SAR(1 g) = 0.420 W/kg; SAR(10 g) = 0.298 W/kg Maximum value of SAR (measured) = 0.448 W/kg  0 dB = 0.448 W/kg = -3.49 dBW/kg	

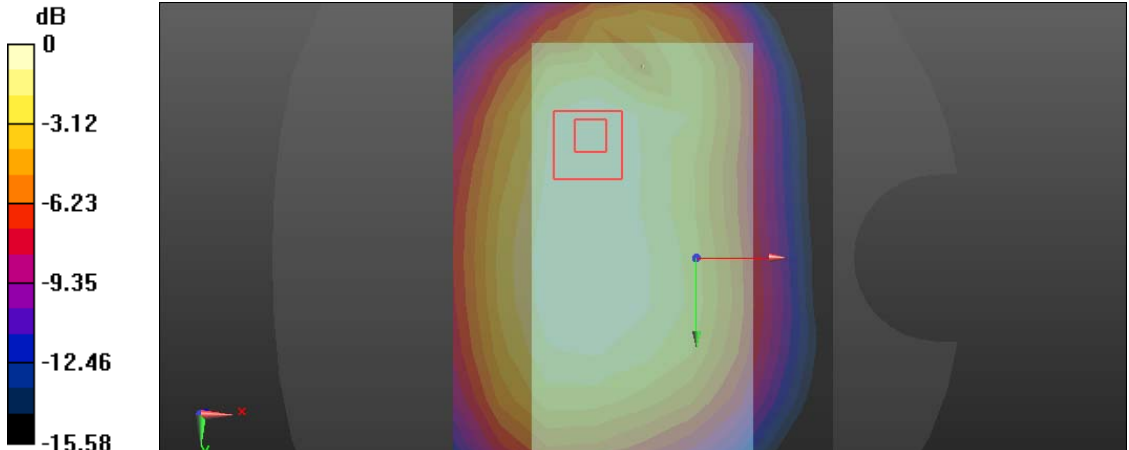
GSM (850MHz with GPRS/Flat)

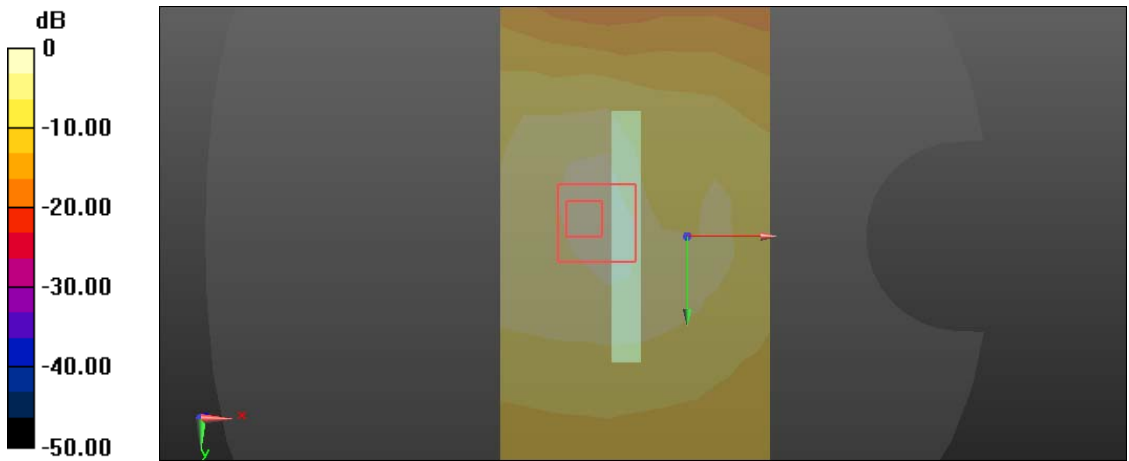
FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TP/850GPRS TP M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.723 W/kg Flat-Section MSL 850 TP/850GPRS TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 26.20 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.983 W/kg SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.503 W/kg Maximum value of SAR (measured) = 0.743 W/kg	
 0 dB = 0.743 W/kg = -1.29 dBW/kg	

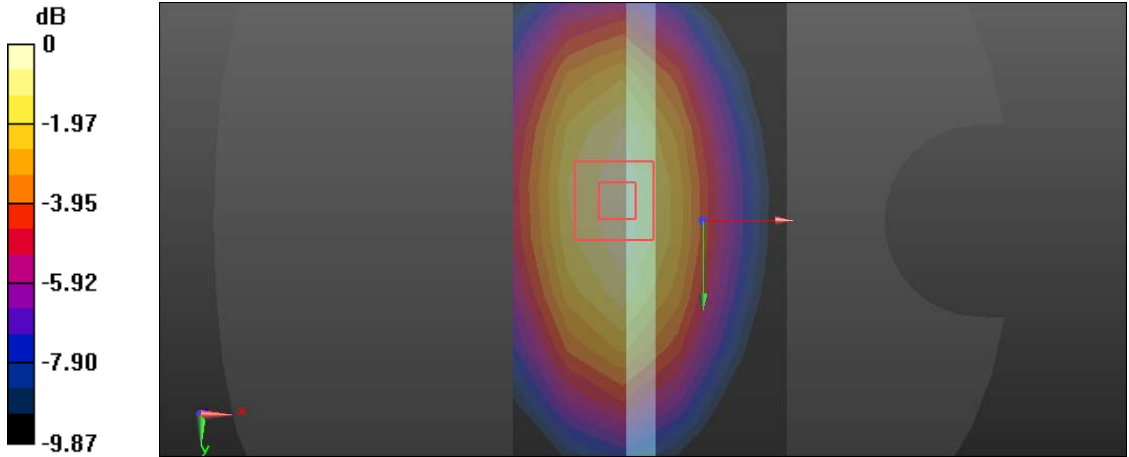
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TG/850GPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.821 W/kg Flat-Section MSL 850 TG/850GPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 27.07 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 1.06 W/kg SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.563 W/kg Maximum value of SAR (measured) = 0.833 W/kg  0 dB = 0.833 W/kg = -0.79 dBW/kg	

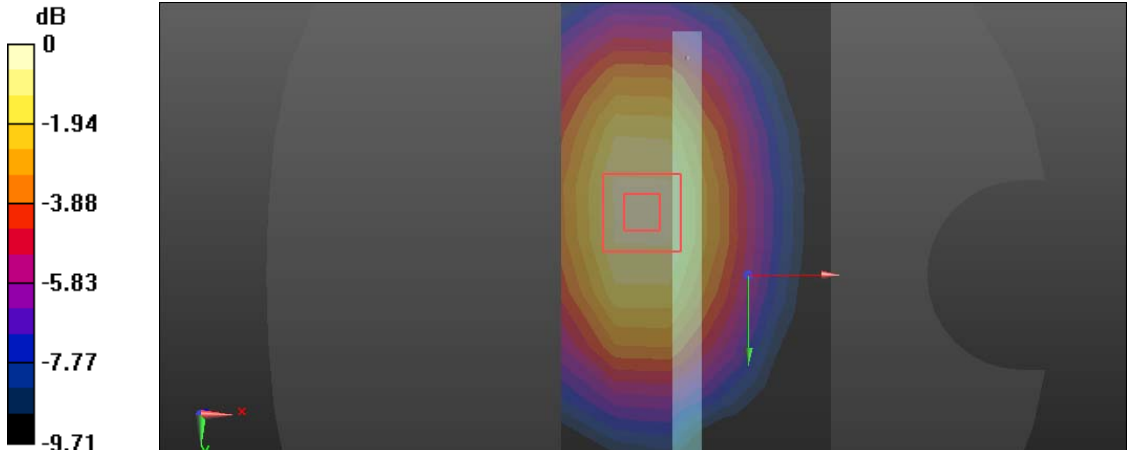
GSM (850MHz with EGPRS/Flat)

FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TP/850EDGE TP M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.709 W/kg Flat-Section MSL 850 TP/850EDGE TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 26.06 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.975 W/kg SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.504 W/kg Maximum value of SAR (measured) = 0.747 W/kg	
 0 dB = 0.747 W/kg = -1.27 dBW/kg	

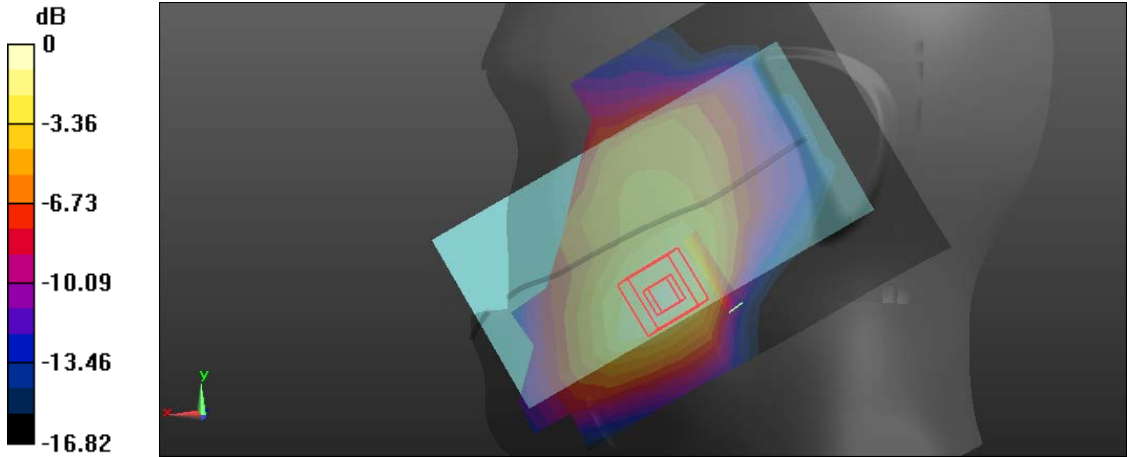
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TG/850EGPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.829 W/kg Flat-Section MSL 850 TG/850EGPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 27.01 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 1.08 W/kg SAR(1 g) = 0.787 W/kg; SAR(10 g) = 0.565 W/kg Maximum value of SAR (measured) = 0.837 W/kg  0 dB = 0.837 W/kg = -0.77 dBW/kg	

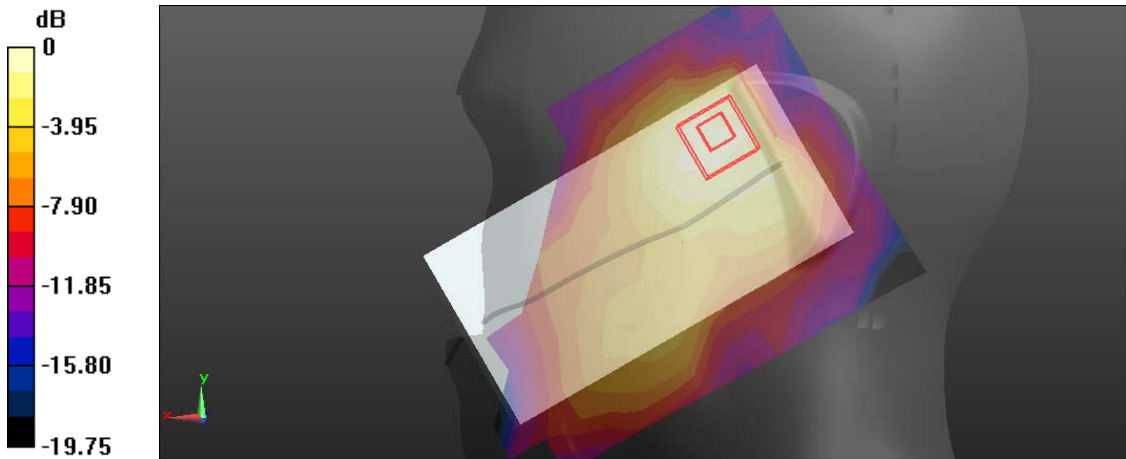
FLAT	EDGE2
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL GSM850 HOT/850EGPRS TP H edge 2/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.320 W/kg Flat-Section MSL GSM850 HOT/850EGPRS TP H edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 14.86 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.750 W/kg SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.189 W/kg Maximum value of SAR (measured) = 0.435 W/kg  0 dB = 0.435 W/kg = -3.62 dBW/kg	

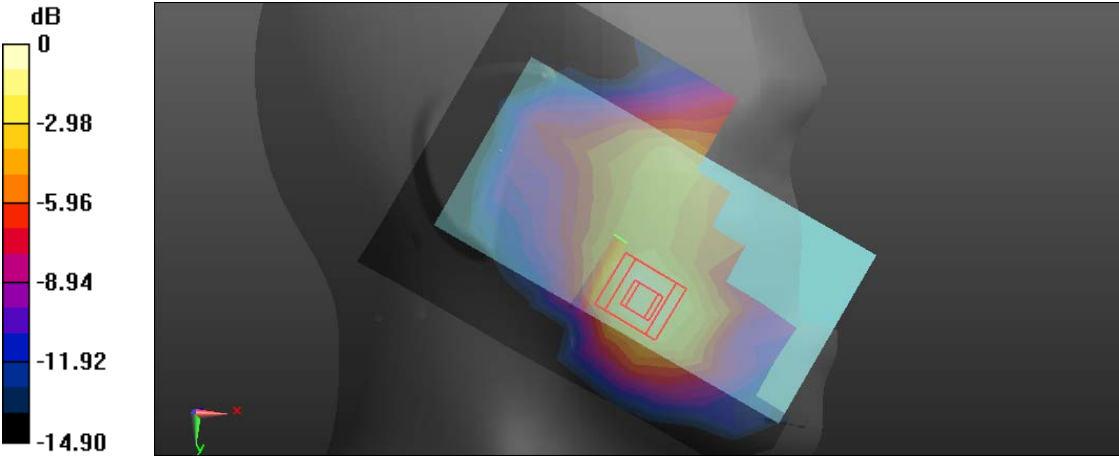
FLAT	EDGE3
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL GSM850 HOT/850EGPRS TP H edge 3/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.750 W/kg Flat-Section MSL GSM850 HOT/850EGPRS TP H edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 26.89 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.05 W/kg SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.480 W/kg Maximum value of SAR (measured) = 0.757 W/kg  0 dB = 0.757 W/kg = -1.21 dBW/kg	

FLAT	EDGE4
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL GSM850 HOT/850EGPRS TP H edge 4/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.325 W/kg Flat-Section MSL GSM850 HOT/850EGPRS TP H edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 16.00 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.504 W/kg SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.233 W/kg Maximum value of SAR (measured) = 0.366 W/kg  0 dB = 0.366 W/kg = -4.37 dBW/kg	

GSM (1900MHz/Head)

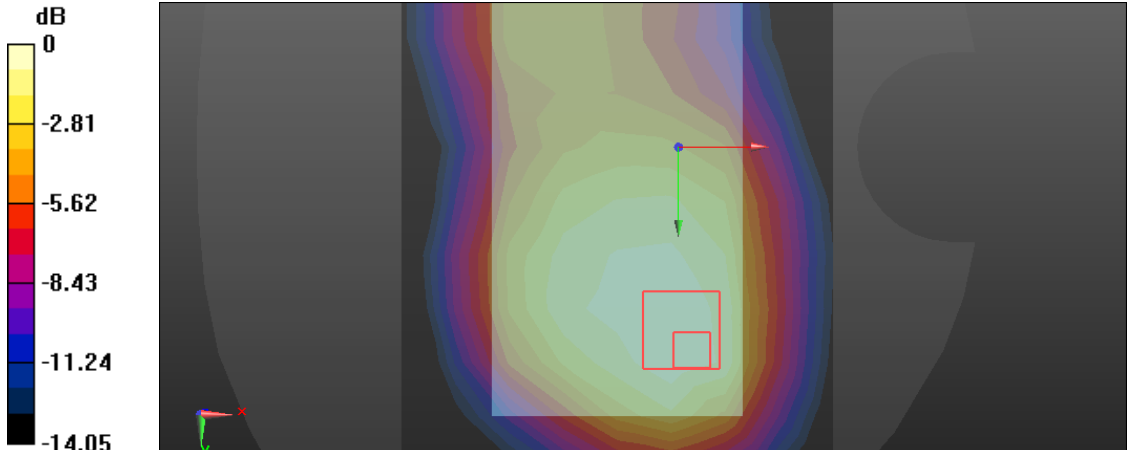
Left Side	Cheek
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL 1900 LEFT/1900GSM HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.202 W/kg Head-Section HSL 1900 LEFT/1900GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.793 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.318 W/kg SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.136 W/kg Maximum value of SAR (measured) = 0.232 W/kg	
 0 dB = 0.232 W/kg = -6.35 dBW/kg	

Left Side	Tilt
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL 1900 LEFT/1900GSM HSL tilt M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0635 W/kg Head-Section HSL 1900 LEFT/1900GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.909 V/m; Power Drift = -0.20 dB Peak SAR (extrapolated) = 0.0950 W/kg SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.045 W/kg Maximum value of SAR (measured) = 0.0740 W/kg  0 dB = 0.0740 W/kg = -11.31 dBW/kg	

Right Side	Cheek
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL 1900 RIGHT/1900GSM HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.146 W/kg Head-Section HSL 1900 RIGHT/1900GSM HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.643 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.226 W/kg SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.099 W/kg Maximum value of SAR (measured) = 0.172 W/kg  0 dB = 0.172 W/kg = -7.64 dBW/kg	

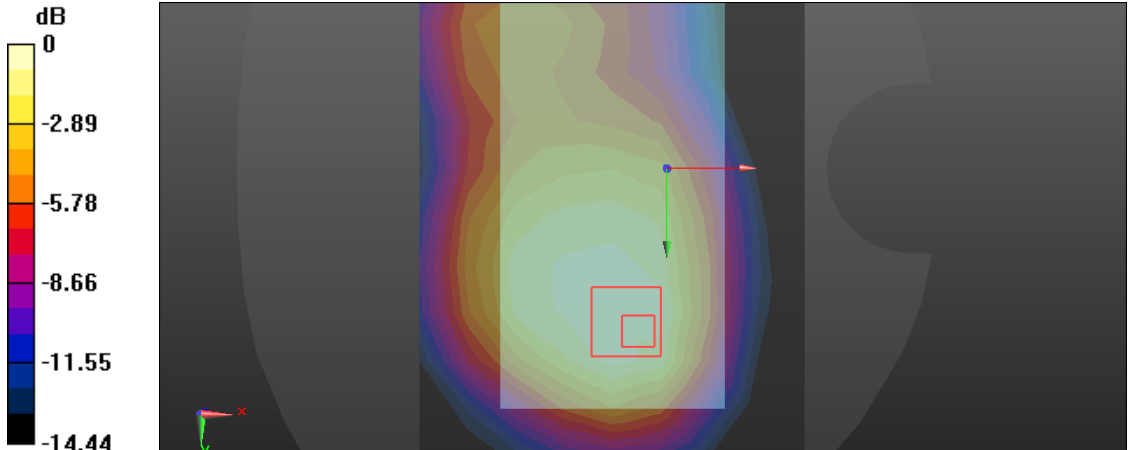
Right Side	Tilt
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL 1900 RIGHT/1900GSM HSL tilt M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0536 W/kg Head-Section HSL 1900 RIGHT/1900GSM HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.462 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 0.0890 W/kg SAR(1 g) = 0.056 W/kg; SAR(10 g) = 0.036 W/kg Maximum value of SAR (measured) = 0.0604 W/kg 0 dB = 0.0604 W/kg = -12.19 dBW/kg	

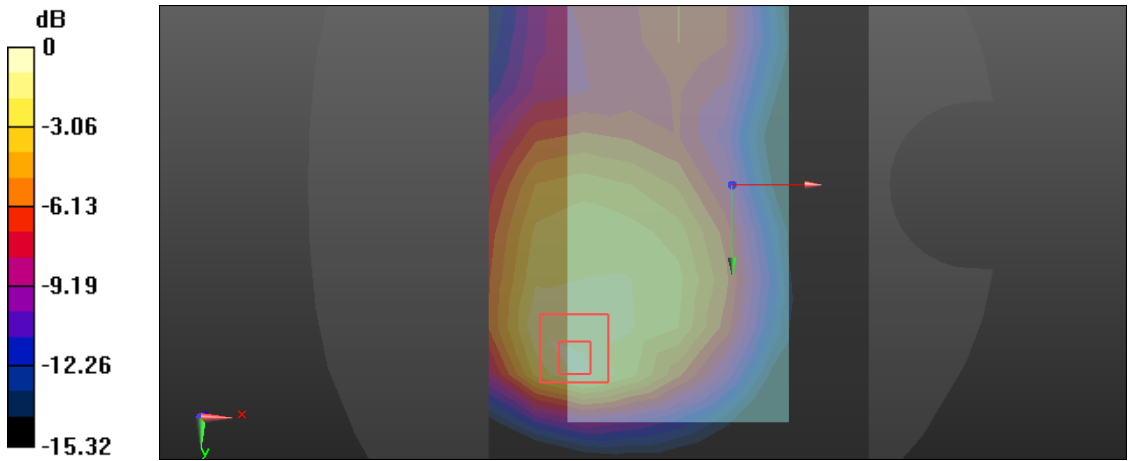
GSM with headset (1900MHz/Flat)

FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TP/1900GSM TP M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.218 W/kg Flat-Section MSL 1900 TP/1900GSM TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 8.398 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.338 W/kg SAR(1 g) = 0.213 W/kg; SAR(10 g) = 0.138 W/kg Maximum value of SAR (measured) = 0.227 W/kg	
 0 dB = 0.227 W/kg = -6.44 dBW/kg	

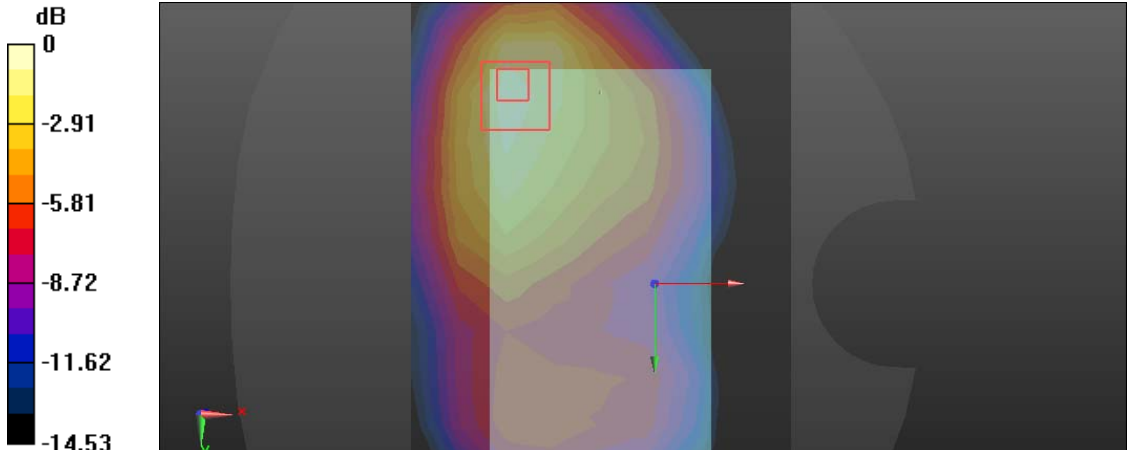
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TG/1900GSM TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.505 W/kg Flat-Section MSL 1900 TG/1900GSM TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.683 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.878 W/kg SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.302 W/kg Maximum value of SAR (measured) = 0.582 W/kg dB 0 -3.19 -6.38 -9.58 -12.77 -15.96 0 dB = 0.582 W/kg = -2.35 dBW/kg	

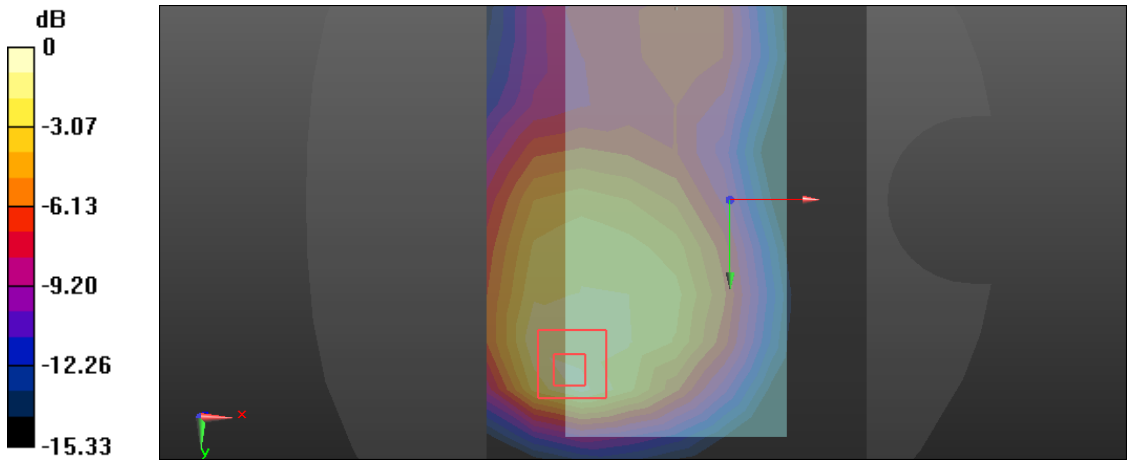
GSM (1900MHz with GPRS/Flat)

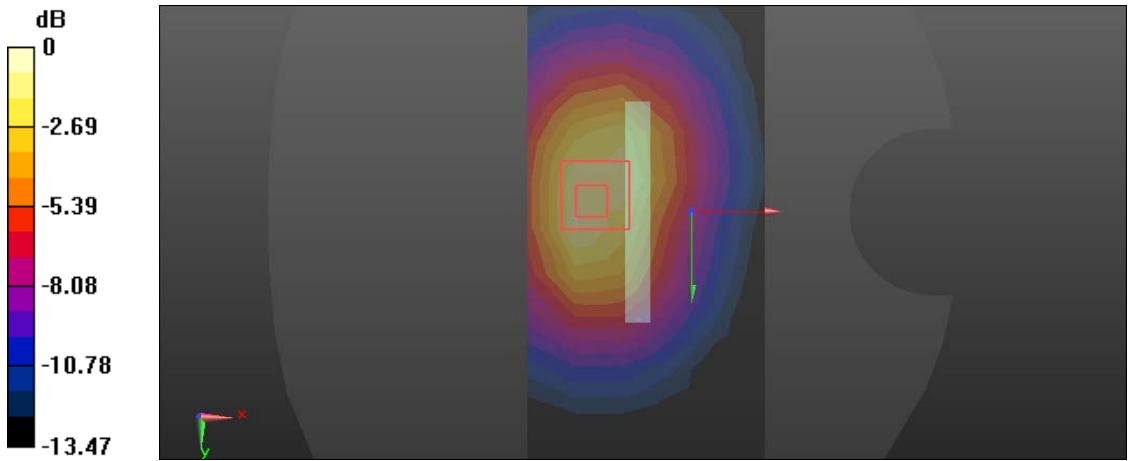
FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TP/1900GPRS TP M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.396 W/kg Flat-Section MSL 1900 TP/1900GPRS TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.61 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.668 W/kg SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.269 W/kg Maximum value of SAR (measured) = 0.451 W/kg	
 0 dB = 0.451 W/kg = -3.46 dBW/kg	

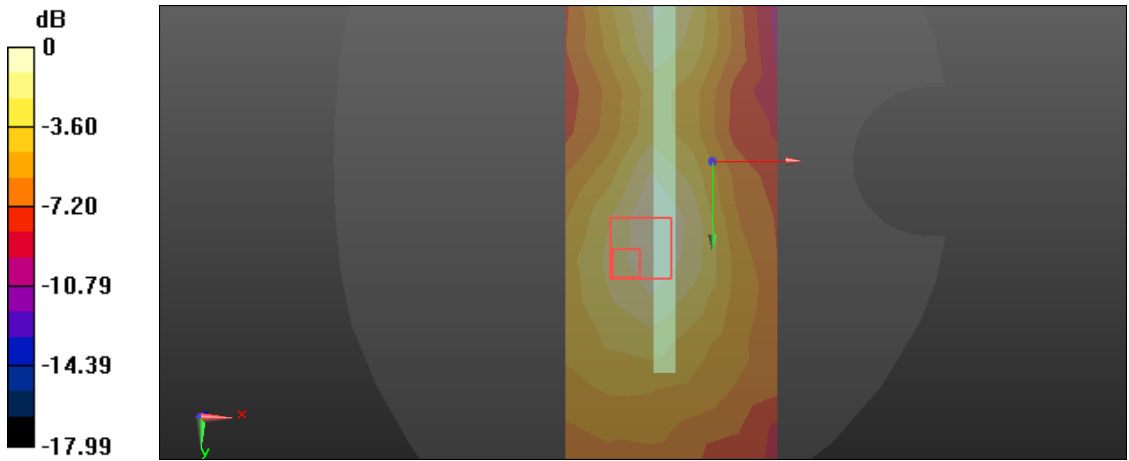
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TG/1900GPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.730 W/kg Flat-Section MSL 1900 TG/1900GPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.59 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 1.25 W/kg SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.450 W/kg Maximum value of SAR (measured) = 0.833 W/kg  0 dB = 0.833 W/kg = -0.79 dBW/kg	

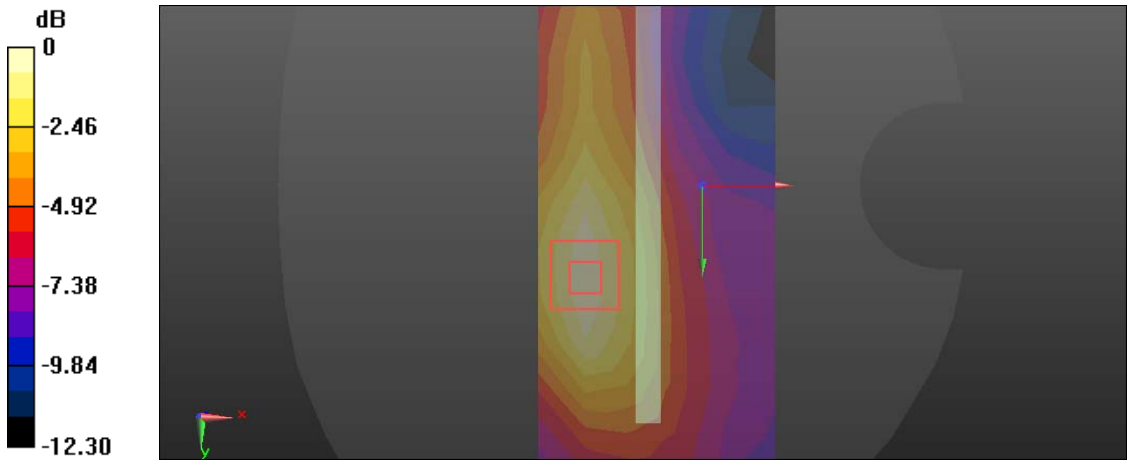
GSM (1900MHz with EGPRS/Flat)

FLAT	Towards phantom
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TP/1900EDGE TP M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.522 W/kg Flat-Section MSL 1900 TP/1900EDGE TP M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 8.130 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.820 W/kg SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.294 W/kg Maximum value of SAR (measured) = 0.532 W/kg	
 0 dB = 0.532 W/kg = -2.74 dBW/kg	

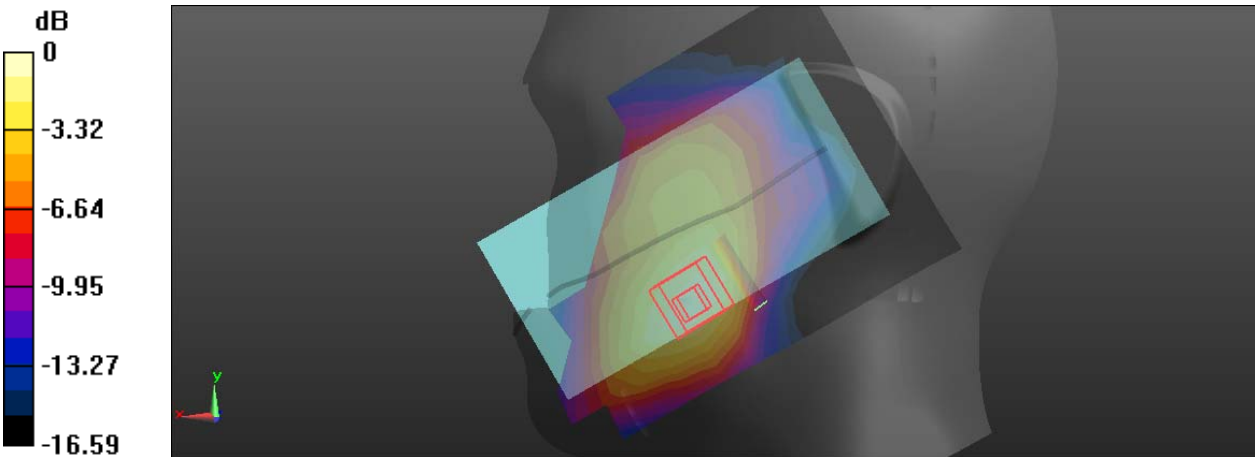
FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TG/1900EGPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.748 W/kg Flat-Section MSL 1900 TG/1900EGPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.69 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 1.30 W/kg SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.462 W/kg Maximum value of SAR (measured) = 0.860 W/kg  0 dB = 0.860 W/kg = -0.66 dBW/kg	

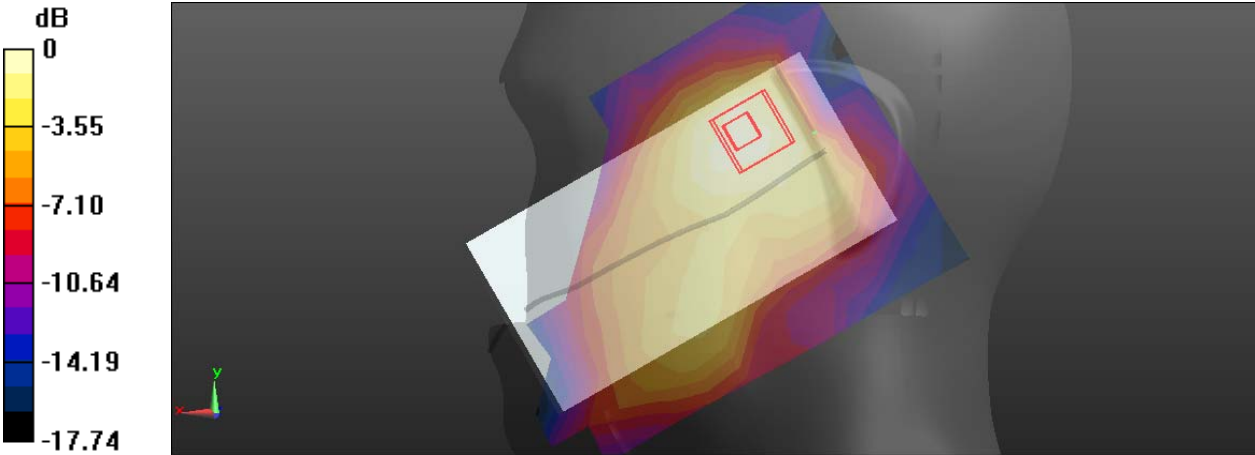
FLAT	EDGE2
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 HOTSPOT/1900EGPRS TP H edge 2/Area Scan (6x15x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.419 W/kg Flat-Section MSL 1900 HOTSPOT/1900EGPRS TP H edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 12.32 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 0.716 W/kg SAR(1 g) = 0.453 W/kg; SAR(10 g) = 0.273 W/kg Maximum value of SAR (measured) = 0.497 W/kg  0 dB = 0.497 W/kg = -3.04 dBW/kg	

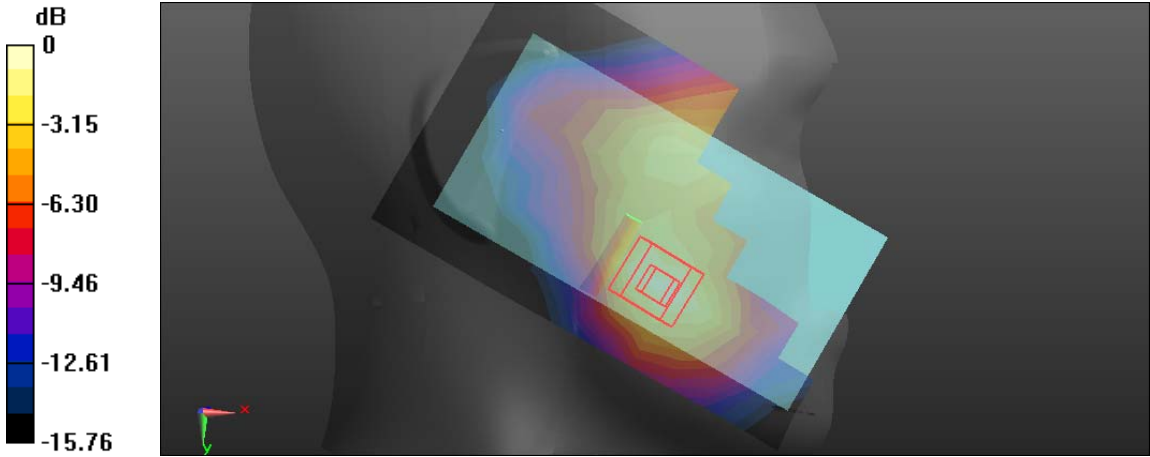
FLAT	EDGE3
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 HOTSPOT/1900EGPRS TP H edge 3/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.135 W/kg Flat-Section MSL 1900 HOTSPOT/1900EGPRS TP H edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.485 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.182 W/kg SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.064 W/kg Maximum value of SAR (measured) = 0.131 W/kg  0 dB = 0.131 W/kg = -8.83 dBW/kg	

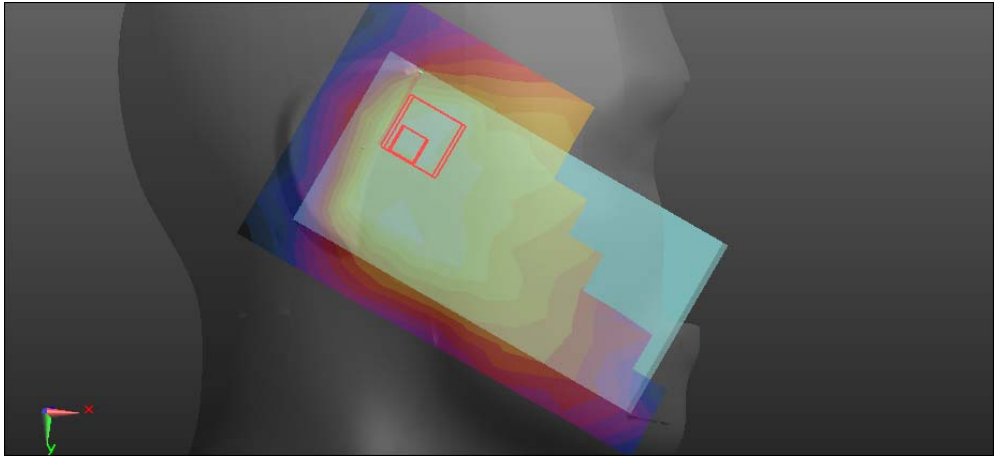
FLAT	EDGE4
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 HOTSPOT/1900EGPRS TP H edge 4/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.178 W/kg Flat-Section MSL 1900 HOTSPOT/1900EGPRS TP H edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.377 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.252 W/kg SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.107 W/kg Maximum value of SAR (measured) = 0.182 W/kg  0 dB = 0.182 W/kg = -7.40 dBW/kg	

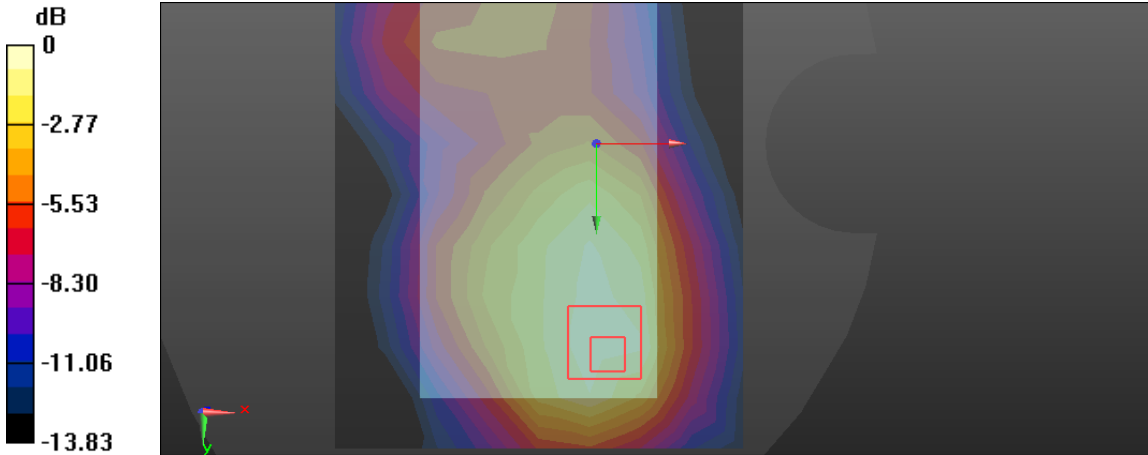
WCDMA Band 2

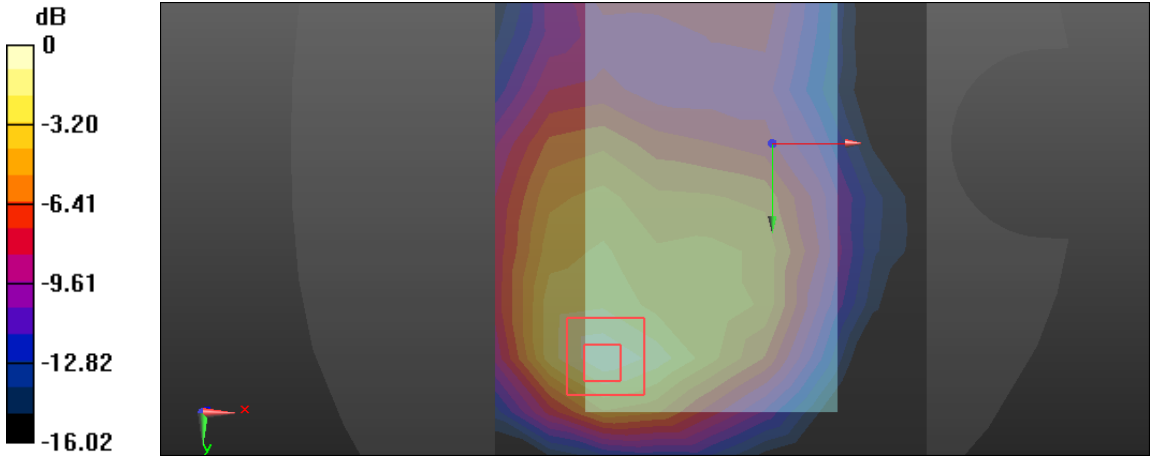
Left Side	Cheek
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band2 Left/wcdma band2 HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.392 W/kg Head-Section HSL wcdma band2 Left/wcdma band2 HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.210 V/m; Power Drift = 0.22 dB Peak SAR (extrapolated) = 0.599 W/kg SAR(1 g) = 0.372 W/kg; SAR(10 g) = 0.225 W/kg Maximum value of SAR (measured) = 0.404 W/kg  0 dB = 0.404 W/kg = -3.94 dBW/kg	

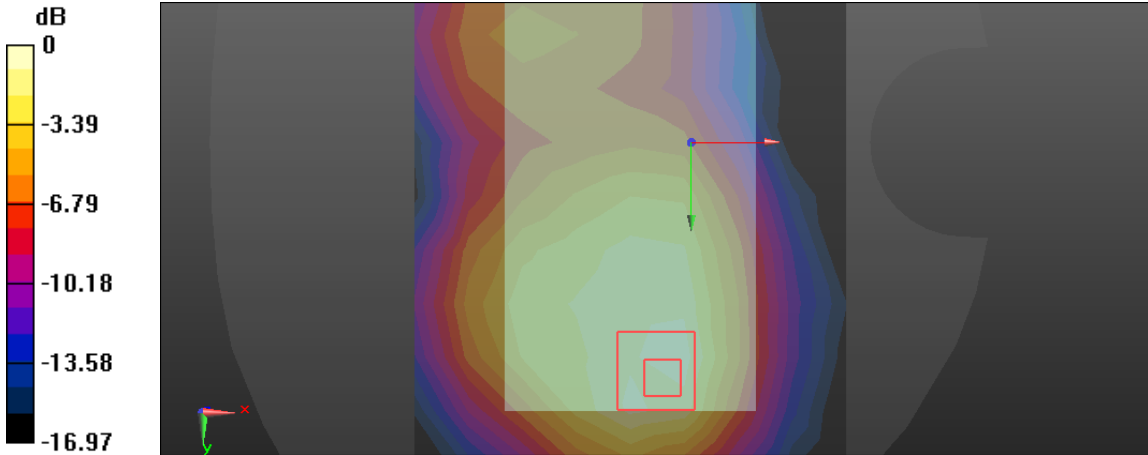
Left Side	Tilt
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band2 Left/wcdma band2 HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.124 W/kg Head-Section HSL wcdma band2 Left/wcdma band2 HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.227 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.192 W/kg SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.080 W/kg Maximum value of SAR (measured) = 0.136 W/kg  0 dB = 0.136 W/kg = -8.66 dBW/kg	

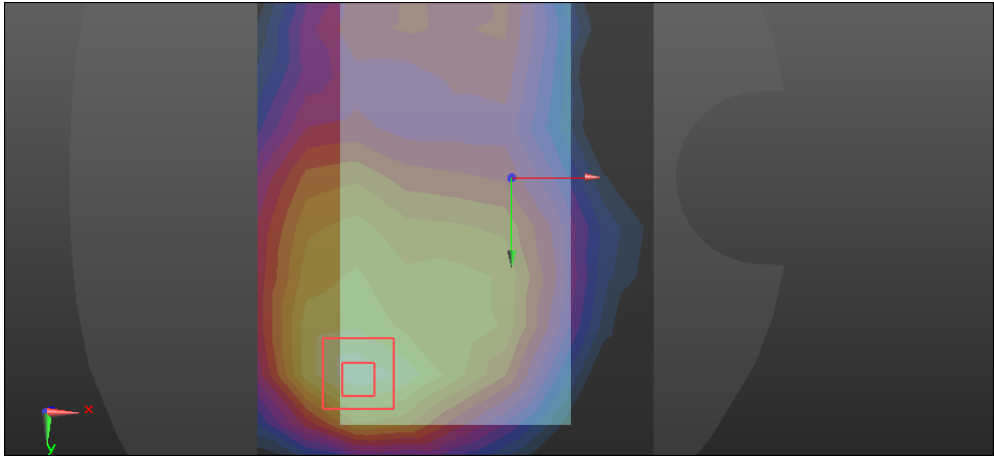
Right Side	Cheek
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band2 Right/wcdma band2 HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.264 W/kg Head-Section HSL wcdma band2 Right/wcdma band2 HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.458 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.380 W/kg SAR(1 g) = 0.250 W/kg; SAR(10 g) = 0.152 W/kg Maximum value of SAR (measured) = 0.272 W/kg  0 dB = 0.272 W/kg = -5.65 dBW/kg	

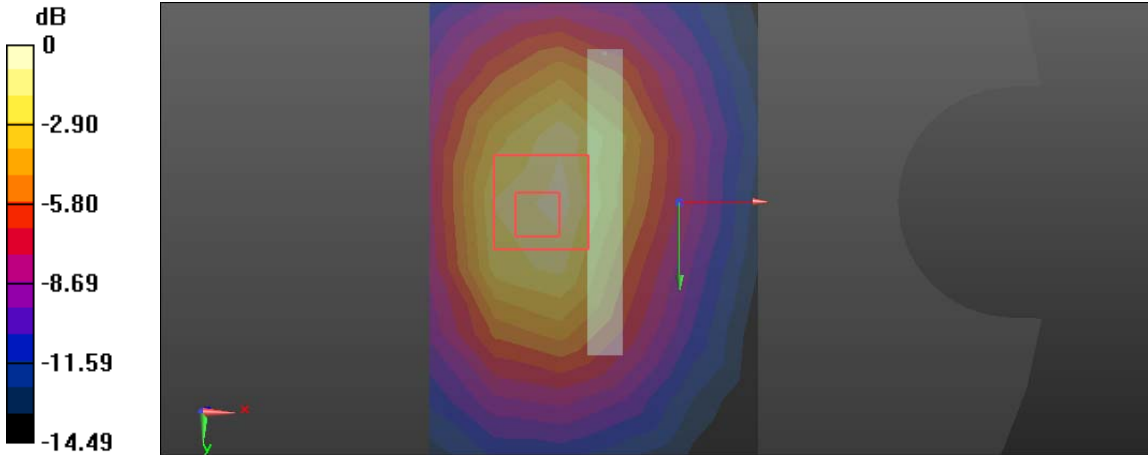
Right Side	Tilt
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band2 Right/wcdma band2 HSL tilt/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0881 W/kg Head-Section HSL wcdma band2 Right/wcdma band2 HSL tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.343 V/m; Power Drift = 0.21 dB Peak SAR (extrapolated) = 0.129 W/kg SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.052 W/kg Maximum value of SAR (measured) = 0.0953 W/kg dB 0 -3.09 -6.17 -9.26 -12.34 -15.43  0 dB = 0.0953 W/kg = -10.21 dBW/kg	

FLAT(VIOCE)	Towards phantom
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TP voice M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.461 W/kg Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TP voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.598 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.794 W/kg SAR(1 g) = 0.454 W/kg; SAR(10 g) = 0.276 W/kg Maximum value of SAR (measured) = 0.488 W/kg  0 dB = 0.488 W/kg = -3.12 dBW/kg	

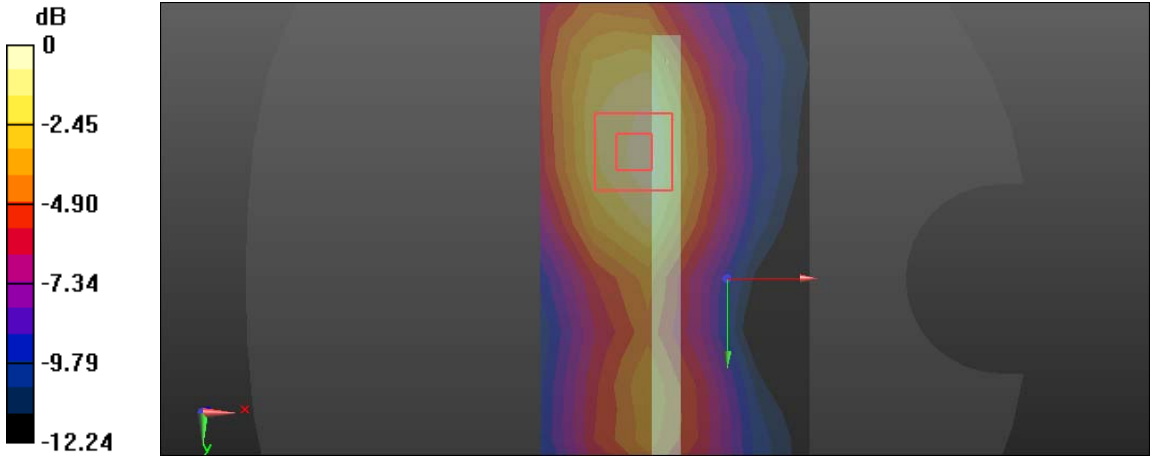
FLAT(VIOCE)	Towards ground
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TG voice M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.637 W/kg Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TG voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.305 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.01 W/kg SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.315 W/kg Maximum value of SAR (measured) = 0.632 W/kg  0 dB = 0.632 W/kg = -1.99 dBW/kg	

FLAT(DATA)	Towards phantom
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TP DATA M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.403 W/kg Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TP DATA M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.642 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.736 W/kg SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.241 W/kg Maximum value of SAR (measured) = 0.457 W/kg  0 dB = 0.457 W/kg = -3.40 dBW/kg	

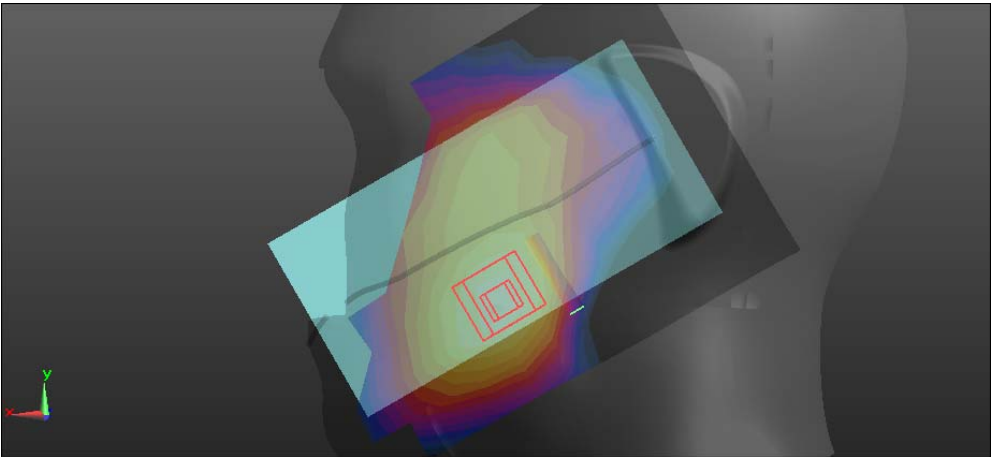
FLAT(DATA)	Towards ground
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TG DATA M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.628 W/kg Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TG DATA M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.611 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 0.999 W/kg SAR(1 g) = 0.568 W/kg; SAR(10 g) = 0.314 W/kg Maximum value of SAR (measured) = 0.633 W/kg dB 0 -3.25 -6.50 -9.75 -13.00 -16.25  0 dB = 0.633 W/kg = -1.99 dBW/kg	

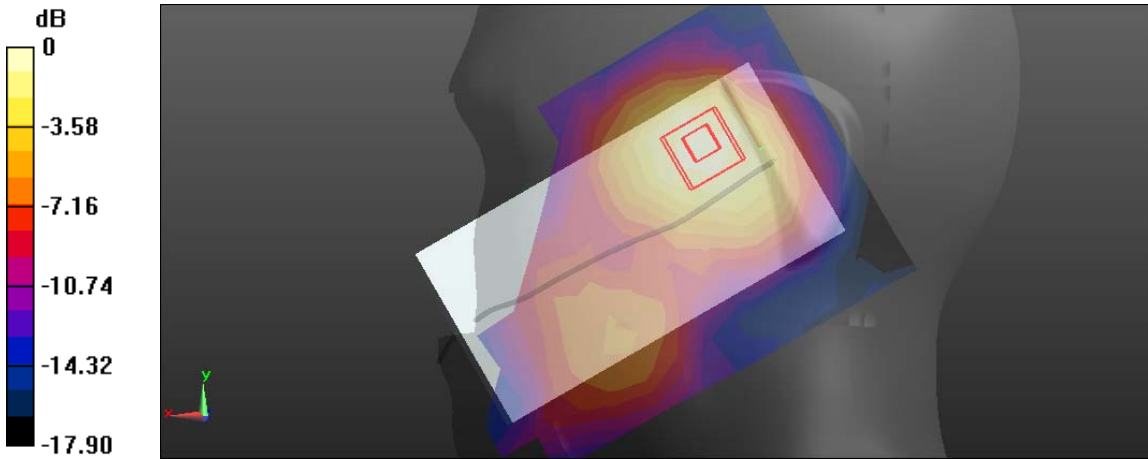
FLAT	EDGE2
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 HOT/wcdma band2 10mm M edge 2/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.542 W/kg Flat-Section MSL wcdma band2 HOT/wcdma band2 10mm M edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.82 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.893 W/kg SAR(1 g) = 0.541 W/kg; SAR(10 g) = 0.313 W/kg Maximum value of SAR (measured) = 0.593 W/kg  0 dB = 0.593 W/kg = -2.27 dBW/kg	

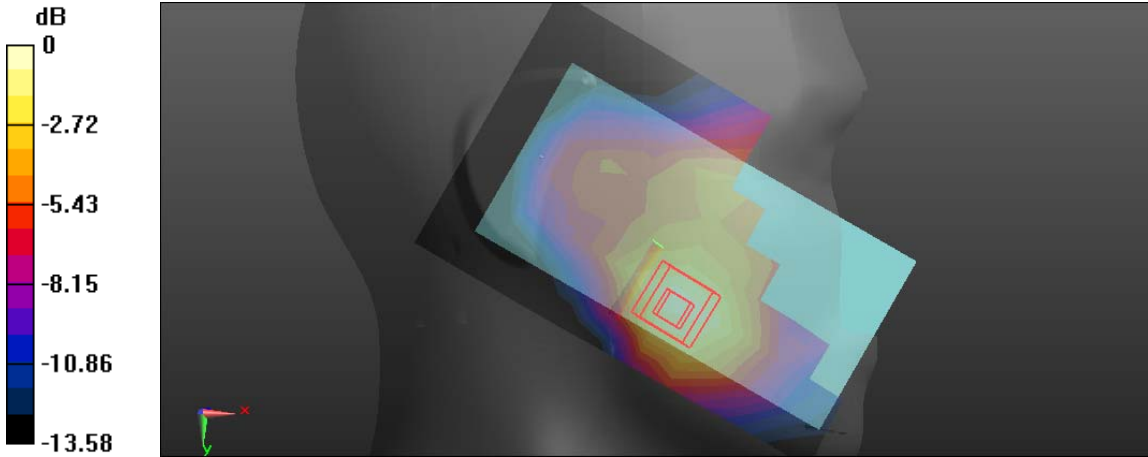
FLAT	EDGE3
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 HOT/wcdma band2 10mm M edge 3/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0766 W/kg Flat-Section MSL wcdma band2 HOT/wcdma band2 10mm M edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.139 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.131 W/kg SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.051 W/kg Maximum value of SAR (measured) = 0.0853 W/kg dB 0 -2.54 -5.08 -7.62 -10.16 -12.70 0 dB = 0.0853 W/kg = -10.69 dBW/kg	

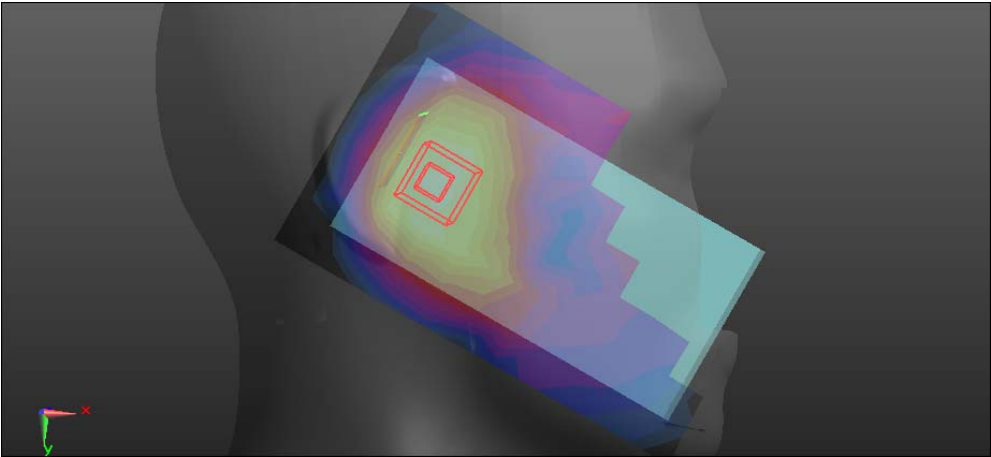
FLAT	EDGE4
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 HOT/wcdma band2 10mm M edge 4/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.392 W/kg Flat-Section MSL wcdma band2 HOT/wcdma band2 10mm M edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.672 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 0.604 W/kg SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.234 W/kg Maximum value of SAR (measured) = 0.415 W/kg  0 dB = 0.415 W/kg = -3.82 dBW/kg	

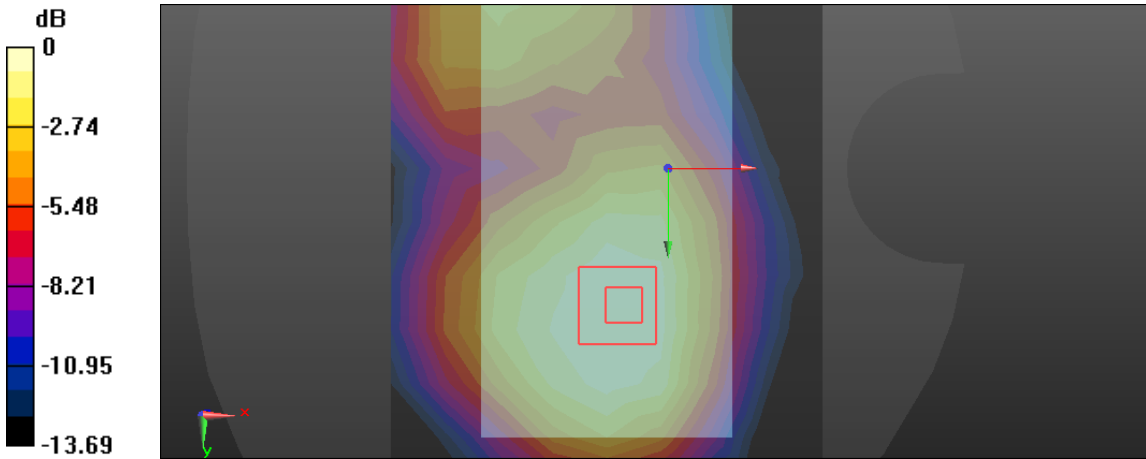
WCDMA Band 4

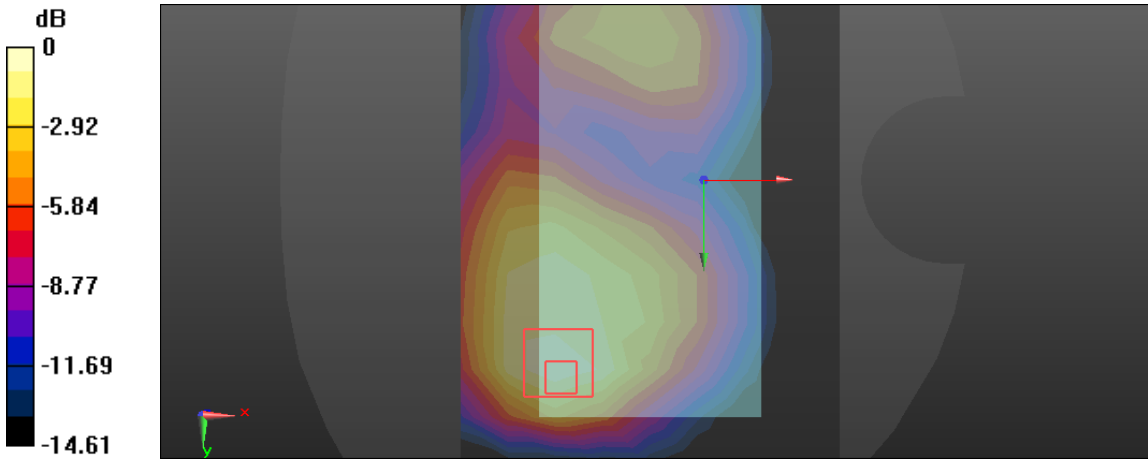
Left Side	Cheek
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band4 Left/wcdma band4 HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.345 W/kg Head-Section HSL wcdma band4 Left/wcdma band4 HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.368 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.529 W/kg SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.230 W/kg Maximum value of SAR (measured) = 0.379 W/kg dB 0 -2.90 -5.81 -8.71 -11.62 -14.52  0 dB = 0.379 W/kg = -4.21 dBW/kg	

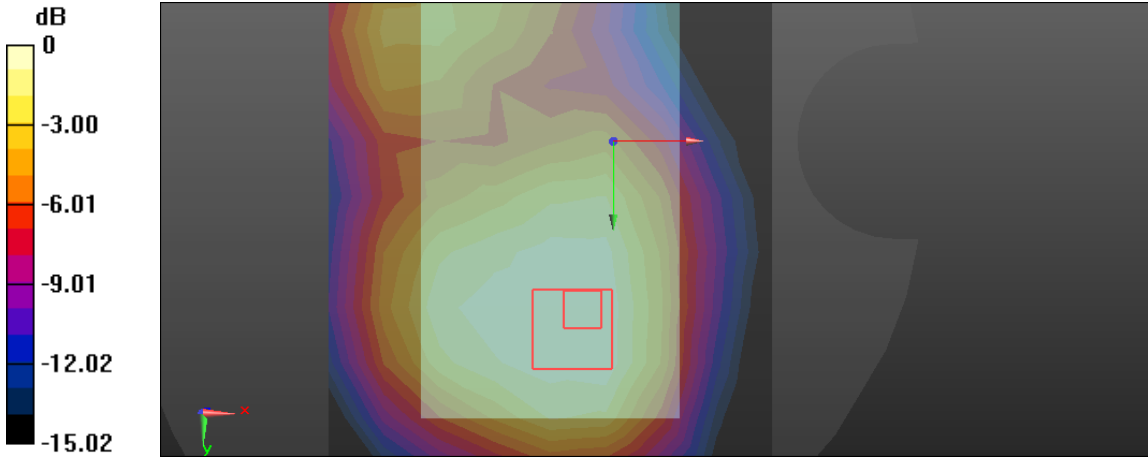
Left Side	Tilt
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band4 Left/wcdma band4 HSL tilt M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.209 W/kg Head-Section HSL wcdma band4 Left/wcdma band4 HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 10.23 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.275 W/kg SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.133 W/kg Maximum value of SAR (measured) = 0.213 W/kg  0 dB = 0.213 W/kg = -6.72 dBW/kg	

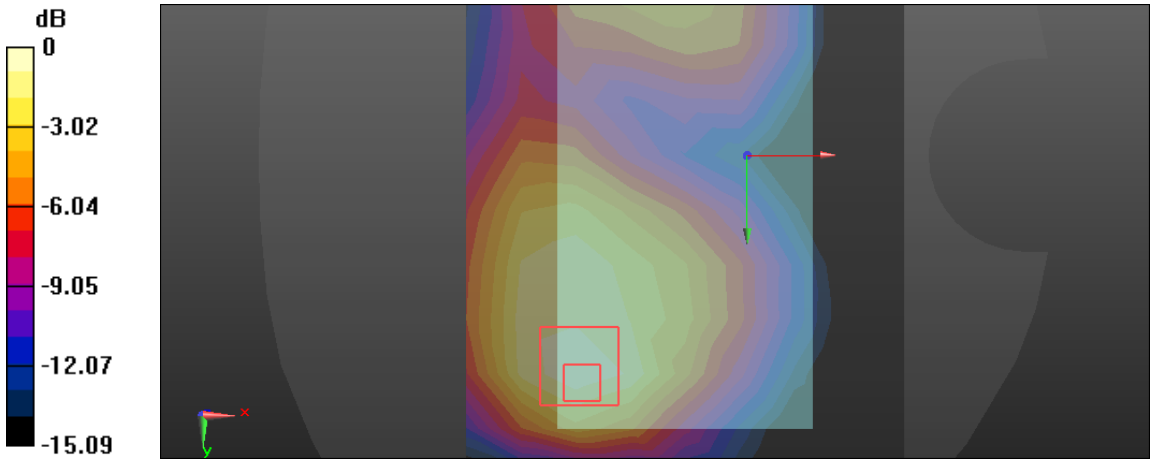
Right Side	Cheek
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band4 Right/wcdma band4 HSL touch M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.260 W/kg Head-Section HSL wcdma band4 Right/wcdma band4 HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.602 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.361 W/kg SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.157 W/kg Maximum value of SAR (measured) = 0.265 W/kg  0 dB = 0.265 W/kg = -5.77 dBW/kg	

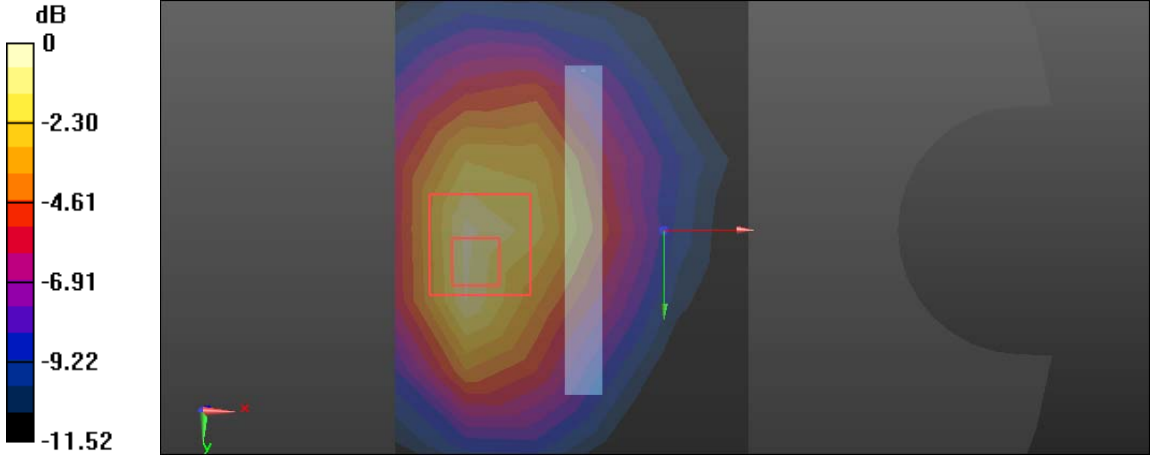
Right Side	Tilt
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band4 Right/wcdma band4 HSL tilt/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.168 W/kg Head-Section HSL wcdma band4 Right/wcdma band4 HSL tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 9.780 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.250 W/kg SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.110 W/kg Maximum value of SAR (measured) = 0.184 W/kg dB 0 -2.91 -5.82 -8.74 -11.65 -14.56  0 dB = 0.184 W/kg = -7.35 dBW/kg	

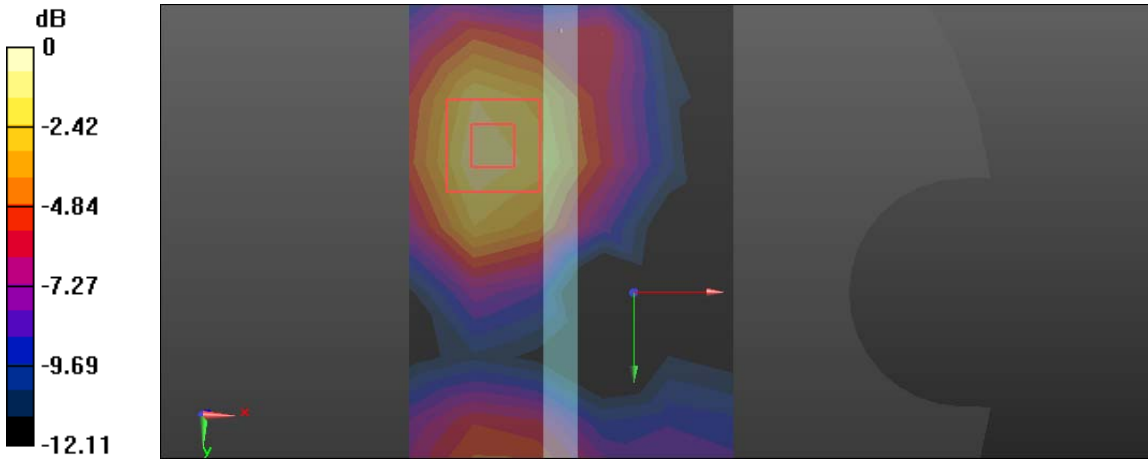
FLAT(VIOCE)	Towards phantom
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TP voice M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.399 W/kg Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TP voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 10.97 V/m; Power Drift = -0.19 dB Peak SAR (extrapolated) = 0.573 W/kg SAR(1 g) = 0.380 W/kg; SAR(10 g) = 0.251 W/kg Maximum value of SAR (measured) = 0.404 W/kg  0 dB = 0.404 W/kg = -3.94 dBW/kg	

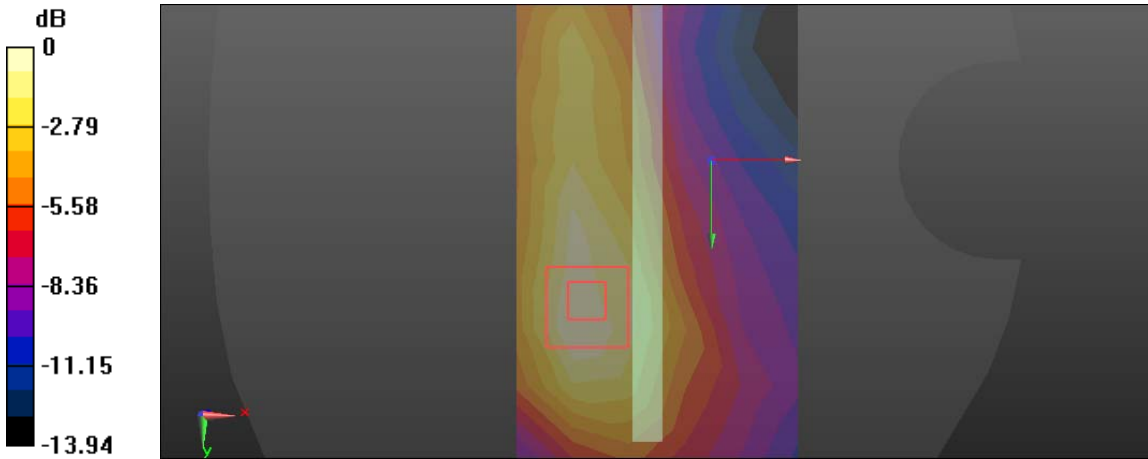
FLAT(VIOCE)	Towards ground
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TG voice M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.725 W/kg Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TG voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.566 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 1.14 W/kg SAR(1 g) = 0.662 W/kg; SAR(10 g) = 0.389 W/kg Maximum value of SAR (measured) = 0.730 W/kg  0 dB = 0.730 W/kg = -1.37 dBW/kg	

FLAT(DATA)	Towards phantom
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TP DATA M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.413 W/kg Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TP DATA M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 9.740 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.655 W/kg SAR(1 g) = 0.402 W/kg; SAR(10 g) = 0.264 W/kg Maximum value of SAR (measured) = 0.428 W/kg  0 dB = 0.428 W/kg = -3.69 dBW/kg	

FLAT(DATA)	Towards ground
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TG DATA M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.760 W/kg Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TG DATA M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.521 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 1.19 W/kg SAR(1 g) = 0.702 W/kg; SAR(10 g) = 0.420 W/kg Maximum value of SAR (measured) = 0.768 W/kg  0 dB = 0.768 W/kg = -1.15 dBW/kg	

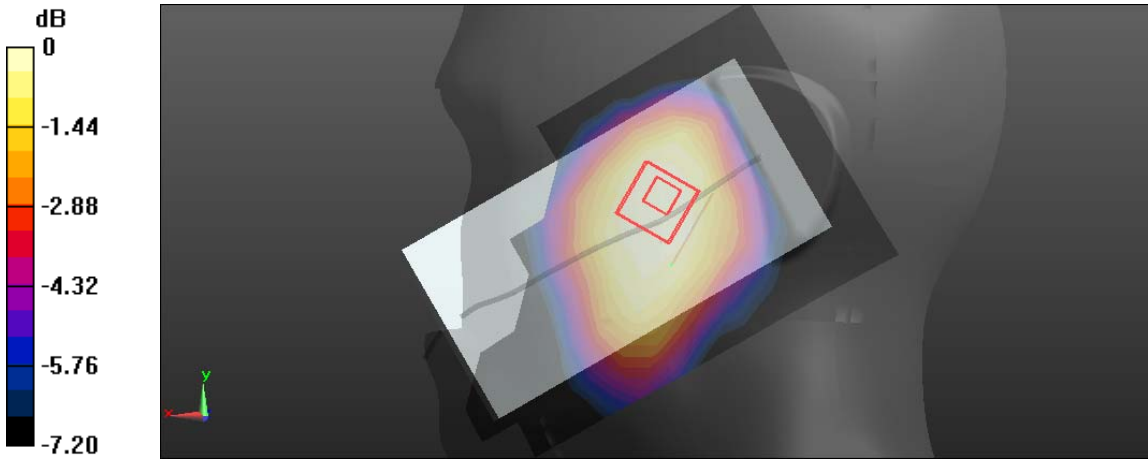
FLAT	EDGE2
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 HOT/wcdma band4 10mm M edge 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.372 W/kg Flat-Section MSL wcdma band4 HOT/wcdma band4 10mm M edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.17 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 0.558 W/kg SAR(1 g) = 0.373 W/kg; SAR(10 g) = 0.232 W/kg Maximum value of SAR (measured) = 0.413 W/kg  0 dB = 0.413 W/kg = -3.84 dBW/kg	

FLAT	EDGE3
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 HOT/wcdma band4 10mm M edge 3/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.124 W/kg Flat-Section MSL wcdma band4 HOT/wcdma band4 10mm M edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.861 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.206 W/kg SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.082 W/kg Maximum value of SAR (measured) = 0.147 W/kg  0 dB = 0.147 W/kg = -8.33 dBW/kg	

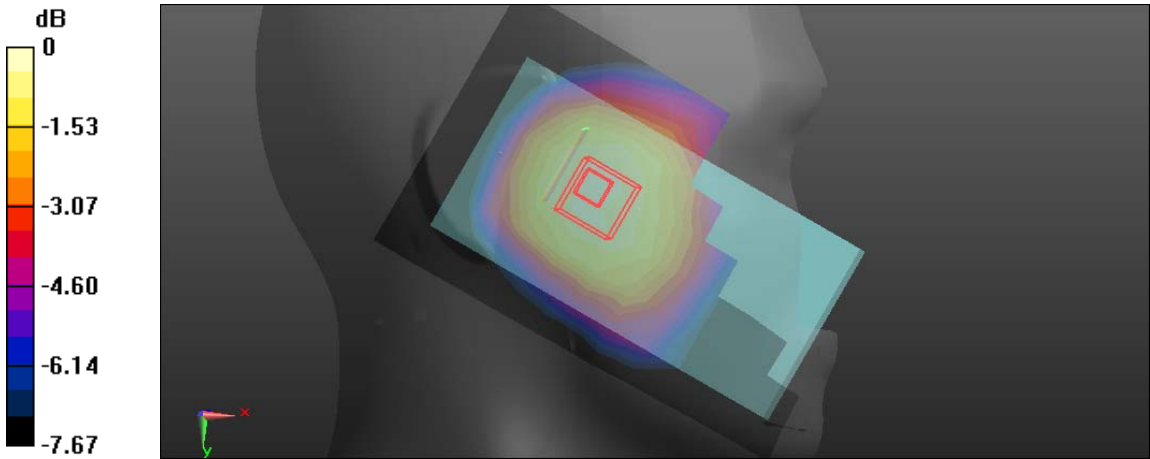
FLAT	EDGE4
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 HOT/wcdma band4 10mm M edge 4/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.226 W/kg Flat-Section MSL wcdma band4 HOT/wcdma band4 10mm M edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.757 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.323 W/kg SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.115 W/kg Maximum value of SAR (measured) = 0.207 W/kg  0 dB = 0.207 W/kg = -6.84 dBW/kg	

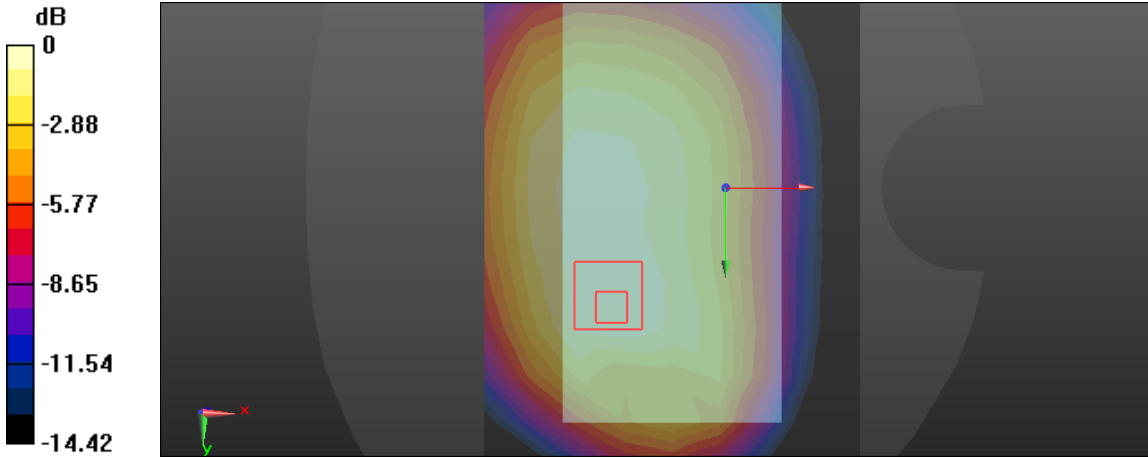
WCDMA Band 5

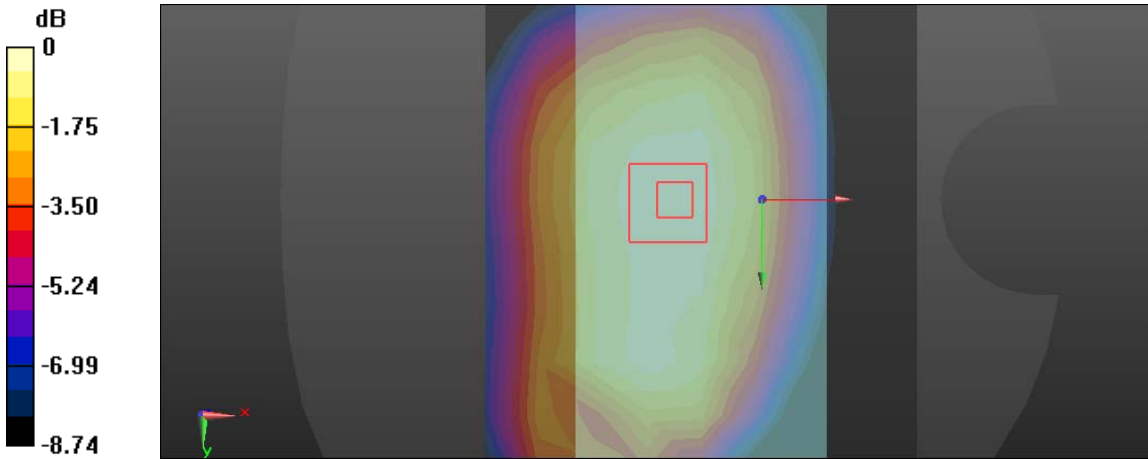
Left Side	Cheek
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band5 Left/wcdma band5 HSL touch M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.150 W/kg Head-Section HSL wcdma band5 Left/wcdma band5 HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.322 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.180 W/kg SAR(1 g) = 0.135 W/kg; SAR(10 g) = 0.096 W/kg Maximum value of SAR (measured) = 0.152 W/kg dB 0 -2.26 -4.53 -6.79 -9.06 -11.32 0 dB = 0.152 W/kg = -8.18 dBW/kg	

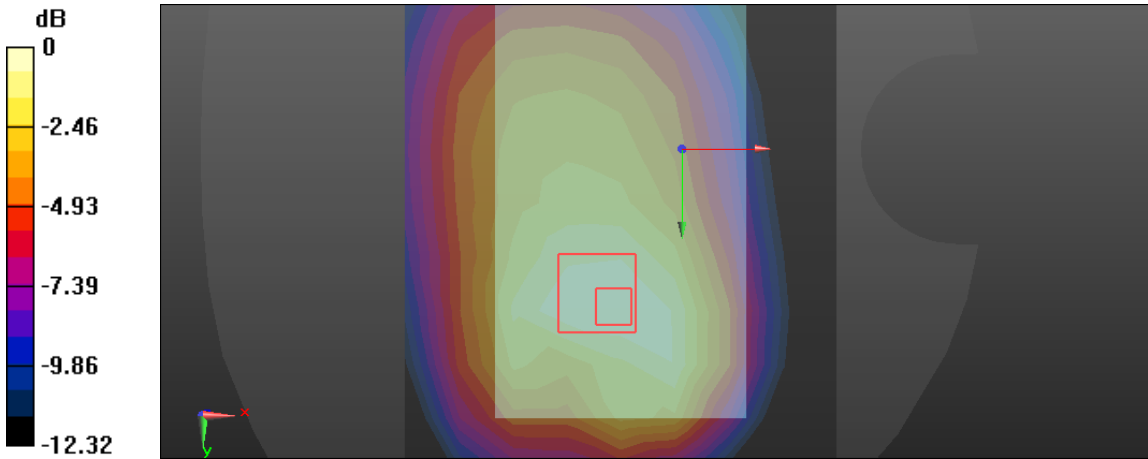
Left Side	Tilt
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band5 Left/wcdma band5 HSL tilt/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0711 W/kg Head-Section HSL wcdma band5 Left/wcdma band5 HSL tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 4.678 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.0790 W/kg SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.052 W/kg Maximum value of SAR (measured) = 0.0696 W/kg  0 dB = 0.0696 W/kg = -11.57 dBW/kg	

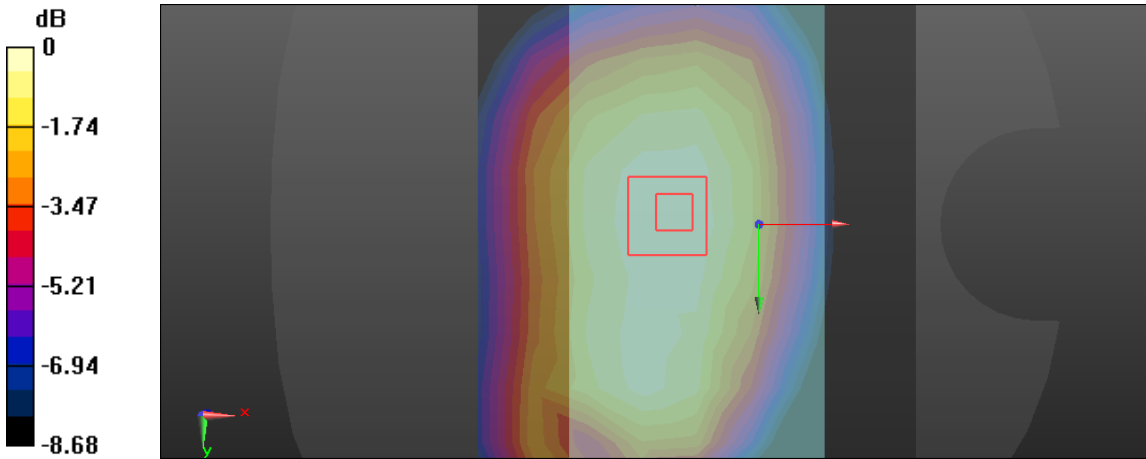
Right Side	Cheek
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band5 Right/wcdma band5 HSL touch M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.142 W/kg Head-Section HSL wcdma band5 Right/wcdma band5 HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.727 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.176 W/kg SAR(1 g) = 0.141 W/kg; SAR(10 g) = 0.111 W/kg Maximum value of SAR (measured) = 0.148 W/kg 0 dB = 0.148 W/kg = -8.30 dBW/kg	

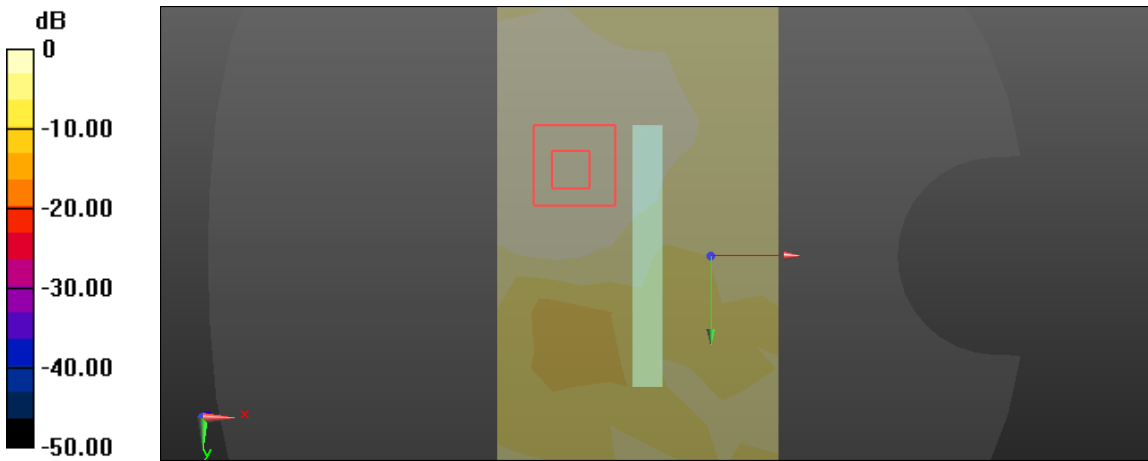
Right Side	Tilt
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.478$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.05, 9.05, 9.05); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL wcdma band5 Right/wcdma band5 HSL tilt/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0989 W/kg Head-Section HSL wcdma band5 Right/wcdma band5 HSL tilt/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.516 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.120 W/kg SAR(1 g) = 0.098 W/kg; SAR(10 g) = 0.078 W/kg Maximum value of SAR (measured) = 0.102 W/kg  0 dB = 0.102 W/kg = -9.91 dBW/kg	

FLAT(VIOCE)	Towards phantom
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TP voice M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.280 W/kg Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TP voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 15.18 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.377 W/kg SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.205 W/kg Maximum value of SAR (measured) = 0.298 W/kg  0 dB = 0.298 W/kg = -5.26 dBW/kg	

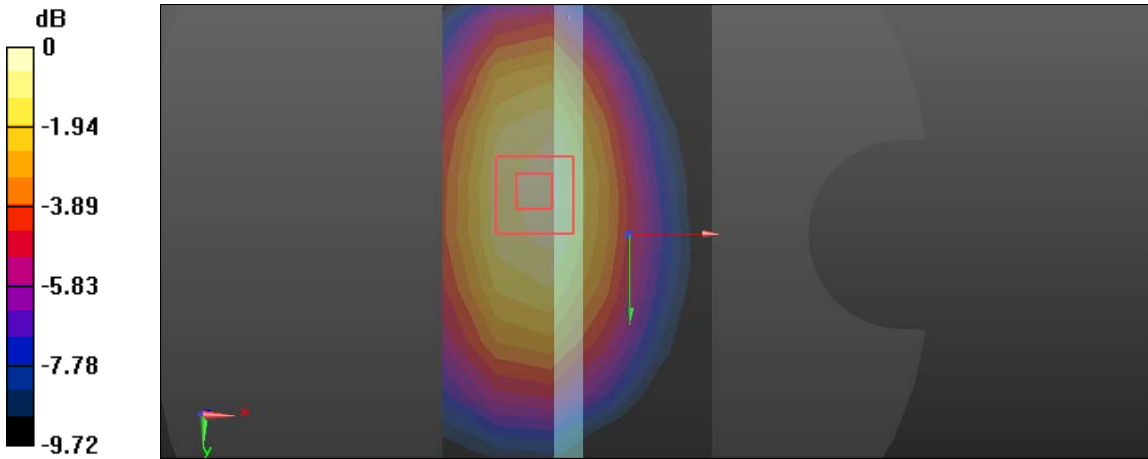
FLAT(VIOCE)	Towards ground
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TG voice M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.346 W/kg Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TG voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 19.03 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.437 W/kg SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.253 W/kg Maximum value of SAR (measured) = 0.352 W/kg  0 dB = 0.352 W/kg = -4.53 dBW/kg	

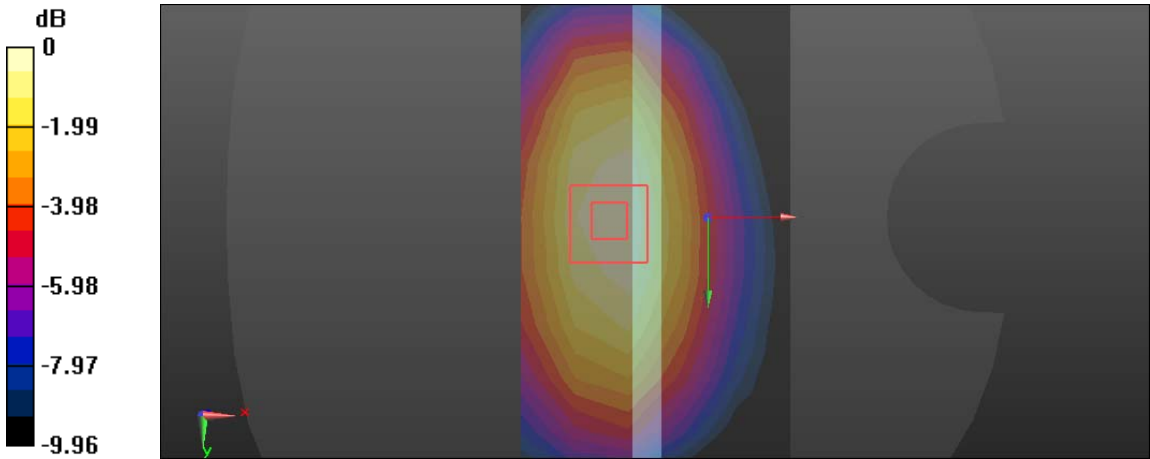
FLAT(DATA)	Towards phantom
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TP DATA M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.358 W/kg Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TP DATA M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 13.87 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 0.498 W/kg SAR(1 g) = 0.330 W/kg; SAR(10 g) = 0.223 W/kg Maximum value of SAR (measured) = 0.351 W/kg  0 dB = 0.351 W/kg = -4.55 dBW/kg	

FLAT(DATA)	Towards ground
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TG DATA M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.343 W/kg Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TG DATA M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 18.96 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.435 W/kg SAR(1 g) = 0.335 W/kg; SAR(10 g) = 0.252 W/kg Maximum value of SAR (measured) = 0.351 W/kg  0 dB = 0.351 W/kg = -4.55 dBW/kg	

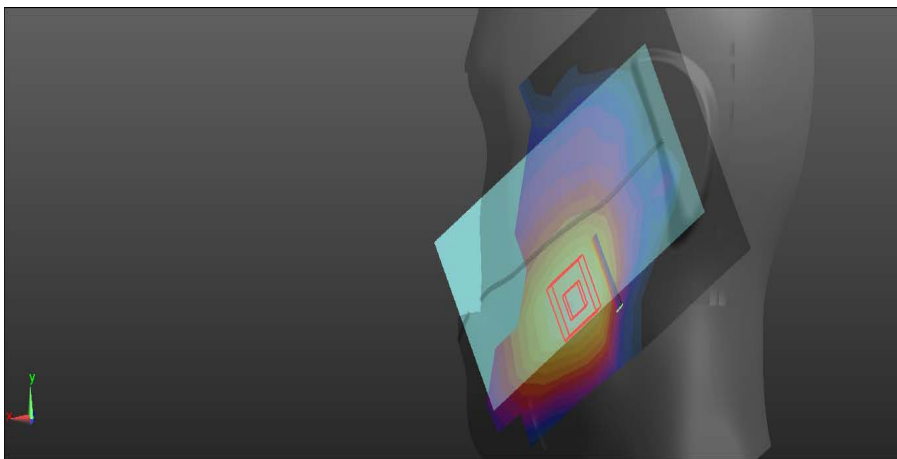
FLAT	EDGE2
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 HOT/wcdma band5 10mm M edge 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0137 W/kg Flat-Section MSL wcdma band5 HOT/wcdma band5 10mm M edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.266 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.0230 W/kg SAR(1 g) = 0.011 W/kg; SAR(10 g) = 0.00633 W/kg Maximum value of SAR (measured) = 0.0141 W/kg  0 dB = 0.0141 W/kg = -18.51 dBW/kg	

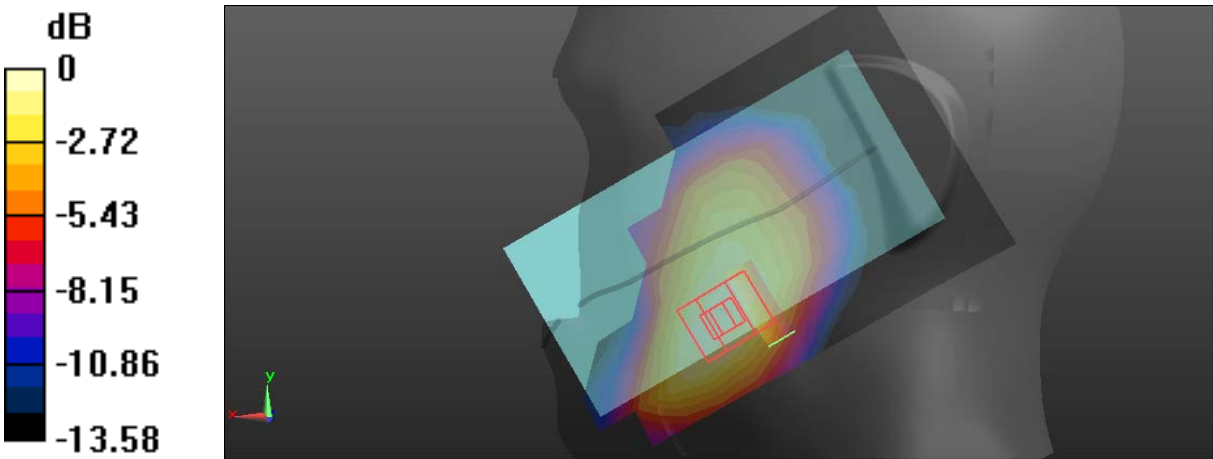


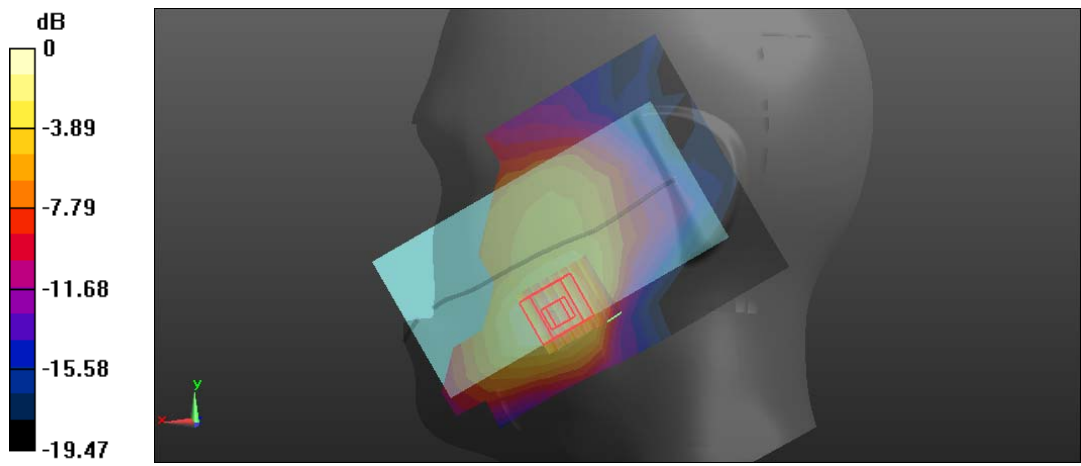
FLAT	EDGE3
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 HOT/wcdma band5 10mm M edge 3/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.125 W/kg Flat-Section MSL wcdma band5 HOT/wcdma band5 10mm M edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 10.61 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.163 W/kg SAR(1 g) = 0.114 W/kg; SAR(10 g) = 0.079 W/kg Maximum value of SAR (measured) = 0.131 W/kg  0 dB = 0.131 W/kg = -8.83 dBW/kg	

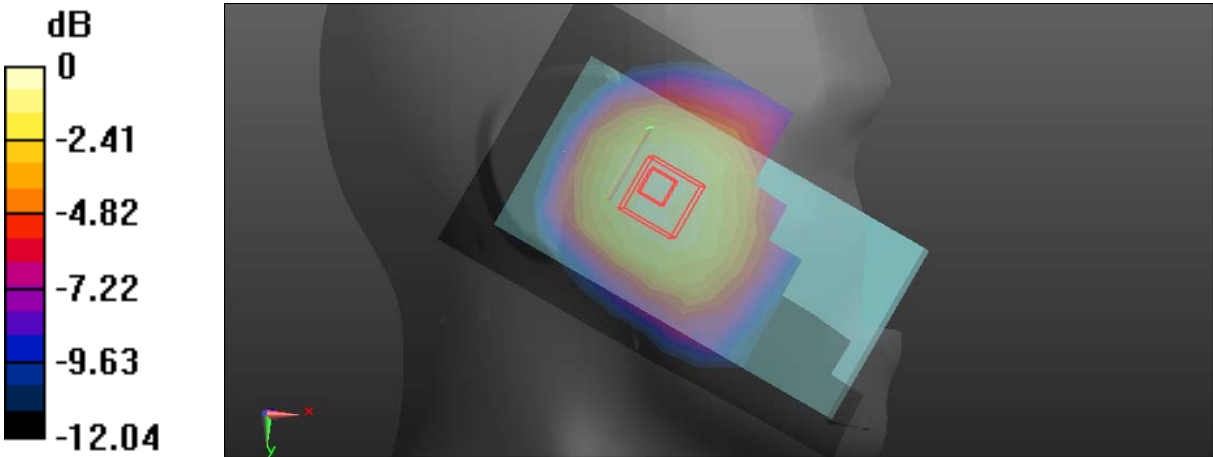
FLAT	EDGE4
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 3mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 HOT/wcdma band5 10mm M edge 4/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.123 W/kg Flat-Section MSL wcdma band5 HOT/wcdma band5 10mm M edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 10.66 V/m; Power Drift = -0.17 dB Peak SAR (extrapolated) = 0.154 W/kg SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.074 W/kg	
 0 dB = 0.123 W/kg = -9.10 dBW/kg	

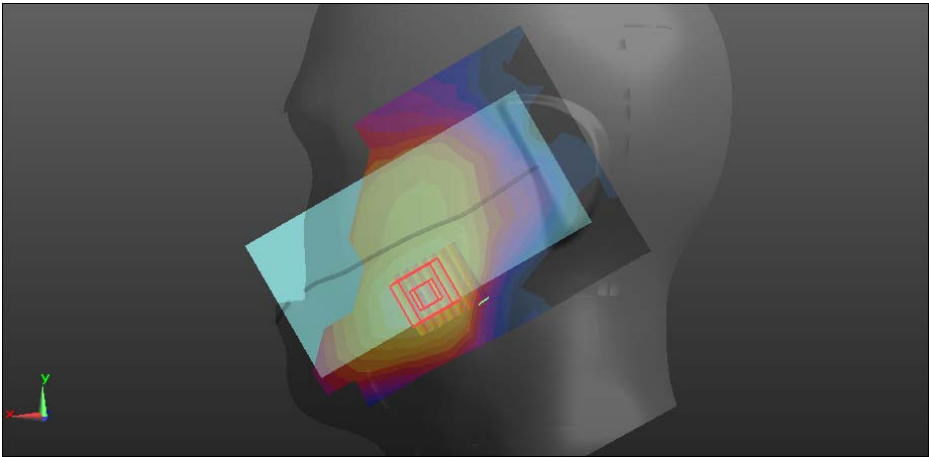
LTE (Band 2 20BW-1RB-Low/Head)

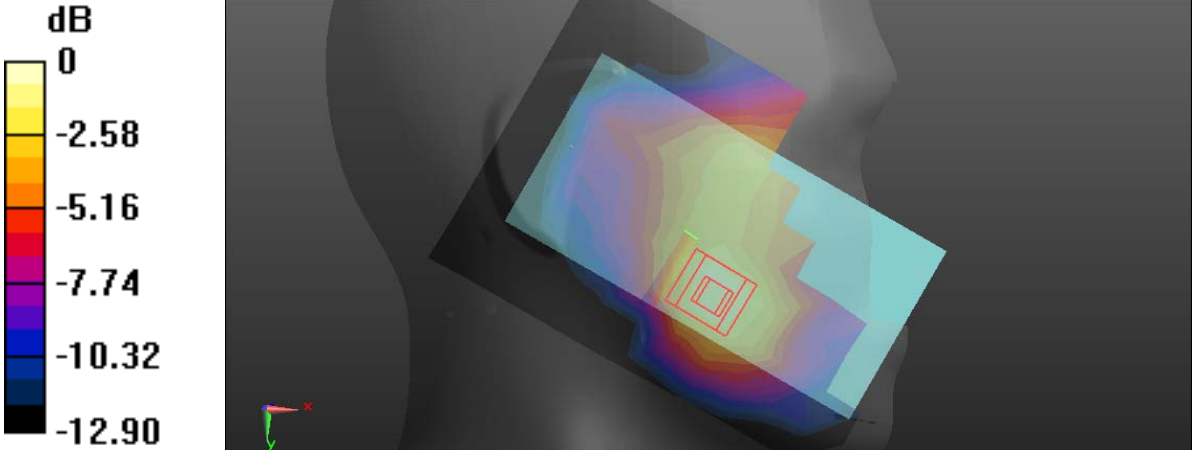
Left Side	Cheek
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.441 W/kg Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.549 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.745 W/kg SAR(1 g) = 0.443 W/kg; SAR(10 g) = 0.261 W/kg Maximum value of SAR (measured) = 0.484 W/kg dB 0 -2.99 -5.98 -8.96 -11.95 -14.94  0 dB = 0.484 W/kg = -3.15 dBW/kg	

Left Side	Tilt
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.115 W/kg Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.223 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.163 W/kg SAR(1 g) = 0.107 W/kg; SAR(10 g) = 0.067 W/kg Maximum value of SAR (measured) = 0.116 W/kg  0 dB = 0.116 W/kg = -9.36 dBW/kg	

Right Side	Cheek
Communication System: UID 0, LTE band 02 (0); Frequency: 1860 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1860 \text{ MHz}$; $\sigma = 1.43 \text{ S/m}$; $\epsilon_r = 39.827$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL touch L/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.334 W/kg Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL touch L/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.051 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.549 W/kg SAR(1 g) = 0.327 W/kg; SAR(10 g) = 0.192 W/kg Maximum value of SAR (measured) = 0.355 W/kg  0 dB = 0.355 W/kg = -4.50 dBW/kg	

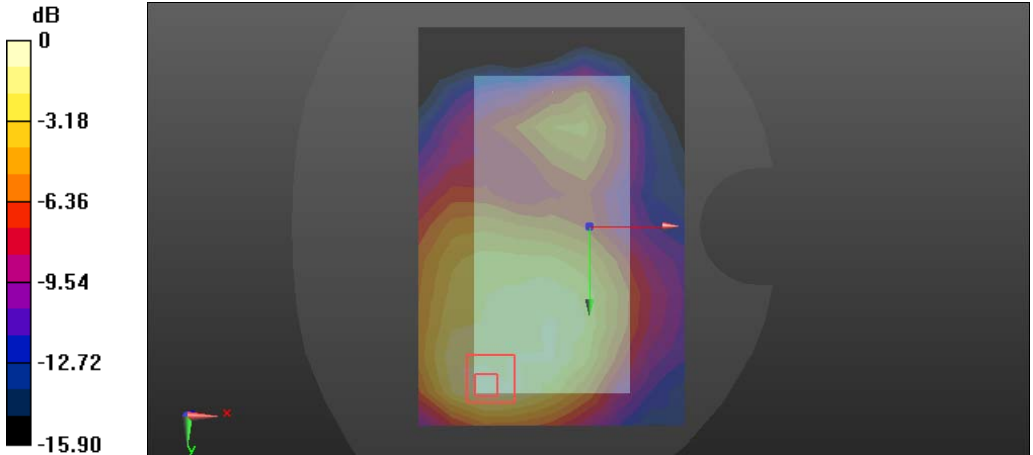
Right Side	Cheek
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Right/LTE band2 20MHz 1RB Low HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.183 W/kg Head-Section HSL LTE band2 Right/LTE band2 20MHz 1RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 4.262 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.298 W/kg SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.119 W/kg Maximum value of SAR (measured) = 0.202 W/kg  0 dB = 0.202 W/kg = -6.95 dBW/kg	

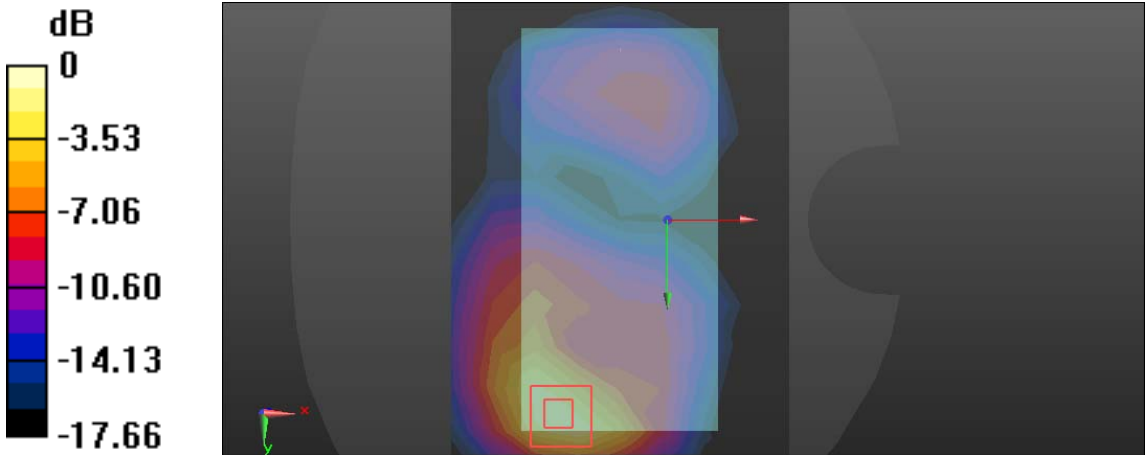
Right Side	Cheek
Communication System: UID 0, LTE band 02 (0); Frequency: 1900 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.75$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL touch H/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.345 W/kg Head-Section HSL LTE band2 Left/LTE band2 20MHz 1RB Low HSL touch H/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.754 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.556 W/kg SAR(1 g) = 0.333 W/kg; SAR(10 g) = 0.196 W/kg Maximum value of SAR (measured) = 0.363 W/kg dB 0 -3.86 -7.73 -11.59 -15.46 -19.32  0 dB = 0.363 W/kg = -4.40 dBW/kg	

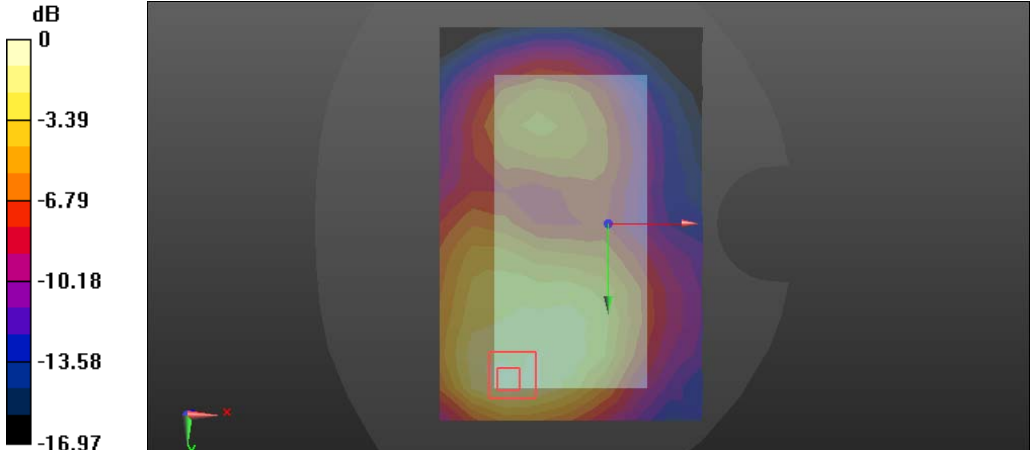
Right Side	Tilt
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Right/LTE band2 20MHz 1RB Low HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0827 W/kg Head-Section HSL LTE band2 Right/LTE band2 20MHz 1RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.792 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.117 W/kg SAR(1 g) = 0.075 W/kg; SAR(10 g) = 0.050 W/kg Maximum value of SAR (measured) = 0.0816 W/kg  0 dB = 0.0816 W/kg = -10.88 dBW/kg	

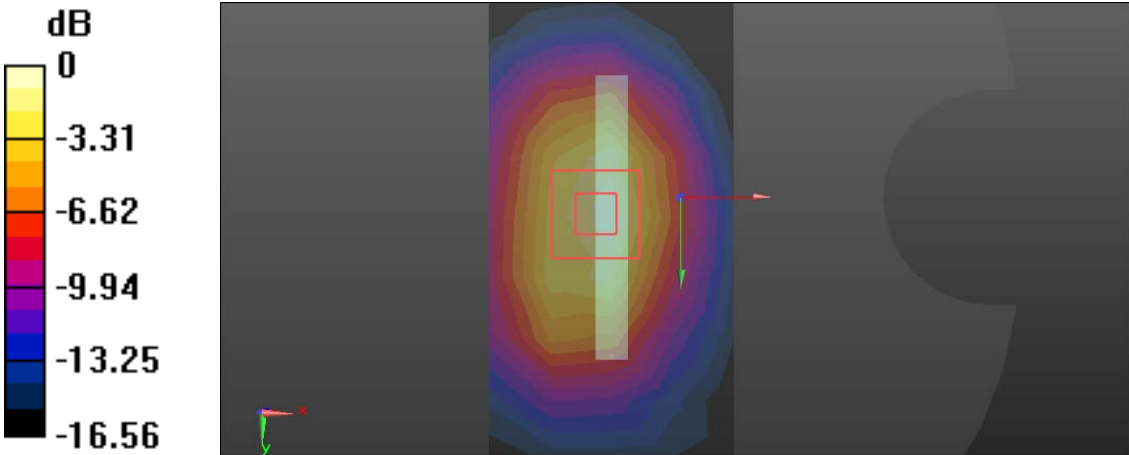
LTE (Band 2 20BW-1RB-Low/Flat)

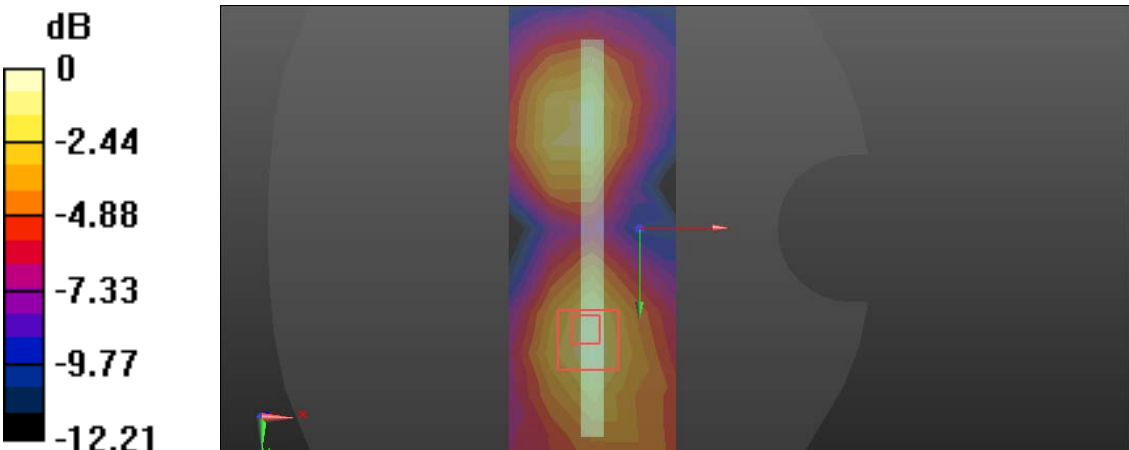
FLAT	Towards phantom
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TP/LTE band2 TP 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.461 W/kg Flat-Section MSL LTE band2 TP/LTE band2 TP 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.559 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.854 W/kg SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.275 W/kg Maximum value of SAR (measured) = 0.510 W/kg dB 0 -3.27 -6.54 -9.82 -13.09 -16.36 0 dB = 0.510 W/kg = -2.92 dBW/kg	

FLAT	Towards ground
Communication System: UID 0, LTE band 02 (0); Frequency: 1860 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1860$ MHz; $\sigma = 1.543$ S/m; $\epsilon_r = 51.207$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB L 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.746 W/kg Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB L 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.78 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 1.22 W/kg SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.412 W/kg Maximum value of SAR (measured) = 0.772 W/kg  0 dB = 0.772 W/kg = -1.12 dBW/kg	

FLAT	Towards ground
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.869 W/kg Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.879 V/m; Power Drift = 0.22 dB Peak SAR (extrapolated) = 1.50 W/kg SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.434 W/kg Maximum value of SAR (measured) = 0.881 W/kg  0 dB = 0.881 W/kg = -0.55 dBW/kg	

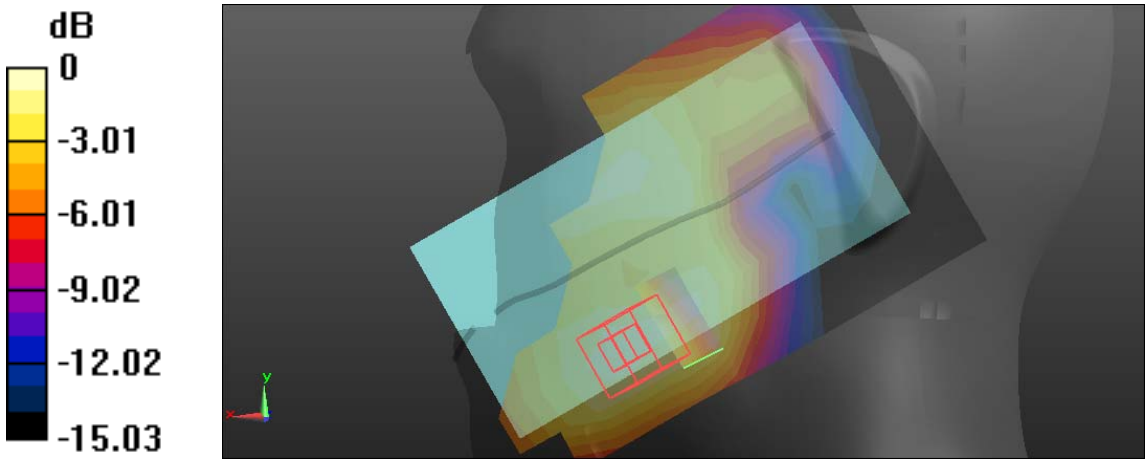
FLAT	Towards ground
Communication System: UID 0, LTE band 02 (0); Frequency: 1900 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.05$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB H 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.807 W/kg Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB H 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 9.316 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 1.33 W/kg SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.450 W/kg Maximum value of SAR (measured) = 0.854 W/kg  0 dB = 0.854 W/kg = -0.69 dBW/kg	

FLAT	EDGE2
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 HOT/LTE band2 20MHz 1RB 10mm M edge 2/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.365 W/kg Flat-Section MSL LTE band2 HOT/LTE band2 20MHz 1RB 10mm M edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 12.53 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.665 W/kg SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.213 W/kg Maximum value of SAR (measured) = 0.415 W/kg  0 dB = 0.415 W/kg = -3.82 dBW/kg	

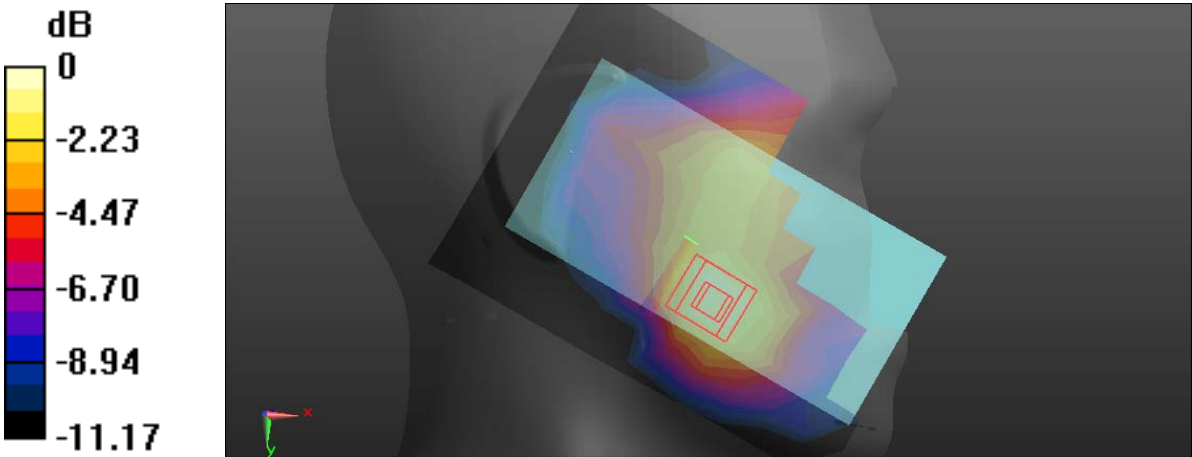
FLAT	EDGE3
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 HOT/LTE band2 20MHz 1RB 10mmM edge 3/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0436 W/kg Flat-Section MSL LTE band2 HOT/LTE band2 20MHz 1RB 10mmM edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.837 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.0710 W/kg SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.028 W/kg Maximum value of SAR (measured) = 0.0457 W/kg  0 dB = 0.0457 W/kg = -13.40 dBW/kg	

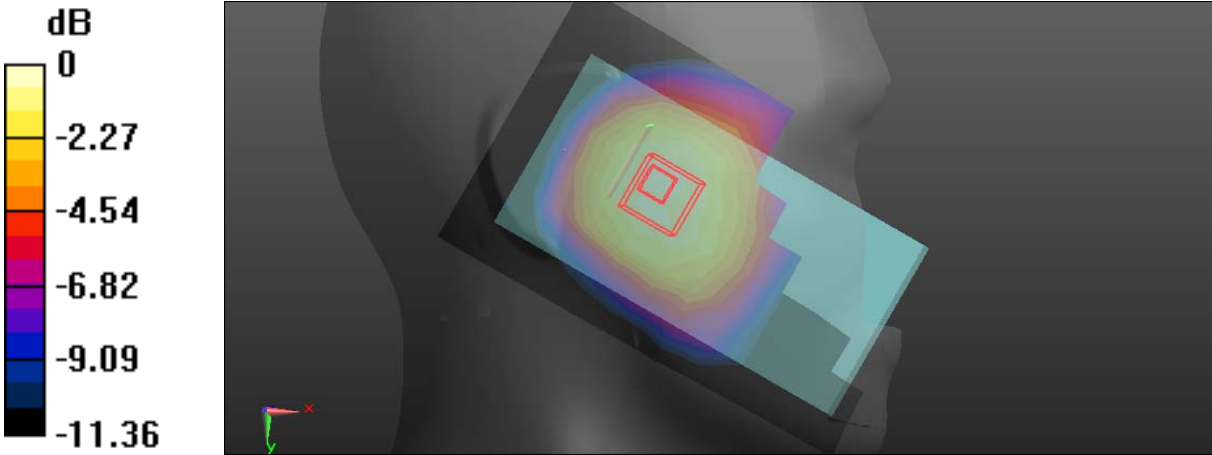
FLAT	EDGE4
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 HOT/LTE band2 20MHz 1RB 10mmM edge 4/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.322 W/kg Flat-Section MSL LTE band2 HOT/LTE band2 20MHz 1RB 10mmM edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.50 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.511 W/kg SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.177 W/kg Maximum value of SAR (measured) = 0.327 W/kg dB 0 -3.10 -6.20 -9.30 -12.40 -15.50 0 dB = 0.327 W/kg = -4.85 dBW/kg	

LTE (Band 2 20BW-50RB-Low/Head)

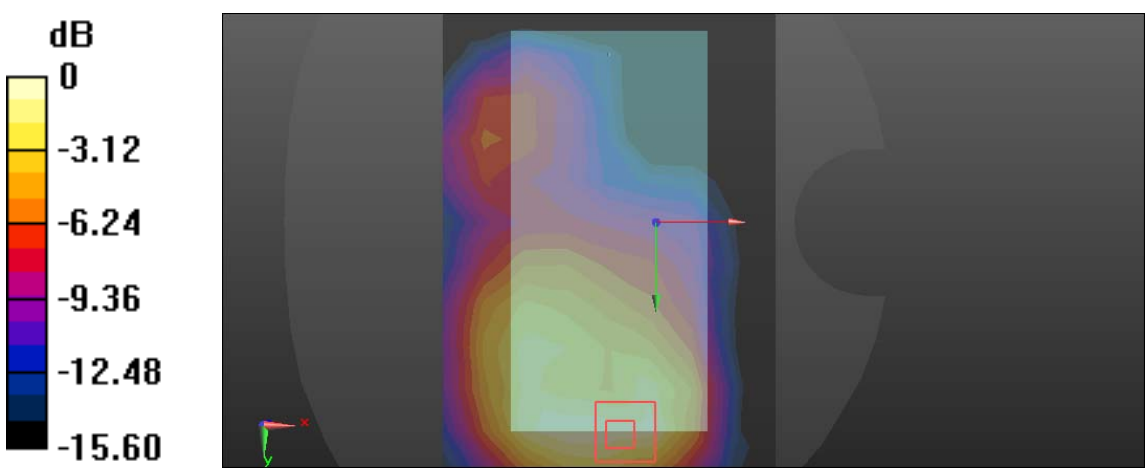
Left Side	Cheek
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Left/LTE band2 20MHz 50RB Low HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.386 W/kg Head-Section HSL LTE band2 Left/LTE band2 20MHz 50RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.705 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.670 W/kg SAR(1 g) = 0.397 W/kg; SAR(10 g) = 0.233 W/kg Maximum value of SAR (measured) = 0.435 W/kg  0 dB = 0.435 W/kg = -3.62 dBW/kg	

Left Side	Tilt
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Left/LTE band2 20MHz 50RB Low HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0977 W/kg Head-Section HSL LTE band2 Left/LTE band2 20MHz 50RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.476 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.176 W/kg SAR(1 g) = 0.096 W/kg; SAR(10 g) = 0.058 W/kg Maximum value of SAR (measured) = 0.114 W/kg 0 dB = 0.114 W/kg = -9.43 dBW/kg	

Right Side	Cheek
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Right/LTE band2 20MHz 50RB Low HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.147 W/kg Head-Section HSL LTE band2 Right/LTE band2 20MHz 50RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.878 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.221 W/kg SAR(1 g) = 0.147 W/kg; SAR(10 g) = 0.094 W/kg Maximum value of SAR (measured) = 0.158 W/kg  0 dB = 0.158 W/kg = -8.01 dBW/kg	

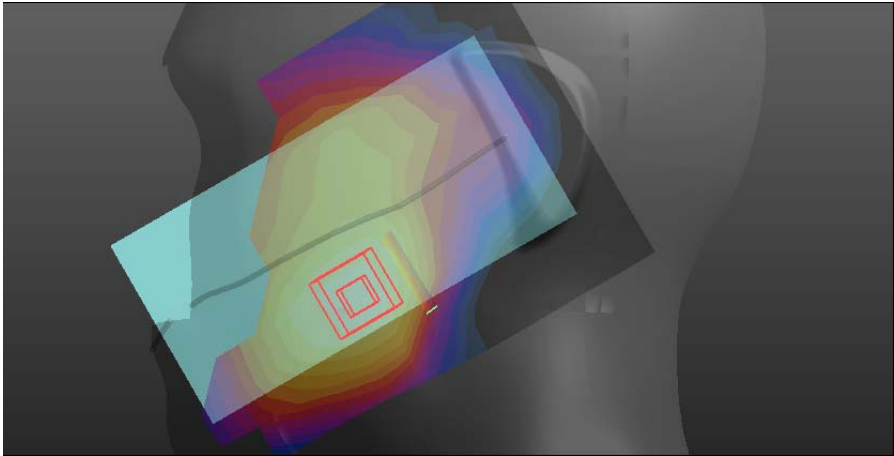
Right Side	Tilt
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.45 \text{ S/m}$; $\epsilon_r = 39.74$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.84, 7.84, 7.84); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band2 Right/LTE band2 20MHz 50RB Low HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0714 W/kg Head-Section HSL LTE band2 Right/LTE band2 20MHz 50RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.151 V/m; Power Drift = -0.15 dB Peak SAR (extrapolated) = 0.109 W/kg SAR(1 g) = 0.067 W/kg; SAR(10 g) = 0.042 W/kg Maximum value of SAR (measured) = 0.0722 W/kg  0 dB = 0.0722 W/kg = -11.41 dBW/kg	

LTE (Band 2 20BW-50RB-Low/Flat)

FLAT	Towards phantom
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TP/LTE band2 TP 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.371 W/kg Flat-Section MSL LTE band2 TP/LTE band2 TP 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.207 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.701 W/kg SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.224 W/kg Maximum value of SAR (measured) = 0.413 W/kg  0 dB = 0.413 W/kg = -3.84 dBW/kg	

FLAT	Towards ground
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.706 W/kg Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.182 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 1.22 W/kg SAR(1 g) = 0.646 W/kg; SAR(10 g) = 0.352 W/kg Maximum value of SAR (measured) = 0.712 W/kg dB 0 -3.25 -6.49 -9.74 -12.98 -16.23 0 dB = 0.712 W/kg = -1.48 dBW/kg	

LTE (Band 4 20BW-1RB-Low/Head)

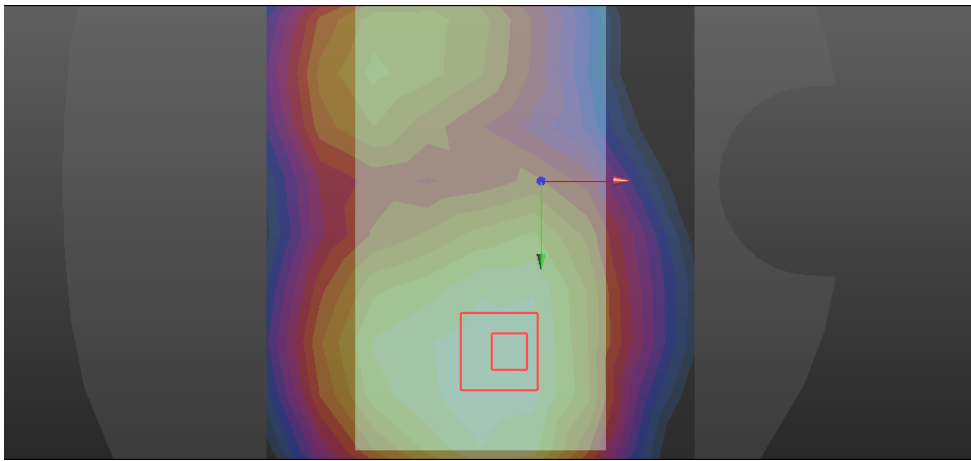
Left Side	Cheek
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Left/LTE band4 20MHz 1RB Low HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.320 W/kg Head-Section HSL LTE band4 Left/LTE band4 20MHz 1RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.913 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.546 W/kg SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.212 W/kg Maximum value of SAR (measured) = 0.375 W/kg dB 0 -3.40 -6.80 -10.19 -13.59 -16.99  0 dB = 0.375 W/kg = -4.26 dBW/kg	

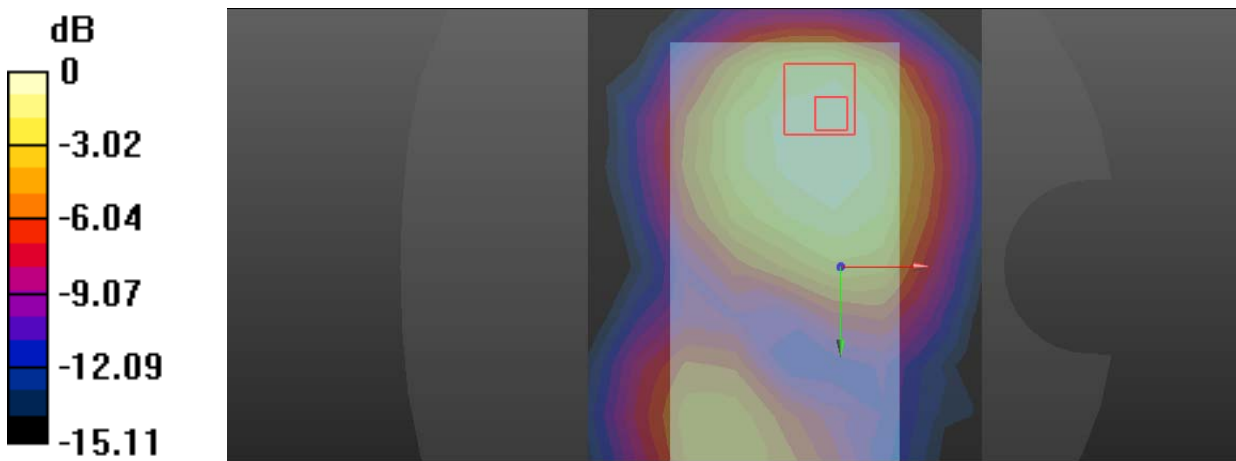
Left Side	Tilt
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.304 \text{ S/m}$; $\epsilon_r = 40.408$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Left/LTE band4 20MHz 1RB Low HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.181 W/kg Head-Section HSL LTE band4 Left/LTE band4 20MHz 1RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.29 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.273 W/kg SAR(1 g) = 0.169 W/kg; SAR(10 g) = 0.105 W/kg Maximum value of SAR (measured) = 0.186 W/kg dB 0 -3.67 -7.34 -11.00 -14.67 -18.34 0 dB = 0.186 W/kg = -7.30 dBW/kg	

Right Side	Cheek
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.304 \text{ S/m}$; $\epsilon_r = 40.408$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Right/LTE band4 20MHz 1RB Low HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.162 W/kg Head-Section HSL LTE band4 Right/LTE band4 20MHz 1RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 6.115 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.266 W/kg SAR(1 g) = 0.170 W/kg; SAR(10 g) = 0.108 W/kg Maximum value of SAR (measured) = 0.187 W/kg 0 dB = 0.187 W/kg = -7.28 dBW/kg	

Right Side	Tilt
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Right/LTE band4 20MHz 1RB Low HSL tilt M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.146 W/kg Head-Section HSL LTE band4 Right/LTE band4 20MHz 1RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 9.733 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.217 W/kg SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.085 W/kg Maximum value of SAR (measured) = 0.149 W/kg dB 0 -2.87 -5.74 -8.61 -11.48 -14.35 0 dB = 0.149 W/kg = -8.27 dBW/kg	

LTE (Band 4 20BW-1RB-Low/Flat)

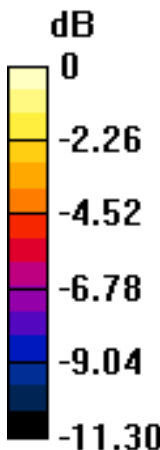
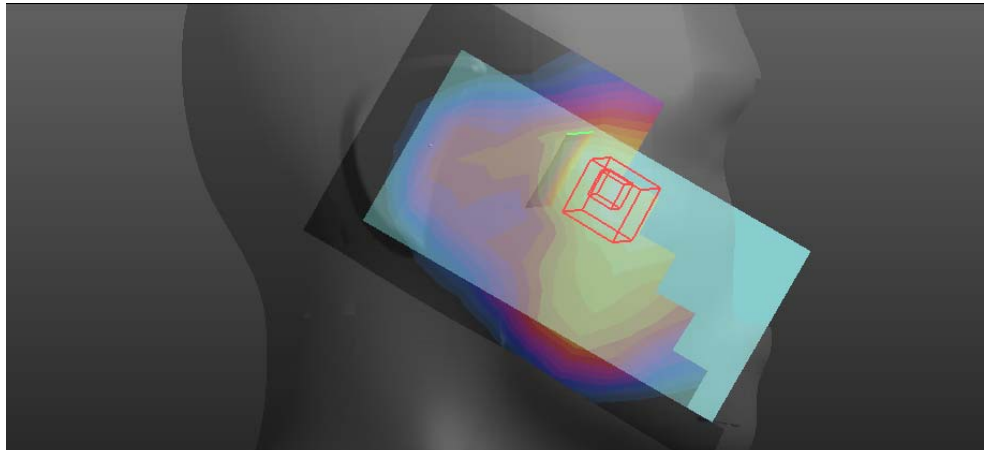
FLAT	Towards phantom
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 TP/LTE band4 TP 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.341 W/kg Flat-Section MSL LTE band4 TP/LTE band4 TP 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.577 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.537 W/kg SAR(1 g) = 0.340 W/kg; SAR(10 g) = 0.221 W/kg Maximum value of SAR (measured) = 0.367 W/kg dB 0 -3.04 -6.09 -9.13 -12.18 -15.22  0 dB = 0.367 W/kg = -4.35 dBW/kg	

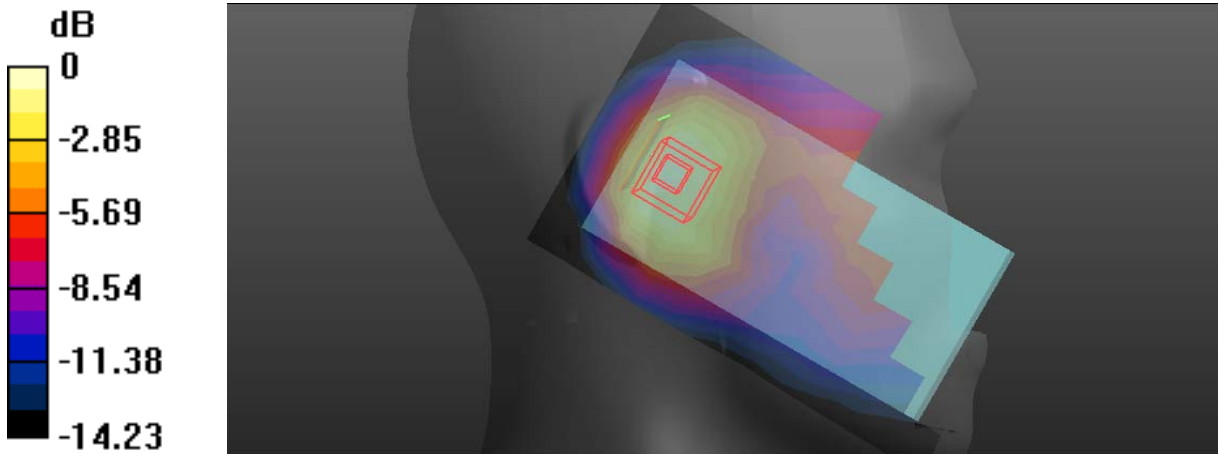
FLAT	Towards ground
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 TG/LTE band4 TG 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.211 W/kg Flat-Section MSL LTE band4 TG/LTE band4 TG 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.712 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.317 W/kg SAR(1 g) = 0.200 W/kg; SAR(10 g) = 0.124 W/kg Maximum value of SAR (measured) = 0.219 W/kg  0 dB = 0.219 W/kg = -6.60 dBW/kg	

LTE (Band 4 20BW-50RB-Low/Head)

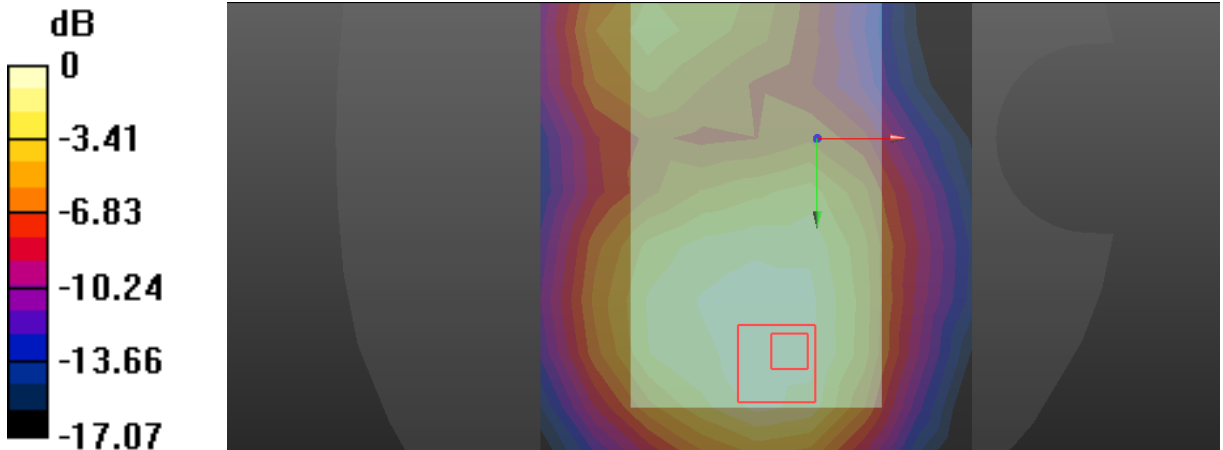
Left Side	Cheek
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.304$ S/m; $\epsilon_r = 40.408$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Left/LTE band4 20MHz 50RB Low HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.267 W/kg Head-Section HSL LTE band4 Left/LTE band4 20MHz 50RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.292 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.447 W/kg SAR(1 g) = 0.280 W/kg; SAR(10 g) = 0.172 W/kg Maximum value of SAR (measured) = 0.305 W/kg dB 0 -3.41 -6.82 -10.23 -13.64 -17.05 0 dB = 0.305 W/kg = -5.16 dBW/kg	

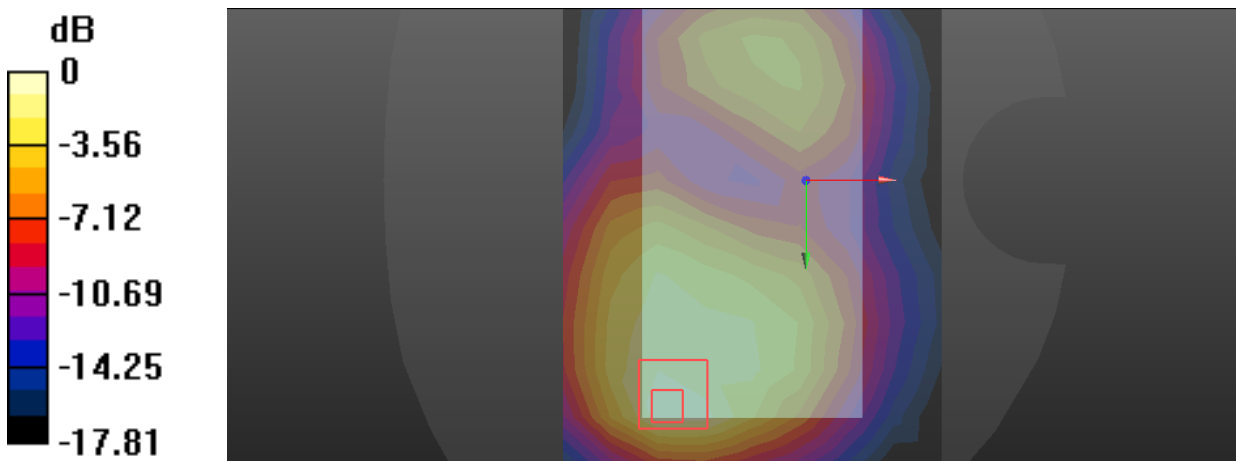
Left Side	Tilt
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.304 \text{ S/m}$; $\epsilon_r = 40.408$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Left/LTE band4 20MHz 50RB Low HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.142 W/kg Head-Section HSL LTE band4 Left/LTE band4 20MHz 50RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.784 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.204 W/kg SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.085 W/kg Maximum value of SAR (measured) = 0.147 W/kg dB 0 -3.62 -7.24 -10.85 -14.47 -18.09 0 dB = 0.147 W/kg = -8.33 dBW/kg	

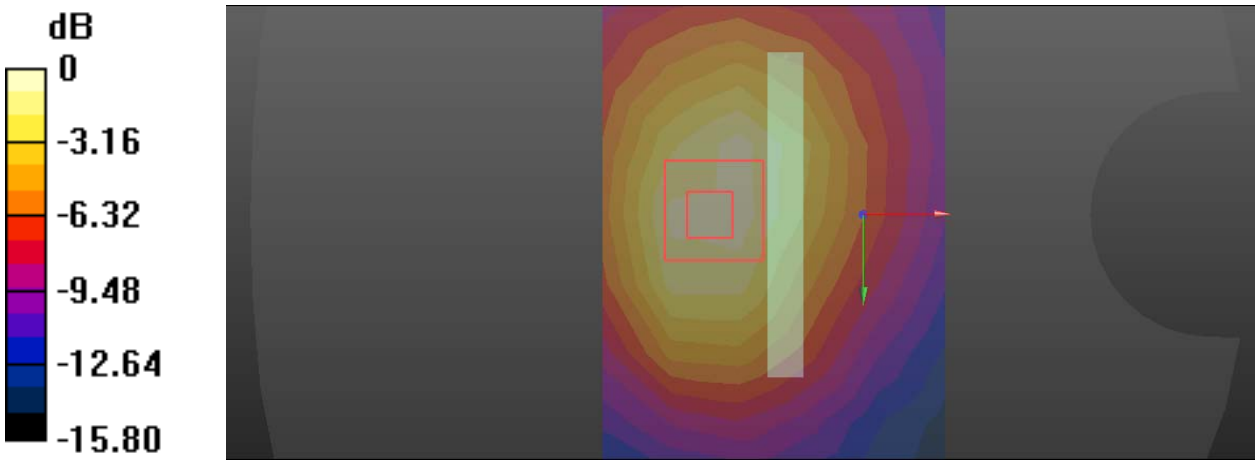
Right Side	Cheek
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.304 \text{ S/m}$; $\epsilon_r = 40.408$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Right/LTE band4 20MHz 50RB Low HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.143 W/kg Head-Section HSL LTE band4 Right/LTE band4 20MHz 50RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.585 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.231 W/kg SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.095 W/kg Maximum value of SAR (measured) = 0.159 W/kg   0 dB = 0.159 W/kg = -7.99 dBW/kg	

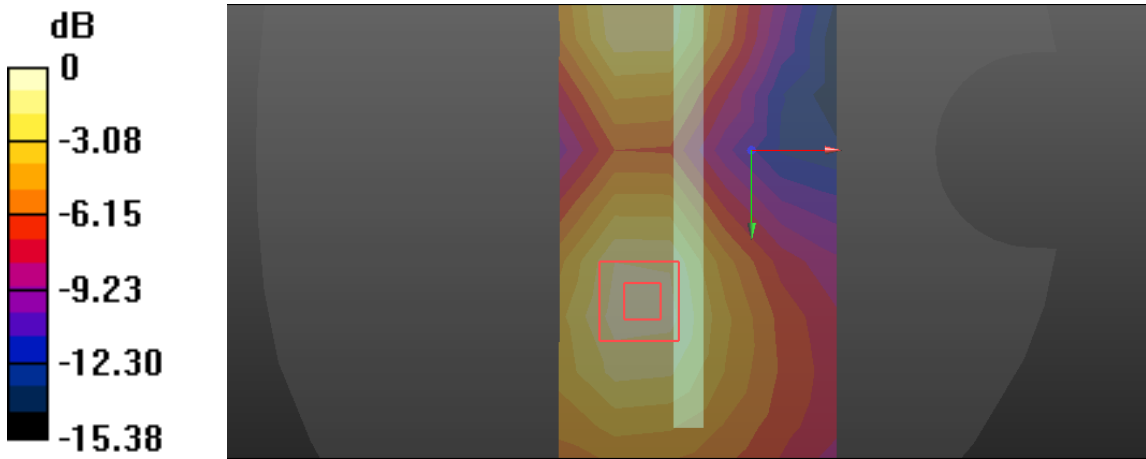
Right Side	Tilt
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.304 \text{ S/m}$; $\epsilon_r = 40.408$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(5.15, 5.15, 5.15); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band4 Right/LTE band4 20MHz 50RB Low HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.124 W/kg Head-Section HSL LTE band4 Right/LTE band4 20MHz 50RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 8.944 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.186 W/kg SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.072 W/kg Maximum value of SAR (measured) = 0.128 W/kg  0 dB = 0.128 W/kg = -8.93 dBW/kg	

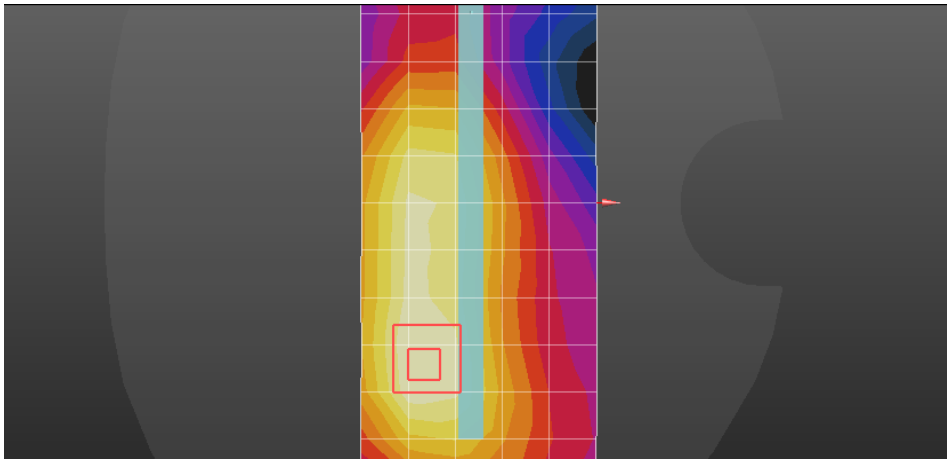
LTE (Band 4 20BW-50RB-Low/Flat)

FLAT	Towards phantom
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 TP/LTE band4 TP 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.267 W/kg Flat-Section MSL LTE band4 TP/LTE band4 TP 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.807 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.446 W/kg SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.169 W/kg Maximum value of SAR (measured) = 0.296 W/kg  0 dB = 0.296 W/kg = -5.29 dBW/kg	

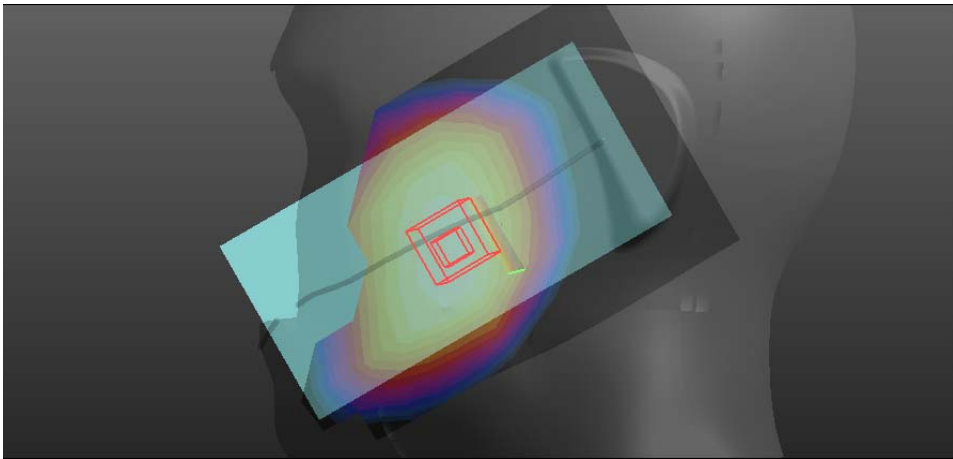
FLAT	Towards ground
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 TG/LTE band4 TG 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.410 W/kg Flat-Section MSL LTE band4 TG/LTE band4 TG 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.211 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.731 W/kg SAR(1 g) = 0.419 W/kg; SAR(10 g) = 0.236 W/kg Maximum value of SAR (measured) = 0.467 W/kg  0 dB = 0.467 W/kg = -3.31 dBW/kg	

FLAT	EDGE2
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 HOT/LTE band4 20MHz 50RB 10mm M edge 2/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.312 W/kg Flat-Section MSL LTE band4 HOT/LTE band4 20MHz 50RB 10mm M edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.16 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.522 W/kg SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.181 W/kg Maximum value of SAR (measured) = 0.342 W/kg  0 dB = 0.342 W/kg = -4.66 dBW/kg	

FLAT	EDGE3
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.404 \text{ S/m}$; $\epsilon_r = 51.622$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 HOT/LTE band4 20MHz 50RB 10mmM edge 3/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.113 W/kg Flat-Section MSL LTE band4 HOT/LTE band4 20MHz 50RB 10mmM edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.986 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.186 W/kg SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.070 W/kg Maximum value of SAR (measured) = 0.127 W/kg  0 dB = 0.127 W/kg = -8.96 dBW/kg	

FLAT	EDGE4
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 HOT/LTE band4 20MHz 50RB 10mmM edge 4/Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.147 W/kg Flat-Section MSL LTE band4 HOT/LTE band4 20MHz 50RB 10mmM edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.986 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.259 W/kg SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.088 W/kg Maximum value of SAR (measured) = 0.168 W/kg dB 0 -3.32 -6.64 -9.95 -13.27 -16.59  0 dB = 0.147 W/kg = -8.33 dBW/kg	

LTE (Band 5 20BW-1RB-Low/Head)

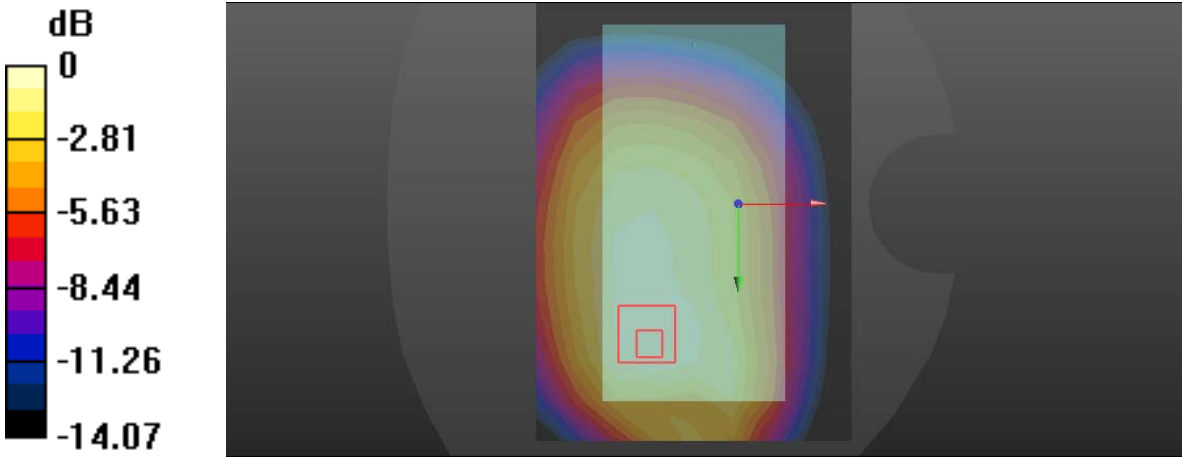
Left Side	Cheek
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.479$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL LTE band5/LTE band5 20BW 1RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.108 W/kg Head-Section Left HSL LTE band5/LTE band5 20BW 1RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.005 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.132 W/kg SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.080 W/kg Maximum value of SAR (measured) = 0.107 W/kg dB 0 -1.72 -3.44 -5.15 -6.87 -8.59  0 dB = 0.107 W/kg = -9.71 dBW/kg	

Left Side	Tilt
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL LTE band5/LTE band5 20BW 1RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0714 W/kg Head-Section Left HSL LTE band5/LTE band5 20BW 1RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.588 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.0860 W/kg SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.054 W/kg Maximum value of SAR (measured) = 0.0726 W/kg dB 0 -1.79 -3.58 -5.38 -7.17 -8.96 0 dB = 0.0726 W/kg = -11.39 dBW/kg	

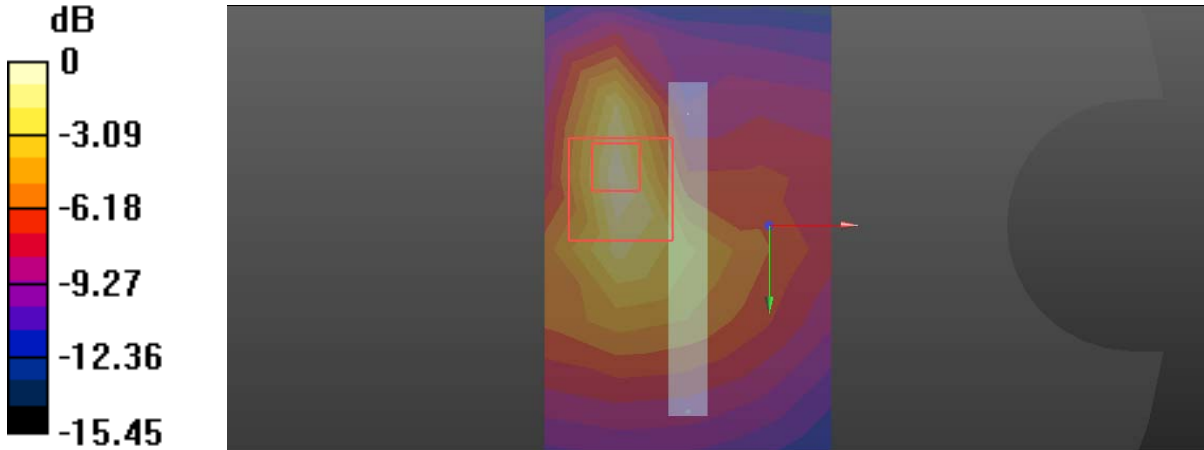
Right Side	Cheek
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL LTE band5/LTE band5 20BW 1RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.129 W/kg Head-Section Right HSL LTE band5/LTE band5 20BW 1RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.210 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.160 W/kg SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.101 W/kg Maximum value of SAR (measured) = 0.136 W/kg 0 dB = 0.136 W/kg = -8.66 dBW/kg	

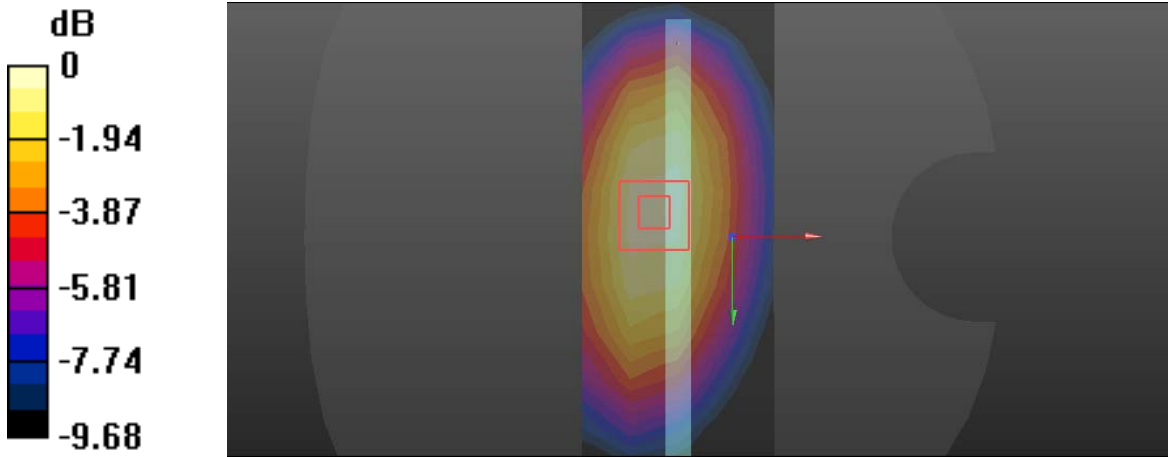
Right Side	Tilt
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL LTE band5/LTE band5 20BW 1RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0768 W/kg Head-Section Right HSL LTE band5/LTE band5 20BW 1RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.520 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.0890 W/kg SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.057 W/kg Maximum value of SAR (measured) = 0.0775 W/kg dB 0 -1.73 -3.46 -5.19 -6.92 -8.65 0 dB = 0.0775 W/kg = -11.11 dBW/kg	

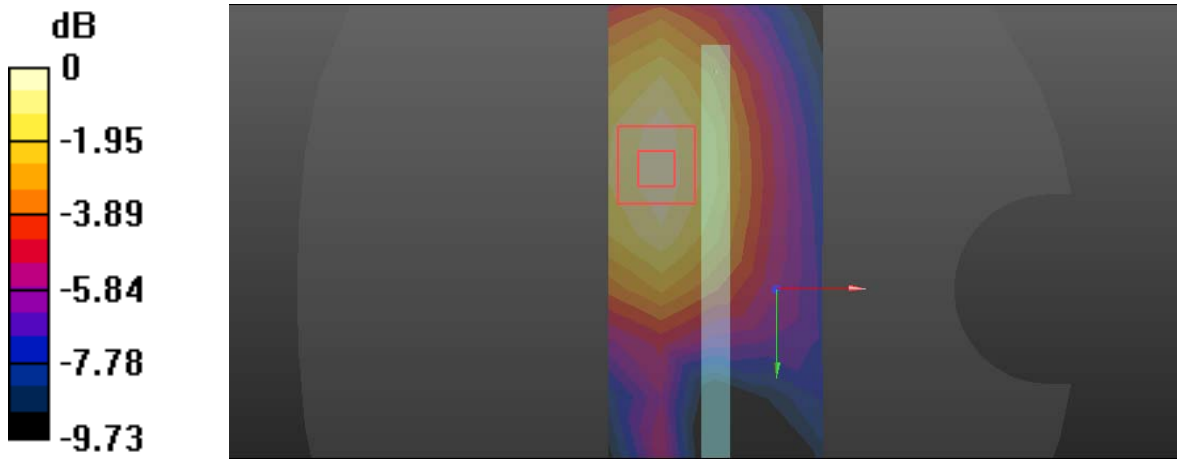
LTE (Band 5 20BW-1RB-Low/Flat)

FLAT	Towards phantom
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.859$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 TP/LTE band5 TP 20BW 1RB LOW M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.170 W/kg Flat-Section MSL LTE band5 TP/LTE band5 TP 20BW 1RB LOW M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.70 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.222 W/kg SAR(1 g) = 0.167 W/kg; SAR(10 g) = 0.122 W/kg Maximum value of SAR (measured) = 0.178 W/kg  0 dB = 0.178 W/kg = -7.50 dBW/kg	

FLAT	Towards ground
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.859$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 TG/LTE band5 TG 20BW 1RB LOW M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.237 W/kg Flat-Section MSL LTE band5 TG/LTE band5 TG 20BW 1RB LOW M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.57 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 0.778 W/kg SAR(1 g) = 0.258 W/kg; SAR(10 g) = 0.111 W/kg Maximum value of SAR (measured) = 0.318 W/kg dB 0 -3.48 -6.96 -10.45 -13.93 -17.41 0 dB = 0.318 W/kg = -4.98 dBW/kg	

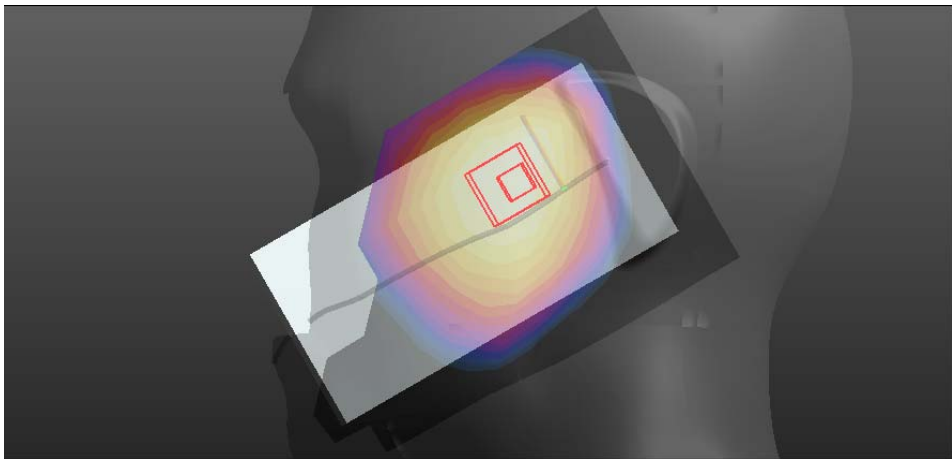
FLAT	EDGE2
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.859$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 HOT/LTE Band2 edge2/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.144 W/kg Flat-Section MSL LTE band5 HOT/LTE Band2 edge2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.638 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.244 W/kg SAR(1 g) = 0.125 W/kg; SAR(10 g) = 0.064 W/kg Maximum value of SAR (measured) = 0.146 W/kg  0 dB = 0.146 W/kg = -8.36 dBW/kg	

FLAT	EDGE3
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.859$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 HOT/LTE Band2 edge3/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.293 W/kg Flat-Section MSL LTE band5 HOT/LTE Band2 edge3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 17.21 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.409 W/kg SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.201 W/kg Maximum value of SAR (measured) = 0.314 W/kg  0 dB = 0.314 W/kg = -5.03 dBW/kg	

FLAT	EDGE4
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.859$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 HOT/LTE Band2 edge4/Area Scan (5x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0655 W/kg Flat-Section MSL LTE band5 HOT/LTE Band2 edge4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.440 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.0860 W/kg SAR(1 g) = 0.062 W/kg; SAR(10 g) = 0.043 W/kg Maximum value of SAR (measured) = 0.0662 W/kg  0 dB = 0.0662 W/kg = -11.79 dBW/kg	

LTE (Band 5 20BW-50RB-Low/Head)

Left Side	Cheek
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.479$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL LTE band5/LTE band5 20BW 50RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.101 W/kg Head-Section Left HSL LTE band5/LTE band5 20BW 50RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.730 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.127 W/kg SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.080 W/kg Maximum value of SAR (measured) = 0.107 W/kg dB 0 -1.67 -3.34 -5.00 -6.67 -8.34 0 dB = 0.107 W/kg = -9.71 dBW/kg	

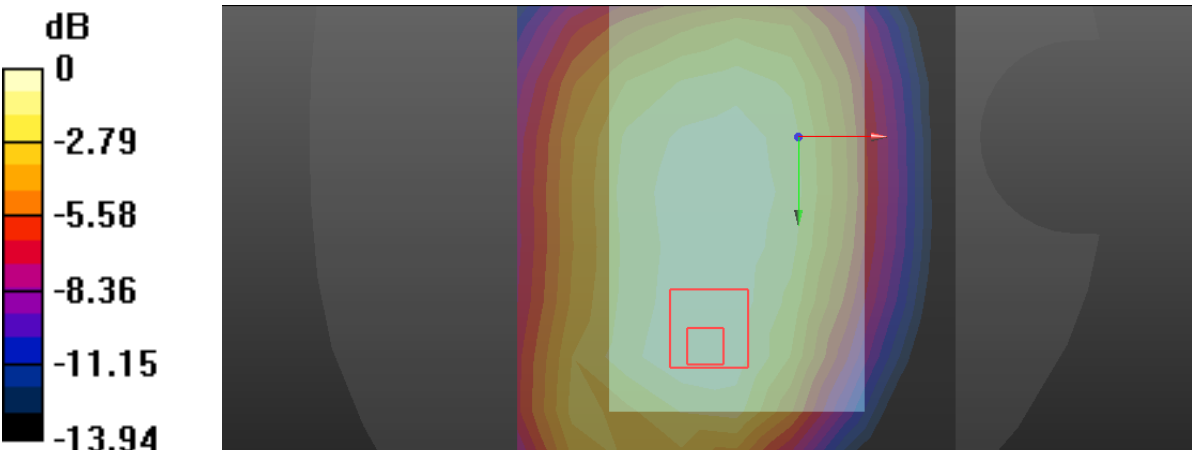
Left Side	Tilt
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Left HSL LTE band5/LTE band5 20BW 50RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0603 W/kg Head-Section Left HSL LTE band5/LTE band5 20BW 50RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.173 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.0760 W/kg SAR(1 g) = 0.059 W/kg; SAR(10 g) = 0.045 W/kg Maximum value of SAR (measured) = 0.0613 W/kg dB 0 -1.77 -3.54 -5.32 -7.09 -8.86  0 dB = 0.0613 W/kg = -12.13 dBW/kg	

Right Side	Cheek
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL LTE band5/LTE band5 20BW 50RB LOW HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0974 W/kg Head-Section Right HSL LTE band5/LTE band5 20BW 50RB LOW HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.890 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.123 W/kg SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.077 W/kg Maximum value of SAR (measured) = 0.103 W/kg 0 dB = 0.103 W/kg = -9.87 dBW/kg	

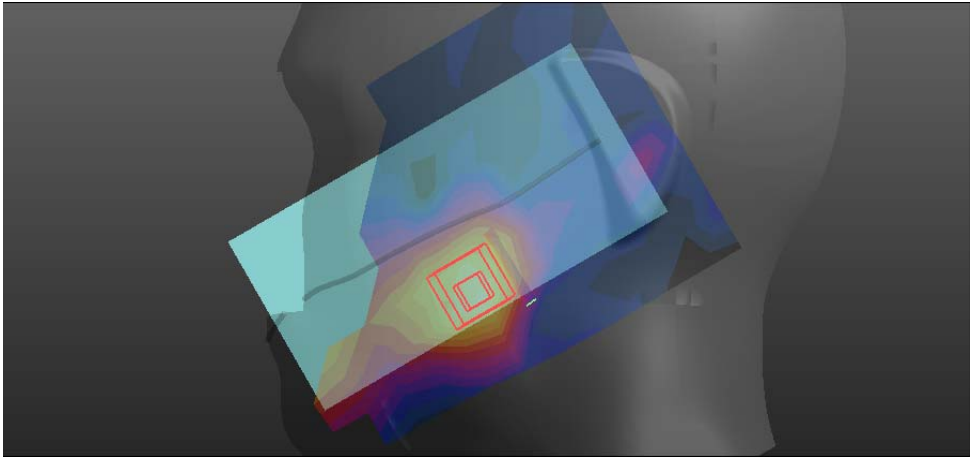
Right Side	Tilt
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.89 \text{ S/m}$; $\epsilon_r = 41.479$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.2, 6.2, 6.2); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section Right HSL LTE band5/LTE band5 20BW 50RB LOW HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0550 W/kg Head-Section Right HSL LTE band5/LTE band5 20BW 50RB LOW HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.426 V/m; Power Drift = 0.15 dB Peak SAR (extrapolated) = 0.0670 W/kg SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.042 W/kg Maximum value of SAR (measured) = 0.0567 W/kg dB 0 -1.65 -3.30 -4.95 -6.60 -8.25 0 dB = 0.0567 W/kg = -12.46 dBW/kg	

LTE (Band 5 20BW-50RB-Low/Flat)

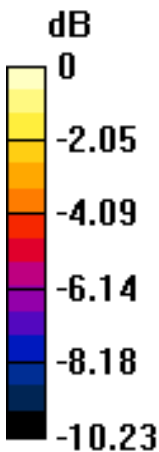
FLAT	Towards phantom
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.859$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 TP/LTE band5 TP 20BW 50RB LOW M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.146 W/kg Flat-Section MSL LTE band5 TP/LTE band5 TP 20BW 50RB LOW M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 10.69 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.193 W/kg SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.104 W/kg Maximum value of SAR (measured) = 0.153 W/kg dB 0 -2.83 -5.66 -8.48 -11.31 -14.14 0 dB = 0.153 W/kg = -8.15 dBW/kg	

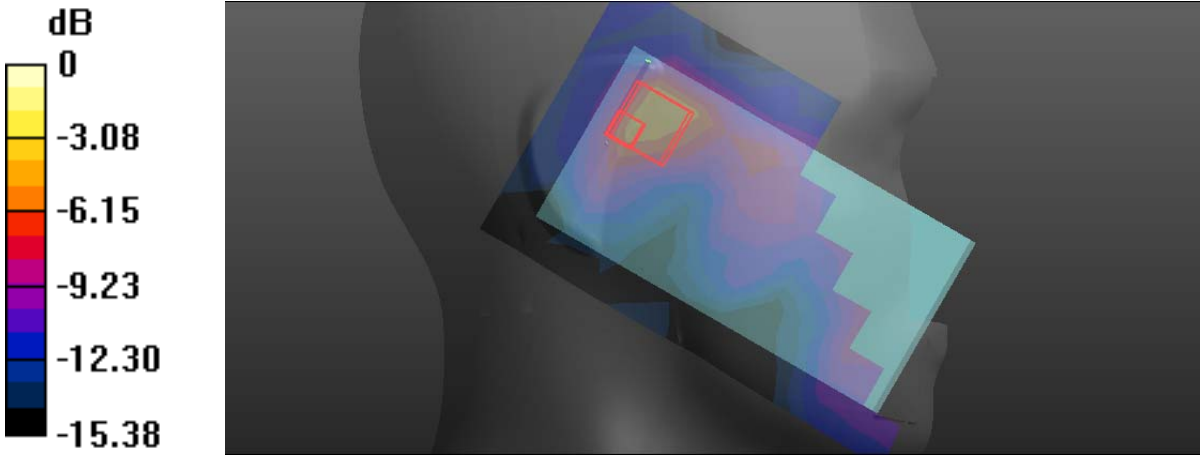
FLAT	Towards ground
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.859$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 TG/LTE band5 TG 20BW 50RB LOW M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.178 W/kg Flat-Section MSL LTE band5 TG/LTE band5 TG 20BW 50RB LOW M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.44 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 0.227 W/kg SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.127 W/kg Maximum value of SAR (measured) = 0.184 W/kg  0 dB = 0.184 W/kg = -7.35 dBW/kg	

LTE (Band 7 20BW-1RB-Low/Head)

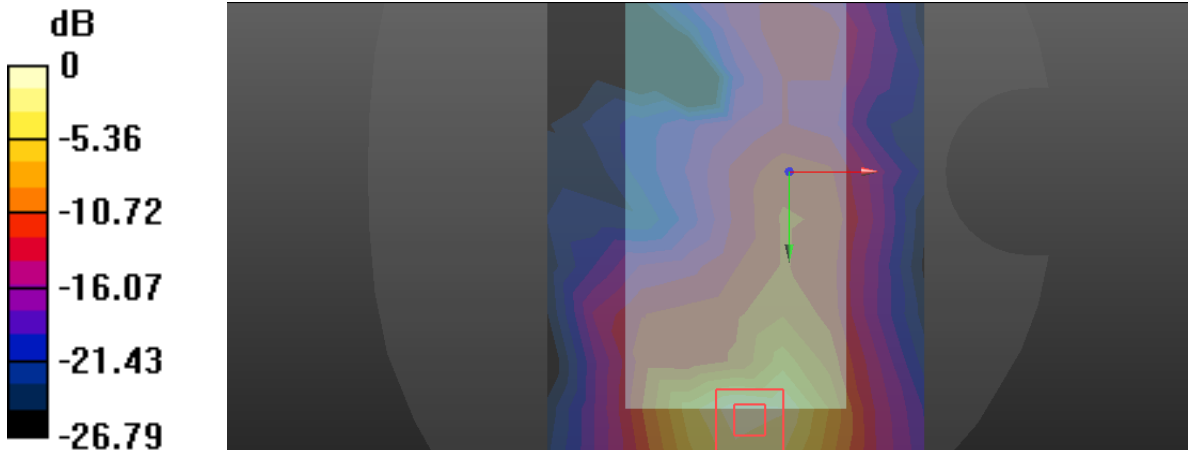
Left Side	Cheek
Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111 Medium parameters used: $f = 2535$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 36.5$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Left/LTE band7 20MHz 1RB Low HSL touch M/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.0626 W/kg Head-Section HSL LTE band7 Left/LTE band7 20MHz 1RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 0.9200 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 0.125 W/kg SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.034 W/kg Maximum value of SAR (measured) = 0.0706 W/kg dB 0 -2.47 -4.94 -7.40 -9.87 -12.34  0 dB = 0.0706 W/kg = -11.51 dBW/kg	

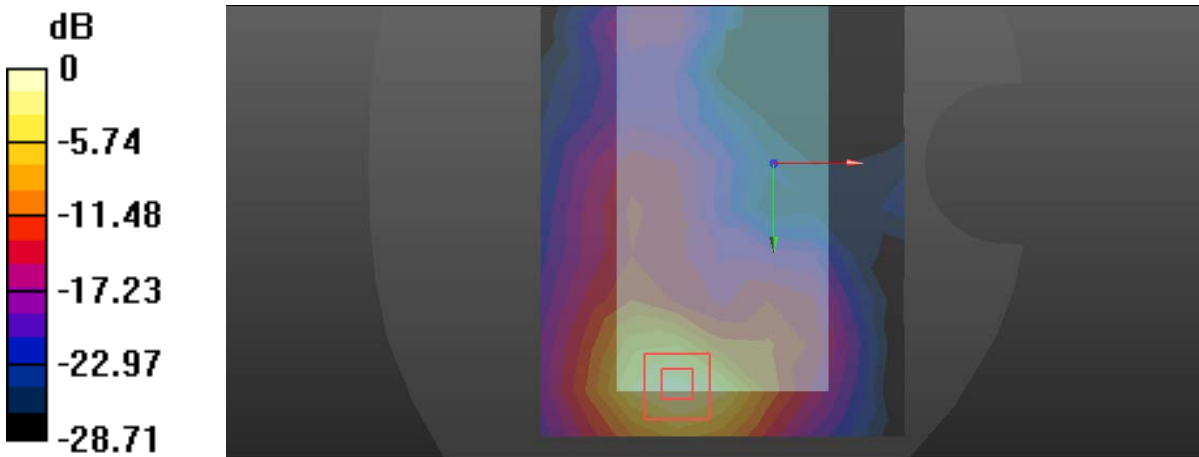
Left Side	Tilt
Communication System: UID 10297 - AAA, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.81066 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Left/LTE band7 20MHz 1RB Low HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0227 W/kg Head-Section HSL LTE band7 Left/LTE band7 20MHz 1RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.333 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.101 W/kg SAR(1 g) = 0.027 W/kg; SAR(10 g) = 0.012 W/kg Maximum value of SAR (measured) = 0.0448 W/kg dB 0 -10.00 -20.00 -30.00 -40.00 -50.00 0 dB = 0.0448 W/kg = -13.49 dBW/kg	

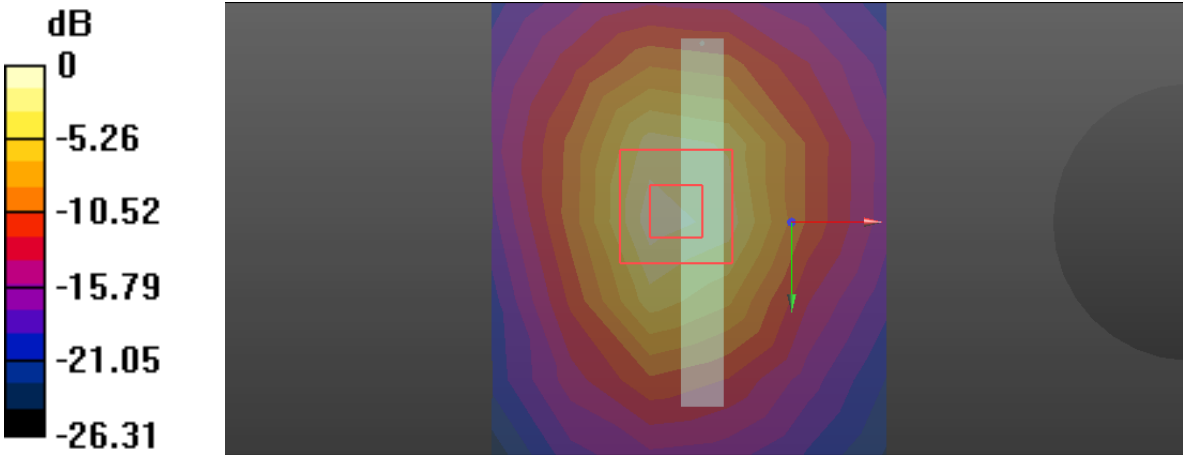
Right Side	Cheek
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Right/LTE band7 20MHz 1RB Low HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0324 W/kg Head-Section HSL LTE band7 Right/LTE band7 20MHz 1RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.823 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.0730 W/kg SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.021 W/kg Maximum value of SAR (measured) = 0.0370 W/kg  0 dB = 0.0370 W/kg = -14.32 dBW/kg	

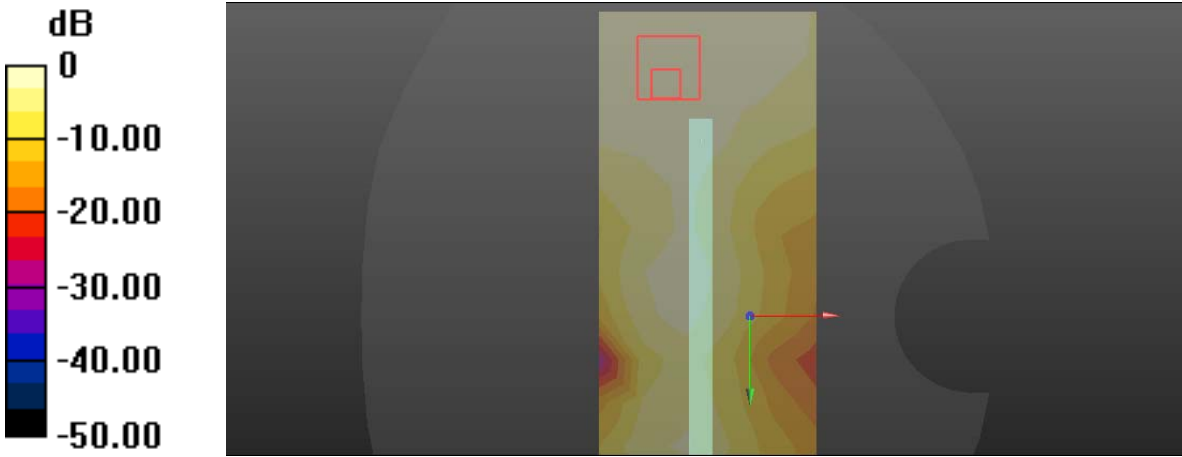
Right Side	Tilt
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Right/LTE band7 20MHz 1RB Low HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0220 W/kg Head-Section HSL LTE band7 Right/LTE band7 20MHz 1RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.632 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.112 W/kg SAR(1 g) = 0.030 W/kg; SAR(10 g) = 0.013 W/kg Maximum value of SAR (measured) = 0.0699 W/kg  0 dB = 0.0699 W/kg = -11.56 dBW/kg	

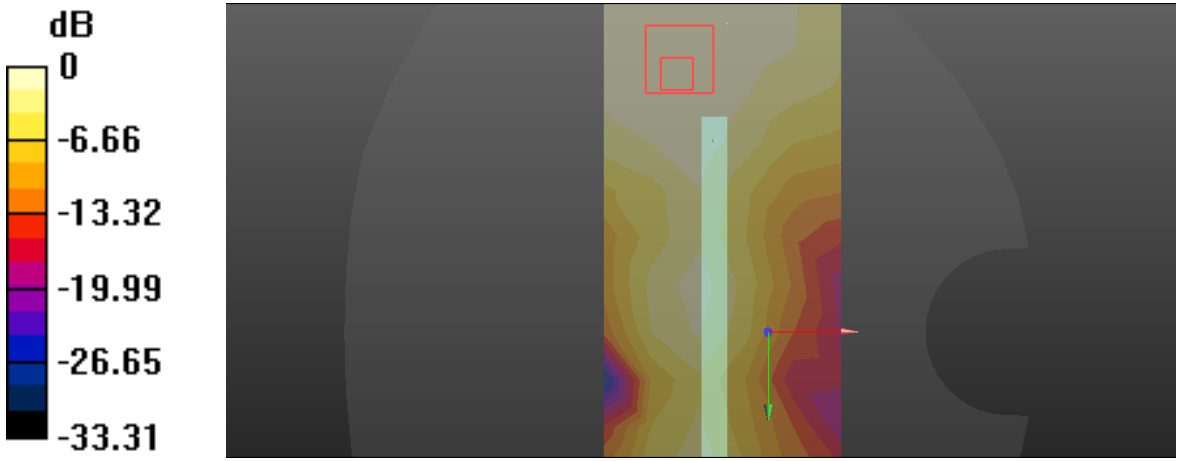
LTE (Band 7 20BW-1RB-Low/Flat)

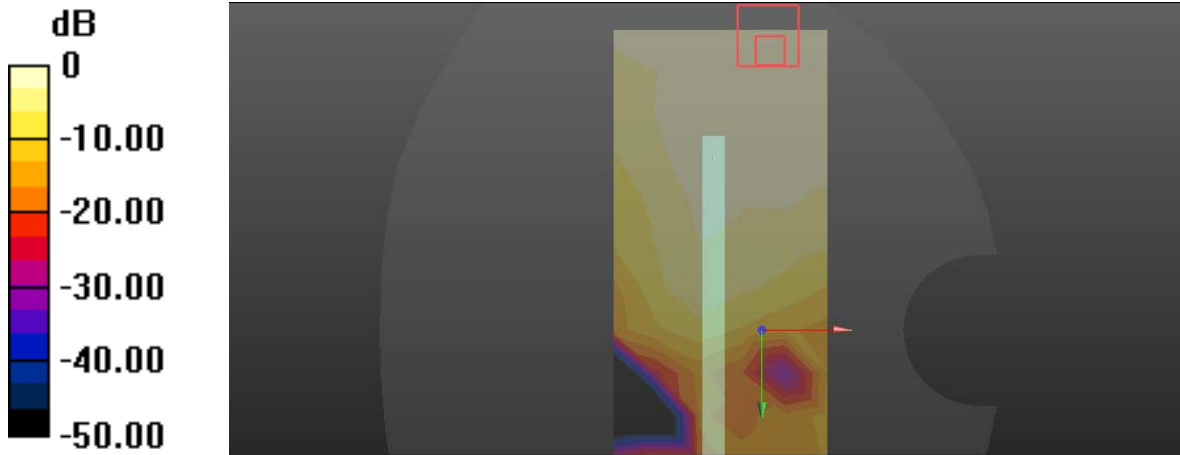
FLAT	Towards phantom
Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111 Medium parameters used: $f = 2535$ MHz; $\sigma = 2.15$ S/m; $\epsilon_r = 50.36$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 TP/LTE band7 TP 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.318 W/kg Flat-Section MSL LTE band7 TP/LTE band7 TP 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.694 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.751 W/kg SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.146 W/kg Maximum value of SAR (measured) = 0.358 W/kg	
 0 dB = 0.358 W/kg = -4.46 dBW/kg	

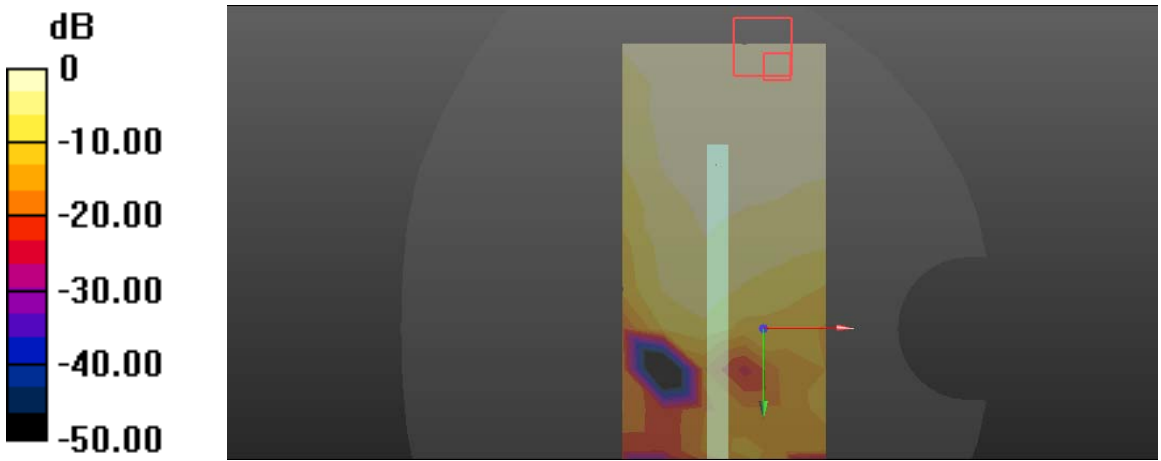
FLAT	Towards ground
Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.15 \text{ S/m}$; $\epsilon_r = 50.36$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 TG/LTE band7 TG 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.819 W/kg Flat-Section MSL LTE band7 TG/LTE band7 TG 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.102 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 1.82 W/kg SAR(1 g) = 0.740 W/kg; SAR(10 g) = 0.311 W/kg Maximum value of SAR (measured) = 0.840 W/kg  0 dB = 0.840 W/kg = -0.76 dBW/kg	

FLAT	EDGE2
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mm M edge 2/Area Scan (6x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.493 W/kg Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mm M edge 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 15.74 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.16 W/kg SAR(1 g) = 0.523 W/kg; SAR(10 g) = 0.234 W/kg Maximum value of SAR (measured) = 0.577 W/kg  0 dB = 0.577 W/kg = -2.39 dBW/kg	

FLAT	EDGE3
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 3/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0498 W/kg Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 3/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.938 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.103 W/kg SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.027 W/kg Maximum value of SAR (measured) = 0.0525 W/kg  0 dB = 0.0525 W/kg = -12.80 dBW/kg	

FLAT	EDGE3
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 3 2/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0506 W/kg Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 3 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 3.939 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 0.104 W/kg SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.027 W/kg Maximum value of SAR (measured) = 0.0531 W/kg  0 dB = 0.0531 W/kg = -12.75 dBW/kg	

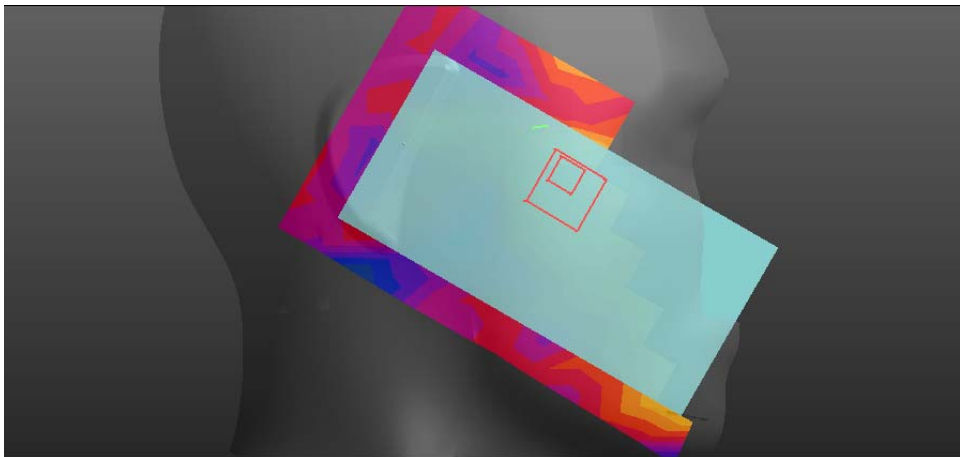
FLAT	EDGE4
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 4/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0193 W/kg Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 4/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.183 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.0400 W/kg SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.010 W/kg Maximum value of SAR (measured) = 0.0196 W/kg  0 dB = 0.0196 W/kg = -17.08 dBW/kg	

FLAT	EDGE4
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 4 2/Area Scan (6x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0178 W/kg Flat-Section MSL LTE band7 HOT/LTE band7 20MHz 1RB 10mmM edge 4 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.043 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.0360 W/kg SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00988 W/kg Maximum value of SAR (measured) = 0.0190 W/kg  0 dB = 0.0190 W/kg = -17.21 dBW/kg	

LTE (Band 7 20BW-50RB-Low/Head)

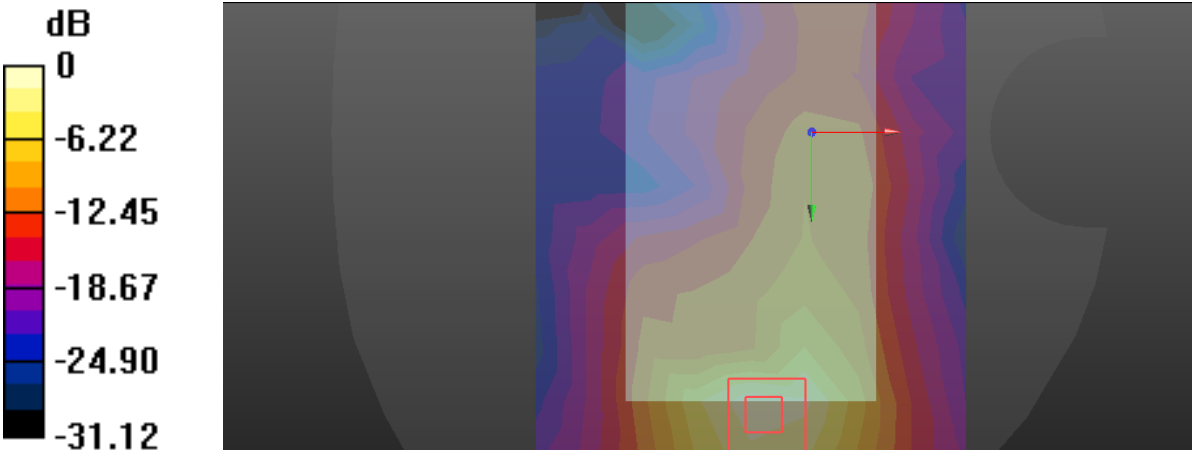
Left Side	Cheek
Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Left/LTE band7 20MHz 50RB Low HSL touch M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0544 W/kg Head-Section HSL LTE band7 Left/LTE band7 20MHz 50RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.993 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.132 W/kg SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.030 W/kg Maximum value of SAR (measured) = 0.0688 W/kg dB 0 -1.99 -3.98 -5.98 -7.97 -9.96 0 dB = 0.0688 W/kg = -11.62 dBW/kg	

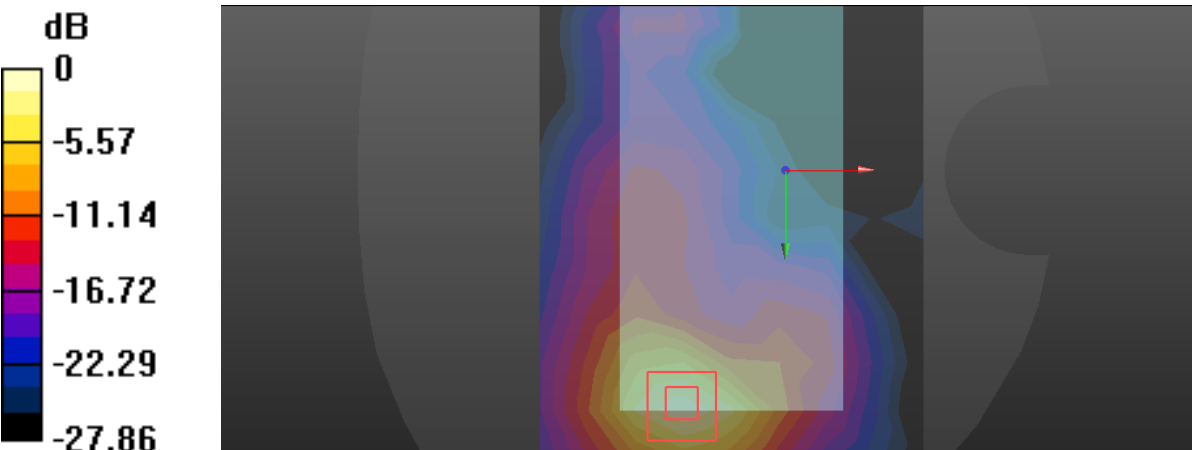
Left Side	Tilt
Communication System: UID 10297 - AAA, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.81066 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Left/LTE band7 20MHz 50RB Low HSL tilt M/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0186 W/kg Head-Section HSL LTE band7 Left/LTE band7 20MHz 50RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.718 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.0450 W/kg SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.00918 W/kg Maximum value of SAR (measured) = 0.0254 W/kg dB 0 -10.00 -20.00 -30.00 -40.00 -50.00 0 dB = 0.0254 W/kg = -15.95 dBW/kg	

Right Side	Cheek
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Right/LTE band7 20MHz 50RB Low HSL touch M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0280 W/kg Head-Section HSL LTE band7 Right/LTE band7 20MHz 50RB Low HSL touch M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.046 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.0730 W/kg SAR(1 g) = 0.029 W/kg; SAR(10 g) = 0.019 W/kg Maximum value of SAR (measured) = 0.0333 W/kg dB 0 -2.23 -4.46 -6.69 -8.92 -11.15  0 dB = 0.0333 W/kg = -14.78 dBW/kg	

Right Side	Tilt
Communication System: UID 0, LTE band 07 (0); Frequency: 2535 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.01 \text{ S/m}$; $\epsilon_r = 36.5$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Right Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.4, 4.4, 4.4); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Head-Section HSL LTE band7 Right/LTE band7 20MHz 50RB Low HSL tilt M/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.0188 W/kg Head-Section HSL LTE band7 Right/LTE band7 20MHz 50RB Low HSL tilt M/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.520 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.424 W/kg SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.012 W/kg Maximum value of SAR (measured) = 0.0995 W/kg 0 dB = 0.0995 W/kg = -10.02 dBW/kg	

LTE (Band 7 20BW-50RB-Low/Flat)

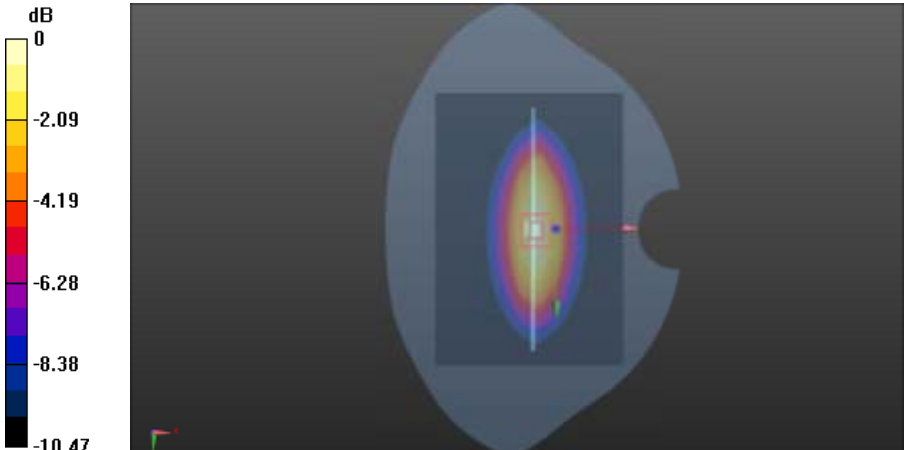
FLAT	Towards phantom
Communication System: UID 10297 - AAA, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.81066 Medium parameters used: $f = 2535$ MHz; $\sigma = 2.15$ S/m; $\epsilon_r = 50.36$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 TP/LTE band7 TP 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.263 W/kg Flat-Section MSL LTE band7 TP/LTE band7 TP 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.398 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.624 W/kg SAR(1 g) = 0.270 W/kg; SAR(10 g) = 0.123 W/kg Maximum value of SAR (measured) = 0.296 W/kg	
 0 dB = 0.296 W/kg = -5.29 dBW/kg	

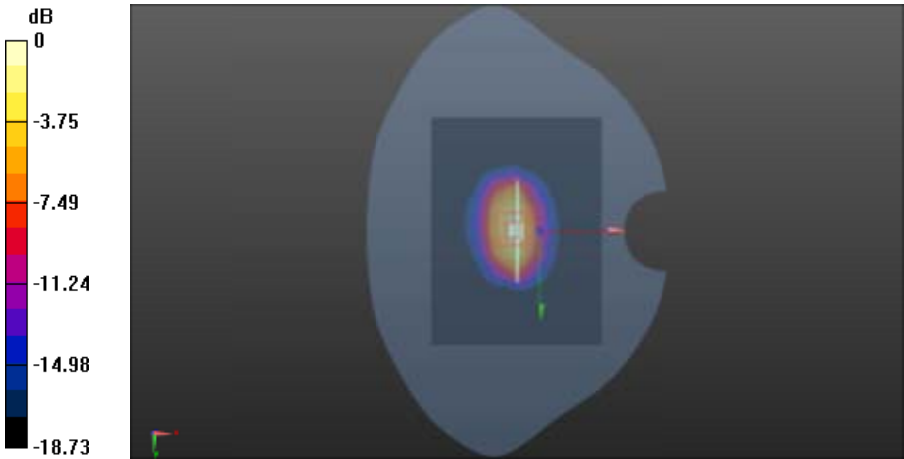
FLAT	Towards ground
Communication System: UID 10297 - AAA, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.81066 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.15 \text{ S/m}$; $\epsilon_r = 50.36$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: ES3DV3 - SN3127; ConvF(4.17, 4.17, 4.17); Calibrated: 2016/8/29; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2016/8/22 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 TG/LTE band7 TG 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.667 W/kg Flat-Section MSL LTE band7 TG/LTE band7 TG 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 1.967 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 1.51 W/kg SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.258 W/kg Maximum value of SAR (measured) = 0.688 W/kg  0 dB = 0.688 W/kg = -1.62 dBW/kg	

NEW TEST

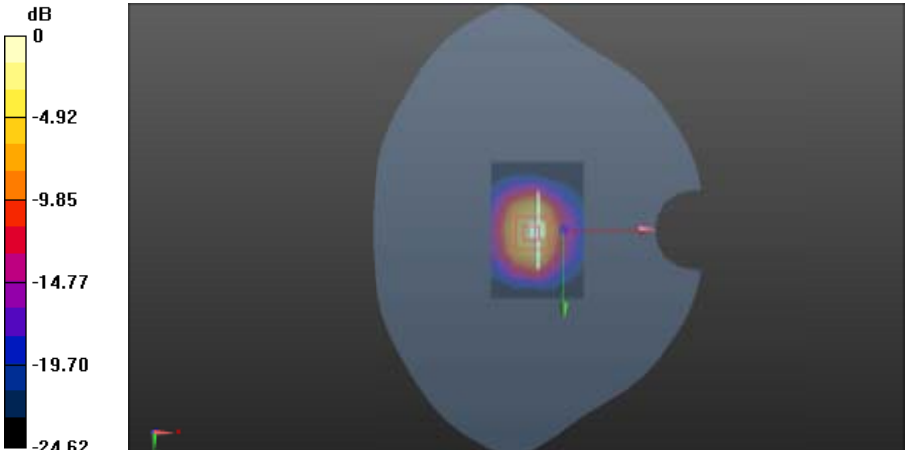
SYSTEM CHECK

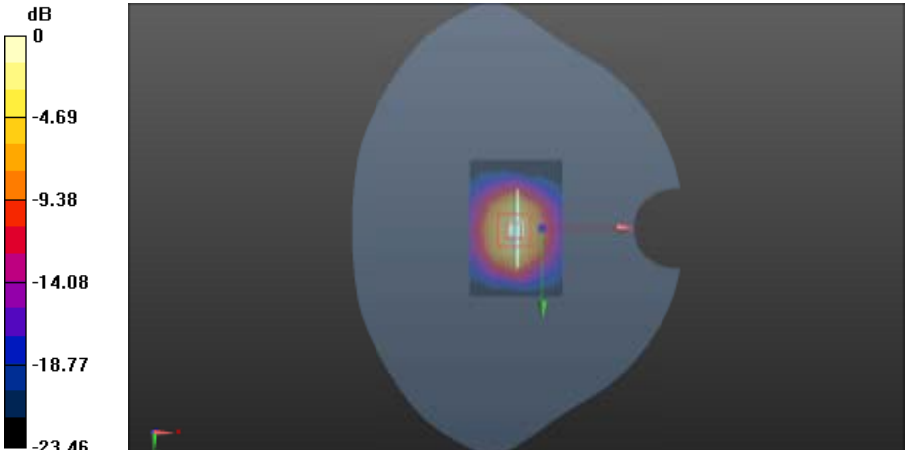
SYSTEM CHECKING SCANS	835MHz Head
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (extrapolated): $f = 835 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 42.236$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.97, 5.97, 5.97); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1559; Type: SAM; Serial: 1559 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 835MHz Head/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (10x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.97 W/kg System Performance Check at Frequencies 835MHz Head/d=15mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 52.036 V/m; Power Drift = -0.12 dB Peak SAR (extrapolated) = 3.82 W/kg SAR(1 g) = 2.42 W/kg; SAR(10 g) = 1.65 W/kg Maximum value of SAR (measured) = 3.11 W/kg	

SYSTEM CHECKING SCANS	835MHz Flat
Communication System: UID 0, CW (0); Frequency: 835 MHz Medium parameters used (extrapolated): $f = 835 \text{ MHz}$; $\sigma = 0.986 \text{ S/m}$; $\epsilon_r = 53.733$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.88, 5.88, 5.88); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -18.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1559; Type: SAM; Serial: 1559 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 835MHz Flat/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (7x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.78 W/kg System Performance Check at Frequencies 835MHz Flat/d=15mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 55.425 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 3.22 W/kg SAR(1 g) = 2.28 W/kg; SAR(10 g) = 1.89 W/kg Maximum value of SAR (measured) = 2.63 W/kg	
	

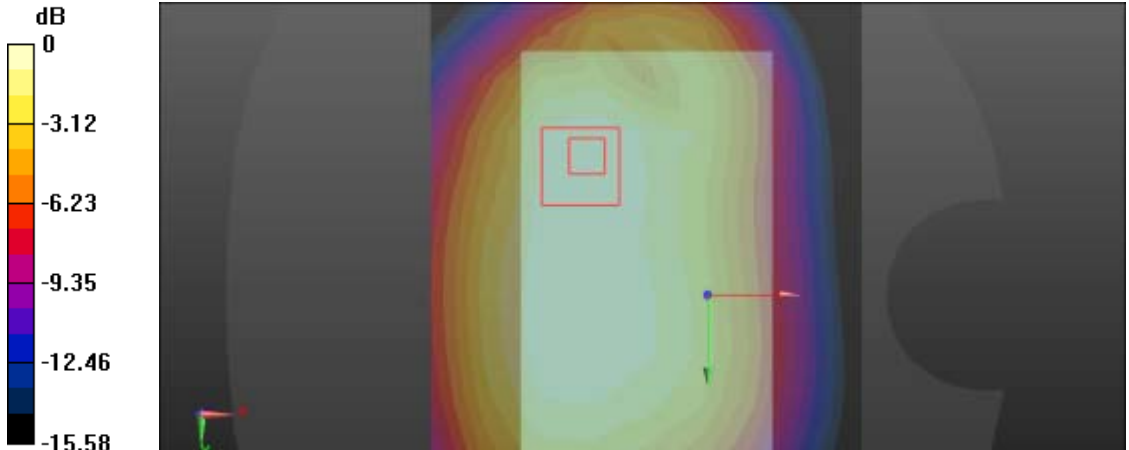
SYSTEM CHECKING SCANS	1900MHz Head
Communication System: UID 0, CW (0); Frequency: 1900 MHz Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.42 \text{ S/m}$; $\epsilon_r = 40.77$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.94, 4.94, 4.94); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1560; Type: SAM; Serial: 1560 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 1900MHz Head/d=10mm, Pin=250mW, dist=2.0mm (EX-Probe)/Area Scan (9x12x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 14.5 W/kg System Performance Check at Frequencies 1900MHz Head/d=10mm, Pin=250mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 97.6 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 21.7 W/kg SAR(1 g) = 9.91 W/kg; SAR(10 g) = 5.31 W/kg Maximum value of SAR (measured) = 14.8 W/kg	
	

SYSTEM CHECKING SCANS	1900MHz Flat
Communication System: UID 0, CW (0); Frequency: 1900 MHz Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.49 \text{ S/m}$; $\epsilon_r = 52.776$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section Measurement Standard:DASY5 (IEEE 1528-2013) DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.67, 4.67, 4.67); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$ - Electronics: DAE4 Sn546; Calibrated: 8/22/2016 - Phantom: SAM 1560; Type: SAM; Serial: 1560 - DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164) System Performance Check at Frequencies 1900MHz Flat/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 15.5 W/kg System Performance Check at Frequencies 1900MHz Flat/d=10mm, Pin=250 mW, dist=2.0mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 93.5 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 18.8 W/kg SAR(1 g) = 9.44 W/kg; SAR(10 g) = 5.52 W/kg Maximum value of SAR (measured) = 13.7 W/kg	

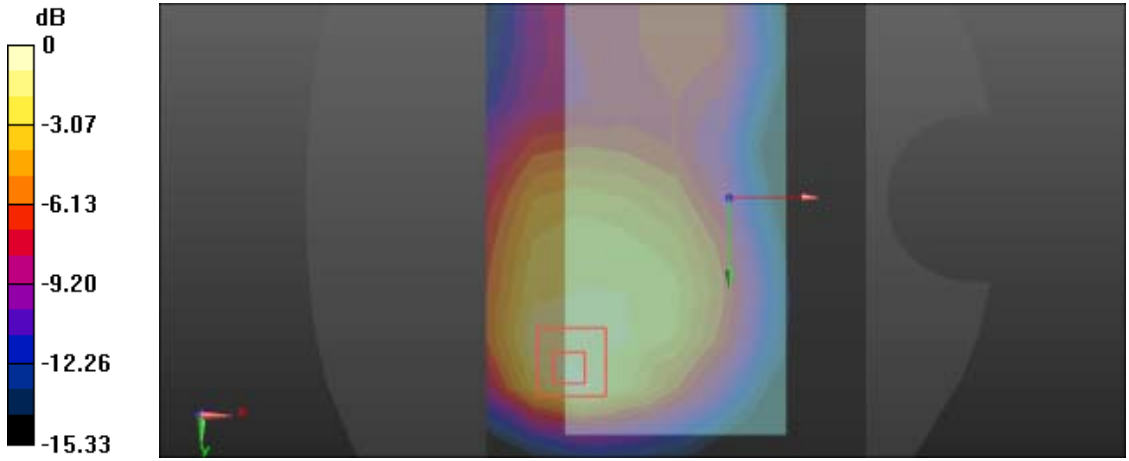
SYSTEM CHECKING SCANS	2450 MHz Head
Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.83 \text{ S/m}$; $\epsilon_r = 39.459$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.35, 4.35, 4.35); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2015/8/19 - Phantom: SAM 1659; Type: QD000P40CD; Serial: TP:1659 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164) System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 17.5 W/kg System Performance Check at Frequencies 2450MHz Head/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 101.8 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 29.7 W/kg SAR(1 g) = 12.64 W/kg; SAR(10 g) = 5.66 W/kg Maximum value of SAR (measured) = 17.4 W/kg	
	

SYSTEM CHECKING SCANS	2450MHz Flat
Communication System: UID 0, CW (0); Frequency: 2450 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.944 \text{ S/m}$; $\epsilon_r = 52.438$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.19, 4.19, 4.19); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn546; Calibrated: 2015/8/19 - Phantom: SAM 1659; Type: QD000P40CD; Serial: TP:1659 - Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164) System Performance Check at Frequencies 2450MHz Flat/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 18.6 W/kg System Performance Check at Frequencies 2450MHz Flat/d=10mm, Pin=250 mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 110.6 V/m; Power Drift = 0.12 dB Peak SAR (extrapolated) = 29.6 W/kg SAR(1 g) = 13.11 W/kg; SAR(10 g) = 5.93 W/kg Maximum value of SAR (measured) = 18.2 W/kg	
	

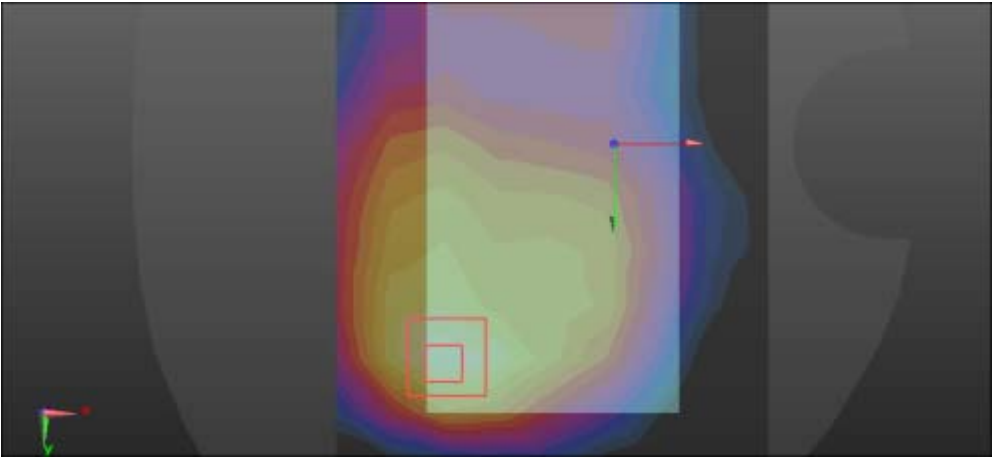
GSM850

FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 836.6 MHz;Duty Cycle: 1:8.6896 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 850 TG/850EGPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.772 W/kg Flat-Section MSL 850 TG/850EGPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 24.12 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 0.89 W/kg SAR(1 g) = 0.685 W/kg; SAR(10 g) = 0.451 W/kg Maximum value of SAR (measured) = 0.743 W/kg  0 dB = 0.743 W/kg = -1.29 dBW/kg	

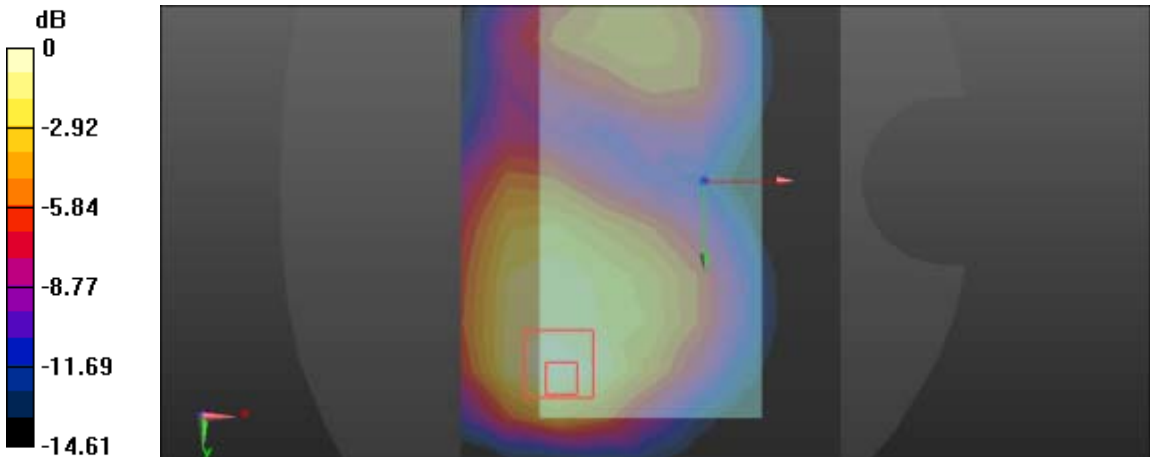
GSM1900

FLAT	Towards ground
Communication System: UID 10021 - DAB, GSM-FDD (TDMA, GMSK); Frequency: 1880 MHz;Duty Cycle: 1:8.6896 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.57$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL 1900 TG/1900EGPRS TG M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15$mm, $dy=15$mm Maximum value of SAR (measured) = 0.594 W/kg Flat-Section MSL 1900 TG/1900EGPRS TG M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$mm, $dy=5$mm, $dz=5$mm Reference Value = 12.17 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 1.18 W/kg SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.355 W/kg Maximum value of SAR (measured) = 0.691 W/kg  0 dB = 0.691 W/kg = -1.61 dBW/kg	

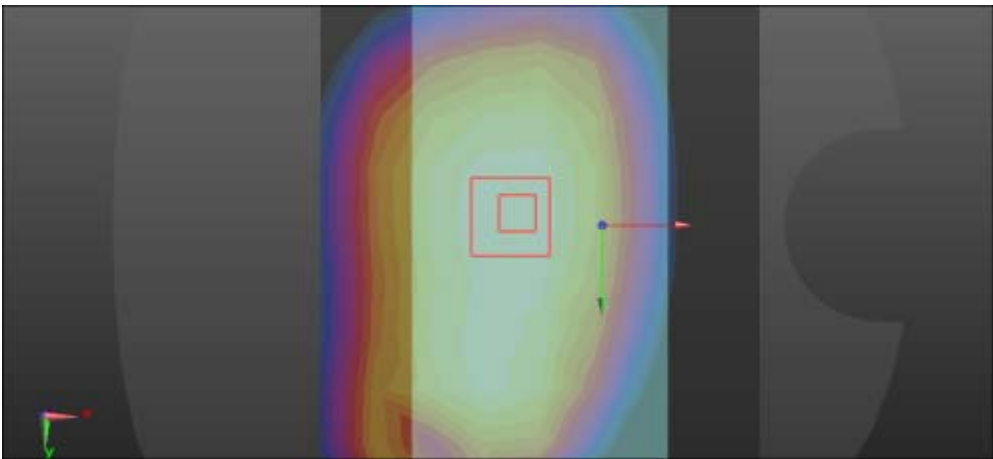
WCDMA BAND2

FLAT(VIOCE)	Towards ground
Communication System: UID 0, band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TG voice M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.577 W/kg Flat-Section MSL wcdma band2 TG&TP/wcdma band2 TG voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 7.245V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.8 8/kg SAR(1 g) = 0.491 W/kg; SAR(10 g) = 0.242 W/kg Maximum value of SAR (measured) = 0.563 W/kg dB 0 -3.20 -6.41 -9.61 -12.82 -16.02  0 dB = 0.563= -2.49 dBW/kg	

WCDMA BAND4

FLAT(VIOCE)	Towards ground
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 1732.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 1732.6$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1660; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TG voice M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.666 W/kg Flat-Section MSL wcdma band4 TG&TP/wcdma band4 TG voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 7.112 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.21 W/kg SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.304 W/kg Maximum value of SAR (measured) = 0.659 W/kg	
 0 dB = 0.659 W/kg = -1.81 dBW/kg	

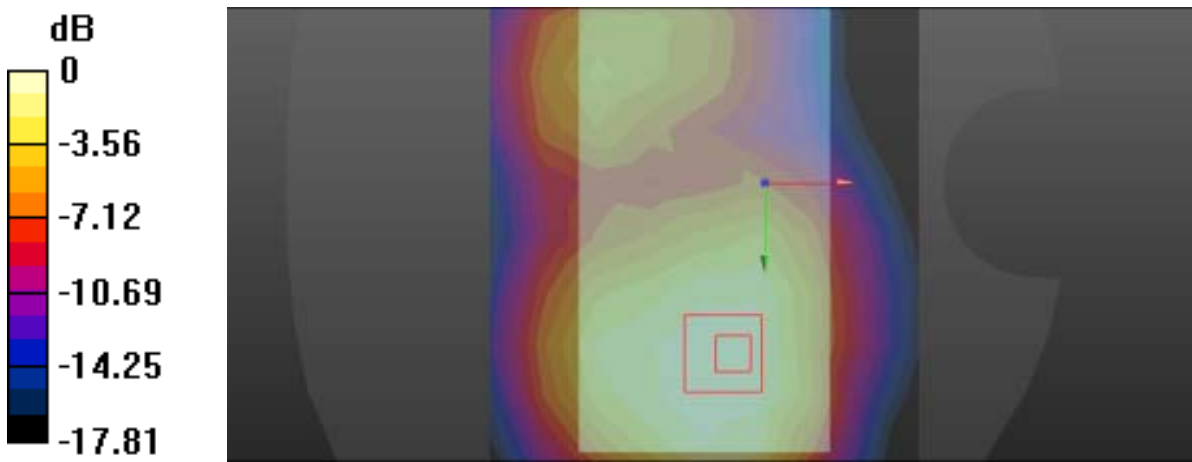
WCDMA BAND5

FLAT(VIOCE)	Towards ground
Communication System: UID 10011 - CAB, UMTS-FDD (WCDMA); Frequency: 836.6 MHz;Duty Cycle: 1:1.95434 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.1, 9.1, 9.1); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: 1659; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TG voice M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.271 W/kg Flat-Section MSL wcdma band5 TG&TP/wcdma band5 TG voice M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 17.11 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.336 W/kg SAR(1 g) = 0.288 W/kg; SAR(10 g) = 0.171 W/kg Maximum value of SAR (measured) = 0.266 W/kg dB 0 -1.75 -3.50 -5.24 -6.99 -8.74  0 dB = 0.266 W/kg = -5.75 dBW/kg	

LTE BAND2

FLAT	Towards ground
Communication System: UID 0, LTE band 2 (0); Frequency: 1880 MHz;Duty Cycle: 1:1 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.57 \text{ S/m}$; $\epsilon_r = 51.14$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.79, 7.79, 7.79); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 2016/10/31 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.835 W/kg Flat-Section MSL LTE band2 TG/LTE band2 TG 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 5.922 V/m; Power Drift = 0.18 dB Peak SAR (extrapolated) = 1.47 W/kg SAR(1 g) = 0.723 W/kg; SAR(10 g) = 0.311 W/kg Maximum value of SAR (measured) = 0.881 W/kg dB 0 -3.53 -7.06 -10.60 -14.13 -17.66 0 dB = 0.881 W/kg = -0.55 dBW/kg	

LTE BAND4

FLAT	Towards ground
Communication System: UID 0, LTE band 4 (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.404$ S/m; $\epsilon_r = 51.622$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.9, 4.9, 4.9); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band4 TG/LTE band4 TG 20MHz 50RB M 10mm/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.362 W/kg Flat-Section MSL LTE band4 TG/LTE band4 TG 20MHz 50RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.675 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.696 W/kg SAR(1 g) = 0.374 W/kg; SAR(10 g) = 0.166 W/kg Maximum value of SAR (measured) = 0.407 W/kg  0 dB = 0.407 W/kg = -4.92 dBW/kg	

LTE BAND5

FLAT	Towards ground
Communication System: UID 0, LTE Band 5 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5 \text{ MHz}$; $\sigma = 0.96 \text{ S/m}$; $\epsilon_r = 55.859$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(6.16, 6.16, 6.16); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: 1559 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band5 TG/LTE band5 TG 20BW 1RB LOW M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.279 W/kg Flat-Section MSL LTE band5 TG/LTE band5 TG 20BW 1RB LOW M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 13.95 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 0.645 W/kg SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.082 W/kg Maximum value of SAR (measured) = 0.255 W/kg dB 0 -3.48 -6.96 -10.45 -13.93 -17.41 0 dB = 0.255 W/kg = -5.93 dBW/kg	

LTE BAND7

FLAT	Towards ground
Communication System: UID 10169 - CAB, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK); Frequency: 2535 MHz;Duty Cycle: 1:3.74111 Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 2.15 \text{ S/m}$; $\epsilon_r = 50.36$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.17, 4.17, 4.17); Calibrated: 2016/11/10; - Sensor-Surface: 4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 10/31/2016 - Phantom: Twin-SAM 1560; Type: QD 000 P40 CD; Serial: 1560 - Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373) Flat-Section MSL LTE band7 TG/LTE band7 TG 20MHz 1RB M 10mm/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.873 W/kg Flat-Section MSL LTE band7 TG/LTE band7 TG 20MHz 1RB M 10mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.567 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.13 W/kg SAR(1 g) = 0.663 W/kg; SAR(10 g) = 0.244 W/kg Maximum value of SAR (measured) = 0.697 W/kg dB 0 -5.74 -11.48 -17.23 -22.97 -28.71 0 dB = 0.697 W/kg = -1.57 dBW/kg	

ANNEX B - RELEVANT PAGES FROM CALIBRATION REPORTS

DAE4 Sn:546

Calibration Laboratory of
Schrey & Partner
Engineering AG
Renggenstrasse 10, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client: SRTC (YHNE) Certificate No.: DAE4-546_Aug16

CALIBRATION CERTIFICATE

Instrument: DAE4 - DC 000 D04 (Sn: -) SFC 546

Calibration procedure(s): DA-CAL-06-v09
Geographical procedure for the data acquisition electronics (DAE)

Calibration date: August 22, 2016

This calibration certificate documents the traceability to national standards, which define the present units of measurement (SI).
The measurements and the uncertainties are given on the following pages and are part of the certificate.

All calibrations have been conducted in the calibration laboratory facility, environmental conditions (23 ± 0.5°C and humidity < 10%).

Calibration Program used (SAS IT) for the calibration:

Primary Standards	Uncertainty	Cal Date (Certificate No.)	Simulation Calibration
DC Voltage	0.01 %	04-Sep-16 (DAE4-546)	See 16
DC Current	0.01 %	04-Sep-16 (DAE4-546)	See 17

Authorized Representative (Signature): [Signature]

Approved by: [Signature] Quality Technical Manager

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: DAE4-546_Aug16 Page 1 of 5

Calibration Laboratory of
Schrey & Partner
Engineering AG
Renggenstrasse 10, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Client: SRTC (YHNE) Certificate No.: DAE4-546_Aug16

Glossary

DAE: data acquisition electronics
Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
- DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
- Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
- Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
- AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage.
- Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
- Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
- Input resistance: Typical value for information; DAE input resistance at the connector, during internal auto-ranging and during measurement.
- Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
- Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-546_Aug16 Page 2 of 5

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200031.74	-2.15	-0.00
Channel X + Input	20003.66	-0.75	-0.00
Channel X - Input	-20001.88	3.77	-0.02
Channel Y + Input	200021.10	-12.53	-0.01
Channel Y + Input	20002.22	-2.15	-0.01
Channel Y - Input	-20003.78	1.88	-0.01
Channel Z + Input	200025.91	-7.99	-0.00
Channel Z + Input	19999.97	-4.36	-0.02
Channel Z - Input	-20005.55	0.07	-0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2000.62	-0.12	-0.01
Channel X + Input	201.00	0.23	0.11
Channel X - Input	-198.76	0.38	-0.19
Channel Y + Input	2000.36	-0.29	-0.01
Channel Y + Input	200.22	-0.57	-0.29
Channel Y - Input	-200.24	-0.93	0.47
Channel Z + Input	2000.61	0.13	0.01
Channel Z + Input	199.06	-1.52	-0.76
Channel Z - Input	-201.43	-1.99	1.00

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	1.49	0.15
	-200	1.41	-0.23
Channel Y	200	-0.40	-0.13
	-200	-1.08	-1.50
Channel Z	200	2.19	2.17
	-200	-4.93	-4.90

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-3.01	-3.43	-
Channel Y	200	9.77	-1.00	-
Channel Z	200	5.39	7.00	-

Certificate No: DAE4-546_Aug16

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15845	15842
Channel Y	16150	14493
Channel Z	15907	16531

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	1.22	0.21	1.94	0.35
Channel Y	0.27	-1.07	1.43	0.50
Channel Z	-0.65	-1.46	0.11	0.35

6. Input Offset Current

Nominal input circuitry offset current on all channels: <250A

7. Input Resistance (Typical values for information)

	Zeroing (MΩm)	Measuring (MΩm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-6	-9

Certificate No: DAE4-546_Aug16

Page 5 of 5

DAE4 Sn:546

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15045	16442
Channel Y	16150	14493
Channel Z	15907	16531

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec
Input: 10 mV

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	1.22	0.21	1.94	0.35
Channel Y	0.27	-1.07	1.43	0.50
Channel Z	-0.65	-1.46	0.11	0.35

6. Input Offset Current

Nominal Input circuitry offset current on all channels: $<25\text{fA}$

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. **Low Battery Alarm Voltage** (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-546_Aug16

Page 5 of 5

DAE4 Sn:720

Calibration Laboratory of Schmid & Partner Engineering AG Engelthurnstrasse 49, 8040 Zurich, Switzerland		 		Schweizerischer Kantonssieger Schweizerischer Kantonssieger Schweizerischer Kantonssieger Schweizerischer Kantonssieger	
Submitted by: The Swiss Accreditation Service (SAC) The Swiss Accreditation Service is one of the signatories for the EA Multilateral Agreement for the recognition of calibration certificates				Accreditation No.: SCS 0108	
Client: BRTS (VWA)				Certificate No.: DAE-700_00116	
CALIBRATION CERTIFICATE					
Item: EMER - TC-500 D04 BM - Sbc 700					
Calibration procedure: QA CALOE 609 Calibration procedure for the data acquisition electronics (SAC)					
Calibration date: October 31, 2016					
This calibration certificate documents the traceability to national standards, which realize the physical units of measurement (SI). The measurements and the uncertainties with confidence intervals are given in the relevant tables and are part of the certificate.					
All calibration have been performed in the shared laboratory facility, ambient temperature (20 ± 0.1) °C and humidity < 70%.					
Calibration Equipment used (EMER) verified for calibration					
Primary Standard: W 16		Gas Check (EMER) Ver. 1.0		Recalibrated Calibration: Yes	
Reference Material Type: 2001		W 16		Yes	
Secondary Standard: W 16		EMER Data (EMER) Ver. 1.0		Recalibrated Check: Yes	
Gas (EMER) Calibration (EMER)		W 16		Yes	
Calibration Test 1: W 16		W 16		Yes	
Name: Deutsche Telekom		Position: Technician		Signature: 	
Representative: F. Bredel		Deputy Technical Manager: 		F. Bredel	
WAB 01000 2016 01					
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.					

DAE4 Sn:720

Calibration Laboratory of
Schmid & Partner
Engineering AG
Rueggstrasse 10, 8090 Zurich, Switzerland

ISO 9001
ISO 17025

Schmid & Partner
Service across all languages
Service customers & suppliers
Service Calibration Service

Accreditation No.: SCS 0108

Accreditation by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Keywords
DAE: data acquisition electronics
Connector angle: information used in DASY system to align probe sensor X to the robot
coordinate system.

Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** This angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters are documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
 - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
 - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage.
 - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
 - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - **Input resistance:** Typical value for information; GAE input resistance at the connector, during internal auto-ranging and during measurement.
 - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
 - **Power consumption:** Typical value for information. Supply currents in various operating modes.

Certificate No: DAE4-720_00108

Page 2 of 5

DC Voltage Measurement

AD-Converter Resolution nominal
High Range: 11.99 mV
Low Range: 11.99 mV
Full Range: -100...+100 mV
Full Range: -10...+10 mV
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	Y	Z
High Range	455.020 ± 0.02% (k=2)	454.780 ± 0.02% (k=2)
Low Range	5.45020 ± 1.02% (k=2)	5.45020 ± 1.02% (k=2)

Connector Angle

Connector angle to be used in DASY system	23.0° ± 1°
---	------------

Certificate No: DAE4-720_00108

Page 3 of 5

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	200030.00	-2.83	-0.00
Channel X - Input	20005.59	1.21	0.01
Channel Y + Input	-20002.63	2.74	-0.01
Channel Y - Input	20001.46	-1.44	-0.00
Channel Z + Input	20003.49	-0.90	-0.00
Channel Z - Input	-20003.62	1.72	-0.01
Channel X + Input	200030.86	-1.63	-0.00
Channel Y + Input	20001.58	-2.67	-0.01
Channel Z + Input	-20009.93	-4.50	0.02
Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	1999.86	-0.99	-0.05
Channel X - Input	200.42	-0.42	-0.21
Channel Y + Input	-199.45	-0.24	0.12
Channel Y - Input	2000.78	-0.01	-0.00
Channel Z + Input	200.66	-0.06	-0.03
Channel Z - Input	-199.50	-0.26	0.14
Channel X + Input	2000.45	-0.29	-0.01
Channel Y + Input	199.41	-1.33	-0.66
Channel Z + Input	-200.21	-0.92	0.46

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-2.59	-3.72
	-200	7.16	5.57
Channel Y	200	15.89	15.62
	-200	-16.62	-17.01
Channel Z	200	-16.19	-16.08
	-200	14.56	14.81

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	0.26	-3.89
Channel Y	200	8.74	-	0.77
Channel Z	200	6.36	7.07	-

Certificate No: DAE4-720_00116

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16156	16521
Channel Y	16178	16048
Channel Z	16424	15774

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	0.75	-1.14	2.77	0.62
Channel Y	-0.03	-1.04	0.90	0.43
Channel Z	-0.18	-2.07	1.75	0.69

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-6	-9

Certificate No: DAE4-720_00116

Page 5 of 5

ES3DV3 Sn:3127

[illegible][illegible]

ES3DV3 - SN:3127

August 29, 2016

Probe ES3DV3

SN:3127

Manufactured: July 11, 2006
Calibrated: August 29, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system)

Certificate No: ES3-3127 Aus16

Page 3 of 12

ES3DV3 - SN:3127

August 29, 2016

BASIC/EASY - Parameters of Probe: ES3DV3 - SN:3127

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm. $[W/(mm^2)]^2$	1.26	1.23	1.18	$\pm 10.1\%$
DCP $[mV]$	102.7	101.6	103.7	

Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB $\sqrt{V/V}$	C	D dB	VR mV	Unc ^a (k=2)
0	CW	X	0.0	0.0	1.0	0.00	209.2 $\pm 3.3\%$
		Y	0.0	0.0	1.0	213.8	
		Z	0.0	0.0	1.0	202.7	

Note: For details on UID parameters see Appendix.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^a The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty table T3L (see Pages 5 and 6).

^b Numerical interpolation parameter, uncertainty not required.

^c Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No.: ES3-2432, Rev.016

Page 4 of 4

ES3DV3 Sn:3127

ES3DV3-SN:3127

August 29, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^d	Conductivity (S/m) ^d	Conf. X	Conf. Y	Conf. Z	Alpha ^e	Depth ^f (mm)	Unc (k=2)
450	43.5	0.87	6.74	6.74	6.74	0.21	2.30	± 13.3 %
750	41.9	0.89	6.55	6.55	6.55	0.62	1.37	± 12.0 %
900	41.5	0.97	6.20	6.20	6.20	0.54	1.41	± 12.0 %
1450	40.5	1.20	5.44	5.44	5.44	0.80	1.06	± 12.0 %
1810	40.0	1.40	5.15	5.15	5.15	0.80	1.16	± 12.0 %
2000	40.0	1.40	5.11	5.11	5.11	0.68	1.28	± 12.0 %
2300	39.5	1.67	4.83	4.83	4.83	0.80	1.19	± 12.0 %
2450	39.2	1.80	4.61	4.61	4.61	0.67	1.38	± 12.0 %
2600	39.0	1.96	4.40	4.40	4.40	0.70	1.36	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the Conf. uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for Conf. assessments at 30, 60, 100, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 100 MHz.

^d At frequencies below 3 GHz, the validity of tissue parameters (i) and (ii) can be related to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (i) and (ii) is restricted to ± 5%. The uncertainty is the RSS of the Conf. uncertainty for indicated target tissue parameters.

^e AlphaDepth are determined during calibration. SPREAD warnings that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

Certificate No: ES3-3127_Aug16

Page 5 of 12

ES3DV3-SN:3127

August 29, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^d	Conductivity (S/m) ^d	Conf. X	Conf. Y	Conf. Z	Alpha ^e	Depth ^f (mm)	Unc (k=2)
450	56.7	0.94	6.99	6.99	6.99	0.12	2.10	± 13.3 %
750	55.5	0.96	6.12	6.12	6.12	0.80	1.14	± 12.0 %
900	55.0	1.05	6.16	6.16	6.16	0.46	1.53	± 12.0 %
1450	54.0	1.30	5.29	5.29	5.29	0.74	1.21	± 12.0 %
1810	53.3	1.52	4.90	4.90	4.90	0.43	1.69	± 12.0 %
2000	53.3	1.52	4.92	4.92	4.92	0.55	1.48	± 12.0 %
2300	52.9	1.81	4.63	4.63	4.63	0.80	1.24	± 12.0 %
2450	52.7	1.95	4.36	4.36	4.36	0.71	1.22	± 12.0 %
2600	52.5	2.16	4.17	4.17	4.17	0.80	1.11	± 12.0 %

^c Frequency validity above 300 MHz of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the Conf. uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ± 10, 25, 40, 50 and 70 MHz for Conf. assessments at 30, 60, 100, 150 and 220 MHz respectively. Above 5 GHz frequency validity can be extended to ± 100 MHz.

^d At frequencies below 3 GHz, the validity of tissue parameters (i) and (ii) can be related to ± 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (i) and (ii) is restricted to ± 5%. The uncertainty is the RSS of the Conf. uncertainty for indicated target tissue parameters.

^e AlphaDepth are determined during calibration. SPREAD warnings that the remaining deviation due to the boundary effect after compensation is always less than ± 1% for frequencies below 3 GHz and below ± 2% for frequencies between 3-6 GHz at any distance larger than half the probe tip diameter from the boundary.

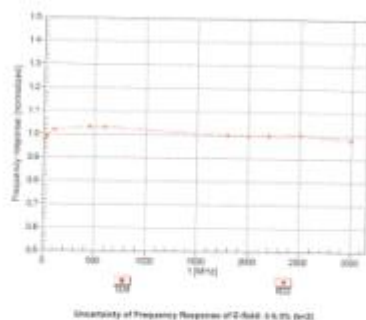
Certificate No: ES3-3127_Aug16

Page 6 of 12

ES3DV3-SN:3127

August 29, 2016

Frequency Response of E-Field (TEM-Cal: 6113 EXX, Waveguide: R22)



Uncertainty of Frequency Response of E-Field: ± 4.4% (k=2)

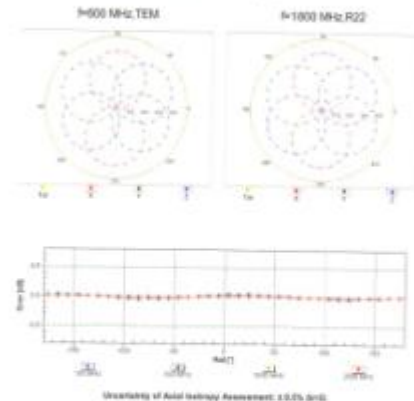
Certificate No: ES3-3127_Aug16

Page 7 of 12

ES3DV3-SN:3127

August 29, 2016

Receiving Pattern (φ), θ = 0°

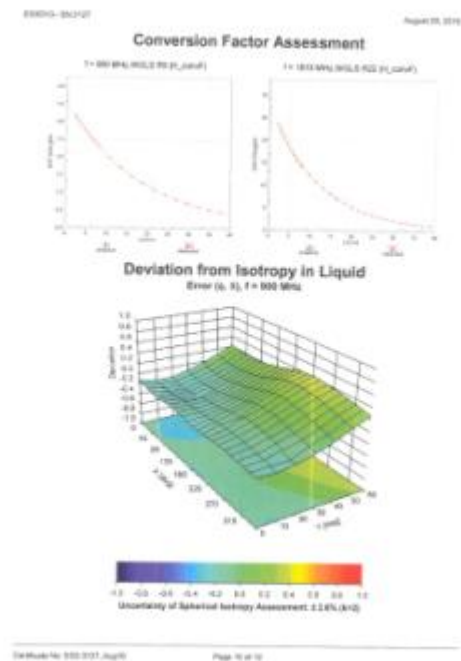
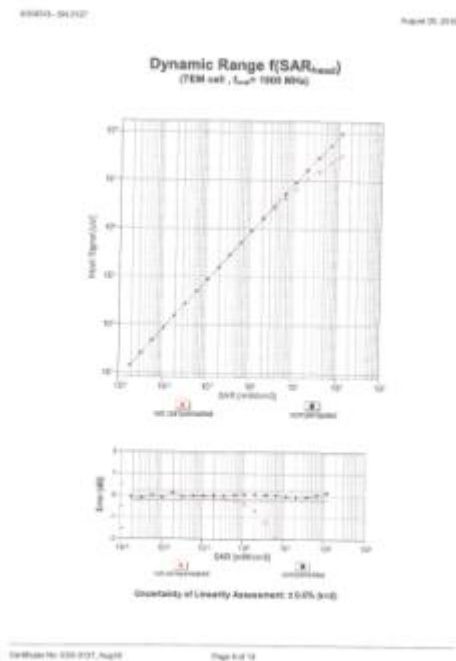


Uncertainty of Axial Symmetry Assessment: ± 0.5% (k=2)

Certificate No: ES3-3127_Aug16

Page 8 of 12

ES3DV3 Sn:3127



ES3DV3-SN:3127 August 29, 2016

DASY/EASY - Parameters of Probe: ES3DV3 - SN:3127

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-15.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	10 mm
Tip Diameter	4 mm
Probe Tip to Sensor X Calibration Point	2 mm
Probe Tip to Sensor Y Calibration Point	2 mm
Probe Tip to Sensor Z Calibration Point	2 mm
Recommended Measurement Distance from Surface	3 mm

Certificate No: ESS-3127_Aug16 Page 11 of 12

ES3DV3-SN:3127 August 29, 2016

Appendix: Modulation Calibration Parameters

UID	Communication System Name	A dB	B dB-V/V	C	D dB	VR mV	Unc ¹ (k=2)
0	CW	X 0.0	0.0	1.0	0.00	209.2	$\pm 3.3\%$
		Y 0.0	0.0	1.0		213.8	
		Z 0.0	0.0	1.0		202.7	
10012-CAR	IEEE 802.11b WiFi 2.4 GHz (SSSS, 1 MHz)	X 3.29	71.4	20.2	1.87	125.8	$\pm 0.7\%$
		Y 2.75	67.3	17.9		129.9	
		Z 3.10	70.4	19.7		130.2	
10108-CAC	LTE-FDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	X 8.43	67.7	20.1	5.80	137.8	$\pm 1.4\%$
		Y 8.63	67.5	19.7		144.8	
		Z 8.38	67.6	20.0		131.5	
10115-CAC	LTE-FDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	X 6.17	67.4	20.0	5.75	134.4	$\pm 1.4\%$
		Y 6.14	67.0	19.6		141.5	
		Z 6.02	67.0	19.7		128.3	
10154-CAC	LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	X 6.13	67.3	19.8	5.75	133.5	$\pm 1.2\%$
		Y 6.19	67.3	19.8		140.3	
		Z 6.04	67.1	19.8		128.2	
10166-CAR	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)	X 5.00	66.8	19.8	5.73	117.2	$\pm 0.9\%$
		Y 5.04	66.9	19.7		120.3	
		Z 4.89	66.5	19.7		111.8	
10175-CAC	LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	X 4.87	66.6	19.7	5.72	117.2	$\pm 0.9\%$
		Y 4.93	66.3	19.4		120.2	
		Z 4.87	66.5	19.6		111.6	
10207-AAA	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	X 6.51	68.0	20.3	5.81	137.1	$\pm 1.4\%$
		Y 6.46	67.6	19.9		140.9	
		Z 6.37	67.6	20.0		130.4	

¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Certificate No: ESS-3127_Aug16 Page 12 of 12

EX3DV4 S_n:3708[illegible][illegible]

EX3DV4 – SN:3708

November 10, 2016

Probe EX3DV4

SN:3708

Manufactured: July 21, 2009
Calibrated: November 10, 2016

Calibrated for DASY/EASY Systems
(Note: non-compatible with DASY2 system!)

Certificate No. EX3-3708, Nov16

Page 3 of 11

E32324-02(2018)

November 10, 2014

DASY/EASY - Parameters of Probe: EK3DV4 - 5N:3708

Basic Calibration Parameters

Norm. Gain Factor ¹	Series 0	Series 1	Series 2	Site Area ²
100%	0.75	1.34	0.40	6.15 E-5
DCP Error	0.17	1.4	100.2	

Modulation Calibration Parameters

Mod	Instrumentation System Name	W	W ₀	B ₀	U	W	W ₀	U ₀	U ₀ Error
11	GM	0	0.0	0.0	1.0	0.00	100.0	110.0	
12		0	0.0	0.0	1.0	0.00	100.0	140.0	
13		0	0.0	0.0	1.0	0.00	100.0	140.0	
1001	GM15-P10 (GM15S)	0	4.44	89.7	11.7	2.00	100.0	40.0	
1002		0	3.36	87.0	10.3	0.00	100.0	100.0	
1003		0	3.08	86.0	10.0	0.00	100.0	100.0	
1001-Data	GM15-P10 (T000, T000)	0	4.00	14.0	100.0	0.00	100.0	110.0	
1002-Data		0	3.00	85.0	10.0	0.00	100.0	100.0	
1003-Data		0	2.51	85.0	10.0	0.00	100.0	100.0	
1000-Data	GM15-P10 (T000, T000)	0	4.00	87.0	10.0	0.00	100.0	110.0	
1001-Data		0	10.00	100.0	11.0	0.00	100.0	100.0	
1002-Data		0	10.00	100.0	11.0	0.00	100.0	100.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

¹The uncertainties of items 4, 5, 6, 7, 8, 9, 10 affect the G₀ factor containing more than 100 pages of errors.

²Normal instrumentation geometry - uncertainty not required.

³Uncertainty is determined using the 1-sigma. Decision Rule: make steps as appropriate. Decision Rule: are as appropriate for the type of the test.

EX3DV4 Sn:3708

SRTC2014-SN:3708 November 10, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

Calibration Parameter Determined in Head Tissue Simulating Media

Frequency (MHz)	Relative Permittivity ¹	Conductivity (S/m)	Coef. E ₁	Coef. E ₂	Coef. E ₃	Alpha ²	Delta ³ (dBm)	Unc. (dBm)
300	47.0	0.87	0.00	0.00	0.00	0.44	0.00	± 12.0 %
1000	40.0	1.40	7.04	7.04	7.04	0.36	0.00	± 12.0 %
3000	40.0	1.40	7.04	7.04	7.04	0.31	0.40	± 12.0 %
10000	30.0	1.00	7.11	7.11	7.11	0.20	0.80	± 12.0 %
30000	30.0	0.70	5.53	5.53	5.53	0.14	1.00	± 13.1 %
100000	30.0	0.70	5.53	5.53	5.53	0.10	1.00	± 13.1 %
300000	30.0	0.70	5.53	5.53	5.53	0.07	1.00	± 13.1 %
1000000	30.0	0.70	5.53	5.53	5.53	0.05	1.00	± 13.1 %
3000000	30.0	0.70	5.53	5.53	5.53	0.03	1.00	± 13.1 %
10000000	30.0	0.70	5.53	5.53	5.53	0.02	1.00	± 13.1 %

¹ Frequency specific values 300 MHz to 1 GHz only apply for (DASY) not a full range (see Page 1), and it is restricted to a 10 MHz. The uncertainty in the ESD of the Coef. is determined by the uncertainty in the measured frequency. The frequency values below 300 MHz are 10, 20, 30, 40, 50 and 100 MHz for Coef. assignments at 30, 40, 50, 100 and 200 MHz respectively. Above 1 GHz frequency values are for 100 MHz.

² At frequencies below 1 GHz, the values of these parameters are not used for the calculation of the ESD. The uncertainty in the ESD of the Coef. is determined by the uncertainty in the measured frequency.

³ Alpha values are determined using the following formula: $\alpha = 10 \log_{10} \left(\frac{1}{1 + \frac{1}{\sigma^2}} \right)$ where σ is the standard deviation of the Coef. values. The uncertainty in the ESD of the Coef. is determined by the uncertainty in the measured frequency.

Certificate No: SRTC-0708, Nov16

Page 3 of 11

SRTC2014-SN:3708 November 10, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

Calibration Parameter Determined in Body Tissue Simulating Media

Frequency (MHz)	Relative Permittivity ¹	Conductivity (S/m)	Coef. E ₁	Coef. E ₂	Coef. E ₃	Alpha ²	Delta ³ (dBm)	Unc. (dBm)
300	50.0	0.80	0.00	0.00	0.00	0.44	0.00	± 12.0 %
1000	50.0	1.50	7.70	7.70	7.70	0.44	0.00	± 12.0 %
3000	50.0	1.50	7.71	7.71	7.71	0.43	0.00	± 12.0 %
10000	50.0	1.00	7.27	7.27	7.27	0.40	0.00	± 12.0 %
30000	40.0	0.70	4.62	4.62	4.62	0.46	0.90	± 13.1 %
100000	40.0	0.70	4.62	4.62	4.62	0.40	0.90	± 13.1 %
300000	40.0	0.70	4.62	4.62	4.62	0.35	0.90	± 13.1 %
1000000	40.0	0.70	4.62	4.62	4.62	0.30	0.90	± 13.1 %
3000000	40.0	0.70	4.62	4.62	4.62	0.25	0.90	± 13.1 %
10000000	40.0	0.70	4.62	4.62	4.62	0.20	0.90	± 13.1 %

¹ Frequency specific values 300 MHz to 1 GHz only apply for (DASY) not a full range (see Page 1), and it is restricted to a 10 MHz. The uncertainty in the ESD of the Coef. is determined by the uncertainty in the measured frequency. The frequency values below 300 MHz are 10, 20, 30, 40, 50 and 100 MHz for Coef. assignments at 30, 40, 50, 100 and 200 MHz respectively. Above 1 GHz frequency values are for 100 MHz.

² At frequencies below 1 GHz, the values of these parameters are not used for the calculation of the ESD. The uncertainty in the ESD of the Coef. is determined by the uncertainty in the measured frequency.

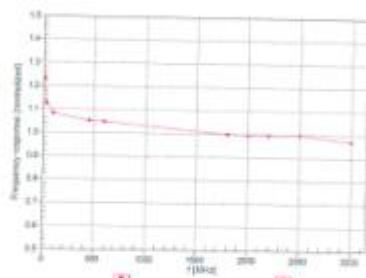
³ Alpha values are determined using the following formula: $\alpha = 10 \log_{10} \left(\frac{1}{1 + \frac{1}{\sigma^2}} \right)$ where σ is the standard deviation of the Coef. values. The uncertainty in the ESD of the Coef. is determined by the uncertainty in the measured frequency.

Certificate No: SRTC-0708, Nov16

Page 4 of 11

SRTC2014-SN:3708 November 10, 2016

Frequency Response of E-Field (TEM-Cell:R110 EXX, Waveguide: R22)




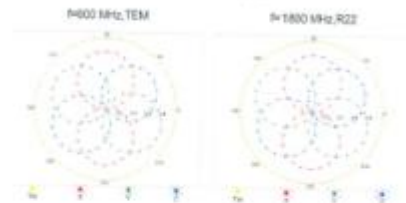
Uncertainty of Frequency Response of E-Field: ± 0.2% (k=2)

Certificate No: SRTC-0708, Nov16

Page 7 of 11

SRTC2014-SN:3708 November 10, 2016

Receiving Pattern (θ, φ = 0°)

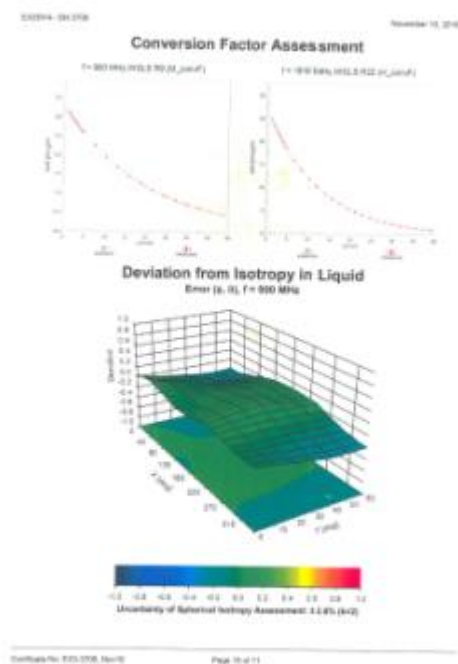
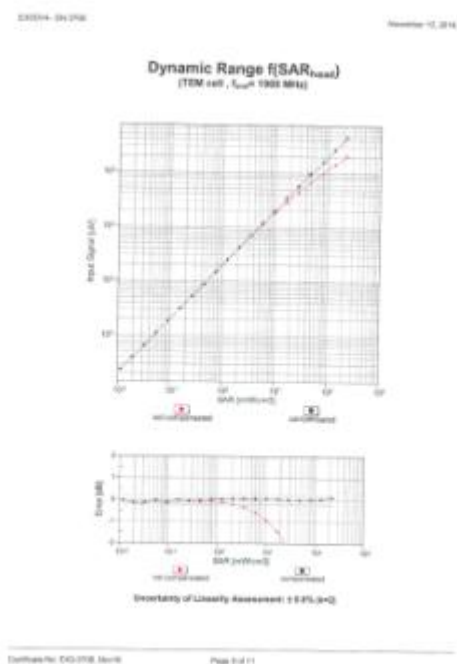


Uncertainty of Receiving Pattern Assessment: ± 0.2% (k=2)

Certificate No: SRTC-0708, Nov16

Page 8 of 11

EX3DV4 Sn:3708



EX3DV4 - SN:3708 November 10, 2016

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3708

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	-1.9
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

D750V3 S_n:1101[illegible]

Calibration Laboratory of Schemt & Partner Engineering AG Dugenhofstrasse 44, 4054 Grenchen, Switzerland	 		Schweizerische Eidgenossenschaft Confédération suisse Confederaziun Svizra Confederaziun Svizra Swiss Confederation
Accredited by the Swiss Accreditation Service (SAS)			Accreditation No.: SCS 0118
This Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates			
Glossary:			
TSL:	Issues circulating liquid		
CEM/F:	sensitivity in TSL / WORM e.g.p		
N/A	not applicable or not measured		
Calibration is Performed According to the Following Standards:			
a) IEEE Std 1528-0012, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices Measurement Techniques", June 2013			
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used at close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005			
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices to use at close proximity to the human body (frequency range of 30 MHz to 3 GHz)", March 2010			
d) KDS 80506A, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
a) CAS9445 System Handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.			
• Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.			
• Feed Port Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance standard is transferred from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.			
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.			
• SAR measured: SAR measured at the stated antenna input power.			
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.			
• SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			

Measurement Conditions			
DS90LV02 system configuration, as for test setup in page 1			
DS90LV02 Version	DS90LV02	V15.0.0	
Termination	Advanced Termination		
Phosphor	Module 1 Pin Phosphor		
Distance Optics Center - TSL	10 mm	with spacer	
Scan Rate Resolution	60 Hz @ ~ 0 mm		
Frequency	750 MHz ± 1 MHz		

Head TSL parameters			
The following parameters and calculations were applied:			
	Temperature	Power/Intensity	Conductivity
Measured Head TSL parameters	22.0 °C	41.8	0.00 mhos
Measured Head TSL parameters	200.0 ± 0.0 °C	61.1 ± 0.5 %	0.00 mhos ± 0.0 %
Head TSL temperature change during test	± 0.0 °C	—	—

SAR result with Head TSL			
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		
SAR measured	250 mW input power normalized to 1W	0.11 W/kg	
SAR for normal Head TSL parameters		0.10 W/kg ± 17.0 % (Std)	

SAR result with Body TSL			
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		
SAR measured	250 mW input power normalized to 1W	1.36 W/kg	
SAR for normal Head TSL parameters		0.28 W/kg ± 10.0 % (Std)	

Body TSL parameters			
The following parameters and calculations were applied:			
	Temperature	Power/Intensity	Conductivity
Measured Body TSL parameters	22.0 °C	33.8	0.00 mhos
Measured Body TSL parameters	225.0 ± 0.0 °C	53.0 ± 0.5 %	0.07 mhos ± 0.0 %
Body TSL temperature change during test	± 0.0 °C	—	—

SAR result with Body TSL			
SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition		
SAR measured	250 mW input power normalized to 1W	0.17 W/kg	
SAR for normal Body TSL parameters		0.05 W/kg ± 17.0 % (Std)	

SAR result with Body TSL			
SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition		
SAR measured	250 mW input power normalized to 1W	1.46 W/kg	
SAR for normal Body TSL parameters		0.72 W/kg ± 10.0 % (Std)	

Document No. 574947-011, 2/2018

Page 3 of 8

Appendix (Additional assessments outside the scope of SCS 0106)

Antenna Parameters with Head TSL

Impedance, normalized to feed point	55.4 (± 0.2) j1
Return Loss	> 30.0 dB

Antenna Parameters with Body TSL

Impedance, normalized to feed point	55.8 (± 0.4) j1
Return Loss	> 30.0 dB

General Antenna Parameters and Design

Element Delay (one element)	1.428 ns
-----------------------------	----------

After long term use with 100W incident power, only a slight warping of the dipole near the feedpoint can be measured.

The dipole is made of standard annealed linear cable. The center conductor of the leading line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small air gaps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. This SCLF data are not affected by this change. The overall dipole length is still according to that Standard.

No precautions have to be applied to the dipole arms, because they are shielded by the shielded connections near the feedpoint (see for example).

Additional EUT Data

Manufactured by	SPCAG
Manufactured on	July 25, 2010

Copyright © 2010/2011 S.C.T., 2010-8

Page 4 of 6

D750V3 Sn:1101

DASY5 Validation Report for Head TSL

Date: 26.10.2016

Test Laboratory: SPESAG, Zurich, Switzerland

DUT: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1101

Communication System: UTD 0 - CW, Frequency: 750 MHz
Medium parameters used: $f = 750 \text{ MHz}$, $n = 0.92$ (air), $\mu = 41$, $\rho = 0.0004 \text{ kg/m}^3$
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EXODV4 - INT448, CoreF(10.07, 10.07, 10.07), Calibrated: 11.06.2016
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DASA 36001, Calibrated: 30.12.2015
- Phantom: Flat Phantom 4 HL, Type: Q000P00AA, Serial: 1001
- DASY52 52.3.9(128), SEMCAD X 14.6.10(7372)

Dipole Calibration for Head Tissue/ $\rho_{\text{tissue}}=200 \text{ g/W}$, $d=15\text{mm}$ /Z-axis Scan (7x7x7)/Cube 0:

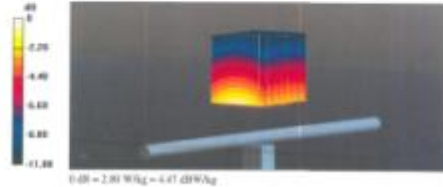
Measurement grid: $d_{\text{ref}}=15\text{mm}$, $d_{\text{ref}}=15\text{mm}$, $d_{\text{ref}}=15\text{mm}$

Reference Value = 38.00 V/m, Power Dens = 0.00 dB

Peak SAR (interpolated) = 2.14 W/kg

SAR(1g) = 2.11 W/kg, SAR(10g) = 1.38 W/kg

Maximum value of SAR (measured) = 2.80 W/kg

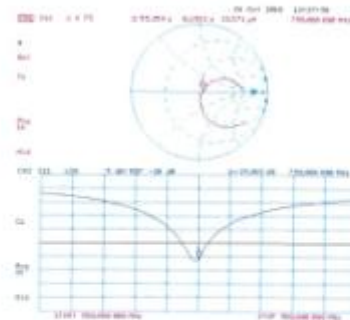


0.00 = 2.80 W/kg = 4.47 dBW/kg

Certificate No: 1710101_101_2016

Page 3 of 8

Impedance Measurement Plot for Head TSL



Certificate No: 1710101_101_2016

Page 5 of 8

DASY5 Validation Report for Body TSL

Date: 26.10.2016

Test Laboratory: SPESAG, Zurich, Switzerland

DUT: Dipole 750 MHz, Type: D750V3, Serial: D750V3 - SN:1101

Communication System: UTD 0 - CW, Frequency: 750 MHz
Medium parameters used: $f = 750 \text{ MHz}$, $n = 0.97$ (air), $\mu = 25.4$, $\rho = 0.0004 \text{ kg/m}^3$
Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EXODV4 - INT448, CoreF(9.99, 9.99, 9.99), Calibrated: 11.06.2016
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DASA 36001, Calibrated: 30.12.2015
- Phantom: Flat Phantom 4 HL, Type: Q000P00AA, Serial: 1001
- DASY52 52.3.9(128), SEMCAD X 14.6.10(7372)

Dipole Calibration for Body Tissue/ $\rho_{\text{tissue}}=200 \text{ g/W}$, $d=15\text{mm}$ /Z-axis Scan (7x7x7)/Cube 0:

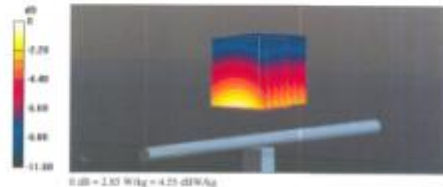
Measurement grid: $d_{\text{ref}}=15\text{mm}$, $d_{\text{ref}}=15\text{mm}$, $d_{\text{ref}}=15\text{mm}$

Reference Value = 36.73 V/m, Power Dens = 0.00 dB

Peak SAR (interpolated) = 2.19 W/kg

SAR(1g) = 2.17 W/kg, SAR(10g) = 1.44 W/kg

Maximum value of SAR (measured) = 2.85 W/kg

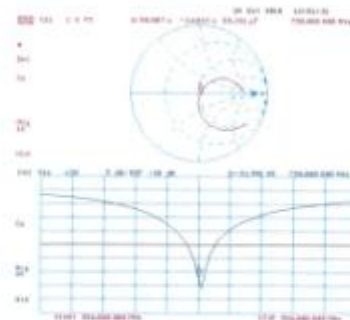


0.00 = 2.85 W/kg = 4.55 dBW/kg

Certificate No: 1710101_101_2016

Page 7 of 8

Impedance Measurement Plot for Body TSL



Certificate No: 1710101_101_2016

Page 9 of 8

Calibration Laboratory of Silbert & Partner Engineering AG Zähringerstrasse 15, 4000 Zurich, Switzerland	 	S C S Schweizerischer Kalibrierdienst Swiss Association of Calibration Swiss Accredited Calibration Service Swiss Calibration Service
Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories in the EA Multilateral Agreement for the recognition of calibration certificates		Accreditation No.: SCS 0108
Client:	BHTC (Virec)	Certificate No.: DDIVIS-40003_0001
CALIBRATION CERTIFICATE		
Item:	DEVIDE - DR-4003	
Calibration performed:	QA-CAL-001-01	
	Calibration procedure for digital voltmeter 4 1/2 digits 700 M Ω	
Calibration date:	October 24, 2008	
This calibration certificate documents the traceability to national standards, which assure the general validity of measurements (1) This measurement result is not comparable with measurement uncertainty as given on the following pages and is not part of the certificate.		
All calibrations were performed in the stated laboratory facility, ambient temperature 20 $\pm$ 0.5 $^{\circ}$ C and humidity $\pm$ 5%.		
Calibration Equipment used (NIST-traceable for calibration):		
Primary Standards:	Lot #	Expiry Date (if certificate No.)
Power source 500V	Lot: 110149	04-May-09 01-May-11 (uncertainty)
Power source 100V/10V	Lot: 110154	04-May-09 01-May-11 (uncertainty)
Power source 100V/0.1V	Lot: 110261	04-May-09 01-May-11 (uncertainty)
Reference 10-45 Alternator	Lot: 5309-2004	05-Apr-09 04-May-11 (0.0002)
Type III Integrating Voltmeter	Lot: 2004-21-100007	04-Apr-09 04-May-11 (0.0002)
Reference Power 0.001W	Lot: 7100	05-Jun-09 03-Jun-10 (0.01)
0.001W	Lot: 9007	03-Jun-09 03-Jun-10 (0.01)
Secondary Standards:	Lot #	Expiry Date (if certificate No.)
Power source 500V/400V	Lot: 0001400100	01-May-09 01-May-11 (uncertainty)
Power source 100V/10V	Lot: 0001400100	01-May-09 01-May-11 (uncertainty)
Power source 100V/0.1V	Lot: 0001400100	01-May-09 01-May-11 (uncertainty)
40 Generator 10V/10V/40V	Lot: 000101	05-Jun-09 01-May-11 (uncertainty)
Power Integrating Voltmeter	Lot: 0001400100	01-May-09 01-May-11 (uncertainty)
Calibrating:	Name Leif Krumm	Function Calibration Technician
Reviewed by:	Name Andreas Krumm	Function Technical Manager
		Signature  
Issued: October 25, 2008		
This calibration certificate shall not be reproduced except in full without written approval of the issuing body.		

Calibration Laboratory of Schmal & Partner Engineering AG Engelshausstrasse 45, 69649 Gelnhausen, Deutschland	 		Neukonsequenzen Radiofrequenz Messen - messen - messen Service- und Schulung Service Calibration Service
Accredited by the Techn. Surveill. Service (TSS) The Service Calibration Service is one of the organisations in the UK Multilateral Agreement for the recognition of calibration certificates			Accreditation No.: SCS 0108
Summary: TSL: _____ Curve: _____ N/A _____ Issue involving legal sensitivity in TSL: $\pm 10\text{ dBm}$ e.g. ± 2 not applicable or not measured			
Calibration is Performed According to the Following Standards:			
a) IEEE 515 1015-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013 b) IEC 62209-1, "Procedures to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005 c) IEC 62209-2, "Procedures to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 3 GHz)", March 2010 d) IEC 60564, "SAR Measurement Requirements for 100 MHz to 3 GHz"			
Additional Documentation:			
e) SARnet System Handbook			
Methods Applied and Interpretation of Parameters:			
a) Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. b) Antenna connectors with TSL: The dipole is mounted such, the antenna is positioned in test point exactly below the center-marking of the flat phantom section, with the arms oriented parallel to the body axis. c) Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance standard is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required. d) Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required. e) SAR measured SAR measured at the distal antenna input power. f) SAR normalized SAR as measured, normalized to an input power of 1 W at the antenna connector. g) SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of measurement, multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.			

Measurement Conditions			
DAISY system configuration, see Fig. 38 for details on page 1			
DAISY Version	DAISY3		V5.0 A.4
Extrapolation	Advanced Extrapolation		
Phenomena	Modular Pipe Phenomena		
Distance (Spigot Center - TBL)	10 mm		with Spigot
Spigot Seal Resolution	0k, 6k, 9k, 12 mm		
Frequency	200 MHz to 1 GHz		

Head TBL parameters			
The following parameters and calculations were applied:			
Measured Head TBL parameters	Temperature	Permeability	Conductivity
Measured Head TBL parameters	20.0 $\pm$ 0.1	41.5	0.00 mW/m
Measured Head TBL parameters	(20.0 $\pm$ 0.5) °C	40.0 $\pm$ 0.5 %	0.00 mW/m $\pm$ 6 %
Head TBL temperature change during test	$\pm$ 0.5 °C		—

SAR result with Head TBL			
SAR averaged over 1 cm ² (1 g) of Head TBL	Condition		
SAR measured	200 mW input power		0.07 W/kg
SAR for nominal Head TBL parameters	normalized to 1W		0.40 W/kg $\pm$ 17.0 % (full)

SAR result with Body TBL			
SAR averaged over 10 cm ² (10 g) of Head TBL	Condition		
SAR measured	200 mW input power		1.09 W/kg
SAR for nominal Head TBL parameters	normalized to 1W		6.54 W/kg $\pm$ 16.5 % (full)

Body TBL parameters			
The below parameters and calculations were applied:			
Measured Body TBL parameters	Temperature	Permeability	Conductivity
Measured Body TBL parameters	20.0 $\pm$ 0.1	55.6	0.47 mW/m
Measured Body TBL parameters	(22.0 $\pm$ 0.5) °C	53.4 $\pm$ 4.4 %	0.40 mW/m $\pm$ 6 %
Body TBL temperature change during test	$\pm$ 0.5 °C		—

SAR result with Body TBL			
SAR averaged over 1 cm ² (1 g) of Body TBL	Condition		
SAR measured	200 mW input power		5.34 W/kg
SAR for nominal Body TBL parameters	normalized to 1W		0.62 W/kg $\pm$ 13.0 % (full)

SAR result over 10 cm ² (10 g) of Body TBL			
SAR measured	Condition		
SAR measured	200 mW input power		1.00 W/kg
SAR for nominal Body TBL parameters	normalized to 1W		0.30 W/kg $\pm$ 16.0 % (full)

CellularDoc 1000000-000001-000001

Page 3 of 6

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.4 Ω - 1.9 jΩ
Return Loss	- 28.4 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.3 Ω - 5.1 jΩ
Return Loss	- 25.8 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.389 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	December 17, 2004

Certificate No: D636V2-45023 Oct18

Page 4 of 8

D835V2 Sn:4d023

DASY5 Validation Report for Head TSL

Date: 24.10.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 830 MHz; Type: D835V2; Serial: D835V2 - SN-4d023

Communication System: UED 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $n = 0.95 \text{ S/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom used: Flat Surface

Measurement Standard: DASY5 (IEEE/IEC/ANSI C39.2011)

DASY52 Configuration:

- Probe: EXD5V4 - INT448; CoreFix 75; 9.75; 9.75; Calibration: 13.06.2016
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DA24 3rd01; Calibration: 30.12.2015
- Phantom: Flat Phantom 4.0L; Type: Q000P09AA; Serial: 1001
- DASY52 52.8.901291; SEMCAD X 14.6.1007372

Dipole Calibration for Head Tissue/Flat=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

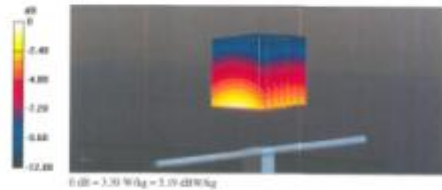
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 81.72 V/m; Power Dens = 0.03 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1g) = 3.47 W/kg; SAR(10g) = 1.09 W/kg

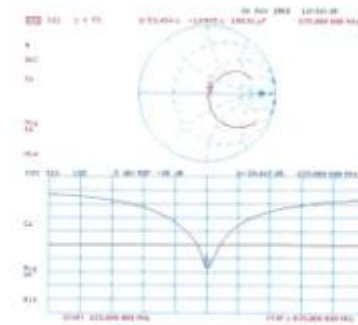
Maximum value of SAR (measured) = 3.10 W/kg



Certificate No.: 080003-40003_00116

Page 8 of 8

Impedance Measurement Plot for Head TSL



Certificate No.: 080003-40003_00116

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 24.10.2016

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN-4d023

Communication System: UED 0 - CW; Frequency: 835 MHz

Medium parameters used: $f = 835 \text{ MHz}$; $n = 0.95 \text{ S/m}$; $\epsilon_r = 55.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom used: Flat Surface

Measurement Standard: DASY5 (IEEE/IEC/ANSI C39.2011)

DASY52 Configuration:

- Probe: EXD5V4 - INT448; CoreFix 75; 9.75; 9.75; Calibration: 13.06.2016
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DA24 3rd01; Calibration: 30.12.2015
- Phantom: Flat Phantom 4.0L; Type: Q000P09AA; Serial: 1001
- DASY52 52.8.901291; SEMCAD X 14.6.1007372

Dipole Calibration for Body Tissue/Flat=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:

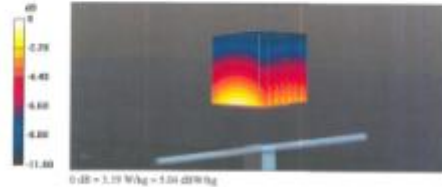
Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.07 V/m; Power Dens = 0.01 dB

Peak SAR (extrapolated) = 3.72 W/kg

SAR(1g) = 2.44 W/kg; SAR(10g) = 1.4 W/kg

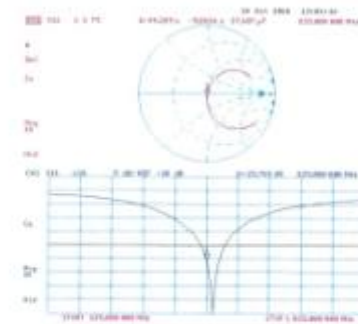
Maximum value of SAR (measured) = 3.19 W/kg



Certificate No.: 080003-40003_00116

Page 7 of 8

Impedance Measurement Plot for Body TSL



Certificate No.: 080003-40003_00116

Page 5 of 8

[illegible]

Calibration Laboratory of Solared & Partner Engineering AG Imprintstrasse 18, 8000 Luzern, Switzerland	 		International Calibration Remote service of all ranges Remote service of all ranges Mobile Calibration Service
Accredited by the Swiss Accreditation Service (SAS)		Accredited by: SCS 0108	
The Swiss Accreditation Service is an official organization in the EU Member States Agreement for the recognition of calibration certificates			
Glossary:			
TSL	Isent attenuating level		
ConstF	constancy in TSL / MCRF in µV		
N/A	not applicable or not measured		
Calibration is Performed According to the Following Standards:			
a) IEC61010-1:2010, "IEEE Recommended Practices for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013			
b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005			
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 3 GHz)", March 2010			
d) IEC61558-5, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
a) DASY45 System Handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.			
• Antenna connectors with TSL: The dipole is mounted with the aperture to position its feed point exactly below the center marking of the flat photon section, with the arms oriented parallel to the body axis.			
• Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.			
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.			
• SAR measured: SAR measured at the stated antenna input power.			
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.			
• SAR vs. nominal TSL parameter: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52 8.8
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz $\pm$ 1 MHz	

Head TSL parameters

The following parameters and calculations were applied

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.6 $\pm$ 6 %	1.39 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power normalized to 1W	10.1 W/kg
SAR for nominal Head TSL parameters		40.7 W/kg $\pm$ 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power normalized to 1W	5.30 W/kg
SAR for nominal Head TSL parameters		21.3 W/kg $\pm$ 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	53.2 $\pm$ 6 %	1.48 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power normalized to 1W	9.80 W/kg
SAR for nominal Body TSL parameters		39.8 W/kg $\pm$ 17.0 % (k=2)
SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power normalized to 1W	5.23 W/kg
SAR for nominal Body TSL parameters		21.1 W/kg $\pm$ 16.5 % (k=2)

Certificate No: D1905V2-5d113, Oct16

Page 3 of 8

Appendix 2: Additional measurements outside the scope of SCS (10E)

Antenna Parameters with Head TSL

Impedance, transformed to feed-point	51.1 Ω ± 3.0 Ω
Return Loss	-33.9 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed-point	47.0 Ω ± 7.7 Ω
Return Loss	-31.8 dB

General Antenna Parameters and Design

Electrical Toler. (one direction)	1.000 mm
-----------------------------------	----------

After long-term use with 100W isotropic power, only a slight warping of the dipole near the feedpoint can be measured.

The dipole is made of standard weight-gauge coated cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for OC-agnostic. On some of the devices, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Caveats" paragraph. The SAE does not affect this change. The central dipole length is still according to the Standard.

No pressure force must be applied to the dipole arms, because they might bend or the isolated connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SYRAG
Manufactured on	July 24, 2009

Copyright © 2010 RWTH AACHEN UNIVERSITY Page 4 of 8

D1900V2 Sn:5d113

DASY5 Validation Report for Head TSL

Date: 31.10.2016

Test Laboratory: SPAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d113

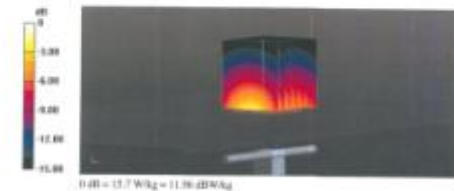
Communication System: UED 0 - CW; Frequency: 1900 MHz
Medium parameters used: $f = 1900$ MHz; $n = 1.29$ Sea; $\epsilon_r = 45.6$; $\rho = 1000$ kg/m³
Phantom section: Flat Surface
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EXCIV4 - SN7348; CoreP: 05, 7.00, 7.00; Calibration: 15.06.2016;
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DA64 8a011; Calibration: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P90AA; Serial: 0001
- DASY52 52.6.6/1204; SEMCAD X 14.6.00/7372

Dipole Calibration for Head Tissue/Power=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube R:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 104.4 V/m; Power DUT = -0.10 dB
Peak SAR (extrapolated) = 19.3 W/kg
SAR(10 g) = 10.1 W/kg; SAR(10 g) = 5.3 W/kg
Maximum value of SAR (measured) = 15.7 W/kg

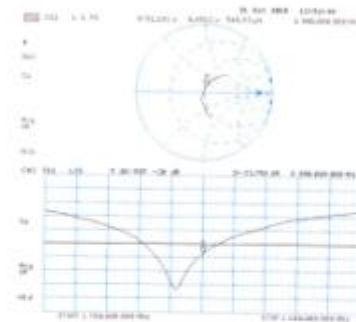


0 dB = 15.7 W/kg = 11.36 dB W/kg

Certificate No: 0100003-00113_0010

Page 5 of 8

Impedance Measurement Plot for Head TSL



Certificate No: 0100003-00113_0010

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 31.10.2016

Test Laboratory: SPAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d113

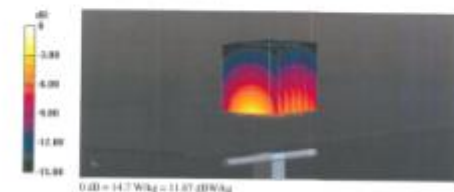
Communication System: UED 0 - CW; Frequency: 1900 MHz
Medium parameters used: $f = 1900$ MHz; $n = 1.41$ Sea; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Surface
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EXCIV4 - SN7348; CoreP: 05, 8.00, 8.00; Calibration: 15.06.2016;
- Sensor Surface: 1 Area (Mechanical Surface Detection)
- Electronics: DA64 8a011; Calibration: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P90AA; Serial: 0002
- DASY52 52.6.6/1204; SEMCAD X 14.6.00/7372

Dipole Calibration for Body Tissue/Power=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube R:

Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 104.5 V/m; Power DUT = -0.10 dB
Peak SAR (extrapolated) = 17.2 W/kg
SAR(10 g) = 9.8 W/kg; SAR(10 g) = 5.25 W/kg
Maximum value of SAR (measured) = 14.7 W/kg

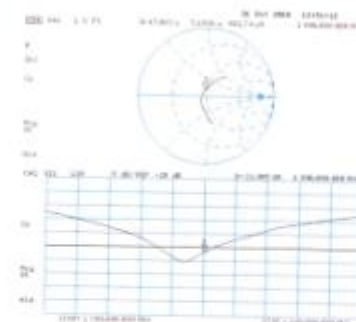


0 dB = 14.7 W/kg = 11.87 dB W/kg

Certificate No: 0100003-00113_0010

Page 7 of 8

Impedance Measurement Plot for Body TSL



Certificate No: 0100003-00113_0010

Page 8 of 8

D2450V2 Sn:738

Calibration Laboratory of
Schmid & Partner
Engineering AG
Engenhauptstrasse 15, 8954 Sulz, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EU
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SRTC (HKL)** Certificate No.: **D2450V2-TSL_Oct16**

CALIBRATION CERTIFICATE

Object: **D2450V2 - 5W TSL**

Calibration procedure: **SAR-CAL-05-19**
Calibration procedure for dipole antenna HKL above 100 MHz

Calibration date: **October 25, 2016**

This calibration certificate documents the conformity to national standards, which involve the physical units of measurement. The
measurements and the associated self-calibration procedure are given in the following pages and are part of the certificate.

All calibrations have been conducted in the direct primary facility, documented independently (2) ± 0.1% uncertainty ± 10%.

Calibration equipment used (MUT) subject to calibration:

Calibration Equipment	Lot #	Due Date (Certificate No.)	Calibration Date
Power meter SPM 100	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference for 50 ohm	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Type of measurement calibration	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference Power (SAR)	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
SAR	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17

Secondary standards:

Calibration Equipment	Lot #	Due Date (Certificate No.)	Calibration Date
Power meter SPM 100	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference for 50 ohm	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Type of measurement calibration	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference Power (SAR)	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
SAR	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17

Calibrated by: **SAR-CAL-05-19** Calibration Equipment: **SAR-CAL-05-19**

Approved by: **SAR-CAL-05-19** Calibration Equipment: **SAR-CAL-05-19**

This calibration certificate shall not be reproduced, copied or further used without written approval of the laboratory.

Certificate No.: D2450V2-TSL_Oct16 Page 1 of 5

Calibration Laboratory of
Schmid & Partner
Engineering AG
Engenhauptstrasse 15, 8954 Sulz, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EU
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SRTC (HKL)** Certificate No.: **D2450V2-TSL_Oct16**

CALIBRATION CERTIFICATE

Object: **D2450V2 - 5W TSL**

Calibration procedure: **SAR-CAL-05-19**
Calibration procedure for dipole antenna HKL above 100 MHz

Calibration date: **October 25, 2016**

This calibration certificate documents the conformity to national standards, which involve the physical units of measurement. The
measurements and the associated self-calibration procedure are given in the following pages and are part of the certificate.

All calibrations have been conducted in the direct primary facility, documented independently (2) ± 0.1% uncertainty ± 10%.

Calibration equipment used (MUT) subject to calibration:

Calibration Equipment	Lot #	Due Date (Certificate No.)	Calibration Date
Power meter SPM 100	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference for 50 ohm	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Type of measurement calibration	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference Power (SAR)	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
SAR	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17

Secondary standards:

Calibration Equipment	Lot #	Due Date (Certificate No.)	Calibration Date
Power meter SPM 100	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Power meter HP 343A	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference for 50 ohm	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Type of measurement calibration	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
Reference Power (SAR)	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17
SAR	04-100116	30-Apr-16 (No. 211-000000000)	Apr-17

Calibrated by: **SAR-CAL-05-19** Calibration Equipment: **SAR-CAL-05-19**

Approved by: **SAR-CAL-05-19** Calibration Equipment: **SAR-CAL-05-19**

This calibration certificate shall not be reproduced, copied or further used without written approval of the laboratory.

Certificate No.: D2450V2-TSL_Oct16 Page 2 of 5

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	Advanced Extrapolation	VS2.8.8
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.2 ± 6 %	1.87 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.1 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	51.2 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	6.07 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	23.9 W/kg ± 16.5 % (k=2)

Body TSL parameters

The following parameters and calculations were applied:

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	51.3 ± 6 %	2.02 mho/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	---	---

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	50.8 W/kg ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.08 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	24.0 W/kg ± 16.5 % (k=2)

Certificate No.: D2450V2-TSL_Oct16 Page 3 of 5

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Parameter	Value
Impedance, transformed to feed point	50.0 ± 0.1 (Ω)
Return Loss	17.0 dB

Antenna Parameters with Body TSL

Parameter	Value
Impedance, transformed to feed point	49.7 ± 0.2 (Ω)
Return Loss	16.5 dB

General Antenna Parameters and Design

Parameter	Value
Electrical Delay (one direction)	1.101 ns

After long term use with 100W radiated power, only a slight shortening of the dipole (see the footprint) can be measured.

The dipole is made of standard average mass cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is flexible and suitable for 3D scanning. The arms of the dipole, which are used as the dipole arms, are in order to improve matching when tested according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the standard.

No excessive force must be applied to the dipole arms, because they might bend or the additional connections near the footprint may be damaged.

Additional EUT Data

Parameter	Value
Manufactured by	SFAS
Manufactured on	August 05, 2015

Certificate No.: D2450V2-TSL_Oct16 Page 4 of 5

D2450V2 Sn:738

DASY5 Validation Report for Head TSL

Date: 25.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

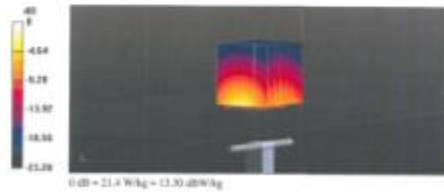
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN:738

Communication System: UED 0 - CW; Frequency: 2450 MHz;
Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.87 \text{ S/m}$; $\epsilon = 36.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C93.29-2011)

DASY5 Configuration:

- Probe: EX3DP4 - SN7589; Class: 7.75, 7.75, 7.75; Calibrated: 05.06.2018;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA69 Sub01; Calibrated: 30.12.2013
- Phantom: Flat Phantom 5.0 (Inert); Type: QD09P50AA; Serial: 1001
- DASY5: 52.8.8(128); SEMCAD X 14.4.30(1312)

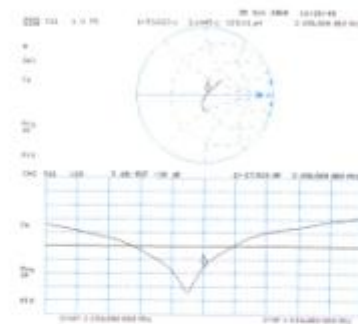
Dipole Calibration for Head Tissue/ $P_{\text{iso}}=200 \text{ mW}$, $d=10\text{mm}$ /Z-axis Scan (7x7x7)/Cube 0:
Measurement grid: $d_x=5\text{mm}$, $d_y=5\text{mm}$, $d_z=1\text{mm}$
Reference Value: $\approx 13.7 \text{ W/kg}$; Power Dens: $\approx 0.04 \text{ dB}$
Peak SAR (interpolated): $\approx 26.4 \text{ W/kg}$
SAR(1 g): $\approx 13.1 \text{ W/kg}$; SAR(10 g): $\approx 6.87 \text{ W/kg}$
Maximum value of SAR (measured): $\approx 21.4 \text{ W/kg}$



Certificate No.: 20180503-728_2018

Page 5 of 8

Impedance Measurement Plot for Head TSL



Certificate No.: 20180503-728_2018

Page 6 of 8

DASY5 Validation Report for Body TSL

Date: 25.10.2018

Test Laboratory: SPEAG, Zurich, Switzerland

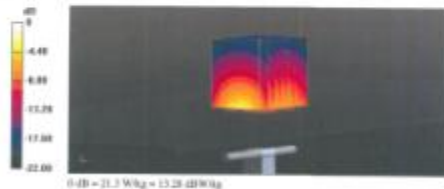
DUT: Dipole 2450 MHz; Type: D2450V2; Serial: SN:738

Communication System: UED 0 - CW; Frequency: 2450 MHz;
Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2.00 \text{ S/m}$; $\epsilon = 51.3$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C93.29-2011)

DASY5 Configuration:

- Probe: EX3DP4 - SN7589; Class: 7.75, 7.75, 7.75; Calibrated: 05.06.2018;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA69 Sub01; Calibrated: 30.12.2013
- Phantom: Flat Phantom 5.0 (Inert); Type: QD09P50AA; Serial: 1001
- DASY5: 52.8.8(128); SEMCAD X 14.4.30(1312)

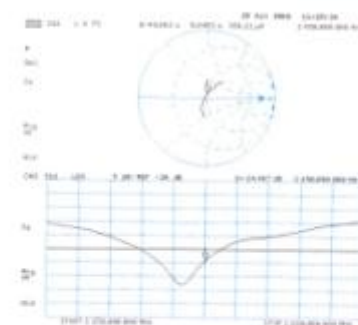
Dipole Calibration for Body Tissue/ $P_{\text{iso}}=200 \text{ mW}$, $d=10\text{mm}$ /Z-axis Scan (7x7x7)/Cube 0:
Measurement grid: $d_x=5\text{mm}$, $d_y=5\text{mm}$, $d_z=1\text{mm}$
Reference Value: $\approx 107.3 \text{ W/kg}$; Power Dens: $\approx 0.04 \text{ dB}$
Peak SAR (interpolated): $\approx 26.0 \text{ W/kg}$
SAR(1 g): $\approx 13.7 \text{ W/kg}$; SAR(10 g): $\approx 6.86 \text{ W/kg}$
Maximum value of SAR (measured): $\approx 21.3 \text{ W/kg}$



Certificate No.: 20180503-728_2018

Page 7 of 8

Impedance Measurement Plot for Body TSL



Certificate No.: 20180503-728_2018

Page 8 of 8

D2600V2 Sn:1089

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zugstrasse 43, 8048 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servicio suizo de calibración
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates
Accreditation No.: SCS 0108

Client: Sony Mobile CN (Viteo) Certificate No.: D2600V2-1089_Jul16

CALIBRATION CERTIFICATE

Device: D2600V2 - SN: 1089
Calibration procedure: QA CAL-05.v9
Calibration procedure for dipole validation kits above 700 MHz
Calibration date: July 13, 2016

This calibration certificate documents the traceability to national standards, which ensure the physical units of measurement (SI).
The measurement and the associated uncertainty are provided on the following pages and are part of the certificate.
All calibrations have been conducted in the clean laboratory facility, environment temperature 22 ± 0.5 °C and humidity < 70%.

Calibration Equipment used (MATE codes for calibration):

Primary Standards	SI	Calibration Certificate No.	Scheduled Calibration
Power meter NRP	SI: 134776	30 Apr 16 (SI: 171-02089-02089)	Apr 17
Power sensor NRP-Z91	SI: 103044	30 Apr 16 (SI: 171-02089)	Apr 17
Power sensor NRP-Z91	SI: 103045	30 Apr 16 (SI: 171-02089)	Apr 17
Reference 20 dB Attenuator	SI: 5058 (DIN)	30 Apr 16 (SI: 171-02089)	Apr 17
Traceable impedance calibration	SI: 104712 (NIST)	30 Apr 16 (SI: 171-02089)	Apr 17
Reference Power F2000A	SI: 7249	30 Jan 16 (SI: 171-02089)	Jan 17
DAK1	SI: 611	30 Jan 16 (SI: 171-02089)	Jan 17

Secondary Standards
Power meter FPO-433
Power sensor HP-433A
Power sensor HP-433A
HP generator 665-5017 (2)
Reference impedance F2000A

Authorized by: Jutta Polak
Laboratory Technician
Checked by: Jutta Polak
Technical Manager

Calibration No.: D2600V2-1089_Jul16 Page 1 of 8

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zugstrasse 43, 8048 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servicio suizo de calibración
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates
Accreditation No.: SCS 0108

Client: Sony Mobile CN (Viteo) Certificate No.: D2600V2-1089_Jul16

Glossary:

- TSL: tissue simulating liquid
 - ConF: sensitivity in TSL / NORM x,y,z
 - N/A: not applicable or not measured
- Calibration is Performed According to the Following Standards:
- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
 - IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
 - IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
 - KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:
e) DASY4S System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Calibration No.: D2600V2-1089_Jul16 Page 2 of 8

Measurement Conditions

DASY Version	DASY4S	Page 2 of 8
Extrapolation	Antenna Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	50 mm	With Spacer
Zoom Scan Resolution	10.0 mm x 5.0 mm	
Frequency	2600.130 ± 1.50 kHz	

Head TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	79.0	1.60 mS/m
Measured Head TSL parameters	22.0 ± 0.2 °C	77.5 ± 6 %	2.02 mS/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	—	—

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	14.6 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	57.1 W/kg ± 17.6 % (k=2)

Body TSL parameters

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.0	2.18 mS/m
Measured Body TSL parameters	22.0 ± 0.2 °C	51.4 ± 6 %	2.20 mS/m ± 6 %
Body TSL temperature change during test	< 0.5 °C	—	—

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	11.6 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	53.7 W/kg ± 17.1 % (k=2)

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 15, 2014

Calibration No.: D2600V2-1089_Jul16 Page 3 of 8

Appendix (Additional assessments outside the scope of SCS 0108)

Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.5 Ω ± 6.8 Ω
Return Loss	> 20.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	45.8 Ω ± 6.0 Ω
Return Loss	> 22.7 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.149 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.
The dipole is made of standard braided coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	March 15, 2014

Calibration No.: D2600V2-1089_Jul16 Page 4 of 8

D2600V2 Sn:1089

DASY5 Validation Report for Head TSL

Date: 12/07/2016

Test Laboratory: SPTAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1089

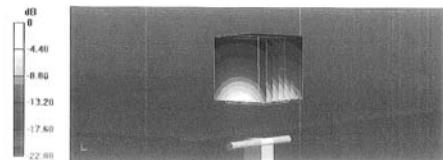
Communication System: UTD 0 - CW; Frequency: 2600 MHz
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 37.5$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF:7.56, 7.56; Calibrated: 15.06.2016;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA64 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- DASY52 52.8.R(1258); SEMCAD X: 14.6.10(7372)

Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

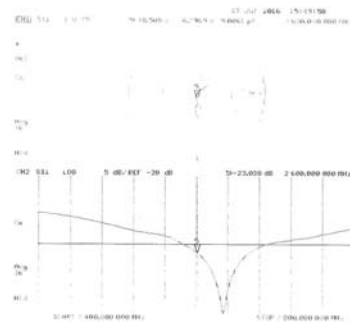
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 117.2 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 31.2 W/kg
NAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.46 W/kg
Maximum value of SAR (measured) = 25.0 W/kg



Calculation: 10*log(25.0) - 10*log(1.0)

Page 7 of 8

Impedance Measurement Plot for Head TSL



Calculation: 10*log(17.447) - 10*log(1.0)

Page 8 of 8

DASY5 Validation Report for Body TSL

Date: 02/07/2016

Test Laboratory: SPTAG, Zurich, Switzerland

DUT: Dipole 2600 MHz; Type: D2600V2; Serial: D2600V2 - SN: 1089

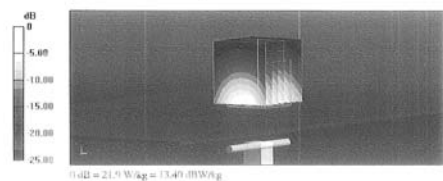
Communication System: UTD 0 - CW; Frequency: 2600 MHz
Medium parameters used: $f = 2600$ MHz; $\sigma = 2.2$ S/m; $\epsilon_r = 51.4$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF:7.48, 7.48; Calibrated: 15.06.2016;
- Sensor Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DA64 Sn601; Calibrated: 30.12.2015
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- DASY52 52.8.R(1258); SEMCAD X: 14.6.10(7372)

Dipole Calibration for Body Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

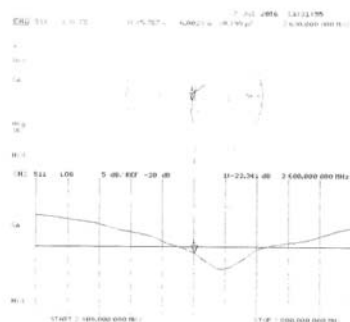
Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 105.3 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 27.8 W/kg
NAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.06 W/kg
Maximum value of SAR (measured) = 21.9 W/kg



Calculation: 10*log(21.9) - 10*log(1.0)

Page 7 of 8

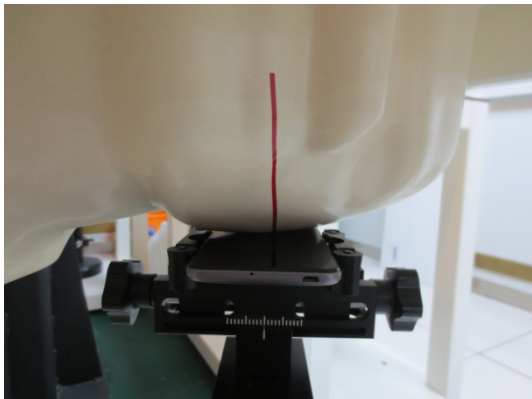
Impedance Measurement Plot for Body TSL



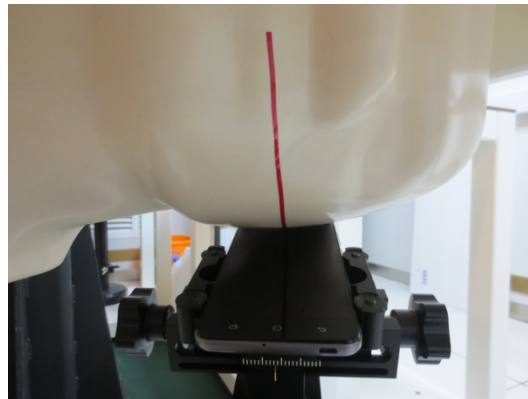
Calculation: 10*log(17.447) - 10*log(1.0)

Page 8 of 8

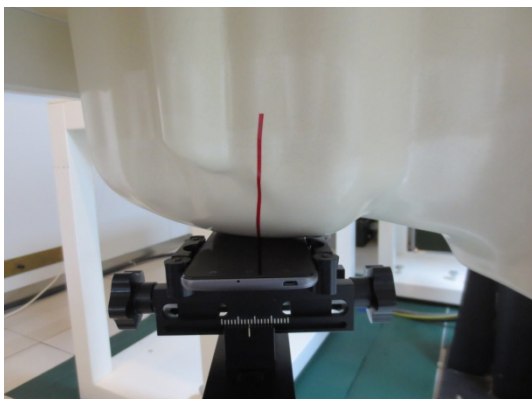
ANNEX C - PHOTOGRAPH



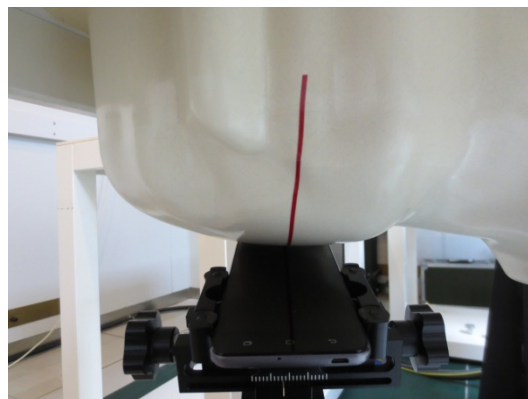
Cheek position, left side



Tilt position, left side



Cheek position, Right side



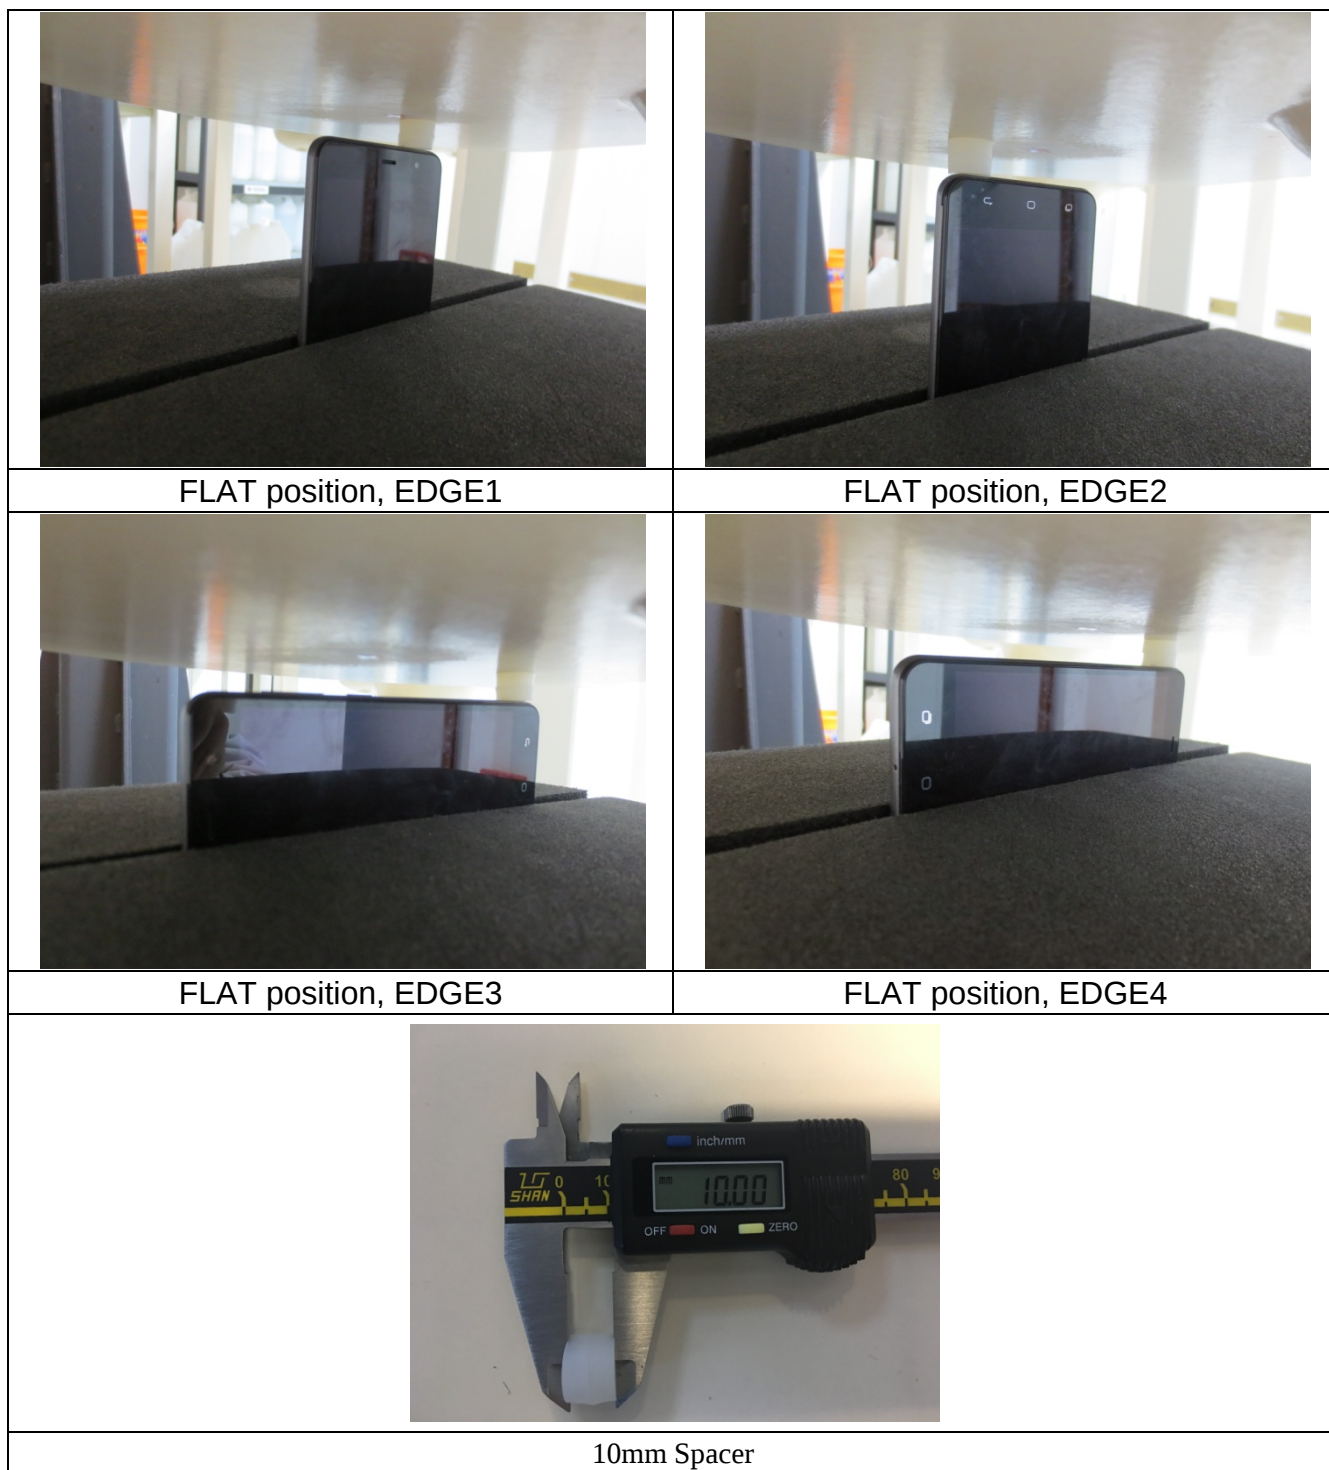
Tilt position, Right side



FLAT position, Towards phantom



FLAT position, Towards ground



---End of Test Report---