


Site: AC2	Time: 2018/08/10 - 00:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2437MHz (CDD Mode)	

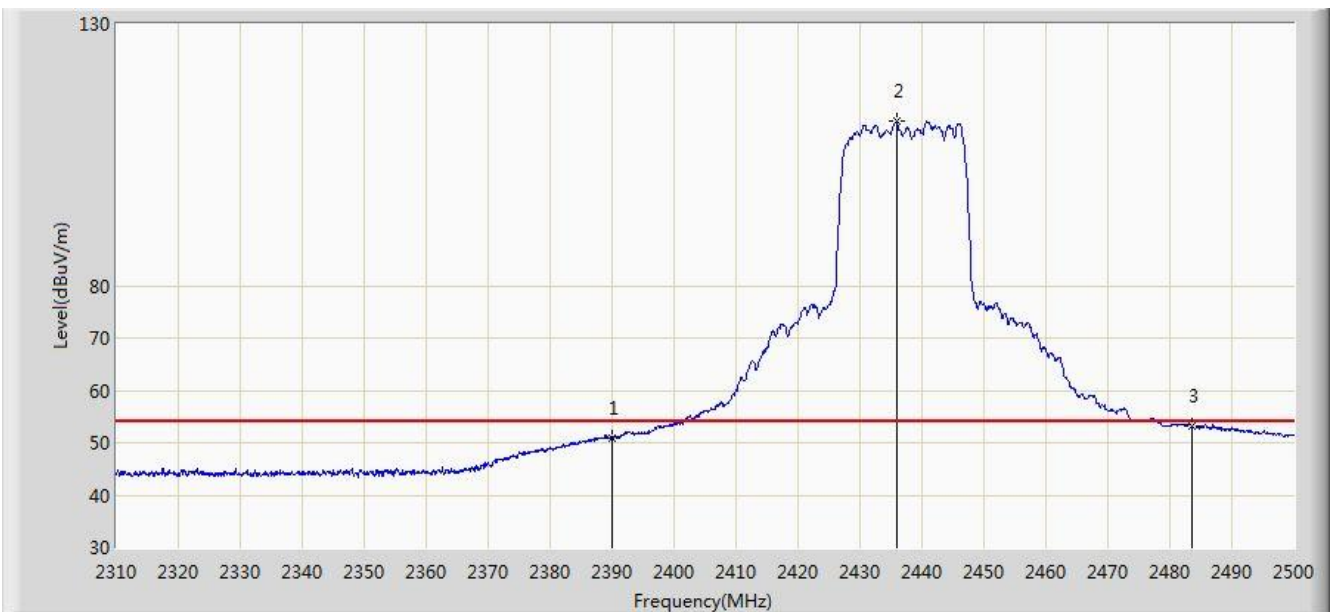


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.925	18.350	-3.075	54.000	32.575	AV
2			2435.970	111.372	78.856	N/A	N/A	32.517	AV
3			2483.500	53.258	20.662	-0.742	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 16:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

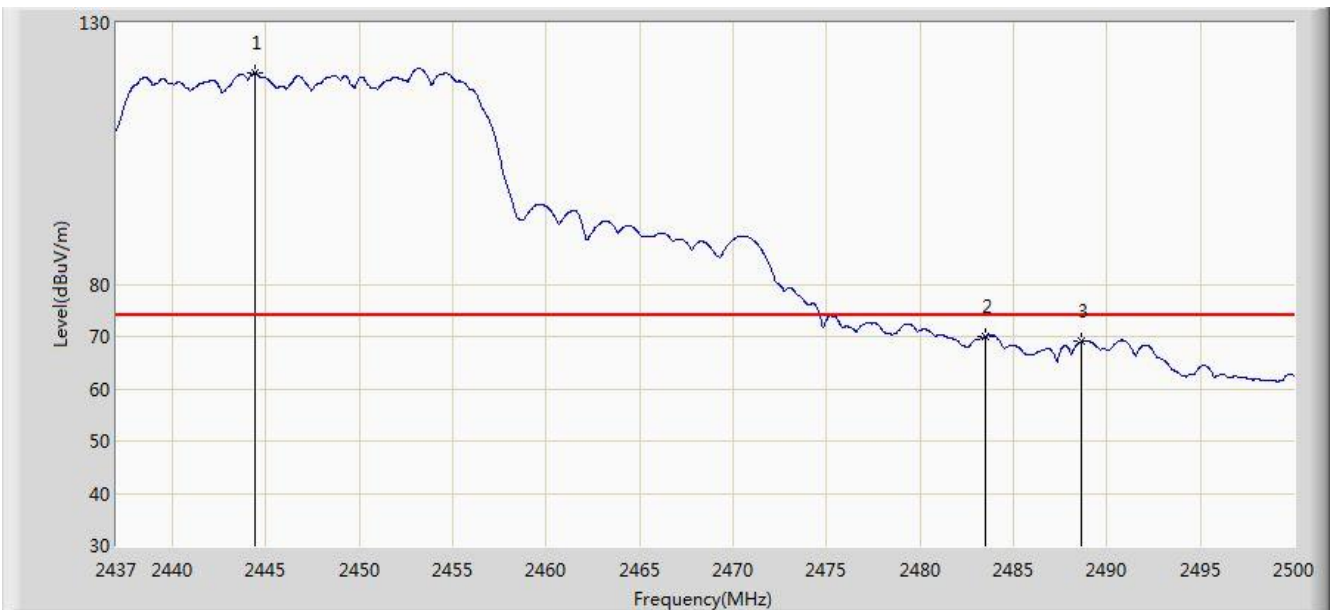


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2444.403	120.431	87.925	N/A	N/A	32.506	PK
2			2483.500	69.956	37.360	-4.044	74.000	32.596	PK
3			2488.628	69.004	36.395	-4.996	74.000	32.609	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

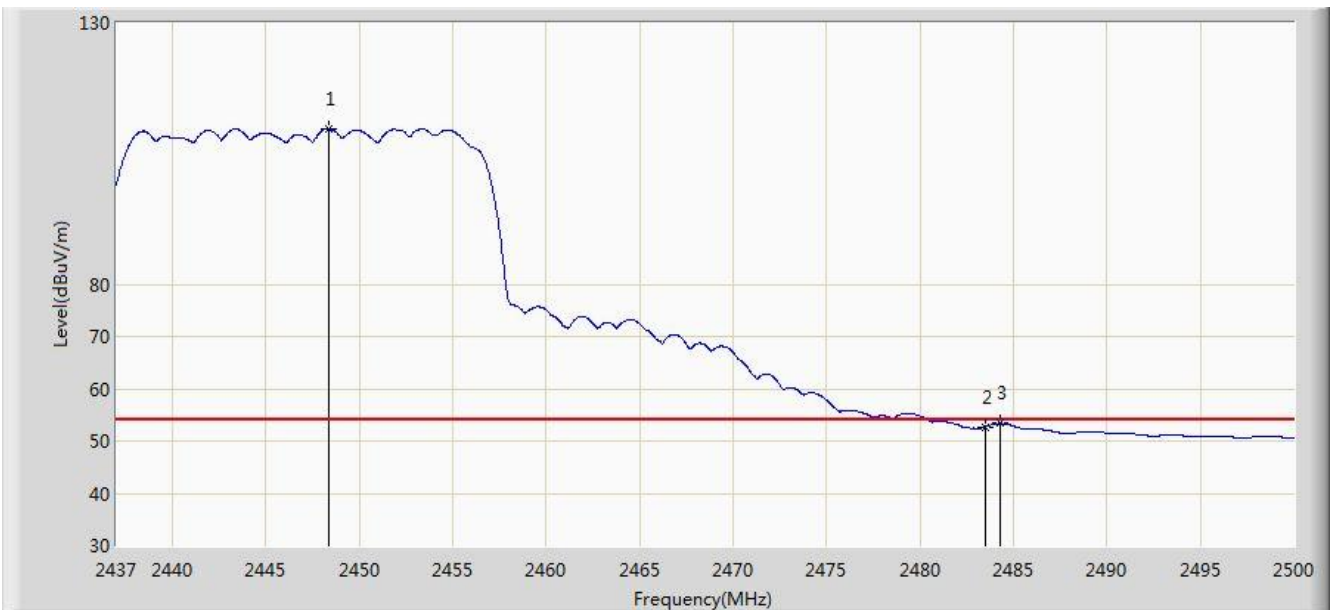


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2448.340	109.777	77.267	N/A	N/A	32.510	AV
2			2483.500	52.738	20.142	-1.262	54.000	32.596	AV
3			2484.281	53.339	20.741	-0.661	54.000	32.598	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2452MHz (CDD Mode) (Worst Polarization)	

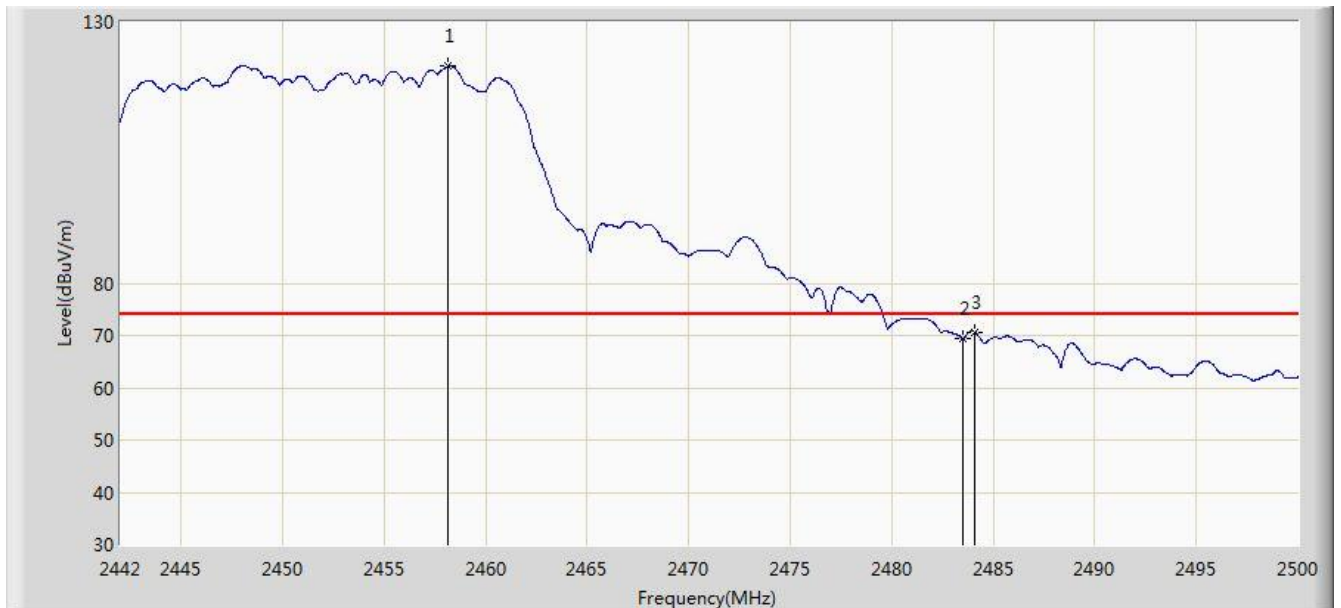


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.124	121.485	88.953	N/A	N/A	32.532	PK
2			2483.500	69.304	36.708	-4.696	74.000	32.596	PK
3			2484.108	70.541	37.944	-3.459	74.000	32.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 16:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2452MHz (CDD Mode) (Worst Polarization)	

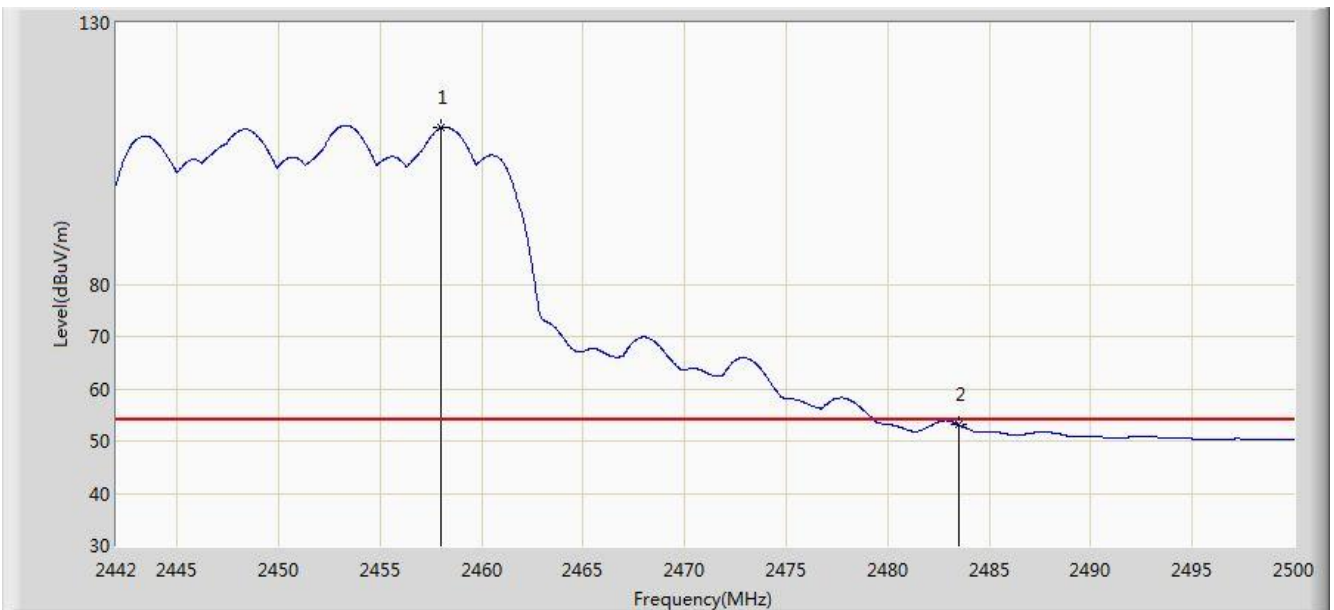


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2458.008	109.980	77.449	N/A	N/A	32.532	AV
2			2483.500	53.103	20.507	-0.897	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 16:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2457MHz (CDD Mode) (Worst Polarization)	

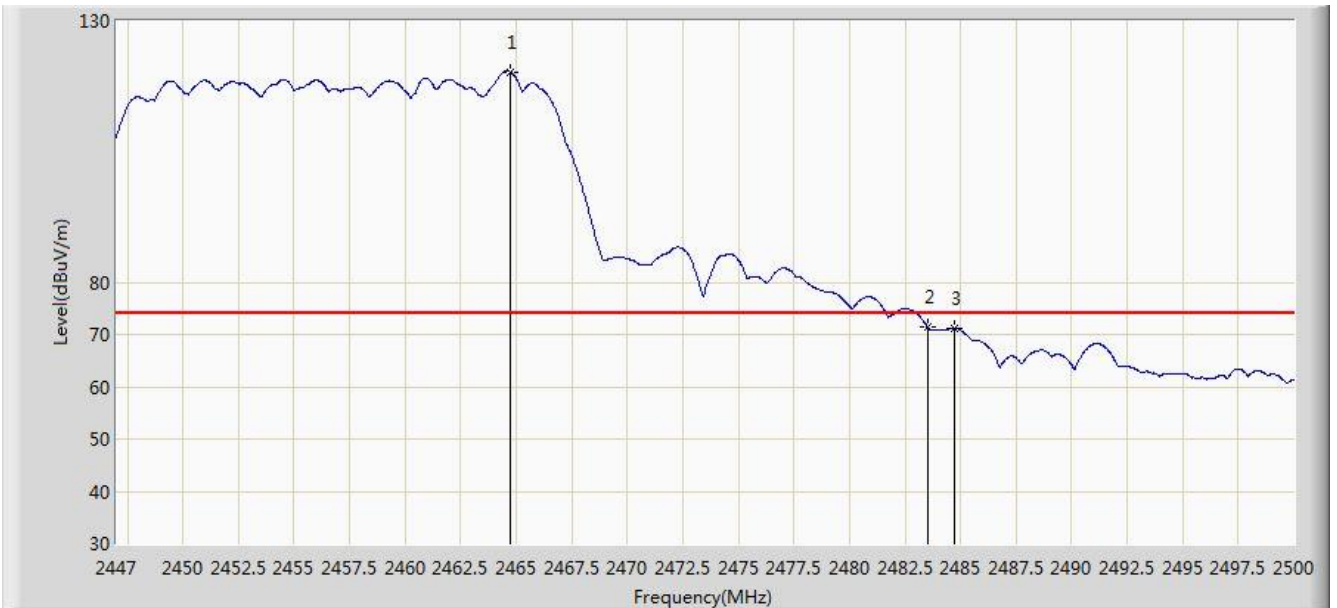


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2464.702	120.274	87.728	N/A	N/A	32.546	PK
2			2483.500	71.485	38.889	-2.515	74.000	32.596	PK
3			2484.736	71.156	38.557	-2.844	74.000	32.599	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 16:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2457MHz (CDD Mode) (Worst Polarization)	

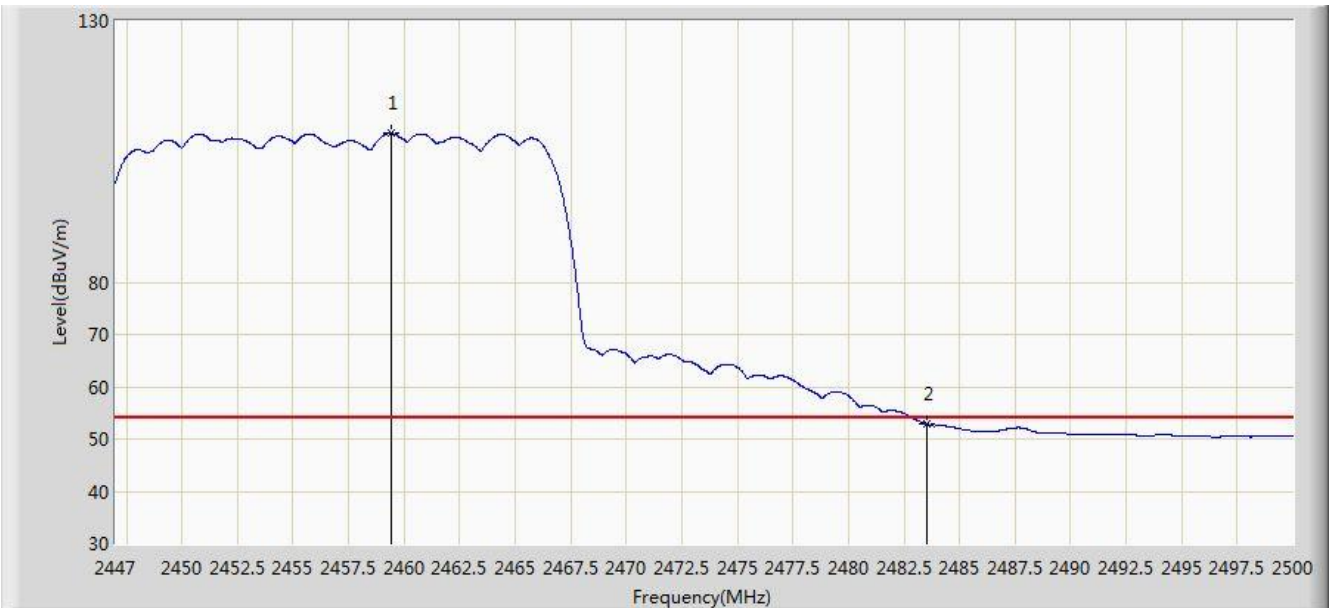

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2459.428	108.461	75.926	N/A	N/A	32.535	AV
2			2483.500	52.883	20.287	-1.117	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 16:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2464.528	106.001	73.455	N/A	N/A	32.545	PK
2			2483.500	60.960	28.364	-13.040	74.000	32.596	PK
3			2487.352	60.046	27.441	-13.954	74.000	32.606	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 16:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	



No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2464.576	94.755	62.209	N/A	N/A	32.545	AV
2			2483.500	47.790	15.194	-6.210	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 16:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2467.360	117.707	85.154	N/A	N/A	32.553	PK
2			2483.500	69.259	36.663	-4.741	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 16:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at Channel 2462MHz (CDD Mode)	

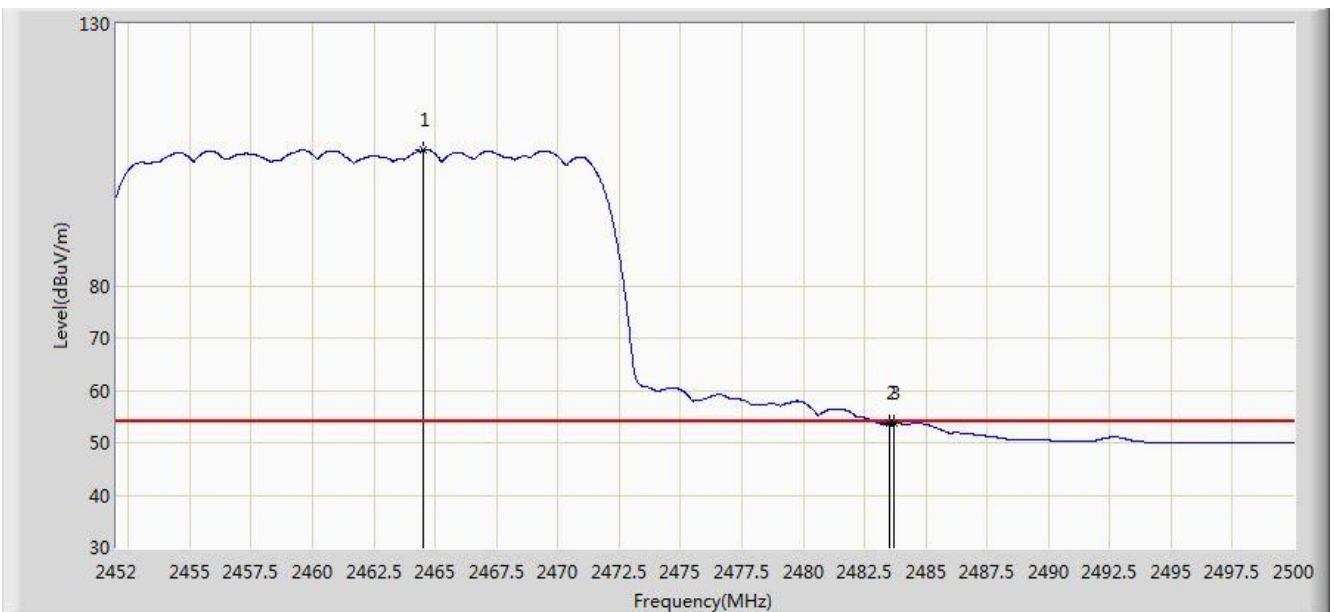


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2464.528	105.934	73.388	N/A	N/A	32.545	AV
2			2483.500	53.710	21.114	-0.290	54.000	32.596	AV
3			2483.680	53.837	21.241	-0.163	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

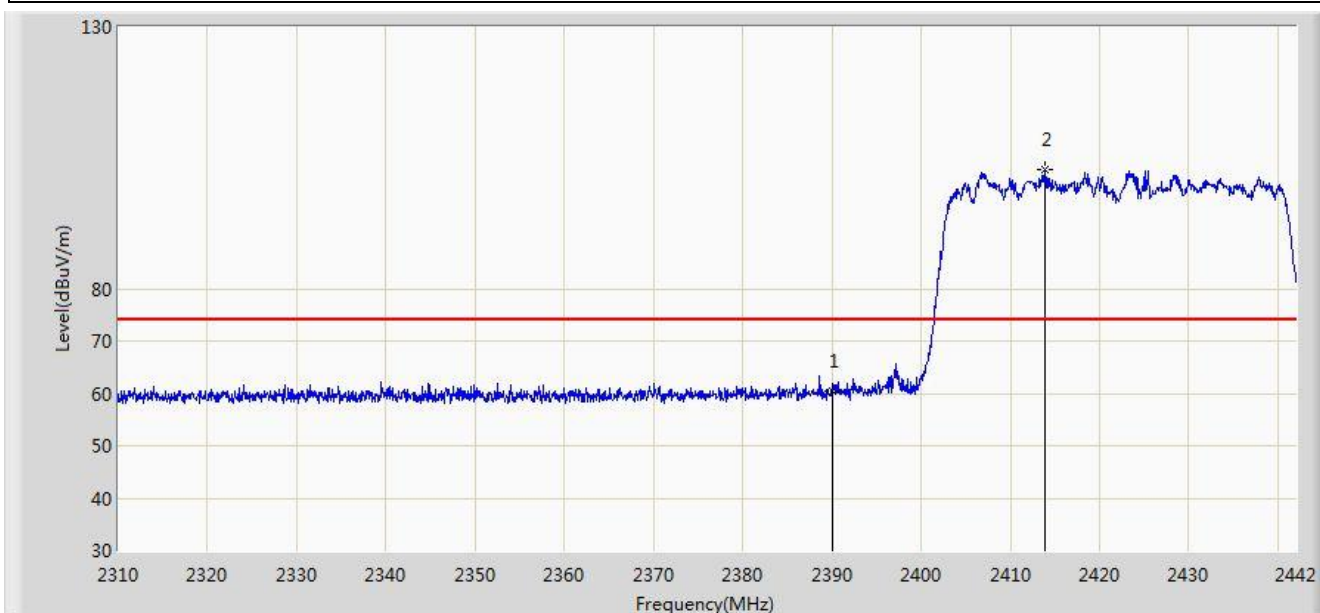


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	60.369	27.794	-13.631	74.000	32.575	PK
2			2413.818	102.623	70.078	N/A	N/A	32.546	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

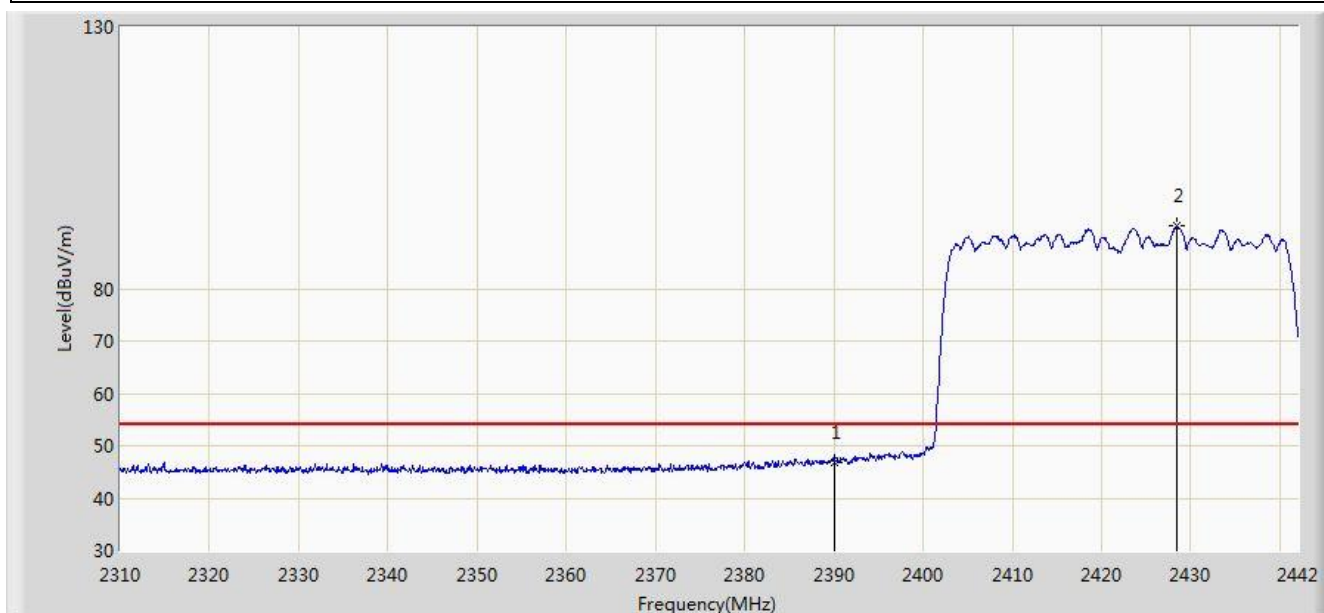


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.830	14.255	-7.170	54.000	32.575	AV
2			2428.470	91.962	59.437	N/A	N/A	32.526	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

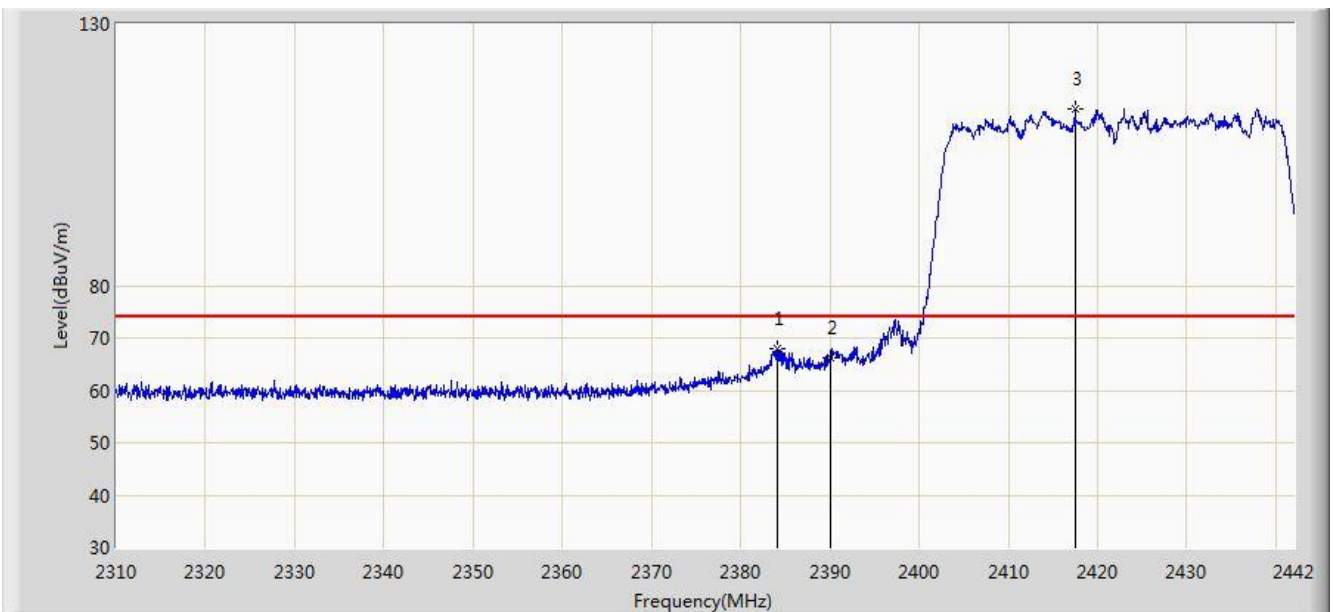


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2384.184	68.084	35.499	-5.916	74.000	32.585	PK
2			2390.000	66.107	33.532	-7.893	74.000	32.575	PK
3			2417.448	113.891	81.351	N/A	N/A	32.540	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2422MHz (CDD Mode)	

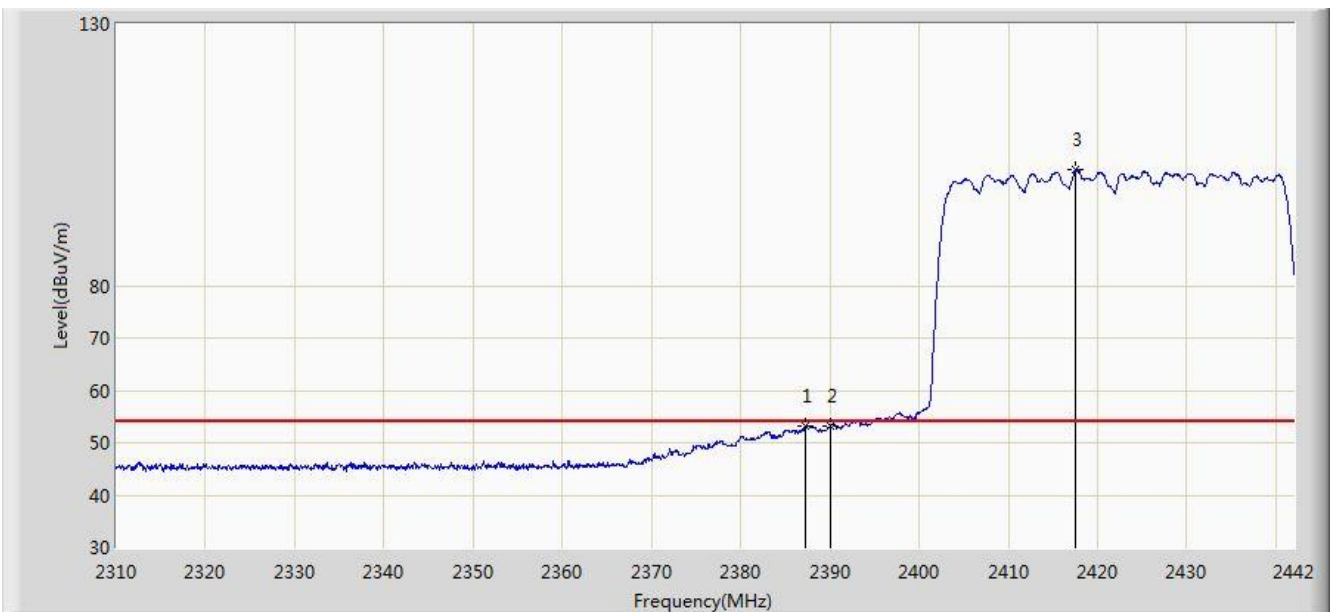


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.220	53.254	20.675	-0.746	54.000	32.579	AV
2			2390.000	53.060	20.485	-0.940	54.000	32.575	AV
3			2417.580	102.078	69.538	N/A	N/A	32.541	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/10/15 - 21:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2427MHz (CDD Mode) (Worst Polarization)	

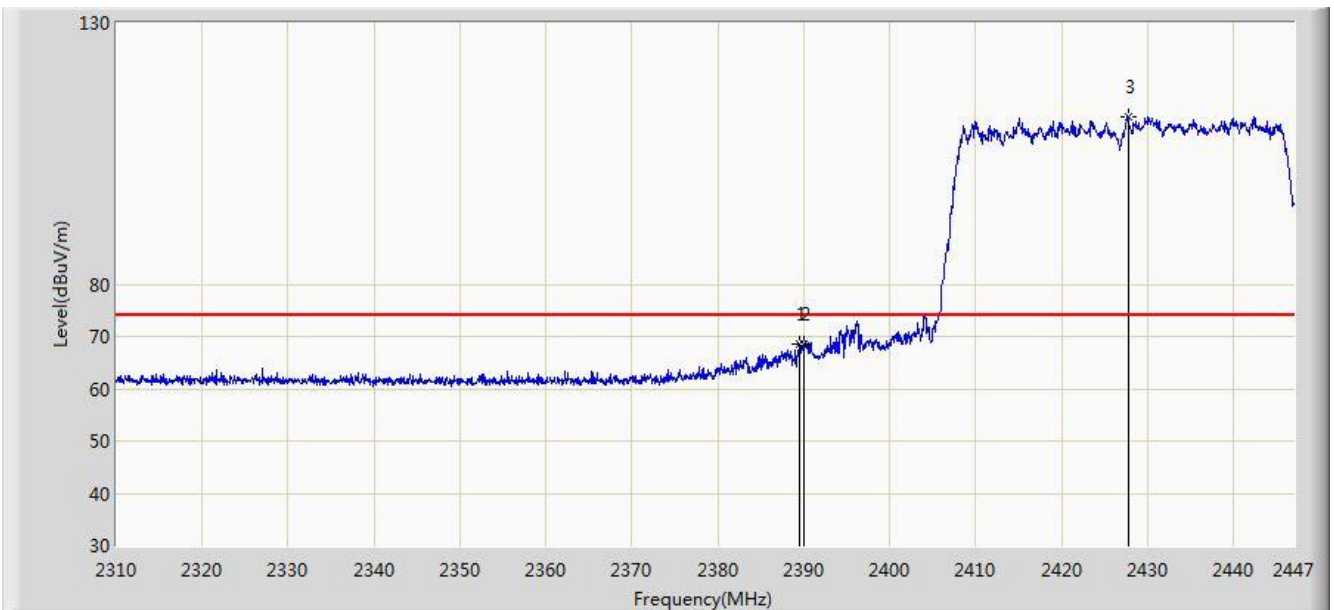


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.529	68.547	35.972	-5.453	74.000	32.575	PK
2			2390.000	68.409	35.834	-5.591	74.000	32.575	PK
3		*	2427.751	112.164	79.638	N/A	N/A	32.527	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/15 - 21:29
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2427MHz (CDD Mode) (Worst Polarization)	

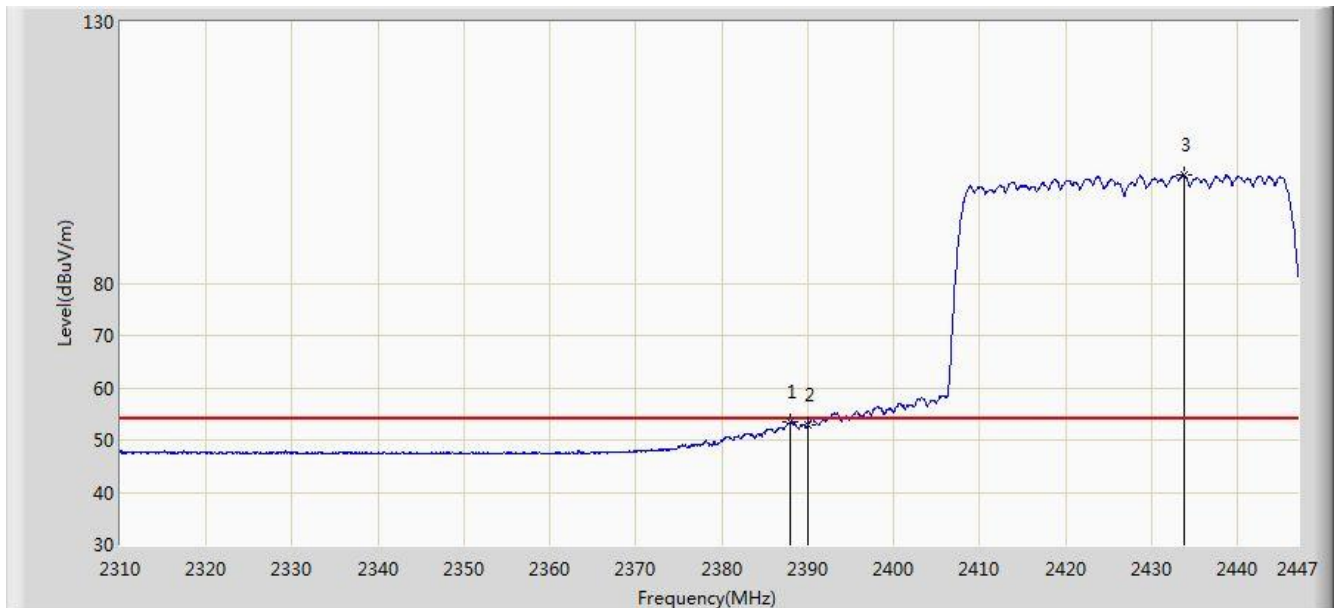


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.021	53.515	20.937	-0.485	54.000	32.578	AV
2			2390.000	52.898	20.323	-1.102	54.000	32.575	AV
3		*	2433.711	100.805	68.286	N/A	N/A	32.519	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/10 - 00:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

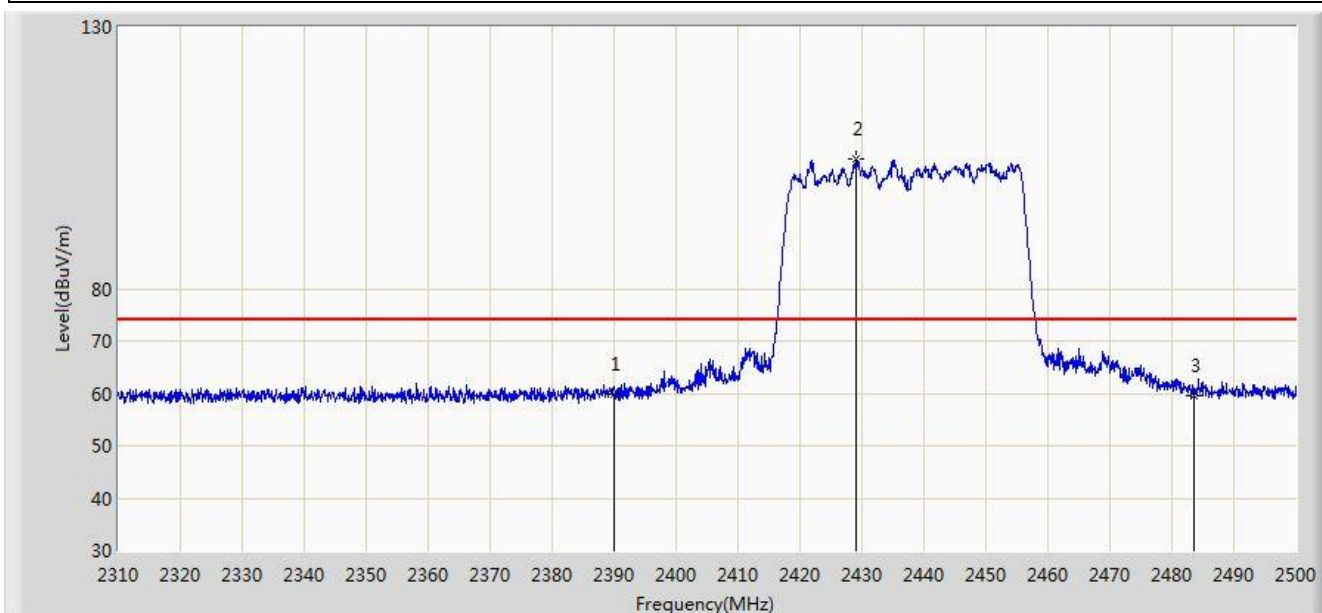


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	59.878	27.303	-14.122	74.000	32.575	PK
2			2428.940	104.879	72.354	N/A	N/A	32.525	PK
3			2483.500	59.547	26.951	-14.453	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

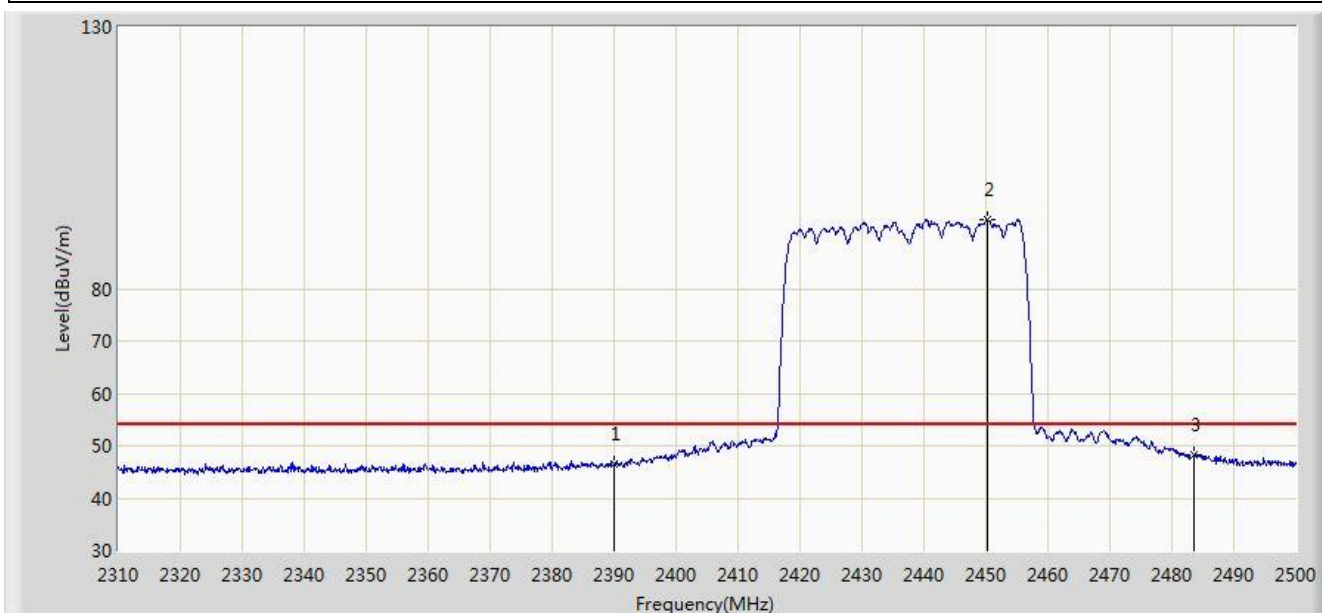


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	46.381	13.806	-7.619	54.000	32.575	AV
2			2450.125	93.232	60.718	N/A	N/A	32.514	AV
3			2483.500	48.185	15.589	-5.815	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

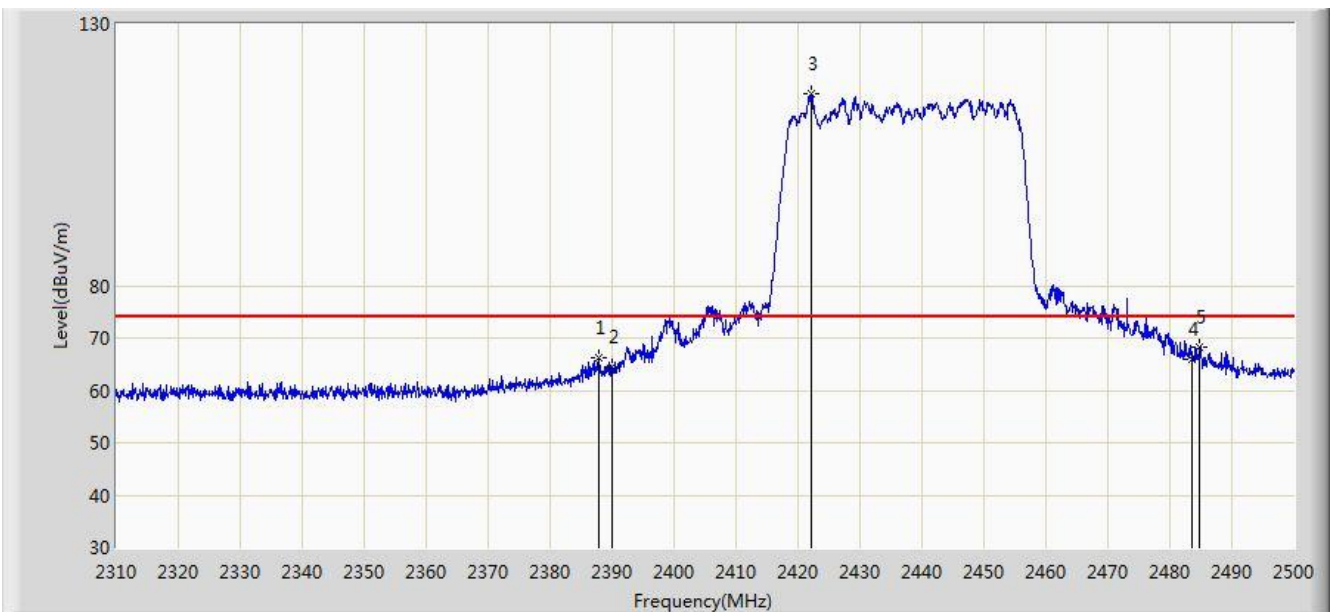


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.805	66.216	33.638	-7.784	74.000	32.579	PK
2			2390.000	64.506	31.931	-9.494	74.000	32.575	PK
3			2422.100	116.765	84.231	N/A	N/A	32.534	PK
4			2483.500	65.984	33.388	-8.016	74.000	32.596	PK
5			2484.800	68.324	35.725	-5.676	74.000	32.599	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/10 - 00:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2437MHz (CDD Mode)	

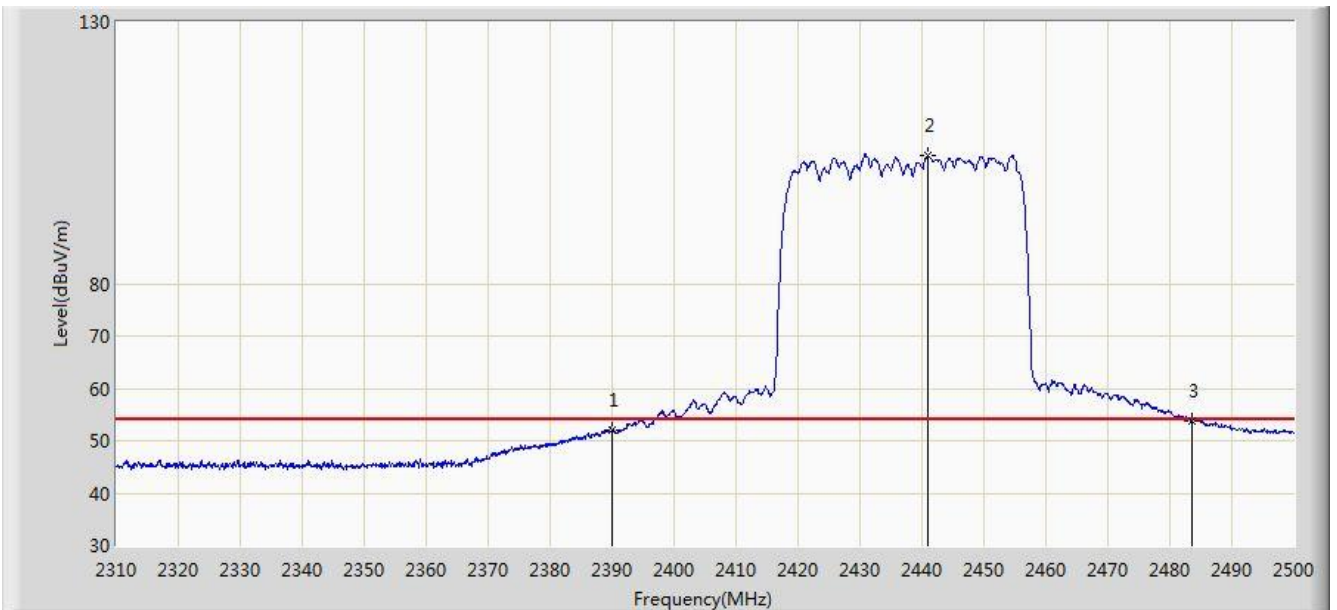


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.034	19.459	-1.966	54.000	32.575	AV
2			2440.910	104.519	72.008	N/A	N/A	32.511	AV
3			2483.500	53.824	21.228	-0.176	54.000	32.596	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/10/15 - 22:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

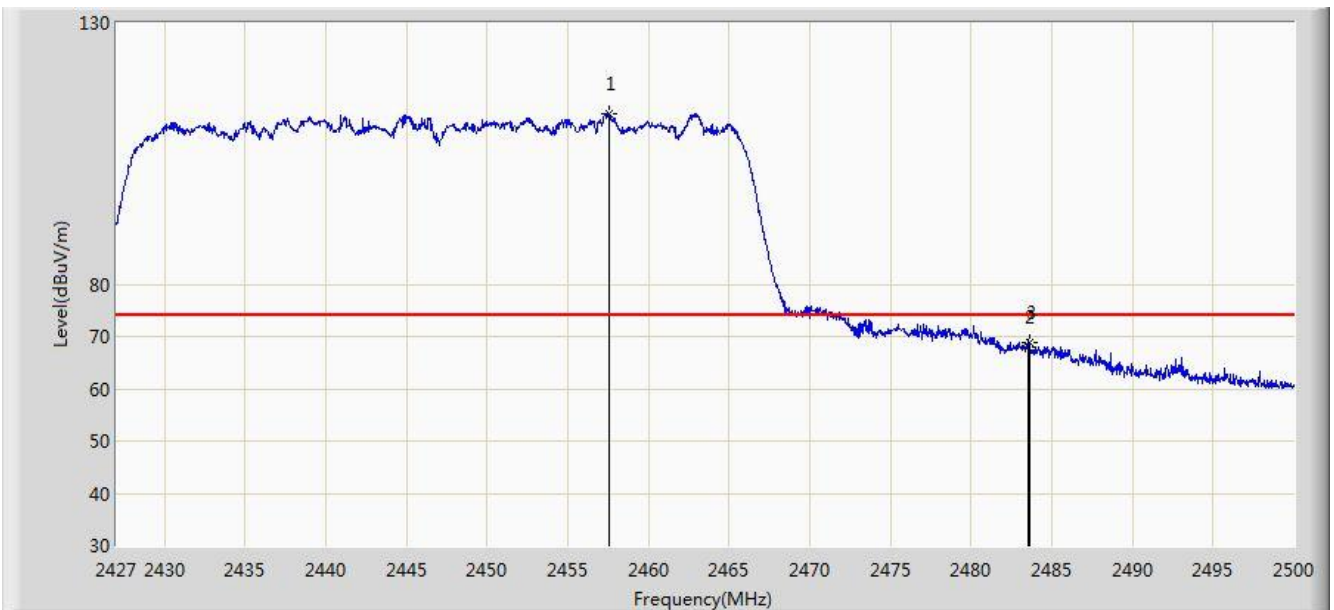


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2457.551	112.509	79.979	N/A	N/A	32.530	PK
2			2483.500	67.843	35.247	-6.157	74.000	32.596	PK
3			2483.612	68.965	36.369	-5.035	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/10/15 - 22:14
Limit: FCC_Part15.209_RE(3m)	Engineer: Snake Ni
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2447MHz (CDD Mode) (Worst Polarization)	

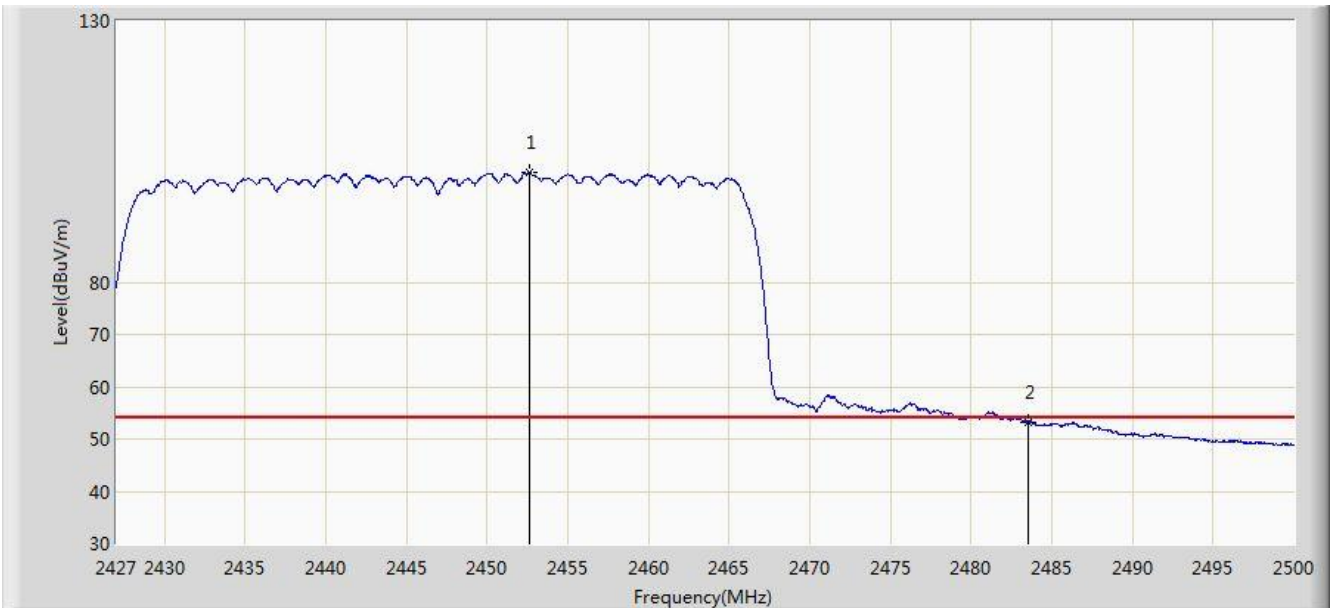


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2452.623	101.073	68.554	N/A	N/A	32.519	AV
2			2483.500	53.288	20.692	-0.712	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: AC2	Time: 2018/08/11 - 15:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

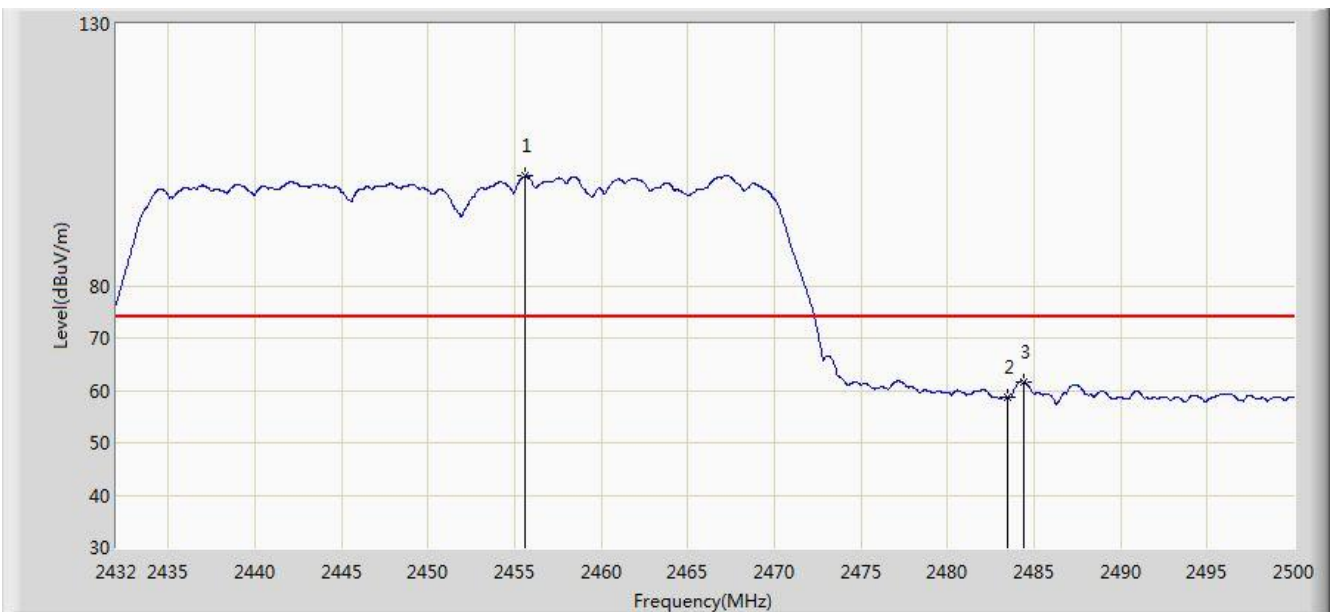


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2455.630	100.965	68.439	N/A	N/A	32.526	PK
2			2483.500	58.612	26.016	-15.388	74.000	32.596	PK
3			2484.428	61.668	29.070	-12.332	74.000	32.598	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 15:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

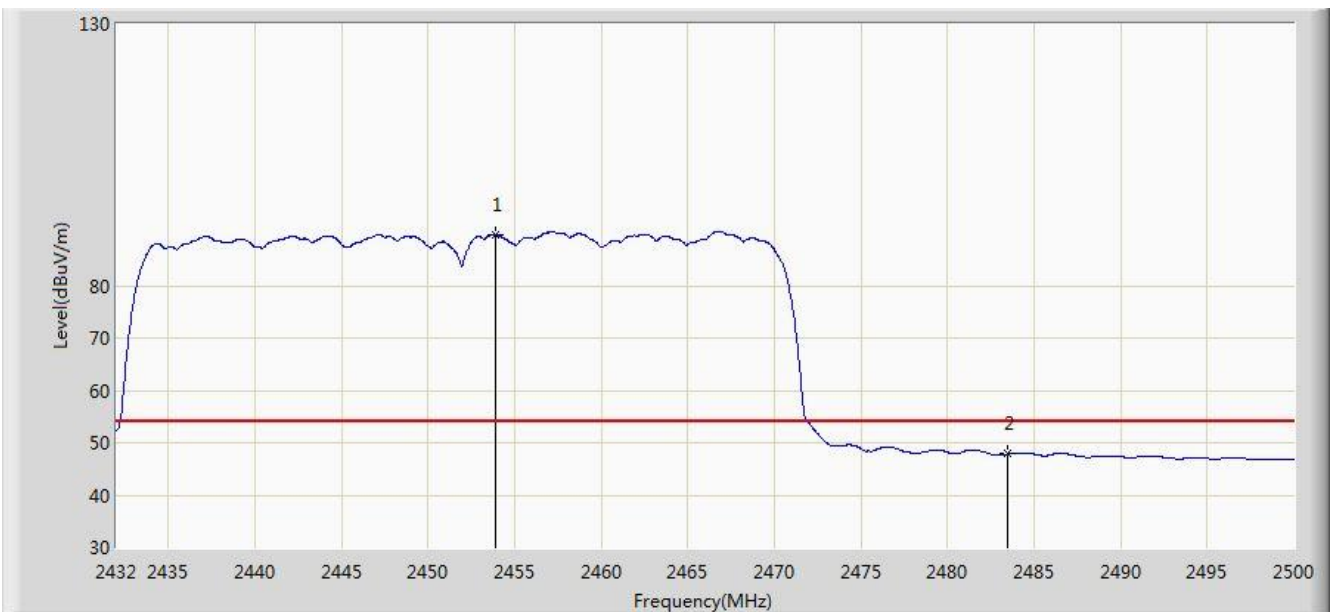


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2453.862	89.800	57.278	N/A	N/A	32.522	AV
2			2483.500	47.851	15.255	-6.149	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 15:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

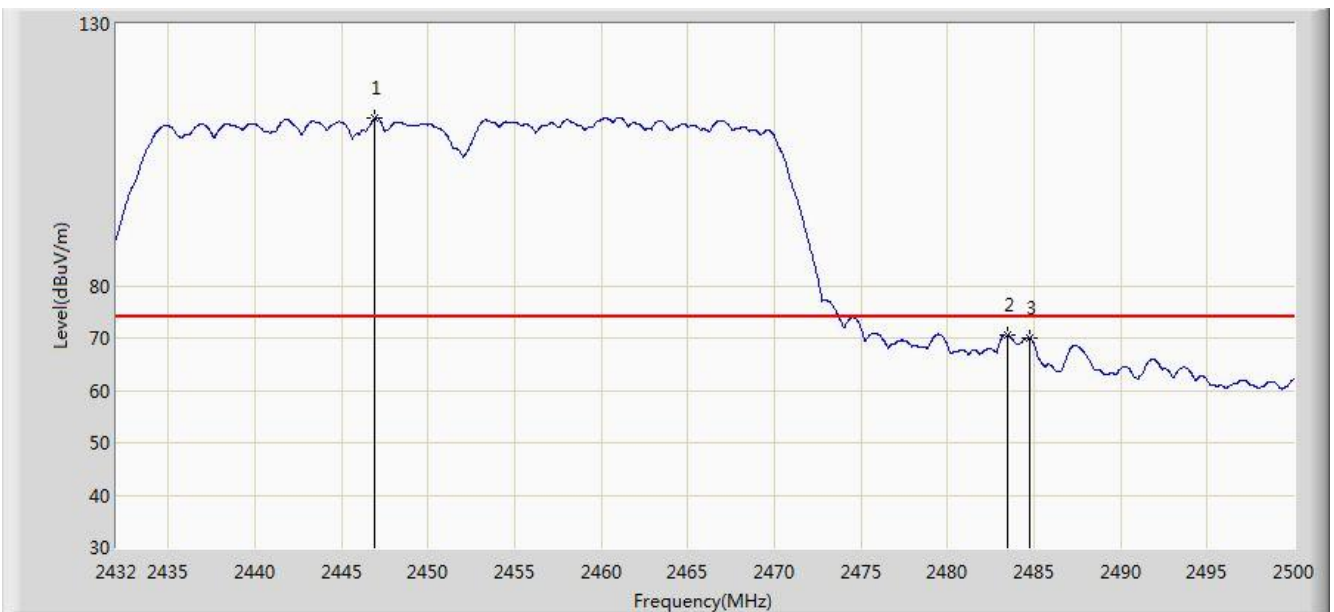


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2446.892	111.891	79.385	N/A	N/A	32.507	PK
2			2483.500	70.621	38.025	-3.379	74.000	32.596	PK
3			2484.734	70.051	37.452	-3.949	74.000	32.599	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/11 - 15:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at Channel 2452MHz (CDD Mode)	

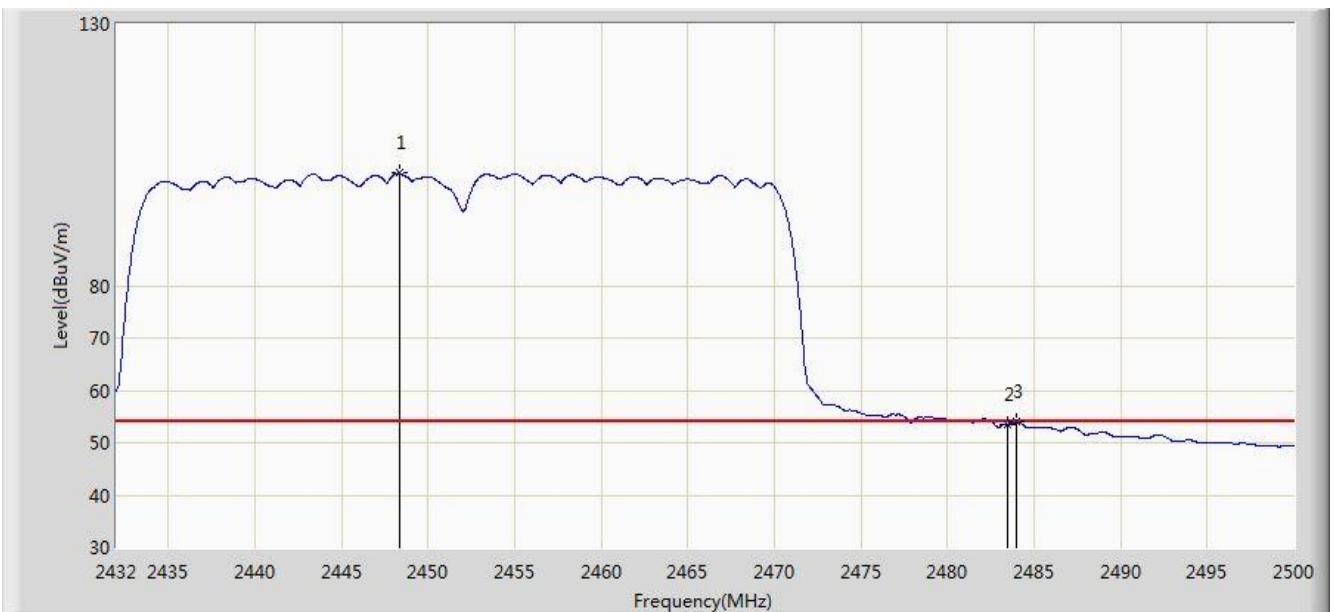


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2448.354	101.469	68.959	N/A	N/A	32.510	AV
2			2483.500	53.579	20.983	-0.421	54.000	32.596	AV
3			2483.986	53.921	21.324	-0.079	54.000	32.597	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2412MHz (Beam-Forming Mode)	

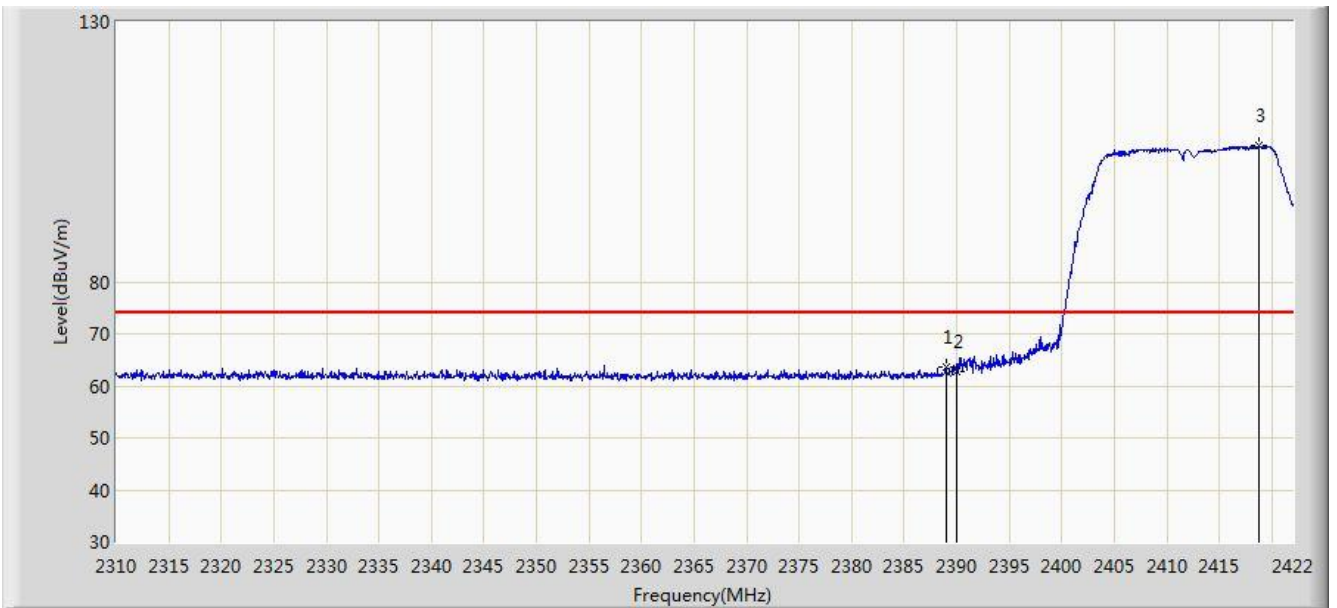


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.960	63.701	31.125	-10.299	74.000	32.576	PK
2			2390.000	62.872	30.297	-11.128	74.000	32.575	PK
3		*	2418.808	106.268	73.729	N/A	N/A	32.539	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2412MHz (Beam-Forming Mode)	

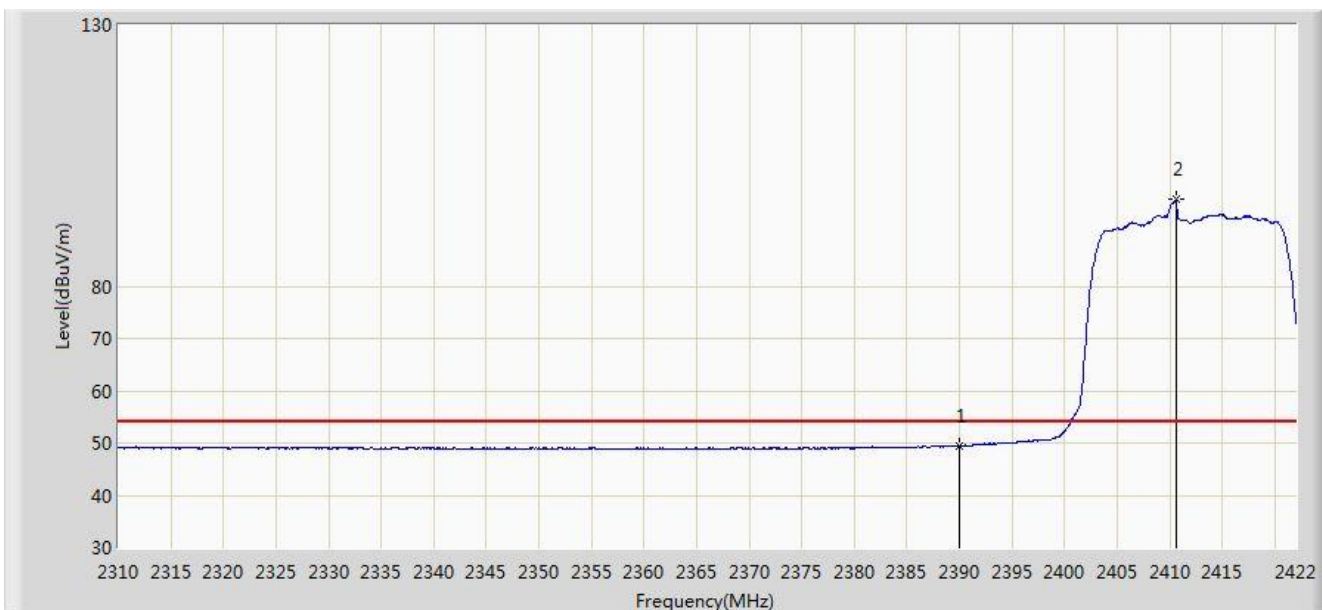


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.477	16.902	-4.523	54.000	32.575	AV
2		*	2410.688	96.619	64.069	N/A	N/A	32.550	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2412MHz (Beam-Forming Mode)	

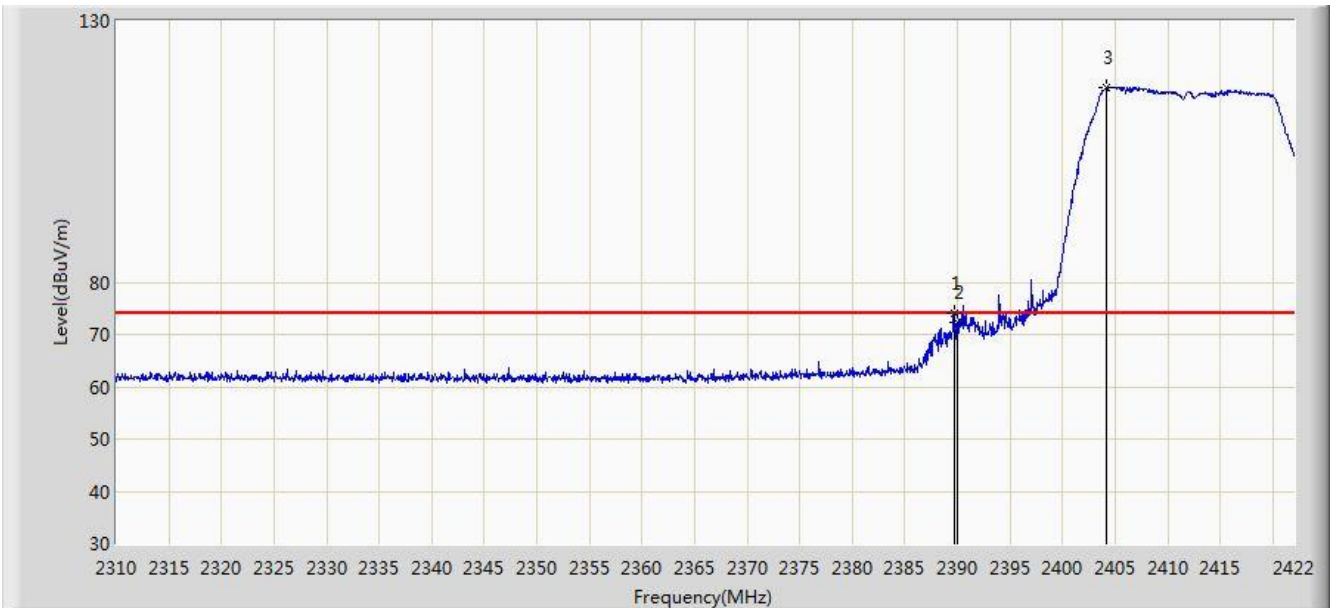


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.688	73.983	41.408	-0.017	74.000	32.575	PK
2			2390.000	72.215	39.640	-1.785	74.000	32.575	PK
3		*	2404.136	117.153	84.596	N/A	N/A	32.556	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2412MHz (Beam-Forming Mode)	

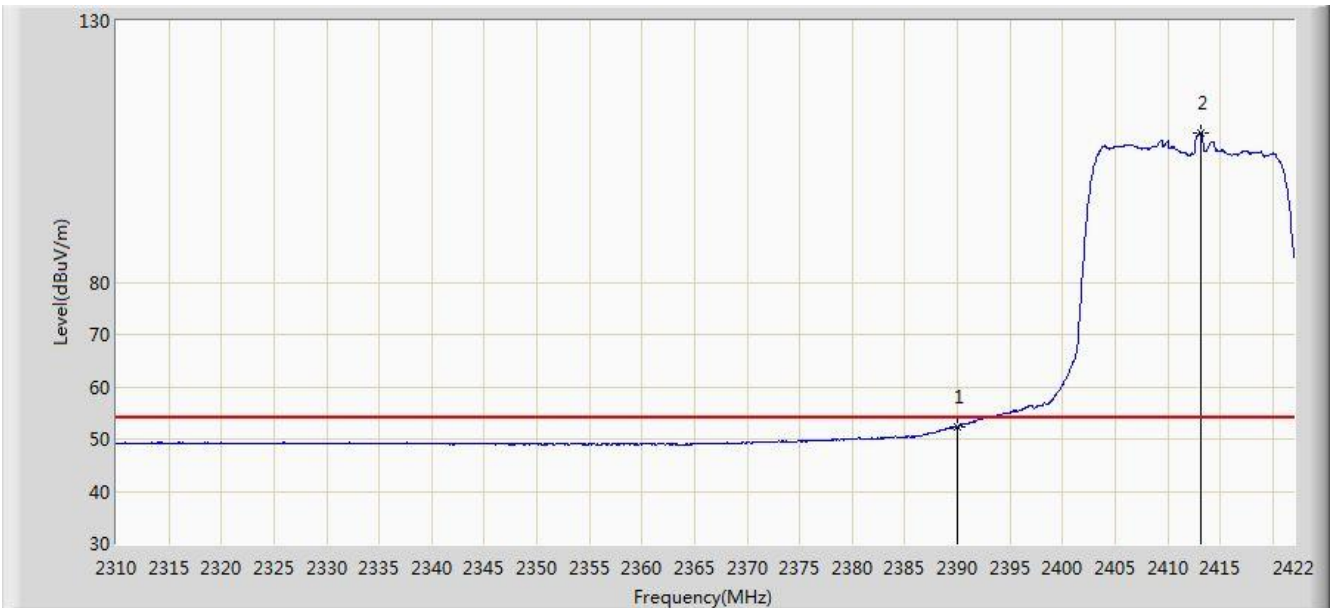


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	52.429	19.854	-1.571	54.000	32.575	AV
2		*	2413.208	108.522	75.976	N/A	N/A	32.546	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:22
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2437MHz (Beam-Forming Mode)	

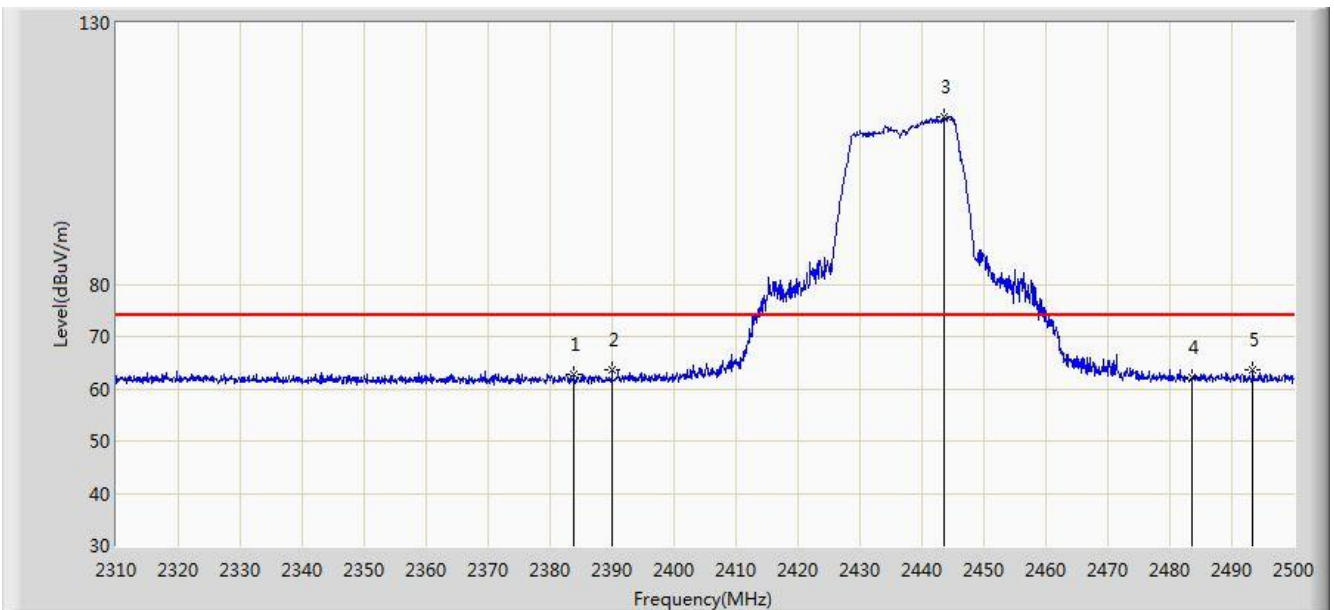


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.910	62.882	30.297	-11.118	74.000	32.586	PK
2			2390.000	63.497	30.922	-10.503	74.000	32.575	PK
3		*	2443.665	111.968	79.461	N/A	N/A	32.507	PK
4			2483.500	62.310	29.714	-11.690	74.000	32.596	PK
5			2493.445	63.560	30.939	-10.440	74.000	32.621	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2437MHz (Beam-Forming Mode)	

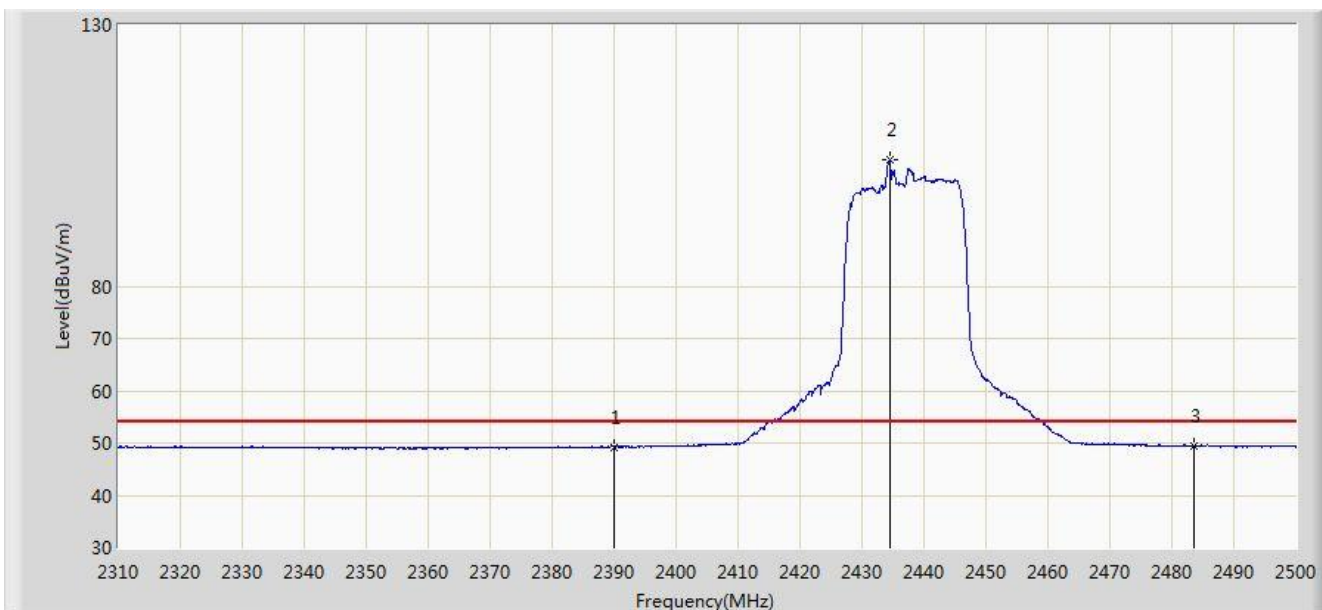


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.250	16.675	-4.750	54.000	32.575	AV
2		*	2434.545	104.175	71.657	N/A	N/A	32.518	AV
3			2483.500	49.421	16.825	-4.579	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2437MHz (Beam-Forming Mode)	

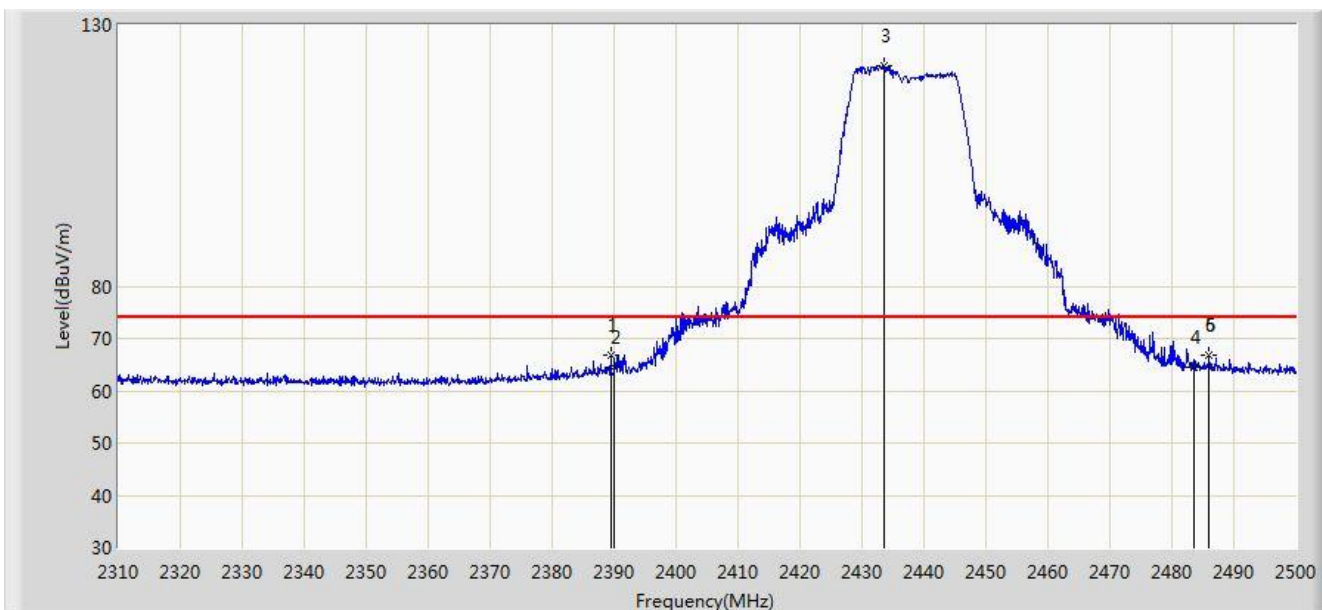


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2389.420	66.810	34.234	-7.190	74.000	32.575	PK
2			2390.000	64.474	31.899	-9.526	74.000	32.575	PK
3		*	2433.500	122.312	89.793	N/A	N/A	32.520	PK
4			2483.500	64.438	31.842	-9.562	74.000	32.596	PK
5			2486.035	66.757	34.155	-7.243	74.000	32.602	PK
6			2486.035	66.757	34.155	-7.243	74.000	32.602	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:20
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2437MHz (Beam-Forming Mode)	

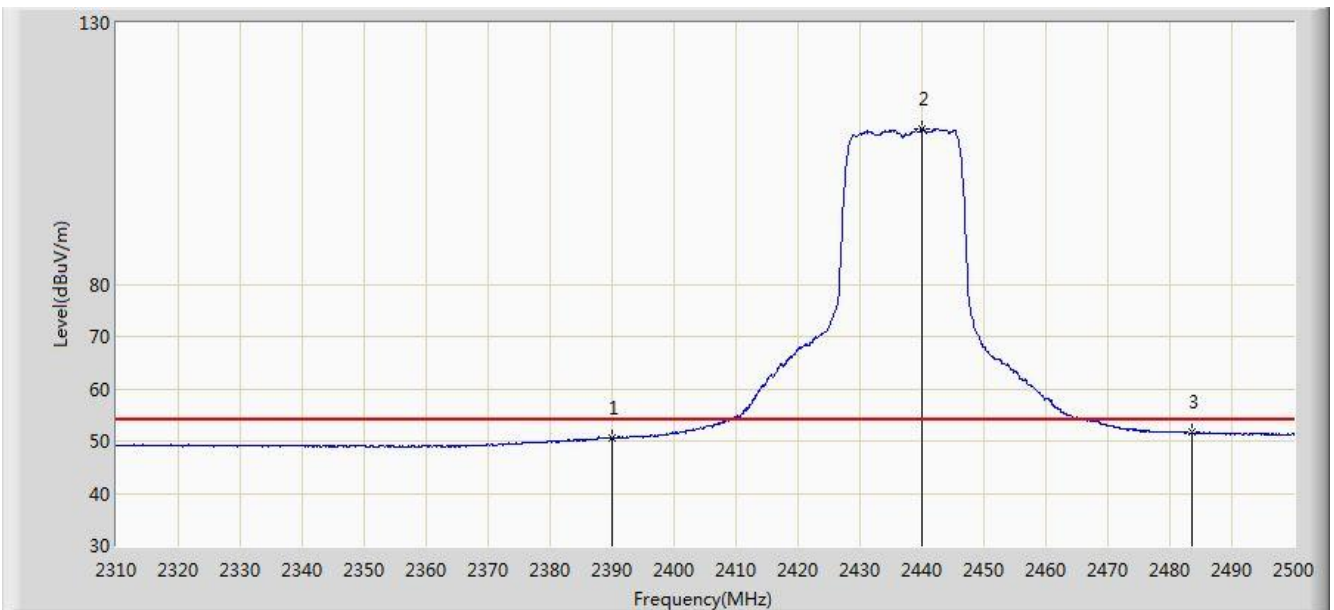


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.626	18.051	-3.374	54.000	32.575	AV
2		*	2440.055	109.689	77.177	N/A	N/A	32.512	AV
3			2483.500	51.596	19.000	-2.404	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2462MHz (Beam-Forming Mode)	

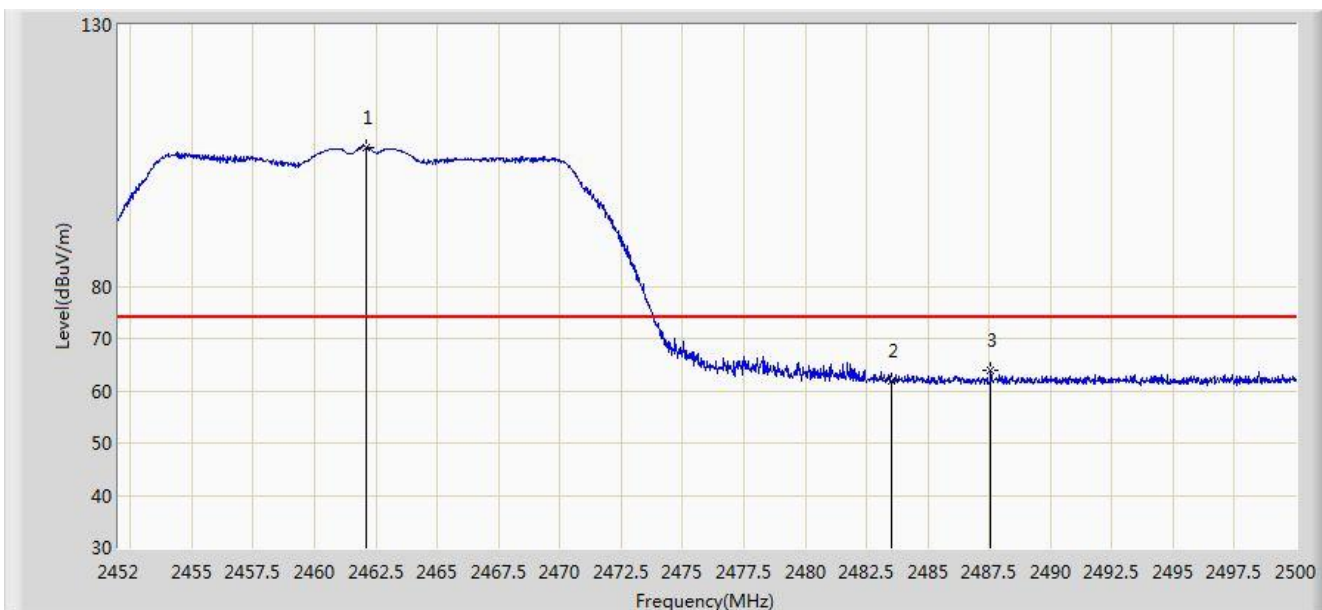


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.128	106.571	74.030	N/A	N/A	32.540	PK
2			2483.500	61.785	29.189	-12.215	74.000	32.596	PK
3			2487.568	63.776	31.170	-10.224	74.000	32.606	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2462MHz (Beam-Forming Mode)	

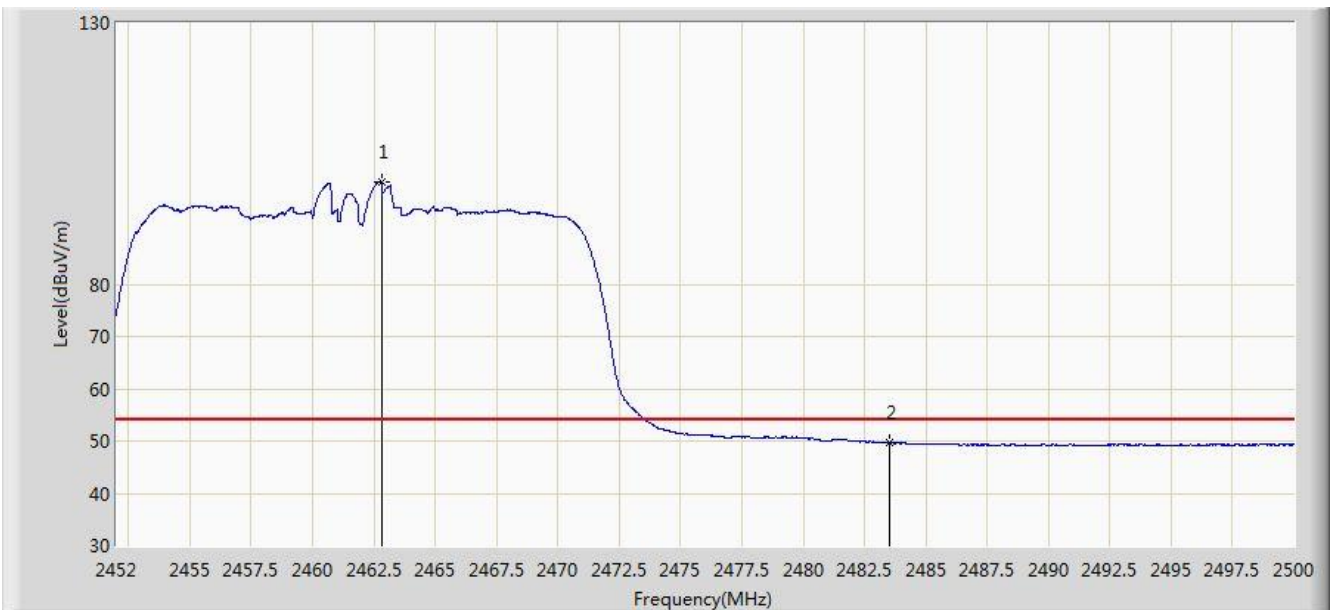


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2462.800	99.613	67.071	N/A	N/A	32.542	AV
2			2483.500	49.577	16.981	-4.423	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 15:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2462MHz (Beam-Forming Mode)	

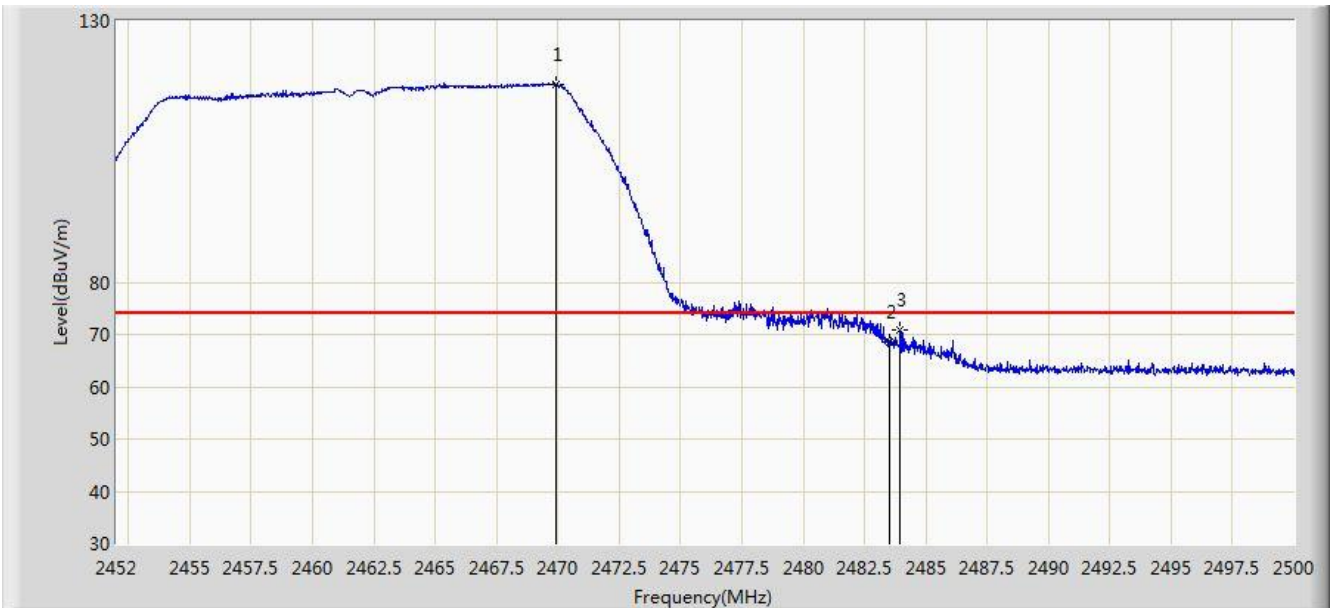


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2469.904	117.806	85.246	N/A	N/A	32.560	PK
2			2483.500	68.556	35.960	-5.444	74.000	32.596	PK
3			2483.944	70.988	38.391	-3.012	74.000	32.596	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:04
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at channel 2462MHz (Beam-Forming Mode)	

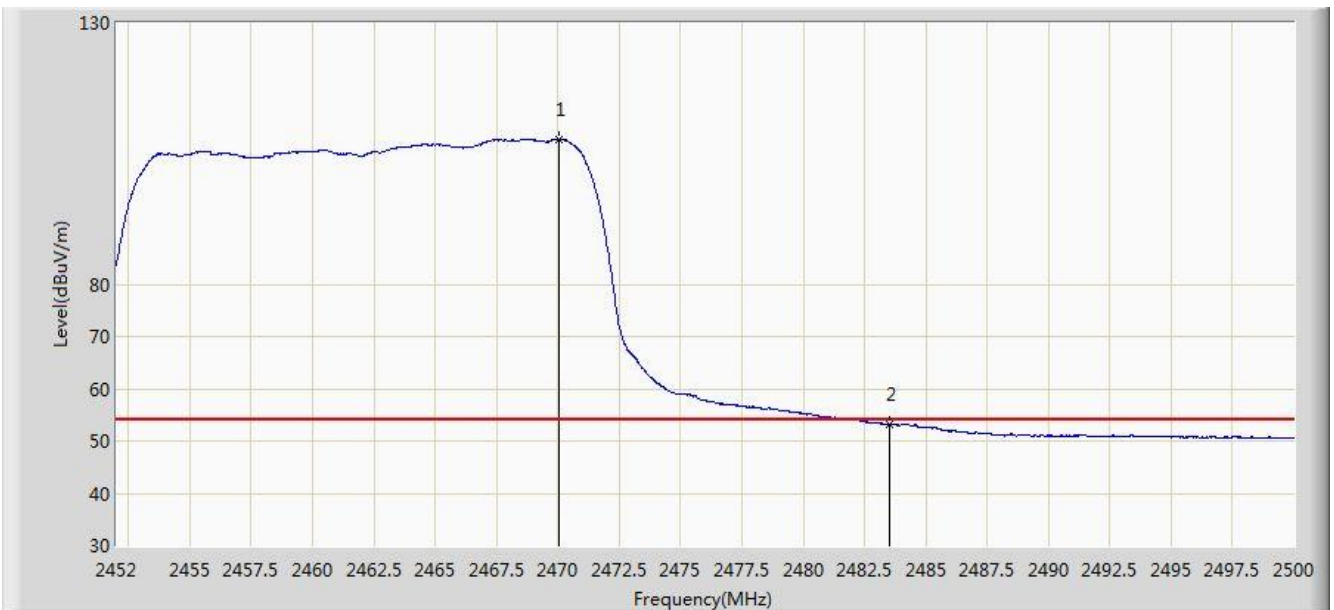


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2470.048	107.716	75.156	N/A	N/A	32.560	AV
2			2483.500	53.213	20.617	-0.787	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2422MHz (Beam-Forming Mode)	

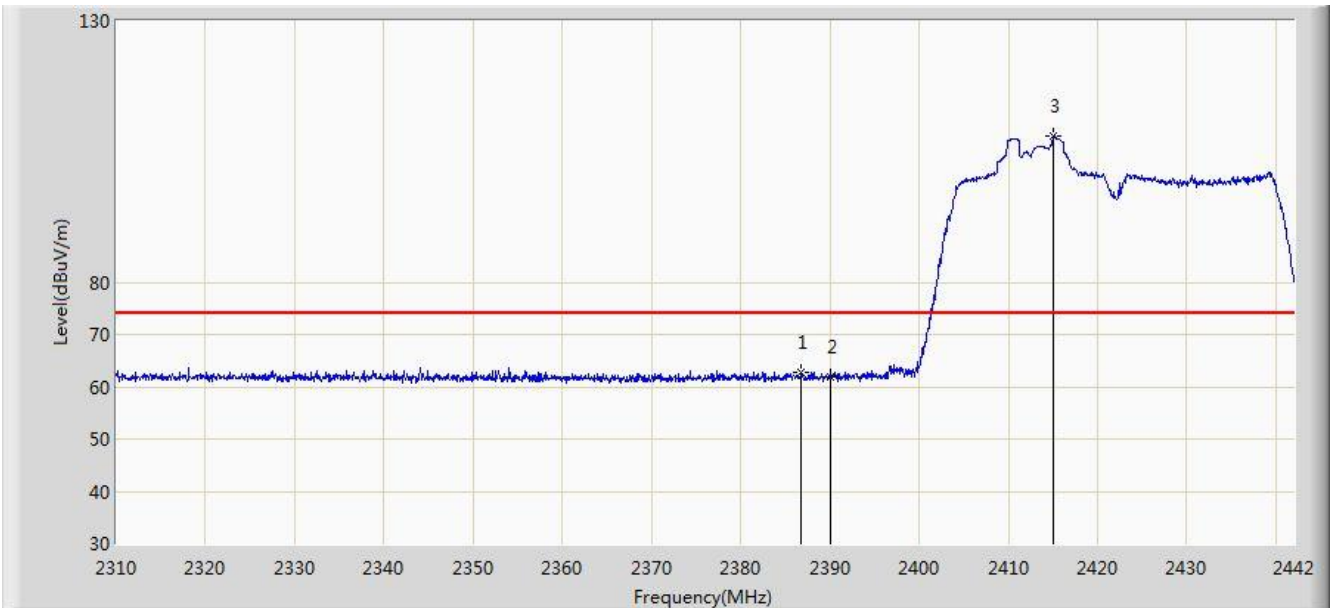


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.824	62.666	30.086	-11.334	74.000	32.580	PK
2			2390.000	61.842	29.267	-12.158	74.000	32.575	PK
3		*	2415.006	107.955	75.411	N/A	N/A	32.544	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2422MHz (Beam-Forming Mode)	

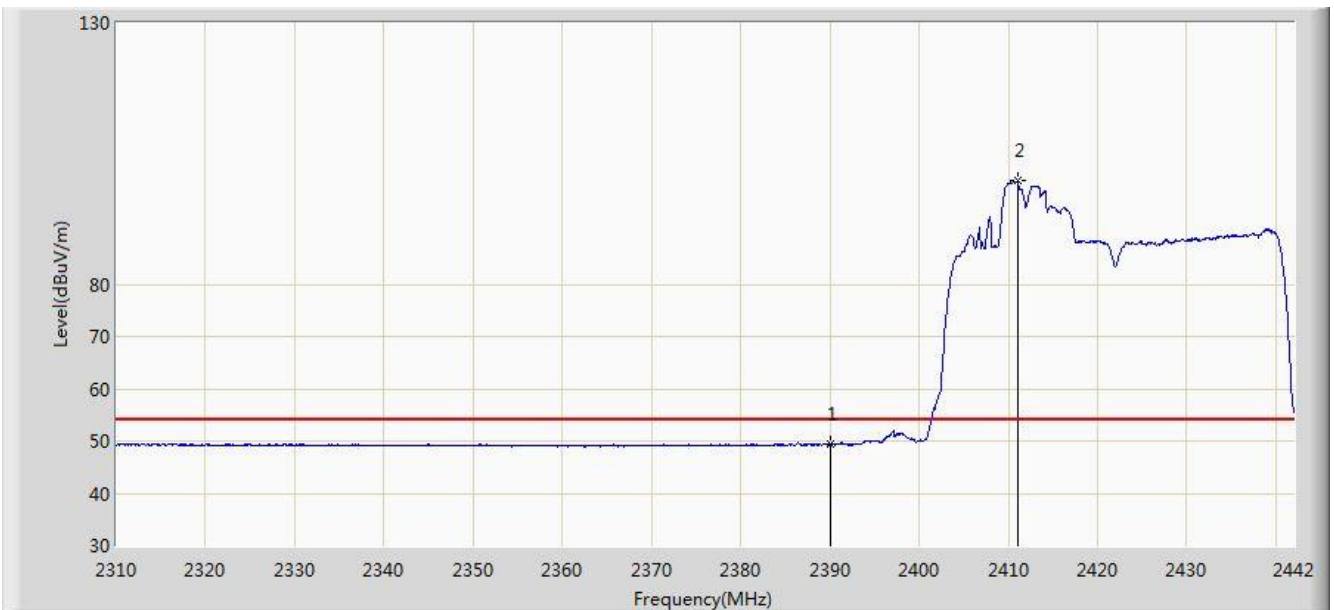


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.386	16.811	-4.614	54.000	32.575	AV
2		*	2411.046	99.756	67.207	N/A	N/A	32.549	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2422MHz (Beam-Forming Mode)	

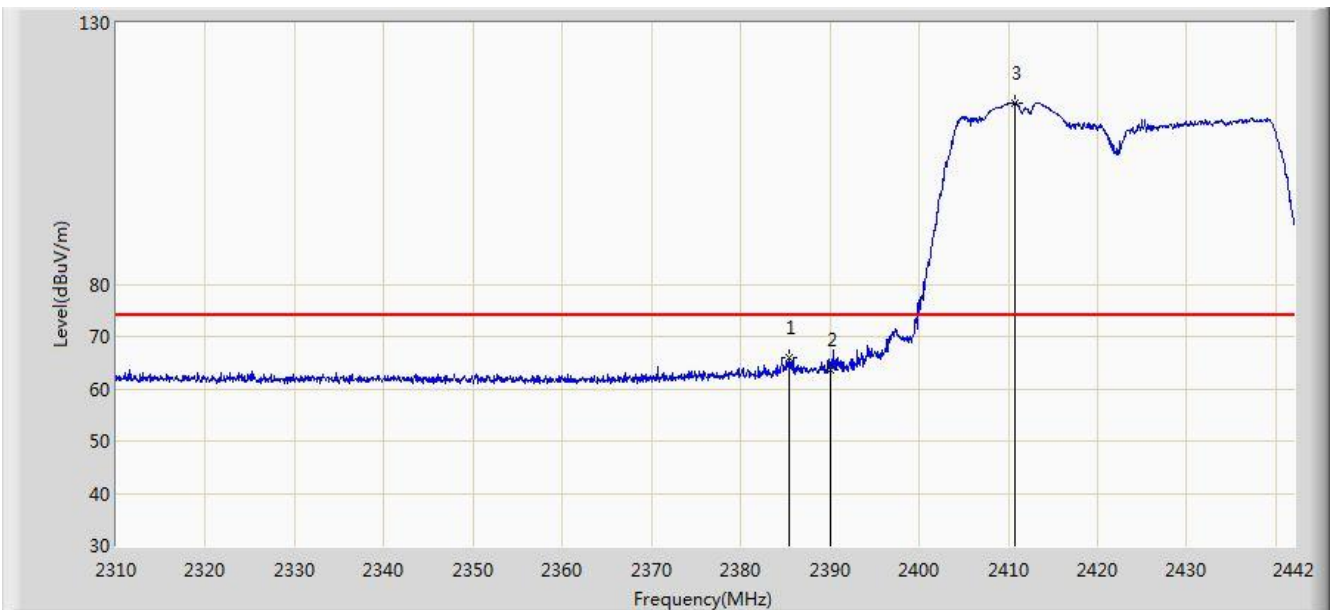


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.438	66.022	33.439	-7.978	74.000	32.583	PK
2			2390.000	63.548	30.973	-10.452	74.000	32.575	PK
3		*	2410.716	114.699	82.149	N/A	N/A	32.550	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2422MHz (Beam-Forming Mode)	

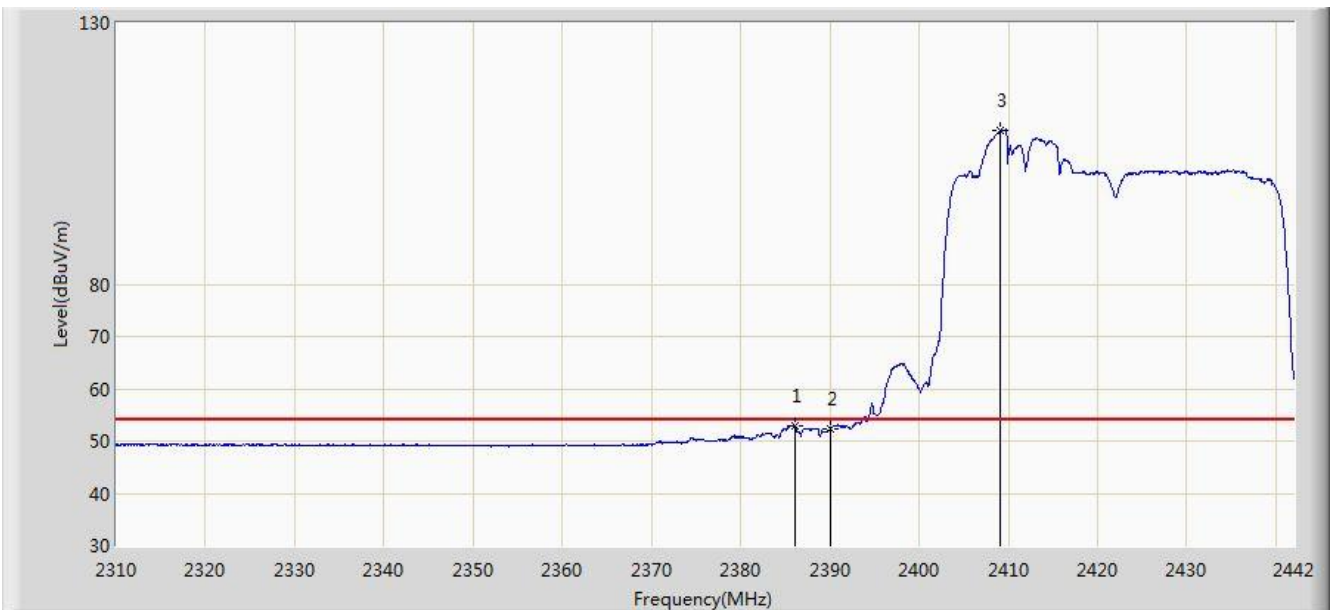


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.164	53.037	20.456	-0.963	54.000	32.582	AV
2			2390.000	52.362	19.787	-1.638	54.000	32.575	AV
3		*	2409.066	109.380	76.829	N/A	N/A	32.551	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2437MHz (Beam-Forming Mode)	

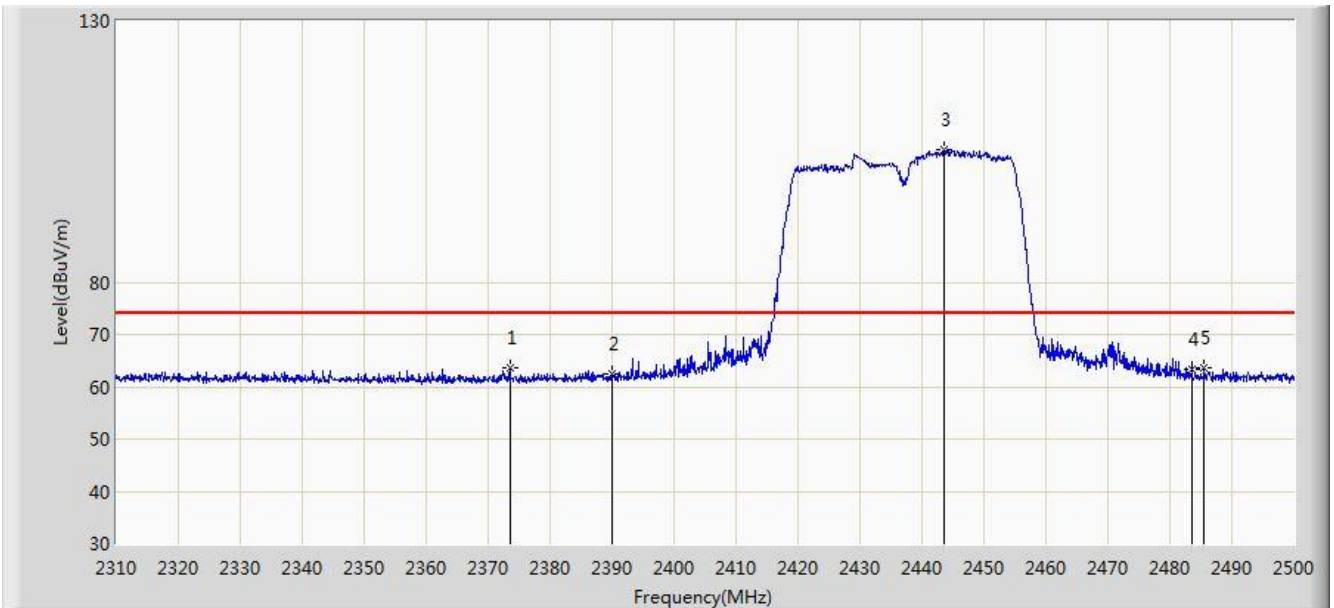


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2373.460	63.715	31.112	-10.285	74.000	32.603	PK
2			2390.000	62.443	29.868	-11.557	74.000	32.575	PK
3		*	2443.475	105.418	72.911	N/A	N/A	32.507	PK
4			2483.500	63.357	30.761	-10.643	74.000	32.596	PK
5			2485.560	63.528	30.927	-10.472	74.000	32.601	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2437MHz (Beam-Forming Mode)	

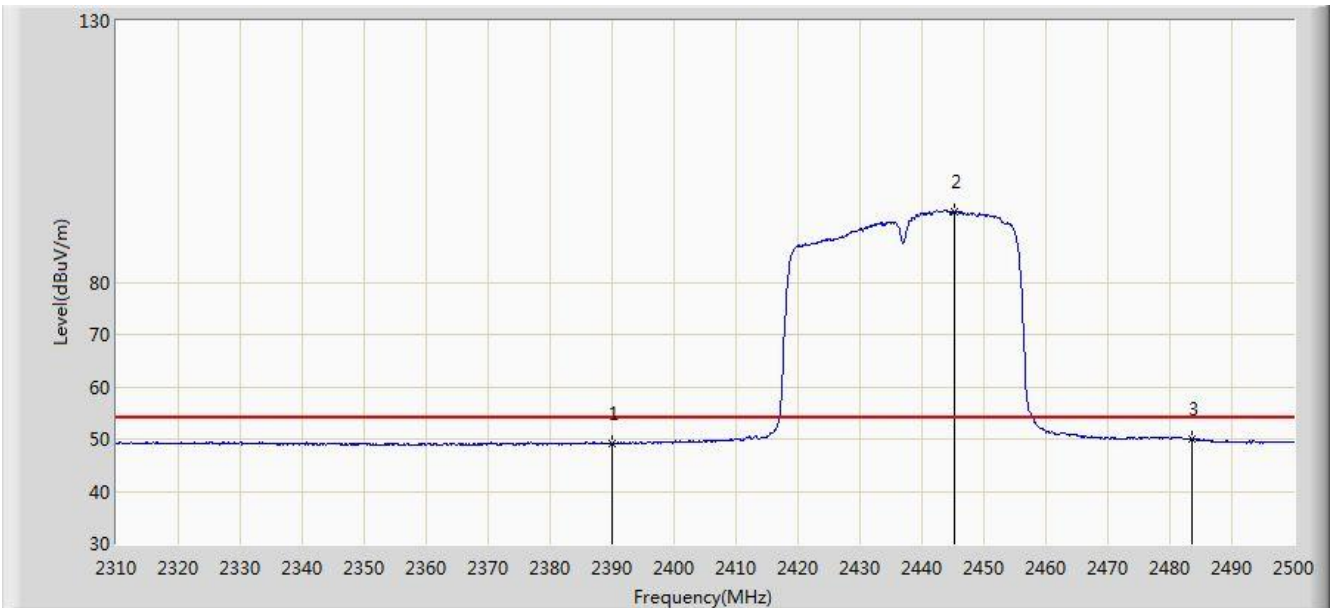


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.146	16.571	-4.854	54.000	32.575	AV
2		*	2445.280	93.597	61.092	N/A	N/A	32.505	AV
3			2483.500	50.001	17.405	-3.999	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2437MHz (Beam-Forming Mode)	

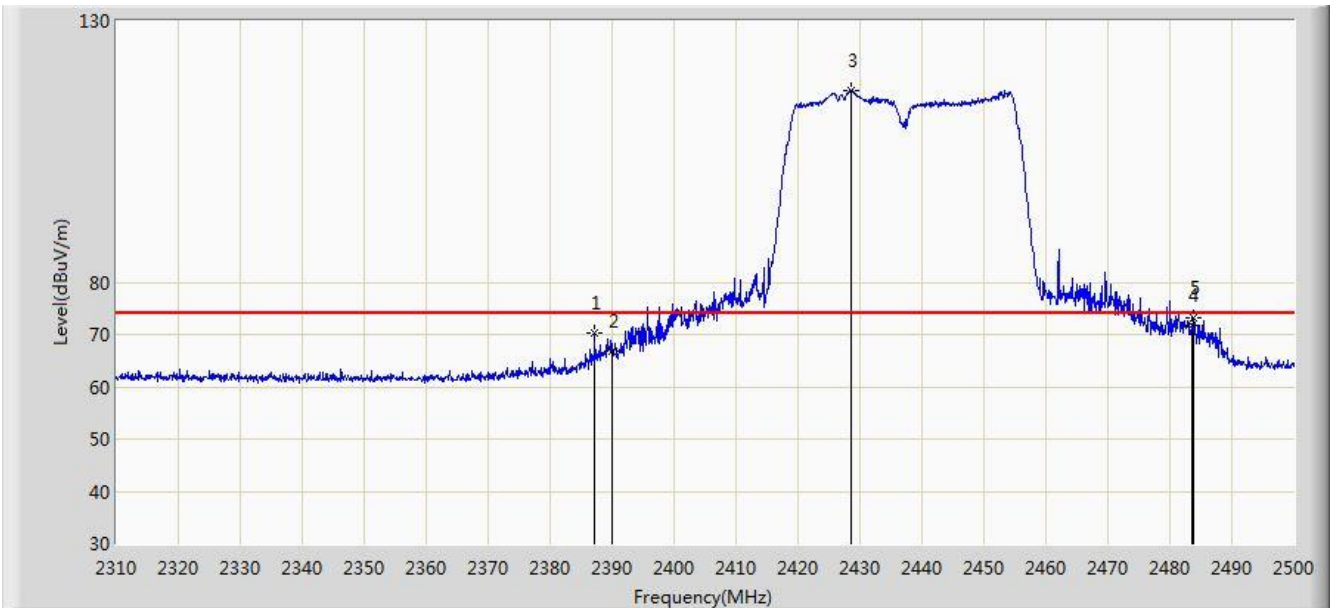


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.140	70.424	37.844	-3.576	74.000	32.579	PK
2			2390.000	66.956	34.381	-7.044	74.000	32.575	PK
3		*	2428.655	116.566	84.041	N/A	N/A	32.525	PK
4			2483.500	71.684	39.088	-2.316	74.000	32.596	PK
5			2483.850	73.050	40.453	-0.950	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2437MHz (Beam-Forming Mode)	

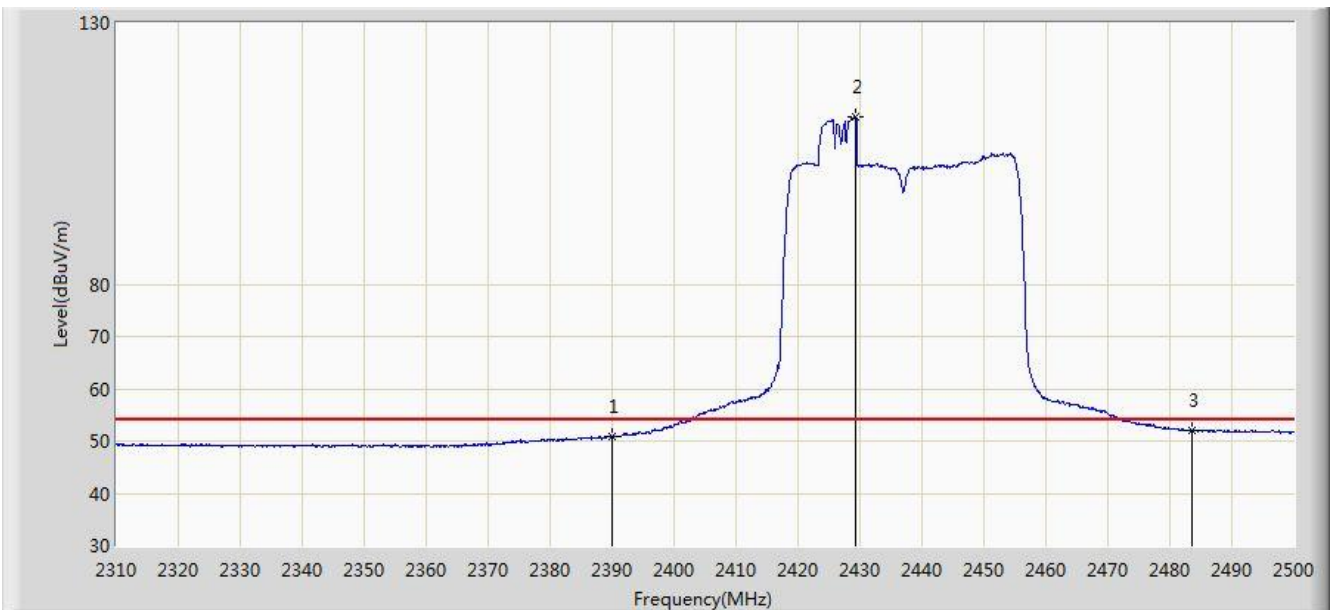


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.808	18.233	-3.192	54.000	32.575	AV
2		*	2429.320	111.971	79.447	N/A	N/A	32.525	AV
3			2483.500	52.025	19.429	-1.975	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2452MHz (Beam-Forming Mode)	

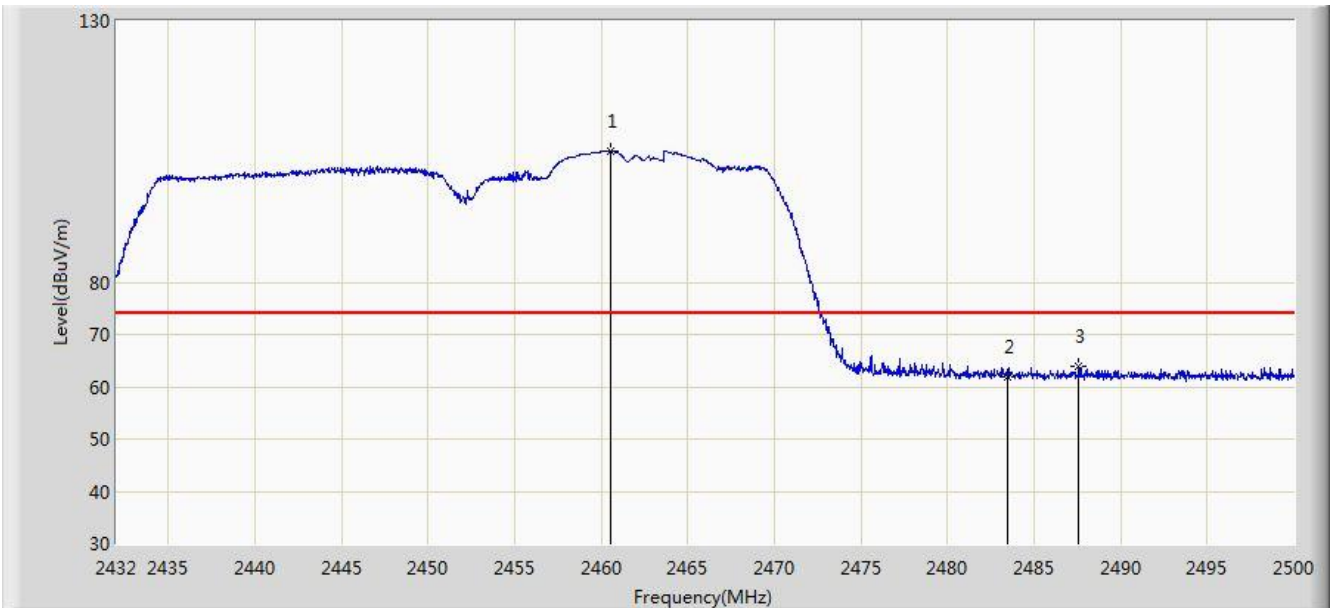


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.526	105.092	72.555	N/A	N/A	32.537	PK
2			2483.500	62.001	29.405	-11.999	74.000	32.596	PK
3			2487.590	64.013	31.407	-9.987	74.000	32.606	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2452MHz (Beam-Forming Mode)	

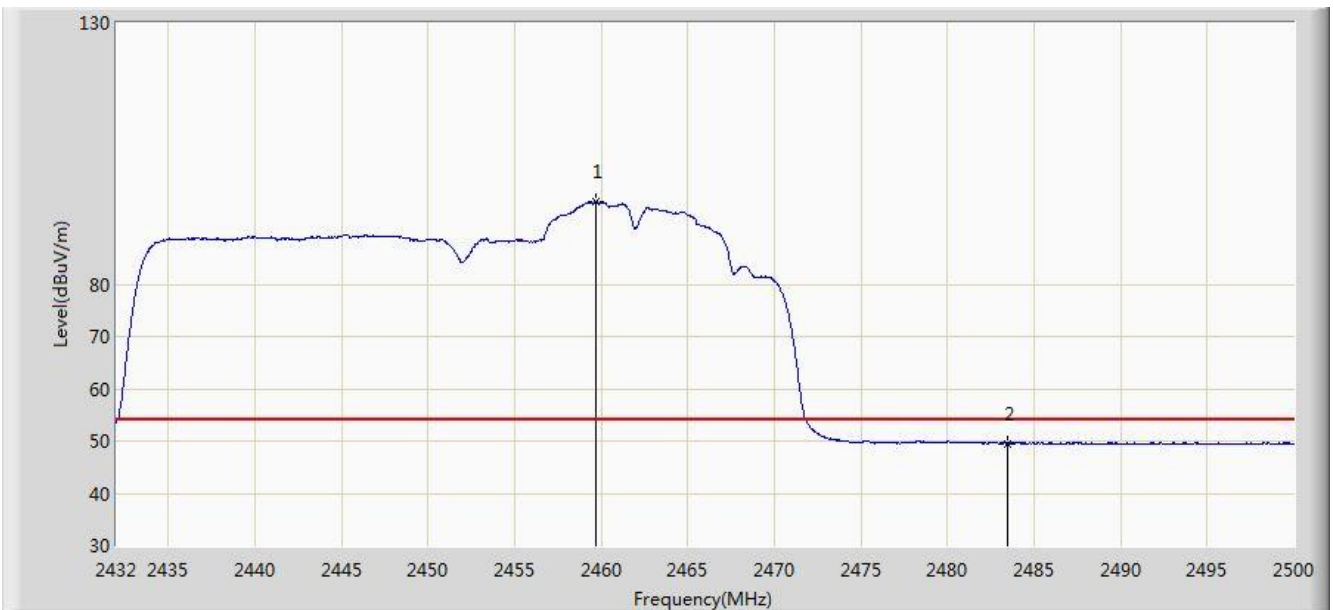


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2459.676	95.701	63.166	N/A	N/A	32.535	AV
2			2483.500	49.564	16.968	-4.436	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2452MHz (Beam-Forming Mode)	

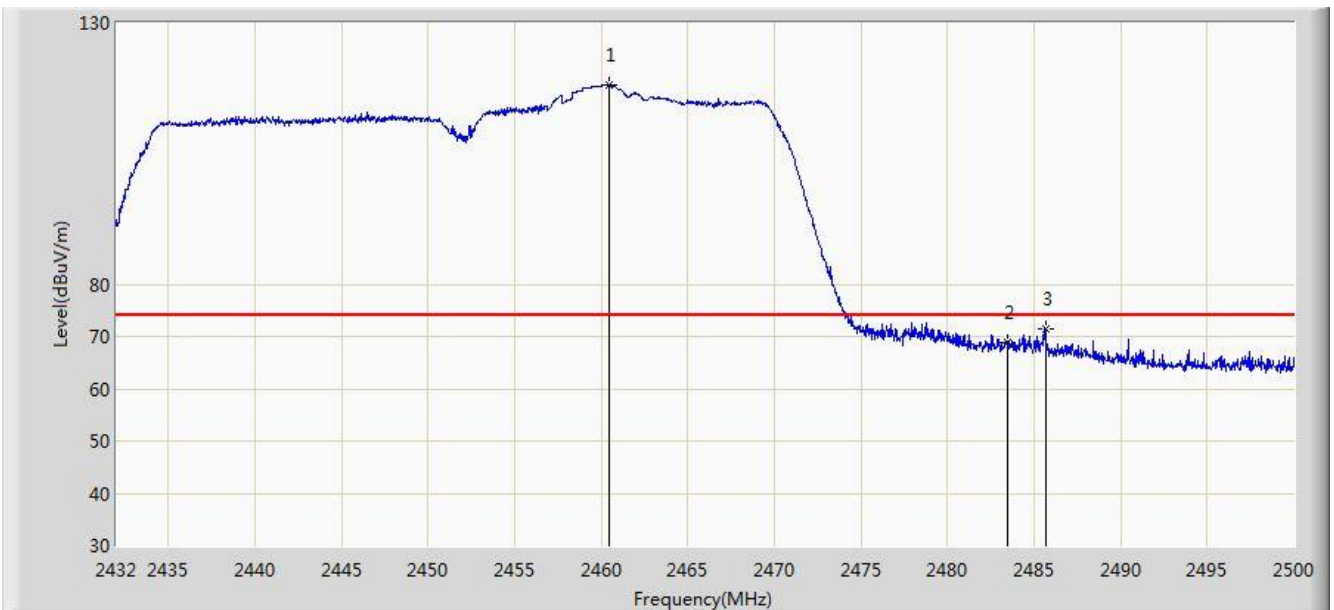


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.424	118.057	85.520	N/A	N/A	32.537	PK
2			2483.500	68.714	36.118	-5.286	74.000	32.596	PK
3			2485.686	71.404	38.803	-2.596	74.000	32.602	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at channel 2452MHz (Beam-Forming Mode)	

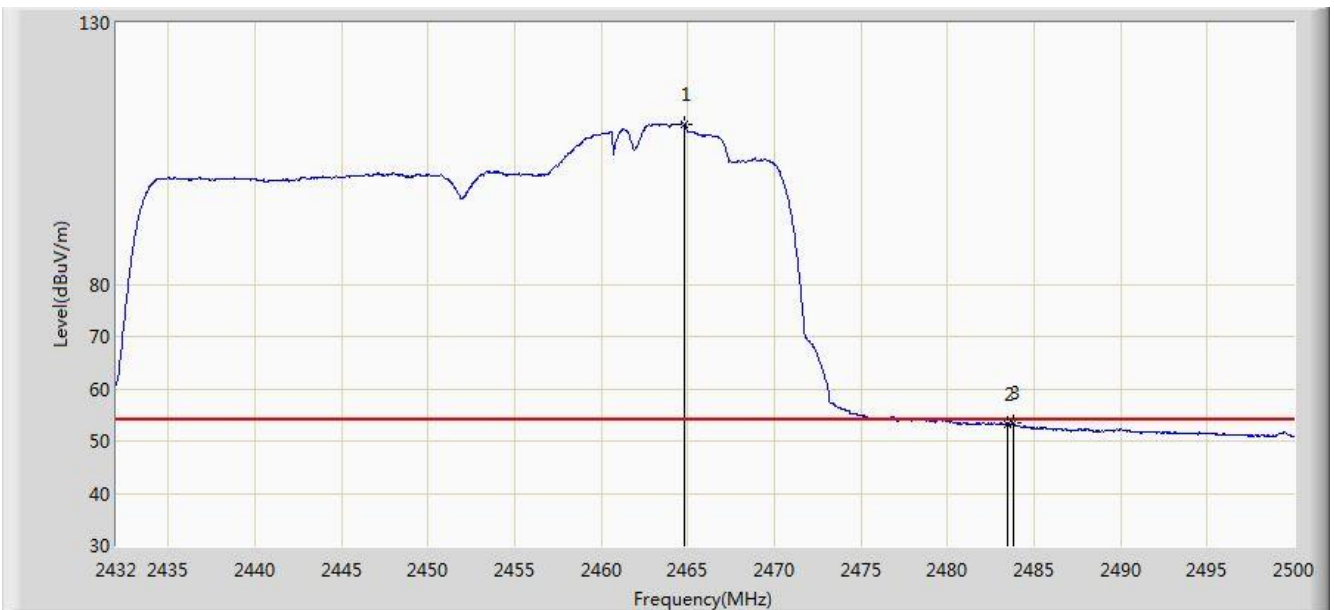


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2464.810	110.657	78.111	N/A	N/A	32.546	AV
2			2483.500	53.207	20.611	-0.793	54.000	32.596	AV
3			2483.782	53.475	20.878	-0.525	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 13:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode)	

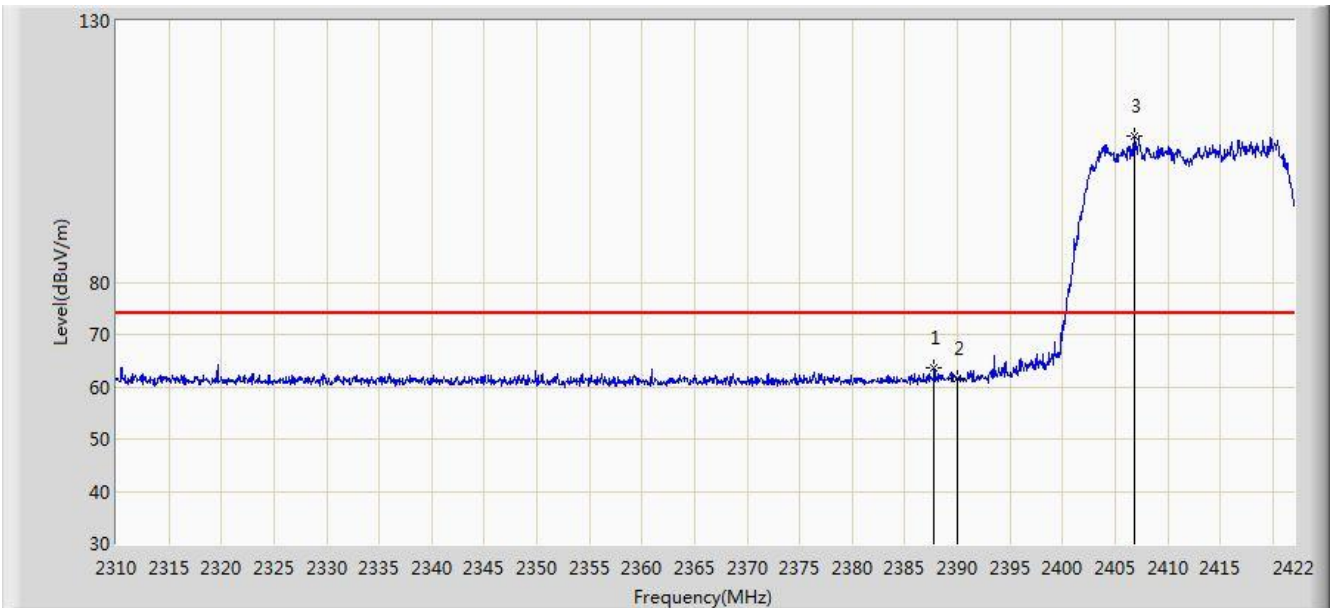


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.784	63.528	30.950	-10.472	74.000	32.579	PK
2			2390.000	61.586	29.011	-12.414	74.000	32.575	PK
3		*	2406.880	107.863	75.309	N/A	N/A	32.553	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 13:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode)	

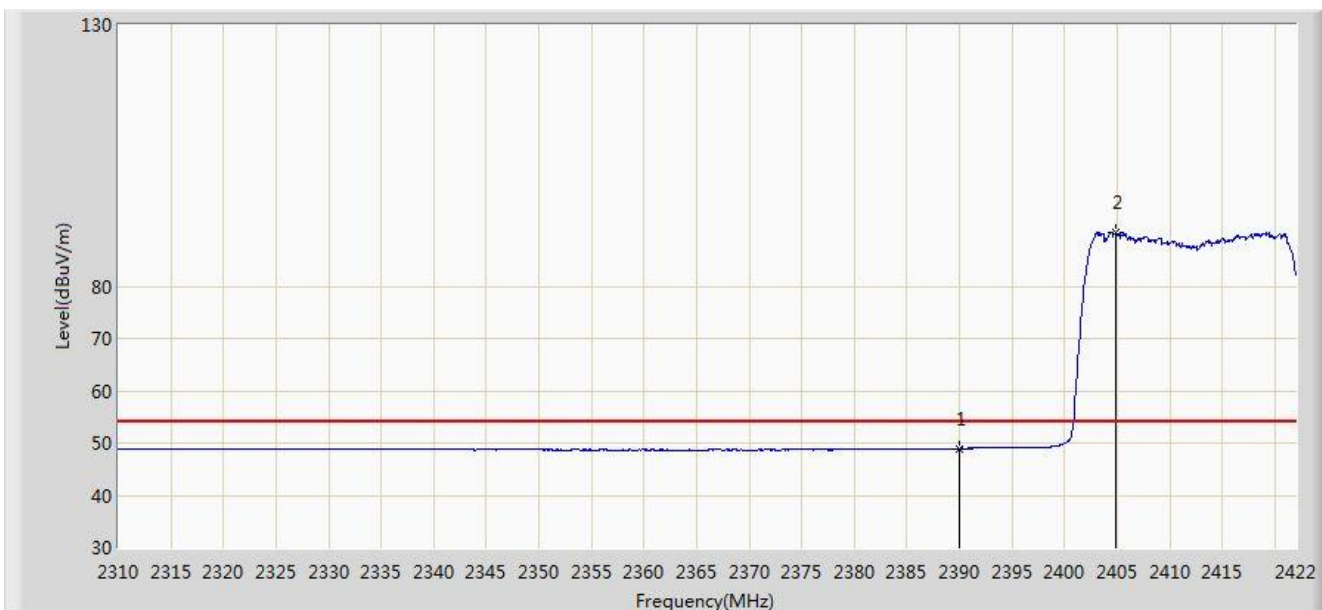


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	48.965	16.390	-5.035	54.000	32.575	AV
2		*	2404.864	90.272	57.716	N/A	N/A	32.556	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:58
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode)	

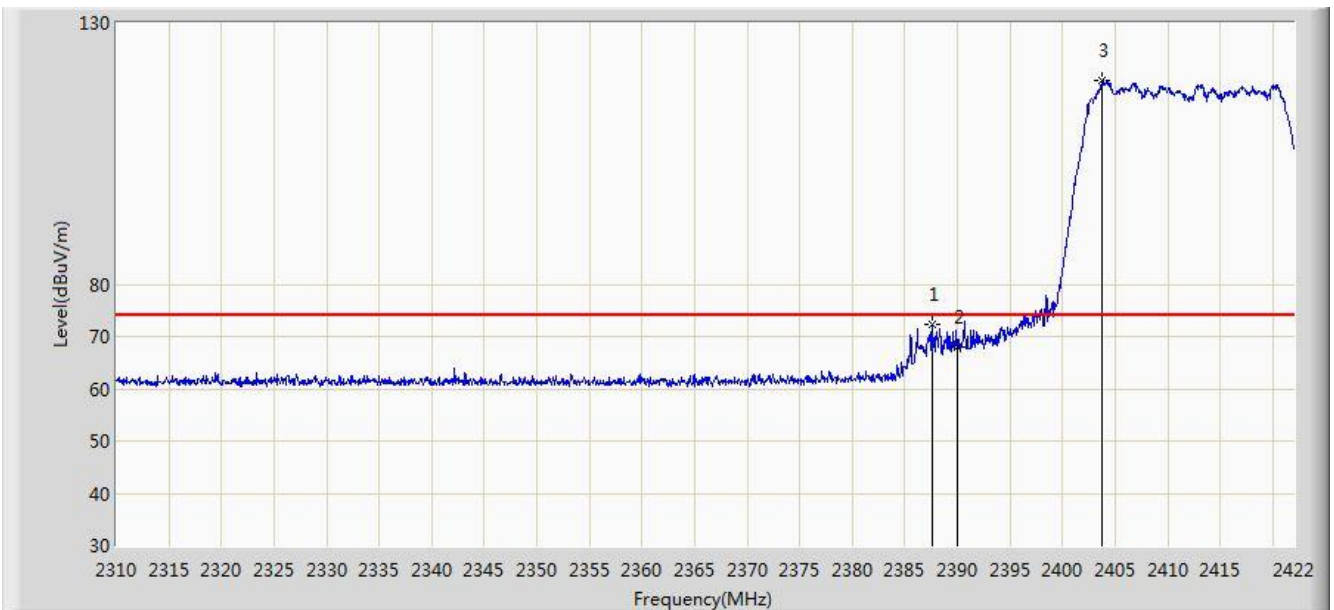


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.560	72.282	39.703	-1.718	74.000	32.579	PK
2			2390.000	68.025	35.450	-5.975	74.000	32.575	PK
3		*	2403.800	119.052	86.495	N/A	N/A	32.557	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 12:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2412MHz (Beam-Forming Mode)	

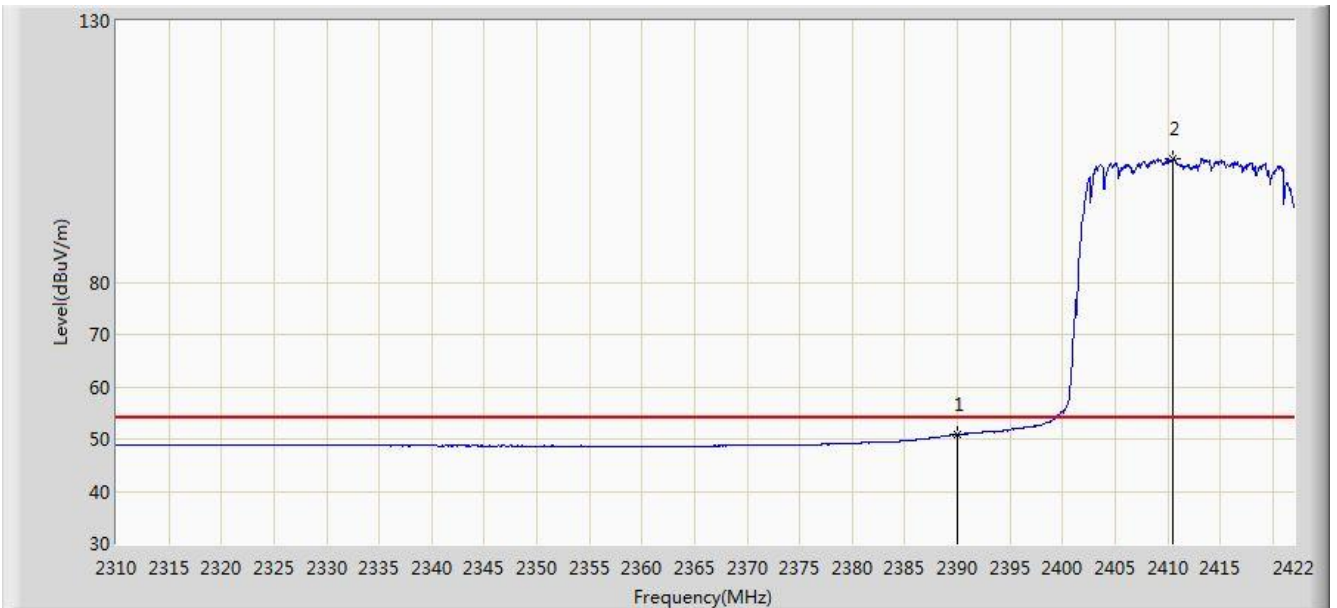


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	50.872	18.297	-3.128	54.000	32.575	AV
2		*	2410.520	103.758	71.208	N/A	N/A	32.549	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 13:28
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode)	

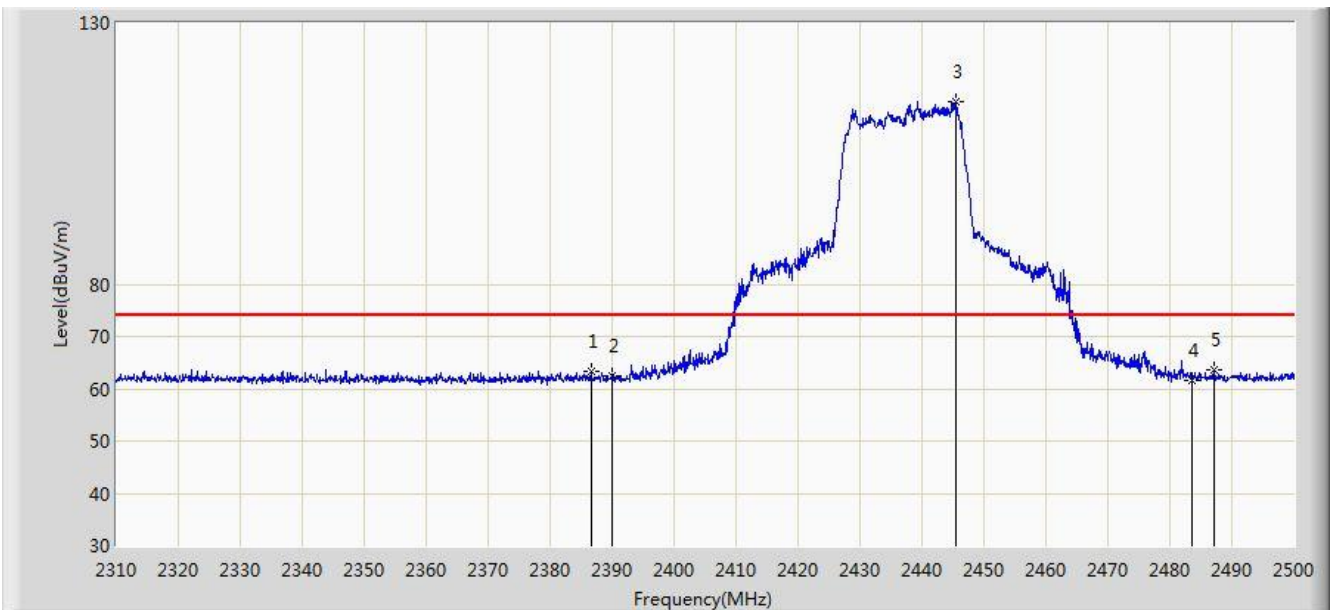


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2386.570	63.444	30.863	-10.556	74.000	32.581	PK
2			2390.000	62.584	30.009	-11.416	74.000	32.575	PK
3		*	2445.470	115.008	82.503	N/A	N/A	32.506	PK
4			2483.500	61.576	28.980	-12.424	74.000	32.596	PK
5			2487.080	63.573	30.968	-10.427	74.000	32.605	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 13:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode)	

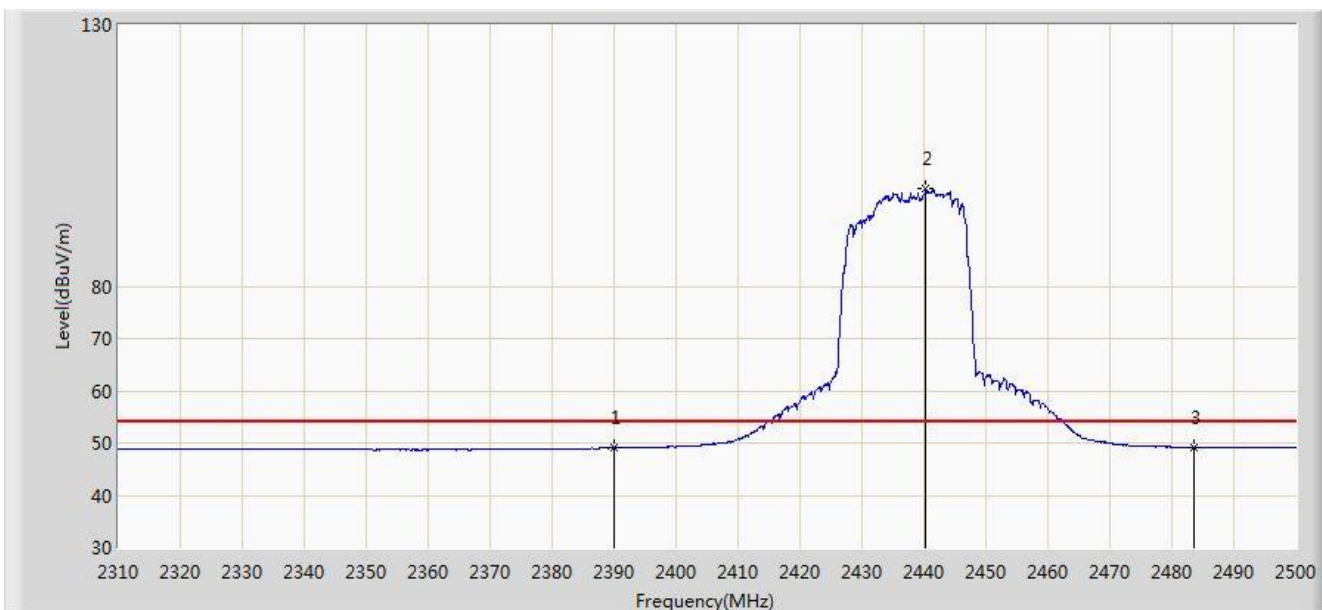


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.037	16.462	-4.963	54.000	32.575	AV
2		*	2440.340	98.584	66.073	N/A	N/A	32.511	AV
3			2483.500	49.154	16.558	-4.846	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 13:24
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode)	

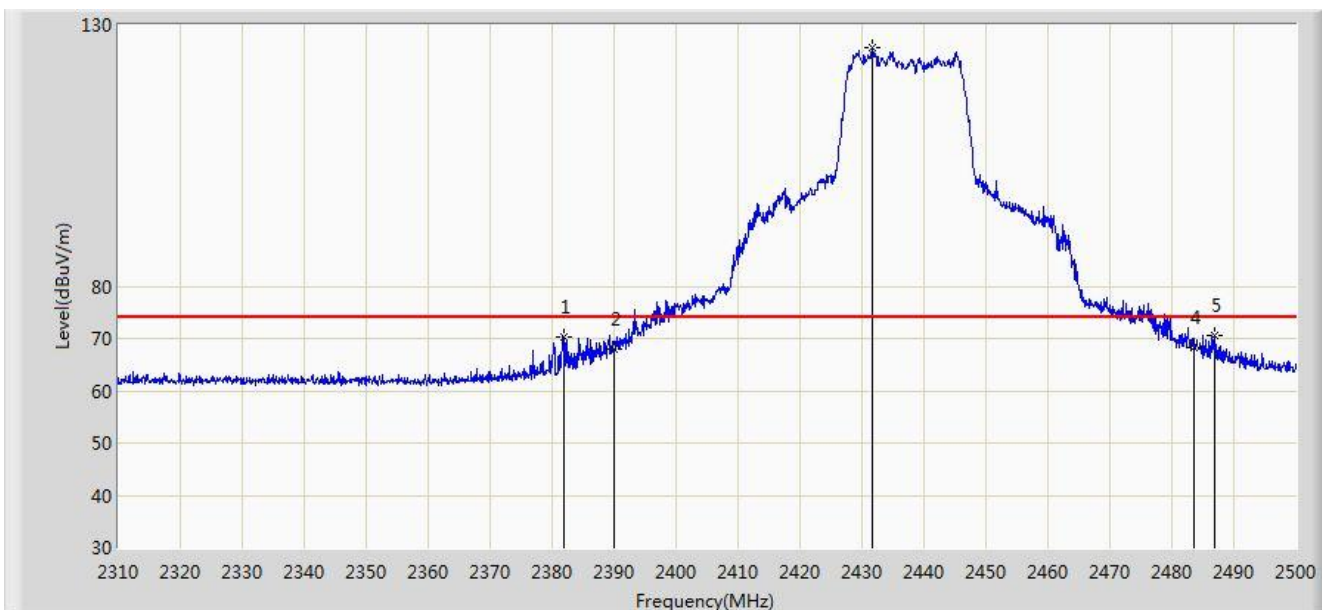


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.010	70.368	37.779	-3.632	74.000	32.589	PK
2			2390.000	67.873	35.298	-6.127	74.000	32.575	PK
3		*	2431.695	125.580	93.058	N/A	N/A	32.522	PK
4			2483.500	68.333	35.737	-5.667	74.000	32.596	PK
5			2486.985	70.580	37.975	-3.420	74.000	32.605	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 13:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2437MHz (Beam-Forming Mode)	

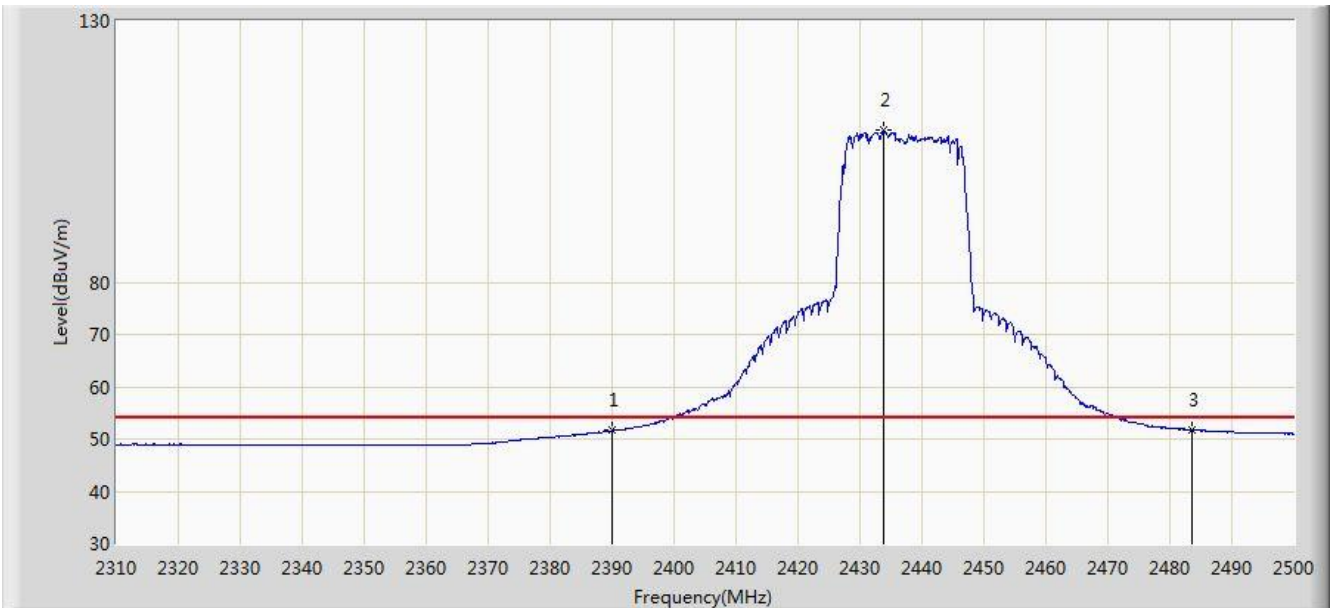


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	51.595	19.020	-2.405	54.000	32.575	AV
2		*	2433.880	109.137	76.618	N/A	N/A	32.519	AV
3			2483.500	51.746	19.150	-2.254	54.000	32.596	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 14:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode)	

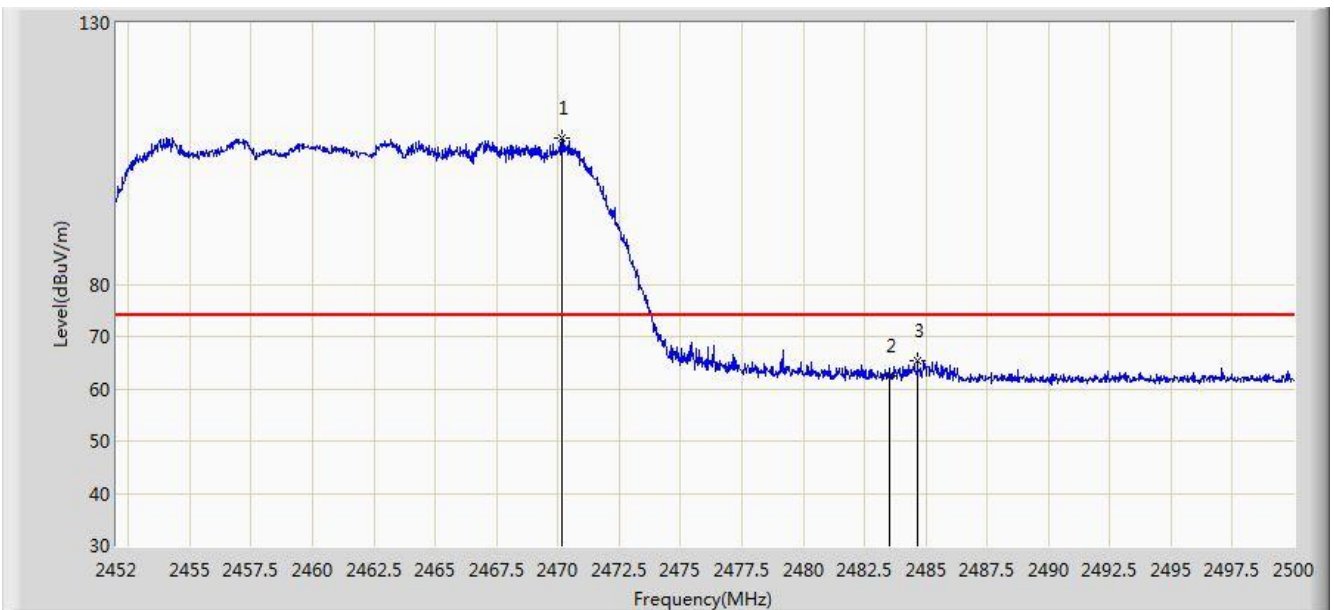


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2470.192	107.929	75.368	N/A	N/A	32.561	PK
2			2483.500	62.451	29.855	-11.549	74.000	32.596	PK
3			2484.664	65.291	32.692	-8.709	74.000	32.599	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode)	

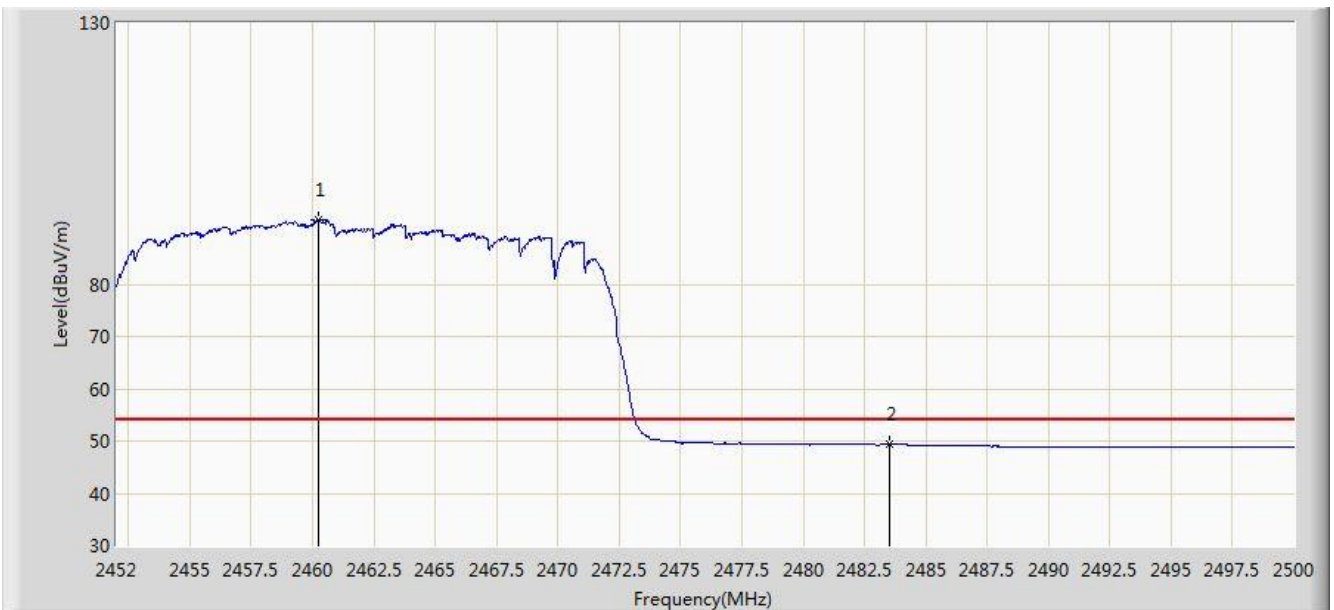


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.256	92.344	59.808	N/A	N/A	32.537	AV
2			2483.500	49.409	16.813	-4.591	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 14:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode)	

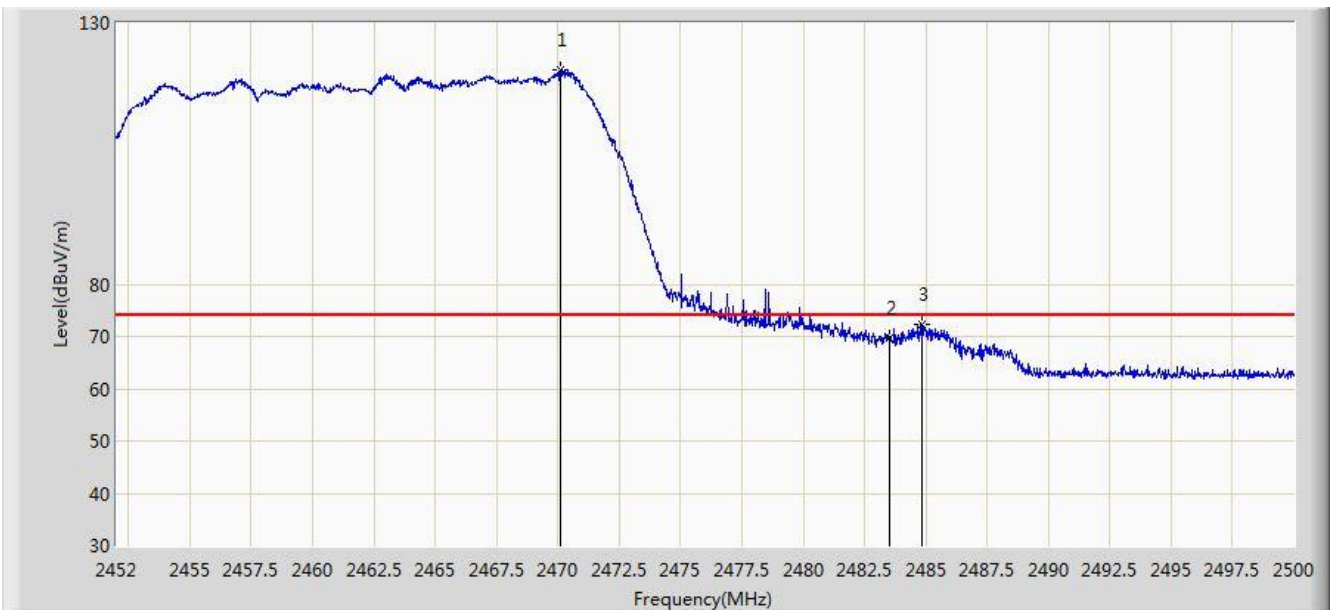


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2470.096	120.909	88.348	N/A	N/A	32.560	PK
2			2483.500	69.724	37.128	-4.276	74.000	32.596	PK
3			2484.856	72.295	39.696	-1.705	74.000	32.599	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 14:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE20 at channel 2462MHz (Beam-Forming Mode)	

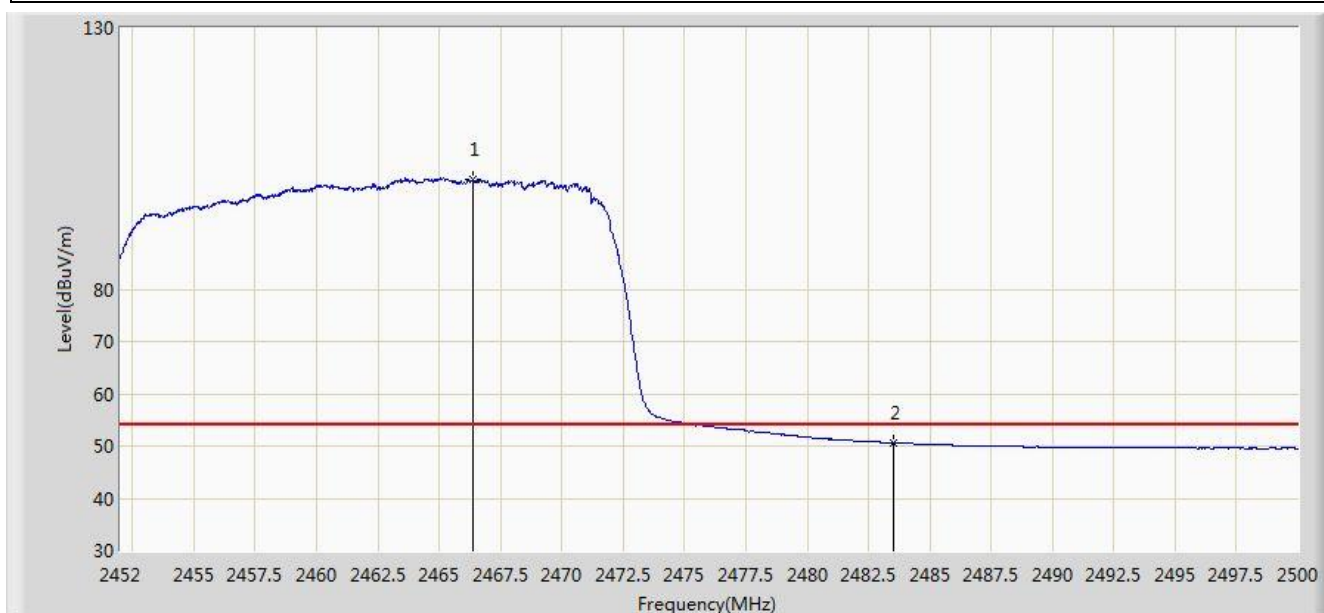


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2466.376	101.131	68.580	N/A	N/A	32.551	AV
2			2483.500	50.543	17.947	-3.457	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode)	

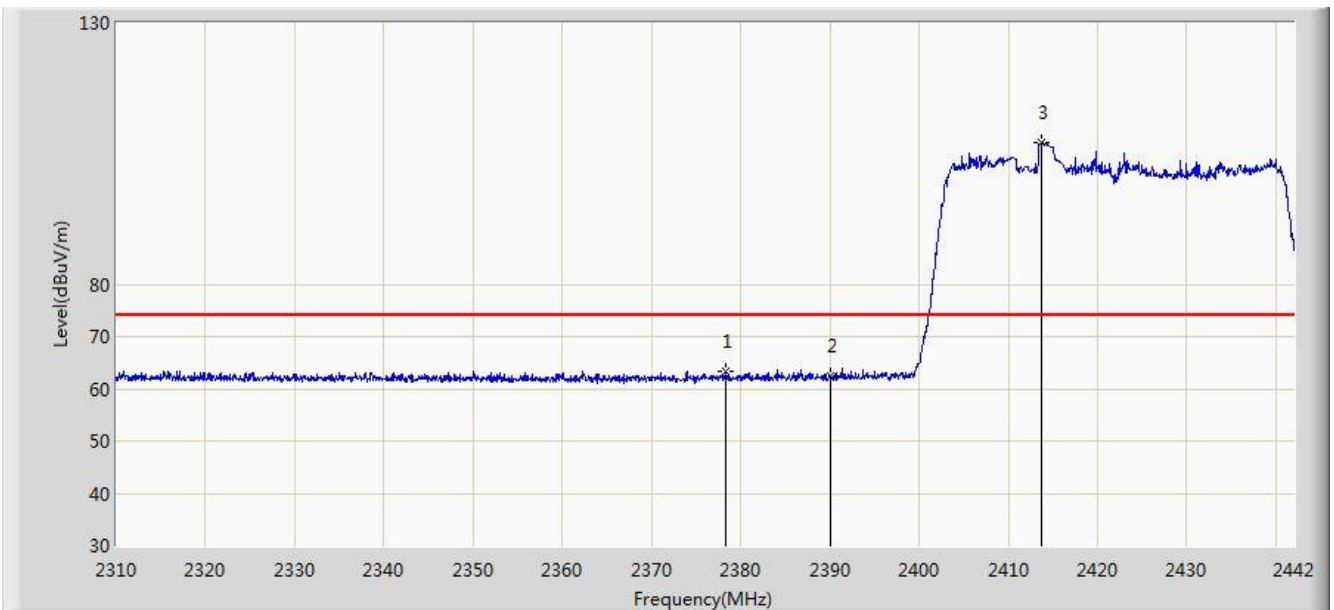


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.376	63.447	30.852	-10.553	74.000	32.595	PK
2			2390.000	62.382	29.807	-11.618	74.000	32.575	PK
3		*	2413.686	107.083	74.537	N/A	N/A	32.546	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 10:48
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode)	

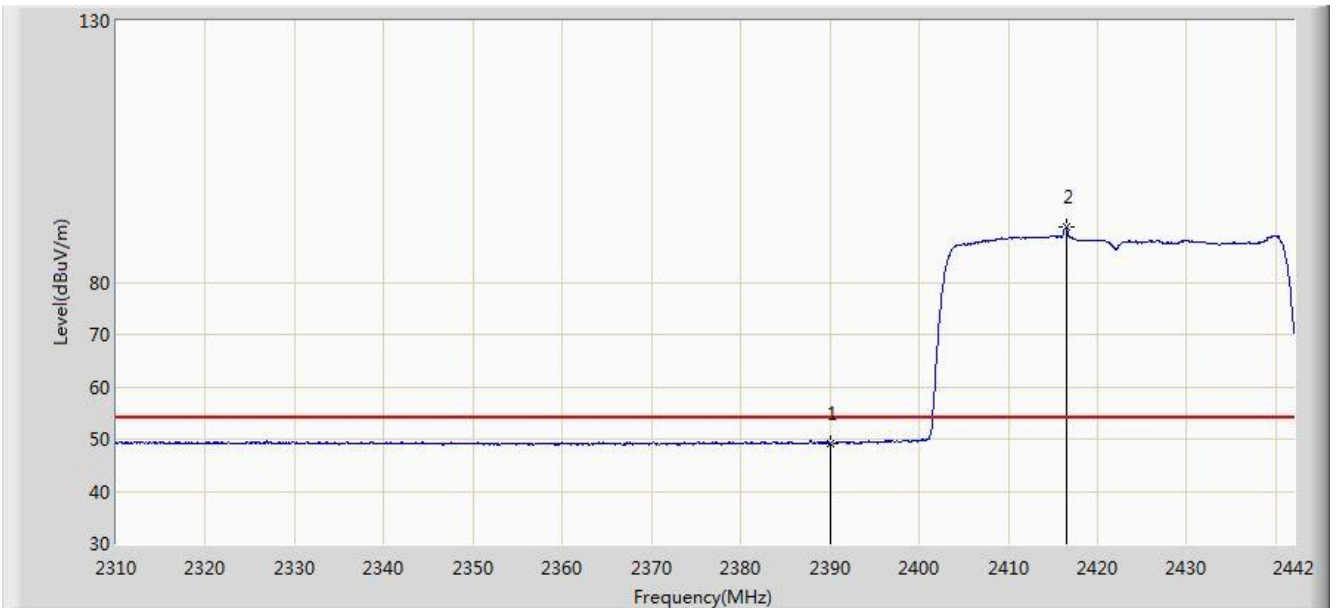


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.228	16.653	-4.772	54.000	32.575	AV
2		*	2416.458	90.477	57.935	N/A	N/A	32.541	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/12 - 10:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode)	

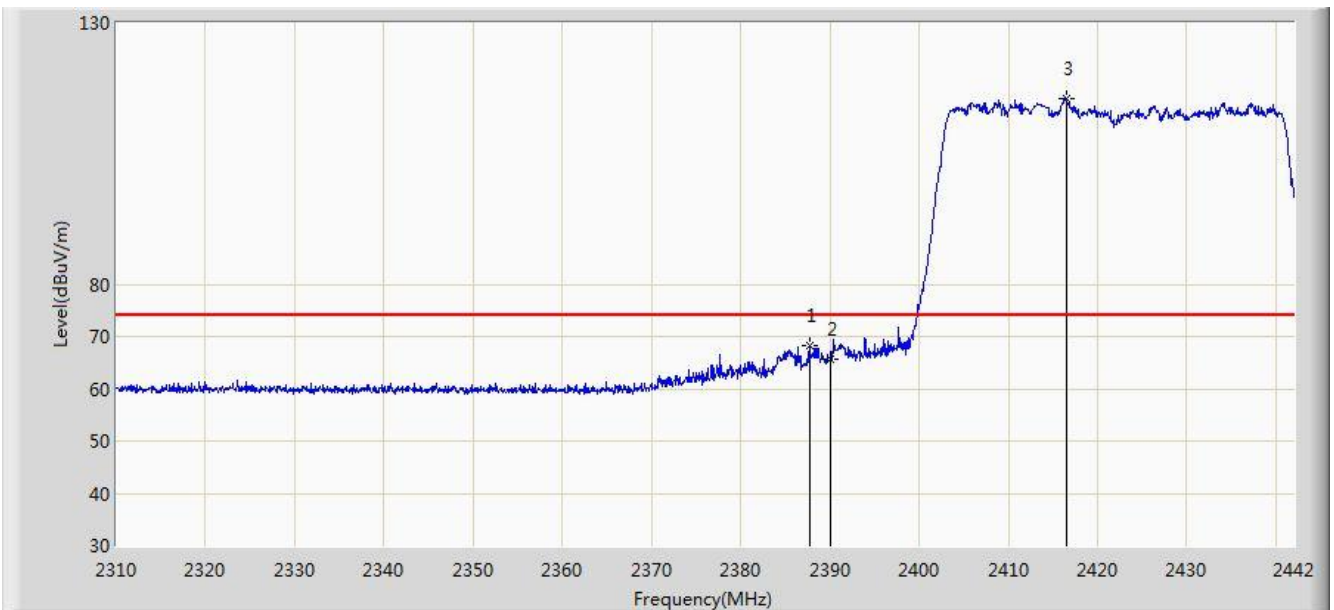


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.748	68.277	35.698	-5.723	74.000	32.579	PK
2			2390.000	65.787	33.212	-8.213	74.000	32.575	PK
3		*	2416.590	115.623	83.081	N/A	N/A	32.542	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 10:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2422MHz (Beam-Forming Mode)	

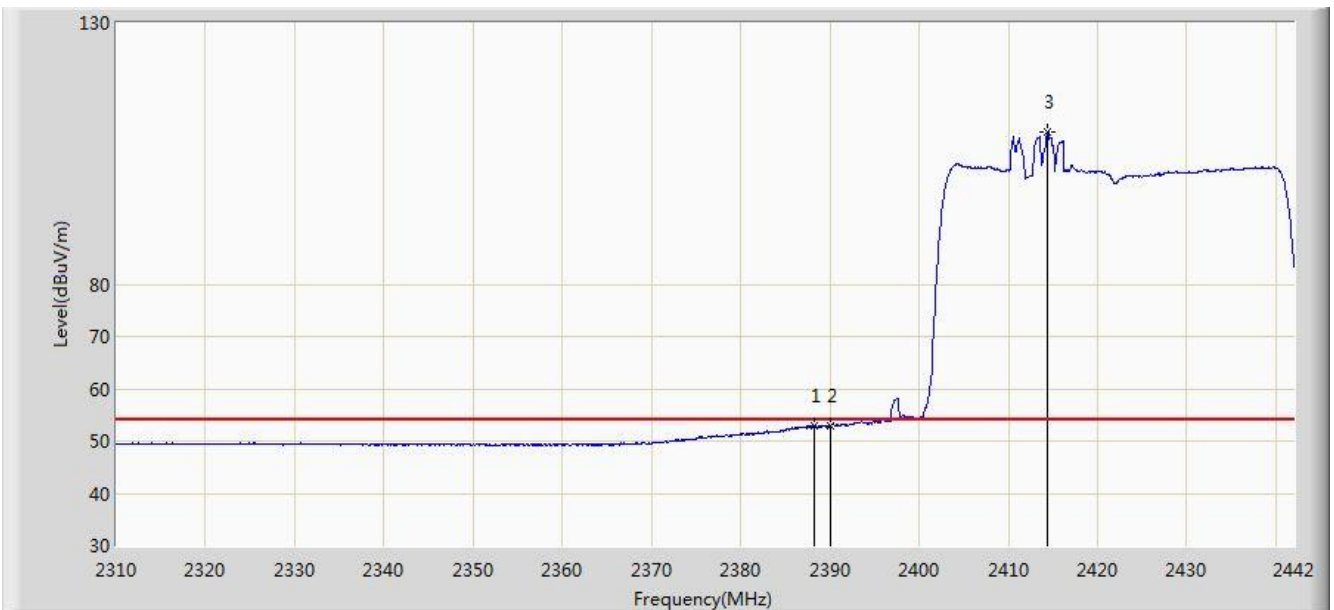


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2388.276	53.023	20.445	-0.977	54.000	32.577	AV
2			2390.000	52.864	20.289	-1.136	54.000	32.575	AV
3		*	2414.412	109.134	76.589	N/A	N/A	32.544	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:13
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode)	

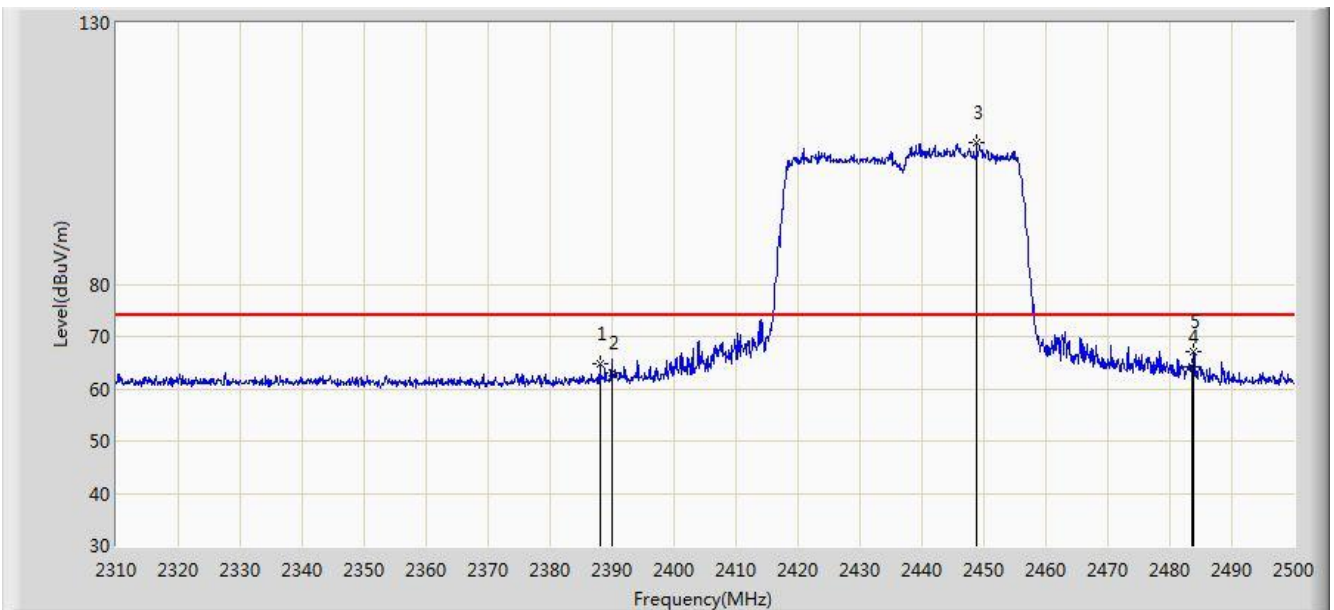


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2387.995	64.832	32.254	-9.168	74.000	32.578	PK
2			2390.000	63.169	30.594	-10.831	74.000	32.575	PK
3		*	2448.795	107.192	74.681	N/A	N/A	32.510	PK
4			2483.500	64.071	31.475	-9.929	74.000	32.596	PK
5			2483.850	67.170	34.573	-6.830	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode)	

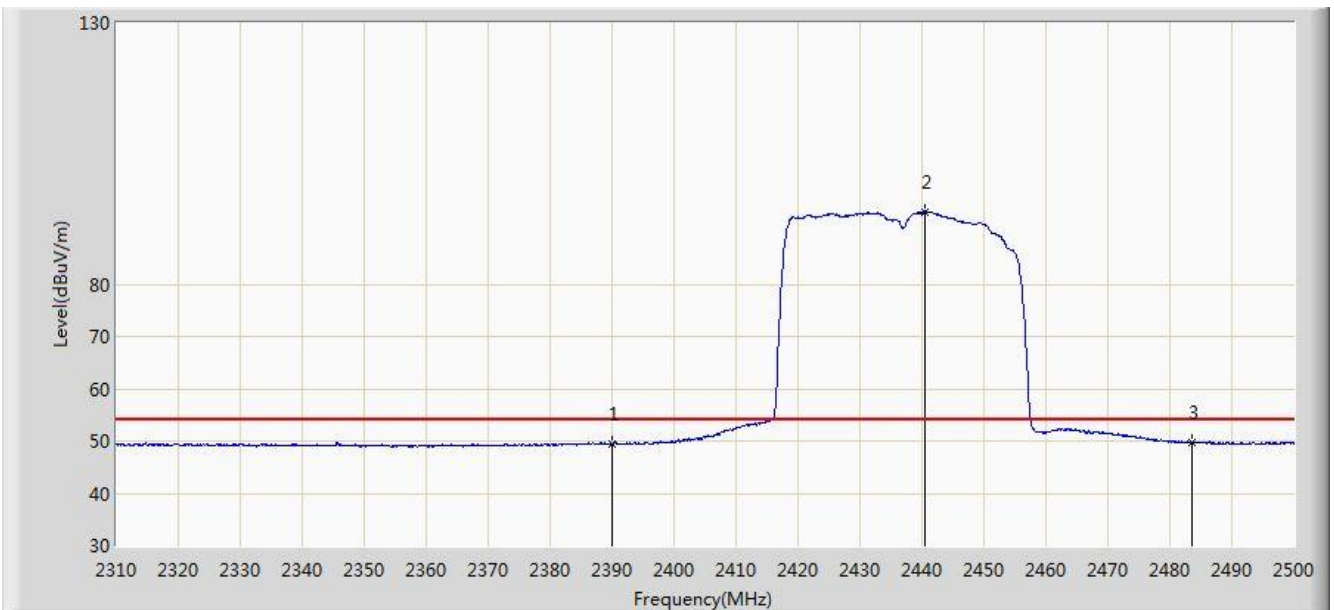


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	49.344	16.769	-4.656	54.000	32.575	AV
2		*	2440.435	93.913	61.402	N/A	N/A	32.511	AV
3			2483.500	49.775	17.179	-4.225	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:08
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode)	

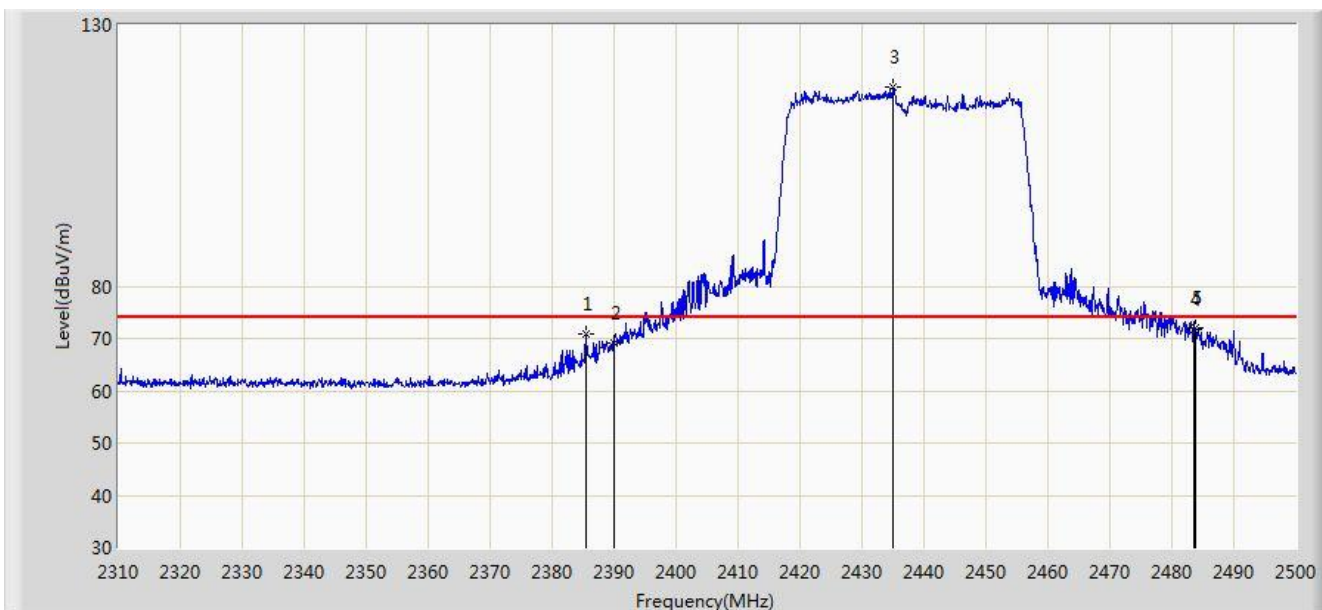


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2385.430	70.846	38.263	-3.154	74.000	32.583	PK
2			2390.000	69.013	36.438	-4.987	74.000	32.575	PK
3		*	2435.020	118.122	85.604	N/A	N/A	32.518	PK
4			2483.500	71.782	39.186	-2.218	74.000	32.596	PK
5			2483.850	71.963	39.366	-2.037	74.000	32.596	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:11
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2437MHz (Beam-Forming Mode)	

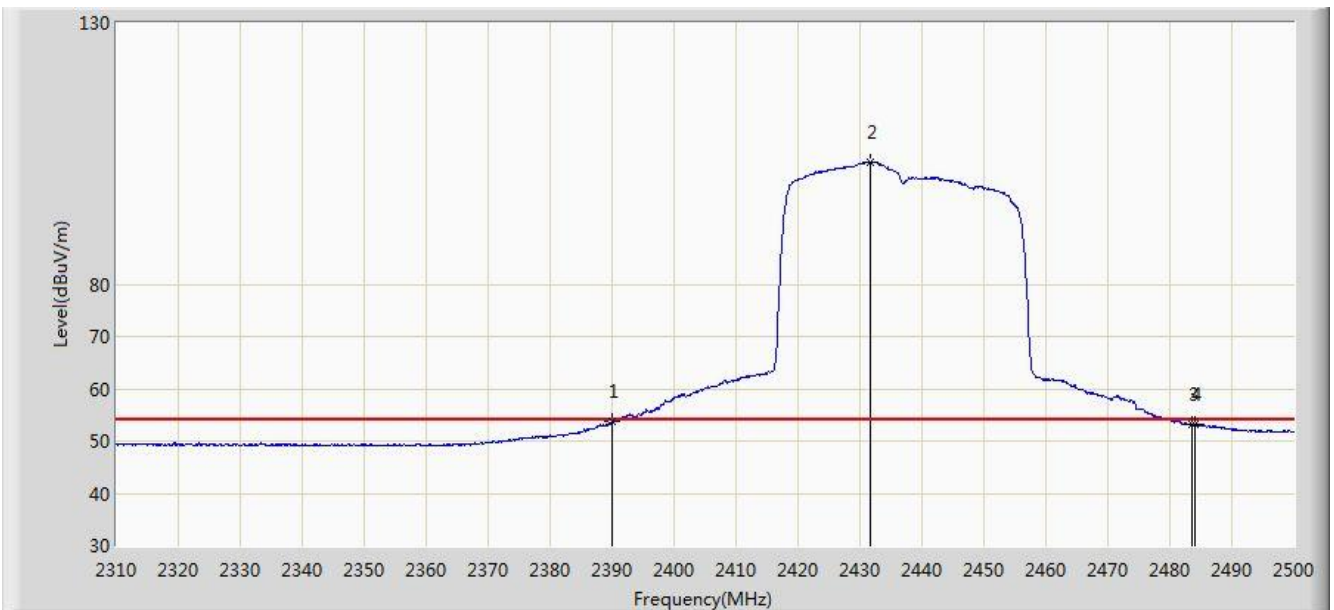


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	53.675	21.100	-0.325	54.000	32.575	AV
2		*	2431.600	103.331	70.809	N/A	N/A	32.521	AV
3			2483.500	53.138	20.542	-0.862	54.000	32.596	AV
4			2484.040	53.256	20.659	-0.744	54.000	32.598	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode)	

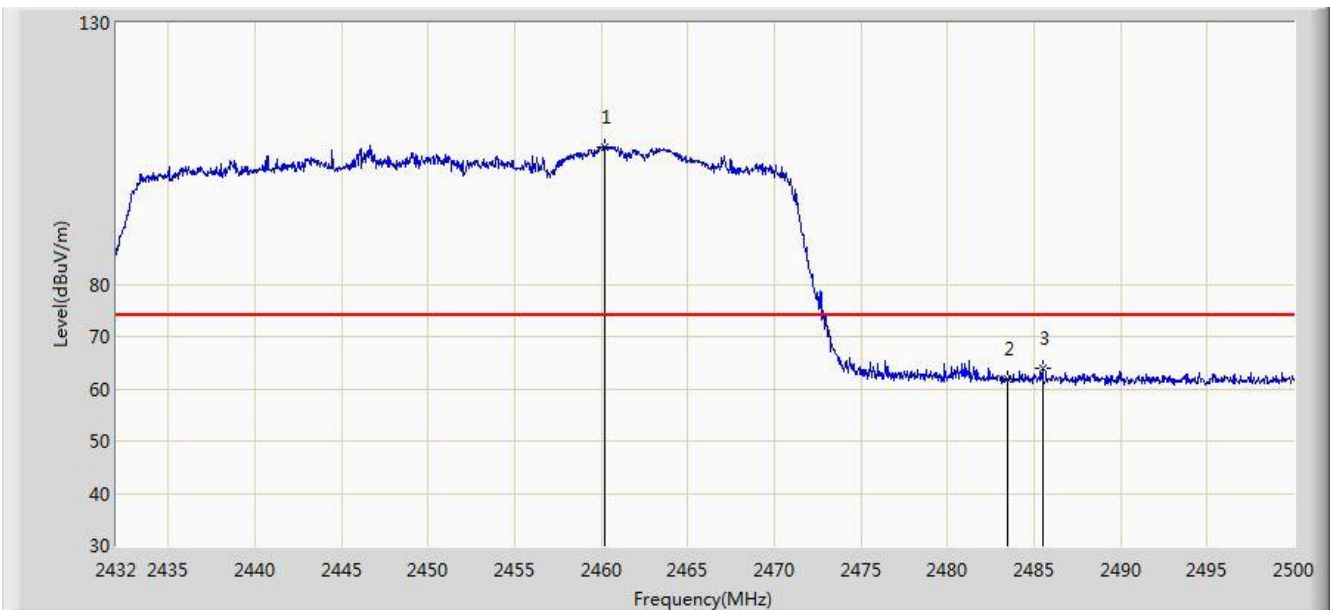


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2460.220	106.296	73.760	N/A	N/A	32.537	PK
2			2483.500	61.826	29.230	-12.174	74.000	32.596	PK
3			2485.482	64.012	31.411	-9.988	74.000	32.601	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode)	

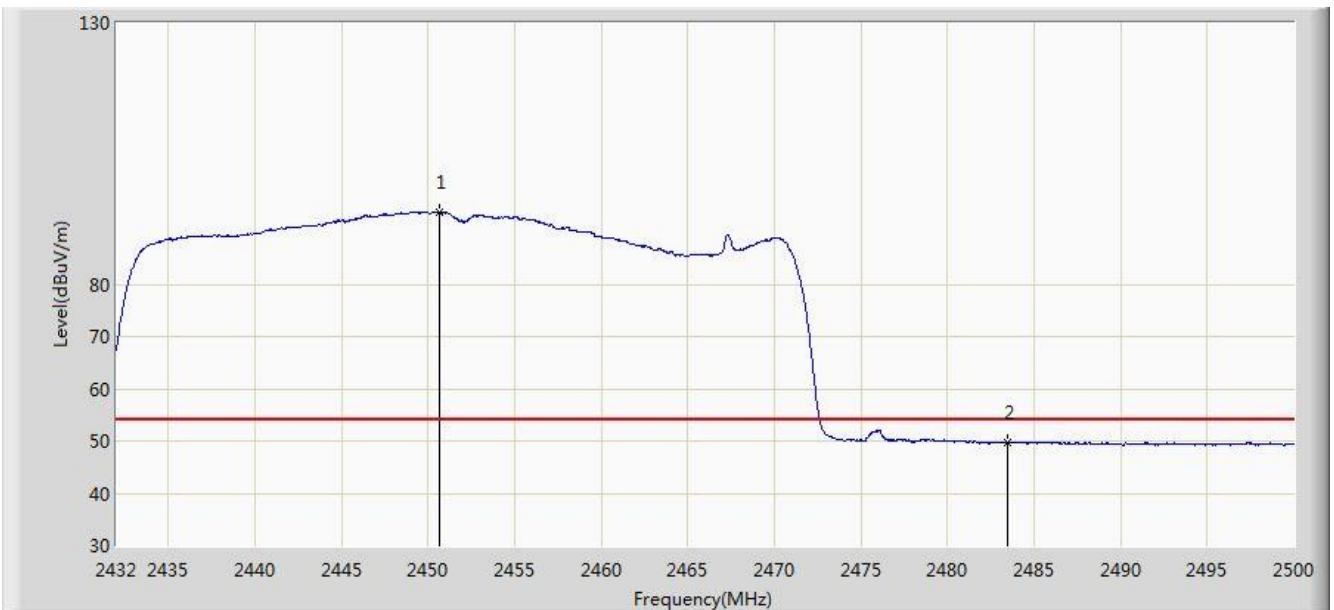


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2450.666	93.888	61.373	N/A	N/A	32.515	AV
2			2483.500	49.726	17.130	-4.274	54.000	32.596	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:19
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode)	

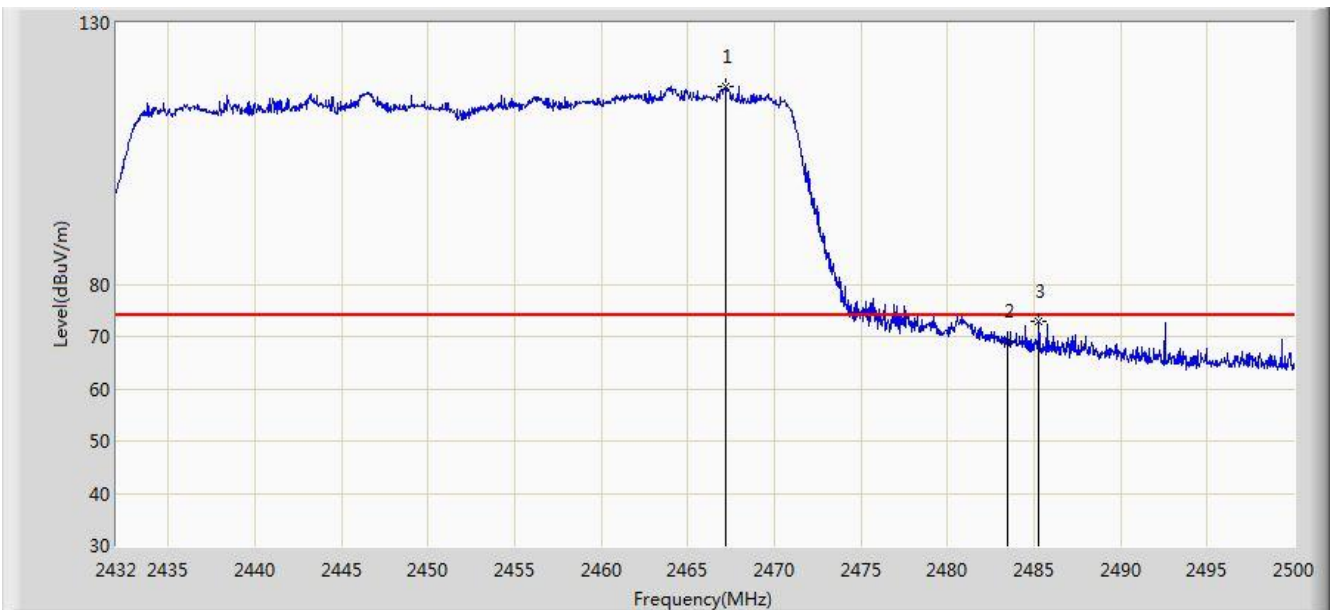


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2467.156	117.802	85.249	N/A	N/A	32.553	PK
2			2483.500	69.030	36.434	-4.970	74.000	32.596	PK
3			2485.278	72.914	40.314	-1.086	74.000	32.600	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: AC2	Time: 2018/08/15 - 11:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Dandy Li
Probe: BBHA9120D_1-18GHz	Polarity: Vertical
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at channel 2452MHz (Beam-Forming Mode)	

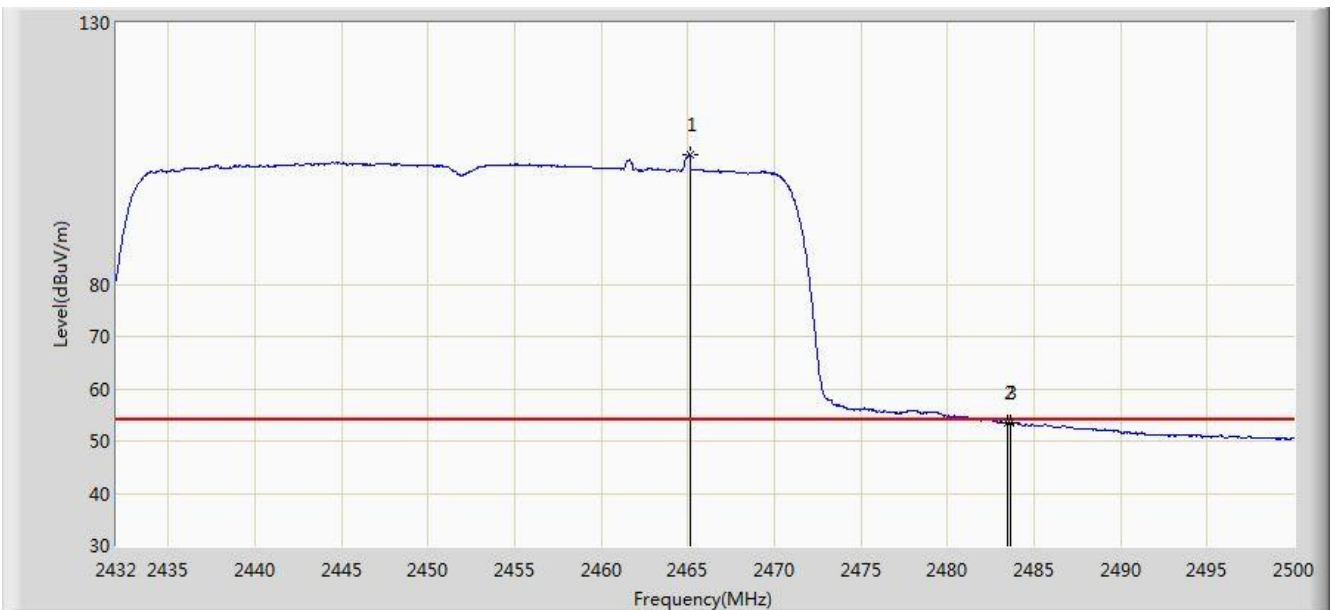

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2465.116	104.692	72.145	N/A	N/A	32.547	AV
2			2483.500	53.451	20.855	-0.549	54.000	32.596	AV
3			2483.646	53.575	20.979	-0.425	54.000	32.596	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

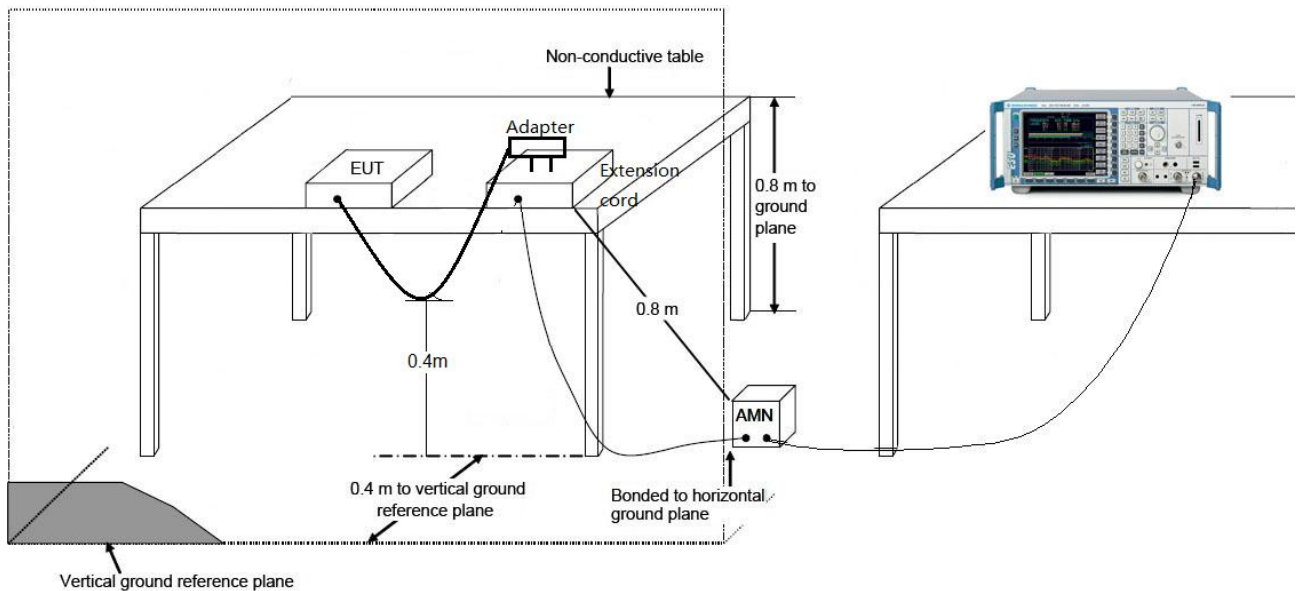

7.8.3.Test Result

Site: SR2	Time: 2018/08/15 - 03:03
Limit: FCC_Part15.207_CE_AC Power_Class B	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode 1	

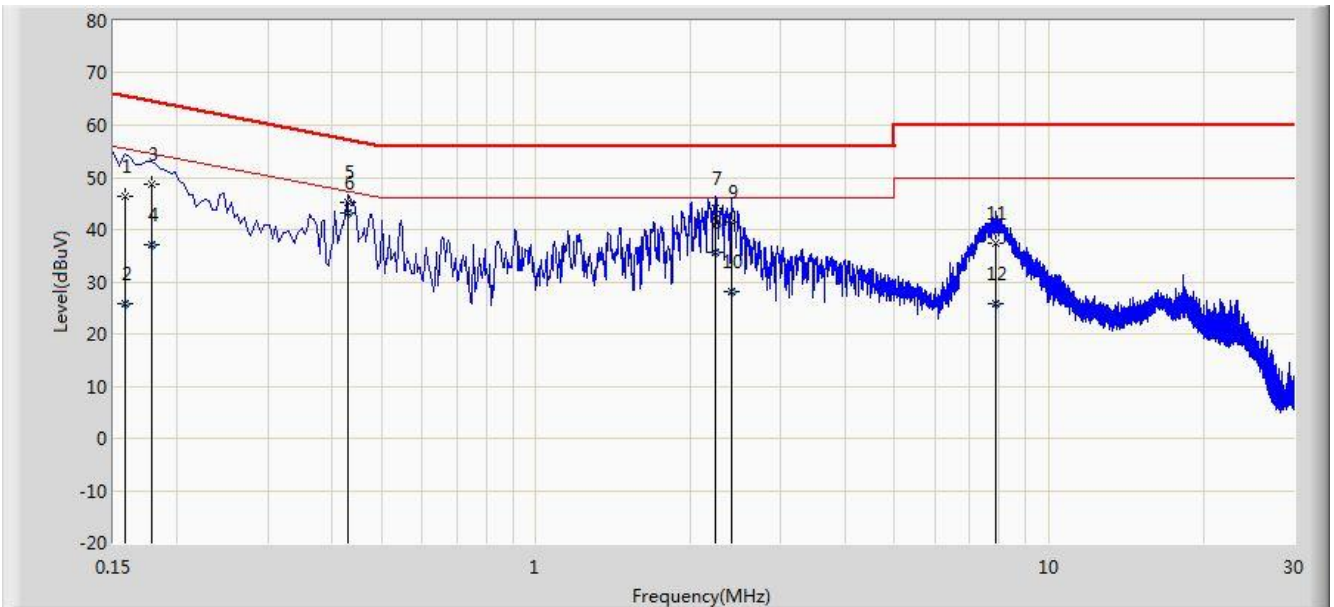


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.158	46.315	36.004	-19.254	65.568	10.311	QP
2			0.158	25.845	15.534	-29.723	55.568	10.311	AV
3			0.178	48.572	38.514	-16.006	64.578	10.058	QP
4			0.178	36.988	26.930	-17.590	54.578	10.058	AV
5			0.430	45.282	35.172	-11.971	57.253	10.110	QP
6		*	0.430	43.291	33.180	-3.962	47.253	10.110	AV
7			2.242	43.972	34.107	-12.028	56.000	9.864	QP
8			2.242	35.657	25.792	-10.343	46.000	9.864	AV
9			2.402	41.500	31.640	-14.500	56.000	9.860	QP
10			2.402	28.077	18.216	-17.923	46.000	9.860	AV
11			7.862	37.349	27.177	-22.651	60.000	10.172	QP
12			7.862	25.700	15.527	-24.300	50.000	10.172	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2018/08/15 - 03:03
Limit: FCC_Part15.207_CE_AC Power_Class B	Engineer: Bacon Dong
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: AX6000 MU-MIMO Wi-Fi Router	Power: AC 120V/60Hz
Test Mode 1	

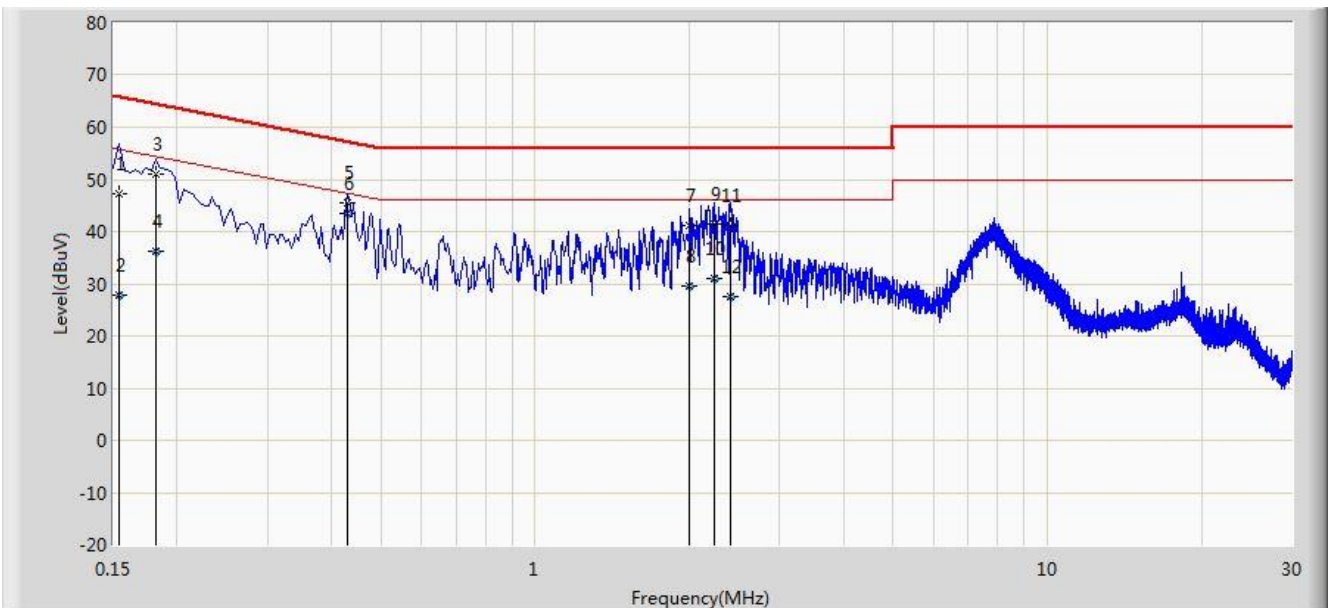

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	47.354	36.638	-18.428	65.781	10.716	QP
2			0.154	27.778	17.062	-28.004	55.781	10.716	AV
3			0.182	51.114	41.071	-13.280	64.394	10.042	QP
4			0.182	36.200	26.158	-18.194	54.394	10.042	AV
5			0.430	45.417	35.282	-11.836	57.253	10.135	QP
6		*	0.430	43.375	33.240	-3.878	47.253	10.135	AV
7			2.002	41.293	31.420	-14.707	56.000	9.873	QP
8			2.002	29.577	19.704	-16.423	46.000	9.873	AV
9			2.234	41.413	31.545	-14.587	56.000	9.868	QP
10			2.234	30.899	21.031	-15.101	46.000	9.868	AV
11			2.402	41.104	31.240	-14.896	56.000	9.864	QP
12			2.402	27.515	17.651	-18.485	46.000	9.864	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **AX6000 MU-MIMO Wi-Fi Router** is in compliance with Part 15C of the FCC Rules.

The End

Appendix A - Test Setup Photograph

Refer to “1808RSU004-UT” file.

Appendix B - EUT Photograph

Refer to “1808RSU004-UE” file.