

FCC Sub6 REPORT

Class II Permissive Change

Applicant Name:
SAMSUNG Electronics Co., Ltd.

Date of Issue:
July 21, 2022

Address:
129, Samsung-ro, Yeongtong-gu,
Suwon-si, Gyeonggi-do, 16677, Rep. of Korea

Location:
HCT CO., LTD.,
74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA
Report No.: HCT-RF-2206-FC035-R1

FCC ID: A3LSMA536U

APPLICANT: SAMSUNG Electronics Co., Ltd.

Model(s): SM-A536U
Additional Model(s): SM-A536U1/DS, SM-S536DL, SM-A536W
EUT Type: Mobile Phone
FCC Classification: Citizens Band End User Devices (CBE)
FCC Rule Part(s): §96, §2

Mode (MHz)	Tx Frequency (MHz)	Emission Designator	Modulation	EIRP	
				Max. Power (W/10 MHz)	Max. Power (dBm/10 MHz)
Sub6 n48 (10)	3555.00 – 3694.98	8M61G7D	PI/2 BPSK	0.122	20.88
		8M62G7D	QPSK	0.122	20.85
		8M58W7D	16QAM	0.093	19.67
		8M58W7D	64QAM	0.065	18.10
		8M57W7D	256QAM	0.042	16.25
Sub6 n48 (15)	3557.52 – 3692.49	12M9G7D	PI/2 BPSK	0.120	20.80
		12M8G7D	QPSK	0.117	20.67
		12M8W7D	16QAM	0.095	19.80
		12M9W7D	64QAM	0.067	18.25
		12M9W7D	256QAM	0.044	16.41
Sub6 n48 (20)	3560.01 – 3690.00	17M9G7D	PI/2 BPSK	0.122	20.88
		17M9G7D	QPSK	0.122	20.86
		17M9W7D	16QAM	0.096	19.82
		18M8W7D	64QAM	0.070	18.48
		17M8W7D	256QAM	0.043	16.29
Sub6 n48 (30)	3565.02 – 3684.99	27M0G7D	PI/2 BPSK	0.124	20.93
		27M0G7D	QPSK	0.123	20.91
		27M0W7D	16QAM	0.098	19.90
		27M0W7D	64QAM	0.067	18.25
		27M0W7D	256QAM	0.043	16.36
Sub6 n48 (40)	3570.00 – 3679.98	37M0G7D	PI/2 BPSK	0.122	20.86
		36M9G7D	QPSK	0.122	20.85
		35M8W7D	16QAM	0.098	19.92
		35M9W7D	64QAM	0.069	18.39
		36M9W7D	256QAM	0.041	16.18

The measurements shown in this report were made in accordance with the procedures specified in CFR47 section §2.947. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them.

HCT CO., LTD. Certifies that no party to this application has subject to a denial of Federal benefits that includes FCC benefits pursuant to section 5301 of the Anti-Drug Abuse Act of 1998, 21 U.S.C. 853(a)

Report No.: HCT-RF-2206-FC035-R1

REVIEWED BY



Report prepared by : Jae Ryang Do
Engineer of Telecommunication Testing Center



Report approved by : Se Wook Park
Manager of Telecommunication Testing Center

This test results were applied only to the test methods required by the standard.

This laboratory is not accredited for the test results marked *.

The above Test Report is the accredited test result by (KS Q) ISO/IEC 17025 and KOLAS(Korea Laboratory Accreditation Scheme), which signed the ILAC-MRA. (HCT Accreditation No.: KT197)

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

Version

TEST REPORT NO.	DATE	DESCRIPTION
HCT-RF-2206-FC035	July 05, 2022	- First Approval Report
HCT-RF-2206-FC035-R1	July 21, 2022	- Updated the list of test equipment

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

Table of Contents

REVIEWED BY	2
1. GENERAL INFORMATION	5
2. INTRODUCTION	6
2.1. DESCRIPTION OF EUT	6
2.2. MEASURING INSTRUMENT CALIBRATION	6
2.3. TEST FACILITY	6
3. DESCRIPTION OF TESTS.....	7
3.1 TEST PROCEDURE	7
3.2 RADIATED POWER.....	8
3.3 RADIATED SPURIOUS EMISSIONS	9
3.4 PEAK- TO- AVERAGE RATIO.....	10
3.5 OCCUPIED BANDWIDTH.	12
3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL	13
3.7 CHANNEL EDGE	15
3.8 Adjacent Channel Leakage Ratio.....	16
3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	17
3.10 WORST CASE(RADIATED TEST)	18
3.11 WORST CASE(CONDUCTED TEST)	19
4. LIST OF TEST EQUIPMENT	20
4.1 Calibration date within the test period	20
4.2 Date of Latest Calibration	21
5. MEASUREMENT UNCERTAINTY	22
6. SUMMARY OF TEST RESULTS	23
7. SAMPLE CALCULATION	24
8. TEST DATA	26
8.1 EQUIVALENT ISOTROPIC RADIATED POWER.....	26
8.2 RADIATED SPURIOUS EMISSIONS	31
8.3 PEAK-TO-AVERAGE RATIO.....	36
8.4 OCCUPIED BANDWIDTH	37
8.5 CONDUCTED SPURIOUS EMISSIONS	38
8.6 CHANNEL EDGE	39
8.7 Adjacent Channel Leakage Ratio(ACLR)	41
8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	42
9. TEST PLOTS.....	47
10. ANNEX A_ TEST SETUP PHOTO.....	198

MEASUREMENT REPORT

1. GENERAL INFORMATION

Applicant Name:	SAMSUNG Electronics Co., Ltd.
Address:	129, Samsung-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16677, Rep. of Korea
FCC ID:	A3LSMA536U
Application Type:	Class II Permissive Change
FCC Classification:	Citizens Band End User Devices (CBE)
FCC Rule Part(s):	§96, §2
EUT Type:	Mobile Phone
Model(s):	SM-A536U
Additional Model(s):	SM-A536U1/DS, SM-S536DL, SM-A536W
SCS(kHz):	30
Bandwidth(MHz):	10, 15, 20, 30, 40
Waveform:	CP-OFDM, DFT-S-OFDM
Modulation:	DFT-S-OFDM: PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM: QPSK, 16QAM, 64QAM, 256QAM
Tx Frequency:	3555.00 – 3694.98 : (Sub6 n48(10 MHz)) 3557.52 – 3692.49 : (Sub6 n48(15 MHz)) 3560.01 – 3690.00 : (Sub6 n48(20 MHz)) 3565.02 – 3684.99 : (Sub6 n48(30 MHz)) 3570.00 – 3679.98 : (Sub6 n48(40 MHz))
Date(s) of Tests:	November 15, 2021 ~ February 18, 2022
Serial number:	Radiated: R3CRB0ZAKDW Conducted: R3CRA0Y7HRZ

2. INTRODUCTION

2.1. DESCRIPTION OF EUT

The EUT was a Mobile Phone with GSM/GPRS/EGPRS/UMTS and LTE, Sub6.

It also supports IEEE 802.11 a/b/g/n/ac (20/40/80), Bluetooth, BT LE, NFC.

2.2. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

2.3. TEST FACILITY

The Fully-anechoic chamber and conducted measurement facility used to collect the radiated data are located at the **74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA.**

3. DESCRIPTION OF TESTS

3.1 TEST PROCEDURE

Test Description	Test Procedure Used
Occupied Bandwidth	- KDB 971168 D01 v03r01 – Section 4.3 - ANSI C63.26-2015 – Section 5.4.4 - KDB 940660 D01 v01
Channel Edge	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Spurious and Harmonic Emissions at Antenna Terminal	- KDB 971168 D01 v03r01 – Section 6.0 - ANSI C63.26-2015 – Section 5.7 - KDB 940660 D01 v01
Conducted Output Power	- N/A (See SAR Report)
Peak- to- Average Ratio	- KDB 971168 D01 v03r01 – Section 5.7 - ANSI C63.26-2015 – Section 5.2.3.4 - KDB 940660 D01 v01
Frequency stability	- ANSI C63.26-2015 – Section 5.6 - KDB 940660 D01 v01
Effective Radiated Power/ Effective Isotropic Radiated Power	- KDB 971168 D01 v03r01 – Section 5.2 & 5.8 - ANSI/TIA-603-E-2016 – Section 2.2.17 - KDB 940660 D01 v01
Radiated Spurious and Harmonic Emissions	- KDB 971168 D01 v03r01 – Section 6.2 - ANSI/TIA-603-E-2016 – Section 2.2.12 - KDB 940660 D01 v01

3.2 RADIATED POWER

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

The equipment under test is placed on a non-conductive table 3-meters away from the receive antenna in accordance with ANSI/TIA-603-E-2016 Clause 2.2.17.

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5 % of the expected OBW, not to exceed 1 MHz
3. VBW $\geq 3 \times$ RBW
4. Span = 1.5 times the OBW
5. No. of sweep points $> 2 \times$ span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
8. The integration bandwidth was set equal to 10 MHz.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize

Test Note

1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula;

$$P_{d(dBm)} = P_{g(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$$

Where: P_d is the dipole equivalent power and P_g is the generator output power into the substitution antenna.

3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value.
These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
4. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

3.3 RADIATED SPURIOUS EMISSIONS

Test Overview

Radiated tests are performed in the Fully-anechoic chamber.

Radiated Spurious Emission Measurements at 3 meters by Substitution Method according to ANSI/TIA-603-E-2016.

Test Settings

1. RBW = 100 kHz for emissions below 1 GHz and NormalHz for emissions above 1 GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $> 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Average
7. The trace was allowed to stabilize
8. Test channel : Low/ Middle/ High
9. Frequency range : We are performed all frequency to 10th harmonics from 9 kHz.

Test Note

1. Measurements value show only up to 3 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
2. The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the test data
3. For spurious emissions above 1 GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated. The spurious emissions is calculated by the following formula;


$$\text{Result}_{(\text{dBm})} = P_{g(\text{dBm})} - \text{cable loss}_{(\text{dB})} + \text{antenna gain}_{(\text{dBi})}$$

Where: P_g is the generator output power into the substitution antenna.

If the fundamental frequency is below 1GHz, RF output power has been converted to EIRP.

$$\text{EIRP}_{(\text{dBm})} = \text{ERP}_{(\text{dBm})} + 2.15$$

3.4 PEAK- TO- AVERAGE RATIO

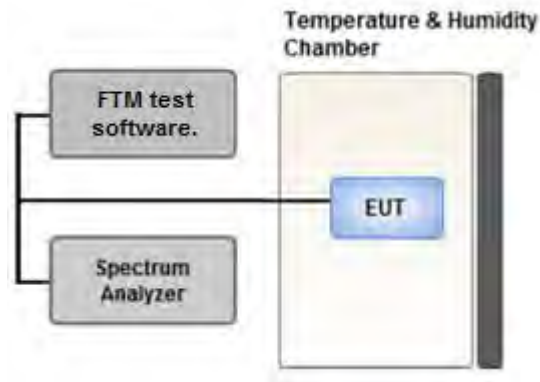

Test setup

① CCDF Procedure for PAPR

Test Settings

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Set the measurement interval as follows:
 - for continuous transmissions, set to 1 ms,
 - or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
4. Record the maximum PAPR level associated with a probability of 0.1 %.

② Alternate Procedure for PAPR

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as P_{Pk} .

Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and record as P_{Avg} . Determine the P.A.R. from:

$$P.A.R_{(dB)} = P_{Pk} (dBm) - P_{Avg} (dBm) \quad (P_{Avg} = \text{Average Power} + \text{Duty cycle Factor})$$

Test Settings(Peak Power)

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW $\geq 3 \times$ RBW.

1. Set the RBW $\geq$ OBW.
2. Set VBW $\geq 3 \times$ RBW.
3. Set span $\geq 2 \times$ OBW.
4. Sweep time $\geq 10 \times$ (number of points in sweep) $\times$ (transmission symbol period).
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)


1. Set span to $2 \times$ to $3 \times$ the OBW.
2. Set RBW $\geq$ OBW.
3. Set VBW $\geq 3 \times$ RBW.
4. Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
5. Sweep time:

Set $\geq [10 \times (\text{number of points in sweep}) \times (\text{transmission period})]$ for single sweep

(automation-compatible) measurement. The transmission period is the (on + off) time.

6. Detector = power averaging (rms).
7. Set sweep trigger to "free run."
8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
9. Use the peak marker function to determine the maximum amplitude level.
10. Add $[10 \log (1/\text{duty cycle})]$ to the measured maximum power level to compute the average power during continuous transmission. For example, add $[10 \log (1/0.25)] = 6 \text{ dB}$ if the duty cycle is a constant 25%.

3.5 OCCUPIED BANDWIDTH.

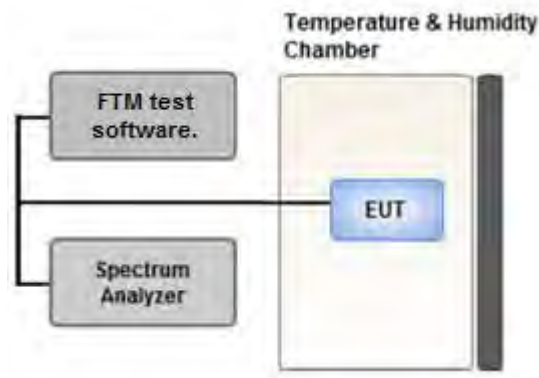

Test setup

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission.

The EUT makes a call to the communication simulator.


The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99 % occupied bandwidth and the 26 dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5 % of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5 % of the 99% occupied bandwidth observed in Step 7

3.6 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL

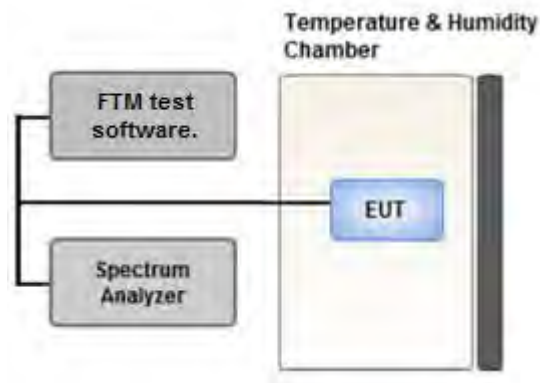

Test setup

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Settings

1. RBW = 1 MHz
2. VBW $\geq$ 3 MHz
3. Detector = RMS
4. Trace Mode = Average
5. Sweep time = auto
6. Number of points in sweep $\geq$ 2 x Span / RBW

Test Notes


1. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Result(dBm) = Reading + Factor

2. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

3.7 CHANNEL EDGE

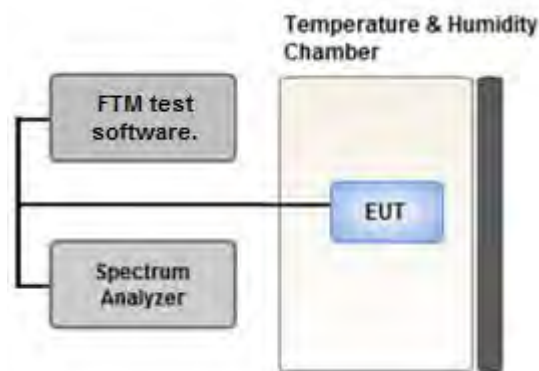

Test setup

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. Within 1 MHz of the channel edge the RBW should be 2% of EBW, then 1 MHz after that.
4. VBW > 3 x RBW
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize


Test Notes

The conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0-10 megahertz above the upper SAS-assigned channel edge and within 0-10 megahertz below the lower SAS-assigned channel edge. At all frequencies greater than 10 megahertz above the upper SAS assigned channel edge and less than 10 MHz below the lower SAS assigned channel edge, the conducted power of any emission shall not exceed -25 dBm/MHz .

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

Where Margin < 1 dB the emission level is either corrected by $10 \log(1 \text{ MHz/ RB})$ or the emission is integrated over a 1 MHz bandwidth to determine the final result. When using the integration method the integration window is either centered on the emission or, for emissions at the band edge, centered by an offset of 500 kHz from the block edge so that the integration window is the 1 MHz adjacent to the block edge.

3.8 Adjacent Channel Leakage Ratio

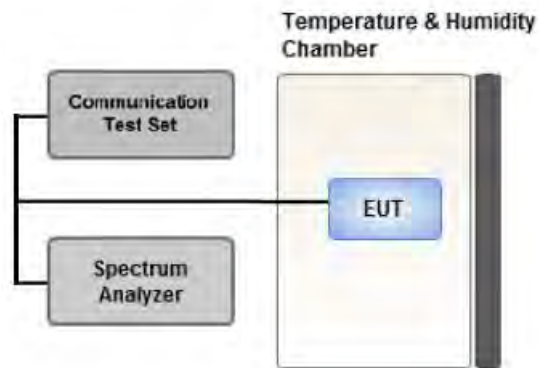

Test setup


Test Settings

1. Use ACP measurement function of Spectrum analyzer to measure adjacent channel leakage ratio
2. Integ BW = Assigned channel bandwidth
5. Detector = RMS
6. Number of sweep points $\geq 2 \times \text{Span/RBW}$
7. Trace mode = trace average
8. Sweep time = 1 s
9. The trace was allowed to stabilize

Test Notes

the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

3.9 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

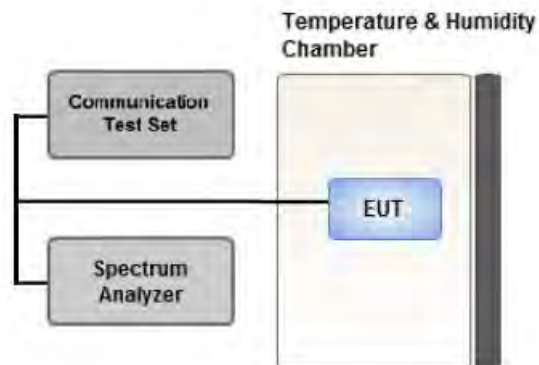

Test setup

Test Overview

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015.

The frequency stability of the transmitter is measured by:

1. Temperature:

The temperature is varied from -30 °C to +50 °C in 10 °C increments using an environmental chamber.

2. Primary Supply Voltage:

- Unless otherwise specified, vary primary supply voltage from 85 % to 115 % of the nominal value for other than hand carried battery equipment.
- For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20 °C to provide a reference).
2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10 °C intervals ranging from -30 °C to +50 °C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.10 WORST CASE(RADIATED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- The EUT was tested in three orthogonal planes(X, Y, Z) and in all possible test configurations and positioning.
- All modes of operation were investigated and the worst case configuration results are reported.

Mode: SA, NSA

Worst case: SA

Mode : Stand alone, Stand alone + External accessories (Earphone, AC adapter, etc)

Worst case : Stand alone

- We were performed the RSE test in condition of co-location.

Mode : Stand alone, Simultaneous transmission scenarios

Worst case : Stand alone

- All EN-DC mode of operation were investigated and the worst case configuration results are reported.

(Worst case: 66A-n48A(10 MHz))

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- SM-A536U & additional models were tested and the worst case results are reported.

(Worst case : SM-A536U)

[Worst case]

Test Description	Modulation	RB size	RB offset	Axis
Effective Isotropic Radiated Power	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	See Section 8.1		Z
Radiated Spurious and Harmonic Emissions	PI/2 BPSK	See Section 8.2		Z

3.11 WORST CASE(CONDUCTED TEST)

- Waveform : All Waveform of operation were investigated and the worst case configuration results are reported.

(Worst case: DFT-S-OFDM)

- Modulation : All Modulation of operation were investigated and the worst case configuration results are reported.

(Worst case: PI/2 BPSK)

- All modes of operation were investigated and the worst case configuration results are reported.

Mode: SA, NSA

Worst case: SA

- All RB sizes, offsets of operation were investigated and the worst case configuration results are reported.

Please refer to the table below.

- SM-A536U & additional models were tested and the worst case results are reported.

(Worst case : SM-A536U)

[Worst case]

Test Description	Modulation	Bandwidth (MHz)	Frequency	RB size	RB offset
Occupied Bandwidth, Peak-To-Average Ratio	PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	10, 15, 20, 30, 40	Mid	Full RB	0
Channel Edge	PI/2 BPSK	10	Low	1	0
			High	1	23
		15	Low	1	0
			High	1	37
		20	Low	1	0
			High	1	50
		30	Low	1	0
			High	1	77
		40	Low	1	0
			High	1	105
		10, 15, 20, 30, 40	Low, Mid, High	Full RB	0
Spurious and Harmonic Emissions at Antenna Terminal	PI/2 BPSK	10, 15, 20, 30, 40	Low, Mid, High	1	1

4. LIST OF TEST EQUIPMENT

4.1 Calibration date within the test period

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	05/30/2022	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	05/30/2022	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	05/28/2022	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2023	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	06/04/2023	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	06/15/2022	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	06/15/2022	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	06/15/2022	Annual
LOW NOISE AMP (100 MHz ~ 18 GHz)	CBLU1183540B-01	CERNEX	26822	06/15/2022	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/23/2022	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/15/2022	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	04/07/2022	Annual
Chamber	SU-642	ESPEC	93008124	03/15/2022	Annual
Signal Analyzer(10Hz~26.5GHz)	N9020A	Agilent	MY51110063	04/22/2022	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	06/01/2022	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	03/02/2022	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/25/2022	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/26/2022	Annual
SIGNAL GENERATOR (100kHz~40GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5Hz~40.0GHz)	N9030B	KEYSIGHT	MY55480167	06/02/2022	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4.2 Date of Latest Calibration

Equipment	Model	Manufacture	Serial No.	Due to Calibration	Calibration Interval
Precision Dipole Antenna	UHAP	Schwarzbeck	01273	03/27/2024	Biennial
Precision Dipole Antenna	UHAP	Schwarzbeck	01274	03/27/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	02289	03/21/2024	Biennial
Horn Antenna(1~18 GHz)	BBHA 9120D	Schwarzbeck	9120D-1299	05/04/2023	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170342	10/13/2022	Biennial
Horn Antenna(15~40 GHz)	BBHA 9170	Schwarzbeck	BBHA9170124	04/12/2023	Biennial
Loop Antenna(9 kHz~30 MHz)	FMZB1513	Rohde & Schwarz	1513-175	06/04/2023	Biennial
Bilog Antenna	VULB9160	Schwarzbeck	3150	03/03/2023	Biennial
Hybrid Antenna	VULB9160	Schwarzbeck	760	02/22/2023	Biennial
High Pass Filter	WHKX10-900-1000-15000-40SS	Wainwright Instruments	15	05/18/2023	Annual
High Pass Filter	WHKX10-2700-3000-18000-40SS	Wainwright Instruments	145	05/18/2023	Annual
High Pass Filter	WHNX6-4740-6000-26500-40CC	Wainwright Instruments	11	05/18/2023	Annual
LOW NOISE AMP (100 MHz ~ 18 GHz)	CBLU1183540B-01	CERNEX	26822	05/18/2023	Annual
Power Amplifier	CBL18265035	CERNEX	22966	12/02/2022	Annual
Power Amplifier	CBL26405040	CERNEX	25956	03/11/2023	Annual
DC Power Supply	E3632A	Hewlett Packard	MY40004427	09/15/2022	Annual
Power Splitter(DC~26.5 GHz)	11667B	Hewlett Packard	11275	03/11/2023	Annual
Chamber	SU-642	ESPEC	93008124	03/04/2023	Annual
Signal Analyzer(10 Hz~26.5 GHz)	N9020A	Agilent	MY51110063	04/19/2023	Annual
ATTENUATOR(20 dB)	8493C	Hewlett Packard	17280	05/18/2023	Annual
Spectrum Analyzer(10 Hz~40 GHz)	FSV40	REOHDE & SCHWARZ	101436	02/25/2023	Annual
Base Station	8960 (E5515C)	Agilent	MY48360800	08/18/2022	Annual
Wideband Radio Communication Tester	MT8821C	Anritsu Corp.	6262287700	05/19/2023	Annual
Wideband Radio Communication Tester	MT8000A	Anritsu Corp.	6262302511	05/18/2023	Annual
SIGNAL GENERATOR (100 kHz~40 GHz)	SMB100A	REOHDE & SCHWARZ	177633	07/05/2022	Annual
Signal Analyzer(5 Hz~40.0 GHz)	N9030B	KEYSIGHT	MY55480167	05/30/2023	Annual
4-Way Divider	ZC4PD-K1844+	Mini-Circuits	942907	09/27/2022	Annual
FCC LTE Mobile Conducted RF Automation Test Software	-	HCT CO., LTD.,	-	-	-

Note:

- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
- Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

5. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4:2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95 % level of confidence. The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	2.00 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (9 kHz ~ 30 MHz)	4.40 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (30 MHz ~ 1 GHz)	5.74 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (1 GHz ~ 18 GHz)	5.51 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (18 GHz ~ 40 GHz)	5.92 (Confidence level about 95 %, $k=2$)
Radiated Disturbance (Above 40 GHz)	5.48 (Confidence level about 95 %, $k=2$)

6. SUMMARY OF TEST RESULTS

6.1 Test Condition : Conducted Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Occupied Bandwidth	§2.1049	N/A	PASS
Band Edge / Spurious and Harmonic Emissions at Antenna Terminal.	§2.1051, §96.41(e)	■ -13 dBm/MHz at frequencies within 0-10 MHz of channel edge ■ -25 dBm/MHz at frequencies greater than 10 MHz above and below channel edge ■ -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS
Adjacent Channel Leakage Ratio	§96.41(e)	At least 30 dB.	PASS
Conducted Output Power	§2.1046	N/A	<u>See Note1</u>
Peak- to- Average Ratio	§96.41(g)	< 13 dB	PASS
Frequency stability / variation of ambient temperature	§2.1055,	Emission must remain in band	PASS

Note:

1. See SAR Report
2. Conducted tests were tested using 5G Wireless Tester.

6.2 Test Condition : Radiated Test

Test Description	FCC Part Section(s)	Test Limit	Test Result
Equivalent Isotropic Radiated Power	§96.41(b)	23 dBm/10 MHz	PASS
Radiated Spurious and Harmonic Emissions	§2.1053, §96.41(e)	-40 dBm/MHz	PASS

Note:

1. Radiated tests were tested using 5G Wireless Tester.

7. SAMPLE CALCULATION

7.1 ERP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBd)	C.L	Pol.	ERP	
channel	Freq.(MHz)						W	dBm
128	824.20	-21.37	38.40	-10.61	0.95	H	0.483	26.84

$$\text{ERP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of effective radiated power.

7.2 EIRP Sample Calculation

Ch./ Freq.		Measured Level(dBm)	Substitute Level(dBm)	Ant. Gain (dBi)	C.L	Pol.	EIRP	
channel	Freq.(MHz)						W	dBm
55990	2595.0	-15.75	18.45	9.90	1.76	H	0.456	26.59

$$\text{EIRP} = \text{Substitute LEVEL(dBm)} + \text{Ant. Gain} - \text{CL(Cable Loss)}$$

- 1) The EUT mounted on a non-conductive turntable is 2.5 meter above test site ground level.
- 2) During the test , the turn table is rotated until the maximum signal is found.
- 3) Record the field strength meter's level.
- 4) Replace the EUT with dipole/Horn antenna that is connected to a calibrated signal generator.
- 5) Increase the signal generator output till the field strength meter's level is equal to the item (3).
- 6) The signal generator output level with Ant. Gain and cable loss are the rating of equivalent isotropic radiated power.

7.3. Emission Designator

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4 M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4 M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

QAM Modulation

Emission Designator = 4 M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

8. TEST DATA

8.1 EQUIVALENT ISOTROPIC RADIATED POWER

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Size
3555.00	Sub6 n48/ 10 MHz [30 kHz]	PI/2 BPSK	-26.68	11.68	11.72	3.10	H	20.31	23.0	1	12
		QPSK	-26.71	11.65	11.72	3.10	H	20.28			
		16-QAM	-27.67	10.69	11.72	3.10	H	19.32			
		64-QAM	-29.29	9.07	11.72	3.10	H	17.70			
		256-QAM	-31.40	6.96	11.72	3.10	H	15.59			
3624.99		PI/2 BPSK	-26.53	12.14	11.85	3.12	H	20.88		1	12
		QPSK	-26.56	12.11	11.85	3.12	H	20.85			
		16-QAM	-27.74	10.93	11.85	3.12	H	19.67			
		64-QAM	-29.31	9.36	11.85	3.12	H	18.10			
		256-QAM	-31.16	7.51	11.85	3.12	H	16.25			
3694.98		PI/2 BPSK	-26.46	11.96	11.71	3.13	H	20.55		1	12
		QPSK	-26.49	11.93	11.71	3.13	H	20.52			
		16-QAM	-27.57	10.85	11.71	3.13	H	19.44			
		64-QAM	-28.91	9.51	11.71	3.13	H	18.10			
		256-QAM	-31.11	7.31	11.71	3.13	H	15.90			

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Size
3557.52	Sub6 n48/ 15 MHz [30 kHz]	PI/2 BPSK	-26.84	11.60	11.74	3.10	H	20.24	23.0	1	19
		QPSK	-26.78	11.66	11.74	3.10	H	20.30			
		16-QAM	-27.61	10.83	11.74	3.10	H	19.47			
		64-QAM	-29.19	9.25	11.74	3.10	H	17.89			
		256-QAM	-31.03	7.41	11.74	3.10	H	16.05			
3624.99		PI/2 BPSK	-26.61	12.06	11.85	3.12	H	20.80		1	19
		QPSK	-26.74	11.93	11.85	3.12	H	20.67			
		16-QAM	-27.61	11.06	11.85	3.12	H	19.80			
		64-QAM	-29.16	9.51	11.85	3.12	H	18.25			
		256-QAM	-31.00	7.67	11.85	3.12	H	16.41			
3692.49		PI/2 BPSK	-26.67	11.88	11.72	3.13	H	20.47		1	19
		QPSK	-26.69	11.86	11.72	3.13	H	20.45			
		16-QAM	-27.47	11.08	11.72	3.13	H	19.67			
		64-QAM	-29.00	9.55	11.72	3.13	H	18.14			
		256-QAM	-31.01	7.54	11.72	3.13	H	16.13			

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Size
3560.01	Sub6 n48/ 20 MHz [30 kHz]	PI/2 BPSK	-26.92	11.52	11.74	3.10	H	20.16	23.0	1	25
		QPSK	-26.94	11.50	11.74	3.10	H	20.14			
		16-QAM	-27.76	10.68	11.74	3.10	H	19.32			
		64-QAM	-29.44	9.00	11.74	3.10	H	17.64			
		256-QAM	-31.31	7.13	11.74	3.10	H	15.77			
3624.99		PI/2 BPSK	-26.53	12.14	11.85	3.12	H	20.88		1	25
		QPSK	-26.55	12.12	11.85	3.12	H	20.86			
		16-QAM	-27.59	11.08	11.85	3.12	H	19.82			
		64-QAM	-28.93	9.74	11.85	3.12	H	18.48			
		256-QAM	-31.12	7.55	11.85	3.12	H	16.29			
3690.00	PI/2 BPSK	-26.69	11.86	11.72	3.13	H	20.45	1	25		
	QPSK	-26.56	11.99	11.72	3.13	H	20.58				
	16-QAM	-27.51	11.04	11.72	3.13	H	19.63				
	64-QAM	-29.06	9.49	11.72	3.13	H	18.08				
	256-QAM	-31.10	7.45	11.72	3.13	H	16.04				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Size
3565.02	Sub6 n48/ 30 MHz [30 kHz]	PI/2 BPSK	-26.96	11.48	11.74	3.10	H	20.12	23.0	1	39
		QPSK	-26.98	11.46	11.74	3.10	H	20.10			
		16-QAM	-27.93	10.51	11.74	3.10	H	19.15			
		64-QAM	-29.36	9.08	11.74	3.10	H	17.72			
		256-QAM	-31.46	6.98	11.74	3.10	H	15.62			
3624.99		PI/2 BPSK	-26.48	12.19	11.85	3.12	H	20.93		1	39
		QPSK	-26.50	12.17	11.85	3.12	H	20.91			
		16-QAM	-27.51	11.16	11.85	3.12	H	19.90			
		64-QAM	-29.16	9.51	11.85	3.12	H	18.25			
		256-QAM	-31.05	7.62	11.85	3.12	H	16.36			
3684.99	PI/2 BPSK	-26.49	12.06	11.72	3.13	H	20.65	1	39		
	QPSK	-26.53	12.02	11.72	3.13	H	20.61				
	16-QAM	-27.36	11.19	11.72	3.13	H	19.78				
	64-QAM	-28.96	9.59	11.72	3.13	H	18.18				
	256-QAM	-31.15	7.40	11.72	3.13	H	15.99				

Freq (MHz)	Mod/ Bandwidth [SCS (kHz)]	Modulation	Measured Level (dBm)	Substitute Level (dBm)	Ant. Gain(dBi)	C.L	Pol	EIRP	Limit	RB	
								dBm/10 MHz		Size	Size
3570.00	Sub6 n48/ 40 MHz [30 kHz]	PI/2 BPSK	-27.16	11.23	11.78	3.07	H	19.94	23.0	1	53
		QPSK	-27.18	11.21	11.78	3.07	H	19.92			
		16-QAM	-28.15	10.24	11.78	3.07	H	18.95			
		64-QAM	-29.51	8.88	11.78	3.07	H	17.59			
		256-QAM	-31.73	6.66	11.78	3.07	H	15.37			
3624.99		PI/2 BPSK	-26.55	12.12	11.85	3.12	H	20.86		1	53
		QPSK	-26.56	12.11	11.85	3.12	H	20.85			
		16-QAM	-27.49	11.18	11.85	3.12	H	19.92			
		64-QAM	-29.02	9.65	11.85	3.12	H	18.39			
		256-QAM	-31.23	7.44	11.85	3.12	H	16.18			
3679.98	PI/2 BPSK	-26.90	11.77	11.74	3.13	H	20.38	1	53		
	QPSK	-26.91	11.76	11.74	3.13	H	20.37				
	16-QAM	-27.85	10.82	11.74	3.13	H	19.43				
	64-QAM	-29.54	9.13	11.74	3.13	H	17.74				
	256-QAM	-31.56	7.11	11.74	3.13	H	15.72				

8.2 RADIATED SPURIOUS EMISSIONS

- NR Band: N48
- Bandwidth: 10 MHz
- Modulation: PI/2 BPSK
- Distance: 1 meters
- SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
637000 (3555.00)	7 110.00	-62.81	10.96	-53.05	4.37	H	-46.46	-40.00	Peak	1	12
	10 665.00	-64.19	11.70	-50.29	5.53	H	-44.12	-40.00	Peak		
	14 220.00	-62.01	13.04	-50.56	6.53	H	-44.05	-40.00	Average		
641666 (3624.99)	7 249.98	-63.62	10.50	-54.00	4.52	H	-48.02	-40.00	Peak	1	12
	10 874.97	-62.69	11.85	-49.29	5.64	H	-43.08	-40.00	Peak		
	14 499.96	-59.96	13.40	-50.90	6.63	H	-44.13	-40.00	Average		
646332 (3694.98)	7 389.96	-62.34	11.14	-51.90	4.51	H	-45.27	-40.00	Peak	1	12
	11 084.94	-65.81	12.27	-51.92	5.67	H	-45.32	-40.00	Peak		
	14 779.92	-58.65	13.76	-50.42	6.67	H	-43.33	-40.00	Peak		

☐ NR Band: N48
☐ Bandwidth: 15 MHz
☐ Modulation: PI/2 BPSK
☐ Distance: 1 meters
☐ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
637168 (3557.52)	7 115.04	-62.33	10.94	-52.53	4.36	H	-45.94	-40.00	Peak	1	19
	10 672.56	-65.91	11.70	-52.10	5.55	H	-45.95	-40.00	Average		
	14 230.08	-62.34	13.06	-50.50	6.51	H	-43.95	-40.00	Average		
641666 (3624.99)	7 249.98	-64.02	10.50	-54.40	4.52	H	-48.42	-40.00	Peak	1	19
	10 874.97	-64.11	11.85	-50.71	5.64	H	-44.50	-40.00	Peak		
	14 499.96	-59.96	13.40	-50.90	6.63	H	-44.13	-40.00	Average		
646166 (3692.49)	7 384.98	-62.09	11.11	-51.89	4.54	H	-45.32	-40.00	Peak	1	19
	11 077.47	-63.65	12.26	-49.78	5.68	H	-43.20	-40.00	Peak		
	14 769.96	-59.86	13.74	-50.99	6.67	H	-43.92	-40.00	Average		

☐ NR Band: N48
☐ Bandwidth: 20 MHz
☐ Modulation: PI/2 BPSK
☐ Distance: 1 meters
☐ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
637334 (3560.01)	7 120.02	-62.09	10.92	-52.25	4.34	H	-45.67	-40.00	Peak	1	25
	10 680.03	-66.31	11.70	-52.08	5.56	H	-45.94	-40.00	Average		
	14 240.04	-62.81	13.08	-50.54	6.49	H	-43.95	-40.00	Average		
641666 (3624.99)	7 249.98	-61.53	10.50	-51.91	4.52	H	-45.93	-40.00	Peak	1	25
	10 874.97	-66.81	11.85	-53.41	5.64	H	-47.20	-40.00	Average		
	14 499.96	-59.96	13.40	-50.90	6.63	H	-44.13	-40.00	Average		
646000 (3690.00)	7 380.00	-62.02	11.08	-52.06	4.56	H	-45.54	-40.00	Peak	1	25
	11 070.00	-67.31	12.24	-53.23	5.68	H	-46.67	-40.00	Average		
	14 760.00	-60.33	13.72	-51.39	6.65	H	-44.32	-40.00	Average		

☐ NR Band: N48
☐ Bandwidth: 30 MHz
☐ Modulation: PI/2 BPSK
☐ Distance: 1 meters
☐ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
637668 (3565.02)	7 130.04	-62.23	10.88	-52.53	4.36	H	-46.01	-40.00	Peak	1	39
	10 695.06	-66.21	11.70	-52.67	5.52	H	-46.49	-40.00	Average		
	14,260.08	-63.10	13.12	11.38	6.48	H	-45.09	-40.00	Average		
641666 (3624.99)	7 249.98	-61.95	10.50	-52.33	4.52	H	-46.35	-40.00	Peak	1	39
	10 874.97	-66.78	11.85	-53.38	5.64	H	-47.17	-40.00	Average		
	14 499.96	-59.75	13.40	-50.69	6.63	H	-43.92	-40.00	Average		
645666 (3684.99)	7 369.98	-62.47	11.02	-52.88	4.56	H	-46.42	-40.00	Peak	1	39
	11 054.97	-67.81	12.21	-53.29	5.63	H	-46.70	-40.00	Average		
	14 739.96	-60.16	13.66	-51.45	6.64	H	-44.43	-40.00	Average		

☒ NR Band: N48
☒ Bandwidth: 40 MHz
☒ Modulation: PI/2 BPSK
☒ Distance: 1 meters
☒ SCS: 30 kHz

Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)	Detector	RB	
										Size	Offset
638000 (3570.00)	7 140.00	-63.02	10.84	-53.51	4.43	H	-47.10	-40.00	Peak	1	53
	10 710.00	-64.21	11.70	-50.61	5.49	H	-44.40	-40.00	Peak		
	14 280.00	-61.71	13.16	-51.00	6.50	H	-44.34	-40.00	Average		
641666 (3624.99)	7 249.98	-62.63	10.50	-53.01	4.52	H	-47.03	-40.00	Peak	1	53
	10 874.97	-63.23	11.85	-49.83	5.64	H	-43.62	-40.00	Peak		
	14 499.96	-59.16	13.40	-50.10	6.63	H	-43.33	-40.00	Peak		
645332 (3679.98)	7 359.96	-63.58	10.96	-53.85	4.53	H	-47.42	-40.00	Peak	1	53
	11 039.94	-64.71	12.20	-50.72	5.56	H	-44.08	-40.00	Peak		
	14 719.92	-60.21	13.58	-51.35	6.69	H	-44.46	-40.00	Average		

☒ ENDC-Mode : 66A(10 MHz)-n48A(10 MHz)

Band	Ch	Freq (MHz)	Measured Level (dBm)	Ant. Gain (dBi)	Substitute Level (dBm)	C.L	Pol	Result (dBm)	Limit (dBm)
66	132322 (1745.0)	3,490.00	-61.12	11.46	-62.43	3.05	V	-54.02	-13.00
		5,235.00	-61.98	11.57	-56.67	3.79	H	-48.89	-13.00
		6,980.00	-62.59	11.16	-50.36	4.51	V	-43.71	-13.00

8.3 PEAK-TO-AVERAGE RATIO

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (dB)
Sub6 n48	10 MHz	3624.99	BPSK	24	0	4.37
			QPSK			5.61
			16-QAM			6.24
			64-QAM			6.34
			256-QAM			6.41
	15 MHz		BPSK	36		4.24
			QPSK			5.57
			16-QAM			6.14
			64-QAM			6.39
			256-QAM			6.41
	20 MHz		BPSK	50		4.16
			QPSK			5.43
			16-QAM			6.11
			64-QAM			6.35
			256-QAM			6.37
	30 MHz		BPSK	75		4.38
			QPSK			5.51
			16-QAM			6.21
			64-QAM			6.40
			256-QAM			6.41
	40 MHz		BPSK	100		4.52
			QPSK			5.49
			16-QAM			6.10
			64-QAM			6.31
			256-QAM			6.45

Note:

1. Plots of the EUT's Peak- to- Average Ratio are shown Page 73 ~ 97.

8.4 OCCUPIED BANDWIDTH

Band	Band Width	Frequency (MHz)	Modulation	Resource Block Size	Resource Block Offset	Data (MHz)
Sub6 n48	10 MHz	3624.99	BPSK	24	0	8.6101
			QPSK			8.6167
			16-QAM			8.5777
			64-QAM			8.5757
			256-QAM			8.5732
	15 MHz		BPSK	36		12.923
			QPSK			12.837
			16-QAM			12.802
			64-QAM			12.873
			256-QAM			12.912
	20 MHz		BPSK	50		17.910
			QPSK			17.886
			16-QAM			17.921
			64-QAM			17.747
			256-QAM			17.838
	30 MHz		BPSK	75		26.980
			QPSK			27.033
			16-QAM			26.951
			64-QAM			26.957
			256-QAM			26.978
	40 MHz		BPSK	100		35.950
			QPSK			35.867
			16-QAM			35.792
			64-QAM			35.851
			256-QAM			35.906

Note:

1. Plots of the EUT's Occupied Bandwidth are shown Page 48 ~ 72.

8.5 CONDUCTED SPURIOUS EMISSIONS

Band	Band Width (MHz)	Frequency (MHz)	Frequency of Maximum Harmonic (GHz)	Factor (dB)	Measurement Maximum Data (dBm)	Result (dBm)	Limit (dBm)
Sub6 n48	10	3555.00	9.0798	30.815	-76.197	-45.382	-40.00
		3624.99	8.3171	30.815	-76.386	-45.571	
		3694.98	7.9910	30.815	-76.364	-45.549	
	15	3557.52	9.1162	30.815	-76.367	-45.552	
		3624.99	8.2687	30.815	-76.577	-45.762	
		3692.49	4.9771	30.200	-76.102	-45.902	
	20	3560.01	8.8599	30.815	-75.693	-44.878	
		3624.99	9.1795	30.815	-76.284	-45.469	
		3690.00	3.7229	30.200	-76.623	-46.423	
	30	3565.02	3.7498	30.200	-76.449	-46.249	
		3624.99	4.0908	30.200	-76.593	-46.393	
		3684.99	3.7259	30.200	-74.867	-44.667	
	40	3570.00	9.6889	30.815	-76.046	-45.231	
		3624.99	4.0195	30.200	-76.135	-45.935	
		3679.98	9.1306	30.815	-76.549	-45.734	

Note:

1. Plots of the EUT's Conducted Spurious Emissions are shown Page 168 ~ 197.

2. Factor(dB) = Cable Loss + Ext. Attenuator + Power Splitter

Result(dBm) = Reading + Factor

3. Factor(dB)

Frequency Range (GHz)	Factor [dB]
0.03 – 1	27.494
1 – 5	30.200
5 – 10	30.815
10 – 15	31.340
15 – 20	31.713
Above 20	32.355

8.6 CHANNEL EDGE

BW (MHz)	RB (Size/ Offset)	Freq. (MHz)	Outside of the authorized band (dBm)							
			Lower Side(MHz)				Upper Side(MHz)			
			Below 3530 MHz	-[B]MHz ~ 3530 MHz	-1 MHz ~ -[B]MHz	0 MHz ~ -1 MHz	0 MHz ~ +1 MHz	1 MHz ~ +[B]MHz	+ [B]MHz ~ 3720 MHz	Above 3720 MHz
10	24/0	3555.00	-53.19	-52.08	-39.85	-40.36	-39.09	-39.77	-52.40	—
		3624.99	—	-44.21	-31.88	-31.77	-29.88	-31.96	-49.06	—
		3694.98	—	-44.59	-30.74	-30.25	-29.92	-29.82	-46.58	-47.48
15	36/0	3557.52	-52.76	-49.75	-41.86	-40.80	-49.01	-48.59	-52.61	—
		3624.99	—	-42.01	-33.66	-31.61	-40.32	-41.67	-49.67	—
		3692.49	—	-49.89	-42.52	-40.70	-49.23	-47.84	-48.17	-47.45
20	50/0	3560.01	-52.22	-49.51	-44.57	-42.81	-48.00	-47.94	-48.86	—
		3624.99	—	-43.21	-36.61	-33.61	-38.91	-42.15	-49.06	—
		3690.00	—	-49.96	-45.32	-42.93	-48.11	-47.40	-47.92	-47.64
30	75/0	3565.02	-49.83	-49.01	-46.25	-43.79	-52.94	-47.97	-49.90	—
		3624.99	—	-42.76	-38.72	-34.68	-46.89	-45.08	-47.99	—
		3684.99	—	-49.91	-47.76	-44.14	-53.51	-49.08	-47.31	-47.87
40	100/0	3570.00	-49.66	-48.84	-47.09	-43.35	-53.71	-48.49	-50.53	—
		3624.99	—	-48.92	-38.33	-33.75	-47.24	-44.55	-48.21	—
		3679.98	—	-48.86	-49.32	-43.80	-52.99	-48.95	-47.17	-47.41
Limit (dBm)			-40.00	-25.00	-13.00	-13.00	-13.00	-13.00	-25.00	-40.00

Note:

1. C.E = Channel Edge
2. Plots of the EUT's Channel Edge are shown Page 113 ~ 167.
3. Duty Cycle factor already applied on the factor.
 - Duty Cycle Factor(dB) = 6.99
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator
 - Result(dBm) = Reading + Factor

BW (MHz)	RB (Size/ Offset)	Freq. (MHz)	Outside of the authorized band (dBm)							
			Lower Side(MHz)				Upper Side(MHz)			
			Below 3530 MHz	-[B]MHz ~ 3530 MHz	-1 MHz ~ -[B]MHz	0 MHz ~ -1 MHz	0 MHz ~ +1 MHz	1 MHz ~ +[B]MHz	+ [B]MHz ~ 3720 MHz	Above 3720 MHz
10	Lower Side: 1/0 Upper Side: 1/23	3555.00	-52.40	-43.55	-31.86	-29.78	-28.62	-33.80	-46.22	—
		3624.99	—	-49.19	-40.13	-57.54	-55.48	-39.60	-44.21	—
		3694.98	—	-44.32	-32.02	-29.98	-29.06	-34.03	-45.29	-47.51
15	Lower Side: 1/0 Upper Side: 1/37	3557.52	-46.82	-41.74	-31.64	-29.68	-28.92	-33.47	-47.94	—
		3624.99	—	-49.69	-42.56	-58.83	-56.82	-40.48	-42.45	—
		3692.49	—	-44.02	-31.69	-27.73	-28.53	-33.34	-44.99	-47.59
20	Lower Side: 1/0 Upper Side: 1/50	3560.01	-44.02	-42.24	-32.35	-33.04	-34.04	-36.48	-47.47	—
		3624.99	—	-49.31	-45.09	-59.79	-56.08	-39.95	-44.36	—
		3690.00	—	-44.97	-33.54	-33.43	-34.19	-36.62	-46.17	-47.16
30	Lower Side: 1/0 Upper Side: 1/77	3565.02	-41.18	-40.95	-33.15	-37.11	-38.74	-37.39	-46.62	—
		3624.99	—	-47.73	-40.33	-61.42	-57.99	-40.40	-42.69	—
		3684.99	—	-43.88	-34.90	-39.38	-39.43	-37.33	-41.65	-45.17
40	Lower Side: 1/0 Upper Side: 1/105	3570.00	-41.26	-40.45	-33.40	-35.70	-37.26	-36.60	-50.13	—
		3624.99	—	-48.31	-40.40	-62.38	-57.56	-40.90	-48.97	—
		3679.98	—	-48.49	-35.44	-37.41	-38.50	-37.07	-42.46	-45.11
Limit (dBm)			-40.00	-25.00	-13.00	-13.00	-13.00	-13.00	-25.00	-40.00

Note:

1. C.E = Channel Edge
2. Plots of the EUT's Channel Edge are shown Page 113 ~ 167.
3. Duty Cycle factor already applied on the factor.
 - Duty Cycle Factor(dB) = 6.99
 - Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator
 - Result(dBm) = Reading + Factor

8.7 Adjacent Channel Leakage Ratio(ACLR)

Band Width	RB (Size/ Offset)	Frequency (MHz)	Adjacent Channel Leakage Ratio(dB)	
			Lower Side	Upper Side
10 MHz	24/0	3555.00	42.66	42.02
		3624.99	44.03	43.15
		3694.98	43.75	43.58
15 MHz	36/0	3557.52	43.42	47.20
		3624.99	44.62	50.79
		3692.49	43.09	45.34
20 MHz	50/0	3560.01	44.40	46.67
		3624.99	45.89	50.52
		3690.00	44.16	44.34
30 MHz	75/0	3565.02	39.66	43.12
		3624.99	43.90	49.68
		3684.99	42.76	42.97
40 MHz	100/0	3570.00	37.11	42.05
		3624.99	38.02	48.72
		3679.98	36.66	40.92
Limit (dB)			ACLR > 30dB	ACLR > 30dB

Note:

1. Duty Cycle factor already applied on the factor.

- Factor(dB) = Duty Cycle factor + Cable Loss + Ext. Attenuator + Power Splitter
- Result(dBm) = Reading + Factor
- Duty Cycle Factor(dB) = 6.990

2. Plots of the EUT's Adjacent Channel Leakage Ratio(ACLR) are shown Page 98 ~ 112.

8.8 FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE

- ▣ BandWidth: 10 MHz
- ▣ Voltage(100 %): 4.200 VDC
- ▣ Batt. Endpoint: 3.400 VDC
- ▣ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
3555.000	100 %	+20(Ref)	3555 000 005	0.0	0.000 000	0.000
	100 %	-30	3555 000 017	12.2	0.000 000	0.003
	100 %	-20	3555 000 018	12.7	0.000 000	0.004
	100 %	-10	3555 000 021	16.0	0.000 000	0.005
	100 %	0	3555 000 021	16.0	0.000 000	0.005
	100 %	+10	3555 000 009	3.5	0.000 000	0.001
	100 %	+30	3555 000 010	4.8	0.000 000	0.001
	100 %	+40	3555 000 020	15.0	0.000 000	0.004
	100 %	+50	3555 000 014	9.2	0.000 000	0.003
	Batt. Endpoint	+20	3555 000 016	10.7	0.000 000	0.003
3694.980	100 %	+20(Ref)	3694 980 014	0.0	0.000 000	0.000
	100 %	-30	3694 980 026	12.7	0.000 000	0.003
	100 %	-20	3694 980 018	4.7	0.000 000	0.001
	100 %	-10	3694 980 028	14.1	0.000 000	0.004
	100 %	0	3694 980 024	10.5	0.000 000	0.003
	100 %	+10	3694 980 028	14.3	0.000 000	0.004
	100 %	+30	3694 980 027	13.2	0.000 000	0.004
	100 %	+40	3694 980 024	10.1	0.000 000	0.003
	100 %	+50	3694 980 027	13.2	0.000 000	0.004
	Batt. Endpoint	+20	3694 980 021	7.8	0.000 000	0.002

- ☐ BandWidth: 15 MHz
☐ Voltage(100 %): 4.200 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
3557.520	100 %	+20(Ref)	3557 520 007	0.0	0.000 000	0.000
	100 %	-30	3557 520 018	10.6	0.000 000	0.003
	100 %	-20	3557 520 016	8.9	0.000 000	0.003
	100 %	-10	3557 520 020	13.0	0.000 000	0.004
	100 %	0	3557 520 013	5.7	0.000 000	0.002
	100 %	+10	3557 520 019	11.5	0.000 000	0.003
	100 %	+30	3557 520 019	11.4	0.000 000	0.003
	100 %	+40	3557 520 013	5.3	0.000 000	0.001
	100 %	+50	3557 520 020	12.5	0.000 000	0.004
	Batt. Endpoint	+20	3557 520 016	9.0	0.000 000	0.003
3692.490	100 %	+20(Ref)	3692 490 004	0.0	0.000 000	0.000
	100 %	-30	3692 490 019	15.3	0.000 000	0.004
	100 %	-20	3692 490 020	16.8	0.000 000	0.005
	100 %	-10	3692 490 012	8.5	0.000 000	0.002
	100 %	0	3692 490 019	14.9	0.000 000	0.004
	100 %	+10	3692 490 013	9.0	0.000 000	0.002
	100 %	+30	3692 490 012	8.4	0.000 000	0.002
	100 %	+40	3692 490 010	6.1	0.000 000	0.002
	100 %	+50	3692 490 016	12.1	0.000 000	0.003
	Batt. Endpoint	+20	3692 490 019	15.4	0.000 000	0.004

- ☐ BandWidth: 20 MHz
☐ Voltage(100 %): 4.200 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band

Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
3560.010	100 %	+20(Ref)	3560 010 006	0.0	0.000 000	0.000
	100 %	-30	3560 010 021	15.4	0.000 000	0.004
	100 %	-20	3560 010 014	8.2	0.000 000	0.002
	100 %	-10	3560 010 016	10.0	0.000 000	0.003
	100 %	0	3560 010 011	5.3	0.000 000	0.001
	100 %	+10	3560 010 012	6.4	0.000 000	0.002
	100 %	+30	3560 010 018	12.5	0.000 000	0.004
	100 %	+40	3560 010 011	5.6	0.000 000	0.002
	100 %	+50	3560 010 013	6.8	0.000 000	0.002
	Batt. Endpoint	+20	3560 010 016	10.0	0.000 000	0.003
3690.000	100 %	+20(Ref)	3690 000 013	0.0	0.000 000	0.000
	100 %	-30	3690 000 017	4.1	0.000 000	0.001
	100 %	-20	3690 000 028	15.6	0.000 000	0.004
	100 %	-10	3690 000 017	4.5	0.000 000	0.001
	100 %	0	3690 000 021	7.9	0.000 000	0.002
	100 %	+10	3690 000 029	16.5	0.000 000	0.004
	100 %	+30	3690 000 027	13.9	0.000 000	0.004
	100 %	+40	3690 000 028	14.8	0.000 000	0.004
	100 %	+50	3690 000 018	4.8	0.000 000	0.001
	Batt. Endpoint	+20	3690 000 020	6.8	0.000 000	0.002

- ☐ BandWidth: 30 MHz
☐ Voltage(100 %): 4.200 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
3565.020	100 %	+20(Ref)	3565 020 015	0.0	0.000 000	0.000
	100 %	-30	3565 020 029	14.3	0.000 000	0.004
	100 %	-20	3565 020 023	8.6	0.000 000	0.002
	100 %	-10	3565 020 021	5.9	0.000 000	0.002
	100 %	0	3565 020 021	6.7	0.000 000	0.002
	100 %	+10	3565 020 024	9.6	0.000 000	0.003
	100 %	+30	3565 020 028	13.3	0.000 000	0.004
	100 %	+40	3565 020 028	13.4	0.000 000	0.004
	100 %	+50	3565 020 023	8.5	0.000 000	0.002
	Batt. Endpoint	+20	3565 020 028	13.1	0.000 000	0.004
3684.990	100 %	+20(Ref)	3684 990 011	0.0	0.000 000	0.000
	100 %	-30	3684 990 027	16.0	0.000 000	0.004
	100 %	-20	3684 990 016	5.1	0.000 000	0.001
	100 %	-10	3684 990 014	3.2	0.000 000	0.001
	100 %	0	3684 990 018	7.3	0.000 000	0.002
	100 %	+10	3684 990 027	15.9	0.000 000	0.004
	100 %	+30	3684 990 025	13.6	0.000 000	0.004
	100 %	+40	3684 990 018	6.6	0.000 000	0.002
	100 %	+50	3684 990 016	4.5	0.000 000	0.001
	Batt. Endpoint	+20	3684 990 026	15.3	0.000 000	0.004

- ☐ BandWidth: 40 MHz
☐ Voltage(100 %): 4.200 VDC
☐ Batt. Endpoint: 3.400 VDC
☐ LIMIT: Emission must remain in band


Test. Frequency (MHz)	Voltage (%)	Temp. (°C)	Frequency (Hz)	Frequency Error (Hz)	Deviation (%)	ppm
3570.000	100 %	+20(Ref)	3570 000 017	0.0	0.000 000	0.000
	100 %	-30	3570 000 031	14.2	0.000 000	0.004
	100 %	-20	3570 000 025	8.7	0.000 000	0.002
	100 %	-10	3570 000 028	11.4	0.000 000	0.003
	100 %	0	3570 000 029	12.7	0.000 000	0.004
	100 %	+10	3570 000 029	12.7	0.000 000	0.004
	100 %	+30	3570 000 026	9.4	0.000 000	0.003
	100 %	+40	3570 000 029	12.0	0.000 000	0.003
	100 %	+50	3570 000 032	15.5	0.000 000	0.004
	Batt. Endpoint	+20	3570 000 028	11.2	0.000 000	0.003
3679.980	100 %	+20(Ref)	3679 980 003	0.0	0.000 000	0.000
	100 %	-30	3679 980 007	3.4	0.000 000	0.001
	100 %	-20	3679 980 018	14.7	0.000 000	0.004
	100 %	-10	3679 980 007	3.8	0.000 000	0.001
	100 %	0	3679 980 017	13.5	0.000 000	0.004
	100 %	+10	3679 980 010	6.3	0.000 000	0.002
	100 %	+30	3679 980 015	11.8	0.000 000	0.003
	100 %	+40	3679 980 018	14.4	0.000 000	0.004
	100 %	+50	3679 980 020	16.7	0.000 000	0.005
	Batt. Endpoint	+20	3679 980 012	8.2	0.000 000	0.002

9. TEST PLOTS


Sub6 n48. Occupied Bandwidth Plot (10 MHz Ch. 641666 BPSK)

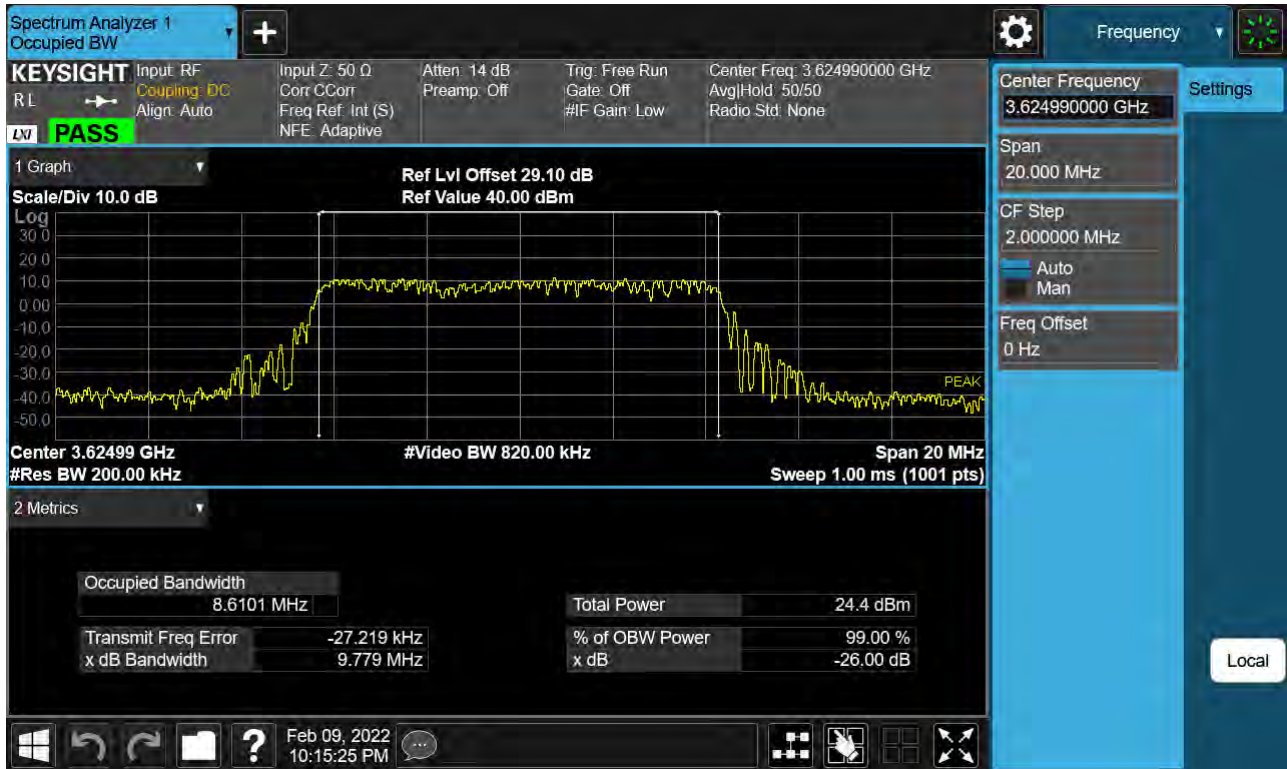


Sub6 n48. Occupied Bandwidth Plot (10 MHz Ch. 641666 QPSK)

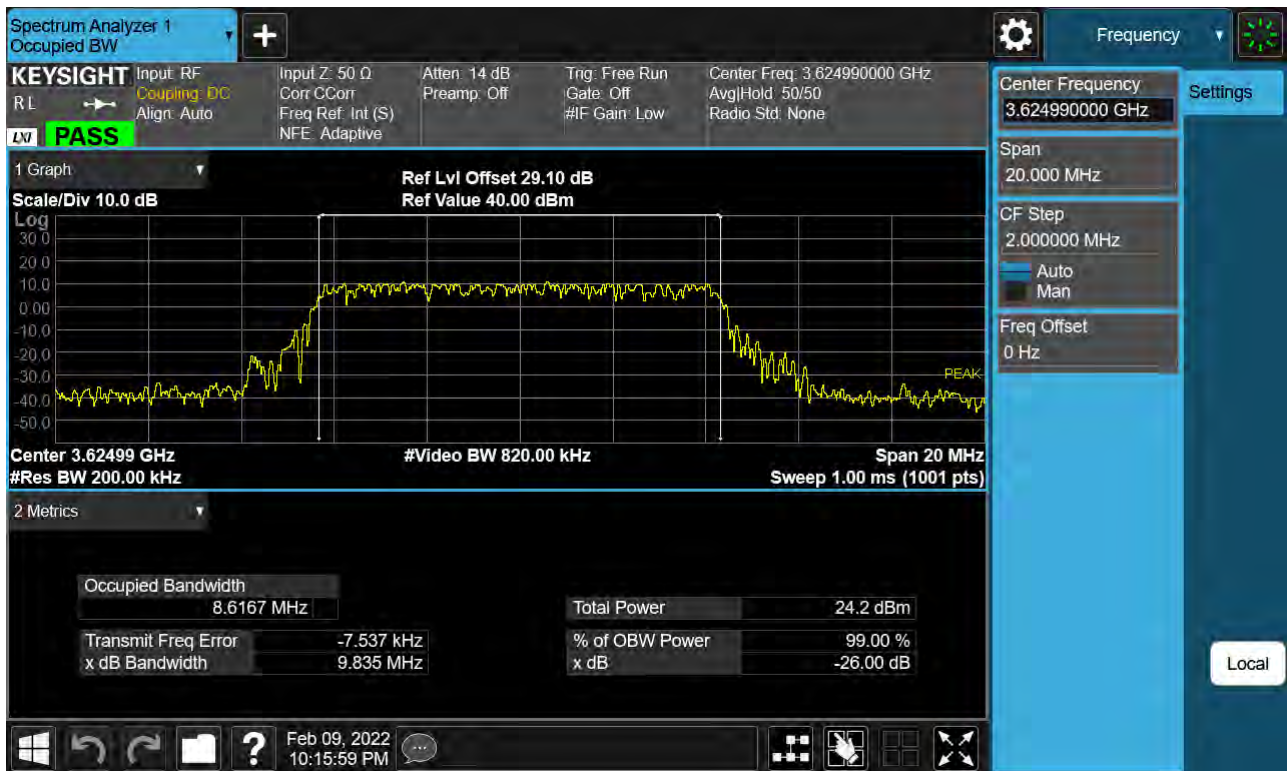


Sub6 n48. Occupied Bandwidth Plot (10 MHz Ch.641666 16-QAM)

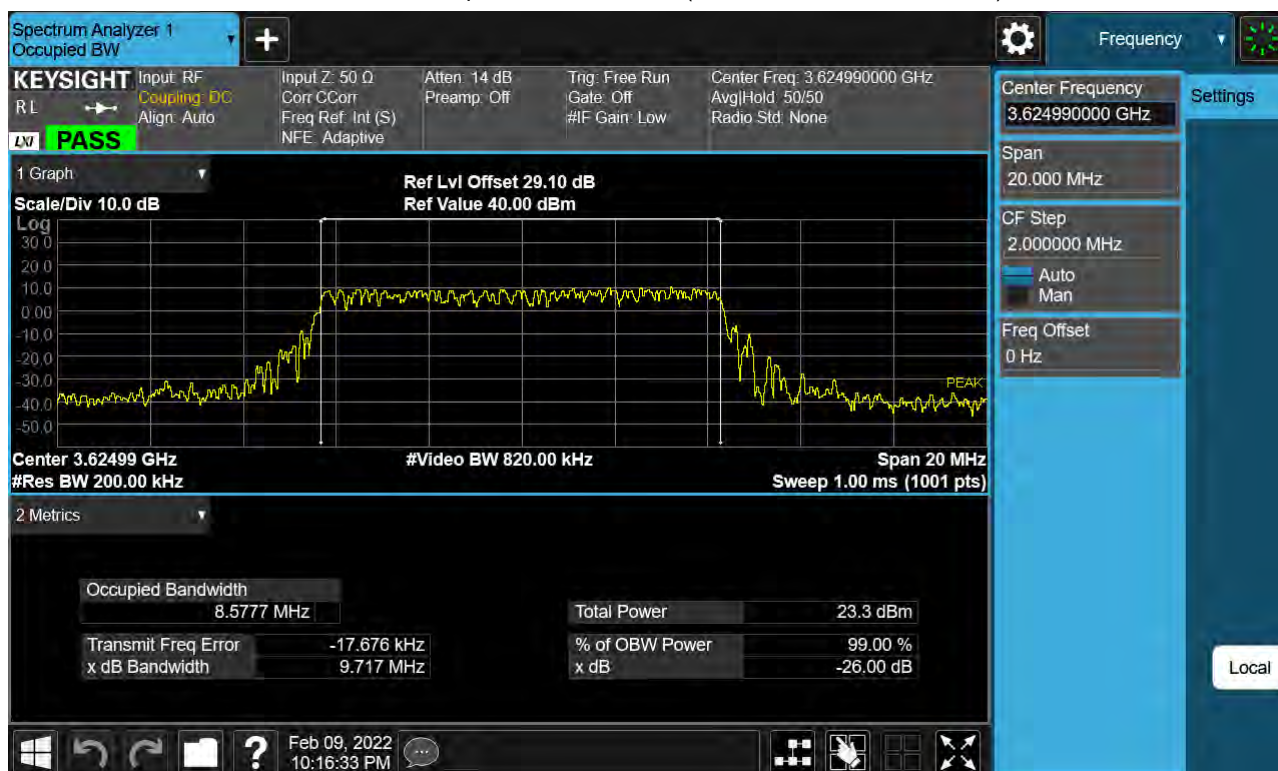


Sub6 n48. Occupied Bandwidth Plot (10 MHz Ch.641666 64-QAM)

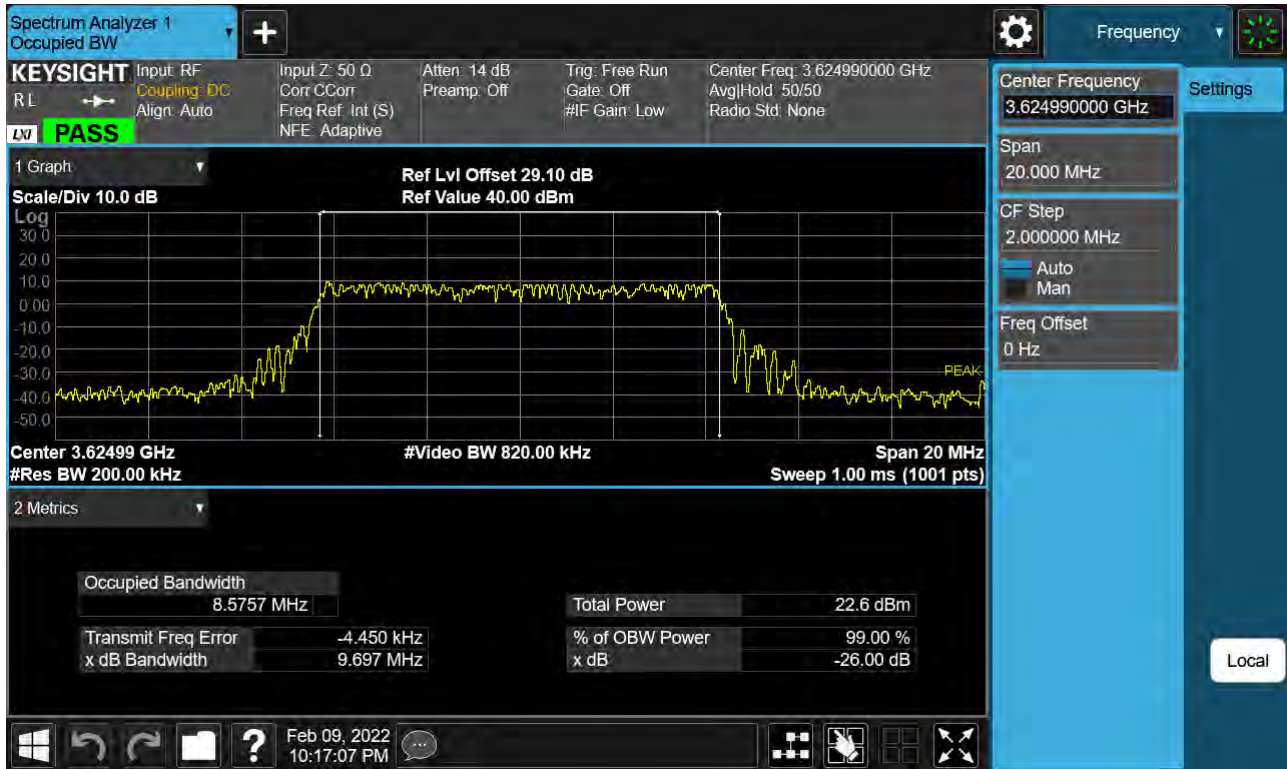


Sub6 n48. Occupied Bandwidth Plot (10 MHz Ch.641666 256-QAM)

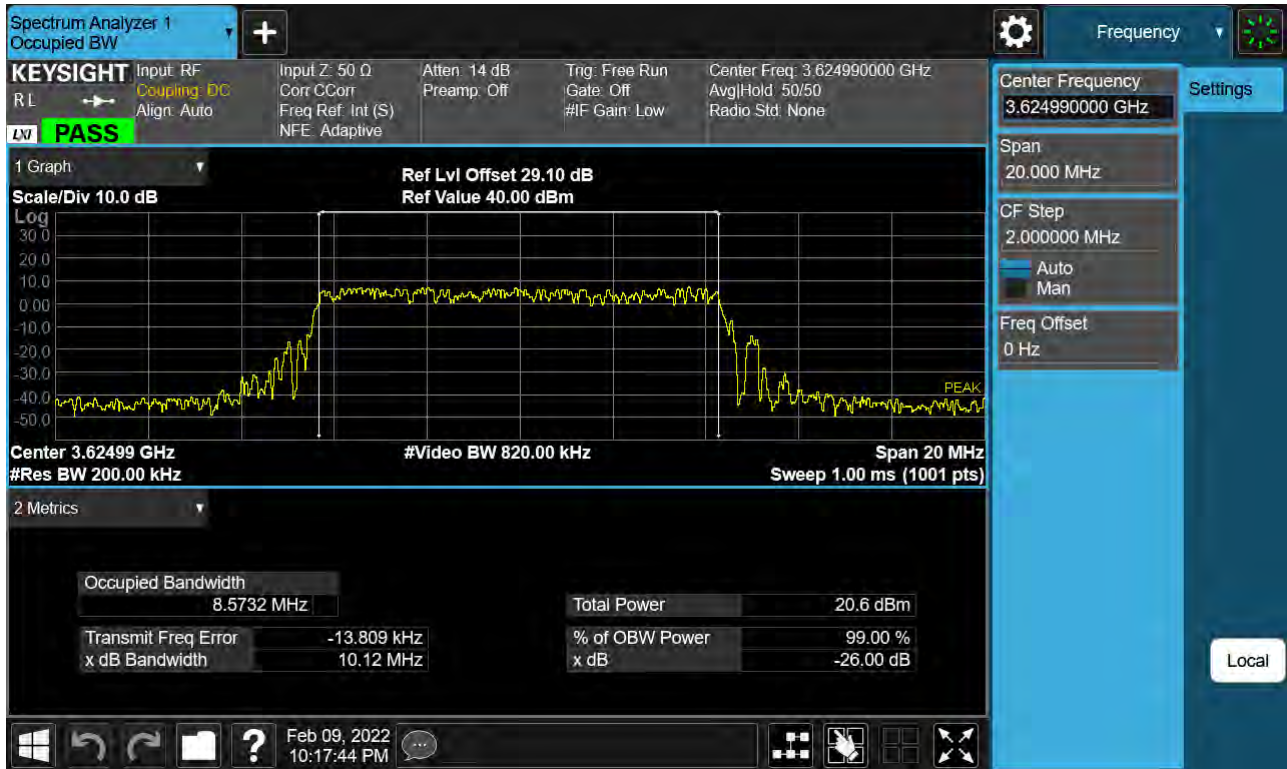


Sub6 n48. Occupied Bandwidth Plot (15 MHz Ch. 641666 BPSK)

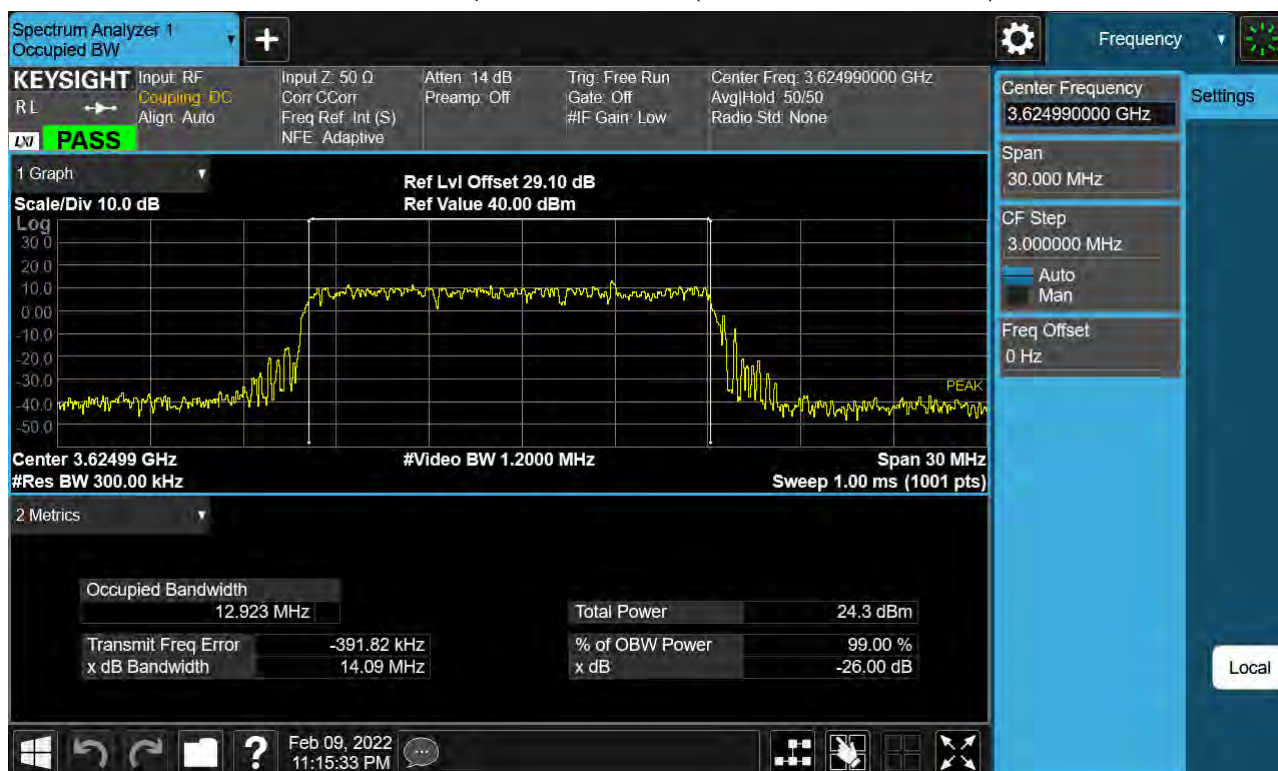


Sub6 n48. Occupied Bandwidth Plot (15 MHz Ch. 641666 QPSK)

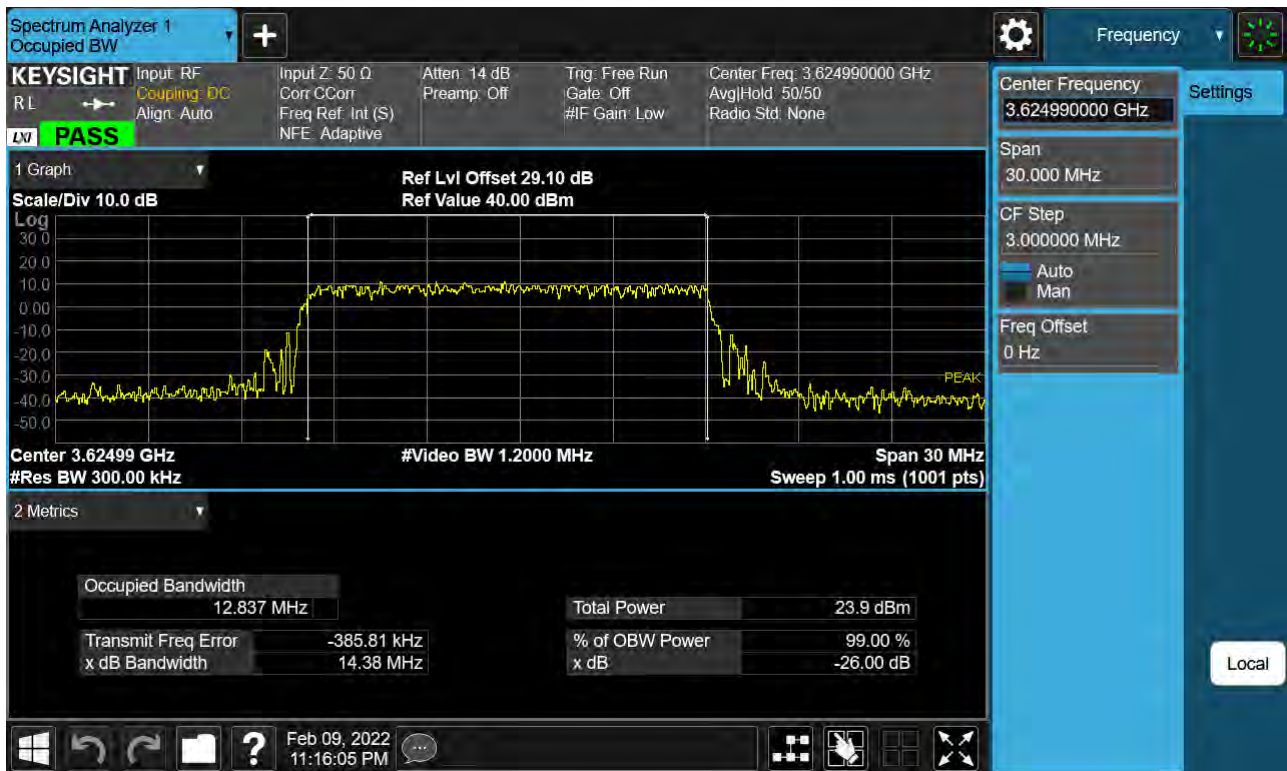


Sub6 n48. Occupied Bandwidth Plot (15 MHz Ch.641666 16-QAM)

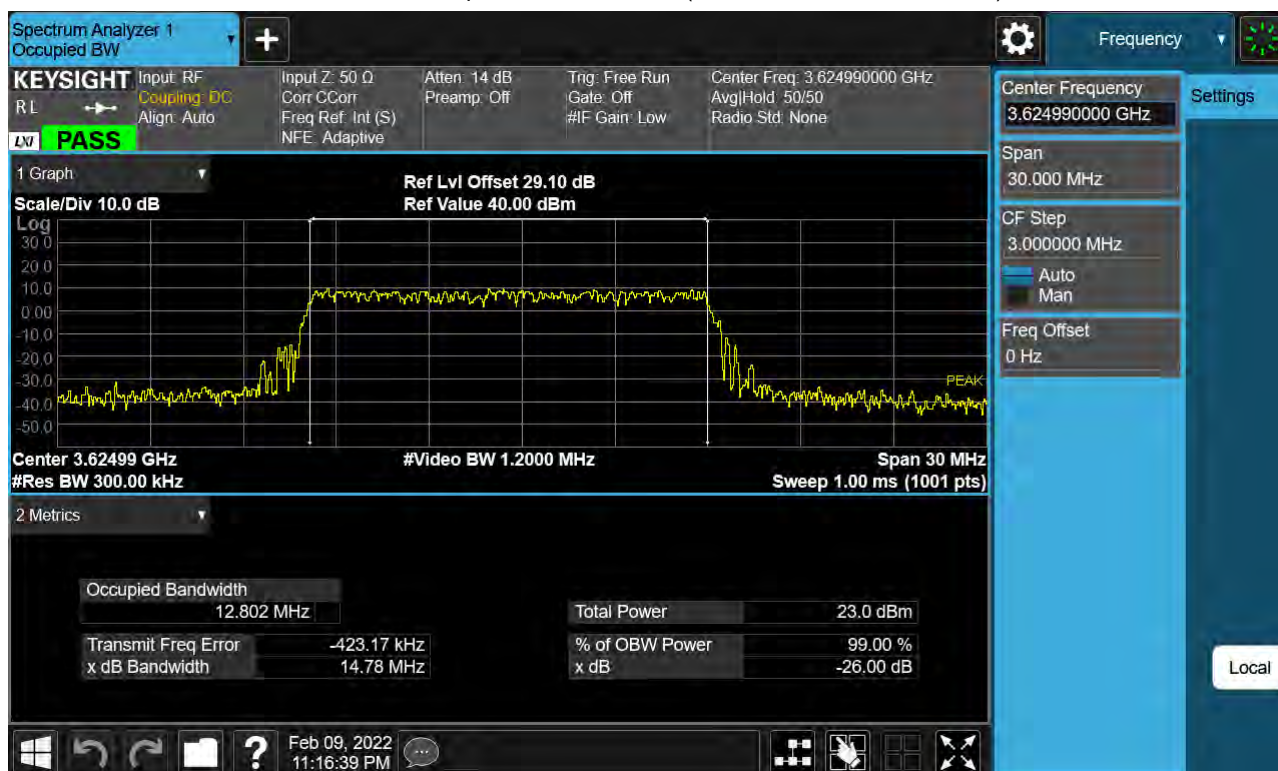


Sub6 n48. Occupied Bandwidth Plot (15 MHz Ch.641666 64-QAM)

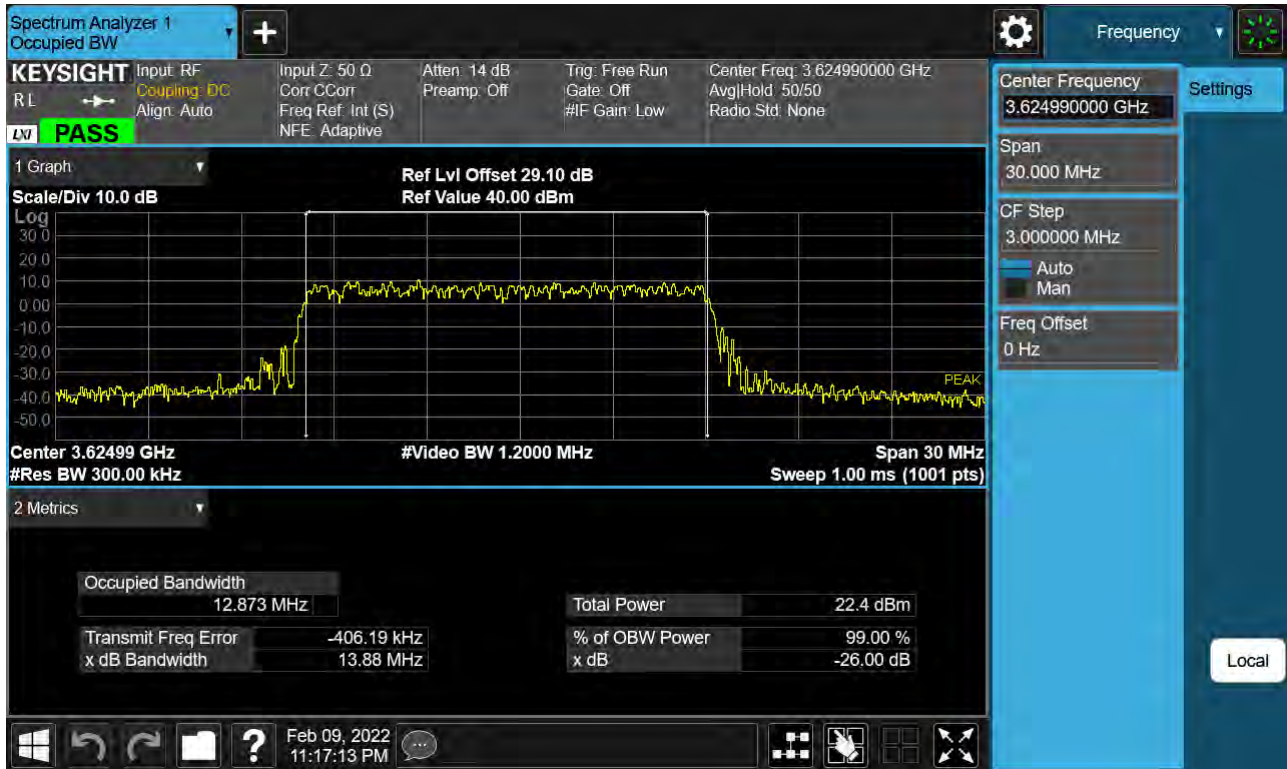


Sub6 n48. Occupied Bandwidth Plot (15 MHz Ch.641666 256-QAM)

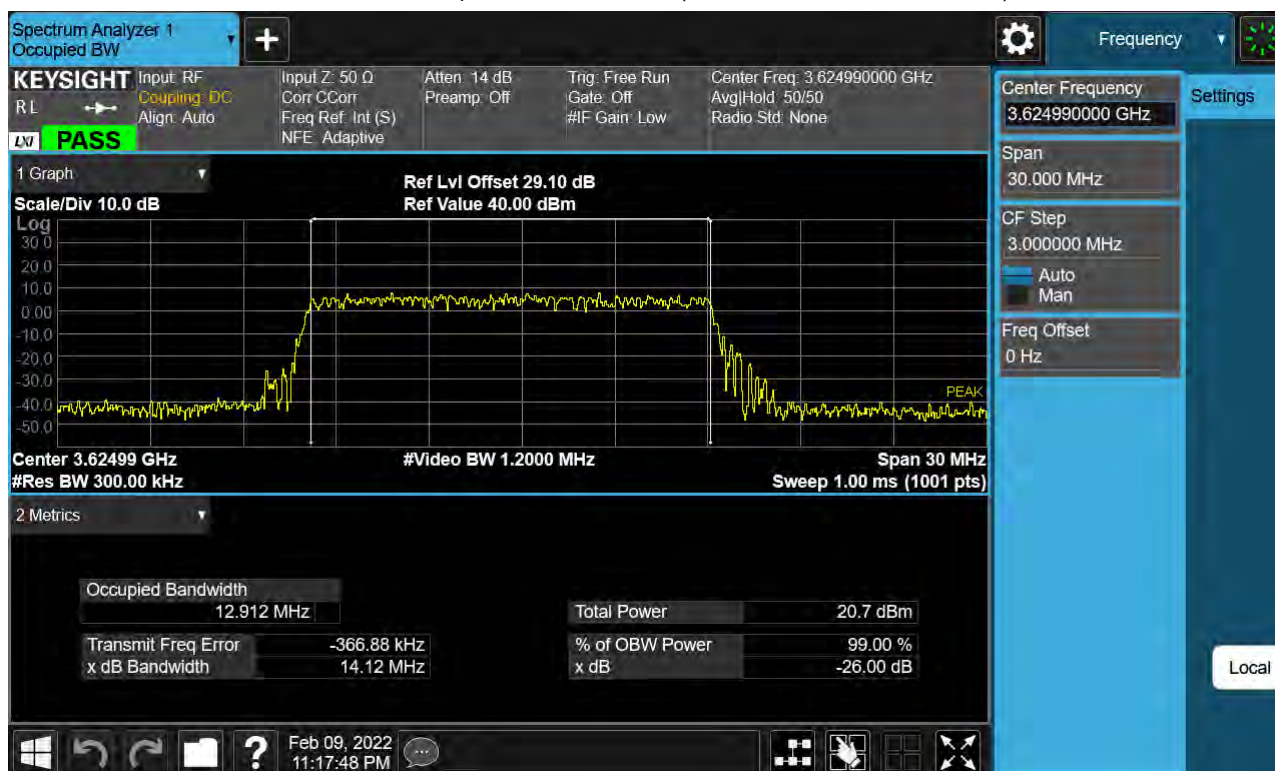


Sub6 n48. Occupied Bandwidth Plot (20 MHz Ch. 641666 BPSK)

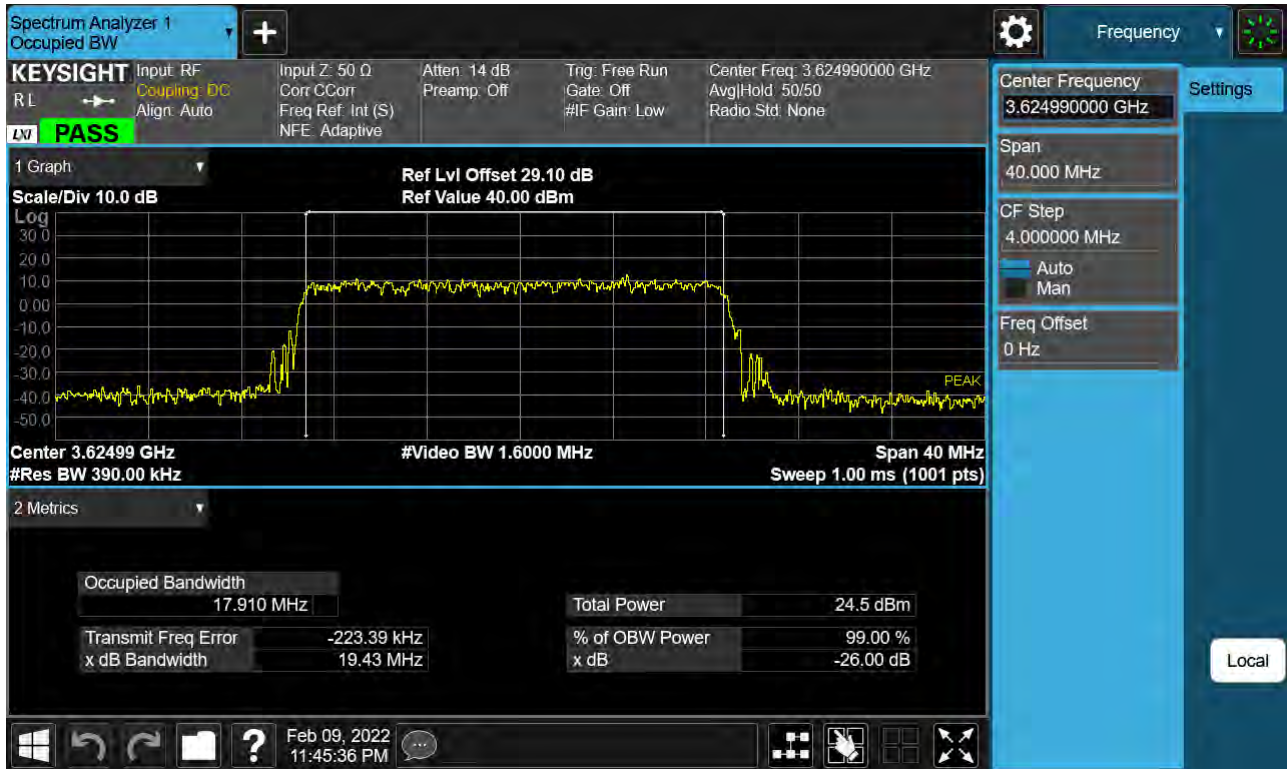


Sub6 n48. Occupied Bandwidth Plot (20 MHz Ch. 641666 QPSK)

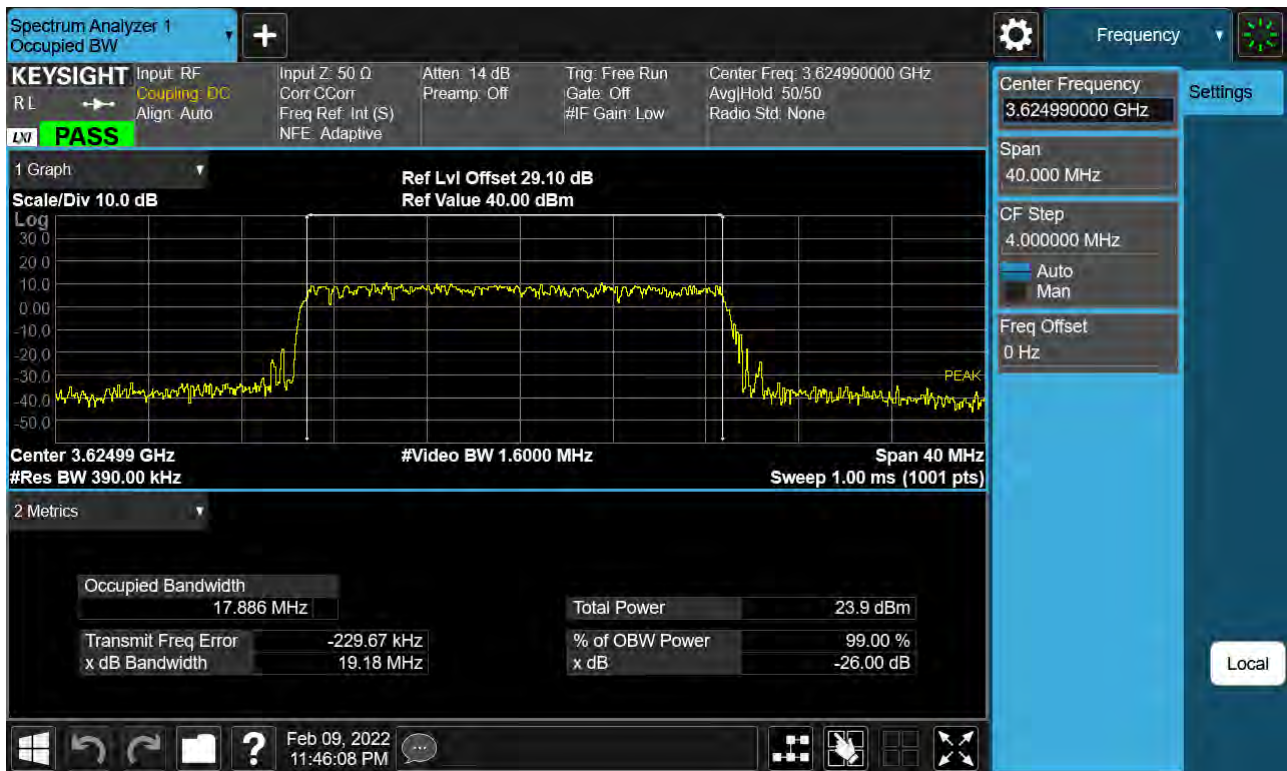


Sub6 n48. Occupied Bandwidth Plot (20 MHz Ch.641666 16-QAM)

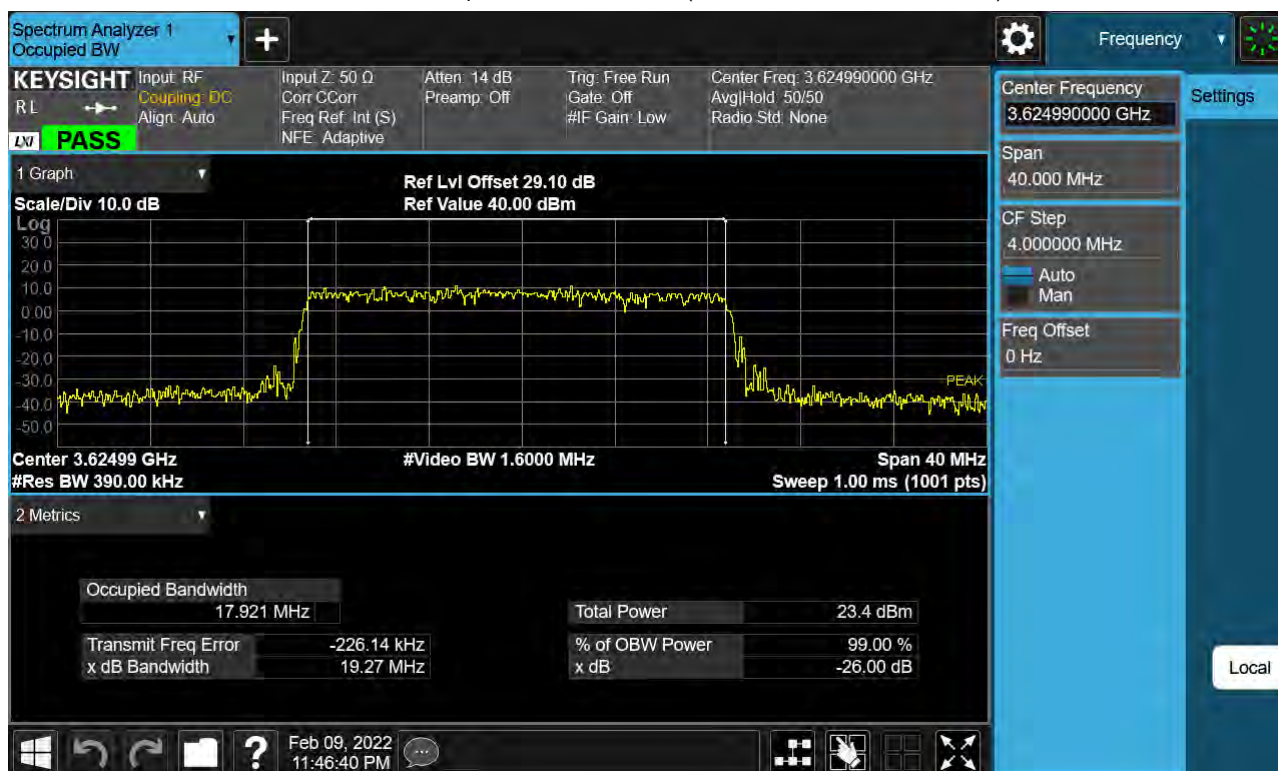


Sub6 n48. Occupied Bandwidth Plot (20 MHz Ch.641666 64-QAM)

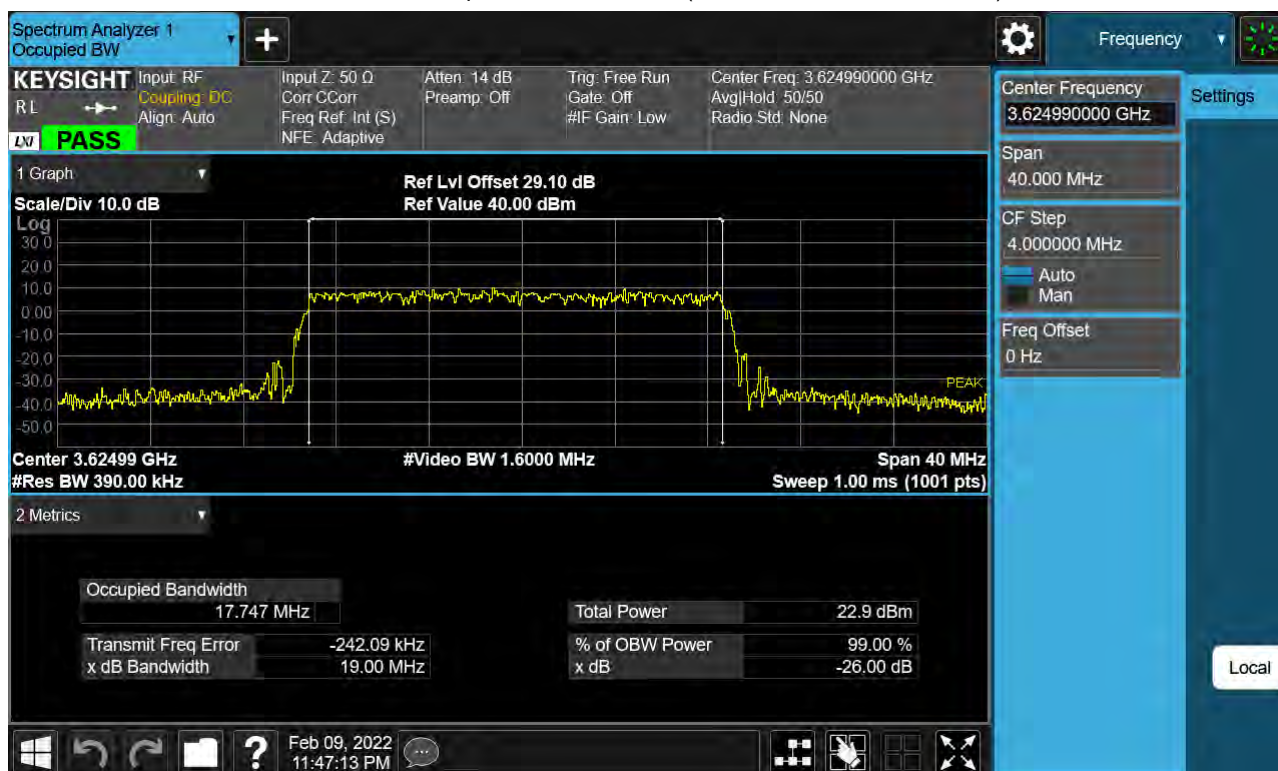


Sub6 n48. Occupied Bandwidth Plot (20 MHz Ch.641666 256-QAM)

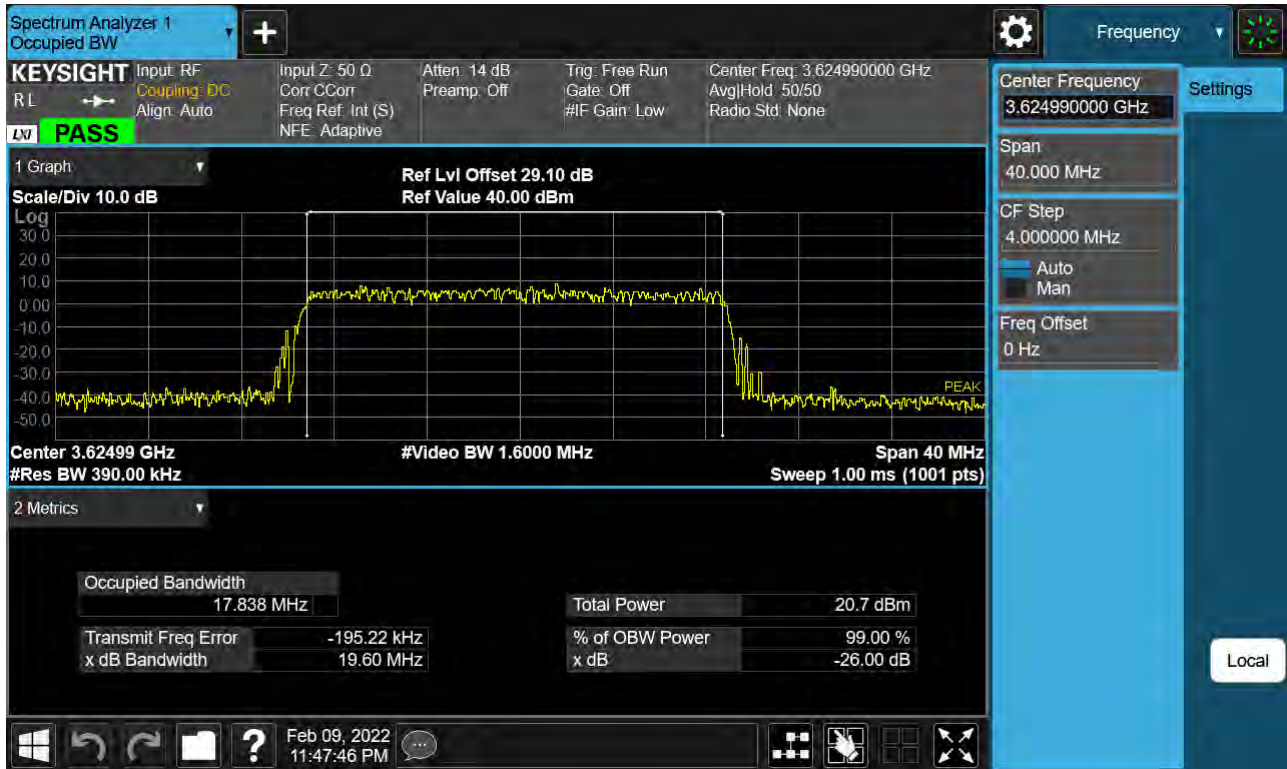


Sub6 n48. Occupied Bandwidth Plot (30 MHz Ch. 641666 BPSK)

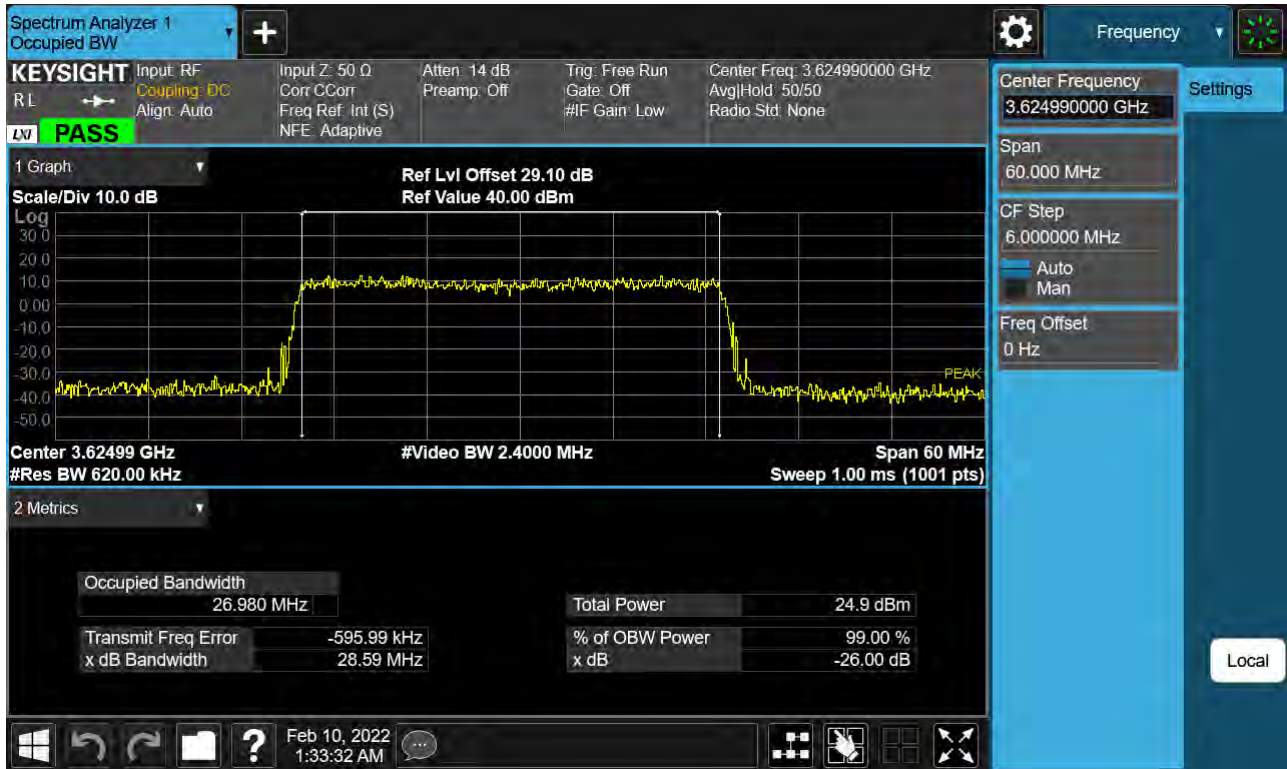


Sub6 n48. Occupied Bandwidth Plot (30 MHz Ch. 641666 QPSK)

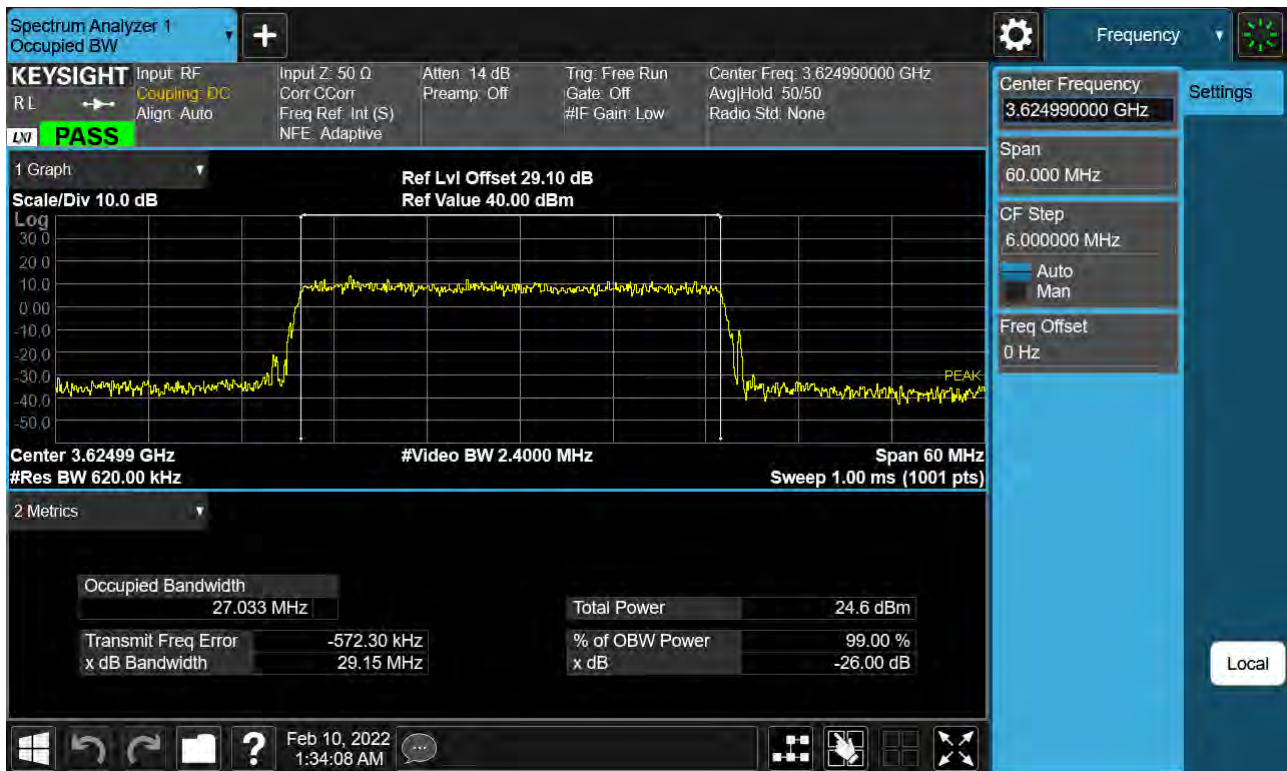


Sub6 n48. Occupied Bandwidth Plot (30 MHz Ch.641666 16-QAM)

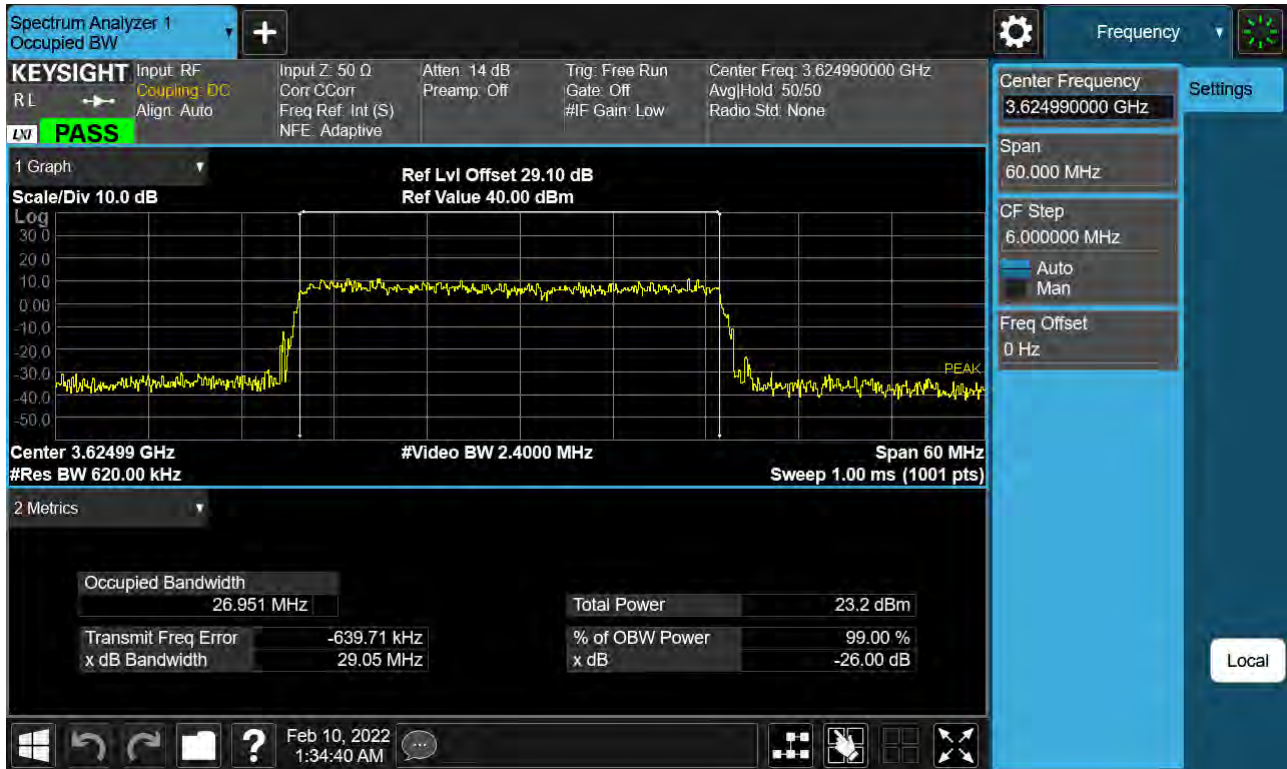


Sub6 n48. Occupied Bandwidth Plot (30 MHz Ch.641666 64-QAM)

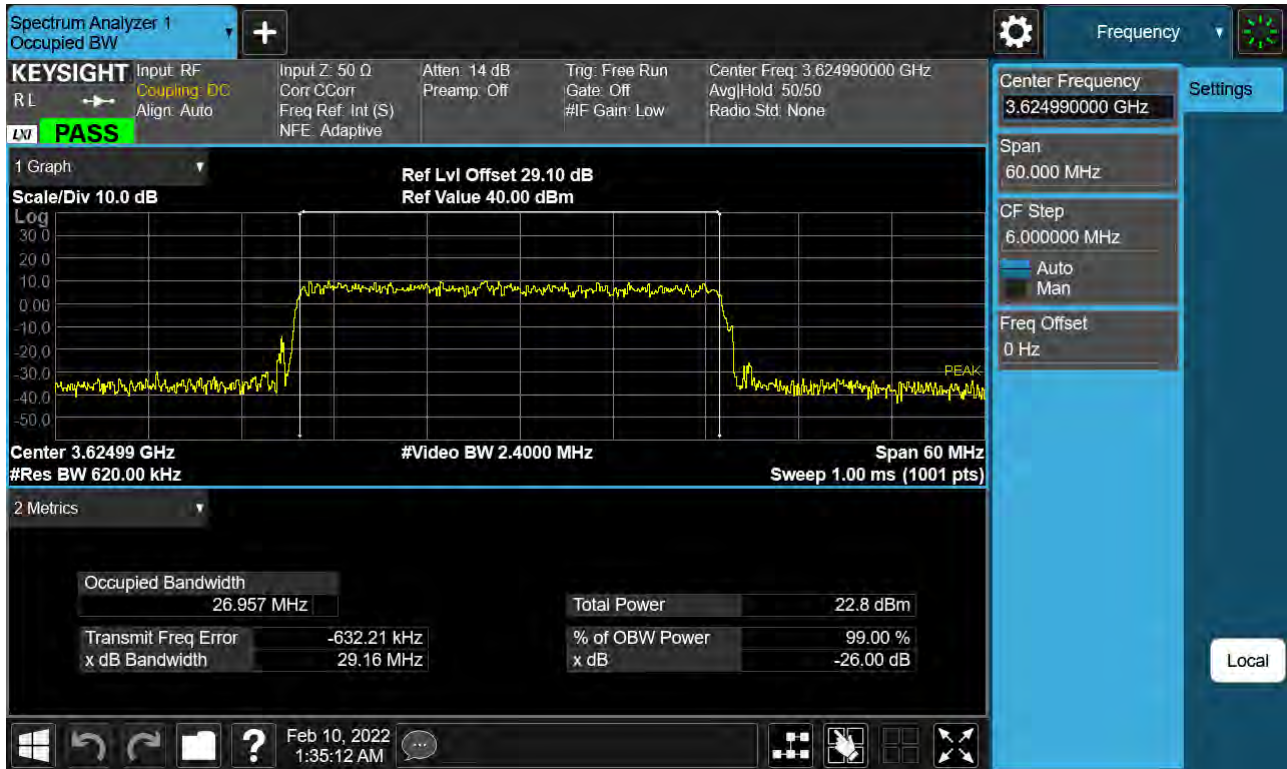


Sub6 n48. Occupied Bandwidth Plot (30 MHz Ch.641666 256-QAM)

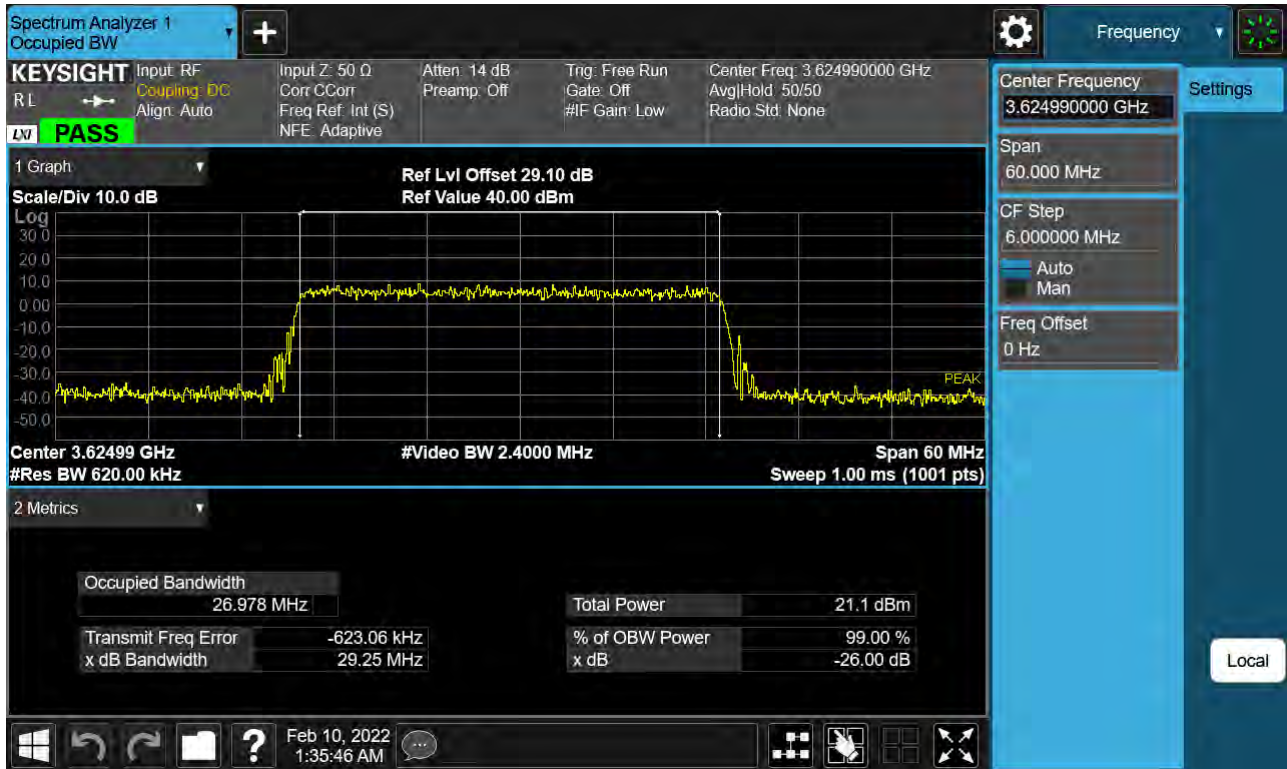


Sub6 n48. Occupied Bandwidth Plot (40 MHz Ch. 641666 BPSK)

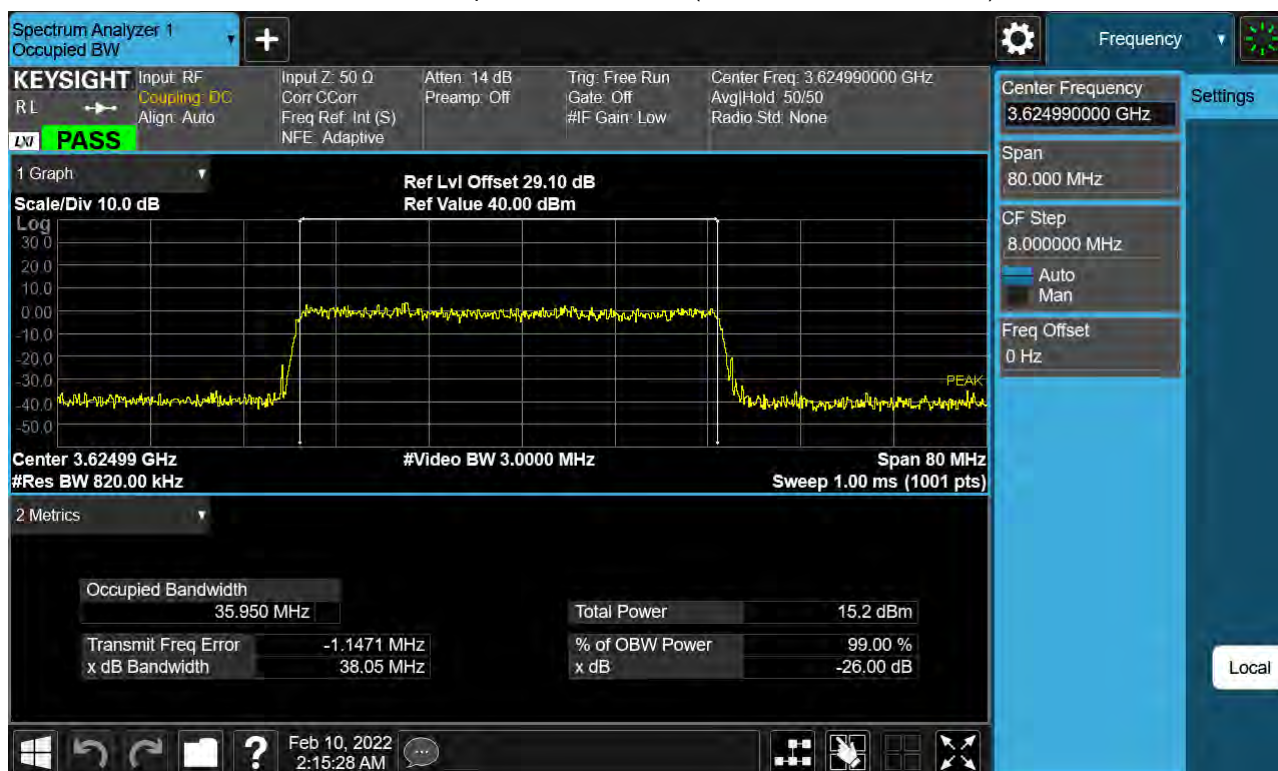


Sub6 n48. Occupied Bandwidth Plot (40 MHz Ch. 641666 QPSK)

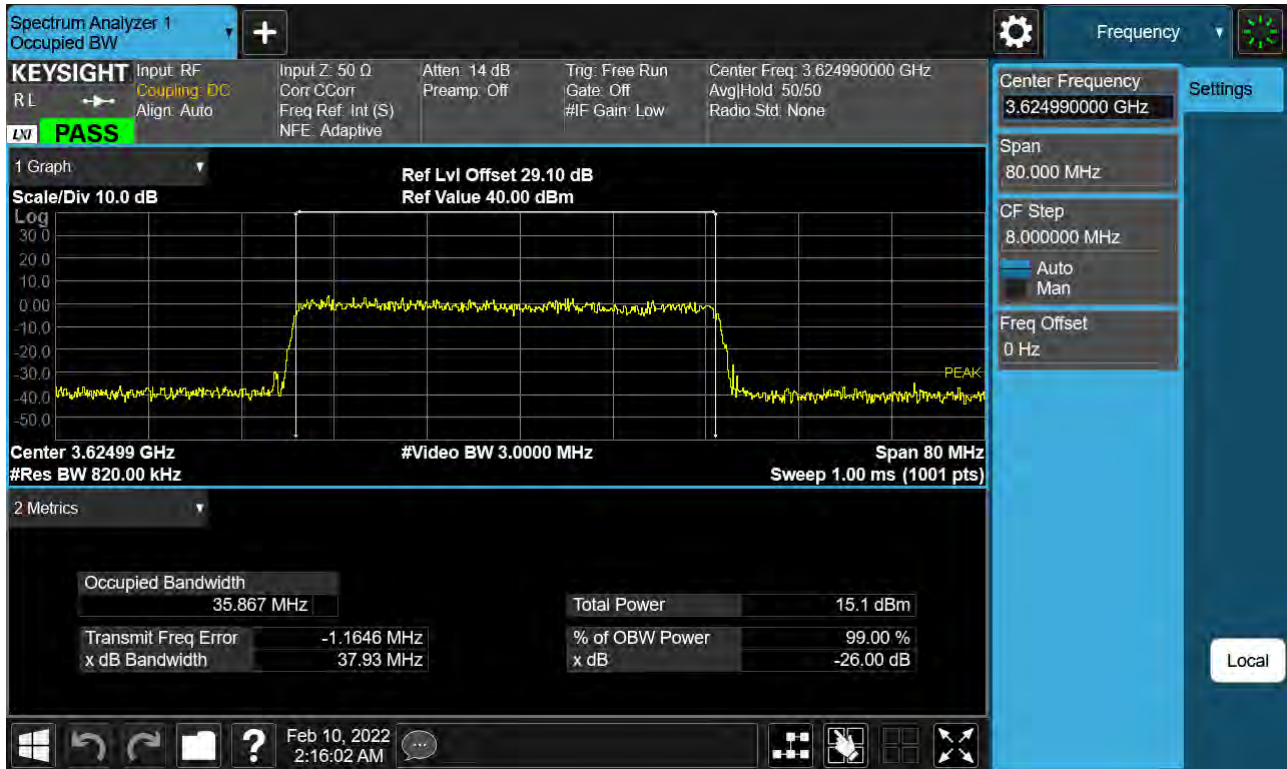


Sub6 n48. Occupied Bandwidth Plot (40 MHz Ch.641666 16-QAM)

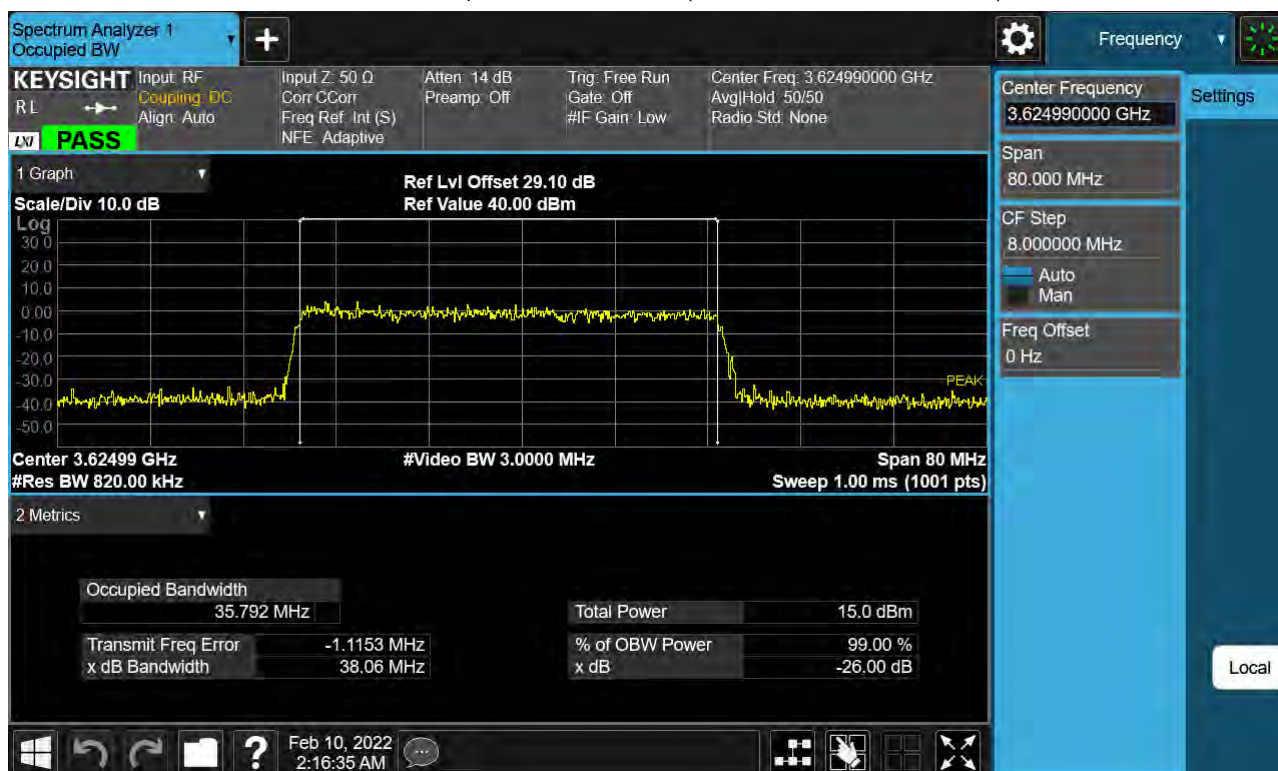


Sub6 n48. Occupied Bandwidth Plot (40 MHz Ch.641666 64-QAM)

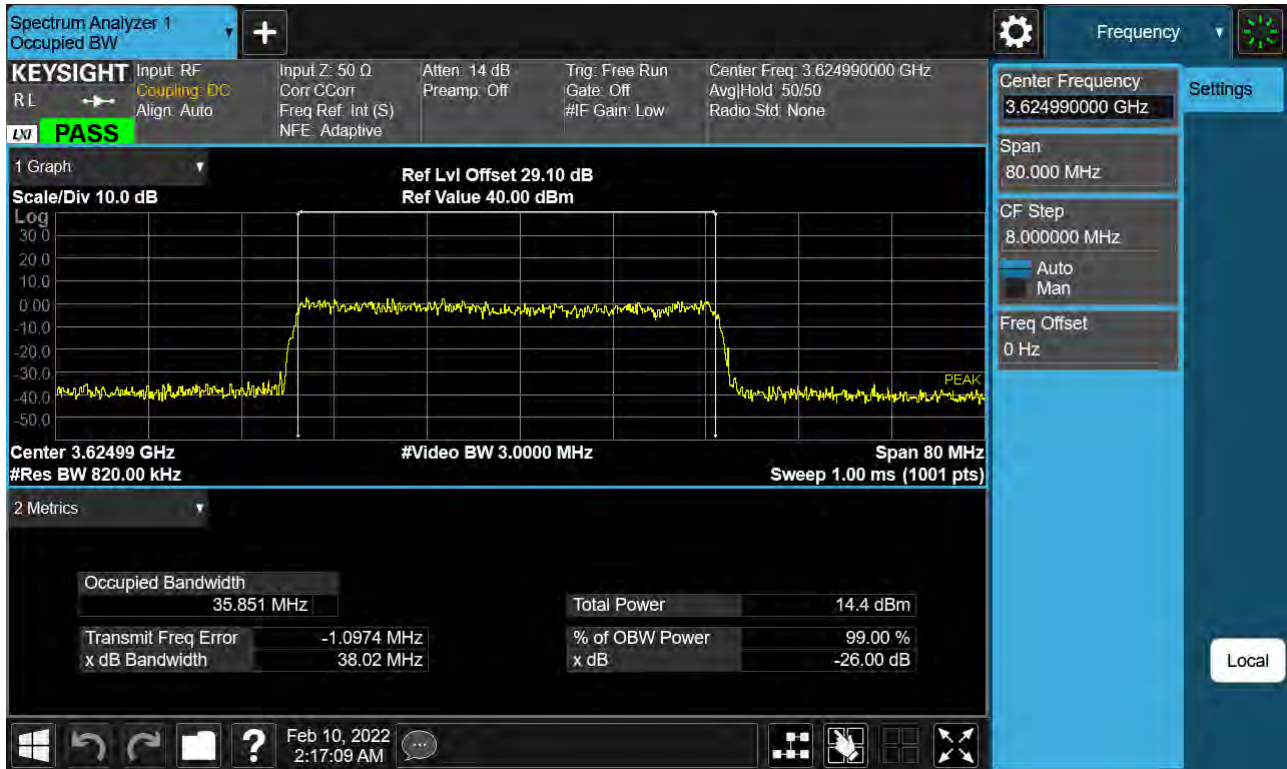

Sub6 n48. Occupied Bandwidth Plot (40 MHz Ch.641666 256-QAM)

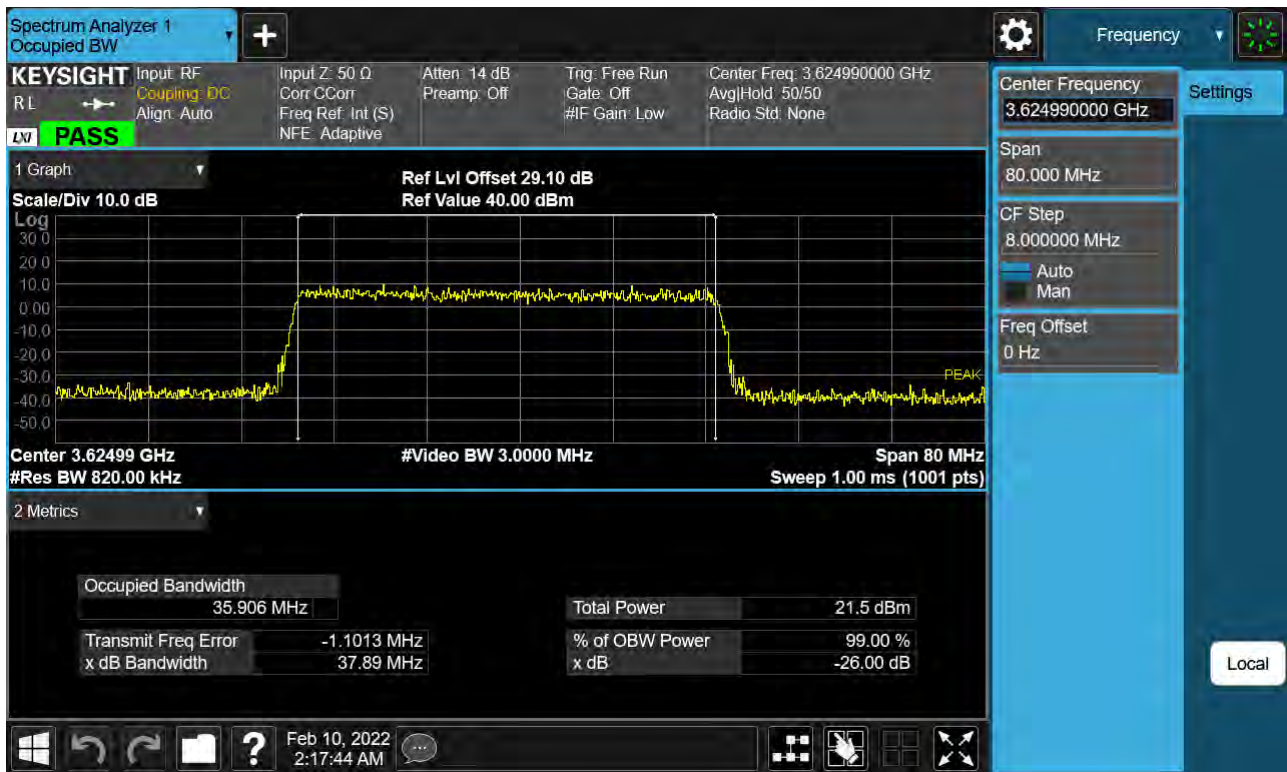

Sub6 n48. PAR Plot (10 MHz Ch. 641666 BPSK)

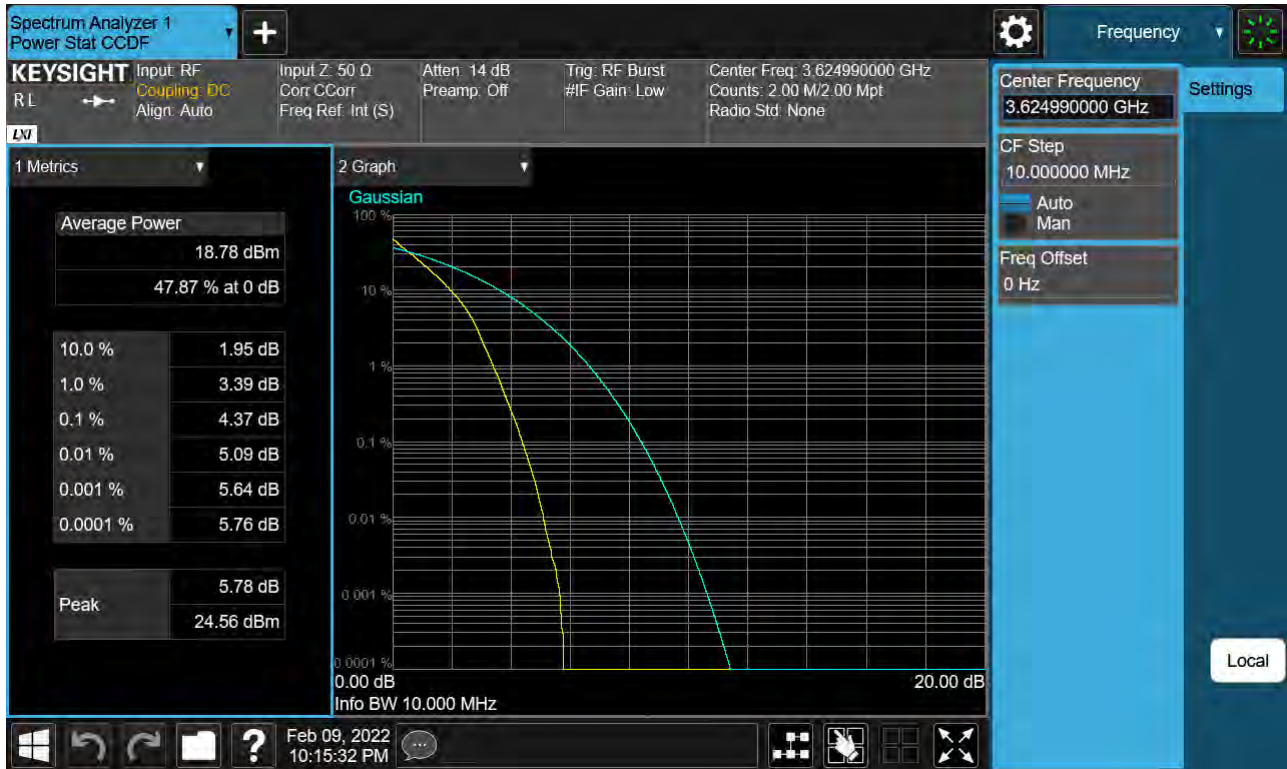


Sub6 n48. PAR Plot (10 MHz Ch. 641666 QPSK)



Sub6 n48. PAR Plot (10 MHz Ch.641666 16-QAM)




Sub6 n48. PAR Plot (10 MHz Ch.641666 64-QAM)

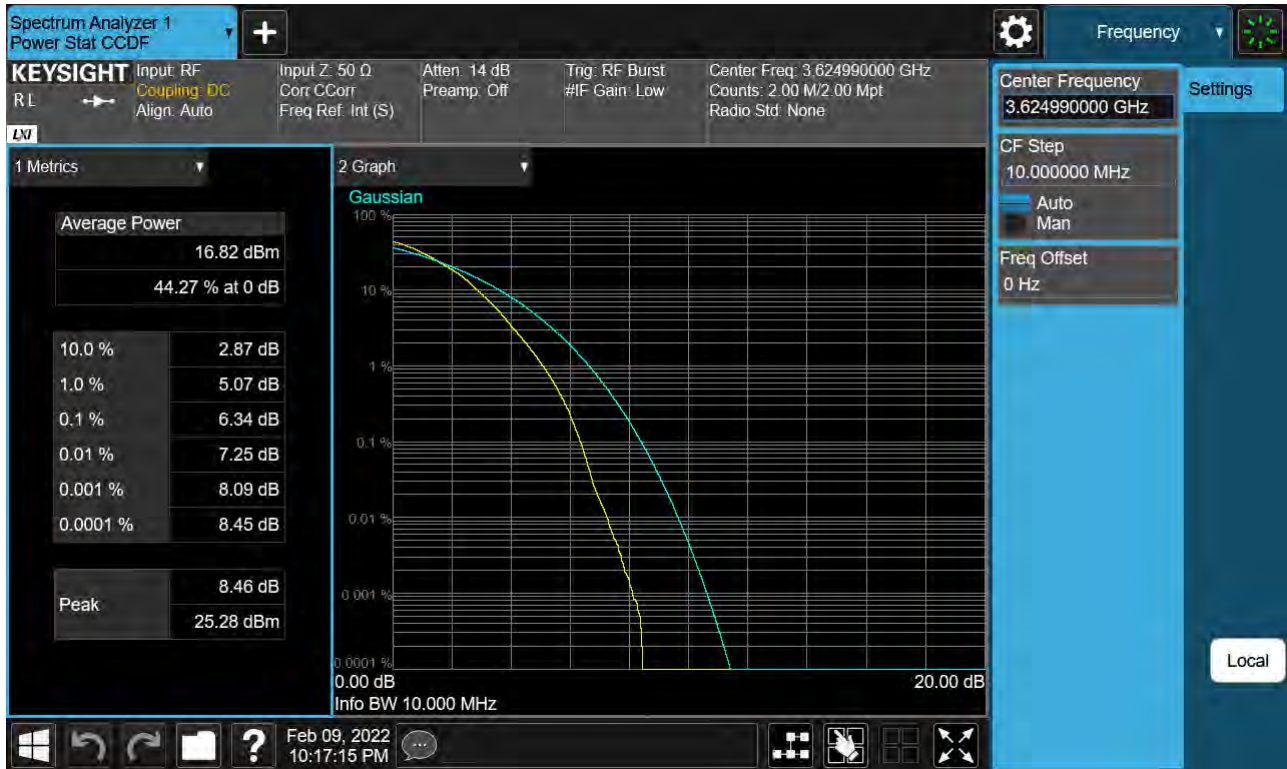

Sub6 n48. PAR Plot (10 MHz Ch.641666 256-QAM)



Sub6 n48. PAR Plot (15 MHz Ch. 641666 BPSK RB 36)

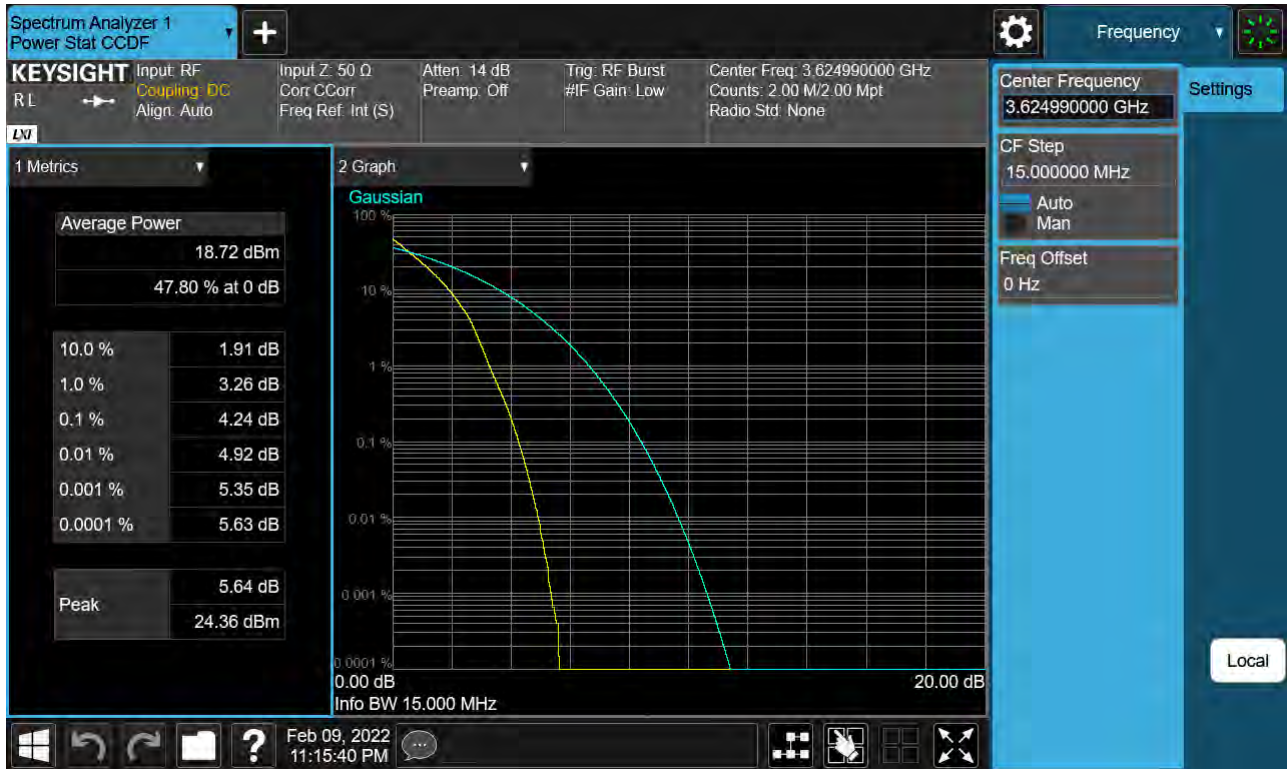

Sub6 n48. PAR Plot (15 MHz Ch. 641666 QPSK)



Sub6 n48. PAR Plot (15 MHz Ch.641666 16-QAM)




Sub6 n48. PAR Plot (15 MHz Ch.641666 64-QAM)




Sub6 n48. PAR Plot (15 MHz Ch.641666 256-QAM)



Sub6 n48. PAR Plot (20 MHz Ch. 641666 BPSK)

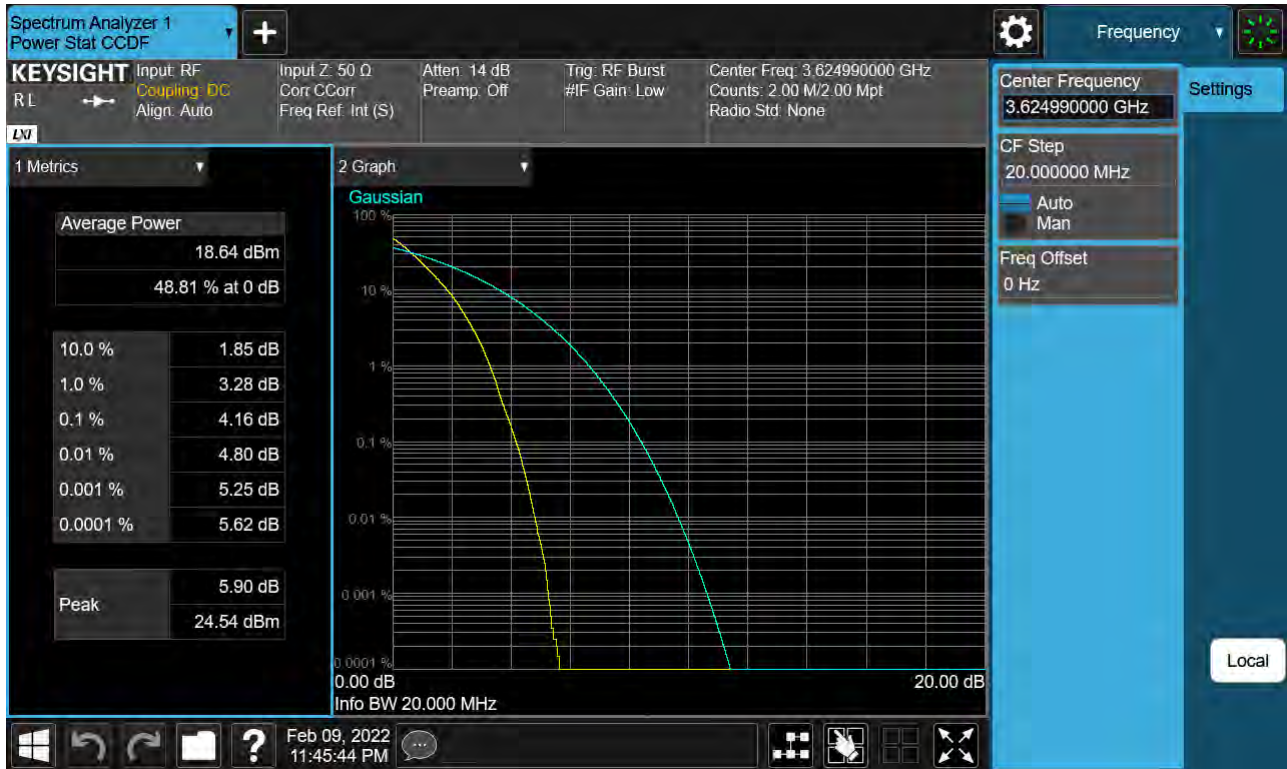


Sub6 n48. PAR Plot (20 MHz Ch. 641666 QPSK)

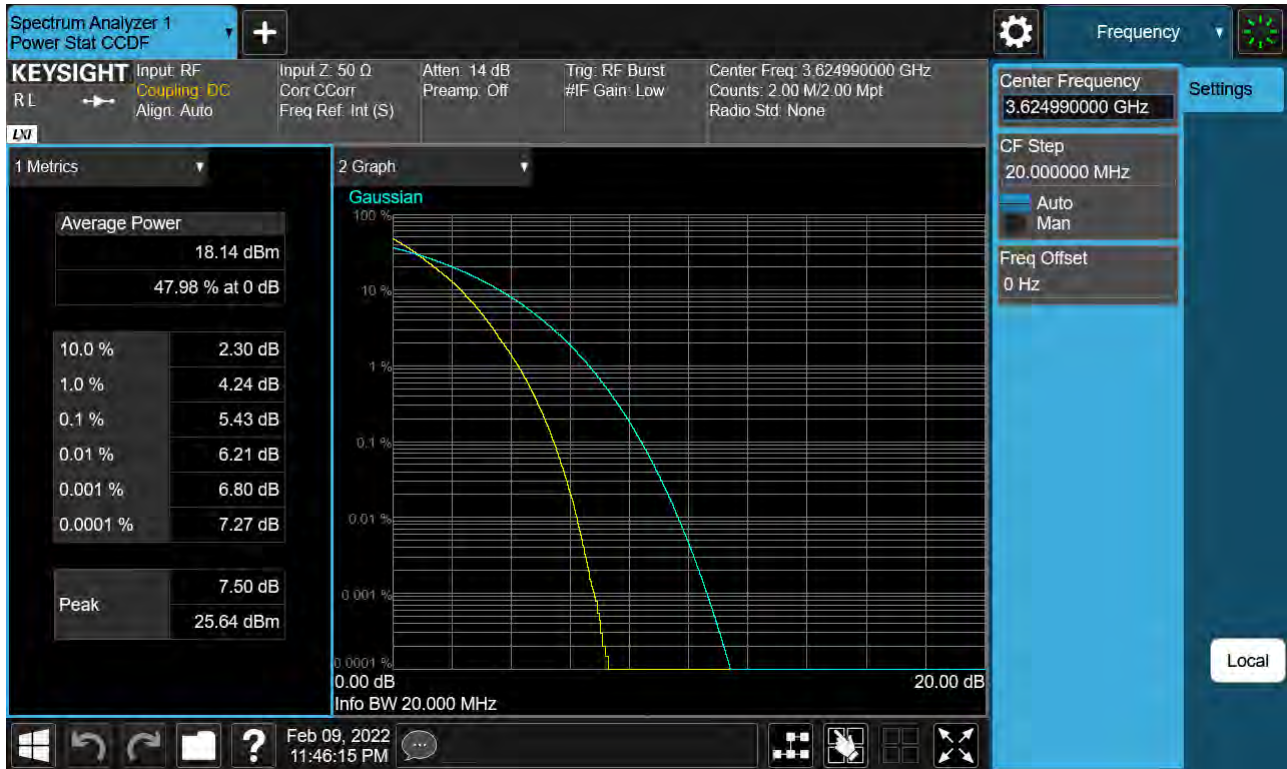


Sub6 n48. PAR Plot (20 MHz Ch.641666 16-QAM)



Sub6 n48. PAR Plot (20 MHz Ch.641666 64-QAM)

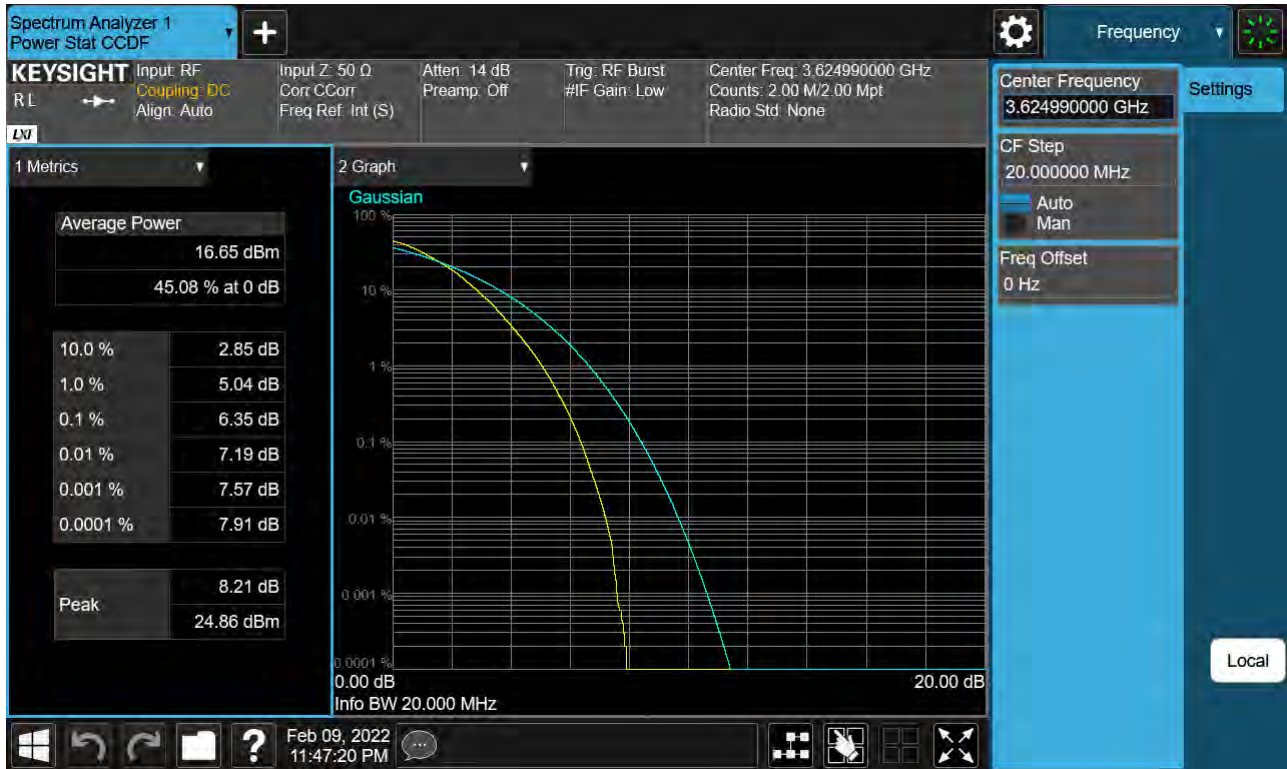

Sub6 n48. PAR Plot (20 MHz Ch.641666 256-QAM)

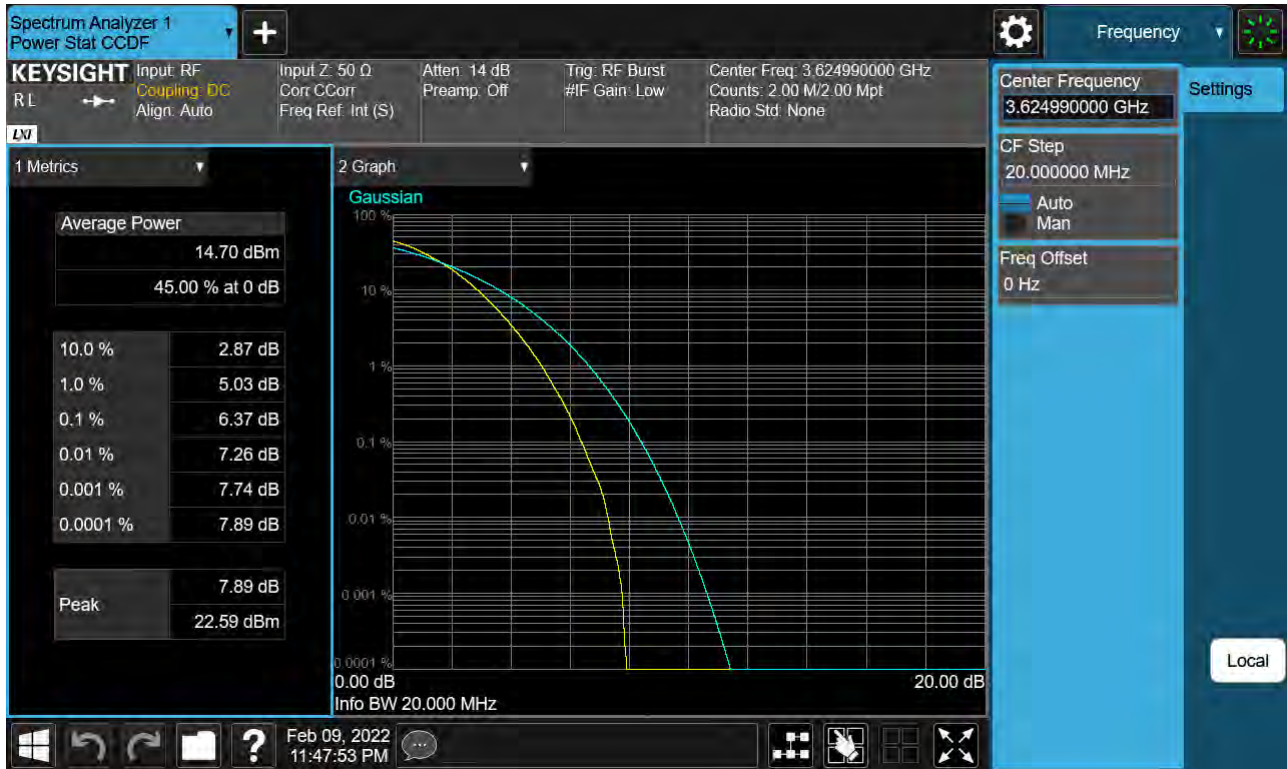

Sub6 n48. PAR Plot (30 MHz Ch. 641666 BPSK)



Sub6 n48. PAR Plot (30 MHz Ch. 641666 QPSK)



Sub6 n48. PAR Plot (30 MHz Ch.641666 16-QAM)



Sub6 n48. PAR Plot (30 MHz Ch.641666 64-QAM)



Sub6 n48. PAR Plot (30 MHz Ch.641666 256-QAM)



Sub6 n48. PAR Plot (40 MHz Ch. 641666 BPSK)



Sub6 n48. PAR Plot (40 MHz Ch. 641666 QPSK)



Sub6 n48. PAR Plot (40 MHz Ch.641666 16-QAM)




Sub6 n48. PAR Plot (40 MHz Ch.641666 64-QAM)



Sub6 n48. PAR Plot (40 MHz Ch.641666 256-QAM RB 100)



Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (10 MHz Ch.637000 BPSK RB 24, Offset 0)

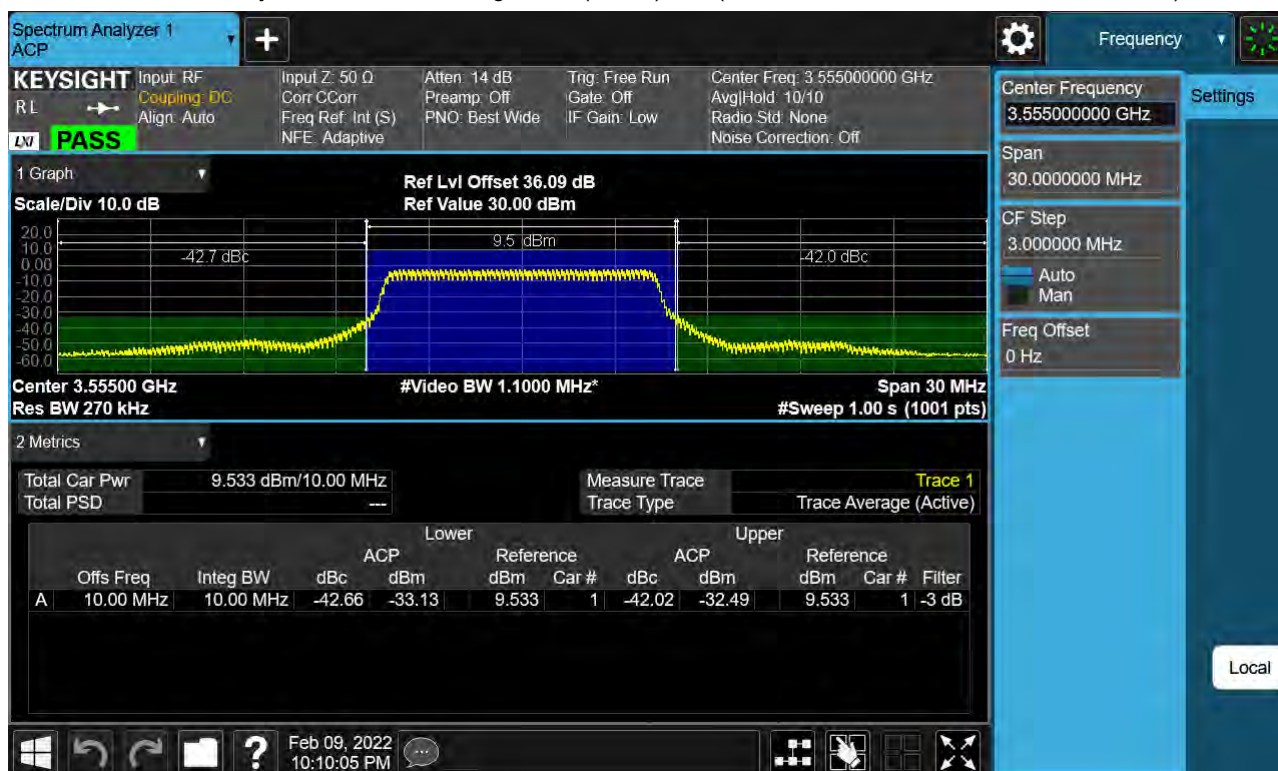

Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF
RL Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr: CCorr
Freq Ref: Int (S)
NFE: Adaptive

Atten: 14 dB
Preamp: Off
PNO: Best Wide

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.624990000 GHz
Avg/Hold: 10/10
Radio Std: None
Noise Correction: Off

Center Frequency
3.624990000 GHz

Span
30.0000000 MHz

CF Step
3.0000000 MHz

Auto
Man

Freq Offset
0 Hz

1 Graph

Scale/Div 10.0 dB

Ref Lvl Offset 36.09 dB
Ref Value 30.00 dBm

18.91 dBm

-44.0 dBc

-43.1 dBc

RMS AVG

Center 3.62499 GHz
Res BW 270 kHz

#Video BW 1.1000 MHz*

Span 30 MHz
#Sweep 1.00 s (1001 pts)

2 Metrics

Total Car Pwr 18.855 dBm/10.00 MHz

Total PSD ---


Measure Trace Trace 1

Trace Type Trace Average (Active)


Lower				Upper						
Offs Freq	Integ BW	ACP dBc	ACP dBm	Reference dBm	Car #	ACP dBc	ACP dBm	Reference dBm	Car #	Filter
A	10.00 MHz	10.00 MHz	-44.03	-25.18	18.86	1	-43.15	-24.29	18.86	1 -3 dB

Windows Taskbar: Feb 09, 2022 10:20:25 PM

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (10 MHz Ch.646332 BPSK RB 24, Offset 0)

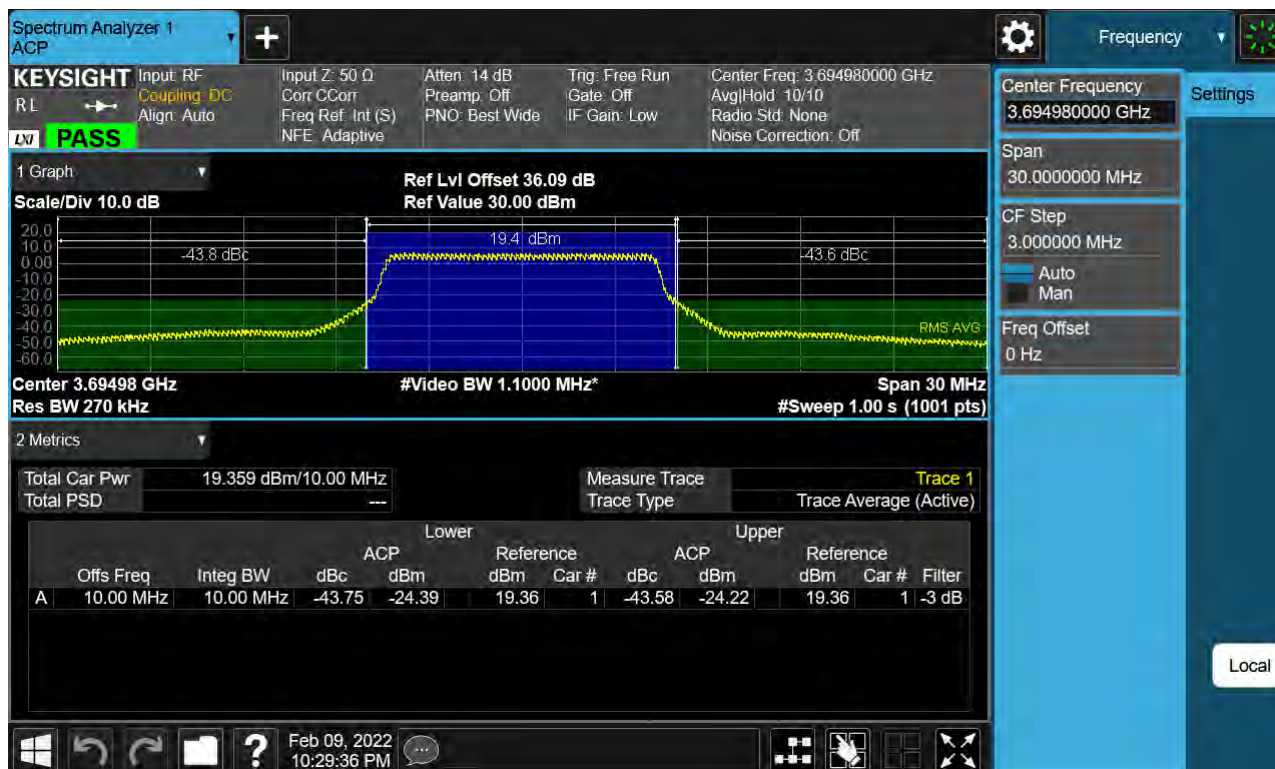

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (15 MHz Ch.637168 BPSK RB 36, Offset 0)

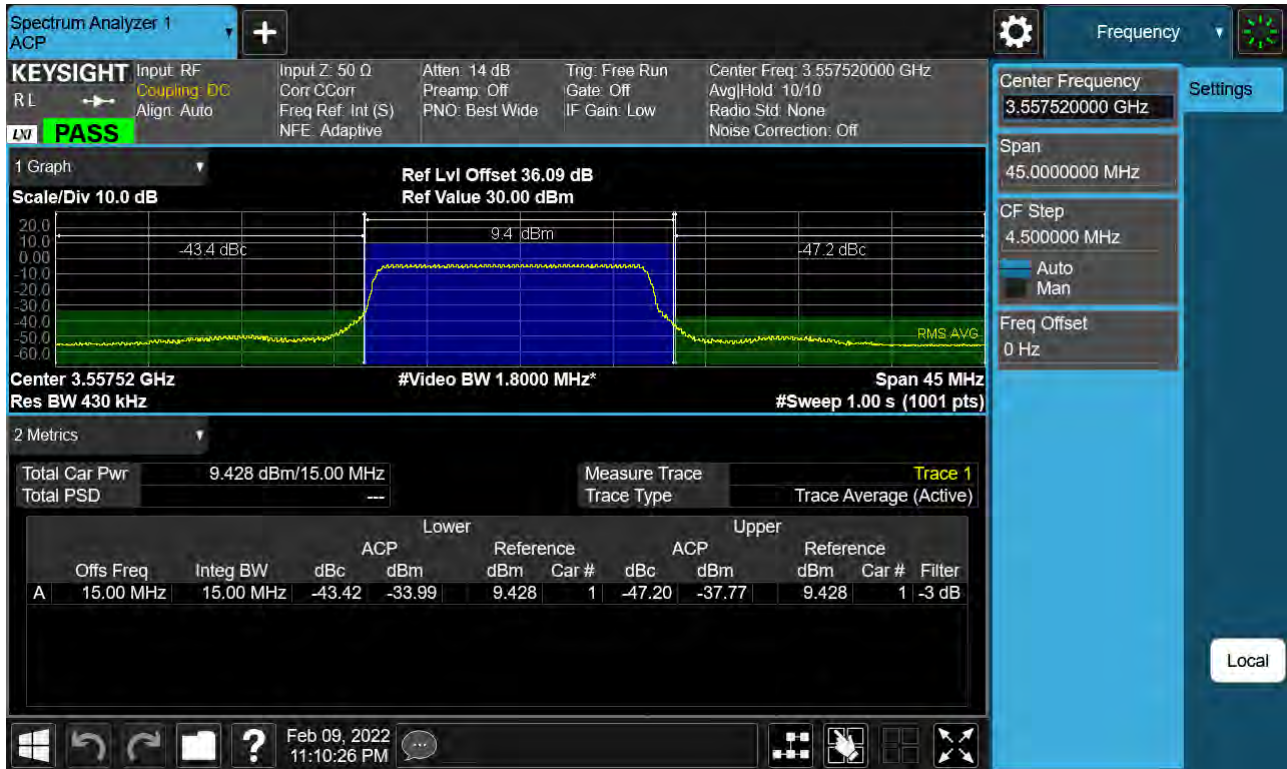

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (15 MHz Ch.641666 BPSK RB 36, Offset 0)



Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
RL Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr: CCorr
Freq Ref: Int (S)
NFE: Adaptive

Atten: 14 dB
Preamp: Off
PNO: Best Wide

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.692490000 GHz
Avg/Hold: 10/10
Radio Std: None
Noise Correction: Off

Center Frequency
3.692490000 GHz

Settings

Span
45.0000000 MHz

CF Step
4.500000 MHz

Auto
Man

Freq Offset
0 Hz

1 Graph

Scale/Div 10.0 dB

Ref Lvl Offset 36.09 dB
Ref Value 30.00 dBm

9.4 dBm

-43.1 dBc

-45.3 dBc

RMS AVG

Center 3.69249 GHz
Res BW 430 kHz

#Video BW 1.8000 MHz*

Span 45 MHz
#Sweep 1.00 s (1001 pts)

2 Metrics

Total Car Pwr 9.432 dBm/15.00 MHz

Total PSD ---

Measure Trace Trace 1

Trace Type Trace Average (Active)


	Offs Freq	Integ BW	dBc	ACP dBm	Reference dBm	Car #	dBc	ACP dBm	Reference dBm	Car #	Filter
A	15.00 MHz	15.00 MHz	-43.09	-33.66	9.432	1	-45.34	-35.90	9.432	1	-3 dB

Lower Upper


Feb 09, 2022 11:29:12 PM

Local

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (20 MHz Ch.637334 BPSK RB 50, Offset 0)

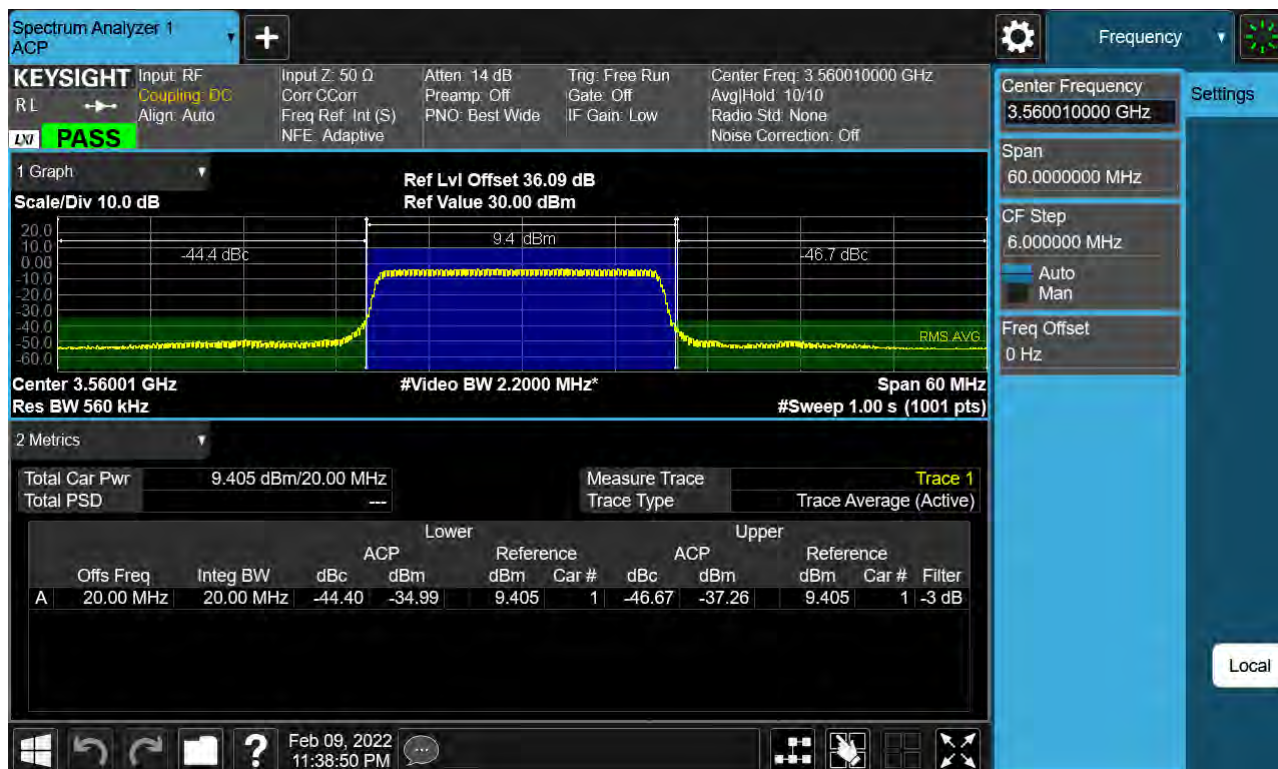

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (20 MHz Ch.641666 BPSK RB 50, Offset 0)

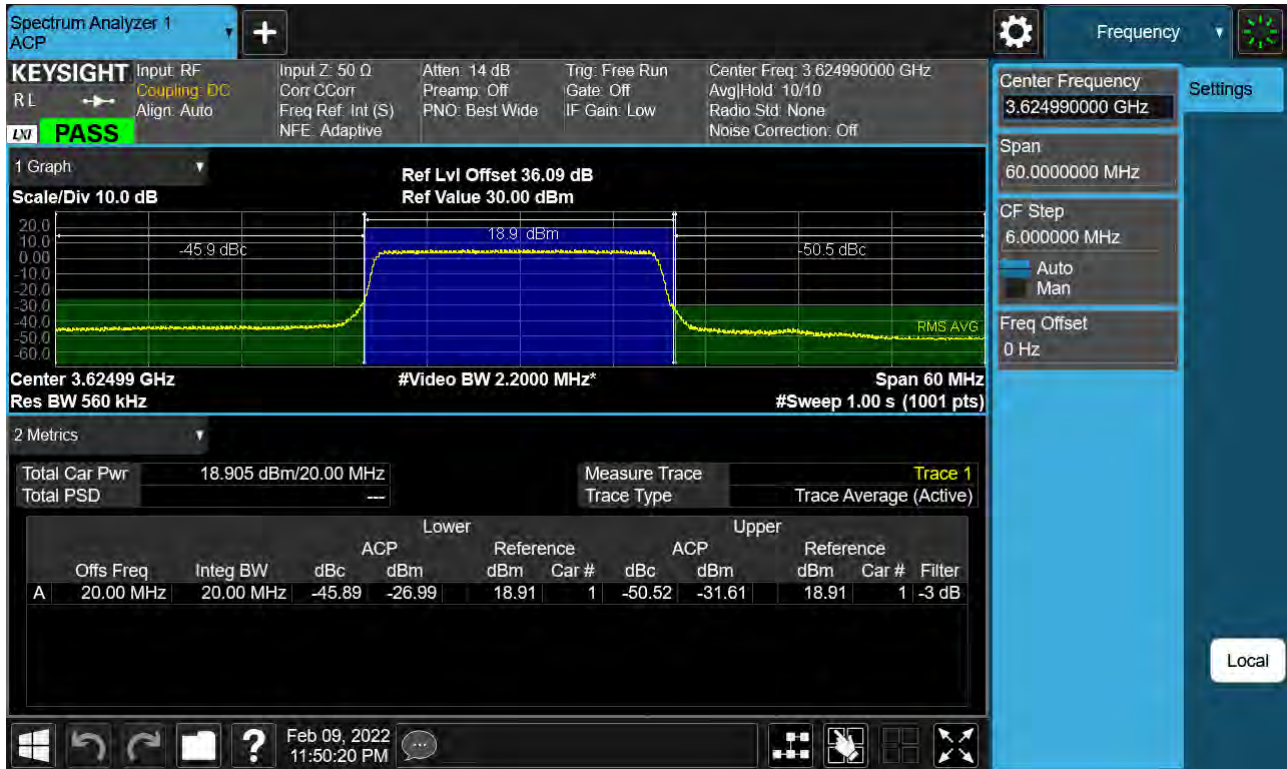

Keysight Spectrum Analyzer 1
ACP

KEYSIGHT Input RF
 RL $\rightarrow$ Coupling: DC
 Align: Auto

Input Z: 50 Ω
 Corr: CCorr
 Freq Ref: Int (S)
 NFE: Adaptive

Atten: 14 dB
 Preamp: Off
 PNO: Best Wide

Trig: Free Run
 Gate: Off
 IF Gain: Low

Center Freq: 3.690000000 GHz
 Avg/Hold: 10/10
 Radio Std: None
 Noise Correction: Off

1 Graph
Scale/Div 10.0 dB
 Ref Lvl Offset 36.09 dB
 Ref Value 30.00 dBm

Center 3.69000 GHz
 Res BW 560 kHz
 Span 60 MHz
 #Video BW 2.000 MHz*
 #Sweep 1.00 s (1001 pts)

2 Metrics

Total Car Pwr: 9.461 dBm/20.00 MHz
 Total PSD: ---


Measure Trace: Trace 1
 Trace Type: Trace Average (Active)

	Offs Freq	Integ BW	dBc	ACP dBm	Reference dBm	Car #	dBc	ACP dBm	Reference dBm	Car #	Filter
A	20.00 MHz	20.00 MHz	-44.16	-34.70	9.461	1	-44.34	-34.88	9.461	1	-3 dB

Frequency: 3.690000000 GHz
 Span: 60.0000000 MHz
 CF Step: 6.0000000 MHz
 Auto Man
 Freq Offset: 0 Hz

Local

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (30 MHz Ch.638000 BPSK RB 75, Offset 0)

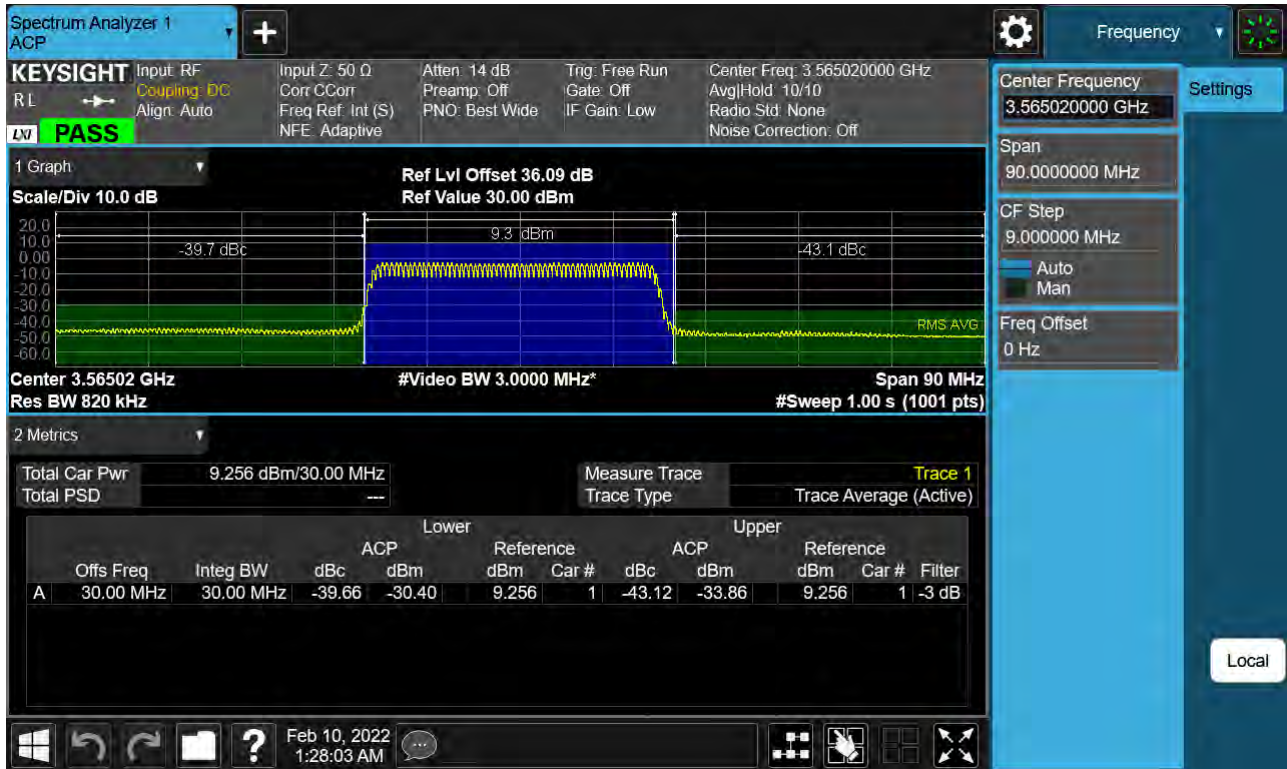

Keysight Spectrum Analyzer 1 ACP

Input RF
 R.L. $\rightarrow$ Coupling: DC Align: Auto

Input Z: 50 Ω
 Corr: CCorr Freq Ref: Int (S) NFE: Adaptive

Atten: 14 dB
 Preamp: Off PNO: Best Wide

Trig: Free Run
 Gate: Off IF Gain: Low

Center Freq: 3.624990000 GHz
 Avg/Hold: 10/10 Radio Std: None Noise Correction: Off

Center Frequency
 3.624990000 GHz **Settings**

Span
 90.0000000 MHz

CF Step
 9.0000000 MHz
☒ Auto ☐ Man

Freq Offset
 0 Hz

1 Graph
 Scale/Div 10.0 dB
 Ref Lvl Offset 36.09 dB
 Ref Value 30.00 dBm

20.0
10.0
0.0
-10.0
-20.0
-30.0
-40.0
-50.0
-60.0

-43.9 dBc 18.9 dBm -49.7 dBc

RMS AVG

Center 3.62499 GHz
Res BW 820 kHz

#Video BW 3.0000 MHz*
Span 90 MHz
#Sweep 1.00 s (1001 pts)

2 Metrics


Total Car Pwr 18.874 dBm/30.00 MHz
Total PSD ---

Measure Trace **Trace 1**
Trace Type Trace Average (Active)

	Lower				Upper				Reference		
	Offs Freq	Integ BW	dBc	dBm	dBm	Car #	dBc	dBm	dBm	Car #	Filter
A	30.00 MHz	30.00 MHz	-43.90	-25.03	18.87	1	-49.68	-30.81	18.87	1	-3 dB

Windows Taskbar: Feb 10, 2022 1:38:18 AM

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (30 MHz Ch.645332 BPSK RB 75, Offset 0)

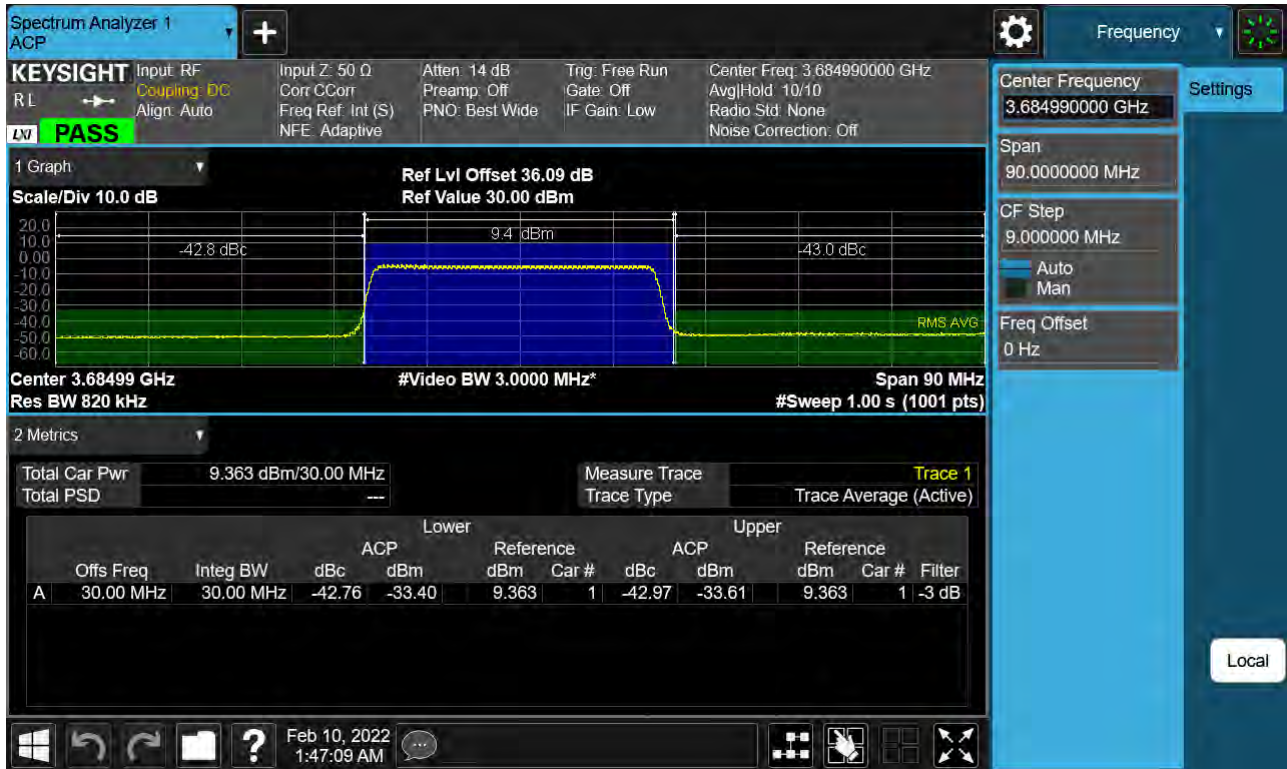

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (40 MHz Ch.638000 BPSK RB 100, Offset 0)



Spectrum Analyzer 1
ACP

KEYSIGHT Input: RF
R.L. Coupling: DC
Align: Auto

Input Z: 50 Ω
Corr: CCorr
Freq Ref: Int (S)
NFE: Adaptive

Atten: 14 dB
Preamp: Off
PNO: Best Wide

Trig: Free Run
Gate: Off
IF Gain: Low

Center Freq: 3.624990000 GHz
Avg/Hold: 10/10
Radio Std: None
Noise Correction: Off

Center Frequency
3.624990000 GHz

Settings

Span
120.000000 MHz

CF Step
12.000000 MHz

Auto
Man

Freq Offset
0 Hz

1 Graph

Scale/Div 10.0 dB

Ref Lvl Offset 36.09 dB
Ref Value 30.00 dBm

19.0 dBm

-38.0 dBc

-48.7 dBc

RMS AVG

Center 3.62499 GHz
Res BW 1.1 MHz

#Video BW 4.0000 MHz*

Span 120 MHz
#Sweep 1.00 s (1001 pts)

2 Metrics

Total Car Pwr 19.028 dBm/40.00 MHz

Total PSD ---


Measure Trace Trace 1

Trace Type Trace Average (Active)

	Lower				Upper				Reference		
	Offs Freq	Integ BW	dBc	ACP dBm	dBm	Car #	dBc	ACP dBm	dBm	Car #	Filter
A	40.00 MHz	40.00 MHz	-38.02	-19.00	19.03	1	-48.72	-29.69	19.03	1	-3 dB

Windows Taskbar: Feb 10, 2022 2:20:18 AM

Sub6 n48. Adjacent Channel Leakage Ratio(ACLR) Plot (40 MHz Ch.645332 BPSK RB 100, Offset 0)

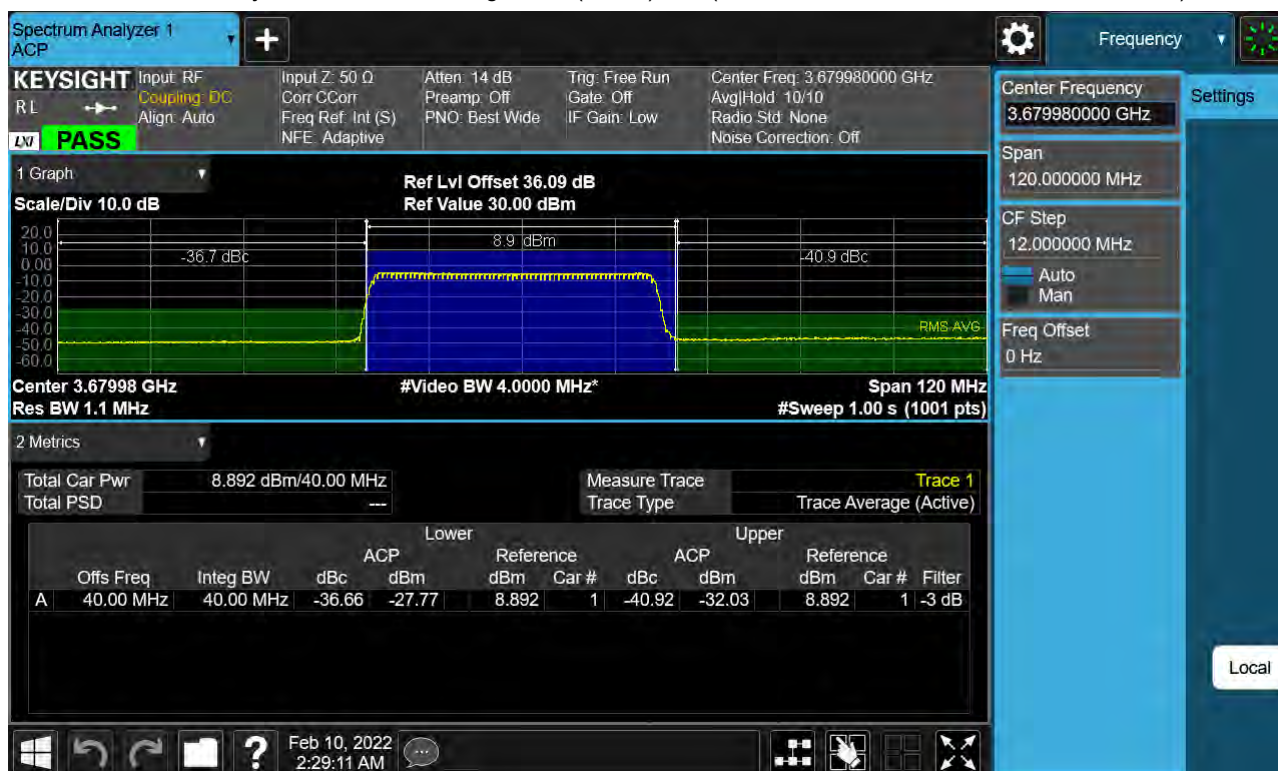

Sub6 n48. 10 M BandEdge(Lower)_Low_3555.00 MHz_BPSK_FullIRB



Sub6 n48. 10 M_BandEdge(Upper)_Low_ 3555.00 MHz_BPSK_FullIRB



Sub6 n48. 10 M_BandEdge(Lower)_Low_ 3555.00 MHz_BPSK_1RB




Sub6 n48. 10 M_BandEdge(Upper)_Low_ 3555.00 MHz_BPSK_1RB



Sub6 n48. 10 M_BandEdge(Center)_Mid_3624.99 MHz_BPSK_FullIRB




Sub6 n48. 10 M_BandEdge(Lower)_Mid_3624.99 MHz_BPSK_1RB

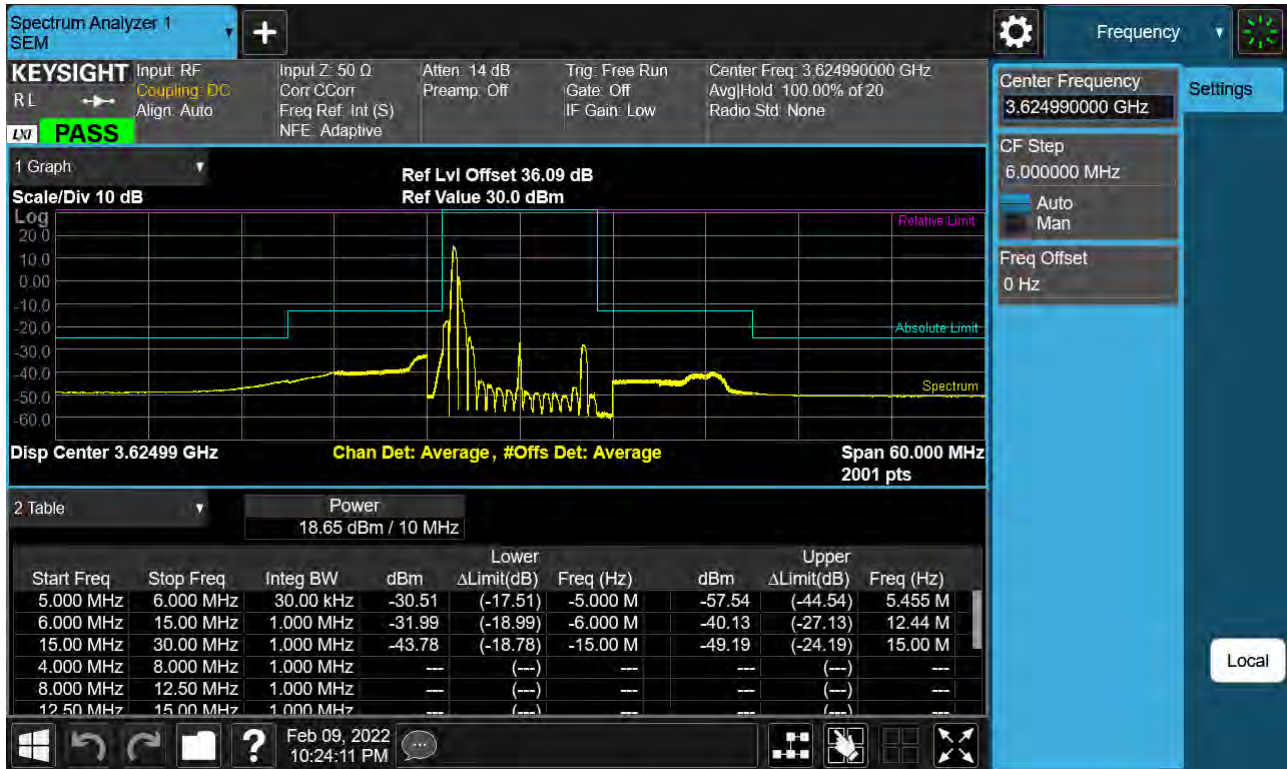


Sub6 n48. 10 M_BandEdge(Upper)_Mid_3624.99 MHz_BPSK_1RB



Sub6 n48. 10 M_BandEdge(Lower)_High_ 3694.98 MHz_BPSK_FullRB

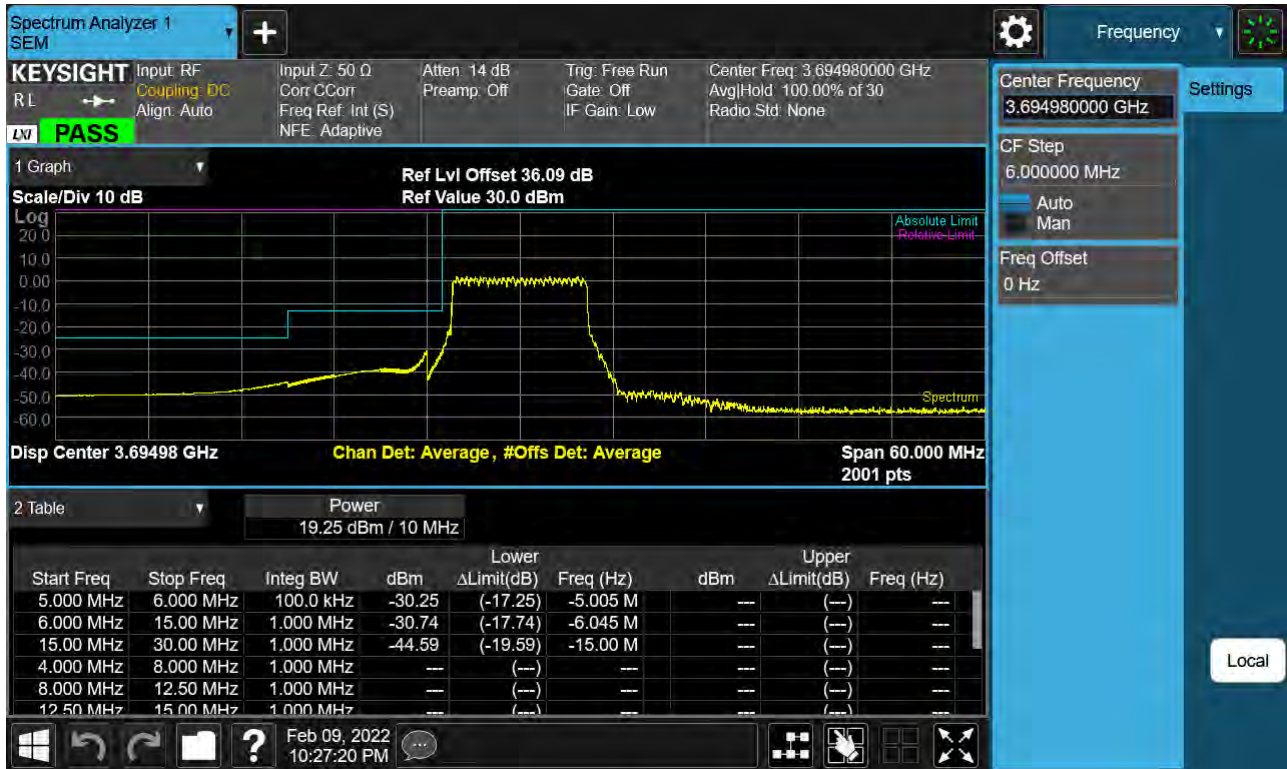


Sub6 n48. 10 M_BandEdge(Upper)_High_ 3694.98 MHz_BPSK_FullRB

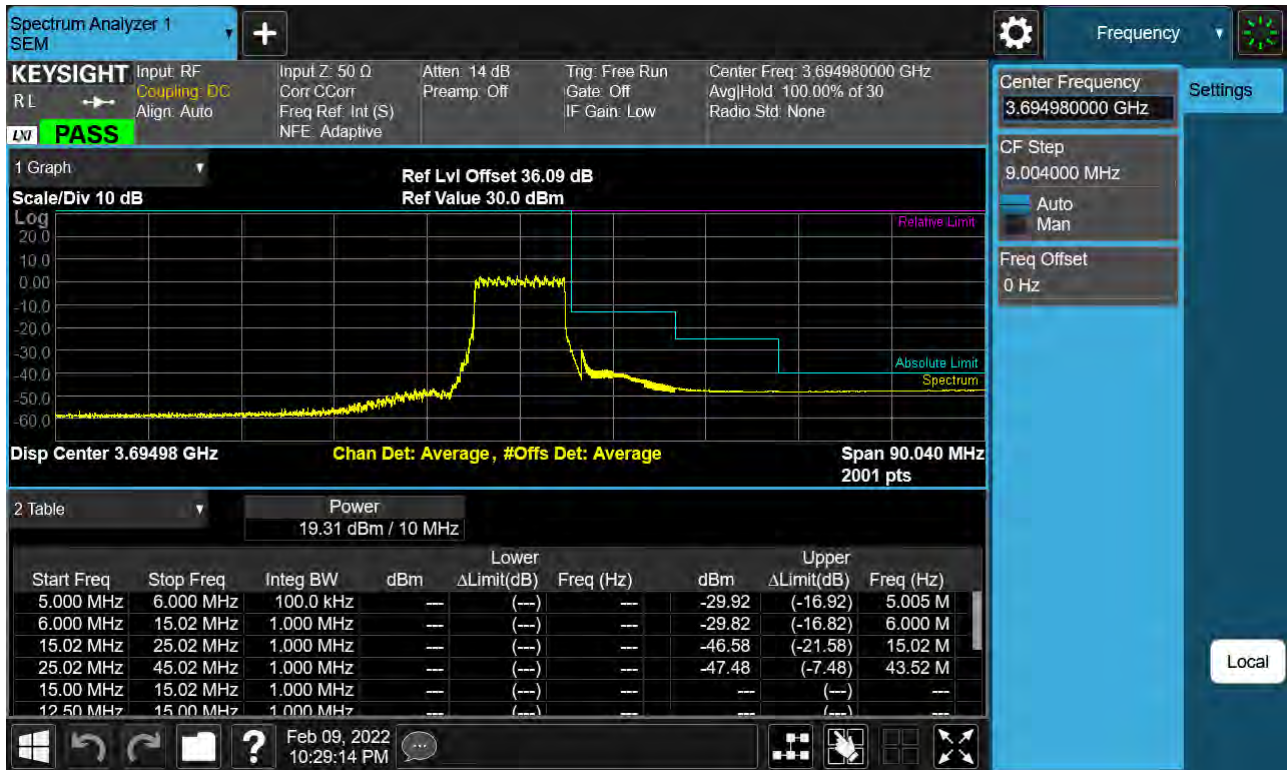


Sub6 n48. 10 M_BandEdge(Lower)_High_ 3694.98 MHz_BPSK_1RB



Sub6 n48. 10 M_BandEdge(Upper)_High_ 3694.98 MHz_BPSK_1RB

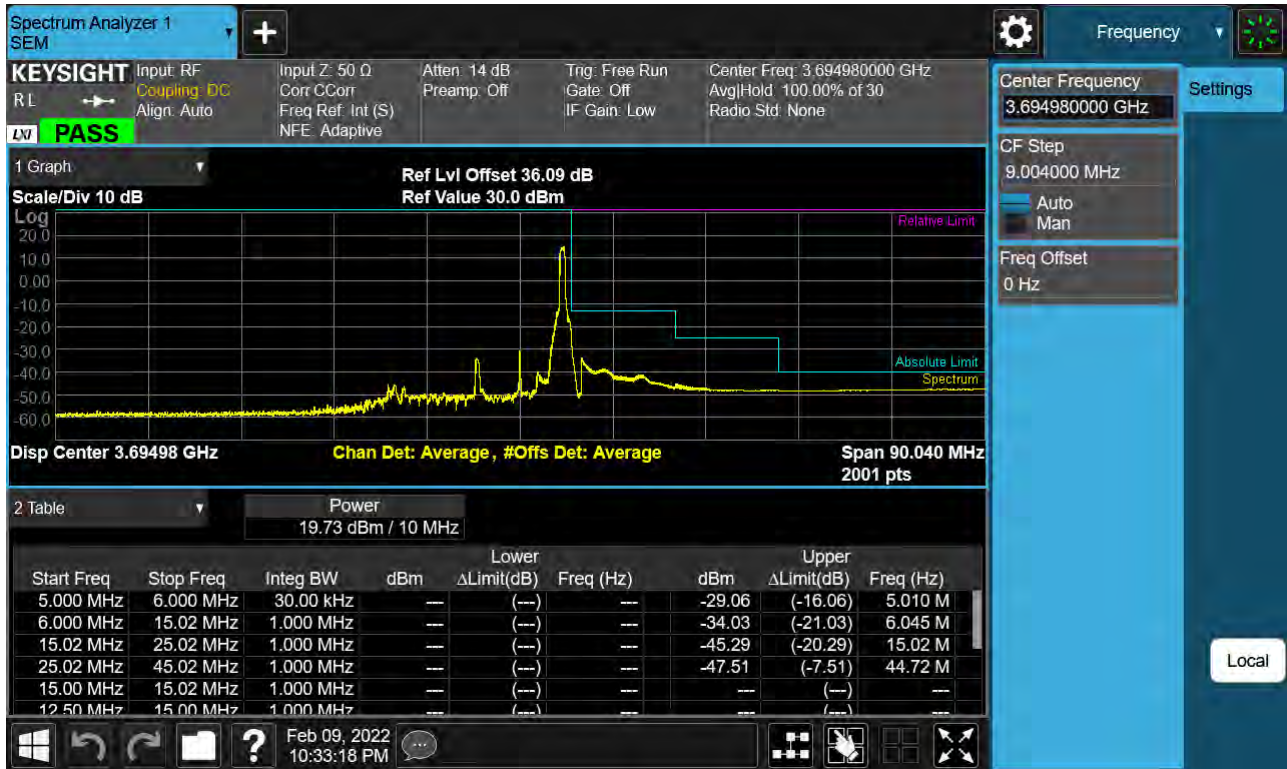


Sub6 n48. 15 M BandEdge(Lower)_Low_ 3557.52 MHz_BPSK_FullRB

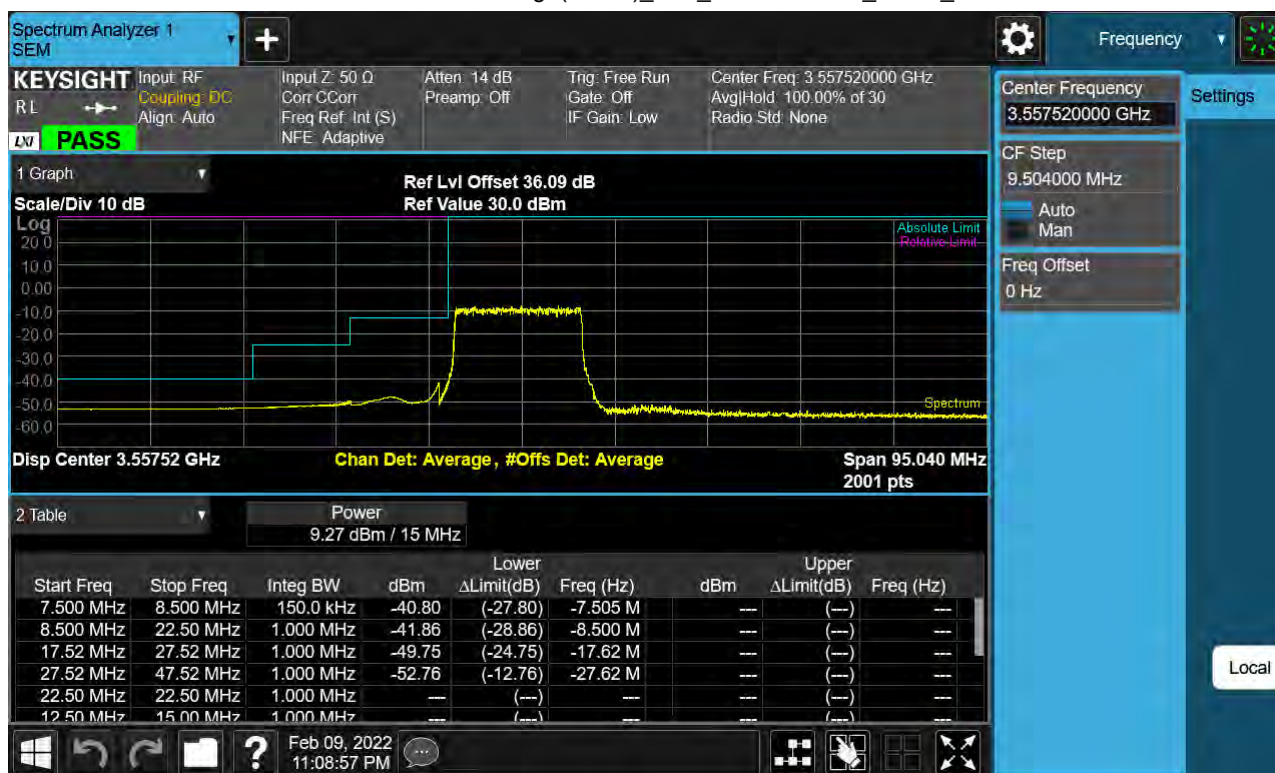

Sub6 n48. 15 M_BandEdge(Upper)_Low_ 3557.52 MHz_BPSK_FullIRB




Sub6 n48. 15 M_BandEdge(Lower)_Low_ 3557.52 MHz_BPSK_1RB

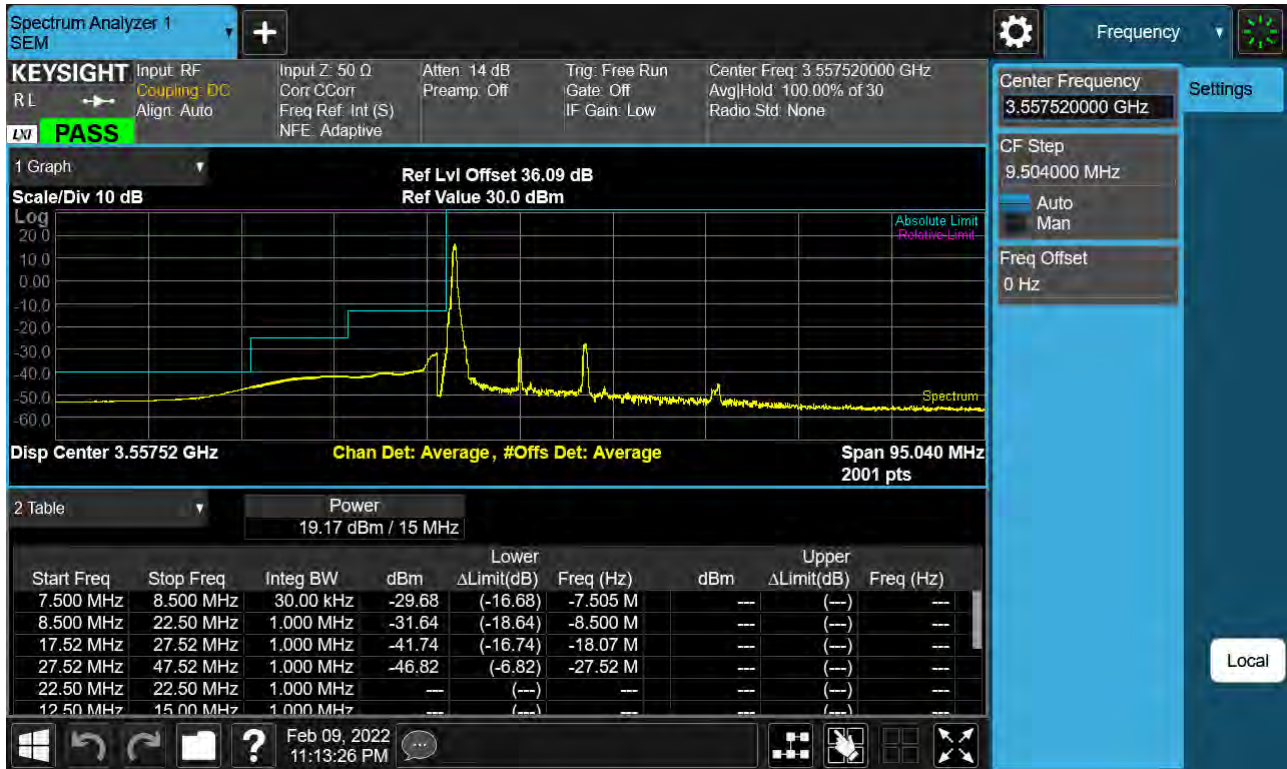

Sub6 n48. 15 M_BandEdge(Upper)_Low_ 3557.52 MHz_BPSK_1RB




Sub6 n48. 15 M_BandEdge(Center)_Mid_3624.99 MHz_BPSK_FullIRB

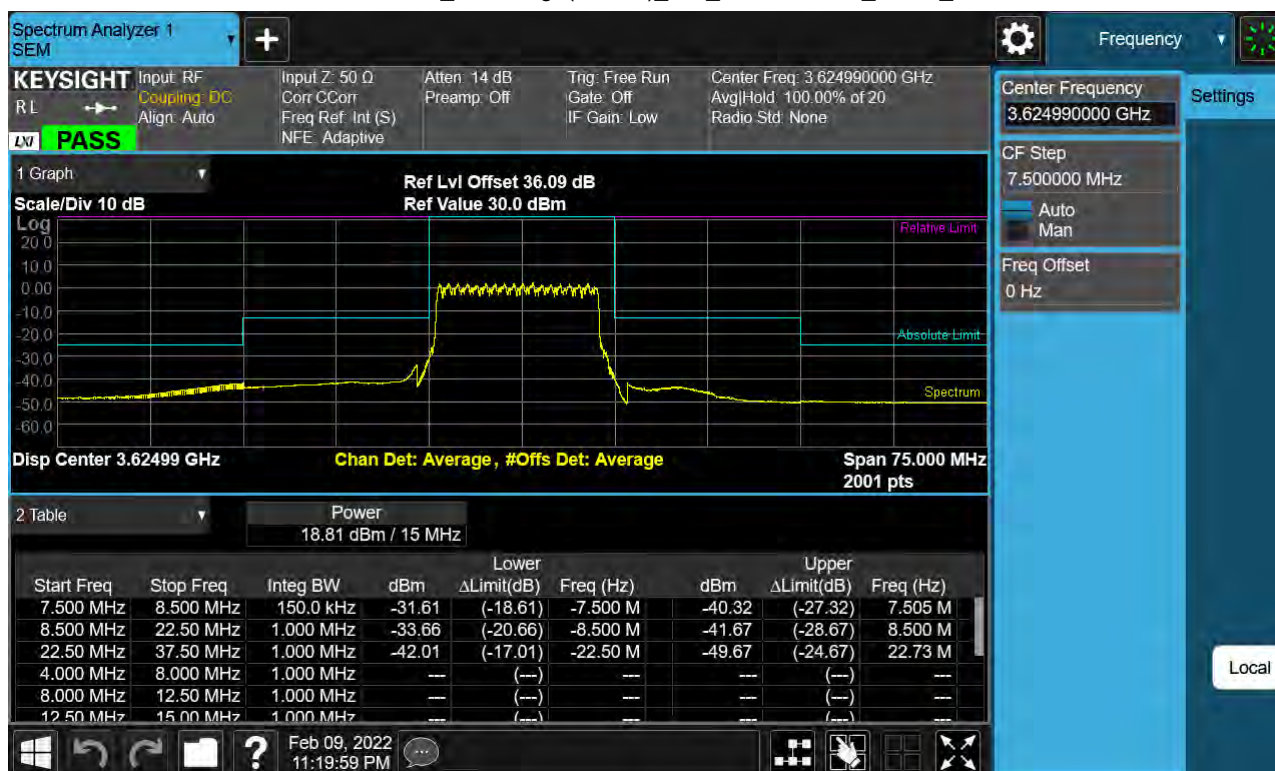


Sub6 n48. 15 M_BandEdge(Lower)_Mid_3624.99 MHz_BPSK_1RB



Sub6 n48. 15 M_BandEdge(Upper)_Mid_3624.99 MHz_BPSK_1RB

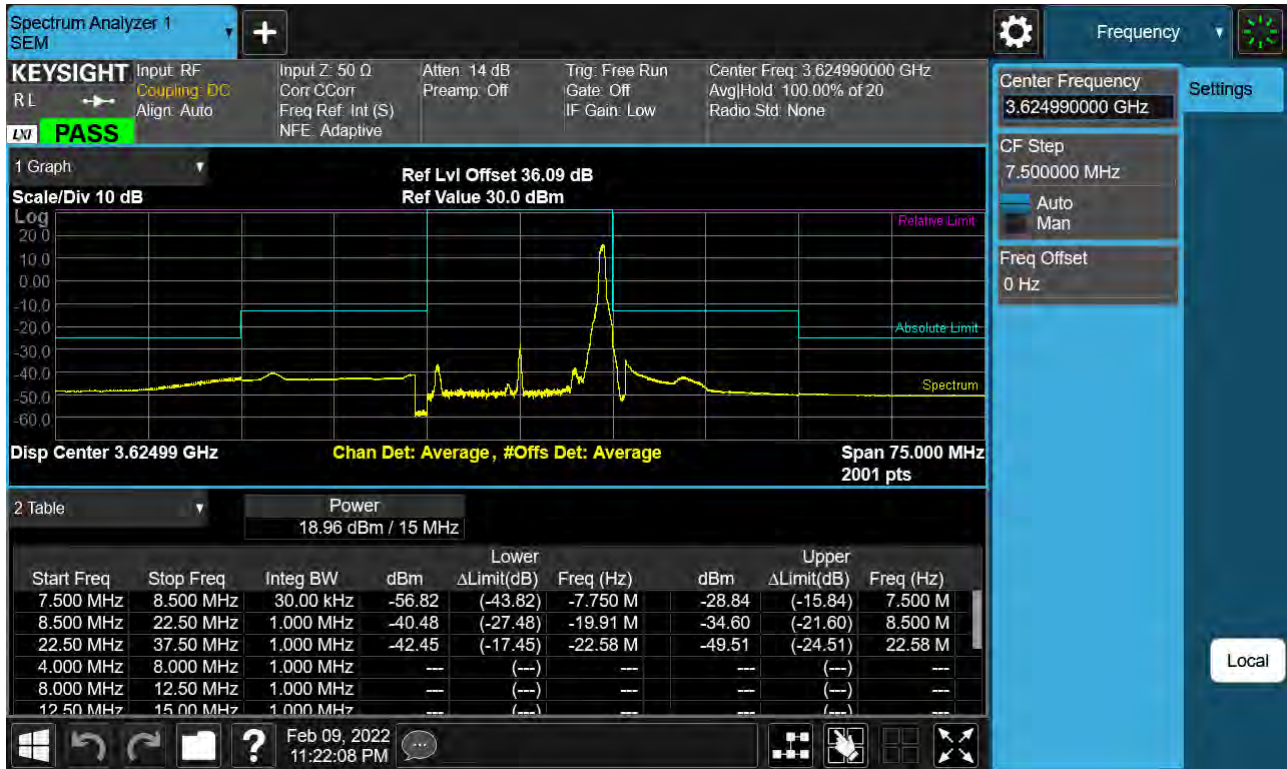


Sub6 n48. 15 M_BandEdge(Lower)_High_ 3692.49 MHz_BPSK_FullIRB

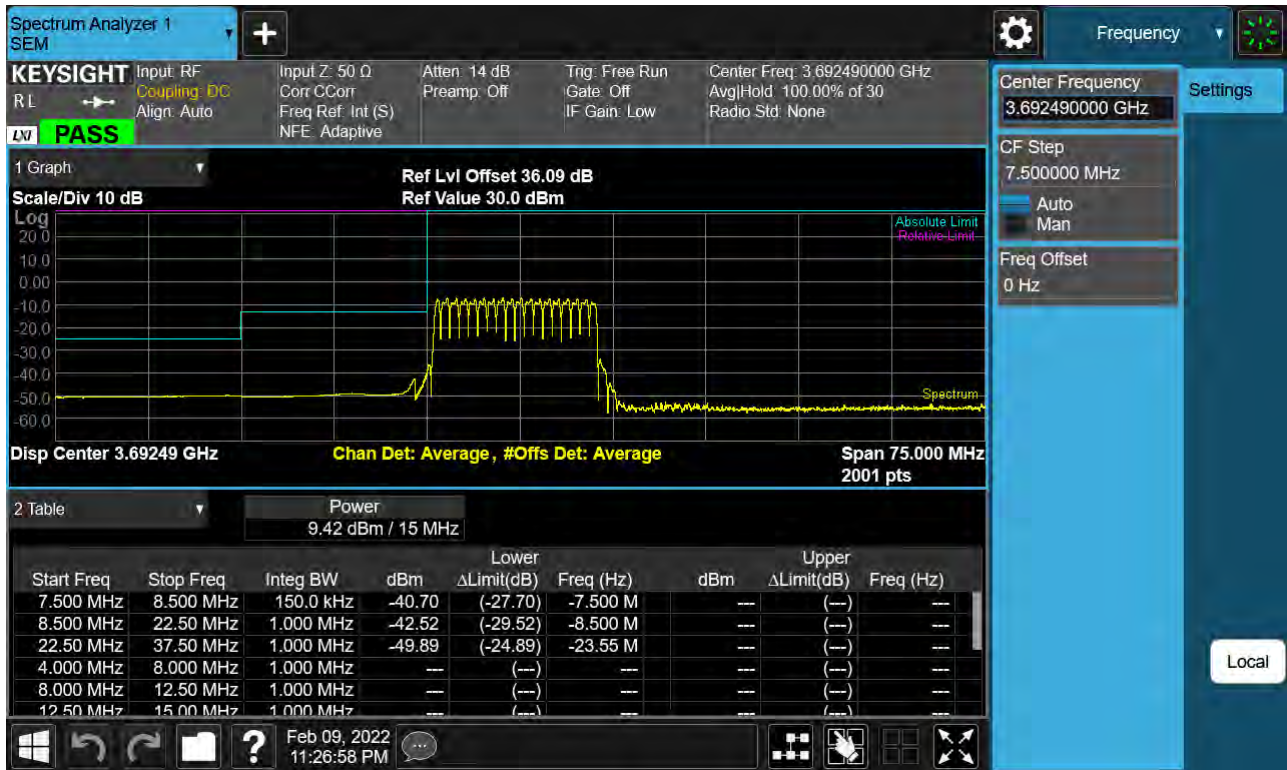

Sub6 n48. 15 M_BandEdge(Upper)_High_ 3692.49 MHz_BPSK_FullIRB




Sub6 n48. 15 M_BandEdge(Lower)_High_ 3692.49 MHz_BPSK_1RB

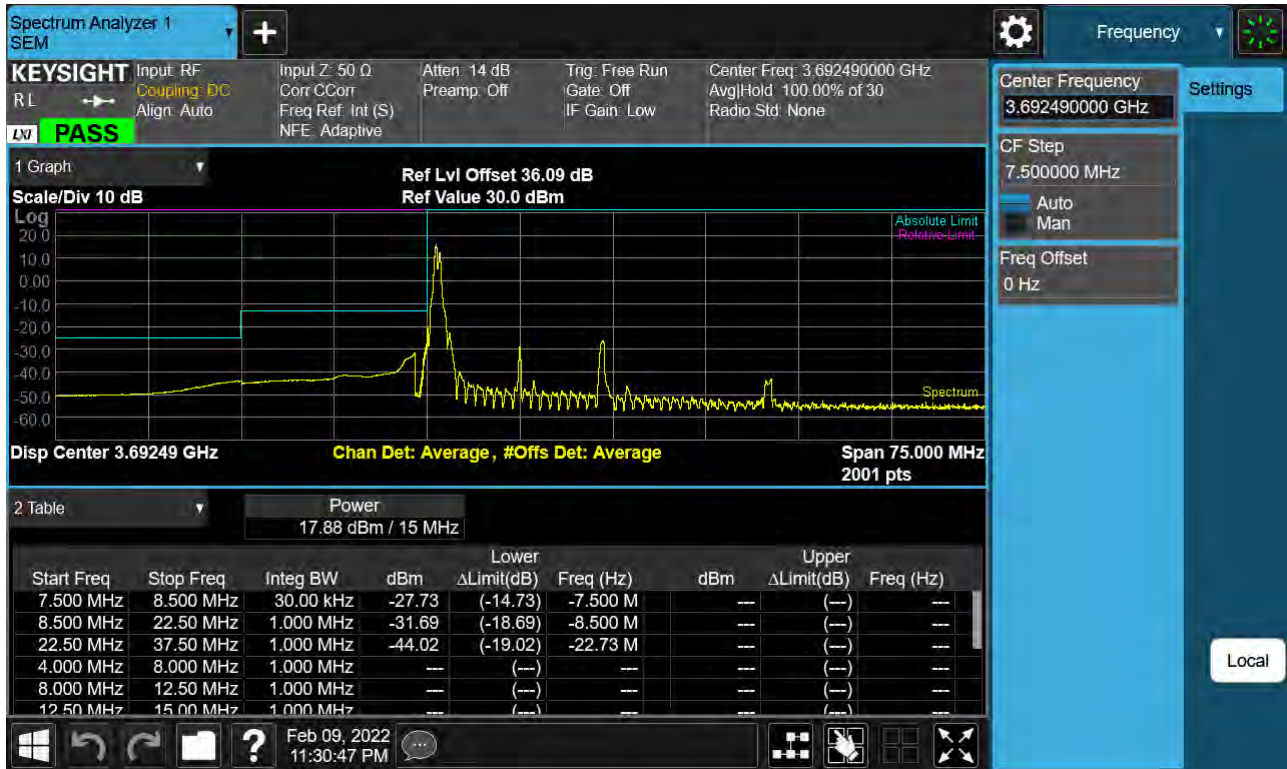

Sub6 n48. 15 M_BandEdge(Upper)_High_ 3692.49 MHz_BPSK_1RB



Sub6 n48. 20 M BandEdge(Lower)_Low_ 3560.01 MHz_BPSK_FullIRB

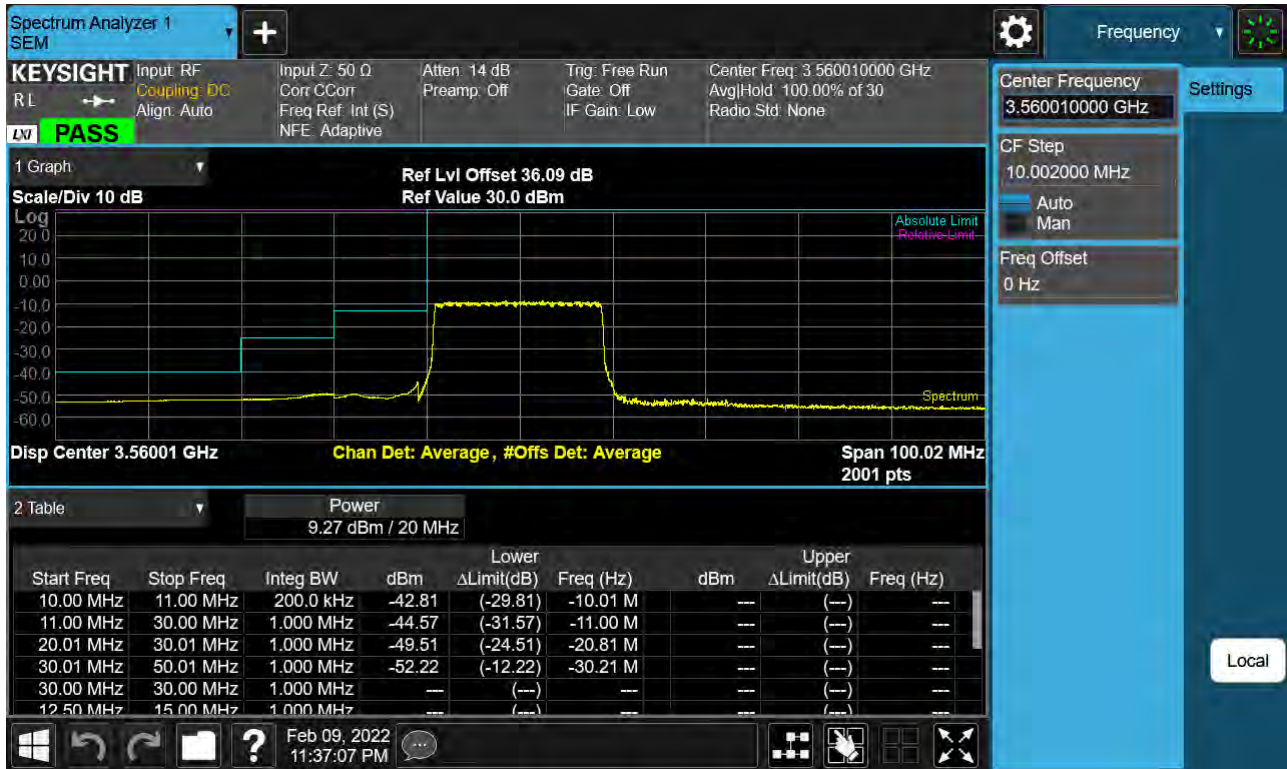


The screenshot displays the Keysight Spectrum Analyzer 1 interface. The main plot shows a spectrum with a yellow trace, a green limit line, and a blue reference line. The plot is titled "1 Graph" and "Scale/Div 10 dB". The x-axis is labeled "Log" and ranges from 10.0 to 60.0. The y-axis is labeled "dBm" and ranges from -60.0 to 20.0. The plot shows a signal at approximately 3.56 GHz with a power level of about -10 dBm. The signal is bounded by a green limit line and a blue reference line. The plot is titled "1 Graph" and "Scale/Div 10 dB".

Below the plot, the "2 Table" section displays measurement data for various frequency ranges. The table has columns for Start Freq, Stop Freq, Integ BW, dBm, Lower Limit (dB), Freq (Hz), Upper Limit (dB), and Freq (Hz). The data is as follows:

Start Freq	Stop Freq	Integ BW	dBm	Lower Limit (dB)	Freq (Hz)	Upper Limit (dB)	Freq (Hz)
10.00 MHz	11.00 MHz	200.0 kHz	---	(---)	---	-48.00 (-35.00)	10.01 M
11.00 MHz	30.00 MHz	1.000 MHz	---	(---)	---	-47.94 (-34.94)	11.00 M
30.00 MHz	40.00 MHz	1.000 MHz	---	(---)	---	-48.86 (-23.86)	30.05 M
4.000 MHz	8.000 MHz	1.000 MHz	---	(---)	---	(---)	---
8.000 MHz	12.50 MHz	1.000 MHz	---	(---)	---	(---)	---
12.50 MHz	15.00 MHz	1.000 MHz	---	(---)	---	(---)	---

Sub6 n48. 20 M_BandEdge(Lower)_Low_ 3560.01 MHz_BPSK_1RB

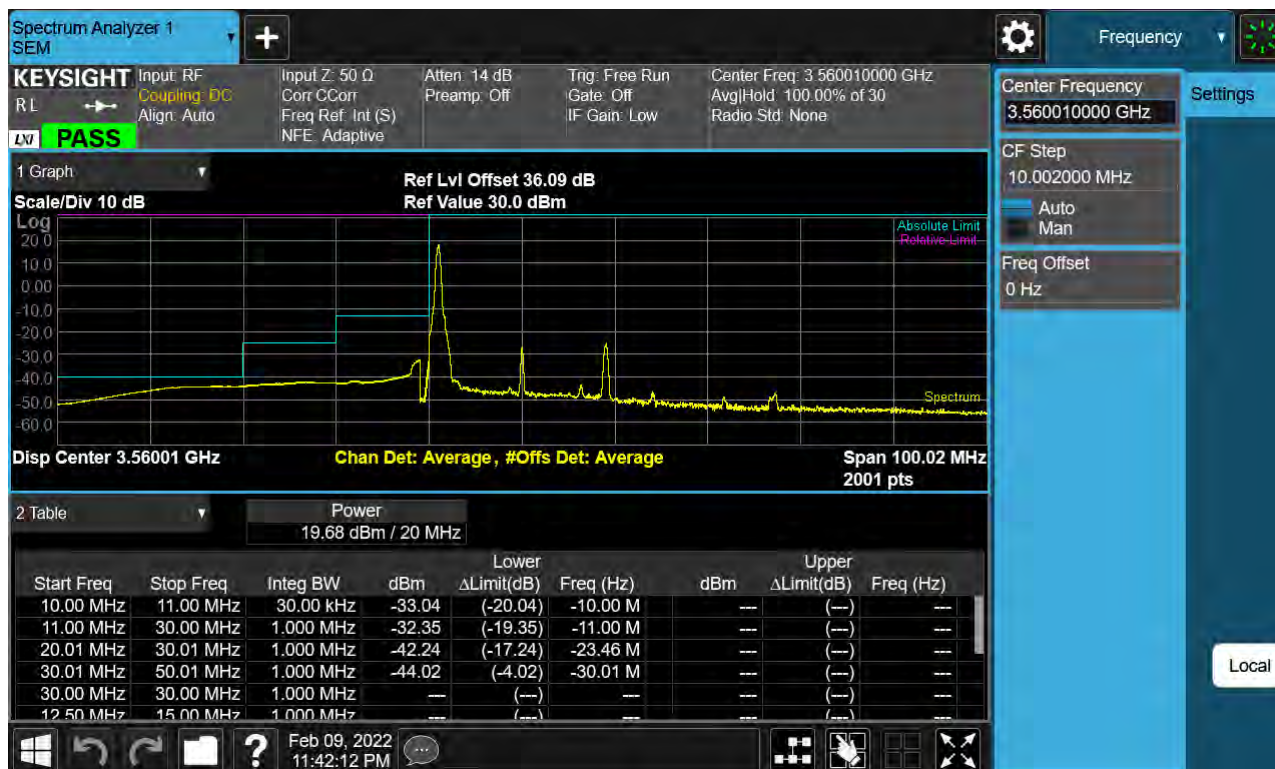

Sub6 n48. 20 M_BandEdge(Upper)_Low_ 3560.01 MHz_BPSK_1RB



Sub6 n48. 20 M_BandEdge(Center)_Mid_3624.99 MHz_BPSK_FullIRB

