
Appendix for the Report

Dosimetric Assessment of the Option GT-Max World (FCC ID: NCMOGTMAX-W)

According to the FCC Requirements

SAR Distribution Plots

January 20, 2006
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
7layers AG
Borsigstrasse 11
D-40880 Ratingen

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, GPRS 850 BODY	3
2	SAR DISTRIBUTION PLOTS, GPRS 1900 BODY	12
3	SAR DISTRIBUTION PLOTS, WCDMA II (FDD) BODY	21
4	SAR DISTRIBUTION PLOTS, WCDMA V (FDD) BODY	30
5	SAR Z-AXIS SCANS (VALIDATION)	39
6	SAR Z-AXIS SCANS (MEASUREMENTS)	40

1 SAR Distribution Plots, GPRS 850 Body

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_1.da4](#)

DUT: Option ; Type: GT Max;
Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.135 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.08 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.100 mW/g

Maximum value of SAR (measured) = 0.159 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.08 V/m; Power Drift = -0.143 dB

Peak SAR (extrapolated) = 0.098 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

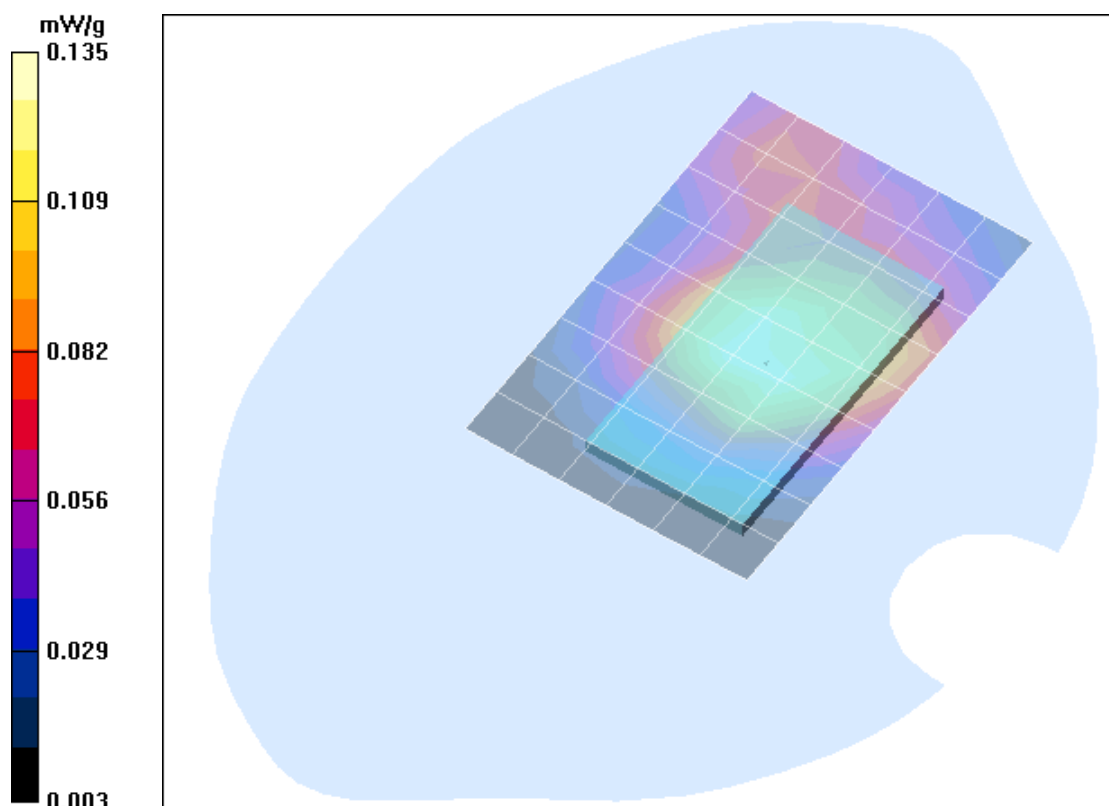


Fig. 1: SAR distribution for GPRS 850, channel 190, position 1 (DELL Latitude C810, January 16, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.164 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.174 dB

Peak SAR (extrapolated) = 0.204 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.153 mW/g

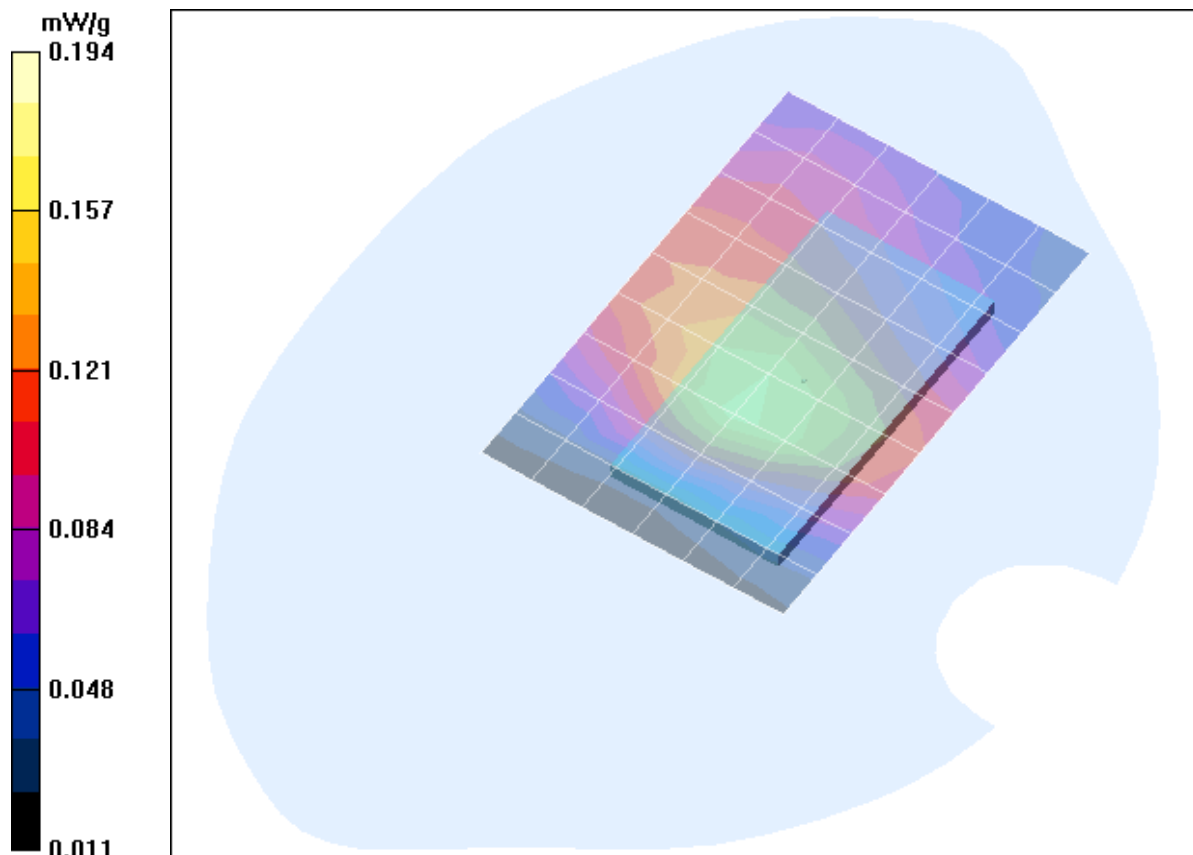


Fig. 2: SAR distribution for GPRS 850, channel 190, position 2 (DELL Latitude C810, January 16, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_5.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.048 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.28 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 0.068 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.050 mW/g

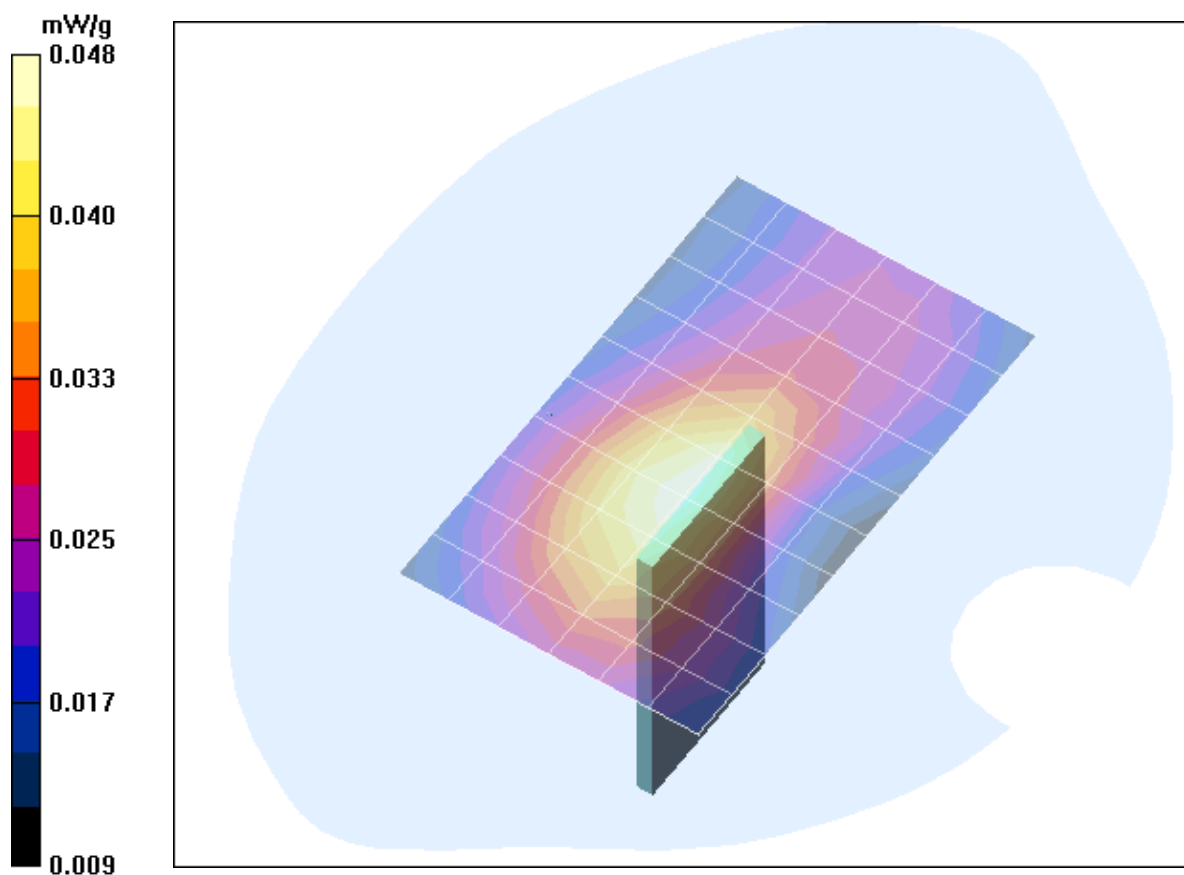


Fig. 3: SAR distribution for GPRS 850, channel 190, position 3 (DELL Latitude C810 , January 16, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.1 V/m; Power Drift = -0.169 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

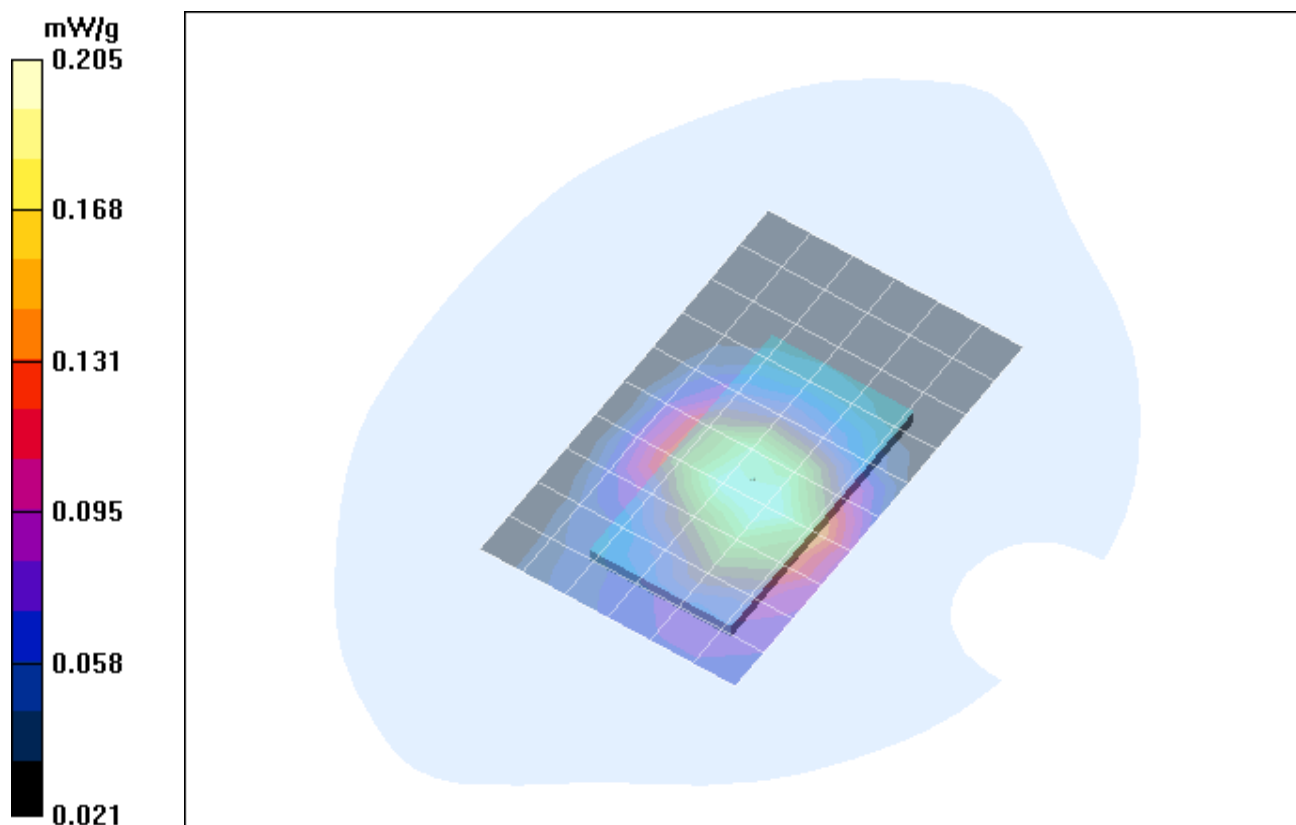


Fig. 4: SAR distribution for GPRS 850, channel 190, position 1 (Packard Bell Easy Note, January 16, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.135 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.9 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.135 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.142 mW/g

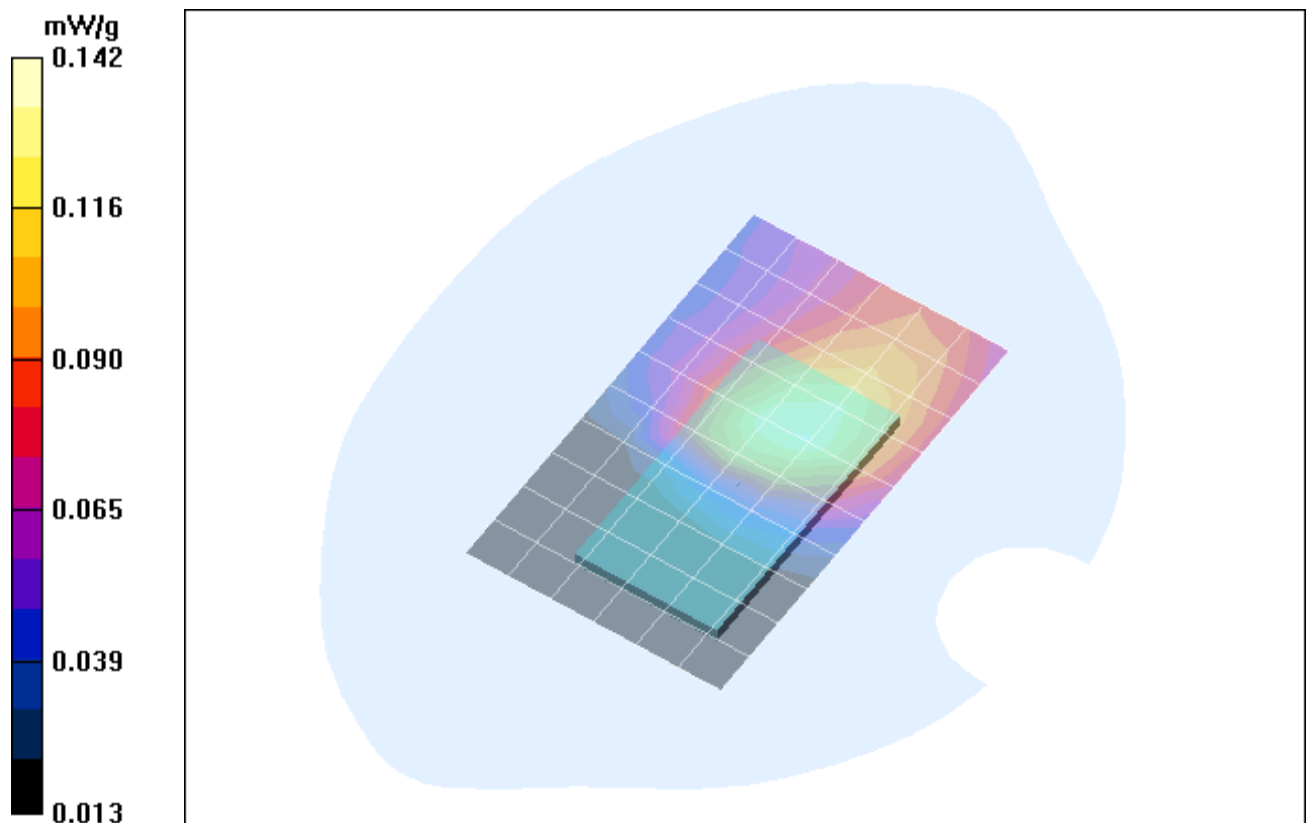


Fig. 5: SAR distribution for GPRS 850, channel 190, position 2 (Packard Bell Easy Note, January 16, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_5.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.063 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.90 V/m; Power Drift = 0.098 dB

Peak SAR (extrapolated) = 0.087 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.066 mW/g

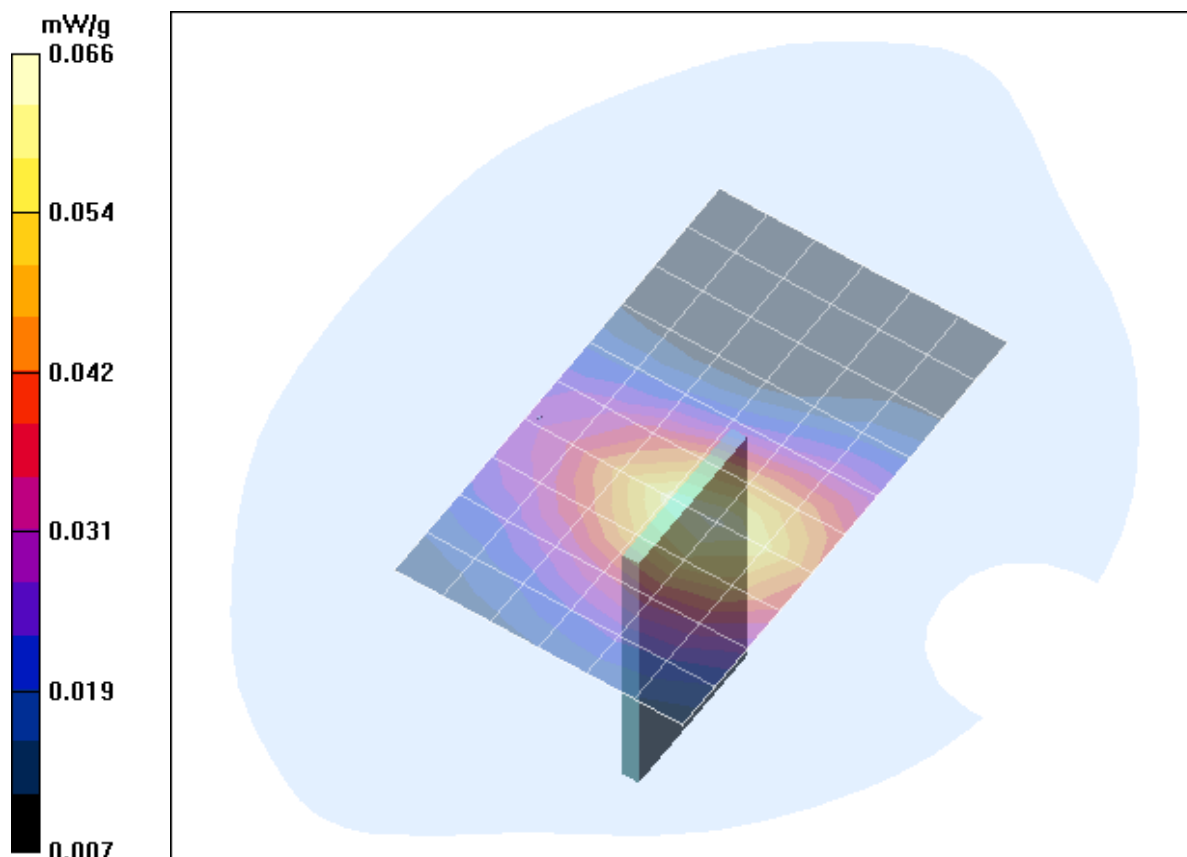


Fig. 6: SAR distribution for GPRS 850, channel 190, position 3 (Packard Bell Easy Note, January 16, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.4° C).

Test Laboratory: The name of your organization; **File Name:** [Max_bahm_1.da4](#)

DUT: Option ; **Type:** GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.180 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.198 dB

Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.178 mW/g

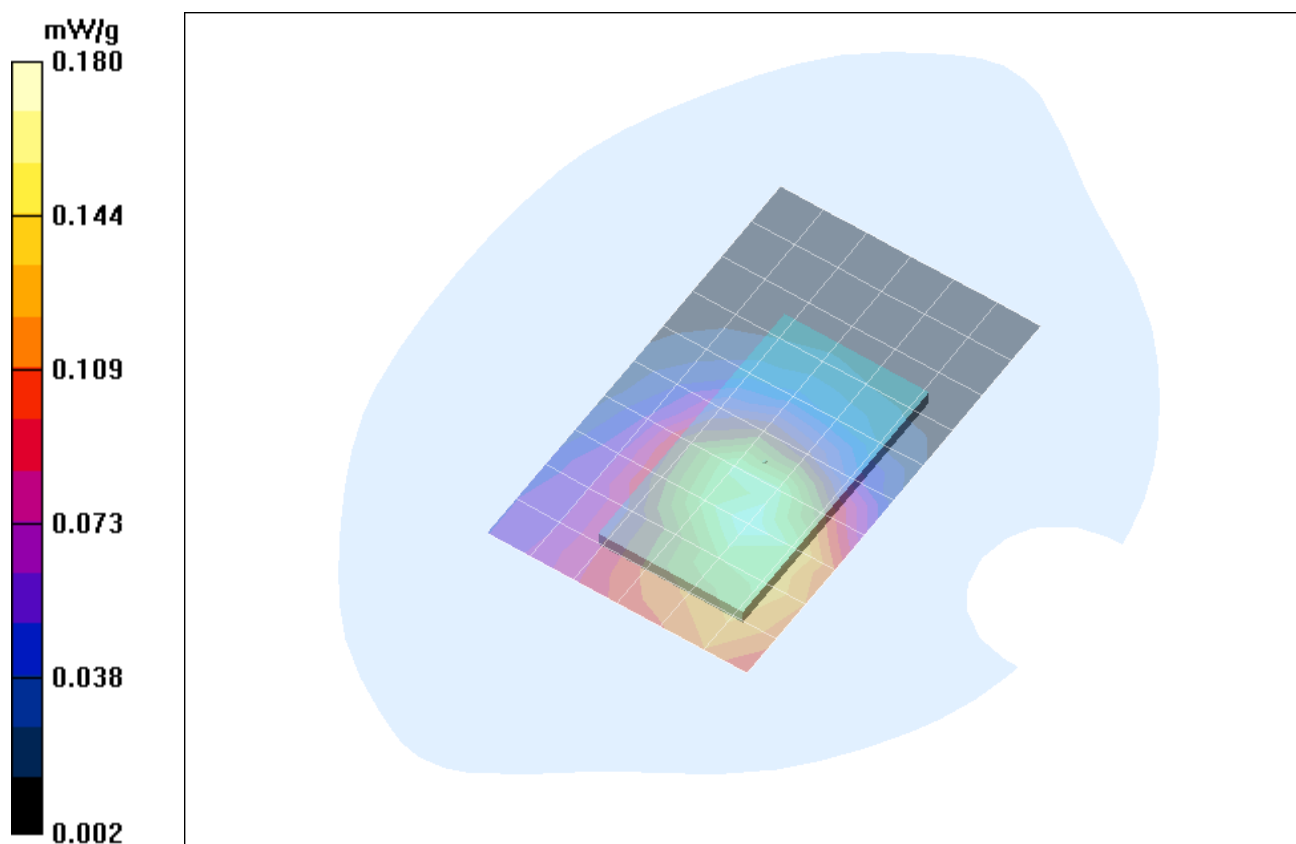


Fig. 7: SAR distribution for GPRS 850, channel 190, position 1 (Fujitsu Siemens Amilo Pro, January 16, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bahm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.117 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.2 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.116 mW/g

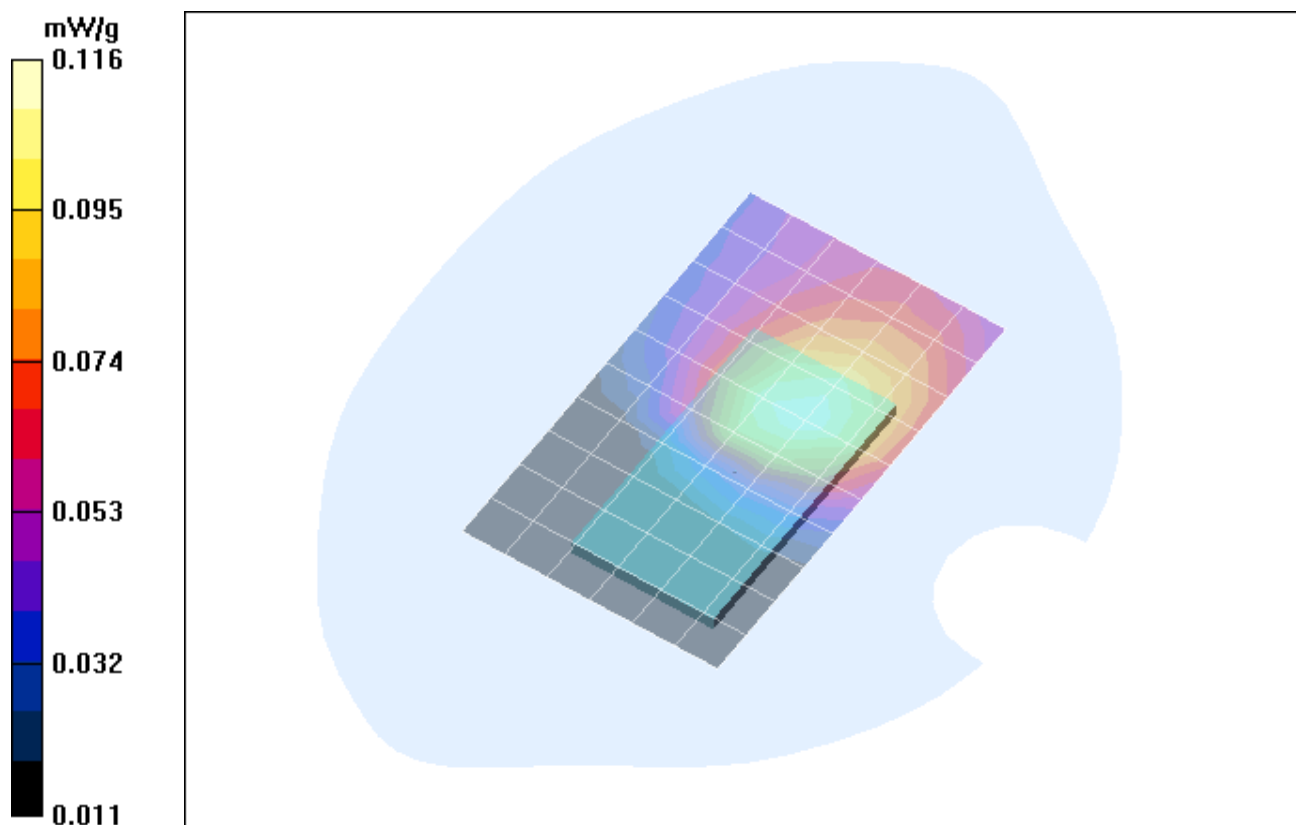


Fig. 8: SAR distribution for GPRS 850, channel 190, position 2 (Fujitsu Siemens Amilo Pro, January 16, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.4° C).

Test Laboratory: The name of your organization; **File Name:** [Max_bahm_5.da4](#)

DUT: Option ; **Type:** GT Max;

Program Name: Body Worn

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.054 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.14 V/m; Power Drift = -0.199 dB

Peak SAR (extrapolated) = 0.075 W/kg

SAR(1 g) = 0.052 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

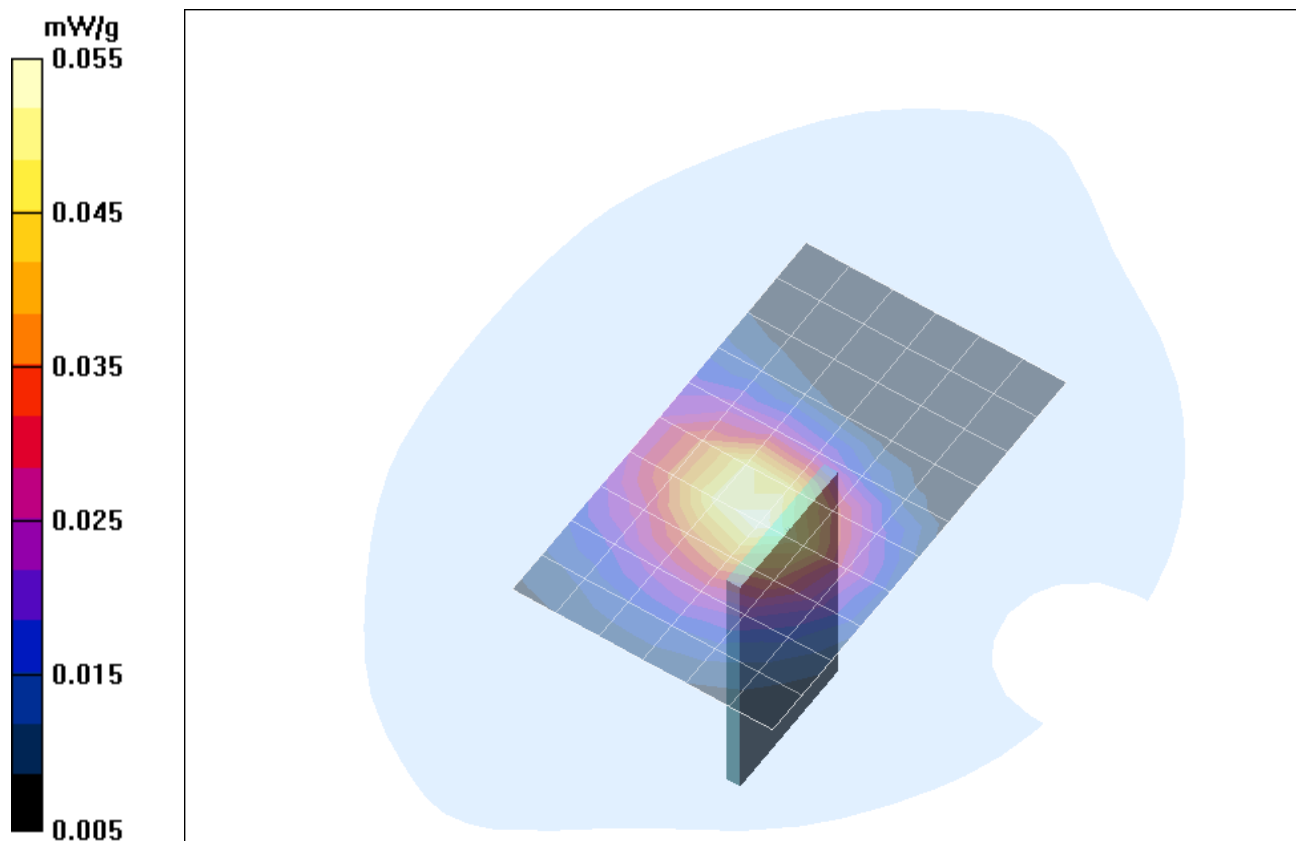


Fig. 9: SAR distribution for GPRS 850, channel 190, position 3 (Fujitsu Siemens Amilo Pro, January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.3° C).

2 SAR Distribution Plots, GPRS 1900 Body

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.556 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.253 mW/g

Maximum value of SAR (measured) = 0.462 mW/g

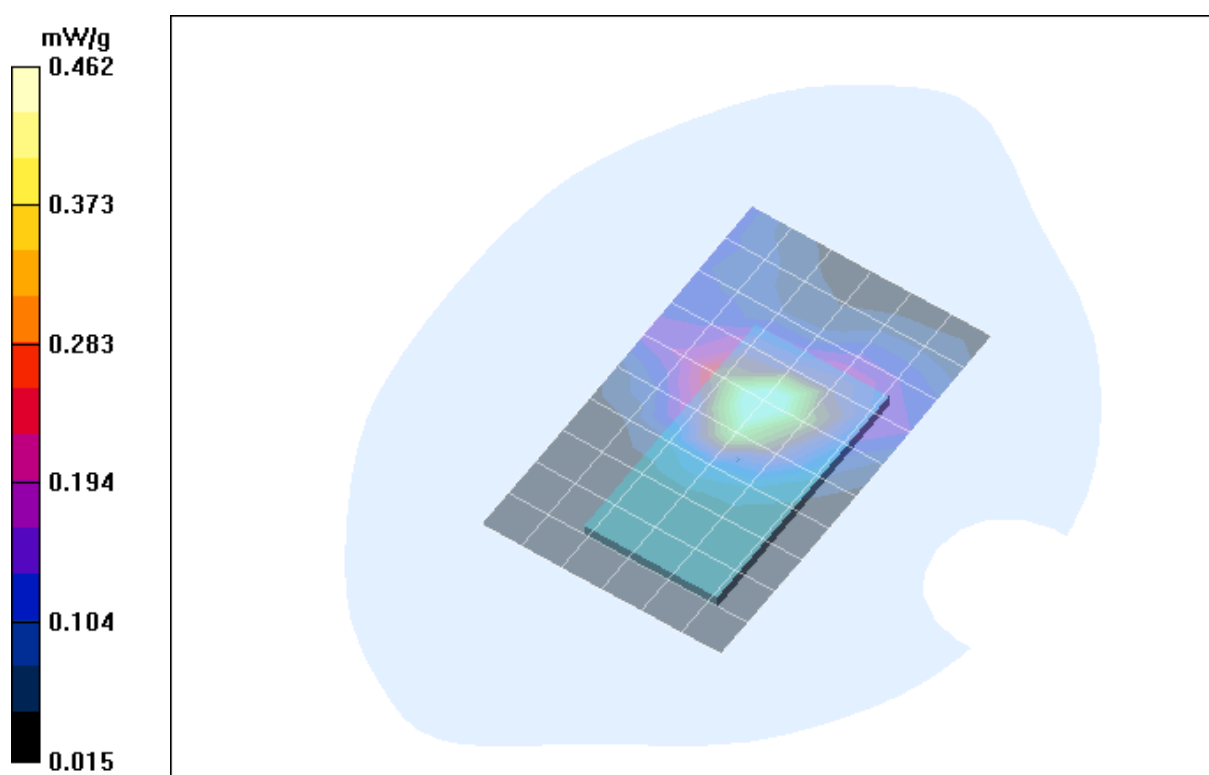


Fig. 10: SAR distribution for GPRS 1900, channel 661, position 1 (DELL Latitude C810, January 12, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.144 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.29 V/m; Power Drift = 0.131 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.133 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.148 mW/g

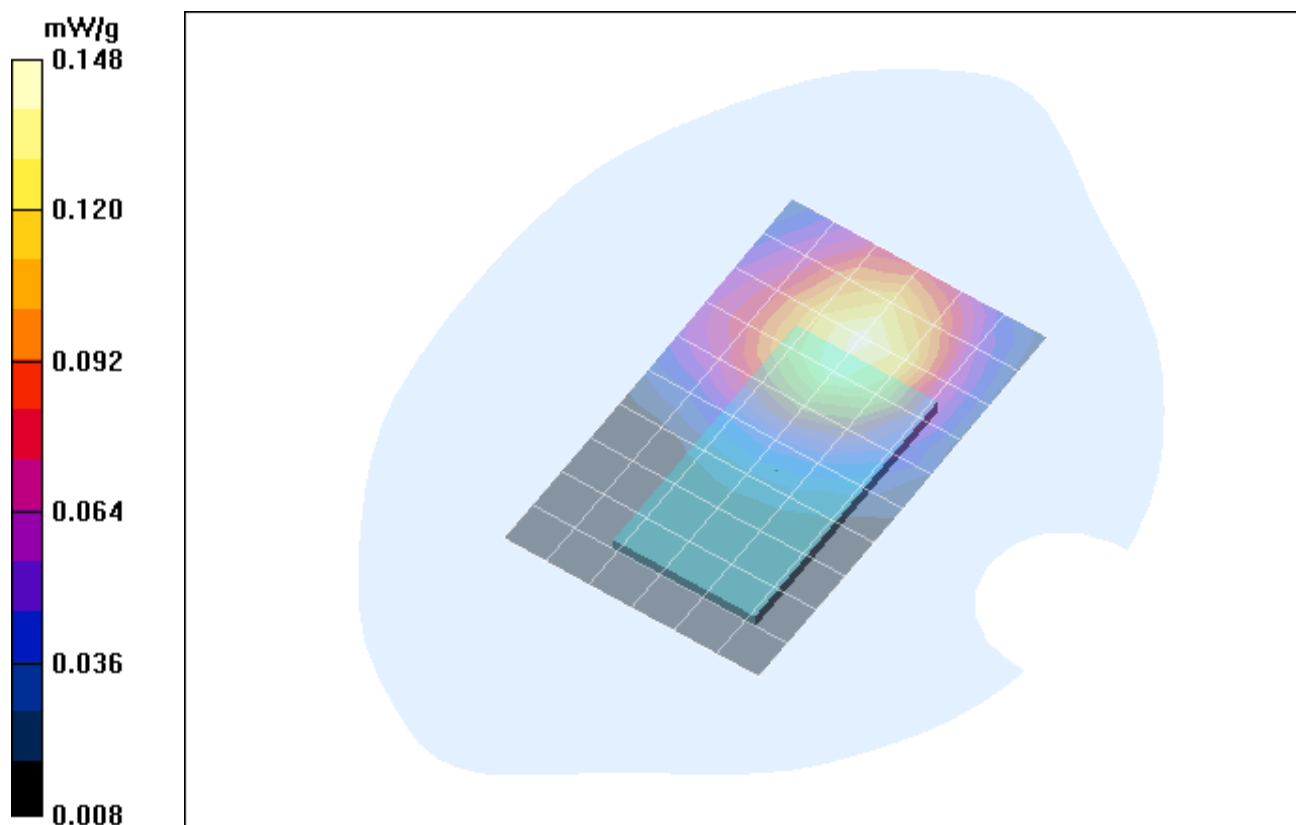


Fig. 11: SAR distribution for GPRS 1900, channel 661, position 2 (DELL Latitude C810, January 12, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.4° C).

Test Laboratory: The name of your organization; **File Name:** [Max_bphm_5.da4](#)

DUT: Option ; **Type:** GT Max;
Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.065 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.40 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.067 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.40 V/m; Power Drift = -0.171 dB

Peak SAR (extrapolated) = 0.082 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.057 mW/g

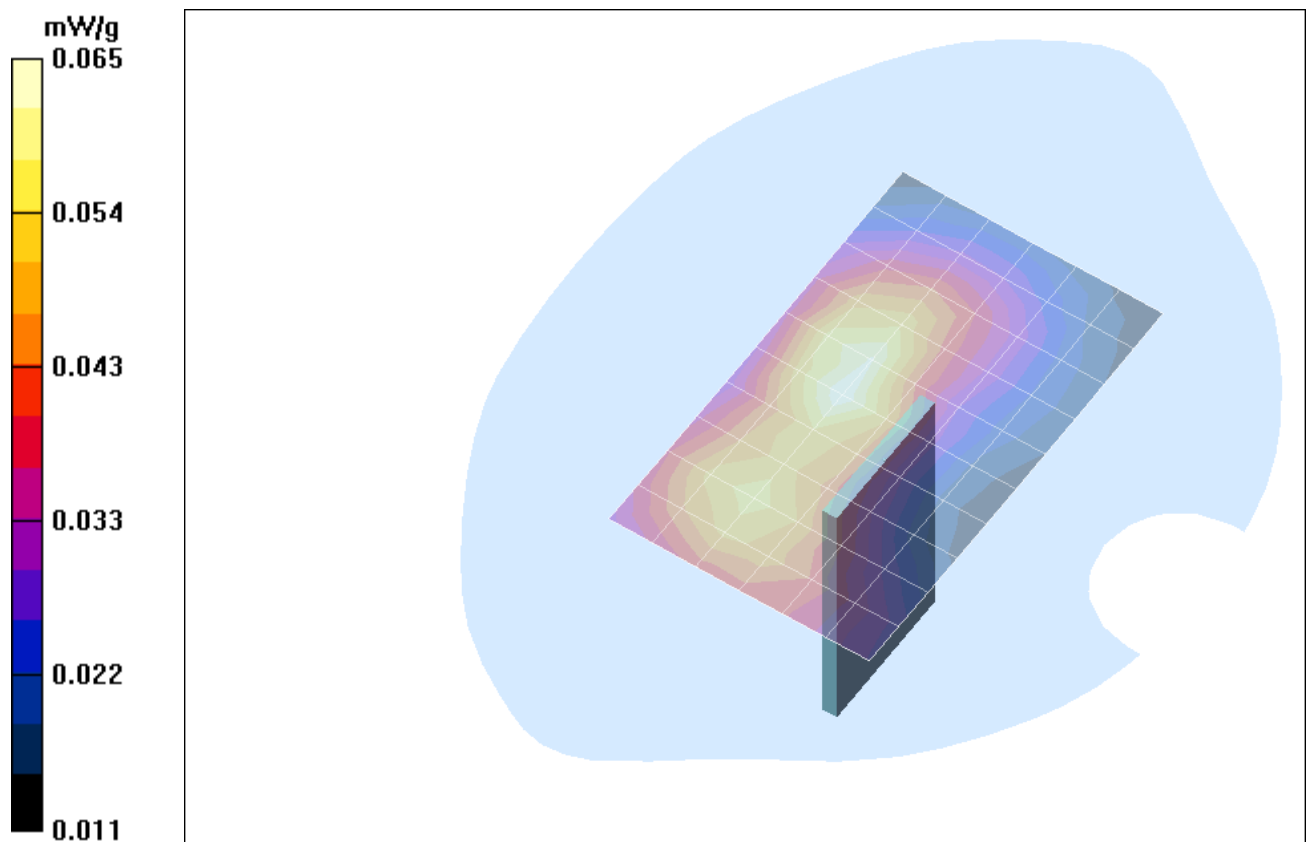


Fig. 12: SAR distribution for GPRS 1900, channel 661, position 3 (DELL Latitude C810 , January 12, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.479 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.8 V/m; Power Drift = -0.130 dB

Peak SAR (extrapolated) = 0.707 W/kg

SAR(1 g) = 0.443 mW/g; SAR(10 g) = 0.266 mW/g

Maximum value of SAR (measured) = 0.489 mW/g

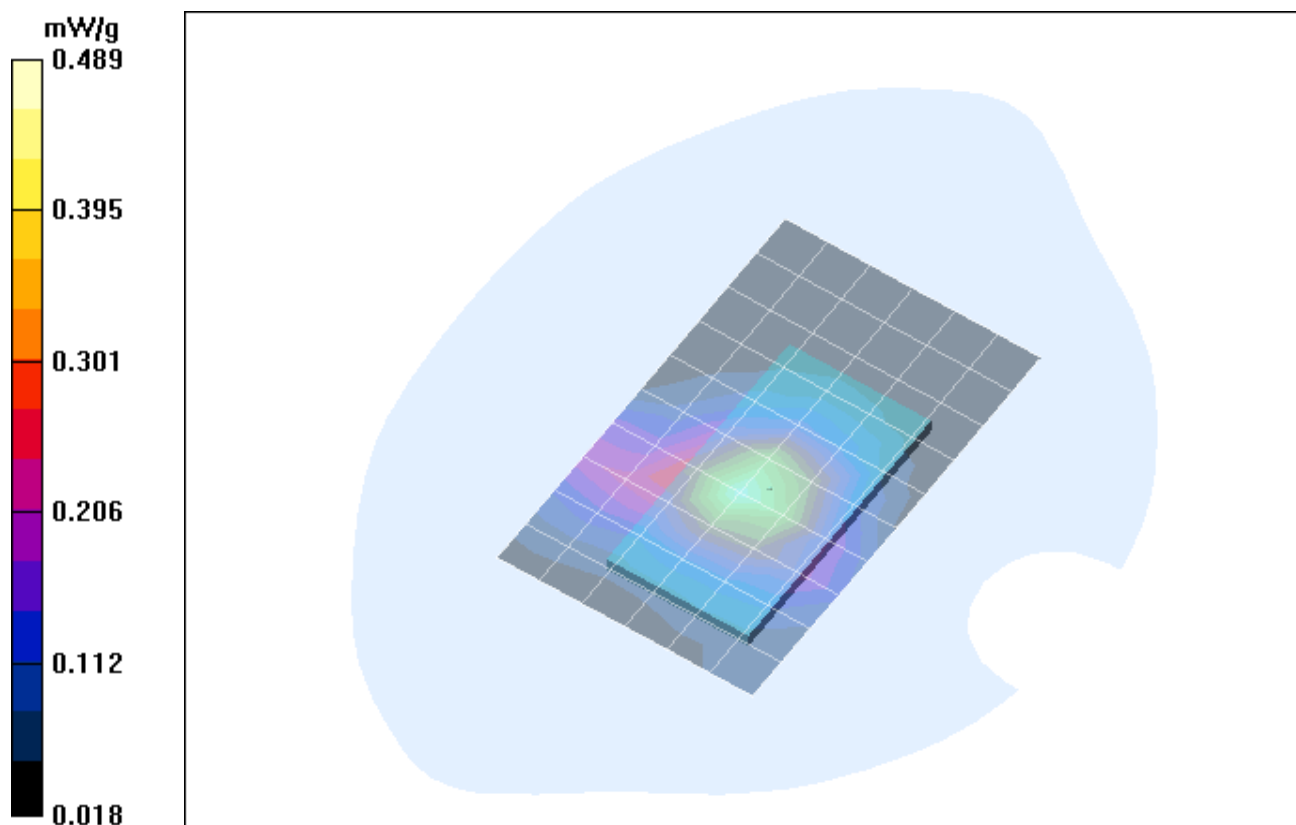


Fig. 13: SAR distribution for GPRS 1900, channel 661, position 1 (Packard Bell Easy Note, January 12, 2006; Ambient Temperature: 21.0° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.008 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.77 V/m; Power Drift = 0.043 dB

Peak SAR (extrapolated) = 0.012 W/kg

SAR(1 g) = 0.00762 mW/g; SAR(10 g) = 0.00552 mW/g

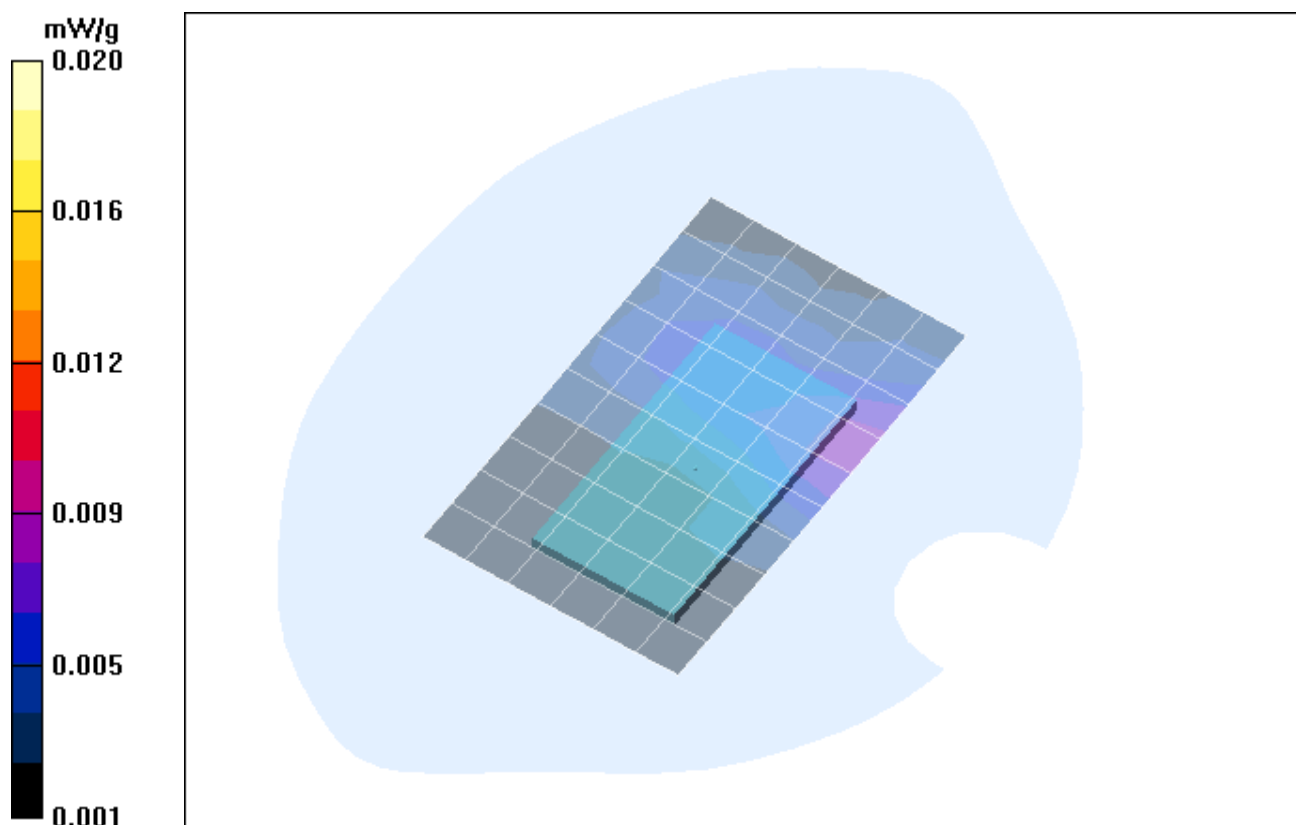


Fig. 14: SAR distribution for GPRS 1900, channel 661, position 2 (Packard Bell Easy Note, January 12, 2006; Ambient Temperature: 21.1° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_5.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.26 V/m; Power Drift = 0.701 dB

Peak SAR (extrapolated) = 0.089 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.040 mW/g

Maximum value of SAR (measured) = 0.065 mW/g

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.063 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.26 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.069 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.050 mW/g

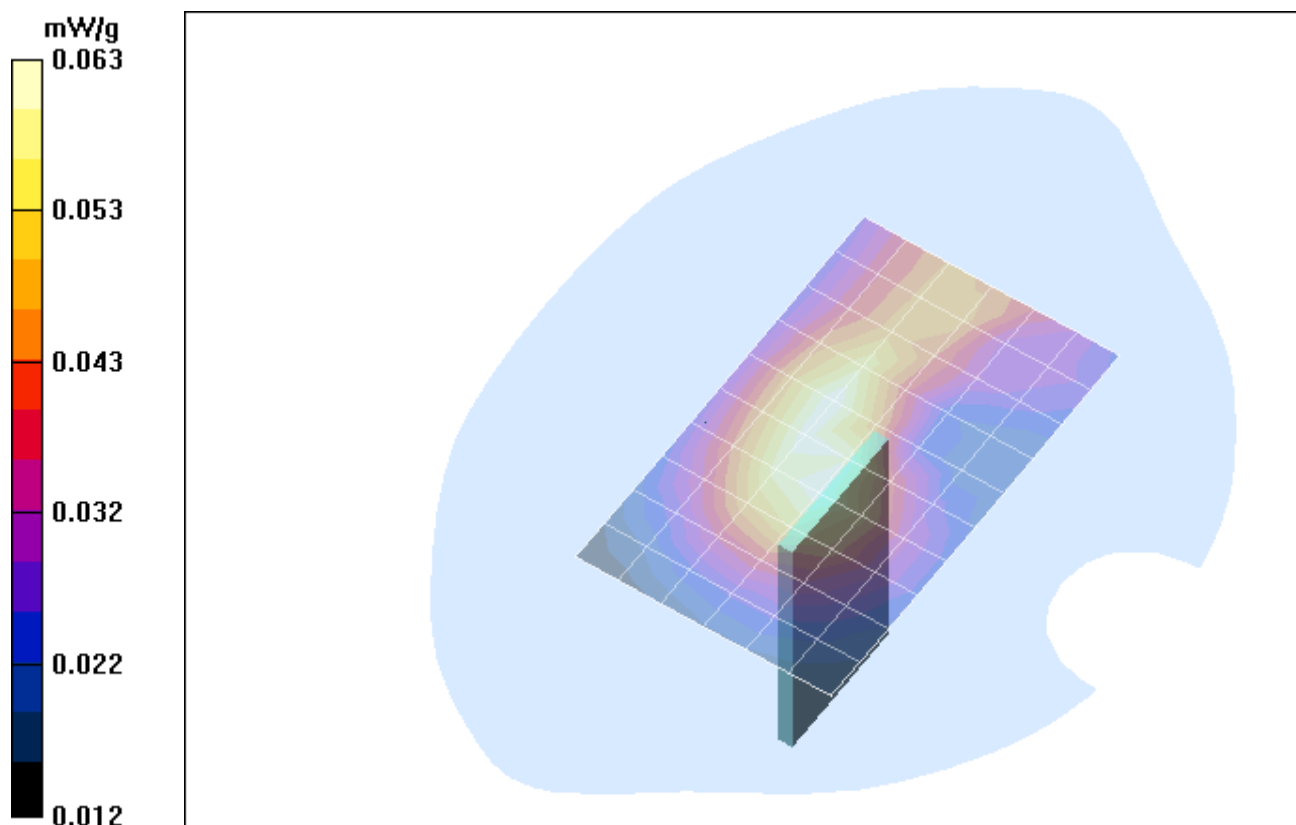


Fig. 15: SAR distribution for GPRS 1900, channel 661, position 3 (Packard Bell Easy Note , January 16, 2006; Ambient Temperature: 21.1° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.013 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.62 V/m; Power Drift = -0.123 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.0089 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

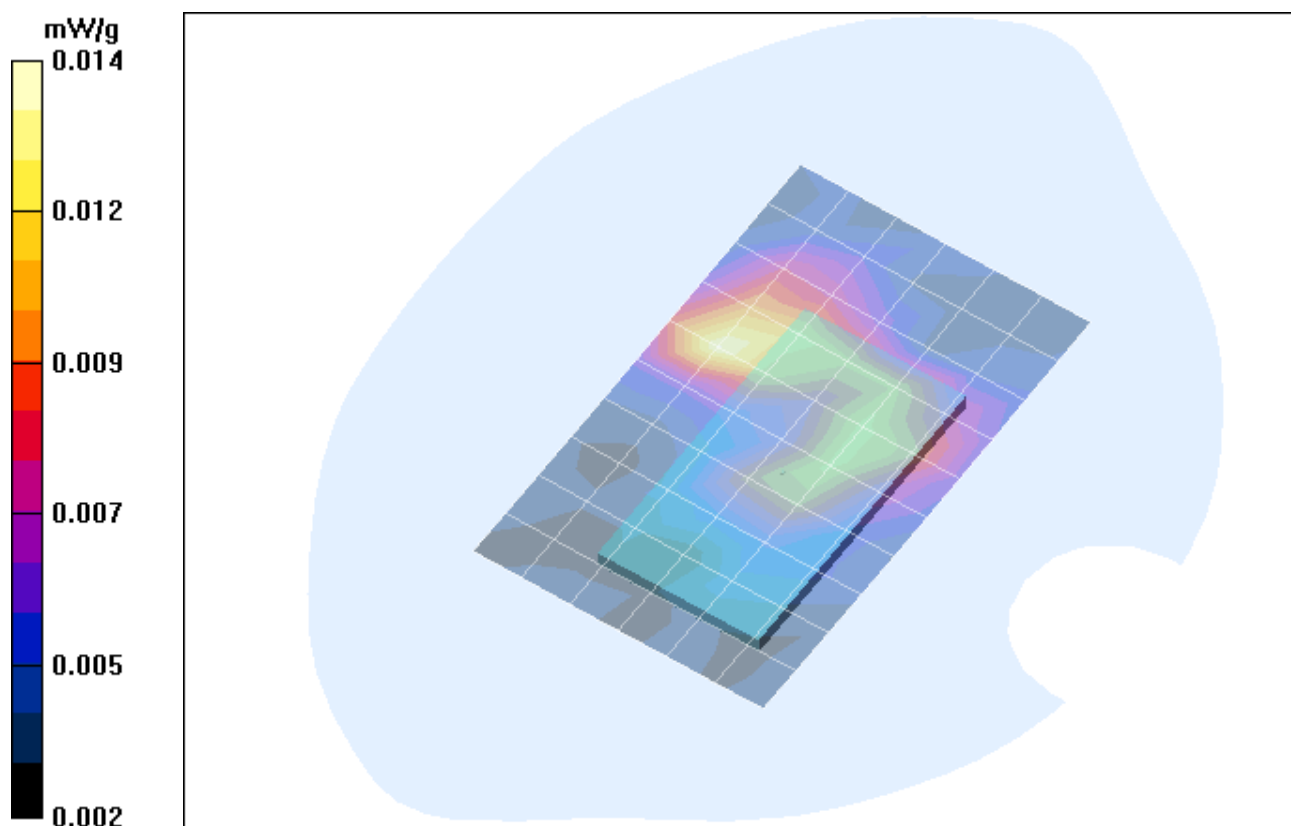


Fig. 16: SAR distribution for GPRS 1900, channel 661, position 1 (Fujitsu Siemens Amilo Pro, January 12, 2006; Ambient Temperature: 21.0° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bphm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.006 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.06 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 0.00554 mW/g; SAR(10 g) = 0.00486 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

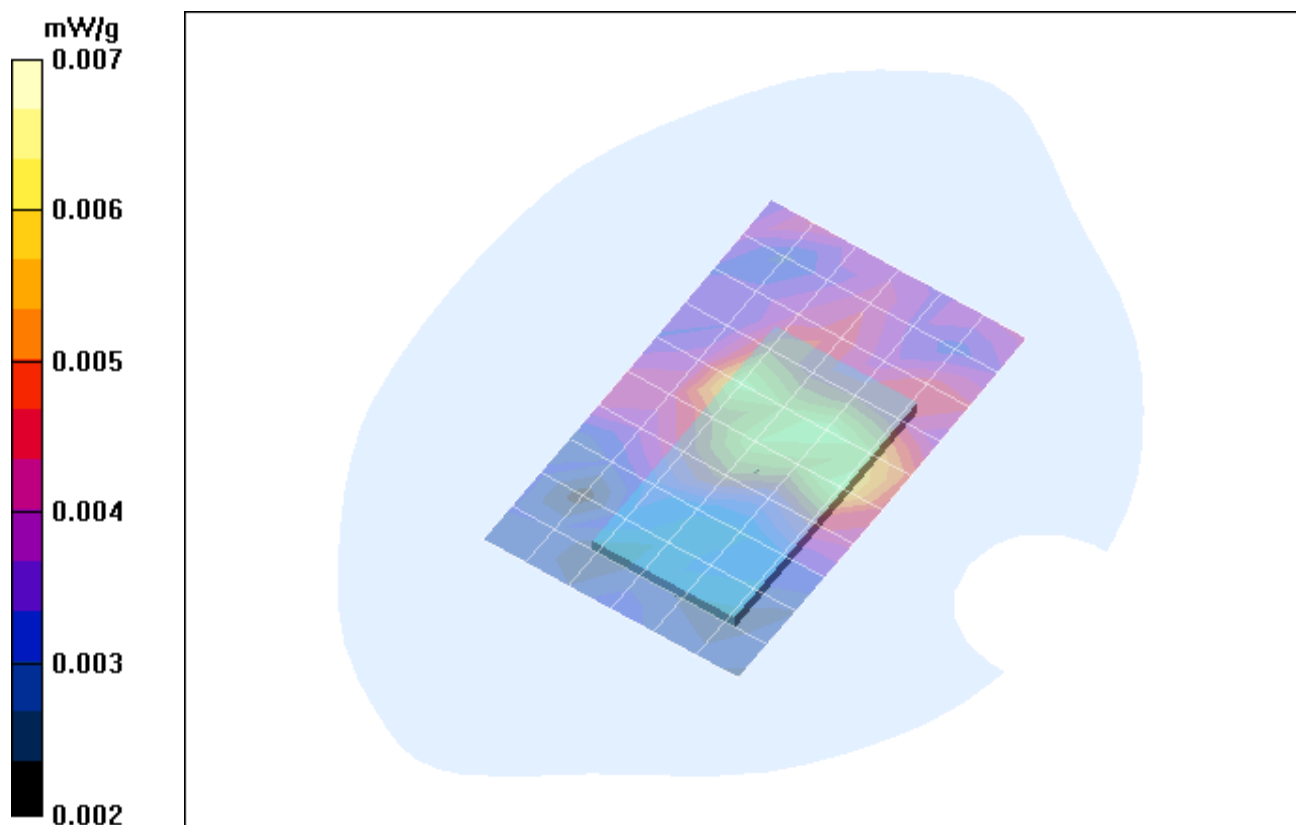


Fig. 17: SAR distribution for GPRS 1900, channel 661, position 2 (Fujitsu Siemens Amilo Pro, January 12, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: The name of your organization; **File Name:** [Max_bphm_5.da4](#)

DUT: Option ; **Type:** GT Max;

Program Name: Body Worn

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.003 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.19 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.005 W/kg

SAR(1 g) = 0.00275 mW/g; SAR(10 g) = 0.00182 mW/g

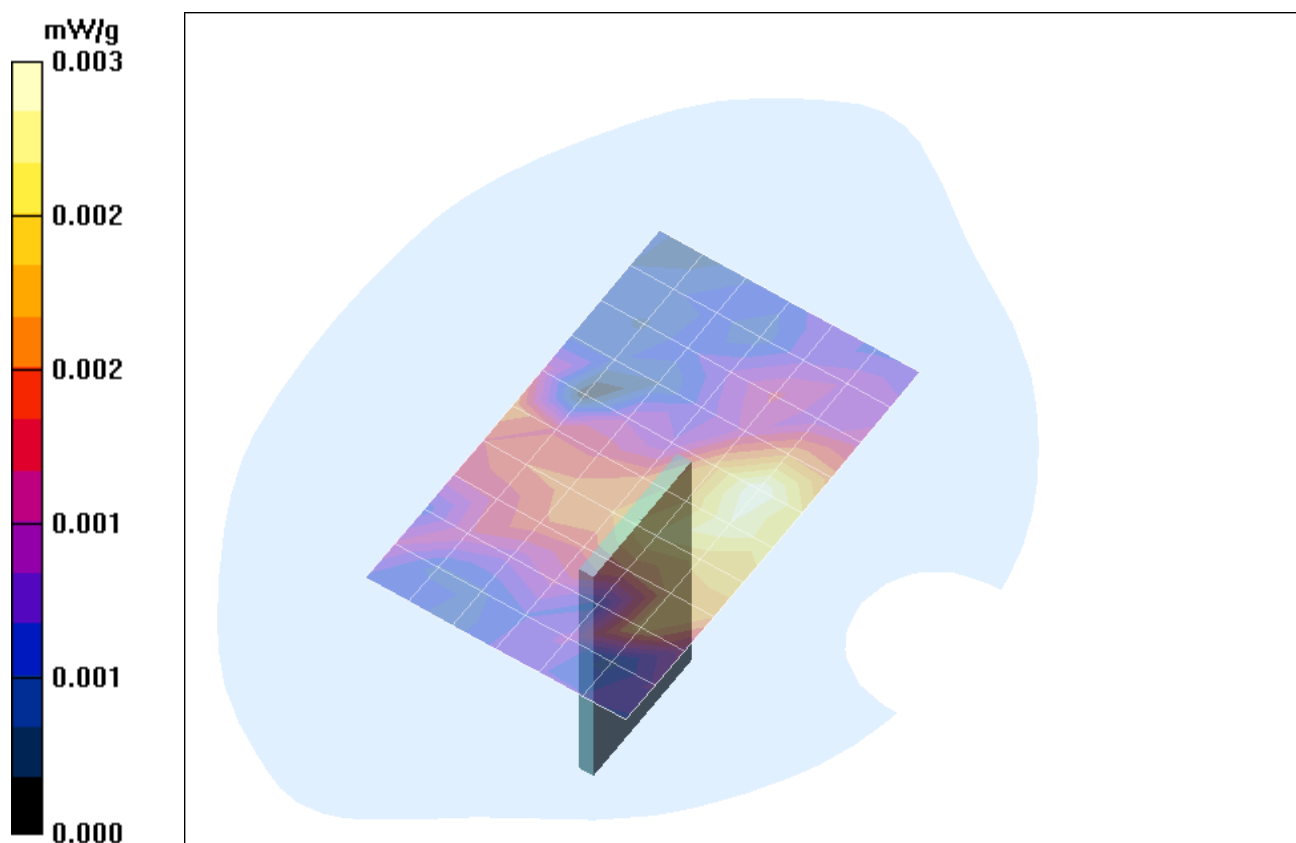


Fig. 18: SAR distribution for GPRS 1900, channel 661, position 3 (Fujitsu Siemens Amilo Pro, January 12, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

3 SAR Distribution Plots, WCDMA II (FDD) Body

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bUllhm_1.da4](#)

DUT: Option ; Type: GT Max;
Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.326 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.479 W/kg

SAR(1 g) = 0.299 mW/g; SAR(10 g) = 0.176 mW/g

Maximum value of SAR (measured) = 0.328 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.5 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.342 W/kg

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.101 mW/g

Maximum value of SAR (measured) = 0.197 mW/g

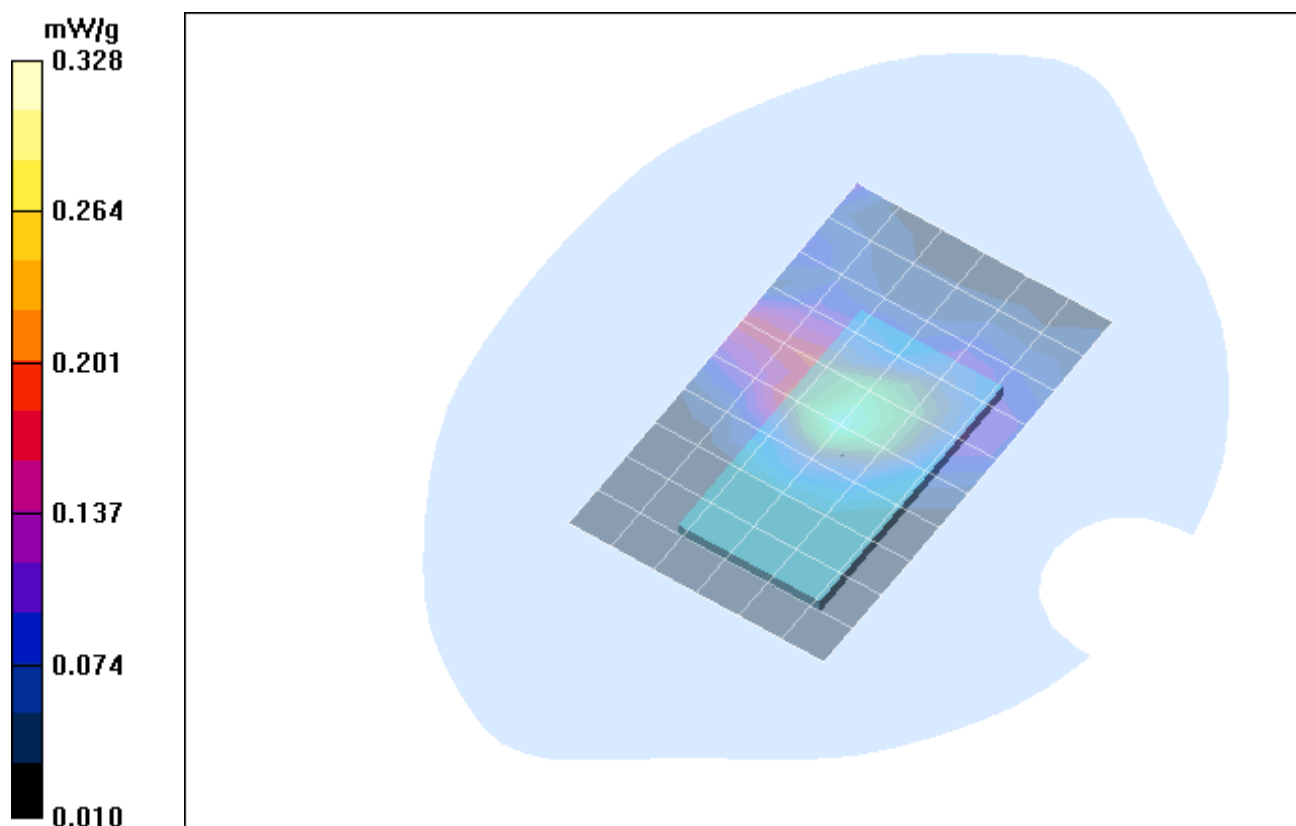


Fig. 19: SAR distribution for WCDMA II (FDD), channel 187, position 1 (DELL Latitude C810, January 12, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.3° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bUllhm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.130 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.39 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.081 mW/g

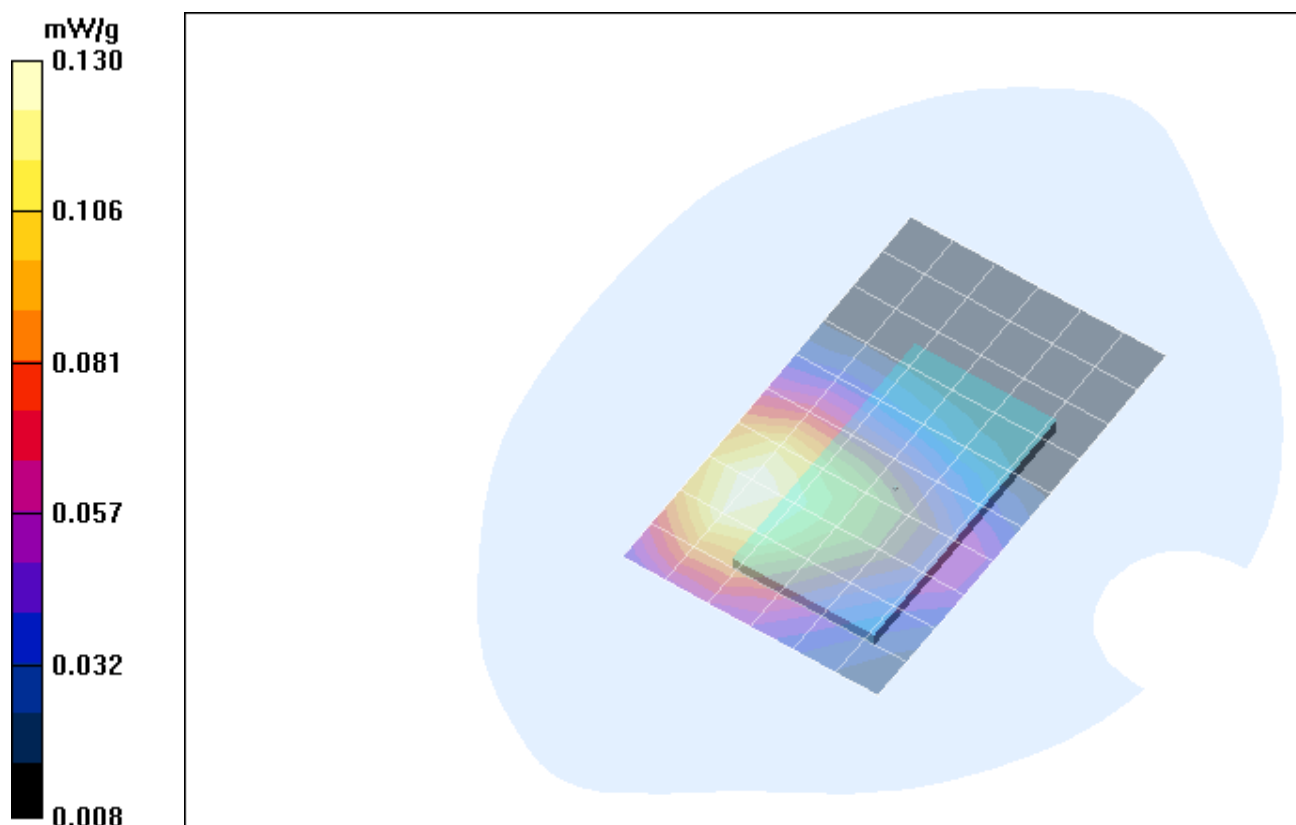


Fig. 20: SAR distribution for WCDMA II (FDD), channel 187, position 2 (DELL Latitude C810, January 12, 2006; Ambient Temperature: 21.2° C; Liquid Temperature: 20.4° C).

Test Laboratory: The name of your organization; **File Name:** [Max_bUllhm_5.da4](#)

DUT: Option ; **Type:** GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.049 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.075 W/kg

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.055 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.19 V/m; Power Drift = 0.193 dB

Peak SAR (extrapolated) = 0.067 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.046 mW/g

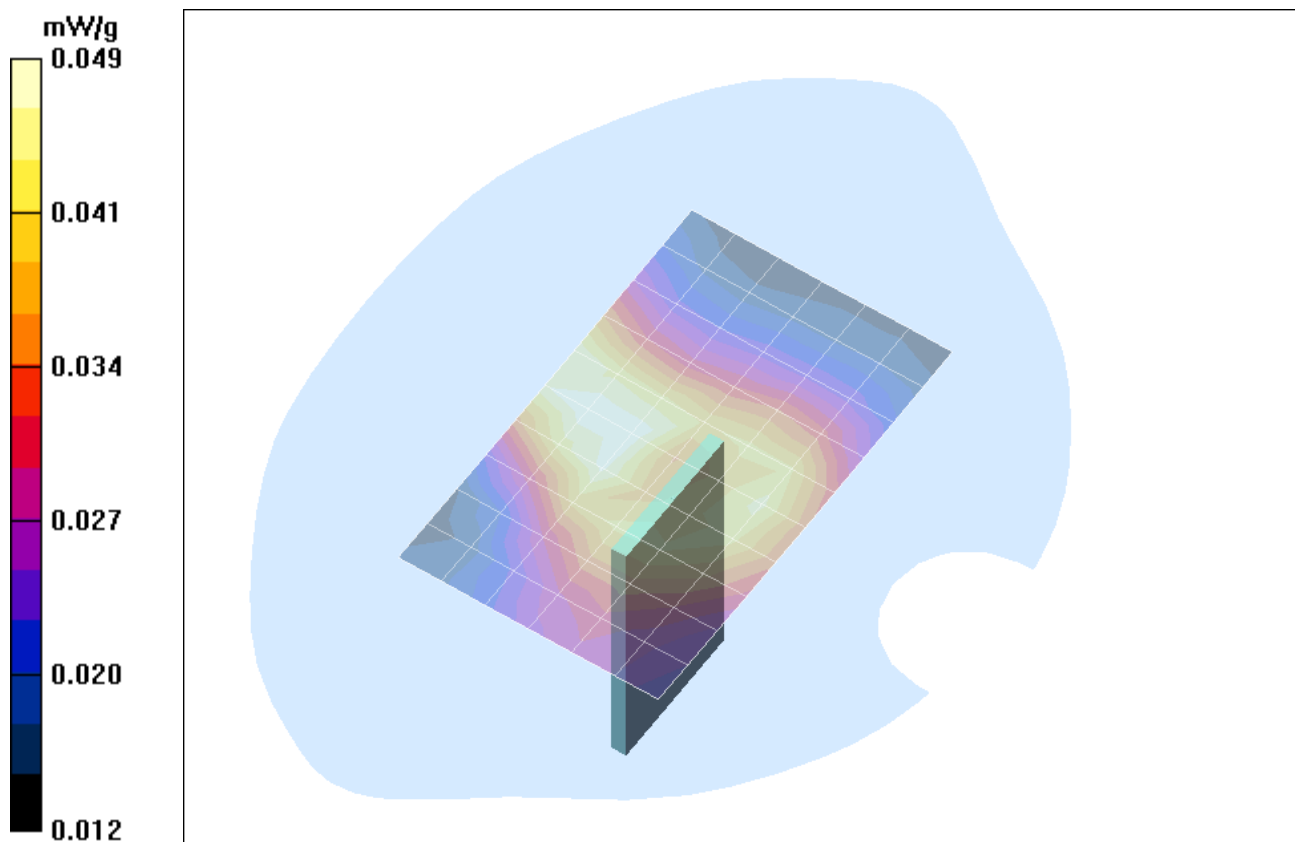


Fig. 21: SAR distribution for WCDMA II (FDD), channel 187, position 3 (DELL Latitude C810, January 12, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bUllhm_1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.419 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = 0.200 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.390 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.423 mW/g

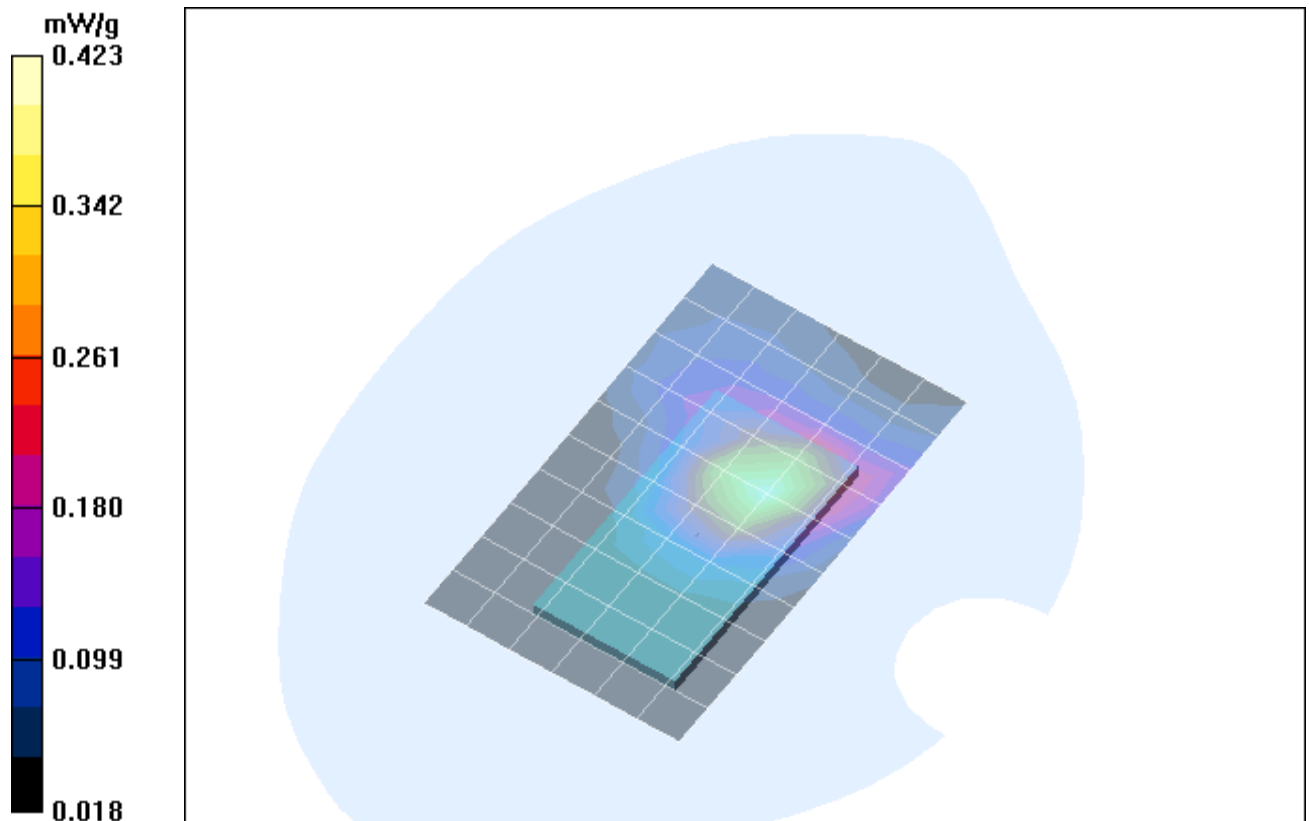


Fig. 22: SAR distribution for WCDMA II (FDD), channel 187, position 1 (Packard Bell Easy Note, January 12, 2006; Ambient Temperature: 21.0° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bUllhm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.174 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.13 V/m; Power Drift = 0.072 dB

Peak SAR (extrapolated) = 0.258 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.112 mW/g

Maximum value of SAR (measured) = 0.184 mW/g

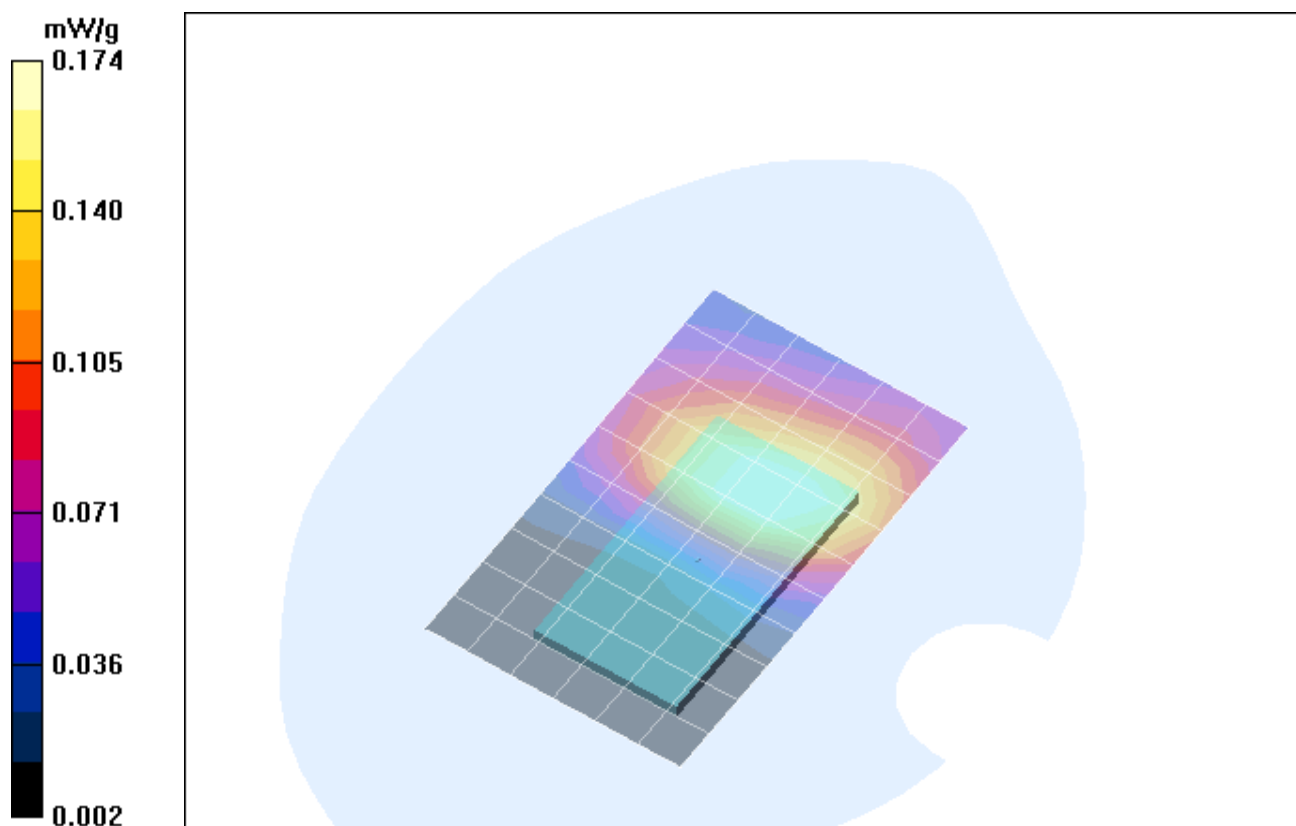


Fig. 23: SAR distribution for WCDMA II (FDD), channel 187, position 2 (Packard Bell Easy Note, January 12, 2006; Ambient Temperature: 21.0° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bullhm_5.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.080 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.62 V/m; Power Drift = -0.020 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.082 mW/g

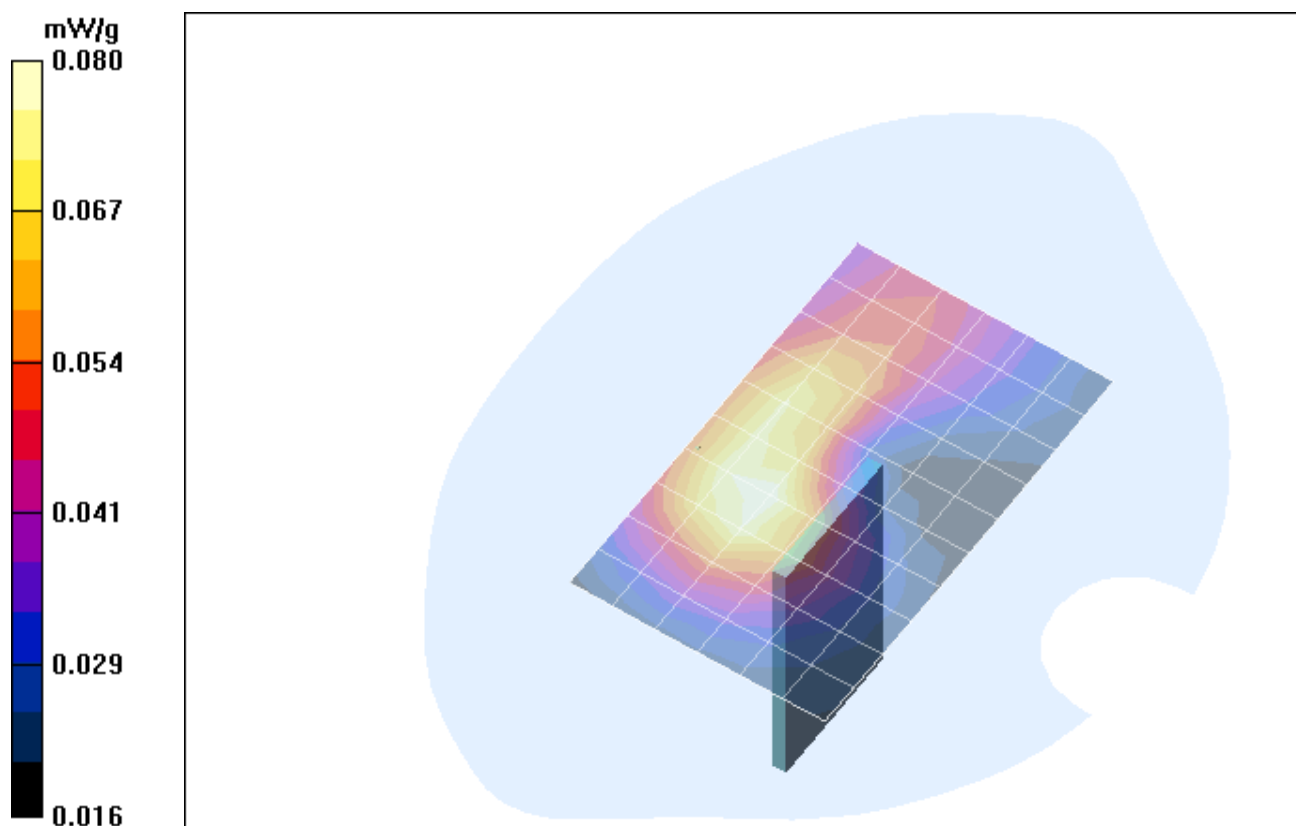


Fig. 24: SAR distribution for WCDMA II (FDD), channel 187, position 3 (Packard Bell Easy Note , January 16, 2006; Ambient Temperature: 21.1° C; Liquid Temperature: 20.6° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bullhm_1.da4](#)

DUT: Option ; Type: GT Max;
Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.299 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.177 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = 0.046 dB

Peak SAR (extrapolated) = 0.241 W/kg

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.109 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

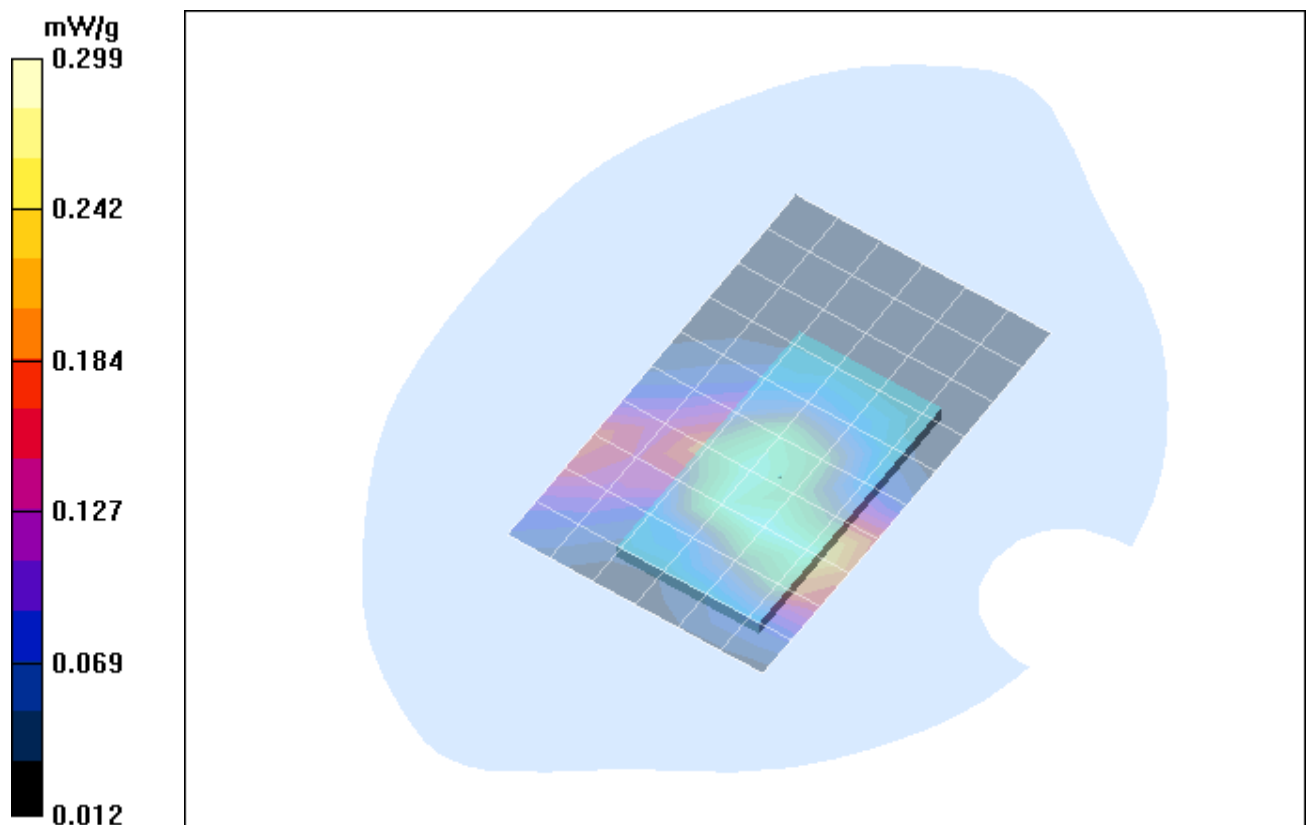


Fig. 25: SAR distribution for WCDMA II (FDD), channel 187, position 1 (Fujitsu Siemens Amilo Pro, January 12, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_bullhm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.164 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = -0.199 dB

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.149 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.160 mW/g

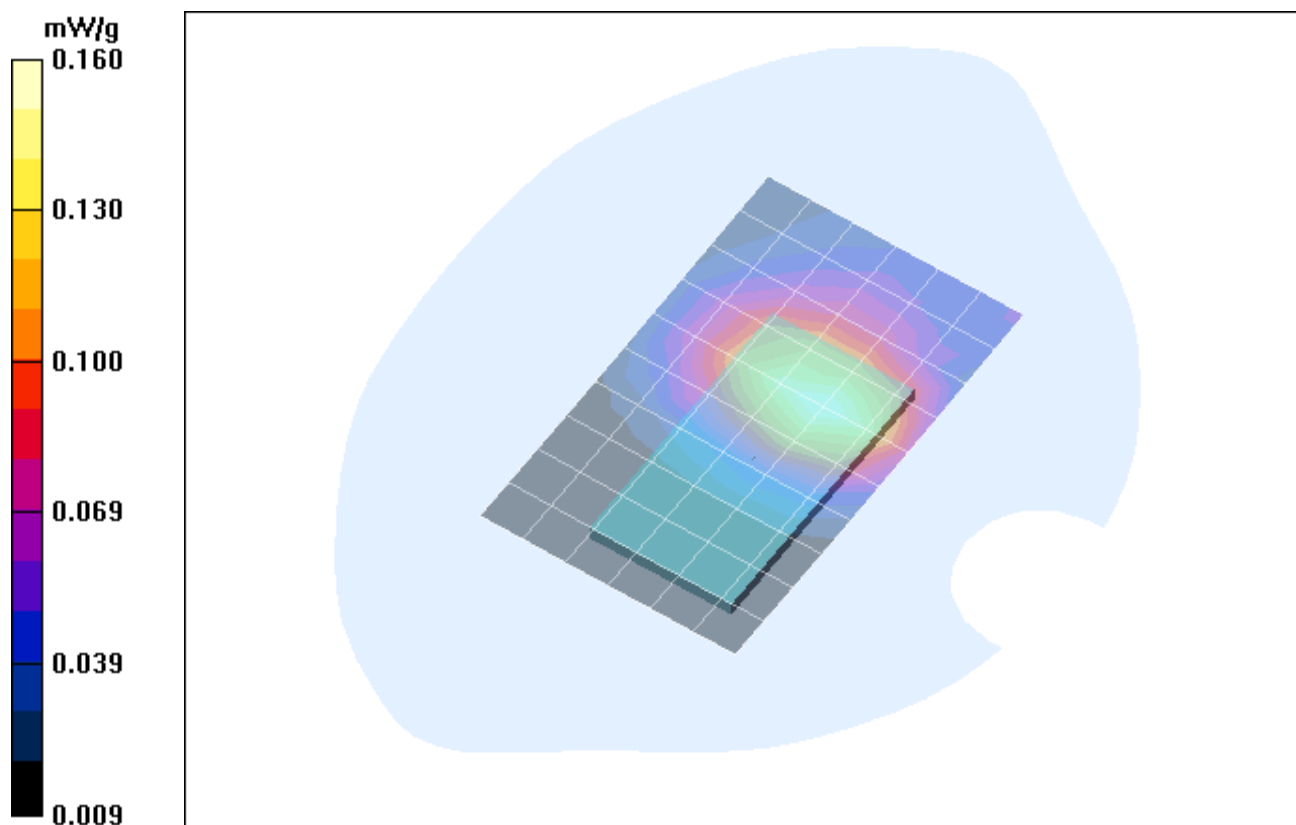


Fig. 26: SAR distribution for WCDMA II (FDD), channel 187, position 2 (Fujitsu Siemens Amilo Pro, January 12, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: The name of your organization; **File Name:** [Max_bullhm_5.da4](#)

DUT: Option ; **Type:** GT Max;

Program Name: Body Worn

Communication System: WCDMA FDD Band II; Frequency: 1887.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1887.5$ MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 54.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(4.52, 4.52, 4.52); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.039 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.00 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 0.058 W/kg

SAR(1 g) = 0.039 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.042 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.00 V/m; Power Drift = 0.191 dB

Peak SAR (extrapolated) = 0.050 W/kg

SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

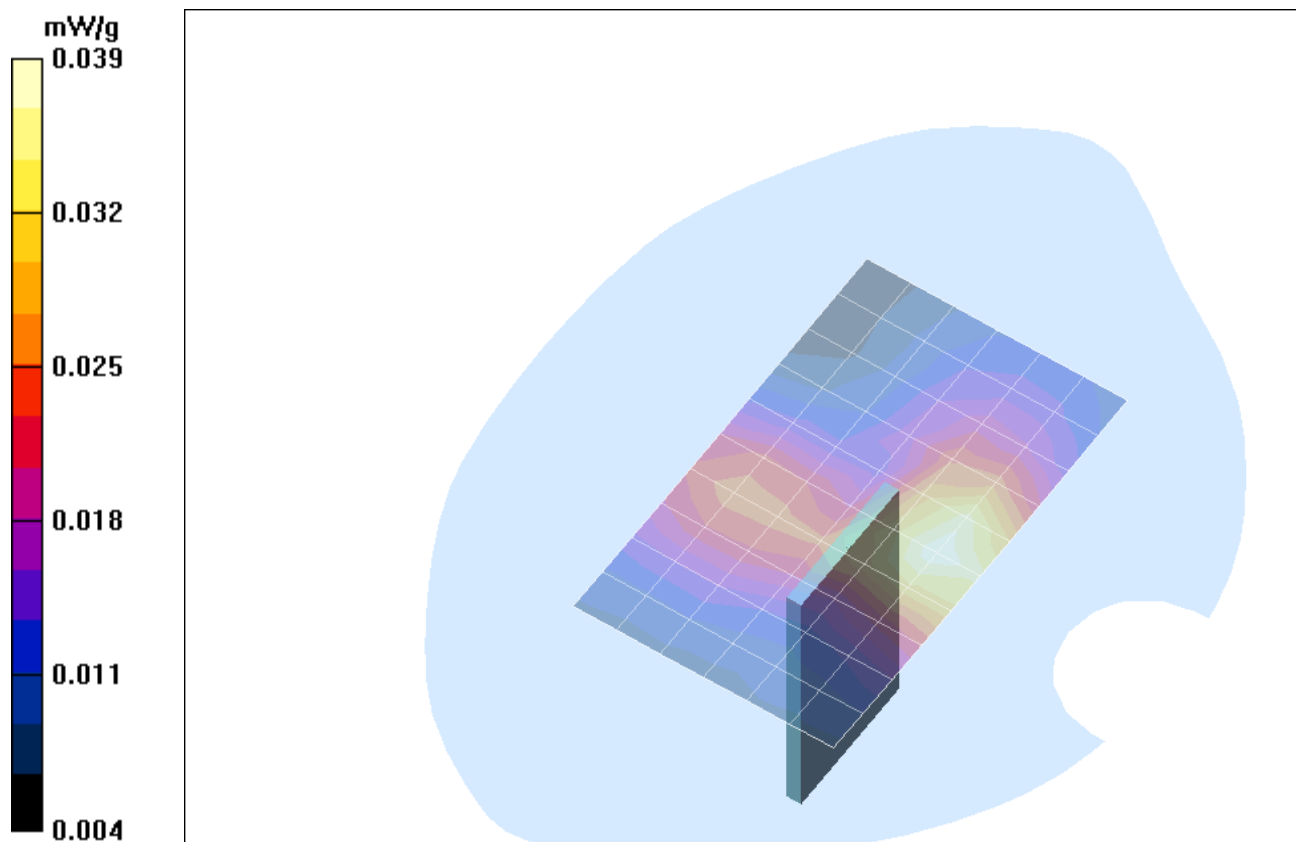


Fig. 27: SAR distribution for WCDMA II (FDD), channel 187, position 3 (Fujitsu Siemens Amilo Pro, January 12, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

4 SAR Distribution Plots, WCDMA V (FDD) Body

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_1.da4](#)

DUT: Option ; Type: GT Max;
Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.048 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.64 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.64 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.057 mW/g

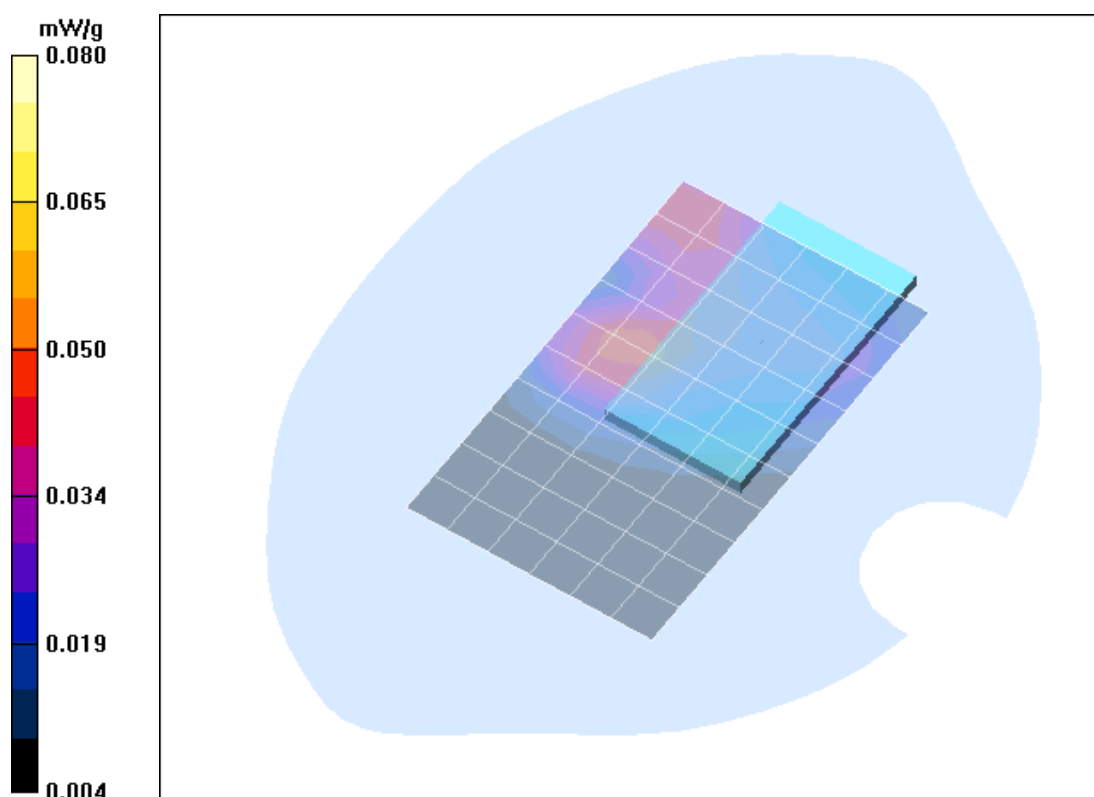


Fig. 28: SAR distribution for WCDMA V (FDD), channel 4183 position 1 (DELL Latitude C810, January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.026 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.02 V/m; Power Drift = 0.198 dB

Peak SAR (extrapolated) = 0.035 W/kg

SAR(1 g) = 0.025 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.027 mW/g

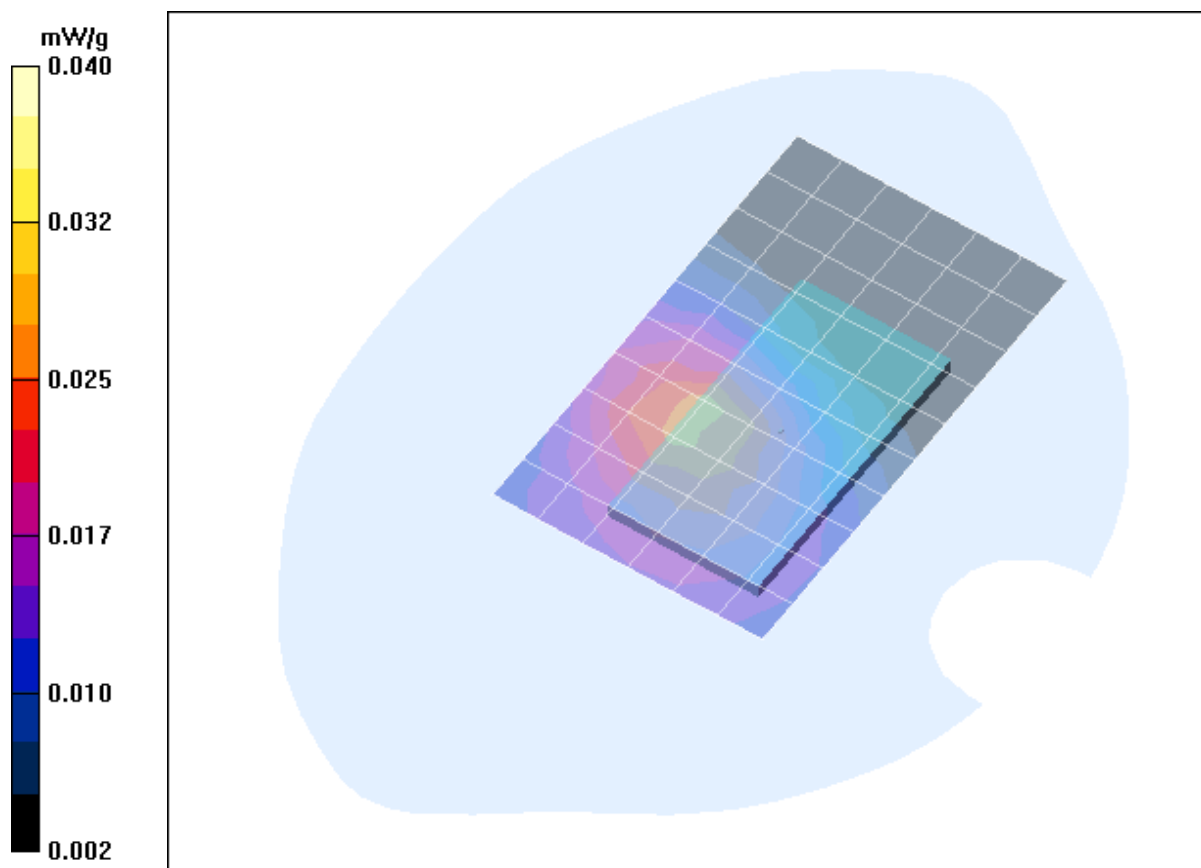


Fig. 29: SAR distribution for WCDMA V (FDD), channel 4183, position 2 (DELL Latitude C810, January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_5.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.013 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.32 V/m; Power Drift = 0.187 dB

Peak SAR (extrapolated) = 0.019 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00883 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

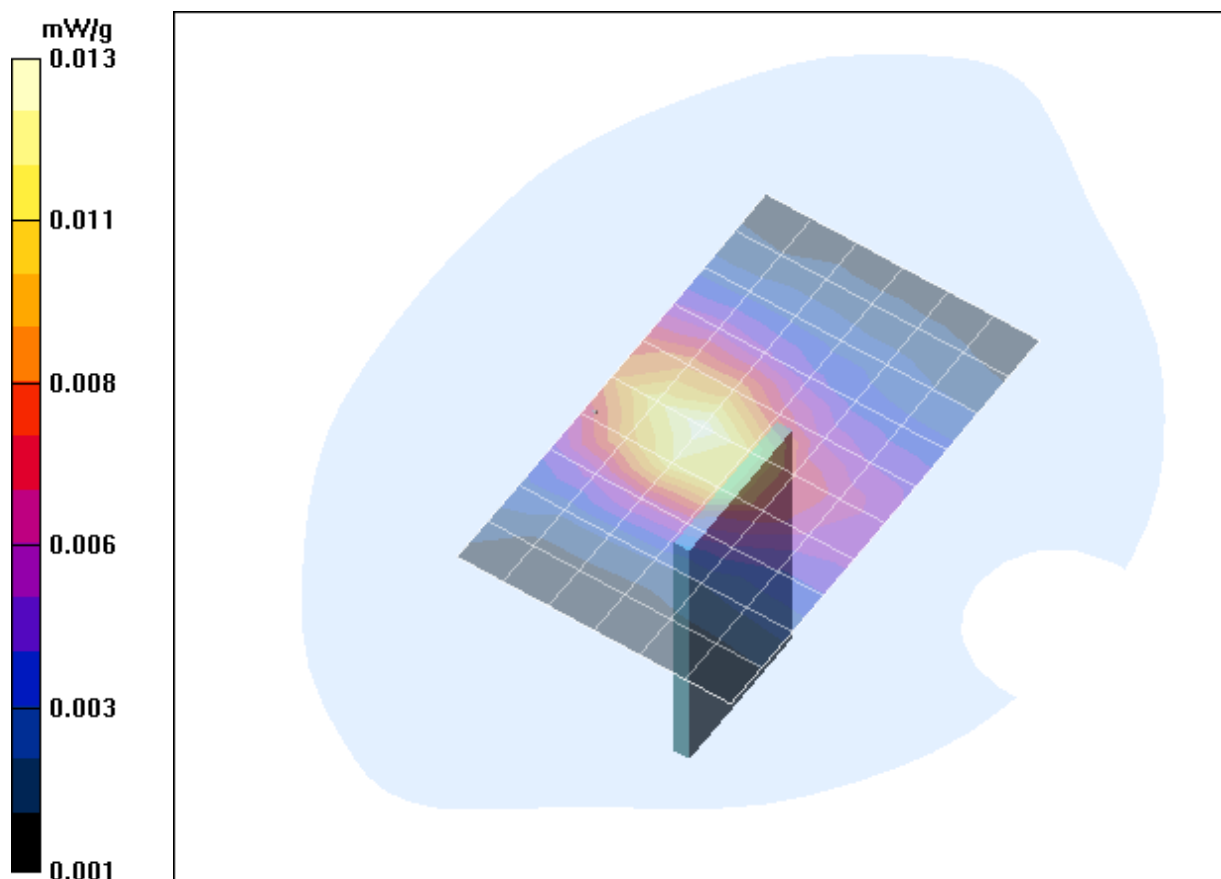


Fig. 30: SAR distribution for WCDMA V (FDD), channel 4183, position 3 (DELL Latitude C810 , January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max buVhm 1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.094 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.68 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.127 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.063 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

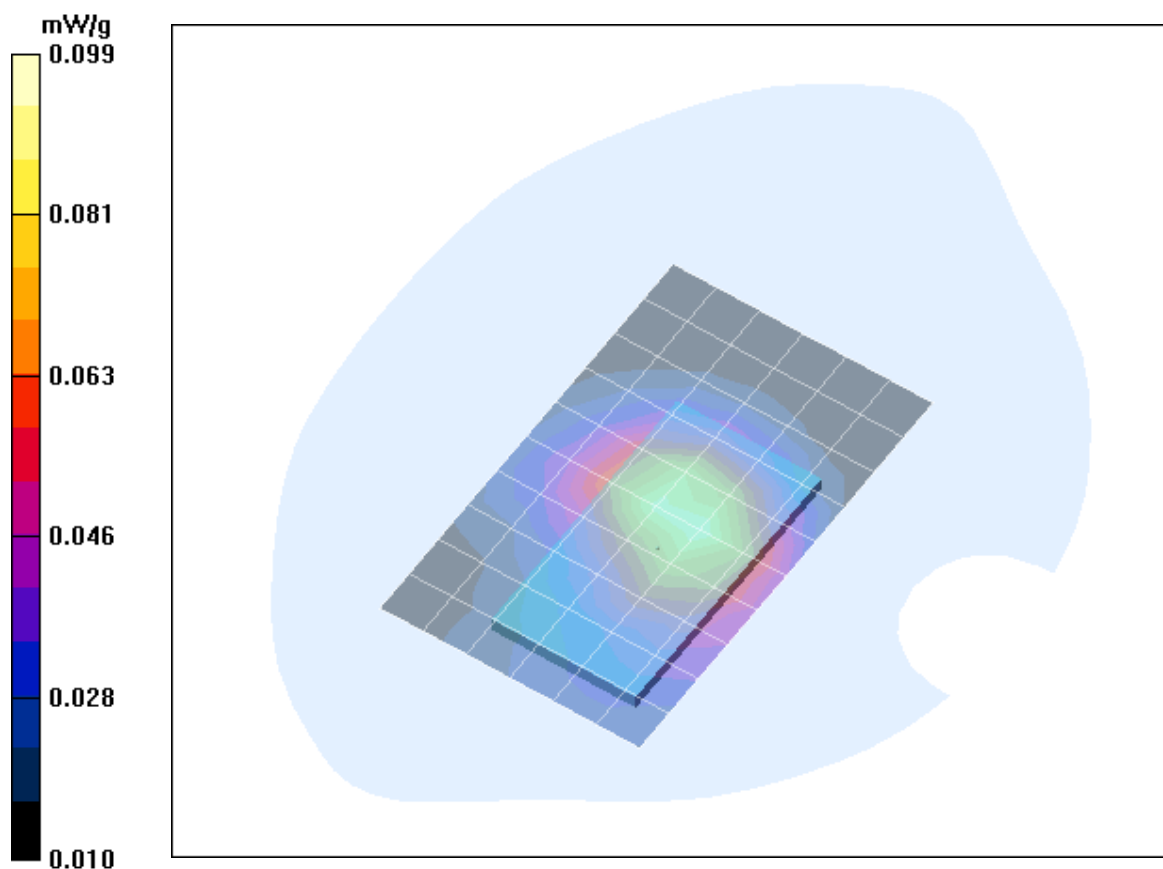


Fig. 31: SAR distribution for WCDMA V (FDD), channel 4183, position 1 (Packard Bell Easy Note, January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.048 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.67 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.079 W/kg

SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.049 mW/g

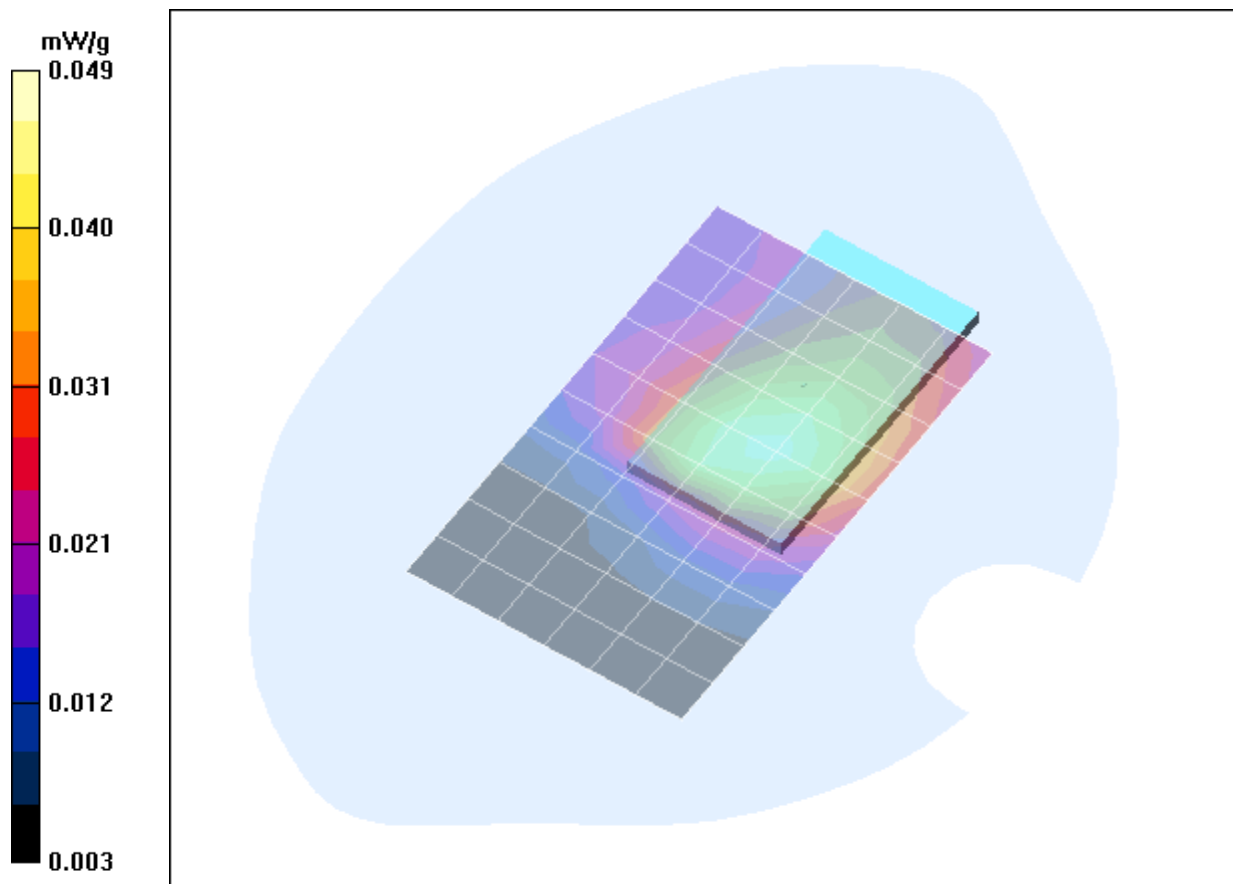


Fig. 32: SAR distribution for WCDMA V (FDD), channel 4183, position 2 (Packard Bell Easy Note, January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_5.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.032 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.79 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.043 W/kg

SAR(1 g) = 0.030 mW/g; SAR(10 g) = 0.021 mW/g

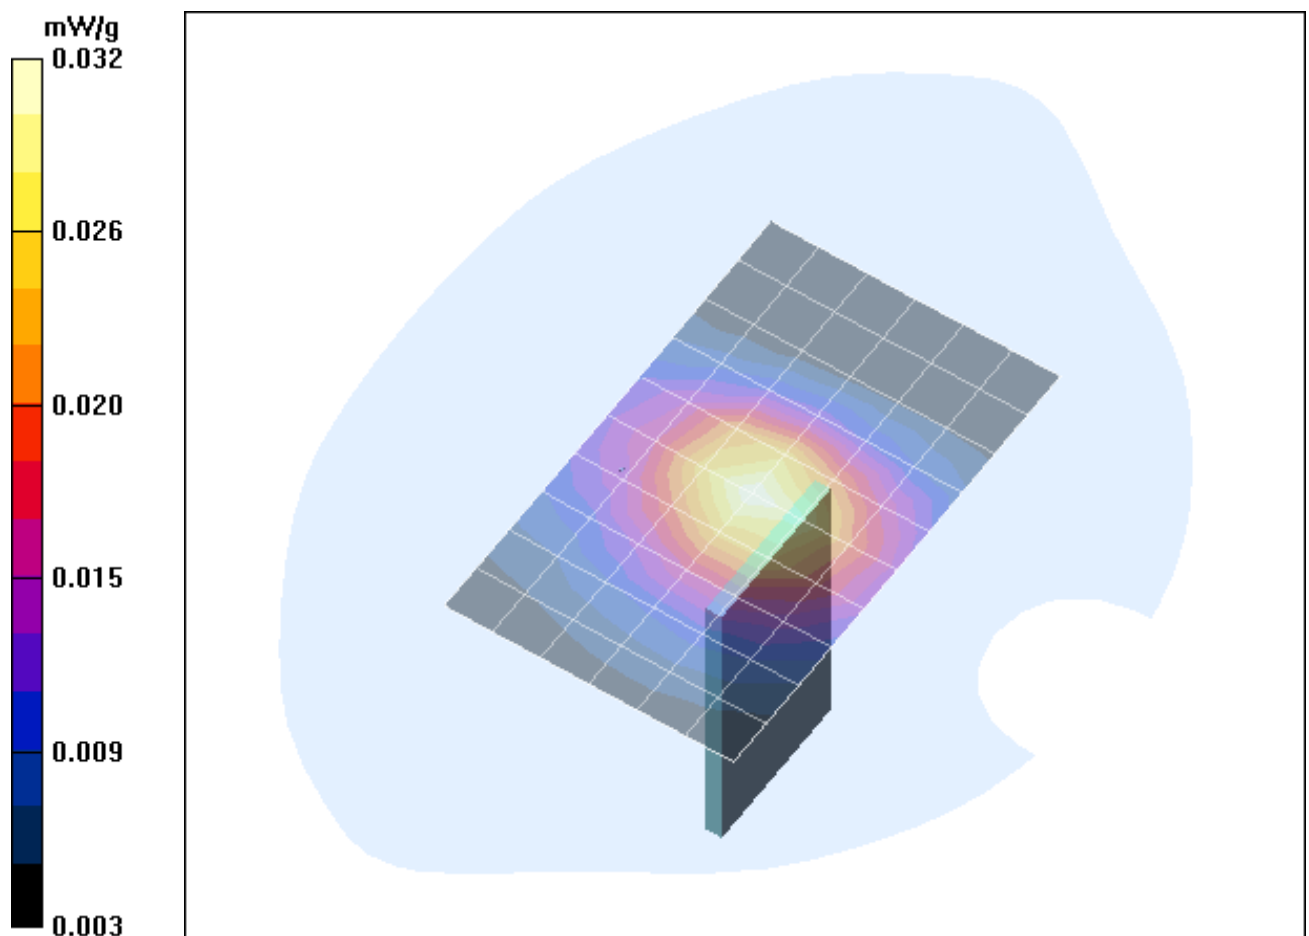


Fig. 33: SAR distribution for WCDMA V (FDD), channel 4183, position 3 (Packard Bell Easy Note , January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_1.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.075 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.58 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 0.099 W/kg

SAR(1 g) = 0.068 mW/g; SAR(10 g) = 0.046 mW/g

Maximum value of SAR (measured) = 0.074 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.58 V/m; Power Drift = 0.075 dB

Peak SAR (extrapolated) = 0.082 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

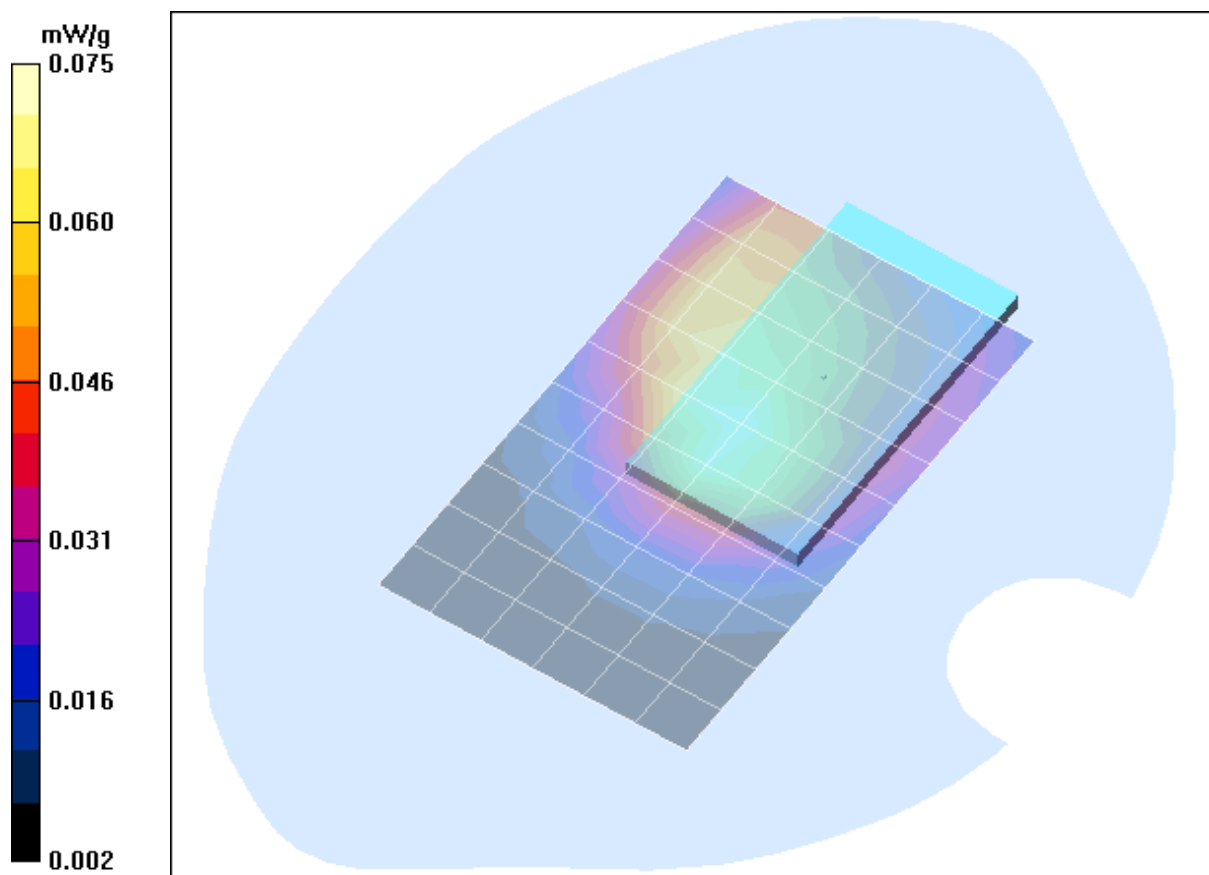


Fig. 34: SAR distribution for WCDMA V (FDD), channel 4183, position 1 (Fujitsu Siemens Amilo Pro, January 16, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [Max_buVhm_2.da4](#)

DUT: Option ; Type: GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.050 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.93 V/m; Power Drift = 0.190 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

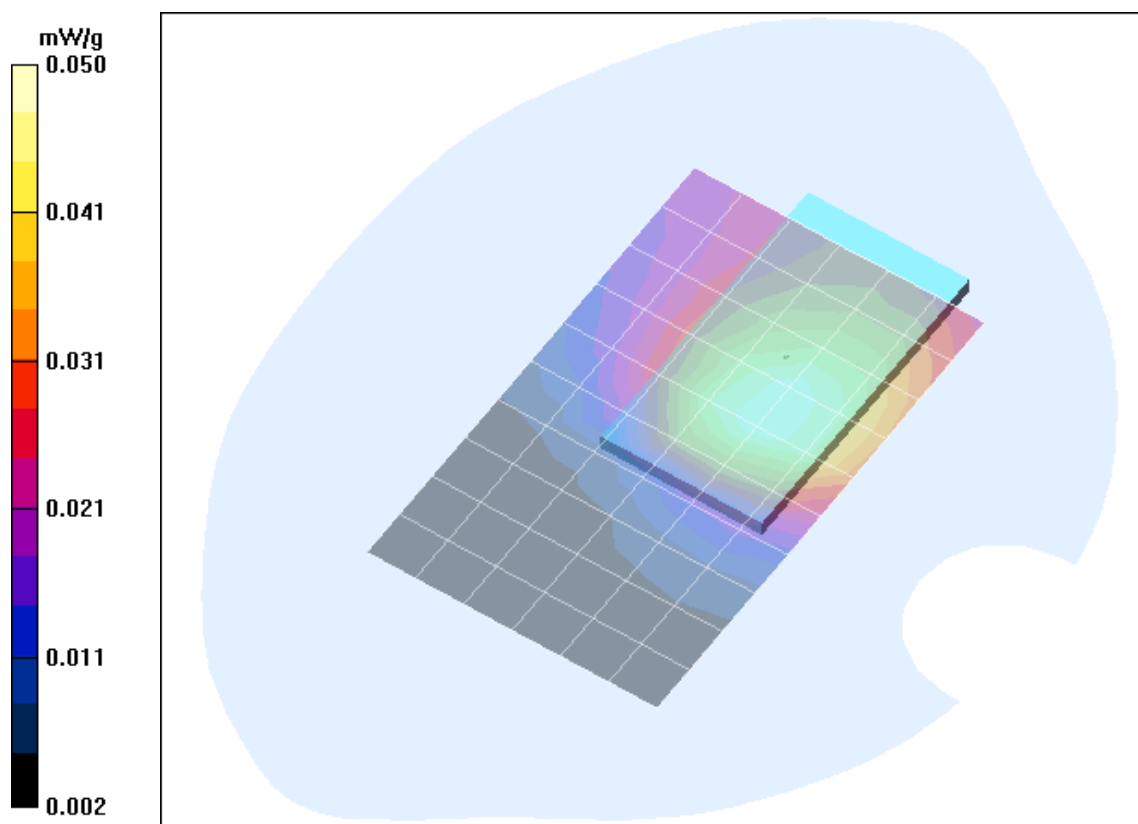


Fig. 35: SAR distribution for WCDMA V (FDD), channel 4183, position 2 (Fujitsu Siemens Amilo Pro, January 16, 2006; Ambient Temperature: 21.3° C; Liquid Temperature: 20.4° C).

Test Laboratory: The name of your organization; **File Name:** [Max_buVhm_5.da4](#)

DUT: Option ; **Type:** GT Max;

Program Name: Body Worn

Communication System: WCDMA (FDD) Band II; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 1.01$ mho/m; $\epsilon_r = 53$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body Worn/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.019 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.22 V/m; Power Drift = -0.007 dB

Peak SAR (extrapolated) = 0.025 W/kg

SAR(1 g) = 0.018 mW/g; SAR(10 g) = 0.013 mW/g

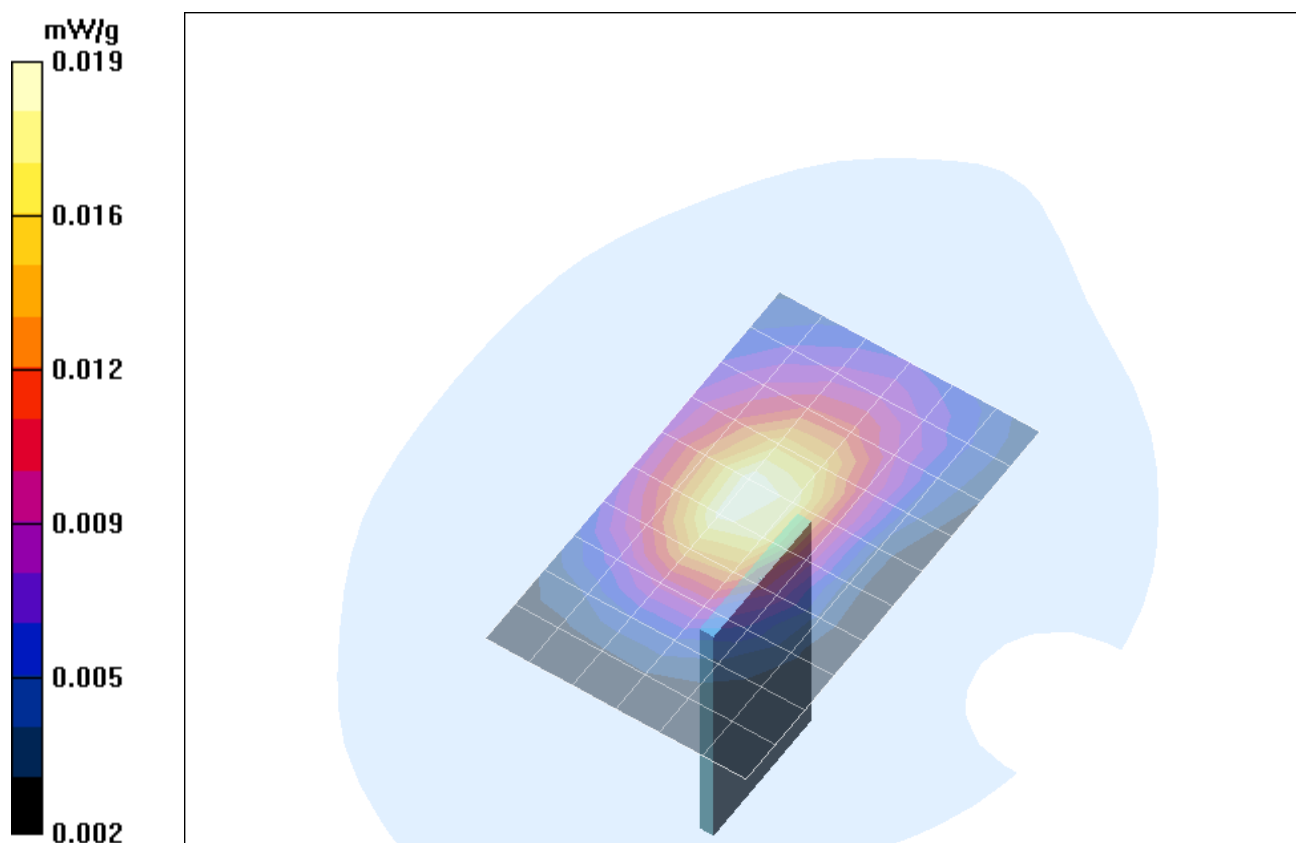


Fig. 36: SAR distribution for WCDMA V (FDD), channel 4183, position 3 (Fujitsu Siemens Amilo Pro, January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature: 20.4° C).

5 SAR z-axis scans (Validation)

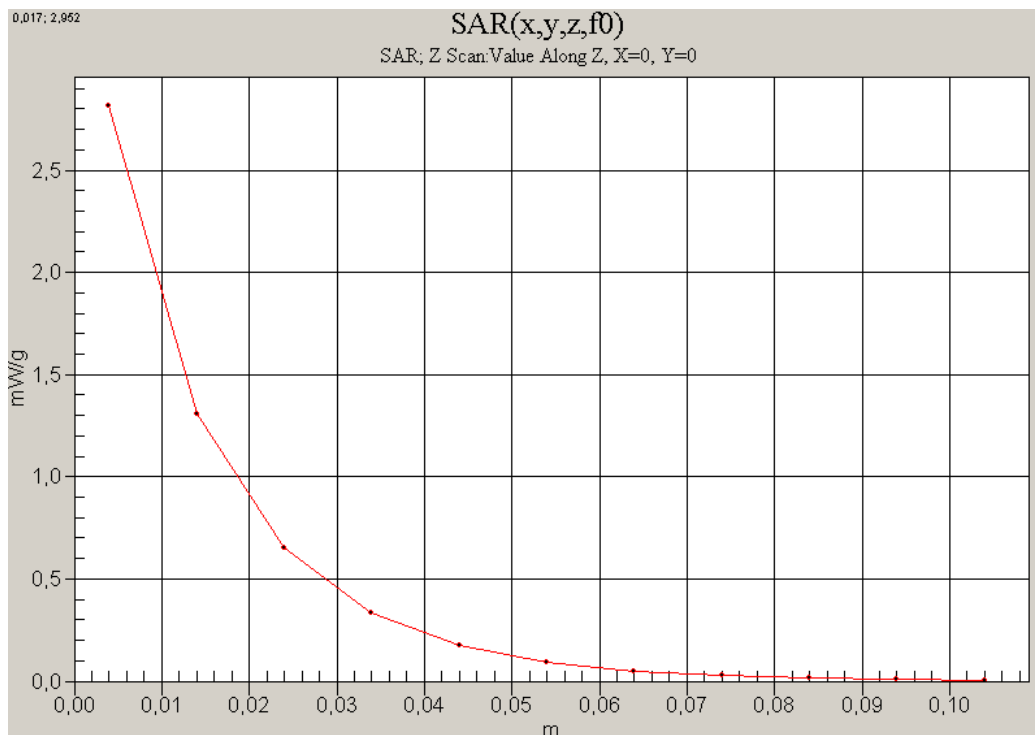


Fig. 37: SAR versus liquid depth, 835 MHz, body (January 16, 2006; Ambient Temperature: 21.2° C; Liquid Temperature : 20.1° C).

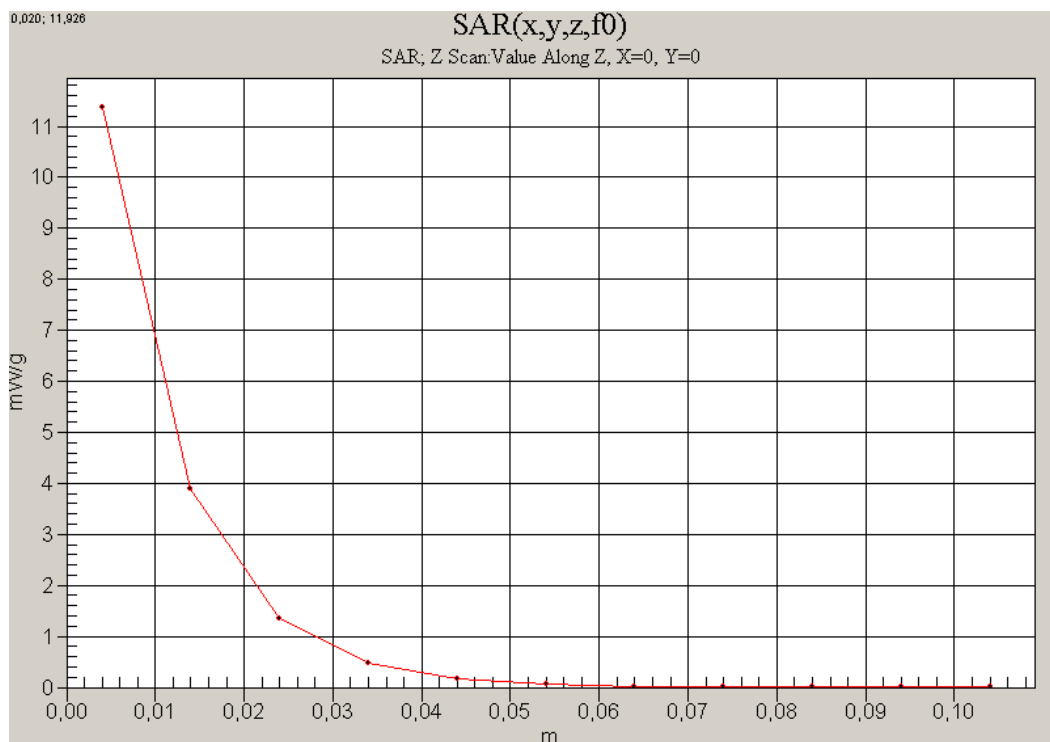


Fig. 38: SAR versus liquid depth, 1900 MHz, body (January 12, 2006; Ambient Temperature: 21.2° C; Liquid Temperature : 20.4° C).

6 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

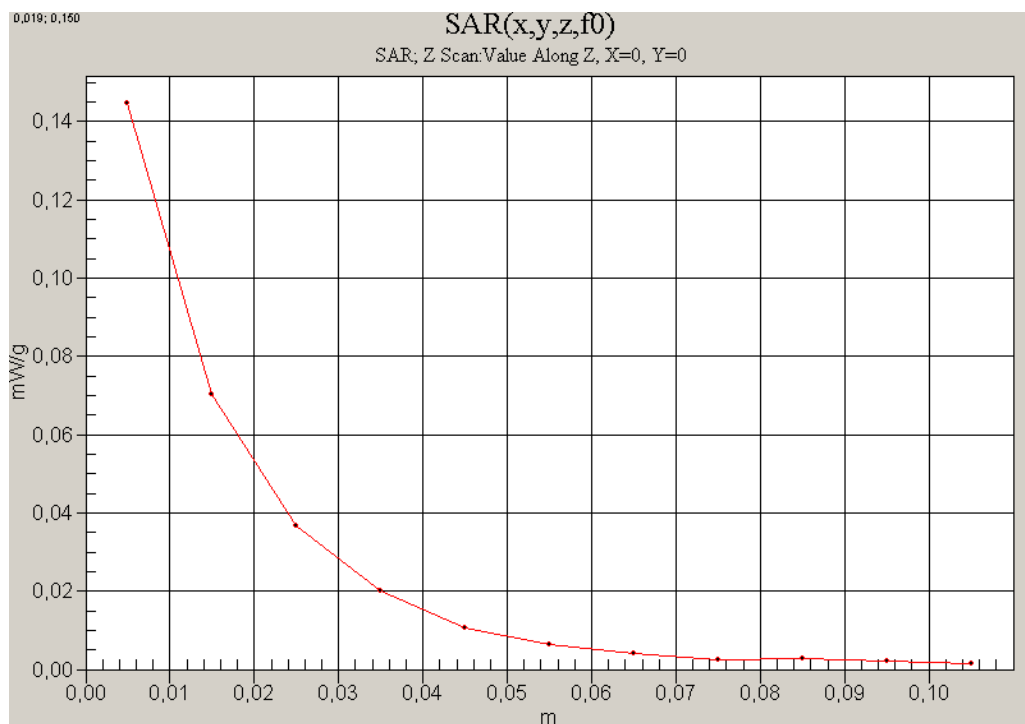


Fig. 39: SAR versus liquid depth, body: GPRS 850, channel 190, position 1 (Packard Bell Easy Note January 16, 2006; Ambient Temperature: 21.2° C; Liquid Temperature : 20.3° C).

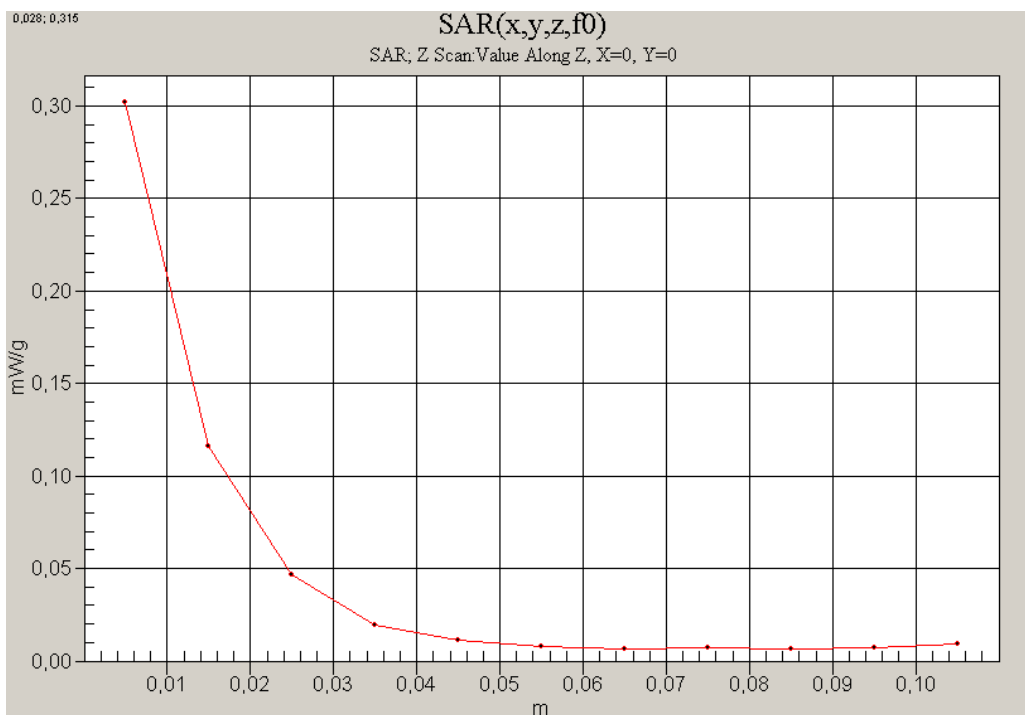


Fig. 40: SAR versus liquid depth, body: GPRS 1900, channel 661, position 1 (Packard Bell Easy Note, January 12, 2006; Ambient Temperature: 21.0° C; Liquid Temperature : 20.4° C).

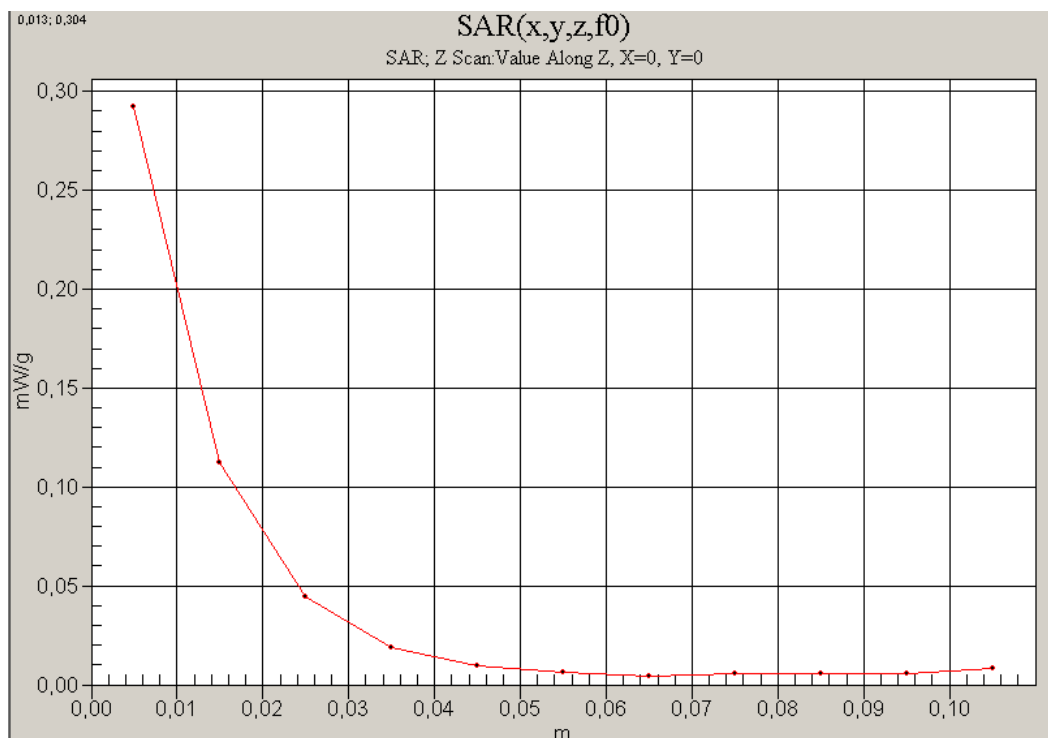


Fig. 41: SAR versus liquid depth, body: WCDMA II (FDD), channel 187, position 1 (Packard Bell Easy Note, January 12, 2006; Ambient Temperature: 21.0° C; Liquid Temperature : 20.5° C).

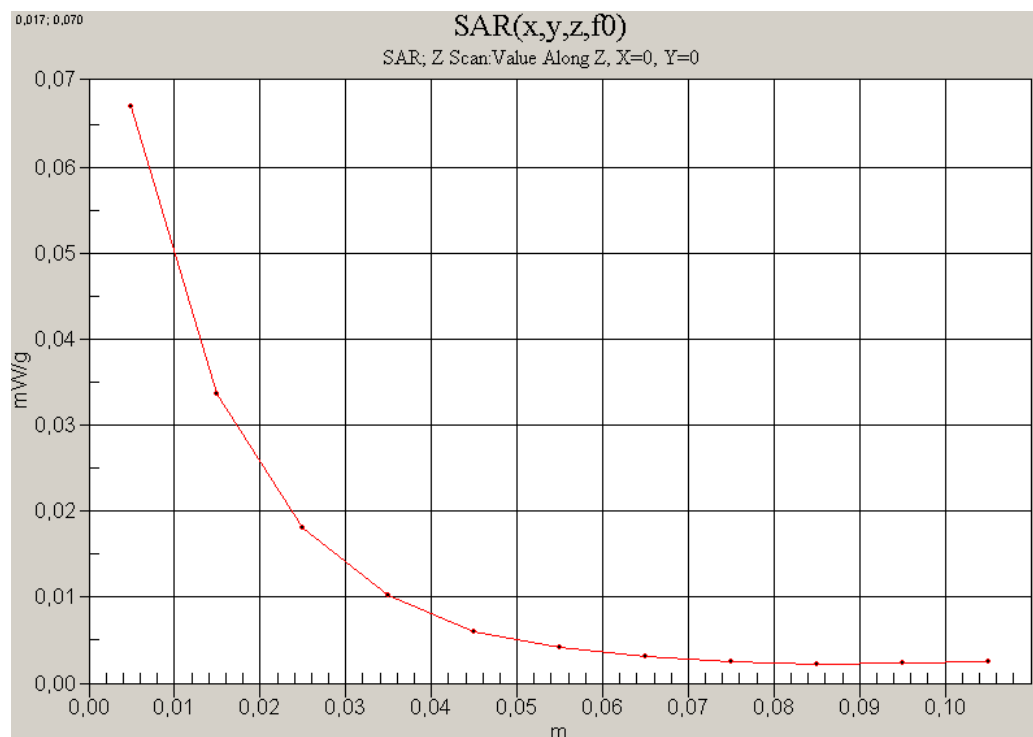


Fig. 42: SAR versus liquid depth, body: WCDMA V (FDD), channel 4183 position 1 (Packard Bell Easy Note January 16, 2006; Ambient Temperature: 21.4° C; Liquid Temperature : 20.5° C).