



PRODUCT SPECIFICATION

TITLE

2.4/5GHz BALANCE FLEX ANTENNA

TABLE OF CONTENTS

1. SCOPE
2. PRODUCT DESCRIPTION
3. APPLICABLE DOCUMENTS
4. GENERAL SPECIFICATION
5. ANTENNA SPECIFICATION
6. MECHANICAL SPECIFICATION
7. ENVIRONMENTAL SPECIFICATION
8. PACKING
9. CONTACT MOLEX

PENDING
APPROVAL

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	1 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14

2.4/5GHz BALANCE FLEX ANTENNA

1.0 SCOPE

This Product Specification covers the mechanical, electrical and environmental performances specification for 2.4/5GHz Balance Flex Antenna.

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER (S)


Product name: 2.4/5GHz Balance Flex Antenna
Series Number: 146153****

2.2 DESCRIPTION

Series 146153 is a balanced, dipole-type, high efficiency antenna for 2.4/5 GHz applications, including WiFi, Bluetooth, Zigbee and others. This antenna is made from poly flexible material with small size 35*9*0.1mm and has double-sided adhesive tape for easy “peel and stick” mounting. This balanced antenna with ground plane independent design offers various cable length options for ease of integration into various devices.

2.3 FEATURES


- Ground plane independent, balanced dual band antenna
- Flex size 35 x 9 x 0.1mm (not contain solder area)
- IPEX MHF (U.FL compatible) connector
- Cable OD1.13mm, 6 standard length options (50/100/150/200/250/300mm)
- RoHS Compliant

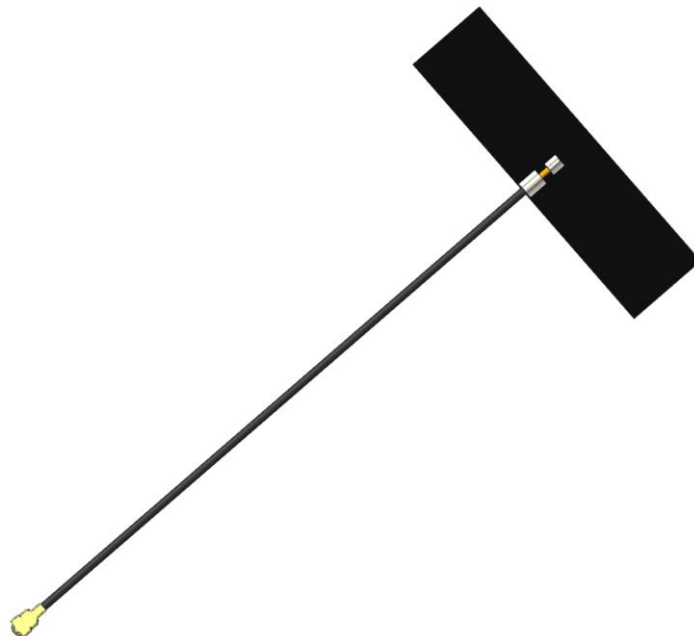

Molex 1461530070 2.4/5GHz BALANCE FLEX ANTENNA MODULE 3D VIEW


REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	2 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14

2.4 PRODUCT STRUCTURE INFORMATION

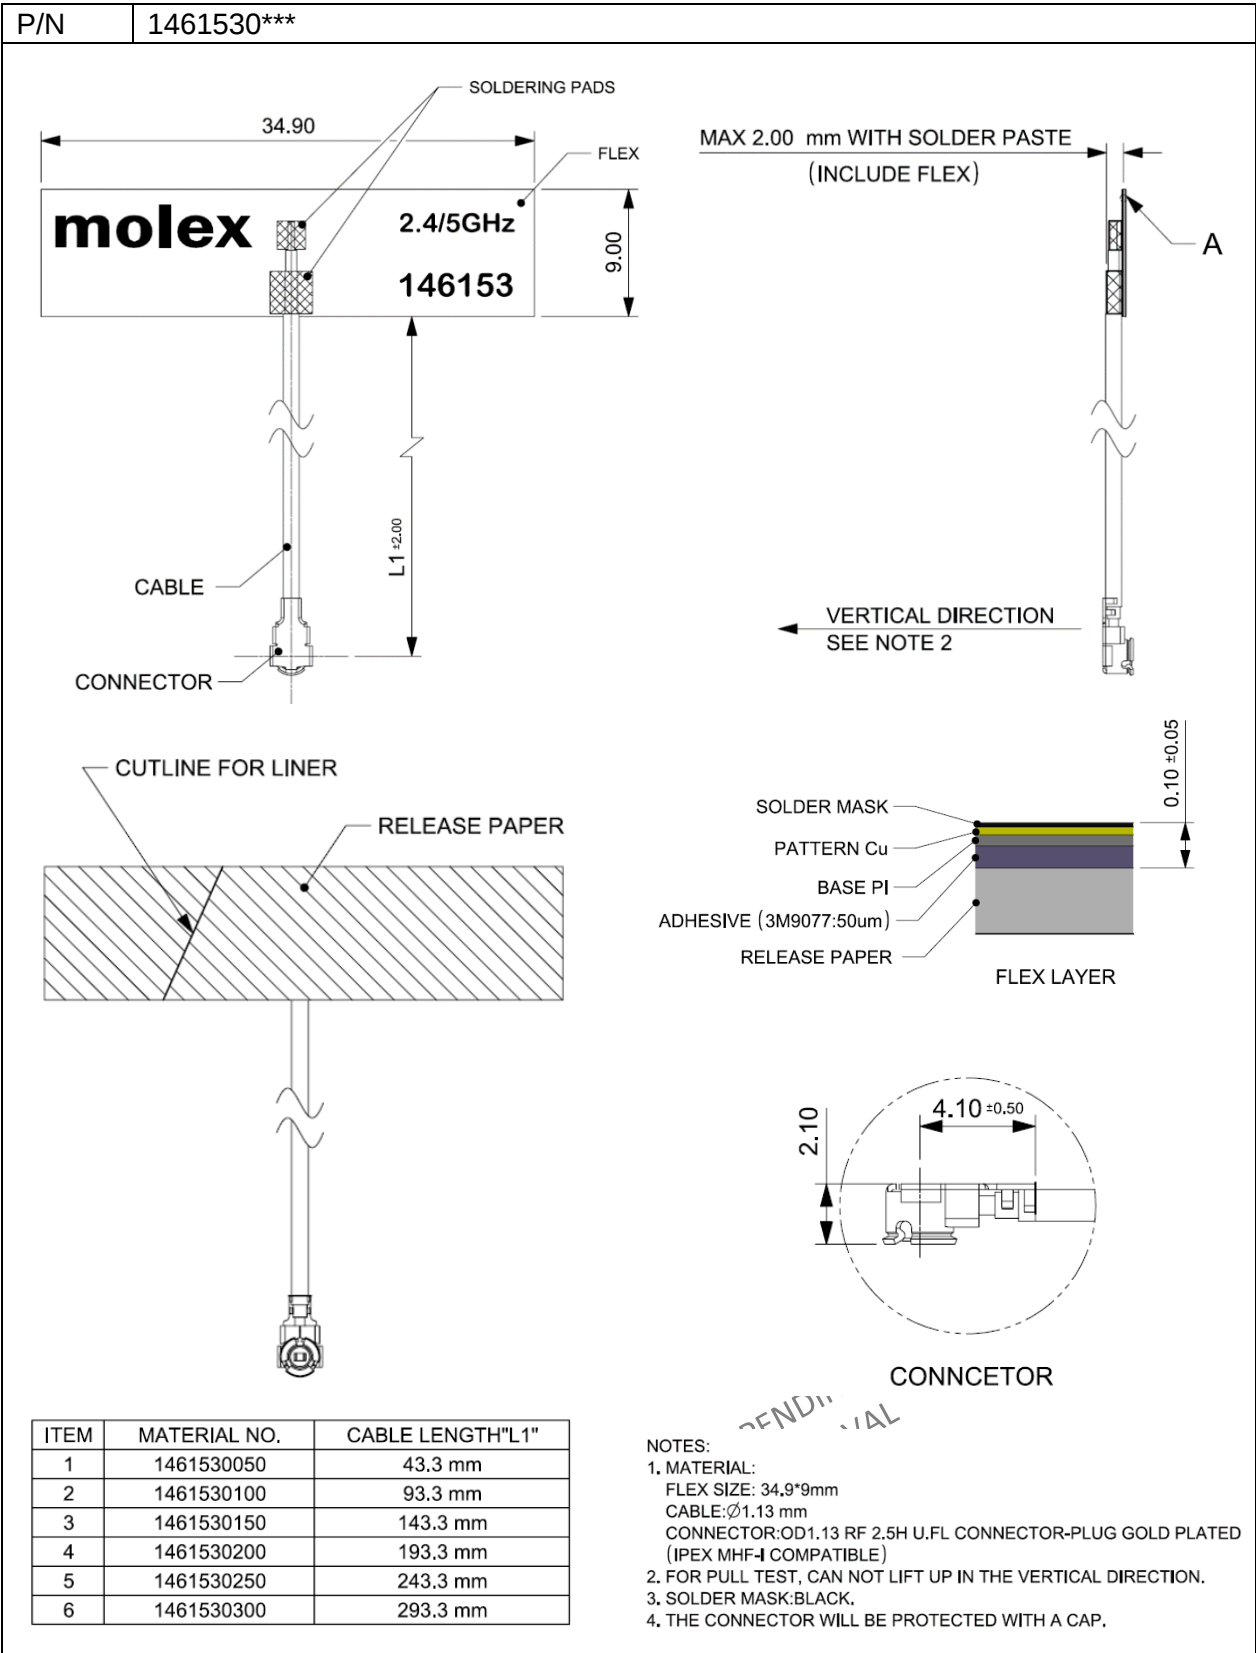

Mechanical Structure Information for 1461530XXX

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	3 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14

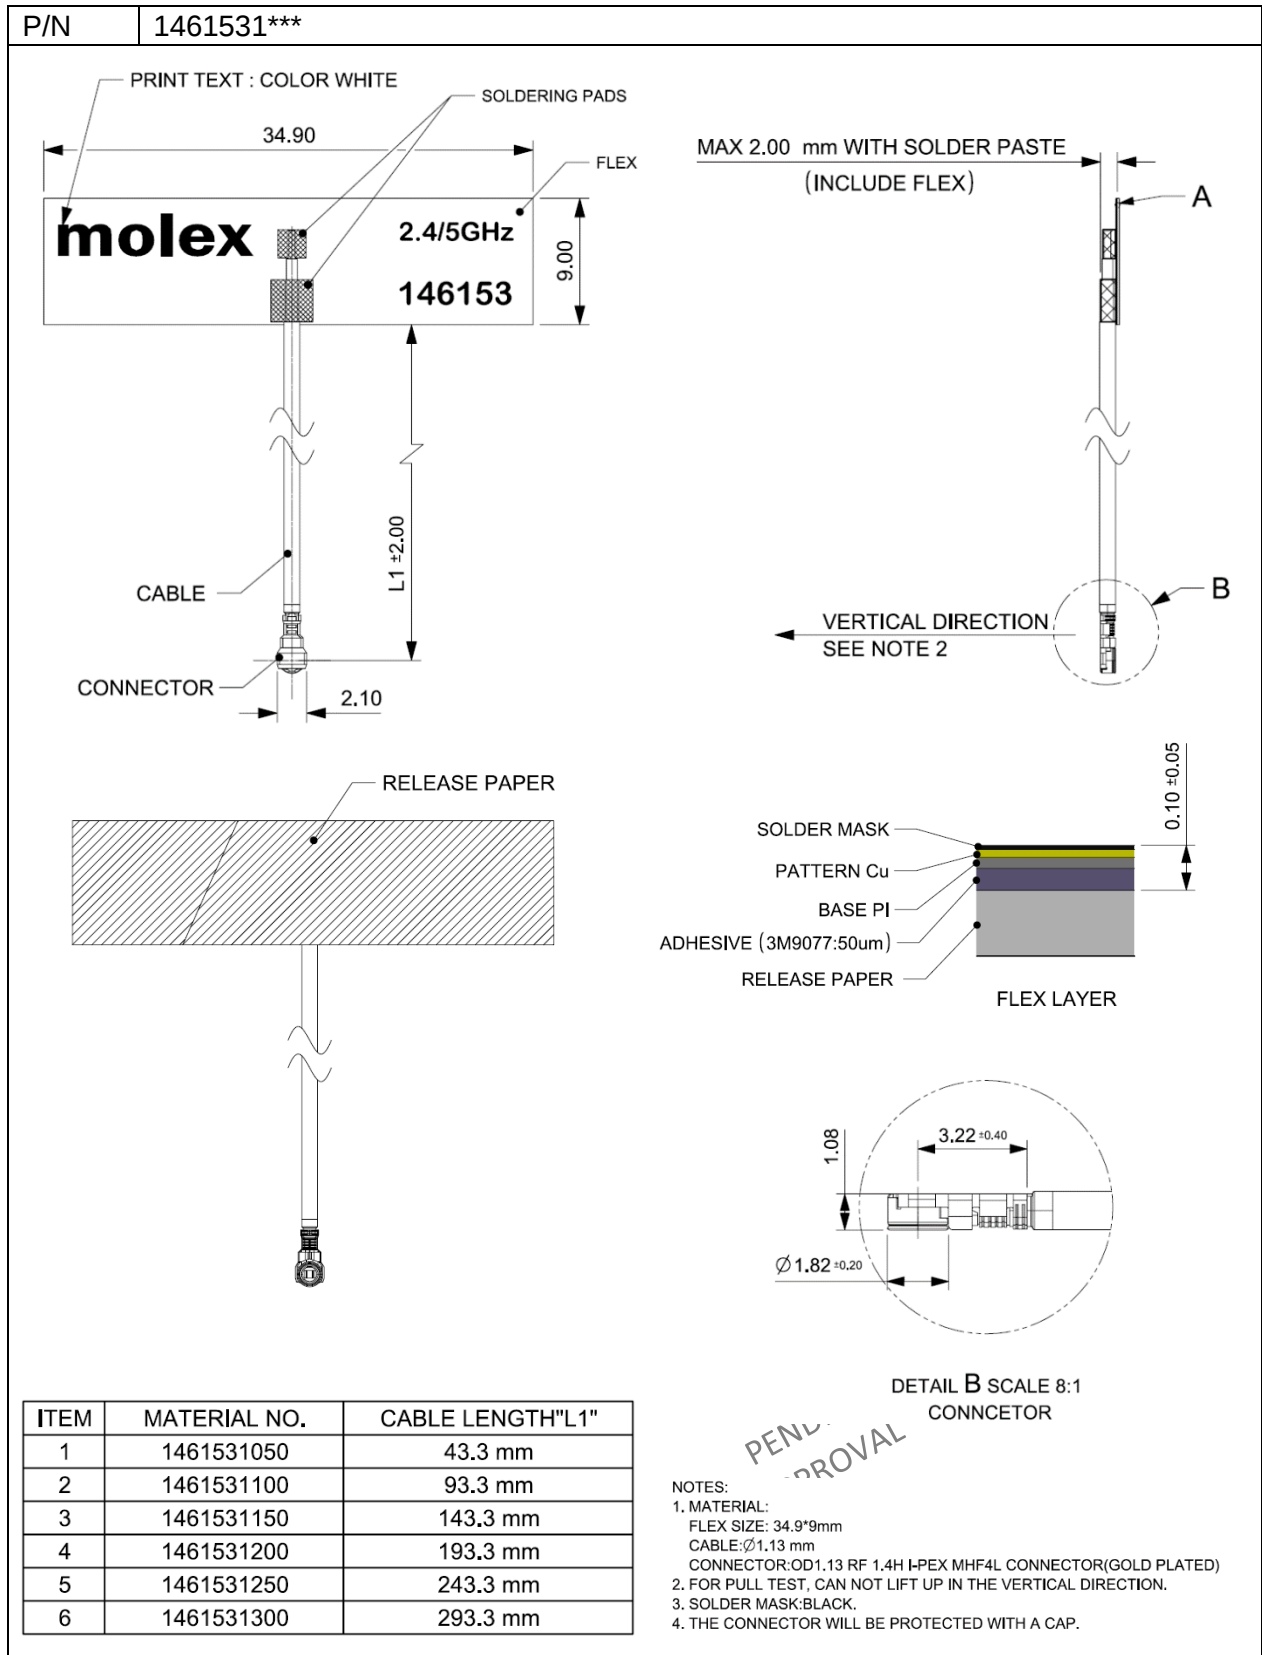

Mechanical Structure Information for 1461531XXX

REVISION: E1	ECR/ECN INFORMATION: EC No: 615969 DATE: 2019/04/22	TITLE: 2.4/5GHz Balance Flex Antenna Product Specification			SHEET No. 4 of 10
DOCUMENT NUMBER: PS-1461530100		CREATED / REVISED BY: Kang Cheng 2019/02/14	CHECKED BY: Cooper Zhou 2019/02/14	APPROVED BY: Stary Song 2019/02/14	

2.4/5GHz Balance Flex Antenna Product Specification

4 of 10

Kang Cheng 2019/02/14 Cooper Zhou 2019/02/14 Stary Song 2019/02/14



PRODUCT SPECIFICATION

3.0 APPLICABLE DOCUMENTS

DOCUMENT	NUMBER	DESCRIPTION
Sale Drawing (SD)	SD-1461530050	Mechanical Dimension of the product
	SD-1461531050	
Application Guide (AS)	AS-1461530100	Antenna Application and surrounding
Packing Drawing (PK)	PK-1461530100	Product packaging specifications

4.0 GENERAL SPECIFICATION

Product name	2.4/5GHz Balance Flex Antenna	
Part number	146153****	
Frequency	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Polarization	Linear	
Operating with matching	-40°C to 85°C	
Storage with matching	-40°C to 85°C	
RF Power	2 Watts	
Impedance with matching	50 Ohms	
Antenna type	Flex	
Connector type	U.FL (MHF compatible)	
User Implementation type	Adhesive 3M9077	
Cable diameter	Ø1.13mm	
Cable length	50 mm (P/N for 1461530050/1461531050)	
	100 mm (P/N for 1461530100/1461531100)	
	150 mm (P/N for 1461530150/1461531150)	
	200 mm (P/N for 1461530200/1461531200)	
	250 mm (P/N for 1461530050/1461531250)	
	300 mm (P/N for 1461530050/1461531300)	

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	5 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14



PRODUCT SPECIFICATION

5.0 ANTENNA SPECIFICATION.

All measurements are done of the antenna mounted on a PC/ABS material block of 1mm thickness with VNA Agilent E5071C and Over-The-Air (OTA) chamber. All measurements in this document are done with the part no.1461530100 for different cable length.

5.1 ELECTRICAL REQUIREMENT

5.1.1 ELECTRICAL REQUIREMENTS FOR CABLE LENGTH 50mm		
P/N	1461530050	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain (Max)	3.27dBi	7.37dBi
Average Total efficiency	>83%	>85%
Return Loss	< -10 dB	< -10 dB

5.1.2 ELECTRICAL REQUIREMENTS FOR CABLE LENGTH 100mm		
P/N	1461530100	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain (Max)	3.1dBi	7.1dBi
Average Total efficiency	>80%	>80%
Return Loss	< -10 dB	< -10 dB

5.1.3 ELECTRICAL REQUIREMENTS FOR CABLE LENGTH 150mm		
P/N	1461530150	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain (Max)	2.93dBi	6.82dBi
Average Total efficiency	>76%	>75%
Return Loss	< -10 dB	< -10 dB

5.1.4 ELECTRICAL REQUIREMENTS FOR CABLE LENGTH 200mm		
P/N	1461530200	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain (Max)	2.75dBi	6.55dBi
Average Total efficiency	>73%	>70%
Return Loss	< -10 dB	< -10 dB

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	6 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14



PRODUCT SPECIFICATION

5.1.5 ELECTRICAL REQUIREMENTS FOR CABLE LENGTH 250mm		
P/N	1461530250	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain (Max)	2.57dBi	6.27dBi
Average Total efficiency	>70%	>66%
Return Loss	< -10 dB	< -10 dB

5.1.6 ELECTRICAL REQUIREMENTS FOR CABLE LENGTH 300mm		
P/N	1461530300	
Frequency Range	2.4GHz-2.5GHz	5.15GHz-5.85GHz
Peak Gain (Max)	2.4dBi	6dBi
Average Total efficiency	>68%	>62%
Return Loss	< -10 dB	< -10 dB

Note that the above antenna performance is measured with just the antenna mounted on a PC/ABS block to similar a free-space condition. When implement into the system, the frequency resonant might be off-tune due to the loading of surrounding components especially metal plane. This off-tune can be compensated through matching. Although module manufacturers specify a peak gain limit, it is based on free-space conditions. The peak gain will be degraded by 1 to 2dBi in the actual implementation as the radiation pattern will change due to the surround components. As such, during selection of antenna, you can select one with high peak gain to compensate for the loss. Molex can offer assistant to choose the best location and best tuning in-order to meet this peak gain requirement.

PENDING
APPROVAL

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	7 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14



PRODUCT SPECIFICATION

5.2 CABLE LOSS

DESCRIPTION	TEST CONDITION	REQUIREMENTS	
Frequency Range	2.4GHz/5GHz	2.0GHz~3.0GHz	5.0GHz~6.0GHz
Attenuation	1m cable measured by VNA5071C	≤3.5dB/m	≤5.5dB/m

Balance antenna resonance is insensitive to cable's length, but the cable's loss will affect the total efficiency.

6.0 MECHANICAL SPECIFICATION

All measurements in this document are done with the part no.1461530100 for different cable length.

DESCRIPTION	TEST CONDITION	TEST RESULT
Pull Test	1. Test machine: Max intelligent load tester 2. Stick the flex antenna on a plastic board, pull cable in axial direction.	Pull force >8N
Un-mating force (connector)	Solder the receptacle connector to the test board, then place the board and plug on push-on/pull-off machine, and repeat mating and un-mating 30 cycles at a speed 25±3mm/min. along the mating axis.	Un-mating force : 0.5 kgf min

PENDING
APPROVAL

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	8 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14



PRODUCT SPECIFICATION

7.0 ENVIRONMENTAL SPECIFICATION

DESCRIPTION	SPECIFICATION
Temperature /Humidity cycling	1.The device under test is kept for 30 mins in an environment with a temperature of -40 °C. 2. Kept for 4 Hours in an environment with a temperature of 85 degrees and a relative humidity of 95%. 3. Kept for 2 Hours in an environment with a temperature of 125 degrees and a relative humidity of 95%. 4. The cycle is repeated until a total of 40 cycles have been completed. Hereafter the conditions are stabilized at room temperature. Transfer temperature 8°C per min. 5. Parts should meet RF spec before and after test. 6. No cosmetic problem (No soldering problem; No adhesion problem of glue.)
Temperature Shock	1.The device under test at -40 °C⇌125 °C by 100 cycles, Dwell of 30 mins, transition time between Dwell 30 secs (~ 61 mins / cycle) and each item should be measured after exposing them in normal temperature and humidity for 24 h. 2. Parts should meet RF spec before and after test. 3. No cosmetic problem (No soldering problem; No adhesion problem of glue) .
High Temperature	1.Temperature:125°C, time:1008 hours 2.There is no substantial obstruction to air flow across and around the samples, and the samples are not touching each other 3. Parts should meet RF spec before and after test. 4. No cosmetic problem (No soldering problem; No adhesion problem of glue) .
Salt mist test	1. The device under test is exposed to a spray of a 5% (by volume) resolution of NACL in water for 2 hours. Thereafter the device under test is left for 1 week in room temperature at a relative humidity of 95%. The cycle is repeated until a total of 2 cycles have been completed. Here after the conditions are stabilized at room temperature. 2. Parts should meet RF spec before and after test. 3. No visible corrosion. Discoloration accept.

REVISION:

E1

ECR/ECN INFORMATION:

EC No: **615969**

DATE: **2019/04/22**

TITLE:

2.4/5GHz Balance Flex Antenna Product Specification

SHEET No.

9 of 10

DOCUMENT NUMBER:

PS-1461530100

CREATED / REVISED BY:

Kang Cheng 2019/02/14



CHECKED BY:

Cooper Zhou 2019/02/14

APPROVED BY:

Stary Song 2019/02/14

8.0 PACKING

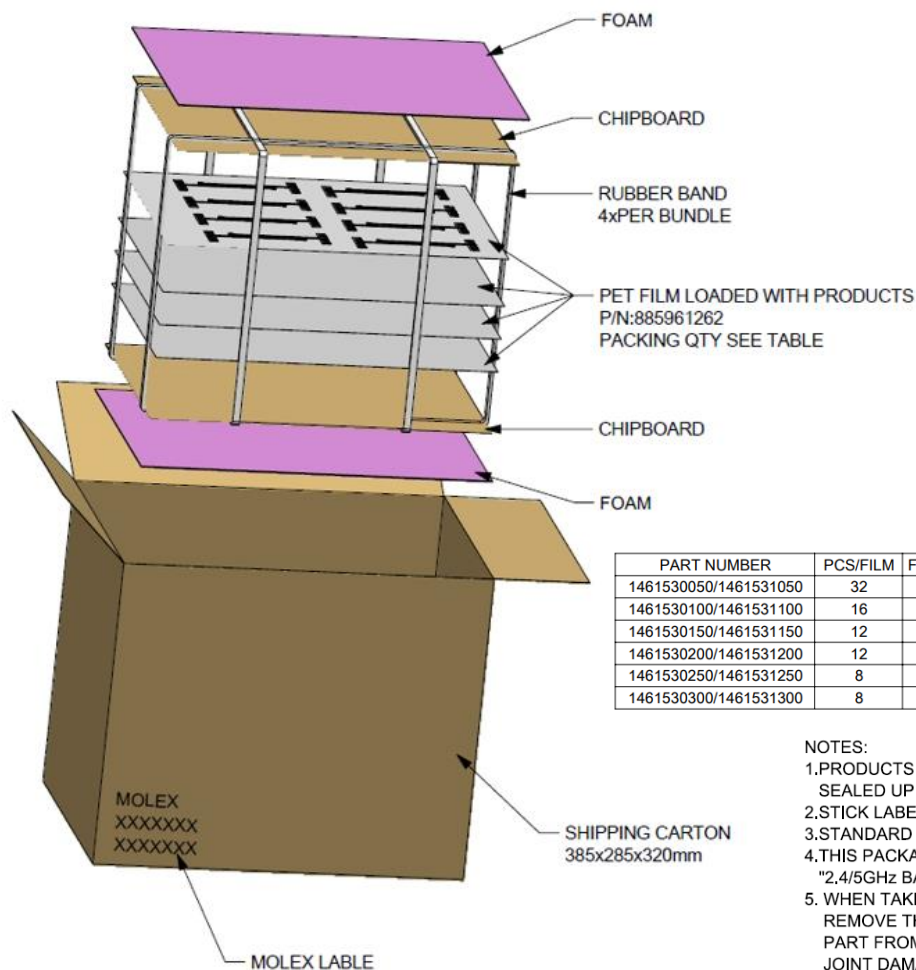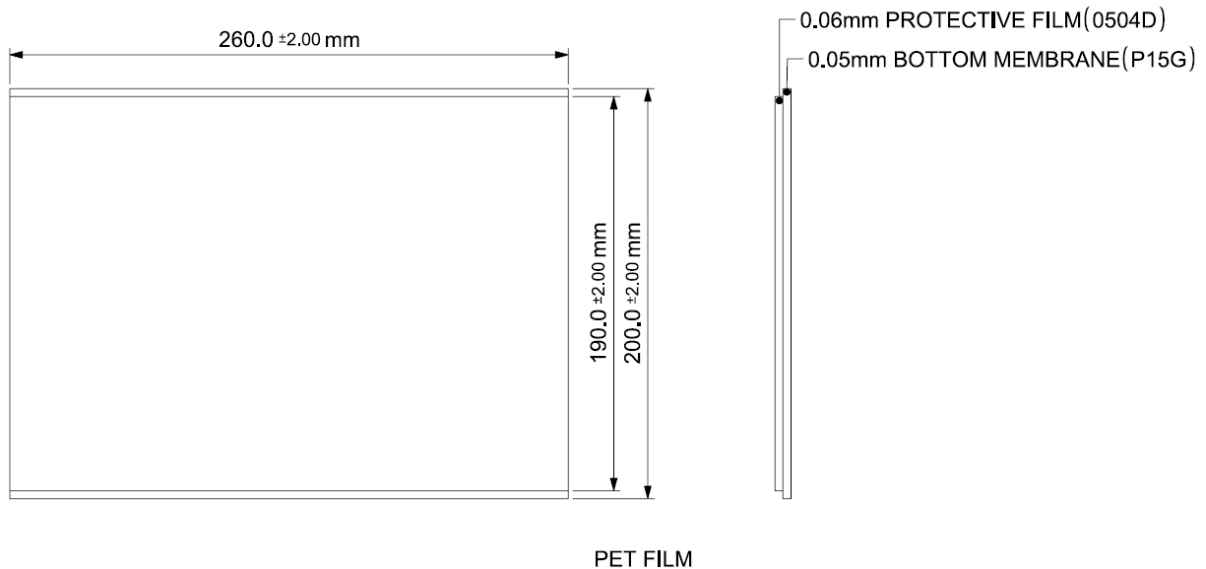

PART NUMBER	PCS/FILM	FILM/BUNDLE	BUNDLE/CARTON	QTY/CARTON
1461530050/1461531050	32	40	4	5120PCS
1461530100/1461531100	16	40	5	3200PCS
1461530150/1461531150	12	40	5	2400PCS
1461530200/1461531200	12	40	5	2400PCS
1461530250/1461531250	8	40	5	1600PCS
1461530300/1461531300	8	40	5	1600PCS

NOTES:

- 1.PRODUCTS MUST BE PACKED IN CARTONS AND SEALED UP WITH TAPE.
- 2.STICK LABEL WITH PART NUMBER AND DATE CODE
- 3.STANDARD PACKAGING QUANTITY:SEE TABLE
- 4.THIS PACKAGING SPECIFICATION TO BE USED FOR "2.4/5GHz BALANCE FLEX ANTENNA".
5. WHEN TAKING PRODUCT FROM PET FILM, PLEASE REMOVE THE COVER TAPE FIRST, THEN PICK UP THE PART FROM FLEX NOT THE CABLE, TO AVOID SOLDER JOINT DAMAGE.

PACKAGING INFORMATION FOR 146153XXXX

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	10 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14



PRODUCT SPECIFICATION

9.0 CONTACT MOLEX

China
Shanghai Plant & Sales Office

Shanghai Plant & Sales Office

889, Ying Lun Road
WaiGaoQiao Free Trade Zone
Pudong, Shanghai, 200131
People's Republic of China
Contact Info:

FAX : 86-21-5048-0011

TEL : 86-21-5048-0889

PENDING
APPROVAL

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
E1	EC No: 615969 DATE: 2019/04/22	2.4/5GHz Balance Flex Antenna Product Specification	9 of 10
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-1461530100	Kang Cheng 2019/02/14	Cooper Zhou 2019/02/14	Stary Song 2019/02/14