

FCC PART 15 SUBPART C MEASUREMENT AND TEST REPORT

For

Voxx Accessories Corp.

3502 Woodview Trace, Suite 220, Indianapolis, Indiana 46268, United States.

E.U.T.: AUDIO SYSTEM WITH BLUETOOTH

Model Name: ARS50B, BC2202C, ARS50, ARS50SC

Brand Name: AR(Acoustic Research)

FCC ID: VIXARS50B

Report Number: NTC1503152F

Test Date(s): March 19, 2015 to May 06, 2015

Report Date(s): May 11, 2015

Prepared by

Dongguan Nore Testing Center Co., Ltd.


**Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China**

Tel: +86-769-22022444

Fax: +86-769-22022799

Prepared By

Approved & Authorized Signer


Rose Hu / Engineer


Sunm Lv / Q.A. Director

Note: This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Dongguan Nore Testing Center Co., Ltd. The test results referenced from this report are relevant only to the sample tested.

Table of Contents

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3 TEST METHODOLOGY	5
1.4 EQUIPMENT MODIFICATIONS	5
1.5 SUPPORT DEVICE	5
1.6 TEST FACILITY AND LOCATION.....	5
1.7 SUMMARY OF TEST RESULTS	5
2. SYSTEM TEST CONFIGURATION.....	7
2.1 EUT CONFIGURATION	7
2.2 SPECIAL ACCESSORIES.....	7
2.3 DESCRIPTION OF TEST MODES	7
2.4 EUT EXERCISE	7
3. CONDUCTED EMISSIONS TEST	8
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	8
3.2 TEST CONDITION	8
3.3 MEASUREMENT RESULTS.....	8
4. RADIATED EMISSION TEST	13
4.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	13
4.2 MEASUREMENT PROCEDURE	14
4.3 LIMIT	14
4.4 MEASUREMENT RESULTS	15
5. CHANNEL SEPARATION TEST.....	21
5.1 MEASUREMENT PROCEDURE	21
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	21
5.3 MEASUREMENT RESULTS.....	21
6. 20DB BANDWIDTH.....	27
6.1 MEASUREMENT PROCEDURE	27
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
6.3 MEASUREMENT RESULTS.....	27
7. HOPPING CHANNEL NUMBER	28
7.1 MEASUREMENT PROCEDURE	33
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	33
7.3 MEASUREMENT RESULTS.....	33

8. TIME OF OCCUPANCY (DWELL TIME).....	35
8.1 MEASUREMENT PROCEDURE	35
8.2 MEASUREMENT RESULTS.....	35
9. MAXIMUM PEAK OUTPUT POWER	35
9.1 MEASUREMENT PROCEDURE	41
9.2 MEASUREMENT RESULTS.....	41
10. BAND EDGE	41
10.1 MEASUREMENT PROCEDURE	47
10.2 LIMIT.....	47
10.3 MEASUREMENT RESULTS.....	47
11. ANTENNA APPLICATION	47
11.1 ANTENNA REQUIREMENT	54
11.2 MEASUREMENT RESULTS.....	54
12. CONDUCTED SPURIOUS EMISSIONS	55
12.1 MEASUREMENT PROCEDURE	55
12.2. MEASUREMENT RESULTS.....	55
13. TEST EQUIPMENT LIST.....	58

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

This device is a BT speaker, it's powered by DC 5V come from Adapter. For more details features, please refer to User's Manual.

Manufacturer : Voxx Accessories Corp.
Address : 3502 Woodview Trace, Suite 220, Indianapolis, Indiana 46268, United States.

Factory : SHENZHEN DEHUIDA TECHNOLOGY CO., LTD
Address : Dehuida Industrial Park, No.237, Xikeng Road, Guanlan Street, Baoan District, Shenzhen City, China

Power Supply : DC 5V come from Adapter
Adapter M/N: TPA101-08050-US(S)
Input: AC100-240V 50/60Hz, 0.5A Max
Output: DC5V 1.5A

Test voltage : AC 120V 60Hz, AC 240V 60Hz

Model name : ARS50B, BC2202C, ARS50, ARS50SC
Model difference : These models have the same circuit schematic, construction and critical components. Their difference in model name is only for trading purpose.

Hardware version : V1.2 2014.10.20
Software version : 001
Serial number : N/A

For BT function

BT Version: 2.1+EDR

Item	2.1+EDR
Frequency	2402-2480MHz
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel	79
Channel space	1MHz
Antenna Type	PCB antenna
Antenna Gain	0dBi (declared by manufacturer)

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **VIXARS50B** filing to comply with Section 15.247 of the FCC Part 15 (2014), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013) and DA 00-705. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

None

1.6 Test Facility and Location

Listed by FCC, August 02, 2011
The Certificate Registration Number is 665078.
Listed by Industry Canada, July 01, 2011
The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd.
(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China
(Full Name: Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Result
§15.247(a)(1)	Channel Separation test	Compliant
§15.247(a)(1)	20dB Bandwidth	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(b)	Max Peak output Power test	Compliant
§15.247(d)	Band edge test	Compliant
§15.207 (a)	AC Power Conducted Emission	Compliant
§15.247(d), §15.209, §15.205	Radiated Emission	Compliant
§15.203	Antenna Requirement	Compliant
§15.247(d)	Conducted Spurious Emission	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3 and DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK, 8DPSK were tested.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

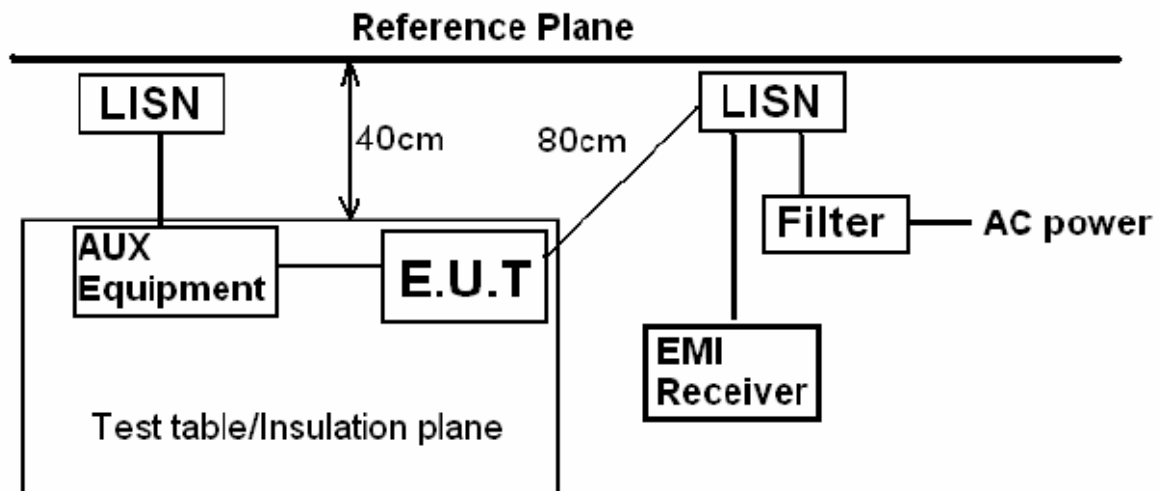

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: BT Mode

3.3 Measurement Results


Please refer to following plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-5-6 11:00:31

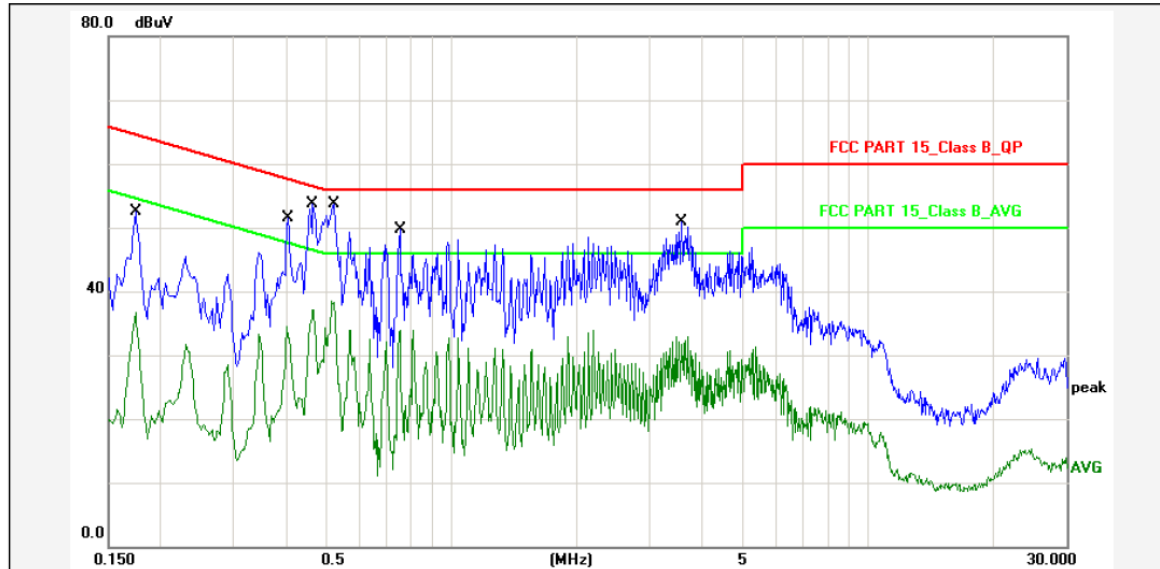

Report No.: ARS50B

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Audiovox

Temp.()/Hum.(%): 24(C) / 58 %

Product: AUDIO SYSTEM WITH BLUETOOTH

Power Rating: AC 120V/60Hz

Model No.: ARS50B

Test Engineer: Jason

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1740	10.80	39.70	50.50	64.76	-14.26	QP	P	
2	0.1740	10.80	23.90	34.70	54.76	-20.06	AVG	P	
3	0.4060	10.80	38.70	49.50	57.73	-8.23	QP	P	
4	0.4060	10.80	21.70	32.50	47.73	-15.23	AVG	P	
5	0.4660	10.80	39.50	50.30	56.58	-6.28	QP	P	
6	0.4660	10.80	24.50	35.30	46.58	-11.28	AVG	P	
7	0.5220	10.80	39.80	50.60	56.00	-5.40	QP	P	
8	0.5220	10.80	26.50	37.30	46.00	-8.70	AVG	P	
9	0.7539	10.80	36.90	47.70	56.00	-8.30	QP	P	
10	0.7539	10.80	21.00	31.80	46.00	-14.20	AVG	P	
11	3.5820	10.80	38.00	48.80	56.00	-7.20	QP	P	
12	3.5820	10.80	20.10	30.90	46.00	-15.10	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-5-6 11:03:27

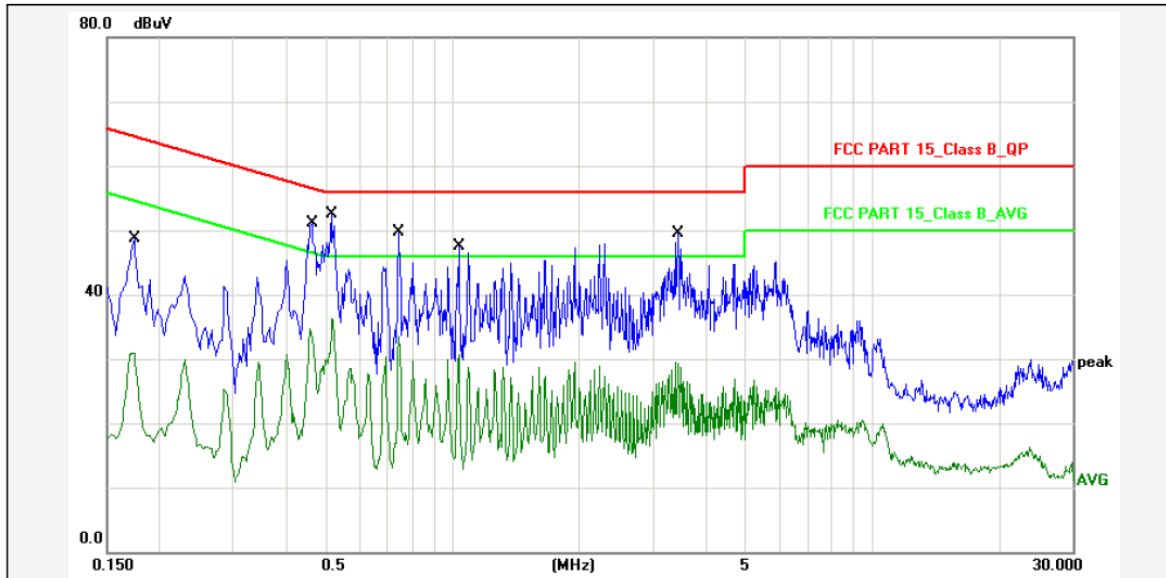

Report No.: ARS50B

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: N

Applicant: Audiovox

Temp.()/Hum.(%): 24(C) / 58 %

Product: AUDIO SYSTEM WITH BLUETOOTH

Power Rating: AC 120V/60Hz

Model No.: ARS50B

Test Engineer: Jason

Test Mode: BT Mode

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1740	10.80	35.90	46.70	64.76	-18.06	QP	P	
2	0.1740	10.80	18.00	28.80	54.76	-25.96	AVG	P	
3	0.4620	10.80	38.30	49.10	56.66	-7.56	QP	P	
4	0.4620	10.80	21.80	32.60	46.66	-14.06	AVG	P	
5	0.5140	10.80	39.80	50.60	56.00	-5.40	QP	P	
6	0.5140	10.80	23.40	34.20	46.00	-11.80	AVG	P	
7	0.7460	10.80	36.80	47.60	56.00	-8.40	QP	P	
8	0.7460	10.80	20.60	31.40	46.00	-14.60	AVG	P	
9	1.0339	10.80	34.70	45.50	56.00	-10.50	QP	P	
10	1.0339	10.80	18.00	28.80	46.00	-17.20	AVG	P	
11	3.4460	10.80	36.70	47.50	56.00	-8.50	QP	P	
12	3.4460	10.80	16.70	27.50	46.00	-18.50	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-5-6 11:11:17

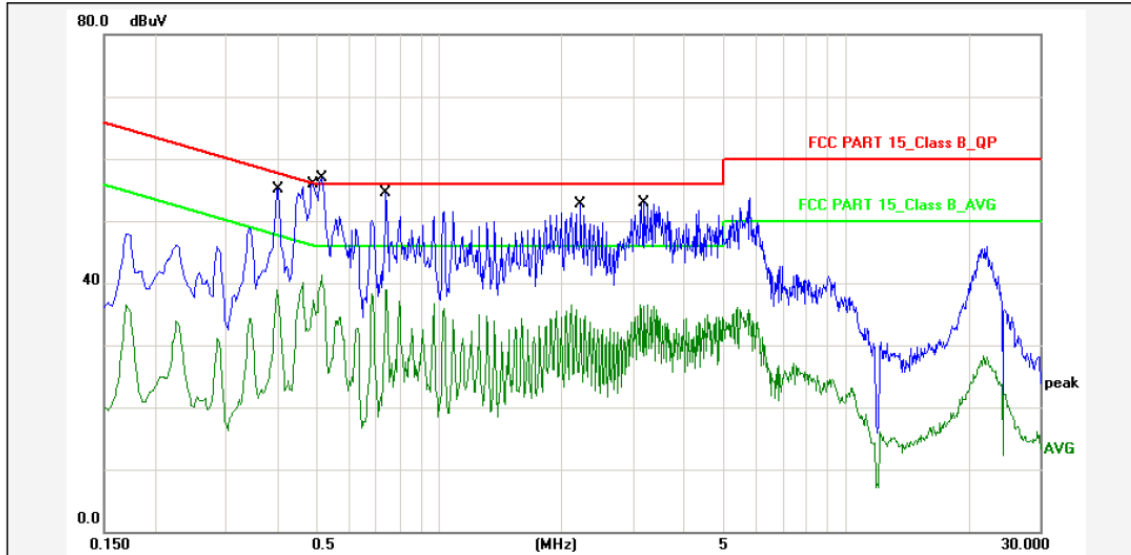

Report No.: ARS50B

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: L1

Applicant: Audiovox

Temp.()/Hum.(%): 24(C) / 58 %

Product: AUDIO SYSTEM WITH BLUETOOTH

Power Rating: AC 240V/60Hz

Model No.: ARS50B

Test Engineer: Jason

Test Mode: AUX IN

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4020	10.80	41.40	52.20	57.81	-5.61	QP	P	
2	0.4020	10.80	26.80	37.60	47.81	-10.21	AVG	P	
3	0.4860	10.80	40.50	51.30	56.24	-4.94	QP	P	
4	0.4860	10.80	23.60	34.40	46.24	-11.84	AVG	P	
5	0.5180	10.80	42.10	52.90	56.00	-3.10	QP	P	
6	0.5180	10.80	28.70	39.50	46.00	-6.50	AVG	P	
7	0.7419	10.80	41.60	52.40	56.00	-3.60	QP	P	
8	0.7419	10.80	26.10	36.90	46.00	-9.10	AVG	P	
9	2.2339	10.80	39.90	50.70	56.00	-5.30	QP	P	
10	2.2339	10.80	23.60	34.40	46.00	-11.60	AVG	P	
11	3.2019	10.80	40.00	50.80	56.00	-5.20	QP	P	
12	3.2019	10.80	23.60	34.40	46.00	-11.60	AVG	P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2015-5-6 11:07:53

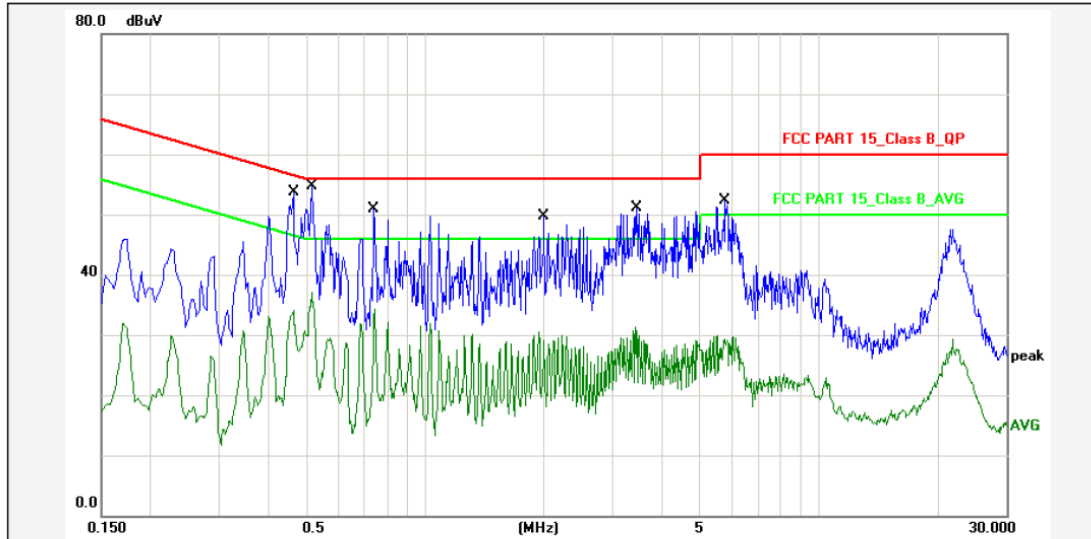

Report No.: ARS50B

Test Standard: FCC PART 15_Class B_QP

Test item: Conducted Emission

Phase: N

Applicant: Audiovox

Temp.()/Hum.(%): 24(C) / 58 %

Product: AUDIO SYSTEM WITH BLUETOOTH

Power Rating: AC 240V/60Hz

Model No.: ARS50B

Test Engineer: Jason

Test Mode: AUX IN

Remark:

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.4620	10.80	34.00	44.80	56.66	-11.86	QP	P	
2	0.4620	10.80	22.30	33.10	46.66	-13.56	AVG	P	
3	0.5140	10.80	37.20	48.00	56.00	-8.00	QP	P	
4	0.5140	10.80	25.10	35.90	46.00	-10.10	AVG	P	
5	0.7420	10.80	38.00	48.80	56.00	-7.20	QP	P	
6	0.7420	10.80	21.40	32.20	46.00	-13.80	AVG	P	
7	2.0020	10.80	36.90	47.70	56.00	-8.30	QP	P	
8	2.0020	10.80	17.60	28.40	46.00	-17.60	AVG	P	
9	3.4380	10.80	38.20	49.00	56.00	-7.00	QP	P	
10	3.4380	10.80	18.60	29.40	46.00	-16.60	AVG	P	
11	5.7819	10.80	39.40	50.20	60.00	-9.80	QP	P	
12	5.7819	10.80	17.00	27.80	50.00	-22.20	AVG	P	


Note: Level=Reading+Factor.

Margin=Limit-Level.


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

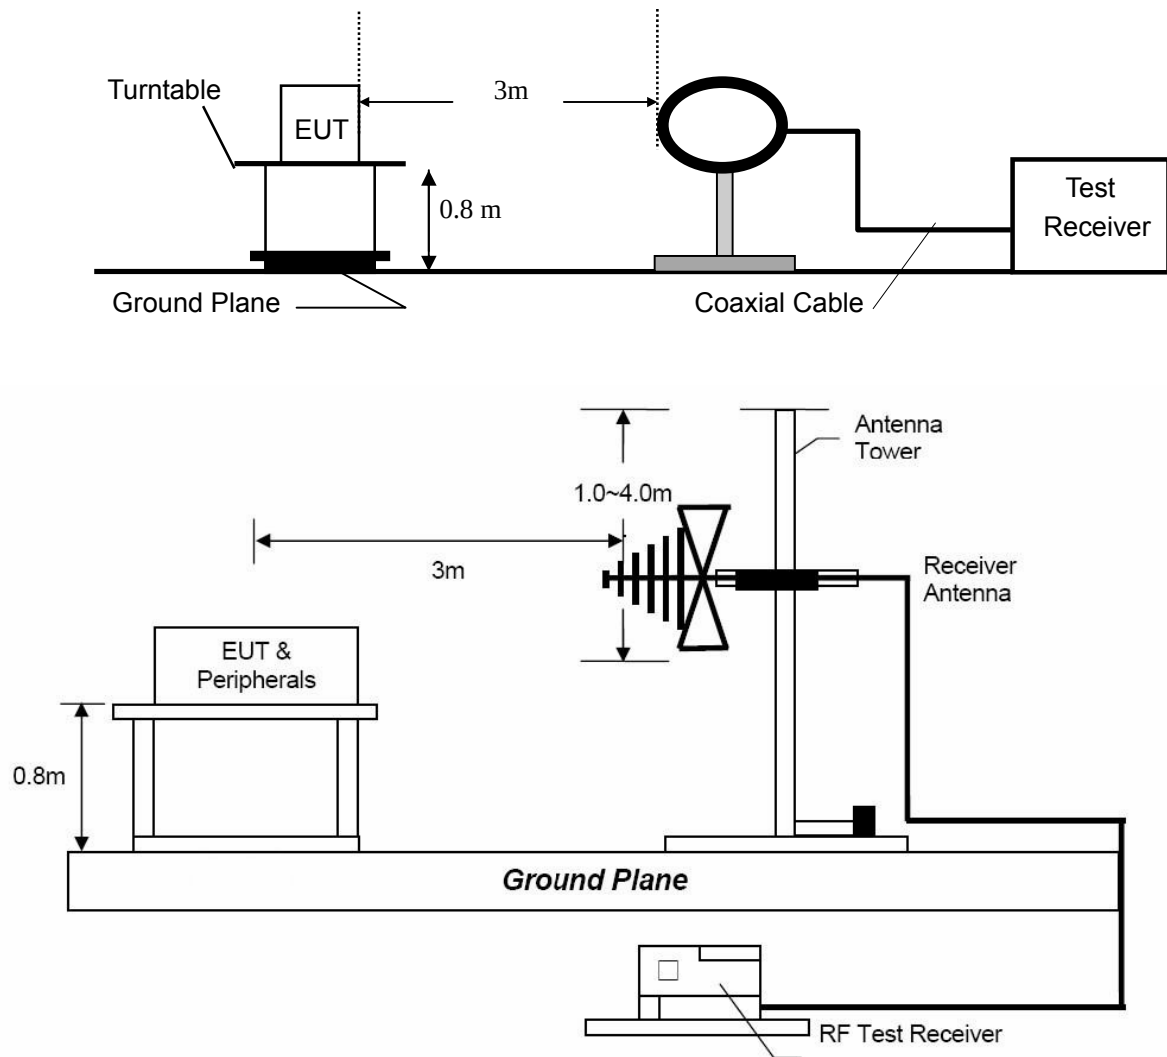

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

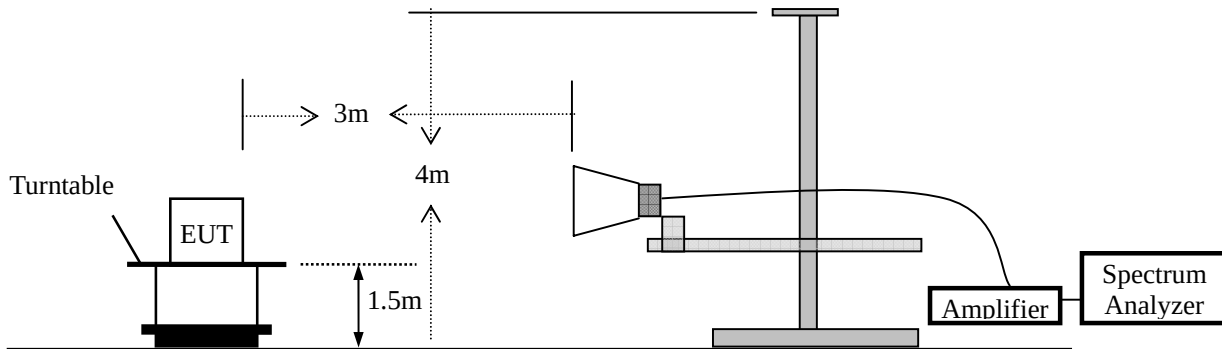

4.2 Measurement Procedure

- a. Below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room. Above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi- anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level $(\text{dB})\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$
(2) The smaller limit shall apply at the cross point between two frequency bands.
(3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
(4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

4.4 Measurement Results


Please refer to following plots.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-5-5 10:47:03

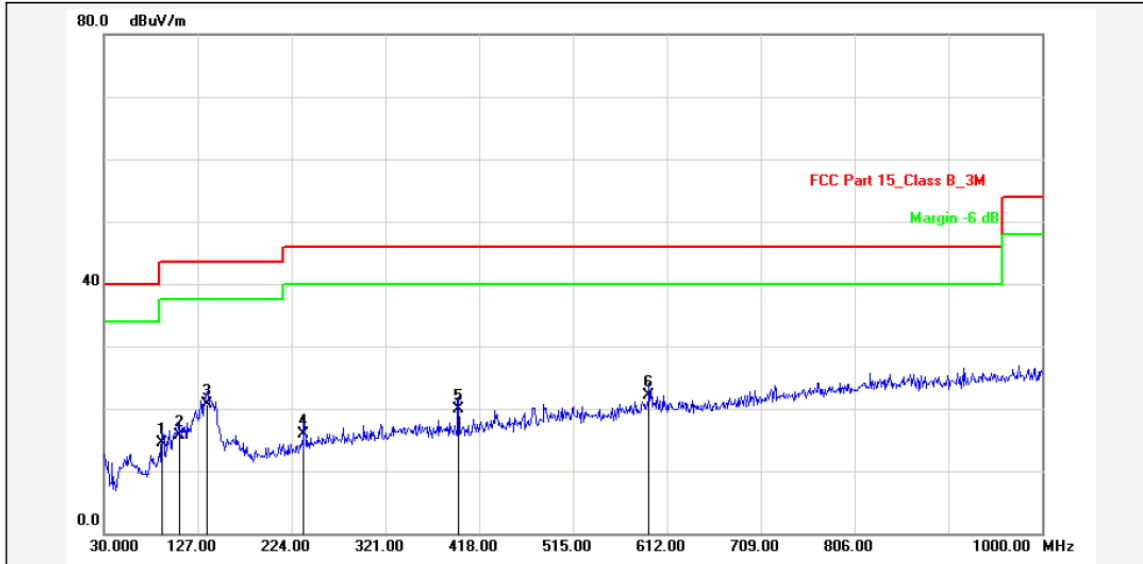

Report No.: ARS50B

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: Audiovox

Product: AUDIO SYSTEM WITH BLUETOOTH

Model No.: ARS50B

Test Distance:

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: AC 120V/60Hz

Test Engineer: Lecdon

Test Mode: TX

Remark: GFSK lowest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	90.1400	-13.90	28.40	14.50	43.50	-29.00	QP			P	
2	107.6000	-12.06	27.86	15.80	43.50	-27.70	QP			P	
3	136.7000	-15.44	36.14	20.70	43.50	-22.80	QP			P	
4	236.6100	-12.18	28.08	15.90	46.00	-30.10	QP			P	
5	396.6600	-9.13	29.03	19.90	46.00	-26.10	QP			P	
6	593.5700	-5.18	27.28	22.10	46.00	-23.90	QP			P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-5-5 10:51:30

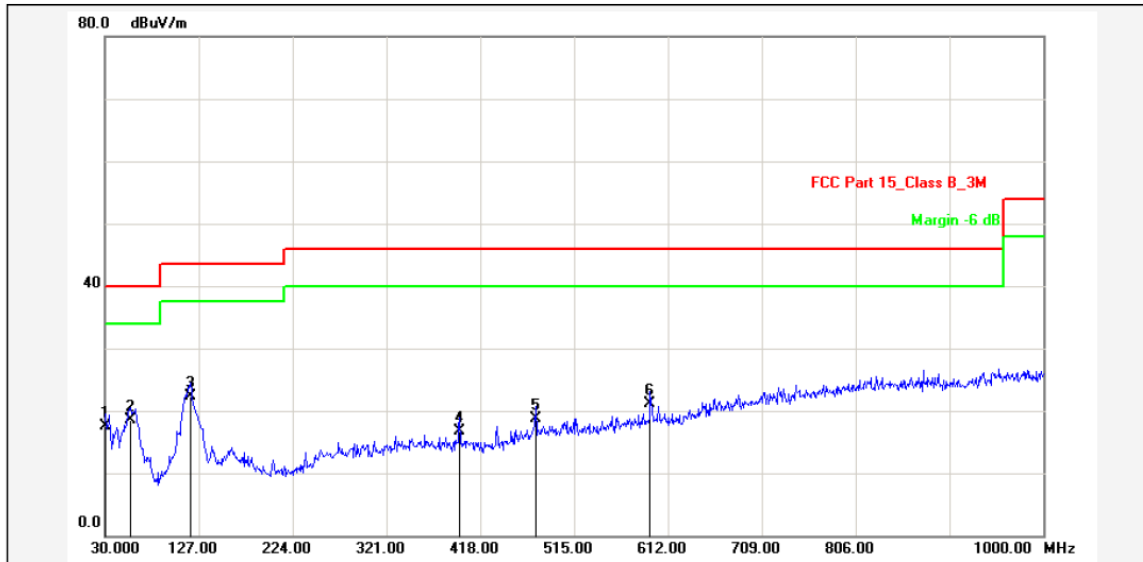

Report No.: ARS50B

Test Standard: FCC Part 15_Class B_3M

Test item: Radiation Emission

Applicant: Audiovox

Product: AUDIO SYSTEM WITH BLUETOOTH

Model No.: ARS50B

Test Distance:

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: AC 120V/60Hz

Test Engineer: Lecdon

Test Mode: TX

Remark: GFSK lowest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.9700	-15.83	33.33	17.50	40.00	-22.50	QP			P	
2	56.1900	-13.85	32.35	18.50	40.00	-21.50	QP			P	
3	118.2700	-16.68	39.08	22.40	43.50	-21.10	QP			P	
4	396.6600	-11.13	27.93	16.80	46.00	-29.20	QP			P	
5	475.2300	-9.34	28.14	18.80	46.00	-27.20	QP			P	
6	593.5700	-7.18	28.28	21.10	46.00	-24.90	QP			P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2015-5-5 10:24:56

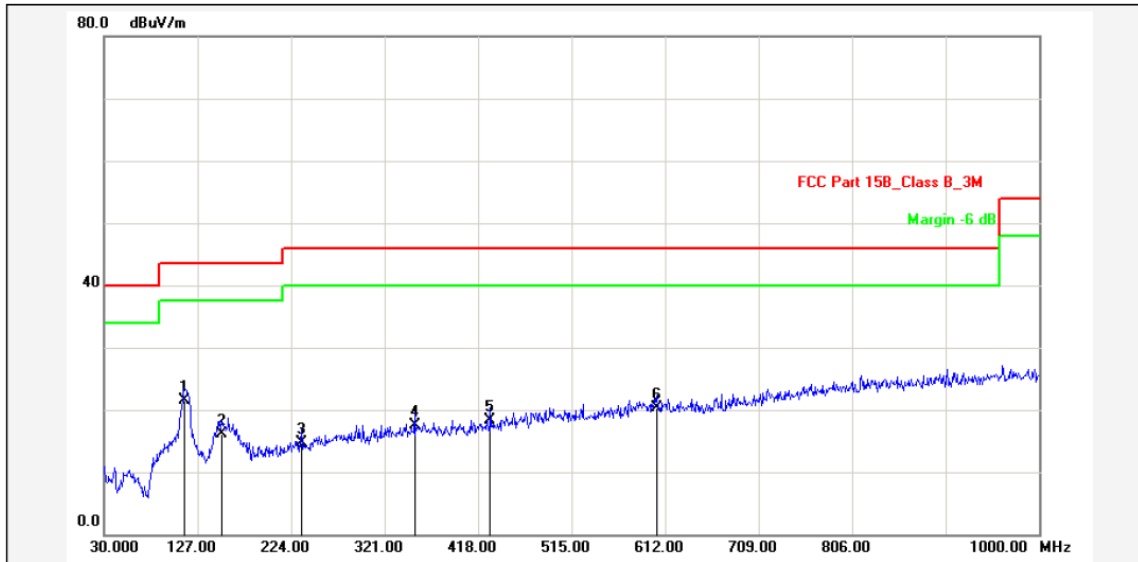

Report No.: ARS50B

Test Standard: FCC Part 15B_Class B_3M

Test item: Radiation Emission

Applicant: Audiovox

Product: AUDIO SYSTEM WITH BLUETOOTH

Model No.: ARS50B

Test Distance:

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: AC 240V/60Hz

Test Engineer: Lecdon

Test Mode: TX

Remark: GFSK lowest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	113.4200	-12.72	34.22	21.50	43.50	-22.00	QP			P	
2	152.2200	-15.43	31.63	16.20	43.50	-27.30	QP			P	
3	234.6700	-12.26	27.06	14.80	46.00	-31.20	QP			P	
4	352.0400	-9.13	26.63	17.50	46.00	-28.50	QP			P	
5	430.6100	-8.42	26.82	18.40	46.00	-27.60	QP			P	
6	603.2700	-5.00	25.30	20.30	46.00	-25.70	QP			P	

Note: Level=Reading+Factor.


Margin=Limit-Level.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2015-5-5 10:20:06

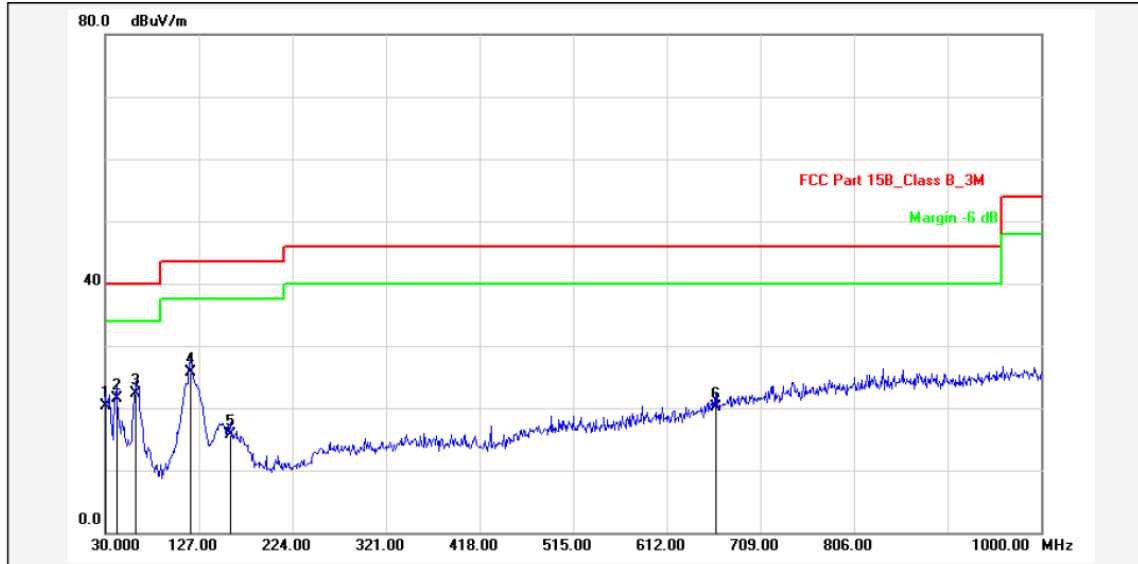

Report No.: ARS50B

Test Standard: FCC Part 15B_Class B_3M

Test item: Radiation Emission

Applicant: Audiovox

Product: AUDIO SYSTEM WITH BLUETOOTH

Model No.: ARS50B

Test Distance:

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 21(C) / 55 %

Power Rating: AC 240V/60Hz

Test Engineer: Lecdon

Test Mode: TX

Remark: GFSK lowest channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1	30.0000	-15.90	36.30	20.40	40.00	-19.60	QP			P	
2	41.6400	-14.69	36.19	21.50	40.00	-18.50	QP			P	
3	62.0100	-14.84	37.24	22.40	40.00	-17.60	QP			P	
4	118.2700	-16.68	42.38	25.70	43.50	-17.80	QP			P	
5	159.9800	-18.16	33.96	15.80	43.50	-27.70	QP			P	
6	663.4100	-4.80	25.00	20.20	46.00	-25.80	QP			P	

Note: Level=Reading+Factor.

Margin=Limit-Level.

Modulation: GFSK (the worst case)
Frequency Range: 1-25GHz Test Date : April 06, 2015
Test Result: PASS Temperature : 25 °C
Measured Distance: 3m Humidity : 52 %
Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	V	38.47	30.97	14.63	53.10	45.60	74.00	54.00	-20.90	-8.40
7206	V	38.72	27.82	20.68	59.40	48.50	74.00	54.00	-14.60	-5.50

4804	H	41.14	33.90	14.63	55.77	48.53	74.00	54.00	-18.23	-5.47
7206	H	40.09	29.83	20.68	60.77	50.51	74.00	54.00	-13.23	-3.49

Operation Mode: TX Mode (Mid)										
4882	V	39.17	32.44	14.97	54.14	47.41	74.00	54.00	-19.86	-6.59
7323	V	34.01	26.99	20.91	54.92	47.90	74.00	54.00	-19.08	-6.10

4882	H	42.76	30.88	14.97	57.73	45.85	74.00	54.00	-16.27	-8.15
7323	H	34.59	21.18	20.91	55.50	42.09	74.00	54.00	-18.50	-11.91

Operation Mode: TX Mode (High)										
4960	V	41.21	28.97	15.30	56.51	44.27	74.00	54.00	-17.49	-9.73
7440	V	36.98	22.10	21.16	58.14	43.26	74.00	54.00	-15.86	-10.74

4960	H	39.23	25.55	15.30	54.53	40.85	74.00	54.00	-19.47	-13.15
7440	H	29.73	22.15	21.16	50.89	43.31	74.00	54.00	-23.11	-10.69

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ± 3.7 dB.
 - (6) Horn antenna used for the emission over 1000MHz.


5. Channel Separation test

5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	April 06, 2015
Temperature :	25 °C	Humidity :	52 %
Test Result:	PASS		


Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit (KHz)
GFSK			
Lowest	2402	1000	>705.3
Middle	2441	1000	>708.0
Highest	2480	1000	>708.7
$\pi/4$ -DQPSK			
Lowest	2402	1010	>907.3
Middle	2441	1010	>910.0
Highest	2480	1005	>900.7
8DPSK			
Lowest	2402	1014	>910
Middle	2441	1043	>907
Highest	2480	1000	>894

GFSK Lowest Channel

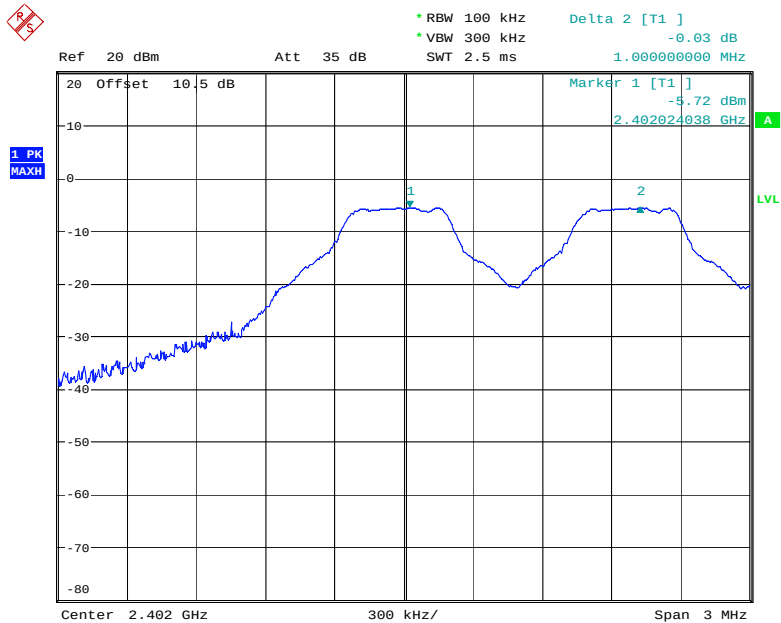


Date: 6.APR.2015 18:07:55

GFSK Middle Channel

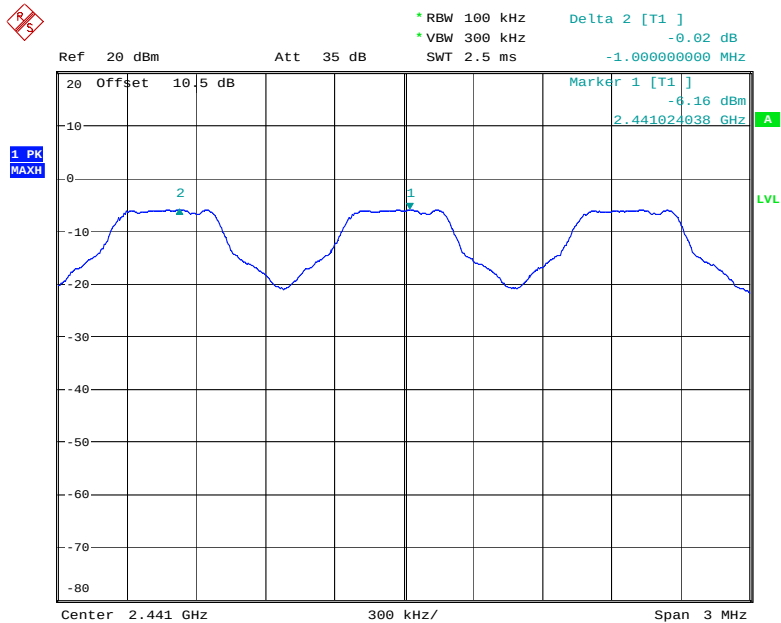


Date: 6.APR.2015 18:09:51

GFSK Highest Channel

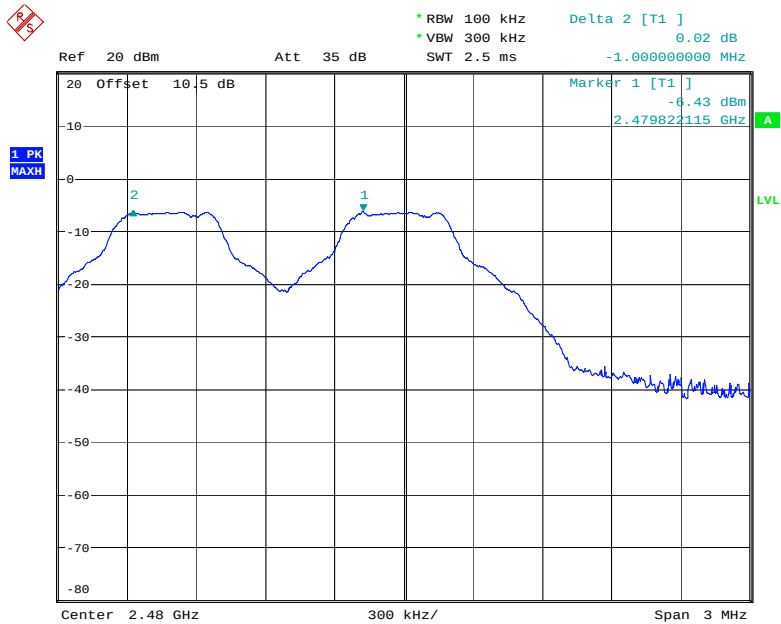


Date: 6.APR.2015 18:13:06

$\pi/4$ -DQPSK Lowest Channel

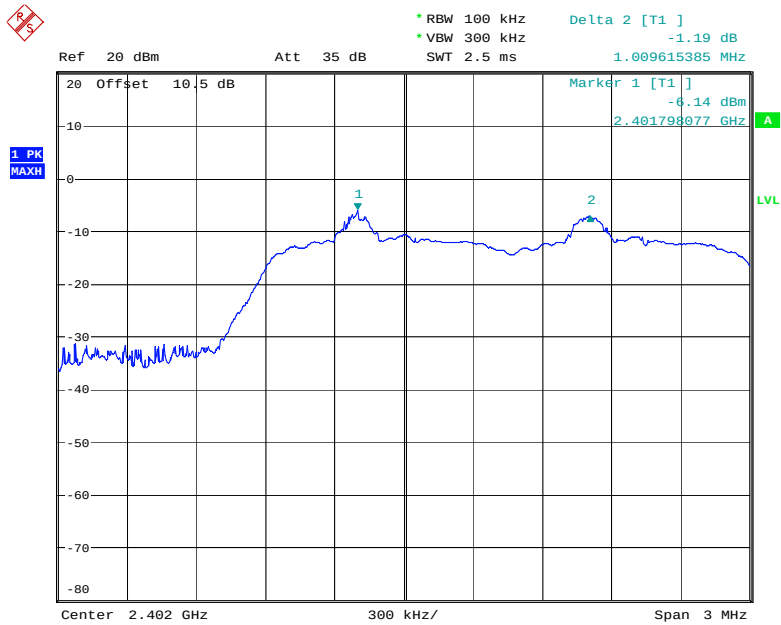


Date: 6.APR.2015 18:15:52

$\pi/4$ -DQPSK Middle Channel

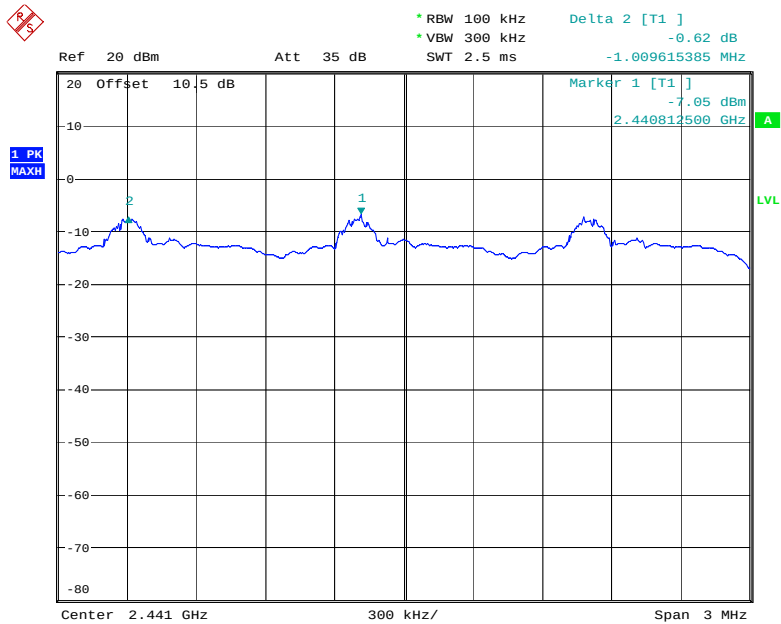


Date: 6.APR.2015 18:18:12

$\pi/4$ -DQPSK Highest Channel

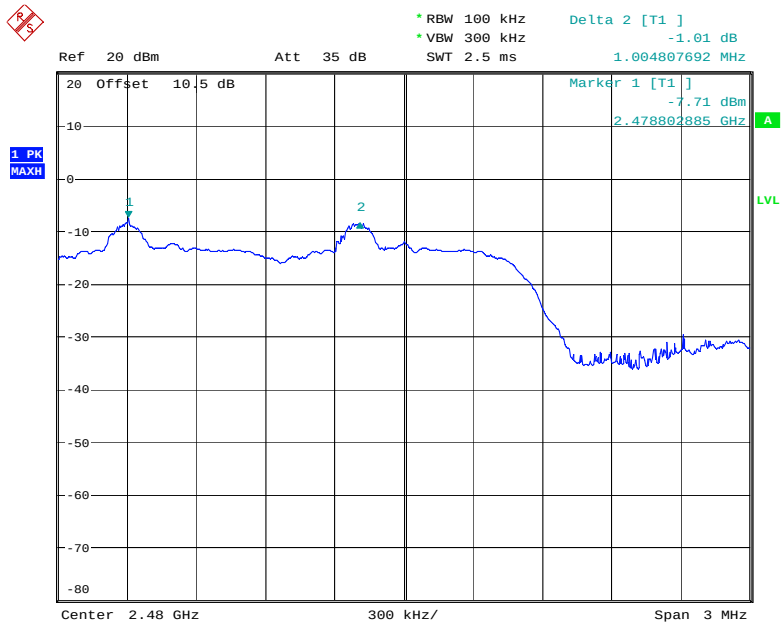


Date: 6.APR.2015 18:19:49

8DPSK Lowest Channel

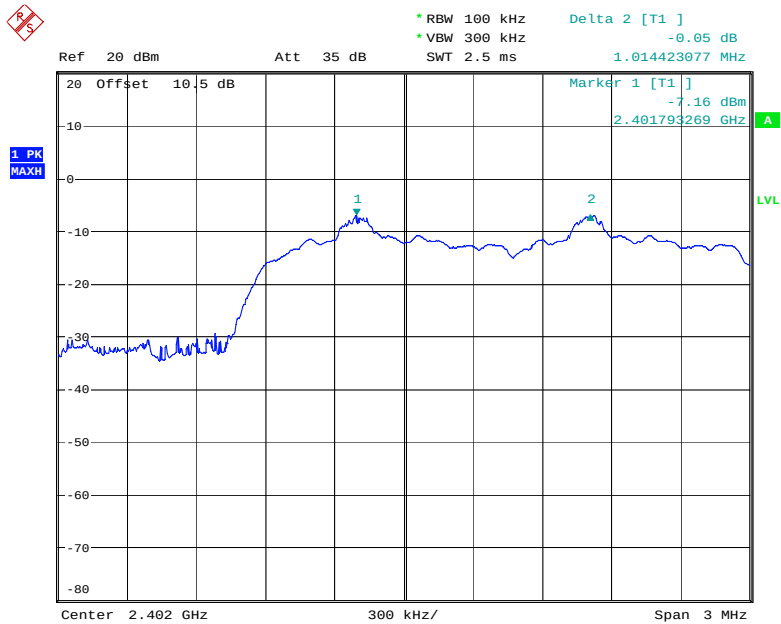

Date: 6.APR.2015 18:21:43


8DPSK Middle Channel

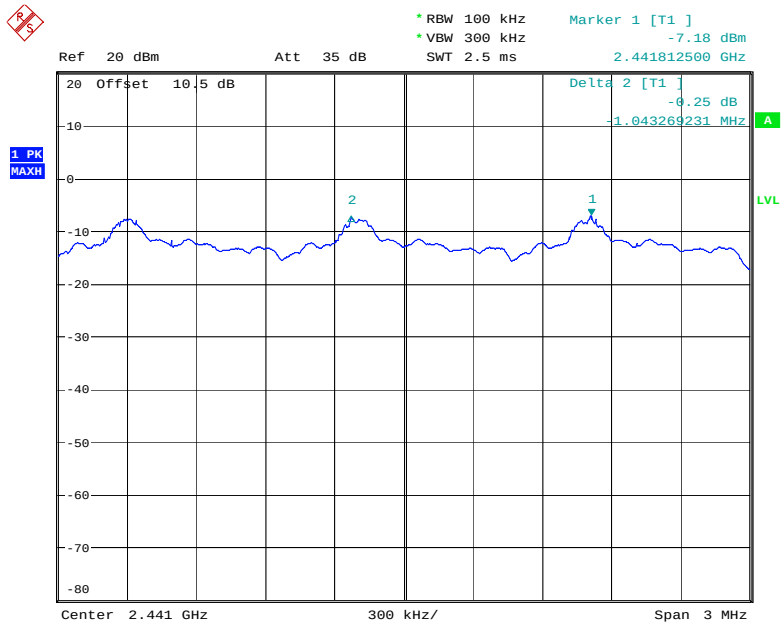

Date: 6.APR.2015 18:24:23



8DPSK Highest Channel

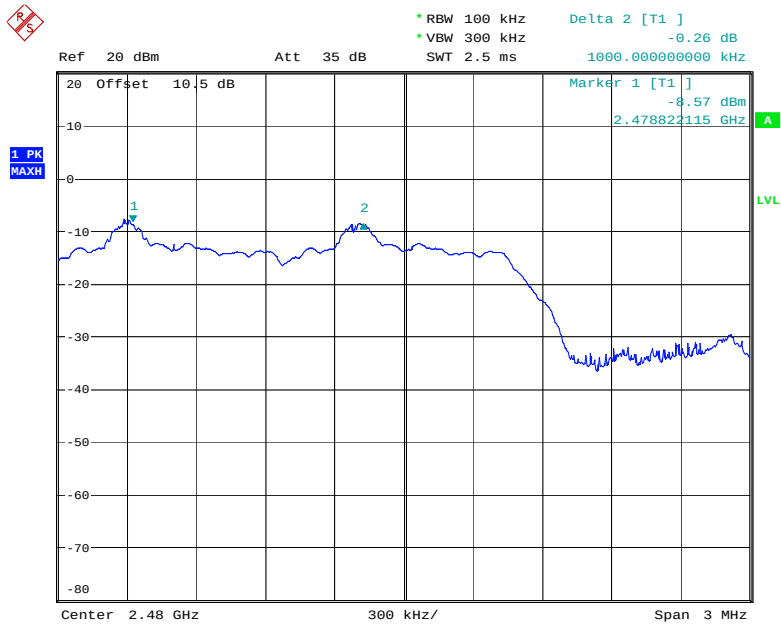

Date: 6.APR.2015 18:26:12


6. 20dB Bandwidth

6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Refer to attached data chart.

Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	30KHz	VBW:	100KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	April 06, 2015
Temperature :	25 °C	Humidity :	52 %
Test Result:	PASS		


Channel frequency (MHz)	20dB Down BW(kHz)
GFSK	
2402	1058
2441	1062
2480	1063
$\pi/4$ -DQPSK	
2402	1361
2441	1365
2480	1351
8DPSK	
2402	1365
2441	1361
2480	1341

GFSK Lowest Channel

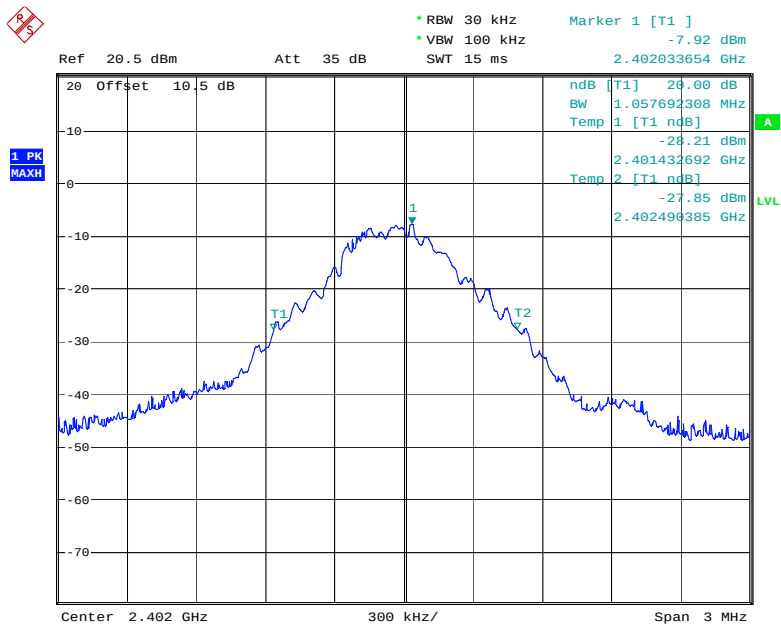


Date: 6.APR.2015 17:56:02

GFSK Middle Channel

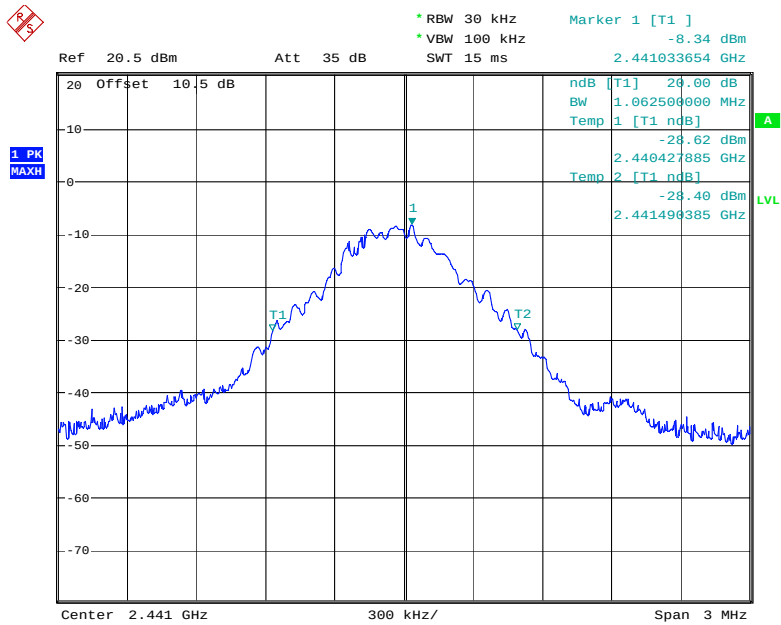


Date: 6.APR.2015 17:57:00

GFSK Highest Channel


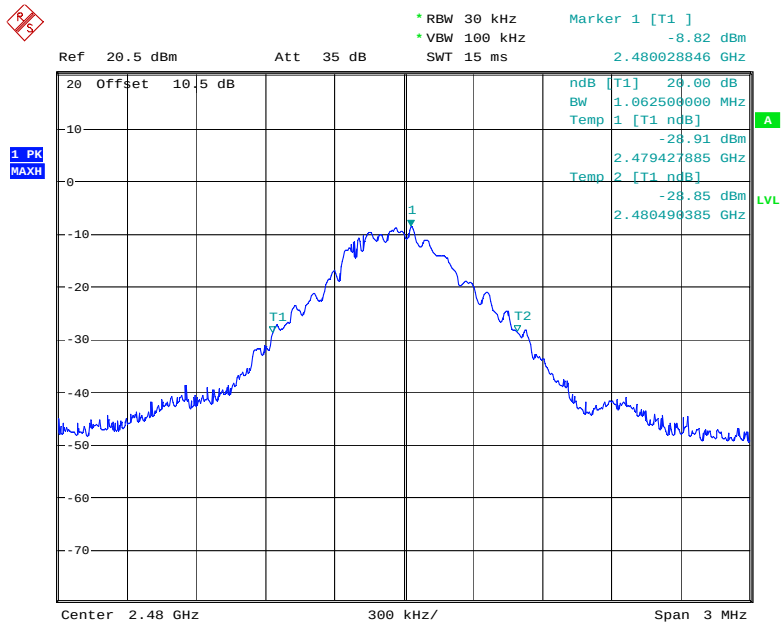


Date: 6.APR.2015 17:57:47


$\pi/4$ -DQPSK Lowest Channel

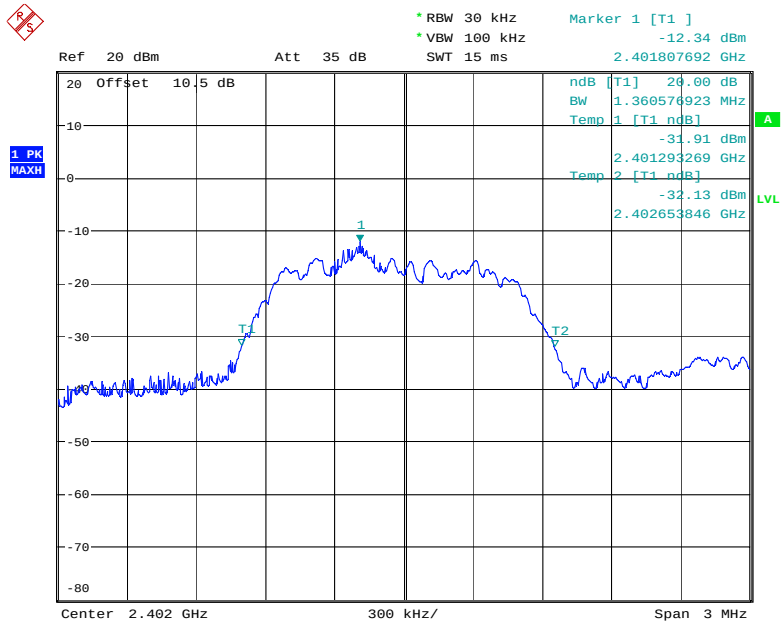

Date: 6.APR.2015 17:58:49




8DPSK Lowest Channel

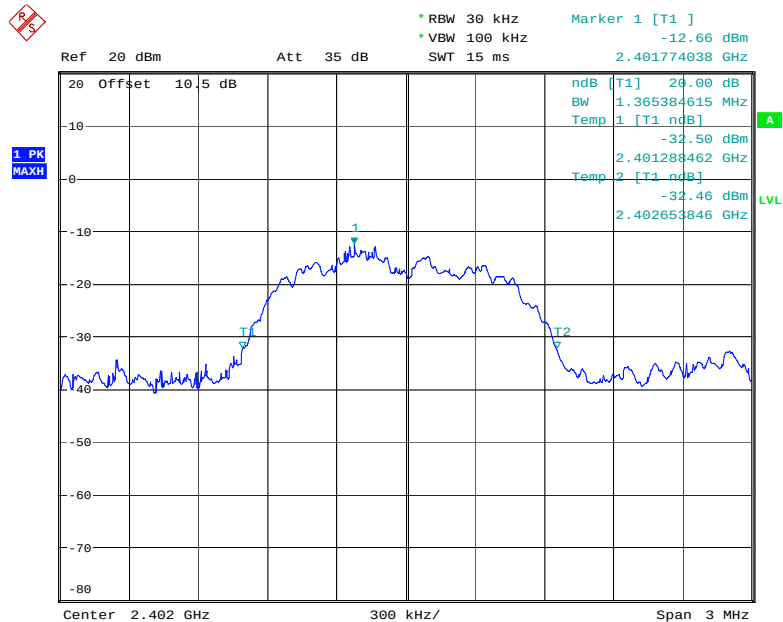


Date: 6.APR.2015 18:02:09

8DPSK Middle Channel

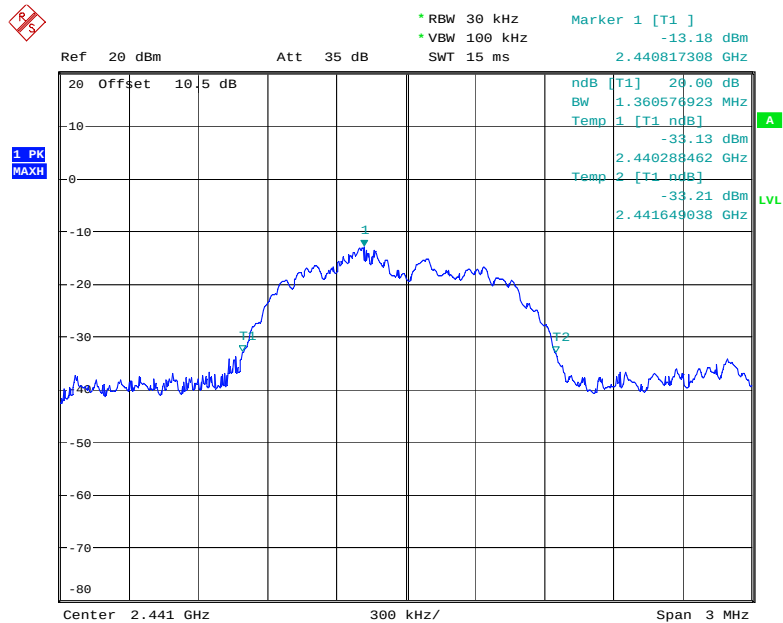

Date: 6.APR.2015 18:03:22

8DPSK Highest Channel

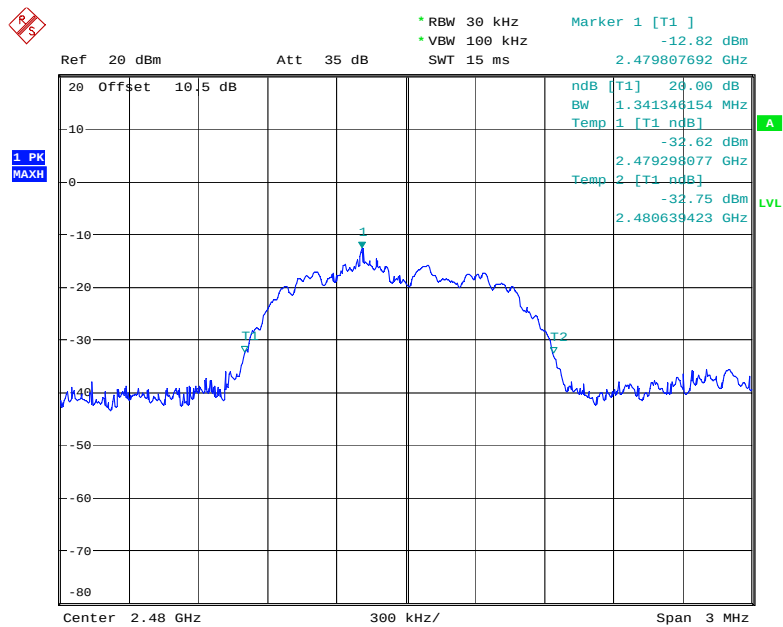

Date: 6.APR.2015 18:04:14


7. Hopping Channel Number

7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results

Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	April 06, 2015
Temperature :	25 °C	Humidity :	52 %
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥ 15

The worst case: GFSK

GFSK

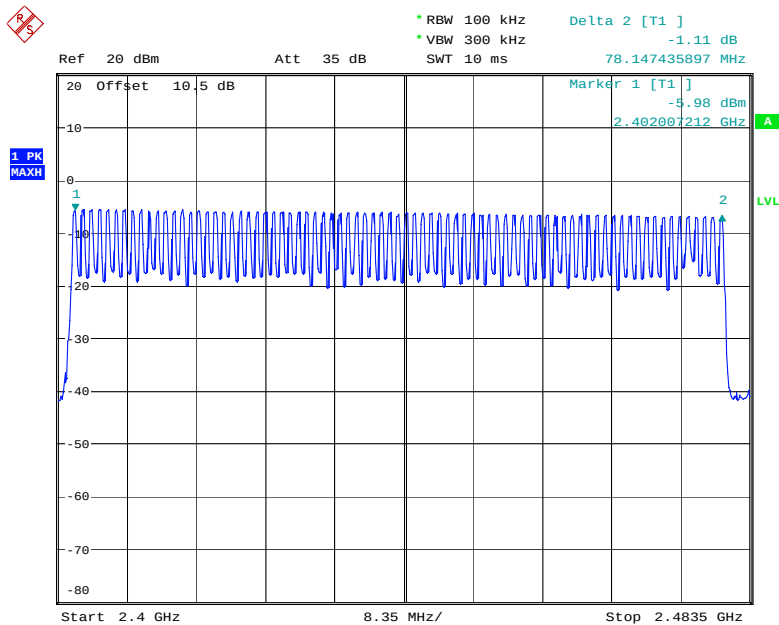

Date: 6.APR.2015 19:15:41

8. Time of Occupancy (Dwell Time)

8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable. The spectrum analyzer center frequency was set to one of the known hopping channels. The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Test Date :	April 06, 2015	Temperature :	25°C
Test Result:	PASS	Humidity :	52 %


Packet	Frequency (MHz)	Result (msec)	Limit (msec)
GFSK			
DH1	2441	$0.545 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 174.4$	400
DH3	2441	$1.691 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 270.6$	400
DH5	2441	$2.821 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 300.9$	400
$\pi/4$ -DQPSK			
2-DH1	2441	$0.345 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 110.4$	400
2-DH3	2441	$1.691 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 270.6$	400
2-DH5	2441	$2.989 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 318.8$	400
8DPSK			
3-DH1	2441	$0.393 \text{ (ms)} * (1600 / (2 * 79)) * 31.6 = 125.8$	400
3-DH3	2441	$1.683 \text{ (ms)} * (1600 / (4 * 79)) * 31.6 = 269.3$	400
3-DH5	2441	$2.837 \text{ (ms)} * (1600 / (6 * 79)) * 31.6 = 302.6$	400

GFSK DH1

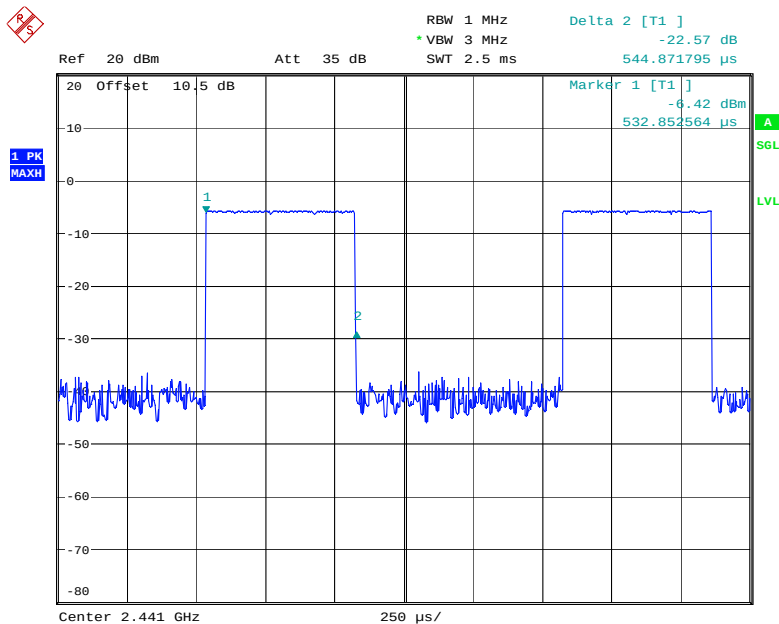


Date: 6.APR.2015 18:29:50

GFSK DH3

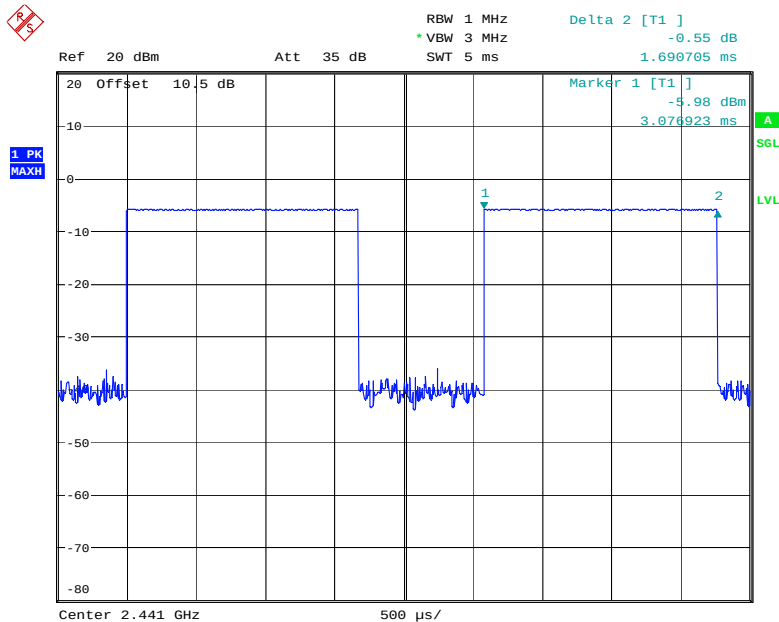


Date: 6.APR.2015 18:32:32

GFSK DH5

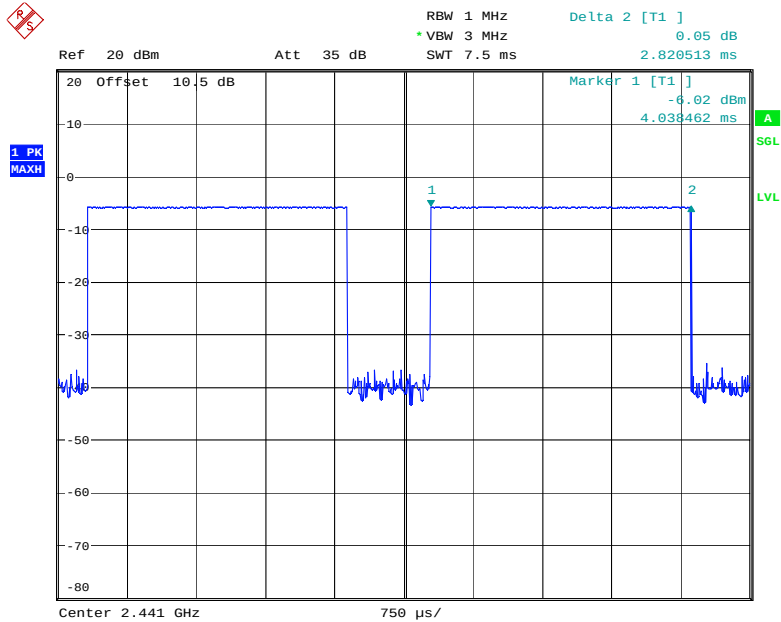

Date: 6.APR.2015 18:33:18


$\pi/4$ -DQPSK 2-DH1

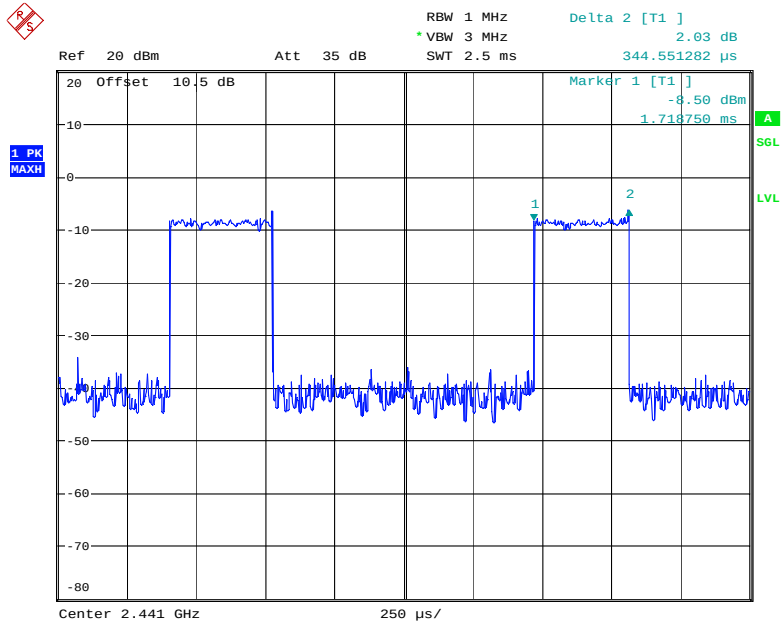

Date: 6.APR.2015 18:33:59




$\pi/4$ -DQPSK 2-DH3

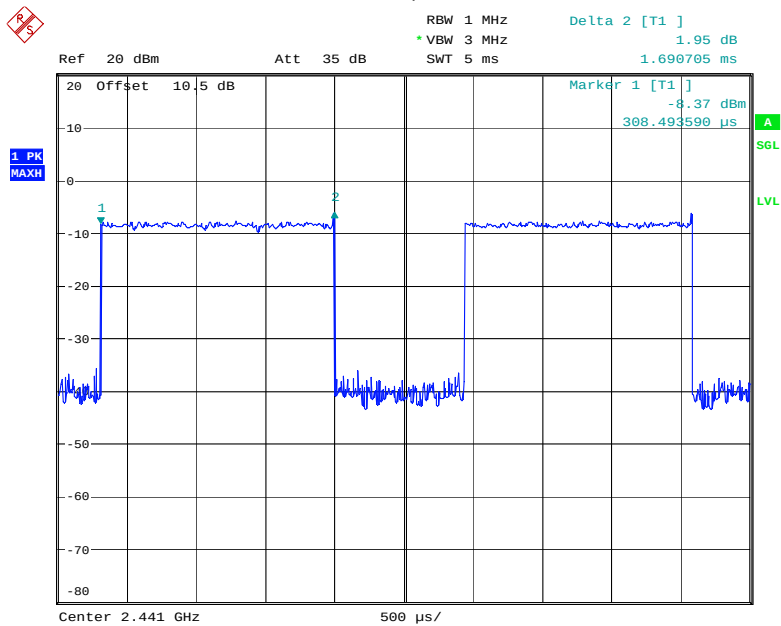


Date: 6.APR.2015 18:34:31

$\pi/4$ -DQPSK 2-DH5

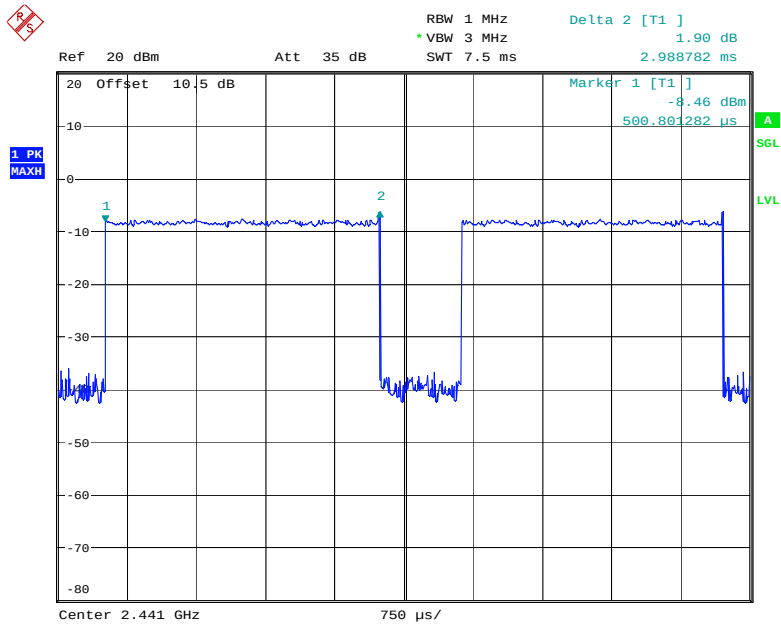


Date: 6.APR.2015 18:35:08

8DPSK 3-DH1

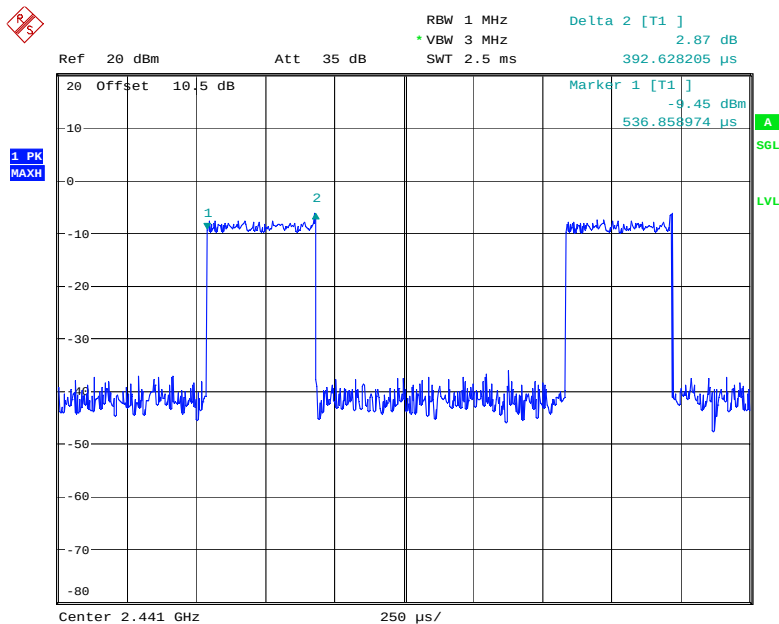

Date: 6.APR.2015 18:35:39


8DPSK 3-DH3

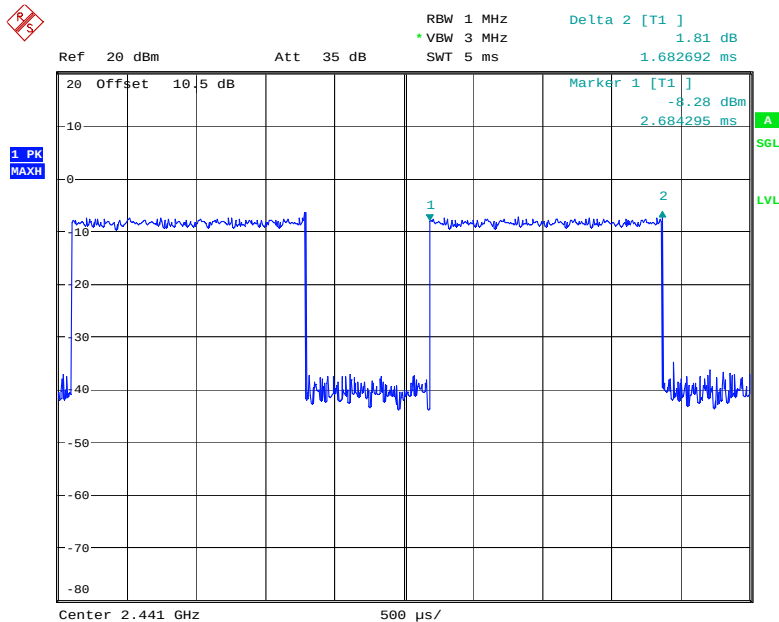

Date: 6.APR.2015 18:36:11



8DPSK 3-DH5

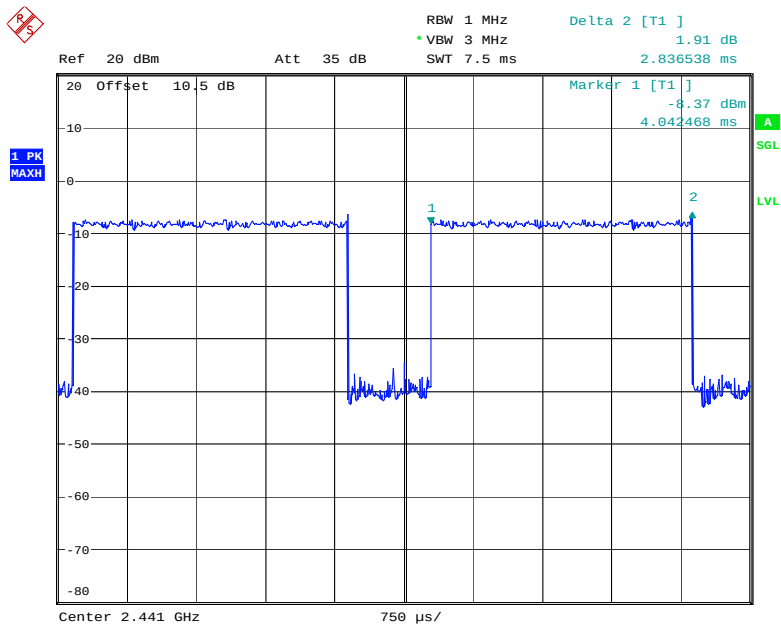

Date: 6.APR.2015 18:36:39

9. MAXIMUM PEAK OUTPUT POWER

9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.


9.2 Measurement Results

Refer to attached data chart.

Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	3MHz	VBW :	3MHz
Spectrum Detector:	PK	Test Date :	April 06, 2015
Test By:	Sance	Temperature :	25 °C
Test Result:	PASS	Humidity :	52%


Channel Frequency (MHz)	Cable Loss dB	Peak Power output(mW)	Peak Power output(dBm)	Peak Power Limit(dBm)	Pass/Fail
GFSK					
2402.00	1.5	0.44	-3.60	21	PASS
2441.00	1.5	0.40	-3.96	21	PASS
2480.00	1.5	0.39	-4.11	21	PASS
$\pi/4$ -DQPSK					
2402.00	1.5	0.41	-3.91	21	PASS
2441.00	1.5	0.39	-4.06	21	PASS
2480.00	1.5	0.35	-4.58	21	PASS
8DPSK					
2402.00	1.5	0.43	-3.70	21	PASS
2441.00	1.5	0.38	-4.16	21	PASS
2480.00	1.5	0.35	-4.51	21	PASS

GFSK Lowest Channel

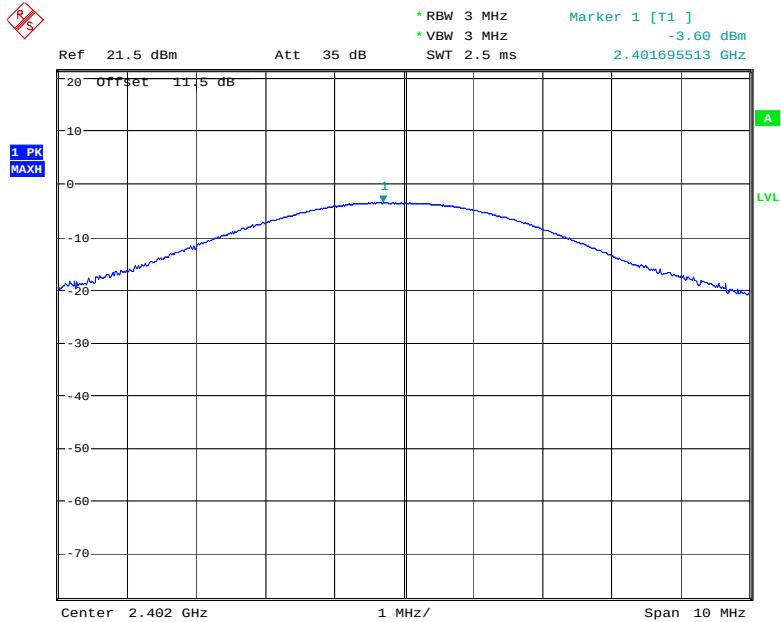


Date: 6.APR.2015 17:26:35

GFSK Middle Channel

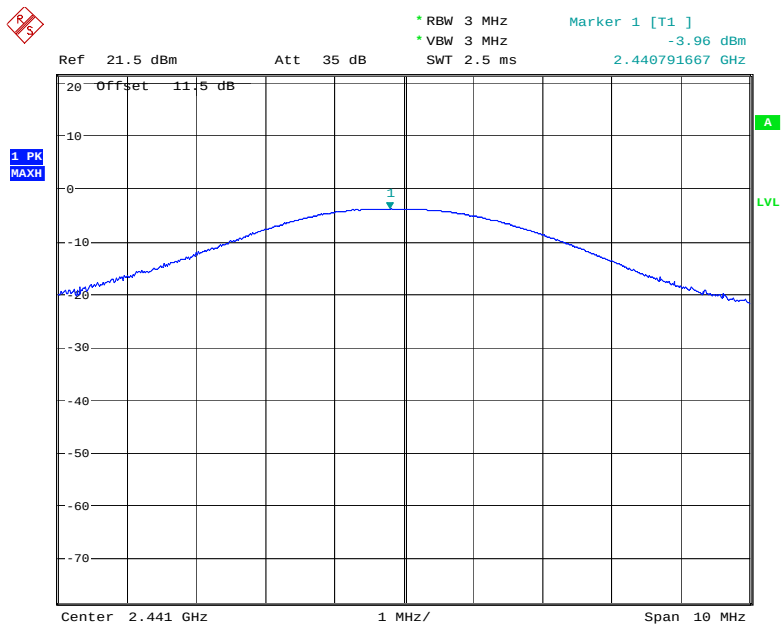


Date: 6.APR.2015 17:28:49

GFSK Highest Channel

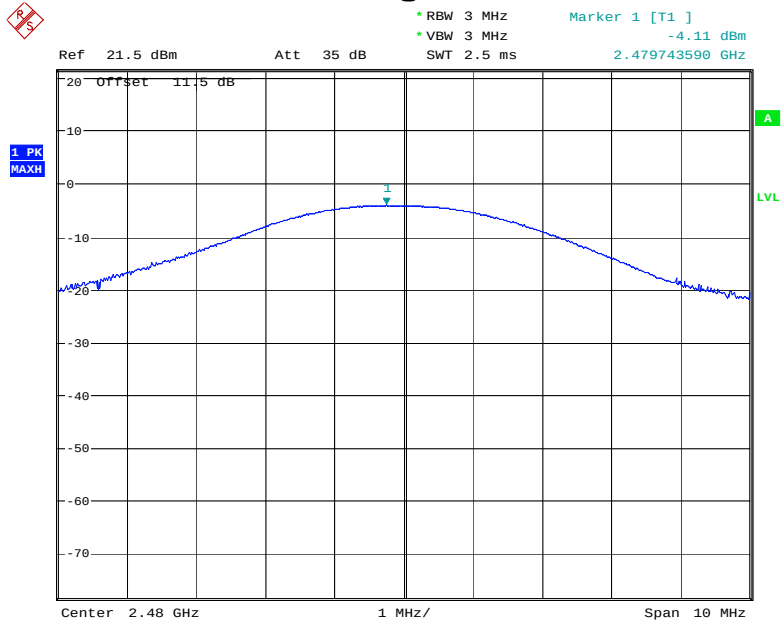


Date: 6.APR.2015 17:32:09

$\pi/4$ -DQPSK Lowest Channel

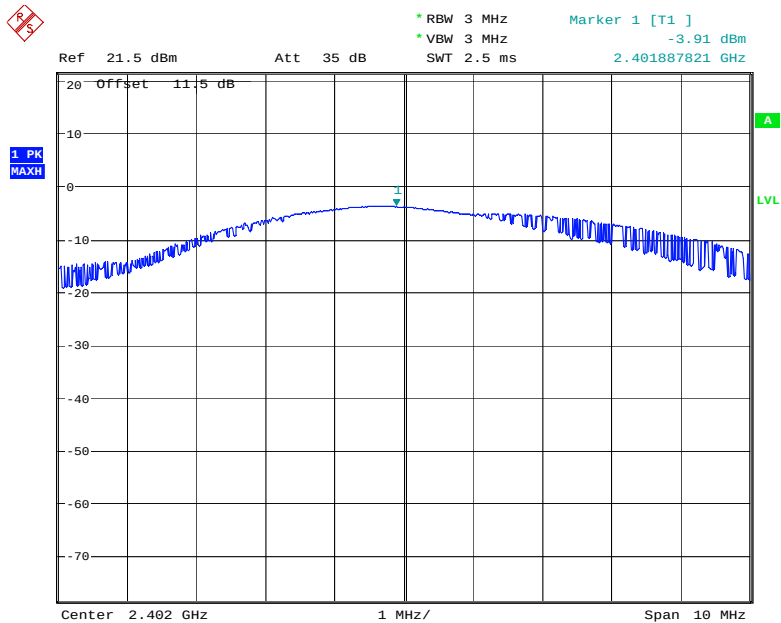


Date: 6.APR.2015 17:38:21

$\pi/4$ -DQPSK Middle Channel

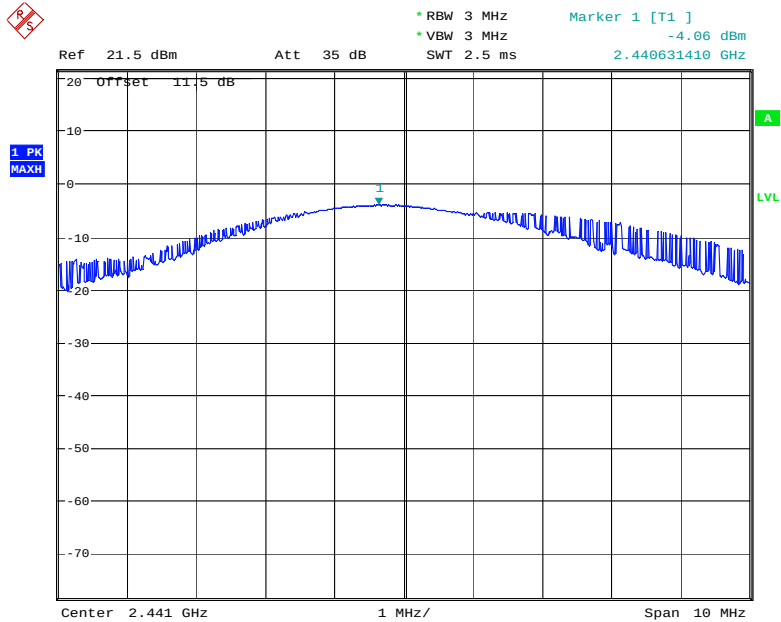


Date: 6.APR.2015 17:41:03

$\pi/4$ -DQPSK Highest Channel

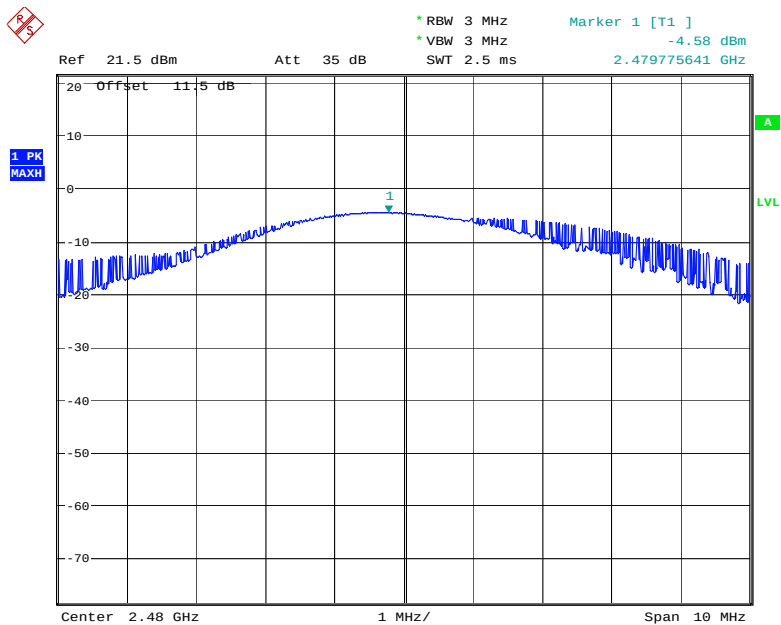


Date: 6.APR.2015 17:44:01

8DPSK Lowest Channel

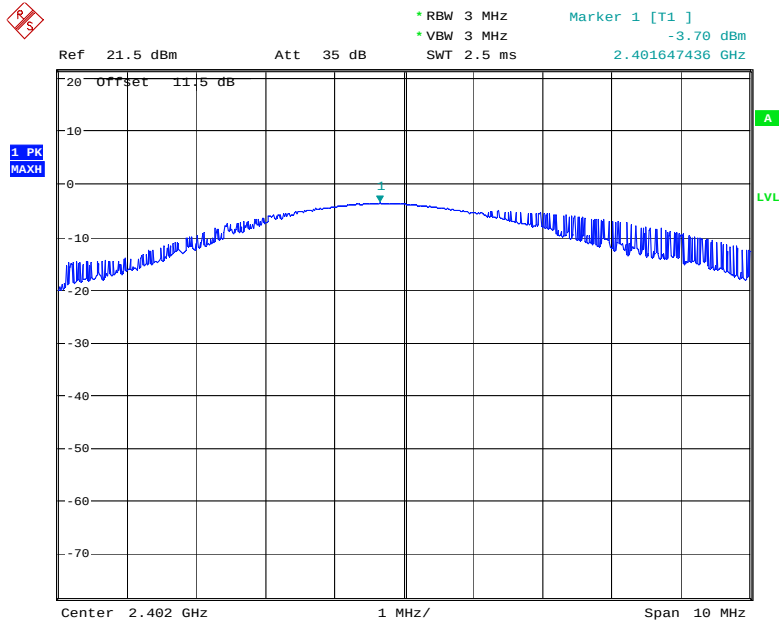


Date: 6.APR.2015 17:46:06

8DPSK Middle Channel

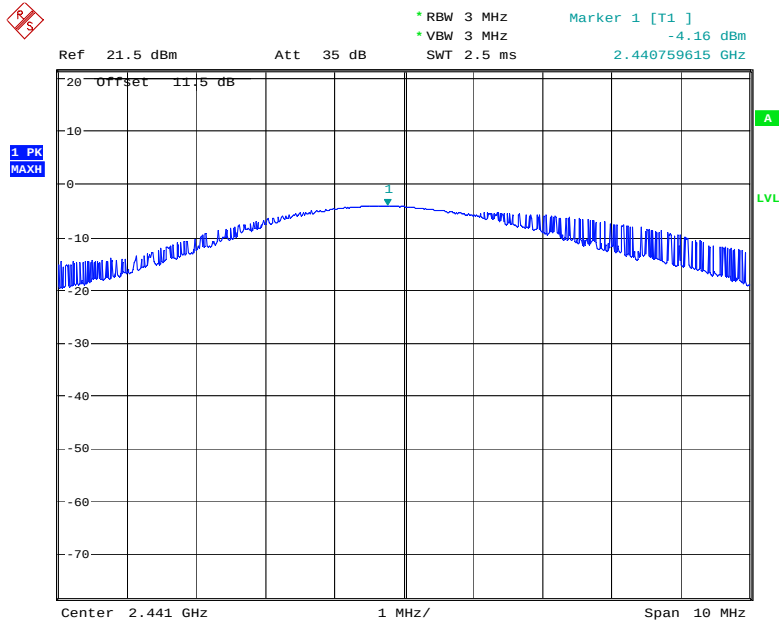

Date: 6.APR.2015 17:48:37

8DPSK Highest Channel

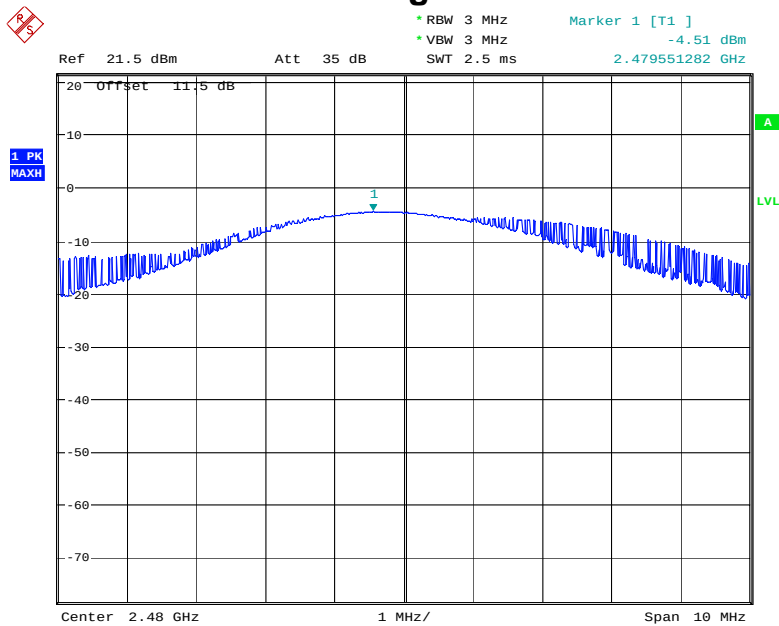

Date: 6.APR.2015 17:51:07

10. Band Edge

10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.3 Measurement Results

Please see below test table and plots.
For Radiated Emission
The worst case: GFSK


Hopping-on mode

Freq. (MHz)	Ant. Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2399.835	H	56.86	42.28	8.09	64.95	50.37	74.00	54.00	-9.05	-3.63
2399.835	V	54.78	42.73	8.09	62.87	50.82	74.00	54.00	-11.13	-3.18
2483.560	H	54.13	37.40	8.36	62.49	45.76	74.00	54.00	-11.51	-8.24
2483.560	V	52.55	42.12	8.36	60.91	50.48	74.00	54.00	-13.09	-3.52


- Note:**
- (1) Emission Level= Reading Level + Factor
 - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (3) Horn antenna used for the emission over 1000MHz.

For RF Conducted

GFSK Lowest Channel

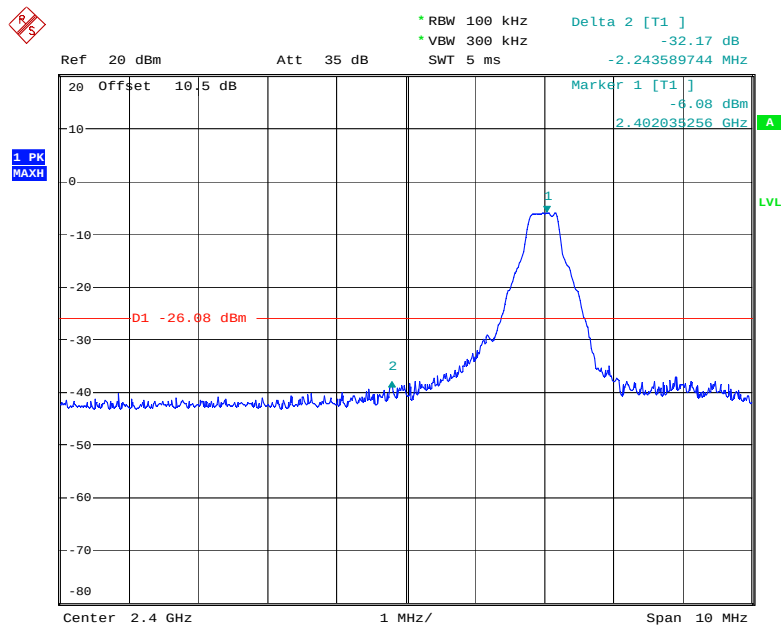


Date: 6.APR.2015 18:39:21

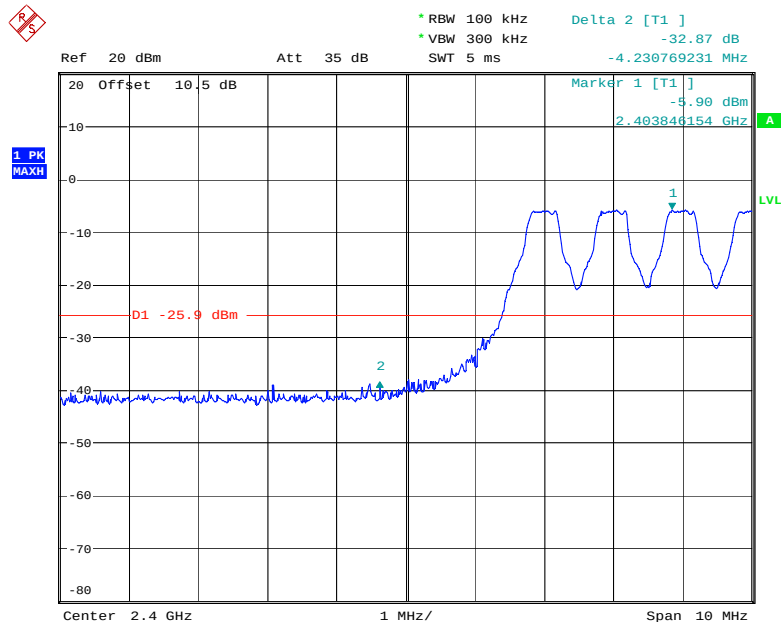


Date: 6.APR.2015 18:46:04



GFSK Highest Channel

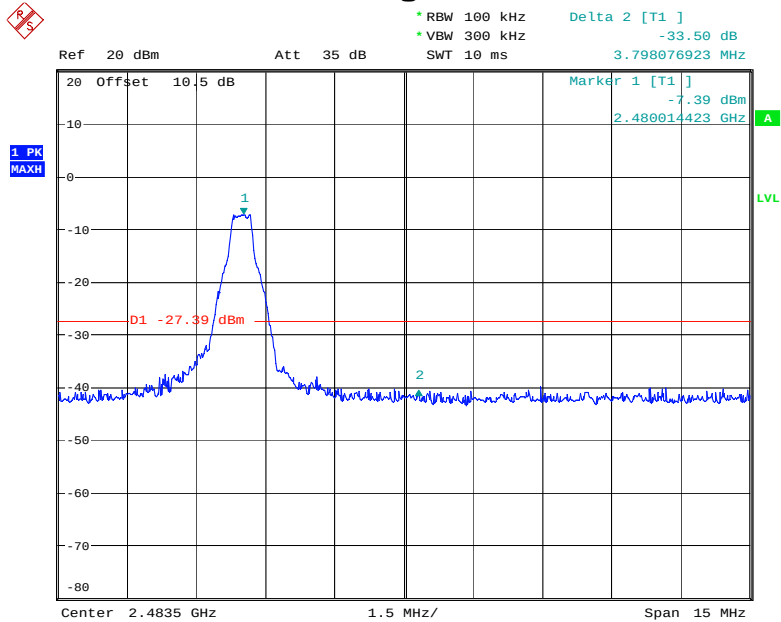


Date: 6.APR.2015 18:48:01

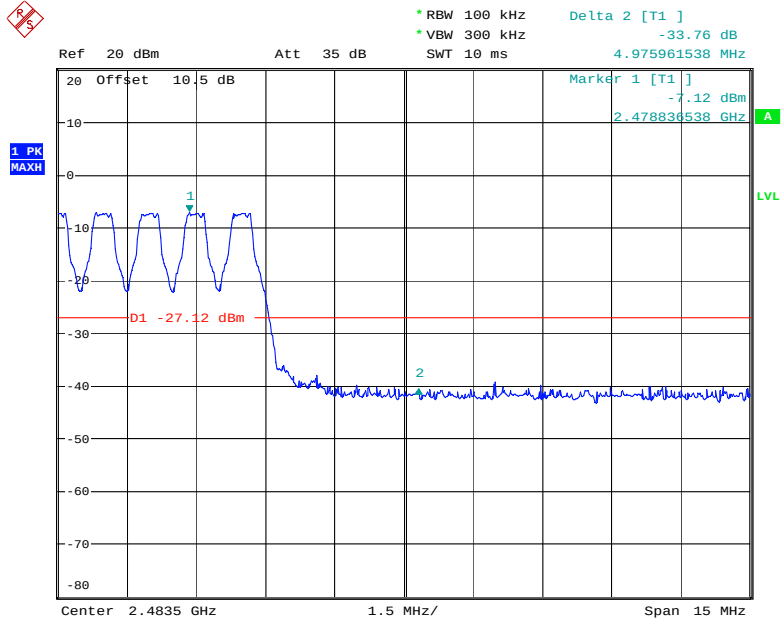


Date: 6.APR.2015 18:49:29

$\pi/4$ -DQPSK Lowest Channel

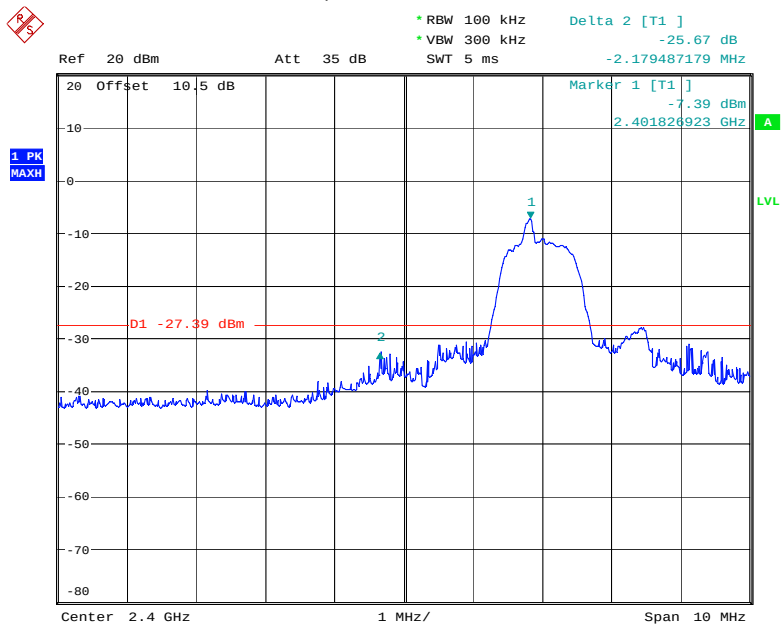


Date: 6.APR.2015 18:51:55

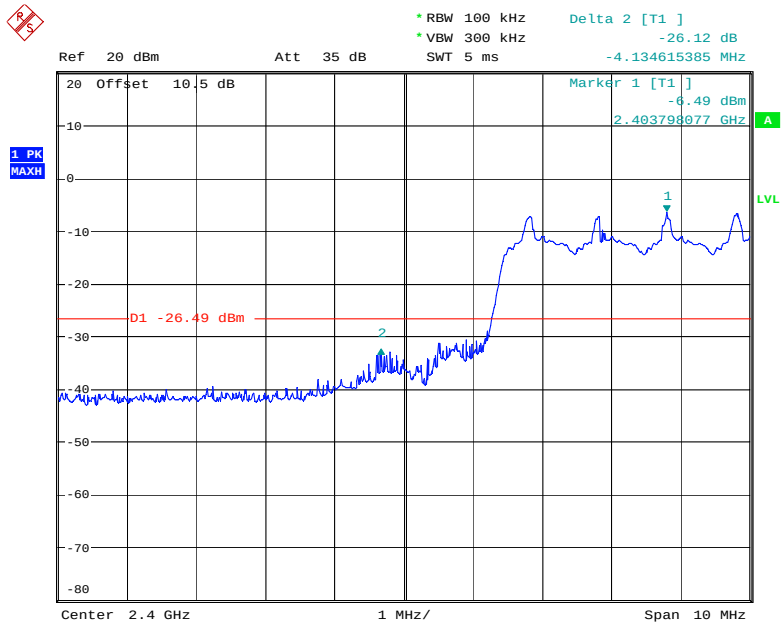


Date: 6.APR.2015 18:55:42

$\pi/4$ -DQPSK Highest Channel

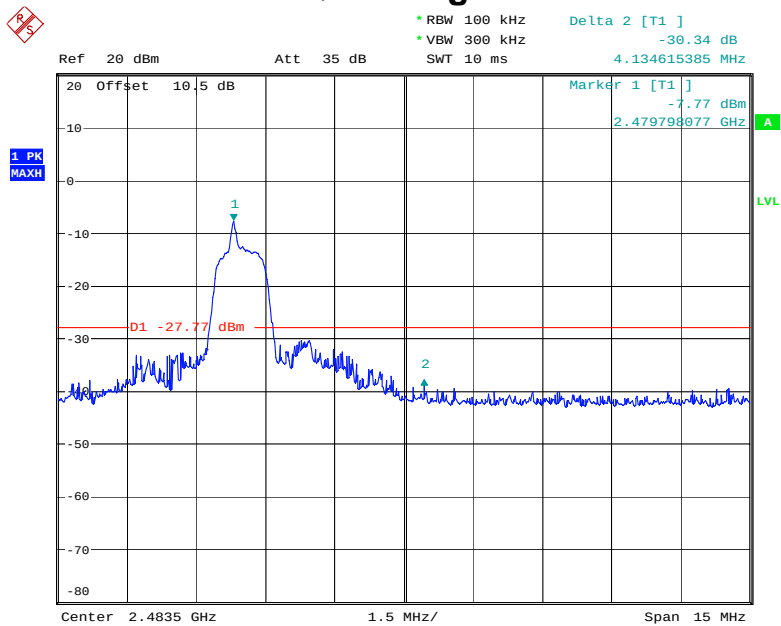


Date: 6.APR.2015 18:58:13

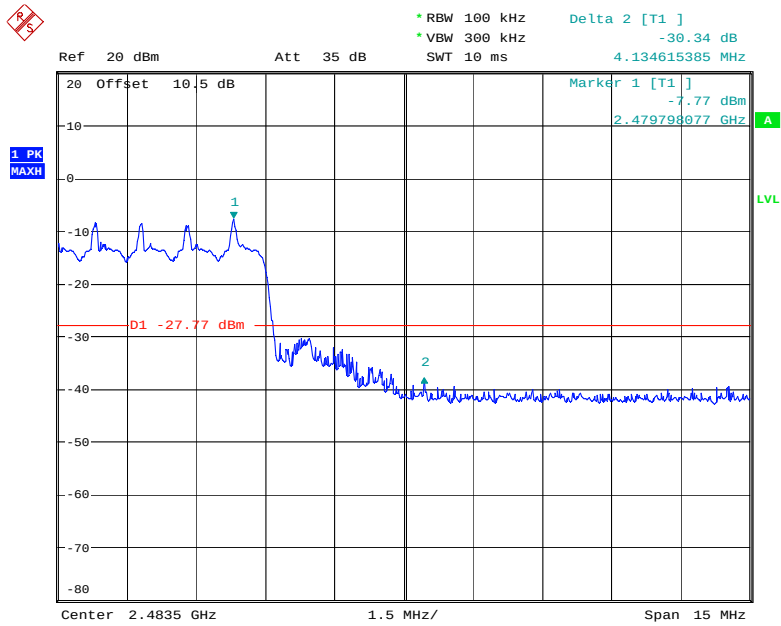


Date: 6.APR.2015 18:59:42

8DPSK Lowest Channel

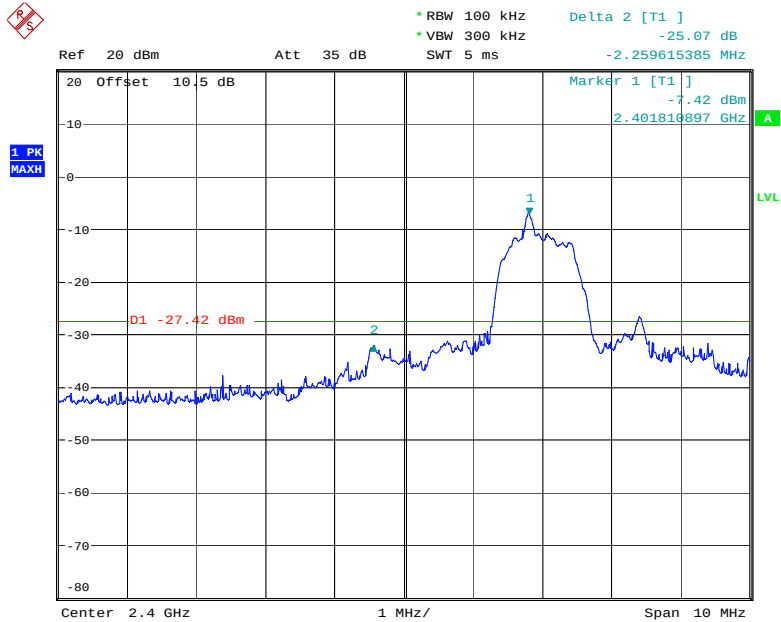


Date: 6.APR.2015 19:00:50

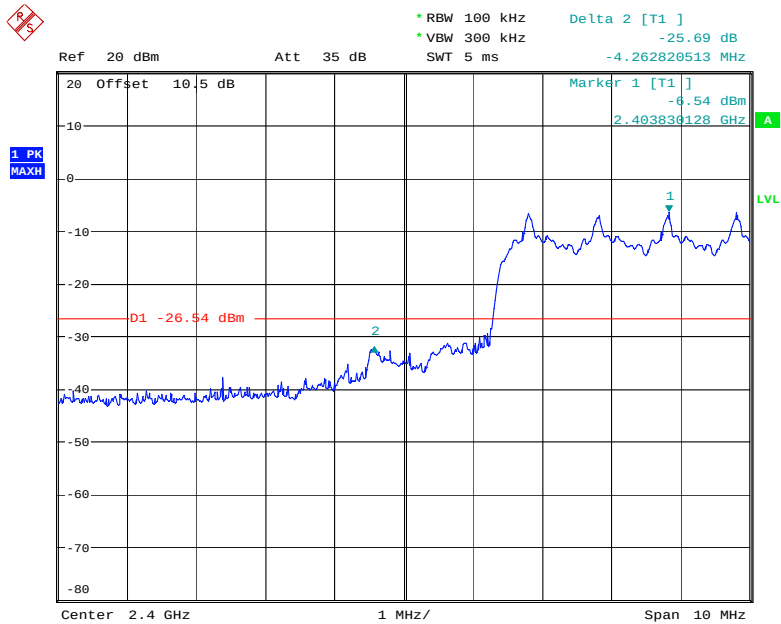


Date: 6.APR.2015 19:02:56



8DPSK Highest Channel

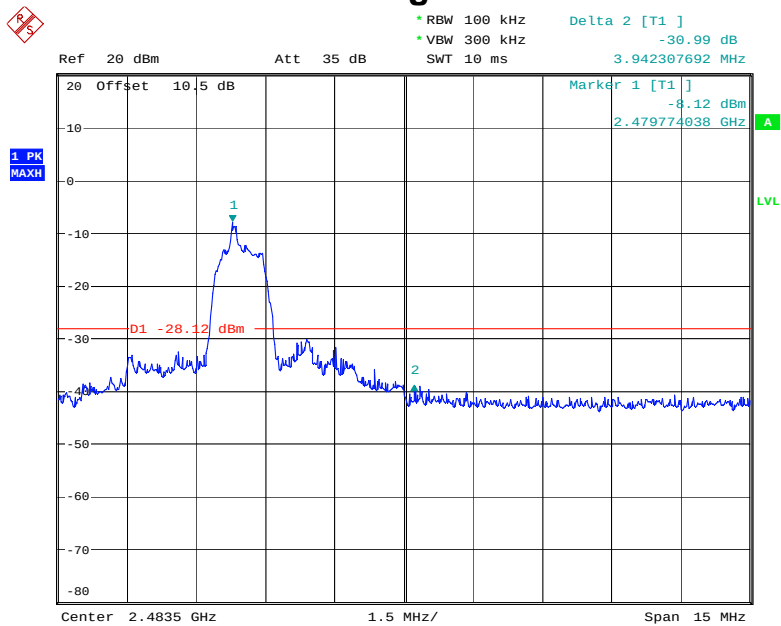

Date: 6.APR.2015 19:04:12

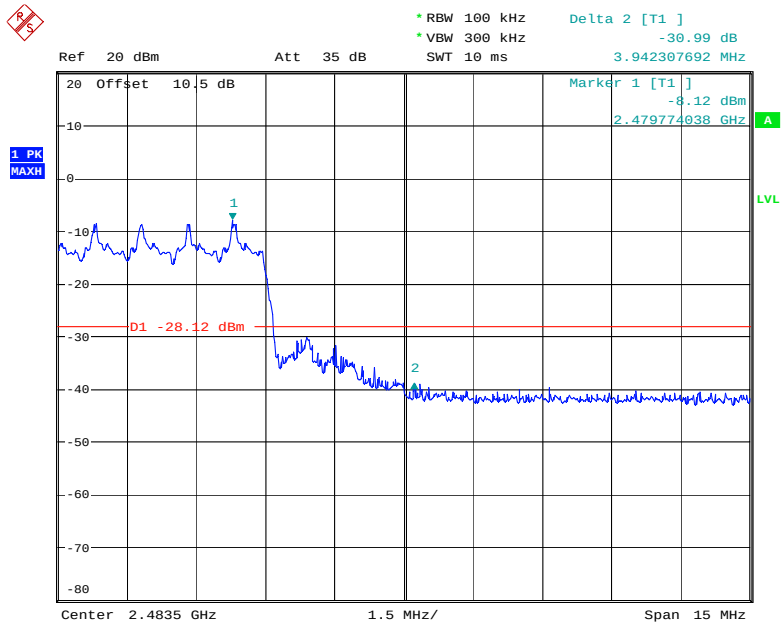

Date: 6.APR.2015 19:06:05

11. Antenna Application

11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Measurement Results

The antenna is integrated on the main PCB and no consideration of replacement, and the best case gain of the antenna is 0dBi. So, the antenna is consider meet the requirement.

12. Conducted Spurious Emissions

12.1 Measurement Procedure


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.

12.2. Measurement Results


Please refer to following plots, the worst case (GFSK) was shown.

Lowest Channel

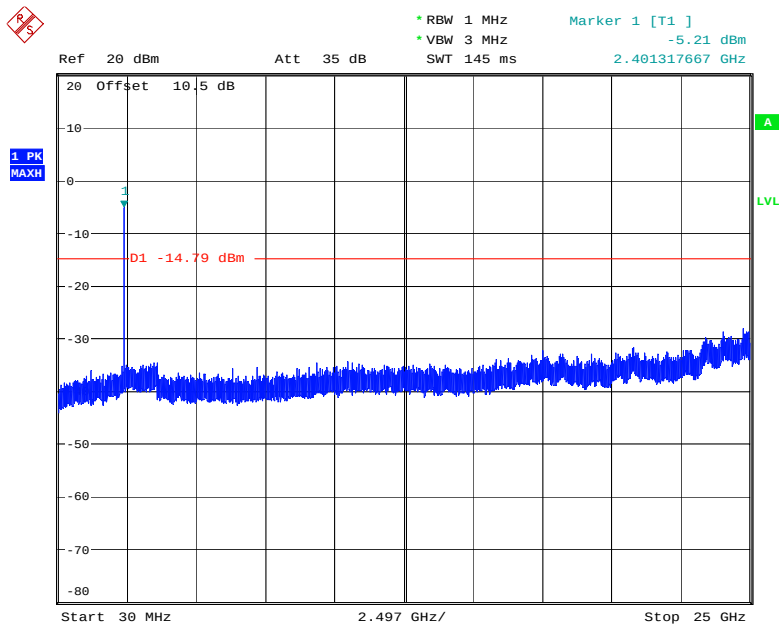

Date: 6.APR.2015 19:53:33


Note: Sweep points=30001pts
Middle Channel

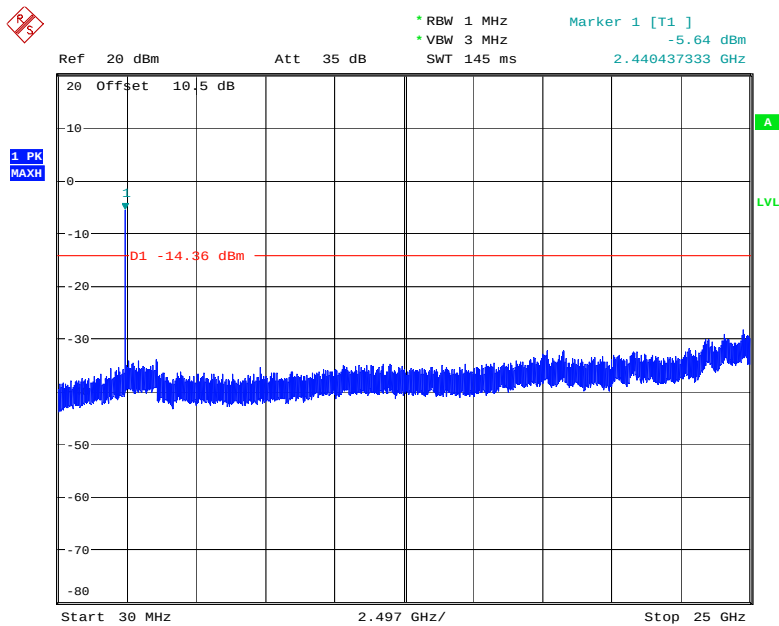

Date: 6.APR.2015 19:55:01

Note: Sweep points=30001pts

Highest Channel

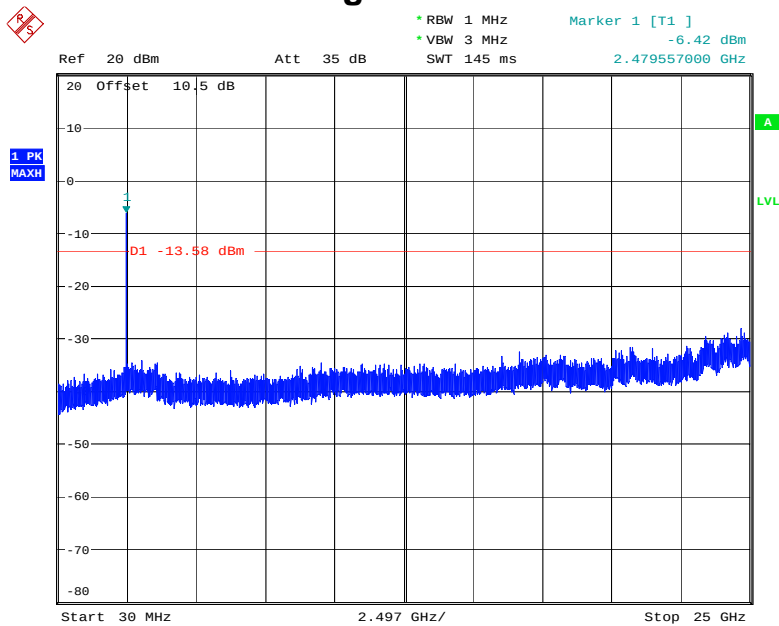

Date: 6.APR.2015 19:56:14

Note: Sweep points=30001pts

13. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 24, 2014	Nov. 23, 2015
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 27, 2014	Nov. 26, 2015
Positioning Controller	UC	UC 3000	N/A	0~360° , 1-4m	N/A	N/A
Color Monitor	SUNSP0	SP-140A	N/A	N/A	N/A	N/A
Single Phase Power Line Filter	SAEMC	PF201A-32	110210	32A	N/A	N/A
3 Phase Power Line Filter	SAEMC	PF401A-200	110318	200A	N/A	N/A
DC Power Filter	SAEMC	PF301A-200	110245	200A	N/A	N/A
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 08, 2014	Nov. 07, 2015
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 07, 2015	Mar. 06, 2016
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 08, 2014	Nov. 07, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~26.5GHz	Oct.24, 2014	Oct.23, 2015
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 06, 2014	Nov. 05, 2015
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.11, 2014	Oct.10, 2015
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Sep. 02, 2014	Sep. 01, 2015
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 04, 2014	Nov. 03, 2015
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 08, 2014	Nov. 07, 2015
Temporary antenna connector	TESCOM	SS402	N/A	1G-18GHz	N/A	N/A

---End---