



## SAR EVALUATION REPORT

### Applicant Name:

LG Electronics MobileComm U.S.A., Inc.  
1000 Sylvan Avenue  
Englewood Cliffs, NJ 07632  
United States

### Date of Testing:

02/28/18 - 03/19/18

### Test Site/Location:

PCTEST Lab, Columbia, MD, USA

### Document Serial No.:

1M1802260032-01-R1.ZNF

### FCC ID:

**ZNFG710VM**

### APPLICANT:

**LG ELECTRONICS MOBILECOMM U.S.A., INC.**

### DUT Type:

Portable Handset

### Application Type:

Certification

### FCC Rule Part(s):

CFR §2.1093

### Model:

LM-G710VM

### Additional Model(s):


LMG710VM, G710VM, LG-G710PM, LGG710PM, G710PM, G710ULM, LM-G710ULM, LMG710ULM

Equipment Class	Band & Mode	Tx Frequency	SAR			
			1g Head (W/kg)	1g Body-Worn (W/kg)	1g Hotspot (W/kg)	10g Phablet (W/kg)
PCE	CDMA/EVDO BC10 (\$90S)	817.90 - 823.10 MHz	0.16	0.35	0.33	N/A
PCE	CDMA/EVDO BC0 (\$22H)	824.70 - 848.31 MHz	0.21	0.43	0.39	N/A
PCE	PCS CDMA/EVDO	1851.25 - 1908.75 MHz	0.20	0.55	0.84	2.28
PCE	GSM/GPRS/EDGE 850	824.20 - 848.80 MHz	0.15	0.36	0.36	N/A
PCE	GSM/GPRS/EDGE 1900	1850.20 - 1909.80 MHz	< 0.1	0.21	0.34	N/A
PCE	UMTS 850	826.40 - 846.60 MHz	0.18	0.47	0.47	N/A
PCE	UMTS 1750	1712.4 - 1752.6 MHz	0.22	0.64	0.94	3.16
PCE	UMTS 1900	1852.4 - 1907.6 MHz	0.22	0.69	1.21	2.81
PCE	LTE Band 12	699.7 - 715.3 MHz	< 0.1	0.21	0.21	N/A
PCE	LTE Band 17	706.5 - 713.5 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 13	779.5 - 784.5 MHz	0.18	0.38	0.38	N/A
PCE	LTE Band 26 (Cell)	814.7 - 848.3 MHz	0.12	0.27	0.27	N/A
PCE	LTE Band 5 (Cell)	824.7 - 848.3 MHz	0.18	0.45	0.45	N/A
PCE	LTE Band 66 (AWS)	1710.7 - 1779.3 MHz	0.20	0.71	1.02	3.13
PCE	LTE Band 4 (AWS)	1710.7 - 1754.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 25 (PCS)	1850.7 - 1914.3 MHz	0.21	0.53	1.16	2.73
PCE	LTE Band 2 (PCS)	1850.7 - 1909.3 MHz	N/A	N/A	N/A	N/A
PCE	LTE Band 41	2498.5 - 2687.5 MHz	< 0.1	1.06	1.06	N/A
DTS	2.4 GHz WLAN	2412 - 2462 MHz	0.20	0.51	0.51	N/A
Nil	U-NII-1	5180 - 5240 MHz	N/A	N/A	0.78	N/A
Nil	U-NII-2A	5250 - 5320 MHz	0.49	0.99	N/A	2.42
Nil	U-NII-2C	5500 - 5720 MHz	0.48	0.66	N/A	1.48
Nil	U-NII-3	5745 - 5825 MHz	0.60	0.77	0.77	N/A
DSS/DTS	Bluetooth	2402 - 2480 MHz	< 0.1	< 0.1	< 0.1	N/A
Simultaneous SAR per KDB 690783 D01v01r03:			0.91	1.59	1.59	3.97

This revised Test Report (S/N: 1M1802260032-01-R1.ZNF) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.



This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.8 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

  
Randy Ortañez  
President





The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sarrick@mwfai.info.

FCC ID ZNFG710VM	 PCTEST ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 1 of 137

# TABLE OF CONTENTS

1	DEVICE UNDER TEST .....	3
2	LTE INFORMATION .....	16
3	INTRODUCTION .....	17
4	DOSIMETRIC ASSESSMENT .....	18
5	DEFINITION OF REFERENCE POINTS .....	19
6	TEST CONFIGURATION POSITIONS .....	20
7	RF EXPOSURE LIMITS .....	24
8	FCC MEASUREMENT PROCEDURES.....	25
9	RF CONDUCTED POWERS .....	33
10	SYSTEM VERIFICATION.....	71
11	SAR DATA SUMMARY .....	76
12	FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS.....	101
13	SAR MEASUREMENT VARIABILITY .....	129
14	ADDITIONAL TESTING PER FCC GUIDANCE .....	131
15	EQUIPMENT LIST .....	133
16	MEASUREMENT UNCERTAINTIES.....	134
17	CONCLUSION .....	135
18	REFERENCES .....	136
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: SAR SYSTEM VALIDATION		
APPENDIX F: DUT ANTENNA DIAGRAM & SAR TEST SETUP PHOTOGRAPHS		
APPENDIX G: POWER REDUCTION VERIFICATION		
APPENDIX H: DOWNLINK LTE CA RF CONDUCTED POWERS		

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 2 of 137	



# 1 DEVICE UNDER TEST

## 1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
CDMA/EVDO BC10 (§90S)	Voice/Data	817.90 - 823.10 MHz
CDMA/EVDO BC0 (§22H)	Voice/Data	824.70 - 848.31 MHz
PCS CDMA/EVDO	Voice/Data	1851.25 - 1908.75 MHz
GSM/GPRS/EDGE 850	Voice/Data	824.20 - 848.80 MHz
GSM/GPRS/EDGE 1900	Voice/Data	1850.20 - 1909.80 MHz
UMTS 850	Voice/Data	826.40 - 846.60 MHz
UMTS 1750	Voice/Data	1712.4 - 1752.6 MHz
UMTS 1900	Voice/Data	1852.4 - 1907.6 MHz
LTE Band 12	Voice/Data	699.7 - 715.3 MHz
LTE Band 17	Voice/Data	706.5 - 713.5 MHz
LTE Band 13	Voice/Data	779.5 - 784.5 MHz
LTE Band 26 (Cell)	Voice/Data	814.7 - 848.3 MHz
LTE Band 5 (Cell)	Voice/Data	824.7 - 848.3 MHz
LTE Band 66 (AWS)	Voice/Data	1710.7 - 1779.3 MHz
LTE Band 4 (AWS)	Voice/Data	1710.7 - 1754.3 MHz
LTE Band 25 (PCS)	Voice/Data	1850.7 - 1914.3 MHz
LTE Band 2 (PCS)	Voice/Data	1850.7 - 1909.3 MHz
LTE Band 41	Voice/Data	2498.5 - 2687.5 MHz
2.4 GHz WLAN	Voice/Data	2412 - 2462 MHz
U-NII-1	Voice/Data	5180 - 5240 MHz
U-NII-2A	Voice/Data	5260 - 5320 MHz
U-NII-2C	Voice/Data	5500 - 5720 MHz
U-NII-3	Voice/Data	5745 - 5825 MHz
Bluetooth	Data	2402 - 2480 MHz
NFC	Data	13.56 MHz
WMC	Data	500 Hz - 4 kHz

## 1.2 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 3 of 137

This device uses an independent fixed level power reduction mechanism for WLAN operations during voice or VoIP held to ear scenarios. Per FCC Guidance, the held-to-ear exposure conditions were evaluated at reduced power according to the head SAR positions described in IEEE 1528-2013. Detailed descriptions of the power reduction mechanism are included in the operational description.



### 1.3 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D01v06.

#### 1.3.1 Maximum PCE Power



Mode / Band		Voice (dBm)	Burst Average GMSK (dBm)		Burst Average 8-PSK (dBm)	
		1 TX Slot	1 TX Slots	2 TX Slots	1 TX Slots	2 TX Slots
GSM/GPRS/EDGE 850	Maximum	<b>33.7</b>	<b>33.7</b>	<b>32.7</b>	<b>27.7</b>	<b>27.7</b>
	Nominal	<b>33.2</b>	<b>33.2</b>	<b>32.2</b>	<b>27.2</b>	<b>27.2</b>
GSM/GPRS/EDGE 1900	Maximum	<b>30.7</b>	<b>30.7</b>	<b>29.7</b>	<b>26.7</b>	<b>26.7</b>
	Nominal	<b>30.2</b>	<b>30.2</b>	<b>29.2</b>	<b>26.2</b>	<b>26.2</b>

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 5 (850 MHz)	Maximum	<b>25.5</b>	<b>25.5</b>	<b>25.5</b>
	Nominal	<b>25.0</b>	<b>25.0</b>	<b>25.0</b>
UMTS Band 4 (1750 MHz)	Maximum	<b>25.2</b>	<b>25.2</b>	<b>25.2</b>
	Nominal	<b>24.7</b>	<b>24.7</b>	<b>24.7</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>25.5</b>	<b>25.5</b>	<b>25.5</b>
	Nominal	<b>25.0</b>	<b>25.0</b>	<b>25.0</b>

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 4 of 137

Mode / Band		Modulated Average (dBm)
CDMA/EVDO BC10 (§90S)	Maximum	25.5
	Nominal	25.0
CDMA/EVDO BC0 (§22H)	Maximum	25.5
	Nominal	25.0
PCS CDMA/EVDO	Maximum	25.2
	Nominal	24.7

Mode / Band		Modulated Average (dBm)
LTE Band 12	Maximum	25.5
	Nominal	25.0
LTE Band 17	Maximum	25.5
	Nominal	25.0
LTE Band 13	Maximum	25.5
	Nominal	25.0
LTE Band 5 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 26 (Cell)	Maximum	25.5
	Nominal	25.0
LTE Band 66 (AWS)	Maximum	25.2
	Nominal	24.7
LTE Band 4 (AWS)	Maximum	25.2
	Nominal	24.7
LTE Band 25 (PCS)	Maximum	25.5
	Nominal	25.0
LTE Band 2 (PCS)	Maximum	25.5
	Nominal	25.0
LTE Band 41 PC3	Maximum	25.2
	Nominal	24.7
LTE Band 41 PC2	Maximum	27.7
	Nominal	27.2

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 5 of 137



### 1.3.1

### Reduced PCE Power

Mode / Band		Modulated Average (dBm)		
		3GPP WCDMA	3GPP HSDPA	3GPP HSUPA
UMTS Band 4 (1750 MHz)	Maximum	<b>24.2</b>	<b>24.2</b>	<b>24.2</b>
	Nominal	<b>23.7</b>	<b>23.7</b>	<b>23.7</b>
UMTS Band 2 (1900 MHz)	Maximum	<b>24.5</b>	<b>24.5</b>	<b>24.5</b>
	Nominal	<b>24.0</b>	<b>24.0</b>	<b>24.0</b>

Mode / Band		Modulated Average (dBm)
PCS CDMA/EVDO	Maximum	<b>24.2</b>
	Nominal	<b>23.7</b>

Mode / Band		Modulated Average (dBm)
LTE Band 66 (AWS)	Maximum	<b>24.2</b>
	Nominal	<b>23.7</b>
LTE Band 4 (AWS)	Maximum	<b>24.2</b>
	Nominal	<b>23.7</b>
LTE Band 25 (PCS)	Maximum	<b>24.5</b>
	Nominal	<b>24.0</b>
LTE Band 2 (PCS)	Maximum	<b>24.5</b>
	Nominal	<b>24.0</b>



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 6 of 137

### 1.3.2

### Maximum Bluetooth and SISO and MIMO WLAN Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)
Bluetooth	Maximum	<b>12.0</b>
	Nominal	<b>11.0</b>
Bluetooth LE	Maximum	<b>5.5</b>
	Nominal	<b>4.5</b>



Mode / Band		Modulated Average - Single Tx Chain (dBm)		
		Ch. 1-2	Ch. 3-9	Ch. 10-11
IEEE 802.11b (2.4 GHz)	Maximum	<b>21.0</b>		
	Nominal	<b>20.0</b>		
IEEE 802.11g (2.4 GHz)	Maximum	<b>18.5</b>	<b>20.5</b>	<b>18.5</b>
	Nominal	<b>17.5</b>	<b>19.5</b>	<b>17.5</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>18.0</b>	<b>19.5</b>	<b>18.0</b>
	Nominal	<b>17.0</b>	<b>18.5</b>	<b>17.0</b>
IEEE 802.11ac (2.4 GHz)	Maximum	<b>18.0</b>	<b>19.5</b>	<b>18.0</b>
	Nominal	<b>17.0</b>	<b>18.5</b>	<b>17.0</b>

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 7 of 137

Mode / Band		Modulated Average (dBm) - MIMO		
		Ch. 1-2	Ch. 3-9	Ch. 10-11
IEEE 802.11b (2.4 GHz)	Maximum	<b>24.0</b>		
	Nominal	<b>23.0</b>		
IEEE 802.11g (2.4 GHz)	Maximum	<b>21.5</b>	<b>23.5</b>	<b>21.5</b>
	Nominal	<b>20.5</b>	<b>22.5</b>	<b>20.5</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>21.0</b>	<b>22.5</b>	<b>21.0</b>
	Nominal	<b>20.0</b>	<b>21.5</b>	<b>20.0</b>
IEEE 802.11ac (2.4 GHz)	Maximum	<b>21.0</b>	<b>22.5</b>	<b>21.0</b>
	Nominal	<b>20.0</b>	<b>21.5</b>	<b>20.0</b>

Mode / Band		Modulated Average - Single Tx Chain (dBm)						
		20 MHz Bandwidth		40 MHz Bandwidth			80 MHz Bandwidth	
		Ch. 36, 44-52, 60-153, 165	Ch. 40, 56, 157-161	Ch. 38	Ch. 46-54, 110-159	Ch. 62-102	Ch. 58	Ch. 42, 106-155
IEEE 802.11a (5 GHz)	Maximum	<b>17.0</b>	<b>18.0</b>					
	Nominal	<b>16.0</b>	<b>17.0</b>					
IEEE 802.11n (5 GHz)	Maximum	<b>17.0</b>	<b>18.0</b>	<b>13.0</b>	<b>16.0</b>	<b>12.5</b>		
	Nominal	<b>16.0</b>	<b>17.0</b>	<b>12.0</b>	<b>15.0</b>	<b>11.5</b>		
IEEE 802.11ac (5 GHz)	Maximum	<b>17.0</b>	<b>18.0</b>	<b>13.0</b>	<b>16.0</b>	<b>12.5</b>	<b>10.5</b>	<b>13.5</b>
	Nominal	<b>16.0</b>	<b>17.0</b>	<b>12.0</b>	<b>15.0</b>	<b>11.5</b>	<b>9.5</b>	<b>12.5</b>

Mode / Band		Modulated Average - MIMO (dBm)						
		20 MHz Bandwidth		40 MHz Bandwidth			80 MHz Bandwidth	
		Ch. 36, 44-52, 60-153, 165	Ch. 40, 56, 157-161	Ch. 38	Ch. 46-54, 110-159	Ch. 62-102	Ch. 58	Ch. 42, 106-155
IEEE 802.11a (5 GHz)	Maximum	<b>20.0</b>	<b>21.0</b>					
	Nominal	<b>19.0</b>	<b>20.0</b>					
IEEE 802.11n (5 GHz)	Maximum	<b>20.0</b>	<b>21.0</b>	<b>16.0</b>	<b>19.0</b>	<b>15.5</b>		
	Nominal	<b>19.0</b>	<b>20.0</b>	<b>15.0</b>	<b>18.0</b>	<b>14.5</b>		
IEEE 802.11ac (5 GHz)	Maximum	<b>20.0</b>	<b>21.0</b>	<b>16.0</b>	<b>19.0</b>	<b>15.5</b>	<b>13.5</b>	<b>16.5</b>
	Nominal	<b>19.0</b>	<b>20.0</b>	<b>15.0</b>	<b>18.0</b>	<b>14.5</b>	<b>12.5</b>	<b>15.5</b>

FCC ID ZNFG710VM	<div></div> <div>SAR EVALUATION REPORT</div> <div></div>		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 8 of 137





### 1.3.1

### Reduced SISO and MIMO WLAN Power

Mode / Band		Modulated Average - Single Tx Chain (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	<b>18.0</b>
	Nominal	<b>17.0</b>
IEEE 802.11g (2.4 GHz)	Maximum	<b>18.0</b>
	Nominal	<b>17.0</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>18.0</b>
	Nominal	<b>17.0</b>
IEEE 802.11ac (2.4 GHz)	Maximum	<b>18.0</b>
	Nominal	<b>17.0</b>

Mode / Band		Modulated Average (dBm) - MIMO
IEEE 802.11b (2.4 GHz)	Maximum	<b>21.0</b>
	Nominal	<b>20.0</b>
IEEE 802.11g (2.4 GHz)	Maximum	<b>21.0</b>
	Nominal	<b>20.0</b>
IEEE 802.11n (2.4 GHz)	Maximum	<b>21.0</b>
	Nominal	<b>20.0</b>
IEEE 802.11ac (2.4 GHz)	Maximum	<b>21.0</b>
	Nominal	<b>20.0</b>



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 9 of 137

### 1.3.2

### Output Power during Simultaneous Scenarios with 2.4 GHz WLAN and 5 GHz WLAN

Mode / Band		Antenna 1 - Modulated Average Single Tx Chain (dBm)
IEEE 802.11b (2.4 GHz)	Maximum	18.0
	Nominal	17.0
IEEE 802.11g (2.4 GHz)	Maximum	18.0
	Nominal	17.0
IEEE 802.11n (2.4 GHz)	Maximum	18.0
	Nominal	17.0
IEEE 802.11ac (2.4 GHz)	Maximum	18.0
	Nominal	17.0

Mode / Band		Antenna 2 - Modulated Average - Single Tx Chain (dBm)					
		20 MHz Bandwidth	40 MHz Bandwidth			80 MHz Bandwidth	
		Ch. 36-165	Ch. 38	Ch. 46-54, 110-159	Ch. 62-102	Ch. 58	Ch. 42, 106-155
IEEE 802.11a (5 GHz)	Maximum	15.0					
	Nominal	14.0					
IEEE 802.11n (5 GHz)	Maximum	15.0	13.0	15.0	12.5		
	Nominal	14.0	12.0	14.0	11.5		
IEEE 802.11ac (5 GHz)	Maximum	15.0	13.0	15.0	12.5	10.5	13.5
	Nominal	14.0	12.0	14.0	11.5	9.5	12.5

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 10 of 137

## 1.4 DUT Antenna Locations

The overall dimensions of this device are > 9 x 5 cm. A diagram showing the location of the device antennas can be found in Appendix F. Since the diagonal dimension of this device is > 160 mm and <200 mm, it is considered a “phablet.”



**Table 1-1  
Device Edges/Sides for SAR Testing**

Device Sides/Edges for SAR Testing						
Mode	Back	Front	Top	Bottom	Right	Left
EVDO BC10 (§90S)	Yes	Yes	No	Yes	Yes	Yes
EVDO BC0 (§22H)	Yes	Yes	No	Yes	Yes	Yes
PCS EVDO	Yes	Yes	No	Yes	Yes	Yes
GPRS 850	Yes	Yes	No	Yes	Yes	Yes
GPRS 1900	Yes	Yes	No	Yes	Yes	Yes
UMTS 850	Yes	Yes	No	Yes	Yes	Yes
UMTS 1750	Yes	Yes	No	Yes	Yes	Yes
UMTS 1900	Yes	Yes	No	Yes	Yes	Yes
LTE Band 12	Yes	Yes	No	Yes	Yes	Yes
LTE Band 13	Yes	Yes	No	Yes	Yes	Yes
LTE Band 26 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 5 (Cell)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 66 (AWS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 25 (PCS)	Yes	Yes	No	Yes	Yes	Yes
LTE Band 41	Yes	Yes	No	Yes	Yes	Yes
2.4 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
2.4 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 1	Yes	Yes	Yes	No	No	Yes
5 GHz WLAN Ant 2	Yes	Yes	Yes	No	No	Yes
Bluetooth	Yes	Yes	Yes	No	No	Yes

Note: Particular DUT edges were not required to be evaluated for wireless router SAR or phablet SAR if the edges were greater than 2.5 cm from the transmitting antenna according to FCC KDB Publication 941225 D06v02r01 Section III and FCC KDB Publication 648474 D04v01r03. The distances between the transmit antennas and the edges of the device are included in the filing. When wireless router mode is enabled U-NII-2A and U-NII-2C operations are disabled.

## 1.5 Near Field Communications (NFC) Antenna

This DUT has NFC operations. The NFC antenna is integrated into the device for this model. Therefore, all SAR tests were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the NFC antenna can be found in Appendix F.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 11 of 137

## 1.6 Simultaneous Transmission Capabilities



According to FCC KDB Publication 447498 D01v06, transmitters are considered to be transmitting simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D01v06 4.3.2 procedures.

**Table 1-2**  
**Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Head	Body-Worn Accessory	Wireless Router	Phablet	Notes
1	1x CDMA voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
2	1x CDMA voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
3	1x CDMA voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
4	1x CDMA voice + 2.4 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
5	1x CDMA voice + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
6	1x CDMA voice + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	N/A	Yes	
7	GSM voice + 2.4 GHz Wi-Fi	Yes	Yes	N/A	Yes	
8	GSM voice + 5 GHz Wi-Fi	Yes	Yes	N/A	Yes	
9	GSM voice + 2.4 GHz Bluetooth	Yes^	Yes	N/A	Yes	^ Bluetooth Tethering is considered
10	GSM voice + 2.4 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
11	GSM voice + 5 GHz Wi-Fi MIMO	Yes	Yes	N/A	Yes	
12	GSM voice + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	N/A	Yes	
13	UMTS + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
14	UMTS + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
15	UMTS + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
16	UMTS + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
17	UMTS + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
18	UMTS + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	Yes	Yes	
19	LTE + 2.4 GHz Wi-Fi	Yes	Yes	Yes	Yes	
20	LTE + 5 GHz Wi-Fi	Yes	Yes	Yes	Yes	
21	LTE + 2.4 GHz Bluetooth	Yes^	Yes	Yes^	Yes	^ Bluetooth Tethering is considered
22	LTE + 2.4 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
23	LTE + 5 GHz Wi-Fi MIMO	Yes	Yes	Yes	Yes	
24	LTE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes	Yes	Yes	Yes	
25	CDMA/EVDO data + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
26	CDMA/EVDO data + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
27	CDMA/EVDO data + 2.4 GHz Bluetooth	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
28	CDMA/EVDO data + 2.4 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
29	CDMA/EVDO data + 5 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
30	CDMA/EVDO data + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
31	GPRS/EDGE + 2.4 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
32	GPRS/EDGE + 5 GHz Wi-Fi	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
33	GPRS/EDGE + 2.4 GHz Bluetooth	Yes^*	Yes*	Yes^	Yes	* Pre-installed VOIP applications are considered ^ Bluetooth Tethering is considered
34	GPRS/EDGE + 2.4 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
35	GPRS/EDGE + 5 GHz Wi-Fi MIMO	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered
36	GPRS/EDGE + 2.4 GHz Wi-Fi Ant 1 + 5 GHz Wi-Fi Ant 2	Yes*	Yes*	Yes	Yes	* Pre-installed VOIP applications are considered

- Bluetooth cannot transmit simultaneously with WLAN.
- All licensed modes share the same antenna path and cannot transmit simultaneously.
- When the user utilizes multiple services in UMTS 3G mode it uses multi-Radio Access Bearer or multi-RAB. The power control is based on a physical control channel (Dedicated Physical Control Channel [DPCCH]) and power control will be adjusted to meet the needs of both services. Therefore, the UMTS+WLAN scenario also represents the UMTS Voice/DATA + WLAN Hotspot scenario.
- Per the manufacturer, WIFI Direct is expected to be used in conjunction with a held-to-ear or body-worn accessory voice call. Therefore, the simultaneous transmission scenarios involving WIFI are listed in the above table.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 12 of 137

5. 5 GHz Wireless Router is only supported for the U-NII-1 and U-NII-3 by S/W, therefore U-NII2A and U-NII2C were not evaluated for wireless router conditions.
6. This device supports 2x2 MIMO Tx for WLAN. 802.11a/g/n/ac modes support CDD, 802.11b mode supports TDD operations only, and 802.11n/ac modes additionally support SDM. Each WLAN antenna can transmit independently or together when operating with MIMO.
7. This device supports BT Tethering.
8. This device supports VOLTE.
9. This device supports VOWIFI.

## 1.7 Miscellaneous SAR Test Considerations

### (A) WIFI/BT

Since Wireless Router operations are not allowed by the chipset firmware using U-NII-2A & U-NII-2C WIFI, only 2.4 GHz, U-NII-1 and U-NII-3 WIFI Hotspot SAR tests and combinations are considered for SAR with respect to Wireless Router configurations according to FCC KDB 941225 D06v02r01.

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 80 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg. Because wireless router operations are not supported for U-NII-2A & U-NII-2C WLAN, phablet SAR tests were performed. Phablet SAR was not evaluated for Bluetooth, 2.4 GHz, U-NII-1, and U-NII-3 WLAN operations since wireless router 1g SAR was <1.2 W/kg.



### (B) Licensed Transmitter(s)

GSM/GPRS/EDGE DTM is not supported for US bands. Therefore, the GSM Voice modes in this report do not transmit simultaneously with GPRS/EDGE Data.

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1x Advanced was not more than 0.25 dB higher than the maximum powers for 1x and the measured SAR in any 1x mode exposure conditions was not greater than 1.2 W/kg per FCC KDB Publication 941225 D01v03r01.

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 13 of 137

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in downlink only LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. Downlink LTE CA conducted powers are included in Appendix H.

This device supports 64QAM on the uplink for LTE Operations. Conducted powers for 64QAM configurations were measured per Section 5.1 of FCC KDB Publication 941225 D05v02r05. SAR was not required for 64QAM since the highest maximum output power for 64 QAM is  $\leq \frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg, per Section 5.2.4 of FCC KDB Publication 941225 D05v02r05.

Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is greater than 160mm and less than 200mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR > 1.2 W/kg.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive.



This device supports LTE capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE Band falls completely within an LTE band with a larger transmission frequency range, both LTE bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 14.1).

This device supports LTE Carrier Aggregation (CA) in the uplink for LTE Band 41 and LTE Band 5 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.



## 1.8 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r04, D05Av01r02, D06v02r01 (2G/3G/4G and Hotspot)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D01v06 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- FCC KDB Publication 648474 D04v01r03 (Phablet Procedures)
- FCC KDB Publication 616217 D04v01r02 (Proximity Sensor)
- October 2013 TCB Workshop Notes (GPRS Testing Considerations)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO, LTE Band 41 Power Class 2/3)
- Fall 2017 TCB Workshop Notes (LTE Carrier Aggregation)

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 14 of 137



## 1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 11.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 15 of 137



LTE Information					
FCC ID	ZNFG710VM				
Form Factor	Portable Handset				
Frequency Range of each LTE transmission band	LTE Band 12 (699.7 - 715.3 MHz)				
	LTE Band 17 (706.5 - 713.5 MHz)				
	LTE Band 13 (779.5 - 784.5 MHz)				
	LTE Band 5 (Cell) (824.7 - 848.3 MHz)				
	LTE Band 26 (Cell) (814.7 - 848.3 MHz)				
	LTE Band 66 (AWS) (1710.7 - 1779.3 MHz)				
	LTE Band 4 (AWS) (1710.7 - 1754.3 MHz)				
	LTE Band 25 (PCS) (1850.7 - 1914.3 MHz)				
	LTE Band 2 (PCS) (1850.7 - 1909.3 MHz)				
	LTE Band 41 (2498.5 - 2687.5 MHz)				
Channel Bandwidths	LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 17: 5 MHz, 10 MHz				
	LTE Band 13: 5 MHz, 10 MHz				
	LTE Band 5 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
	LTE Band 26 (Cell): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
	LTE Band 66 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 4 (AWS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 25 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 2 (PCS): 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
	LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)
LTE Band 17: 5 MHz	706.5 (23755)		710 (23790)		713.5 (23825)
LTE Band 17: 10 MHz	709 (23780)		710 (23790)		711 (23800)
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)
LTE Band 13: 10 MHz	N/A		782 (23230)		N/A
LTE Band 5 (Cell): 1.4 MHz	824.7 (20407)		836.5 (20525)		848.3 (20643)
LTE Band 5 (Cell): 3 MHz	825.5 (20415)		836.5 (20525)		847.5 (20635)
LTE Band 5 (Cell): 5 MHz	826.5 (20425)		836.5 (20525)		846.5 (20625)
LTE Band 5 (Cell): 10 MHz	829 (20450)		836.5 (20525)		844 (20600)
LTE Band 26 (Cell): 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)
LTE Band 26 (Cell): 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)
LTE Band 26 (Cell): 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)
LTE Band 26 (Cell): 10 MHz	819 (26740)		831.5 (26865)		844 (26990)
LTE Band 26 (Cell): 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)
LTE Band 66 (AWS): 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)
LTE Band 66 (AWS): 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)
LTE Band 66 (AWS): 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)
LTE Band 66 (AWS): 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)
LTE Band 66 (AWS): 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)
LTE Band 66 (AWS): 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)
LTE Band 4 (AWS): 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)
LTE Band 4 (AWS): 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)
LTE Band 4 (AWS): 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)
LTE Band 4 (AWS): 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)
LTE Band 4 (AWS): 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)
LTE Band 4 (AWS): 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)
LTE Band 25 (PCS): 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)
LTE Band 25 (PCS): 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)
LTE Band 25 (PCS): 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)
LTE Band 25 (PCS): 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)
LTE Band 25 (PCS): 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)
LTE Band 25 (PCS): 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)
LTE Band 2 (PCS): 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19193)
LTE Band 2 (PCS): 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)
LTE Band 2 (PCS): 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)
LTE Band 2 (PCS): 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)
LTE Band 2 (PCS): 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)
LTE Band 2 (PCS): 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41490)
UE Category	DL UE Cat 18 (QPSK, 16 QAM, 64 QAM), UL UE Cat 13 (QPSK, 16 QAM, 64 QAM)				
Modulations Supported in UL	QPSK, 16QAM, 64QAM				
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.5? (manufacturer attestation to be provided)	YES				
A-MPR (Additional MPR) disabled for SAR Testing?	YES				
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations				
LTE Additional Information	This device does not support full CA features on 3GPP Release 12. It supports uplink carrier aggregation for LTE CA_41C with a maximum of two 20MHz component carriers and LTE CA_5B with a maximum of two 10MHz component carriers. All other uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC unless otherwise specified. The following LTE Release 12 Features are not supported: Relay, HetNet, Enhanced MIMO, eCIC, MDH, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.				

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 16 of 137	



### 3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

#### 3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

**Equation 3-1**  
**SAR Mathematical Equation**

$$SAR = \frac{d}{dt} \left( \frac{dU}{dm} \right) = \frac{d}{dt} \left( \frac{dU}{\rho dv} \right)$$



SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m<sup>3</sup>)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]


FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 17 of 137

## 4 DOSIMETRIC ASSESSMENT

### 4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
  - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
  - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot" condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
  - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.





**Figure 4-1**  
**Sample SAR Area Scan**

**Table 4-1**  
**Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04\***

Frequency	Maximum Area Scan Resolution (mm) ( $\Delta x_{\text{area}}, \Delta y_{\text{area}}$ )	Maximum Zoom Scan Resolution (mm) ( $\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$ )	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
			$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	$\Delta z_{\text{zoom}}(n>1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22


\*Also compliant to IEEE 1528-2013 Table 6

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>			<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 18 of 137	

## 5 DEFINITION OF REFERENCE POINTS

### 5.1 EAR REFERENCE POINT

Figure 5-2 shows the front, back and side views of the SAM Twin Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERP is 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 5-1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front), also called the Reference Pivoting Line, is not perpendicular to the reference plane (see Figure 5-1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




**Figure 5-1**  
Close-Up Side view  
of ERP

### 5.2 HANDSET REFERENCE POINTS



Two imaginary lines on the handset were established: the vertical centerline and the horizontal line. The test device was placed in a normal operating position with the acoustic output located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Figure 5-3). The acoustic output was then located at the same level as the center of the ear reference point. The test device was positioned so that the “vertical centerline” was bisecting the front surface of the handset at its top and bottom edges, positioning the “ear reference point” on the outer surface of the both the left and right head phantoms on the ear reference point.

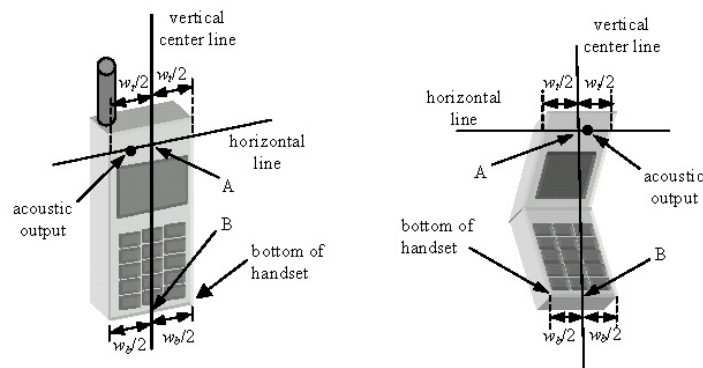

**Figure 5-2**  
Front, back and side view of SAM Twin Phantom



**Figure 5-3**  
Handset Vertical Center & Horizontal Line Reference Points

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 19 of 137

## 6 TEST CONFIGURATION POSITIONS

### 6.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ .

### 6.2 Positioning for Cheek

1. The test device was positioned with the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 6-1), such that the plane defined by the vertical center line and the horizontal line of the phone is approximately parallel to the sagittal plane of the phantom.

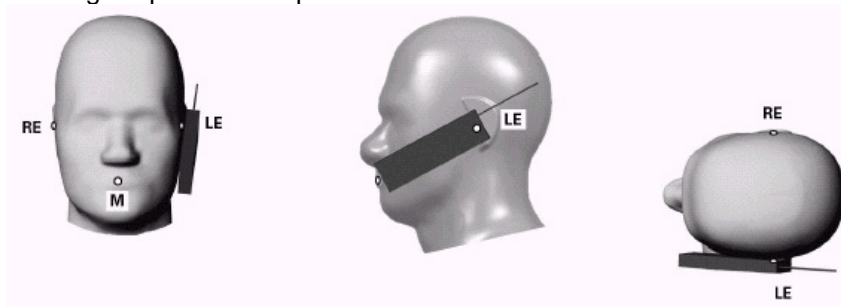




Figure 6-1 Front, Side and Top View of Cheek Position

2. The handset was translated towards the phantom along the line passing through RE & LE until the handset touches the pinna.
3. While maintaining the handset in this plane, the handset was rotated around the LE-RE line until the vertical centerline was in the reference plane.
4. The phone was then rotated around the vertical centerline until the phone (horizontal line) was symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE, and maintaining the device contact with the ear, the device was rotated about the NF line until any point on the handset made contact with a phantom point below the ear (cheek) (See Figure 6-2).

### 6.3 Positioning for Ear / 15° Tilt

With the test device aligned in the “Cheek Position”:

1. While maintaining the orientation of the phone, the phone was retracted parallel to the reference plane far enough to enable a rotation of the phone by 15 degrees.
2. The phone was then rotated around the horizontal line by 15 degrees.
3. While maintaining the orientation of the phone, the phone was moved parallel to the reference plane until any part of the handset touched the head. (In this position, point A was located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact was at any location other than the pinna, the angle of the phone would then be reduced. In this situation, the tilted position was obtained when any part of the phone was in contact of the ear as well as a second part of the phone was in contact with the head (see Figure 6-2).

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 20 of 137





contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

Body-worn accessories may not always be supplied or available as options for some devices intended to be authorized for body-worn use. In this case, a test configuration with a separation distance between the back of the device and the flat phantom is used. Test position spacing was documented. Transmitters that are designed to operate in front of a person's face, as in push-to-talk configurations, are tested for SAR compliance with the front of the device positioned to face the flat phantom in head fluid. For devices that are carried next to the body such as a shoulder, waist or chest-worn transmitters, SAR compliance is tested with the accessories, including headsets and microphones, attached to the device and positioned against a flat phantom in a normal use configuration.

## 6.6 Extremity Exposure Configurations

Devices that are designed or intended for use on extremities or mainly operated in extremity only exposure conditions; i.e., hands, wrists, feet and ankles, may require extremity SAR evaluation. When the device also operates in close proximity to the user's body, SAR compliance for the body is also required. The 1g body and 10g extremity SAR Exclusion Thresholds found in KDB Publication 447498 D01v06 should be applied to determine SAR test requirements.

Per KDB Publication 447498 D01v06, Cell phones (handsets) are not normally designed to be used on extremities or operated in extremity only exposure conditions. The maximum output power levels of handsets generally do not require extremity SAR testing to show compliance. Therefore, extremity SAR was not evaluated for this device.



## 6.7 Wireless Router Configurations

Some battery-operated handsets have the capability to transmit and receive user data through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 mm from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 6.8 Phablet Configurations

For smart phones with a display diagonal dimension > 150 mm or an overall diagonal dimension > 160 mm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 22 of 137



support voice calls next to the ear, the phablets procedures outlined in KDB Publication 648474 D04v01r03 should be applied to evaluate SAR compliance. A device marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance. In addition to the normally required head and body-worn accessory SAR test procedures required for handsets, the UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna  $\leq 25$  mm from that surface or edge, in direct contact with the phantom, for 10g SAR. The UMPC mini-tablet 1g SAR at 5 mm is not required. When hotspot mode applies, 10g SAR is required only for the surfaces and edges with hotspot mode 1g SAR  $> 1.2$  W/kg.

## 6.9 Additional Test Positions due to Proximity Considerations

This device uses a sensor to reduce voice and data powers in extremity (hand-held) use conditions.

When the sensor detects a user is touching the device on or near to the antenna the device reduces the maximum allowed output power. However, the proximity sensor is not active when the device is moved beyond the sensor triggering distance and the maximum output power is no longer limited. Therefore, an additional exposure condition is needed in the vicinity of the triggering distance to ensure SAR is compliant when the device is allowed to operate at a non-reduced output power level.

The proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device at these additional test positions. Sensor triggering distance summary data is included in Appendix G.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 23 of 137

## 7 RF EXPOSURE LIMITS

### 7.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.



### 7.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Table 7-1**  
**SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6**

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
<b>Peak Spatial Average SAR</b> Head	1.6	8.0
<b>Whole Body SAR</b>	0.08	0.4
<b>Peak Spatial Average SAR</b> Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 24 of 137



## 8 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

### 8.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D01v06, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

### 8.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is  $\leq 0.25$  dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is  $\leq 1.2$  W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

### 8.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”



The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

### 8.4 SAR Measurement Conditions for CDMA2000

The following procedures were performed according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

#### 8.4.1 Output Power Verification

See 3GPP2 C.S0011/TIA-98-E as recommended by FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.” Maximum output power is verified on the High, Middle and Low channels according to procedures in section 4.4.5.2 of 3GPP2 C.S0011/TIA-98-E. SO55 tests were measured with power control bits in the “All Up” condition.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 25 of 137

1. If the mobile station (MS) supports Reverse TCH RC 1 and Forward TCH RC 1, set up a call using Fundamental Channel Test Mode 1 (RC=1/1) with 9600 bps data rate only.
2. Under RC1, C.S0011 Table 4.4.5.2-1, Table 8-1 parameters were applied.
3. If the MS supports the RC 3 Reverse FCH, RC3 Reverse SCH<sub>0</sub> and demodulation of RC 3,4, or 5, set up a call using Supplemental Channel Test Mode 3 (RC 3/3) with 9600 bps Fundamental Channel and 9600 bps SCH<sub>0</sub> data rate.
4. Under RC3, C.S0011 Table 4.4.5.2-2, Table 8-2 was applied.

**Table 8-1**  
**Parameters for Max. Power for RC1**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-104
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

**Table 8-2**  
**Parameters for Max. Power for RC3**

Parameter	Units	Value
$I_{or}$	dBm/1.23 MHz	-86
$\frac{Pilot E_c}{I_{or}}$	dB	-7
$\frac{Traffic E_c}{I_{or}}$	dB	-7.4

5. FCHs were configured at full rate for maximum SAR with “All Up” power control bits.

## 8.4.2 Head SAR Measurements

SAR for next to the ear head exposure is measured in RC3 with the handset configured to transmit at full rate in SO55. The 3G SAR test reduction procedure is applied to RC1 with RC3 as the primary mode; otherwise, SAR is required for the channel with maximum measured output in RC1 using the head exposure configuration that results in the highest reported SAR in RC3.

Head SAR is additionally evaluated using EVDO Rev. A to support compliance for VoIP operations. See Section 8.4.5 for EVDO Rev. A configuration parameters.

## 8.4.3 Body-worn SAR Measurements



SAR for body-worn exposure configurations is measured in RC3 with the DUT configured to transmit at full rate on FCH with all other code channels disabled using TDSO / SO32. The 3G SAR test reduction procedure is applied to the multiple code channel configuration (FCH+SCH<sub>n</sub>), with FCH only as the primary mode. Otherwise, SAR is required for multiple code channel configuration (FCH + SCH<sub>n</sub>), with FCH at full rate and SCH<sub>0</sub> enabled at 9600 bps, using the highest reported SAR configuration for FCH only. When multiple code channels are enabled, the transmitter output can shift by more than 0.5 dB and may lead to higher SAR drifts and SCH dropouts.

The 3G SAR test reduction procedure is applied to body-worn accessory SAR in RC1 with RC3 as the primary mode. Otherwise, SAR is required for RC1, with SO55 and full rate, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

## 8.4.4 Body-worn SAR Measurements for EVDO Devices

For handsets with EVDO capabilities, the 3G SAR test reduction procedure is applied to EVDO Rev. 0 with 1x RTT RC3 as the primary mode to determine body-worn accessory test requirements. Otherwise, body-worn accessory SAR is required for Rev. 0, at 153.6 kbps, using the highest reported SAR configuration for body-worn accessory exposure in RC3.

The 3G SAR test reduction procedure is applied to Rev. A, with Rev. 0 as the primary mode to determine body-worn accessory SAR test requirements. When SAR is not required for Rev. 0, the 3G SAR test reduction is applied with 1x RTT RC3 as the primary mode.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 26 of 137

When SAR is required for EVDO Rev. A, SAR is measured with a Reverse Data Channel payload size of 4096 bits and a Termination Target of 16 slots defined for Subtype 2 Physical Layer configurations, using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0 or 1x RTT RC3, as appropriate.

#### 8.4.5 Body SAR Measurements for EVDO Hotspot

Hotspot Body SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0. The 3G SAR test reduction procedure is applied to Rev. A, Subtype 2 Physical layer configuration, with Rev. 0 as the primary mode; otherwise, SAR is measured for Rev. A using the highest reported SAR configuration for body-worn accessory exposure in Rev. 0. The AT is tested with a Reverse Data Channel rate of 153.6 kbps in Subtype 0/1 Physical Layer configurations; and a Reverse Data Channel payload size of 4096 bits and Termination Target of 16 slots in Subtype 2 Physical Layer configurations.

For EVDO data devices that also support 1x RTT voice and/or data operations, the 3G SAR test reduction procedure is applied to 1x RTT RC3 and RC1 with EVDO Rev. 0 and Rev. A as the respective primary modes. Otherwise, the 'Body-Worn Accessory SAR' procedures in the '3GPP2 CDMA 2000 1x Handsets' section are applied.

#### 8.4.6 CDMA2000 1x Advanced

This device additionally supports 1x Advanced. Conducted powers are measured using SO75 with RC8 on the uplink and RC11 on the downlink per FCC KDB Publication 941225 D01v03r01. Smart blanking is disabled for all measurements. The EUT is configured with forward power control Mode 000 and reverse power control at 400 bps. Conducted powers are measured on an Agilent 8960 Series 10 Wireless Communications Test Set, Model E5515C using the CDMA2000 1x Advanced application, Option E1962B-410.

The 3G SAR test reduction procedure is applied to the 1x-Advanced transmission mode with 1x RTT RC3 as the primary mode. When SAR measurement is required, the 1x-Advanced power measurement configurations are used. The 1x Advanced SAR procedures are applied separately to head, body-worn accessory and other exposure conditions.



### 8.5 SAR Measurement Conditions for UMTS

#### 8.5.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

#### 8.5.2 Head SAR Measurements

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all "1s". The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 27 of 137

primary mode. Otherwise, SAR is measured for 12.2 kbps AMR in 3.4 kbps SRB (signaling radio bearer) using the highest reported SAR configuration in 12.2 kbps RMC for head exposure.

### 8.5.3 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH<sub>n</sub> configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH<sub>n</sub>, for the highest reported SAR configuration in 12.2 kbps RMC.

### 8.5.4 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

### 8.5.5 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

## 8.6 SAR Measurement Conditions for LTE



LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

### 8.6.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

### 8.6.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 28 of 137

### 8.6.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

### 8.6.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:



- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
  - i. The required channel and offset combination with the highest maximum output power is required for SAR.
  - ii. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
  - iii. When the reported SAR for a required test channel is  $> 1.45$  W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is  $< 0.8$  W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to  $\frac{1}{2}$  dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is  $< 1.45$  W/kg.

### 8.6.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

### 8.6.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. For every supported combination of downlink only carrier aggregation, additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 29 of 137



## 8.7 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

### 8.7.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

### 8.7.2 U-NII-1 and U-NII-2A



For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is  $> 1.2$  W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is  $> 1.2$  W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

### 8.7.4 Initial Test Position Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 30 of 137

### 8.7.5 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.6 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.



### 8.7.7 Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is  $\leq 0.8$  W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is  $\leq 1.2$  W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements (See Section 8.7.6). When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.8 Subsequent Test Configuration Procedures



For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is  $\leq 1.2$  W/kg, no additional SAR tests for the

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 31 of 137

subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

### 8.7.9 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D01v06 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is <1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 32 of 137



## 9 RF CONDUCTED POWERS

### 9.1 CDMA Conducted Powers


**Table 9-1**  
**Maximum Conducted Power**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
Cellular	564	90S	820.1	25.34	25.39	25.40	25.33	25.20	25.34	25.38
Cellular	1013	22H	824.7	25.44	25.50	25.46	25.36	25.43	25.48	25.49
	384	22H	836.52	25.40	25.35	25.39	25.22	25.35	25.34	25.43
	777	22H	848.31	25.48	25.42	25.46	25.41	25.38	25.47	25.37
PCS	25	24E	1851.25	25.10	25.12	25.10	25.04	25.00	25.13	25.05
	600	24E	1880	25.09	24.85	25.16	24.93	24.93	25.13	24.92
	1175	24E	1908.75	25.03	24.91	24.90	24.78	24.86	25.19	24.81



**Table 9-2**  
**Reduced Conducted Powers**

Band	Channel	Rule Part	Frequency	SO55 [dBm]	SO55 [dBm]	SO75 [dBm]	TDSO SO32 [dBm]	TDSO SO32 [dBm]	1x EvDO Rev. 0 [dBm]	1x EvDO Rev. A [dBm]
	F-RC		MHz	RC1	RC3	RC11	FCH+SCH	FCH	(RTAP)	(RETAP)
PCS	25	24E	1851.25	24.16	24.15	24.10	24.16	24.16	24.20	24.17
	600	24E	1880	24.15	24.16	24.13	24.13	24.11	24.14	24.19
	1175	24E	1908.75	24.10	24.20	24.16	24.15	24.14	24.13	24.16

Note: RC1 is only applicable for IS-95 compatibility. For FCC Rule Part 90S, Per FCC KDB Publication 447498 D01v06 4.1.g), only one channel is required since the device operates within the transmission range of 817.90 – 823.10 MHz.



**Figure 9-1**  
**Power Measurement Setup**

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 33 of 137



## 9.2 GSM Conducted Powers

Table 9-3  
Maximum Conducted Power

Maximum Burst-Averaged Output Power						
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	33.60	33.59	<b>32.69</b>	27.16	26.98
	190	33.65	33.69	<b>32.64</b>	27.06	26.89
	251	33.62	33.65	<b>32.62</b>	27.12	26.91
GSM 1900	512	30.30	30.40	<b>29.50</b>	25.70	25.51
	661	30.41	30.47	<b>29.43</b>	25.66	25.47
	810	30.33	30.34	<b>29.46</b>	25.66	25.54

Calculated Maximum Frame-Averaged Output Power						
		Voice	GPRS/EDGE Data (GMSK)		EDGE Data (8-PSK)	
Band	Channel	GSM [dBm] CS (1 Slot)	GPRS [dBm] 1 Tx Slot	GPRS [dBm] 2 Tx Slot	EDGE [dBm] 1 Tx Slot	EDGE [dBm] 2 Tx Slot
GSM 850	128	24.57	24.56	<b>26.67</b>	18.13	20.96
	190	24.62	24.66	<b>26.62</b>	18.03	20.87
	251	24.59	24.62	<b>26.60</b>	18.09	20.89
GSM 1900	512	21.27	21.37	<b>23.48</b>	16.67	19.49
	661	21.38	21.44	<b>23.41</b>	16.63	19.45
	810	21.30	21.31	<b>23.44</b>	16.63	19.52

GSM 850	Frame Avg. Targets:	24.17	24.17	<b>26.18</b>	18.17	21.18
GSM 1900		21.17	21.17	<b>23.18</b>	17.17	20.18

FCC ID ZNFG710VM			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset			Page 34 of 137



Note:

1. Both burst-averaged and calculated frame-averaged powers are included. Frame-averaged power was calculated from the measured burst-averaged power by converting the slot powers into linear units and calculating the energy over 8 timeslots.
2. GPRS/EDGE (GMSK) output powers were measured with coding scheme setting of 1 (CS1) on the base station simulator. CS1 was configured to measure GPRS output power measurements and SAR to ensure GMSK modulation in the signal. Our Investigation has shown that CS1 - CS4 settings do not have any impact on the output levels or modulation in the GPRS modes.
3. EDGE (8-PSK) output powers were measured with MCS7 on the base station simulator. MCS7 coding scheme was used to measure the output powers for EDGE since investigation has shown that choosing MCS7 coding scheme will ensure 8-PSK modulation. It has been shown that MCS levels that produce 8PSK modulation do not have an impact on output power.

**GSM Class: B**  
**GPRS Multislot class: 10** (Max 2 Tx uplink slots)  
**EDGE Multislot class: 10** (Max 2 Tx uplink slots)  
**DTM Multislot Class: N/A**



**Figure 9-2**  
**Power Measurement Setup**

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 35 of 137

## 9.3 UMTS Conducted Powers

**Table 9-4**  
**Maximum Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	25.47	25.43	25.35	24.96	24.98	24.94	25.22	25.21	25.24	-
99		12.2 kbps AMR	25.46	25.39	25.40	24.96	25.00	25.03	25.20	25.30	25.28	-
6	HSDPA	Subtest 1	24.38	24.24	24.21	23.74	23.89	23.81	24.07	24.10	24.17	0
6		Subtest 2	24.37	24.28	24.22	23.76	23.91	23.82	24.10	24.16	24.18	0
6		Subtest 3	23.89	23.78	23.71	23.26	23.42	23.34	23.61	23.62	23.70	0.5
6		Subtest 4	23.86	23.79	23.69	23.27	23.41	23.32	23.67	23.63	23.68	0.5
6	HSUPA	Subtest 1	24.08	24.02	24.00	23.86	24.00	23.94	24.24	24.27	24.36	0
6		Subtest 2	22.41	22.30	22.19	21.84	21.96	21.91	22.27	22.26	22.34	2
6		Subtest 3	23.36	23.28	23.20	22.84	22.99	22.90	23.24	23.27	23.32	1
6		Subtest 4	22.36	22.27	22.17	21.85	22.00	21.94	22.28	22.25	22.36	2
6		Subtest 5	24.39	24.28	24.21	23.84	23.98	23.92	24.25	24.26	24.33	0



**Table 9-5**  
**Reduced Conducted Power**

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	24.18	24.17	24.13	24.46	24.46	24.35	-
99		12.2 kbps AMR	24.16	24.15	24.20	24.46	24.49	24.48	-
6	HSDPA	Subtest 1	22.95	23.01	22.94	24.15	24.17	24.23	0
6		Subtest 2	22.91	23.00	22.92	24.16	24.20	24.24	0
6		Subtest 3	22.40	22.47	22.44	23.65	23.68	23.71	0.5
6		Subtest 4	22.41	22.51	22.44	23.69	23.66	23.72	0.5
6	HSUPA	Subtest 1	22.84	22.96	22.91	23.98	24.16	24.24	0
6		Subtest 2	20.82	20.98	20.93	22.16	22.18	22.22	2
6		Subtest 3	21.85	21.99	21.91	23.16	23.15	23.25	1
6		Subtest 4	20.83	20.99	20.90	22.12	22.15	22.22	2
6		Subtest 5	22.87	23.00	22.98	24.16	24.14	24.26	0

This device does not support DC-HSDPA.



**Figure 9-3**  
**Power Measurement Setup**

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 36 of 137

## 9.4 LTE Conducted Powers



### 9.4.1

### LTE Band 12

Table 9-6  
LTE Band 12 Conducted Powers - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.40	0	0
	1	25	25.37		0
	1	49	25.15		0
	25	0	24.24	0-1	1
	25	12	24.13		1
	25	25	24.17		1
	50	0	24.20		1
16QAM	1	0	24.46	0-1	1
	1	25	24.40		1
	1	49	24.43		1
	25	0	23.30	0-2	2
	25	12	23.13		2
	25	25	23.28		2
	50	0	23.27		2
64QAM	1	0	23.34	0-2	2
	1	25	23.32		2
	1	49	23.43		2
	25	0	22.29	0-3	3
	25	12	22.06		3
	25	25	22.20		3
	50	0	22.22		3

Note: LTE Band 12 at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 37 of 137

**Table 9-7**  
**LTE Band 12 Conducted Powers - 5 MHz Bandwidth**

LTE Band 12 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23035 (701.5 MHz)	23095 (707.5 MHz)	23155 (713.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.34	25.42	25.37	0	0
	1	12	25.42	25.30	25.29		0
	1	24	25.22	25.06	25.13		0
	12	0	24.16	24.22	24.15	0-1	1
	12	6	24.05	24.19	24.07		1
	12	13	24.18	24.25	24.15		1
	25	0	24.29	24.28	24.20		1
16QAM	1	0	24.43	24.46	24.40	0-1	1
	1	12	24.42	24.38	24.42		1
	1	24	24.48	24.47	24.41		1
	12	0	23.37	23.23	23.36	0-2	2
	12	6	23.09	23.12	23.14		2
	12	13	23.25	23.21	23.24		2
	25	0	23.37	23.28	23.28		2
64QAM	1	0	23.42	23.36	23.30	0-2	2
	1	12	23.31	23.30	23.33		2
	1	24	23.36	23.43	23.33		2
	12	0	22.31	22.15	22.24	0-3	3
	12	6	21.97	22.11	22.07		3
	12	13	22.15	22.15	22.13		3
	25	0	22.36	22.19	22.18		3



**Table 9-8**  
**LTE Band 12 Conducted Powers - 3 MHz Bandwidth**

LTE Band 12 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23025 (700.5 MHz)	23095 (707.5 MHz)	23165 (714.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.37	25.42	25.34	0	0
	1	7	25.35	25.24	25.29		0
	1	14	25.29	24.98	25.09		0
	8	0	24.07	24.24	24.19	0-1	1
	8	4	24.05	24.22	24.12		1
	8	7	24.16	24.27	24.16		1
	15	0	24.26	24.37	24.26		1
16QAM	1	0	24.34	24.38	24.45	0-1	1
	1	7	24.38	24.31	24.36		1
	1	14	24.48	24.50	24.42		1
	8	0	23.33	23.15	23.31	0-2	2
	8	4	23.18	23.07	23.14		2
	8	7	23.19	23.24	23.16		2
	15	0	23.44	23.25	23.25		2
64QAM	1	0	23.33	23.29	23.33	0-2	2
	1	7	23.34	23.25	23.32		2
	1	14	23.40	23.42	23.34		2
	8	0	22.33	22.07	22.22	0-3	3
	8	4	22.07	21.96	22.11		3
	8	7	22.08	22.12	22.15		3
	15	0	22.36	22.16	22.17		3

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 38 of 137	

**Table 9-9**  
**LTE Band 12 Conducted Powers -1.4 MHz Bandwidth**

LTE Band 12 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23017 (699.7 MHz)	23095 (707.5 MHz)	23173 (715.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.34	25.50	25.33	0	0
	1	2	25.26	25.24	25.27		0
	1	5	25.29	24.95	25.09		0
	3	0	25.30	25.39	25.29		0
	3	2	25.38	25.20	25.35		0
	3	3	25.20	24.93	25.08		0
	6	0	24.23	24.37	24.25	0-1	1
16QAM	1	0	24.28	24.33	24.40	0-1	1
	1	2	24.43	24.23	24.33		1
	1	5	24.41	24.44	24.46		1
	3	0	24.35	24.47	24.42		1
	3	2	24.41	24.27	24.27		1
	3	3	24.46	24.42	24.40		1
	6	0	23.43	23.28	23.24	0-2	2
64QAM	1	0	23.18	23.29	23.36	0-2	2
	1	2	23.36	23.16	23.24		2
	1	5	23.37	23.34	23.42		2
	3	0	23.23	23.43	23.32		2
	3	2	23.38	23.24	23.16		2
	3	3	23.37	23.41	23.31		2
	6	0	22.41	22.21	22.15	0-3	3

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 39 of 137





## 9.4.2

## LTE Band 13

**Table 9-10**  
**LTE Band 13 Conducted Powers - 10 MHz Bandwidth**



LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	<b>25.49</b>	0	0
	1	25	25.37		0
	1	49	25.32		0
	25	0	24.22	0-1	1
	25	12	<b>24.29</b>		1
	25	25	24.12		1
	50	0	24.16		1
16QAM	1	0	24.11	0-1	1
	1	25	24.32		1
	1	49	24.15		1
	25	0	23.23	0-2	2
	25	12	23.41		2
	25	25	23.35		2
	50	0	23.07		2
64QAM	1	0	23.10	0-2	2
	1	25	23.15		2
	1	49	23.11		2
	25	0	22.20	0-3	3
	25	12	22.21		3
	25	25	22.03		3
	50	0	22.05		3

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 40 of 137

**Table 9-11**  
**LTE Band 13 Conducted Powers - 5 MHz Bandwidth**  
**LTE Band 13**  
**5 MHz Bandwidth**

Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.30	0	0
	1	12	25.40		0
	1	24	25.00		0
	12	0	24.25	0-1	1
	12	6	24.47		1
	12	13	24.33		1
	25	0	24.31		1
16QAM	1	0	24.40	0-1	1
	1	12	24.32		1
	1	24	24.31		1
	12	0	23.26	0-2	2
	12	6	23.34		2
	12	13	23.38		2
	25	0	23.37		2
64QAM	1	0	23.15	0-2	2
	1	12	23.06		2
	1	24	23.20		2
	12	0	22.06	0-3	3
	12	6	22.05		3
	12	13	22.16		3
	25	0	22.18		3

Note: LTE Band 13 at 5 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 41 of 137



### 9.4.3

### LTE Band 26 (Cell)

Table 9-12  
LTE Band 26 (Cell) Conducted Powers - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.43	0	0
	1	36	25.42		0
	1	74	25.34		0
	36	0	24.30	0-1	1
	36	18	24.20		1
	36	37	24.12		1
	75	0	24.06		1
16QAM	1	0	24.33	0-1	1
	1	36	24.40		1
	1	74	24.35		1
	36	0	23.23	0-2	2
	36	18	23.25		2
	36	37	23.11		2
	75	0	23.19		2
64QAM	1	0	23.25	0-2	2
	1	36	23.35		2
	1	74	23.34		2
	36	0	22.12	0-3	3
	36	18	22.20		3
	36	37	22.04		3
	75	0	22.14		3

Note: LTE Band 26 (Cell) at 15 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 42 of 137

**Table 9-13**  
**LTE Band 26 (Cell) Conducted Powers - 10 MHz Bandwidth**

LTE Band 26 (Cell) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26740 (819.0 MHz)	26865 (831.5 MHz)	26990 (844.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.39	25.45	25.40	0	0
	1	25	25.43	25.32	25.43		0
	1	49	25.32	25.33	25.40		0
	25	0	24.21	24.29	24.32	0-1	1
	25	12	24.10	24.22	24.11		1
	25	25	24.11	24.13	24.12		1
16QAM	50	0	23.94	24.15	24.14	0-1	1
	1	0	24.39	24.24	24.35		1
	1	25	24.34	24.44	24.41		1
	1	49	24.40	24.35	24.37	0-2	1
	25	0	23.27	23.15	23.25		2
	25	12	23.25	23.23	23.16		2
64QAM	25	25	23.07	23.16	23.18	0-2	2
	50	0	23.15	23.23	23.21		2
	1	0	23.30	23.18	23.31	0-2	2
	1	25	23.34	23.32	23.33		2
	1	49	23.34	23.25	23.29		2
	25	0	22.16	22.03	22.24	0-3	3
25	12	22.18	22.18	22.04	3		
25	25	22.03	22.14	22.08	3		
	50	0	22.10	22.16	22.14		3

**Table 9-14**  
**LTE Band 26 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 26 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26715 (816.5 MHz)	26865 (831.5 MHz)	27015 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.49	25.38	25.50	0	0
	1	12	25.34	25.49	25.35		0
	1	24	25.39	25.43	25.29		0
	12	0	24.21	24.37	24.38	0-1	1
	12	6	24.22	24.24	24.16		1
	12	13	24.10	24.16	24.14		1
16QAM	25	0	24.11	24.12	24.11	0-1	1
	1	0	24.35	24.38	24.39		1
	1	12	24.37	24.41	24.31		1
	1	24	24.35	24.42	24.35	0-2	1
	12	0	23.24	23.21	23.25		2
	12	6	23.22	23.30	23.28		2
64QAM	12	13	23.03	23.10	23.13	0-2	2
	25	0	23.25	23.19	23.11		2
	1	0	23.32	23.32	23.33		0-2
	1	12	23.26	23.39	23.22	2	
	1	24	23.27	23.40	23.30	2	
	64QAM	12	0	22.18	22.11	22.16	0-3
12		6	22.16	22.26	22.20	3	
12		13	21.99	22.10	22.10	3	
25		0	22.19	22.11	22.07		3



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 43 of 137	

**Table 9-15**  
**LTE Band 26 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 26 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26705 (815.5 MHz)	26865 (831.5 MHz)	27025 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.50	25.37	25.42	0	0
	1	7	25.33	25.40	25.36		0
	1	14	25.28	25.38	25.38		0
	8	0	24.27	24.39	24.24	0-1	1
	8	4	24.21	24.20	24.24		1
	8	7	24.09	24.16	24.13		1
	15	0	24.03	24.10	24.04		1
16QAM	1	0	24.31	24.39	24.28	0-1	1
	1	7	24.40	24.42	24.37		1
	1	14	24.25	24.27	24.31		1
	8	0	23.16	23.20	23.15	0-2	2
	8	4	23.27	23.30	23.25		2
	8	7	23.11	23.07	23.14		2
	15	0	23.12	23.17	23.23		2
64QAM	1	0	23.21	23.35	23.25	0-2	2
	1	7	23.37	23.34	23.32		2
	1	14	23.16	23.17	23.25		2
	8	0	22.05	22.16	22.12	0-3	3
	8	4	22.23	22.25	22.15		3
	8	7	22.00	21.98	22.08		3
	15	0	22.00	22.05	22.23		3

**Table 9-16**  
**LTE Band 26 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 26 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26697 (814.7 MHz)	26865 (831.5 MHz)	27033 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.42	25.46	25.45	0	0
	1	2	25.37	25.46	25.48		0
	1	5	25.36	25.36	25.33		0
	3	0	25.36	25.34	25.45		0
	3	2	25.38	25.40	25.49		0
	3	3	25.37	25.38	25.35		0
	6	0	24.13	24.04	24.15	0-1	1
16QAM	1	0	24.34	24.29	24.31	0-1	1
	1	2	24.40	24.38	24.45		1
	1	5	24.36	24.36	24.27		1
	3	0	24.39	24.31	24.30		1
	3	2	24.39	24.34	24.42		1
	3	3	24.31	24.34	24.34		1
	6	0	23.18	23.22	23.21	0-2	2
64QAM	1	0	23.13	23.11	23.20	0-2	2
	1	2	23.02	23.16	23.11		2
	1	5	22.94	23.06	23.01		2
	3	0	23.31	23.36	23.17		2
	3	2	23.35	23.41	23.37		2
	3	3	23.18	23.20	23.20		2
	6	0	22.06	22.10	22.12	0-3	3

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 44 of 137	



### 9.4.1

### LTE Band 5 (Cell)

**Table 9-17**  
**LTE Band 5 (Cell) Conducted Powers - 10 MHz Bandwidth**

LTE Band 5 (Cell) 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20525 (836.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	25.35	0	0
	1	25	24.94		0
	1	49	25.20		0
	25	0	24.29	0-1	1
	25	12	24.18		1
	25	25	24.16		1
	50	0	24.27		1
16QAM	1	0	24.12	0-1	1
	1	25	24.34		1
	1	49	24.21		1
	25	0	23.28	0-2	2
	25	12	23.12		2
	25	25	23.19		2
	50	0	23.20		2
64QAM	1	0	23.10	0-2	2
	1	25	23.22		2
	1	49	23.19		2
	25	0	22.25	0-3	3
	25	12	22.01		3
	25	25	22.09		3
	50	0	22.11		3

Note: LTE Band 5 (Cell) at 10 MHz bandwidth does not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 45 of 137

**Table 9-18**  
**LTE Band 5 (Cell) Conducted Powers - 5 MHz Bandwidth**

LTE Band 5 (Cell) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20425 (826.5 MHz)	20525 (836.5 MHz)	20625 (846.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.25	25.28	25.10	0	0
	1	12	25.19	25.10	24.98		0
	1	24	25.22	25.15	25.11		0
	12	0	24.26	24.17	24.11	0-1	1
	12	6	24.29	24.14	24.22		1
	12	13	24.19	24.13	24.26		1
	25	0	24.26	24.09	24.18		1
16QAM	1	0	24.16	24.22	24.16	0-1	1
	1	12	24.10	24.38	23.90		1
	1	24	24.16	24.23	24.06		1
	12	0	23.32	23.21	23.31	0-2	2
	12	6	23.35	23.16	23.25		2
	12	13	23.28	23.17	23.36		2
	25	0	23.23	23.13	23.21		2
64QAM	1	0	23.14	23.17	23.04	0-2	2
	1	12	23.03	23.37	22.87		2
	1	24	23.10	23.18	23.00		2
	12	0	22.20	22.19	22.28	0-3	3
	12	6	22.29	22.13	22.17		3
	12	13	22.23	22.08	22.30		3
	25	0	22.15	22.07	22.14		3

**Table 9-19**  
**LTE Band 5 (Cell) Conducted Powers - 3 MHz Bandwidth**

LTE Band 5 (Cell) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20415 (825.5 MHz)	20525 (836.5 MHz)	20635 (847.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.02	25.13	25.16	0	0
	1	7	25.08	25.14	25.11		0
	1	14	25.02	25.08	25.11		0
	8	0	24.17	24.14	24.07	0-1	1
	8	4	24.23	24.14	24.23		1
	8	7	24.10	24.08	24.17		1
	15	0	24.23	24.16	24.21		1
16QAM	1	0	24.06	24.06	24.26	0-1	1
	1	7	24.30	24.20	24.20		1
	1	14	23.86	23.76	24.16		1
	8	0	23.28	23.20	23.10	0-2	2
	8	4	23.27	23.10	23.22		2
	8	7	23.22	23.11	23.21		2
	15	0	23.20	23.08	23.10		2
64QAM	1	0	22.99	23.03	23.25	0-2	2
	1	7	23.23	23.20	23.11		2
	1	14	22.86	22.69	23.15		2
	8	0	22.19	22.12	21.98	0-3	3
	8	4	22.25	22.08	22.18		3
	8	7	22.21	22.10	22.11		3
	15	0	22.12	22.01	22.09		3

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 46 of 137	





**Table 9-20**  
**LTE Band 5 (Cell) Conducted Powers -1.4 MHz Bandwidth**

LTE Band 5 (Cell) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20407 (824.7 MHz)	20525 (836.5 MHz)	20643 (848.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.02	24.99	25.05	0	0
	1	2	25.07	25.03	25.07		0
	1	5	25.01	25.06	25.06		0
	3	0	25.22	24.99	25.11		0
	3	2	25.23	25.07	25.26		0
	3	3	25.11	24.98	25.17		0
	6	0	24.18	24.07	24.10	0-1	1
16QAM	1	0	24.29	24.31	24.16	0-1	1
	1	2	24.22	24.10	24.20		1
	1	5	24.28	24.32	24.26		1
	3	0	24.39	24.16	24.20		1
	3	2	24.31	24.17	24.18		1
	3	3	24.27	24.14	24.16		1
	6	0	23.11	23.19	23.02	0-2	2
64QAM	1	0	23.18	23.30	23.12	0-2	2
	1	2	23.12	23.07	23.17		2
	1	5	23.25	23.28	23.15		2
	3	0	23.32	23.12	23.18		2
	3	2	23.28	23.12	23.13		2
	3	3	23.24	23.02	23.04		2
	6	0	22.00	22.10	21.91	0-3	3

## 9.4.2 LTE Band 66 (AWS)

**Table 9-21**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.20	25.19	25.18	0	0
	1	50	25.18	25.13	25.13		0
	1	99	25.06	25.10	25.11		0
	50	0	24.05	23.93	24.16	0-1	1
	50	25	23.70	23.91	24.06		1
	50	50	24.19	24.15	24.18		1
16QAM	100	0	24.08	24.15	24.11	0-1	1
	1	0	24.20	23.77	23.96		1
	1	50	23.86	23.52	23.86		1
	1	99	23.96	23.89	24.04	0-2	1
	50	0	22.45	22.95	23.03		2
	50	25	22.71	22.94	23.13		2
64QAM	50	50	23.10	23.15	23.07	0-2	2
	100	0	22.92	23.15	23.16		2
	1	0	23.19	22.70	22.89	0-2	2
	1	50	22.79	22.41	22.78		2
	1	99	22.88	22.83	22.99		2
	50	0	21.42	21.91	21.98	0-3	3
50	25	21.66	21.89	22.11	3		
50	50	22.01	22.14	22.03	3		
64QAM	100	0	21.81	22.14	22.05		3



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 47 of 137	

**Table 9-22**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.10	25.16	25.13	0	0
	1	36	25.10	25.02	25.07		0
	1	74	25.00	25.10	25.14		0
	36	0	24.08	23.94	24.12	0-1	1
	36	18	23.69	23.88	23.96		1
	36	37	24.00	24.09	24.14		1
	75	0	23.96	24.11	24.08		1
16QAM	1	0	24.00	23.72	23.97	0-1	1
	1	36	23.90	23.52	23.77		1
	1	74	23.96	23.96	24.08		1
	36	0	22.41	22.99	23.13	0-2	2
	36	18	22.69	23.00	23.04		2
	36	37	23.08	23.07	23.03		2
	75	0	22.91	23.09	23.15		2
64QAM	1	0	22.93	22.70	22.97	0-2	2
	1	36	22.84	22.49	22.69		2
	1	74	22.93	22.95	23.02		2
	36	0	21.30	21.98	22.07	0-3	3
	36	18	21.61	21.88	21.94		3
	36	37	21.96	22.01	21.99		3
	75	0	21.85	22.02	22.11		3

**Table 9-23**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.00	25.17	25.13	0	0
	1	25	25.20	25.08	25.06		0
	1	49	25.03	25.07	25.14		0
	25	0	24.06	23.88	24.12	0-1	1
	25	12	23.73	23.87	24.14		1
	25	25	24.00	24.13	24.18		1
	50	0	24.15	24.13	24.05		1
16QAM	1	0	24.16	23.74	23.98	0-1	1
	1	25	23.77	23.57	23.78		1
	1	49	23.91	23.96	24.10		1
	25	0	22.48	22.92	22.93	0-2	2
	25	12	22.81	22.97	23.10		2
	25	25	23.12	23.14	23.08		2
	50	0	22.94	23.09	23.18		2
64QAM	1	0	23.05	22.64	22.93	0-2	2
	1	25	22.74	22.51	22.72		2
	1	49	22.83	22.92	23.05		2
	25	0	21.36	21.85	21.89	0-3	3
	25	12	21.73	21.88	22.06		3
	25	25	22.00	22.02	22.02		3
	50	0	21.86	22.07	22.16		3



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 48 of 137	

**Table 9-24**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.00	25.00	25.10	0	0
	1	12	25.18	25.20	25.09		0
	1	24	25.03	25.00	25.11		0
	12	0	24.11	24.03	24.17	0-1	1
	12	6	23.76	24.00	24.12		1
	12	13	24.00	24.05	24.00		1
16QAM	25	0	24.05	24.00	24.15	0-1	1
	1	0	24.20	23.82	23.93		1
	1	12	23.86	23.55	23.93		1
	1	24	24.00	23.87	24.06	0-2	1
	12	0	22.41	22.92	22.97		2
	12	6	22.67	22.92	23.16		2
64QAM	12	13	23.10	23.18	23.09	0-2	2
	25	0	22.96	23.10	23.17		2
	1	0	23.17	22.75	22.84	0-2	2
	1	12	22.79	22.52	22.82		2
	1	24	22.90	22.80	23.05		2
	64QAM	12	0	21.39	21.84	21.97	0-3
12		6	21.56	21.80	22.07	3	
12		13	22.05	22.12	22.01	3	
25		0	21.87	21.99	22.07	3	

**Table 9-25**  
**LTE Band 66 (AWS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) Maximum Power and Power Spectral Density Bandwidth							
LTE Band 66 (AWS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.14	25.08	25.20	0	0
	1	7	25.16	25.12	25.12		0
	1	14	25.06	25.02	25.18		0
	8	0	24.12	23.91	24.20	0-1	1
	8	4	23.66	23.88	24.01		1
	8	7	24.18	24.14	24.19		1
16QAM	15	0	24.05	24.10	24.11	0-1	1
	1	0	24.12	23.77	23.98		1
	1	7	23.85	23.46	23.88		1
	1	14	24.00	23.84	24.00	1	
	8	0	22.49	22.98	22.99	0-2	2
	8	4	22.77	22.89	23.13		2
8	7	23.00	23.06	23.07	2		
64QAM	15	0	22.88	23.07	23.20	0-2	2
	1	0	23.03	22.73	22.89		2
	1	7	22.84	22.36	22.83		2
	1	14	22.98	22.83	22.91	2	
	8	0	21.40	21.93	21.87	0-3	3
	8	4	21.74	21.87	22.08		3
8	7	21.98	21.96	21.96	3		
	15	0	21.83	22.07	22.14	3	



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 49 of 137	

**Table 9-26**  
**LTE Band 66 (AWS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.00	25.17	25.00	0	0
	1	2	25.17	25.13	25.11		0
	1	5	25.03	25.07	25.14		0
	3	0	25.10	25.10	25.15		0
	3	2	25.12	25.11	25.04		0
	3	3	25.04	25.05	25.13		0
	6	0	24.09	24.17	24.14	0-1	1
16QAM	1	0	24.00	23.68	23.86	0-1	1
	1	2	23.88	23.52	23.87		1
	1	5	23.99	23.90	24.00		1
	3	0	24.18	24.20	24.19		1
	3	2	24.11	24.00	24.05		1
	3	3	24.14	23.71	24.01		1
	6	0	22.83	23.12	23.19	0-2	2
64QAM	1	0	22.89	22.66	22.85	0-2	2
	1	2	22.79	22.41	22.82		2
	1	5	22.95	22.78	22.98		2
	3	0	23.06	23.19	23.07		2
	3	2	23.03	22.97	23.05		2
	3	3	23.05	22.59	22.96		2
	6	0	21.74	22.04	22.13	0-3	3

**Table 9-27**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.11	24.12	24.13	0	0
	1	50	24.17	24.13	24.18		0
	1	99	24.20	24.18	24.00		0
	50	0	23.91	23.79	23.78	0-1	0
	50	25	23.74	23.79	23.80		0
	50	50	23.83	23.82	23.85		0
	100	0	23.82	23.69	23.80		0
16QAM	1	0	24.19	24.12	24.11	0-1	0
	1	50	24.14	24.06	24.08		0
	1	99	24.20	24.12	24.00		0
	50	0	23.12	23.05	23.13	0-2	1
	50	25	23.15	23.04	23.04		1
	50	50	23.06	23.12	23.04		1
	100	0	23.12	23.13	23.18		1
64QAM	1	0	23.11	23.10	23.00	0-2	1
	1	50	23.05	23.04	23.05		1
	1	99	23.18	23.06	22.94		1
	50	0	22.01	22.05	22.10	0-3	2
	50	25	22.12	21.93	21.97		2
	50	50	22.00	22.12	21.95		2
	100	0	22.07	22.12	22.12		2



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 50 of 137

**Table 9-28**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 66 (AWS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132047 (1717.5 MHz)	132322 (1745.0 MHz)	132597 (1772.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.06	24.18	24.01	0	0
	1	36	24.07	24.11	24.05		0
	1	74	24.15	24.10	24.04		0
	36	0	23.81	23.83	23.87	0-1	0
	36	18	23.72	23.74	23.84		0
	36	37	23.88	23.82	23.80		0
	75	0	23.73	23.76	23.81		0
16QAM	1	0	24.20	24.15	24.13	0-1	0
	1	36	24.20	24.11	24.18		0
	1	74	24.10	23.99	24.05		0
	36	0	23.08	23.14	23.14	0-2	1
	36	18	23.03	23.16	23.14		1
	36	37	22.88	22.96	23.00		1
	75	0	23.00	23.14	23.06		1
64QAM	1	0	23.18	23.10	23.12	0-2	1
	1	36	23.18	23.07	23.08		1
	1	74	22.98	22.97	22.96		1
	36	0	21.98	22.06	22.10	0-3	2
	36	18	21.95	22.08	22.08		2
	36	37	21.85	21.92	21.99		2
	75	0	21.96	22.13	21.96		2

**Table 9-29**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.07	24.13	24.18	0	0
	1	25	24.12	23.97	24.02		0
	1	49	24.13	24.18	24.03		0
	25	0	23.97	23.71	23.99	0-1	0
	25	12	23.79	23.74	23.91		0
	25	25	23.94	23.96	23.79		0
	50	0	23.90	23.72	23.80		0
16QAM	1	0	24.04	24.19	24.14	0-1	0
	1	25	24.01	24.17	24.14		0
	1	49	24.16	24.03	24.16		0
	25	0	23.12	23.11	23.13	0-2	1
	25	12	23.07	23.20	23.20		1
	25	25	22.84	23.04	23.07		1
	50	0	23.16	23.10	23.12		1
64QAM	1	0	22.97	23.13	23.04	0-2	1
	1	25	23.00	23.08	23.12		1
	1	49	23.16	23.00	23.15		1
	25	0	22.09	22.08	22.04	0-3	2
	25	12	21.96	22.08	22.14		2
	25	25	21.83	21.98	22.06		2
	50	0	22.10	22.09	22.06		2



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 51 of 137	

**Table 9-30**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 66 (AWS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131997 (1712.5 MHz)	132322 (1745.0 MHz)	132647 (1777.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.18	24.18	24.12	0	0
	1	12	24.15	24.16	23.92		0
	1	24	24.20	24.01	24.02		0
	12	0	23.92	23.68	23.83	0-1	0
	12	6	23.80	23.84	23.80		0
	12	13	23.89	23.80	23.92		0
	25	0	23.84	23.82	23.90		0
16QAM	1	0	24.10	24.15	24.05	0-1	0
	1	12	24.13	24.11	24.05		0
	1	24	24.17	24.04	24.03		0
	12	0	23.08	23.09	23.09	0-2	1
	12	6	23.05	23.13	23.01		1
	12	13	22.89	23.06	23.10		1
	25	0	23.04	23.07	23.06		1
64QAM	1	0	23.01	23.14	22.97	0-2	1
	1	12	23.12	23.11	22.95		1
	1	24	23.15	22.93	22.98		1
	12	0	22.08	22.08	21.97	0-3	2
	12	6	22.03	22.03	21.92		2
	12	13	21.88	22.03	21.99		2
	25	0	21.98	21.97	21.98		2



**Table 9-31**  
**LTE Band 66 (AWS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 66 (AWS) 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			131987 (1711.5 MHz)	132322 (1745.0 MHz)	132657 (1778.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	24.14	24.05	24.11	0	0	
	1	7	24.16	24.10	24.09		0	
	1	14	23.98	24.13	23.94		0	
	8	0	23.88	23.87	23.74	0-1	0	
	8	4	23.70	23.75	23.80		0	
	8	7	23.91	23.97	23.78		0	
16QAM	15	0	23.87	23.79	23.81	0-1	0	
	1	0	24.18	24.20	24.13		0	
	1	7	24.05	24.18	24.10		0	
	1	14	24.10	24.16	23.99	0-2	0	
	8	0	23.16	23.09	23.14		1	
	8	4	23.18	23.20	23.14		1	
64QAM	8	7	22.95	23.01	23.01	0-2	1	
	15	0	23.19	23.17	23.09		1	
	64QAM	1	0	23.16	23.16	23.04	0-2	1
		1	7	23.03	23.12	22.98		1
		1	14	23.03	23.16	22.94		1
		8	0	22.06	22.06	22.09	0-3	2
8		4	22.15	22.18	22.09	2		
8		7	21.83	21.93	21.91	2		
	15	0	22.13	22.07	22.01		2	

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 52 of 137	

**Table 9-32**  
**LTE Band 66 (AWS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 66 (AWS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			131979 (1710.7 MHz)	132322 (1745.0 MHz)	132665 (1779.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.09	24.03	24.07	0	0
	1	2	24.05	24.15	24.11		0
	1	5	24.07	24.16	23.99		0
	3	0	23.86	23.78	23.80		0
	3	2	23.85	23.67	23.92		0
	3	3	23.81	23.95	23.76		0
	6	0	23.88	23.69	23.84	0-1	0
16QAM	1	0	24.09	24.01	24.19	0-1	0
	1	2	24.03	24.20	24.07		0
	1	5	24.07	24.00	24.12		0
	3	0	24.14	24.20	24.18		0
	3	2	24.06	24.11	24.15		0
	3	3	24.07	24.02	24.13		0
	6	0	23.06	23.18	23.19	0-2	1
64QAM	1	0	23.01	22.95	23.08	0-2	1
	1	2	22.92	23.19	23.06		1
	1	5	23.04	22.99	23.05		1
	3	0	23.11	23.13	23.18		1
	3	2	23.05	23.11	23.13		1
	3	3	22.95	22.93	23.09		1
	6	0	22.00	22.16	22.18	0-3	2

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 53 of 137



### 9.4.3



### LTE Band 25 (PCS)

**Table 9-33**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.23	25.30	25.46	0	0
	1	50	25.14	25.15	25.45		0
	1	99	25.03	25.06	25.41		0
	50	0	23.91	24.28	24.07	0-1	1
	50	25	23.87	24.17	24.30		1
	50	50	23.95	24.16	24.03		1
	100	0	23.76	24.10	24.00		1
16QAM	1	0	24.28	24.31	24.31	0-1	1
	1	50	23.63	24.09	24.03		1
	1	99	24.32	24.35	24.16		1
	50	0	22.95	23.34	23.20	0-2	2
	50	25	22.93	23.30	23.03		2
	50	50	22.94	23.18	23.18		2
	100	0	22.98	23.25	23.12		2
64QAM	1	0	23.23	23.25	23.23	0-2	2
	1	50	22.60	23.00	22.96		2
	1	99	23.26	23.24	23.10		2
	50	0	21.93	22.28	22.18	0-3	3
	50	25	21.84	22.20	21.92		3
	50	50	21.88	22.06	22.12		3
	100	0	21.88	22.20	22.05		3

**Table 9-34**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.26	25.26	25.47	0	0
	1	36	25.20	25.15	25.44		0
	1	74	25.08	24.99	25.38		0
	36	0	23.79	24.20	24.04	0-1	1
	36	18	23.86	24.22	24.35		1
	36	37	23.89	24.12	24.00		1
	75	0	23.85	24.03	23.95		1
16QAM	1	0	24.21	24.28	24.38	0-1	1
	1	36	23.65	24.12	24.11		1
	1	74	24.38	24.28	24.07		1
	36	0	23.00	23.25	23.24	0-2	2
	36	18	22.84	23.28	23.05		2
	36	37	22.96	23.24	23.19		2
	75	0	22.99	23.27	23.14		2
64QAM	1	0	23.19	23.26	23.30	0-2	2
	1	36	22.61	23.07	23.05		2
	1	74	23.32	23.23	22.99		2
	36	0	21.90	22.20	22.16	0-3	3
	36	18	21.77	22.20	22.00		3
	36	37	21.89	22.16	22.07		3
	75	0	21.88	22.19	22.09		3



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 54 of 137

**Table 9-35**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.27	25.29	25.47	0	0
	1	25	25.05	25.12	25.49		0
	1	49	25.03	25.01	25.41		0
	25	0	23.95	24.30	24.12	0-1	1
	25	12	23.93	24.27	24.32		1
	25	25	23.96	24.20	24.05		1
	50	0	23.67	24.04	23.99		1
16QAM	1	0	24.31	24.34	24.38	0-1	1
	1	25	23.64	24.12	24.06		1
	1	49	24.33	24.36	24.08		1
	25	0	22.95	23.31	23.17	0-2	2
	25	12	22.89	23.28	23.05		2
	25	25	22.99	23.23	23.18		2
	50	0	22.96	23.32	23.11		2
64QAM	1	0	23.27	23.25	23.37	0-2	2
	1	25	22.56	23.05	23.04		2
	1	49	23.31	23.32	23.03		2
	25	0	21.86	22.26	22.16	0-3	3
	25	12	21.77	22.20	21.94		3
	25	25	21.99	22.16	22.06		3
	50	0	21.87	22.22	22.01		3

**Table 9-36**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.22	25.23	25.42	0	0
	1	12	25.08	25.11	25.45		0
	1	24	25.04	25.13	25.43		0
	12	0	23.86	24.35	24.17	0-1	1
	12	6	23.91	24.12	24.28		1
	12	13	23.97	24.25	24.07		1
	25	0	23.71	24.09	24.03		1
16QAM	1	0	24.18	24.36	24.32	0-1	1
	1	12	23.65	24.09	24.02		1
	1	24	24.25	24.36	24.22		1
	12	0	22.94	23.32	23.18	0-2	2
	12	6	22.91	23.38	22.98		2
	12	13	22.94	23.20	23.11		2
	25	0	23.02	23.28	23.10		2
64QAM	1	0	23.14	23.32	23.29	0-2	2
	1	12	22.64	23.05	22.98		2
	1	24	23.21	23.27	23.18		2
	12	0	21.85	22.31	22.17	0-3	3
	12	6	21.86	22.29	21.95		3
	12	13	21.91	22.13	22.06		3
	25	0	22.00	22.28	22.08		3



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 55 of 137	

**Table 9-37**  
**LTE Band 25 (PCS) Maximum Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	25.14	25.37	25.20	0	0	
	1	7	25.03	25.18	25.39		0	
	1	14	25.02	25.00	25.37		0	
	8	0	23.86	24.25	24.07	0-1	1	
	8	4	23.81	24.24	24.29		1	
	8	7	23.95	24.22	23.95		1	
16QAM	15	0	23.75	24.11	24.00	0-1	1	
	1	0	24.31	24.26	24.29		0-1	1
	1	7	23.65	24.12	23.96			1
	1	14	24.33	24.39	24.18	0-2		1
	8	0	22.95	23.32	23.18		2	
	8	4	22.86	23.39	22.96		2	
64QAM	8	7	22.90	23.14	23.11	0-2	2	
	15	0	22.91	23.22	23.06		2	
	1	0	23.19	23.16	23.24	0-2	2	
	1	7	22.56	23.02	22.86		2	
	1	14	23.27	23.34	23.17	0-3	2	
	8	0	21.92	22.29	22.11		3	
8	4	21.74	22.27	21.87	3			
64QAM	8	7	21.78	22.12	21.99	0-3	3	
	15	0	21.83	22.14	21.99		3	

**Table 9-38**  
**LTE Band 25 (PCS) Maximum Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	25.32	25.26	25.43	0	0
	1	2	25.11	25.11	25.38		0
	1	5	24.96	25.11	25.37		0
	3	0	25.25	25.38	25.40		0
	3	2	25.13	25.10	25.49		0
	3	3	24.93	25.03	25.38		0
	6	0	23.69	24.19	24.01	0-1	1
16QAM	1	0	24.26	24.27	24.42	0-1	1
	1	2	23.54	24.07	24.05		1
	1	5	24.31	24.37	24.14		1
	3	0	23.85	24.31	24.05		1
	3	2	23.80	24.11	24.40		1
	3	3	23.87	24.10	24.03		1
	6	0	22.97	23.27	23.12	0-2	2
64QAM	1	0	23.16	23.23	23.32	0-2	2
	1	2	22.54	23.01	23.02		2
	1	5	23.22	23.30	23.12		2
	3	0	22.85	23.24	23.05		2
	3	2	22.69	23.04	23.30		2
	3	3	22.85	23.04	22.99		2
	6	0	21.93	22.17	22.11	0-3	3



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 56 of 137	

**Table 9-39**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 20 MHz Bandwidth**

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.47	24.44	24.36	0	0
	1	50	24.42	24.43	24.45		0
	1	99	24.48	24.46	24.38		0
	50	0	24.24	24.22	24.16	0-1	0
	50	25	24.13	24.10	24.07		0
	50	50	23.95	23.93	23.94		0
	100	0	24.06	24.09	24.02		0
16QAM	1	0	24.27	24.45	24.47	0-1	0
	1	50	24.36	24.42	24.22		0
	1	99	24.19	24.17	24.07		0
	50	0	23.22	23.29	23.23	0-2	1
	50	25	23.21	23.25	23.30		1
	50	50	23.00	23.14	23.19		1
	100	0	23.05	23.19	23.28		1
64QAM	1	0	23.19	23.42	23.44	0-2	1
	1	50	23.30	23.36	23.10		1
	1	99	23.17	23.06	23.03		1
	50	0	22.20	22.18	22.22	0-3	2
	50	25	22.16	22.17	22.19		2
	50	50	21.92	22.13	22.18		2
	100	0	21.98	22.12	22.19		2

**Table 9-40**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 15 MHz Bandwidth**

LTE Band 25 (PCS) 15 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26115 (1857.5 MHz)	26365 (1882.5 MHz)	26615 (1907.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.44	24.14	24.40	0	0
	1	36	24.47	24.41	24.39		0
	1	74	24.45	24.41	24.15		0
	36	0	24.10	24.24	24.20	0-1	0
	36	18	23.98	24.17	24.18		0
	36	37	24.05	24.07	23.96		0
	75	0	24.03	24.15	24.03		0
16QAM	1	0	24.43	24.37	24.34	0-1	0
	1	36	24.40	24.26	24.36		0
	1	74	24.21	24.22	24.09		0
	36	0	23.17	23.30	23.25	0-2	1
	36	18	23.19	23.25	23.30		1
	36	37	23.14	23.22	23.19		1
	75	0	22.99	23.13	23.09		1
64QAM	1	0	23.38	23.28	23.23	0-2	1
	1	36	23.36	23.21	23.34		1
	1	74	23.16	23.15	23.06		1
	36	0	22.05	22.18	22.18	0-3	2
	36	18	22.13	22.14	22.22		2
	36	37	22.05	22.15	22.09		2
	75	0	21.87	22.12	21.98		2



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 57 of 137	

**Table 9-41**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 10 MHz Bandwidth**

LTE Band 25 (PCS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26090 (1855.0 MHz)	26365 (1882.5 MHz)	26640 (1910.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.41	24.40	24.38	0	0
	1	25	24.45	24.49	24.50		0
	1	49	24.25	24.39	24.39		0
	25	0	24.19	24.10	24.22	0-1	0
	25	12	24.14	24.00	24.05		0
	25	25	24.10	24.04	23.83		0
	50	0	24.12	23.96	24.18		0
16QAM	1	0	24.46	24.48	24.43	0-1	0
	1	25	24.49	24.30	24.38		0
	1	49	24.08	24.21	24.13		0
	25	0	23.28	23.34	23.37	0-2	1
	25	12	23.22	23.20	23.33		1
	25	25	22.98	23.08	23.21		1
	50	0	23.10	23.22	23.25		1
64QAM	1	0	23.37	23.44	23.42	0-2	1
	1	25	23.46	23.29	23.34		1
	1	49	23.06	23.10	23.02		1
	25	0	22.22	22.33	22.30	0-3	2
	25	12	22.17	22.09	22.25		2
	25	25	21.98	22.01	22.09		2
	50	0	22.09	22.19	22.23		2

**Table 9-42**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 5 MHz Bandwidth**

LTE Band 25 (PCS) 5 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26065 (1852.5 MHz)	26365 (1882.5 MHz)	26665 (1912.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.45	24.43	24.32	0	0
	1	12	24.38	24.38	24.50		0
	1	24	24.17	24.42	24.41		0
	12	0	24.32	24.07	24.26	0-1	0
	12	6	24.21	24.00	24.12		0
	12	13	23.96	24.13	23.89		0
	25	0	23.98	24.03	24.12		0
16QAM	1	0	24.33	24.31	24.45	0-1	0
	1	12	24.27	24.31	24.34		0
	1	24	24.16	24.13	24.22		0
	12	0	23.26	23.19	23.28	0-2	1
	12	6	23.35	23.16	23.30		1
	12	13	22.90	23.07	23.21		1
	25	0	23.06	23.14	23.28		1
64QAM	1	0	23.32	23.19	23.36	0-2	1
	1	12	23.16	23.28	23.24		1
	1	24	23.09	23.11	23.11		1
	12	0	22.23	22.12	22.23	0-3	2
	12	6	22.23	22.15	22.25		2
	12	13	21.79	22.05	22.19		2
	25	0	22.04	22.10	22.26		2



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 58 of 137	

**Table 9-43**  
**LTE Band 25 (PCS) Reduced Conducted Powers - 3 MHz Bandwidth**

LTE Band 25 (PCS) 3 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26055 (1851.5 MHz)	26365 (1882.5 MHz)	26675 (1913.5 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.47	24.12	24.16	0	0
	1	7	24.15	24.14	24.18		0
	1	14	24.42	24.42	24.47		0
	8	0	24.18	24.20	24.11	0-1	0
	8	4	24.04	24.13	24.03		0
	8	7	23.99	23.98	23.84		0
	15	0	24.04	24.00	23.96		0
16QAM	1	0	24.16	24.39	24.49	0-1	0
	1	7	24.35	24.30	24.34		0
	1	14	24.01	24.24	24.11		0
	8	0	23.24	23.30	23.42	0-2	1
	8	4	23.27	23.20	23.31		1
	8	7	23.15	23.17	23.23		1
	15	0	23.11	23.11	23.19		1
64QAM	1	0	23.07	23.32	23.43	0-2	1
	1	7	23.34	23.18	23.25		1
	1	14	22.97	23.19	23.05		1
	8	0	22.19	22.21	22.40	0-3	2
	8	4	22.22	22.14	22.29		2
	8	7	22.03	22.17	22.12		2
	15	0	22.01	22.02	22.17		2

**Table 9-44**  
**LTE Band 25 (PCS) Reduced Conducted Powers -1.4 MHz Bandwidth**

LTE Band 25 (PCS) 1.4 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26047 (1850.7 MHz)	26365 (1882.5 MHz)	26683 (1914.3 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	24.45	24.49	24.25	0	0
	1	2	24.45	24.41	24.42		0
	1	5	24.42	24.35	24.45		0
	3	0	24.29	24.07	24.27		0
	3	2	24.24	24.28	24.15		0
	3	3	23.92	23.96	23.84		0
	6	0	24.06	23.88	24.08	0-1	0
16QAM	1	0	24.24	24.25	24.30	0-1	0
	1	2	24.40	24.30	24.27		0
	1	5	24.11	24.17	24.21		0
	3	0	24.23	24.23	24.34		0
	3	2	24.23	24.18	24.05		0
	3	3	23.98	24.08	23.85	0	
64QAM	6	0	23.23	23.16	23.28	0-2	1
	1	0	23.14	23.14	23.20	0-2	1
	1	2	23.32	23.28	23.18		1
	1	5	23.10	23.14	23.12		1
	3	0	23.16	23.21	23.32		1
	3	2	23.13	23.07	22.95		1
	3	3	22.87	23.07	22.84		1
6	0	22.12	22.07	22.26	0-3	2	

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 59 of 137	

## 9.4.4



## LTE Band 41

**Table 9-45**  
**LTE Band 41 Power Class 3 Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.41	25.17	25.12	25.12	24.89	0	0
	1	50	24.43	25.11	25.15	25.03	25.14		0
	1	99	24.35	25.03	25.16	24.71	24.69		0
	50	0	23.60	24.08	24.03	23.88	24.06	0-1	1
	50	25	23.57	24.01	24.06	23.91	23.88		1
	50	50	23.57	23.93	24.01	23.91	23.93		1
	100	0	23.57	24.01	24.05	24.00	24.04		1
16QAM	1	0	23.51	24.11	24.11	23.87	23.99	0-1	1
	1	50	23.41	24.06	24.03	23.82	24.14		1
	1	99	23.36	24.10	23.95	23.80	24.11		1
	50	0	22.62	23.15	23.12	22.87	23.09	0-2	2
	50	25	22.59	23.06	22.99	22.98	22.94		2
	50	50	22.52	23.08	22.95	22.89	23.02		2
	100	0	22.56	23.01	23.07	22.94	23.01		2
64QAM	1	0	22.39	23.01	23.05	22.81	22.93	0-2	2
	1	50	22.31	23.05	23.03	22.81	23.04		2
	1	99	22.36	23.03	22.85	22.76	23.03		2
	50	0	21.51	22.06	22.09	21.78	22.02	0-3	3
	50	25	21.55	22.03	21.96	21.88	21.82		3
	50	50	21.49	22.05	21.92	21.87	21.95		3
	100	0	21.52	22.00	21.96	21.83	21.89		3

**Table 9-46**  
**LTE Band 41 Power Class 3 Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.37	25.14	25.15	25.02	24.87	0	0
	1	36	24.45	25.04	25.09	24.97	25.17		0
	1	74	24.37	25.05	25.07	24.64	24.60		0
	36	0	23.57	24.06	24.00	23.89	23.99	0-1	1
	36	18	23.56	23.99	24.08	23.89	23.97		1
	36	37	23.55	23.95	23.94	23.93	23.92		1
	75	0	23.50	24.02	24.08	24.04	24.00		1
16QAM	1	0	23.57	24.13	24.06	23.80	24.04	0-1	1
	1	36	23.39	24.08	23.97	23.78	24.09		1
	1	74	23.27	24.07	23.94	23.77	24.13		1
	36	0	22.54	23.15	23.11	22.88	23.08	0-2	2
	36	18	22.56	23.03	23.03	22.98	23.02		2
	36	37	22.59	23.17	23.01	22.88	23.09		2
	75	0	22.55	22.92	23.07	22.89	23.01		2
64QAM	1	0	22.55	23.07	23.02	22.79	23.03	0-2	2
	1	36	22.33	23.03	22.86	22.73	23.00		2
	1	74	22.21	22.98	22.87	22.71	23.01		2
	36	0	21.50	22.04	22.06	21.80	22.01	0-3	3
	36	18	21.55	21.92	21.93	21.91	21.95		3
	36	37	21.50	22.08	21.91	21.87	21.98		3
	75	0	21.47	21.81	22.00	21.85	21.93		3

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 60 of 137





**Table 9-47**  
**LTE Band 41 Power Class 3 Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.46	25.18	25.04	25.18	24.79	0	0
	1	25	24.40	25.10	25.16	25.05	25.13		0
	1	49	24.39	25.00	25.14	24.68	24.69		0
	25	0	23.53	24.09	24.11	23.83	24.00	0-1	1
	25	12	23.49	23.94	24.14	23.97	23.89		1
	25	25	23.58	23.82	23.91	23.96	23.92		1
	50	0	23.59	23.92	24.05	24.00	24.01		1
16QAM	1	0	23.56	24.01	24.15	23.86	23.96	0-1	1
	1	25	23.42	24.05	24.04	23.81	24.14		1
	1	49	23.33	24.04	23.90	23.80	24.12		1
	25	0	22.71	23.14	23.06	22.90	23.04	0-2	2
	25	12	22.66	23.02	23.04	23.03	23.01		2
	25	25	22.52	23.03	22.98	22.98	23.01		2
	50	0	22.56	23.04	23.04	22.93	22.90		2
64QAM	1	0	22.49	22.92	23.06	22.74	22.91	0-2	2
	1	25	22.34	22.95	23.00	22.75	23.10		2
	1	49	22.27	22.94	22.81	22.74	23.10		2
	25	0	21.59	22.11	21.99	21.79	22.01	0-3	3
	25	12	21.55	21.95	21.93	22.02	21.90		3
	25	25	21.43	21.99	21.98	21.88	22.01		3
	50	0	21.48	22.03	21.97	21.88	21.87		3

**Table 9-48**  
**LTE Band 41 Power Class 3 Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	24.43	25.08	25.02	25.11	24.79	0	0
	1	12	24.40	25.15	25.16	24.95	25.09		0
	1	24	24.39	25.01	25.13	24.73	24.75		0
	12	0	23.53	23.97	24.04	23.93	24.08	0-1	1
	12	6	23.55	24.08	24.01	23.91	23.86		1
	12	13	23.58	23.98	23.93	23.95	23.87		1
16QAM	25	0	23.67	23.94	24.00	24.04	24.13	0-1	1
	1	0	23.51	24.08	24.15	23.86	23.97		1
	1	12	23.39	23.98	23.98	23.83	24.18		1
	1	24	23.34	24.10	23.95	23.77	24.04	0-2	1
	12	0	22.67	23.16	23.07	22.89	23.07		2
	12	6	22.62	23.04	23.00	22.99	22.85		2
64QAM	12	13	22.50	22.97	22.85	22.93	23.06	0-2	2
	25	0	22.55	23.10	22.99	22.96	23.05		2
	1	0	22.48	23.07	23.12	22.84	22.95		2
	1	12	22.35	22.88	22.94	22.81	23.06	0-2	2
	1	24	22.32	22.98	22.83	22.73	22.94		2
	12	0	21.57	22.09	22.00	21.83	21.98		3
	12	6	21.53	21.92	21.98	21.89	21.75	0-3	3
	12	13	21.42	21.95	21.75	21.85	21.96		3
25	0	21.48	22.10	21.98	21.92	22.02	3		



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 61 of 137	

**Table 9-49**  
**LTE Band 41 Power Class 2 Conducted Powers - 20 MHz Bandwidth**

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.60	27.65	27.40	27.64	27.21	0	0
	1	50	27.22	26.87	27.22	27.48	26.50		0
	1	99	27.15	26.83	27.21	27.37	27.29		0
	50	0	26.40	26.44	26.35	26.16	26.22	0-1	1
	50	25	26.32	26.32	26.25	26.06	26.15		1
	50	50	26.28	26.19	26.30	25.88	26.18		1
	100	0	26.37	26.24	26.31	25.99	26.19		1
16QAM	1	0	26.35	26.17	26.25	26.40	25.72	0-1	1
	1	50	26.12	26.13	26.21	26.21	26.29		1
	1	99	26.13	26.18	26.13	25.97	26.15		1
	50	0	25.34	25.37	25.11	25.15	25.36	0-2	2
	50	25	25.23	25.34	25.23	25.04	25.21		2
	50	50	25.24	25.18	25.32	24.96	25.21		2
	100	0	25.32	25.31	25.27	24.98	25.25		2
64QAM	1	0	25.30	25.07	25.17	25.33	24.62	0-2	2
	1	50	25.05	25.03	25.12	25.15	25.26		2
	1	99	25.02	25.06	25.10	24.87	25.13		2
	50	0	24.25	24.29	24.04	24.07	24.34	0-3	3
	50	25	24.13	24.27	24.16	23.98	24.11		3
	50	50	24.21	24.11	24.24	23.87	24.10		3
	100	0	24.20	24.30	24.27	23.86	24.20		3

**Table 9-50**  
**LTE Band 41 Power Class 2 Conducted Powers - 15 MHz Bandwidth**

LTE Band 41 15 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.65	27.64	27.45	27.64	27.22	0	0
	1	36	27.17	26.84	27.14	27.52	26.54		0
	1	74	27.11	26.90	27.18	27.43	27.25		0
	36	0	26.32	26.48	26.36	26.18	26.20	0-1	1
	36	18	26.28	26.26	26.31	26.06	26.23		1
	36	37	26.29	26.27	26.31	25.89	26.13		1
	75	0	26.35	26.22	26.28	25.97	26.13		1
16QAM	1	0	26.36	26.18	26.25	26.37	25.69	0-1	1
	1	36	26.08	26.17	26.21	26.22	26.29		1
	1	74	26.13	26.23	26.08	25.89	26.09		1
	36	0	25.25	25.32	25.17	25.15	25.34	0-2	2
	36	18	25.31	25.36	25.32	25.04	25.23		2
	36	37	25.23	25.22	25.38	24.92	25.26		2
	75	0	25.29	25.26	25.22	24.92	25.32		2
64QAM	1	0	25.33	25.07	25.15	25.33	24.64	0-2	2
	1	36	25.06	25.07	25.10	25.12	25.29		2
	1	74	25.10	25.22	24.98	24.85	25.09		2
	36	0	24.24	24.21	24.15	24.13	24.33	0-3	3
	36	18	24.25	24.34	24.31	24.02	24.16		3
	36	37	24.22	24.21	24.29	23.86	24.21		3
	75	0	24.18	24.22	24.22	23.90	24.32		3



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 62 of 137	

**Table 9-51**  
**LTE Band 41 Power Class 2 Conducted Powers - 10 MHz Bandwidth**

LTE Band 41 10 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.61	27.70	27.44	27.61	27.22	0	0
	1	25	27.23	26.82	27.24	27.52	26.47		0
	1	49	27.13	26.85	27.15	27.35	27.24		0
	25	0	26.36	26.43	26.31	26.15	26.22	0-1	1
	25	12	26.30	26.31	26.14	26.09	26.14		1
	25	25	26.36	26.21	26.25	25.97	26.27		1
	50	0	26.35	26.35	26.29	25.94	26.11		1
16QAM	1	0	26.32	26.13	26.19	26.38	25.77	0-1	1
	1	25	26.22	26.20	26.11	26.14	26.32		1
	1	49	26.07	26.15	26.11	25.91	26.20		1
	25	0	25.37	25.33	25.08	25.10	25.40	0-2	2
	25	12	25.28	25.33	25.21	24.93	25.18		2
	25	25	25.25	25.12	25.33	25.01	25.19		2
	50	0	25.25	25.38	25.25	24.96	25.26		2
64QAM	1	0	25.24	25.12	25.10	25.36	24.72	0-2	2
	1	25	25.12	25.16	25.10	25.04	25.26		2
	1	49	25.04	25.15	25.04	24.83	25.12		2
	25	0	24.26	24.33	23.97	24.10	24.31	0-3	3
	25	12	24.23	24.22	24.16	23.87	24.14		3
	25	25	24.14	24.00	24.31	23.97	24.12		3
	50	0	24.20	24.27	24.20	23.85	24.15		3

**Table 9-52**  
**LTE Band 41 Power Class 2 Conducted Powers - 5 MHz Bandwidth**

LTE Band 41 5 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	27.64	27.59	27.42	27.60	27.16	0	0
	1	12	27.31	26.95	27.22	27.46	26.56		0
	1	24	27.20	26.83	27.14	27.25	27.30		0
	12	0	26.43	26.39	26.39	26.14	26.13	0-1	1
	12	6	26.31	26.35	26.33	26.16	26.17		1
	12	13	26.23	26.16	26.31	25.80	26.14		1
	25	0	26.35	26.33	26.29	25.95	26.17		1
16QAM	1	0	26.43	26.13	26.26	26.44	25.70	0-1	1
	1	12	26.12	26.23	26.13	26.28	26.32		1
	1	24	26.15	26.21	26.15	25.96	26.09		1
	12	0	25.32	25.40	25.17	25.20	25.32	0-2	2
	12	6	25.19	25.36	25.25	25.10	25.16		2
	12	13	25.34	25.13	25.35	24.97	25.19		2
	25	0	25.26	25.34	25.29	24.98	25.25		2
64QAM	1	0	25.34	25.10	25.14	25.32	24.65	0-2	2
	1	12	25.12	25.21	25.04	25.25	25.23		2
	1	24	25.13	25.19	25.13	24.95	25.05		2
	12	0	24.25	24.35	24.05	24.09	24.21	0-3	3
	12	6	24.17	24.24	24.17	24.09	24.12		3
	12	13	24.32	24.09	24.23	23.93	24.17		3
	25	0	24.16	24.31	24.17	23.86	24.18		3

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 63 of 137	

## 9.4.5 LTE Uplink Carrier Aggregation Conducted Powers

**Table 9-53**  
**LTE Band 5 Uplink Carrier Aggregation Conducted Powers**


Combination	PCC									SCC								Power		
	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA 5B	LTE B5	10	20525	836.5	2525	881.5	QPSK	1	0	LTE B5	5	20453	829.3	2453	874.3	QPSK	1	24	25.06	25.35

**Table 9-54**  
**LTE Band 41 Uplink Carrier Aggregation Conducted Powers**



Combination	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	40185	2549.5	QPSK	1	0	LTE B41	20	39987	2529.7	QPSK	1	99	24.90	25.17
CA_41C	LTE B41	20	40620	2593.0	QPSK	1	99	LTE B41	20	40818	2612.8	QPSK	1	0	25.20	25.16

### Notes:

1. This device supports uplink carrier aggregation for LTE CA\_41C with a maximum of two 20 MHz component carriers and LTE CA\_5B with a maximum of two 10 MHz component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
3. Uplink carrier aggregation is only possible when the device is operating with Power Class 3 for LTE Band 41.



**Figure 9-4**  
**Power Measurement Setup**

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 64 of 137

## 9.5 WLAN Conducted Powers

**Table 9-55**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 1**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	<b>20.81</b>	18.40	17.61	17.60
2437	6	20.69	20.04	19.08	19.05
2462	11	20.72	18.21	17.57	17.62

**Table 9-56**  
**2.4 GHz WLAN Maximum Average RF Power – Ant 2**



2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	20.96	18.26	17.57	17.58
2437	6	<b>20.99</b>	19.85	18.93	18.89
2462	11	20.98	18.28	17.51	17.50

**Table 9-57**  
**2.4 GHz WLAN Maximum Average RF Power – MIMO**

2.4GHz 802.11g Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
2412	1	18.40	18.26	21.34
2422	3	19.82	19.67	22.76
2437	6	<b>20.04</b>	<b>19.85</b>	<b>22.96</b>
2452	9	19.74	19.93	22.85
2462	11	18.21	18.28	21.26

**Table 9-58**  
**2.4 GHz WLAN Ant 1 Reduced Average RF Power/Output Power During Simultaneous Conditions with 2.4 GHz and 5 GHz WLAN**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	<b>17.58</b>	17.24	17.02	17.09
2437	6	17.42	17.02	17.21	17.14
2462	11	17.27	17.01	17.09	17.03



FCC ID ZNFG710VM			SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset			Page 65 of 137

**Table 9-59**  
**2.4 GHz WLAN Reduced Average RF Power – Ant 2**

2.4GHz Conducted Power [dBm]					
Freq [MHz]	Channel	IEEE Transmission Mode			
		802.11b	802.11g	802.11n	802.11ac
2412	1	<b>17.48</b>	17.15	17.15	17.27
2437	6	17.26	17.03	17.09	17.07
2462	11	17.31	17.01	17.29	17.12

**Table 9-60**  
**5 GHz WLAN Maximum Average RF Power – Ant 1**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	16.64	16.42	16.56
5200	40	<b>17.52</b>	17.40	17.38
5220	44	16.44	16.17	16.23
5240	48	16.55	16.38	16.47
5260	52	16.52	16.31	16.36
5280	56	<b>17.56</b>	17.34	17.35
5300	60	16.71	16.46	16.53
5320	64	16.71	16.57	16.66
5500	100	16.32	16.11	16.05
5600	120	<b>16.56</b>	16.46	16.43
5620	124	16.40	16.30	16.34
5720	144	16.45	16.33	16.33
5745	149	16.45	16.43	16.36
5785	157	17.46	17.38	17.38
5805	161	<b>17.47</b>	17.57	17.50
5825	165	16.77	16.68	16.59



FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 66 of 137

**Table 9-61**  
**5 GHz WLAN Maximum Average RF Power – Ant 2**

5GHz (20MHz) Conducted Power [dBm]				
Freq [MHz]	Channel	IEEE Transmission Mode		
		802.11a	802.11n	802.11ac
5180	36	16.32	16.42	16.39
5200	40	<b>17.27</b>	17.25	17.29
5220	44	16.47	16.49	16.45
5240	48	16.50	16.50	16.50
5260	52	16.51	16.56	16.58
5280	56	<b>17.50</b>	17.51	17.47
5300	60	16.41	16.40	16.41
5320	64	16.41	16.33	16.38
5500	100	16.66	16.25	16.32
5600	120	16.67	16.20	16.23
5620	124	<b>16.68</b>	16.51	16.36
5720	144	16.63	16.27	16.34
5745	149	16.43	16.14	16.33
5785	157	<b>17.50</b>	17.28	17.32
5805	161	17.33	17.02	17.07
5825	165	16.55	16.24	16.32

**Table 9-62**  
**5 GHz WLAN Maximum Average RF Power – MIMO**

5GHz (20MHz) 802.11n Conducted Power [dBm]				
Freq [MHz]	Channel	ANT1	ANT2	MIMO
5180	36	16.42	16.42	19.43
5200	40	<b>17.40</b>	<b>17.25</b>	<b>20.34</b>
5220	44	16.17	16.49	19.34
5240	48	16.38	16.50	19.45
5260	52	16.31	16.56	19.45
5280	56	<b>17.34</b>	<b>17.51</b>	<b>20.44</b>
5300	60	16.46	16.40	19.44
5320	64	16.57	16.33	19.46
5500	100	16.11	16.25	19.19
5600	120	16.46	16.20	19.34
5620	124	<b>16.30</b>	<b>16.51</b>	<b>19.42</b>
5720	144	16.33	16.27	19.31
5745	149	16.43	16.14	19.30
5785	157	<b>17.38</b>	<b>17.28</b>	<b>20.34</b>
5805	161	17.57	17.02	20.31
5825	165	16.68	16.24	19.48

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 67 of 137




**Table 9-63**  
**5 GHz WLAN Ant 2 Output Powers During Simultaneous Conditions with 2.4 GHz and 5 GHz WLAN**



5GHz (40MHz) Conducted Power [dBm]			
Freq [MHz]	Channel	IEEE Transmission Mode	
		802.11n	802.11ac
		Average	Average
5190	38	12.37	12.34
5230	46	<b>14.50</b>	14.49
5270	54	<b>14.48</b>	14.51
5310	62	11.86	11.86
5510	102	12.11	11.93
5590	118	14.41	14.45
5630	126	14.43	14.46
5710	142	<b>14.51</b>	14.47
5755	151	<b>14.51</b>	14.44
5795	159	14.48	14.53

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

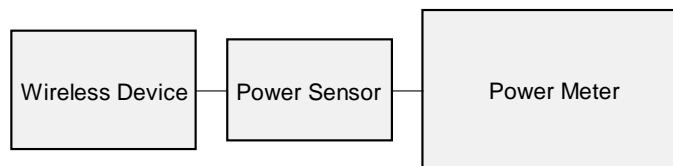- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- The bolded data rate and channel above were tested for SAR.



**Figure 9-5**  
**Power Measurement Setup**

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 68 of 137

## 9.6 Bluetooth Conducted Powers

Table 9-64  
Bluetooth Average RF Power

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	<b>11.81</b>	15.163
2441	1.0	39	<b>11.67</b>	14.693
2480	1.0	78	<b>11.56</b>	14.327
2402	2.0	0	<b>11.14</b>	13.009
2441	2.0	39	<b>11.04</b>	12.696
2480	2.0	78	<b>10.93</b>	12.393
2402	3.0	0	<b>11.20</b>	13.180
2441	3.0	39	<b>11.10</b>	12.895
2480	3.0	78	<b>10.99</b>	12.551

Note: The bolded data rates and channel above were tested for SAR.



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 69 of 137



Figure 9-6  
Bluetooth Transmission Plot

Equation 9-1  
Bluetooth Duty Cycle Calculation

$$Duty\ Cycle = \frac{Pulse\ Width}{Period} * 100\% = \frac{2.910ms}{3.75ms} * 100\% = 77.6\%$$

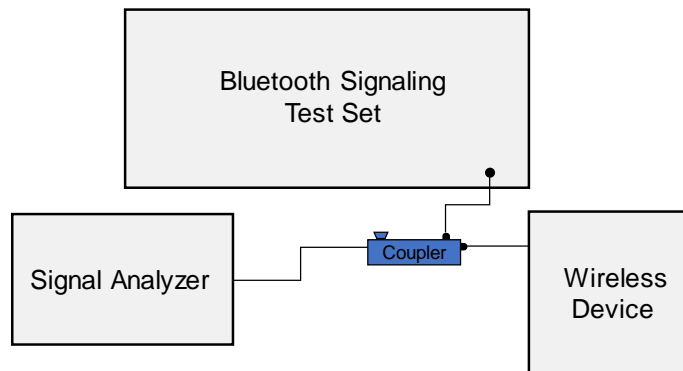




Figure 9-7  
Power Measurement Setup



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	
			Page 70 of 137

# 10 SYSTEM VERIFICATION

## 10.1 Tissue Verification



**Table 10-1**  
**Measured Head Tissue Properties**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
3/11/2018	750H	21.4	700	0.875	40.909	0.889	42.201	-1.57%	-3.06%
			710	0.878	40.878	0.890	42.149	-1.35%	-3.02%
			740	0.887	40.813	0.893	41.994	-0.67%	-2.81%
			755	0.892	40.775	0.894	41.916	-0.22%	-2.72%
			770	0.898	40.725	0.895	41.838	0.34%	-2.66%
			785	0.904	40.690	0.896	41.760	0.89%	-2.56%
3/8/2018	835H	21.6	820	0.887	41.707	0.899	41.578	-1.33%	0.31%
			835	0.901	41.528	0.900	41.500	0.11%	0.07%
			850	0.915	41.341	0.916	41.500	-0.11%	-0.38%
3/13/2018	835H	20.8	820	0.935	39.820	0.899	41.578	4.00%	-4.23%
			835	0.940	39.773	0.900	41.500	4.44%	-4.16%
			850	0.945	39.722	0.916	41.500	3.17%	-4.28%
3/5/2018	1750H	22.5	1710	1.335	39.696	1.348	40.142	-0.96%	-1.11%
			1750	1.376	39.510	1.371	40.079	0.36%	-1.42%
			1790	1.415	39.337	1.394	40.016	1.51%	-1.70%
3/8/2018	1900H	22.0	1850	1.401	39.108	1.400	40.000	0.07%	-2.23%
			1880	1.434	39.000	1.400	40.000	2.43%	-2.50%
			1910	1.464	38.895	1.400	40.000	4.57%	-2.76%
3/1/2018	2450H	21.8	2400	1.815	38.829	1.756	39.289	3.36%	-1.17%
			2450	1.871	38.635	1.800	39.200	3.94%	-1.44%
			2500	1.919	38.452	1.855	39.136	3.45%	-1.75%
			2550	1.981	38.243	1.909	39.073	3.77%	-2.12%
			2600	2.032	38.002	1.964	39.009	3.46%	-2.58%
3/5/2018	2450H	21.5	2400	1.812	38.205	1.756	39.289	3.19%	-2.76%
			2450	1.868	38.023	1.800	39.200	3.78%	-3.00%
			2500	1.924	37.842	1.855	39.136	3.72%	-3.31%
			2550	1.984	37.669	1.909	39.073	3.93%	-3.59%
			2600	2.037	37.459	1.964	39.009	3.72%	-3.97%
3/15/2018	2450H	21.6	2400	1.815	39.863	1.756	39.289	3.36%	1.46%
			2450	1.876	39.676	1.800	39.200	4.22%	1.21%
			2500	1.934	39.480	1.855	39.136	4.26%	0.88%
			2550	1.994	39.278	1.909	39.073	4.45%	0.52%
			2600	2.054	39.075	1.964	39.009	4.58%	0.17%
03/12/2018	5200H-5800H	21.0	5240	4.558	37.199	4.696	35.940	-2.94%	3.50%
			5260	4.579	37.137	4.717	35.917	-2.93%	3.40%
			5280	4.607	37.110	4.737	35.894	-2.74%	3.39%
			5300	4.617	37.076	4.758	35.871	-2.96%	3.36%
			5320	4.641	37.051	4.778	35.849	-2.87%	3.35%
			5500	4.823	36.782	4.963	35.643	-2.82%	3.20%
			5520	4.838	36.806	4.983	35.620	-2.91%	3.33%
			5540	4.863	36.782	5.004	35.597	-2.82%	3.33%
			5560	4.890	36.736	5.024	35.574	-2.67%	3.27%
			5580	4.912	36.705	5.045	35.551	-2.64%	3.25%
			5600	4.933	36.664	5.065	35.529	-2.61%	3.19%
			5620	4.953	36.700	5.086	35.506	-2.62%	3.36%
			5640	4.983	36.656	5.106	35.483	-2.41%	3.31%
			5660	5.001	36.601	5.127	35.460	-2.46%	3.22%
			5680	5.015	36.570	5.147	35.437	-2.56%	3.20%
			5700	5.041	36.555	5.168	35.414	-2.46%	3.22%
			5745	5.092	36.478	5.214	35.363	-2.34%	3.15%
			5765	5.109	36.439	5.234	35.340	-2.39%	3.11%
			5785	5.140	36.404	5.255	35.317	-2.19%	3.08%
			5800	5.150	36.401	5.270	35.300	-2.28%	3.12%
			5805	5.151	36.395	5.275	35.294	-2.35%	3.12%
			5825	5.173	36.365	5.296	35.271	-2.32%	3.10%

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 71 of 137

**Table 10-2**  
**Measured Body Tissue Properties**



Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
3/14/2018	750B	21.0	700	0.956	53.324	0.959	55.726	-0.31%	-4.31%
			710	0.960	53.297	0.960	55.687	0.00%	-4.29%
			740	0.968	53.175	0.963	55.570	0.52%	-4.31%
			755	0.973	53.125	0.964	55.512	0.93%	-4.30%
			770	0.978	53.080	0.965	55.453	1.35%	-4.28%
			785	0.984	53.050	0.966	55.395	1.86%	-4.23%
3/4/2018	835B	21.1	820	0.983	53.024	0.969	55.258	1.44%	-4.04%
			835	0.998	52.865	0.970	55.200	2.89%	-4.23%
			850	1.012	52.701	0.988	55.154	2.43%	-4.45%
3/7/2018	835B	20.7	820	0.969	53.678	0.969	55.258	0.00%	-2.86%
			835	0.985	53.465	0.970	55.200	1.55%	-3.14%
			850	0.999	53.377	0.988	55.154	1.11%	-3.22%
3/19/2018	835B	20.9	820	0.958	52.797	0.969	55.258	-1.14%	-4.45%
			835	0.973	52.660	0.970	55.200	0.31%	-4.60%
			850	0.988	52.533	0.988	55.154	0.00%	-4.75%
3/7/2018	1750B	21.7	1710	1.423	52.474	1.463	53.537	-2.73%	-1.99%
			1750	1.465	52.334	1.488	53.432	-1.55%	-2.05%
			1790	1.508	52.206	1.514	53.326	-0.40%	-2.10%
3/12/2018	1750B	21.5	1710	1.416	52.513	1.463	53.537	-3.21%	-1.91%
			1750	1.462	52.352	1.488	53.432	-1.75%	-2.02%
			1790	1.504	52.186	1.514	53.326	-0.66%	-2.14%
3/14/2018	1750B	21.8	1710	1.457	51.554	1.463	53.537	-0.41%	-3.70%
			1750	1.503	51.403	1.488	53.432	1.01%	-3.80%
			1790	1.543	51.240	1.514	53.326	1.92%	-3.91%
3/7/2018	1900B	21.4	1850	1.508	52.300	1.520	53.300	-0.79%	-1.88%
			1880	1.542	52.157	1.520	53.300	1.45%	-2.14%
			1910	1.577	52.100	1.520	53.300	3.75%	-2.25%
3/9/2018	1900B	22.5	1850	1.475	53.897	1.520	53.300	-2.96%	1.12%
			1880	1.510	53.801	1.520	53.300	-0.66%	0.94%
			1910	1.545	53.696	1.520	53.300	1.64%	0.74%
3/12/2018	1900B	22.6	1850	1.494	53.044	1.520	53.300	-1.71%	-0.48%
			1880	1.527	52.927	1.520	53.300	0.46%	-0.70%
			1910	1.558	52.781	1.520	53.300	2.50%	-0.97%
2/28/2018	2450B	21.8	2400	1.979	51.486	1.902	52.767	4.05%	-2.43%
			2450	2.036	51.326	1.950	52.700	4.41%	-2.61%
			2500	2.091	51.209	2.021	52.636	3.46%	-2.71%
			2550	2.156	51.117	2.092	52.573	3.06%	-2.77%
			2600	2.221	50.903	2.163	52.509	2.68%	-3.06%
3/4/2018	2450B	21.9	2400	1.949	50.981	1.902	52.767	2.47%	-3.38%
			2450	2.004	50.846	1.950	52.700	2.77%	-3.52%
			2500	2.063	50.699	2.021	52.636	2.08%	-3.68%
			2550	2.123	50.566	2.092	52.573	1.48%	-3.82%
			2600	2.181	50.405	2.163	52.509	0.83%	-4.01%
			2650	2.240	50.259	2.234	52.445	0.27%	-4.17%
			2700	2.295	50.102	2.305	52.382	-0.43%	-4.35%
3/15/2018	2450B	22.4	2400	1.958	52.017	1.902	52.767	2.94%	-1.42%
			2450	2.006	51.873	1.950	52.700	2.87%	-1.57%
			2500	2.067	51.679	2.021	52.636	2.28%	-1.82%
			2550	2.126	51.612	2.092	52.573	1.63%	-1.83%
			2600	2.178	51.414	2.163	52.509	0.69%	-2.09%

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 72 of 137	

**Table 10-3**  
**Measured Body Tissue Properties (Continued)**

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, $\sigma$ (S/m)	Measured Dielectric Constant, $\epsilon$	TARGET Conductivity, $\sigma$ (S/m)	TARGET Dielectric Constant, $\epsilon$	% dev $\sigma$	% dev $\epsilon$
03/05/2018	5200B-5800B	22.2	5180	5.392	47.500	5.276	49.041	2.20%	-3.14%
			5200	5.430	47.436	5.299	49.014	2.47%	-3.22%
			5220	5.455	47.460	5.323	48.987	2.48%	-3.12%
			5240	5.478	47.438	5.346	48.960	2.47%	-3.11%
			5260	5.494	47.373	5.369	48.933	2.33%	-3.19%
			5280	5.519	47.309	5.393	48.906	2.34%	-3.27%
			5300	5.540	47.302	5.416	48.879	2.29%	-3.23%
			5320	5.581	47.265	5.439	48.851	2.61%	-3.25%
			5500	5.806	46.997	5.650	48.607	2.76%	-3.31%
			5520	5.839	46.961	5.673	48.580	2.93%	-3.33%
			5540	5.866	46.901	5.696	48.553	2.96%	-3.40%
			5560	5.899	46.840	5.720	48.526	3.13%	-3.47%
			5580	5.936	46.821	5.743	48.499	3.36%	-3.46%
			5600	5.959	46.831	5.766	48.471	3.35%	-3.38%
			5620	5.989	46.796	5.790	48.444	3.44%	-3.40%
			5640	5.994	46.731	5.813	48.417	3.11%	-3.48%
			5660	6.038	46.672	5.837	48.390	3.44%	-3.55%
			5680	6.057	46.667	5.860	48.363	3.36%	-3.51%
			5700	6.095	46.619	5.883	48.336	3.60%	-3.55%
			5745	6.157	46.546	5.936	48.275	3.72%	-3.58%
			5765	6.194	46.514	5.959	48.248	3.94%	-3.59%
			5785	6.209	46.501	5.982	48.220	3.79%	-3.56%
			5800	6.232	46.466	6.000	48.200	3.87%	-3.60%
			5805	6.241	46.450	6.006	48.193	3.91%	-3.62%
			5825	6.260	46.419	6.029	48.166	3.83%	-3.63%
03/11/2018	5200B-5800B	20.5	5180	5.412	47.831	5.276	49.041	2.58%	-2.47%
			5200	5.445	47.813	5.299	49.014	2.76%	-2.45%
			5220	5.482	47.756	5.323	48.987	2.99%	-2.51%
			5240	5.504	47.746	5.346	48.960	2.96%	-2.48%
			5260	5.528	47.668	5.369	48.933	2.96%	-2.59%
			5280	5.537	47.661	5.393	48.906	2.67%	-2.55%
			5300	5.565	47.603	5.416	48.879	2.75%	-2.61%
			5320	5.595	47.597	5.439	48.851	2.87%	-2.57%
			5500	5.853	47.254	5.650	48.607	3.59%	-2.78%
			5520	5.878	47.281	5.673	48.580	3.61%	-2.67%
			5540	5.905	47.238	5.696	48.553	3.67%	-2.71%
			5560	5.939	47.145	5.720	48.526	3.83%	-2.85%
			5580	5.954	47.122	5.743	48.499	3.67%	-2.84%
			5600	5.986	47.093	5.766	48.471	3.82%	-2.84%
			5620	6.011	47.098	5.790	48.444	3.82%	-2.78%
			5640	6.048	47.051	5.813	48.417	4.04%	-2.82%
			5660	6.075	47.018	5.837	48.390	4.08%	-2.84%
			5680	6.112	46.976	5.860	48.363	4.30%	-2.87%
			5700	6.137	46.929	5.883	48.336	4.32%	-2.91%
			5745	6.217	46.813	5.936	48.275	4.73%	-3.03%
			5765	6.242	46.785	5.959	48.248	4.75%	-3.03%
			5785	6.274	46.726	5.982	48.220	4.88%	-3.10%
			5800	6.289	46.731	6.000	48.200	4.82%	-3.05%
			5805	6.293	46.728	6.006	48.193	4.78%	-3.04%
			5825	6.327	46.674	6.029	48.166	4.94%	-3.10%
03/18/2018	5200B-5800B	20.6	5180	5.433	47.495	5.276	49.041	2.98%	-3.15%
			5200	5.469	47.487	5.299	49.014	3.21%	-3.12%
			5220	5.472	47.484	5.323	48.987	2.80%	-3.07%
			5240	5.500	47.462	5.346	48.960	2.88%	-3.06%
			5260	5.516	47.381	5.369	48.933	2.74%	-3.17%
			5280	5.551	47.322	5.393	48.906	2.93%	-3.24%
			5300	5.566	47.263	5.416	48.879	2.77%	-3.31%
			5320	5.606	47.218	5.439	48.851	3.07%	-3.34%
			5500	5.865	46.935	5.650	48.607	3.81%	-3.44%
			5520	5.837	46.912	5.673	48.580	2.89%	-3.43%
			5540	5.920	46.831	5.696	48.553	3.93%	-3.55%
			5560	5.932	46.814	5.720	48.526	3.71%	-3.53%
			5580	5.950	46.804	5.743	48.499	3.60%	-3.49%
			5600	5.970	46.771	5.766	48.471	3.54%	-3.51%
			5620	6.014	46.733	5.790	48.444	3.87%	-3.53%
			5640	6.053	46.682	5.813	48.417	4.13%	-3.58%
			5660	6.065	46.639	5.837	48.390	3.91%	-3.62%
			5680	6.108	46.630	5.860	48.363	4.23%	-3.58%
			5700	6.131	46.609	5.883	48.336	4.22%	-3.57%
			5745	6.167	46.545	5.936	48.275	3.89%	-3.58%
			5765	6.217	46.475	5.959	48.248	4.33%	-3.67%
			5785	6.251	46.461	5.982	48.220	4.50%	-3.65%
			5800	6.289	46.396	6.000	48.200	4.82%	-3.74%
			5805	6.282	46.374	6.006	48.193	4.60%	-3.77%
			5825	6.287	46.432	6.029	48.166	4.28%	-3.60%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2). The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>			<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 73 of 137		

## 10.2 Test System Verification

Prior to SAR assessment, the system is verified to  $\pm 10\%$  of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in Appendix E.

**Table 10-4**  
**System Verification Results – 1g**


System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>1g</sub> (W/kg)	1 W Target SAR <sub>1g</sub> (W/kg)	1 W Normalized SAR <sub>1g</sub> (W/kg)	Deviation <sub>1g</sub> (%)
E	750	HEAD	03/11/2018	21.0	21.4	0.200	1003	3213	1.560	8.280	7.800	-5.80%
E	835	HEAD	03/08/2018	24.3	21.6	0.200	4d132	3213	1.880	9.360	9.400	0.43%
E	835	HEAD	03/13/2018	23.4	21.2	0.200	4d132	3213	2.010	9.360	10.050	7.37%
E	1750	HEAD	03/05/2018	23.7	22.5	0.100	1008	3213	3.840	36.400	38.400	5.49%
G	1900	HEAD	03/08/2018	21.1	20.5	0.100	5d148	3332	4.030	40.100	40.300	0.50%
H	2450	HEAD	03/01/2018	21.7	21.8	0.100	797	7410	5.300	52.700	53.000	0.57%
H	2600	HEAD	03/01/2018	21.7	21.8	0.100	1126	7410	5.780	56.400	57.800	2.48%
H	2450	HEAD	03/05/2018	22.4	21.5	0.100	797	7410	5.340	52.700	53.400	1.33%
K	2450	HEAD	03/15/2018	22.9	21.6	0.100	797	7406	5.090	52.700	50.900	-3.42%
H	5250	HEAD	03/12/2018	21.0	21.0	0.050	1191	3589	3.920	78.900	78.400	-0.63%
H	5600	HEAD	03/12/2018	21.0	21.0	0.050	1191	3589	3.930	83.600	78.600	-5.98%
H	5750	HEAD	03/12/2018	21.0	21.0	0.050	1191	3589	3.760	79.100	75.200	-4.93%
K	750	BODY	03/14/2018	22.5	21.0	0.200	1161	7406	1.800	8.430	9.000	6.76%
J	835	BODY	03/04/2018	22.6	21.1	0.200	4d133	3914	2.010	9.410	10.050	6.80%
J	835	BODY	03/07/2018	21.0	20.7	0.200	4d133	3914	1.830	9.410	9.150	-2.76%
E	835	BODY	03/19/2018	23.7	20.9	0.200	4d132	3213	1.980	9.710	9.900	1.96%
K	1750	BODY	03/07/2018	22.2	21.7	0.100	1148	7406	3.870	37.000	38.700	4.59%
H	1900	BODY	03/07/2018	21.9	21.4	0.100	5d080	7410	4.120	39.100	41.200	5.37%
J	1900	BODY	03/09/2018	21.9	22.5	0.100	5d148	3914	4.270	39.600	42.700	7.83%
J	1900	BODY	03/12/2018	21.5	22.5	0.100	5d080	3914	4.100	39.100	41.000	4.86%
K	2450	BODY	02/28/2018	22.4	21.8	0.100	797	7406	5.190	51.100	51.900	1.57%
K	2450	BODY	03/04/2018	22.7	21.9	0.100	797	7406	5.110	51.100	51.100	0.00%
K	2600	BODY	03/04/2018	22.7	21.9	0.100	1126	7406	5.370	54.300	53.700	-1.10%
G	2450	BODY	03/15/2018	22.6	21.4	0.100	797	3332	5.260	51.100	52.600	2.94%
D	5250	BODY	03/05/2018	22.3	21.2	0.050	1237	7308	3.530	76.900	70.600	-8.19%
D	5600	BODY	03/05/2018	22.3	21.2	0.050	1237	7308	3.830	78.500	76.600	-2.42%
D	5750	BODY	03/05/2018	22.3	21.2	0.050	1237	7308	3.660	77.100	73.200	-5.06%
D	5250	BODY	03/11/2018	20.5	20.1	0.050	1237	7308	3.680	76.900	73.600	-4.29%
D	5600	BODY	03/11/2018	20.5	20.1	0.050	1237	7308	3.790	78.500	75.800	-3.44%
D	5750	BODY	03/11/2018	20.5	20.1	0.050	1237	7308	3.590	77.100	71.800	-6.87%
D	5250	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	3.610	76.900	72.200	-6.11%
D	5600	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	3.840	78.500	76.800	-2.17%
D	5750	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	3.610	77.100	72.200	-6.36%

FCC ID ZNFG710VM	 <b>PCTEST</b> Engineering Laboratory, Inc.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 74 of 137



**Table 10-5**  
**System Verification Results – 10g**

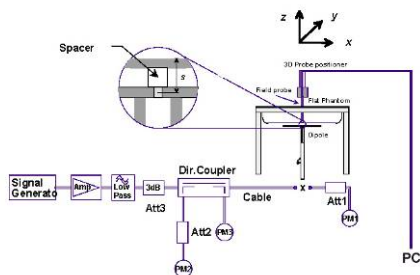

System Verification TARGET & MEASURED												
SAR System #	Tissue Frequency (MHz)	Tissue Type	Date:	Amb. Temp (°C)	Liquid Temp (°C)	Input Power (W)	Source SN	Probe SN	Measured SAR <sub>10g</sub> (W/kg)	1 W Target SAR <sub>10g</sub> (W/kg)	1 W Normalized SAR <sub>10g</sub> (W/kg)	Deviation <sub>10g</sub> (%)
I	1750	BODY	03/12/2018	22.6	20.9	0.100	1150	3287	1.950	19.500	19.500	0.00%
H	1750	BODY	03/14/2018	23.0	21.8	0.100	1150	7410	2.060	19.500	20.600	5.64%
J	1900	BODY	03/09/2018	21.9	22.5	0.100	5d148	3914	2.190	20.900	21.900	4.78%
J	1900	BODY	03/12/2018	21.5	22.5	0.100	5d080	3914	2.090	20.700	20.900	0.97%
D	5250	BODY	03/05/2018	22.3	21.2	0.050	1237	7308	0.988	21.500	19.760	-8.09%
D	5600	BODY	03/05/2018	22.3	21.2	0.050	1237	7308	1.070	22.100	21.400	-3.17%
D	5750	BODY	03/05/2018	22.3	21.2	0.050	1237	7308	1.020	21.400	20.400	-4.67%
D	5250	BODY	03/11/2018	20.5	20.1	0.050	1237	7308	1.030	21.500	20.600	-4.19%
D	5600	BODY	03/11/2018	20.5	20.1	0.050	1237	7308	1.050	22.100	21.000	-4.98%
D	5750	BODY	03/11/2018	20.5	20.1	0.050	1237	7308	1.000	21.400	20.000	-6.54%
D	5250	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	1.010	21.500	20.200	-6.05%
D	5600	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	1.060	22.100	21.200	-4.07%
D	5750	BODY	03/18/2018	21.7	20.7	0.050	1237	7308	1.010	21.400	20.200	-5.61%



**Figure 10-1**  
**System Verification Setup Diagram**



**Figure 10-2**  
**System Verification Setup Photo**

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>	 <b>LG</b>	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 75 of 137	

# 11 SAR DATA SUMMARY



## 11.1 Standalone Head SAR Data

**Table 11-1**  
**CDMA BC10 (\$90S) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.39	-0.02	Right	Cheek	07157	1:1	0.149	1.026	0.153	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.39	0.04	Right	Tilt	07157	1:1	0.063	1.026	0.065	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.39	0.13	Left	Cheek	07157	1:1	0.121	1.026	0.124	
820.10	564	CDMA BC10 (\$90S)	RC3 / SO55	25.5	25.39	0.18	Left	Tilt	07157	1:1	0.055	1.026	0.056	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.38	-0.07	Right	Cheek	07165	1:1	0.153	1.028	0.157	A1
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.38	0.08	Right	Tilt	07165	1:1	0.053	1.028	0.054	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.38	0.05	Left	Cheek	07165	1:1	0.111	1.028	0.114	
820.10	564	CDMA BC10 (\$90S)	EVDO Rev. A	25.5	25.38	0.18	Left	Tilt	07165	1:1	0.063	1.028	0.065	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-2**  
**CDMA BC0 (\$22H) Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.35	0.04	Right	Cheek	07157	1:1	0.199	1.035	0.206	A2
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.35	0.10	Right	Tilt	07157	1:1	0.084	1.035	0.087	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.35	0.01	Left	Cheek	07157	1:1	0.163	1.035	0.169	
836.52	384	CDMA BC0 (\$22H)	RC3 / SO55	25.5	25.35	0.12	Left	Tilt	07157	1:1	0.083	1.035	0.086	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.43	0.01	Right	Cheek	07165	1:1	0.169	1.016	0.172	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.43	0.06	Right	Tilt	07165	1:1	0.064	1.016	0.065	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.43	0.04	Left	Cheek	07165	1:1	0.139	1.016	0.141	
836.52	384	CDMA BC0 (\$22H)	EVDO Rev. A	25.5	25.43	0.15	Left	Tilt	07165	1:1	0.068	1.016	0.069	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 76 of 137

**Table 11-3**  
**PCS CDMA Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	RC3 / SO55	25.2	24.85	-0.02	Right	Cheek	07140	1:1	0.117	1.084	0.127	
1880.00	600	PCS CDMA	RC3 / SO55	25.2	24.85	-0.19	Right	Tilt	07140	1:1	0.117	1.084	0.127	
1880.00	600	PCS CDMA	RC3 / SO55	25.2	24.85	0.21	Left	Cheek	07140	1:1	0.188	1.084	0.204	A3
1880.00	600	PCS CDMA	RC3 / SO55	25.2	24.85	0.13	Left	Tilt	07140	1:1	0.108	1.084	0.117	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	24.92	0.04	Right	Cheek	07140	1:1	0.114	1.067	0.122	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	24.92	0.16	Right	Tilt	07140	1:1	0.117	1.067	0.125	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	24.92	0.11	Left	Cheek	07140	1:1	0.185	1.067	0.197	
1880.00	600	PCS CDMA	EVDO Rev. A	25.2	24.92	0.11	Left	Tilt	07140	1:1	0.104	1.067	0.111	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-4**  
**GSM 850 Head SAR**

MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
836.60	190	GSM 850	GSM	33.7	33.65	0.08	Right	Cheek	07165	1	1:8.3	0.051	1.012	0.052	
836.60	190	GSM 850	GSM	33.7	33.65	-0.02	Right	Tilt	07165	1	1:8.3	0.022	1.012	0.022	
836.60	190	GSM 850	GSM	33.7	33.65	0.15	Left	Cheek	07165	1	1:8.3	0.040	1.012	0.040	
836.60	190	GSM 850	GSM	33.7	33.65	0.18	Left	Tilt	07165	1	1:8.3	0.023	1.012	0.023	
836.60	190	GSM 850	GPRS	32.7	32.64	-0.08	Right	Cheek	07165	2	1:4.15	0.143	1.014	0.145	A4
836.60	190	GSM 850	GPRS	32.7	32.64	0.18	Right	Tilt	07165	2	1:4.15	0.059	1.014	0.060	
836.60	190	GSM 850	GPRS	32.7	32.64	0.03	Left	Cheek	07165	2	1:4.15	0.101	1.014	0.102	
836.60	190	GSM 850	GPRS	32.7	32.64	0.12	Left	Tilt	07165	2	1:4.15	0.058	1.014	0.059	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 77 of 137

**Table 11-5  
GSM 1900 Head SAR**



MEASUREMENT RESULTS															
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	# of Time Slots	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
1880.00	661	GSM 1900	GSM	30.7	30.41	0.00	Right	Cheek	07140	1	1:8.3	0.042	1.069	0.045	
1880.00	661	GSM 1900	GSM	30.7	30.41	0.07	Right	Tilt	07140	1	1:8.3	0.035	1.069	0.037	
1880.00	661	GSM 1900	GSM	30.7	30.41	0.16	Left	Cheek	07140	1	1:8.3	0.071	1.069	0.076	
1880.00	661	GSM 1900	GSM	30.7	30.41	0.06	Left	Tilt	07140	1	1:8.3	0.040	1.069	0.043	
1880.00	661	GSM 1900	GPRS	29.7	29.43	0.17	Right	Cheek	07140	2	1:4.15	0.050	1.064	0.053	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.20	Right	Tilt	07140	2	1:4.15	0.049	1.064	0.052	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.10	Left	Cheek	07140	2	1:4.15	0.080	1.064	0.085	A5
1880.00	661	GSM 1900	GPRS	29.7	29.43	0.14	Left	Tilt	07140	2	1:4.15	0.046	1.064	0.049	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-6  
UMTS 850 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
836.60	4183	UMTS 850	RMC	25.5	25.43	0.00	Right	Cheek	07165	1:1	0.180	1.016	0.183	A6
836.60	4183	UMTS 850	RMC	25.5	25.43	0.06	Right	Tilt	07165	1:1	0.076	1.016	0.077	
836.60	4183	UMTS 850	RMC	25.5	25.43	0.09	Left	Cheek	07165	1:1	0.138	1.016	0.140	
836.60	4183	UMTS 850	RMC	25.5	25.43	0.09	Left	Tilt	07165	1:1	0.079	1.016	0.080	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-7  
UMTS 1750 Head SAR**

MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.04	Right	Cheek	07140	1:1	0.130	1.052	0.137	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.09	Right	Tilt	07140	1:1	0.100	1.052	0.105	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.00	Left	Cheek	07140	1:1	0.206	1.052	0.217	A7
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.02	Left	Tilt	07140	1:1	0.113	1.052	0.119	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 78 of 137

**Table 11-8**  
**UMTS 1900 Head SAR**



MEASUREMENT RESULTS														
FREQUENCY		Mode/Band	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.03	Right	Cheek	07140	1:1	0.116	1.069	0.124	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.15	Right	Tilt	07140	1:1	0.127	1.069	0.136	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.13	Left	Cheek	07140	1:1	0.207	1.069	0.221	A8
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.10	Left	Tilt	07140	1:1	0.140	1.069	0.150	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Head 1.6 W/kg (mW/g) averaged over 1 gram							

**Table 11-9**  
**LTE Band 12 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	-0.10	0	Right	Cheek	QPSK	1	0	07132	1:1	0.085	1.023	0.087	A9
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	-0.03	1	Right	Cheek	QPSK	25	0	07132	1:1	0.072	1.062	0.076	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	0.12	0	Right	Tilt	QPSK	1	0	07132	1:1	0.033	1.023	0.034	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	0.00	1	Right	Tilt	QPSK	25	0	07132	1:1	0.028	1.062	0.030	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	0.04	0	Left	Cheek	QPSK	1	0	07132	1:1	0.065	1.023	0.066	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	0.08	1	Left	Cheek	QPSK	25	0	07132	1:1	0.054	1.062	0.057	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	0.16	0	Left	Tilt	QPSK	1	0	07132	1:1	0.034	1.023	0.035	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	0.08	1	Left	Tilt	QPSK	25	0	07132	1:1	0.030	1.062	0.032	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-10**  
**LTE Band 13 Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	0.03	0	Right	Cheek	QPSK	1	0	07124	1:1	0.177	1.002	0.177	A10
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.05	1	Right	Cheek	QPSK	25	12	07124	1:1	0.150	1.050	0.158	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	0.02	0	Right	Tilt	QPSK	1	0	07124	1:1	0.076	1.002	0.076	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	-0.03	1	Right	Tilt	QPSK	25	12	07124	1:1	0.067	1.050	0.070	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	0.05	0	Left	Cheek	QPSK	1	0	07124	1:1	0.140	1.002	0.140	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.03	1	Left	Cheek	QPSK	25	12	07124	1:1	0.123	1.050	0.129	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	-0.08	0	Left	Tilt	QPSK	1	0	07124	1:1	0.074	1.002	0.074	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.05	1	Left	Tilt	QPSK	25	12	07124	1:1	0.064	1.050	0.067	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 79 of 137	

**Table 11-11**  
**LTE Band 26 (Cell) Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	-0.01	0	Right	Cheek	QPSK	1	0	07165	1:1	0.117	1.016	0.119	A11
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.07	1	Right	Cheek	QPSK	36	0	07165	1:1	0.099	1.047	0.104	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	0.13	0	Right	Tilt	QPSK	1	0	07165	1:1	0.043	1.016	0.044	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.17	1	Right	Tilt	QPSK	36	0	07165	1:1	0.037	1.047	0.039	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	0.18	0	Left	Cheek	QPSK	1	0	07165	1:1	0.082	1.016	0.083	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.13	1	Left	Cheek	QPSK	36	0	07165	1:1	0.070	1.047	0.073	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	0.16	0	Left	Tilt	QPSK	1	0	07165	1:1	0.045	1.016	0.046	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.12	1	Left	Tilt	QPSK	36	0	07165	1:1	0.040	1.047	0.042	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-12**  
**LTE Band 5 (Cell) Head SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
		MHz		Ch.														(W/kg)		(W/kg)	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.02	0	Right	Cheek	QPSK	1	0	07165	1:1	0.165	1.035	0.171	A12
2 CC Uplink	PCC	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.06	-0.21	0	Right	Cheek	QPSK	1	0	07165	1:1	0.158	1.107	0.175	
	SCC	829.30	20453	Mid		5							QPSK	1	24						
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.04	1	Right	Cheek	QPSK	25	0	07165	1:1	0.136	1.050	0.143	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.12	0	Right	Tilt	QPSK	1	0	07165	1:1	0.067	1.035	0.069	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.07	1	Right	Tilt	QPSK	25	0	07165	1:1	0.055	1.050	0.058	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.06	0	Left	Cheek	QPSK	1	0	07165	1:1	0.112	1.035	0.116	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.03	1	Left	Cheek	QPSK	25	0	07165	1:1	0.094	1.050	0.099	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.13	0	Left	Tilt	QPSK	1	0	07165	1:1	0.064	1.035	0.066	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.09	1	Left	Tilt	QPSK	25	0	07165	1:1	0.052	1.050	0.055	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Head									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

**Table 11-13**  
**LTE Band 66 (AWS) Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.20	0	Right	Cheek	QPSK	1	0	07140	1:1	0.152	1.000	0.152	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.02	1	Right	Cheek	QPSK	50	50	07140	1:1	0.121	1.002	0.121	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.13	0	Right	Tilt	QPSK	1	0	07140	1:1	0.125	1.000	0.125	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.03	1	Right	Tilt	QPSK	50	50	07140	1:1	0.102	1.002	0.102	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.12	0	Left	Cheek	QPSK	1	0	07140	1:1	0.197	1.000	0.197	A13
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.05	1	Left	Cheek	QPSK	50	50	07140	1:1	0.189	1.002	0.189	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.01	0	Left	Tilt	QPSK	1	0	07140	1:1	0.122	1.000	0.122	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.20	1	Left	Tilt	QPSK	50	50	07140	1:1	0.118	1.002	0.118	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										

FCC ID ZNFG710VM		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 80 of 137

**Table 11-14**  
**LTE Band 25 (PCS) Head SAR**



MEASUREMENT RESULTS																			
FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.	(W/kg)														(W/kg)			
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.15	0	Right	Cheek	QPSK	1	0	07140	1:1	0.119	1.009	0.120	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.04	1	Right	Cheek	QPSK	50	25	07140	1:1	0.087	1.047	0.091	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.15	0	Right	Tilt	QPSK	1	0	07140	1:1	0.127	1.009	0.128	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.00	1	Right	Tilt	QPSK	50	25	07140	1:1	0.098	1.047	0.103	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.21	0	Left	Cheek	QPSK	1	0	07140	1:1	0.206	1.009	0.208	A14
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.18	1	Left	Cheek	QPSK	50	25	07140	1:1	0.155	1.047	0.162	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.09	0	Left	Tilt	QPSK	1	0	07140	1:1	0.117	1.009	0.118	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	-0.18	1	Left	Tilt	QPSK	50	25	07140	1:1	0.092	1.047	0.096	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Head 1.6 W/kg (mW/g) averaged over 1 gram									

**Table 11-15**  
**LTE Band 41 Head SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY			Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Side	Test Position	Modulation	RB Size	RB Offset	Device Serial Number	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
		MHz	Ch.																		
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.17	0.18	0	Right	Cheek	QPSK	1	0	07165	1:1.58	0.018	1.007	0.018	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	24.2	24.08	-0.19	1	Right	Cheek	QPSK	50	0	07165	1:1.58	0.016	1.028	0.016	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.17	0.19	0	Right	Tilt	QPSK	1	0	07165	1:1.58	0.007	1.007	0.007	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	24.2	24.08	0.20	1	Right	Tilt	QPSK	50	0	07165	1:1.58	0.007	1.028	0.007	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.17	0.18	0	Left	Cheek	QPSK	1	0	07165	1:1.58	0.032	1.007	0.032	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	24.2	24.08	0.15	1	Left	Cheek	QPSK	50	0	07165	1:1.58	0.025	1.028	0.026	
1 CC Uplink - Power Class 2	N/A	2549.50	40185	Low-Md	LTE Band 41	20	27.7	27.65	0.11	0	Left	Cheek	QPSK	1	0	07165	1:2.31	0.038	1.012	0.038	A15
2 CC Uplink - Power Class 3	PCC	2549.50	40185	Low-Md	LTE Band 41	20	25.2	24.90	-0.19	0	Left	Cheek	QPSK	1	0	07165	1:1.58	0.027	1.072	0.029	
	SCC	2529.70	39987	Low-Md									QPSK	1	99						
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	25.2	25.17	0.12	0	Left	Tilt	QPSK	1	0	07165	1:1.58	0.019	1.007	0.019	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Md	LTE Band 41	20	24.2	24.08	0.13	1	Left	Tilt	QPSK	50	0	07165	1:1.58	0.014	1.028	0.014	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT												Head									
Spatial Peak												1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population												averaged over 1 gram									

**Table 11-16**  
**DTS Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	18.0	17.58	0.12	Right	Cheek	1	07116	1	99.5	0.339	0.176	1.102	1.005	0.195	A16
2412	1	802.11b	DSSS	22	18.0	17.58	-0.16	Right	Tilt	1	07116	1	99.5	0.175	-	1.102	1.005	-	
2412	1	802.11b	DSSS	22	18.0	17.58	-0.12	Left	Cheek	1	07116	1	99.5	0.120	-	1.102	1.005	-	
2412	1	802.11b	DSSS	22	18.0	17.58	0.06	Left	Tilt	1	07116	1	99.5	0.131	-	1.102	1.005	-	
2412	1	802.11b	DSSS	22	18.0	17.48	0.13	Right	Cheek	2	07116	1	99.2	0.086	0.054	1.127	1.008	0.061	
2412	1	802.11b	DSSS	22	18.0	17.48	0.19	Right	Tilt	2	07116	1	99.2	0.031	-	1.127	1.008	-	
2412	1	802.11b	DSSS	22	18.0	17.48	0.15	Left	Cheek	2	07116	1	99.2	0.022	-	1.127	1.008	-	
2412	1	802.11b	DSSS	22	18.0	17.48	0.17	Left	Tilt	2	07116	1	99.2	0.013	-	1.127	1.008	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population									Head 1.6 W/kg (mW/g) averaged over 1 gram										



FCC ID ZNFG710VM		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 81 of 137

**Table 11-17  
NII Head SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	18.0	17.56	-0.15	Right	Cheek	1	07116	6	98.5	0.865	0.434	1.107	1.015	0.488	
5280	56	802.11a	OFDM	20	18.0	17.56	0.17	Right	Tilt	1	07116	6	98.5	0.816	0.314	1.107	1.015	0.353	
5280	56	802.11a	OFDM	20	18.0	17.56	0.18	Left	Cheek	1	07116	6	98.5	0.231	-	1.107	1.015	-	
5280	56	802.11a	OFDM	20	18.0	17.56	0.14	Left	Tilt	1	07116	6	98.5	0.278	-	1.107	1.015	-	
5280	56	802.11a	OFDM	20	18.0	17.50	0.00	Right	Cheek	2	07116	6	98.8	0.117	0.049	1.122	1.012	0.056	
5280	56	802.11a	OFDM	20	18.0	17.50	0.21	Right	Tilt	2	07116	6	98.8	0.036	-	1.122	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.50	0.19	Left	Cheek	2	07116	6	98.8	0.056	-	1.122	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.50	-0.16	Left	Tilt	2	07116	6	98.8	0.040	-	1.122	1.012	-	
5600	120	802.11a	OFDM	20	17.0	16.56	0.14	Right	Cheek	1	07116	6	98.5	0.823	0.431	1.107	1.015	0.484	
5600	120	802.11a	OFDM	20	17.0	16.56	0.04	Right	Tilt	1	07116	6	98.5	0.696	0.396	1.107	1.015	0.445	
5600	120	802.11a	OFDM	20	17.0	16.56	-0.16	Left	Cheek	1	07116	6	98.5	0.298	-	1.107	1.015	-	
5600	120	802.11a	OFDM	20	17.0	16.56	0.03	Left	Tilt	1	07116	6	98.5	0.389	-	1.107	1.015	-	
5620	124	802.11a	OFDM	20	17.0	16.68	-0.13	Right	Cheek	2	07116	6	98.8	0.079	0.023	1.076	1.012	0.025	
5620	124	802.11a	OFDM	20	17.0	16.68	0.12	Right	Tilt	2	07116	6	98.8	0.023	-	1.076	1.012	-	
5620	124	802.11a	OFDM	20	17.0	16.68	0.19	Left	Cheek	2	07116	6	98.8	0.055	-	1.076	1.012	-	
5620	124	802.11a	OFDM	20	17.0	16.68	0.21	Left	Tilt	2	07116	6	98.8	0.027	-	1.076	1.012	-	
5805	161	802.11a	OFDM	20	18.0	17.47	0.17	Right	Cheek	1	07116	6	98.5	1.441	0.521	1.130	1.015	0.598	A17
5805	161	802.11a	OFDM	20	18.0	17.47	0.12	Right	Tilt	1	07116	6	98.5	1.001	0.515	1.130	1.015	0.591	
5805	161	802.11a	OFDM	20	18.0	17.47	0.15	Left	Cheek	1	07116	6	98.5	0.405	-	1.130	1.015	-	
5805	161	802.11a	OFDM	20	18.0	17.47	-0.21	Left	Tilt	1	07116	6	98.5	0.585	-	1.130	1.015	-	
5785	157	802.11a	OFDM	20	18.0	17.50	0.03	Right	Cheek	2	07116	6	98.8	0.191	0.076	1.122	1.012	0.086	
5785	157	802.11a	OFDM	20	18.0	17.50	0.11	Right	Tilt	2	07116	6	98.8	0.034	-	1.122	1.012	-	
5785	157	802.11a	OFDM	20	18.0	17.50	0.12	Left	Cheek	2	07116	6	98.8	0.126	-	1.122	1.012	-	
5785	157	802.11a	OFDM	20	18.0	17.50	0.04	Left	Tilt	2	07116	6	98.8	0.057	-	1.122	1.012	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Head											
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-18  
DSS Head SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Side	Test Position	Device Serial Number	Data Rate (Mbps)	Duty Cycle %	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2402.00	0	Bluetooth	FHSS	12.0	11.81	0.18	Right	Cheek	07165	1	77.6	0.054	1.045	1.289	0.073	A18
2402.00	0	Bluetooth	FHSS	12.0	11.81	0.21	Right	Tilt	07165	1	77.6	0.035	1.045	1.289	0.047	
2402.00	0	Bluetooth	FHSS	12.0	11.81	0.02	Left	Cheek	07165	1	77.6	0.019	1.045	1.289	0.026	
2402.00	0	Bluetooth	FHSS	12.0	11.81	0.15	Left	Tilt	07165	1	77.6	0.015	1.045	1.289	0.020	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Head 1.6 W/kg (mW/g) averaged over 1 gram								

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 82 of 137	





## 11.2 Standalone Body-Worn SAR Data

**Table 11-19**  
**GSM/UMTS/CDMA Body-Worn SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of Time Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (\$90S)	TDSO / SO32	25.5	25.20	-0.06	10 mm	07140	N/A	1:1	back	0.329	1.072	0.353	A19
836.52	384	CDMA BC0 (\$22H)	TDSO / SO32	25.5	25.35	-0.05	10 mm	07140	N/A	1:1	back	0.415	1.035	0.430	A21
1880.00	600	PCS CDMA	TDSO / SO32	25.2	24.93	-0.21	10 mm	07140	N/A	1:1	back	0.521	1.064	0.554	A23
836.60	190	GSM 850	GSM	33.7	33.65	0.00	10 mm	07116	1	1:8.3	back	0.161	1.012	0.163	
836.60	190	GSM 850	GPRS	32.7	32.64	-0.05	10 mm	07116	2	1:4.15	back	0.353	1.014	0.358	A25
1880.00	661	GSM 1900	GSM	30.7	30.41	-0.01	10 mm	07165	1	1:8.3	back	0.162	1.069	0.173	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.15	10 mm	07165	2	1:4.15	back	0.193	1.064	0.205	A26
836.60	4183	UMTS 850	RMC	25.5	25.43	-0.03	10 mm	07132	N/A	1:1	back	0.461	1.016	0.468	A28
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.00	10 mm	07140	N/A	1:1	back	0.611	1.052	0.643	A29
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.04	10 mm	07116	N/A	1:1	back	0.645	1.069	0.690	A31
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

**Table 11-20**  
**LTE FDD Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	0.15	0	07165	QPSK	1	0	10 mm	back	1:1	0.203	1.023	0.208	A33
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	-0.06	1	07165	QPSK	25	0	10 mm	back	1:1	0.182	1.062	0.193	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	-0.01	0	07165	QPSK	1	0	10 mm	back	1:1	0.377	1.002	0.378	A35
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.01	1	07165	QPSK	25	12	10 mm	back	1:1	0.346	1.050	0.363	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	0.06	0	07132	QPSK	1	0	10 mm	back	1:1	0.268	1.016	0.272	A36
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.01	1	07132	QPSK	36	0	10 mm	back	1:1	0.232	1.047	0.243	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.00	0	07140	QPSK	1	0	10 mm	back	1:1	0.709	1.000	0.709	A38
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.03	1	07140	QPSK	50	50	10 mm	back	1:1	0.546	1.002	0.547	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.16	0	07116	QPSK	1	0	10 mm	back	1:1	0.521	1.009	0.526	A40
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.01	1	07116	QPSK	50	25	10 mm	back	1:1	0.403	1.047	0.422	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT									Body										
Spatial Peak									1.6 W/kg (mW/g)										
Uncontrolled Exposure/General Population									averaged over 1 gram										

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 83 of 137

**Table 11-21**  
**LTE FDD Band 5 Body-Worn SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		Mhz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.13	0	07165	QPSK	1	0	10 mm	back	1:1	0.436	1.035	0.451	A37
2 CC Uplink	PCC	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.06	-0.14	0	07165	QPSK	1	0	10 mm	back	1:1	0.402	1.107	0.445	
	SCC	829.30	20453	Mid		5						QPSK	1	24							
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.18	1	07165	QPSK	25	0	10 mm	back	1:1	0.360	1.050	0.378	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

**Table 11-22**  
**LTE TDD Body-Worn SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.2	24.43	0.02	0	07140	QPSK	1	50	10 mm	back	1:1.58	0.450	1.194	0.537	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.17	-0.01	0	07140	QPSK	1	0	10 mm	back	1:1.58	0.779	1.007	0.784	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	25.2	25.16	-0.13	0	07140	QPSK	1	99	10 mm	back	1:1.58	0.868	1.009	0.876	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.2	25.12	0.04	0	07140	QPSK	1	0	10 mm	back	1:1.58	0.848	1.019	0.864	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	25.2	25.14	0.00	0	07140	QPSK	1	50	10 mm	back	1:1.58	0.557	1.014	0.565	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.08	0.02	1	07140	QPSK	50	0	10 mm	back	1:1.58	0.580	1.028	0.596	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	24.2	24.05	0.02	1	07140	QPSK	100	0	10 mm	back	1:1.58	0.758	1.035	0.785	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	27.7	27.21	-0.12	0	07140	QPSK	1	99	10 mm	back	1:2.31	0.951	1.119	1.064	A42
2 CC Uplink - Power Class 3	PCC	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	-0.20	0	07140	QPSK	1	99	10 mm	back	1:1.58	0.880	1.000	0.880	
	SCC	2612.80	40818	Mid								QPSK	1	0							
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	27.7	27.21	-0.03	0	07140	QPSK	1	99	10 mm	back	1:2.31	0.949	1.119	1.062	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram										

Note: Blue entry represents variability measurement.



**Table 11-23**  
**DTS SISO Body-Worn SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg				(W/kg)	
2412	1	802.11b	DSSS	22	21.0	20.81	-0.01	10 mm	1	07116	1	back	99.5	0.502	0.298	1.045	1.005	0.313	
2437	6	802.11b	DSSS	22	21.0	20.99	0.04	10 mm	2	07249	1	back	99.2	0.625	0.505	1.002	1.008	0.510	A43
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-24**  
**DTS MIMO Body-Worn SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															W/kg	(W/kg)	(Power)	(Duty Cycle)	(W/kg)	
2437	6	802.11g	OFDM	20	20.5	20.04	20.5	19.85	0.00	10 mm	MIMO	07124	6	back	98.3	0.704	0.501	1.161	1.017	0.592	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

To achieve the 2.4 GHz WLAN 23.5 dBm (Ch. 6) maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 20.5 dBm (Ch.6).

FCC ID ZNFG710VM		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 84 of 137	

**Table 11-25**  
**DTS Body-Worn SAR for Conditions with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	18.0	17.58	0.05	10 mm	1	07132	1	back	99.5	0.251	0.201	1.102	1.005	0.223	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

DTS was additionally evaluated at the maximum allowed output power during operations with simultaneous 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN. 5 GHz Ant 2 WIFI was not transmitting during the above evaluations.

**Table 11-26**  
**NII SISO Body-Worn SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
5280	56	802.11a	OFDM	20	18.0	17.56	0.18	10 mm	1	07157	6	back	98.5	0.337	0.184	1.107	1.015	0.207	
5260	52	802.11a	OFDM	20	17.0	16.51	0.06	10 mm	2	07157	6	back	98.8	1.346	0.699	1.119	1.012	0.792	
5280	56	802.11a	OFDM	20	18.0	17.50	-0.17	10 mm	2	07157	6	back	98.8	0.991	0.873	1.122	1.012	0.991	
5320	64	802.11a	OFDM	20	17.0	16.41	0.02	10 mm	2	07157	6	back	98.8	1.666	0.687	1.146	1.012	0.797	
5600	120	802.11a	OFDM	20	17.0	16.56	-0.06	10 mm	1	07157	6	back	98.5	0.263	0.125	1.107	1.015	0.140	
5620	124	802.11a	OFDM	20	17.0	16.68	-0.11	10 mm	2	07157	6	back	98.8	1.343	0.604	1.076	1.012	0.658	
5805	161	802.11a	OFDM	20	18.0	17.47	-0.13	10 mm	1	07157	6	back	98.5	0.555	0.289	1.130	1.015	0.331	
5785	157	802.11a	OFDM	20	18.0	17.50	0.06	10 mm	2	07157	6	back	98.8	1.468	0.681	1.122	1.012	0.773	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											

**Table 11-27**  
**NII MIMO Body-Worn SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate [Mbps]	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															W/kg	(W/kg)	(W/kg)			
5260	52	802.11n	OFDM	20	17.0	16.31	17.0	16.56	0.12	10 mm	MIMO	07157	13	back	98.6	1.553	0.667	1.172	1.014	0.793	A44
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	0.05	10 mm	MIMO	07157	13	back	98.6	1.900	0.904	1.164	1.014	1.067	
5320	64	802.11n	OFDM	20	17.0	16.57	17.0	16.33	0.04	10 mm	MIMO	07157	13	back	98.6	1.568	0.718	1.167	1.014	0.850	
5620	124	802.11n	OFDM	20	17.0	16.30	17.0	16.51	0.13	10 mm	MIMO	07157	13	back	98.6	1.250	0.669	1.175	1.014	0.797	
5745	149	802.11n	OFDM	20	17.0	16.43	17.0	16.14	0.08	10 mm	MIMO	07157	13	back	98.6	1.405	0.632	1.219	1.014	0.781	
5785	157	802.11n	OFDM	20	18.0	17.38	18.0	17.28	0.03	10 mm	MIMO	07157	13	back	98.6	1.799	0.786	1.180	1.014	0.940	
5805	161	802.11n	OFDM	20	18.0	17.57	18.0	17.02	-0.04	10 mm	MIMO	07157	13	back	98.6	1.938	0.808	1.253	1.014	1.027	
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	-0.04	10 mm	MIMO	07157	13	back	98.6	2.073	0.873	1.164	1.014	1.030	
5805	161	802.11n	OFDM	20	18.0	17.57	18.0	17.02	-0.16	10 mm	MIMO	07157	13	back	98.6	2.209	0.827	1.253	1.014	1.051	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

Note:

1. Blue entry represents variability measurement.
2. To achieve the 5GHz WLAN 20.0 dBm (Ch. 52, 64, 124, 149) and 21 dBm (Ch. 56, 157, 161) maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17.0 dBm (Ch. 52, 64, 124, 149) and 18.0 dBm (Ch. 56, 157, 161).

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 85 of 137	



**Table 11-28**  
**NII Body-Worn SAR for Conditions with 2.4 GHz Ant 1 and 5 Ghz Ant 2 WLAN**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)	(W/kg)			
5270	54	802.11n	OFDM	40	15.0	14.48	0.13	10 mm	2	07132	13.5	back	97.9	0.880	0.420	1.127	1.021	0.483	
5710	142	802.11n	OFDM	40	15.0	14.51	0.01	10 mm	2	07132	13.5	back	97.9	0.695	0.348	1.119	1.021	0.398	
5755	151	802.11n	OFDM	40	15.0	14.51	-0.11	10 mm	2	07132	13.5	back	97.9	0.775	0.328	1.119	1.021	0.375	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

NII was additionally evaluated at the maximum allowed output power during operations with simultaneous 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN. 2.4 GHz Ant 1 WIFI was not transmitting during the above evaluations.

**Table 11-29**  
**DSS Body-Worn SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)			(W/kg)	
2402	0	Bluetooth	FHSS	12.0	11.81	0.17	10 mm	07116	1	back	77.6	0.030	1.045	1.289	0.040	A46
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 86 of 137	

## 11.3 Standalone Hotspot SAR Data

**Table 11-30**  
**GPRS/UMTS/CDMA Hotspot SAR Data**

MEASUREMENT RESULTS															
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	# of GPRS Slots	Duty Cycle	Side	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #
MHz	Ch.											(W/kg)		(W/kg)	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.34	-0.05	10 mm	07140	N/A	1:1	back	0.319	1.038	0.331	A20
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.34	-0.04	10 mm	07140	N/A	1:1	front	0.271	1.038	0.281	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.34	-0.01	10 mm	07140	N/A	1:1	bottom	0.241	1.038	0.250	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.34	0.01	10 mm	07140	N/A	1:1	right	0.275	1.038	0.285	
820.10	564	CDMA BC10 (§90S)	EVDO Rev. 0	25.5	25.34	0.15	10 mm	07140	N/A	1:1	left	0.092	1.038	0.095	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.34	0.15	10 mm	07140	N/A	1:1	back	0.375	1.038	0.389	A22
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.34	0.01	10 mm	07140	N/A	1:1	front	0.343	1.038	0.356	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.34	-0.07	10 mm	07140	N/A	1:1	bottom	0.290	1.038	0.301	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.34	-0.09	10 mm	07140	N/A	1:1	right	0.307	1.038	0.319	
836.52	384	CDMA BC0 (§22H)	EVDO Rev. 0	25.5	25.34	0.13	10 mm	07140	N/A	1:1	left	0.090	1.038	0.093	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.19	10 mm	07140	N/A	1:1	back	0.507	1.016	0.515	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.16	10 mm	07140	N/A	1:1	front	0.451	1.016	0.458	
1851.25	25	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.01	10 mm	07140	N/A	1:1	bottom	0.828	1.016	0.841	A24
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	-0.01	10 mm	07140	N/A	1:1	bottom	0.818	1.016	0.831	
1908.75	1175	PCS CDMA	EVDO Rev. 0	25.2	25.19	0.10	10 mm	07140	N/A	1:1	bottom	0.779	1.002	0.781	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.02	10 mm	07140	N/A	1:1	right	0.110	1.016	0.112	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	-0.01	10 mm	07140	N/A	1:1	left	0.311	1.016	0.316	
836.60	190	GSM 850	GPRS	32.7	32.64	-0.05	10 mm	07116	2	1:4.15	back	0.353	1.014	0.358	A25
836.60	190	GSM 850	GPRS	32.7	32.64	-0.10	10 mm	07116	2	1:4.15	front	0.288	1.014	0.292	
836.60	190	GSM 850	GPRS	32.7	32.64	-0.04	10 mm	07116	2	1:4.15	bottom	0.220	1.014	0.223	
836.60	190	GSM 850	GPRS	32.7	32.64	0.00	10 mm	07116	2	1:4.15	right	0.246	1.014	0.249	
836.60	190	GSM 850	GPRS	32.7	32.64	0.07	10 mm	07116	2	1:4.15	left	0.065	1.014	0.066	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.15	10 mm	07165	2	1:4.15	back	0.193	1.064	0.205	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.14	10 mm	07165	2	1:4.15	front	0.175	1.064	0.186	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.01	10 mm	07165	2	1:4.15	bottom	0.321	1.064	0.342	A27
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.03	10 mm	07165	2	1:4.15	right	0.057	1.064	0.061	
1880.00	661	GSM 1900	GPRS	29.7	29.43	-0.05	10 mm	07165	2	1:4.15	left	0.131	1.064	0.139	
836.60	4183	UMTS 850	RMC	25.5	25.43	-0.03	10 mm	07132	N/A	1:1	back	0.461	1.016	0.468	A28
836.60	4183	UMTS 850	RMC	25.5	25.43	-0.04	10 mm	07132	N/A	1:1	front	0.393	1.016	0.399	
836.60	4183	UMTS 850	RMC	25.5	25.43	0.00	10 mm	07132	N/A	1:1	bottom	0.292	1.016	0.297	
836.60	4183	UMTS 850	RMC	25.5	25.43	0.02	10 mm	07132	N/A	1:1	right	0.339	1.016	0.344	
836.60	4183	UMTS 850	RMC	25.5	25.43	-0.03	10 mm	07132	N/A	1:1	left	0.096	1.016	0.098	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.02	10 mm	07140	N/A	1:1	back	0.611	1.052	0.643	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.02	10 mm	07140	N/A	1:1	front	0.559	1.052	0.588	
1712.40	1312	UMTS 1750	RMC	25.2	24.96	-0.01	10 mm	07140	N/A	1:1	bottom	0.886	1.057	0.937	A30
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.01	10 mm	07140	N/A	1:1	bottom	0.858	1.052	0.903	
1752.60	1513	UMTS 1750	RMC	25.2	24.94	0.03	10 mm	07140	N/A	1:1	bottom	0.846	1.062	0.898	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	-0.02	10 mm	07140	N/A	1:1	right	0.091	1.052	0.096	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	-0.01	10 mm	07140	N/A	1:1	left	0.447	1.052	0.470	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.04	10 mm	07116	N/A	1:1	back	0.645	1.069	0.690	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.00	10 mm	07116	N/A	1:1	front	0.521	1.069	0.557	
1852.40	9262	UMTS 1900	RMC	25.5	25.22	-0.02	10 mm	07116	N/A	1:1	bottom	1.130	1.067	1.206	A32
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.01	10 mm	07116	N/A	1:1	bottom	1.080	1.069	1.155	
1907.60	9538	UMTS 1900	RMC	25.5	25.24	0.03	10 mm	07116	N/A	1:1	bottom	0.950	1.062	1.009	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.00	10 mm	07116	N/A	1:1	right	0.154	1.069	0.165	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.04	10 mm	07116	N/A	1:1	left	0.366	1.069	0.391	
1852.40	9262	UMTS 1900	RMC	25.5	25.22	0.00	10 mm	07116	N/A	1:1	bottom	0.991	1.067	1.057	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Body 1.6 W/kg (mW/g) averaged over 1 gram								

Note: Blue entry represents variability measurement.



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 87 of 137

**Table 11-31**  
**LTE Band 12 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	0.15	0	07165	QPSK	1	0	10 mm	back	1:1	0.203	1.023	0.208	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	-0.06	1	07165	QPSK	25	0	10 mm	back	1:1	0.182	1.062	0.193	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	-0.05	0	07165	QPSK	1	0	10 mm	front	1:1	0.205	1.023	0.210	A34
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	-0.01	1	07165	QPSK	25	0	10 mm	front	1:1	0.173	1.062	0.184	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	-0.01	0	07165	QPSK	1	0	10 mm	bottom	1:1	0.135	1.023	0.138	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	0.02	1	07165	QPSK	25	0	10 mm	bottom	1:1	0.113	1.062	0.120	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	-0.04	0	07165	QPSK	1	0	10 mm	right	1:1	0.163	1.023	0.167	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	0.02	1	07165	QPSK	25	0	10 mm	right	1:1	0.142	1.062	0.151	
707.50	23095	Mid	LTE Band 12	10	25.5	25.40	0.08	0	07165	QPSK	1	0	10 mm	left	1:1	0.076	1.023	0.078	
707.50	23095	Mid	LTE Band 12	10	24.5	24.24	-0.18	1	07165	QPSK	25	0	10 mm	left	1:1	0.057	1.062	0.061	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-32**  
**LTE Band 13 Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
Mhz	Ch.														(W/kg)		(W/kg)		
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	-0.01	0	07165	QPSK	1	0	10 mm	back	1:1	0.377	1.002	0.378	A35
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.01	1	07165	QPSK	25	12	10 mm	back	1:1	0.346	1.050	0.363	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	-0.09	0	07165	QPSK	1	0	10 mm	front	1:1	0.234	1.002	0.234	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	-0.06	1	07165	QPSK	25	12	10 mm	front	1:1	0.219	1.050	0.230	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	-0.02	0	07165	QPSK	1	0	10 mm	bottom	1:1	0.167	1.002	0.167	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.04	1	07165	QPSK	25	12	10 mm	bottom	1:1	0.152	1.050	0.160	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	-0.07	0	07165	QPSK	1	0	10 mm	right	1:1	0.152	1.002	0.152	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.09	1	07165	QPSK	25	12	10 mm	right	1:1	0.133	1.050	0.140	
782.00	23230	Mid	LTE Band 13	10	25.5	25.49	0.13	0	07165	QPSK	1	0	10 mm	left	1:1	0.035	1.002	0.035	
782.00	23230	Mid	LTE Band 13	10	24.5	24.29	0.20	1	07165	QPSK	25	12	10 mm	left	1:1	0.030	1.050	0.032	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Body											
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g)											
								averaged over 1 gram											



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 88 of 137

**Table 11-33**  
**LTE Band 26 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	0.06	0	07132	QPSK	1	0	10 mm	back	1:1	0.268	1.016	0.272	A36
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.01	1	07132	QPSK	36	0	10 mm	back	1:1	0.232	1.047	0.243	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	-0.03	0	07132	QPSK	1	0	10 mm	front	1:1	0.208	1.016	0.211	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.05	1	07132	QPSK	36	0	10 mm	front	1:1	0.183	1.047	0.192	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	-0.02	0	07132	QPSK	1	0	10 mm	bottom	1:1	0.171	1.016	0.174	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	-0.12	1	07132	QPSK	36	0	10 mm	bottom	1:1	0.148	1.047	0.155	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	-0.10	0	07132	QPSK	1	0	10 mm	right	1:1	0.214	1.016	0.217	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	-0.09	1	07132	QPSK	36	0	10 mm	right	1:1	0.169	1.047	0.177	
831.50	26865	Mid	LTE Band 26 (Cell)	15	25.5	25.43	0.19	0	07132	QPSK	1	0	10 mm	left	1:1	0.071	1.016	0.072	
831.50	26865	Mid	LTE Band 26 (Cell)	15	24.5	24.30	0.00	1	07132	QPSK	36	0	10 mm	left	1:1	0.055	1.047	0.058	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

**Table 11-34**  
**LTE Band 5 (Cell) Hotspot SAR**

MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.13	0	07165	QPSK	1	0	10 mm	back	1:1	0.436	1.035	0.451	A37
2 CC Uplink	PCC	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.06	-0.14	0	07165	QPSK	1	0	10 mm	back	1:1	0.402	1.107	0.445	
	SCC	829.30	20453	Mid		5						QPSK	1	24							
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.18	1	07165	QPSK	25	0	10 mm	back	1:1	0.360	1.050	0.378	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.08	0	07165	QPSK	1	0	10 mm	front	1:1	0.372	1.035	0.385	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.09	1	07165	QPSK	25	0	10 mm	front	1:1	0.301	1.050	0.316	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	-0.10	0	07165	QPSK	1	0	10 mm	bottom	1:1	0.245	1.035	0.254	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	-0.09	1	07165	QPSK	25	0	10 mm	bottom	1:1	0.198	1.050	0.208	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	-0.04	0	07165	QPSK	1	0	10 mm	right	1:1	0.238	1.035	0.246	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	-0.04	1	07165	QPSK	25	0	10 mm	right	1:1	0.199	1.050	0.209	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	25.5	25.35	0.14	0	07165	QPSK	1	0	10 mm	left	1:1	0.108	1.035	0.112	
1 CC Uplink	N/A	836.50	20525	Mid	LTE Band 5 (Cell)	10	24.5	24.29	0.02	1	07165	QPSK	25	0	10 mm	left	1:1	0.092	1.050	0.097	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population										Body 1.6 W/kg (mW/g) averaged over 1 gram											

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 89 of 137



**Table 11-35**  
**LTE Band 66 (AWS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.00	0	07140	QPSK	1	0	10 mm	back	1:1	0.709	1.000	0.709	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.03	1	07140	QPSK	50	50	10 mm	back	1:1	0.546	1.002	0.547	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.00	0	07140	QPSK	1	0	10 mm	front	1:1	0.603	1.000	0.603	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	-0.03	1	07140	QPSK	50	50	10 mm	front	1:1	0.457	1.002	0.458	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.02	0	07140	QPSK	1	0	10 mm	bottom	1:1	1.000	1.000	1.000	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	25.2	25.19	-0.10	0	07140	QPSK	1	0	10 mm	bottom	1:1	0.948	1.002	0.950	
1770.00	132572	High	LTE Band 66 (AWS)	20	25.2	25.18	0.03	0	07140	QPSK	1	0	10 mm	bottom	1:1	0.960	1.005	0.965	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.01	1	07140	QPSK	50	50	10 mm	bottom	1:1	0.752	1.002	0.754	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	24.15	0.19	1	07140	QPSK	100	0	10 mm	bottom	1:1	0.738	1.012	0.747	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.08	0	07140	QPSK	1	0	10 mm	right	1:1	0.065	1.000	0.065	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.05	1	07140	QPSK	50	50	10 mm	right	1:1	0.060	1.002	0.060	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.03	0	07140	QPSK	1	0	10 mm	left	1:1	0.542	1.000	0.542	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.01	1	07140	QPSK	50	50	10 mm	left	1:1	0.401	1.002	0.402	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.05	0	07140	QPSK	1	0	10 mm	bottom	1:1	1.020	1.000	1.020	A39
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											

Note: Blue entry represents variability measurement.

**Table 11-36**  
**LTE Band 25 (PCS) Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.16	0	07116	QPSK	1	0	10 mm	back	1:1	0.521	1.009	0.526	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.01	1	07116	QPSK	50	25	10 mm	back	1:1	0.403	1.047	0.422	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.05	0	07116	QPSK	1	0	10 mm	front	1:1	0.530	1.009	0.535	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.19	1	07116	QPSK	50	25	10 mm	front	1:1	0.402	1.047	0.421	
1860.00	26140	Low	LTE Band 25 (PCS)	20	25.5	25.23	-0.05	0	07116	QPSK	1	0	10 mm	bottom	1:1	1.090	1.064	1.160	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	25.5	25.30	-0.01	0	07116	QPSK	1	0	10 mm	bottom	1:1	1.100	1.047	1.152	A41
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.15	0	07116	QPSK	1	0	10 mm	bottom	1:1	1.040	1.009	1.049	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	-0.03	1	07116	QPSK	50	25	10 mm	bottom	1:1	0.735	1.047	0.770	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.10	-0.02	1	07116	QPSK	100	0	10 mm	bottom	1:1	0.792	1.096	0.868	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.02	0	07116	QPSK	1	0	10 mm	right	1:1	0.147	1.009	0.148	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.00	1	07116	QPSK	50	25	10 mm	right	1:1	0.115	1.047	0.120	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.01	0	07116	QPSK	1	0	10 mm	left	1:1	0.352	1.009	0.355	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.00	1	07116	QPSK	50	25	10 mm	left	1:1	0.258	1.047	0.270	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram											



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 90 of 137	



**Table 11-37**  
**LTE Band 41 Hotspot SAR**



MEASUREMENT RESULTS																					
1 CC Uplink   2 CC Uplink	Component Carrier	FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (1g)	Scaling Factor	Reported SAR (1g)	Plot #	
		MHz	Ch.														(W/kg)		(W/kg)		
1 CC Uplink - Power Class 3	N/A	2506.00	39750	Low	LTE Band 41	20	25.2	24.43	0.02	0	07140	QPSK	1	50	10 mm	back	1:1.58	0.450	1.194	0.537	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.17	-0.01	0	07140	QPSK	1	0	10 mm	back	1:1.58	0.779	1.007	0.784	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	25.2	25.16	-0.13	0	07140	QPSK	1	99	10 mm	back	1:1.58	0.868	1.009	0.876	
1 CC Uplink - Power Class 3	N/A	2636.50	41055	Mid-High	LTE Band 41	20	25.2	25.12	0.04	0	07140	QPSK	1	0	10 mm	back	1:1.58	0.848	1.019	0.864	
1 CC Uplink - Power Class 3	N/A	2680.00	41490	High	LTE Band 41	20	25.2	25.14	0.00	0	07140	QPSK	1	50	10 mm	back	1:1.58	0.557	1.014	0.565	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.08	0.02	1	07140	QPSK	50	0	10 mm	back	1:1.58	0.580	1.028	0.596	
1 CC Uplink - Power Class 3	N/A	2593.00	40620	Mid	LTE Band 41	20	24.2	24.05	0.02	1	07140	QPSK	100	0	10 mm	back	1:1.58	0.758	1.035	0.785	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	27.7	27.21	-0.12	0	07140	QPSK	1	99	10 mm	back	1:2.31	0.951	1.119	1.064	A42
2 CC Uplink - Power Class 3	PCC	2593.00	40620	Mid	LTE Band 41	20	25.2	25.20	-0.20	0	07140	QPSK	1	99	10 mm	back	1:1.58	0.880	1.000	0.880	
	SCC	2612.80	40818	Mid								QPSK	1	0							
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.17	0.11	0	07140	QPSK	1	0	10 mm	front	1:1.58	0.149	1.007	0.150	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.08	0.10	1	07140	QPSK	50	0	10 mm	front	1:1.58	0.123	1.028	0.126	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.17	0.05	0	07140	QPSK	1	0	10 mm	bottom	1:1.58	0.427	1.007	0.430	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.08	0.00	1	07140	QPSK	50	0	10 mm	bottom	1:1.58	0.356	1.028	0.366	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.17	0.13	0	07140	QPSK	1	0	10 mm	right	1:1.58	0.033	1.007	0.033	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.08	-0.17	1	07140	QPSK	50	0	10 mm	right	1:1.58	0.028	1.028	0.029	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	25.2	25.17	0.17	0	07140	QPSK	1	0	10 mm	left	1:1.58	0.054	1.007	0.054	
1 CC Uplink - Power Class 3	N/A	2549.50	40185	Low-Mid	LTE Band 41	20	24.2	24.08	0.18	1	07140	QPSK	50	0	10 mm	left	1:1.58	0.047	1.028	0.048	
1 CC Uplink - Power Class 2	N/A	2593.00	40620	Mid	LTE Band 41	20	27.7	27.21	-0.03	0	07140	QPSK	1	99	10 mm	back	1:2.31	0.949	1.119	1.062	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak										Body											
Uncontrolled Exposure/General Population										1.6 W/kg (mW/g)											
										averaged over 1 gram											

Note: Blue entry represents variability measurement.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 91 of 137

**Table 11-38**  
**WLAN Hotspot SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	21.0	20.81	-0.01	10 mm	1	07116	1	back	99.5	0.502	0.298	1.045	1.005	0.313	
2412	1	802.11b	DSSS	22	21.0	20.81	0.18	10 mm	1	07116	1	front	99.5	0.200	0.163	1.045	1.005	0.171	
2412	1	802.11b	DSSS	22	21.0	20.81	-0.13	10 mm	1	07116	1	top	99.5	0.219	-	1.045	1.005	-	
2412	1	802.11b	DSSS	22	21.0	20.81	0.19	10 mm	1	07116	1	left	99.5	0.146	-	1.045	1.005	-	
2437	6	802.11b	DSSS	22	21.0	20.99	0.04	10 mm	2	07249	1	back	99.2	0.625	0.505	1.002	1.008	0.510	A43
2437	6	802.11b	DSSS	22	21.0	20.99	0.18	10 mm	2	07249	1	front	99.2	0.062	-	1.002	1.008	-	
2437	6	802.11b	DSSS	22	21.0	20.99	0.17	10 mm	2	07249	1	top	99.2	0.038	-	1.002	1.008	-	
2437	6	802.11b	DSSS	22	21.0	20.99	0.00	10 mm	2	07249	1	left	99.2	0.214	0.161	1.002	1.008	0.163	
5200	40	802.11a	OFDM	20	18.0	17.52	0.16	10 mm	1	07157	6	back	98.5	0.379	0.212	1.117	1.015	0.240	
5200	40	802.11a	OFDM	20	18.0	17.52	0.14	10 mm	1	07157	6	front	98.5	0.080	-	1.117	1.015	-	
5200	40	802.11a	OFDM	20	18.0	17.52	0.12	10 mm	1	07157	6	top	98.5	0.060	-	1.117	1.015	-	
5200	40	802.11a	OFDM	20	18.0	17.52	0.13	10 mm	1	07157	6	left	98.5	0.085	-	1.117	1.015	-	
5180	36	802.11a	OFDM	20	17.0	16.32	0.11	10 mm	2	07157	6	back	98.8	1.054	0.503	1.169	1.012	0.595	
5200	40	802.11a	OFDM	20	18.0	17.27	-0.18	10 mm	2	07157	6	back	98.8	1.368	0.655	1.183	1.012	0.784	
5240	48	802.11a	OFDM	20	17.0	16.50	0.05	10 mm	2	07157	6	back	98.8	1.401	0.621	1.122	1.012	0.705	
5200	40	802.11a	OFDM	20	18.0	17.27	-0.19	10 mm	2	07157	6	front	98.8	0.021	-	1.183	1.012	-	
5200	40	802.11a	OFDM	20	18.0	17.27	0.00	10 mm	2	07157	6	top	98.8	0.110	-	1.183	1.012	-	
5200	40	802.11a	OFDM	20	18.0	17.27	0.12	10 mm	2	07157	6	left	98.8	0.376	0.185	1.183	1.012	0.221	
5805	161	802.11a	OFDM	20	18.0	17.47	-0.13	10 mm	1	07157	6	back	98.5	0.555	0.289	1.130	1.015	0.331	
5805	161	802.11a	OFDM	20	18.0	17.47	0.18	10 mm	1	07157	6	front	98.5	0.105	-	1.130	1.015	-	
5805	161	802.11a	OFDM	20	18.0	17.47	0.21	10 mm	1	07157	6	top	98.5	0.223	-	1.130	1.015	-	
5805	161	802.11a	OFDM	20	18.0	17.47	0.15	10 mm	1	07157	6	left	98.5	0.152	-	1.130	1.015	-	
5785	157	802.11a	OFDM	20	18.0	17.50	0.06	10 mm	2	07157	6	back	98.8	1.468	0.681	1.122	1.012	0.773	
5785	157	802.11a	OFDM	20	18.0	17.50	0.00	10 mm	2	07157	6	front	98.8	0.026	-	1.122	1.012	-	
5785	157	802.11a	OFDM	20	18.0	17.50	0.10	10 mm	2	07157	6	top	98.8	0.094	-	1.122	1.012	-	
5785	157	802.11a	OFDM	20	18.0	17.50	0.10	10 mm	2	07157	6	left	98.8	0.430	0.178	1.122	1.012	0.202	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT								Body											
Spatial Peak								1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population								averaged over 1 gram											



FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 92 of 137

**Table 11-39**  
**WLAN MIMO Hotspot SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.															W/kg	(W/kg)			(W/kg)	
2437	6	802.11g	OFDM	20	20.5	20.04	20.5	19.85	0.00	10 mm	MIMO	07124	6	back	98.3	0.704	0.501	1.161	1.017	0.592	
2437	6	802.11g	OFDM	20	20.5	20.04	20.5	19.85	-0.04	10 mm	MIMO	07124	6	front	98.3	0.184	-	1.161	1.017	-	
2437	6	802.11g	OFDM	20	20.5	20.04	20.5	19.85	0.19	10 mm	MIMO	07124	6	top	98.3	0.361	0.240	1.161	1.017	0.283	
2437	6	802.11g	OFDM	20	20.5	20.04	20.5	19.85	0.00	10 mm	MIMO	07124	6	left	98.3	0.310	-	1.161	1.017	-	
5200	40	802.11n	OFDM	20	18.0	17.40	18.0	17.25	0.18	10 mm	MIMO	07157	13	back	98.6	1.659	0.732	1.189	1.014	0.883	
5240	48	802.11n	OFDM	20	17.0	16.38	17.0	16.50	0.07	10 mm	MIMO	07157	13	back	98.6	1.459	0.697	1.153	1.014	0.815	
5200	40	802.11n	OFDM	20	18.0	17.40	18.0	17.25	0.16	10 mm	MIMO	07157	13	front	98.6	0.083	0.034	1.189	1.014	0.041	
5200	40	802.11n	OFDM	20	18.0	17.40	18.0	17.25	0.19	10 mm	MIMO	07157	13	top	98.6	0.138	-	1.189	1.014	-	
5200	40	802.11n	OFDM	20	18.0	17.40	18.0	17.25	0.11	10 mm	MIMO	07157	13	left	98.6	0.401	0.199	1.189	1.014	0.240	
5745	149	802.11n	OFDM	20	17.0	16.43	17.0	16.14	0.08	10 mm	MIMO	07157	13	back	98.6	1.405	0.632	1.219	1.014	0.781	
5785	157	802.11n	OFDM	20	18.0	17.38	18.0	17.28	0.03	10 mm	MIMO	07157	13	back	98.6	1.799	0.786	1.180	1.014	0.940	
5805	161	802.11n	OFDM	20	18.0	17.57	18.0	17.02	-0.16	10 mm	MIMO	07157	13	back	98.6	2.209	0.827	1.253	1.014	1.051	A45
5785	157	802.11n	OFDM	20	18.0	17.38	18.0	17.28	0.19	10 mm	MIMO	07157	13	front	98.6	0.074	0.034	1.180	1.014	0.041	
5785	157	802.11n	OFDM	20	18.0	17.38	18.0	17.28	0.17	10 mm	MIMO	07157	13	top	98.6	0.230	-	1.180	1.014	-	
5785	157	802.11n	OFDM	20	18.0	17.38	18.0	17.28	0.19	10 mm	MIMO	07157	13	left	98.6	0.500	0.216	1.180	1.014	0.258	
5805	161	802.11n	OFDM	20	18.0	17.57	18.0	17.02	-0.04	10 mm	MIMO	07157	13	back	98.6	1.938	0.808	1.253	1.014	1.027	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT										Body											
Spatial Peak										1.6 W/kg (mW/g)											
Uncontrolled Exposure/General Population										averaged over 1 gram											

**Note:**

1. Blue entry represents variability measurement.
2. To achieve the 2.4 GHz WLAN 23.5 dBm (Ch. 6) maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 20.5 dBm (Ch.6).
3. To achieve the 5GHz WLAN 20.0 dBm (Ch. 48, 149) and 21 dBm (Ch. 40, 157, 161) maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17.0 dBm (Ch. 48, 149) and 18.0 dBm (Ch. 40, 157, 161).

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 93 of 137



**Table 11-40**  
**WLAN Hotspot SAR for Conditions with 2.4 GHz Ant 1 and 5 GHz WLAN Ant 2**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (1g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g)	Plot #
MHz	Ch.													W/kg	(W/kg)			(W/kg)	
2412	1	802.11b	DSSS	22	18.0	17.58	0.05	10 mm	1	07132	1	back	99.5	0.251	0.201	1.102	1.005	0.223	
2412	1	802.11b	DSSS	22	18.0	17.58	0.17	10 mm	1	07132	1	front	99.5	0.070	-	1.102	1.005	-	
2412	1	802.11b	DSSS	22	18.0	17.58	0.19	10 mm	1	07132	1	top	99.5	0.161	-	1.102	1.005	-	
2412	1	802.11b	DSSS	22	18.0	17.58	0.20	10 mm	1	07132	1	left	99.5	0.084	-	1.102	1.005	-	
5230	46	802.11n	OFDM	40	15.0	14.50	0.00	10 mm	2	07132	13.5	back	97.9	0.825	0.375	1.122	1.021	0.430	
5230	46	802.11n	OFDM	40	15.0	14.50	0.14	10 mm	2	07132	13.5	front	97.9	0.015	0.005	1.122	1.021	0.006	
5230	46	802.11n	OFDM	40	15.0	14.50	-0.13	10 mm	2	07132	13.5	top	97.9	0.054	-	1.122	1.021	-	
5230	46	802.11n	OFDM	40	15.0	14.50	0.19	10 mm	2	07132	13.5	left	97.9	0.218	0.093	1.122	1.021	0.107	
5755	151	802.11n	OFDM	40	15.0	14.51	-0.11	10 mm	2	07132	13.5	back	97.9	0.775	0.328	1.119	1.021	0.375	
5755	151	802.11n	OFDM	40	15.0	14.51	0.19	10 mm	2	07132	13.5	front	97.9	0.012	0.000	1.119	1.021	0.000	
5755	151	802.11n	OFDM	40	15.0	14.51	-0.13	10 mm	2	07132	13.5	top	97.9	0.042	-	1.119	1.021	-	
5755	151	802.11n	OFDM	40	15.0	14.51	0.20	10 mm	2	07132	13.5	left	97.9	0.176	-	1.119	1.021	-	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT																			
Spatial Peak								Body											
Uncontrolled Exposure/General Population								1.6 W/kg (mW/g)											
								averaged over 1 gram											

DTS and NII were additionally evaluated at the maximum allowed output power during operations with Simultaneous 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN. 2.4 GHz Ant 1 WIFI was not transmitting during the NII evaluations, and 5 GHz Ant 2 WIFI was not transmitting during the DTS evaluations.

**Table 11-41**  
**DSS Hotspot SAR**

MEASUREMENT RESULTS																
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	SAR (1g)	Scaling Factor (Cond Power)	Scaling Factor (Duty Cycle)	Reported SAR (1g) (W/kg)	Plot #
MHz	Ch.											(W/kg)				
2402	0	Bluetooth	FHSS	12.0	11.81	0.17	10 mm	07116	1	back	77.6	0.030	1.045	1.289	0.040	A46
2402	0	Bluetooth	FHSS	12.0	11.81	0.20	10 mm	07116	1	front	77.6	0.010	1.045	1.289	0.013	
2402	0	Bluetooth	FHSS	12.0	11.81	0.12	10 mm	07116	1	top	77.6	0.014	1.045	1.289	0.019	
2402	0	Bluetooth	FHSS	12.0	11.81	-0.03	10 mm	07116	1	left	77.6	0.012	1.045	1.289	0.016	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Body 1.6 W/kg (mW/g) averaged over 1 gram								



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 94 of 137

## 11.4 Standalone Phablet SAR Data

**Table 11-42**  
**UMTS/CDMA Phablet SAR Data**



MEASUREMENT RESULTS														
FREQUENCY		Mode	Service	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Device Serial Number	Duty Cycle	Side	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #
MHz	Ch.										(W/kg)		(W/kg)	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.04	5 mm	07165	1:1	back	0.627	1.016	0.637	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	-0.14	2 mm	07165	1:1	front	1.200	1.016	1.219	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.18	6 mm	07165	1:1	bottom	0.734	1.016	0.746	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.12	0 mm	07165	1:1	right	0.163	1.016	0.166	
1880.00	600	PCS CDMA	EVDO Rev. 0	25.2	25.13	0.15	0 mm	07165	1:1	left	0.916	1.016	0.931	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	24.14	0.17	0 mm	07165	1:1	back	1.680	1.014	1.704	
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	24.14	0.12	0 mm	07165	1:1	front	1.180	1.014	1.197	
1851.25	25	PCS CDMA	EVDO Rev. 0	24.2	24.20	-0.01	0 mm	07165	1:1	bottom	2.280	1.000	2.280	A47
1880.00	600	PCS CDMA	EVDO Rev. 0	24.2	24.14	-0.02	0 mm	07165	1:1	bottom	1.940	1.014	1.967	
1908.75	1175	PCS CDMA	EVDO Rev. 0	24.2	24.13	-0.08	0 mm	07165	1:1	bottom	1.990	1.016	2.022	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	0.05	5 mm	07140	1:1	back	0.933	1.052	0.982	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	-0.18	2 mm	07140	1:1	front	1.550	1.052	1.631	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	-0.02	6 mm	07140	1:1	bottom	1.010	1.052	1.063	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	-0.02	0 mm	07140	1:1	right	0.062	1.052	0.065	
1732.40	1412	UMTS 1750	RMC	25.2	24.98	-0.17	0 mm	07140	1:1	left	1.160	1.052	1.220	
1712.40	1312	UMTS 1750	RMC	24.2	24.18	-0.02	0 mm	07124	1:1	back	2.060	1.005	2.070	
1732.40	1412	UMTS 1750	RMC	24.2	24.17	-0.02	0 mm	07124	1:1	back	2.080	1.007	2.095	
1752.60	1513	UMTS 1750	RMC	24.2	24.13	-0.03	0 mm	07124	1:1	back	2.040	1.016	2.073	
1712.40	1312	UMTS 1750	RMC	24.2	24.18	0.07	0 mm	07124	1:1	front	2.010	1.005	2.020	
1732.40	1412	UMTS 1750	RMC	24.2	24.17	0.05	0 mm	07124	1:1	front	2.050	1.007	2.064	
1752.60	1513	UMTS 1750	RMC	24.2	24.13	0.05	0 mm	07124	1:1	front	2.030	1.016	2.062	
1712.40	1312	UMTS 1750	RMC	24.2	24.18	0.00	0 mm	07124	1:1	bottom	2.770	1.005	2.784	
1732.40	1412	UMTS 1750	RMC	24.2	24.17	0.00	0 mm	07124	1:1	bottom	2.940	1.007	2.961	
1752.60	1513	UMTS 1750	RMC	24.2	24.13	-0.02	0 mm	07124	1:1	bottom	3.110	1.016	3.160	A48
1752.60	1513	UMTS 1750	RMC	24.2	24.13	-0.02	0 mm	07124	1:1	bottom	2.960	1.016	3.007	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	0.09	5 mm	07116	1:1	back	0.648	1.069	0.693	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.17	2 mm	07116	1:1	front	1.070	1.069	1.144	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.07	6 mm	07116	1:1	bottom	0.996	1.069	1.065	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.05	0 mm	07116	1:1	right	0.164	1.069	0.175	
1880.00	9400	UMTS 1900	RMC	25.5	25.21	-0.07	0 mm	07116	1:1	left	1.030	1.069	1.101	
1880.00	9400	UMTS 1900	RMC	24.5	24.46	0.17	0 mm	07116	1:1	back	1.750	1.009	1.766	
1880.00	9400	UMTS 1900	RMC	24.5	24.46	0.10	0 mm	07116	1:1	front	1.290	1.009	1.302	
1852.40	9262	UMTS 1900	RMC	24.5	24.46	0.01	0 mm	07116	1:1	bottom	2.780	1.009	2.805	A49
1880.00	9400	UMTS 1900	RMC	24.5	24.46	-0.06	0 mm	07116	1:1	bottom	2.740	1.009	2.765	
1907.60	9538	UMTS 1900	RMC	24.5	24.35	0.10	0 mm	07116	1:1	bottom	2.700	1.035	2.795	
1852.40	9262	UMTS 1900	RMC	24.5	24.46	-0.01	0 mm	07116	1:1	bottom	2.760	1.009	2.785	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population							Phablet 4.0 W/kg (mW/g) averaged over 10 grams							

Note: Blue entry represents variability measurement.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 95 of 137

**Table 11-43**  
**LTE Phablet SAR**

MEASUREMENT RESULTS																			
FREQUENCY		Mode	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	MPR [dB]	Device Serial Number	Modulation	RB Size	RB Offset	Spacing	Side	Duty Cycle	SAR (10g)	Scaling Factor	Reported SAR (10g)	Plot #	
MHz	Ch.														(W/kg)		(W/kg)		
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.14	0	07140	QPSK	1	0	5 mm	back	1:1	0.865	1.000	0.865	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.00	1	07140	QPSK	50	50	5 mm	back	1:1	0.706	1.002	0.707	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	0.00	0	07140	QPSK	1	0	2 mm	front	1:1	1.340	1.000	1.340	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	-0.15	1	07140	QPSK	50	50	2 mm	front	1:1	0.902	1.002	0.904	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.05	0	07140	QPSK	1	0	6 mm	bottom	1:1	0.929	1.000	0.929	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	0.00	1	07140	QPSK	50	50	6 mm	bottom	1:1	0.715	1.002	0.716	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.12	0	07140	QPSK	1	0	0 mm	right	1:1	0.060	1.000	0.060	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	-0.09	1	07140	QPSK	50	50	0 mm	right	1:1	0.045	1.002	0.045	
1720.00	132072	Low	LTE Band 66 (AWS)	20	25.2	25.20	-0.09	0	07140	QPSK	1	0	0 mm	left	1:1	1.090	1.000	1.090	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.19	-0.16	1	07140	QPSK	50	50	0 mm	left	1:1	0.880	1.002	0.882	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.20	-0.15	0	07140	QPSK	1	99	0 mm	back	1:1	2.110	1.000	2.110	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	24.18	-0.03	0	07140	QPSK	1	99	0 mm	back	1:1	2.000	1.005	2.010	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.2	24.18	0.17	0	07140	QPSK	1	50	0 mm	back	1:1	1.950	1.005	1.960	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	23.91	-0.01	0	07140	QPSK	50	0	0 mm	back	1:1	2.060	1.069	2.202	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	23.82	0.00	0	07140	QPSK	50	50	0 mm	back	1:1	2.020	1.091	2.204	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.2	23.85	0.00	0	07140	QPSK	50	50	0 mm	back	1:1	1.930	1.084	2.092	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	23.82	-0.02	0	07140	QPSK	100	0	0 mm	back	1:1	2.060	1.091	2.247	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.20	-0.19	0	07140	QPSK	1	99	0 mm	front	1:1	2.020	1.000	2.020	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	24.18	-0.16	0	07140	QPSK	1	99	0 mm	front	1:1	1.950	1.005	1.960	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.2	24.18	-0.14	0	07140	QPSK	1	50	0 mm	front	1:1	1.840	1.005	1.849	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	23.91	-0.15	0	07140	QPSK	50	0	0 mm	front	1:1	1.970	1.069	2.106	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	23.82	-0.20	0	07140	QPSK	50	50	0 mm	front	1:1	1.920	1.091	2.095	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.2	23.85	-0.21	0	07140	QPSK	50	50	0 mm	front	1:1	1.830	1.084	1.984	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	23.82	-0.05	0	07140	QPSK	100	0	0 mm	front	1:1	2.050	1.091	2.237	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	24.20	0.12	0	07140	QPSK	1	99	0 mm	bottom	1:1	2.770	1.000	2.770	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	24.18	-0.06	0	07140	QPSK	1	99	0 mm	bottom	1:1	2.900	1.005	2.915	A50
1770.00	132572	High	LTE Band 66 (AWS)	20	24.2	24.18	0.08	0	07140	QPSK	1	50	0 mm	bottom	1:1	2.900	1.005	2.915	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	23.91	0.05	0	07140	QPSK	50	0	0 mm	bottom	1:1	2.750	1.069	2.940	
1745.00	132322	Mid	LTE Band 66 (AWS)	20	24.2	23.82	0.01	0	07140	QPSK	50	50	0 mm	bottom	1:1	2.850	1.091	3.109	
1770.00	132572	High	LTE Band 66 (AWS)	20	24.2	23.85	0.11	0	07140	QPSK	50	50	0 mm	bottom	1:1	2.870	1.084	3.111	
1720.00	132072	Low	LTE Band 66 (AWS)	20	24.2	23.82	0.06	0	07140	QPSK	100	0	0 mm	bottom	1:1	2.870	1.091	3.131	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.06	0	07157	QPSK	1	0	5 mm	back	1:1	0.725	1.009	0.732	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.12	1	07157	QPSK	50	25	5 mm	back	1:1	0.549	1.047	0.575	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.04	0	07157	QPSK	1	0	2 mm	front	1:1	1.250	1.009	1.261	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	-0.02	1	07157	QPSK	50	25	2 mm	front	1:1	0.813	1.047	0.851	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.05	0	07157	QPSK	1	0	6 mm	bottom	1:1	0.810	1.009	0.817	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.00	1	07157	QPSK	50	25	6 mm	bottom	1:1	0.619	1.047	0.648	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	0.05	0	07157	QPSK	1	0	0 mm	right	1:1	0.178	1.009	0.180	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	0.02	1	07157	QPSK	50	25	0 mm	right	1:1	0.133	1.047	0.139	
1905.00	26590	High	LTE Band 25 (PCS)	20	25.5	25.46	-0.07	0	07157	QPSK	1	0	0 mm	left	1:1	1.090	1.009	1.100	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.30	-0.07	1	07157	QPSK	50	25	0 mm	left	1:1	0.840	1.047	0.879	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.48	-0.16	0	07157	QPSK	1	99	0 mm	back	1:1	1.340	1.005	1.347	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.24	0.00	0	07157	QPSK	50	0	0 mm	back	1:1	1.490	1.062	1.582	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.48	-0.01	0	07157	QPSK	1	99	0 mm	front	1:1	1.630	1.005	1.638	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.24	0.12	0	07157	QPSK	50	0	0 mm	front	1:1	1.810	1.062	1.922	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.48	-0.06	0	07157	QPSK	1	99	0 mm	bottom	1:1	2.270	1.005	2.281	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.46	-0.05	0	07157	QPSK	1	99	0 mm	bottom	1:1	2.180	1.009	2.200	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.45	-0.07	0	07157	QPSK	1	50	0 mm	bottom	1:1	2.310	1.012	2.338	
1860.00	26140	Low	LTE Band 25 (PCS)	20	24.5	24.24	-0.06	0	07157	QPSK	50	0	0 mm	bottom	1:1	2.570	1.062	2.729	A51
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.22	-0.05	0	07157	QPSK	50	0	0 mm	bottom	1:1	2.450	1.067	2.614	
1905.00	26590	High	LTE Band 25 (PCS)	20	24.5	24.16	-0.05	0	07157	QPSK	50	0	0 mm	bottom	1:1	2.500	1.081	2.703	
1882.50	26365	Mid	LTE Band 25 (PCS)	20	24.5	24.09	-0.04	0	07157	QPSK	100	0	0 mm	bottom	1:1	2.400	1.099	2.638	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Phablet												
Spatial Peak							4.0 W/kg (mW/g)												
Uncontrolled Exposure/General Population							averaged over 10 grams												

FCC ID ZNFG710VM		<b>SAR EVALUATION REPORT</b>		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 96 of 137

**Table 11-44**  
**WLAN Phablet SAR**



MEASUREMENT RESULTS																			
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power [dBm]	Conducted Power [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.													W/kg	(W/kg)		(W/kg)		
5280	56	802.11a	OFDM	20	18.0	17.56	-0.15	0 mm	1	07157	6	back	98.5	5.732	0.750	1.107	1.015	0.843	
5280	56	802.11a	OFDM	20	18.0	17.56	-0.10	0 mm	1	07157	6	front	98.5	2.647	-	1.107	1.015	-	
5280	56	802.11a	OFDM	20	18.0	17.56	0.13	0 mm	1	07157	6	top	98.5	0.764	-	1.107	1.015	-	
5280	56	802.11a	OFDM	20	18.0	17.56	0.09	0 mm	1	07157	6	left	98.5	0.504	-	1.107	1.015	-	
5260	52	802.11a	OFDM	20	17.0	16.51	-0.03	0 mm	2	07157	6	back	98.8	18.072	1.700	1.119	1.012	1.925	
5280	56	802.11a	OFDM	20	18.0	17.50	-0.18	0 mm	2	07157	6	back	98.8	22.253	2.130	1.122	1.012	2.419	
5320	64	802.11a	OFDM	20	17.0	16.41	-0.11	0 mm	2	07157	6	back	98.8	15.632	1.690	1.146	1.012	1.960	
5280	56	802.11a	OFDM	20	18.0	17.50	0.16	0 mm	2	07157	6	front	98.8	0.363	0.046	1.122	1.012	0.052	
5280	56	802.11a	OFDM	20	18.0	17.50	0.18	0 mm	2	07157	6	top	98.8	0.276	-	1.122	1.012	-	
5280	56	802.11a	OFDM	20	18.0	17.50	0.19	0 mm	2	07157	6	left	98.8	4.613	0.456	1.122	1.012	0.518	
5600	120	802.11a	OFDM	20	17.0	16.56	0.16	0 mm	1	07157	6	back	98.5	3.699	0.645	1.107	1.015	0.725	
5600	120	802.11a	OFDM	20	17.0	16.56	0.19	0 mm	1	07157	6	front	98.5	1.733	-	1.107	1.015	-	
5600	120	802.11a	OFDM	20	17.0	16.56	0.18	0 mm	1	07157	6	top	98.5	0.702	-	1.107	1.015	-	
5600	120	802.11a	OFDM	20	17.0	16.56	0.19	0 mm	1	07157	6	left	98.5	0.986	-	1.107	1.015	-	
5620	124	802.11a	OFDM	20	17.0	16.68	-0.21	0 mm	2	07157	6	back	98.8	17.343	1.360	1.076	1.012	1.481	
5620	124	802.11a	OFDM	20	17.0	16.68	0.17	0 mm	2	07157	6	front	98.8	0.277	0.027	1.076	1.012	0.029	
5620	124	802.11a	OFDM	20	17.0	16.68	0.12	0 mm	2	07157	6	top	98.8	0.220	-	1.076	1.012	-	
5620	124	802.11a	OFDM	20	17.0	16.68	0.19	0 mm	2	07157	6	left	98.8	2.670	0.286	1.076	1.012	0.311	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population								Phablet 4.0 W/kg (mW/g) averaged over 10 grams											

**Table 11-45**  
**WLAN MIMO Phablet SAR**

MEASUREMENT RESULTS																					
FREQUENCY		Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift [dB]	Spacing	Antenna Config.	Device Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Peak SAR of Area Scan	SAR (10g)	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Reported SAR (10g)	Plot #
MHz	Ch.															W/kg	(W/kg)		(W/kg)		
5260	52	802.11n	OFDM	20	17.0	16.31	17.0	16.56	-0.04	0 mm	MIMO	07157	13	back	98.6	23.491	1.960	1.172	1.014	2.329	A52
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	0.19	0 mm	MIMO	07157	13	back	98.6	40.697	2.520	1.164	1.014	2.974	
5320	64	802.11n	OFDM	20	17.0	16.57	17.0	16.33	0.15	0 mm	MIMO	07157	13	back	98.6	22.017	1.770	1.167	1.014	2.095	
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	0.00	0 mm	MIMO	07157	13	front	98.6	3.009	0.313	1.164	1.014	0.369	
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	0.11	0 mm	MIMO	07157	13	top	98.6	0.603	-	1.164	1.014	-	
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	0.16	0 mm	MIMO	07157	13	left	98.6	4.509	0.403	1.164	1.014	0.476	
5600	120	802.11n	OFDM	20	17.0	16.46	17.0	16.20	0.03	0 mm	MIMO	07157	13	back	98.6	20.748	1.830	1.202	1.014	2.230	
5620	124	802.11n	OFDM	20	17.0	16.30	17.0	16.51	-0.02	0 mm	MIMO	07157	13	back	98.6	22.070	1.780	1.175	1.014	2.121	
5620	124	802.11n	OFDM	20	17.0	16.30	17.0	16.51	0.17	0 mm	MIMO	07157	13	front	98.6	2.030	0.183	1.175	1.014	0.218	
5620	124	802.11n	OFDM	20	17.0	16.30	17.0	16.51	0.13	0 mm	MIMO	07157	13	top	98.6	0.728	-	1.175	1.014	-	
5620	124	802.11n	OFDM	20	17.0	16.30	17.0	16.51	0.19	0 mm	MIMO	07157	13	left	98.6	2.960	0.335	1.175	1.014	0.399	
5280	56	802.11n	OFDM	20	18.0	17.34	18.0	17.51	0.10	0 mm	MIMO	07157	13	back	98.6	39.514	2.520	1.164	1.014	2.974	
ANSI / IEEE C95.1 1992 - SAFETY LIMIT											Phablet										
Spatial Peak											4.0 W/kg (mW/g)										
Uncontrolled Exposure/General Population											averaged over 10 grams										

Note:

1. Blue entry represents variability measurement.
2. To achieve the 5GHz WLAN 20.0 dBm (Ch. 52, 64, 120,124) and 21 dBm (Ch. 56) maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17.0 dBm (Ch. 52, 64, 120,124) and 18.0 dBm (Ch. 56).

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 97 of 137	

## 11.5 SAR Test Notes

### General Notes:



1. The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Publication 616217 D04v01r02, and FCC KDB Publication 447498 D01v06.
2. Batteries are fully charged at the beginning of the SAR measurements.
3. Liquid tissue depth was at least 15.0 cm for all frequencies.
4. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
5. SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D01v06.
6. Device was tested using a fixed spacing for body-worn accessory testing. A separation distance of 10 mm was considered because the manufacturer has determined that there will be body-worn accessories available in the marketplace for users to support this separation distance.
7. Per FCC KDB Publication 648474 D04v01r03, body-worn SAR was evaluated without a headset connected to the device. Since the standalone reported body-worn SAR was  $\leq 1.2$  W/kg, no additional body-worn SAR evaluations using a headset cable were required.
8. Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 13 for variability analysis.
9. During SAR Testing for the Wireless Router conditions per FCC KDB Publication 941225 D06v02r01, the actual Portable Hotspot operation (with actual simultaneous transmission of a transmitter with WIFI) was not activated (See Section 6.7 for more details).
10. Per FCC KDB Publication 648474 D04v01r03, this device is considered a "phablet" since the diagonal dimension is  $> 160$  mm and  $< 200$  mm. Therefore, phablet SAR tests are required when wireless router mode does not apply or if wireless router 1g SAR  $> 1.2$  W/kg.
11. This device utilizes power reduction for some wireless modes and technologies, as outlined in Section 1.3. The maximum output power allowed for each transmitter and exposure condition was evaluated for SAR compliance based on expected use conditions and simultaneous transmission scenarios.
12. Unless otherwise noted, when 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds below.
13. Additional SAR tests for phablet SAR were evaluated per KDB 616217 Section 6 (See Section 6.9 for more information).

### GSM Test Notes:

1. Body-Worn accessory testing is typically associated with voice operations. Therefore, GSM voice was evaluated for body-worn SAR.
2. Justification for reduced test configurations per KDB Publication 941225 D01v03r01 and October 2013 TCB Workshop Notes: The source-based frame-averaged output power was evaluated for all GPRS/EDGE slot configurations. The configuration with the highest target frame averaged output power was evaluated for hotspot SAR. When the maximum frame-averaged powers are equivalent across two or more slots (within 0.25 dB), the configuration with the most number of time slots was tested.
3. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
4. GPRS was additionally evaluated for head and body-worn exposure conditions to address possible VoIP scenarios.

### CDMA Notes:

1. Head SAR for CDMA2000 mode was tested under RC3/SO55 per FCC KDB Publication 941225 D01v03r01.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 98 of 137





2. Body-Worn SAR was tested with 1x RTT with TDSO / SO32 FCH Only. EVDO Rev0 and RevA and TDSO / SO32 FCH+SCH SAR tests were not required per the 3G SAR Test Reduction Procedure in FCC KDB Publication 941225 D01v03r01.
3. CDMA Wireless Router SAR is measured using Subtype 0/1 Physical Layer configurations for Rev. 0 according to KDB 941225 D01v03r01 procedures for data devices. Wireless Router SAR tests for Subtype 2 of Rev.A and 1x RTT configurations were not required per the 3G SAR Test Reduction Policy in KDB Publication 941225 D01v03r01.
4. Head SAR was additionally evaluated using EVDO Rev. A to determine compliance for VoIP operations.
5. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.
6. CDMA 1X Advanced technology was not required for SAR since the maximum allowed output powers for 1X Advanced was not more than 0.25 dB higher than the maximum powers for 1X.

#### UMTS Notes:

1. UMTS mode in was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D01v06, if the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is  $\leq 0.8$  W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s). When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel was used.

#### LTE Notes:

1. LTE Considerations: LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 8.6.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D01v06, when the reported LTE Band 41 SAR measured at the highest output power channel in a given a test configuration was  $> 0.6$  W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not  $> 0.25$  dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 14 for linearity results.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 99 of 137



- For LTE Band 41 and LTE Band 5, per Fall TCB Workshop Notes, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

#### WLAN Notes:

- For held-to-ear, hotspot, and phablet operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg for 1g evaluations, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
- Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 8.7.5 for more information.
- Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI single transmission chain operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 8.7.6 for more information.
- Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01v06 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see Section 12 for complete analysis.
- When the maximum reported 1g averaged SAR is  $\leq 0.8$  W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was  $\leq 1.20$  W/kg for 1g evaluations or all test channels were measured.
- The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
- When 10-g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

#### Bluetooth Notes

- Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 100% transmission duty factor to determine compliance. See Section 9.6 for the time domain plot and calculation for the duty factor of the device.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 100 of 137	

## 12 FCC MULTI-TX AND ANTENNA SAR CONSIDERATIONS

### 12.1 Introduction

The following procedures adopted from FCC KDB Publication 447498 D01v06 are applicable to devices with built-in unlicensed transmitters such as 802.11 and Bluetooth devices which may simultaneously transmit with the licensed transmitter.



### 12.2 Simultaneous Transmission Procedures

This device contains transmitters that may operate simultaneously. Therefore, simultaneous transmission analysis is required. Per FCC KDB Publication 447498 D01v06 4.3.2 and IEEE 1528-2013 Section 6.3.4.1.2, simultaneous transmission SAR test exclusion may be applied when the sum of the 1g SAR for all the simultaneous transmitting antennas in a specific physical test configuration is  $\leq 1.6$  W/kg. The different test positions in an exposure condition may be considered collectively to determine SAR test exclusion according to the sum of 1g or 10g SAR.

### 12.3 Head SAR Simultaneous Transmission Analysis



**Table 12-1**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.157	0.195	0.061	0.352	0.218	0.413
	CDMA/EVDO BC0 (§22H)	0.206	0.195	0.061	0.401	0.267	0.462
	PCS CDMA/EVDO	0.204	0.195	0.061	0.399	0.265	0.460
	GSM/GPRS 850	0.145	0.195	0.061	0.340	0.206	0.401
	GSM/GPRS 1900	0.085	0.195	0.061	0.280	0.146	0.341
	UMTS 850	0.183	0.195	0.061	0.378	0.244	0.439
	UMTS 1750	0.217	0.195	0.061	0.412	0.278	0.473
	UMTS 1900	0.221	0.195	0.061	0.416	0.282	<b>0.477</b>
	LTE Band 12	0.087	0.195	0.061	0.282	0.148	0.343
	LTE Band 13	0.177	0.195	0.061	0.372	0.238	0.433
	LTE Band 26 (Cell)	0.119	0.195	0.061	0.314	0.180	0.375
	LTE Band 66 (AWS)	0.197	0.195	0.061	0.392	0.258	0.453
	LTE Band 25 (PCS)	0.208	0.195	0.061	0.403	0.269	0.464
	LTE Band 5 (Cell)	0.175	0.195	0.061	0.370	0.236	0.431
	LTE Band 41	0.038	0.195	0.061	0.233	0.099	0.294

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 101 of 137



**Table 12-2**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)		
		1	2	3	1+2	1+3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.157	0.598	0.086	0.755	0.243	0.841
	CDMA/EVDO BC0 (§22H)	0.206	0.598	0.086	0.804	0.292	0.890
	PCS CDMA/EVDO	0.204	0.598	0.086	0.802	0.290	0.888
	GSM/GPRS 850	0.145	0.598	0.086	0.743	0.231	0.829
	GSM/GPRS 1900	0.085	0.598	0.086	0.683	0.171	0.769
	UMTS 850	0.183	0.598	0.086	0.781	0.269	0.867
	UMTS 1750	0.217	0.598	0.086	0.815	0.303	0.901
	UMTS 1900	0.221	0.598	0.086	0.819	0.307	<b>0.905</b>
	LTE Band 12	0.087	0.598	0.086	0.685	0.173	0.771
	LTE Band 13	0.177	0.598	0.086	0.775	0.263	0.861
	LTE Band 26 (Cell)	0.119	0.598	0.086	0.717	0.205	0.803
	LTE Band 66 (AWS)	0.197	0.598	0.086	0.795	0.283	0.881
	LTE Band 25 (PCS)	0.208	0.598	0.086	0.806	0.294	0.892
	LTE Band 5 (Cell)	0.175	0.598	0.086	0.773	0.261	0.859
	LTE Band 41	0.038	0.598	0.086	0.636	0.124	0.722

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 102 of 137



**Table 12-3**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	3	1+2+3
Head SAR	CDMA/EVDO BC10 (§90S)	0.157	0.195	0.086	0.438
	CDMA/EVDO BC0 (§22H)	0.206	0.195	0.086	0.487
	PCS CDMA/EVDO	0.204	0.195	0.086	0.485
	GSM/GPRS 850	0.145	0.195	0.086	0.426
	GSM/GPRS 1900	0.085	0.195	0.086	0.366
	UMTS 850	0.183	0.195	0.086	0.464
	UMTS 1750	0.217	0.195	0.086	0.498
	UMTS 1900	0.221	0.195	0.086	<b>0.502</b>
	LTE Band 12	0.087	0.195	0.086	0.368
	LTE Band 13	0.177	0.195	0.086	0.458
	LTE Band 26 (Cell)	0.119	0.195	0.086	0.400
	LTE Band 66 (AWS)	0.197	0.195	0.086	0.478
	LTE Band 25 (PCS)	0.208	0.195	0.086	0.489
	LTE Band 5 (Cell)	0.175	0.195	0.086	0.456
	LTE Band 41	0.038	0.195	0.086	0.319

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 103 of 137

**Table 12-4**  
**Simultaneous Transmission Scenario with Bluetooth (Held to Ear)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Head SAR	CDMA/EVDO BC10 (§90S)	0.157	0.073	0.230
	CDMA/EVDO BC0 (§22H)	0.206	0.073	0.279
	PCS CDMA/EVDO	0.204	0.073	0.277
	GSM/GPRS 850	0.145	0.073	0.218
	GSM/GPRS 1900	0.085	0.073	0.158
	UMTS 850	0.183	0.073	0.256
	UMTS 1750	0.217	0.073	0.290
	UMTS 1900	0.221	0.073	<b>0.294</b>
	LTE Band 12	0.087	0.073	0.160
	LTE Band 13	0.177	0.073	0.250
	LTE Band 26 (Cell)	0.119	0.073	0.192
	LTE Band 66 (AWS)	0.197	0.073	0.270
	LTE Band 25 (PCS)	0.208	0.073	0.281
	LTE Band 5 (Cell)	0.175	0.073	0.248
	LTE Band 41	0.038	0.073	0.111



FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 104 of 137

## 12.4 Body-Worn Simultaneous Transmission Analysis

**Table 12-5**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	$\Sigma$ SAR (W/kg)	
		1	2	3	1+2	1+3
Body-Worn	CDMA BC10 (§90S)	0.353	0.313	0.510	0.666	0.863
	CDMA BC0 (§22H)	0.430	0.313	0.510	0.743	0.940
	PCS CDMA	0.554	0.313	0.510	0.867	1.064
	GSM/GPRS 850	0.358	0.313	0.510	0.671	0.868
	GSM/GPRS 1900	0.205	0.313	0.510	0.518	0.715
	UMTS 850	0.468	0.313	0.510	0.781	0.978
	UMTS 1750	0.643	0.313	0.510	0.956	1.153
	UMTS 1900	0.690	0.313	0.510	1.003	1.200
	LTE Band 12	0.208	0.313	0.510	0.521	0.718
	LTE Band 13	0.378	0.313	0.510	0.691	0.888
	LTE Band 26 (Cell)	0.272	0.313	0.510	0.585	0.782
	LTE Band 66 (AWS)	0.709	0.313	0.510	1.022	1.219
	LTE Band 25 (PCS)	0.526	0.313	0.510	0.839	1.036
	LTE Band 5 (Cell)	0.451	0.313	0.510	0.764	0.961
	LTE Band 41	1.064	0.313	0.510	1.377	<b>1.574</b>

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	CDMA BC10 (§90S)	0.353	0.592	0.945	N/A
	CDMA BC0 (§22H)	0.430	0.592	1.022	N/A
	PCS CDMA	0.554	0.592	1.146	N/A
	GSM/GPRS 850	0.358	0.592	0.950	N/A
	GSM/GPRS 1900	0.205	0.592	0.797	N/A
	UMTS 850	0.468	0.592	1.060	N/A
	UMTS 1750	0.643	0.592	1.235	N/A
	UMTS 1900	0.690	0.592	1.282	N/A
	LTE Band 12	0.208	0.592	0.800	N/A
	LTE Band 13	0.378	0.592	0.970	N/A
	LTE Band 26 (Cell)	0.272	0.592	0.864	N/A
	LTE Band 66 (AWS)	0.709	0.592	<b>1.301</b>	N/A
	LTE Band 25 (PCS)	0.526	0.592	1.118	N/A
	LTE Band 5 (Cell)	0.451	0.592	1.043	N/A
	LTE Band 41	1.064	0.592	See Note 1	0.02



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset
Page 105 of 137		



**Table 12-6**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.353	0.331	0.684
	CDMA BC0 (§22H)	0.430	0.331	0.761
	PCS CDMA	0.554	0.331	0.885
	GSM/GPRS 850	0.358	0.331	0.689
	GSM/GPRS 1900	0.205	0.331	0.536
	UMTS 850	0.468	0.331	0.799
	UMTS 1750	0.643	0.331	0.974
	UMTS 1900	0.690	0.331	1.021
	LTE Band 12	0.208	0.331	0.539
	LTE Band 13	0.378	0.331	0.709
	LTE Band 26 (Cell)	0.272	0.331	0.603
	LTE Band 66 (AWS)	0.709	0.331	1.040
	LTE Band 25 (PCS)	0.526	0.331	0.857
	LTE Band 5 (Cell)	0.451	0.331	0.782
	LTE Band 41	1.064	0.331	<b>1.395</b>

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	CDMA BC10 (§90S)	0.353	0.991	1.344	N/A
	CDMA BC0 (§22H)	0.430	0.991	1.421	N/A
	PCS CDMA	0.554	0.991	<b>1.545</b>	N/A
	GSM/GPRS 850	0.358	0.991	1.349	N/A
	GSM/GPRS 1900	0.205	0.991	1.196	N/A
	UMTS 850	0.468	0.991	1.459	N/A
	UMTS 1750	0.643	0.991	See Note 1	0.02
	UMTS 1900	0.690	0.991	See Note 1	0.02
	LTE Band 12	0.208	0.991	1.199	N/A
	LTE Band 13	0.378	0.991	1.369	N/A
	LTE Band 26 (Cell)	0.272	0.991	1.263	N/A
	LTE Band 66 (AWS)	0.709	0.991	See Note 1	0.02
	LTE Band 25 (PCS)	0.526	0.991	1.517	N/A
	LTE Band 5 (Cell)	0.451	0.991	1.442	N/A
	LTE Band 41	1.064	0.991	See Note 1	0.03

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 106 of 137



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Body-Worn	CDMA BC10 (§90S)	0.353	1.067	1.420	N/A
	CDMA BC0 (§22H)	0.430	1.067	1.497	N/A
	PCS CDMA	0.554	1.067	See Note 1	0.02
	GSM/GPRS 850	0.358	1.067	1.425	N/A
	GSM/GPRS 1900	0.205	1.067	1.272	N/A
	UMTS 850	0.468	1.067	1.535	N/A
	UMTS 1750	0.643	1.067	See Note 1	0.02
	UMTS 1900	0.690	1.067	See Note 1	0.02
	LTE Band 12	0.208	1.067	1.275	N/A
	LTE Band 13	0.378	1.067	1.445	N/A
	LTE Band 26 (Cell)	0.272	1.067	1.339	N/A
	LTE Band 66 (AWS)	0.709	1.067	See Note 1	0.02
	LTE Band 25 (PCS)	0.526	1.067	<b>1.593</b>	N/A
	LTE Band 5 (Cell)	0.451	1.067	1.518	N/A
	LTE Band 41	1.064	1.067	See Note 1	0.03





FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 107 of 137

Table 12-7

## Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Body-Worn at 1.0 cm)

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	3	1+2+3
Body-Worn	CDMA BC10 (§90S)	0.353	0.223	0.483	1.059
	CDMA BC0 (§22H)	0.430	0.223	0.483	1.136
	PCS CDMA	0.554	0.223	0.483	1.260
	GSM/GPRS 850	0.358	0.223	0.483	1.064
	GSM/GPRS 1900	0.205	0.223	0.483	0.911
	UMTS 850	0.468	0.223	0.483	1.174
	UMTS 1750	0.643	0.223	0.483	1.349
	UMTS 1900	0.690	0.223	0.483	1.396
	LTE Band 12	0.208	0.223	0.483	0.914
	LTE Band 13	0.378	0.223	0.483	1.084
	LTE Band 26 (Cell)	0.272	0.223	0.483	0.978
	LTE Band 66 (AWS)	0.709	0.223	0.483	<b>1.415</b>
	LTE Band 25 (PCS)	0.526	0.223	0.483	1.232
	LTE Band 5 (Cell)	0.451	0.223	0.483	1.157
	LTE Band 41	1.064	0.223	0.483	See Table Below



Configuration	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR		
		1	2	3	1+2+3	1+2	1+3	2+3
Back Side	LTE Band 41	1.064	0.223	0.483	See Note 1	0.01	0.02	0.03

FCC ID ZNFG710VM	 SAR EVALUATION REPORT 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 108 of 137

**Table 12-8**  
**Simultaneous Transmission Scenario with Bluetooth (Body-Worn at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Body-Worn	CDMA BC10 (§90S)	0.353	0.040	0.393
	CDMA BC0 (§22H)	0.430	0.040	0.470
	PCS CDMA	0.554	0.040	0.594
	GSM/GPRS 850	0.358	0.040	0.398
	GSM/GPRS 1900	0.205	0.040	0.245
	UMTS 850	0.468	0.040	0.508
	UMTS 1750	0.643	0.040	0.683
	UMTS 1900	0.690	0.040	0.730
	LTE Band 12	0.208	0.040	0.248
	LTE Band 13	0.378	0.040	0.418
	LTE Band 26 (Cell)	0.272	0.040	0.312
	LTE Band 66 (AWS)	0.709	0.040	0.749
	LTE Band 25 (PCS)	0.526	0.040	0.566
	LTE Band 5 (Cell)	0.451	0.040	0.491
	LTE Band 41	1.064	0.040	<b>1.104</b>

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 109 of 137



## 12.5 Hotspot SAR Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.



**Table 12-9**  
**Simultaneous Transmission Scenario with 2.4 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	0.313	0.644
	EVDO BC0 (§22H)	0.389	0.313	0.702
	PCS EVDO	0.841	0.313	1.154
	GPRS 850	0.358	0.313	0.671
	GPRS 1900	0.342	0.313	0.655
	UMTS 850	0.468	0.313	0.781
	UMTS 1750	0.937	0.313	1.250
	UMTS 1900	1.206	0.313	<b>1.519</b>
	LTE Band 12	0.210	0.313	0.523
	LTE Band 13	0.378	0.313	0.691
	LTE Band 26 (Cell)	0.272	0.313	0.585
	LTE Band 66 (AWS)	1.020	0.313	1.333
	LTE Band 25 (PCS)	1.160	0.313	1.473
	LTE Band 5 (Cell)	0.451	0.313	0.764
	LTE Band 41	1.064	0.313	1.377

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 110 of 137

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	0.510	0.841
	EVDO BC0 (§22H)	0.389	0.510	0.899
	PCS EVDO	0.841	0.510	1.351
	GPRS 850	0.358	0.510	0.868
	GPRS 1900	0.342	0.510	0.852
	UMTS 850	0.468	0.510	0.978
	UMTS 1750	0.937	0.510	1.447
	UMTS 1900	1.206	0.510	See Table Below
	LTE Band 12	0.210	0.510	0.720
	LTE Band 13	0.378	0.510	0.888
	LTE Band 26 (Cell)	0.272	0.510	0.782
	LTE Band 66 (AWS)	1.020	0.510	1.530
	LTE Band 25 (PCS)	1.160	0.510	See Table Below
	LTE Band 5 (Cell)	0.451	0.510	0.961
	LTE Band 41	1.064	0.510	<b>1.574</b>



Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.690	0.510	1.200	Hotspot SAR	Back	0.526	0.510	1.036
	Front	0.557	0.510*	1.067		Front	0.535	0.510*	1.045
	Top	-	0.510*	0.510		Top	-	0.510*	0.510
	Bottom	1.206	-	<b>1.206</b>		Bottom	1.160	-	<b>1.160</b>
	Right	0.165	-	0.165		Right	0.148	-	0.148
	Left	0.391	0.163	0.554		Left	0.355	0.163	0.518

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 111 of 137

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	0.592	0.923
	EVDO BC0 (§22H)	0.389	0.592	0.981
	PCS EVDO	0.841	0.592	1.433
	GPRS 850	0.358	0.592	0.950
	GPRS 1900	0.342	0.592	0.934
	UMTS 850	0.468	0.592	1.060
	UMTS 1750	0.937	0.592	<b>1.529</b>
	UMTS 1900	1.206	0.592	See Table Below
	LTE Band 12	0.210	0.592	0.802
	LTE Band 13	0.378	0.592	0.970
	LTE Band 26 (Cell)	0.272	0.592	0.864
	LTE Band 66 (AWS)	1.020	0.592	See Table Below
	LTE Band 25 (PCS)	1.160	0.592	See Table Below
	LTE Band 5 (Cell)	0.451	0.592	1.043
	LTE Band 41	1.064	0.592	See Table Below



Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.690	0.592	<b>1.282</b>	Hotspot SAR	Back	0.709	0.592	<b>1.301</b>
	Front	0.557	0.592*	1.149		Front	0.603	0.592*	1.195
	Top	-	0.283	0.283		Top	-	0.283	0.283
	Bottom	1.206	-	1.206		Bottom	1.020	-	1.020
	Right	0.165	-	0.165		Right	0.065	-	0.065
	Left	0.391	0.592*	0.983		Left	0.542	0.592*	1.134

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2			1	2	1+2	1+2
Hotspot SAR	Back	0.526	0.592	1.118	Hotspot SAR	Back	1.064	0.592	See Note 1	0.02
	Front	0.535	0.592*	1.127		Front	0.150	0.592*	<b>0.742</b>	N/A
	Top	-	0.283	0.283		Top	-	0.283	0.283	N/A
	Bottom	1.160	-	<b>1.160</b>		Bottom	0.430	-	0.430	N/A
	Right	0.148	-	0.148		Right	0.033	-	0.033	N/A
	Left	0.355	0.592*	0.947		Left	0.054	0.592*	0.646	N/A

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 112 of 137

**Table 12-10**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	$\Sigma$ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	0.331	0.662
	EVDO BC0 (§22H)	0.389	0.331	0.720
	PCS EVDO	0.841	0.331	1.172
	GPRS 850	0.358	0.331	0.689
	GPRS 1900	0.342	0.331	0.673
	UMTS 850	0.468	0.331	0.799
	UMTS 1750	0.937	0.331	1.268
	UMTS 1900	1.206	0.331	<b>1.537</b>
	LTE Band 12	0.210	0.331	0.541
	LTE Band 13	0.378	0.331	0.709
	LTE Band 26 (Cell)	0.272	0.331	0.603
	LTE Band 66 (AWS)	1.020	0.331	1.351
	LTE Band 25 (PCS)	1.160	0.331	1.491
	LTE Band 5 (Cell)	0.451	0.331	0.782
	LTE Band 41	1.064	0.331	1.395



FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 113 of 137

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	0.784	1.115
	EVDO BC0 (§22H)	0.389	0.784	1.173
	PCS EVDO	0.841	0.784	See Table Below
	GPRS 850	0.358	0.784	1.142
	GPRS 1900	0.342	0.784	1.126
	UMTS 850	0.468	0.784	<b>1.252</b>
	UMTS 1750	0.937	0.784	See Table Below
	UMTS 1900	1.206	0.784	See Table Below
	LTE Band 12	0.210	0.784	0.994
	LTE Band 13	0.378	0.784	1.162
	LTE Band 26 (Cell)	0.272	0.784	1.056
	LTE Band 66 (AWS)	1.020	0.784	See Table Below
	LTE Band 25 (PCS)	1.160	0.784	See Table Below
	LTE Band 5 (Cell)	0.451	0.784	1.235
	LTE Band 41	1.064	0.784	See Table Below

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.515	0.784	<b>1.299</b>	Hotspot SAR	Back	0.643	0.784	<b>1.427</b>
	Front	0.458	0.784*	1.242		Front	0.588	0.784*	1.372
	Top	-	0.784*	0.784		Top	-	0.784*	0.784
	Bottom	0.841	-	0.841		Bottom	0.937	-	0.937
	Right	0.112	-	0.112		Right	0.096	-	0.096
	Left	0.316	0.221	0.537		Left	0.470	0.221	0.691

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2			1	2	1+2
Hotspot SAR	Back	0.690	0.784	<b>1.474</b>	Hotspot SAR	Back	0.709	0.784	<b>1.493</b>
	Front	0.557	0.784*	1.341		Front	0.603	0.784*	1.387
	Top	-	0.784*	0.784		Top	-	0.784*	0.784
	Bottom	1.206	-	1.206		Bottom	1.020	-	1.020
	Right	0.165	-	0.165		Right	0.065	-	0.065
	Left	0.391	0.221	0.612		Left	0.542	0.221	0.763

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2			1	2	1+2	1+2
Hotspot SAR	Back	0.526	0.784	1.310	Hotspot SAR	Back	1.064	0.784	See Note 1	0.02
	Front	0.535	0.784*	<b>1.319</b>		Front	0.150	0.784*	<b>0.934</b>	N/A
	Top	-	0.784*	0.784		Top	-	0.784*	0.784	N/A
	Bottom	1.160	-	1.160		Bottom	0.430	-	0.430	N/A
	Right	0.148	-	0.148		Right	0.033	-	0.033	N/A
	Left	0.355	0.221	0.576		Left	0.054	0.221	0.275	N/A

FCC ID ZNFG710VM		SAR EVALUATION REPORT			Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 114 of 137	





Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	1.051	1.382
	EVDO BC0 (§22H)	0.389	1.051	1.440
	PCS EVDO	0.841	1.051	See Table Below
	GPRS 850	0.358	1.051	1.409
	GPRS 1900	0.342	1.051	1.393
	UMTS 850	0.468	1.051	<b>1.519</b>
	UMTS 1750	0.937	1.051	See Table Below
	UMTS 1900	1.206	1.051	See Table Below
	LTE Band 12	0.210	1.051	1.261
	LTE Band 13	0.378	1.051	1.429
	LTE Band 26 (Cell)	0.272	1.051	1.323
	LTE Band 66 (AWS)	1.020	1.051	See Table Below
	LTE Band 25 (PCS)	1.160	1.051	See Table Below
	LTE Band 5 (Cell)	0.451	1.051	1.502
	LTE Band 41	1.064	1.051	See Table Below

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	
Hotspot SAR	Back	0.515	1.051	<b>1.566</b>	
	Front	0.458	0.041	0.499	
	Top	-	1.051*	1.051	
	Bottom	0.841	-	0.841	
	Right	0.112	-	0.112	
	Left	0.316	0.258	0.574	
Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	0.643	1.051	See Note 1	0.02
	Front	0.588	0.041	0.629	N/A
	Top	-	1.051*	<b>1.051</b>	N/A
	Bottom	0.937	-	0.937	N/A
	Right	0.096	-	0.096	N/A
	Left	0.470	0.258	0.728	N/A

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	0.690	1.051	See Note 1	0.02
	Front	0.557	0.041	0.598	N/A
	Top	-	1.051*	1.051	N/A
	Bottom	1.206	-	<b>1.206</b>	N/A
	Right	0.165	-	0.165	N/A
	Left	0.391	0.258	0.649	N/A
Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	0.709	1.051	See Note 1	0.02
	Front	0.603	0.041	0.644	N/A
	Top	-	1.051*	<b>1.051</b>	N/A
	Bottom	1.020	-	1.020	N/A
	Right	0.065	-	0.065	N/A
	Left	0.542	0.258	0.800	N/A

Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	
Hotspot SAR	Back	0.526	1.051	<b>1.577</b>	
	Front	0.535	0.041	0.576	
	Top	-	1.051*	1.051	
	Bottom	1.160	-	1.160	
	Right	0.148	-	0.148	
	Left	0.355	0.258	0.613	
Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2
Hotspot SAR	Back	1.064	1.051	See Note 1	0.03
	Front	0.150	0.041	0.191	N/A
	Top	-	1.051*	<b>1.051</b>	N/A
	Bottom	0.430	-	0.430	N/A
	Right	0.033	-	0.033	N/A
	Left	0.054	0.258	0.312	N/A

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 115 of 137

**Table 12-11**  
**Simultaneous Transmission Scenario with 2.4 GHz Ant 1 and 5 GHz Ant 2 WLAN (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	EVDO BC10 (\$90S)	0.331	0.223	0.430	0.984
	EVDO BC0 (\$22H)	0.389	0.223	0.430	1.042
	PCS EVDO	0.841	0.223	0.430	1.494
	GPRS 850	0.358	0.223	0.430	1.011
	GPRS 1900	0.342	0.223	0.430	0.995
	UMTS 850	0.468	0.223	0.430	1.121
	UMTS 1750	0.937	0.223	0.430	<b>1.590</b>
	UMTS 1900	1.206	0.223	0.430	See Table Below
	LTE Band 12	0.210	0.223	0.430	0.863
	LTE Band 13	0.378	0.223	0.430	1.031
	LTE Band 26 (Cell)	0.272	0.223	0.430	0.925
	LTE Band 66 (AWS)	1.020	0.223	0.430	See Table Below
	LTE Band 25 (PCS)	1.160	0.223	0.430	See Table Below
	LTE Band 5 (Cell)	0.451	0.223	0.430	1.104
	LTE Band 41	1.064	0.223	0.430	See Table Below

Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	Σ SAR (W/kg)	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3			1	2	3	1+2+3
Hotspot SAR	Back	0.690	0.223	0.430	<b>1.343</b>	Hotspot SAR	Back	0.709	0.223	0.430	<b>1.362</b>
	Front	0.557	0.223*	0.006	0.786		Front	0.603	0.223*	0.006	0.832
	Top	-	0.223*	0.430*	0.653		Top	-	0.223*	0.430*	0.653
	Bottom	1.206	-	-	1.206		Bottom	1.020	-	-	1.020
	Right	0.165	-	-	0.165		Right	0.065	-	-	0.065
	Left	0.391	0.223*	0.107	0.721		Left	0.542	0.223*	0.107	0.872



Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	0.526	0.223	0.430	<b>1.179</b>
	Front	0.535	0.223*	0.006	0.764
	Top	-	0.223*	0.430*	0.653
	Bottom	1.160	-	-	1.160
	Right	0.148	-	-	0.148
	Left	0.355	0.223*	0.107	0.685

Simult Tx	Configuration	LTE Band 41 SAR (W/kg)	2.4 GHz WLAN Ant 1 at 17 dBm SAR (W/kg)	5 GHz WLAN Ant 2 at 14 dBm SAR (W/kg)	Σ SAR (W/kg)
		1	2	3	1+2+3
Hotspot SAR	Back	1.064	0.223	0.430	See Table Below
	Front	0.150	0.223*	0.006	0.379
	Top	-	0.223*	0.430*	<b>0.653</b>
	Bottom	0.430	-	-	0.430
	Right	0.033	-	-	0.033
	Left	0.054	0.223*	0.107	0.384



Antenna Pair		SPLS Ratio
Ant "a"	Ant "b"	$(a+b)^{1.5}/D_{a-b}$
2.4 GHz WLAN Ant 1 at 17 dBm	5 GHz WLAN Ant 2 at 14 dBm	0.03
2.4 GHz WLAN Ant 1 at 17 dBm	LTE Band 41	0.01
5 GHz WLAN Ant 2 at 14 dBm	LTE Band 41	0.02

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset
Page 116 of 137		

**Table 12-12**  
**Simultaneous Transmission Scenario with Bluetooth (Hotspot at 1.0 cm)**

Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	Bluetooth SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Hotspot SAR	EVDO BC10 (§90S)	0.331	0.040	0.371
	EVDO BC0 (§22H)	0.389	0.040	0.429
	PCS EVDO	0.841	0.040	0.881
	GPRS 850	0.358	0.040	0.398
	GPRS 1900	0.342	0.040	0.382
	UMTS 850	0.468	0.040	0.508
	UMTS 1750	0.937	0.040	0.977
	UMTS 1900	1.206	0.040	<b>1.246</b>
	LTE Band 12	0.210	0.040	0.250
	LTE Band 13	0.378	0.040	0.418
	LTE Band 26 (Cell)	0.272	0.040	0.312
	LTE Band 66 (AWS)	1.020	0.040	1.060
	LTE Band 25 (PCS)	1.160	0.040	1.200
	LTE Band 5 (Cell)	0.451	0.040	0.491
	LTE Band 41	1.064	0.040	1.104

Note 1: No evaluation was performed to determine the aggregate 1g SAR for these configurations as the SPLS ratio between the antenna pairs was not greater than 0.04 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLS ratio analysis.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 117 of 137

## 12.6 Phablet Simultaneous Transmission Analysis

Per FCC KDB Publication 941225 D06v02r01, the devices edges with antennas more than 2.5 cm from edge are not required to be evaluated for SAR (“-”).

(\*) For test positions that were not required to be evaluated for WLAN SAR per FCC KDB publication 248227, the worst case WLAN SAR result for applicable exposure conditions was used for simultaneous transmission analysis.

For Phablet SAR summation the highest reported SAR across all test distances was used as the most conservative evaluation for simultaneous transmission analysis for each device edge.



Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR (scaled to the maximum output power, including tolerance) < 1.2 W/kg. Therefore, no further analysis beyond the tables included in this section was required to determine that possible simultaneous transmission scenarios would not exceed the SAR limit.

**Table 12-13**  
**Simultaneous Transmission Scenario with 5 GHz WLAN (Phablet)**



Exposure Condition	Mode	2G/3G/4G SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	PCS EVDO	2.280	0.843	3.123
	UMTS 1750	3.160	0.843	See Table Below
	UMTS 1900	2.805	0.843	3.648
	LTE Band 66 (AWS)	3.131	0.843	<b>3.974</b>
	LTE Band 25 (PCS)	2.729	0.843	3.572

Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN Ant 1 SAR (W/kg)	Σ SAR (W/kg)
		1	2	1+2
Phablet SAR	Back	2.095	0.843	2.938
	Front	2.064	0.843*	2.907
	Top	-	0.843*	0.843
	Bottom	3.160	-	<b>3.160</b>
	Right	0.065	-	0.065
	Left	1.220	0.843*	2.063



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 118 of 137	

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	1.704	2.419	See Note 1	0.07	Phablet SAR	Back	2.095	2.419	See Note 1	0.08
	Front	1.219	0.052	1.271	N/A		Front	2.064	0.052	2.116	N/A
	Top	-	2.419*	2.419	N/A		Top	-	2.419*	2.419	N/A
	Bottom	2.280	-	2.280	N/A		Bottom	3.160	-	3.160	N/A
	Right	0.166	-	0.166	N/A		Right	0.065	-	0.065	N/A
	Left	0.931	0.518	1.449	N/A		Left	1.220	0.518	1.738	N/A
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	1.766	2.419	See Note 1	0.07	Phablet SAR	Back	2.247	2.419	See Note 1	0.09
	Front	1.302	0.052	1.354	N/A		Front	2.237	0.052	2.289	N/A
	Top	-	2.419*	2.419	N/A		Top	-	2.419*	2.419	N/A
	Bottom	2.805	-	2.805	N/A		Bottom	3.131	-	3.131	N/A
	Right	0.175	-	0.175	N/A		Right	0.060	-	0.060	N/A
	Left	1.101	0.518	1.619	N/A		Left	1.090	0.518	1.608	N/A
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN Ant 2 SAR (W/kg)	Σ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	1.582	2.419	See Note 1	0.07	Phablet SAR	Back	1.582	2.419	See Note 1	0.07
	Front	1.922	0.052	1.974	N/A		Front	1.922	0.052	1.974	N/A
	Top	-	2.419*	2.419	N/A		Top	-	2.419*	2.419	N/A
	Bottom	2.729	-	2.729	N/A		Bottom	2.729	-	2.729	N/A
	Right	0.180	-	0.180	N/A		Right	0.180	-	0.180	N/A
	Left	1.100	0.518	1.618	N/A		Left	1.100	0.518	1.618	N/A

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 119 of 137

Simult Tx	Configuration	PCS EVDO SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR	Simult Tx	Configuration	UMTS 1750 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	1.704	2.974	See Note 1	0.09	Phablet SAR	Back	2.095	2.974	See Note 1	0.10
	Front	1.219	0.369	1.588	N/A		Front	2.064	0.369	2.433	N/A
	Top	-	2.974*	<b>2.974</b>	N/A		Top	-	2.974*	2.974	N/A
	Bottom	2.280	-	2.280	N/A		Bottom	3.160	-	<b>3.160</b>	N/A
	Right	0.166	-	0.166	N/A		Right	0.065	-	0.065	N/A
	Left	0.931	0.476	1.407	N/A		Left	1.220	0.476	1.696	N/A
Simult Tx	Configuration	UMTS 1900 SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 66 (AWS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	1.766	2.974	See Note 1	0.09	Phablet SAR	Back	2.247	2.974	See Note 1	0.10
	Front	1.302	0.369	1.671	N/A		Front	2.237	0.369	2.606	N/A
	Top	-	2.974*	<b>2.974</b>	N/A		Top	-	2.974*	2.974	N/A
	Bottom	2.805	-	2.805	N/A		Bottom	3.131	-	<b>3.131</b>	N/A
	Right	0.175	-	0.175	N/A		Right	0.060	-	0.060	N/A
	Left	1.101	0.476	1.577	N/A		Left	1.090	0.476	1.566	N/A
Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR	Simult Tx	Configuration	LTE Band 25 (PCS) SAR (W/kg)	5 GHz WLAN MIMO SAR (W/kg)	$\Sigma$ SAR (W/kg)	SPLSR
		1	2	1+2	1+2			1	2	1+2	1+2
Phablet SAR	Back	1.582	2.974	See Note 1	0.08	Phablet SAR	Back	1.582	2.974	See Note 1	0.08
	Front	1.922	0.369	2.291	N/A		Front	1.922	0.369	2.291	N/A
	Top	-	2.974*	<b>2.974</b>	N/A		Top	-	2.974*	<b>2.974</b>	N/A
	Bottom	2.729	-	2.729	N/A		Bottom	2.729	-	2.729	N/A
	Right	0.180	-	0.180	N/A		Right	0.180	-	0.180	N/A
	Left	1.100	0.476	1.576	N/A		Left	1.100	0.476	1.576	N/A

Note 1: No evaluation was performed to determine the aggregate 10g SAR for these configurations as the SPLSR ratio between the antenna pairs was not greater than 0.10 per FCC KDB 447498 D01v06. See Section 12.7 for detailed SPLSR ratio analysis.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 120 of 137

## 12.7 SPLSR Evaluation and Analysis

Per FCC KDB Publication 447498 D01v06, when the sum of the standalone transmitters is more than 1.6 W/kg for 1g, the SAR sum to peak locations can be analyzed to determine SAR distribution overlaps. When the SAR peak to location ratio (shown below) for each pair of antennas is  $\leq 0.04$  for 1g and  $\leq 0.10$ , simultaneous SAR evaluation is not required. The distance between the transmitters was calculated using the following formula.

$$\text{Distance}_{\text{Tx1} - \text{Tx2}} = R_i = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2}$$

$$\text{SPLS Ratio} = \frac{(SAR_1 + SAR_2)^{1.5}}{R_i}$$



### 12.7.1 Body-Worn Back Side SPLSR Evaluation and Analysis

**Table 12-14**  
**Peak SAR Locations for Body-Worn Back Side**

Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
2.4 GHz WLAN Ant 1 at 17 dBm	-0.20	60.00	0.223
2.4 GHz WLAN MIMO	13.00	67.20	0.592
5 GHz WLAN Ant 2 at 14 dBm	11.00	46.00	0.483
5 GHz WLAN Ant 2	10.00	42.00	0.991
5 GHz WLAN MIMO	11.00	48.00	1.067
PCS CDMA	-10.00	-75.00	0.554
UMTS 1750	-11.50	-70.50	0.643
UMTS 1900	-11.50	-72.00	0.69
LTE Band 66	-10.00	-72.00	0.709
LTE Band 41	-15.50	-63.40	1.064


**Table 12-15**  
**Body-Worn Back Side SAR to Peak Location Separation Ratio Calculations**



Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	(a+b) <sup>1.5</sup> /D <sub>a-b</sub>	
5 GHz WLAN MIMO	PCS CDMA	1.067	0.554	1.621	124.78	0.02	1
5 GHz WLAN MIMO	UMTS 1750	1.067	0.643	1.710	120.62	0.02	2
5 GHz WLAN MIMO	UMTS 1900	1.067	0.69	1.757	122.09	0.02	3
5 GHz WLAN MIMO	LTE Band 66	1.067	0.709	1.776	121.82	0.02	4
5 GHz WLAN MIMO	LTE Band 41	1.067	1.064	2.131	114.51	0.03	5
2.4 GHz WLAN Ant 1 at 17 dBm	5 GHz WLAN Ant 2 at 14 dBm	0.223	0.483	0.706	17.93	0.03	6
2.4 GHz WLAN Ant 1 at 17 dBm	LTE Band 41	0.223	1.064	1.287	124.34	0.01	
5 GHz WLAN Ant 2 at 14 dBm	LTE Band 41	0.483	1.064	1.547	112.56	0.02	
5 GHz WLAN Ant 2	UMTS 1750	0.991	0.643	1.634	114.54	0.02	7
5 GHz WLAN Ant 2	UMTS 1900	0.991	0.69	1.681	116.01	0.02	8
5 GHz WLAN Ant 2	LTE Band 66	0.991	0.709	1.700	115.74	0.02	9
5 GHz WLAN Ant 2	LTE Band 41	0.991	1.064	2.055	108.44	0.03	10
2.4 GHz WLAN MIMO	LTE Band 41	0.592	1.064	1.656	133.67	0.02	11

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 121 of 137




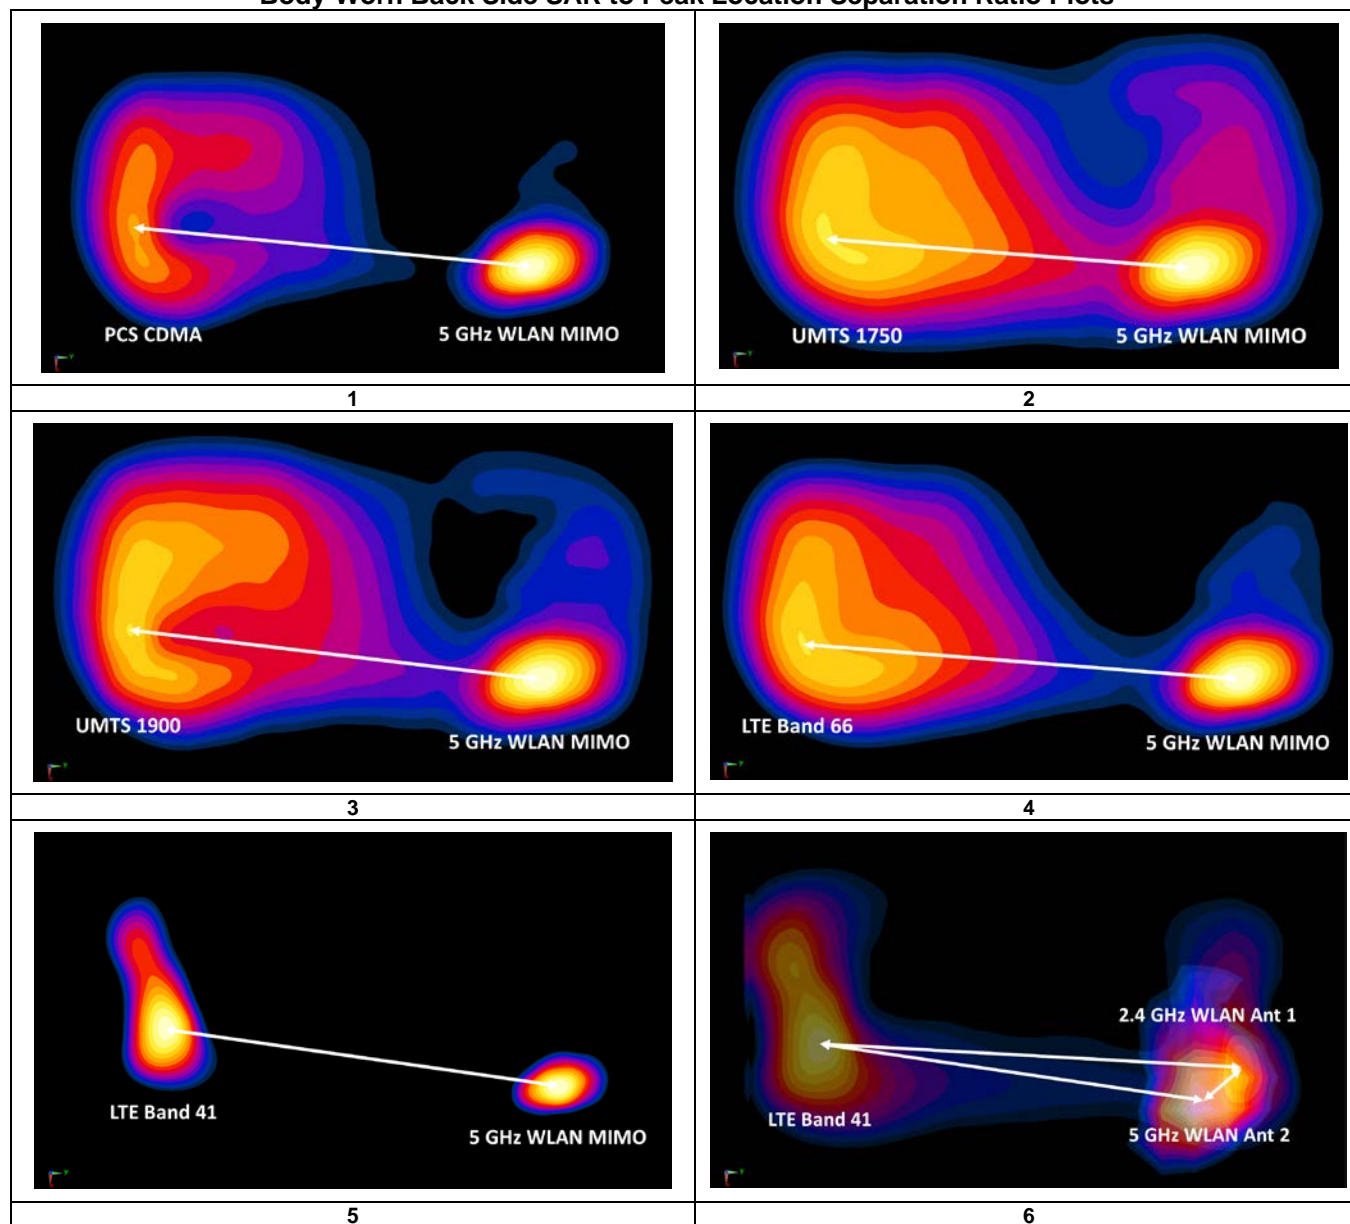

**Table 12-16**  
**Body-Worn Back Side SAR to Peak Location Separation Ratio Plots**



FCC ID ZNFG710VM	 <b>PCTEST</b> <small>ENGINEERING LABORATORY, INC.</small>	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 122 of 137	

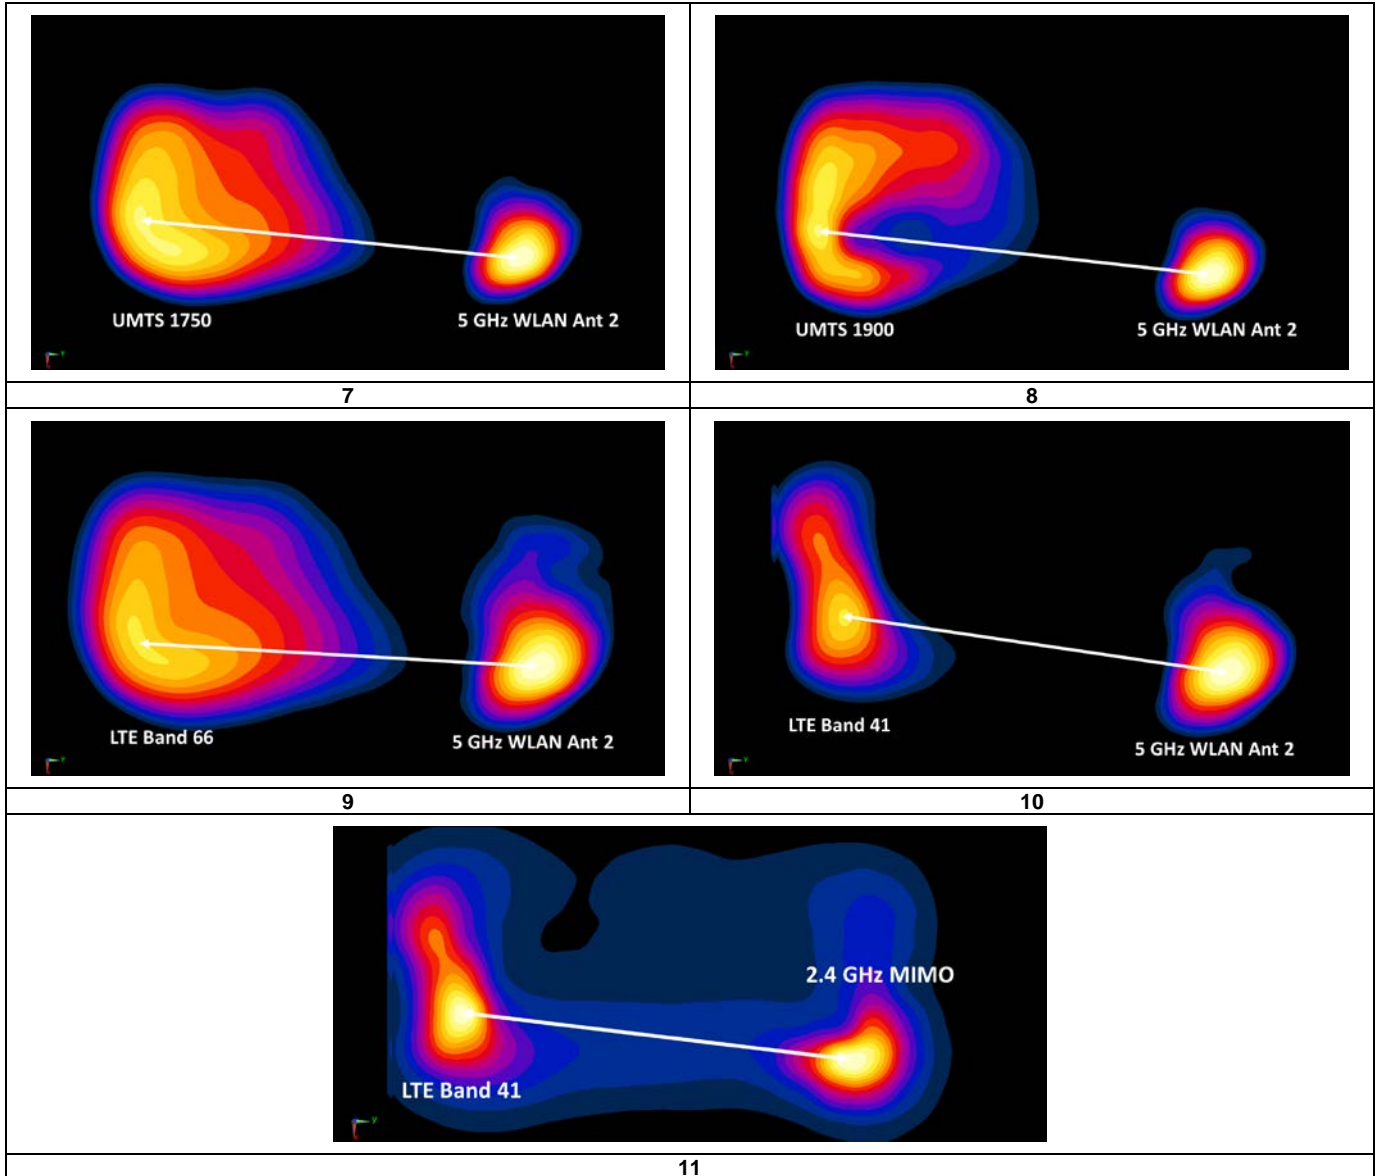



FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 123 of 137



## 12.7.2 Hotspot Back Side SPLSR Evaluation and Analysis

**Table 12-17**  
**Peak SAR Locations for Hotspot Back Side**


Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
2.4 GHz WLAN Ant 1 at 17 dBm	-0.20	60.00	0.223
2.4 GHz WLAN MIMO	13.00	67.20	0.592
5 GHz WLAN Ant 2 at 14 dBm	11.00	49.00	0.43
5 GHz WLAN Ant 2	10.00	48.00	0.784
5 GHz WLAN MIMO	10.00	49.00	1.051
UMTS 1750	-11.50	-70.50	0.643
UMTS 1900	-11.50	-72.00	0.69
LTE Band 66	-10.00	-72.00	0.709
LTE Band 41	-15.50	-63.40	1.064

**Table 12-18**  
**Hotspot Back Side SAR to Peak Location Separation Ratio Calculations**

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN Ant 2	LTE Band 41	0.784	1.064	1.848	114.28	0.02	1
5 GHz WLAN MIMO	UMTS 1750	1.051	0.643	1.694	121.42	0.02	2
5 GHz WLAN MIMO	UMTS 1900	1.051	0.69	1.741	122.90	0.02	3
5 GHz WLAN MIMO	LTE Band 66	1.051	0.709	1.760	122.64	0.02	4
5 GHz WLAN MIMO	LTE Band 41	1.051	1.064	2.115	115.26	0.03	5
2.4 GHz WLAN Ant 1 at 17 dBm	5 GHz WLAN Ant 2 at 14 dBm	0.223	0.43	0.653	15.70	0.03	6
2.4 GHz WLAN Ant 1 at 17 dBm	LTE Band 41	0.223	1.064	1.287	124.34	0.01	
5 GHz WLAN Ant 2 at 14 dBm	LTE Band 41	0.43	1.064	1.494	115.48	0.02	
2.4 GHz WLAN MIMO	LTE Band 41	0.592	1.064	1.656	133.67	0.02	7

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 124 of 137	

**Table 12-19**  
**Hotspot Back Side SAR to Peak Location Separation Ratio Plots**

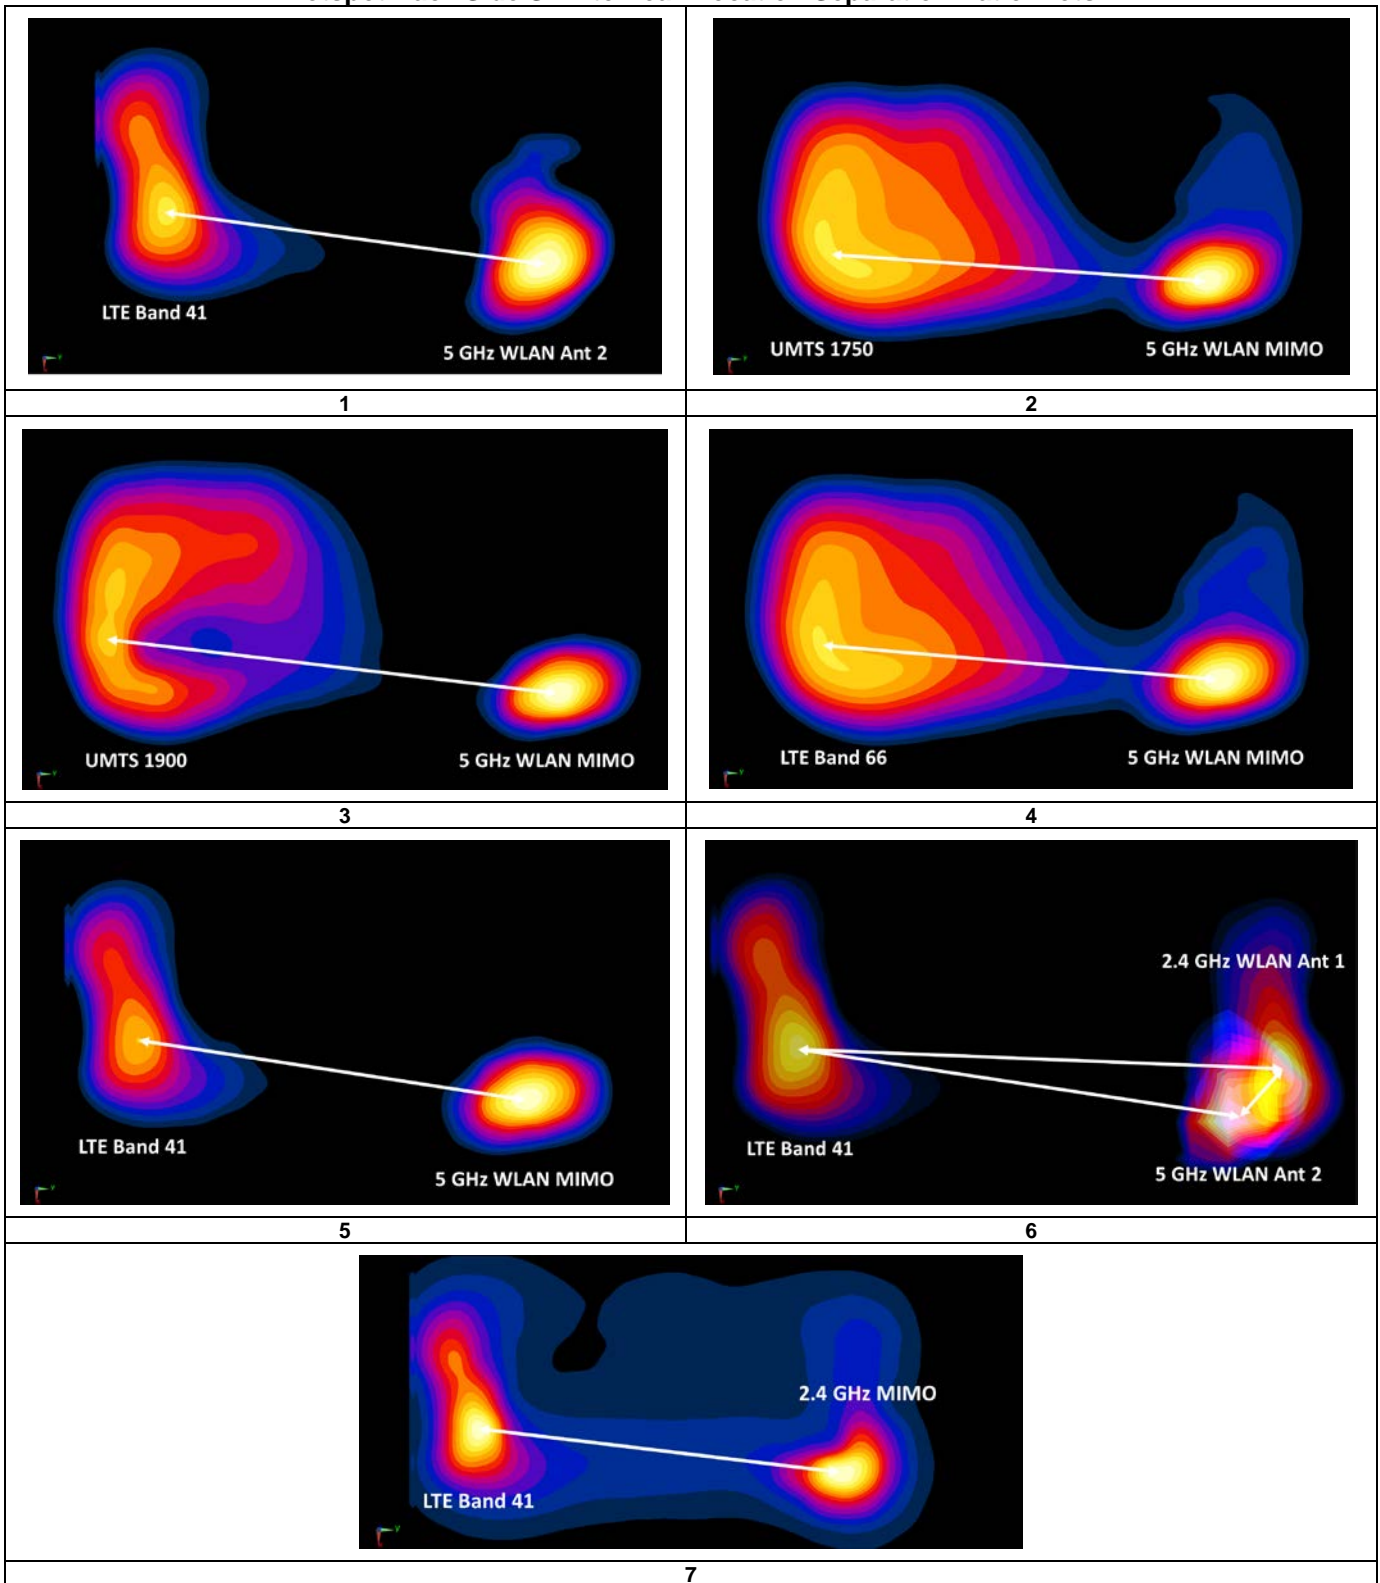

FCC ID ZNFG710VM



SAR EVALUATION REPORT



Approved by:  
Quality Manager

Document S/N:

1M1802260032-01-R1.ZNF

Test Dates:

02/28/18 - 03/19/18

DUT Type:

Portable Handset

Page 125 of 137



### 12.7.3 Phablet Back Side SPLSR Evaluation and Analysis

**Table 12-20**  
**Peak SAR Locations for Phablet Back Side**


Mode/Band	x (mm)	y (mm)	Reported SAR (W/kg)
5 GHz WLAN Ant 2	12.00	44.00	2.419
5 GHz WLAN MIMO	12.00	45.00	2.974
PCS EVDO	-2.50	-69.00	1.704
UMTS 1900	-7.00	-70.50	1.766
LTE Band 25 (PCS)	-4.00	-70.50	1.582
UMTS 1750	-8.50	-72.00	2.095
LTE Band 66	-2.50	-71.50	2.247



**Table 12-21**  
**Phablet Back Side SAR to Peak Location Separation Ratio Calculations**

Antenna Pair		Standalone SAR (W/kg)		Standalone SAR Sum (W/kg)	Peak SAR Separation Distance (mm)	SPLS Ratio	Plot Number
Ant "a"	Ant "b"	a	b	a+b	D <sub>a-b</sub>	$(a+b)^{1.5}/D_{a-b}$	
5 GHz WLAN Ant 2	PCS EVDO	2.419	1.704	4.123	113.93	0.07	1
5 GHz WLAN Ant 2	UMTS 1750	2.419	2.095	4.514	117.80	0.08	2
5 GHz WLAN Ant 2	UMTS 1900	2.419	1.766	4.185	116.07	0.07	3
5 GHz WLAN Ant 2	LTE Band 66	2.419	2.247	4.666	116.41	0.09	4
5 GHz WLAN Ant 2	LTE Band 25 (PCS)	2.419	1.582	4.001	115.61	0.07	5
5 GHz WLAN MIMO	PCS EVDO	2.974	1.704	4.678	114.92	0.09	6
5 GHz WLAN MIMO	UMTS 1750	2.974	2.095	5.069	118.78	0.10	7
5 GHz WLAN MIMO	UMTS 1900	2.974	1.766	4.740	117.05	0.09	8
5 GHz WLAN MIMO	LTE Band 66	2.974	2.247	5.221	117.40	0.10	9
5 GHz WLAN MIMO	LTE Band 25 (PCS)	2.974	1.582	4.556	116.60	0.08	10


<b>FCC ID</b> ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 126 of 137

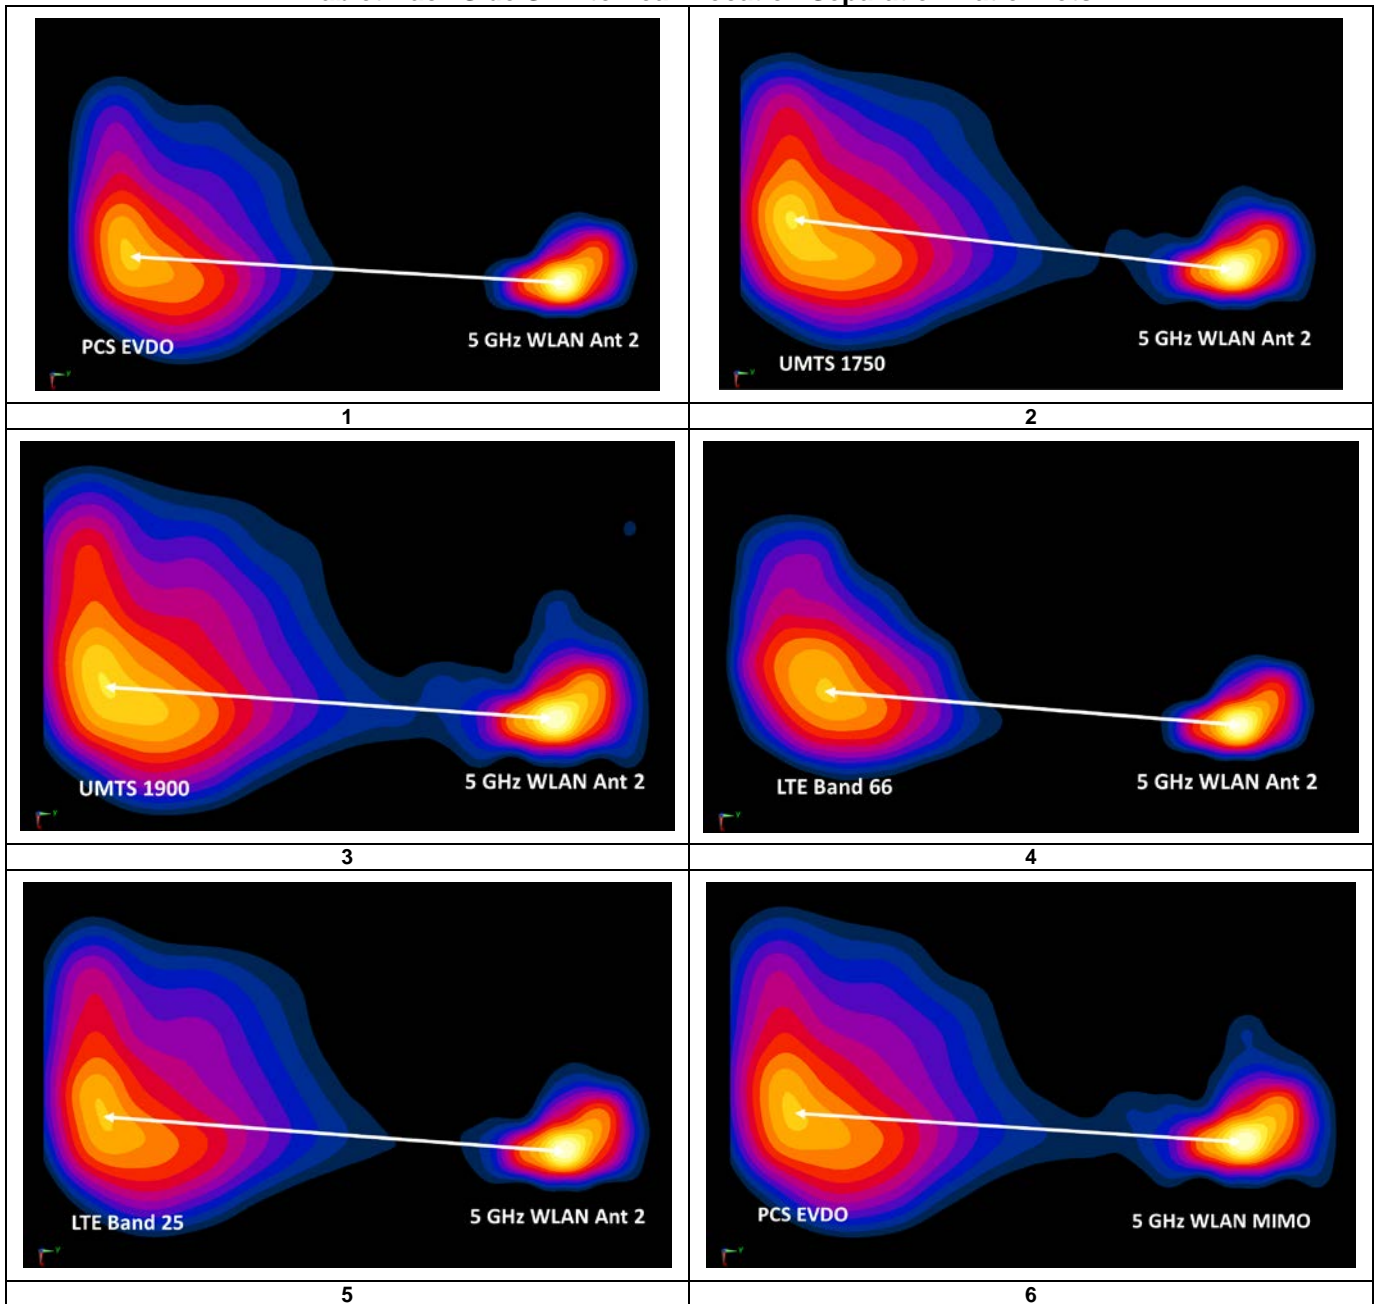**Table 12-22**  
**Phablet Back Side SAR to Peak Location Separation Ratio Plots**





FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 	<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset
© 2018 PCTEST Engineering Laboratory, Inc.		REV 20.08 M 03/02/2018

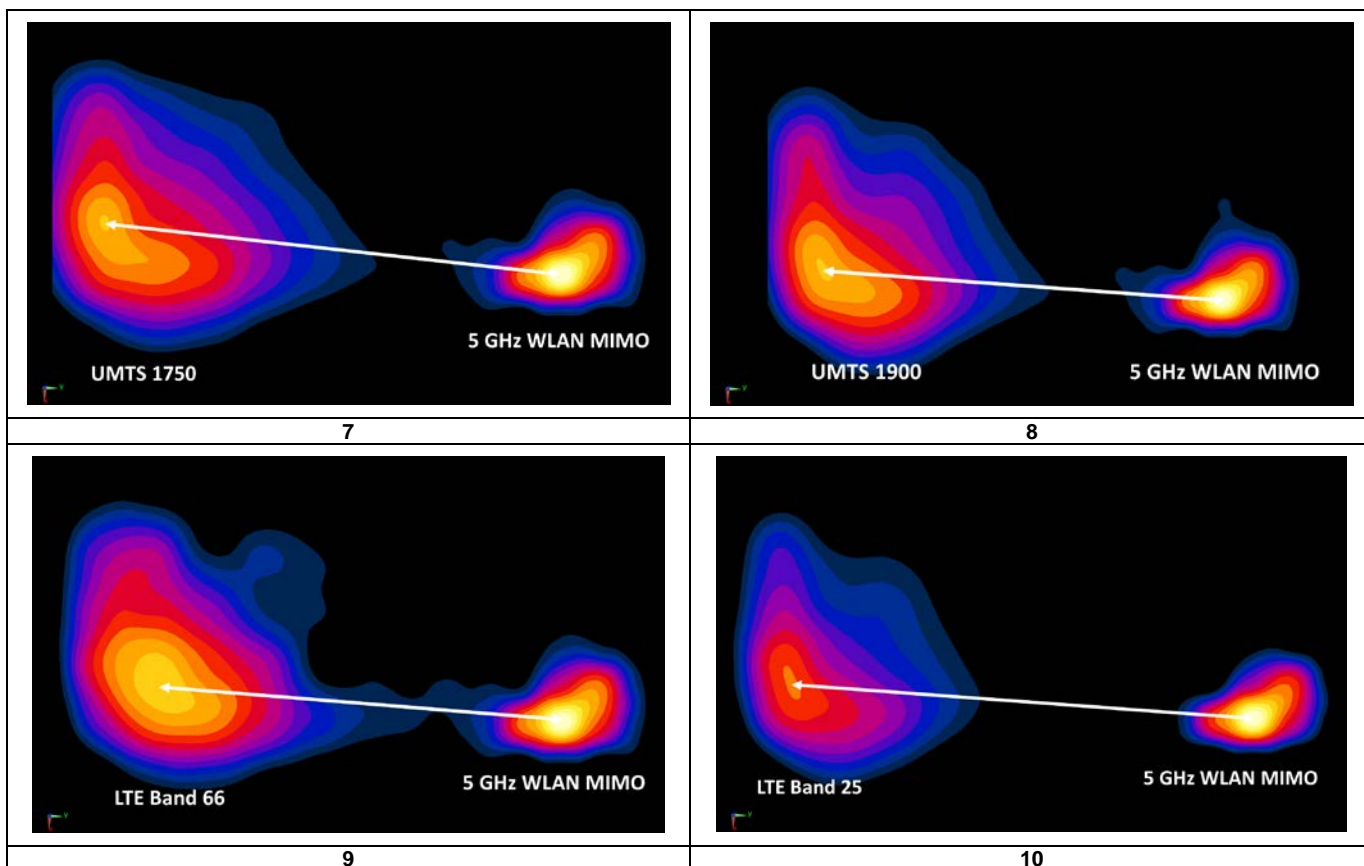



## 12.8 Simultaneous Transmission Conclusion

The above numerical summed SAR results and SPLSR analysis are sufficient to determine that simultaneous transmission cases will not exceed the SAR limit and therefore no measured volumetric simultaneous SAR summation is required per FCC KDB Publication 447498 D01v06 and IEEE 1528- 2013 Section 6.3.4.1.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 128 of 137

## 13 SAR MEASUREMENT VARIABILITY

### 13.1 Measurement Variability



Per FCC KDB Publication 865664 D01v01r04, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media were required for SAR measurements in a frequency band, the variability measurement procedures were applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. These additional measurements were repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .
- 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg
- 5) When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

**Table 13-1**  
**Body SAR Measurement Variability Results**

BODY VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (1g)	1st Repeated SAR (1g)	Ratio	2nd Repeated SAR (1g)	Ratio	3rd Repeated SAR (1g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1900	1852.40	9262	UMTS 1900	RMC	N/A	bottom	10 mm	1.130	0.991	1.14	N/A	N/A	N/A	N/A
1750	1720.00	132072	LTE Band 66 (AWS), 20 MHz Bandwidth	QPSK, 1 RB, 0 RB Offset	N/A	bottom	10 mm	1.000	1.020	1.02	N/A	N/A	N/A	N/A
2600	2593.00	40620	LTE Band 41 PC2, 20 MHz Bandwidth	QPSK, 1 RB, 99 RB Offset	N/A	back	10 mm	0.951	0.949	1.00	N/A	N/A	N/A	N/A
5250	5280.00	56	802.11n, 20 MHz Bandwidth	OFDM , MIMO	13	back	10 mm	0.904	0.873	1.04	N/A	N/A	N/A	N/A
5750	5805.00	161	802.11n, 20 MHz Bandwidth	OFDM , MIMO	13	back	10 mm	0.827	0.808	1.02	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Body							
Spatial Peak							1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population							averaged over 1 gram							



FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 129 of 137

**Table 13-2**  
**Phablet SAR Measurement Variability Results**

PHABLET VARIABILITY RESULTS														
Band	FREQUENCY		Mode	Service	Data Rate (Mbps)	Side	Spacing	Measured SAR (10g)	1st Repeated SAR (10g)	Ratio	2nd Repeated SAR (10g)	Ratio	3rd Repeated SAR (10g)	Ratio
	MHz	Ch.						(W/kg)	(W/kg)		(W/kg)		(W/kg)	
1750	1752.60	1513	UMTS 1750	RMC	N/A	bottom	0 mm	3.110	2.960	1.05	N/A	N/A	N/A	N/A
1900	1852.40	9262	UMTS 1900	RMC	N/A	bottom	0 mm	2.780	2.760	1.01	N/A	N/A	N/A	N/A
5250	5280.00	56	802.11n, 20 MHz Bandwidth	OFDM, MIMO	13	back	0 mm	2.520	2.520	1.00	N/A	N/A	N/A	N/A
ANSI / IEEE C95.1 1992 - SAFETY LIMIT							Phablet							
Spatial Peak							4.0 W/kg (mW/g)							
Uncontrolled Exposure/General Population							averaged over 10 grams							

## 13.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g and <3.75 W/kg for 10g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset	Page 130 of 137	



## 14 ADDITIONAL TESTING PER FCC GUIDANCE


### 14.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes as < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.



LTE Band 41 SAR testing with power class 2 at the highest power and available duty factor was additionally performed for the power class 3 configuration with the highest SAR for each exposure condition.

**Table 14-1**  
**LTE Band 41 Head Linearity Data**

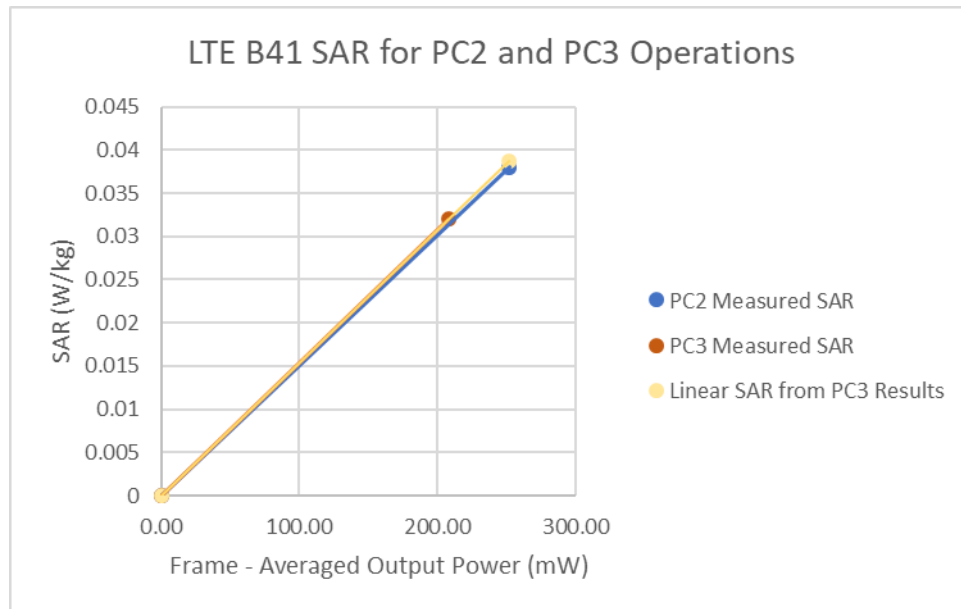	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.2	27.7
Measured Output Power (dBm)	25.17	27.65
Measured SAR (W/kg)	0.032	0.038
Measured Power (mW)	328.85	582.10
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	208.16	252.05
% deviation from expected linearity		-1.93%




**Figure 14-1**  
**LTE Band 41 Head Linearity**



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT	 <b>LG</b>	Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 131 of 137

**Table 14-2**  
**LTE Band 41 Body Linearity Data**

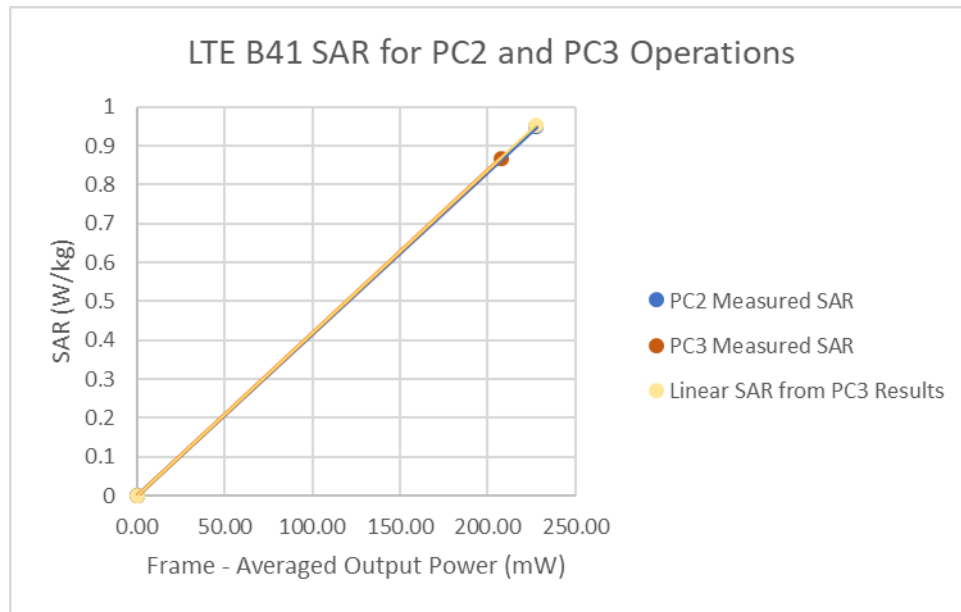	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.2	27.7
Measured Output Power (dBm)	25.16	27.21
Measured SAR (W/kg)	0.868	0.949
Measured Power (mW)	328.10	526.02
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	207.68	227.77
% deviation from expected linearity		-0.31%





**Figure 14-2**  
**LTE Band 41 Body Linearity**

FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	<b>SAR EVALUATION REPORT</b>		<b>Approved by:</b> Quality Manager
<b>Document S/N:</b> 1M1802260032-01-R1.ZNF	<b>Test Dates:</b> 02/28/18 - 03/19/18	<b>DUT Type:</b> Portable Handset		Page 132 of 137

# 15 EQUIPMENT LIST



Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	8594A	(9kHz-2.9GHz) Spectrum Analyzer	N/A	N/A	N/A	3051A00187
Agilent	E4432B	ESG-D Series Signal Generator	3/24/2017	Annual	3/24/2018	US40053896
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/22/2017	Annual	3/22/2018	MY45470194
Agilent	N9020A	MXA Signal Analyzer	1/24/2018	Annual	1/24/2019	US46470561
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46170464
Agilent	E5515C	Wireless Communications Test Set	2/7/2018	Biennial	2/7/2020	GB43304447
Agilent	8753ES	S-Parameter Network Analyzer	2/8/2018	Annual	2/8/2019	US39170122
Agilent	N5182A	MXG Vector Signal Generator	11/1/2017	Annual	11/1/2018	MY47420603
Agilent	E4438C	ESG Vector Signal Generator	3/24/2017	Biennial	3/24/2019	MY42082385
Agilent	8753ES	S-Parameter Vector Network Analyzer	8/17/2017	Annual	8/17/2018	MY40003841
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433971
Anritsu	ML2495A	Power Meter	11/28/2017	Annual	11/28/2018	1039008
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231538
Anritsu	MA24106A	USB Power Sensor	6/7/2017	Annual	6/7/2018	1231535
Anritsu	MA2411B	Pulse Power Sensor	7/14/2017	Annual	7/14/2018	1339026
Anritsu	MT8820C	Radio Communication Analyzer	5/23/2017	Annual	5/23/2018	6201240328
Anritsu	MT8821C	Radio Communication Analyzer	11/17/2017	Annual	11/17/2018	6201381794
Anritsu	MT8821C	Radio Communication Analyzer	8/15/2017	Annual	8/15/2018	6200901190
COMTECH	AR85729-5/5759B	Solid State Amplifier	CBT	N/A	CBT	M3W1A00-1002
Control Company	4352	Ultra Long Stem Thermometer	6/7/2017	Biennial	6/7/2019	170424967
Control Company	4040	Therm./ Clock/ Humidity Monitor	1/8/2018	Annual	1/8/2019	160473909
Control Company	4040	Therm./ Clock/ Humidity Monitor	3/1/2017	Biennial	3/1/2019	170152009
Keysight	772D	Dual Directional Coupler	CBT	N/A	CBT	MY52180215
MCL	BW-N6W5+	6dB Attenuator	CBT	N/A	CBT	1139
MiniCircuits	SLP-2400+	Low Pass Filter	CBT	N/A	CBT	R8979500903
MiniCircuits	VLF-6000+	Low Pass Filter	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	4014C-6	4 - 8 GHz SMA 6 dB Directional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE2209-10	Bidirectional Coupler	CBT	N/A	CBT	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Pasternack	PE5011-1	Torque Wrench	7/19/2017	Biennial	7/19/2019	N/A
Rohde & Schwarz	CMU200	Base Station Simulator	4/11/2017	Annual	4/11/2018	836371/0079
Rohde & Schwarz	CMW500	Radio Communication Tester	11/3/2017	Annual	11/3/2018	100976
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	7/20/2017	Annual	7/20/2018	132885
Seekonk	NC-100	Torque Wrench 5/16", 8" lbs	1/22/2018	Annual	1/22/2019	N/A
Seekonk	NC-100	Torque Wrench (8" lb)	9/1/2016	Biennial	9/1/2018	21053
SPEAG	DAKS-3.5	Portable DAK	9/5/2017	Annual	9/5/2018	1045
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/15/2018	Annual	2/15/2019	665
SPEAG	DAE4	Dasy Data Acquisition Electronics	2/9/2018	Annual	2/9/2019	1272
SPEAG	DAE4	Dasy Data Acquisition Electronics	8/9/2017	Annual	8/9/2018	1323
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/21/2017	Annual	6/21/2018	1333
SPEAG	DAE4	Dasy Data Acquisition Electronics	7/13/2017	Annual	7/13/2018	1322
SPEAG	DAE4	Dasy Data Acquisition Electronics	6/14/2017	Annual	6/14/2018	1334
SPEAG	DAE4	Dasy Data Acquisition Electronics	4/11/2017	Annual	4/11/2018	1407
SPEAG	D1765V2	1765 MHz SAR Dipole	5/9/2017	Annual	5/9/2018	1008
SPEAG	D1900V2	1900 MHz SAR Dipole	7/8/2016	Biennial	7/8/2018	5d080
SPEAG	D2450V2	2450 MHz SAR Dipole	9/11/2017	Annual	9/11/2018	797
SPEAG	D750V3	750 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	1003
SPEAG	D835V2	835 MHz SAR Dipole	7/11/2017	Annual	7/11/2018	4d133
SPEAG	D835V2	835 MHz SAR Dipole	1/15/2018	Annual	1/15/2019	4d132
SPEAG	D1900V2	1900 MHz SAR Dipole	2/7/2018	Annual	2/7/2019	5d148
SPEAG	D5GHZV2	5 GHz SAR Dipole	9/21/2016	Biennial	9/21/2018	1191
SPEAG	D1750V2	1750 MHz SAR Dipole	5/9/2017	Annual	5/9/2018	1148
SPEAG	D1750V2	1750 MHz SAR Dipole	7/14/2016	Biennial	7/14/2018	1150
SPEAG	D5GHZV2	5 GHz SAR Dipole	8/15/2017	Annual	8/15/2018	1237
SPEAG	D750V3	750 MHz SAR Dipole	7/13/2016	Biennial	7/13/2018	1161
SPEAG	D2600V2	2600 MHz SAR Dipole	7/10/2017	Annual	7/10/2018	1126
SPEAG	EX3DV4	SAR Probe	1/16/2018	Annual	1/16/2019	3589
SPEAG	ES3DV3	SAR Probe	2/13/2018	Annual	2/13/2019	3213
SPEAG	EX3DV4	SAR Probe	2/14/2018	Annual	2/14/2019	3914
SPEAG	ES3DV3	SAR Probe	8/14/2017	Annual	8/14/2018	3332
SPEAG	EX3DV4	SAR Probe	8/16/2017	Annual	8/16/2018	7308
SPEAG	EX3DV4	SAR Probe	4/18/2017	Annual	4/18/2018	7406
SPEAG	EX3DV4	SAR Probe	7/17/2017	Annual	7/17/2018	7410
SPEAG	ES3DV3	SAR Probe	9/18/2017	Annual	9/18/2018	3287

Note: CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID ZNFG710VM		SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 133 of 137

## 16 MEASUREMENT UNCERTAINTIES

a	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	Tol. (± %)	Prob. Dist.	Div.	c <sub>i</sub> 1gm	c <sub>i</sub> 10 gms	1gm u <sub>i</sub> (± %)	10gms u <sub>i</sub> (± %)	v <sub>i</sub>
<b>Measurement System</b>								
Probe Calibration	6.55	N	1	1.0	1.0	6.6	6.6	∞
Axial Isotropy	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	2.0	R	1.73	1.0	1.0	1.2	1.2	∞
Linearity	0.3	N	1	1.0	1.0	0.3	0.3	∞
System Detection Limits	0.25	R	1.73	1.0	1.0	0.1	0.1	∞
Readout Electronics	0.3	N	1	1.0	1.0	0.3	0.3	∞
Response Time	0.8	R	1.73	1.0	1.0	0.5	0.5	∞
Integration Time	2.6	R	1.73	1.0	1.0	1.5	1.5	∞
RF Ambient Conditions - Noise	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
RF Ambient Conditions - Reflections	3.0	R	1.73	1.0	1.0	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	0.4	R	1.73	1.0	1.0	0.2	0.2	∞
Probe Positioning w/ respect to Phantom	6.7	R	1.73	1.0	1.0	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	4.0	R	1.73	1.0	1.0	2.3	2.3	∞
<b>Test Sample Related</b>								
Test Sample Positioning	2.7	N	1	1.0	1.0	2.7	2.7	35
Device Holder Uncertainty	1.67	N	1	1.0	1.0	1.7	1.7	5
Output Power Variation - SAR drift measurement	5.0	R	1.73	1.0	1.0	2.9	2.9	∞
SAR Scaling	0.0	R	1.73	1.0	1.0	0.0	0.0	∞
<b>Phantom &amp; Tissue Parameters</b>								
Phantom Uncertainty (Shape & Thickness tolerances)	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	4.2	N	1	0.78	0.71	3.3	3.0	10
Liquid Permittivity - measurement uncertainty	4.1	N	1	0.23	0.26	1.0	1.1	10
Liquid Conductivity - Temperature Uncertainty	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
<b>Combined Standard Uncertainty (k=1)</b>						RSS	11.5	11.3
<b>Expanded Uncertainty</b> (95% CONFIDENCE LEVEL)						k=2	23.0	22.6



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 134 of 137

## 17 CONCLUSION

### 17.1 Measurement Conclusion



The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]



FCC ID ZNFG710VM	 <b>PCTEST</b> ENGINEERING LABORATORY, INC.	SAR EVALUATION REPORT		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset		Page 135 of 137

## 18 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 136 of 137

- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.
- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID ZNFG710VM	 <b>SAR EVALUATION REPORT</b> 		Approved by: Quality Manager
Document S/N: 1M1802260032-01-R1.ZNF	Test Dates: 02/28/18 - 03/19/18	DUT Type: Portable Handset	Page 137 of 137

## APPENDIX A: SAR TEST DATA



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, Cellular CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.887 \text{ S/m}$ ;  $\epsilon_r = 41.706$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-08-2018; Ambient Temp: 24.3°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO Rev. A, Rule Part 90S, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.62 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.201 W/kg

**SAR(1 g) = 0.153 W/kg**

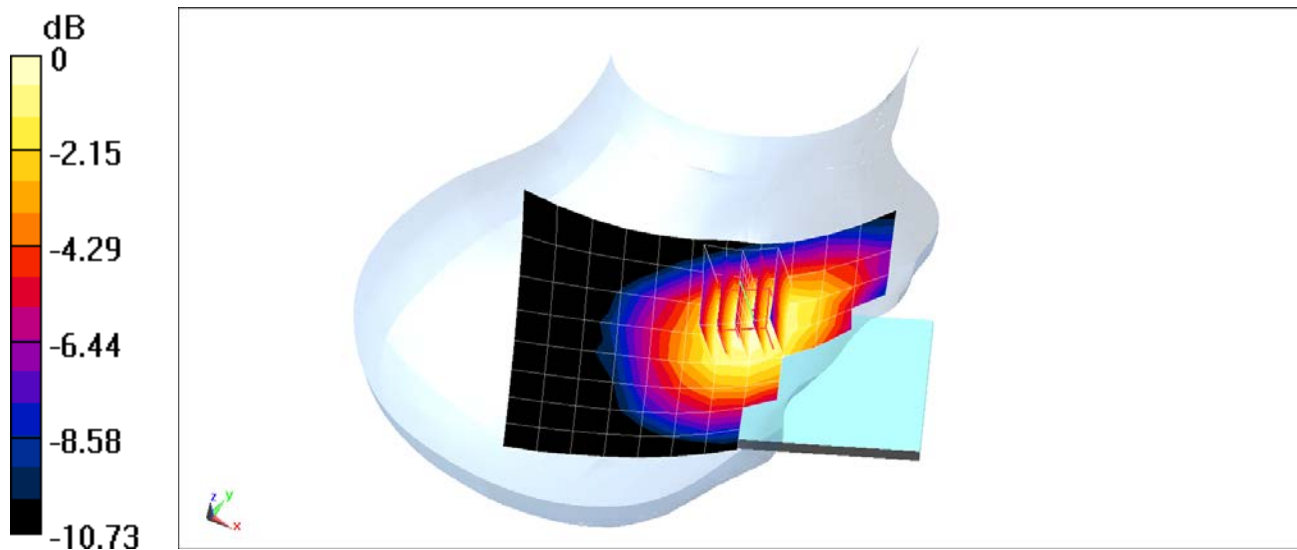

0 dB = 0.167 W/kg = -7.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07157**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.902 \text{ S/m}$ ;  $\epsilon_r = 41.509$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-08-2018; Ambient Temp: 24.3°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. CDMA, Rule Part 22H, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.26 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.264 W/kg

**SAR(1 g) = 0.199 W/kg**

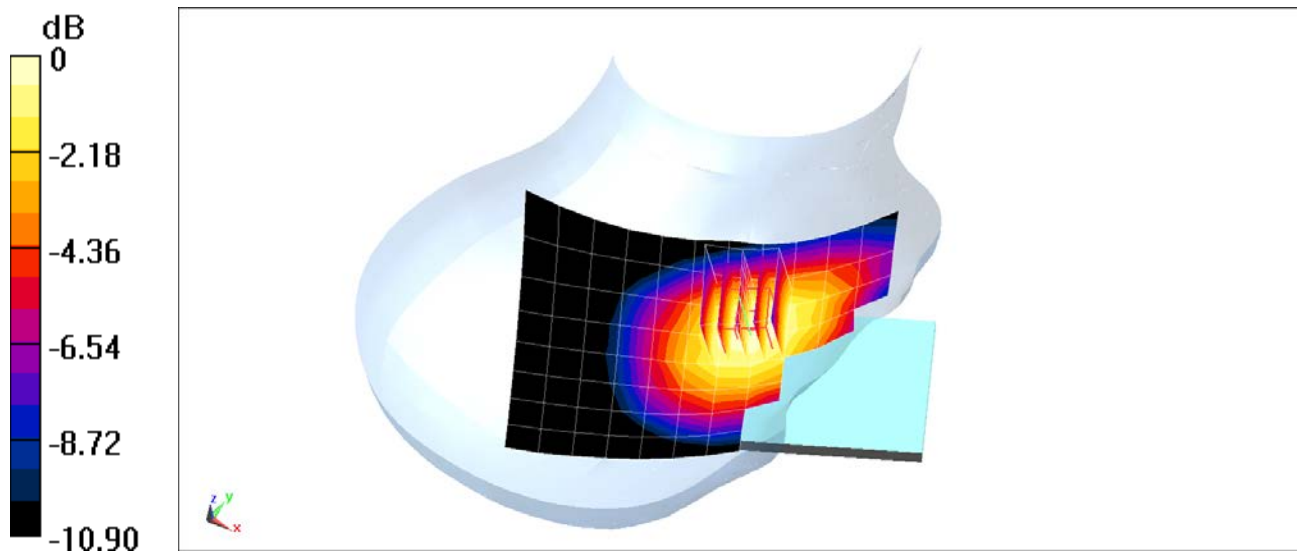

0 dB = 0.218 W/kg = -6.62 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, PCS CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 39$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: PCS CDMA, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.62 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.305 W/kg

**SAR(1 g) = 0.188 W/kg**

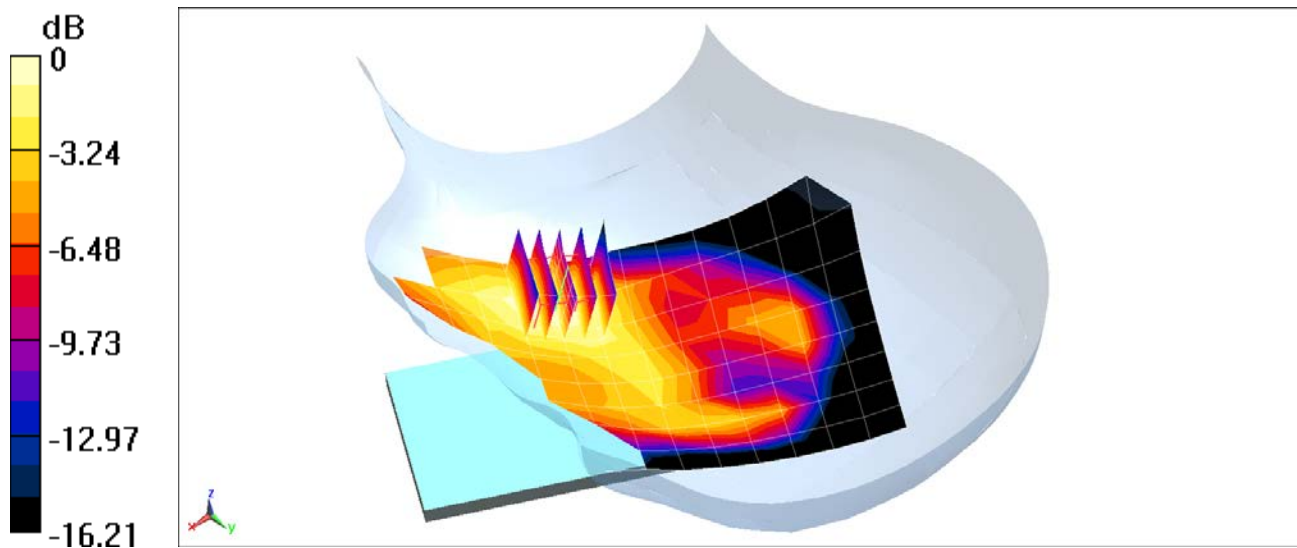

0 dB = 0.209 W/kg = -6.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6$  MHz;  $\sigma = 0.902$  S/m;  $\epsilon_r = 41.508$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Test Date: 03-08-2018; Ambient Temp: 24.3°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 850, Right Head, Cheek, Mid.ch, 2 Tx slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.88 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.192 W/kg

**SAR(1 g) = 0.143 W/kg**

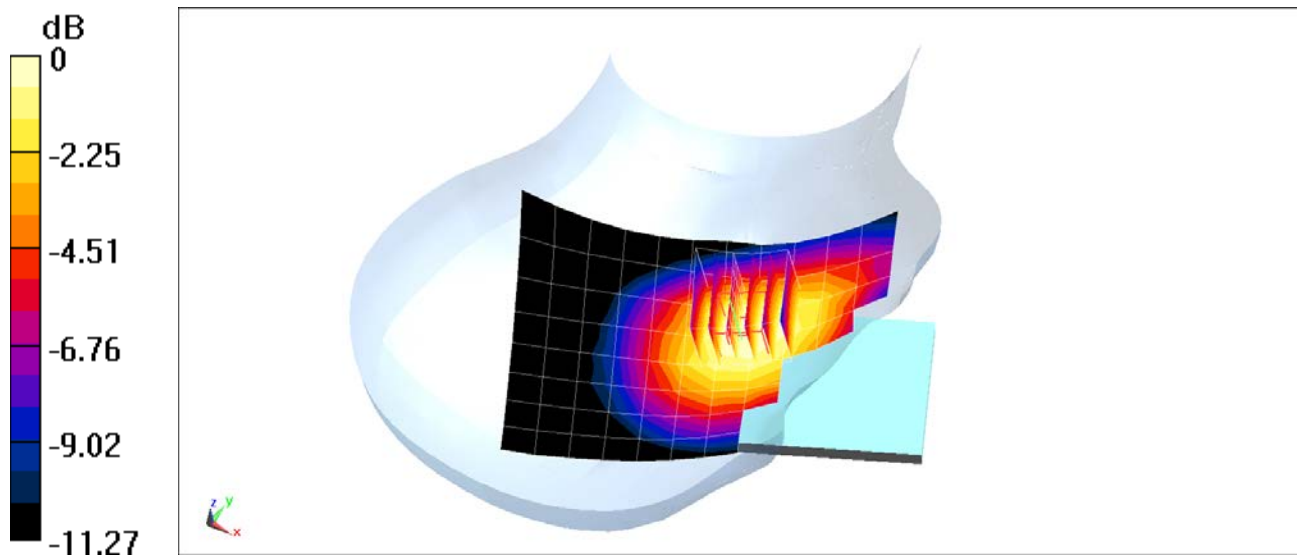

0 dB = 0.157 W/kg = -8.04 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, \_GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 39$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 1900, Left Head, Cheek, Mid.ch, 2 Tx slots**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.144 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.132 W/kg

**SAR(1 g) = 0.080 W/kg**

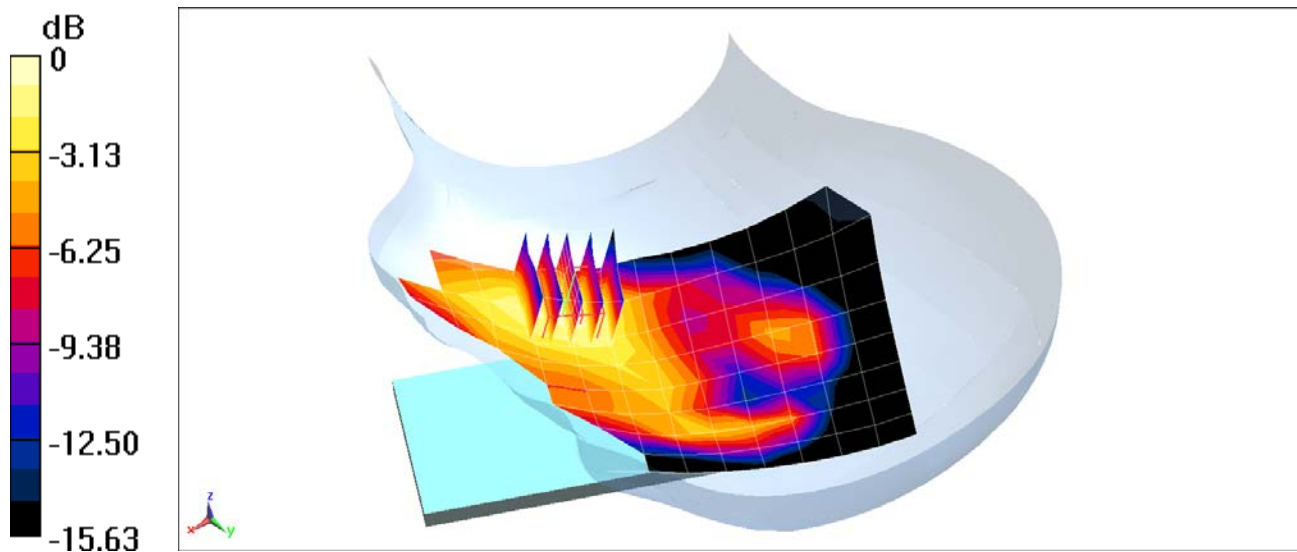

0 dB = 0.0995 W/kg = -10.02 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.902 \text{ S/m}$ ;  $\epsilon_r = 41.508$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-08-2018; Ambient Temp: 24.3°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 850, Right Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.43 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.236 W/kg

**SAR(1 g) = 0.180 W/kg**

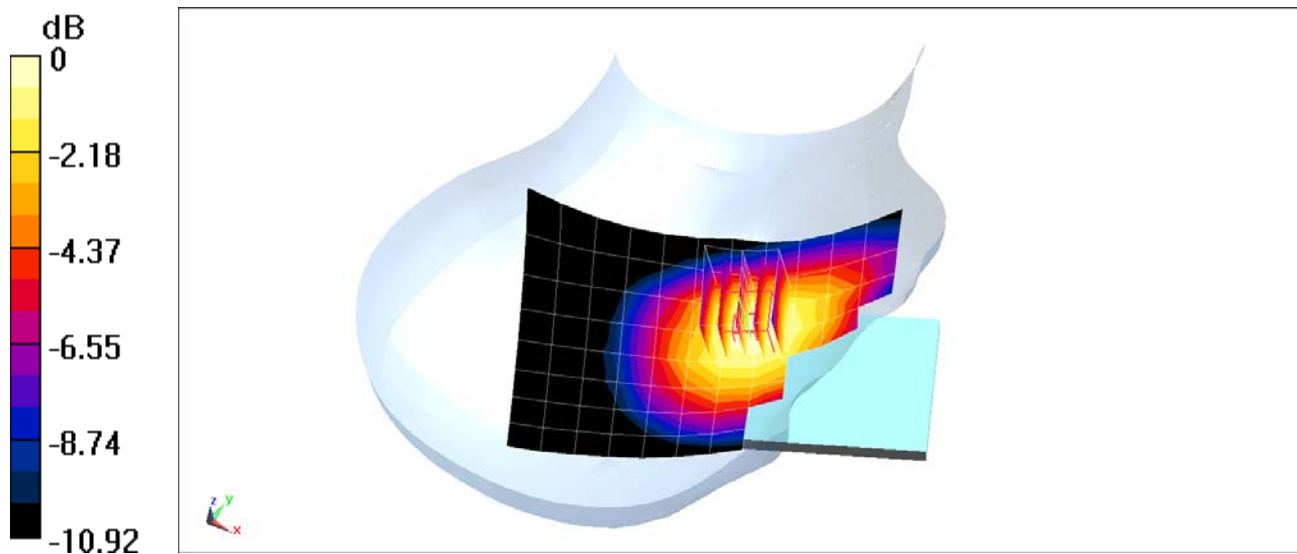

0 dB = 0.196 W/kg = -7.08 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.358 \text{ S/m}$ ;  $\epsilon_r = 39.592$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-05-2018; Ambient Temp: 23.7°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(5.45, 5.45, 5.45); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1750, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.10 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.311 W/kg

**SAR(1 g) = 0.206 W/kg**

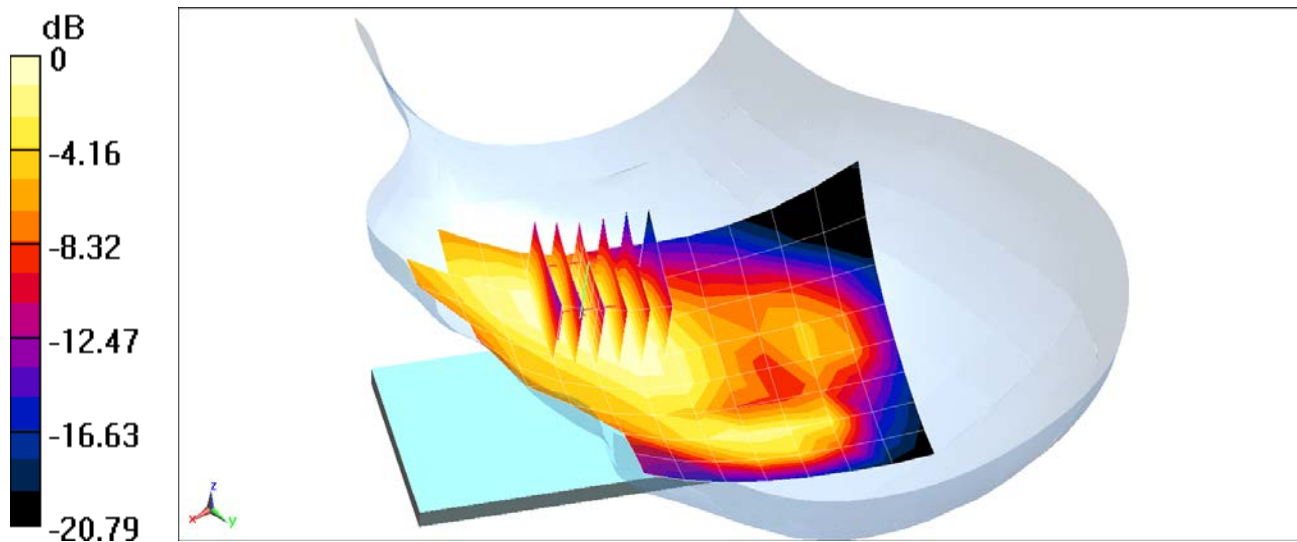

0 dB = 0.238 W/kg = -6.23 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 39$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Left Head, Cheek, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.60 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.334 W/kg

**SAR(1 g) = 0.207 W/kg**

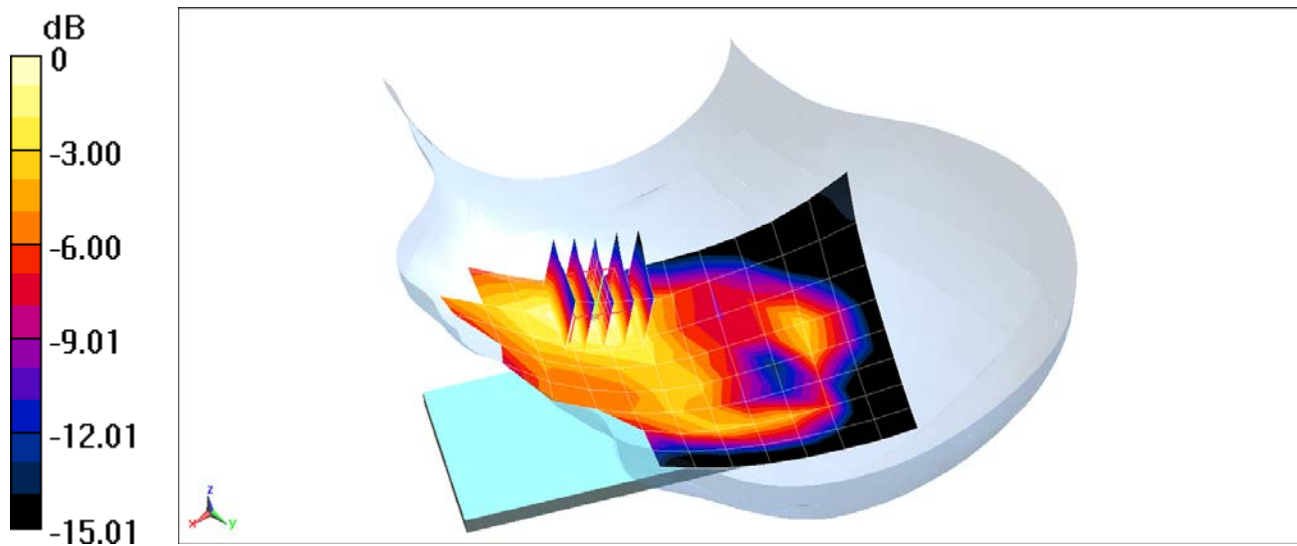

0 dB = 0.246 W/kg = -6.09 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07132**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.877 \text{ S/m}$ ;  $\epsilon_r = 40.886$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-11-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.63 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.111 W/kg

**SAR(1 g) = 0.085 W/kg**

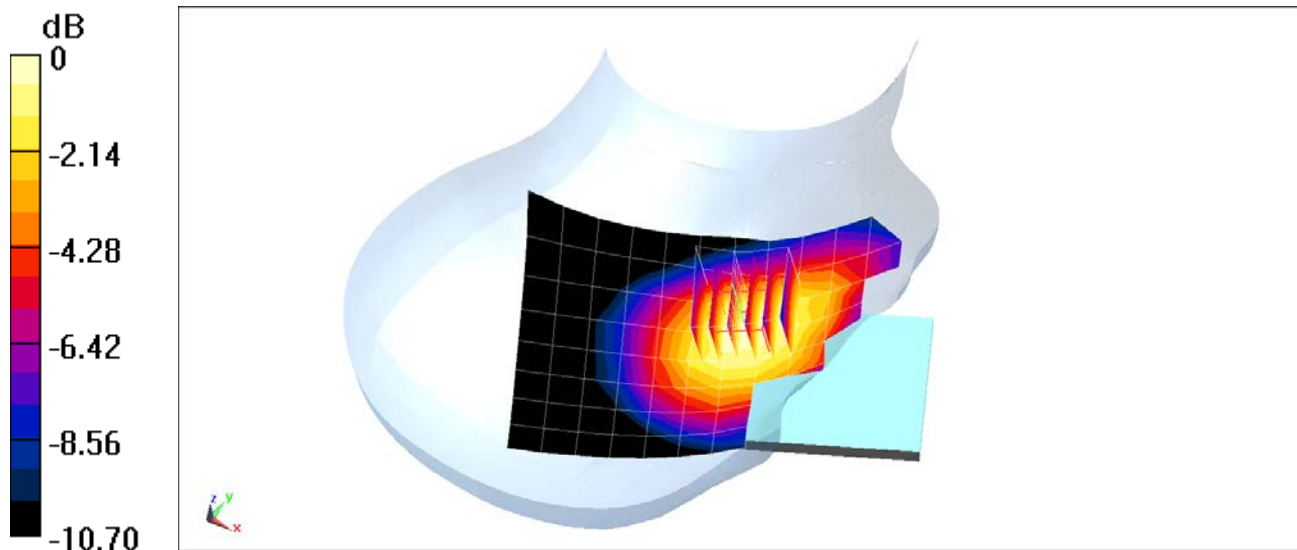

0 dB = 0.0926 W/kg = -10.33 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07124**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.903 \text{ S/m}$ ;  $\epsilon_r = 40.697$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-11-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 15.14 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.177 W/kg**

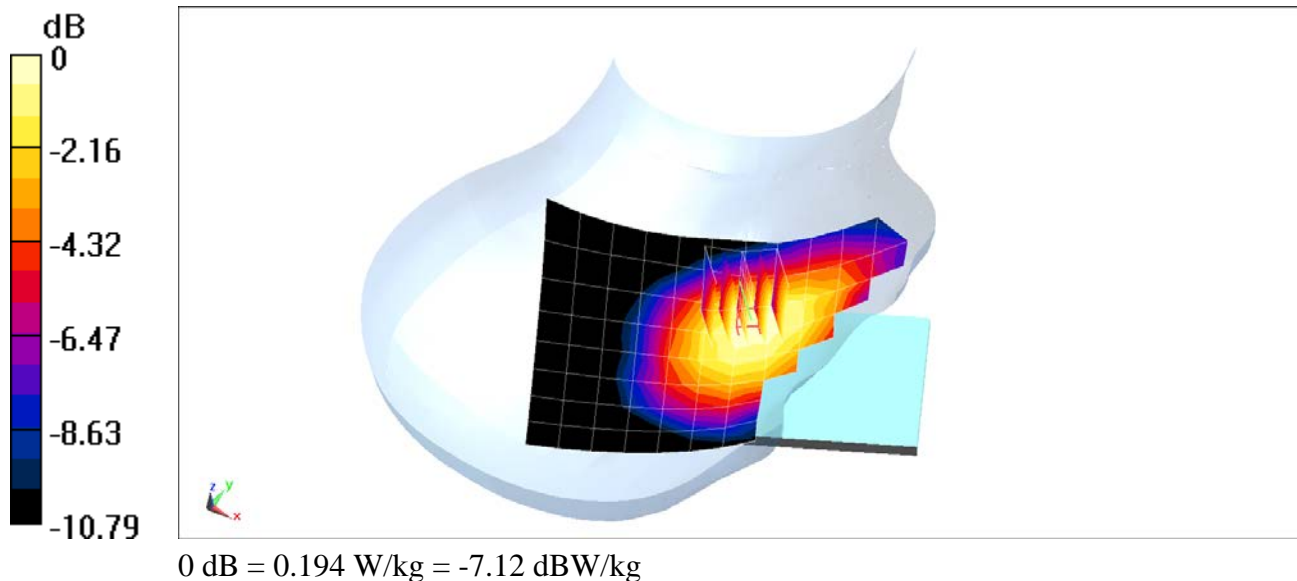

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.898 \text{ S/m}$ ;  $\epsilon_r = 41.57$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-08-2018; Ambient Temp: 24.3°C; Tissue Temp: 21.6°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Right Head, Cheek, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.29 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.155 W/kg

**SAR(1 g) = 0.117 W/kg**

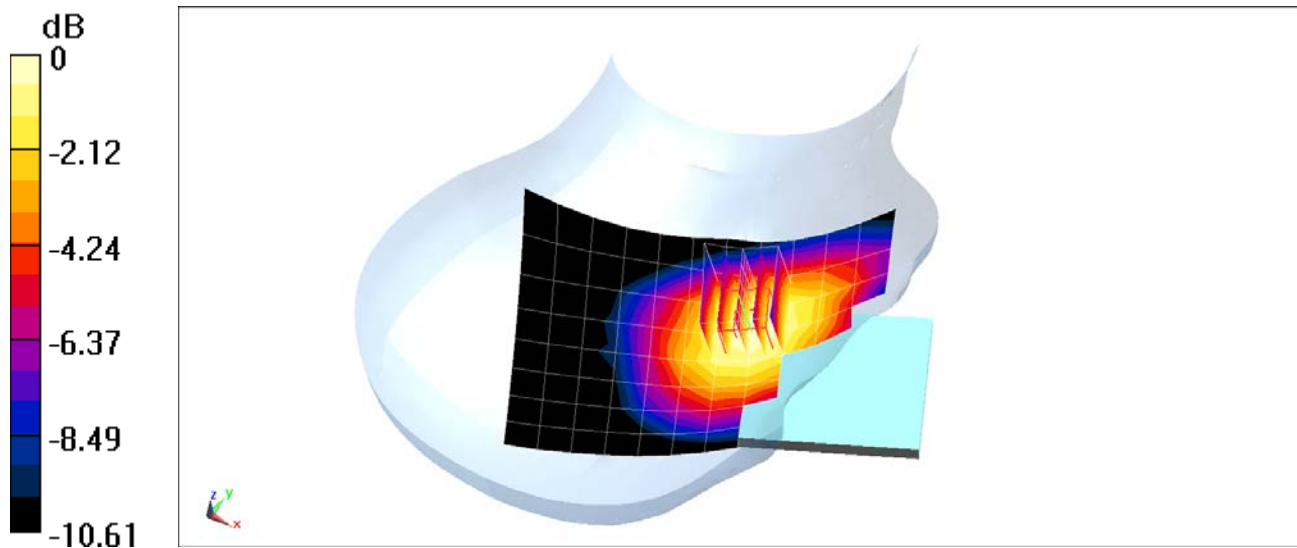

0 dB = 0.128 W/kg = -8.93 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 5 (Cell.); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used (interpolated):

$f = 836.5$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 39.768$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

Test Date: 03-13-2018; Ambient Temp: 23.4°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Right Head, Cheek, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.36 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.215 W/kg

**SAR(1 g) = 0.165 W/kg**

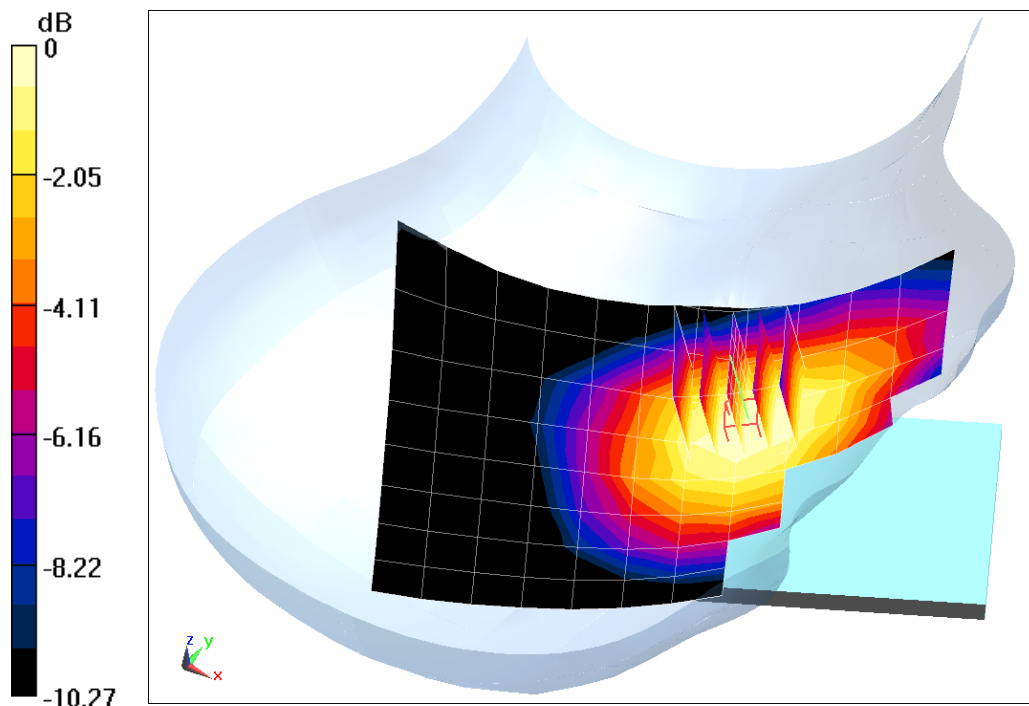

0 dB = 0.181 W/kg = -7.42 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used (interpolated):

$f = 1720 \text{ MHz}$ ;  $\sigma = 1.345 \text{ S/m}$ ;  $\epsilon_r = 39.649$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-05-2018; Ambient Temp: 23.7°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(5.45, 5.45, 5.45); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Left Head, Cheek, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 12.94 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.310 W/kg

**SAR(1 g) = 0.197 W/kg**

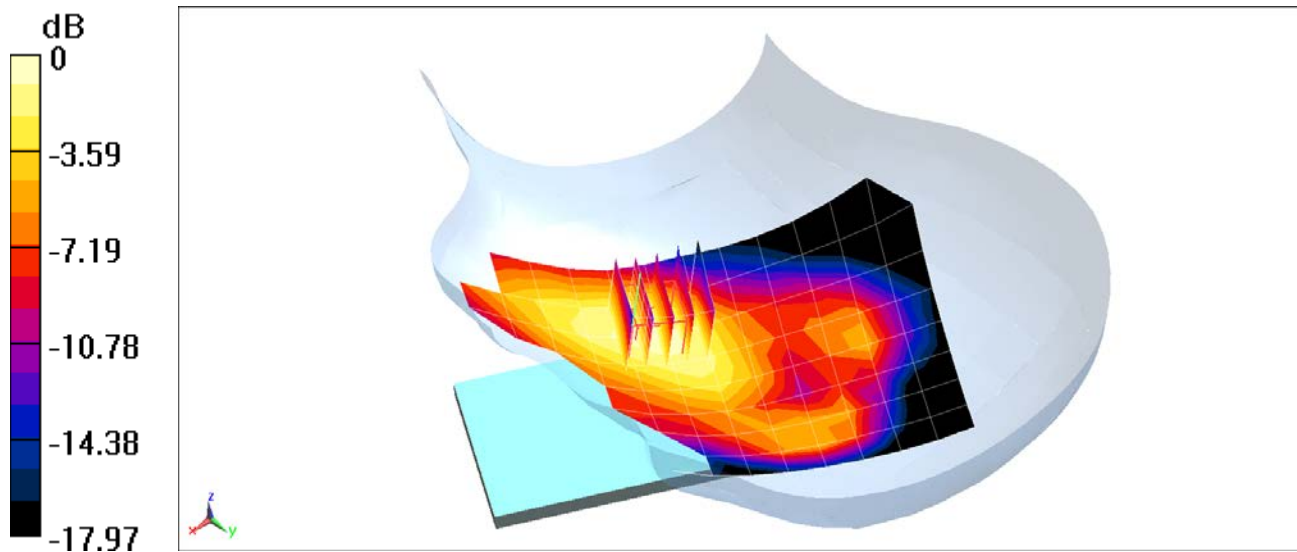

0 dB = 0.234 W/kg = -6.31 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$ ;  $\sigma = 1.459 \text{ S/m}$ ;  $\epsilon_r = 38.913$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Left Head, Cheek, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.69 V/m; Power Drift = 0.21 dB

Peak SAR (extrapolated) = 0.338 W/kg

**SAR(1 g) = 0.206 W/kg**

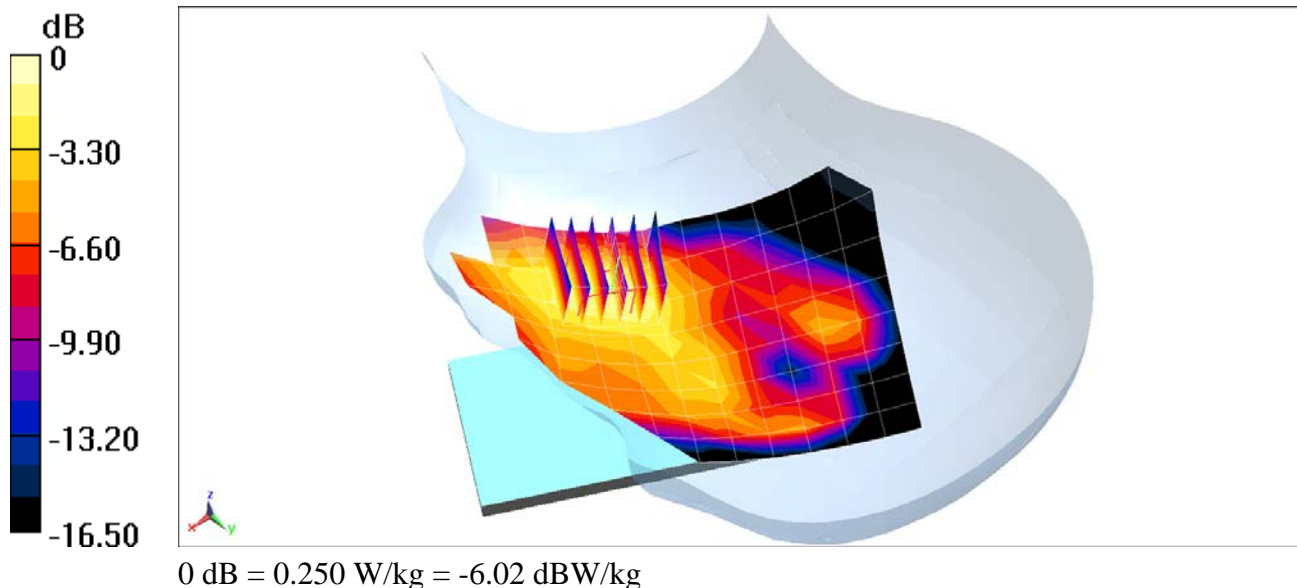

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 41 (Class 2); Frequency: 2549.5 MHz; Duty Cycle: 1:2.31

Medium: 2450 Head Medium parameters used:

$f = 2550$  MHz;  $\sigma = 1.981$  S/m;  $\epsilon_r = 38.243$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

Test Date: 3-01-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(7.42, 7.42, 7.42); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41 PC2, Left Head, Cheek, Low-Mid.ch, QPSK,  
20 MHz Bandwidth, 1 RB, 0 RB Offset**


**Area Scan (10x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.965 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.0810 W/kg

**SAR(1 g) = 0.038 W/kg**

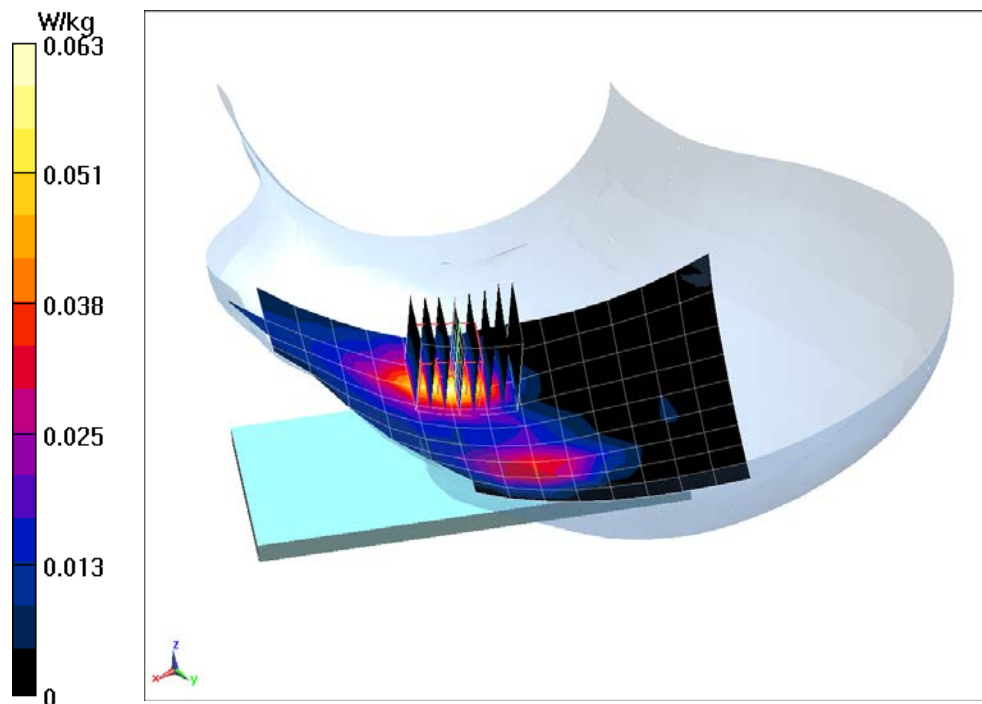



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, \_IEEE 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2412 \text{ MHz}$ ;  $\sigma = 1.825 \text{ S/m}$ ;  $\epsilon_r = 38.161$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-05-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(7.68, 7.68, 7.68); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, 22 MHz Bandwidth, Antenna 1, Right Head, Cheek, Ch 1, 1 Mbps**


**Area Scan (11x18x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.325 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.443 W/kg

**SAR(1 g) = 0.176 W/kg**

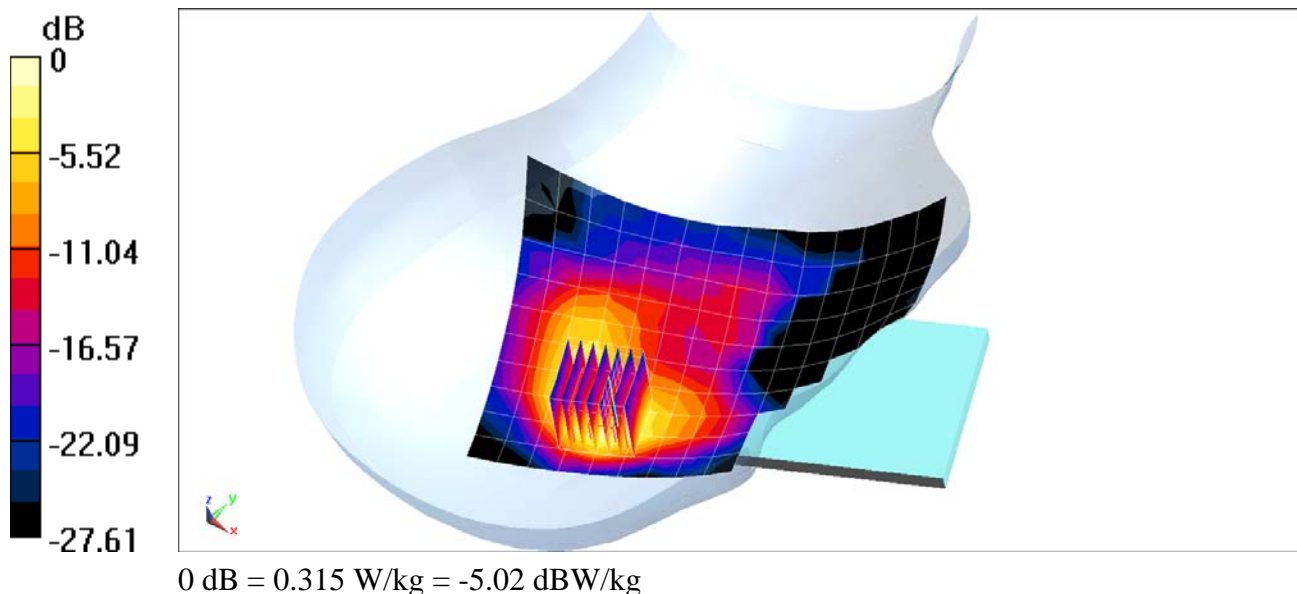



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5805 \text{ MHz}$ ;  $\sigma = 5.151 \text{ S/m}$ ;  $\epsilon_r = 36.395$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.42, 4.42, 4.42); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11a, U-NII-3, 20 MHz Bandwidth, Right Head, Cheek,  
Antenna 1, Ch 161, 6 Mbps**


**Area Scan (13x22x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.142 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 2.71 W/kg

**SAR(1 g) = 0.521 W/kg**

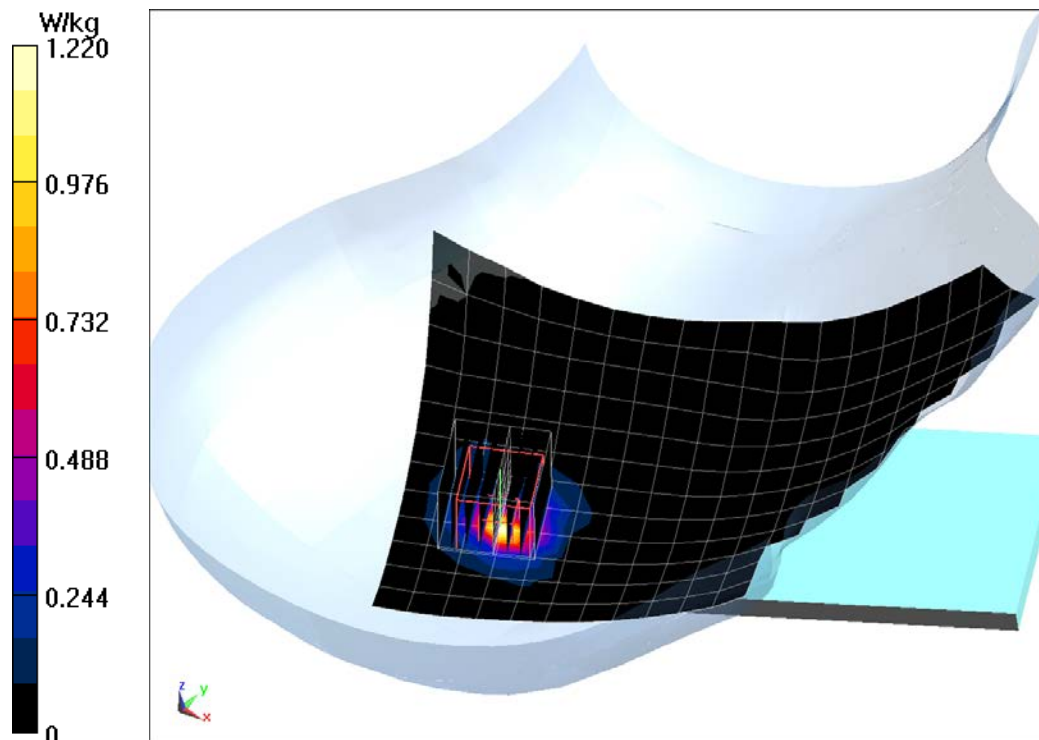

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.289

Medium: 2450 Head Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$ ;  $\sigma = 1.817 \text{ S/m}$ ;  $\epsilon_r = 39.856$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

Test Date: 03-15-2018; Ambient Temp: 22.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7406; ConvF(7.68, 7.68, 7.68); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: Bluetooth, Right Head, Cheek, Ch 0, 1 Mbps**


**Area Scan (11x19x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 5.312 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.119 W/kg

**SAR(1 g) = 0.054 W/kg**

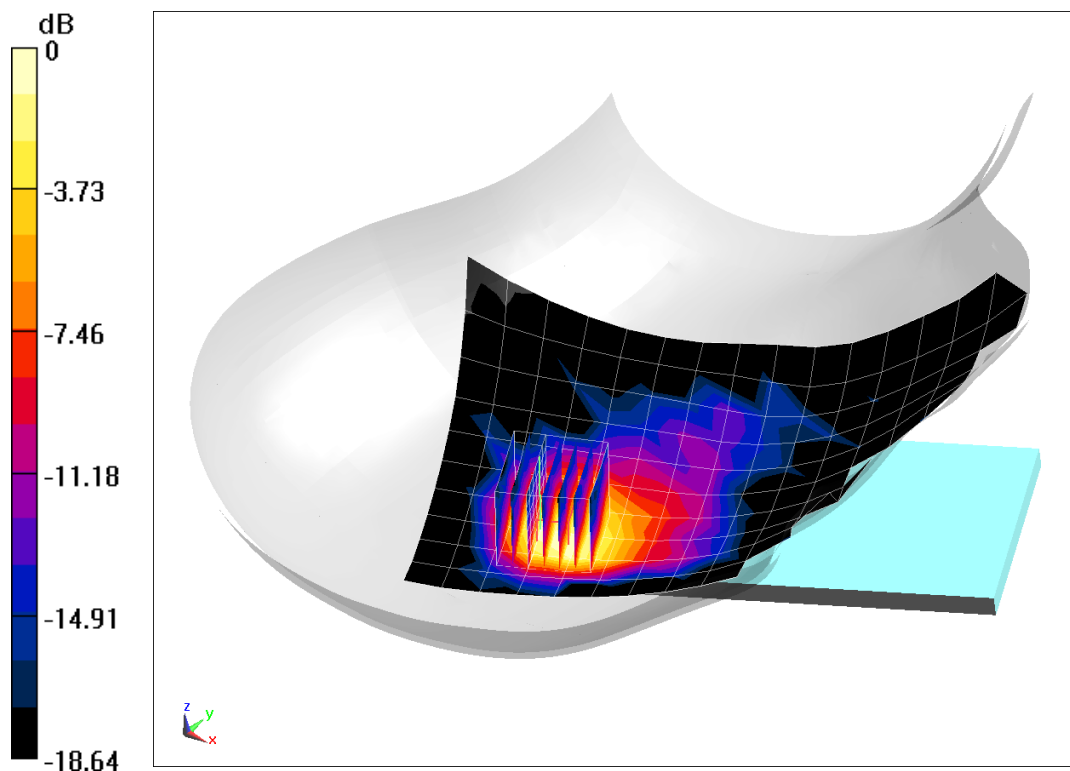

0 dB = 0.0882 W/kg = -10.55 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.969 \text{ S/m}$ ;  $\epsilon_r = 53.677$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. CDMA BC10, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.12 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.589 W/kg

**SAR(1 g) = 0.329 W/kg**

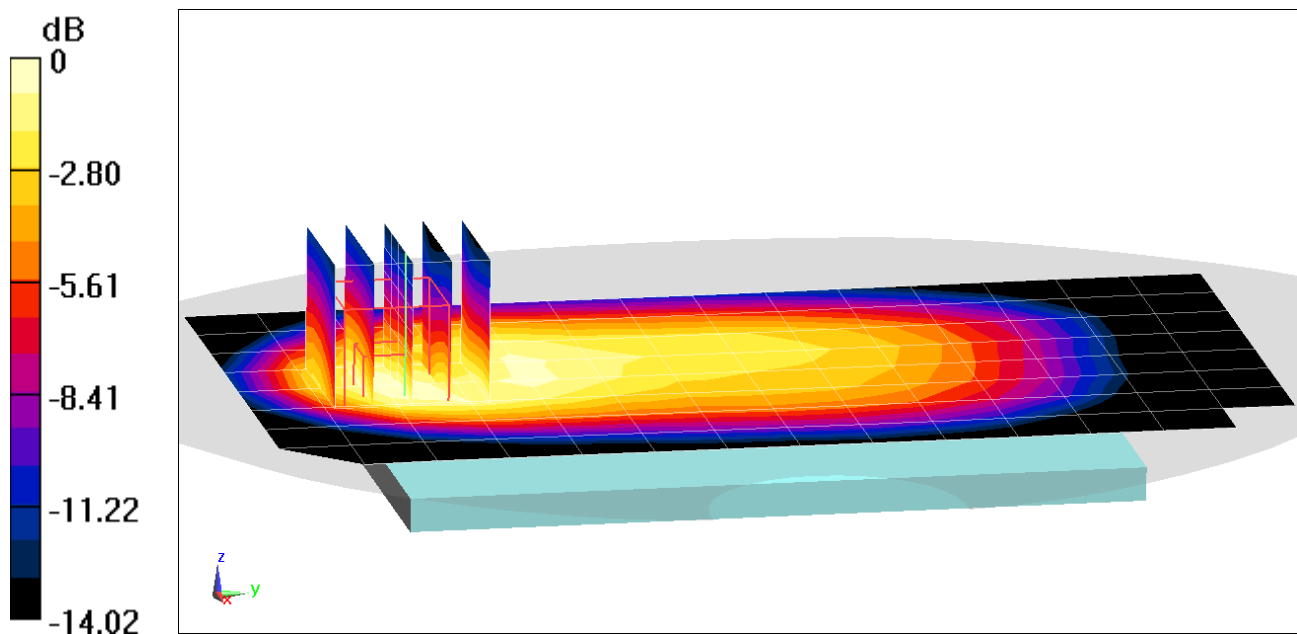

0 dB = 0.480 W/kg = -3.19 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, CDMA; Frequency: 820.1 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 820.1 \text{ MHz}$ ;  $\sigma = 0.969 \text{ S/m}$ ;  $\epsilon_r = 53.677$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO BC10, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 18.75 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.562 W/kg

**SAR(1 g) = 0.319 W/kg**

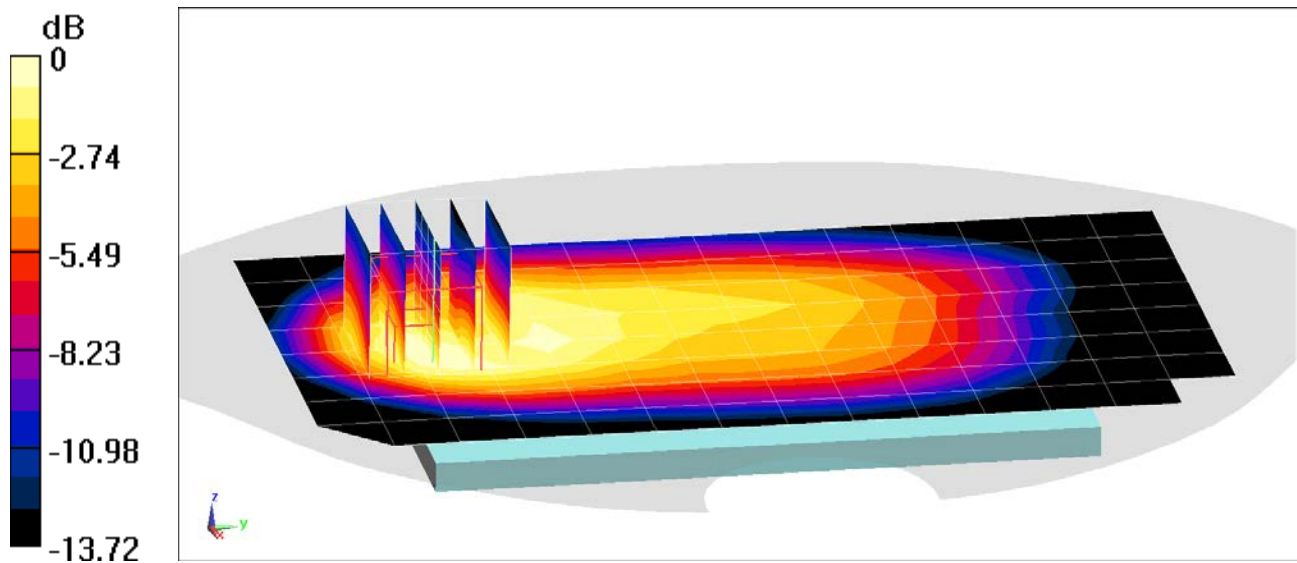

0 dB = 0.460 W/kg = -3.37 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.986 \text{ S/m}$ ;  $\epsilon_r = 53.456$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. CDMA BC0, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.97 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.736 W/kg

**SAR(1 g) = 0.415 W/kg**

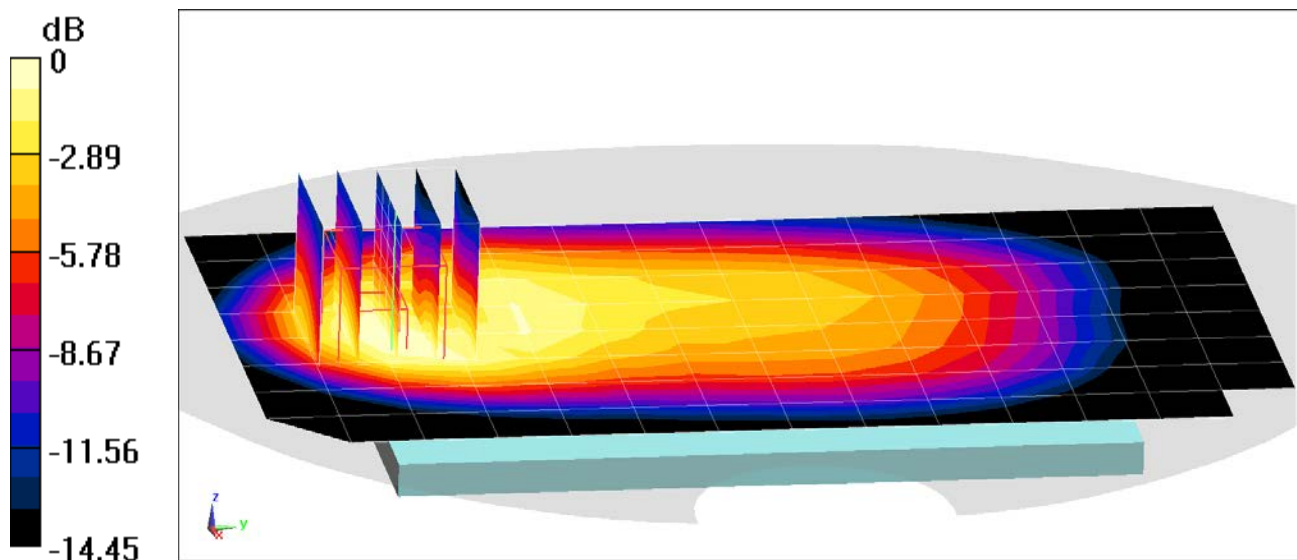

0 dB = 0.593 W/kg = -2.27 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.52 \text{ MHz}$ ;  $\sigma = 0.986 \text{ S/m}$ ;  $\epsilon_r = 53.456$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.0°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: Cell. EVDO BC0, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.57 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.635 W/kg

**SAR(1 g) = 0.375 W/kg**

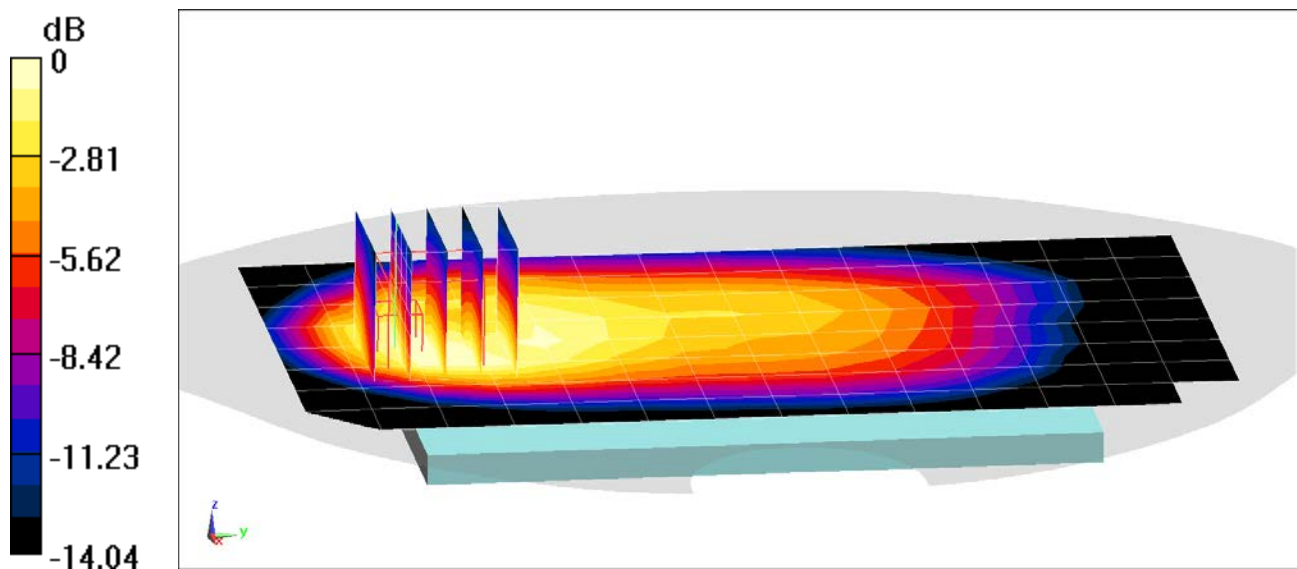

0 dB = 0.531 W/kg = -2.75 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, CDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 53.801$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: PCS CDMA, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.55 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.891 W/kg

**SAR(1 g) = 0.521 W/kg**

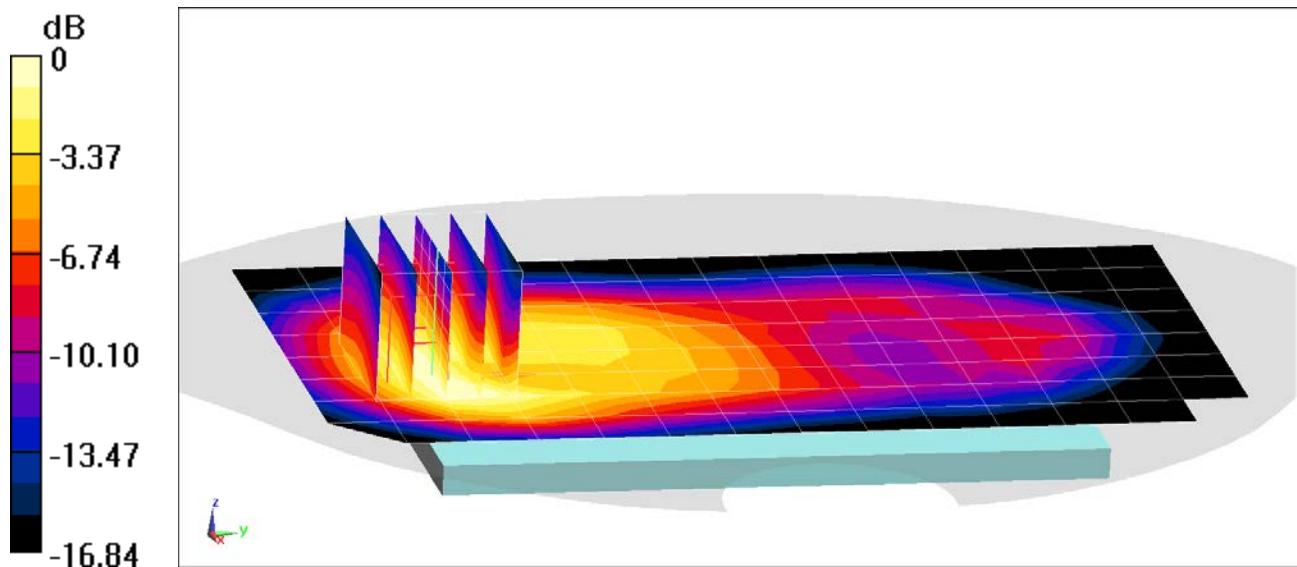

0 dB = 0.766 W/kg = -1.16 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.476 \text{ S/m}$ ;  $\epsilon_r = 53.893$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: PCS EVDO, Body SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.68 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.39 W/kg

**SAR(1 g) = 0.828 W/kg**

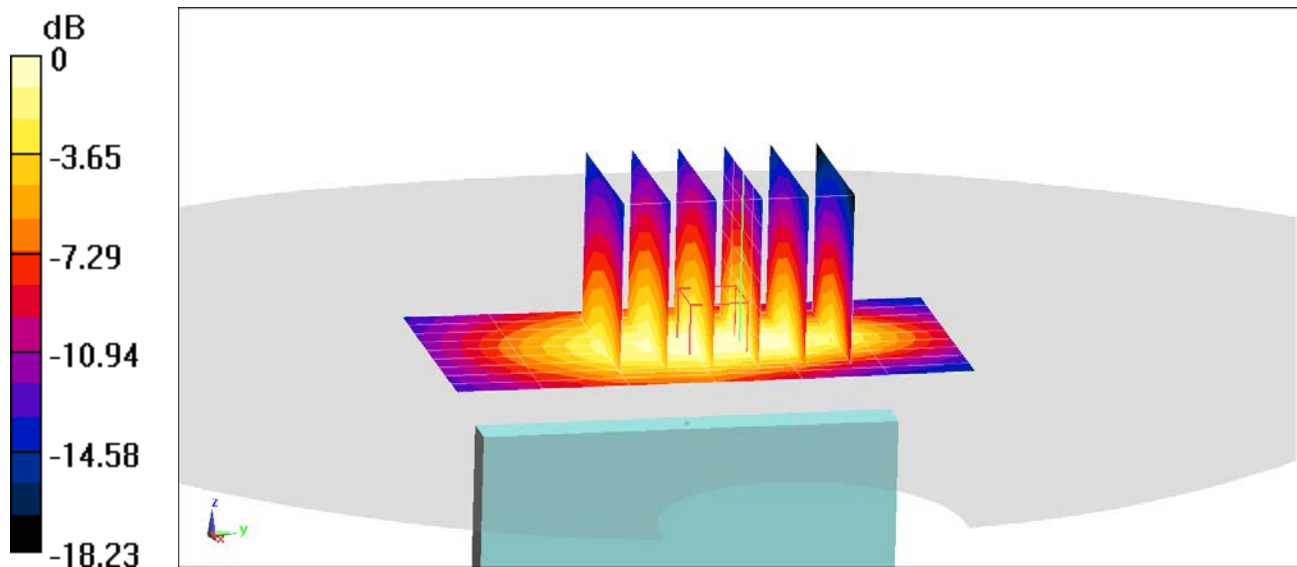

0 dB = 1.19 W/kg = 0.76 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 836.6 MHz; Duty Cycle: 1:4.15

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.999 \text{ S/m}$ ;  $\epsilon_r = 52.848$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-04-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 850, Body SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.23 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.637 W/kg

**SAR(1 g) = 0.353 W/kg**

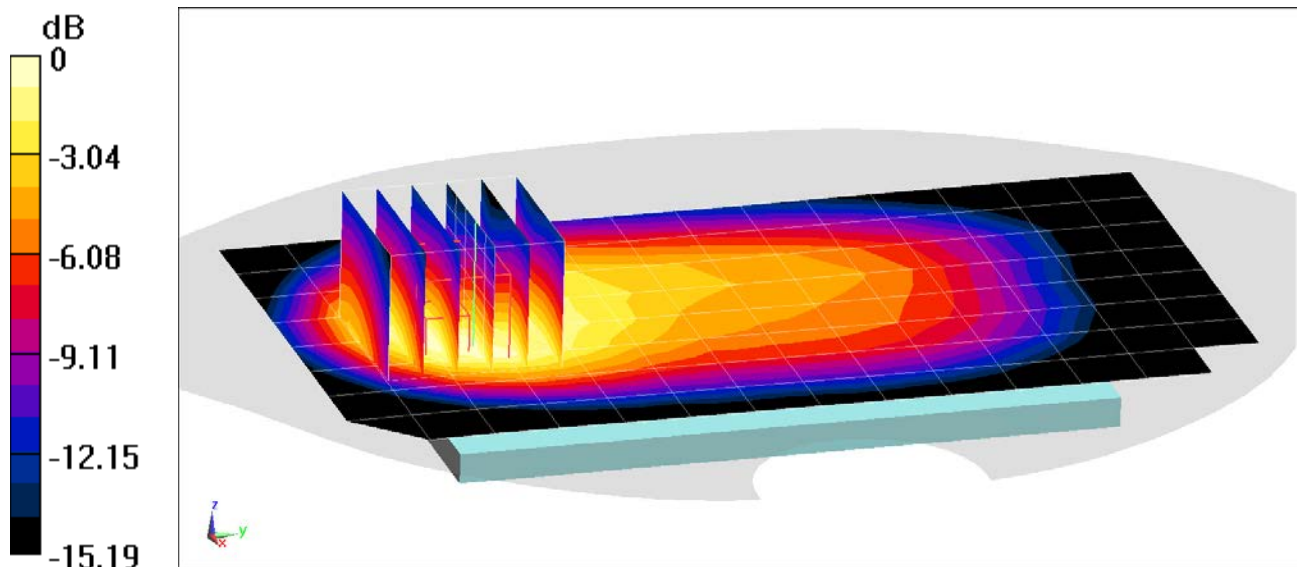

0 dB = 0.514 W/kg = -2.89 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 53.801$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 1900, Body SAR, Back side, Mid.ch, 2 Tx Slots**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (6x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 11.74 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.327 W/kg

**SAR(1 g) = 0.193 W/kg**

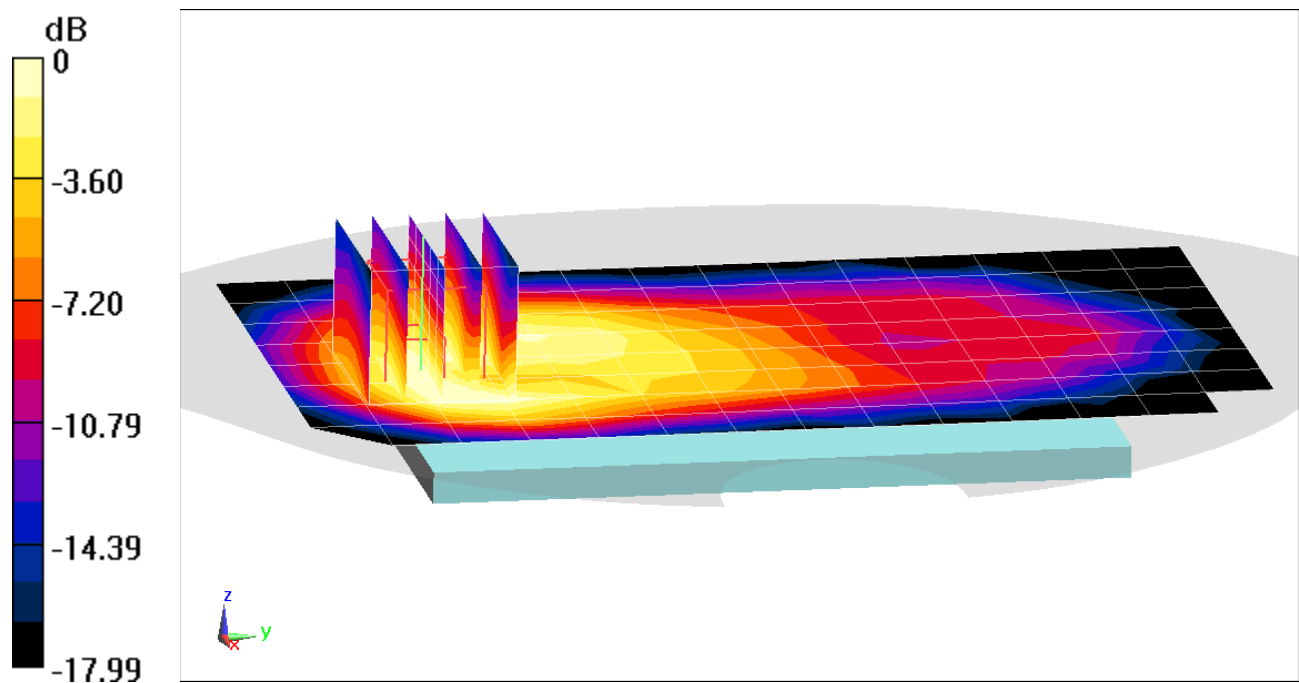

0 dB = 0.277 W/kg = -5.58 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, GSM GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.51 \text{ S/m}$ ;  $\epsilon_r = 53.801$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: GPRS 1900, Body SAR, Bottom Edge, Mid.ch, 2 Tx Slots**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.17 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.550 W/kg

**SAR(1 g) = 0.321 W/kg**

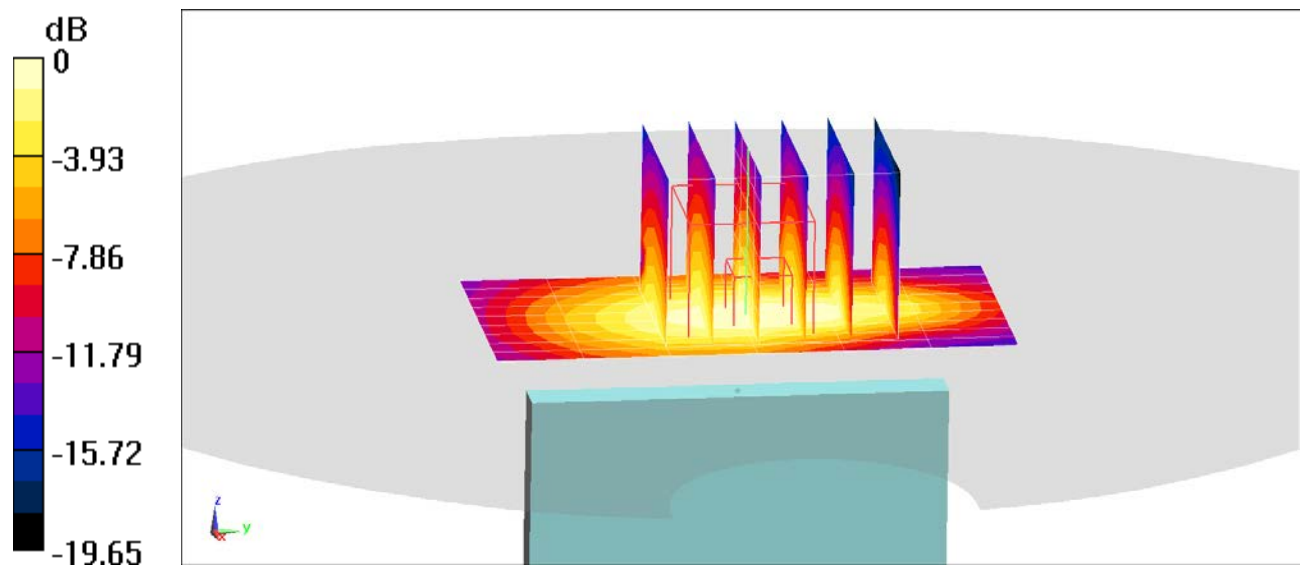

0 dB = 0.465 W/kg = -3.33 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07132**

Communication System: UID 0, UMTS; Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.6 \text{ MHz}$ ;  $\sigma = 0.999 \text{ S/m}$ ;  $\epsilon_r = 52.848$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-04-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 850, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 19.97 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.823 W/kg

**SAR(1 g) = 0.461 W/kg**

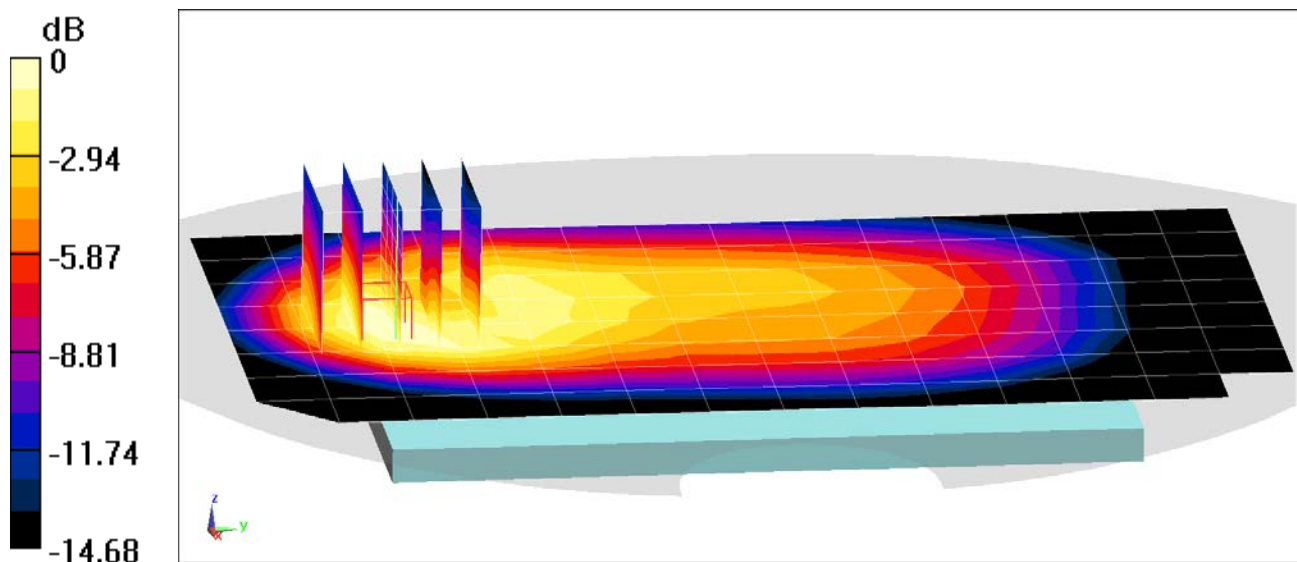

0 dB = 0.661 W/kg = -1.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, UMTS; Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1732.4 \text{ MHz}$ ;  $\sigma = 1.447 \text{ S/m}$ ;  $\epsilon_r = 52.396$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1750, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.69 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.02 W/kg

**SAR(1 g) = 0.611 W/kg**

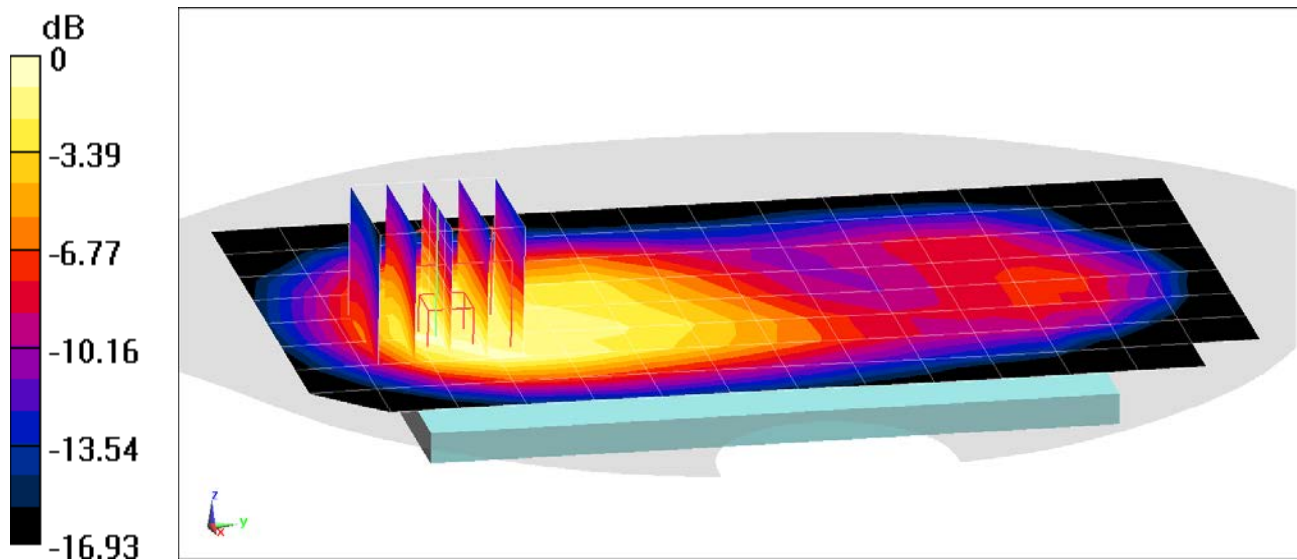

0 dB = 0.875 W/kg = -0.58 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, \_UMTS; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.426 \text{ S/m}$ ;  $\epsilon_r = 52.466$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1750, Body SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 26.23 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.886 W/kg**

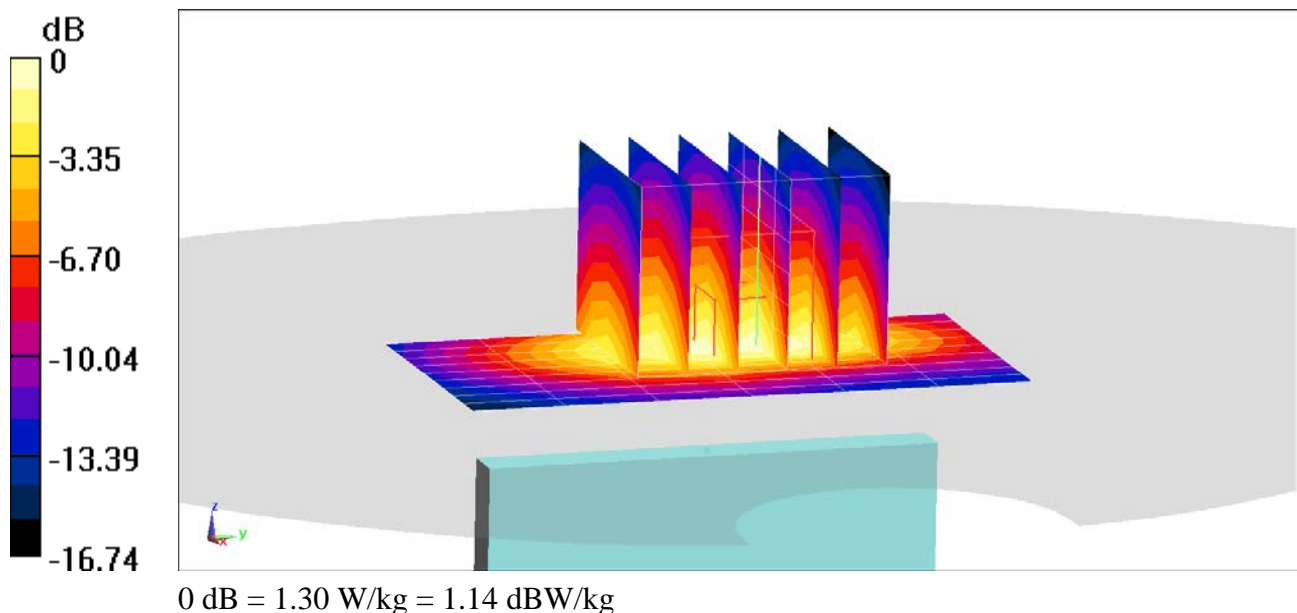

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used:

$f = 1880 \text{ MHz}$ ;  $\sigma = 1.542 \text{ S/m}$ ;  $\epsilon_r = 52.157$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(7.98, 7.98, 7.98); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Body SAR, Back side, Mid.ch**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (7x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 21.24 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.05 W/kg

**SAR(1 g) = 0.645 W/kg**

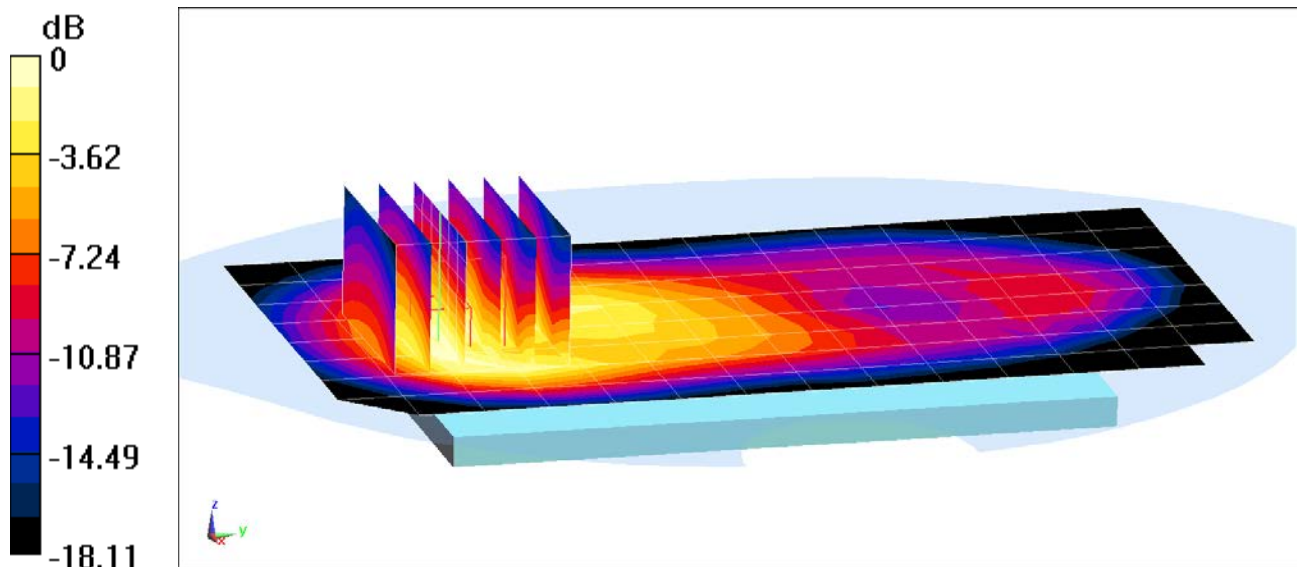

0 dB = 0.915 W/kg = -0.39 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, \_UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.511 \text{ S/m}$ ;  $\epsilon_r = 52.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(7.98, 7.98, 7.98); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Body SAR, Bottom Edge, Low.ch**


**Area Scan (10x7x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.87 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.85 W/kg

**SAR(1 g) = 1.13 W/kg**

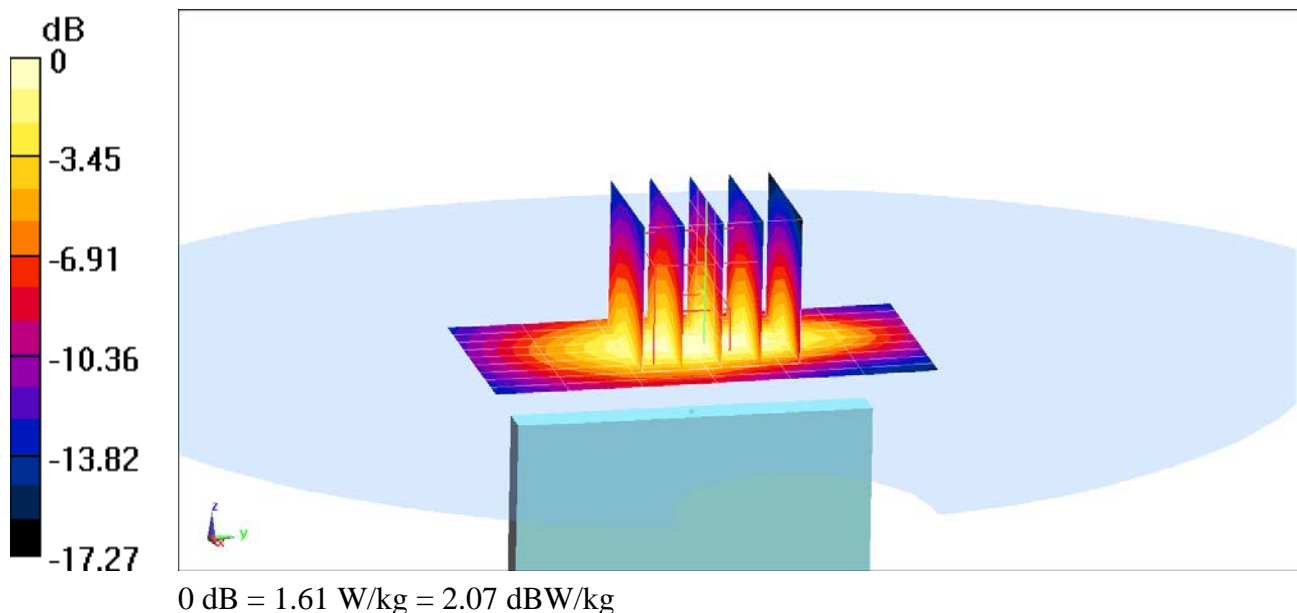



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5$  MHz;  $\sigma = 0.959$  S/m;  $\epsilon_r = 53.304$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-14-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF(9.9, 9.9, 9.9); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.36 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.381 W/kg

**SAR(1 g) = 0.203 W/kg**

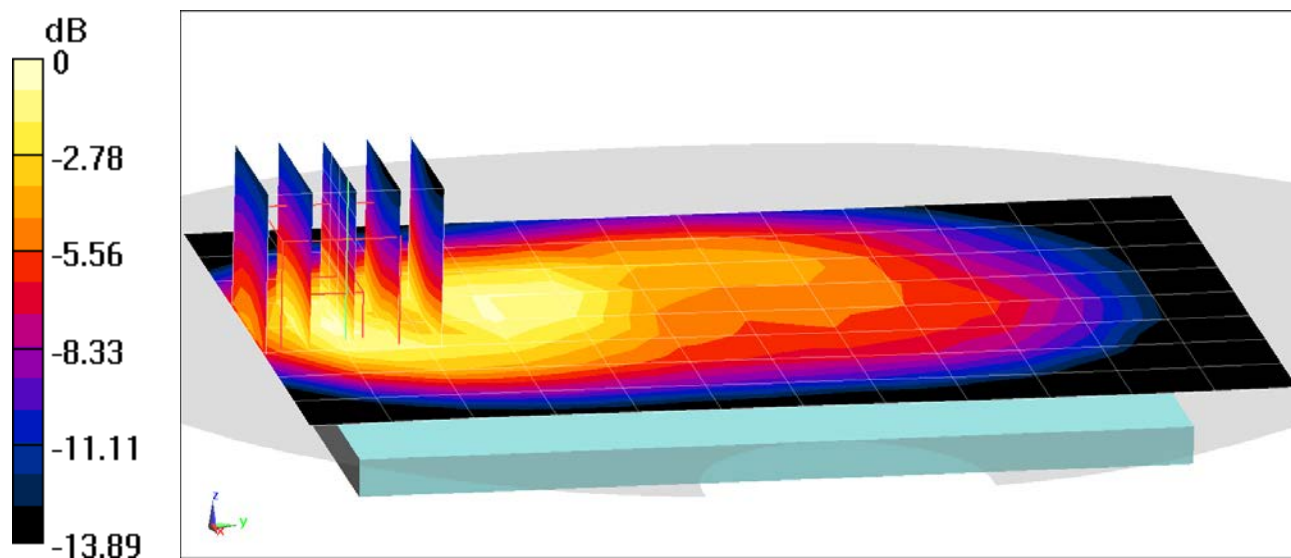

0 dB = 0.310 W/kg = -5.09 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 707.5 \text{ MHz}$ ;  $\sigma = 0.959 \text{ S/m}$ ;  $\epsilon_r = 53.304$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-14-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF(9.9, 9.9, 9.9); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 12, Body SAR, Front side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 14.49 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.382 W/kg

**SAR(1 g) = 0.205 W/kg**

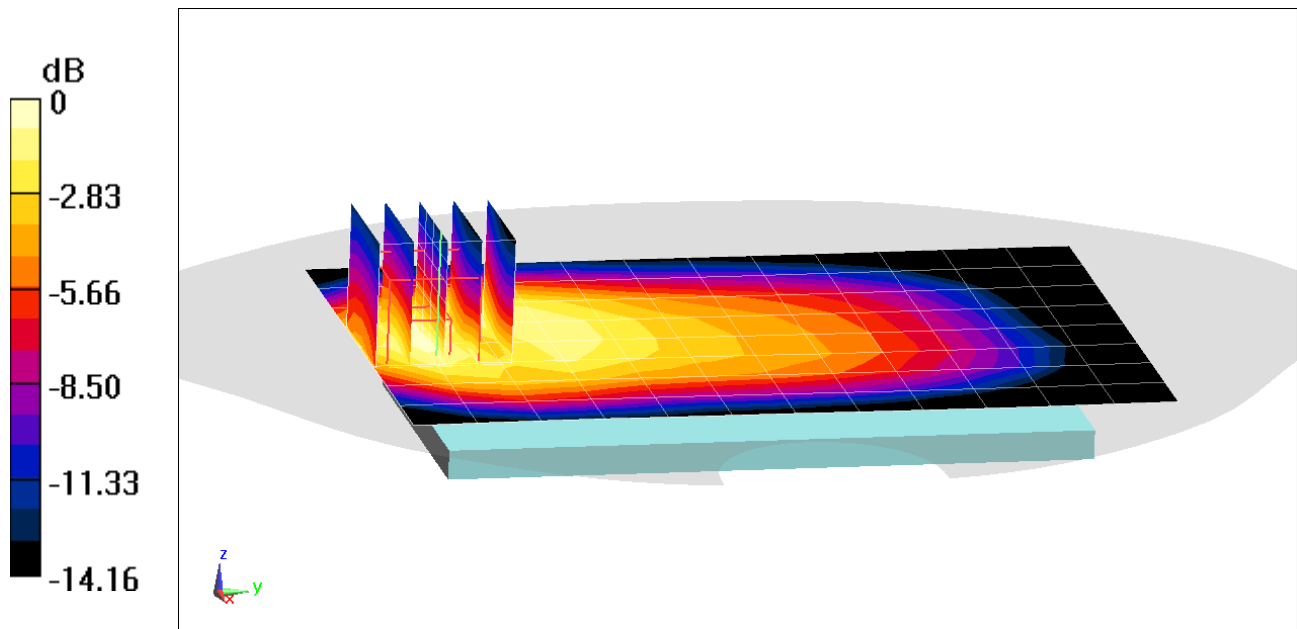

0 dB = 0.297 W/kg = -5.27 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 782 \text{ MHz}$ ;  $\sigma = 0.983 \text{ S/m}$ ;  $\epsilon_r = 53.056$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-14-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF(9.9, 9.9, 9.9); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 13, Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.49 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.706 W/kg

**SAR(1 g) = 0.377 W/kg**

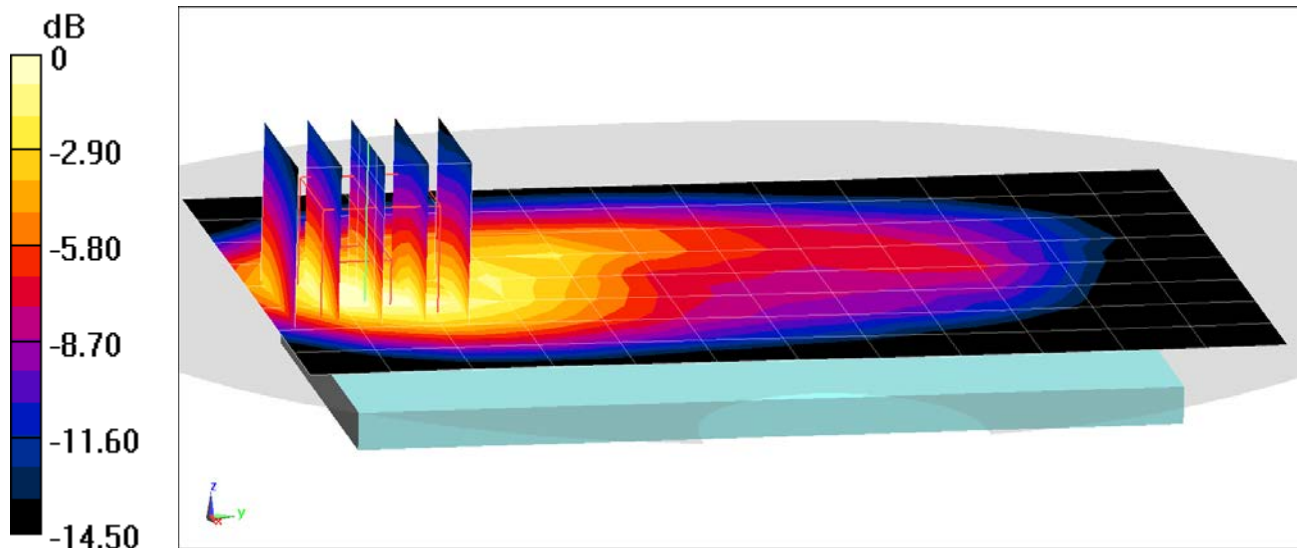

0 dB = 0.579 W/kg = -2.37 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07132**

Communication System: UID 0, LTE Band 26; Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 831.5 \text{ MHz}$ ;  $\sigma = 0.995 \text{ S/m}$ ;  $\epsilon_r = 52.902$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-04-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 26 (Cell.), Body SAR, Back side, Mid.ch,  
15 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.83 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.268 W/kg**

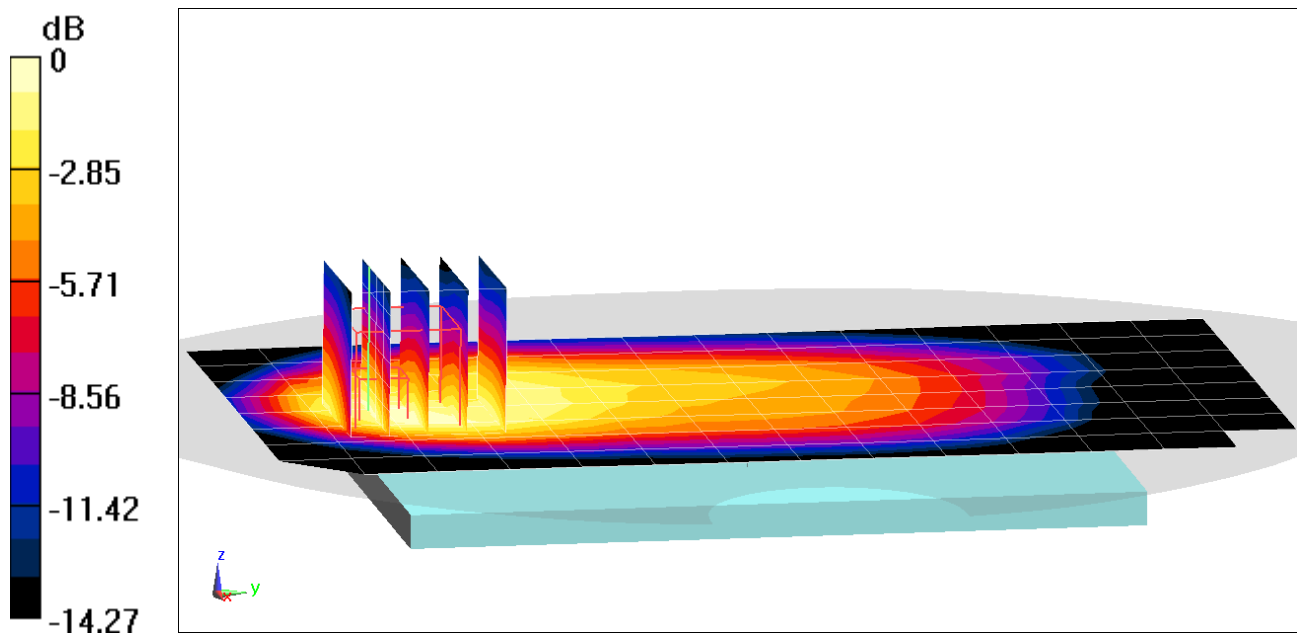

0 dB = 0.404 W/kg = -3.94 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, LTE Band 5; Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used (interpolated):

$f = 836.5 \text{ MHz}$ ;  $\sigma = 0.975 \text{ S/m}$ ;  $\epsilon_r = 52.647$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 5 (Cell.), Body SAR, Back side, Mid.ch,  
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.26 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.749 W/kg

**SAR(1 g) = 0.436 W/kg**

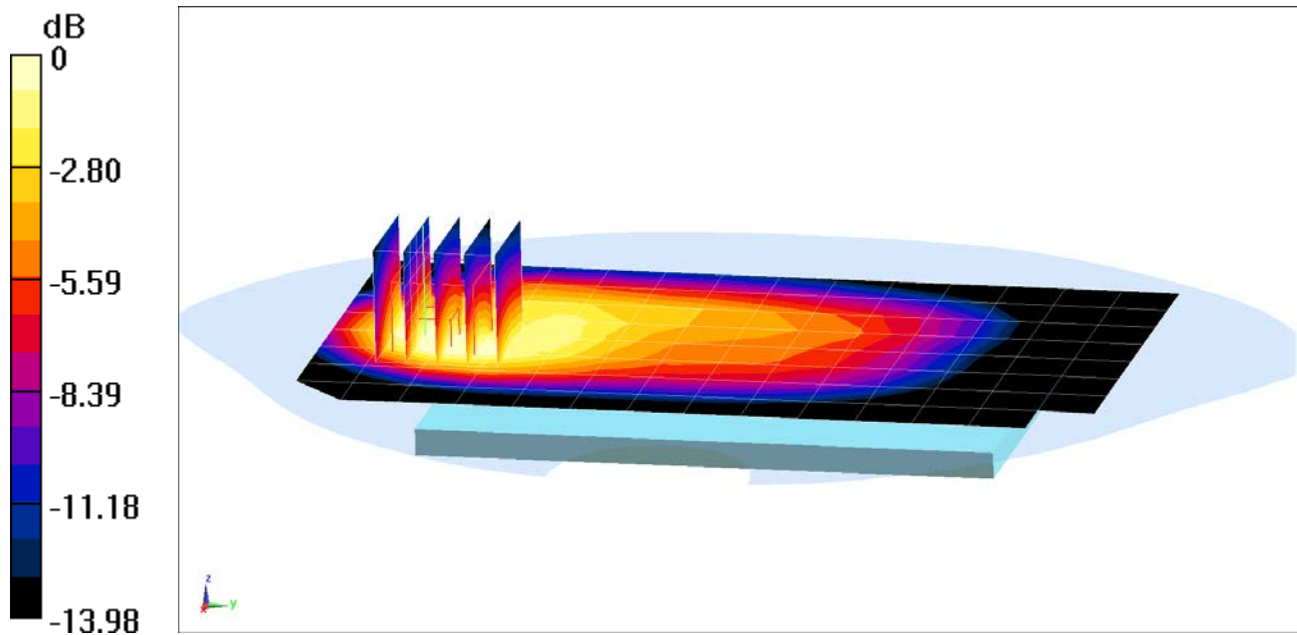

0 dB = 0.533 W/kg = -2.73 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1720 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 52.439$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Back side, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.53 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.709 W/kg**

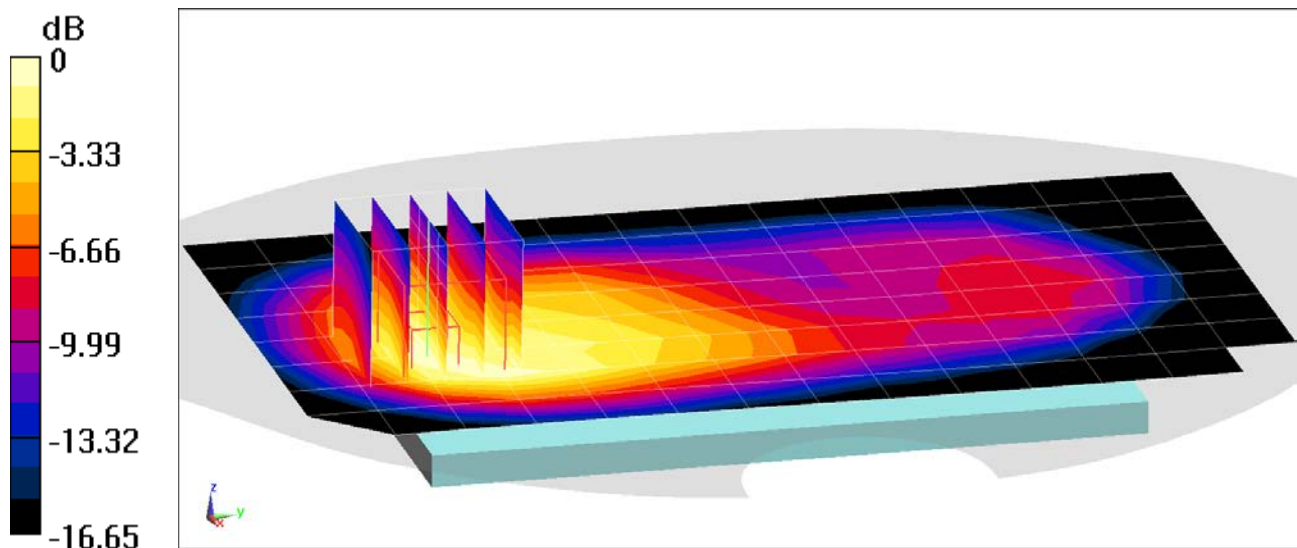

0 dB = 1.02 W/kg = 0.09 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, \_LTE Band 66 (AWS); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1720 \text{ MHz}$ ;  $\sigma = 1.434 \text{ S/m}$ ;  $\epsilon_r = 52.439$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Body SAR, Bottom Edge, Low.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (11x7x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 28.18 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 1.02 W/kg**

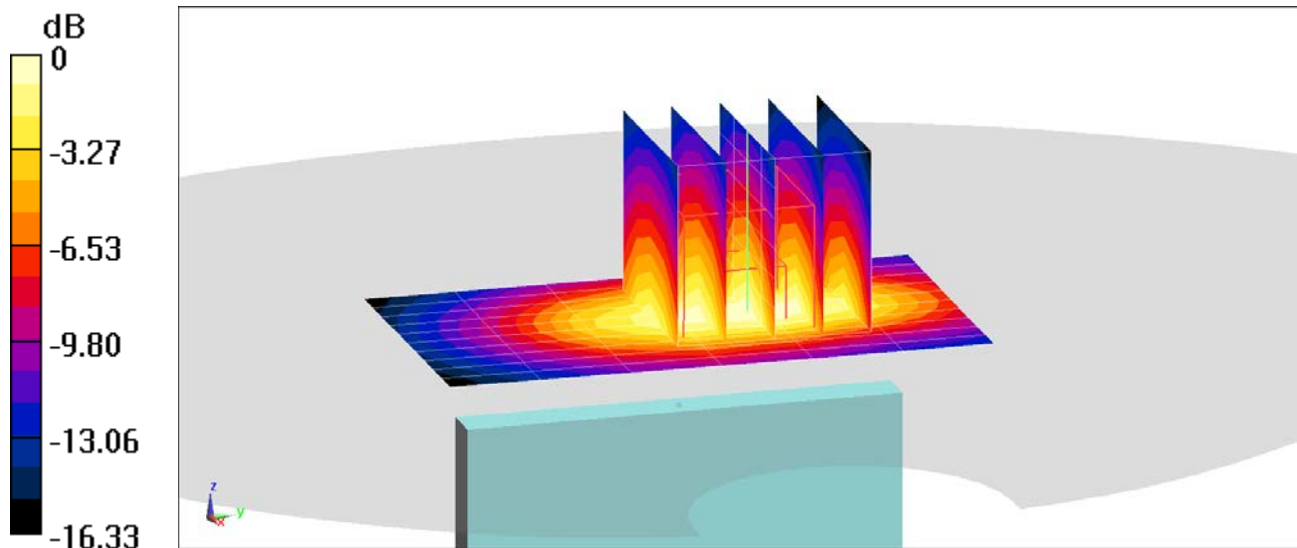

0 dB = 1.48 W/kg = 1.70 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1905 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1905 \text{ MHz}$ ;  $\sigma = 1.571 \text{ S/m}$ ;  $\epsilon_r = 52.109$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(7.98, 7.98, 7.98); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Back side, High.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.77 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.842 W/kg

**SAR(1 g) = 0.521 W/kg**

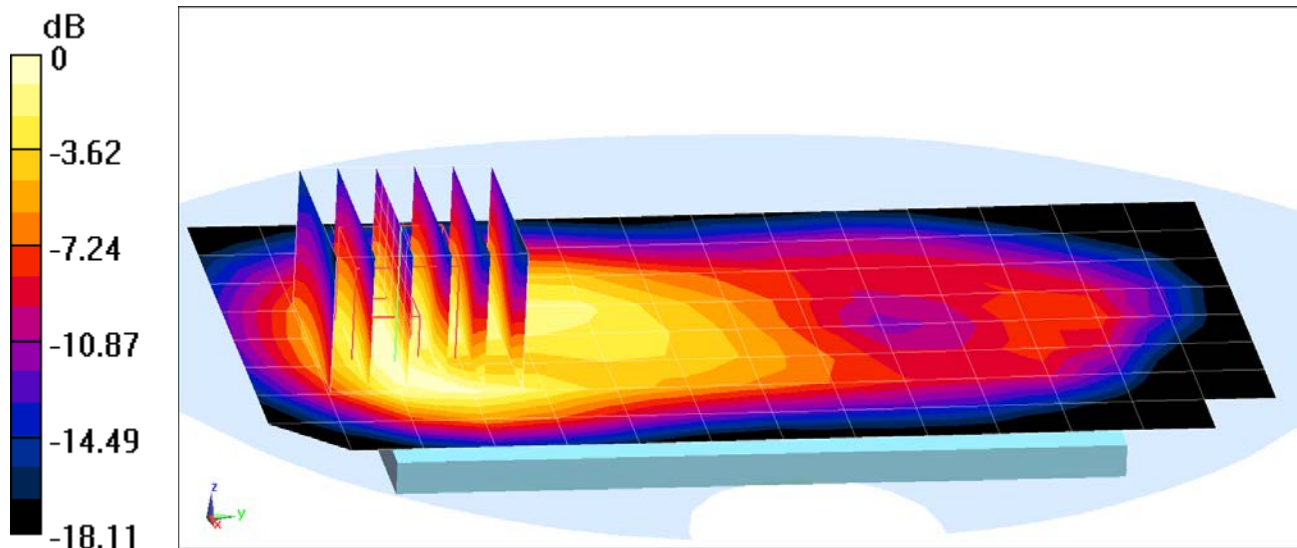

0 dB = 0.737 W/kg = -1.33 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1882.5 \text{ MHz}$ ;  $\sigma = 1.545 \text{ S/m}$ ;  $\epsilon_r = 52.152$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(7.98, 7.98, 7.98); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Body SAR, Bottom Edge, Mid.ch,  
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**


**Area Scan (9x9x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 28.23 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.80 W/kg

**SAR(1 g) = 1.1 W/kg**

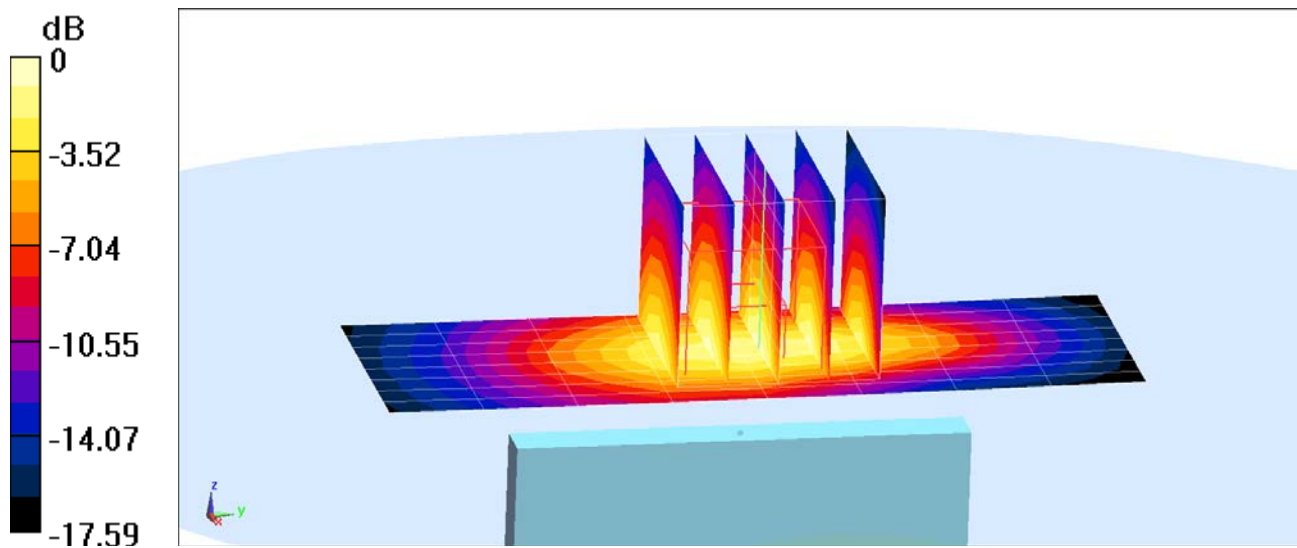

0 dB = 1.57 W/kg = 1.96 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, \_LTE Band 41 (Class 2); Frequency: 2593 MHz; Duty Cycle: 1:2.31

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2593 \text{ MHz}$ ;  $\sigma = 2.173 \text{ S/m}$ ;  $\epsilon_r = 50.428$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-04-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 41 PC2, Body SAR, Back side, Mid.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 99 RB Offset**


**Area Scan (10x16x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x8x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 20.60 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.21 W/kg

**SAR(1 g) = 0.951 W/kg**

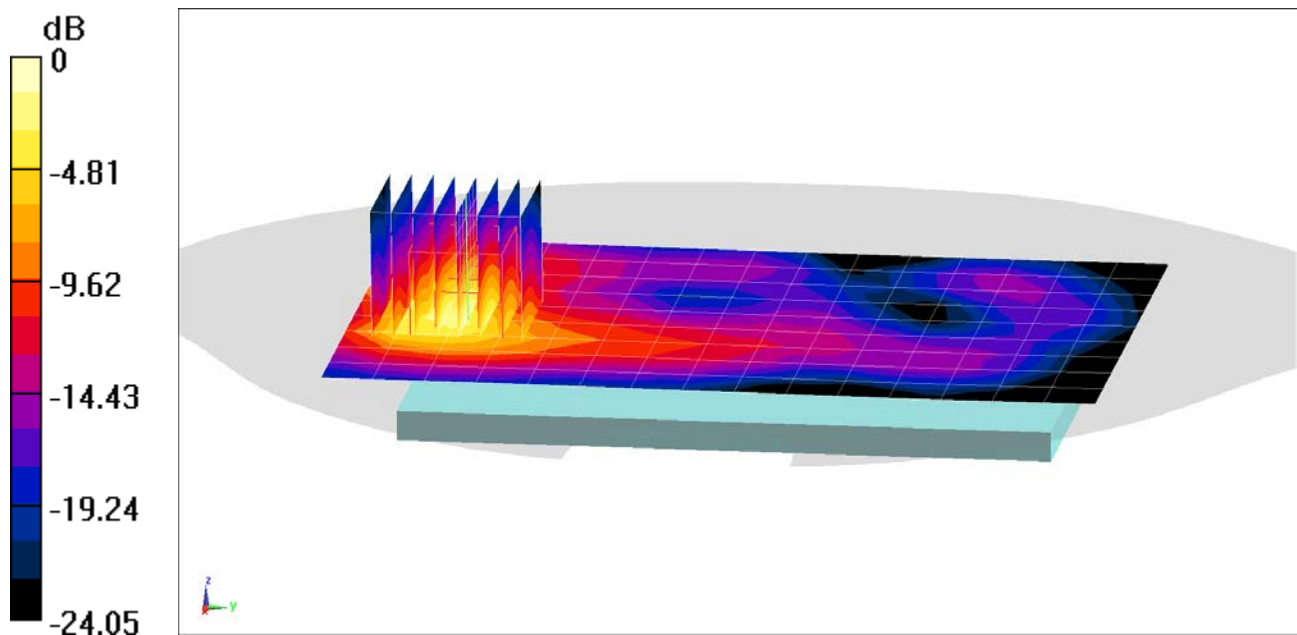

0 dB = 1.70 W/kg = 2.30 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07249**

Communication System: UID 0, \_IEEE 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2437 \text{ MHz}$ ;  $\sigma = 2.021 \text{ S/m}$ ;  $\epsilon_r = 51.368$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-28-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7406; ConvF(7.6, 7.6, 7.6); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11b, Antenna 2, 22 MHz Bandwidth, Body SAR, Ch 6, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.05 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.10 W/kg

**SAR(1 g) = 0.505 W/kg**

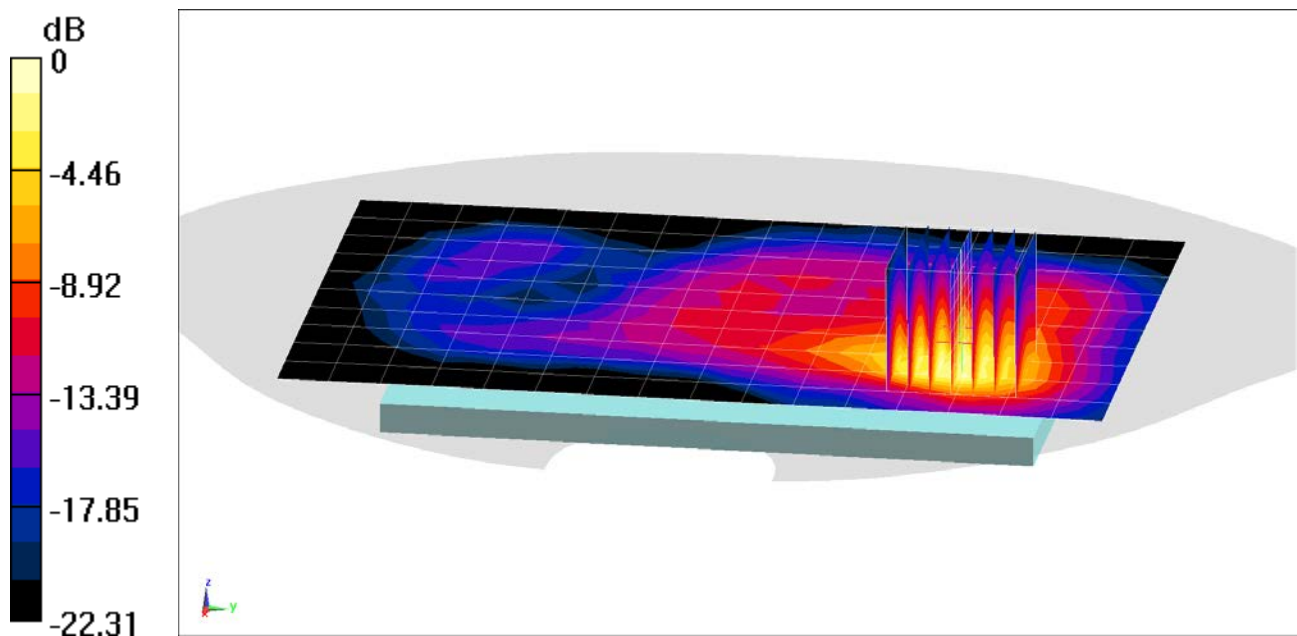

0 dB = 0.838 W/kg = -0.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07157**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5280 \text{ MHz}$ ;  $\sigma = 5.537 \text{ S/m}$ ;  $\epsilon_r = 47.661$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-11-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n, MIMO, UNII-2A, 20 MHz Bandwidth, Body SAR,  
Ch 56, 13.0 Mbps, Back Side**


**Area Scan (13x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 13.51 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 3.99 W/kg

**SAR(1 g) = 0.904 W/kg**

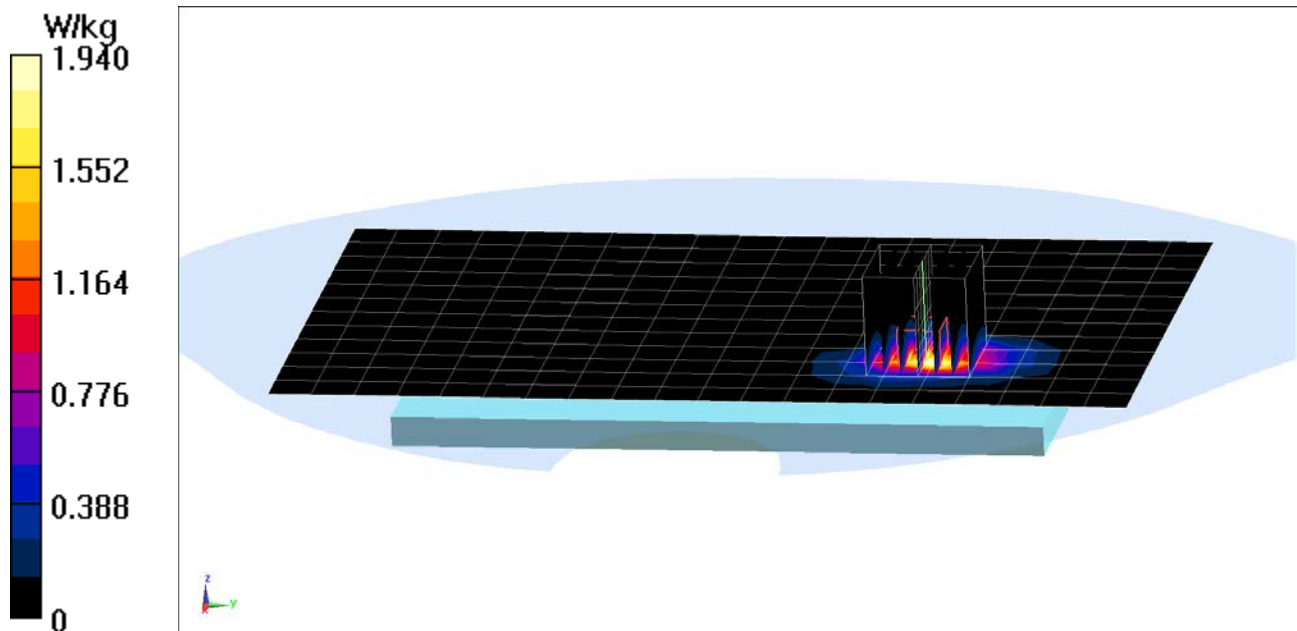

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07157**

Communication System: UID 0, 802.11a 5.2-5.8 GHz Band; Frequency: 5805 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5805 \text{ MHz}$ ;  $\sigma = 6.293 \text{ S/m}$ ;  $\epsilon_r = 46.728$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-11-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n, MIMO, UNII-3, 20 MHz Bandwidth, Body SAR,  
Ch 161, 13.0 Mbps, Back Side**


**Area Scan (13x21x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 12.45 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 3.92 W/kg

**SAR(1 g) = 0.827 W/kg**

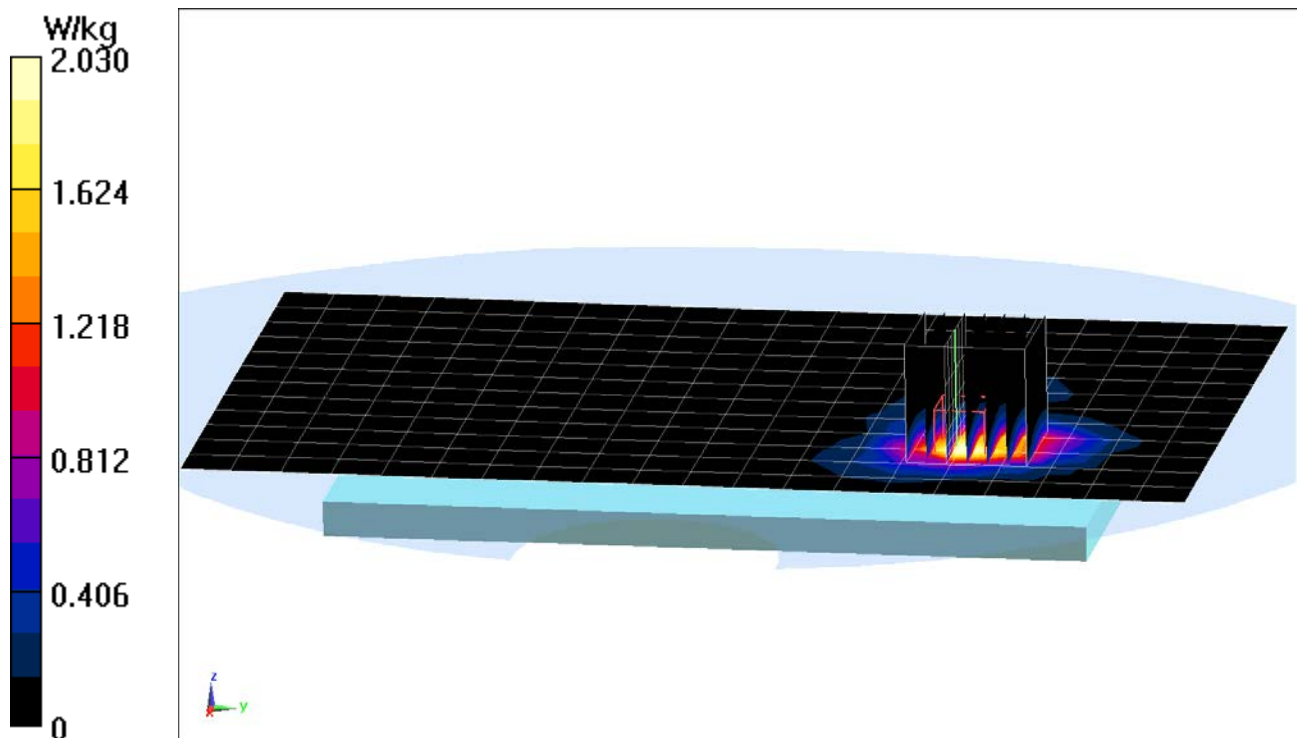

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, Bluetooth; Frequency: 2402 MHz; Duty Cycle: 1:1.289

Medium: 2450 Body Medium parameters used (interpolated):

$f = 2402 \text{ MHz}$ ;  $\sigma = 1.96 \text{ S/m}$ ;  $\epsilon_r = 52.011$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-15-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3332; ConvF(4.55, 4.55, 4.55); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: Bluetooth, Body SAR, Ch 0, 1 Mbps, Back Side**


**Area Scan (11x17x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.238 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0650 W/kg

**SAR(1 g) = 0.030 W/kg**

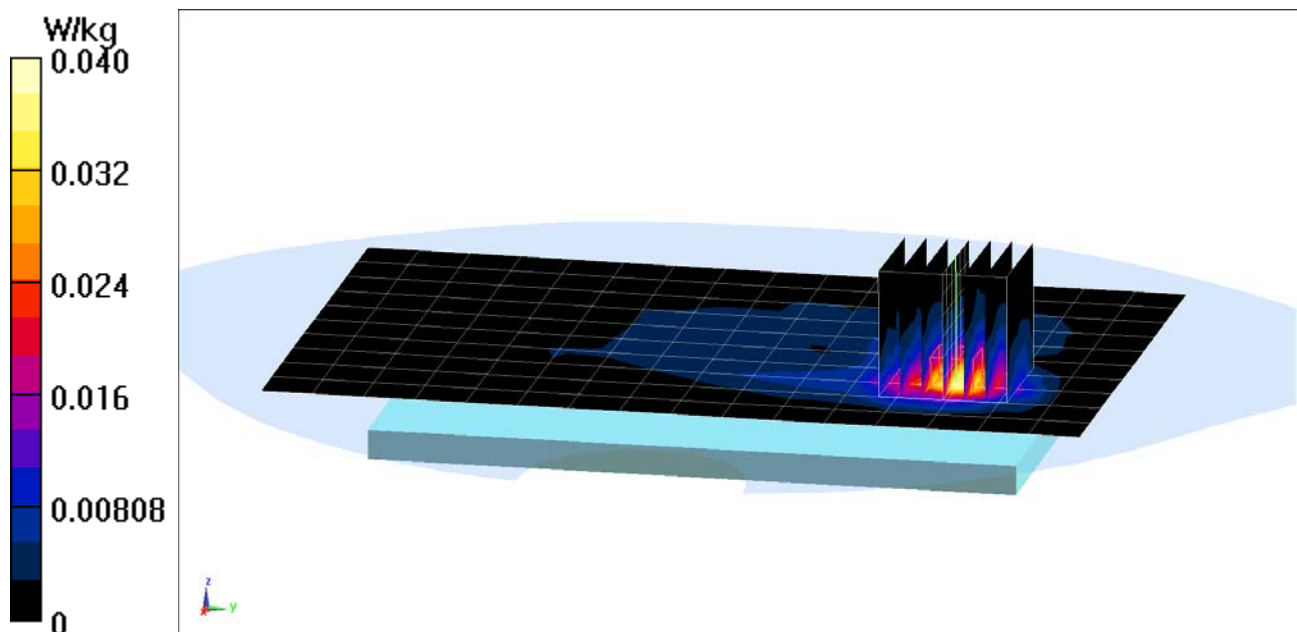

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07165**

Communication System: UID 0, CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1851.25 \text{ MHz}$ ;  $\sigma = 1.476 \text{ S/m}$ ;  $\epsilon_r = 53.893$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: PCS EVDO, Phablet SAR, Bottom Edge, Low.ch**


**Area Scan (10x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 58.36 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 12.5 W/kg

**SAR(10 g) = 2.28 W/kg**

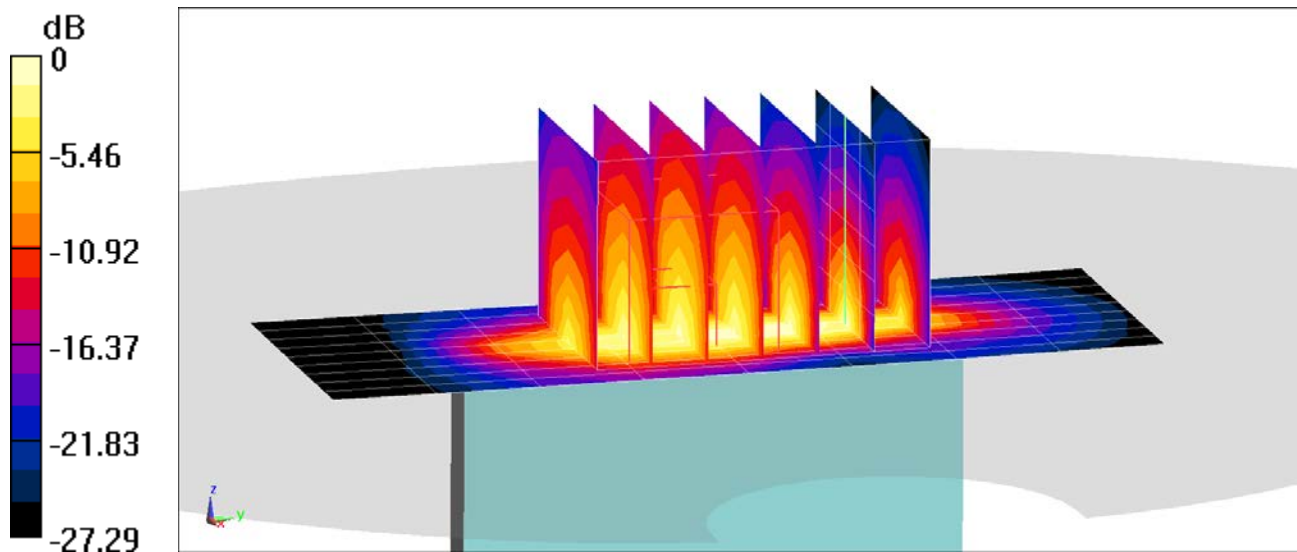

0 dB = 9.79 W/kg = 9.91 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07124**

Communication System: UID 0, UMTS; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.465 \text{ S/m}$ ;  $\epsilon_r = 52.341$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-12-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1750, Phablet SAR, Bottom Edge, High.ch**


**Area Scan (10x9x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 69.07 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 13.0 W/kg

**SAR(10 g) = 3.11 W/kg**

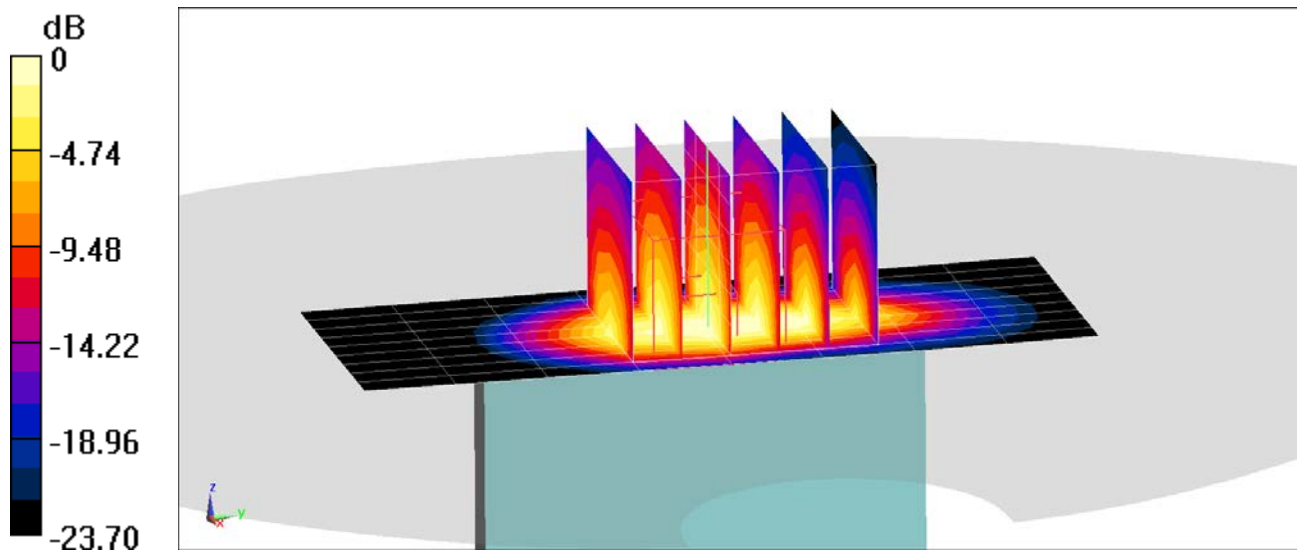

0 dB = 8.13 W/kg = 9.10 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07116**

Communication System: UID 0, UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.478 \text{ S/m}$ ;  $\epsilon_r = 53.889$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: UMTS 1900, Phablet SAR, Bottom Edge, Low.ch**


**Area Scan (11x9x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 71.04 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 12.8 W/kg

**SAR(10 g) = 2.78 W/kg**

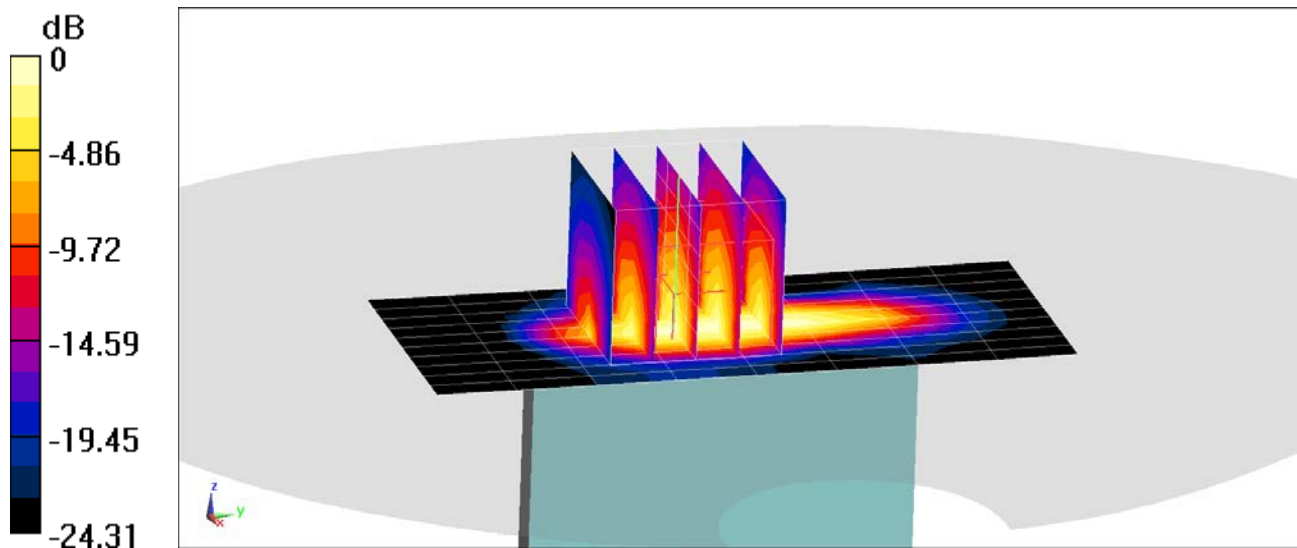

0 dB = 10.8 W/kg = 10.33 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07140**

Communication System: UID 0, \_LTE Band 66 (AWS); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used (interpolated):

$f = 1745 \text{ MHz}$ ;  $\sigma = 1.497 \text{ S/m}$ ;  $\epsilon_r = 51.422$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-14-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.32, 8.32, 8.32); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 66 (AWS), Phablet SAR, Bottom Edge, Mid.ch, 20 MHz Bandwidth,  
QPSK, 1 RB, 99 RB Offset**


**Area Scan (10x9x1):** Measurement grid:  $dx=5\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x6x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 68.98 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 16.5 W/kg

**SAR(10 g) = 2.9 W/kg**

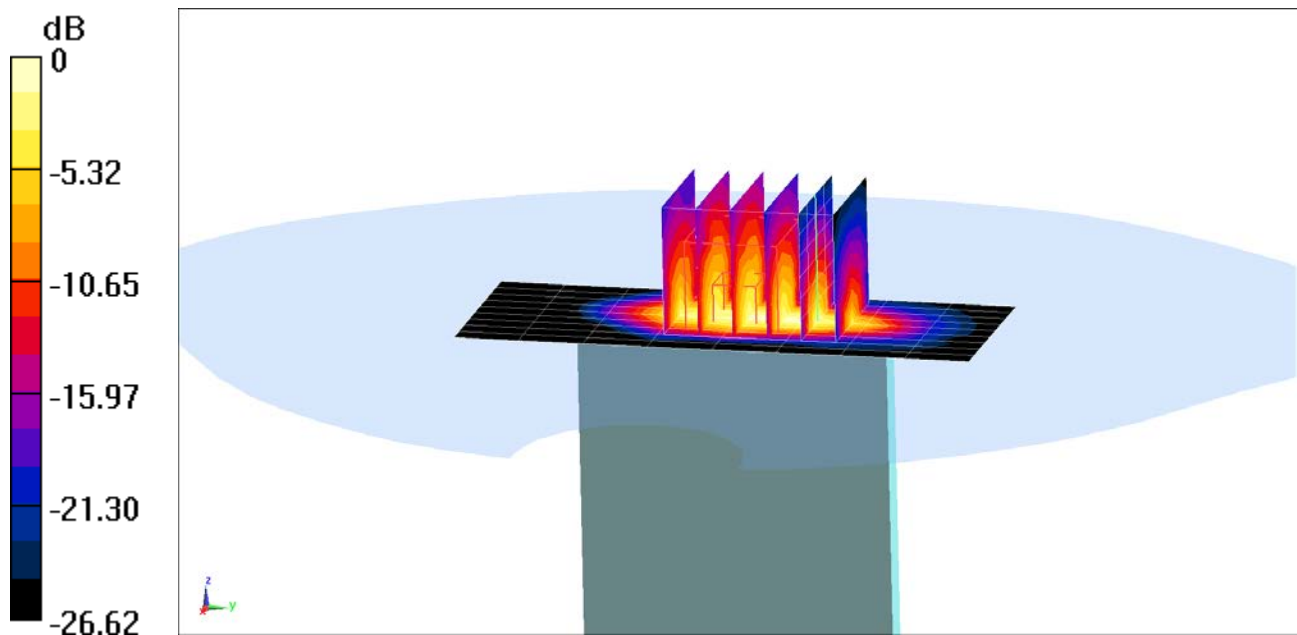

0 dB = 13.4 W/kg = 11.27 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07157**

Communication System: UID 0, LTE Band 25 (PCS); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1860 \text{ MHz}$ ;  $\sigma = 1.505 \text{ S/m}$ ;  $\epsilon_r = 53.005$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: LTE Band 25 (PCS), Phablet SAR, Bottom Edge, Low.ch,  
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**


**Area Scan (10x13x1):** Measurement grid: dx=5mm, dy=15mm

**Zoom Scan (5x7x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 61.14 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 14.2 W/kg

**SAR(10 g) = 2.57 W/kg**

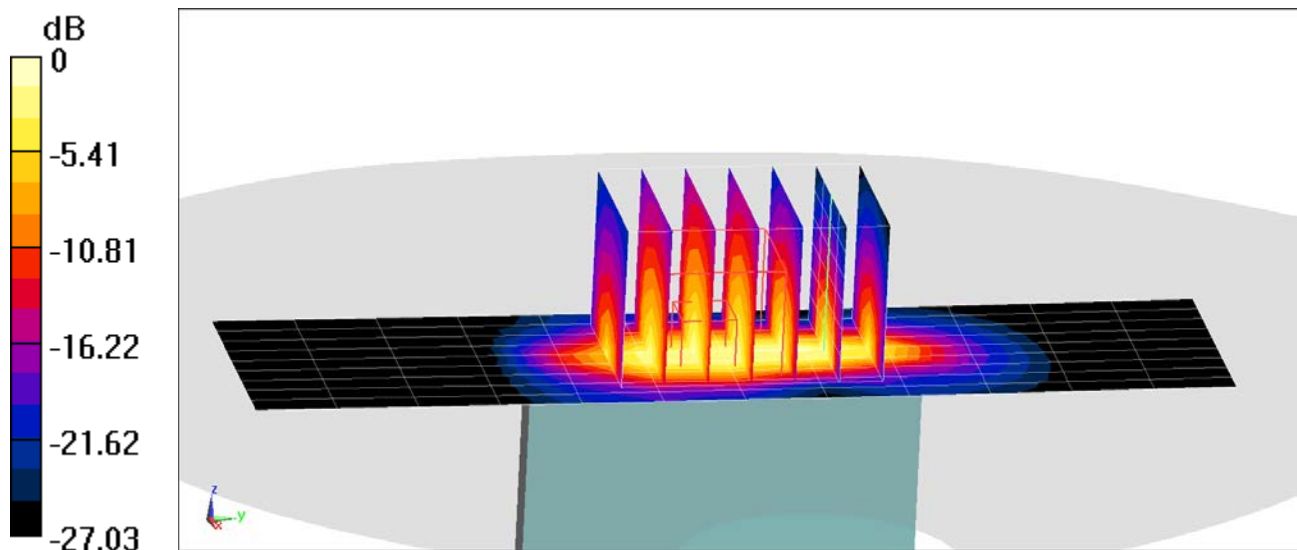

0 dB = 11.5 W/kg = 10.61 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: ZNFG710VM; Type: Portable Handset; Serial: 07157**

Communication System: UID 0, 802.11n 5.2-5.8 GHz Band; Frequency: 5280 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5280 \text{ MHz}$ ;  $\sigma = 5.537 \text{ S/m}$ ;  $\epsilon_r = 47.661$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 0.0 cm

Test Date: 03-11-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

**Mode: IEEE 802.11n, MIMO, U-NII-2A, 20 MHz Bandwidth,  
Phablet SAR, Ch 56, 13.0 Mbps, Back Side**


**Area Scan (13x19x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Reference Value = 4.601 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 138 W/kg

**SAR(10 g) = 2.52 W/kg**

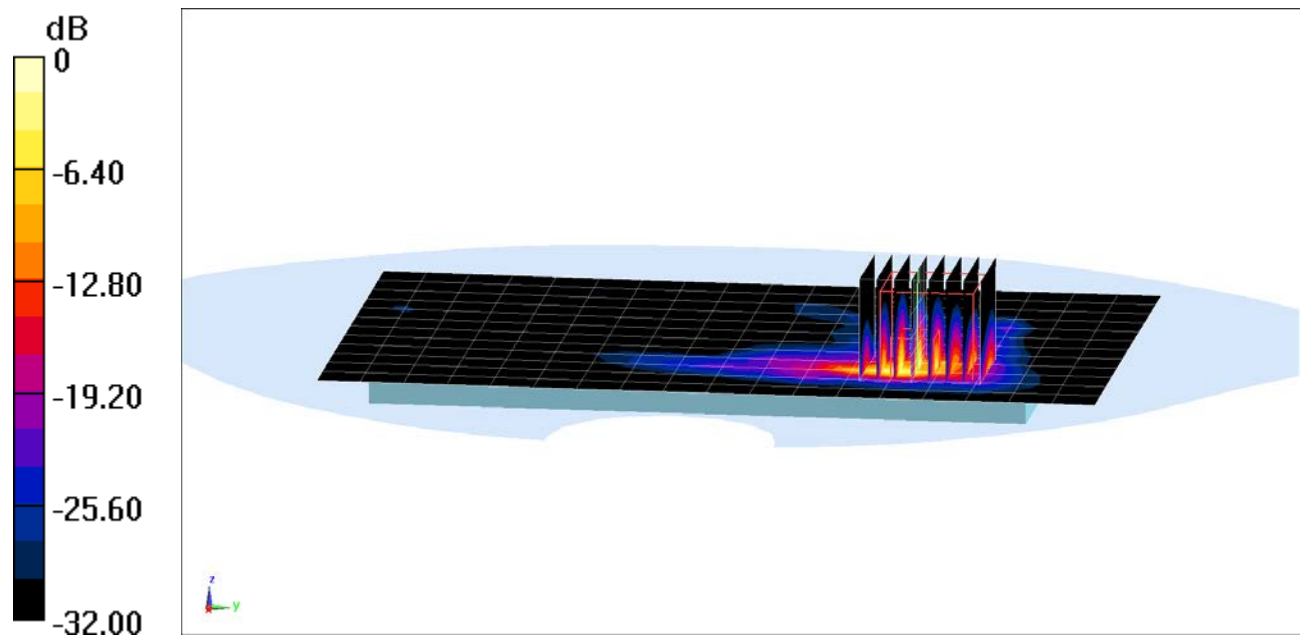

0 dB = 51.4 W/kg = 17.11 dBW/kg

## APPENDIX B: SYSTEM VERIFICATION

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1003**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Head Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.89 \text{ S/m}$ ;  $\epsilon_r = 40.788$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-11-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3213; ConvF(6.75, 6.75, 6.75); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 750 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 1.56 W/kg**

Deviation(1 g) = -5.80%

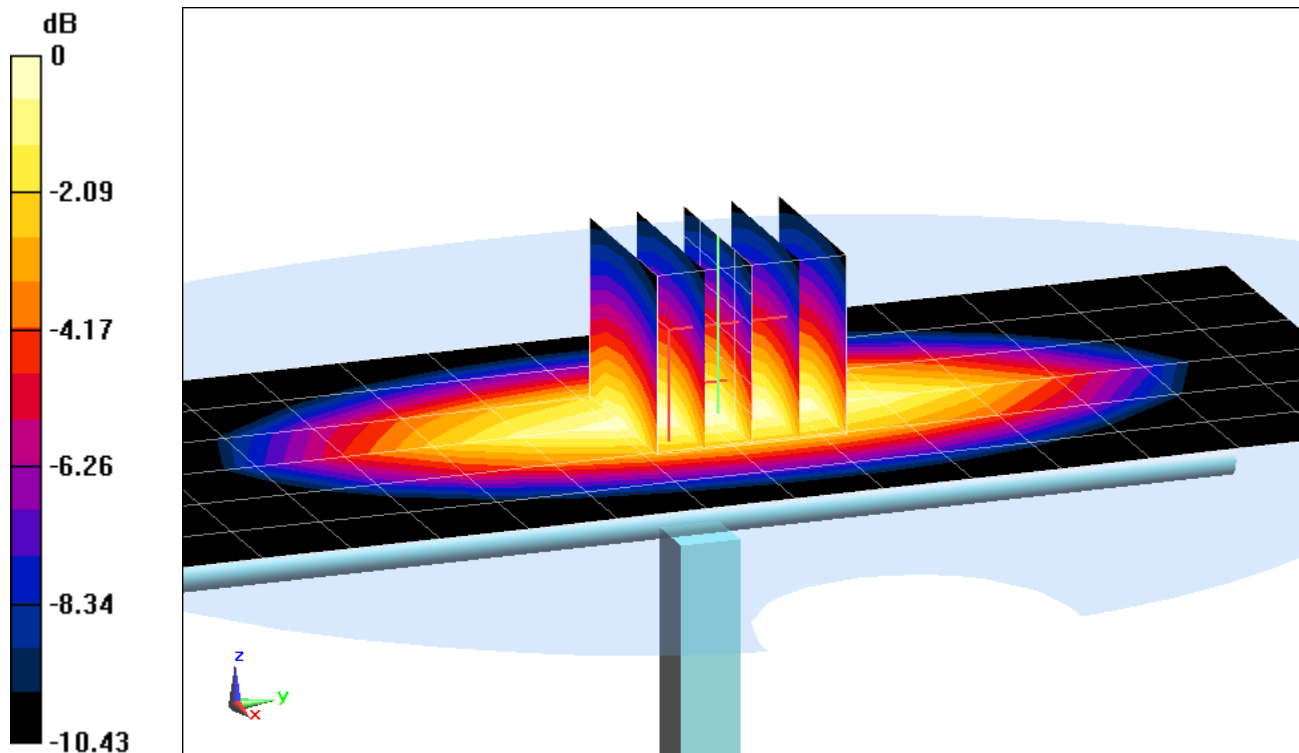

0 dB = 1.82 W/kg = 2.60 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Head Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.94 \text{ S/m}$ ;  $\epsilon_r = 39.773$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-13-2018; Ambient Temp: 23.4°C; Tissue Temp: 21.2°C

Probe: ES3DV3 - SN3213; ConvF(6.42, 6.42, 6.42); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 835 MHz System Verification at 23.0 dBm (200 mW)


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.01 W/kg

**SAR(1 g) = 2.01 W/kg**

Deviation(1 g) = 7.37%

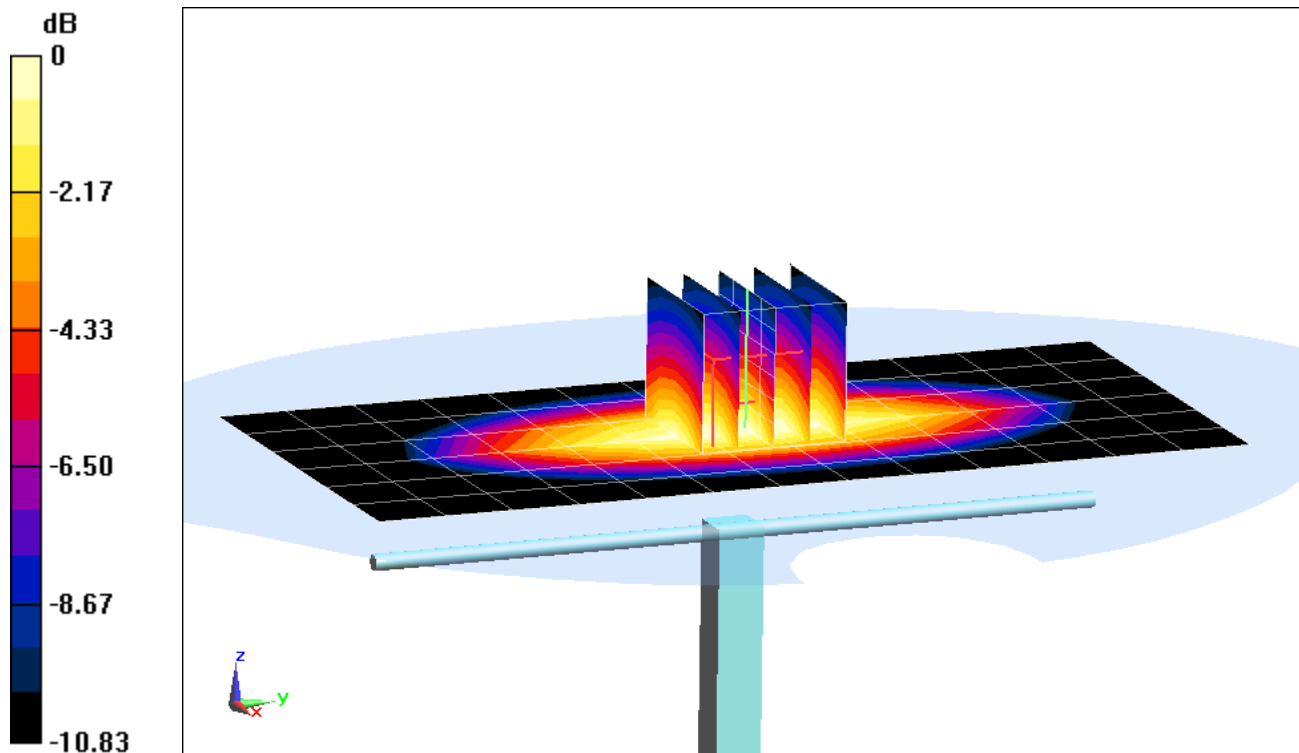

0 dB = 2.36 W/kg = 3.73 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1765V2; Serial: 1008**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Head Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.376 \text{ S/m}$ ;  $\epsilon_r = 39.51$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-05-2018; Ambient Temp: 23.7°C; Tissue Temp: 22.5°C

Probe: ES3DV3 - SN3213; ConvF(5.45, 5.45, 5.45); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM 5.0 front; Type: QD000P40CD; Serial: 1648

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.02 W/kg

**SAR(1 g) = 3.84 W/kg**

Deviation(1 g) = 5.49%

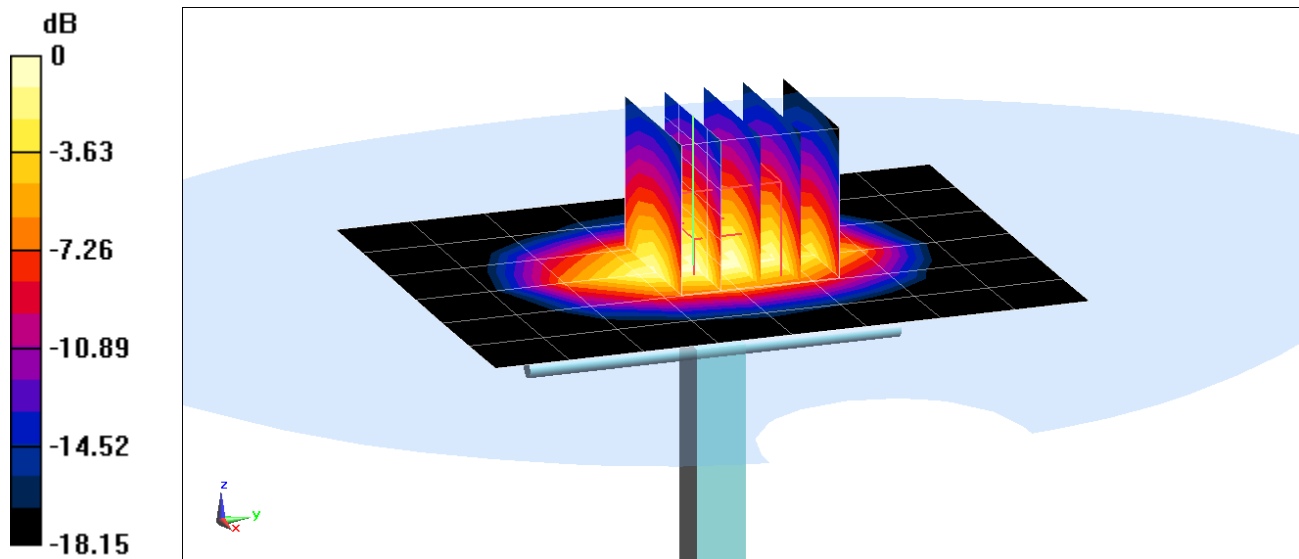

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Head Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.454 \text{ S/m}$ ;  $\epsilon_r = 38.93$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-08-2018; Ambient Temp: 21.1°C; Tissue Temp: 20.5°C

Probe: ES3DV3 - SN3332; ConvF(5.33, 5.33, 5.33); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x10x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 7.38 W/kg

**SAR(1 g) = 4.03 W/kg**

Deviation(1 g) = 0.50%

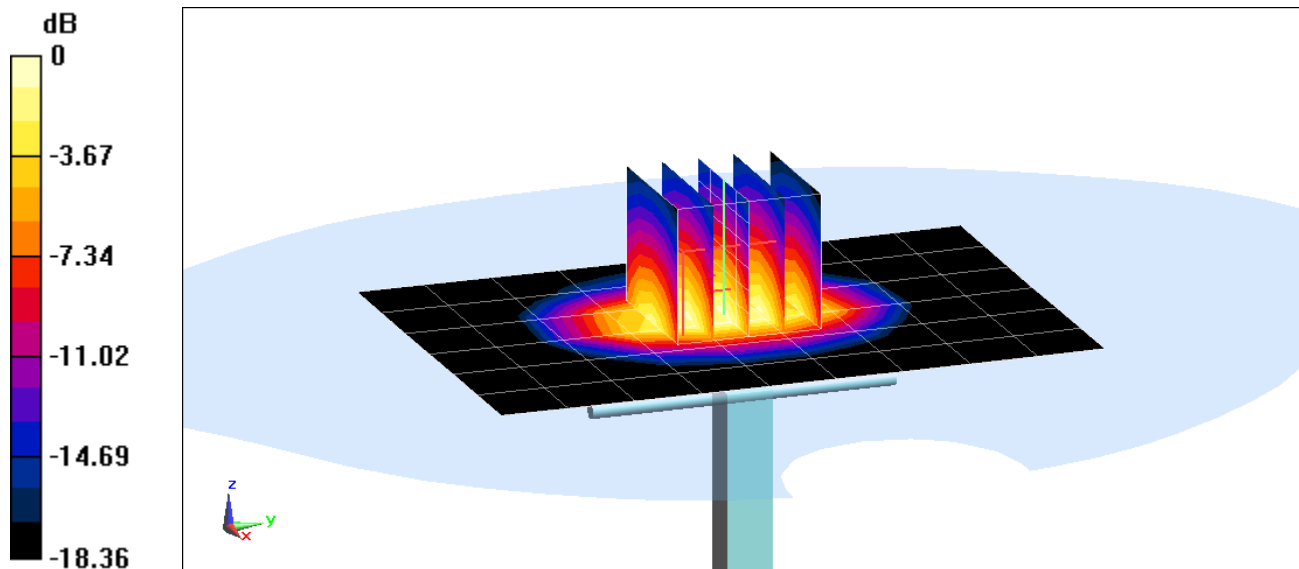

0 dB = 5.12 W/kg = 7.09 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.868 \text{ S/m}$ ;  $\epsilon_r = 38.023$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-05-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.5°C

Probe: EX3DV4 - SN7410; ConvF(7.68, 7.68, 7.68); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **2450 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.7 W/kg

**SAR(1 g) = 5.34 W/kg**

Deviation(1 g) = 1.33%

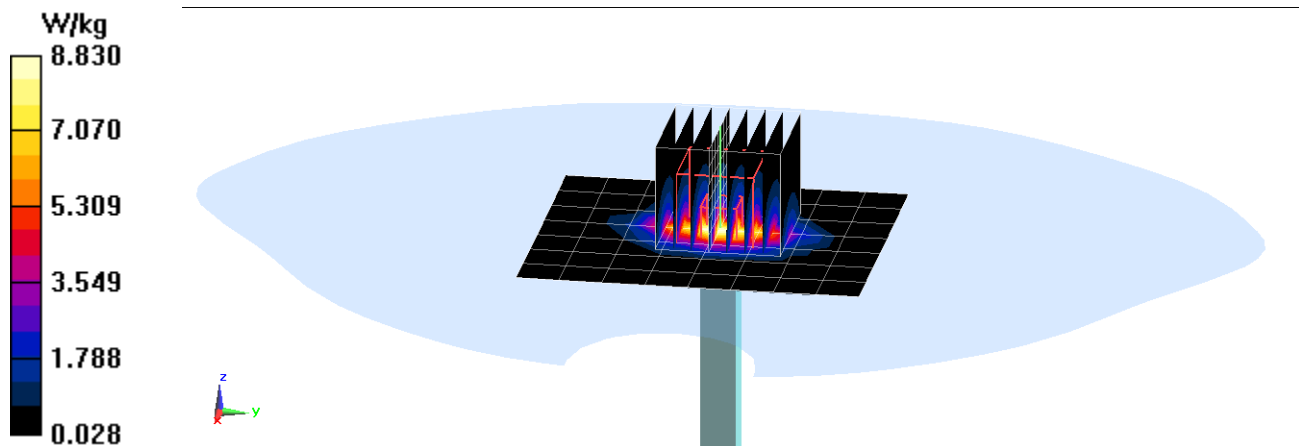

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 1.876 \text{ S/m}$ ;  $\epsilon_r = 39.676$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-15-2018; Ambient Temp: 22.9°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7406; ConvF(7.68, 7.68, 7.68); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: TP1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **2450 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 11.2 W/kg

**SAR(1 g) = 5.09 W/kg**

Deviation(1 g) = -3.42%

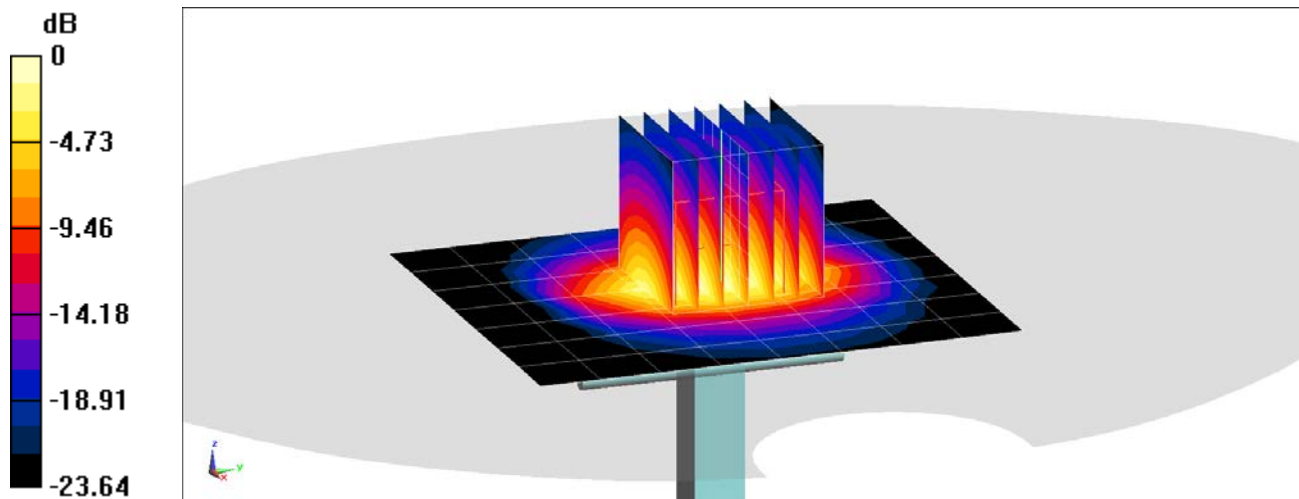

0 dB = 8.73 W/kg = 9.41 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Head Medium parameters used:

$f = 2600$  MHz;  $\sigma = 2.032$  S/m;  $\epsilon_r = 38.002$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-01-2018; Ambient Temp: 21.7°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(7.42, 7.42, 7.42); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **2600 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 13.1 W/kg

**SAR(1 g) = 5.78 W/kg**

Deviation(1 g) = 2.48%

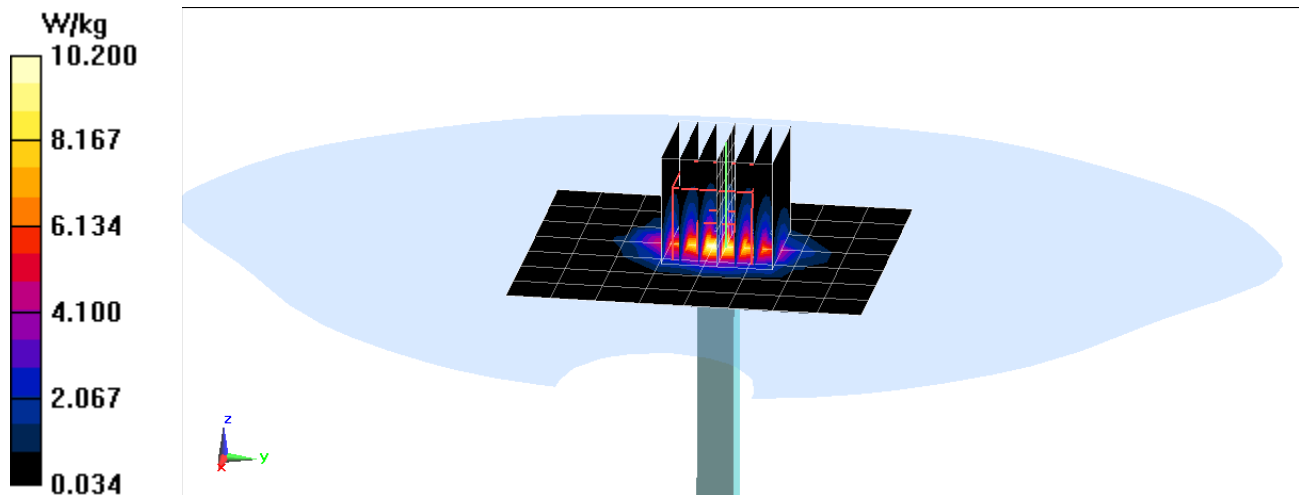

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$ ;  $\sigma = 4.569 \text{ S/m}$ ;  $\epsilon_r = 37.168$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.69, 4.69, 4.69); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## 5250 MHz System Verification at 17.0 dBm (50 mW)


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.3 W/kg

**SAR(1 g) = 3.92 W/kg**

Deviation(1 g) = -0.63%

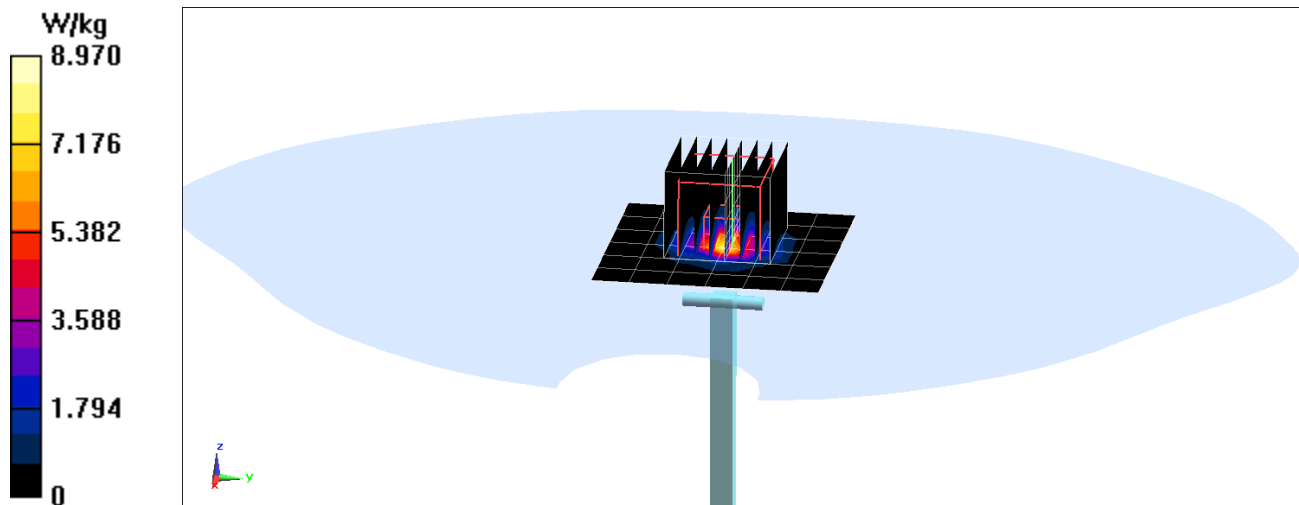

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used:

$f = 5600 \text{ MHz}$ ;  $\sigma = 4.933 \text{ S/m}$ ;  $\epsilon_r = 36.664$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.17, 4.17, 4.17); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **5600 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.4 W/kg

**SAR(1 g) = 3.93 W/kg**

Deviation(1 g) = -5.98%

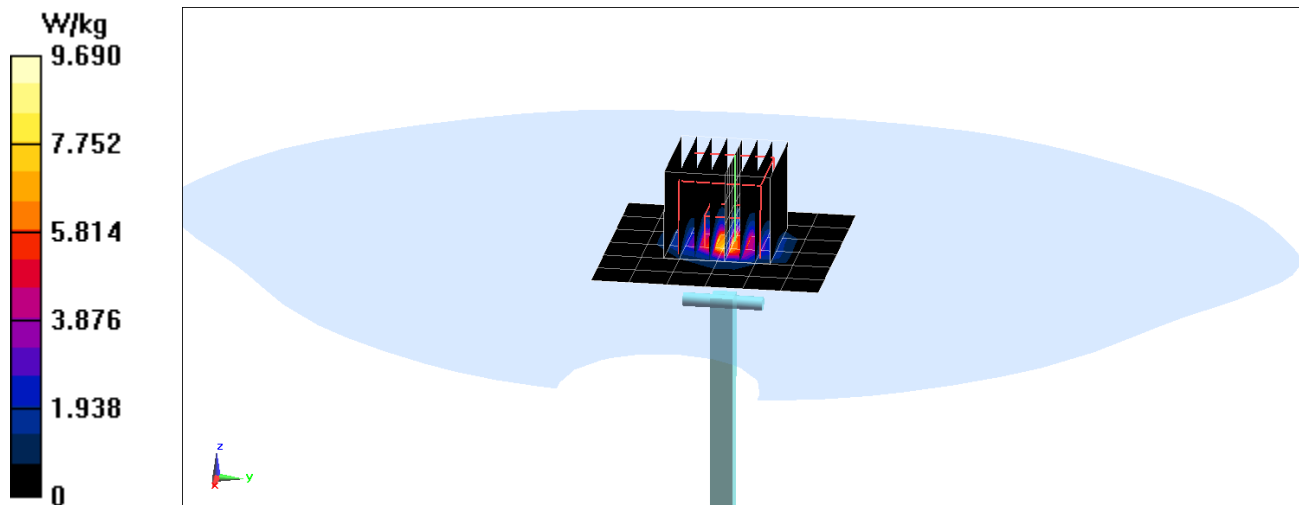

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1191**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5GHz Head Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$ ;  $\sigma = 5.096 \text{ S/m}$ ;  $\epsilon_r = 36.468$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.0°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN3589; ConvF(4.42, 4.42, 4.42); Calibrated: 1/16/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **5750 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 17.1 W/kg

**SAR(1 g) = 3.76 W/kg**

Deviation(1 g) = -4.93%

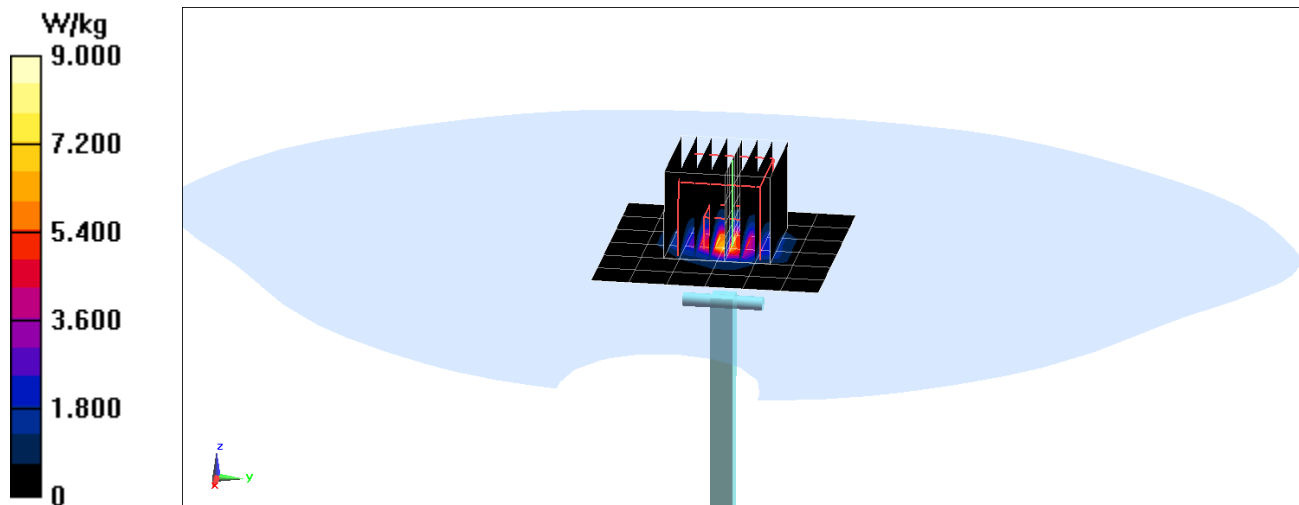



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 750 MHz; Type: D750V3; Serial: 1161**

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: 750 Body Medium parameters used (interpolated):

$f = 750 \text{ MHz}$ ;  $\sigma = 0.971 \text{ S/m}$ ;  $\epsilon_r = 53.142$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 3-14-2018; Ambient Temp: 22.5°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7406; ConvF(9.9, 9.9, 9.9); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **750 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x15x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 2.68 W/kg

**SAR(1 g) = 1.8 W/kg**

Deviation(1 g) = 6.76%

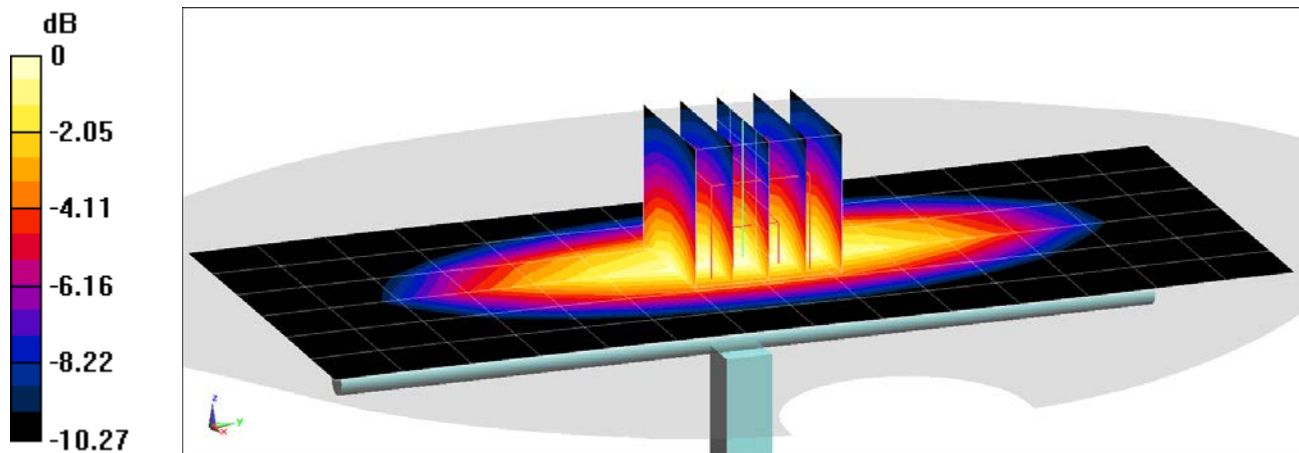

0 dB = 2.38 W/kg = 3.77 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d133**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.998 \text{ S/m}$ ;  $\epsilon_r = 52.865$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-04-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.1°C

Probe: EX3DV4 - SN3914; ConvF(9.57, 9.57, 9.57); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 Right; Type: QD 000 P40 CD; Serial: 1800

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 3.00 W/kg

**SAR(1 g) = 2.01 W/kg**

Deviation(1 g) = 6.80%

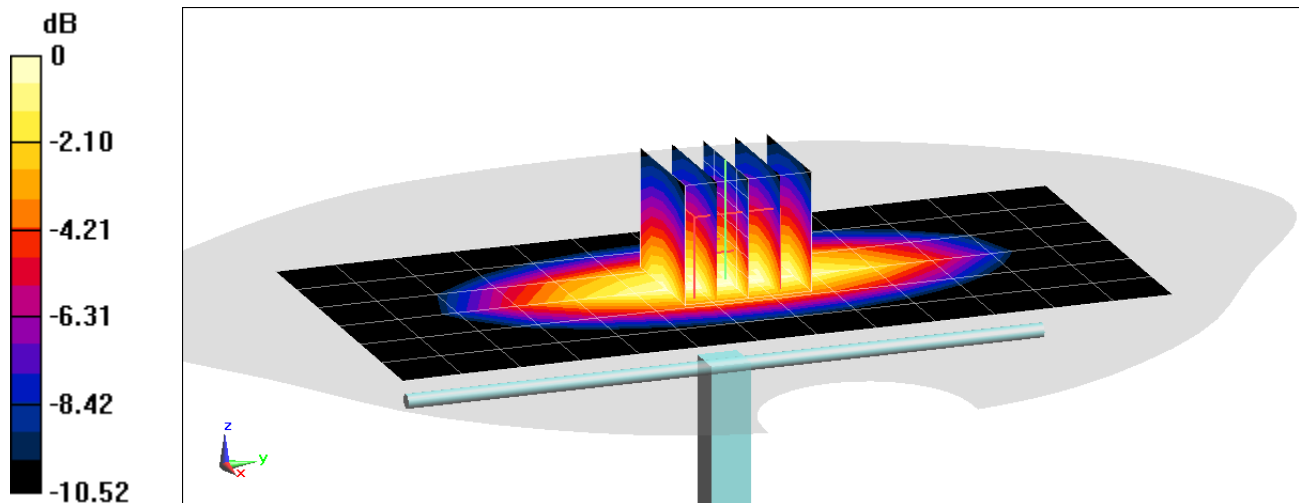

0 dB = 2.67 W/kg = 4.27 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 835 MHz; Type: D835V2; Serial: 4d132**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Body Medium parameters used:

$f = 835 \text{ MHz}$ ;  $\sigma = 0.973 \text{ S/m}$ ;  $\epsilon_r = 52.66$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 03-19-2018; Ambient Temp: 23.7°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3213; ConvF(6.2, 6.2, 6.2); Calibrated: 2/13/2018;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1272; Calibrated: 2/9/2018

Phantom: SAM V5.0 Right; Type: QD000P40CD; Serial: 1647

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **835 MHz System Verification at 23.0 dBm (200 mW)**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 2.91 W/kg

**SAR(1 g) = 1.98 W/kg**

Deviation(1 g) = 1.96%

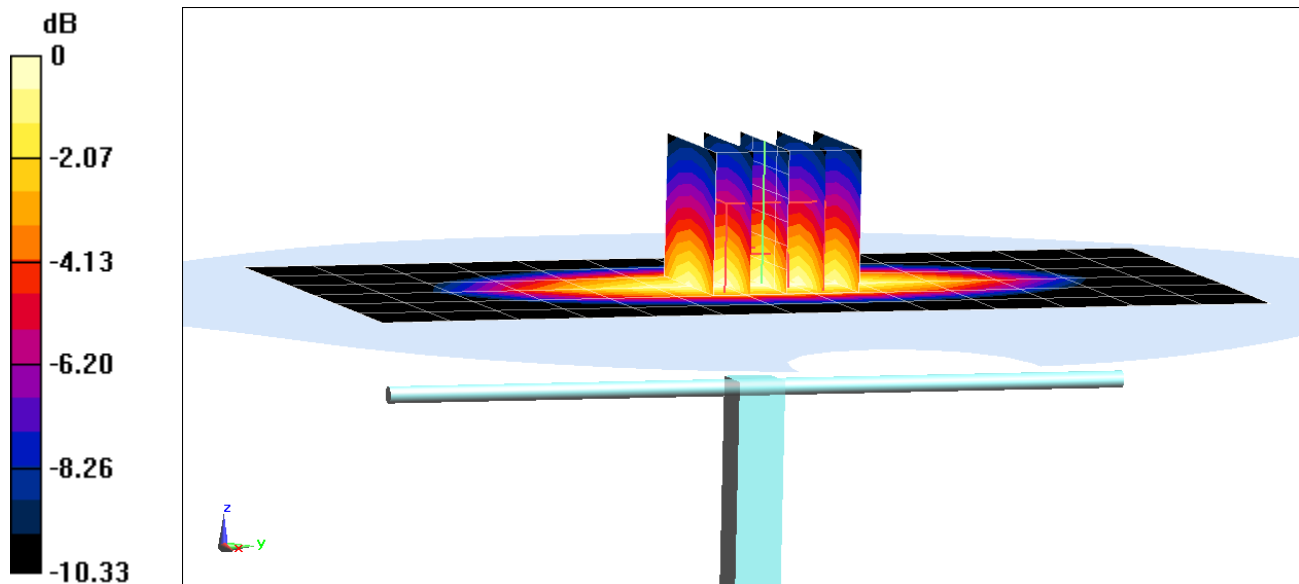

0 dB = 2.32 W/kg = 3.65 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1148**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750$  MHz;  $\sigma = 1.465$  S/m;  $\epsilon_r = 52.334$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 22.2°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7406; ConvF(8.08, 8.08, 8.08); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.92 W/kg

**SAR(1 g) = 3.87 W/kg**

Deviation(1 g) = 4.59%

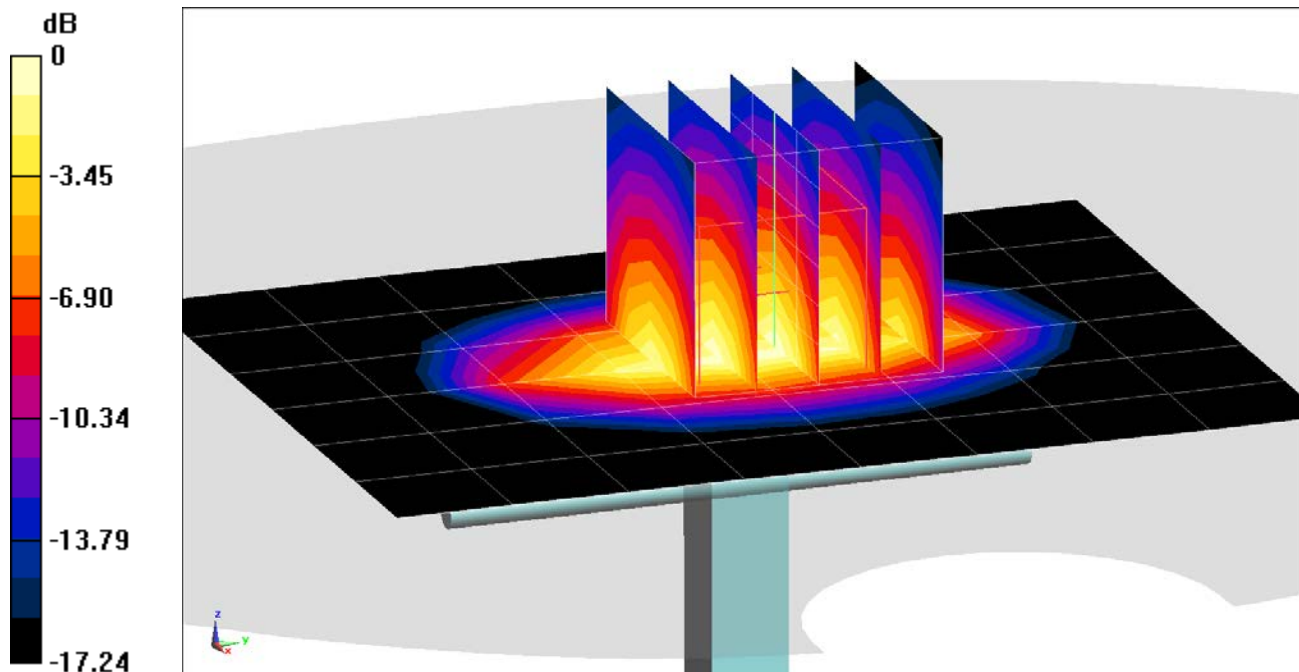

0 dB = 5.84 W/kg = 7.66 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.462 \text{ S/m}$ ;  $\epsilon_r = 52.352$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 22.6°C; Tissue Temp: 20.9°C

Probe: ES3DV3 - SN3287; ConvF(5.19, 5.19, 5.19); Calibrated: 9/18/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1333; Calibrated: 6/21/2017

Phantom: Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 6.40 W/kg

**SAR(10 g) = 1.95 W/kg**

Deviation(10 g) = 0.00%

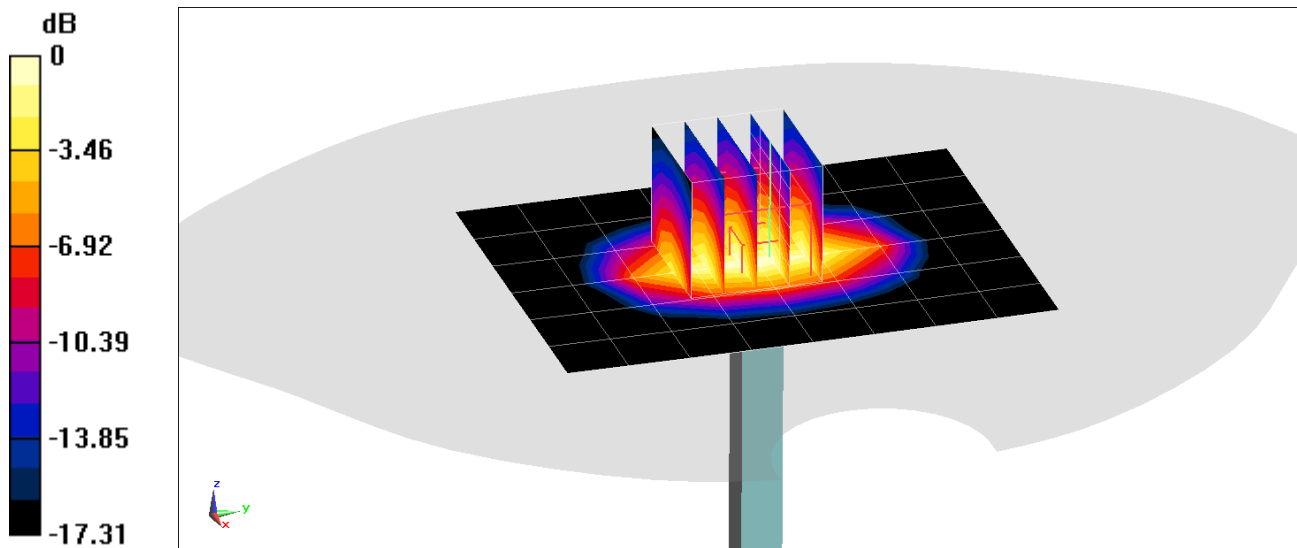

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1750 MHz; Type: D1750V2; Serial: 1150**

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: 1750 Body Medium parameters used:

$f = 1750 \text{ MHz}$ ;  $\sigma = 1.503 \text{ S/m}$ ;  $\epsilon_r = 51.403$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-14-2018; Ambient Temp: 23.0°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7410; ConvF(8.32, 8.32, 8.32); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP (Left); Type: SAM; Serial: 1715

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1750 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.00 W/kg

**SAR(10 g) = 2.06 W/kg**

Deviation(10 g) = 5.64%

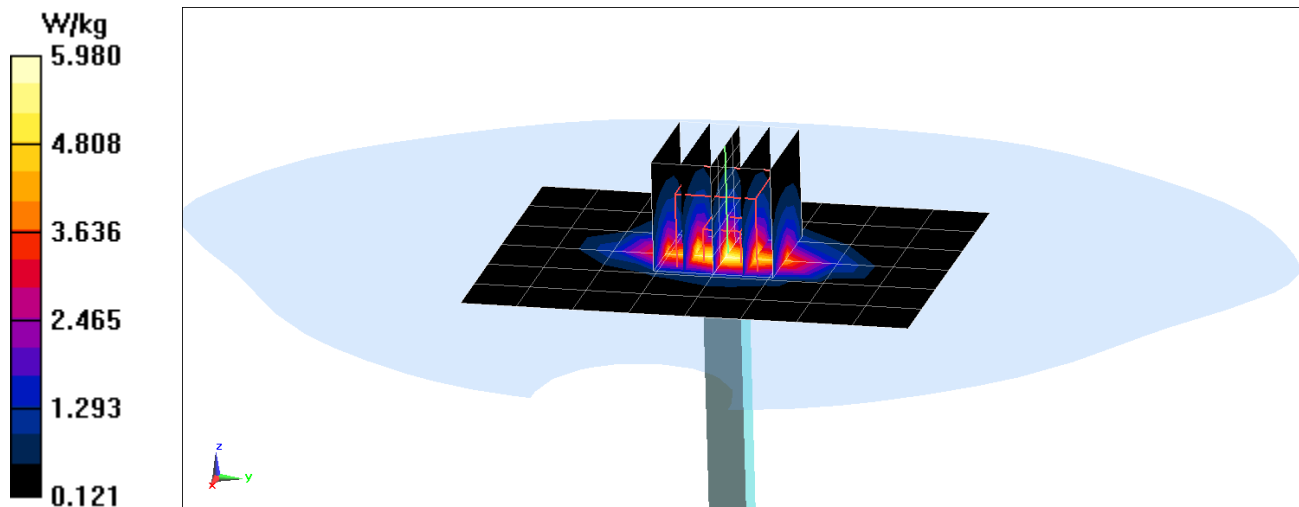

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900$  MHz;  $\sigma = 1.565$  S/m;  $\epsilon_r = 52.119$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-07-2018; Ambient Temp: 21.9°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN7410; ConvF(7.98, 7.98, 7.98); Calibrated: 7/17/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1322; Calibrated: 7/13/2017

Phantom: SAM with CRP v5.0 (Right); Type: QD000P40CD; Serial: TP:1759

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **1900 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.38 W/kg

**SAR(1 g) = 4.12 W/kg**

Deviation(1 g) = 5.37%

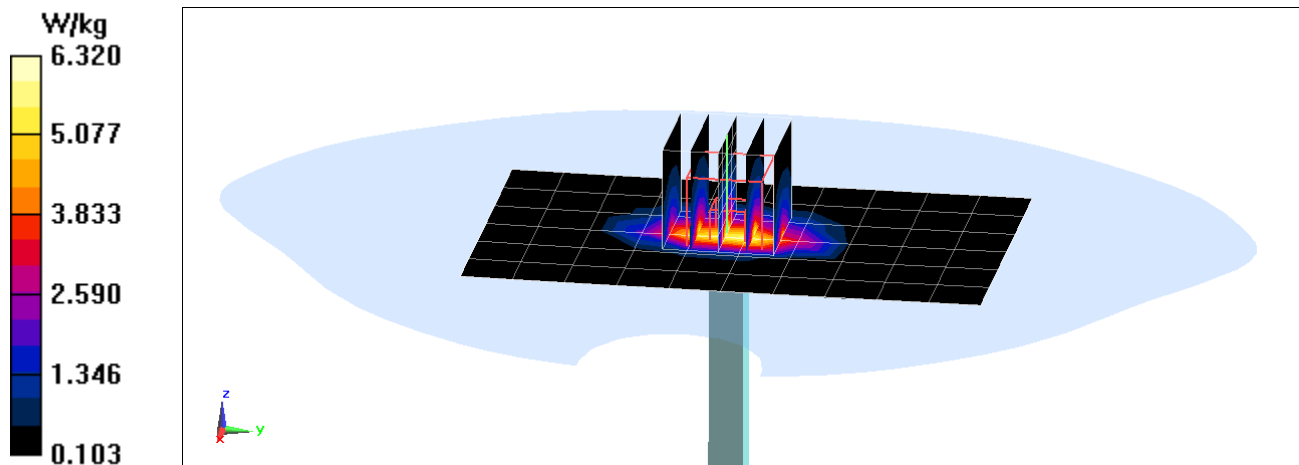

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d148**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.533 \text{ S/m}$ ;  $\epsilon_r = 53.731$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-09-2018; Ambient Temp: 21.9°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.89 W/kg

**SAR(1 g) = 4.27 W/kg; SAR(10 g) = 2.19 W/kg**

Deviation(1 g) = 7.83%; Deviation(10 g) = 4.78%

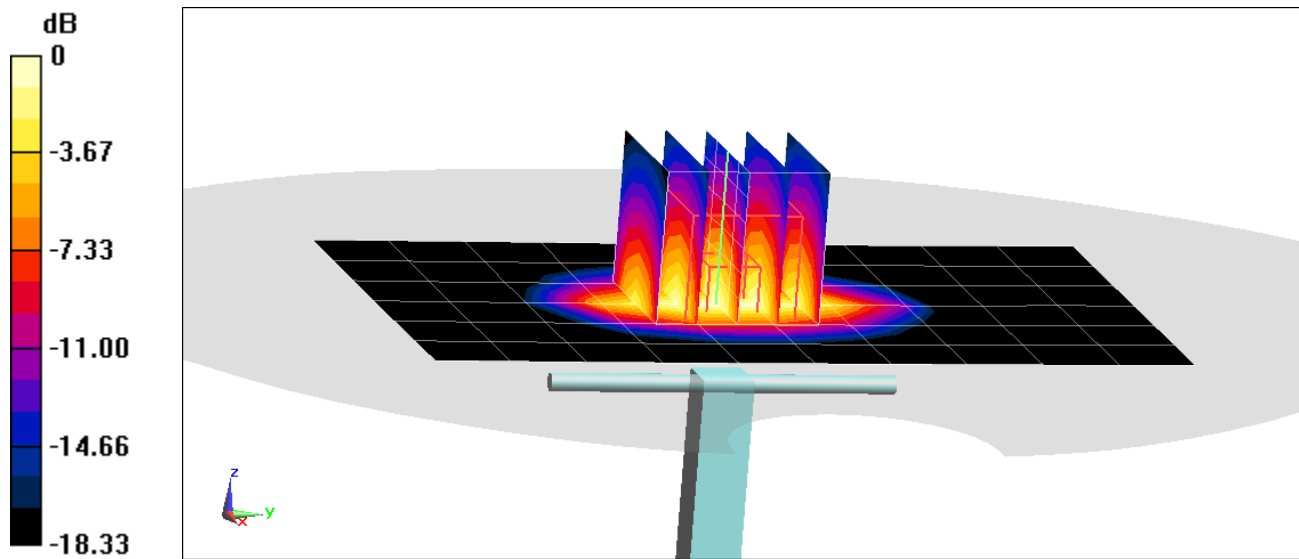

0 dB = 6.65 W/kg = 8.23 dBW/kg



# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d080**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Body Medium parameters used (interpolated):

$f = 1900 \text{ MHz}$ ;  $\sigma = 1.548 \text{ S/m}$ ;  $\epsilon_r = 52.83$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-12-2018; Ambient Temp: 21.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN3914; ConvF(7.62, 7.62, 7.62); Calibrated: 2/14/2018;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn665; Calibrated: 2/15/2018

Phantom: Twin-SAM V5.0 left; Type: QD 000 P40 CD; Serial: 1692

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## 1900 MHz System Verification at 20.0 dBm (100 mW)


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Peak SAR (extrapolated) = 7.75 W/kg

**SAR(1 g) = 4.1 W/kg; SAR(10 g) = 2.09 W/kg**

Deviation(1 g) = 4.86%; Deviation(10 g) = 0.97%

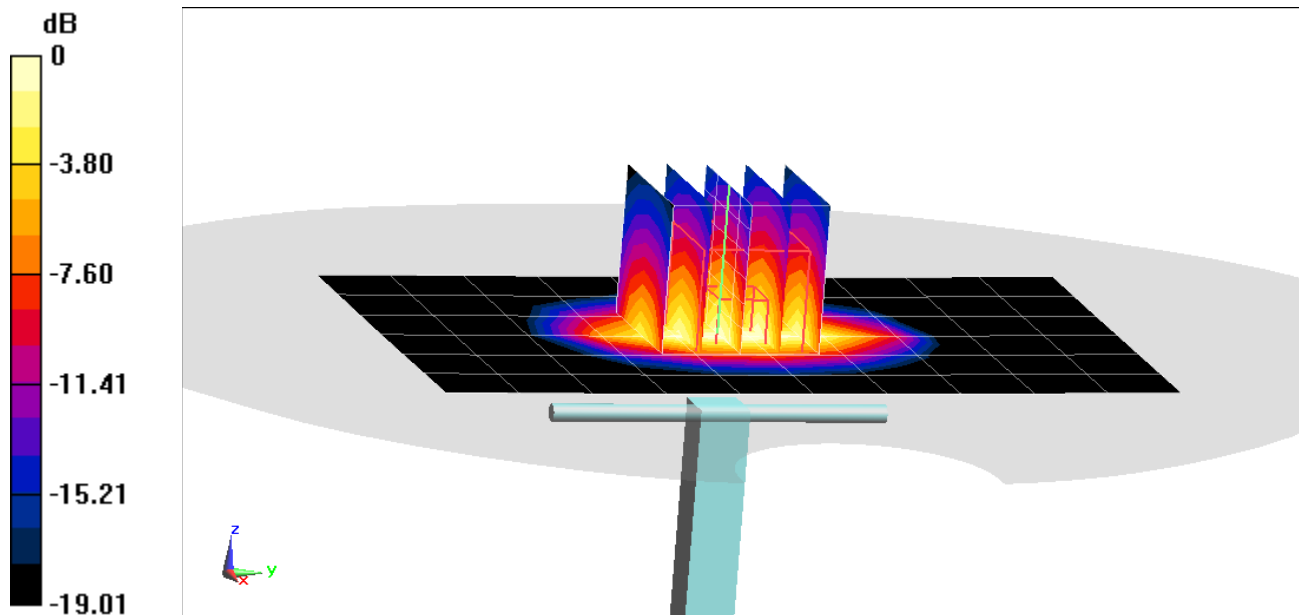

0 dB = 6.19 W/kg = 7.92 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.036 \text{ S/m}$ ;  $\epsilon_r = 51.326$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 02-28-2018; Ambient Temp: 22.4°C; Tissue Temp: 21.8°C

Probe: EX3DV4 - SN7406; ConvF(7.6, 7.6, 7.6); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: LeftTwin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1375

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **2450 MHz System Verification at 20.0 dBm (100 mW)**



**Area Scan (8x9x1):** Measurement grid: dx=12mm, dy=12mm

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 5.19 W/kg**

Deviation(1 g) = 1.57%

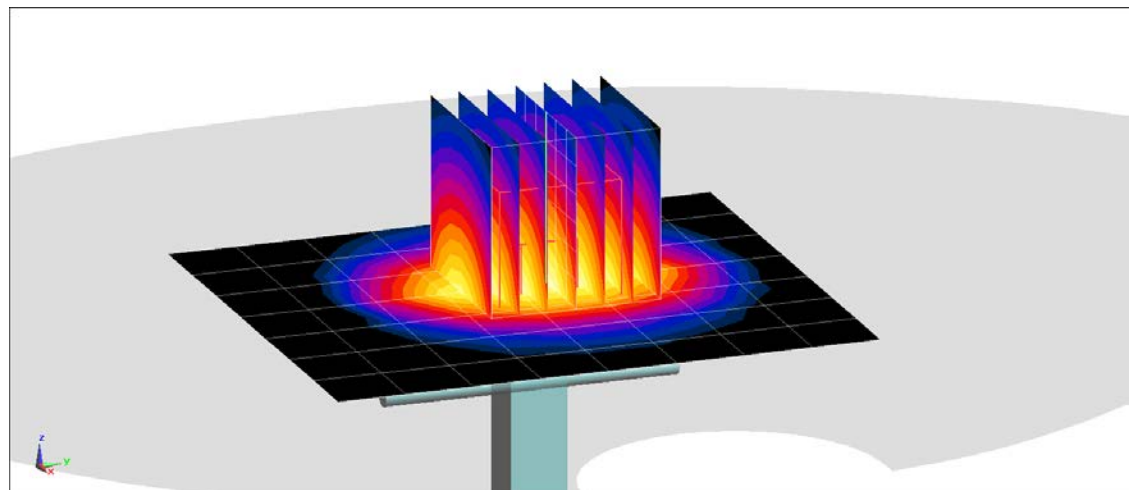

0 dB = 8.74 W/kg = 9.42 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2600 MHz; Type: D2600V2; Serial: 1126**

Communication System: UID 0, CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2600 \text{ MHz}$ ;  $\sigma = 2.181 \text{ S/m}$ ;  $\epsilon_r = 50.405$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-04-2018; Ambient Temp: 22.7°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7406; ConvF(7.31, 7.31, 7.31); Calibrated: 4/18/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1407; Calibrated: 4/11/2017

Phantom: Right Twin-SAM V5.0; Type: QD 000 P40 CD; Serial: 1797

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **2600 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 11.8 W/kg

**SAR(1 g) = 5.37 W/kg**

Deviation(1 g) = -1.10%

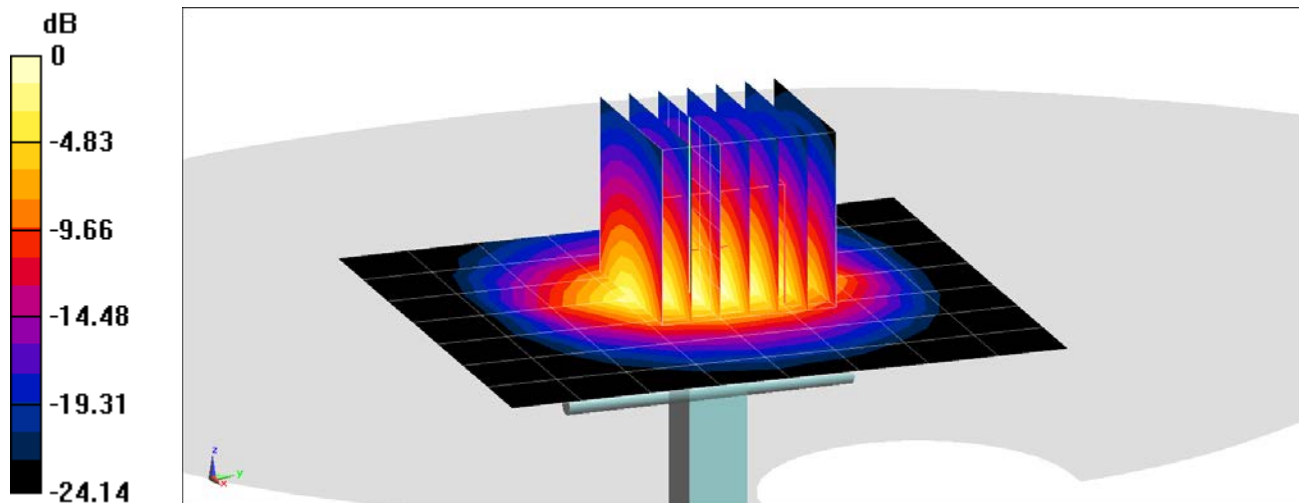

0 dB = 9.18 W/kg = 9.63 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: 797**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: 2450 Body Medium parameters used:

$f = 2450 \text{ MHz}$ ;  $\sigma = 2.006 \text{ S/m}$ ;  $\epsilon_r = 51.873$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-15-2018; Ambient Temp: 22.6°C; Tissue Temp: 21.4°C

Probe: ES3DV3 - SN3332; ConvF(4.55, 4.55, 4.55); Calibrated: 8/14/2017;

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1323; Calibrated: 8/9/2017

Phantom: SAM Front; Type: SAM; Serial: 1686

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **2450 MHz System Verification at 20.0 dBm (100 mW)**


**Area Scan (8x9x1):** Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Peak SAR (extrapolated) = 10.9 W/kg

**SAR(1 g) = 5.26 W/kg**

Deviation(1 g) = 2.94%

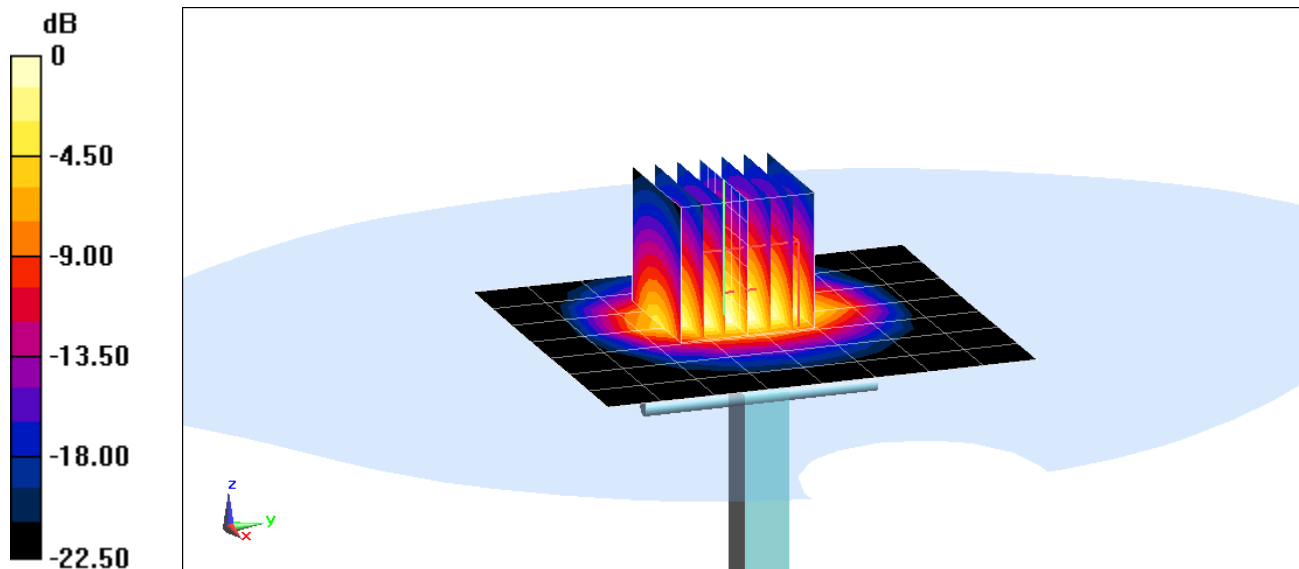

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5250 \text{ MHz}$ ;  $\sigma = 5.486 \text{ S/m}$ ;  $\epsilon_r = 47.405$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-05-2018; Ambient Temp: 22.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7308; ConvF(4.84, 4.84, 4.84); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10;SEMCAD X Version 14.6.10 (7417)

## **5250 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=1.4\text{mm}$ ; Graded Ratio: 1.4

Peak SAR (extrapolated) = 16.8 W/kg

**SAR(1 g) = 3.53 W/kg; SAR(10 g) = 0.988 W/kg**

Deviation(1 g) = -8.19%; Deviation(10 g) = -8.09%

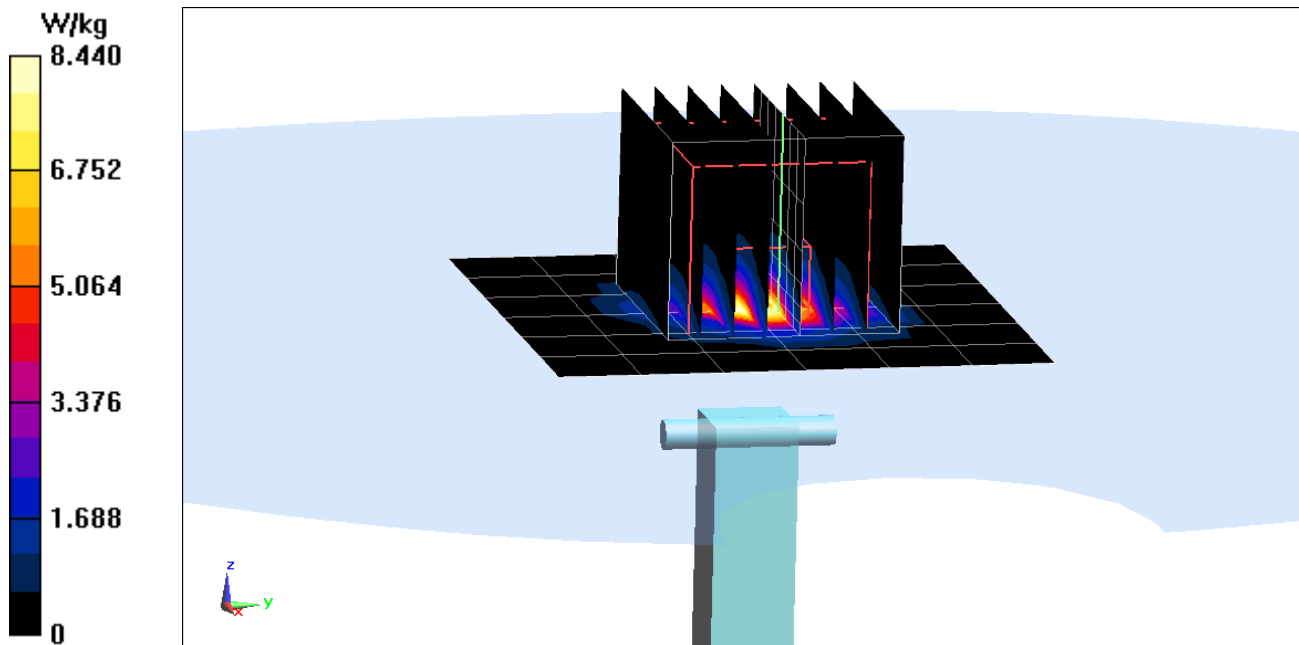

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used:

$f = 5600$  MHz;  $\sigma = 5.986$  S/m;  $\epsilon_r = 47.093$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-11-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7308; ConvF(4.23, 4.23, 4.23); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **5600 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.5 W/kg

**SAR(1 g) = 3.79 W/kg; SAR(10 g) = 1.05 W/kg**

Deviation(1 g) = -3.44%; Deviation(10 g) = -4.98%

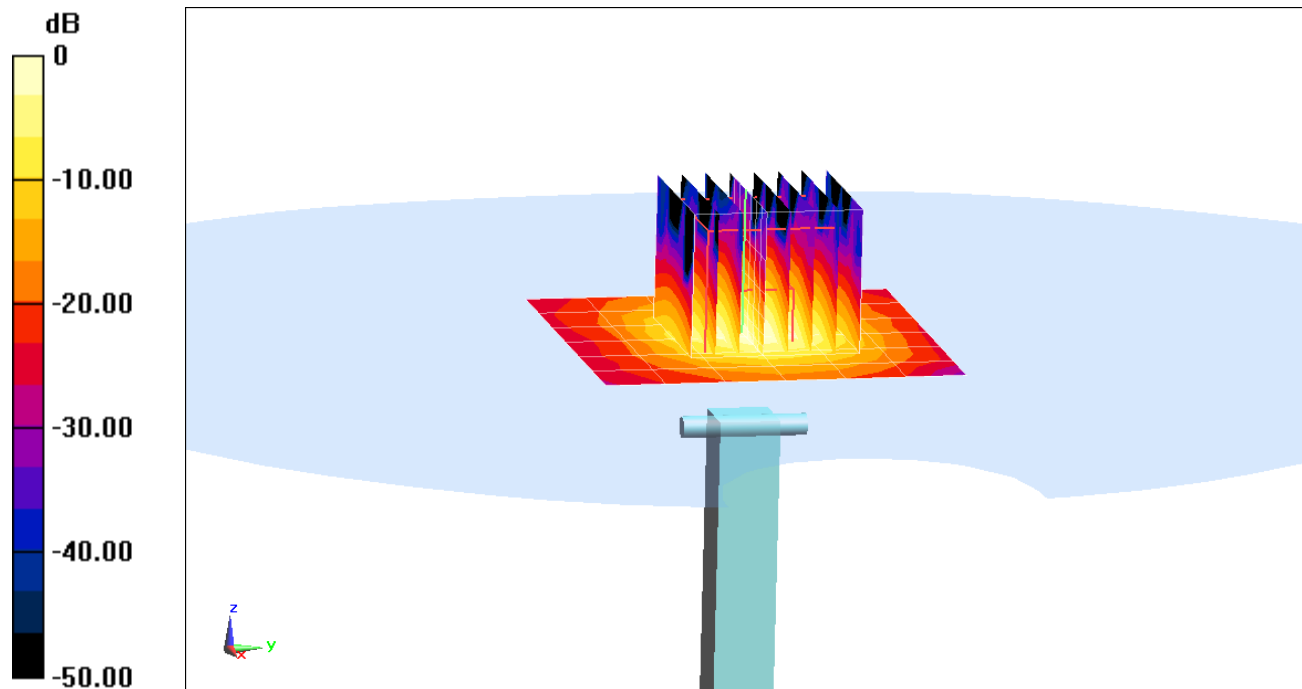

0 dB = 9.55 W/kg = 9.80 dBW/kg

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: Dipole 5 GHz; Type: D5GHzV2; Serial: 1237**

Communication System: UID 0, CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: 5 GHz Body Medium parameters used (interpolated):

$f = 5750 \text{ MHz}$ ;  $\sigma = 6.223 \text{ S/m}$ ;  $\epsilon_r = 46.806$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 03-11-2018; Ambient Temp: 20.5°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7308; ConvF(4.5, 4.5, 4.5); Calibrated: 8/16/2017;

Sensor-Surface: 1.4mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1334; Calibrated: 6/14/2017

Phantom: SAM with CRP v5.0 Front; Type: QD000P40CD; Serial: 1646

Measurement SW: DASY52, Version 52.10; SEMCAD X Version 14.6.10 (7417)

## **5750 MHz System Verification at 17.0 dBm (50 mW)**


**Area Scan (7x7x1):** Measurement grid: dx=10mm, dy=10mm

**Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 18.3 W/kg

**SAR(1 g) = 3.59 W/kg; SAR(10 g) = 1.000 W/kg**

Deviation(1 g) = -6.87%; Deviation(10 g) = -6.54%

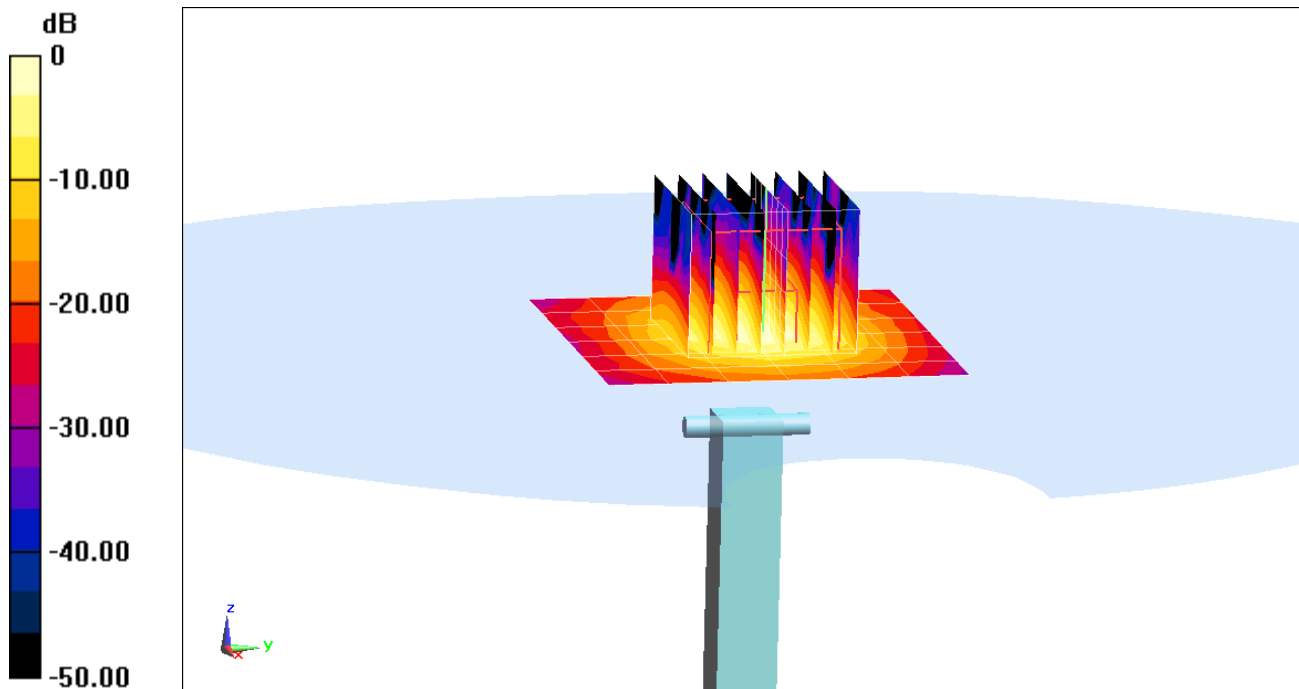

0 dB = 9.12 W/kg = 9.60 dBW/kg

## APPENDIX C: PROBE CALIBRATION





Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D750V3-1003\_Jan18**

## CALIBRATION CERTIFICATE

Object **D750V3 - SN:1003**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

*BN*  
*01-25-2018*

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3^\circ\text{C}$ ) and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner** Function: **Laboratory Technician**

Approved by: **Katja Pokovic** Technical Manager

Signature

*Leif Klysner*

*Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	750 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.9	0.89 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.9 $\pm$ 6 %	0.90 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.10 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.28 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.42 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.5	0.96 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	55.0 $\pm$ 6 %	0.96 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.15 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	8.58 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.43 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	5.71 W/kg $\pm$ 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.8 $\Omega$ - 2.1 j $\Omega$
Return Loss	- 27.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	49.2 $\Omega$ - 6.2 j $\Omega$
Return Loss	- 24.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.043 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	January 21, 2009

## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

### SAR result with SAM Head (Top)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.98 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.94 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.33 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.32 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Mouth)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.05 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.22 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Neck)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.01 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	8.06 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.38 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.52 W/kg ± 16.9 % (k=2)

### SAR result with SAM Head (Ear)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.67 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.70 W/kg ± 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.15 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.60 W/kg ± 16.9 % (k=2)

## DASY5 Validation Report for Head TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750$  MHz;  $\sigma = 0.9$  S/m;  $\epsilon_r = 40.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Head Tissue/Pin=250 mW, d=15mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.11 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.15 W/kg

**SAR(1 g) = 2.1 W/kg; SAR(10 g) = 1.37 W/kg**


Maximum value of SAR (measured) = 2.80 W/kg

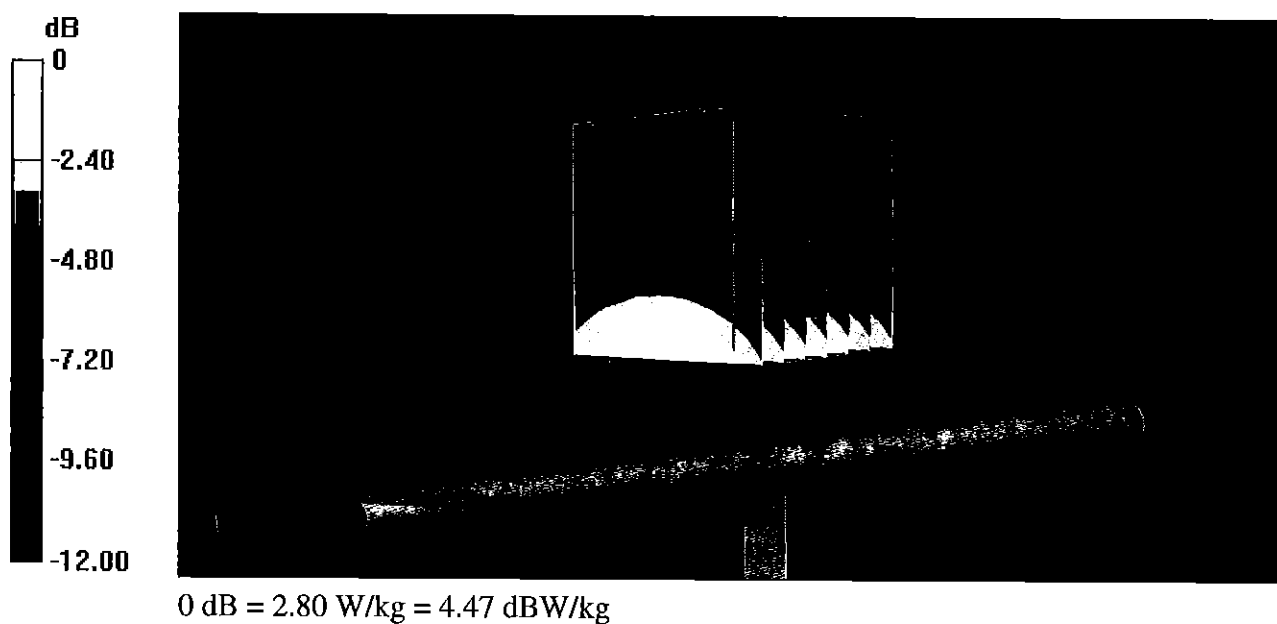

Impedance Measurement Plot for Head TSL

12 Jan 2018 13:14:07  
CH1 S11 1 U FS 1: 53.754  $\Omega$  -2.0996  $\Omega$  101.07 pF 750.000 000 MHz

\*  
De1  
CA

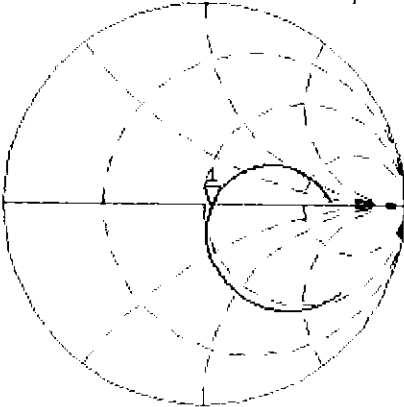


Avg  
16  
H1d

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.643 dB 750.000 000 MHz

CA

Avg  
16  
H1d

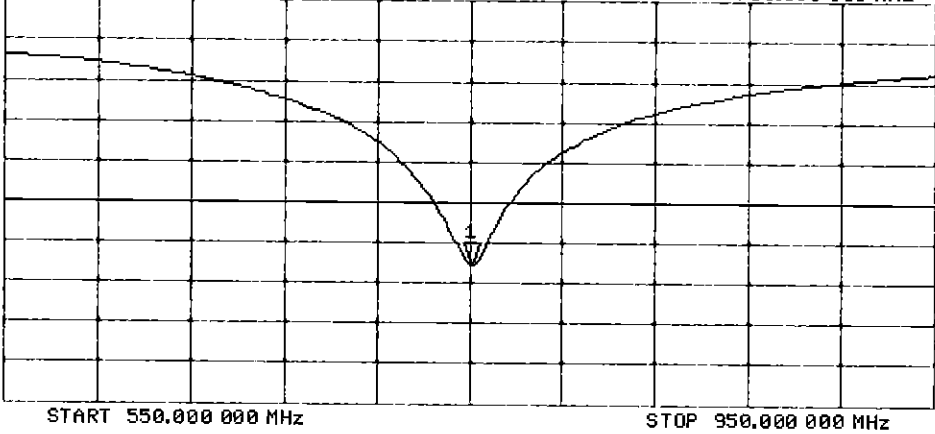

## DASY5 Validation Report for Body TSL

Date: 12.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.96 \text{ S/m}$ ;  $\epsilon_r = 55$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.19, 10.19, 10.19); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (Back); Type: QD 00R P49 AA; Serial: 1005
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**Dipole Calibration for Body Tissue/Pin=250 mW,  $d=15\text{mm}$ /Zoom Scan (7x8x7)/Cube 0:**


Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 57.31 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.17 W/kg


**SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.43 W/kg**

Maximum value of SAR (measured) = 2.83 W/kg

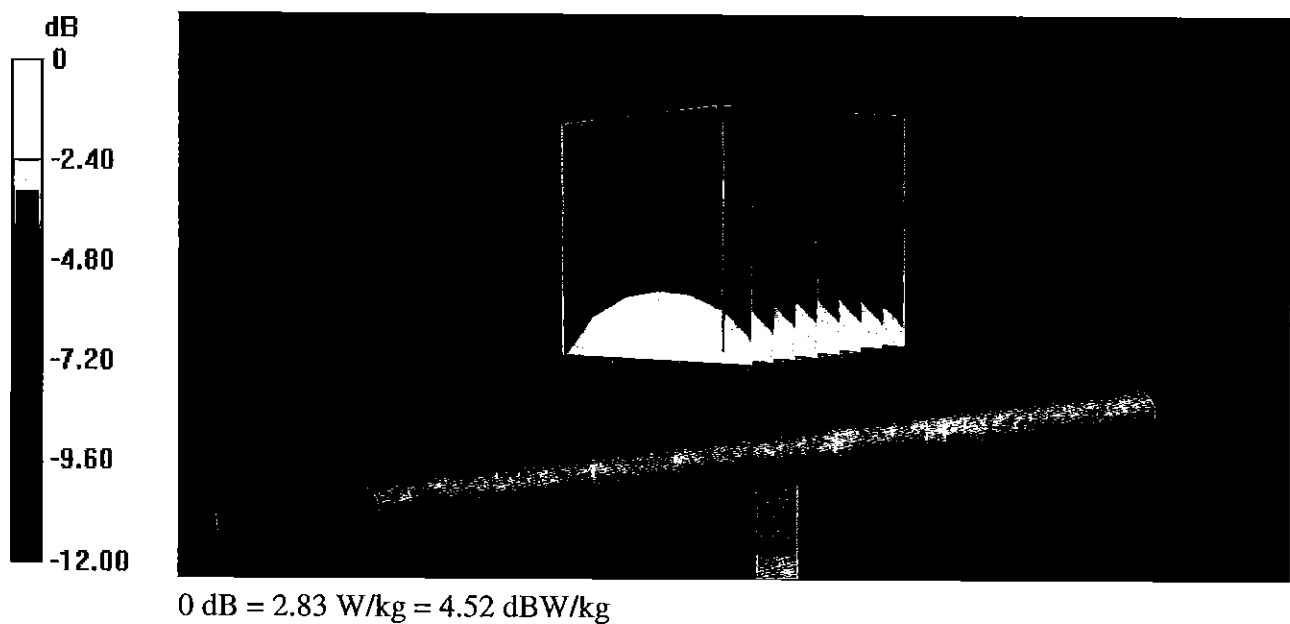



Impedance Measurement Plot for Body TSL

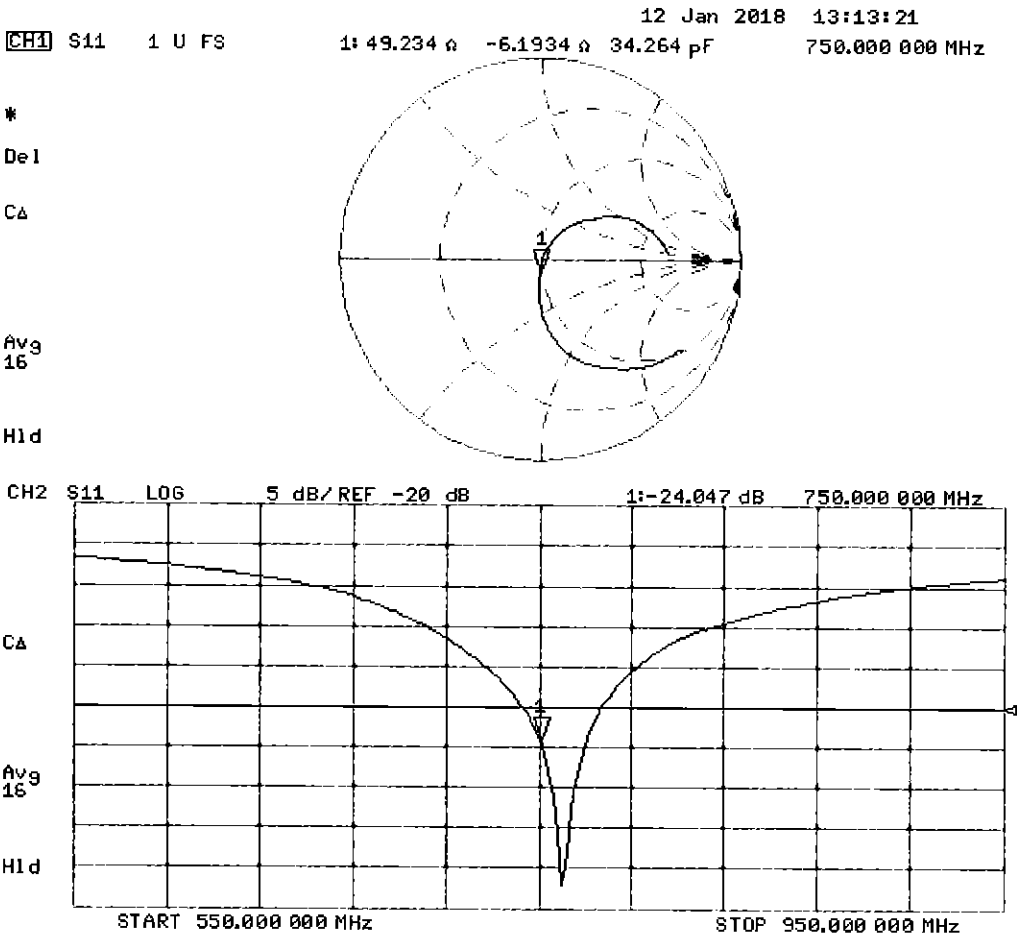

## DASY5 Validation Report for SAM Head

Date: 15.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 750 MHz; Type: D750V3; Serial: D750V3 - SN:1003**

Communication System: UID 0 - CW; Frequency: 750 MHz

Medium parameters used:  $f = 750 \text{ MHz}$ ;  $\sigma = 0.9 \text{ S/m}$ ;  $\epsilon_r = 44.2$ ;  $\rho = 1000 \text{ kg/m}^3$

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(10.22, 10.22, 10.22); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: SAM Head
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

**SAM Head/Top/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.79 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.89 W/kg

**SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.33 W/kg**

Maximum value of SAR (measured) = 2.58 W/kg

**SAM Head/Mouth/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.85 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.94 W/kg

**SAR(1 g) = 2.05 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.62 W/kg

**SAM Head/Neck/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 56.29 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.78 W/kg

**SAR(1 g) = 2.01 W/kg; SAR(10 g) = 1.38 W/kg**

Maximum value of SAR (measured) = 2.56 W/kg


**SAM Head/Ear/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 51.01 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.31 W/kg

**SAR(1 g) = 1.67 W/kg; SAR(10 g) = 1.15 W/kg**

Maximum value of SAR (measured) = 2.11 W/kg

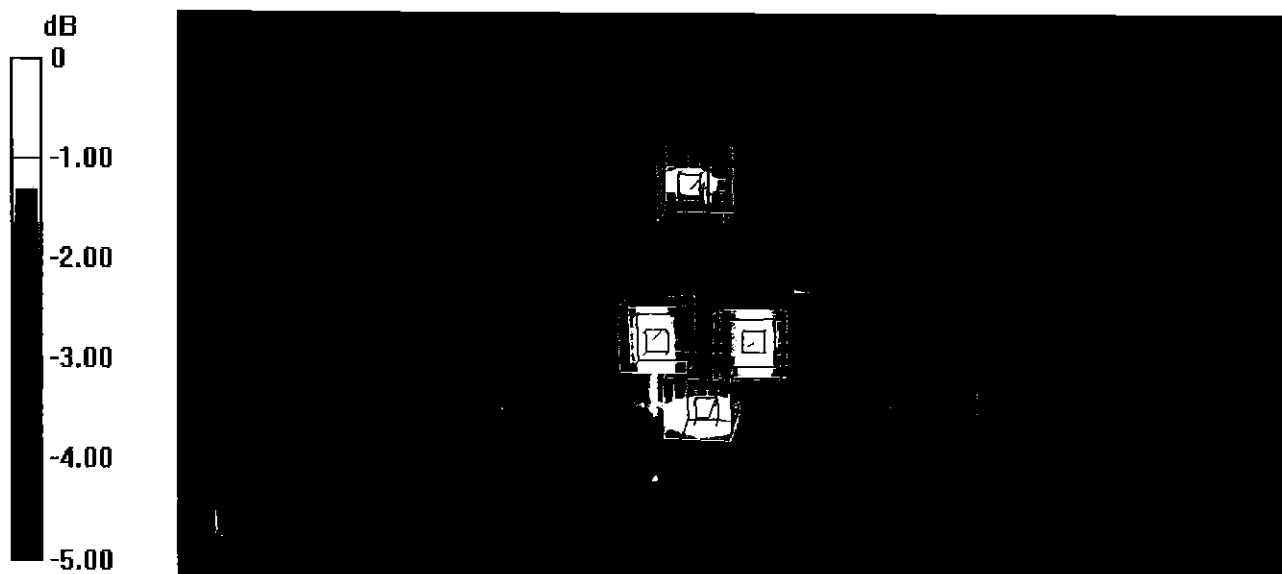

0 dB = 2.58 W/kg = 4.12 dBW/kg



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Client **PC Test**

Certificate No: **D835V2-4d132\_Jan18**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN:4d132**

Calibration procedure(s) **QA CAL-05.v9**  
**Calibration procedure for dipole validation kits above 700 MHz**

Calibration date: **January 15, 2018**

*BNV*  
**01-25-2018**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-17 (No. 217-02521/02522)	Apr-18
Power sensor NRP-Z91	SN: 103244	04-Apr-17 (No. 217-02521)	Apr-18
Power sensor NRP-Z91	SN: 103245	04-Apr-17 (No. 217-02522)	Apr-18
Reference 20 dB Attenuator	SN: 5058 (20k)	07-Apr-17 (No. 217-02528)	Apr-18
Type-N mismatch combination	SN: 5047.2 / 06327	07-Apr-17 (No. 217-02529)	Apr-18
Reference Probe EX3DV4	SN: 7349	30-Dec-17 (No. EX3-7349_Dec17)	Dec-18
DAE4	SN: 601	26-Oct-17 (No. DAE4-601_Oct17)	Oct-18
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power meter EPM-442A	SN: GB37480704	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: US37292783	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
Power sensor HP 8481A	SN: MY41092317	07-Oct-15 (in house check Oct-16)	In house check: Oct-18
RF generator R&S SMT-06	SN: 100972	15-Jun-15 (in house check Oct-16)	In house check: Oct-18
Network Analyzer HP 8753E	SN: US37390585	18-Oct-01 (in house check Oct-17)	In house check: Oct-18

Calibrated by: **Leif Klysner**      Name: **Leif Klysner**      Function: **Laboratory Technician**

Approved by: **Katja Pokovic**      Name: **Katja Pokovic**      Function: **Technical Manager**

Signature  
*Leif Klysner*  
*Katja Pokovic*

Issued: January 15, 2018

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.10.0
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5.0 mm	
Frequency	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	40.7 $\pm$ 6 %	0.92 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.39 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.36 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.10 W/kg $\pm$ 16.5 % (k=2)

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 $\pm$ 0.2) °C	54.8 $\pm$ 6 %	0.99 mho/m $\pm$ 6 %
Body TSL temperature change during test	< 0.5 °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	9.71 W/kg $\pm$ 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.62 W/kg
SAR for nominal Body TSL parameters	normalized to 1W	6.39 W/kg $\pm$ 16.5 % (k=2)

## Appendix (Additional assessments outside the scope of SCS 0108)

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.8 $\Omega$ - 2.9 j $\Omega$
Return Loss	- 29.5 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.4 $\Omega$ - 5.7 j $\Omega$
Return Loss	- 23.9 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.386 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 22, 2011

## Appendix (Additional assessments outside the scope of SCS 0108)

### Measurement Conditions

DASY system configuration, as far as not given on page 1 and 3.

Phantom	SAM Head Phantom	For usage with cSAR3DV2-R/L
---------	------------------	-----------------------------

### SAR result with SAM Head (Top)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.40 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.41 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.58 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.21 W/kg $\pm$ 16.9 % (k=2)

### SAR result with SAM Head (Mouth)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.47 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.69 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.64 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.45 W/kg $\pm$ 16.9 % (k=2)

### SAR result with SAM Head (Neck)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.35 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	9.22 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.59 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	6.25 W/kg $\pm$ 16.9 % (k=2)

### SAR result with SAM Head (Ear)

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.03 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	7.96 W/kg $\pm$ 17.5 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.37 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	5.39 W/kg $\pm$ 16.9 % (k=2)



## DASY5 Validation Report for Head TSL

Date: 08.01.2018

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d132**

Communication System: UID 0 - CW; Frequency: 835 MHz

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.92 \text{ S/m}$ ;  $\epsilon_r = 40.7$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN7349; ConvF(9.9, 9.9, 9.9); Calibrated: 30.12.2017;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 26.10.2017
- Phantom: Flat Phantom 4.9 (front); Type: QD 00L P49 AA; Serial: 1001
- DASY52 52.10.0(1446); SEMCAD X 14.6.10(7417)

### Dipole Calibration for Head Tissue/Pin=250 mW, d=10mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 63.23 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg

**SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.55 W/kg**

Maximum value of SAR (measured) = 3.22 W/kg



0 dB = 3.22 W/kg = 5.08 dBW/kg