

Conducted test results

No.1-6998-23-02-11_TR1-A201-R1

June 28, 2024

Test Standard(s) FCC 15.247 - NI

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

on behalf of

Authorized

Andreas Curette
Testing Manager
Radio Labs

Table of Content

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate	3
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi/4DQPSK	9
FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK	15

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic Basic rate

References

TC start	28.06.2024 10:30:35
Ambit temp [°C] humidity [rel%]	27.4 46
System version	5.0.7.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic Basic Rate
Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	1
Power Control	No
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	None
Perform Inquiry	No
EUT BT Address (if Inquiry No)	0123456789AB
Signaling BT Address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic Basic rate
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.52	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.48 8.96 15
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

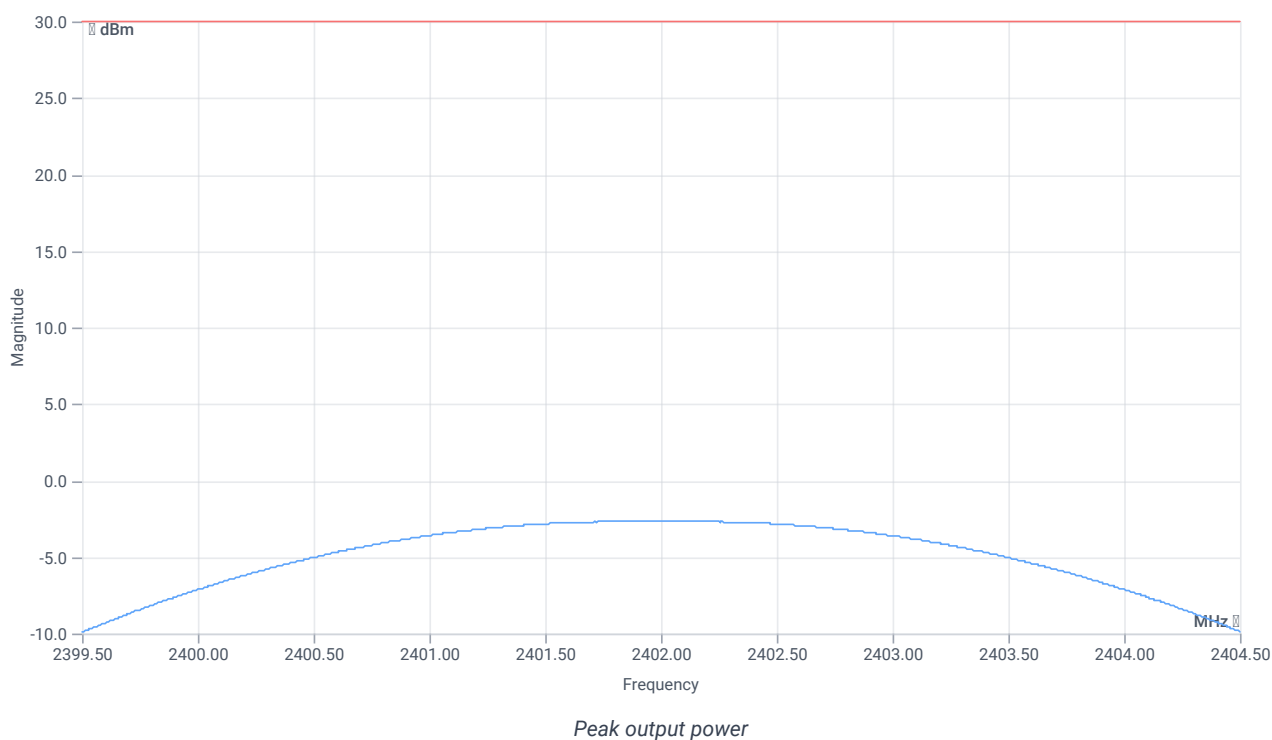

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.68	dBm	PASS
Peak power	---	1000	0.539511	mW	PASS
Frequency at peak	---	---	2402.12	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.19	dBm	INFO
Ref. frequency	---	---	2441.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.81 9 15
Start [MHz] Stop [MHz]	2438.500 2443.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

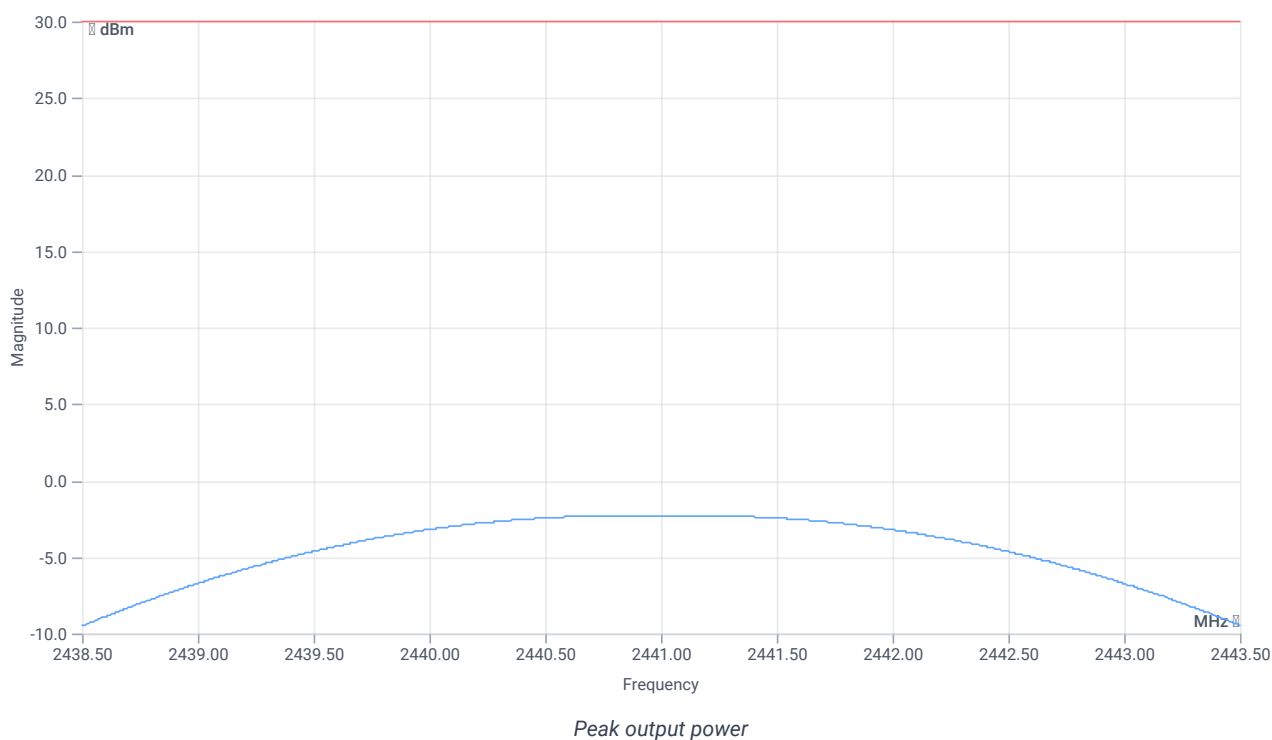

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.29	dBm	PASS
Peak power	---	1000	0.590201	mW	PASS
Frequency at peak	---	---	2441.145	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-2.06	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.94 9.1 15
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

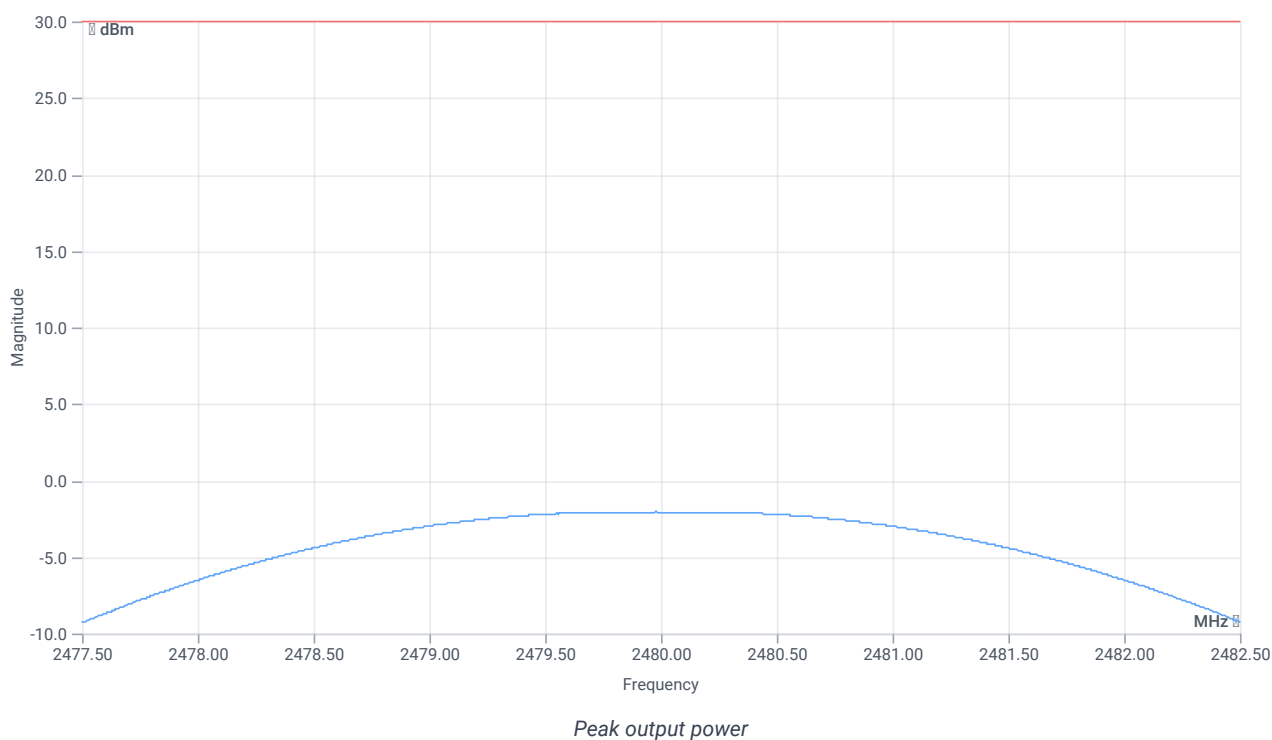

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.05	dBm	PASS
Peak power	---	1000	0.623735	mW	PASS
Frequency at peak	---	---	2479.98	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR Pi/4DQPSK

References

TC start	28.06.2024 10:32:13
Ambit temp [°C] humidity [rel%]	27.5 46
System version	5.0.7.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR Pi/4DQPSK
Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	1
Power Control	No
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	None
Perform Inquiry	No
EUT BT Address (if Inquiry No)	0123456789AB
Signaling BT Address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR Pi/4DQPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-4.08	dBm	INFO
Ref. frequency	---	---	2401.800	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.92 8.96 15
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

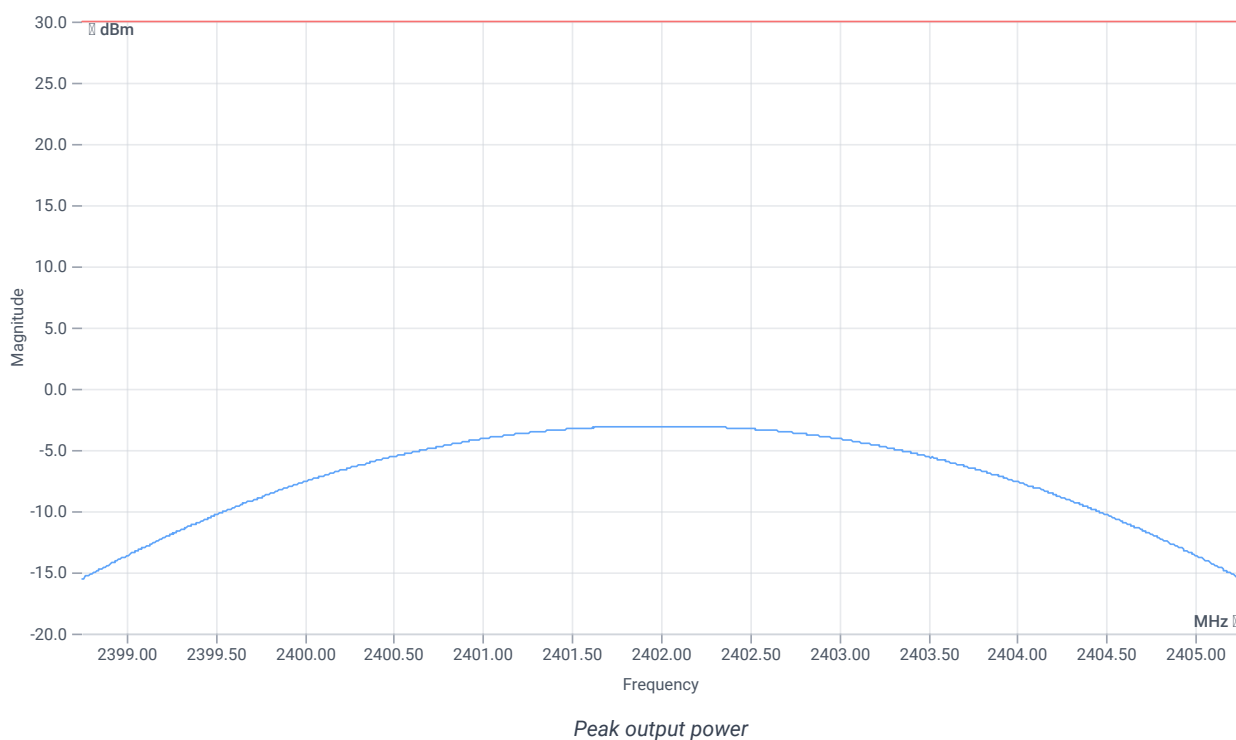

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-3.07	dBm	PASS
Peak power	---	1000	0.493174	mW	PASS
Frequency at peak	---	---	2401.883	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-3.45	dBm	INFO
Ref. frequency	---	---	2441.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.55 9 15
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

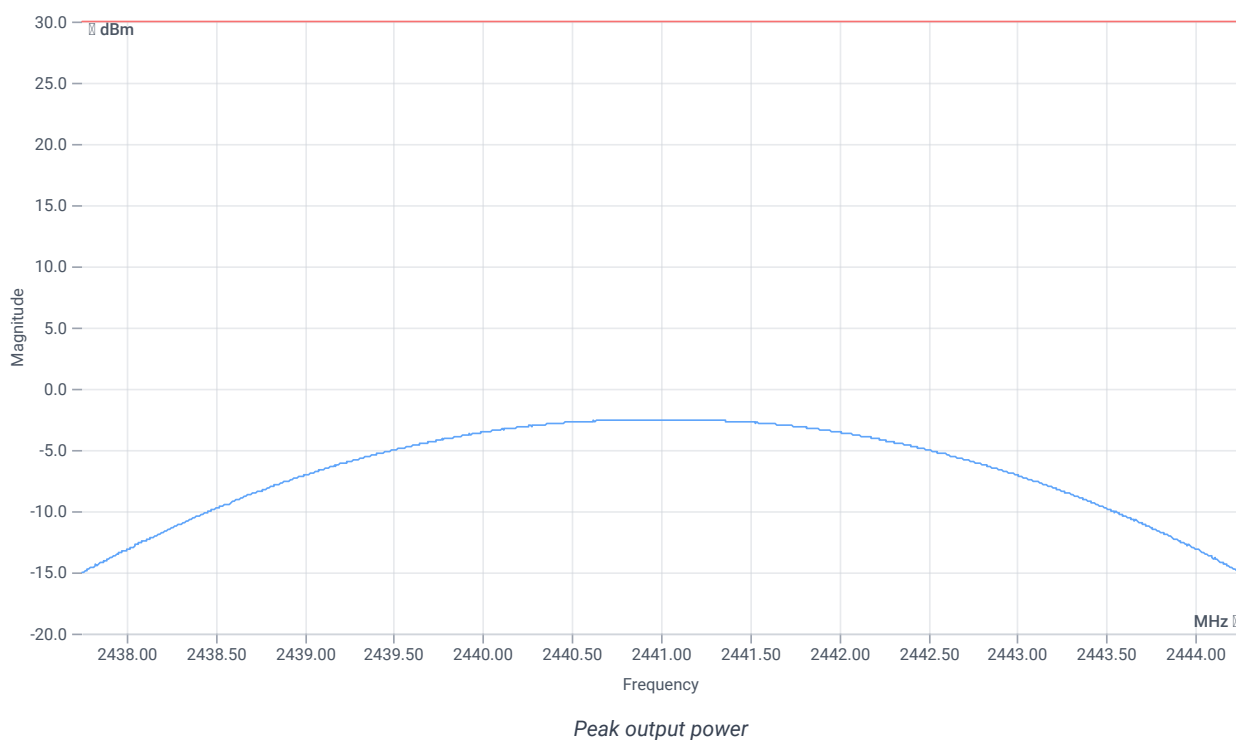

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.53	dBm	PASS
Peak power	---	1000	0.55847	mW	PASS
Frequency at peak	---	---	2441.091	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-3.53	dBm	INFO
Ref. frequency	---	---	2480.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.47 9.1 15
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

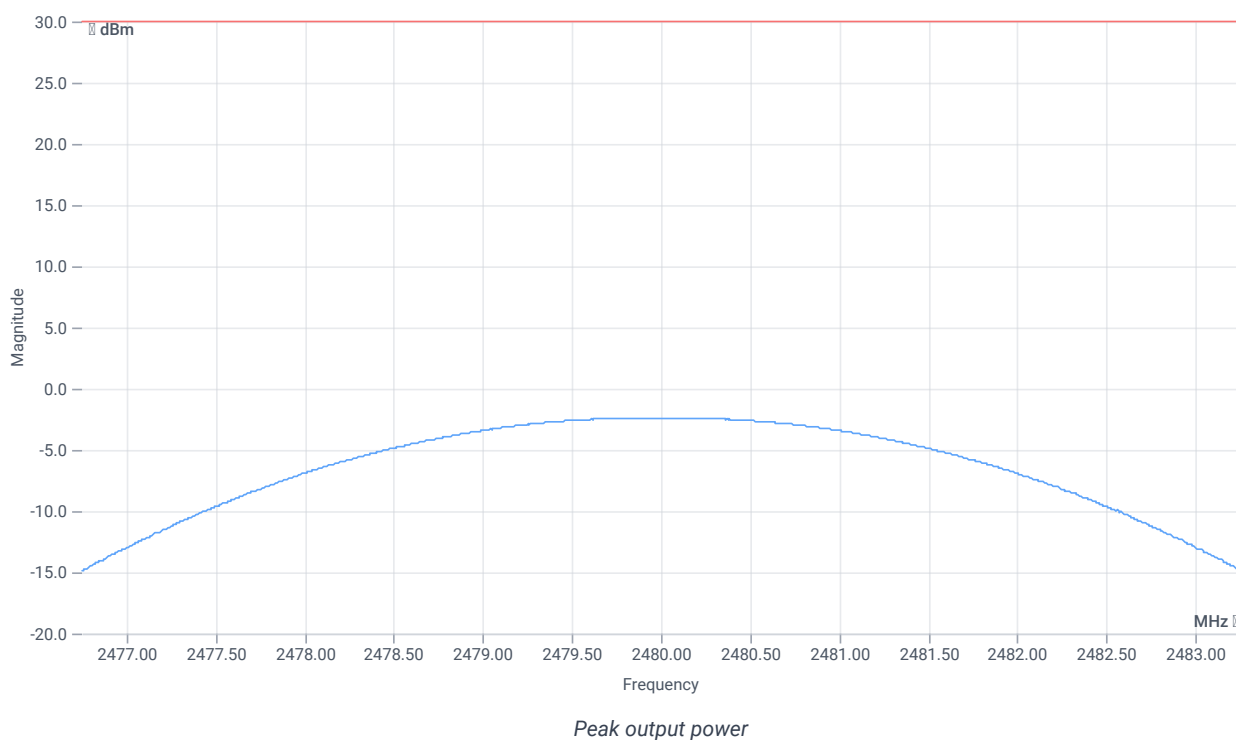

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.39	dBm	PASS
Peak power	---	1000	0.576766	mW	PASS
Frequency at peak	---	---	2479.838	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power FHSS ~ BT Classic EDR 8DPSK

References

TC start	28.06.2024 10:34:05
Ambit temp [°C] humidity [rel%]	27.6 46
System version	5.0.7.0
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS - BT Classic EDR 8DPSK
Information	

EUT Common Settings BT Classic

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	1
Power Control	No
Longest Supported Packet Type	DH5
RF Supported	Basic Rate True EDR Pi/4DQPSK True EDR 8DPSK True
Testmode	None
Perform Inquiry	No
EUT BT Address (if Inquiry No)	0123456789AB
Signaling BT Address	BABEBEDADBAD

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT Classic EDR 8DPSK
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2441
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-4.14	dBm	INFO
Ref. frequency	---	---	2402.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.86 8.96 15
Start [MHz] Stop [MHz]	2398.750 2405.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

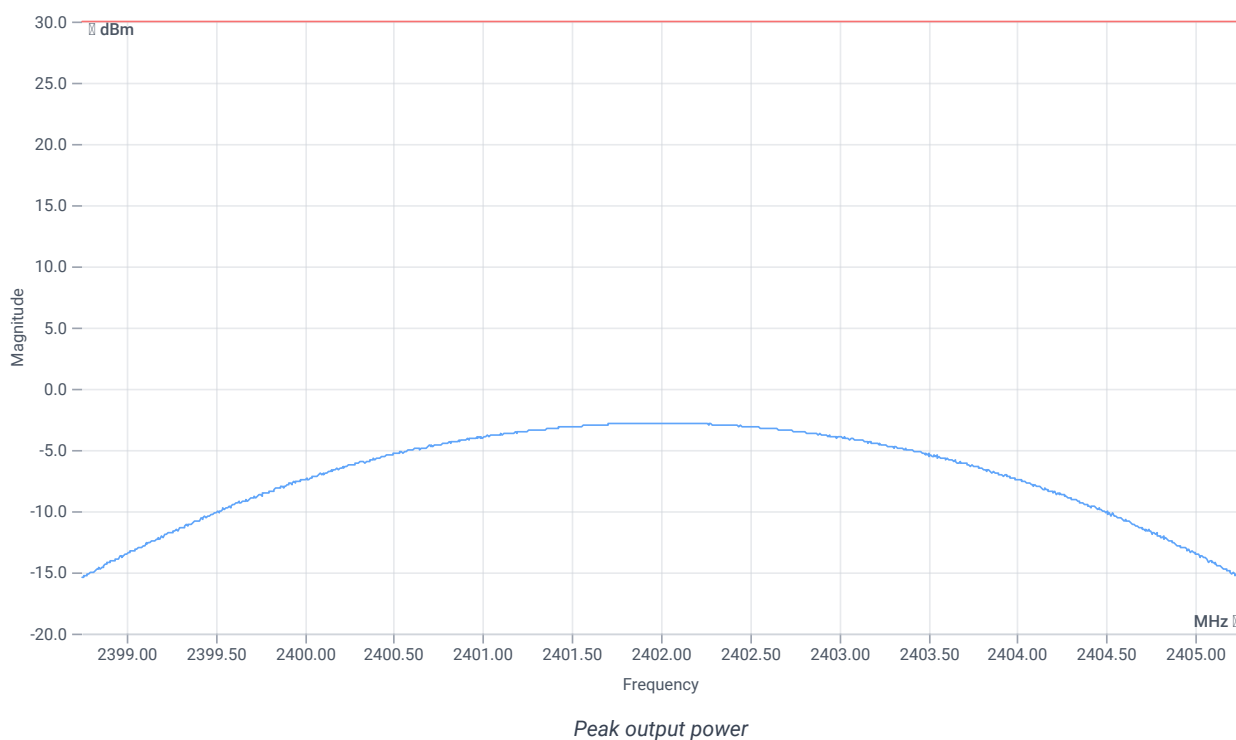

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.81	dBm	PASS
Peak power	---	1000	0.5236	mW	PASS
Frequency at peak	---	---	2401.903	MHz	INFO


Test at TX 2441 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-3.22	dBm	INFO
Ref. frequency	---	---	2441.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.78 9 15
Start [MHz] Stop [MHz]	2437.750 2444.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

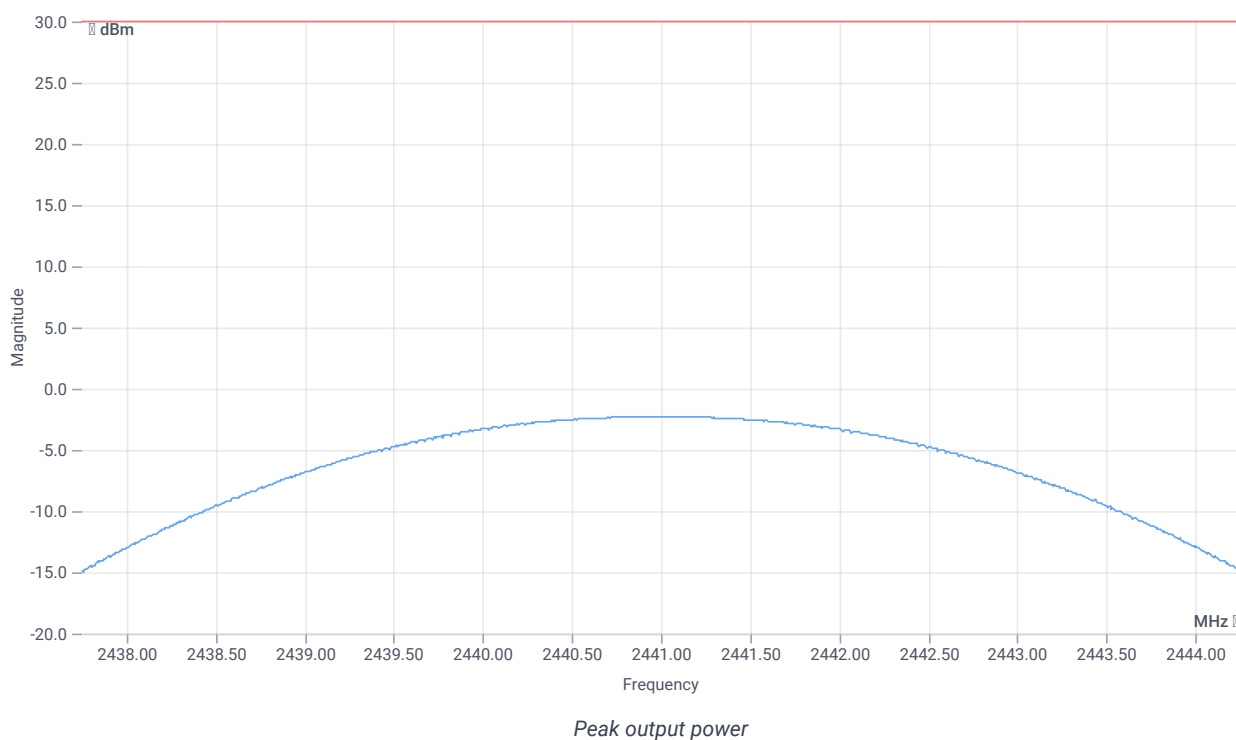

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.27	dBm	PASS
Peak power	---	1000	0.592925	mW	PASS
Frequency at peak	---	---	2441.026	MHz	INFO


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-3.52	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	6.48 9.1 15
Start [MHz] Stop [MHz]	2476.750 2483.250
RBW [MHz] VBW [MHz]	3.000000 10.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

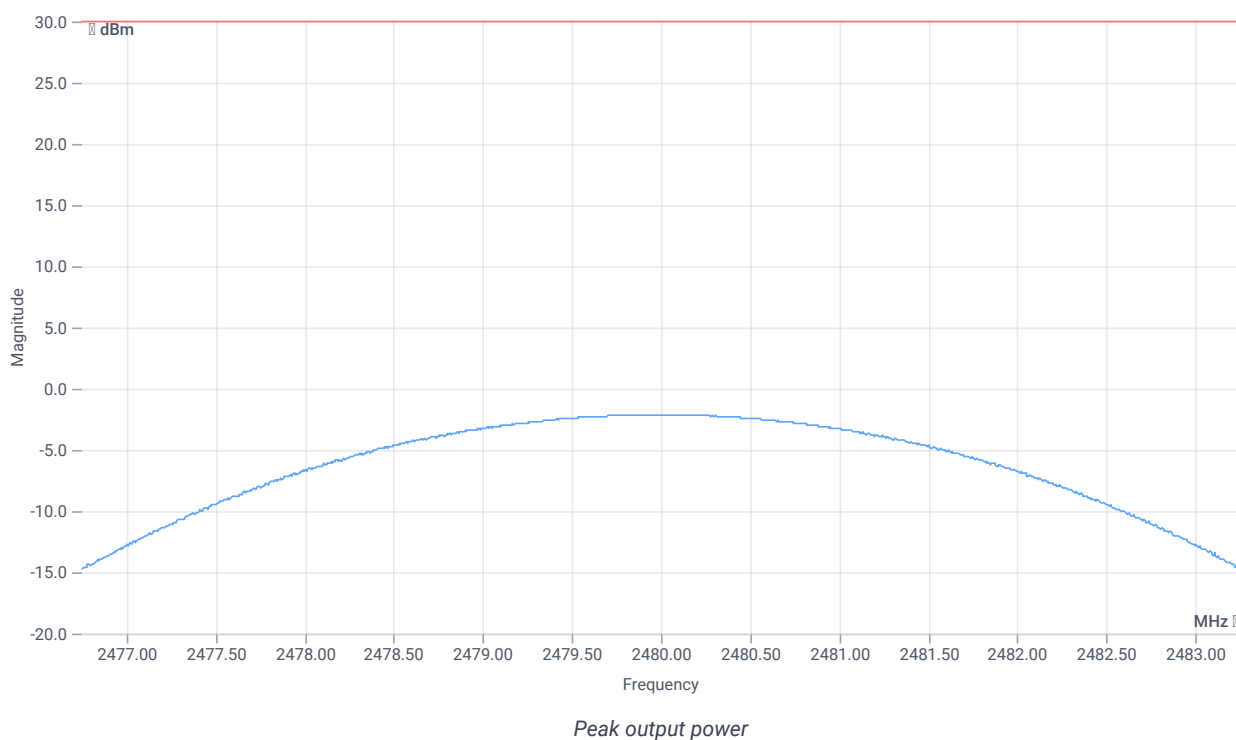

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-2.13	dBm	PASS
Peak power	---	1000	0.61235	mW	PASS
Frequency at peak	---	---	2479.929	MHz	INFO

Verdict

PASS

- END OF DOCUMENT -