

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 825$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 52.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 128/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.078 mW/g


GPRS ch 128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.34 V/m; Power Drift = -0.079 dB

Peak SAR (extrapolated) = 0.115 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

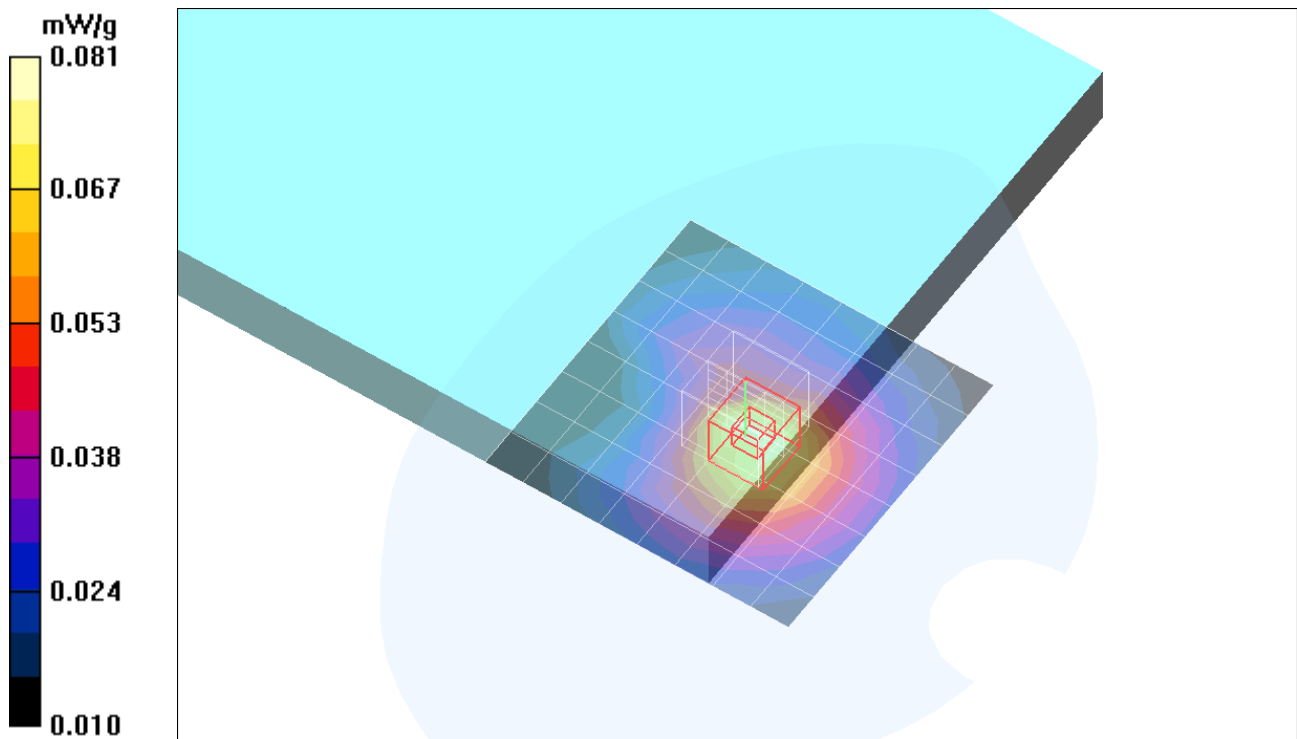

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 192/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.084 mW/g

GPRS ch 192/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.17 V/m; Power Drift = 0.050 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.084 mW/g; SAR(10 g) = 0.057 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.091 mW/g

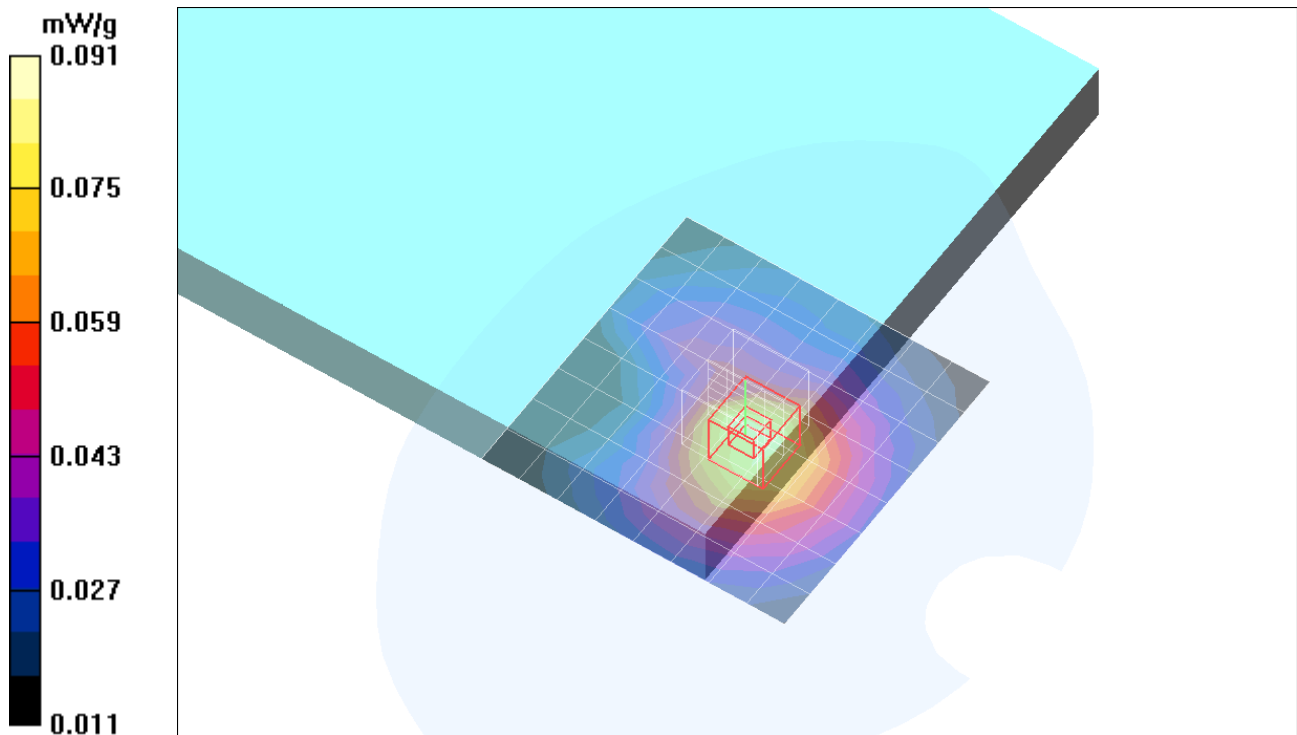

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 251/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.080 mW/g

GPRS ch 251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.35 V/m; Power Drift = 0.094 dB

Peak SAR (extrapolated) = 0.123 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.054 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.085 mW/g

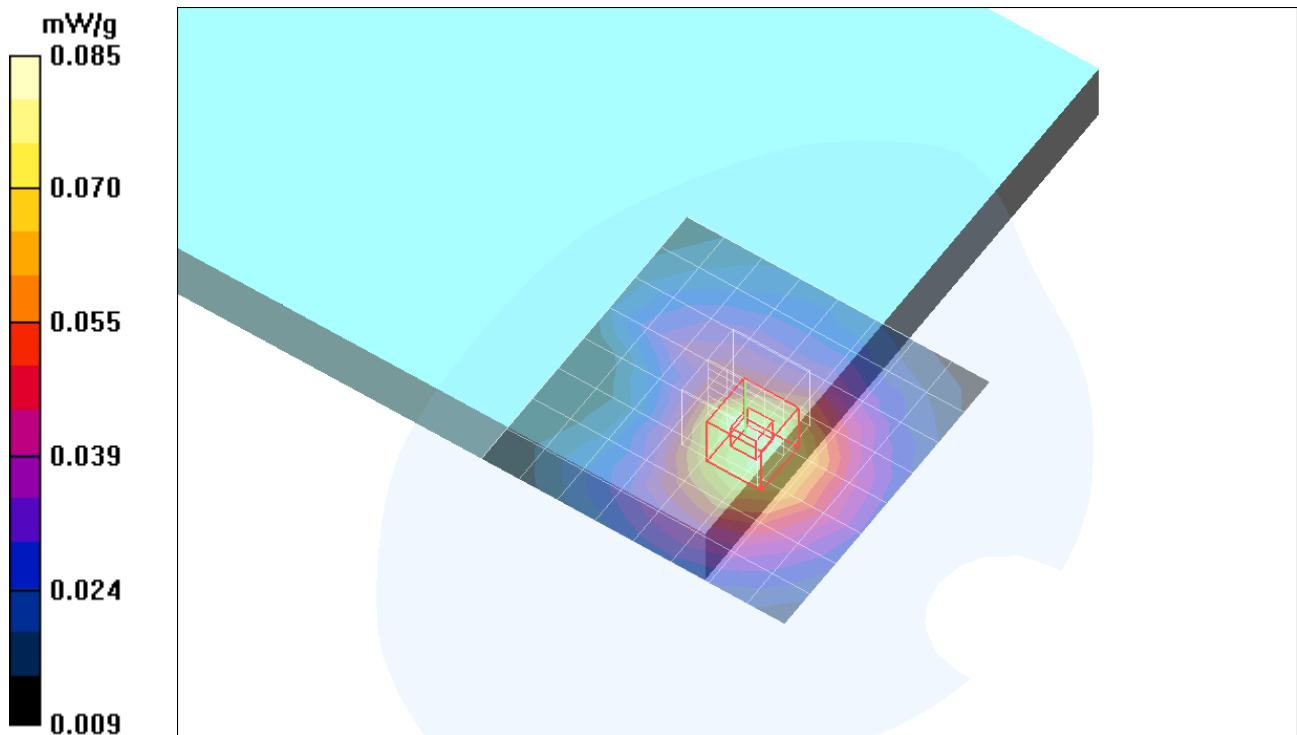

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 192 with WLAN/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.089 mW/g

GPRS ch 192 with WLAN/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.88 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.059 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.094 mW/g

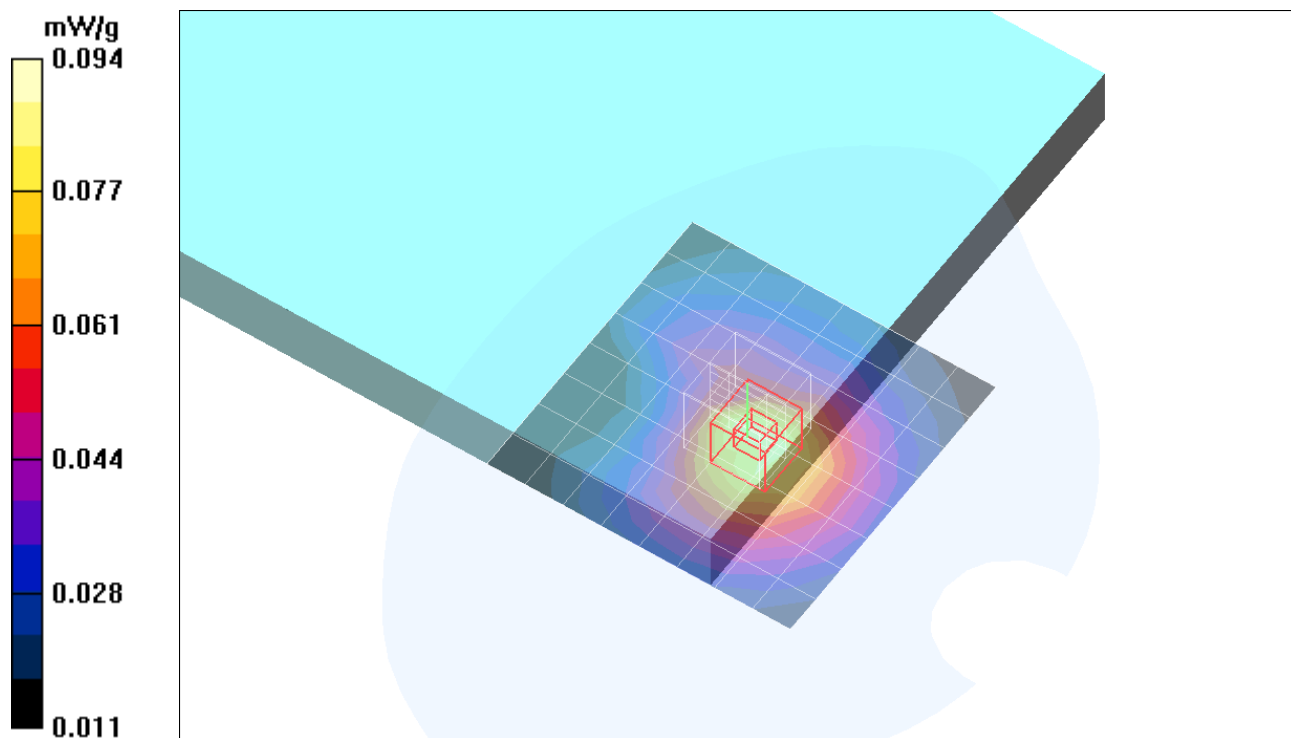

Test Laboratory: Compliance Certification Services

M2 Note Aluminum


DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

GPRS ch 192 with WLAN/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.063 mW/g

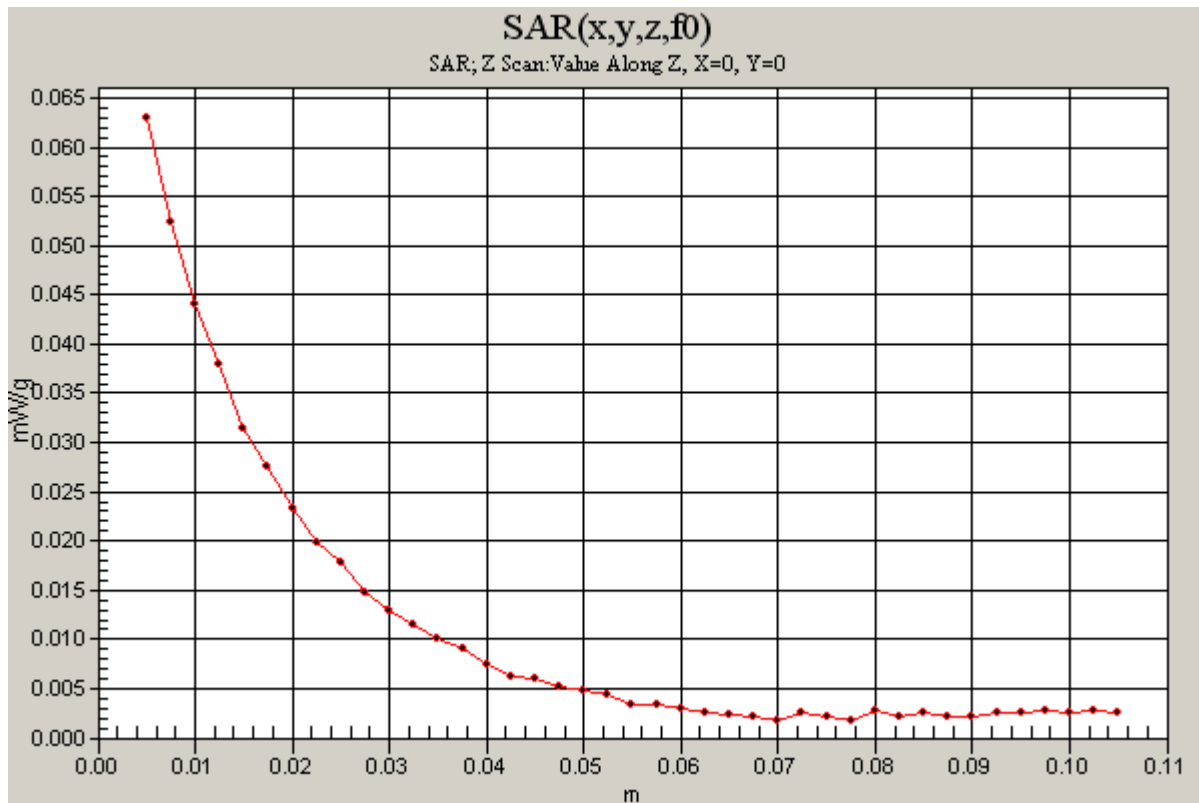

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 837$ MHz; $\sigma = 0.96$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 2; Type: SAM 2; Serial: 1050
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

EGPRS ch 192/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.026 mW/g

EGPRS ch 192/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 5.39 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.041 W/kg

SAR(1 g) = 0.027 mW/g; SAR(10 g) = 0.018 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.029 mW/g

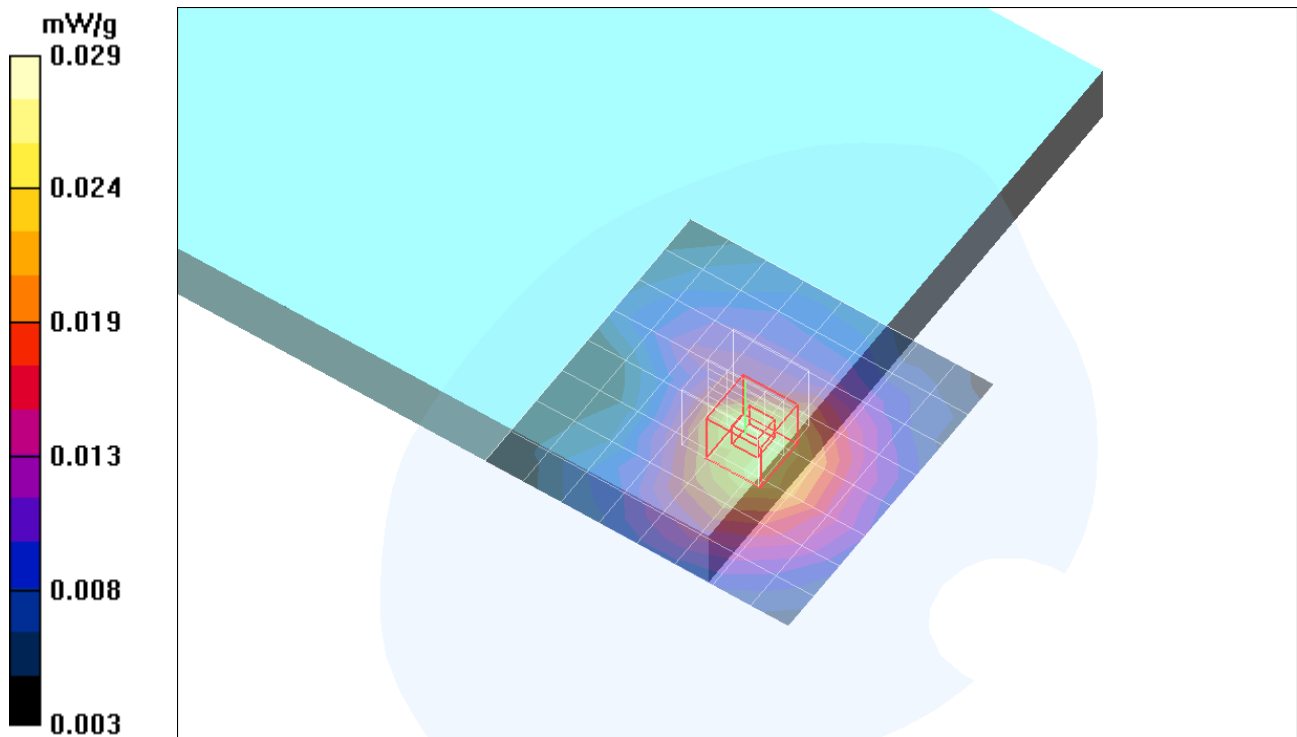

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 52.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 512/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.063 mW/g

GPRS ch 512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.02 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.088 W/kg

SAR(1 g) = 0.061 mW/g; SAR(10 g) = 0.039 mW/g

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.067 mW/g

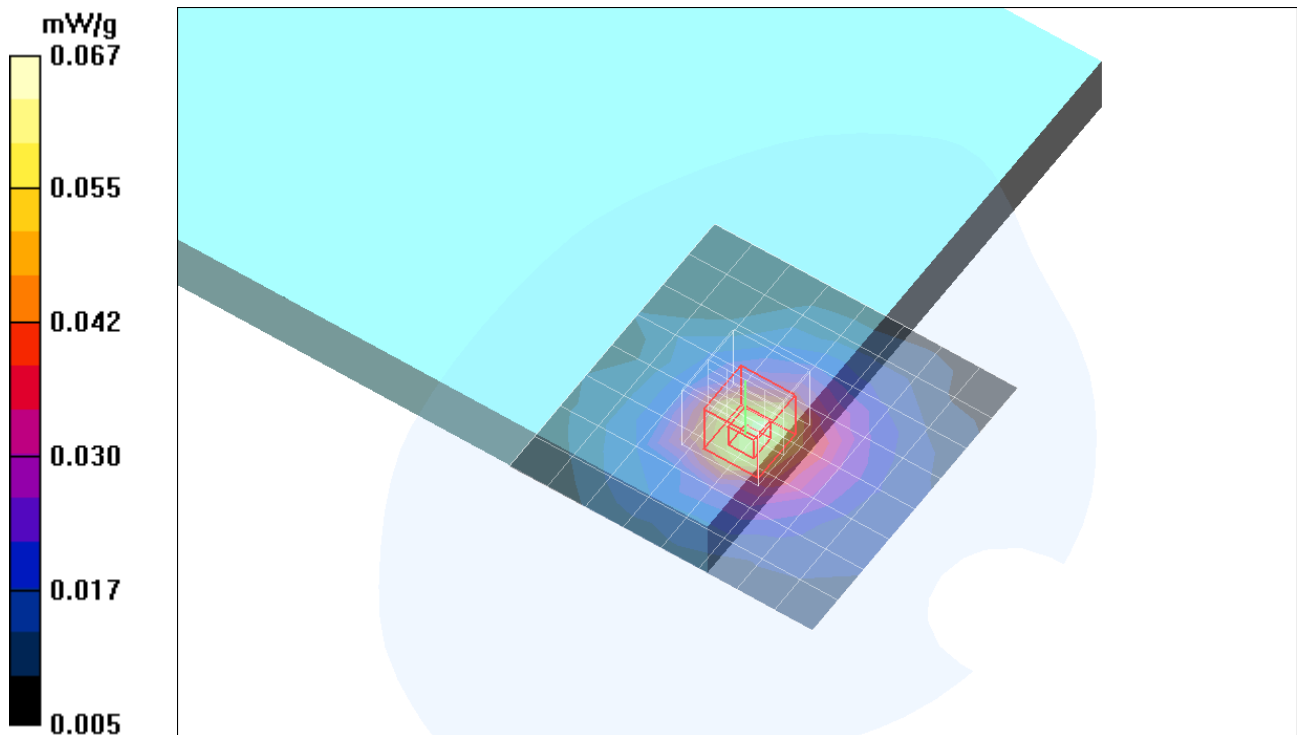

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 661/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.095 mW/g


GPRS ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.52 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.100 mW/g

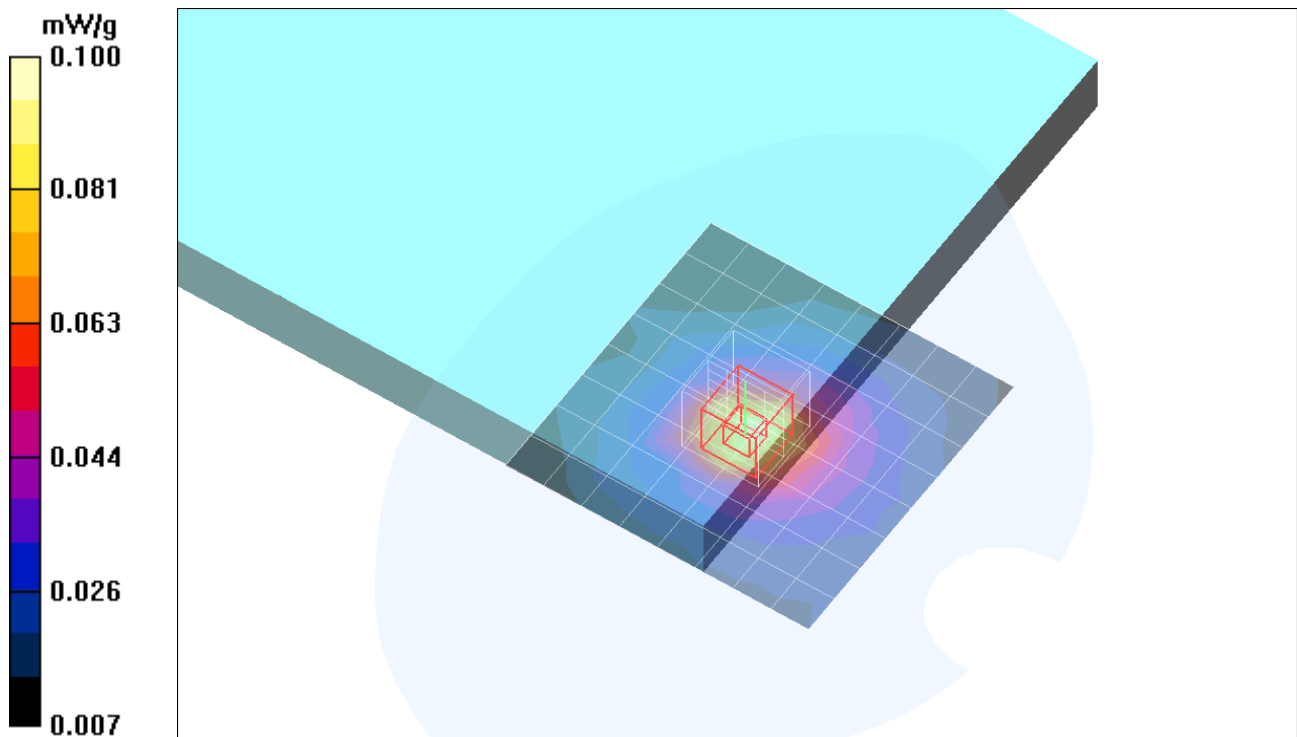

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1910$ MHz; $\sigma = 1.47$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 810/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.077 mW/g


GPRS ch 810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 7.58 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 0.113 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

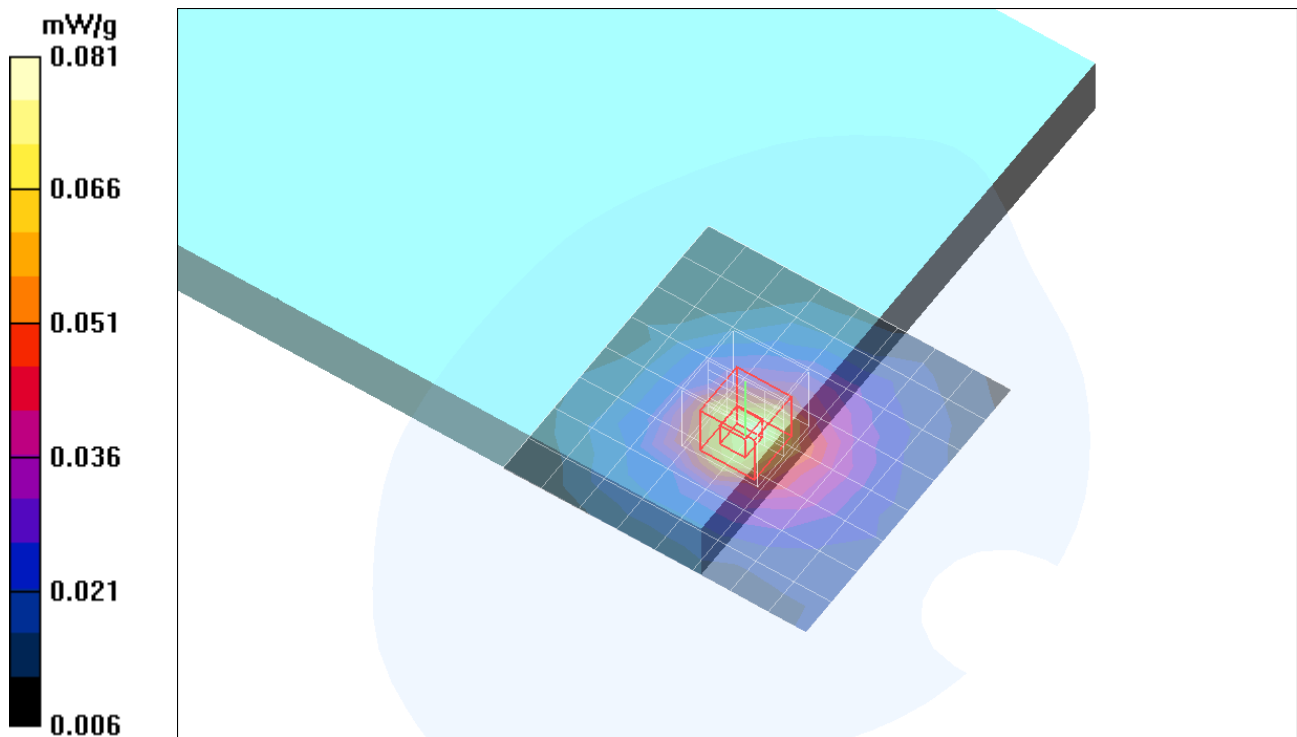

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

GPRS ch 661 with WLAN/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.095 mW/g


GPRS ch 661 with WLAN/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.58 V/m; Power Drift = -0.189 dB

Peak SAR (extrapolated) = 0.137 W/kg

SAR(1 g) = 0.092 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

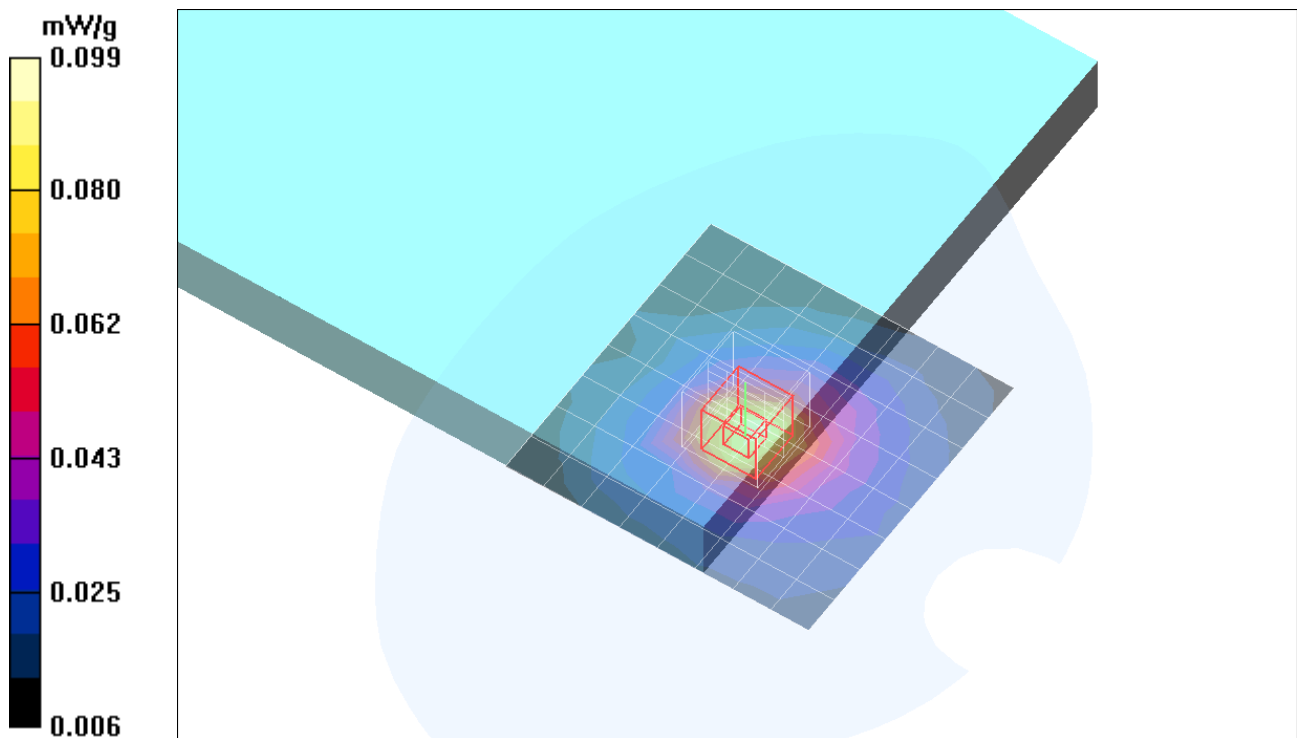


Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

GPRS ch 661 with WLAN/Z Scan (1x1x41): Measurement grid: dx=20mm, dy=20mm, dz=2.5mm
Maximum value of SAR (measured) = 0.064 mW/g

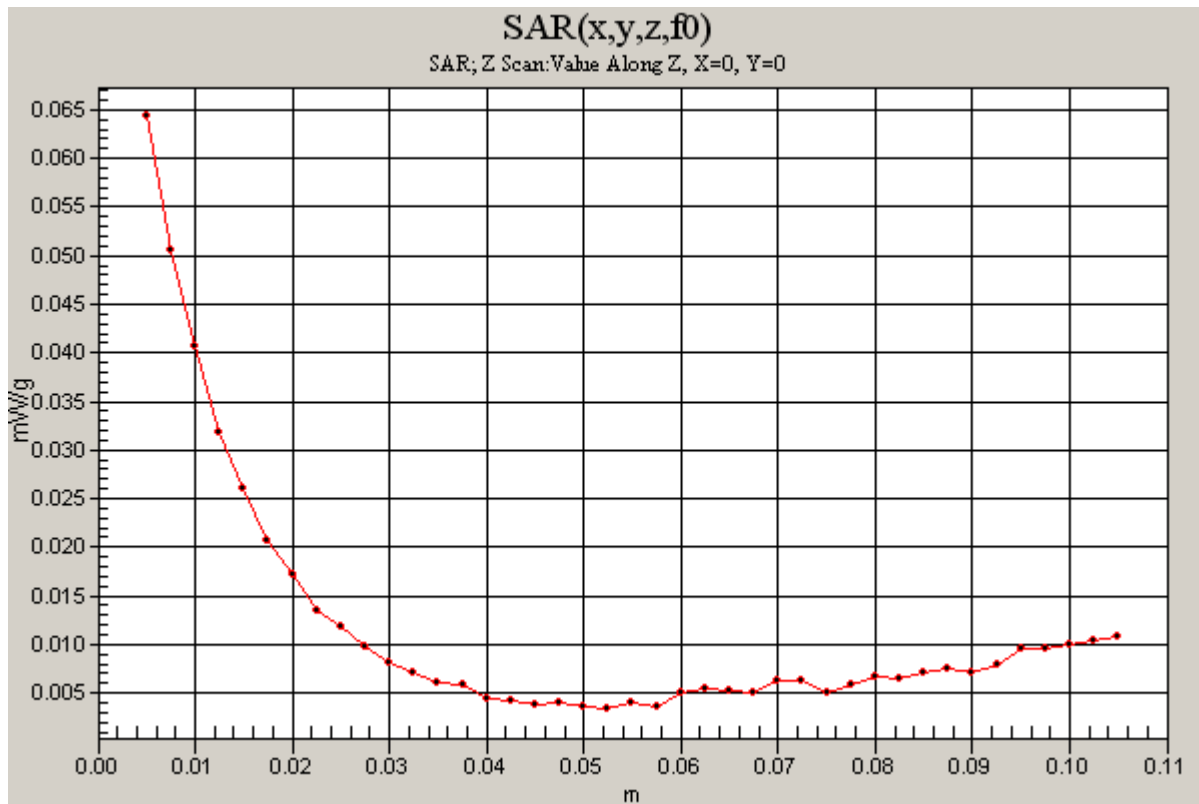

Test Laboratory: Compliance Certification Services

M2 Note Aluminum

DUT: M2 AL LCD Cover; Type: Laptop; Serial: N/A

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(7.6, 7.6, 7.6); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 21; Postprocessing SW: SEMCAD, V1.8 Build 170

EGPRS ch 661/Area Scan (9x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.048 mW/g

EGPRS ch 661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 6.11 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.072 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

