

FCC Test Report

Report No.: AGC02931200602FE02

FCC ID : POD-ANGPOC1

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : POC Radio

BRAND NAME : TYT

MODEL NAME : IP-79

APPLICANT : TYT Electronics Co., Ltd.

DATE OF ISSUE : Nov. 26, 2020

STANDARD(S) : FCC Part 22H & 24E& 27L Rules

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd.

O Jo uoitats A GC



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test resu presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 2 of 60

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	1	Nov. 26, 2020	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the special pedicated fresh dynapection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Report No.: AGC02931200602FE02 Page 3 of 60

TABLE OF CONTENTS

VERIFICATION OF COMPLIANCE	5
1. GENERAL TECHNICAL INFORMATION	6
1.1 PRODUCT DESCRIPTION	
1.2 RELATED SUBMITTAL(S) / GRANT (S)	7
1.3 TEST METHODOLOGY	7
1.4 DEVICE CAPABILITIES	
1.5 ADDRESS OF THE TEST LABORATORY	
1.6 TEST FACILITY	8
1.7 ENVIRONMENTAL CONDITIONS	9
1.8 MEASUREMENT UNCERTAINTY	9
1.9 SPECIAL ACCESSORIES	9
1.10 EQUIPMENT MODIFICATIONS	9
2. SYSTEM TEST CONFIGURATION	10
2.1 EUT CONFIGURATION	10
2.2 EUT EXERCISE	10
2.3 CONFIGURATION OF EUT SYSTEM	10
3. SUMMARY OF TEST RESULTS	11
3.1 TEST CONDITION : CONDUCTED TEST	
3.2 TEST CONDITION : RADIATED TEST	11
4. DESCRIPTION OF TEST MODES	
5. LIST OF TEST EQUIPMENT	15
6. CONDUCTED OUTPUT POWER	17
6.1 MEASUREMENT OVERVIEW	17
6.2 MEASUREMENT METHOD	
6.3 MEASUREMENT SETUP	17
6.4 MEASUREMENT RESULT	
7. RADIATED OUTPUT POWER	
7.1 MEASUREMENT OVERVIEW	20
7.2 MEASUREMENT METHOD	
7.3 MEASUREMENT SETUP	21
7.4 MEASUREMENT RESULT	23
8. PEAK-TO-AVERAGE RATIO	24
8.1 PROVISIONS APPLICABLE	
8.2 MEASUREMENT METHOD	24
8.3 MEASUREMENT SETUP	25

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 4 of 60

8.4 MEASUREMENT RESULT	26
9. OCCUPIED BANDWIDTH	27
9.1 PROVISIONS APPLICABLE	27
9.2 MEASUREMENT METHOD	27
9.3 MEASUREMENT SETUP	27
9.4 MEASUREMENT RESULT	28
10. BAND EDGE EMISSIONS AT ANTENNA TERMINAL	31
10.1 MEASUREMENT OVERVIEW	31
10.2 MEASUREMENT METHOD	31
10.3 MEASUREMENT METHOD	31
10.4 MEASUREMENT RESULT	32
11. SPURIOUS EMISSIONS AT ANTENNA TERMINAL	34
11.1 PROVISIONS APPLICABLE	34
11.2 MEASUREMENT METHOD	34
11.3 MEASUREMENT SETUP	34
11.4 MEASUREMENT RESULT	36
12. RADIATED SPURIOUS EMISSION	_
12.1. PROVISIONS APPLICABLE	43
12.2. MEASUREMENT PROCEDURE	43
12.3. MEASUREMENT SETUP	
12.4 MEASUREMENT RESULT	45
13. FREQUENCY STABILITY / VARIATION OF AMBIENT TEMPERATURE	52
13.1 PROVISIONS APPLICABLE	52
13.2 MEASUREMENT METHOD	52
13.3 MEASUREMENT SETUP	53
13.4 MEASUREMENT RESULT	54
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	59
APPENDIX B. PHOTOGRAPHS OF FUT	60

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 5 of 60

VERIFICATION OF COMPLIANCE

Applicant	TYT Electronics Co., Ltd.		
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.		
Manufacturer	TYT Electronics Co., Ltd.		
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.		
Factory	TYT Electronics Co., Ltd.		
Address	Block 39-1, Optoelectronics-information industry base, Nan'an, Quanzhou, Fujian, China.		
Product Designation	POC Radio		
Brand Name	TYT		
Test Model	IP-79		
Date of test	Sep. 10, 2020~Nov. 26, 2020		
Deviation	No any deviation from the test method.		
Condition of Test Sample	Normal		

WE HEREBY CERTIFY THAT:

The above equipment was tested by Attestation of Global Compliance(Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI/TIA-603-E-2016. The sample tested as described in this report is in compliance with the FCC Rules Part 22H, 24E and 27L. The test results of this report relate only to the tested sample identified in this report.

Prepared By	Imjer 1	lucorg
	Donjon Huang (Project Engineer)	Nov. 26, 2020
Reviewed By	Calin	Liu
CGC	Calvin Liu (Reviewer)	Nov. 26, 2020
Approved By	Forrest	vi
GC C	Forrest Lei Authorized Officer	Nov. 26, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pestud/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 6 of 60

1. GENERAL TECHNICAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	POC Radio	C		\C
Hardware Version:	TP-79-RF-V1.4.2			
Software Version:	EC25AFFAR07A08M4G			
Support Networks:	WCDMA, HSDPA, HSU	PA		100
	☐GPRS 850 ☐PCS19	00 (U.S. Bands)	8	
	☐GSM 900 ☐DCS 18	300 (Non-U.S. Bands)		8
Frequency Bands:	⊠UMTS FDD Band II 🏾	UMTS FDD Band IV		GU
	⊠UMTS FDD Band V (U.S. Bands)			
	☐UMTS FDD Band I ☐	UMTS FDD Band VIII (N	Non-U.S. Bands)	
Type of Modulation:	BPSK,QPSK Modulation	n For WCDMA/HSDPA/H	HSUPA	
	WCDMA Band II: 1852.4MHz-1907.6 MHz			
Frequency Range:	WCDMA Band IV: 1712.4-1752.6 MHz			
	WCDMA Band V: 826.4	-846.6 MHz		a.C
	WCDMA Band II:	4M15F9W		
Emission Designator:	WCDMA Band IV:	4M15F9W		
	WCDMA Band V:	4M15F9W		
Antenna Type:	PIFA Antenna	-6		
Antenna gain:	WCDMA850:-4dBi	WCDMA1700:-2dBi	WCDMA1900	D:-3dBi
Power Supply:	DC 7.4V by battery	0	GU	·G
Battery parameter:	DC 7.4V 3800mAh			
Single Card:	WCDMA/LTE Card Slot		(a)	
Extreme Vol. Limits:	DC6.29V to 8.51V (Normal: 7.4V)			
Extreme Temp. Tolerance	-20 °C to +50 °C			

WCDMA CARD SLOT DISPLAY:

	Maximum ERP/EIRP	Max. Average	
	(dBm)	Burst Power (dBm)	
UMTS BAND V	23.84	24.77	
UMTS BAND II	23.67	24.59	
UMTS BAND IV	21.83	23.04	

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written appropriation of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 7 of 60

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: POD-ANGPOC1**, filing to comply with the FCC Part 22H&24E&27L requirements.

1.3 TEST METHODOLOGY

The tests were performed according to following standards:

FCC Part 22 Public Mobile Services.

FCC Part 24 Personal Communications Services.

FCC Part 27 Miscellaneous Wireless Communications Services.

FCC Part 2 Frequency allocations and radio treaty matters, general rules and regulations.

TIA/EIA 603 E: March 2016 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

ANSI-C63.26:2015 American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

KDB971168 D01 v03r01 Measurement Guidance For Certification Of Licensed Digital Transmitters

1.4 DEVICE CAPABILITIES

This device contains the following capabilities:

850/1700/1900 WCDMA/HSPA, LTE, GPS, Amateur walkie talkie.

For emissions from 1GHz – 18GHz, low, mid, and high channels were tested with highest power and worst case configuration.

The emissions below 1GHz and above 18GHz were tested with the highest transmitting power channel and the worst case configuration.

The EUT was manipulated through three orthogonal planes of X-orientation (flatbed), Y-orientation (landscape), and Z-orientation (portrait) during the testing. Only the worst case emissions were reported in this test report.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE, he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 8 of 60

1.5 ADDRESS OF THE TEST LABORATORY

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Residual Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 9 of 60

1.7 ENVIRONMENTAL CONDITIONS

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range	15~35℃	-20℃~50℃
Humidty range	20 % to 75 %.	20 % to 75 %.
Pressure range	86-106kPa	86-106kPa
Power supply	DC 7.4V	DC6.29V or 8.51V

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

1.8 MEASUREMENT UNCERTAINTY

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)
Radio Frequency	± 6.5 x 10-8	(1)
RF Power, Conducted	± 0.9 dB	(1)

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.9 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.10 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the bedicated restroy/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 10 of 60

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	POC Radio	IP-79	FCC ID: POD-ANGPOC1	EUT
2	Adapter	DLD-418	Input: AC 100-240V 0.2A Output: DC 12V 0.5A	AE
3	Battery	IP-79	DC 7.4V 3800mAh	AE
4	Back Clip	N/A	N/A	AE
5	Charger	N/A	Input: DC 12V 0.5A Output: DC 8.4V 0.5A	AE

Note:

- All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.
- 2. The battery is full-charged during the test

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 11 of 60

3. SUMMARY OF TEST RESULTS

3.1 TEST CONDITION: CONDUCTED TEST

Item	Test Description	FCC Rules	Result
1	Occupied Bandwidth	§2.1049	Pass
2	Band Edge / Spurious and Harmonic Emissions at Antenna Terminal	§2.1051, §22.917(a), §24.238(a) §27.53(h)	Pass
5	Conducted Output Power	§2.1046	Pass
6	Frequency stability / variation of ambient temperature	§2.1055, § 22.355	Pass
7	Peak- to- Average Ratio	§24.232(d), §27.50(d)(5), §24.235, §27.54	Pass

3.2 TEST CONDITION: RADIATED TEST

Item	Test Description	FCC Rules	Result
9 1	Effective Radiated Power	§22.913(a)(5)	Pass
2	Equivalent Isotropic Radiated Power	§24.232(c), §27.50(d)(4)	0
3	Radiated Spurious and Harmonic Emissions	§2.1053, §22.917(a), §24.238(a), §27.53(h)	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 12 of 60

4. DESCRIPTION OF TEST MODES

		RF Channel				
Bands	Tx/Rx Frequency	Low(L)	High(H)			
WCDMA band V	TX	Channel 4132	Channel 4182	Channel 4233		
WCDIVIA barid V	(824 MHz ~ 849 MHz)	826.4 MHz	836.4 MHz	846.6 MHz		
	TX	Channel 9262	Channel 9400	Channel 9538		
WCDMA Band II	(1850 MHz-1910 MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz		
-C	TX	Channel 1312	Channel 1412	Channel 1513		
WCDMA Band IV	(1710 MHz-1755 MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz		

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
WCDMA Band II/IV/V	RMC 12.2kbps Link	RMC 12.2kbps Link

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pseudo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC who he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 13 of 60

ACCORDING TO 3GPP 25.101 SUB-CLAUSE 6.2.2 , THE MAXIMUM OUTPUT POWER IS ALLOWED TO BE REDUCED BY FOLLOWING THE TABLE.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)	
For all combinations of ,DPDCH,DPCCH	0≤ CM≤3.5	MAY(CM 1 O)	
HS-DPDCH,E-DPDCH and E-DPCCH	05 CIVIS3.5	MAX(CM-1,0)	

Note: CM=1 for β $_{\rm c}/\beta$ $_{\rm d}$ =12/15, β $_{\rm hs}/\beta$ $_{\rm c}$ =24/15.For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done. However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Postuo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGE. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 14 of 60

4.2 EMISSION DESIGNATOR

GSM Emission Designator

Emission Designator = 249KGXW

GSM BW = 249 kHz

G = Phase Modulation

X = Cases not otherwise covered

W = Combination (Audio/Data)

WCDMA Emission Designator

Emission Designator = 4M17F9W

WCDMA BW = 4.17 MHz

F = Frequency Modulation

9 = Composite Digital Info

W = Combination (Audio/Data)

QAM Modulation

Emission Designator = 4M48W7D

LTE BW = 4.48 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

EDGE Emission Designator

Emission Designator = 249KG7W

GSM BW = 249 kHz

G = Phase Modulation

7 = Quantized/Digital Info

W = Combination (Audio/Data)

QPSK Modulation

Emission Designator = 4M48G7D

LTE BW = 4.48 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission; telemetry; telecommand

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated restrou/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 15 of 60

5. LIST OF TEST EQUIPMENT

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2020	May 14, 2021
LISN	R&S	ESH2-Z5	100086	Jul. 03, 2020	Jul. 02, 2021
TEST RECEIVER	R&S	ESCI	10096	May 15, 2020	May 14, 2021
EXA Signal Analyzer	Aglient	N9020B	MY56101792	Jul. 15, 2020	Jul. 14, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	768	Oct. 09, 2019	Oct. 08, 2021
preamplifier	ChengYi	EMC184045S E	980508	Sep. 23, 2019	Sep. 22, 2020
preamplifier	ChengYi	EMC184045S E	980508	Sep. 21, 2020	Sep. 20, 2021
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 17, 2019	May. 16, 2021
Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-205	Jun.10, 2020	Jun.09, 2021
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep.20, 2019	Sep.19, 2021
SIGNAL ANALYZER	Agilent	N9020A	MY52090123	Sep. 03, 2020	Sep. 02, 2021
USB Wideband Power Sensor	Agilent	U2021XA	MY54110007	Jun. 08, 2020	Jun. 07, 2021
Universal Radio Communication Tester	R&S	CMU200	120237	Jul. 03, 2020	Jul. 02, 2022
Universal Radio Communication Tester	Agilent	8960	GB46200384	Aug. 20, 2020	Aug. 21, 2021
Power Splitter	Agilent	11636A	34	Jun.10, 2020	Jun.09, 2021
Attenuator	JFW	50FHC-006-5 0	N/A	Jun.10, 2020	Jun.09, 2021
Horn Ant (18G-40GHz)	Schwarzbeck	BBHA 9170	50	Sep. 21, 2019	Sep. 20, 2021
Horn Ant (18G-40GHz)	ETS	QWH_SL_18 _40_K_SG		Sep. 21, 2019	Sep. 20, 2021
Power Splitter	Agilent	11636A	1	Sep.18, 2019	Sep.17, 2020

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 16 of 60

Power Splitter	Agilent	11636A	1	Sep.16, 2020	Sep.15, 2021
CMU200	R&S	120237	1	July 03, 2020	July 02, 2022
Artificial Mains Network ENV216	R&S	101242		July 03, 2020	July 02, 2022
Filter Bank Notch 1(880-915MHz)	MICRO-TRONICS	010		Feb. 25, 2020	Feb. 24, 2021
Filter Bank Notch 2 (1710-1785MHz)	MICRO-TRONICS	009	1	Feb. 25, 2020	Feb. 24, 2021
Filter Bank Notch 3 (1920-1980MHz)	MICRO-TRONICS	008	1	Feb. 25, 2020	Feb. 24, 2021

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written perhorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 17 of 60

6. CONDUCTED OUTPUT POWER

6.1 MEASUREMENT OVERVIEW

The conduction test is carried out in a shielded room.

According to the test, connect the device under test to the antenna port on the non-conductive platform directly to the test device for evaluation and measurement (ANSI-C63.26-2015 Clause 5.4)

6.2 MEASUREMENT METHOD

- The transmitter output port was connected to base station.
- The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
- The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all mode (GSM/EGPRS 850, GSM/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V)at 3 typical channels (the Top Channel, the Middle Channel and the Bottom Channel) for each band.

6.3 MEASUREMENT SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feet (Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 18 of 60

6.4 MEASUREMENT RESULT

WCDMA Band II Maximum Average Power (dBm)							
Channel	9538						
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz				
RMC 12.2kbps	24.40	24.49	24.59				
HSDPA Subtest-1	23.51	23.53	23.59				
HSDPA Subtest-2	22.56	22.66	22.67				
HSDPA Subtest-3	22.48	22.66	22.73				
HSDPA Subtest-4	22.43	22.65	22.68				
HSUPA Subtest-1	22.70	23.07	22.93				
HSUPA Subtest-2	22.10	22.42	22.33				
HSUPA Subtest-3	22.29	22.32	22.20				
HSUPA Subtest-4	22.91	23.01	22.94				
HSUPA Subtest-5	23.41	23.42	23.32				

WCDMA Band IV Maximum Average Power (dBm)								
Channel	1312	1412	1513					
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz					
RMC 12.2kbps	22.84	23.04	22.50					
HSDPA Subtest-1	22.11	21.88	21.46					
HSDPA Subtest-2	21.21	21.02	20.51					
HSDPA Subtest-3	21.10	20.99	20.59					
HSDPA Subtest-4	20.77	20.97	20.59					
HSUPA Subtest-1	20.66	21.37	20.95					
HSUPA Subtest-2	20.42	21.11	20.26					
HSUPA Subtest-3	19.73	20.35	19.44					
HSUPA Subtest-4	21.29	21.12	20.73					
HSUPA Subtest-5	21.84	22.08	21.62					

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 19 of 60

g/Inspection
The test results
the test report.

WCDMA Band V Maximum Average Power (dBm)							
Channel	4132	4182	4233				
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz				
RMC 12.2kbps	24.69	24.69	24.77				
HSDPA Subtest-1	23.74	23.79	23.84				
HSDPA Subtest-2	22.82	22.98	23.10				
HSDPA Subtest-3	22.68	22.96	22.96				
HSDPA Subtest-4	22.63	22.96	22.93				
HSUPA Subtest-1	22.78	23.05	23.26				
HSUPA Subtest-2	22.13	22.51	22.63				
HSUPA Subtest-3	21.87	22.17	22.31				
HSUPA Subtest-4	22.94	23.07	23.17				
HSUPA Subtest-5	23.46	23.53	23.73				

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the speciated restaurable stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 20 of 60

7. RADIATED OUTPUT POWER

7.1 MEASUREMENT OVERVIEW

The radiation test is carried out in a semi-anechoic chamber.

According to the test, put the device under test on a non-conductive platform 3 meters away from the receiving antenna (ANSI/TIA-603-E-2016 Article 2.2.17).

The following rules are for the maximum radiated power limit requirements of the product:

Mode	Nominal Peak Power
GSM 850	< 7 Watts max. ERP (38.45dBm)
PCS 1900	< 2 Watts max. EIRP (33dBm)
WCDMA Band II	< 2 Watts max. EIRP (33dBm)
WCDMA Band IV	< 1 Watts max. EIRP (30dBm)
WCDMA Band V	< 7 Watts max. ERP (38.45dBm)

7.2 MEASUREMENT METHOD

- Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
- 2. RBW = 1 5% of the expected OBW, not to exceed 1MHz
- 3. VBW ≥ 3 x RBW
- 4. Span = 1.5 times the OBW
- 5. No. of sweep points > 2 x span / RBW
- 6. Detector = RMS
- 7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto".
- 8. The integration bandwidth was roughly set equal to the measured OBW of the signal for signals with continuous operation.
- 9. Trace mode = trace averaging (RMS) over 100 sweeps
- 10. The trace was allowed to stabilize.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the conditional reports and the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 21 of 60

Radiation Construction Method:

- 1. The turntable is rotated through 360 degrees, and the receiving antenna scans in order to determine the level of the maximized emission.
- 2. A half wave dipole is then substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator and the previously recorded signal was duplicated.

The power is calculated by the following formula:


$$Pd(dBm) = Pg(dBm) - cable loss (dB) + antenna gain (dB)$$

Where: Pd is the dipole equivalent power and Pg is the generator output power into the substitution antenna.


- 3. The maximum value is calculated by adding the forward power to the calibrated source plus its appropriate gain value. These steps are repeated with the receiving antenna in both vertical and horizontal polarization. the difference between the gain of the horn and an isotropic antenna are taken into consideration
- 4. The EUT was tested in three orthogonal planes (X, Y, Z) and in all possible test configurations and positioning.
- 5. All measurements are performed as RMS average measurements while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies.

7.3 MEASUREMENT SETUP


Radiated Below 1 GHz

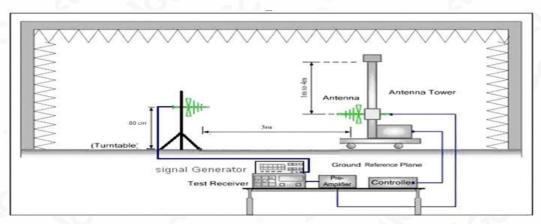


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.






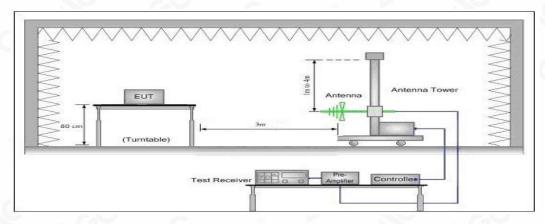

Radiated Above 1 GHz

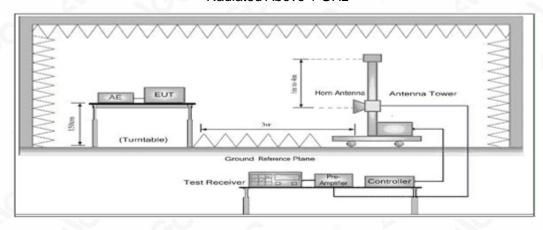

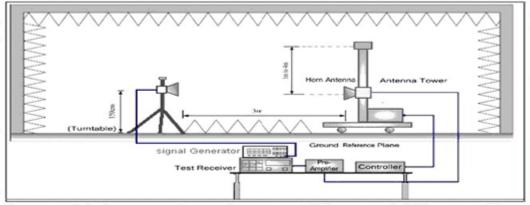

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 23 of 60

7.4 MEASUREMENT RESULT

	Ch	./ Freq.	Substitute	Ant. Gain			Limit EIRP		/ERP
Mode	channel	Freq. (MHz)	LEVEL (dBm)	EL (dBd)	C.L	Pol.	W	W	dBm
0	4132	826.4	19.15	5.90	1.21	Н		0.242	23.84
WCDMA850	4183	836.6	19.14	5.90	1.25	Н	<6	0.239	23.79
(8)	4233	846.6	19.15	5.90	1.24	Н	7.00	0.240	23.81
	4132	826.4	17.87	5.90	1.21	Н	< 7.00	0.180	22.56
HSPA	4183	836.6	18.12	5.90	1.25	Н	GO	0.189	22.77
	4233	846.6	18.09	5.90	1.24	Н		0.188	22.75
W05144	9262	1852.4	16.97	8.6	2.11	Н		0.222	23.46
WCDMA	9400	1880.0	17.13	8.6	2.15	Н	< 2.00	0.228	23.58
1900	9538	1907.6	17.22	8.6	2.15	Н		0.233	23.67
100	9262	1852.4	15.49	8.6	2.11	Н		0.158	21.98
HSPA	9400	1880.0	16.20	8.6	2.15	Н	. 6	0.184	22.65
8	9538	1907.6	15.58	8.6	2.15	Н		0.160	22.03
MODIM	1312	1712.4	15.43	8.3	2.05	Н	8	0.147	21.68
WCDMA	1412	1732.4	15.54	8.3	2.05	Н	GO	0.151	21.79
1700	1513	1752.6	15.59	8.3	2.06	Н	4.00	0.152	21.83
- 60	1312 1712.4 14.47 8.3	8.3	2.05	Н	< 1.00	0.118	20.72		
HSPA	1412	1732.4	14.38	8.3	2.05	Н	C	0.116	20.63
@	1513	1752.6	14.64	8.3	2.06	Н		0.122	20.88

Note:1._EIRP/ERP = Substitute LEVEL (dBm) + Ant. Gain - C.L (Cable Loss)

2. All polarizations and modes have been tested, only the worst mode is recorded in the report

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 24 of 60

8. PEAK-TO-AVERAGE RATIO

8.1 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

8.2 MEASUREMENT METHOD

① CCDF Procedure for PAPR:

- 1. Set resolution/measurement bandwidth ≥ signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;
- 3. Set the measurement interval as follows:
- -for continuous transmissions, set to 1 ms,
- -or burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time

that is less than or equal to the burst duration.

4. Record the maximum PAPR level associated with a probability of 0.1%.

2 Alternate Procedure for PAPR:

Use one of the procedures presented in 5.2(ANSI C63.26-2015) to measure the total peak power and record as PPk. Use one of the applicable procedures presented 5.2(ANSI C63.26-2015) to measure the total average power and recordas PAvg. Determine the P.A.R. from:

P.A.R(dB) = PPk (dBm) - PAvg (dBm) (PAvg = Average Power + Duty cycle Factor) Allow trace to fully stabilize.


Use the peak marker function to determine the peak amplitude level.

Test Settings(Peak Power):

The measurement instrument must have a RBW that is greater than or equal to the OBW of the signal to be measured and a VBW \geq 3 × RBW.

- 1. Set the RBW ≥ OBW.
- 2. Set VBW ≥ 3 x RBW.
- 3. Set span ≥ 2 × OBW.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.





- 4. Sweep time ≥ 10 × (number of points in sweep) × (transmission symbol period).
- 5. Detector = peak.
- 6. Trace mode = max hold.
- 7. Allow trace to fully stabilize.
- 8. Use the peak marker function to determine the peak amplitude level.

Test Settings(Average Power)

- 1. Set span to 2 x to 3 x the OBW.
- 2. Set RBW ≥ OBW.
- 3. Set VBW ≥ 3 × RBW.
- 4. Set number of measurement points in sweep ≥ 2 × span / RBW.
- 5. Sweep time: Set ≥ [10 × (number of points in sweep) × (transmission period)] for single sweep (automation-compatible) measurement. The transmission period is the (on + off) time.
- 6. Detector = power averaging (rms).
- 7. Set sweep trigger to "free run."
- 8. Trace average at least 100 traces in power averaging (rms) mode if sweep is set to auto-couple. (To accurately determine the average power over the on and off period of the transmitter, it can be necessary to increase the number of traces to be averaged above 100 or, if using a manually configured sweep time, increase the sweep time.)
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. Add [10 log (1/duty cycle)] to the measured maximum power level to compute the average power during continuous transmission. For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is a constant 25%.

8.3 MEASUREMENT SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the condicated restrouting portion of Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.



Page 26 of 60

8.4 MEASUREMENT RESULT

Bands	Modulation	Peak-to-average ratio (dB)			Limit	Result
Danus	Wodalation	Lowest	Middle	Highest	(dB)	Result
WCDMA Band II	RMC 12.2kbps	2.99	2.95	3.04	13	Pass
WCDMA Band II	HSUPA	2.56	2.74	2.93	13	Pass
WCDMA Band II	HSDPA	2.41	2.69	3.01	13	Pass
WCDMA Band IV	RMC 12.2kbps	3.86	5.19	6.02	13	Pass
WCDMA Band IV	HSUPA	4.03	4.87	4.98	13	Pass
WCDMA Band IV	HSDPA	4.25	5.01	5.77	13	Pass
WCDMA Band V	RMC 12.2kbps	3.09	3.28	5.50	13	Pass
WCDMA Band V	HSUPA	3.24	2.95	3.84	13	Pass
WCDMA Band V	HSDPA	3.06	3.11	4.21	13	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 27 of 60

9. OCCUPIED BANDWIDTH

9.1 PROVISIONS APPLICABLE

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 % of the total mean power of a given emission. The EUT makes a call to the communication simulator.

The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth

9.2 MEASUREMENT METHOD

- 1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
 - 1 5% of the 99% occupied bandwidth observed in Step 7

9.3 MEASUREMENT SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the a/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter achieves the content of the report is not permitted without the writter achieves the content of ACE The test results ce of the test report. presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15da/\$\subseteq\$ after Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 28 of 60

9.4 MEASUREMENT RESULT

	Test Band Test Mode				Emission Bandwidth	Verdict
	Test Bariu	rest wode	rest Charmer	(KHz)	(KHz)	verdict
	WCDMA		LCH	4151.5	4733	PASS
		UMTS	MCH	4151.7	4740	PASS
	850	HCH	4133.9	4727	PASS	

Test Band	Test Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
			(KHz)	(KHz)	
WCDMA 1900	UMTS	LCH	4140.1	4732	PASS
		MCH	4152.6	4723	PASS
		HCH	4130.4	4716	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth	Emission Bandwidth	Verdict
			(KHz)	(KHz)	
WCDMA 1700	UMTS	LCH	4147.5	4719	PASS
		MCH	4129.7	4702	PASS
		HCH	4139.3	4728	PASS

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Report No.: AGC02931200602FE02 Page 29 of 60



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



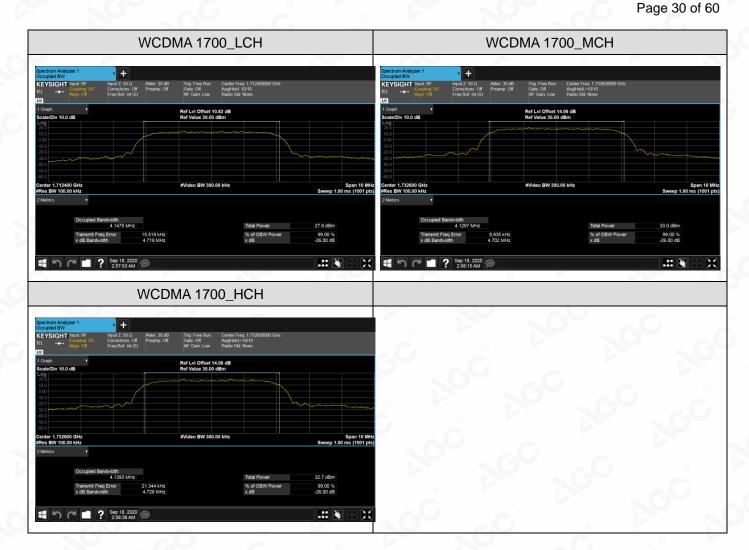

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated restriction. Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 31 of 60

10. BAND EDGE EMISSIONS AT ANTENNA TERMINAL

10.1 MEASUREMENT OVERVIEW

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.


10.2 MEASUREMENT METHOD

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- 4. $VBW > 3 \times RBW$
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize

TEST NOTE

According to FCC 22.917, 24.238, 27.53 specified that power of any emission outside of The authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least 43 + 10 log(P) dB.In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. All measurements were done at 2 channels(low and high operational frequency range.) The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.

10.3 MEASUREMENT METHOD

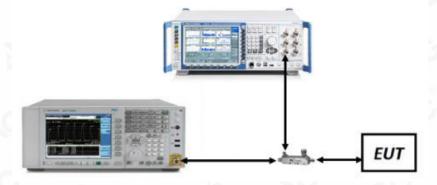


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festivo/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 32 of 60


10.4 MEASUREMENT RESULT

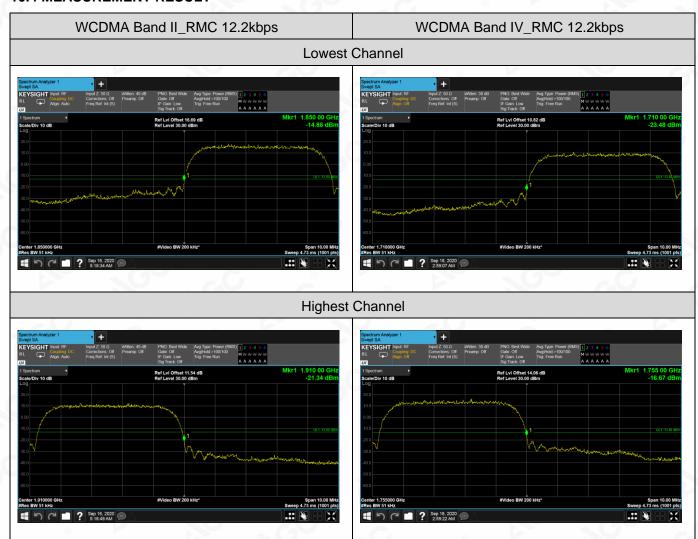

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





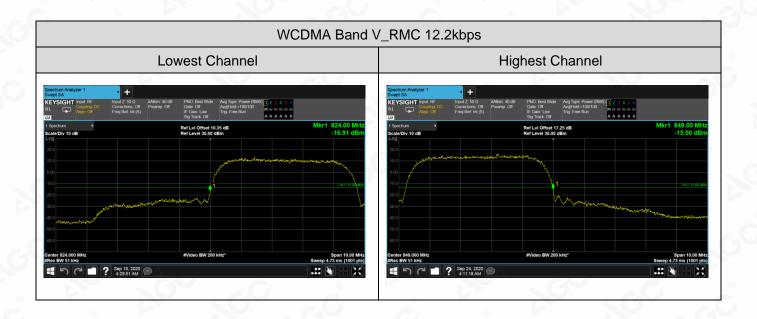

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated resting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pulnorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 34 of 60

11. SPURIOUS EMISSIONS AT ANTENNA TERMINAL

11.1 PROVISIONS APPLICABLE

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst case configuration. All modes of operation were investigated and the worst case configuration results are reported in this section.

11.2 MEASUREMENT METHOD

Test Settings (GSM)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = Peak
- 4. Trace Mode = max hold
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

Test Settings (WCDMA)

- 1. RBW = 1 MHz
- 2. VBW ≥ 3 MHz
- 3. Detector = RMS
- 4. Trace Mode = trace average
- 5. Sweep time = auto
- 6. Number of points in sweep ≥ 2 x Span / RBW

11.3 MEASUREMENT SETUP



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Festing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 35 of 60

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 36 of 60

11.4 MEASUREMENT RESULT

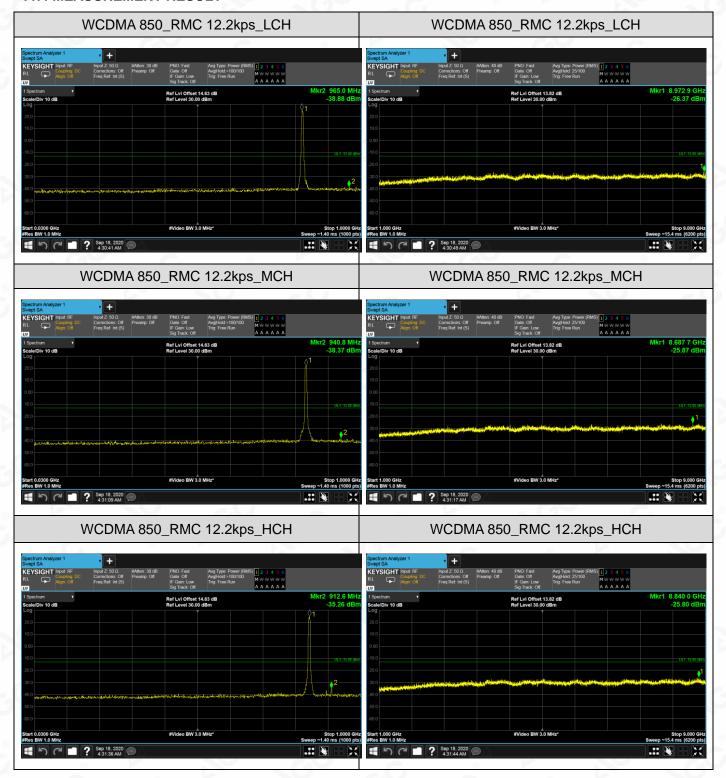


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Restriction Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter purportization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.




Page 37 of 60

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





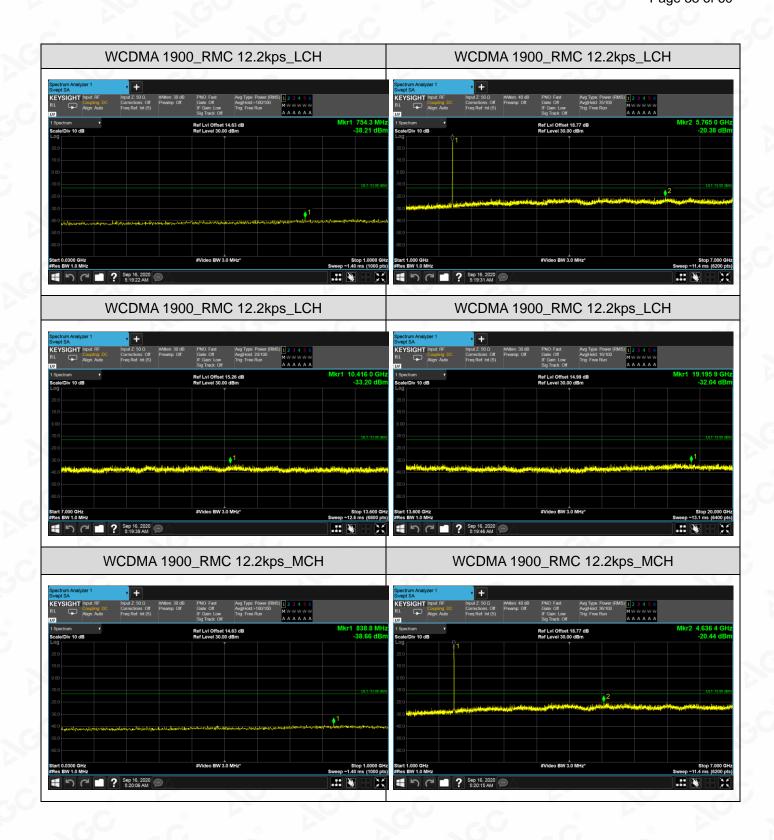


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Feature/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.




Page 39 of 60

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated Pesting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter appropriation of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





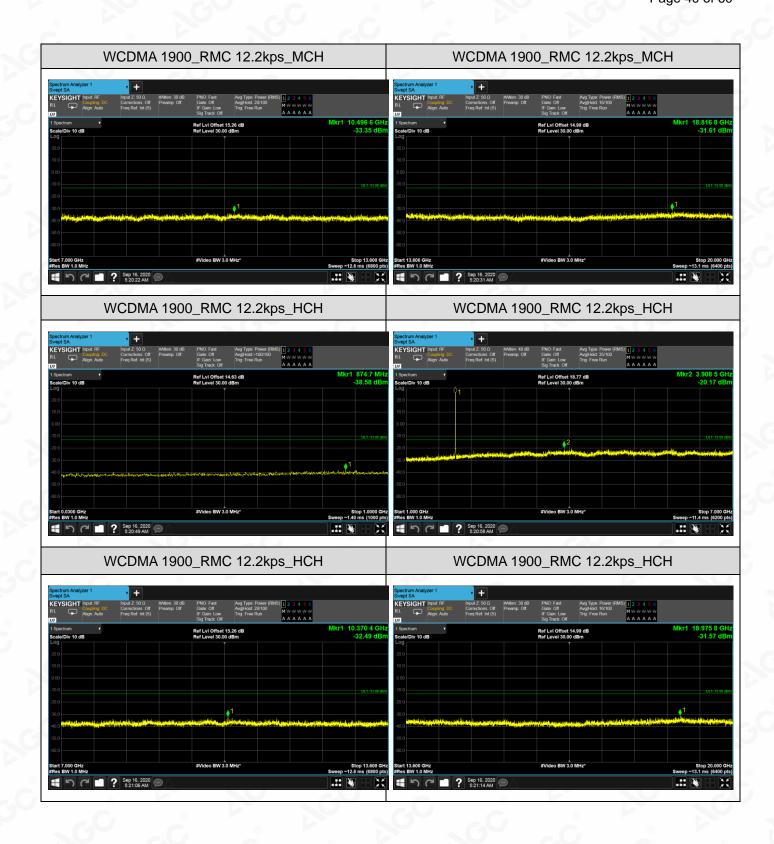

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Dedicated Pestho/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.