

Report No.: TW2203422-02E

File reference No.: 2022-05-23

Applicant: Hangzhou Roombanker Technology Co., Ltd

Product: S-Serial Smart Gateway

Model No.: DSGW-034, RFA-Z115-Z2-001, RFA-Z115-Z2-002

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Terry Tang

Terry Tang

Manager

Dated: May 23, 2022


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2203422-02E

Date: 2022-05-23



Page 2 of 86

Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



Test Report Conclusion

Content

| 1.0 | General Details | 4 |
|------|-------------------------------------|----|
| 1.1 | Test Lab Details | 4 |
| 1.2 | Applicant Details | 4 |
| 1.3 | Description of EUT | 4 |
| 1.4 | Submitted Sample | 5 |
| 1.5 | Test Duration. | 5 |
| 1.6 | Test Uncertainty. | 5 |
| 1.7 | Test By | 5 |
| 2.0 | List of Measurement Equipment | 6 |
| 3.0 | Technical Details | 8 |
| 3.1 | Summary of Test Results | 8 |
| 3.2 | Test Standards. | 8 |
| 4.0 | EUT Modification. | 8 |
| 5.0 | Power Line Conducted Emission Test. | 9 |
| 5.1 | Schematics of the Test. | 9 |
| 5.2 | Test Method and Test Procedure. | 9 |
| 5.3 | Configuration of the EUT | 9 |
| 5.4 | EUT Operating Condition. | 10 |
| 5.5 | Conducted Emission Limit. | 10 |
| 5.6 | Test Result. | 10 |
| 6.0 | Radiated Emission test | 13 |
| 6.1 | Test Method and Test Procedure. | 13 |
| 6.2 | Configuration of the EUT | 14 |
| 6.3 | EUT Operation Condition. | 14 |
| 6.4 | Radiated Emission Limit | 14 |
| 7.0 | 6dB Bandwidth Measurement | 24 |
| 8.0 | Maximum Output Power | 44 |
| 9.0 | Power Spectral Density Measurement. | 47 |
| 10.0 | Out of Band Measurement. | 66 |
| 11.0 | Antenna Requirement. | 84 |
| 12.0 | FCC ID Label. | 85 |
| 13.0 | Photo of Test Setup and EUT View. | 86 |

Report No.: TW2203422-02E

Date: 2022-05-23



Page 4 of 86

1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Telephone: +86-18768289112

Fax: --

1.3 Description of EUT

Product: S-Serial Smart Gateway

Manufacturer: Hangzhou Roombanker Technology Co., Ltd Address: A#801 Wantong center, Hangzhou, China

Trademark: N/A

Model Number: DSGW-034

Additional Model Number: RFA-Z115-Z2-001, RFA-Z115-Z2-002

Hardware Version: V1.0 Software Version: V1.0

Serial No.: DSGW034202205060001

Rating: DC5V, 1A

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz;

IEEE 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n (HT20, HT40)

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs15

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203422-02E

Date: 2022-05-23



Page 5 of 86

Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels;

IEEE 802.11n (HT40): 7 Channels;

Antenna: PCB antenna used. The gain of the antennas is 1.5dBi. (Declared by the applicant)

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2022-03-28 to 2022-05-23

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty =5%

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Andy Xing

Report No.: TW2203422-02E Page 6 of 86

Date: 2022-05-23



| 2.0 Test Equipment | | | | | |
|-----------------------|---------------|----------------------|--------------|--------------|------------|
| Instrument Type | Manufacturer | Model | Serial No. | Date of Cal. | Due Date |
| ESPI Test Receiver | R&S | ESPI 3 | 100379 | 2021-06-18 | 2022-06-17 |
| Impuls-Begrenzer | R&S | ESH3-Z2 | 100281 | 2021-06-18 | 2022-06-17 |
| Loop Antenna | EMCO | 6507 | 00078608 | 2021-06-18 | 2024-06-17 |
| Spectrum | R&S | FSIQ26 | 100292 | 2021-06-18 | 2022-06-17 |
| Horn Antenna | A-INFO | LB-180400-KF | ANT01060660 | 2021-07-02 | 2024-07-02 |
| Horn Antenna | R&S | BBHA 9120D | 9120D-631 | 2021-07-02 | 2024-07-02 |
| Power meter | Anritsu | ML2487A | 6K00003613 | 2021-06-18 | 2022-06-17 |
| Power sensor | Anritsu | MA2491A | 32263 | 2021-06-18 | 2022-06-17 |
| Bilog Antenna | Schwarebeck | VULB9163 | 9163/340 | 2021-07-02 | 2024-07-01 |
| 9*6*6 Anechoic | | | N/A | 2021-07-02 | 2022-07-01 |
| EMI Test Receiver | RS | ESVB | 826156/011 | 2021-06-18 | 2022-06-17 |
| EMI Test Receiver | RS | ESH3 | 860904/006 | 2021-06-18 | 2022-06-17 |
| Spectrum | HP/Agilent | ESA-L1500A | US37451154 | 2021-06-18 | 2022-06-17 |
| Spectrum | HP/Agilent | E4407B | MY50441392 | 2021-06-18 | 2022-06-17 |
| Spectrum | RS | FSP | 1164.4391.38 | 2022-01-14 | 2023-01-13 |
| RF Cable | Zhengdi | ZT26-NJ-NJ-8 M/FA | | 2021-06-18 | 2022-06-17 |
| RF Cable | Zhengdi | 7m | | 2021-06-18 | 2022-06-17 |
| RF Switch | EM | EMSW18 | 060391 | 2021-06-18 | 2022-06-17 |
| Pre-Amplifier | Schwarebeck | BBV9743 | #218 | 2021-06-18 | 2022-06-17 |
| Pre-Amplifier | HP/Agilent | 8449B | 3008A00160 | 2021-06-18 | 2022-06-17 |
| LISN | SCHAFFNER | NNB42 | 00012 | 2022-01-05 | 2023-01-04 |
| 2.4G band-pass filter | Micro-Tronics | BRM50701 | SN-041 | 2021-06-18 | 2022-06-17 |

2.2 Automation Test Software

For Conducted Emission Test

| Name | Version |
|--------|-------------------|
| EZ-EMC | Ver.EMC-CON 3A1.1 |

For Radiated Emissions

| Name | Version |
|---|---------|
| EMI Test Software BL410-EV18.91 | V18.905 |
| EMI Test Software BL410-EV18.806 High Frequency | V18.06 |

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: TW2203422-02E

Date: 2022-05-23



Page 7 of 86

3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low | 2412 |
| Middle | 2437 |
| High | 2462 |

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing;

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

| Channel | Frequency (MHz) |
|---------|-----------------|
| Low | 2422 |
| Middle | 2437 |
| High | 2452 |

IEEE 802.11n (HT40) mode: mcs0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

Page 8 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



3.0 **Technical Details**

3.1 **Summary of test results**

| Standard | Test Type | Result | Notes |
|--|----------------------------------|--------|----------|
| FCC Part 15, Paragraph15.203 | Antenna Requirement | Pass | Complies |
| FCC Part 15, Paragraph15.207 | Conducted Emission Test | Pass | Complies |
| | Spectrum bandwidth of a | Pass | Complies |
| ECC Dout 15 Submout C | Orthogonal Frequency | | |
| FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit | Division Multiplex System | | |
| raragraph 15.247(a)(2) Limit | Limit: 6dB | | |
| | bandwidth>500kHz | | |
| ECC Part 15 Dayagraph | Maximum peak output | Pass | |
| FCC Part 15, Paragraph 15.247(b) | power | | Complies |
| | Limit: max. 30dBm | | |
| FCC Part 15, Paragraph | Transmitter Radiated | Pass | Complies |
| 15.109,15.205 & 15.209 | Emission | | |
| | Limit: Table 15.209 | | |
| FCC Part 15, Paragraph | Power Spectral Density | Pass | Complies |
| 15.247(e) | Limit: max. 8dBm/3kHz | | |
| FCC Part 15, Paragraph | Out of Band Emission and | Pass | Complies |
| 15.247(d) | Restricted Band | | |
| | Radiation | | |
| | Limit: 20dB less than | | |
| | peak value of fundamental | | |
| | frequency | | |
| | Restricted band limit: | | |
| | Table 15.209 | | |

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2203422-02E Page 9 of 86

Date: 2022-05-23



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

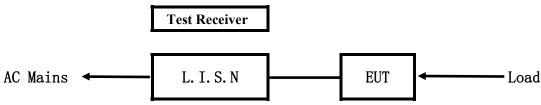


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

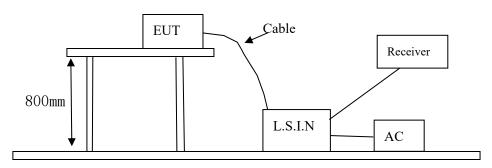

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

| Device | Manufacturer | Model | FCC ID |
|------------------------|--|------------------|---------------|
| | Hangzhou Roombanker Technology Co., Ltd | DSGW-034, | |
| S-Serial Smart Gateway | | RFA-Z115-Z2-001, | 2AUXBDSGW-034 |
| | reciniology Co., Ltd | RFA-Z115-Z2-002 | |

B. Internal Device

| Device | Manufacturer | Model | FCC ID/DOC |
|--------|--------------|-------|------------|
| N/A | | | |

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2203422-02E Page 10 of 86

Date: 2022-05-23



C. Peripherals

| Device | Manufacturer | Model | Rating |
|------------|--------------|-----------------|-----------------------------------|
| Power KEYU | | KA23-0502000DEU | Input: 100-240V~, 50/60Hz, 0.35A; |
| Supply | | | Output: DC5V, 2A |

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

| Frequency | Limits (d | lB μV) |
|-------------------|------------------|---------------|
| (MHz) | Quasi-peak Level | Average Level |
| $0.15 \sim 0.50$ | 66.0~56.0* | 56.0~46.0* |
| $0.50 \sim 5.00$ | 56.0 | 46.0 |
| $5.00 \sim 30.00$ | 60.0 | 50.0 |

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2022-05-23



Conducted Emission on Live Terminal (150kHz to 30MHz) A:


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

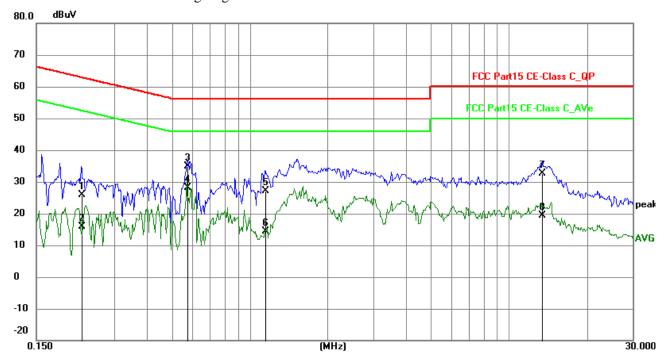

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.2241 | 16.20 | 9.75 | 25.95 | 62.67 | -36.72 | QP | Р |
| 2 | 0.2241 | 6.15 | 9.75 | 15.90 | 52.67 | -36.77 | AVG | Р |
| 3 | 0.5751 | 25.14 | 9.77 | 34.91 | 56.00 | -21.09 | QP | Р |
| 4 | 0.5751 | 18.29 | 9.77 | 28.06 | 46.00 | -17.94 | AVG | Р |
| 5 | 1.1445 | 17.34 | 9.79 | 27.13 | 56.00 | -28.87 | QP | Р |
| 6 | 1.1445 | 4.69 | 9.79 | 14.48 | 46.00 | -31.52 | AVG | Р |
| 7 | 13.4598 | 22.34 | 10.31 | 32.65 | 60.00 | -27.35 | QP | Р |
| 8 | 13.4598 | 9.17 | 10.31 | 19.48 | 50.00 | -30.52 | AVG | Р |

Date: 2022-05-23



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

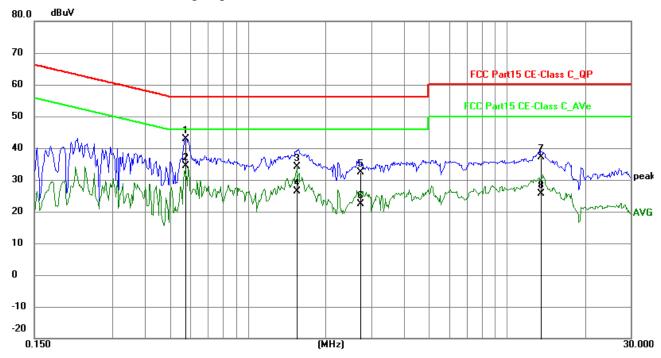

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|-----|--------------------|-------------------|----------------|-----------------|-----------------|----------------|----------|-----|
| 1 | 0.5751 | 33.18 | 9.77 | 42.95 | 56.00 | -13.05 | QP | Р |
| 2 | 0.5751 | 24.54 | 9.77 | 34.31 | 46.00 | -11.69 | AVG | Р |
| 3 | 1.5489 | 24.31 | 9.80 | 34.11 | 56.00 | -21.89 | QP | Р |
| 4 | 1.5489 | 16.48 | 9.80 | 26.28 | 46.00 | -19.72 | AVG | Р |
| 5 | 2.7084 | 22.45 | 9.83 | 32.28 | 56.00 | -23.72 | QP | Р |
| 6 | 2.7084 | 12.47 | 9.83 | 22.30 | 46.00 | -23.70 | AVG | Р |
| 7 | 13.5300 | 26.76 | 10.32 | 37.08 | 60.00 | -22.92 | QP | Р |
| 8 | 13.5300 | 15.24 | 10.32 | 25.56 | 50.00 | -24.44 | AVG | Р |

Report No.: TW2203422-02E Page 13 of 86

Date: 2022-05-23




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

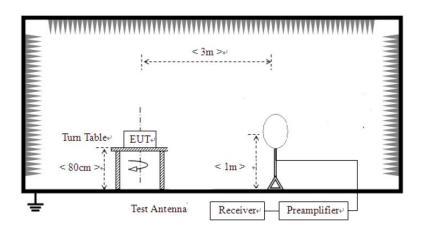


Report No.: TW2203422-02E


Date: 2022-05-23



For radiated emissions from 30MHz to1GHz

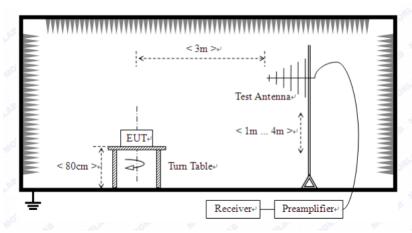

For radiated emissions above 1GHz

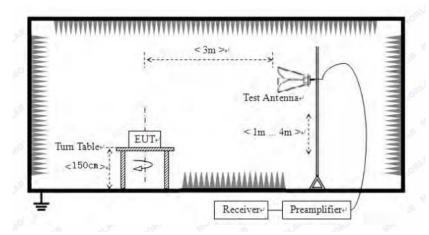

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2203422-02E Page 15 of 86

Date: 2022-05-23



Frequencies in restricted band are complied to limit on Paragraph 15.209

| Frequency Range (MHz) | Distance (m) | Field strength (dB μ V/m) |
|-----------------------|--------------|-----------------------------------|
| 0.009-0.049 | 3 | 20log(2400/F(kHz)) +40log (300/3) |
| 0.490-1.705 | 3 | 20log(24000/F(kHz)) +40log (30/3) |
| 1.705-30 | 3 | 69.5 |
| 30-88 | 3 | 40.0 |
| 88-216 | 3 | 43.5 |
| 216-960 | 3 | 46.0 |
| Above 960 | 3 | 54.0 |

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Worse case were recorded in the test report. 802.11g was the worst case.

Note: Only the worst case was recorded in the test report.

Page 16 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

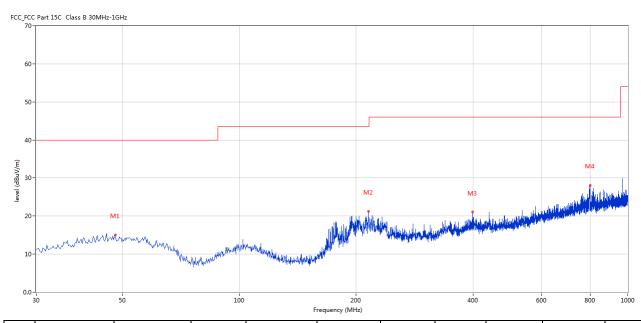

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 47.941 | 15.05 | -11.30 | 40.0 | -24.95 | Peak | 179.00 | 100 | Horizontal | Pass |
| 2 | 215.224 | 21.28 | -13.60 | 43.5 | -22.22 | Peak | 81.00 | 100 | Horizontal | Pass |
| 3 | 398.750 | 21.03 | -8.63 | 46.0 | -24.97 | Peak | 206.00 | 100 | Horizontal | Pass |
| 4 | 799.745 | 28.04 | -2.97 | 46.0 | -17.96 | Peak | 101.00 | 100 | Horizontal | Pass |

Page 17 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

Results: Pass

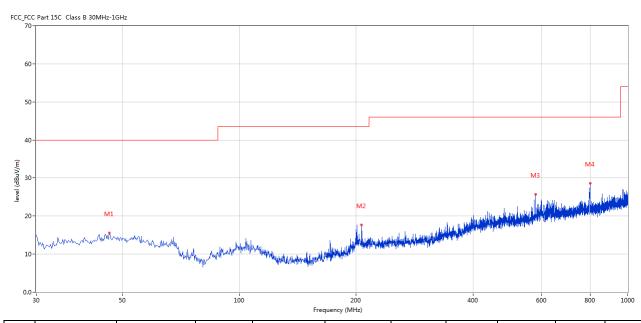

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 46.243 | 15.54 | -11.41 | 40.0 | -24.46 | Peak | 132.00 | 100 | Vertical | Pass |
| 2 | 206.496 | 17.68 | -13.65 | 43.5 | -25.82 | Peak | 163.00 | 100 | Vertical | Pass |
| 3 | 579.853 | 25.69 | -5.57 | 46.0 | -20.31 | Peak | 42.00 | 100 | Vertical | Pass |
| 4 | 799.745 | 28.55 | -2.97 | 46.0 | -17.45 | Peak | 165.00 | 100 | Vertical | Pass |

Page 18 of 86


Report No.: TW2203422-02E

Date: 2022-05-23



Please refer to the following test plots for details:

CH01 for 11g at 6Mbps: Horizontal

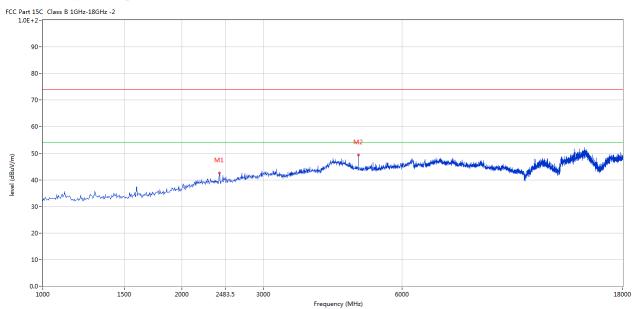


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (0) | (cm) | | |
| 1 | 2410.647 | 42.48 | -3.57 | 74.0 | -31.52 | Peak | 41.00 | 100 | Horizontal | Pass |
| 2 | 4824.044 | 49.32 | 3.14 | 74.0 | -23.68 | Peak | 212.00 | 100 | Horizontal | Pass |

Page 19 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



CH01 for 11g at 6Mbps: Vertical

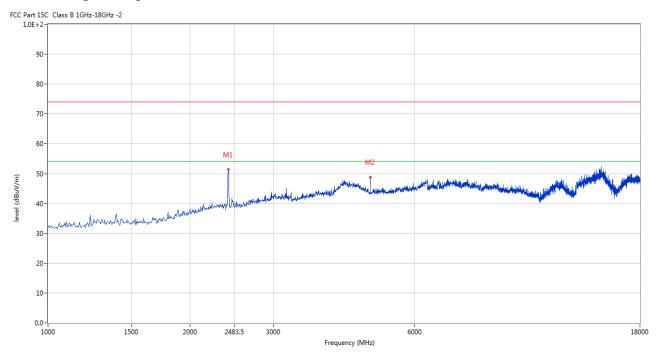


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table (o) | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|-----------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | | (cm) | | |
| 1 | 2410.647 | 50.56 | -3.57 | 74.0 | -23.44 | Peak | 85.00 | 100 | Vertical | Pass |
| 2 | 4824.044 | 48.78 | 3.14 | 74.0 | -25.22 | Peak | 173.00 | 100 | Vertical | Pass |

Report No.: TW2203422-02E Page 20 of 86

Date: 2022-05-23



CH06 for 11g at 6Mbps: Horizontal

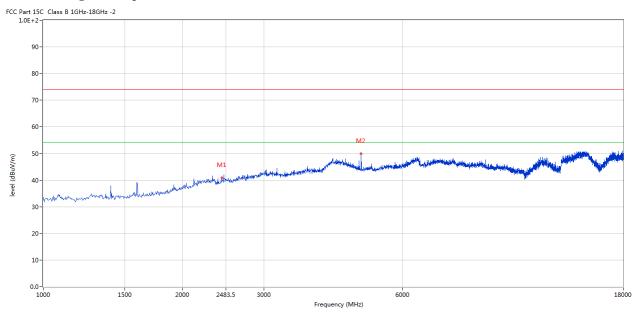


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2436.141 | 40.91 | -3.57 | 74.0 | -33.09 | Peak | 356.00 | 100 | Horizontal | Pass |
| 2 | 4875.031 | 49.84 | 3.19 | 74.0 | -24.16 | Peak | 201.00 | 100 | Horizontal | Pass |

Report No.: TW2203422-02E Page 21 of 86

Date: 2022-05-23



CH06 for 11g at 6Mbps: Vertical

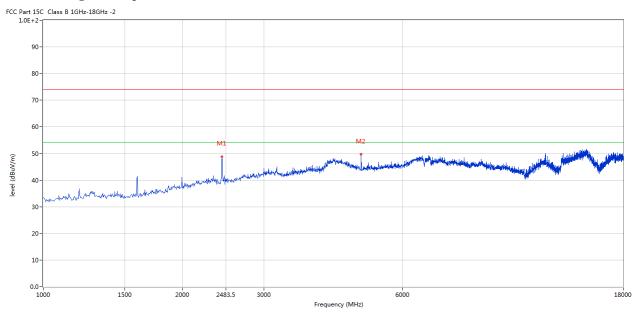


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2436.141 | 48.82 | -3.57 | 74.0 | -25.18 | Peak | 83.00 | 100 | Vertical | Pass |
| 2 | 4875.031 | 49.76 | 3.19 | 74.0 | -24.24 | Peak | 166.00 | 100 | Vertical | Pass |

Report No.: TW2203422-02E Page 22 of 86

Date: 2022-05-23



CH11 for 11g at 6Mbps: Horizontal

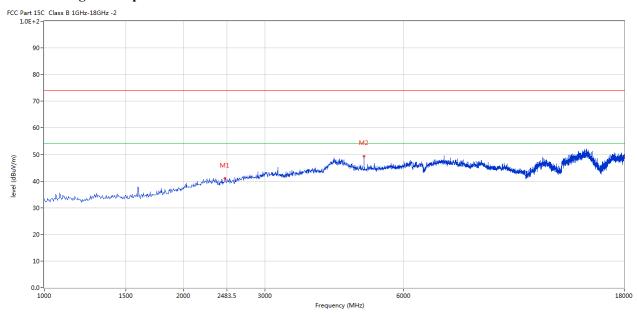


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2461.635 | 41.02 | -3.57 | 74.0 | -32.98 | Peak | 322.00 | 100 | Horizontal | Pass |
| 2 | 4921.770 | 49.34 | 3.27 | 74.0 | -24.66 | Peak | 201.00 | 100 | Horizontal | Pass |

Report No.: TW2203422-02E Page 23 of 86

Date: 2022-05-23



CH11 for 11g at 6Mbps: Vertical

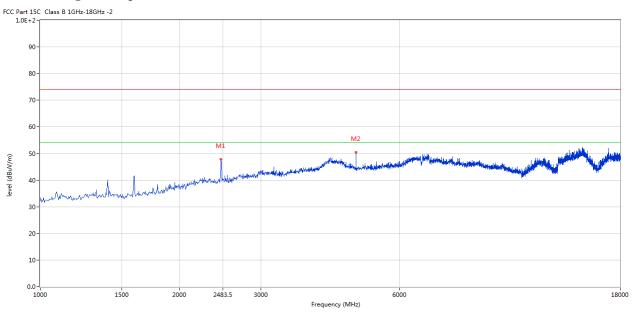

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2461.635 | 47.90 | -3.57 | 74.0 | -26.10 | Peak | 130.00 | 100 | Vertical | Pass |
| 2 | 4921.770 | 50.62 | 3.27 | 74.0 | -23.38 | Peak | 11.00 | 100 | Vertical | Pass |

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result–Limit
- 4. For radiated Emissions from 18-25GHz and below 30MHz, it is only the floor noise and less than the limit for more than 20dB. No necessary to take down.
- 5. the final peak measurement results less than the AV limit. No necessary to take down the final AV measurement result
- 6. A 2.4G band-pass filter was used the radiated emissions test.

Page 24 of 86


Report No.: TW2203422-02E

Date: 2022-05-23



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Report No.: TW2203422-02E Page 25 of 86

Date: 2022-05-23



6dB Occupied Bandwidth


| EUT | | S-Se | erial Smart | Gateway | Model | DS | SGW-034 |
|----------|-----|-----------------------|---------------------------|-------------------------|-----------------|----|------------|
| Mode | | | 802.111 |) | Test Voltage | Ι | OC5.0V |
| Temperat | ure | | 24 deg. (| C, | Humidity | 5 | 6% RH |
| Channel | | el Frequency (MHz) | Data Transfer Rate (Mbps) | 6 dB Bandwidth (MHz) | Minimum (MHz | | Pass/ Fail |
| 1 | | 2412 | 1 | 10.07 | 0.5 | | Pass |
| 6 | | 2437 | 1 | 10.04 | 0.5 | | Pass |
| 11 | | 2462 | 1 | 10.04 | 0.5 | | Pass |
| 1 | | 2412 | 11 | 9.04 | 0.5 | | Pass |
| 6 | | 2437 | 11 | 9.08 | 0.5 | | Pass |
| 11 | | 2462 | 11 | 9.08 | 0.5 | | Pass |

Page 26 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



1. 802.11b at 1Mbps of CH01

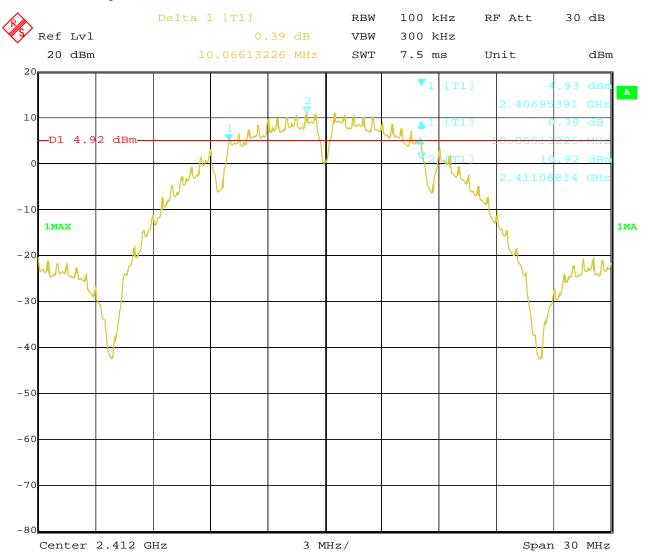


Date: 19.MAY.2022 11:52:41

Page 27 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



2. 802.11b at 1Mbps of CH06

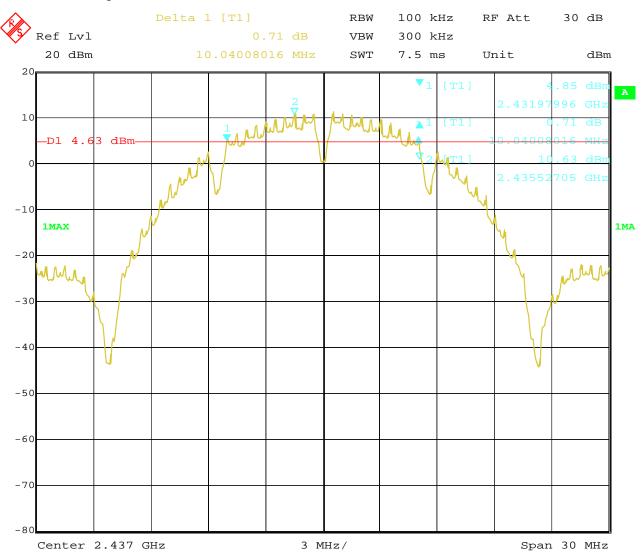


Date: 19.MAY.2022 12:14:06

Page 28 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



3. 802.11b at 1Mbps of CH11

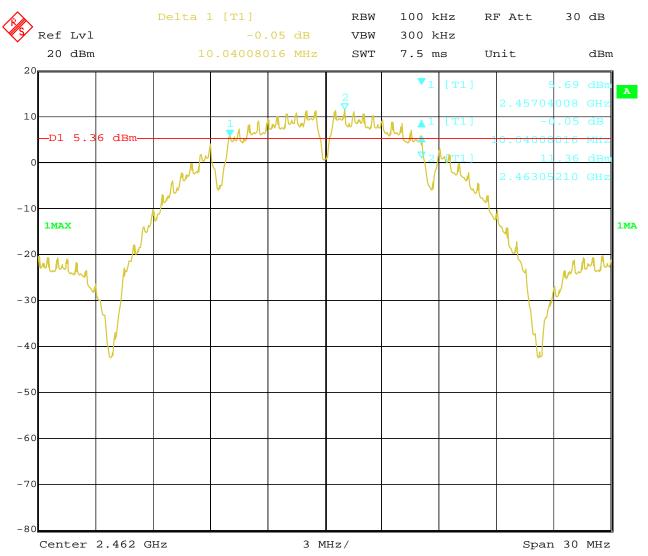


Date: 19.MAY.2022 14:06:37

Page 29 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



4. 802.11b at 11Mbps of CH01

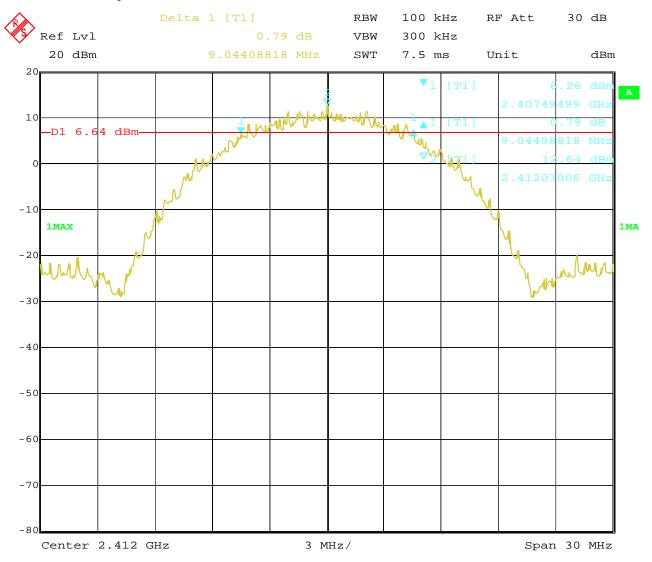


Date: 19.MAY.2022 11:58:17

Page 30 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



5. 802.11b at 11Mbps of CH06

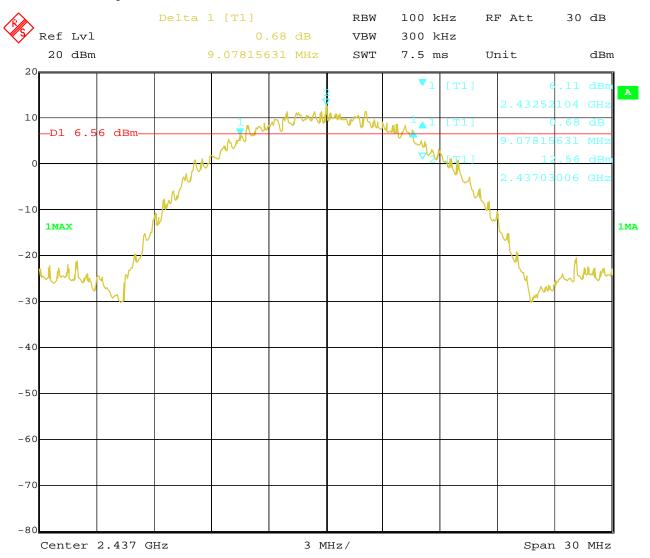


Date: 19.MAY.2022 12:22:08

Page 31 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



6. 802.11b at 11Mbps of CH11

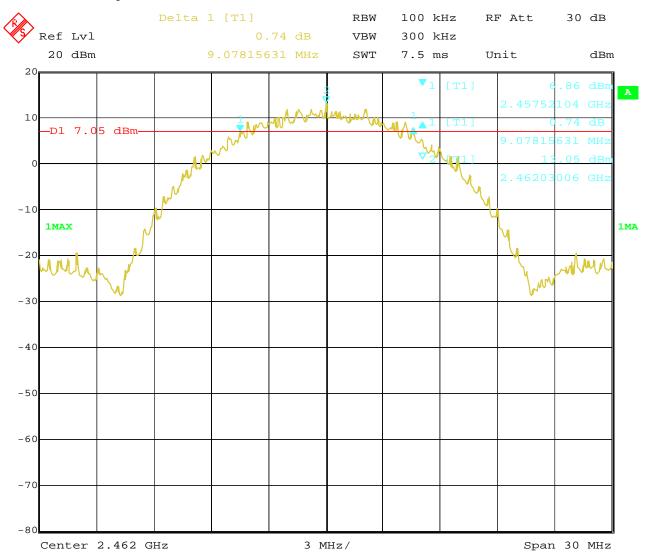

Date: 19.MAY.2022 14:01:23 Report No.: TW2203422-02E Page 32 of 86

Date: 2022-05-23



6dB Occupied Bandwidth

| EUT | | S-Se | erial Smart | Gateway | Model | DSGW-034 |
|----------|-----|-----------------------|---------------------------|-------------------------|----------------------|---------------|
| Mode | | | 802.11 | g | Test Voltage | DC5.0V |
| Temperat | ure | | 24 deg. | C, | Humidity | 56% RH |
| Channel | | el Frequency (MHz) | Data Transfer Rate (Mbps) | 6 dB Bandwidth (MHz) | Minimum Lim (MHz) | it Pass/ Fail |
| 1 | | 2412 | 6 | 15.18 | 0.5 | Pass |
| 6 | | 2437 | 6 | 15.15 | 0.5 | Pass |
| 11 | | 2462 | 6 | 15.15 | 0.5 | Pass |


Page 33 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



Test Plots:

1. 802.11g at 6Mbps of CH01

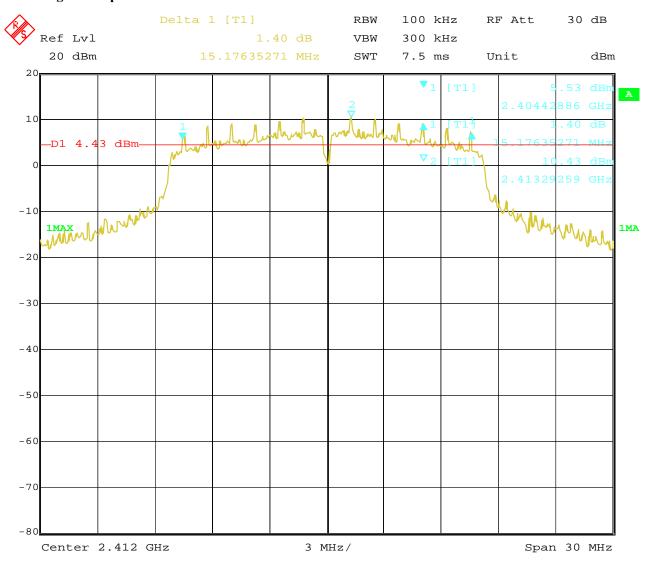


19.MAY.2022 12:03:51 Date:

Page 34 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



2. 802.11g at 6Mbps of CH06

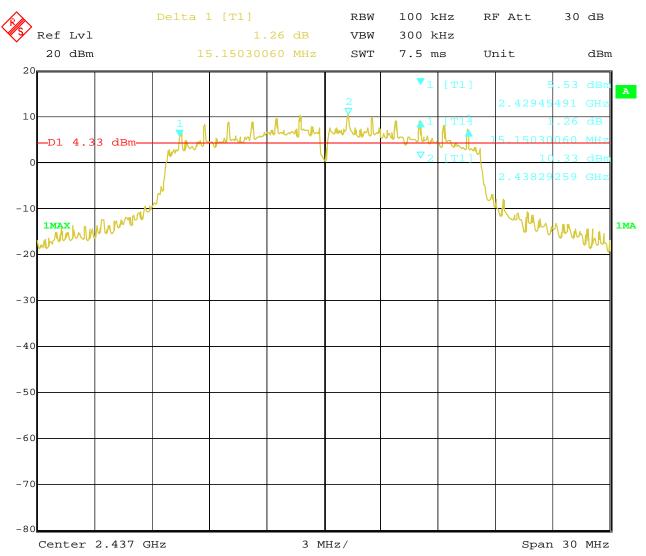


Date: 19.MAY.2022 12:08:16

Page 35 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



3. 802.11g at 6Mbps of CH11

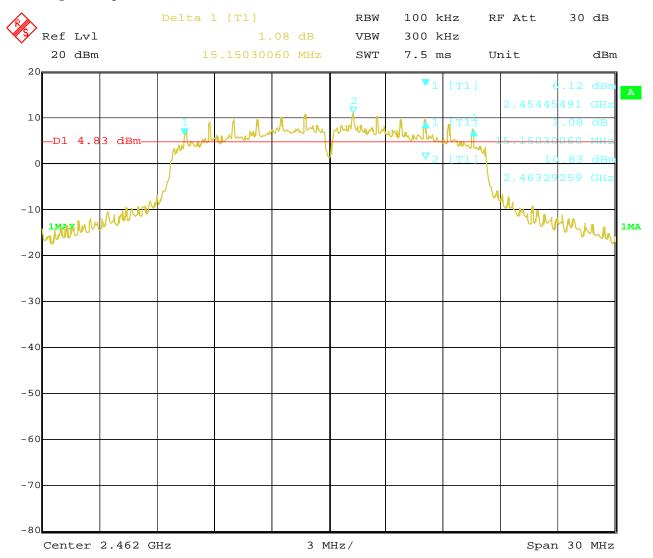

Date: 19.MAY.2022 14:24:48 Report No.: TW2203422-02E Page 36 of 86

Date: 2022-05-23



6dB Occupied Bandwidth

| EUT | | S-Serial Smart Gateway | | | Model | DSGW-034 | |
|-------------|----------------------------|------------------------|---------------------------|-------------------------|------------------------|----------|------------|
| Mode | | 802.11n HT20 | | | Test Voltage | DC5.0V | |
| Temperature | | 24 deg. C, | | | Humidity | | 56% RH |
| Channel | Channel Frequency (MHz) | | Data Transfer Rate (Mbps) | 6 dB Bandwidth (MHz) | Minimum Limit (MHz) | | Pass/ Fail |
| 1 | | 2412 | mcs0 | 15.15 | 0.5 | 0.5 | |
| 6 | | 2437 | mcs0 | 15.15 | 0.5 | | Pass |
| 11 | | 2462 | mcs0 | 15.15 | 0.5 | | Pass |


Page 37 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



Test Plots:

1. 802.11n at HT20 of CH01

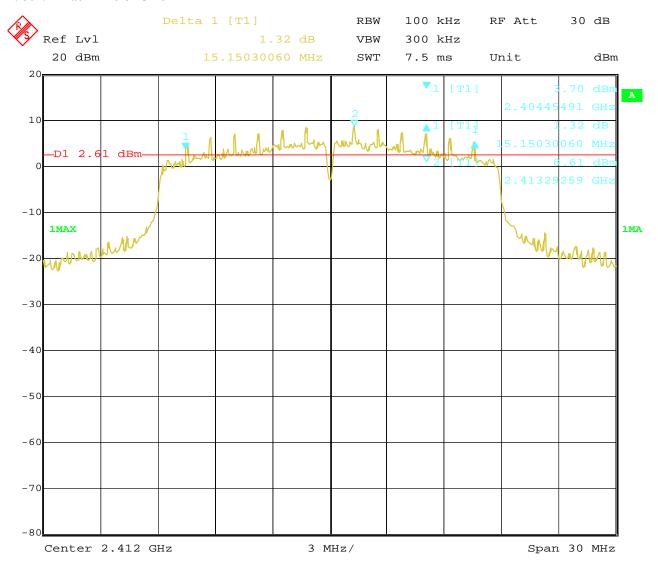


19.MAY.2022 14:46:05 Date:

Page 38 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



2. 802.11n at HT20 of CH06

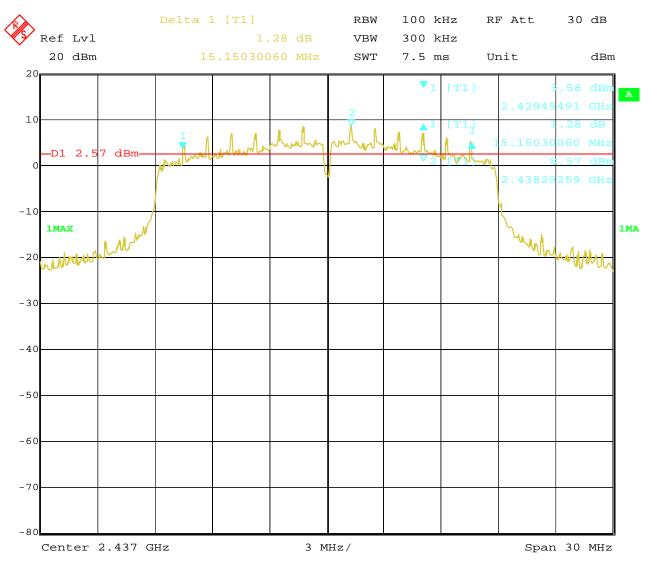


Date: 19.MAY.2022 14:41:32

Page 39 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



3. 802.11n at HT20 of CH11

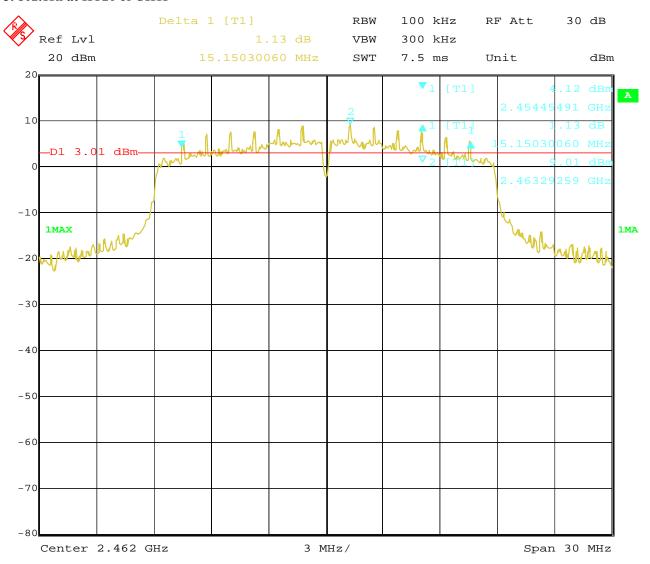

Date: 19.MAY.2022 14:34:00 Report No.: TW2203422-02E Page 40 of 86

Date: 2022-05-23



6dB Occupied Bandwidth

| EUT | | S-Serial Smart Gateway | | | Model | DSGW-034 | |
|-----------|-----|------------------------|---------------------------|-------------------------|--------------|----------|------------|
| Mode | | | 802.11n H | T40 | Test Voltage | DC5.0V | |
| Temperati | ure | 24 deg. C, | | | Humidity | 56% RH | |
| Channel | | el Frequency (MHz) | Data Transfer Rate (Mbps) | 6 dB Bandwidth (MHz) | Minimum Lin | nit | Pass/ Fail |
| 3 | | 2422 | mcs0 | 35.05 | 0.5 | | Pass |
| 6 | | 2437 | mcs0 | 35.06 | 0.5 | | Pass |
| 9 | | 2452 | | 35.09 | 0.5 | | Pass |


Page 41 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



Test Plots:

1. 802.11n at HT40 of CH03

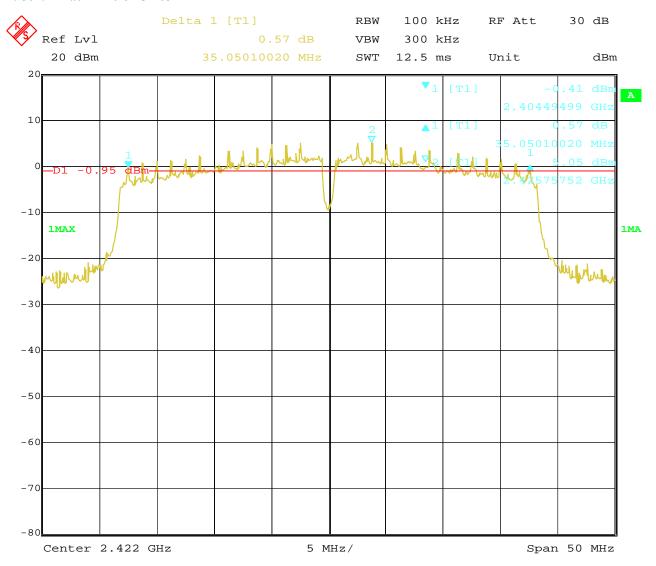


19.MAY.2022 14:50:59 Date:

Page 42 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



2. 802.11n at HT40 of CH06

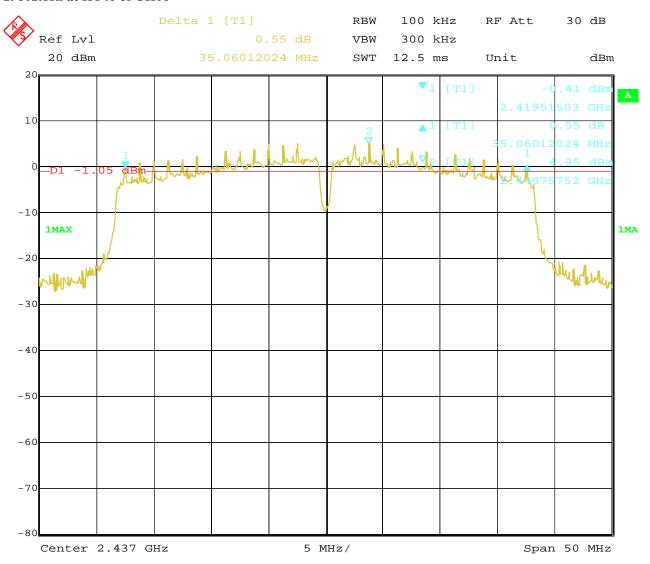


Date: 19.MAY.2022 14:52:40

Page 43 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



3. 802.11n at HT40 of CH09

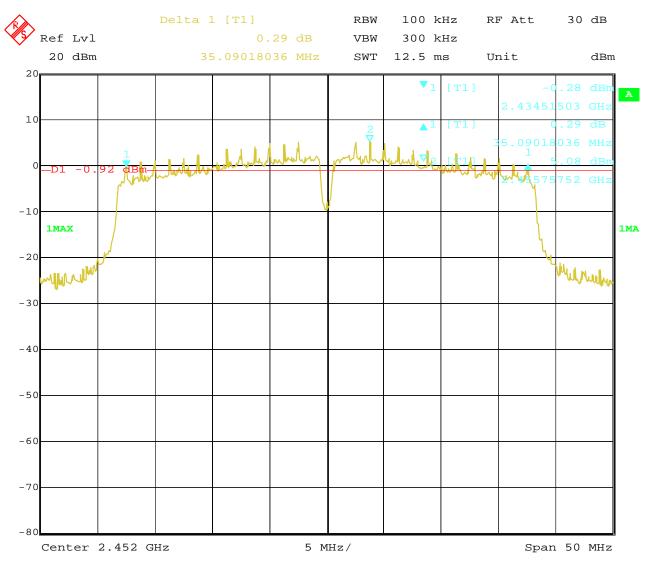

Date: 19.MAY.2022 15:02:19 Report No.: TW2203422-02E


Date: 2022-05-23



Page 44 of 86

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The PK power was measured

Report No.: TW2203422-02E Page 45 of 86

Date: 2022-05-23



8.4Test Results

| EUT | | S-Serial Smart Gateway | | Model | D | SGW-034 |
|----------|---------------|------------------------|----------------|--------------------|-----|------------|
| Mode | | 802.11b | | Test Voltage DC | | DC5.0V |
| Temperat | ure | | 24 deg. C, | Humidity | | 56% RH |
| Channel | Frequ (MH: | uency z) | PK Power (dBm) | Power Lim (dBm) | nit | Pass/ Fail |
| 1 | 2412 | | 22.88 | 30 | | Pass |
| 6 | 2437 | | 22.85 | 30 | | Pass |
| 11 | 2462 | | 23.26 | 30 | | Pass |

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

| EUT | | S-Serial Smart Gateway | | Model | I | OSGW-034 |
|----------|-------------------------|------------------------|----------------|---------------------|---|------------|
| Mode | | | 802.11g | Test Voltage DC5.0V | | DC5.0V |
| Temperat | ure | | 24 deg. C, | leg. C, Humidity | | 56% RH |
| Channel | Channel Frequency (MHz) | | PK Power (dBm) | Power Limit (dBm) | | Pass/ Fail |
| 1 | 1 2412 | | 27.78 | 30 | | Pass |
| 6 | 6 2437 | | 27.68 | 30 | | Pass |
| 11 | 11 2462 | | 28.14 | 30 | | Pass |

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: TW2203422-02E Page 46 of 86

Date: 2022-05-23



| EUT | EUT | | S-Serial Smart Gateway | Model | DSGW-034 |
|----------|---------------|-------------|------------------------|-------------------|------------|
| Mode | | | 802.11n (HT20) | Test Voltage | DC5.0V |
| Temperat | ure | | 24 deg. C, | Humidity | 56% RH |
| Channel | Frequence (MH | uency z) | PK Power (dBm) | Power Limit (dBm) | Pass/ Fail |
| 1 | 1 2412 | | 25.63 | 30 | Pass |
| 6 | 2437 | | 25.53 | 30 | Pass |
| 11 | 2462 | | 25.99 | 30 | Pass |

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

| EUT | | S-Serial Smart Gateway | | Model D | | SGW-034 |
|----------|--------|------------------------|----------------|--------------------|-------------|------------|
| Mode | e | | 802.11n (HT40) | Test Voltage | | DC5.0V |
| Temperat | ure | | 24 deg. C, | Humidity | Humidity 56 | |
| Channel | Freque | uency z) | PK Power (dBm) | Power Lin (dBm) | nit | Pass/ Fail |
| 3 | 2422 | | 25.39 | 30 | | Pass |
| 6 | 2437 | | 25.33 | 30 | | Pass |
| 9 | 2452 | | 25.21 | 30 | | Pass |

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Report No.: TW2203422-02E


Date: 2022-05-23



Page 47 of 86

9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2203422-02E Page 48 of 86

Date: 2022-05-23



9.4Test Result

| EUT | | | S-Serial Smart Gateway | Model | DSGW-034 | |
|----------|------|----------------|---|--------------|------------|------------|
| Mode | | 802.11b 11Mbps | | Test Voltage | DC: | 5.0V |
| Temperat | ure | | 24 deg. C, | Humidity | 56% RH | |
| Channel | Freq | uency | ency Power Spectral Density (dBm/10kHz) | | Limit | Pass/ Fail |
| | (M | Hz) | | | (dBm/3kHz) | |
| 1 | 24 | 112 | 1.04 | | 8 | Pass |
| 6 | 24 | 137 | 1.22 | | 8 | Pass |
| 11 | 24 | 162 | 1.74 | | 8 | Pass |

| EUT | | | S-Serial Smart Gateway | Model | DSGW | V-034 | | |
|----------|------|---------------|----------------------------|--------------|---------------------|------------|-----|----|
| Mode | ; | 802.11b 1Mbps | | Test Voltage | DC5.0V | | | |
| Temperat | ture | | 24 deg. C, Humidity | | 24 deg. C, Humidity | | 56% | RH |
| Channel | Freq | uency | Power Spectral Density (dB | m/10kHz) | Limit | Pass/ Fail | | |
| | (M | (Hz) | | | (dBm/3kHz) | | | |
| 1 | 24 | 412 | -0.20 | | 8 | Pass | | |
| 6 | 24 | 137 | -0.26 | | 8 | Pass | | |
| 11 | 24 | 162 | 0.20 | | 8 | Pass | | |

| EUT | | | S-Serial Smart Gateway | Model | DSGV | V-034 |
|----------|----------------------|-------|-----------------------------|--------------|------------|------------|
| Mode | | | 802.11g 6Mbps | Test Voltage | DC5 | .0V |
| Temperat | pperature 24 deg. C, | | Humidity | 56% | RH | |
| Channel | _ | uency | Power Spectral Density (dBm | n/10kHz) | Limit | Pass/ Fail |
| | (M | Hz) | | | (dBm/3kHz) | |
| 1 | 24 | 1.13 | | | 8 | Pass |
| 6 | 24 | 137 | 2.14 | | 8 | Pass |
| 11 | 24 | 162 | 1.55 | | 8 | Pass |

Report No.: TW2203422-02E Page 49 of 86

Date: 2022-05-23



| EUT | | | S-Serial Smart Gateway | Model | DSGW-034 | |
|----------|------|-------------------|--------------------------------------|---------------------|------------|------------|
| Mode | | 802.11n HT20 mcs0 | | Test Voltage | DC5 | .0V |
| Temperat | ure | | 24 deg. C, | 24 deg. C, Humidity | | RH |
| Channel | Freq | uency | nency Power Spectral Density (dBm/10 | | Limit | Pass/ Fail |
| | (M | (Hz) | | | (dBm/3kHz) | |
| 1 | 24 | 412 | -0.90 | | 8 | Pass |
| 6 | 24 | 437 | -1.63 | | 8 | Pass |
| 11 | 24 | 162 | -1.57 | | 8 | Pass |

| EUT | | S-Serial Smart Gateway | | Model | DSGV | V-034 | |
|----------|------------|------------------------|-----------------------------|------------------------------------|------------|------------|--|
| Mode | | | 802.11n HT40 mcs0 | Test Voltage | DC5 | .0V | |
| Temperat | emperature | | 24 deg. C, | Humidity | 56% | 56% RH | |
| Channel | Freq | uency | Power Spectral Density (dBm | Power Spectral Density (dBm/10kHz) | | Pass/ Fail | |
| | (M | (Hz) | | | (dBm/3kHz) | | |
| 3 | 24 | -5.31 | | | 8 | Pass | |
| 6 | 24 | 137 | -4.55 | | 8 | Pass | |
| 9 | 24 | 452 | -3.45 | | 8 | Pass | |


Page 50 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

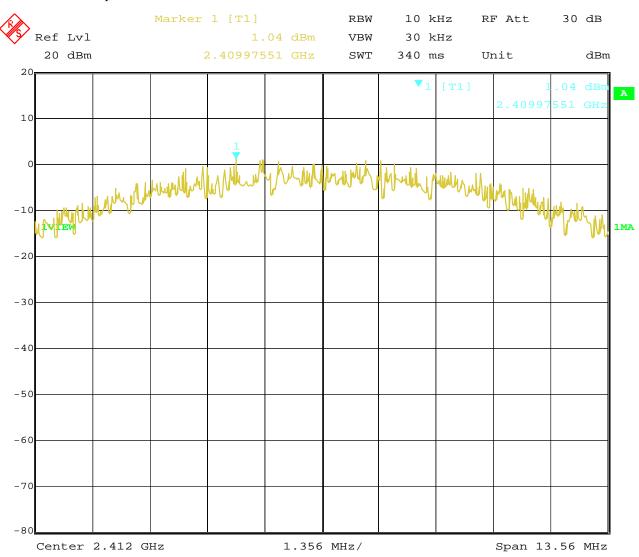

19.MAY.2022 15:53:21 Date:


Page 51 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



2. 802.11b at 11Mbps at CH06

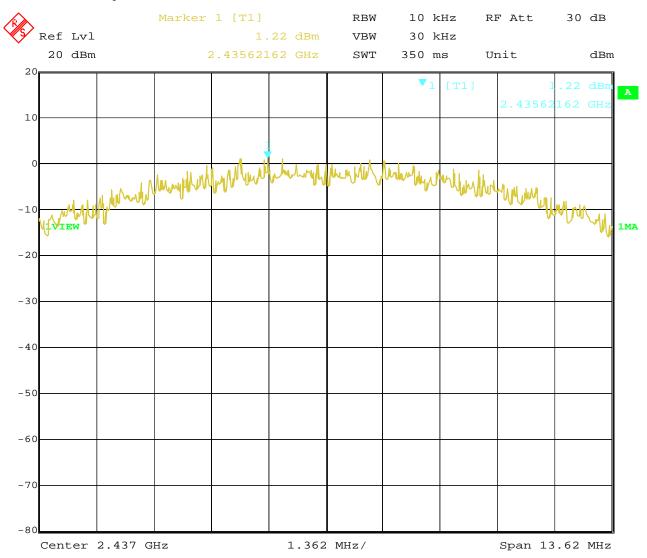


Date: 19.MAY.2022 15:54:22 Report No.: TW2203422-02E Page 52 of 86

Date: 2022-05-23



3. 802.11b at 11Mbps of CH11

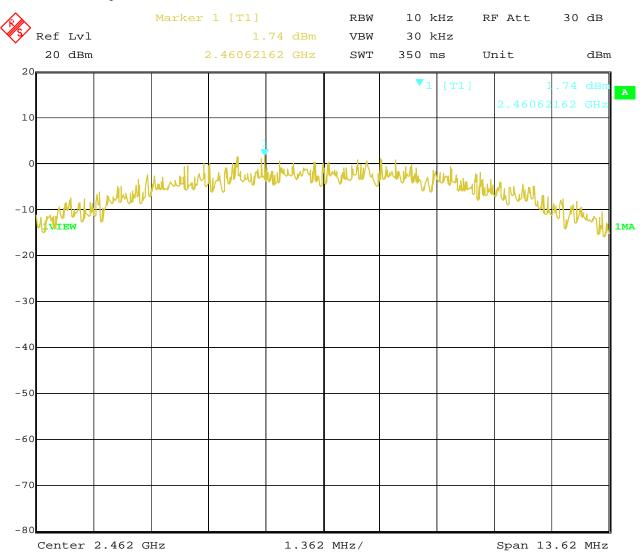


Date: 19.MAY.2022 15:54:59 Report No.: TW2203422-02E Page 53 of 86

Date: 2022-05-23



4. 802.11b at 1Mbps of CH1

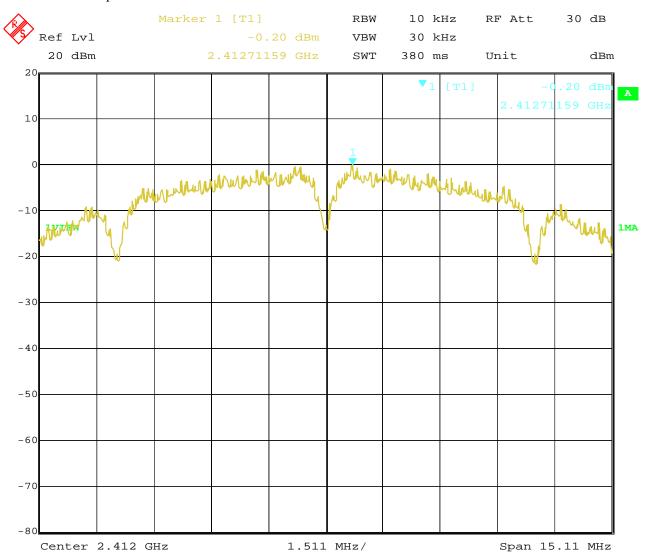

Date: 19.MAY.2022 16:00:30


Page 54 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



5. 802.11b at 1Mbps of CH6

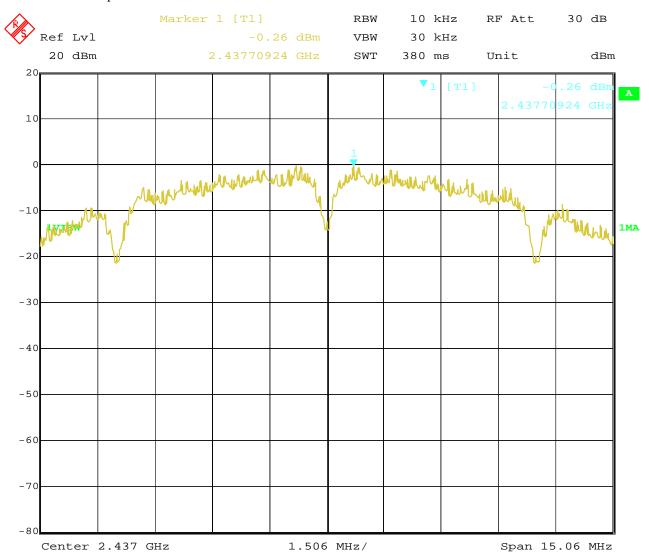


Date: 19.MAY.2022 15:59:34

Page 55 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



6. 802.11b at 1Mbps of CH11

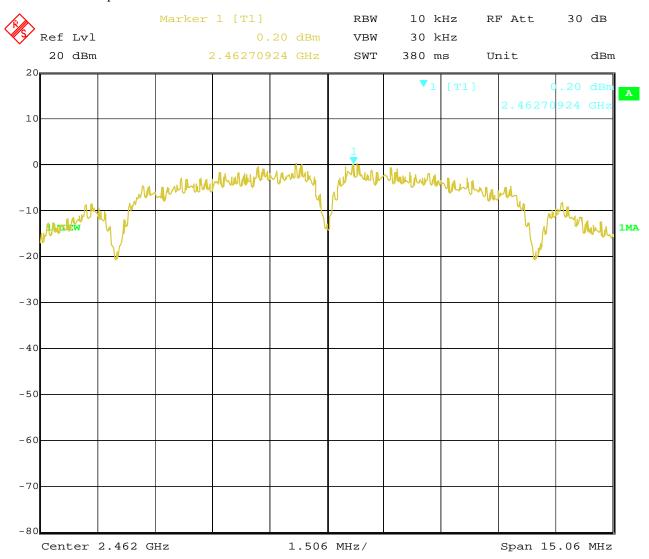


Date: 19.MAY.2022 15:58:35 Report No.: TW2203422-02E Page 56 of 86

Date: 2022-05-23



7. 802.11g at 6Mbps of CH1

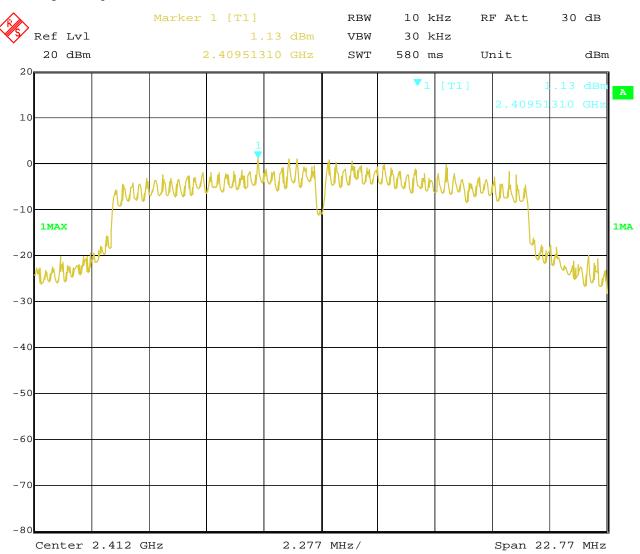


Date: 19.MAY.2022 16:04:13 Report No.: TW2203422-02E Page 57 of 86

Date: 2022-05-23



8. 802.11g at 6Mbps of CH6

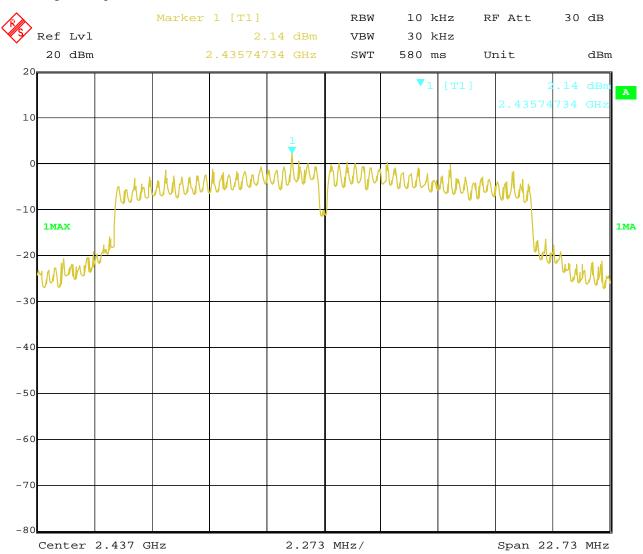

Date: 19.MAY.2022 16:08:57


Page 58 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



9. 802.11g at 6Mbps of CH11

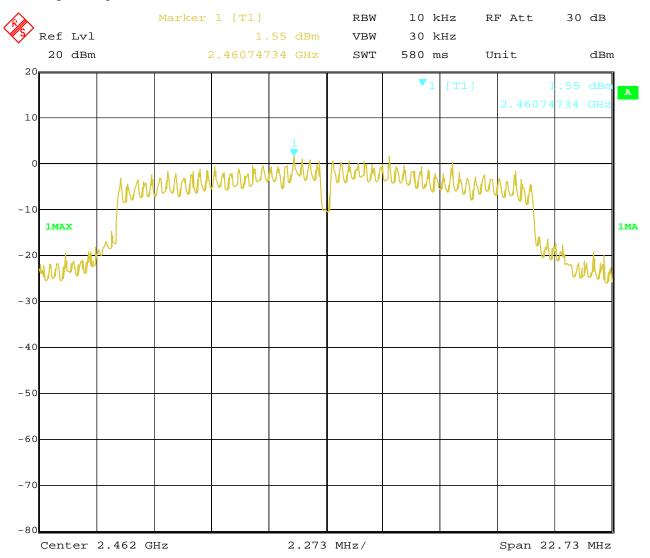


Date: 19.MAY.2022 16:14:07

Page 59 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



10. 802.11n at HT20 of CH01

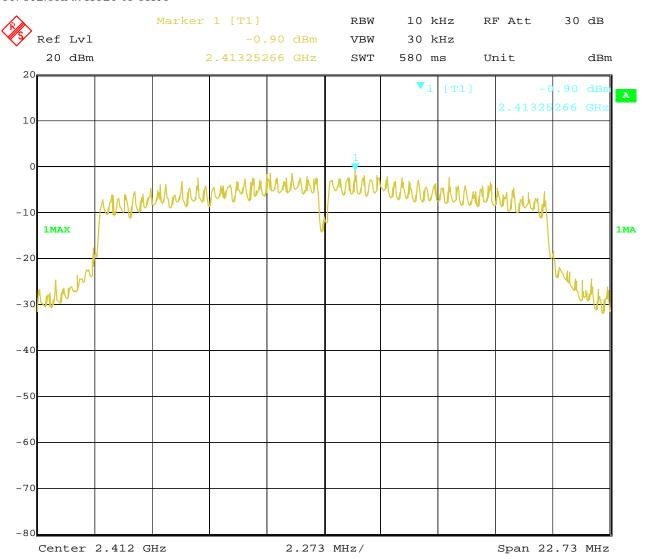


Date: 19.MAY.2022 16:31:20 Report No.: TW2203422-02E Page 60 of 86

Date: 2022-05-23



11. 802.11n at HT20 of CH06

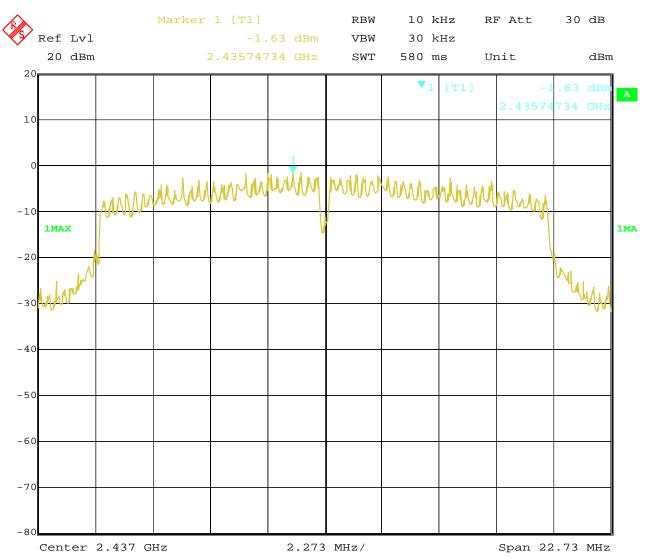


Date: 19.MAY.2022 16:22:26 Report No.: TW2203422-02E Page 61 of 86

Date: 2022-05-23



12. 802.11n at HT20 of CH11

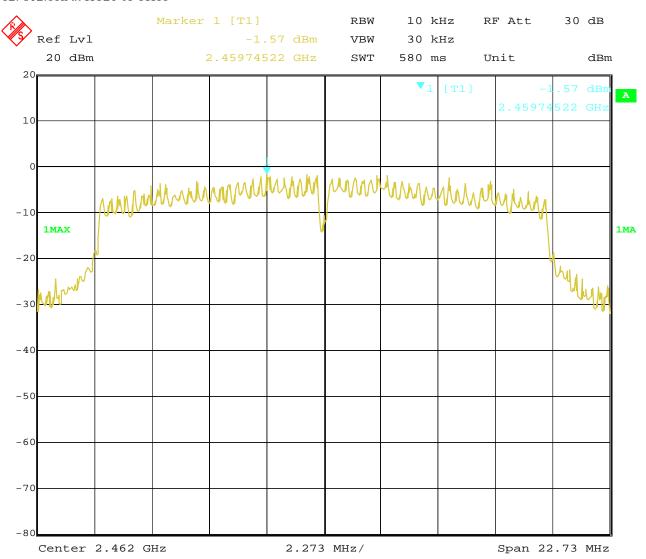


19.MAY.2022 16:16:32 Date:

Page 62 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



13. 802.11n at HT40 of CH03

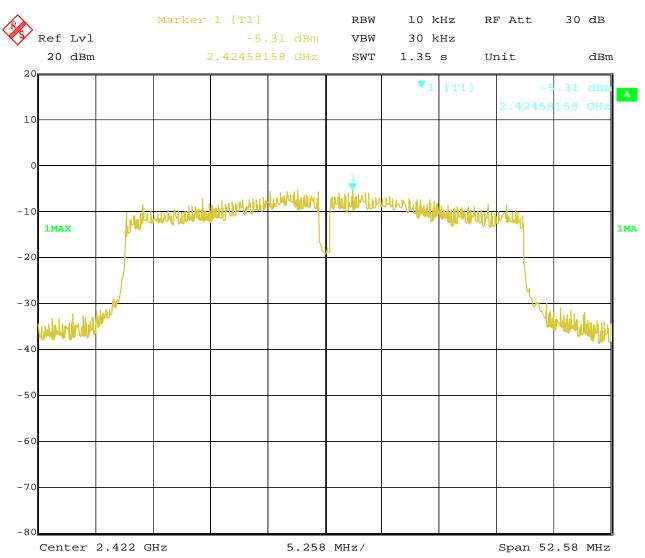


Date: 19.MAY.2022 16:34:11

Page 63 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



14. 802.11n at HT40 of CH06

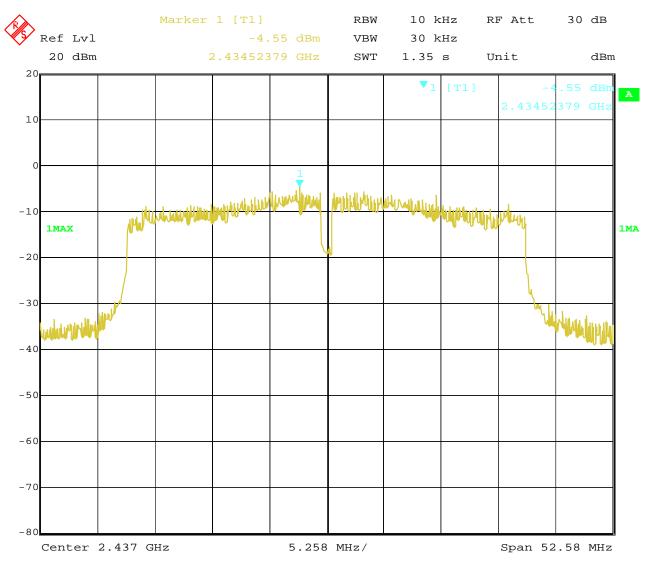


Date: 19.MAY.2022 16:37:07

Page 64 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



15. 802.11n at HT40 of CH09

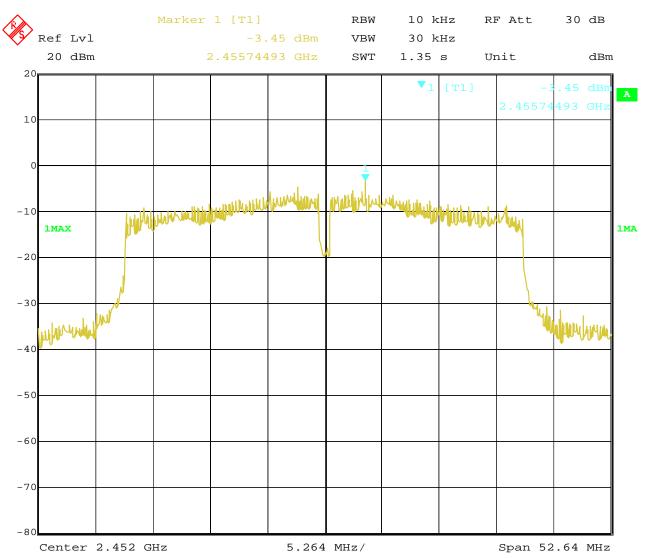


Date: 19.MAY.2022 16:39:11 Report No.: TW2203422-02E

Date: 2022-05-23



Page 65 of 86

10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. (Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. for band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 66 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




For 802.11b mode

CH01 at 1Mbps

10.4 Band-edge Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

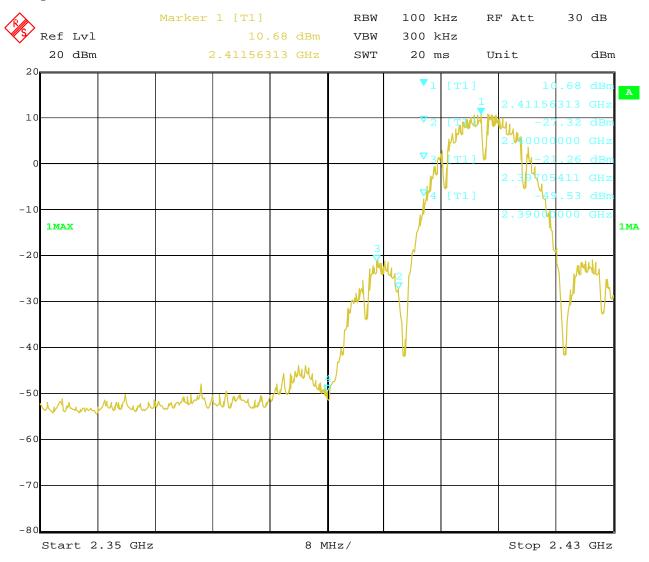

19.MAY.2022 17:10:08 Date:

Page 67 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




CH11 at 1Mbps

10.4 Band-edge Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

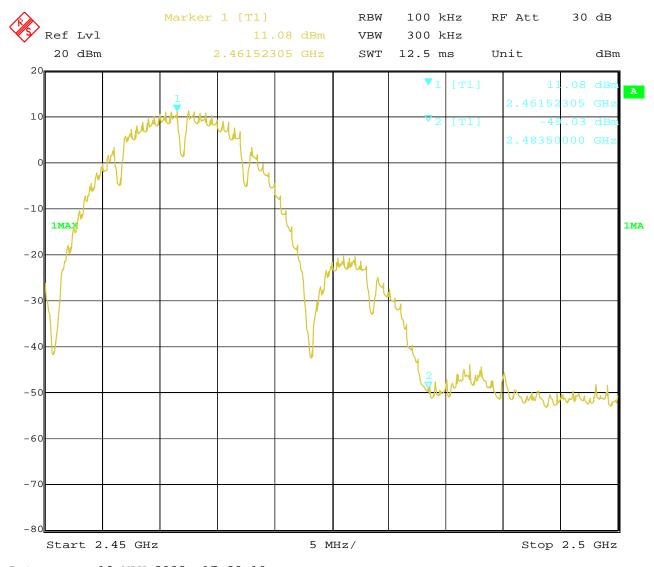

19.MAY.2022 17:20:10 Date:

Page 68 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




For 802.11b mode

CH01 at 11Mbps

10.4 Band-edge Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

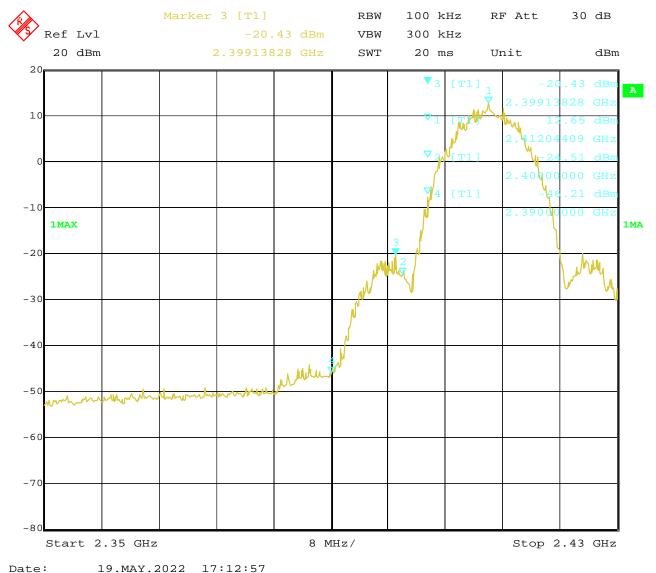

Date:

Page 69 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




CH11 at 11Mbps

10.4 Band-edge Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

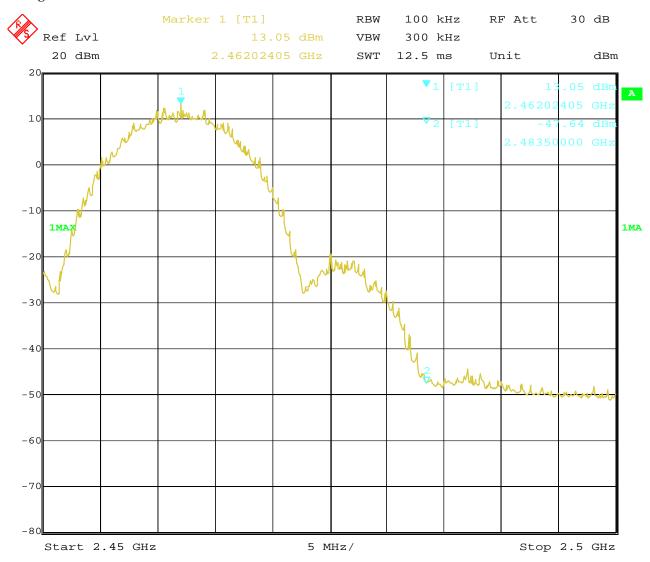

19.MAY.2022 17:17:08 Date:

Page 70 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

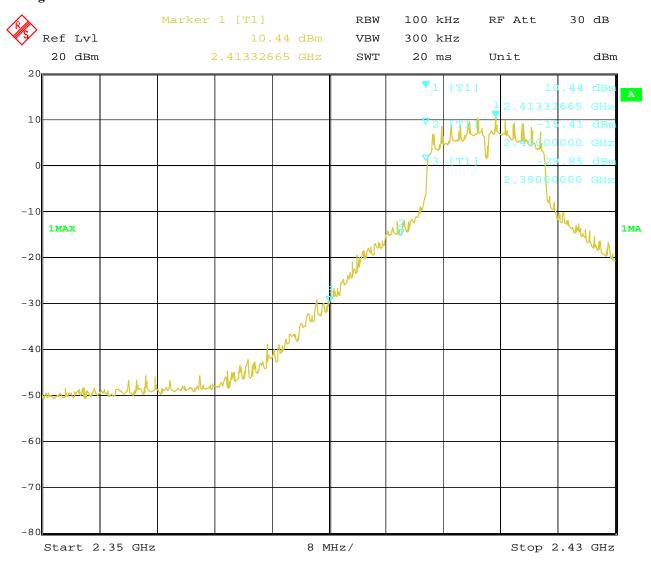

19.MAY.2022 17:07:16 Date:

Page 71 of 86 Report No.: TW2203422-02E

Date: 2022-05-23




CH11 at 6Mbps

Band-edge Measurement 10.4

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

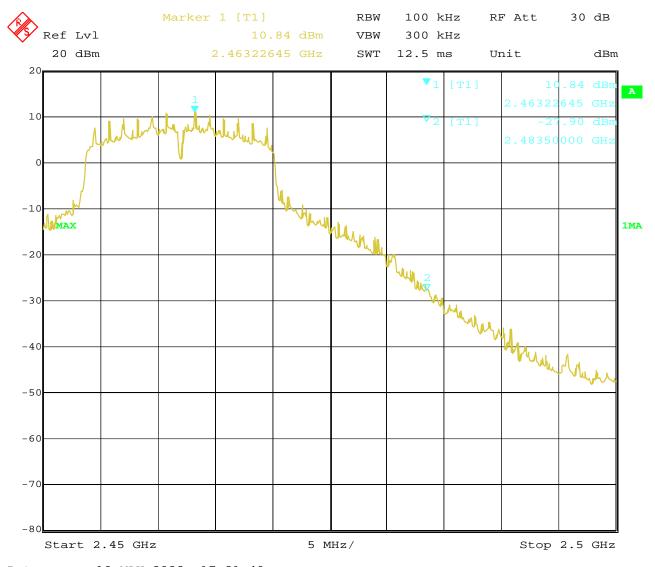

19.MAY.2022 Date: 17:21:40

Page 72 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




For 802.11n (HT20) mode

CH01 at mcs0

Band-edge Measurement 10.4

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

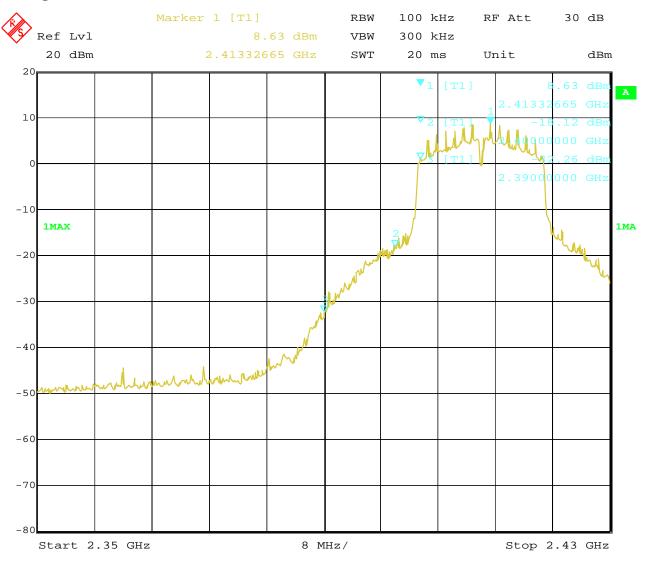

19.MAY.2022 17:05:06 Date:

Page 73 of 86 Report No.: TW2203422-02E

Date: 2022-05-23




CH11 at mcs0

10.4 Band-edge Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

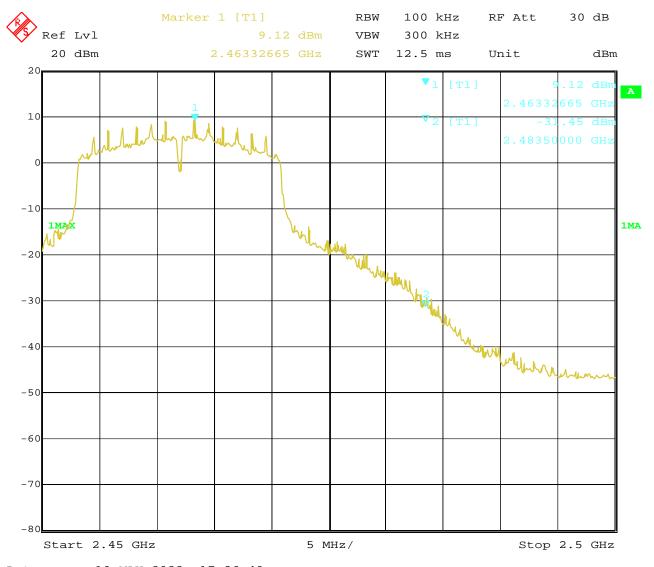

19.MAY.2022 Date: 17:26:40

Page 74 of 86

Report No.: TW2203422-02E

Date: 2022-05-23




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

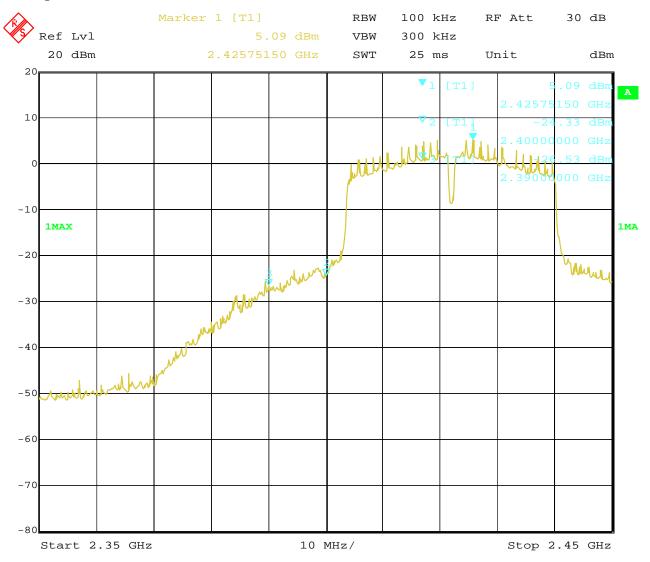

19.MAY.2022 17:02:30 Date:

Page 75 of 86 Report No.: TW2203422-02E

Date: 2022-05-23




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

| EUT | S-Serial Smart Gateway | Model | DSGW-034 |
|--------------|------------------------|--------------|----------|
| Mode | Keeping Transmitting | Test Voltage | DC5.0V |
| Temperature | 24 deg. C, | Humidity | 56% RH |
| Test Result: | Pass | Detector | PK |

Test Figure:

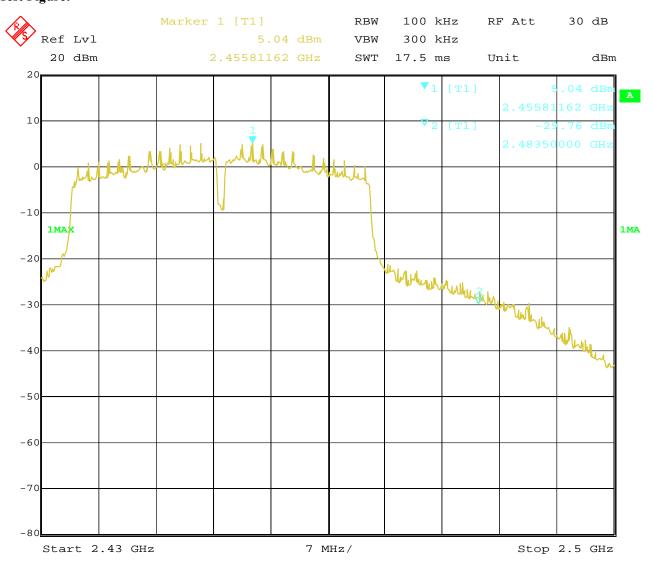

19.MAY.2022 17:00:37 Date:

Report No.: TW2203422-02E Page 76 of 86

Date: 2022-05-23



10.5 Restricted band Measurement

| EUT | S-Se | rial Smart Gateway | | Model | | DSGW-034 | | | |
|--------------|---------------------------------------|--------------------|----------|----------|--------|-----------------|--|--|--|
| Mode | Keeping Transmitting | | | Test V | oltage | DC5.0V | | | |
| Temperature | 24 deg. C, | | | Hun | nidity | 56% RH | | | |
| Test Result: | Pass | | | Dete | ector | PK | | | |
| | 802.11b mode, Low Channel, Horizontal | | | | | | | | |
| 2390 | PK (dBμV/m) | 58.76 | т:. | | | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | 39.34 | Lii | nit | | 54(dBμV/m) | | | |
| | | 802.11b mode, Low | Channel, | Vertical | | | | | |
| 2390 | PK (dBμV/m) | 55.68 | т:. | Limit | | 74(dBµV/m) | | | |
| | AV (dBμV/m) | 37.25 | Lli | mı | | 54(dBµV/m) | | | |

| EUT | S-Se | rial Smart Gateway | | M | odel | DSGW-034 | |
|--------------|-------------|----------------------|------------|-------------|------------|-----------------|--|
| Mode | Kee | Keeping Transmitting | | | Voltage | DC5.0V | |
| Temperature | | 24 deg. C, | | | nidity | 56% RH | |
| Test Result: | | Pass | | Detector PK | | | |
| | | 802.11b mode, High | Channel, H | orizont | al | | |
| 2483.5 | PK (dBμV/m) | 57.76 | т. | •, | 74(dBμV/m) | | |
| | AV (dBμV/m) | 38.90 | Limi | It | | $54(dB\mu V/m)$ | |
| | | 802.11b mode, High | Channel, V | /ertical | | | |
| 2483.5 | PK (dBμV/m) | 55.06 | Limi | | 74(dBμV/m) | | |
| | AV (dBμV/m) | 38.25 | Limi | Limit | | 54(dBμV/m) | |

Page 77 of 86 Report No.: TW2203422-02E

Date: 2022-05-23



10.5 Restricted band Measurement

| EUT | S-Se | rial Smart Gateway | | Model | | DSGW-034 | | | |
|--------------|---------------------------------------|----------------------|----------|--------------|--------|-----------------|--|--|--|
| Mode | Kee | Keeping Transmitting | | | | DC5.0V | | | |
| Temperature | | 24 deg. C, | | | nidity | 56% RH | | | |
| Test Result: | | Pass | | | ector | PK | | | |
| | 802.11g mode, Low Channel, Horizontal | | | | | | | | |
| 2390 | PK (dBμV/m) | 64.52 | т.:. | nit | | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | 45.17 | LII | mı | | $54(dB\mu V/m)$ | | | |
| | | 802.11g mode, Low | Channel, | Vertical | | | | | |
| 2390 | PK (dBμV/m) | 61.89 | Liı | ., 74(dBµV/m | | 74(dBµV/m) | | | |
| | AV (dBμV/m) | 42.29 | LII | 1111 | | $54(dB\mu V/m)$ | | | |

| EUT | S-S | S-Serial Smart Gateway | | | odel | DSGW-034 | | |
|--|----------------------|------------------------|------------|----------|-------------|-----------------|--|--|
| Mode | Keeping Transmitting | | | Test V | Voltage | DC5.0V | | |
| Temperature | 24 deg. C, | | | Humidity | | 56% RH | | |
| Test Result: | | Pass | | Det | Detector PK | | | |
| 802.11g mode, High Channel, Horizontal | | | | | | | | |
| 2483.5 | PK (dBµV/m) | 62.37 | т. | ٠, | | $74(dB\mu V/m)$ | | |
| | AV (dBμV/m) | 43.49 | Limi | IT | | $54(dB\mu V/m)$ | | |
| | | 802.11g mode, High | Channel, V | /ertical | | | | |
| 2483.5 | PK (dBμV/m) | 60.39 | т :: | T | | 74(dBμV/m) | | |
| | AV (dBμV/m) | 40.85 | Limit | | | 54(dBμV/m) | | |

Report No.: TW2203422-02E Page 78 of 86

Date: 2022-05-23



10.5 Restricted band Measurement

| EUT | S-Se | rial Smart Gateway | | Mo | odel | DSGW-034 | | |
|--------------|--|----------------------|----------|-------------|------------|-----------------|--|--|
| Mode | Keeping Transmitting | | | Test V | oltage | DC5.0V | | |
| Temperature | 24 deg. C, | | | Hum | nidity | 56% RH | | |
| Test Result: | | Pass | | | ector | PK | | |
| | 802.11n HT20 mode, Low Channel, Horizontal | | | | | | | |
| 2390 | PK (dBµV/m) | 66.36 | т:. | nit | | $74(dB\mu V/m)$ | | |
| | AV (dBμV/m) | 47.58 | LII | mı | 54(dBμV/m) | | | |
| | 8 | 302.11n HT20 mode, L | ow Chanr | nel, Vertic | al | | | |
| 2390 | PK (dBµV/m) | 63.64 | Limit | | 74(dBμV/m) | | | |
| | AV (dBμV/m) | 45.03 | LII | 1111 | 54(dBμV/m) | | | |

| EUT | S-Se | erial Smart Gateway | | Model | | DSGW-034 | |
|--------------|-------------|----------------------|------------|------------|------------|-----------------|--|
| Mode | Ke | Keeping Transmitting | | | /oltage | DC5.0V | |
| Temperature | | 24 deg. C, | | Hun | nidity | 56% RH | |
| Test Result: | | Pass | | Det | tector PK | | |
| | 80 | 2.11n HT20 mode, Hig | h Channel, | Horizo | ntal | | |
| 2483.5 | PK (dBμV/m) | 65.68 | т. | ., | | $74(dB\mu V/m)$ | |
| | AV (dBμV/m) | 46.35 | Limi | it | 54(dBμV/m) | | |
| | 8 | 02.11n HT20 mode, H | igh Channe | el, Vertic | al | | |
| 2483.5 | PK (dBμV/m) | 63.25 | т :: | ., | 74(dBµV/m) | | |
| | AV (dBμV/m) | 44.78 | Limi | ıt | 54(dBμV/m) | | |

Page 79 of 86 Report No.: TW2203422-02E


Date: 2022-05-23



10.5 Restricted band Measurement

| EUT | S-Se | erial Smart Gateway | | M | odel | DSGW-034 | |
|--|-------------|----------------------|--------------|------------|--------|-----------------|--|
| Mode | Kee | | Test Voltage | | DC5.0V | | |
| Temperature | | 24 deg. C, | | | | 56% RH | |
| Test Result: | | Pass | | Det | tector | PK | |
| 802.11n HT40 mode, Low Channel, Horizontal | | | | | | | |
| 2390 | PK (dBμV/m) | 70.64 | т:. | | | $74(dB\mu V/m)$ | |
| | AV (dBμV/m) | 51.33 | Lii | nit | | 54(dBµV/m) | |
| | | 802.11n HT40 mode, L | ow Chan | nel Vertic | al | | |
| 2390 | PK (dBμV/m) | 70.10 | т:. | Limit | | 74(dBμV/m) | |
| | AV (dBμV/m) | 50.62 | Lli | mı | | 54(dBµV/m) | |

Test Plots

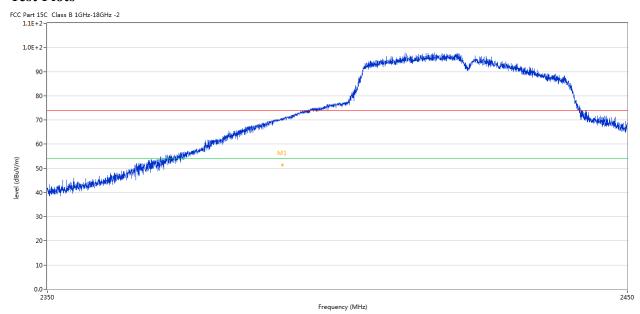

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2390.040 | 70.64 | -3.53 | 74.0 | -3.36 | Peak | 273.00 | 100 | Horizontal | Pass |
| 1** | 2390.040 | 51.33 | -3.53 | 54.0 | -2.67 | AV | 273.00 | 100 | Horizontal | Pass |

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to


adopt any other remedies which may be appropriate.

Page 80 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



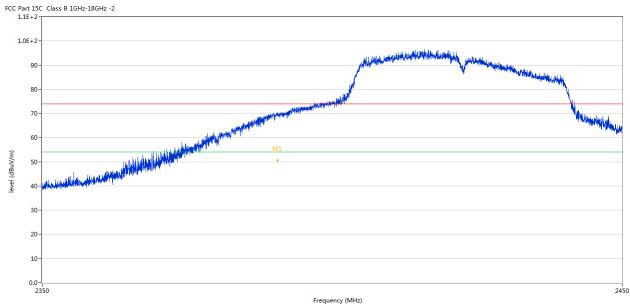

| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2390.070 | 70.10 | -3.54 | 74.0 | -3.90 | Peak | 169.00 | 100 | Vertical | Pass |
| 1** | 2390.070 | 50.62 | -3.54 | 54.0 | -3.38 | AV | 169.00 | 100 | Vertical | Pass |


Page 81 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



| EUT | S-Serial Smart Gateway | | | | Iodel | DSGW-034 | | | |
|---|------------------------|-------|-------|----|-----------------|-----------------|--|--|--|
| Mode | Keeping Transmitting | | | | Voltage | DC5.0V | | | |
| Temperature | 24 deg. C, | | | | midity | 56% RH | | | |
| Test Result: | Pass | | | | etector | PK | | | |
| 802.11n HT40 mode, High Channel, Horizontal | | | | | | | | | |
| 2483.5 | PK (dBµV/m) | 68.73 | т. | ٠, | | $74(dB\mu V/m)$ | | | |
| | AV (dBμV/m) | 48.89 | Lim | 1τ | 54(dBμV/m) | | | | |
| 802.11n HT40 mode, High Channel, Vertical | | | | | | | | | |
| 2483.5 | PK (dBμV/m) | 65.00 | Limit | | $74(dB\mu V/m)$ | | | | |
| | AV (dBμV/m) | 46.83 | | | | $54(dB\mu V/m)$ | | | |

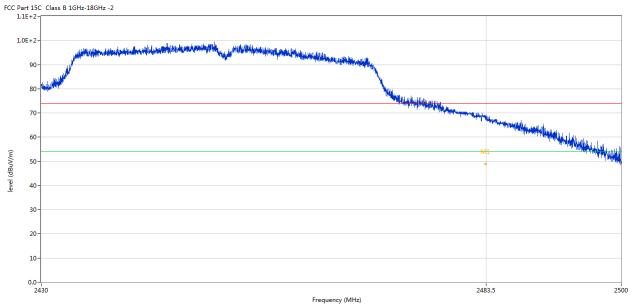


| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|------------|---------|
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2483.451 | 68.73 | -3.57 | 74.0 | -5.27 | Peak | 118.00 | 100 | Horizontal | Pass |
| 1** | 2483.451 | 48.89 | -3.57 | 54.0 | -5.11 | AV | 118.00 | 100 | Horizontal | Pass |

Page 82 of 86

Report No.: TW2203422-02E

Date: 2022-05-23



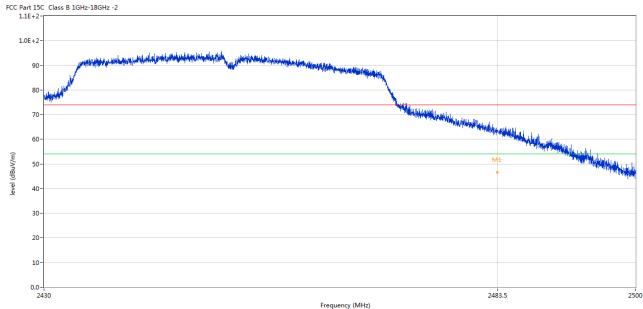

| | | | | | 1 7 7 | | | | | |
|-----|-----------|----------|--------|----------|------------|----------|--------|--------|----------|---------|
| No. | Frequency | Results | Factor | Limit | Over Limit | Detector | Table | Height | ANT | Verdict |
| | (MHz) | (dBuV/m) | (dB) | (dBuV/m) | (dB) | | (o) | (cm) | | |
| 1 | 2483.464 | 65.00 | -3.57 | 74.0 | -9.00 | Peak | 297.00 | 100 | Vertical | Pass |
| 1** | 2483.464 | 46.83 | -3.57 | 54.0 | -7.17 | AV | 297.00 | 100 | Vertical | Pass |

Report No.: TW2203422-02E

Date: 2022-05-23



Page 83 of 86

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

PCB antenna used. The gain of the antennas is 1.5dBi (Declared by the applicant)

Report No.: TW2203422-02E Page 84 of 86

Date: 2022-05-23




12.0 FCC ID Label

FCC ID: 2AUXBDSGW-034

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

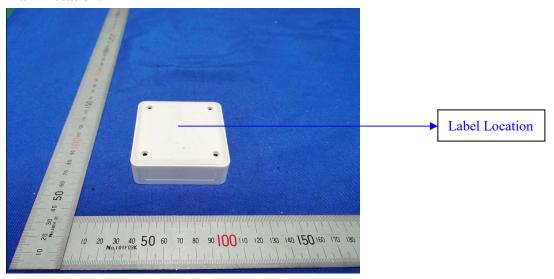

Page 85 of 86


Report No.: TW2203422-02E

Date: 2022-05-23



13.0 **Photo of testing**

Conducted Emission Test Setup:

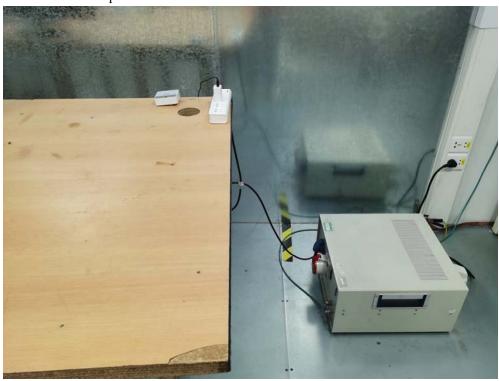


Report No.: TW2203422-02E

Date: 2022-05-23



Radiated Emission Test Setup:

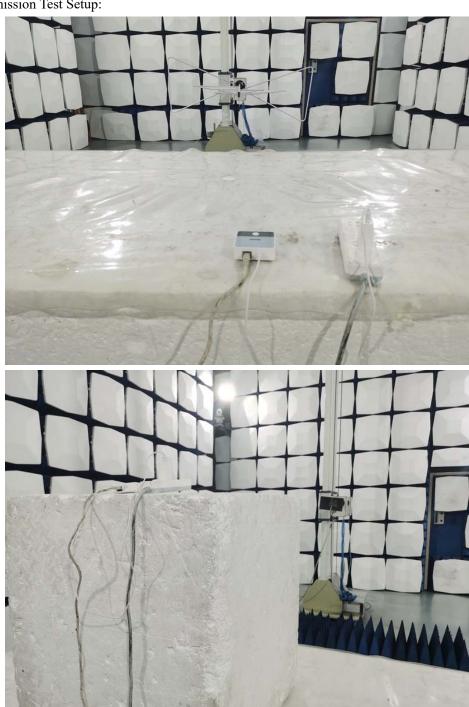

Photographs - EUT

Please refer test report TW2203422-01E

-End of the report-

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.