

TEST REPORT

Equipment Under Test	: IEEE 802.11b/g WLAN Cardbus Card
Model No.	: XG-301
FCC ID	: M4Y-XG-300
Applicant	: Z-COM, Inc.
Address of Applicant	: 7F-2,NO.9,PROSPERITY 1 ROAD,SCIENCE-BASED INDUSTRIAL PARK,HSINCHU,TAIWAN,R.O.C.
Date of Receipt	: 2003.06.06
Date of Test(s)	: 2003.06.06
Date of Issue	: 2003.06.13 1 st edition, 2003.08.13 2 nd edition

Standards:

**FCC OET Bulletin 65 supplement C,
ANSI/IEEE C95.1 , C95.3**

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS Taiwan E&E Services or testing done by SGS Taiwan E&E Services in connection with distribution or use of the product described in this report must be approved by SGS Taiwan E&E Services in writing.

Tested by : Dikin Yang Date : 2003/6/13

Approved by : Robert Chang Date : 2003/8/13

Contents

1. General Information

1.1 Testing Laboratory.....	3
1.2 Details of Applicant.....	3
1.3 Description of EUT(s).....	3
1.4 Test Environment.....	3
1.5 Operation Configuration.....	4
1.6 The SAR Measurement System.....	4
1.7 SAR System Verification.....	4
1.8 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz.....	5
1.9 Operation Procedure.....	5
1.10 Test Standards and Limits.....	6

2. Summary of Results..... 8

3. Instruments List..... 8

4. Measurements..... 10

at a distance of 1.5 cm from the base of the phantom

4.1 Edge-on position, lowest channel.....	10
4.2 Edge-on position, middle channel.....	11
4.3 Edge-on position, highest channel.....	12
4.4 End-on position, lowest channel.....	13
4.5 End-on position, middle channel.....	14
4.6 End-on position, highest channel.....	15

at a distance of 0.0 cm from the base of the phantom(0.7 cm Spacing between EUT & Planar Phantom)

4.7 End-on position, lowest channel.....	16
4.8 End-on position, middle channel.....	17
4.9 End-on position, highest channel.....	18

4.10 System Performance Validation	19
--	----

APPENDIX

1. Photographs of Test Setup.....	20
2. Photographs of EUT.....	24
3. Probe Calibration certificate.....	26
4. Uncertainty Analysis.....	30
5. Phantom description.....	31
6. System Validation from Original equipment supplier.....	32

1. General Information

1.1 Testing Laboratory

SGS Taiwan Ltd. (FCC Registration number: 573967)
1F, No. 134, Wukung Road, Wuku industrial zone
Taipei county , Taiwan , R.O.C.
Telephone : +886-2-2299-3279
Fax : +886-2-2298-2698
Internet : <http://www.sgs.com.tw>

1.2 Details of Applicant

Name Z-COM, Inc
Address 7F-2,NO.9,PROSPERITY 1 ROAD,,SCIENCE-BASED
INDUSTRIAL PARK,HSINCHU,TAIWAN,R.O.C.

1.3 Description of EUT(s)

1	Product name	IEEE 802.11b/g WLAN Cardbus Card
2	Product ID	XG-301
3	Serial Number	38552672
4	Power supply	Powered by PCMCIA slot 3.3V
5	Frequency range	2412-2462 MHz

1.4 Test Environment

Ambient temperature : 21.9° C

Tissue Simulating Liquid : 21° C- 23° C

1.5 Operation Configuration

Configuration 1: "Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom (Fig.3 & Fig.4)

Configuration 2: "End-on" placement; top cover parallel and at a distance of 1.5 cm from the base of the phantom (Fig.5 & Fig.6)

Configuration 3: "End-on" placement; top cover parallel and at a distance of 0.0 cm from the base of the phantom . (Fig.7 & Fig.8) (0.7 cm Spacing between EUT & Planar Phantom)

1.6 The SAR Measurement System

A photograph of the SAR measurement System is given in Fig. 2. This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (Speag Dasy 4 professional system). A Model ET3DV6 1759 E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-simulant.

1.7 SAR System Verification

The microwave circuit arrangement for system verification is sketched in Fig.1. The Measured SAR distribution for the peak 1-g SAR is 13.7 m W/g and 10-g SAR is 6.12 m W/g. The measured 1-g SAR is 13.6 m W/g and 10-g SAR is 6.05 m W/g for this dipole. In comparison, it shows that the measured SAR plot is quite close to the original one.(see **APPENDIX** System Validation from Original equipment supplier SPEAG by Schmid & Partner)

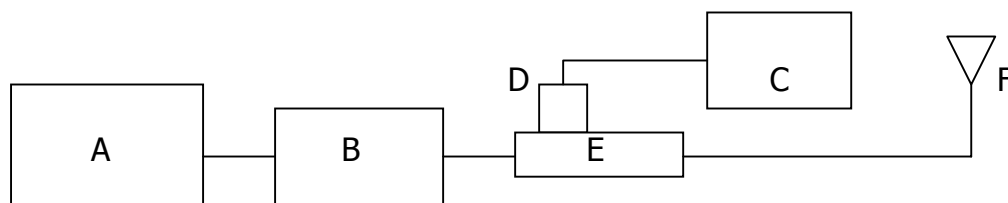


Fig.1 The microwave circuit arrangement used for SAR system verification

- A. Agilent Model 8648D Signal Generator
- B. Mini circuits Model ZHL-42 Amplifier
- C. Agilent Model E4416A Power Meter
- D. Agilent Model 8482H Power Sensor
- E. Agilent Model 777D Dual directional coupling
- F. Reference dipole antenna

Validation Kit	Frequency	Target SAR 1g (250mW)	Target SAR 10g (250mW)	Measured SAR 1g	Measured SAR 10g	Measured date
DT3DV6 S/N :1759	2450 MHz	13.7 m W/g	6.02 m W/g	13.6 m W/g	6.05 m W/g	2003-08-13

Table 1. Results system validation

1.8 Tissue Simulant Fluid for the Frequency Band 2.4 to 2.5 GHz

The dielectric properties for this body-simulant fluid were measured by using the HP Model 85070D Dielectric Probe (rates frequency band 200 MHz to 20 GHz) in conjunction with HP 8714ET Network Analyzer(300 KHz-3000 MHz) by using a procedure detailed in Section V. The Measured dielectric parameters of the body-simulant fluid at 2400 MHz are $\rho = 52.5 \pm 5\%$, $\sigma = 2.00 \pm 10\%$ S/m. The measured properties are close to the values of $\rho = 51.66$ and $\sigma = 2.021$ S/m. The Conductivity (σ) and Permittivity (ρ) are listed in Table 1. For the SAR measurement given in this report . We obtain the desired dielectric properties to simulate the body tissue at the midband frequency of 2437MHz to be $\rho = 51.55$ and $\sigma = 1.991$ S/m.(Table 2). A photograph of the Tissue Simulant Fluid liquid depth 15cm is given in Fig .8 .

Channel	Frequency (MHz)	Conductivity (σ)	Permittivity (ρ)
01	2412	1.958	51.64
06	2437	1.991	51.55
11	2462	2.018	51.45

Table 2. Dielectric parameters for the Frequency Band 2.4 to 2.5 GHz

1.9 Operation Procedure

By using the program subordinated in the computer, and change into the written channel, and then set in highest power. Finally, we will test it by dividing into 3 ways.

Configuration 1: " Edge-on" placement ; edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom. (Fig.3 & Fig.4)

Configuration 2: "End-on" placement; top cover parallel and at a distance of 1.5 cm from the base of the phantom . (Fig.5 & Fig.6)

Configuration 3: "End-on" placement; top cover parallel and at a distance of 0.0 cm from the base of the phantom . (Fig.7 & Fig.8) (0.7 cm Spacing between EUT & Planar Phantom)

The way by using the holder makes EUT 1.5cm close to the flat phantom then aims the center, and start to make the measurement. In doing so, we can measure data .The Peak 1-g SAR for the various configurations of the 802.11b/g WLAN Cardbus Adapter are summarized in Table 3. All of the measured 1-g SAR are less then the FCC 96-326 guideline of 1.6 W/kg .

1-g SAR in W/kg			
Pc position relative to the flat phantom	2412 MHz channel 1	2437 MHz channel 6	2462 MHz channel 11
EUT Peak Power Output	19.00dbm	19.01dbm	18.62dbm
Configuration 1 Edge-on	0.173	0.172	0.171
Configuration 2 End-on at a distance of 1.5 cm from the base of the phantom	0.33	0.336	0.351
Configuration 3 End-on at a distance of 0.0 cm from the base of the phantom	1.25	1.08	1.11

Table .3 The peak 1-g SAR measured for the IEEE 802.11b/g WLAN Cardbus Card

The lowest channel supported by the EUT is channel 0, and highest channel can be measured is channel 11. So the channels above are used as the lowest and highest channel in the testing, and the middle channel is set as channel 06.

1.10 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate ("SAR") in Section 4.2 of "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz," ANSI/IEEE C95.1-1992, Copyright 1992 by the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017. These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in "Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields," NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that

transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter. Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

(1) Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

(2) Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube). General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure. Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section.(Table .4)

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR (Brain)	1.60 m W/g	8.00 m W/g
Spatial Average SAR (Whole Body)	0.08 m W/g	0.40 m W/g
Spatial Peak SAR (Hands/Feet/Ankle/Wrist)	4.00 m W/g	20.00 m W/g

Table .4 RF exposure limits

2.Summary of Results

EUT position	Peak SAR (W/Kg)	1g Average (mW/g)	10g Average (mW/g)	Max value of SAR (mW/g)	Verdict
at a distance of 1.5 cm from the base of the phantom					
Edge-on position, lowest channel	0.417	0.173	0.0887	0.187	<i>PASS</i>
Edge-on position, middle channel	0.425	0.172	0.0887	0.193	<i>PASS</i>
Edge-on position, highest channel	0.411	0.171	0.0891	0.18	<i>PASS</i>
End-on position, lowest channel	0.761	0.33	0.167	0.34	<i>PASS</i>
End-on position, middle channel	0.806	0.336	0.172	0.348	<i>PASS</i>
End-on position , highest channel	0.847	0.351	0.179	0.357	<i>PASS</i>
at a distance of 0.0 cm from the base of the phantom					
End-on position, lowest channel	2.86	1.25	0.609	1.28	<i>PASS</i>
End-on position, middle channel	2.41	1.08	0.538	1.11	<i>PASS</i>
End-on position , highest channel	2.53	1.11	0.559	1.13	<i>PASS</i>

3. Instruments List

Manufacturer	Device	Type	Serial number	Date of last calibration
Schmid & Partner Engineering AG	Dosimetric E-Fiel Probe	ET3DV6	1759	March 7 2003
Schmid & Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2	727	March 5 2003
Schmid & Partner Engineering AG	Data acquisition Electronics	DAE3	547	January 30 2003
Schmid & Partner Engineering AG	Software	DASY 4 V4.1c Build 47	---	Calibration isn't necessary
Schmid & Partner Engineering AG	Phantom	SAM	---	Calibration isn't necessary
Agilent	Network Analyser	8714ET	US41442815	16 JAN 2003
Agilent	Dielectric Probe Kit	85070D	US01440168	20-JAN 2003

4. Measurements

Edge-on position, lowest channel

Date/Time: 06/09/03 16:53:54

DUT: Z-COM; Type: Wireless Card; Serial: 38552672
Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: M2450 ($\sigma = 1.95826$ mho/m, $\epsilon_r = 51.7097$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 3/7/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 1/30/2003
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Vertical/Area Scan (61x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.4 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.186 mW/g

Vertical/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.417 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.0887 mW/g

Reference Value = 10.4 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.187 mW/g

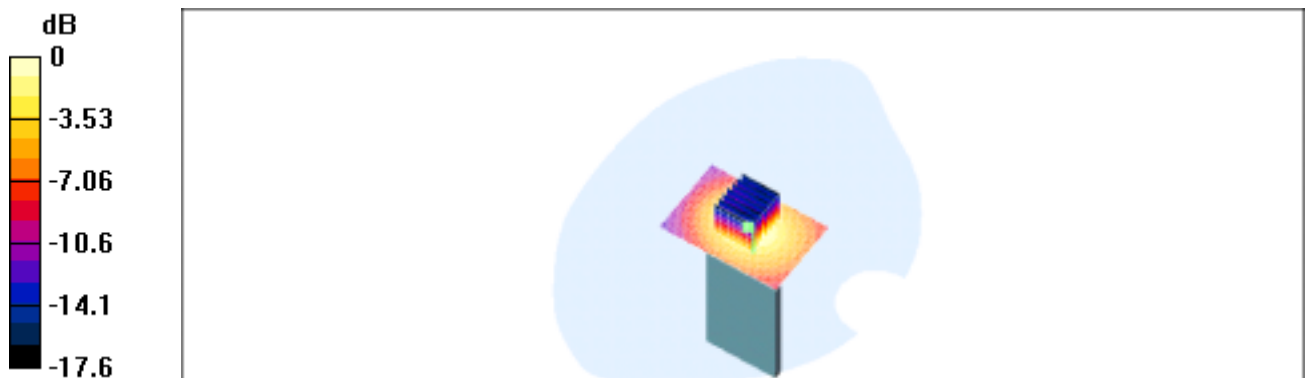

0 dB = 0.187mW/g

Edge-on position, middle channel

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.99146$ mho/m, $\epsilon_r = 51.6172$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 3/7/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 1/30/2003
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Vertical/Area Scan (61x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 10.2 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.19 mW/g

Vertical/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.425 W/kg

SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.0887 mW/g

Reference Value = 10.2 V/m

Power Drift = -0.06 dB

Maximum value of SAR = 0.193 mW/g

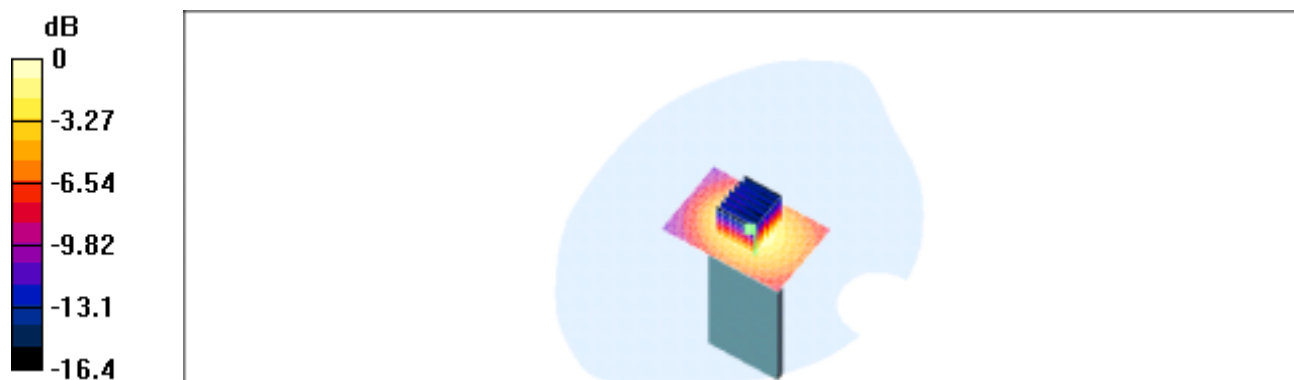

0 dB = 0.193mW/g

Edge-on position, highest channel

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2.01798$ mho/m, $\epsilon_r = 51.4499$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 3/7/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 1/30/2003
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Vertical/Area Scan (61x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 9.75 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.175 mW/g

Vertical/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.0891 mW/g

Reference Value = 9.75 V/m

Power Drift = -0.03 dB

Maximum value of SAR = 0.18 mW/g

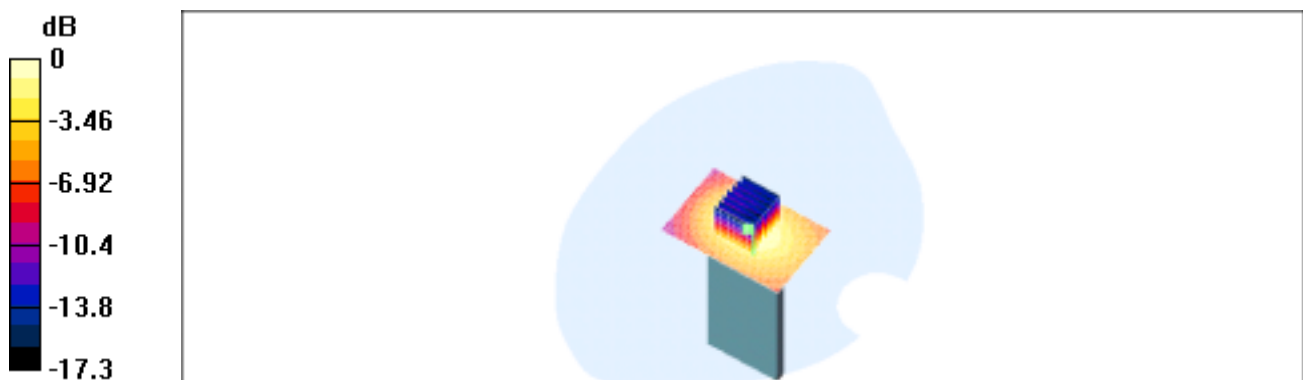

0 dB = 0.18mW/g

End-on position, lowest channel

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.95826$ mho/m, $\epsilon_r = 51.7097$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 3/7/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 1/30/2003
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.2 V/m

Power Drift = 0.3 dB

Maximum value of SAR = 0.338 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.33 mW/g; SAR(10 g) = 0.167 mW/g

Reference Value = 13.2 V/m

Power Drift = 0.3 dB

Maximum value of SAR = 0.34 mW/g

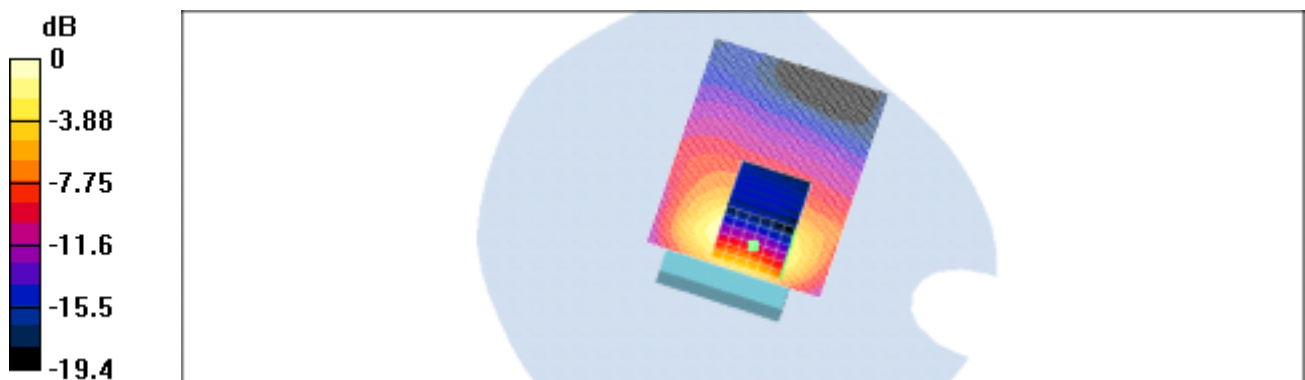

0 dB = 0.34mW/g

End-on position, middle channel

Date/Time: 06/10/03 15:20:55

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.99146$ mho/m, $\epsilon_r = 51.6172$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 3/7/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 1/30/2003
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.8 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.351 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.806 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.172 mW/g

Reference Value = 13.8 V/m

Power Drift = 0.01 dB

Maximum value of SAR = 0.348 mW/g

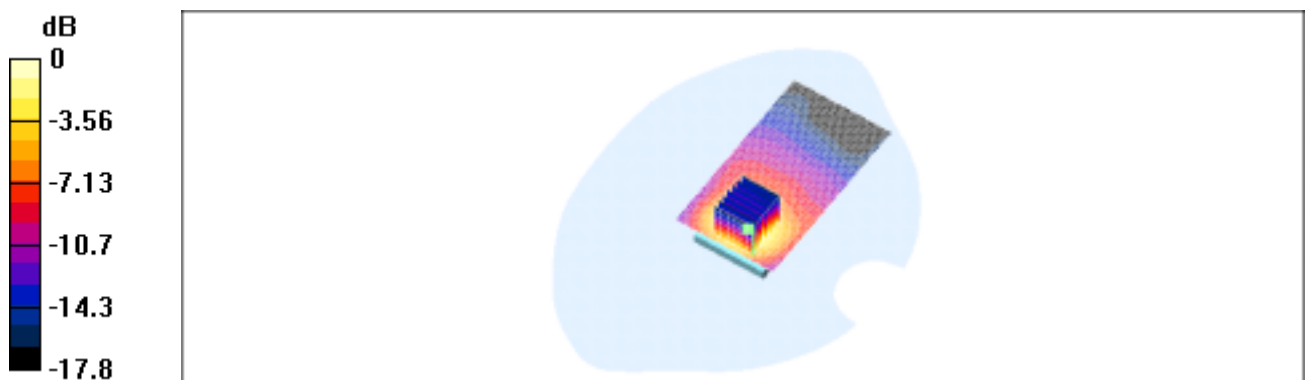

0 dB = 0.348mW/g

End-on position, highest channel

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2.01798$ mho/m, $\epsilon_r = 51.4499$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 3/7/2003
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 1/30/2003
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal/Area Scan (51x91x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 13.7 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.367 mW/g

Horizontal/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 0.847 W/kg

SAR(1 g) = 0.351 mW/g; SAR(10 g) = 0.179 mW/g

Reference Value = 13.7 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 0.357 mW/g

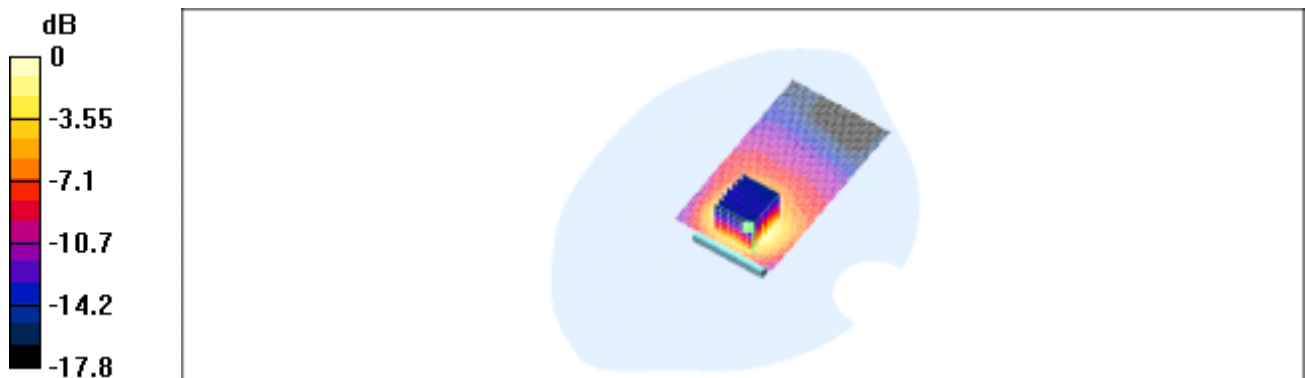

End-on position, lowest channel

at a distance of 0.0 cm from the base of the phantom

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.95826$ mho/m, $\epsilon_r = 51.7097$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal Ch01/Area Scan (51x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 25.9 V/m

Power Drift = -0.009 dB

Maximum value of SAR = 1.31 mW/g

Horizontal Ch01/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 2.86 W/kg

SAR(1 g) = 1.25 mW/g; SAR(10 g) = 0.609 mW/g

Reference Value = 25.9 V/m

Power Drift = -0.009 dB

Maximum value of SAR = 1.28 mW/g

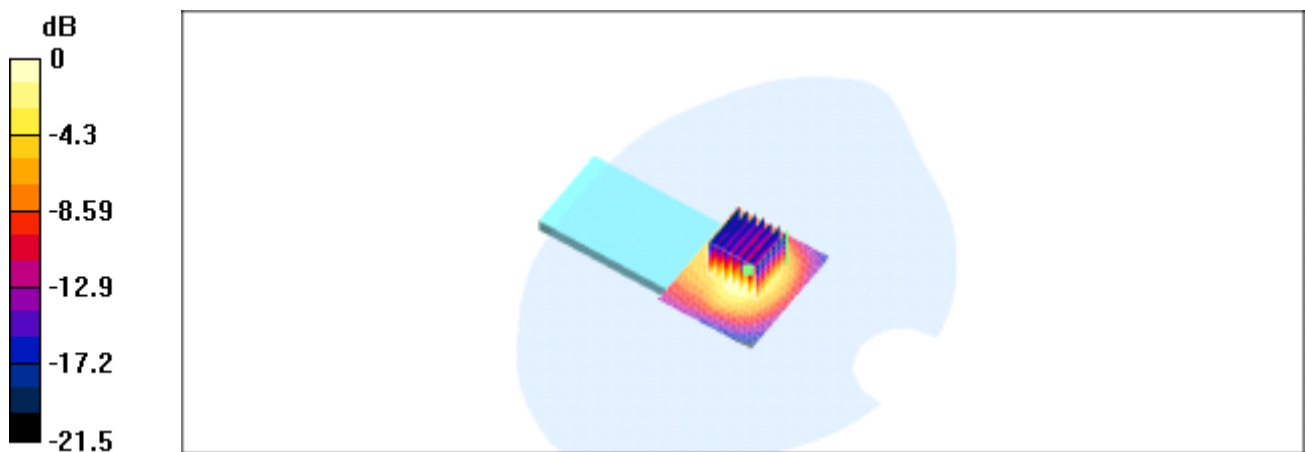

0 dB = 1.28mW/g

End-on position, middle channel

at a distance of 0.0 cm from the base of the phantom

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.99146$ mho/m, $\epsilon_r = 51.6172$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal Ch01/Area Scan (51x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 20.7 V/m

Power Drift = 0.09 dB

Maximum value of SAR = 1.14 mW/g

Horizontal Ch01/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.538 mW/g

Reference Value = 20.7 V/m

Power Drift = 0.09 dB

Maximum value of SAR = 1.11 mW/g

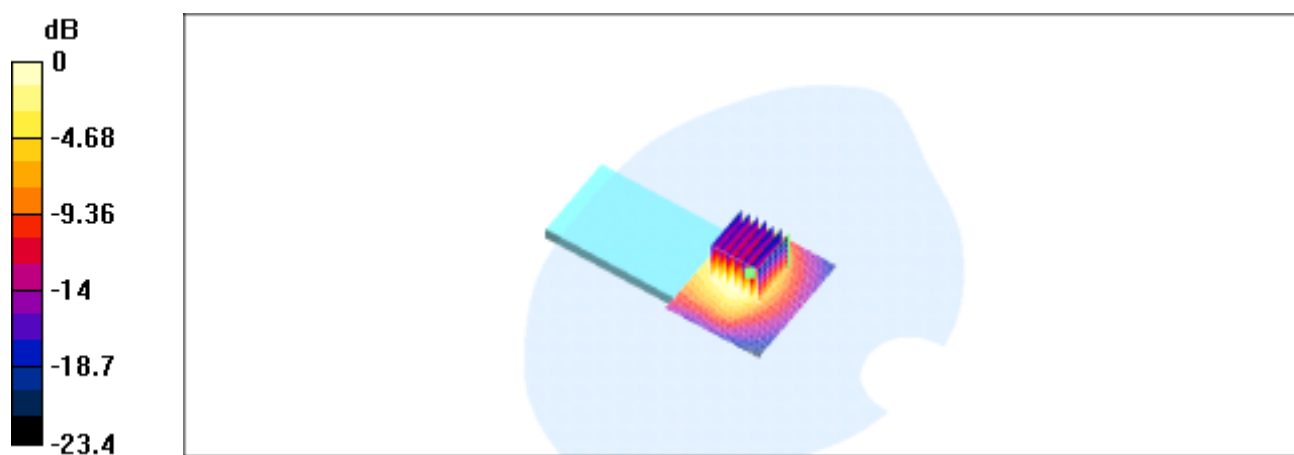

0 dB = 1.11mW/g

End-on position, highest channel

at a distance of 0.0 cm from the base of the phantom

DUT: Z-COM; Type: Wireless Card; Serial: 38552672

Program: Wireless LAN 802.11a/g Adapter

Communication System: Wireless LAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 2.01798$ mho/m, $\epsilon_r = 51.4499$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

Horizontal Ch11/Area Scan (51x41x1): Measurement grid: dx=15mm, dy=15mm

Reference Value = 21.1 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 1.16 mW/g

Horizontal Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 2.53 W/kg

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.559 mW/g

Reference Value = 21.1 V/m

Power Drift = 0.04 dB

Maximum value of SAR = 1.13 mW/g.

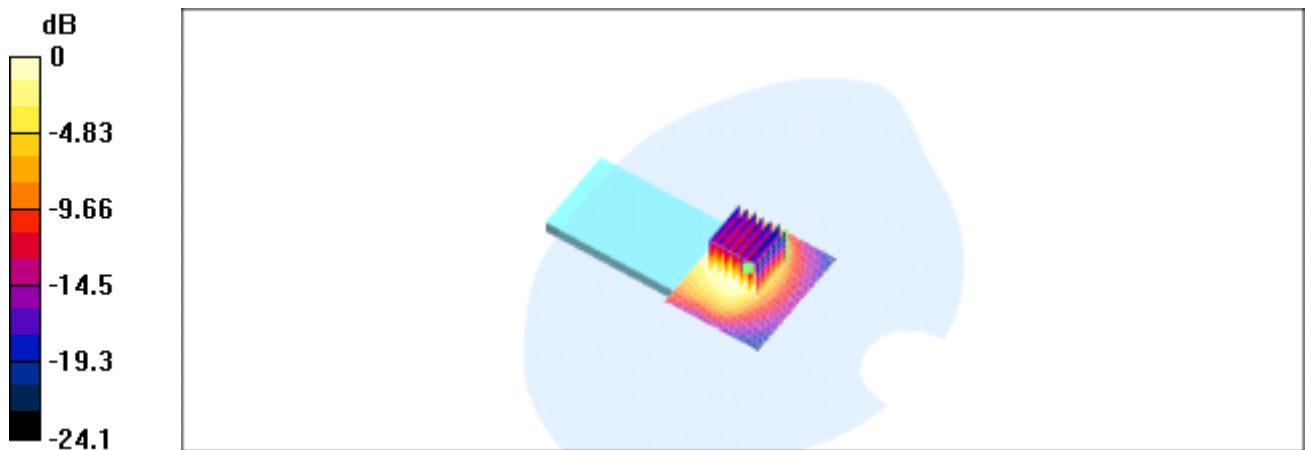

0 dB = 1.13mW/g

SAR System Performance Verification

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:727

Program: 2003-08-13

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: M2450 ($\sigma = 1.93$ mho/m, $\epsilon_r = 51.17$, $\rho = 1000$ kg/m³)

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1759; ConvF(4.5, 4.5, 4.5); Calibrated: 2003/3/7
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn547; Calibrated: 2003/1/30
- Phantom: SAM 12; Type: SAM 4.0; Serial: TP:1150
- Measurement SW: DASY4, V4.1 Build 47; Postprocessing SW: SEMCAD, V1.6 Build 115

System Test/Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 94 V/m

Power Drift = -0.09 dB

Maximum value of SAR = 15.3 mW/g

System Test/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Peak SAR (extrapolated) = 30 W/kg

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.05 mW/g

Reference Value = 94 V/m

Power Drift = -0.09 dB

Maximum value of SAR = 15.1 mW/g

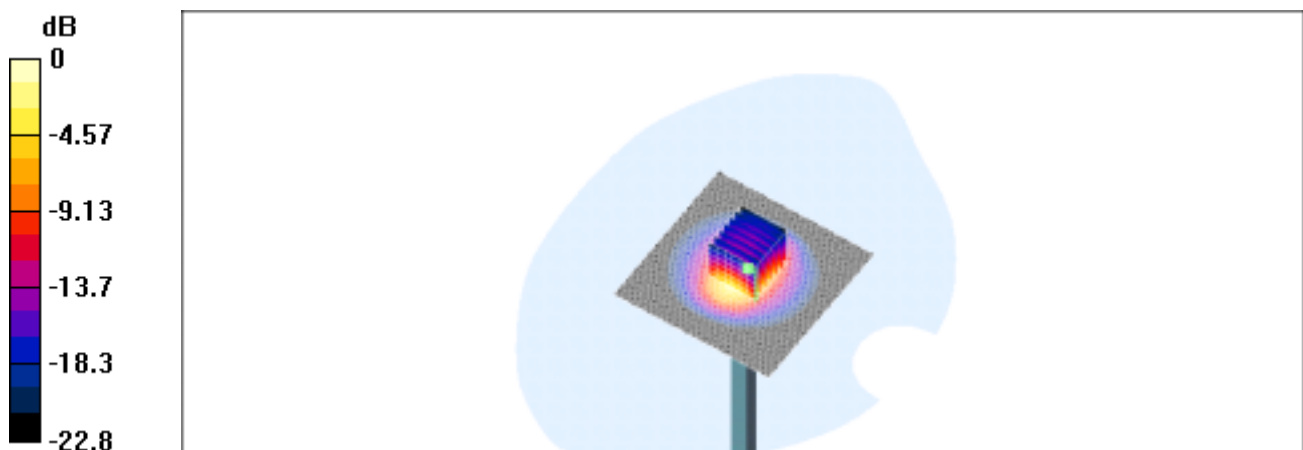

0 dB = 15.1mW/g

Appendix

Photographs of Test Setup



Fig.2 Photograph of the SAR measurement System

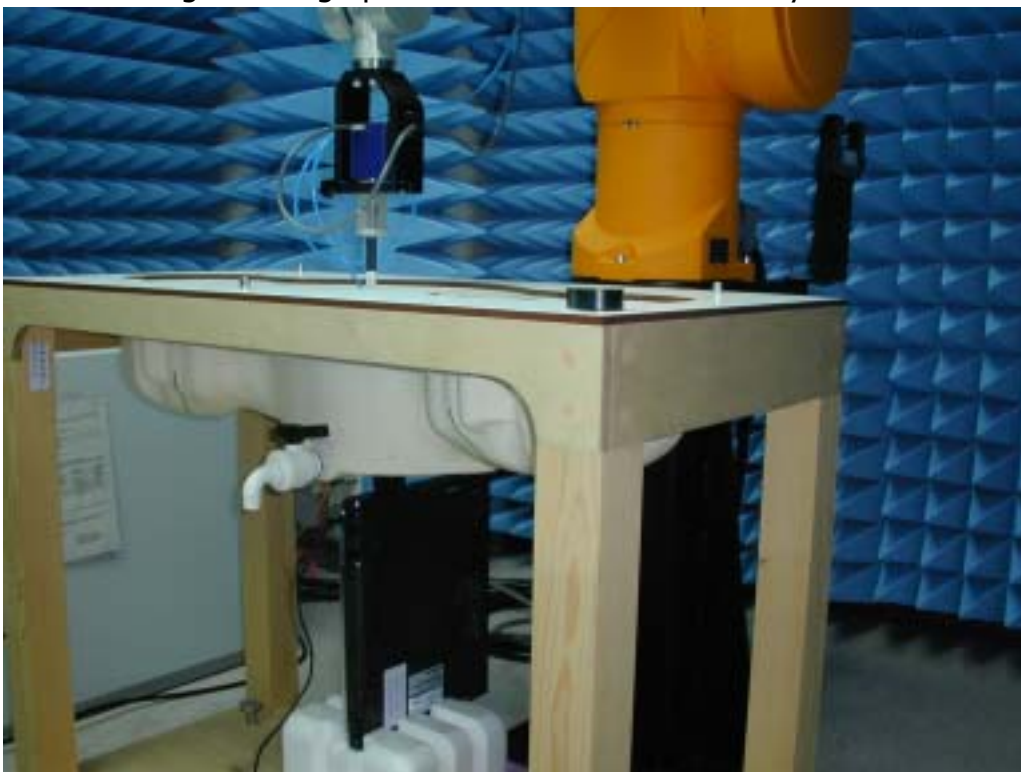


Fig.3 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom



Fig.4 Photograph of the edge of the PC at 90° and at a distance of 1.5 cm from the base of the phantom



Fig.5 Photograph of the top cover parallel and at a distance of 1.5 cm from the base of the phantom



Fig.6 Photograph of the top cover parallel and at a distance of 1.5 cm from the base of the phantom

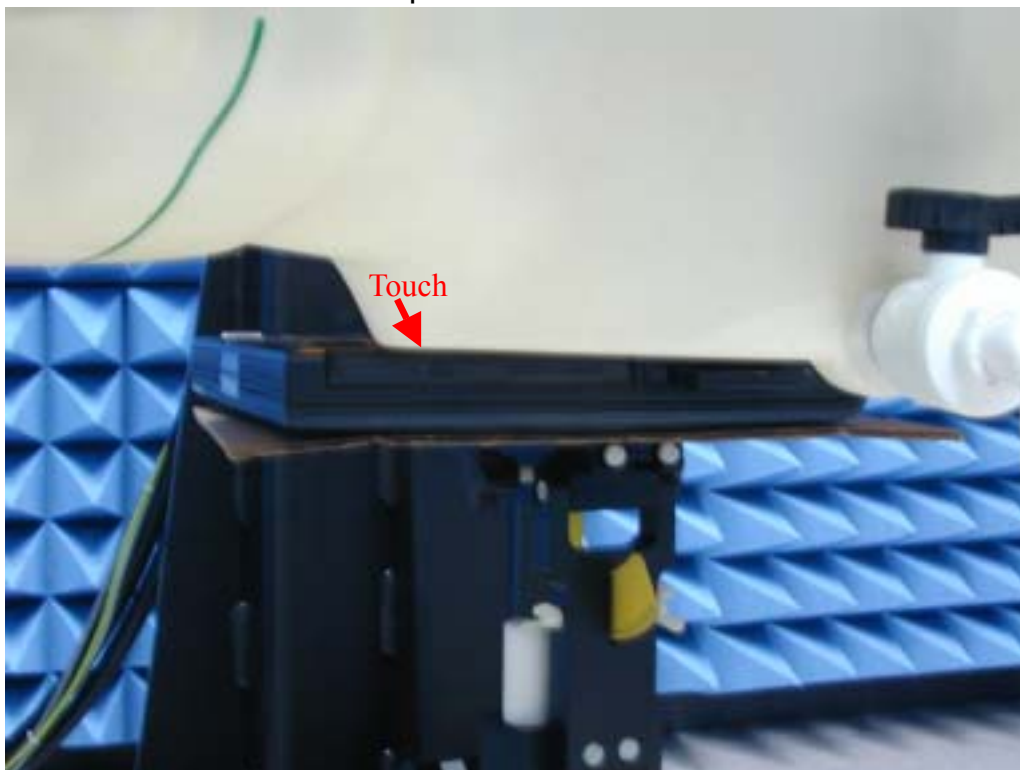


Fig.7 Photograph of the top cover parallel and at a distance of 0.0 cm from the base of the phantom. (0.7 cm Spacing between EUT & Planar Phantom)

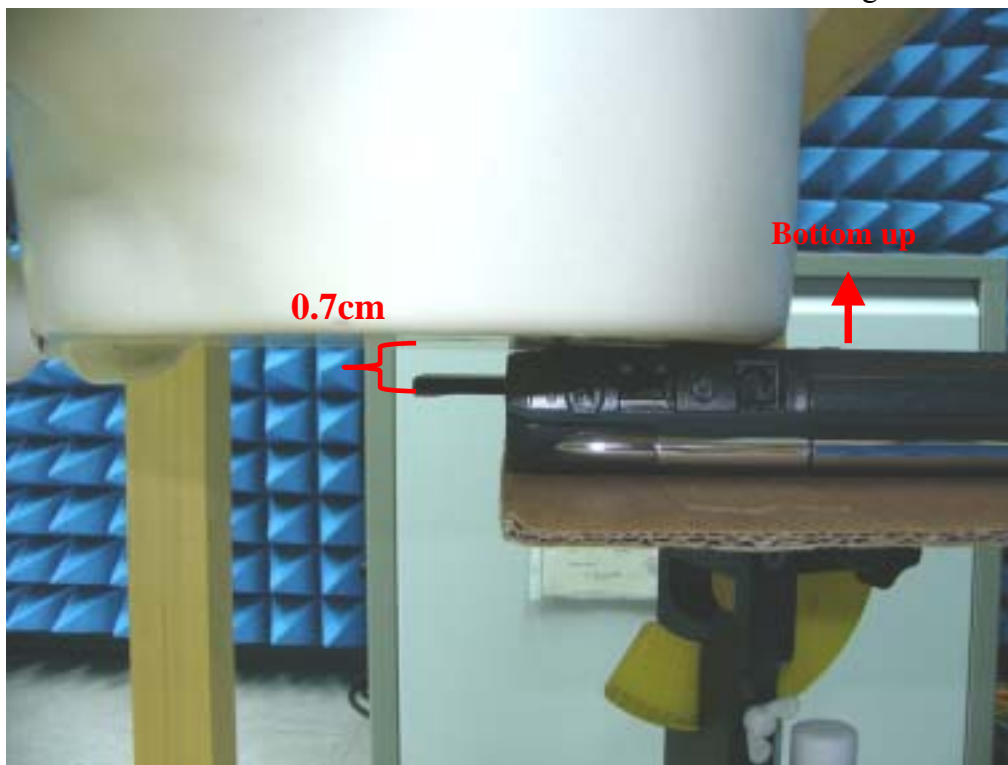


Fig.8 Photograph of the top cover parallel and at a distance of 0.0 cm from the base of the phantom. (0.7 cm Spacing between EUT & Planar Phantom)

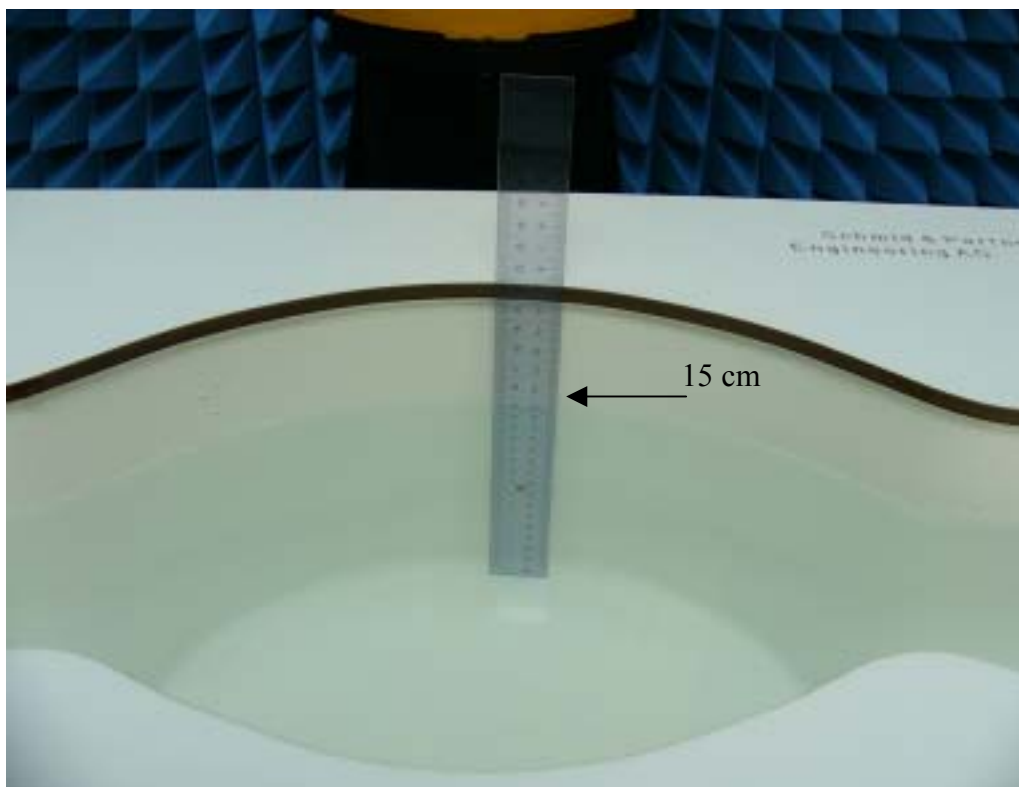


Fig.9 Photograph of the Tissue Simulant Fluid liquid depth 15cm

Photographs of the EUT



Fig.10 Front view of device



Fig.11 Back view of device



Fig.12 with COMPAQ N800 Host Laptop PC PCMCIA slot

Probe Calibration certificate

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Client **SGS (Auden)**

CALIBRATION CERTIFICATE

Object(s) **ET3DV6 - SN:1759**

Calibration procedure(s) **QA CAL-01.v2
Calibration procedure for dosimetric E-field probes**

Calibration date: **March 7, 2003**

Condition of the calibrated item **In Tolerance (according to the specific calibration document)**

This calibration statement documents traceability of M&TE used in the calibration procedures and conformity of the procedures with the ISO/IEC 17025 international standard.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

Model Type	ID #	Cal Date	Scheduled Calibration
RF generator HP 8684C	US3642U01700	4-Aug-99 (in house check Aug-02)	in house check: Aug-05
Power sensor E4412A	MY41495277	8-Mar-02	Mar-03
Power sensor HP 8481A	MY41092160	18-Sep-02	Sep-03
Power meter EPM E4419B	GB41293874	13-Sep-02	Sep-03
Network Analyzer HP 8753E	US36432426	3-May-00	in house check: May 03
Fuke Process Calibrator Type 702	SN: 6295803	3-Sep-01	Sep-03

Calibrated by:	Name Nico Vertert	Function Technician	Signature 
----------------	-----------------------------	-------------------------------	--

Approved by:	Name Katja Pokovic	Function Laboratory Director	Signature 
--------------	------------------------------	--	--

Date issued: March 7, 2003

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

Schmid & Partner Engineering AG

s p e a g

Zeughausstrasse 43, 8004 Zurich, Switzerland
Phone +41 1 245 9700, Fax +41 1 245 9778
info@speag.com, <http://www.speag.com>

Probe ET3DV6

SN:1759


Manufactured:	November 12, 2002
Last calibration:	March 7, 2003

Calibrated for DASY Systems


(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1759

March 7, 2003

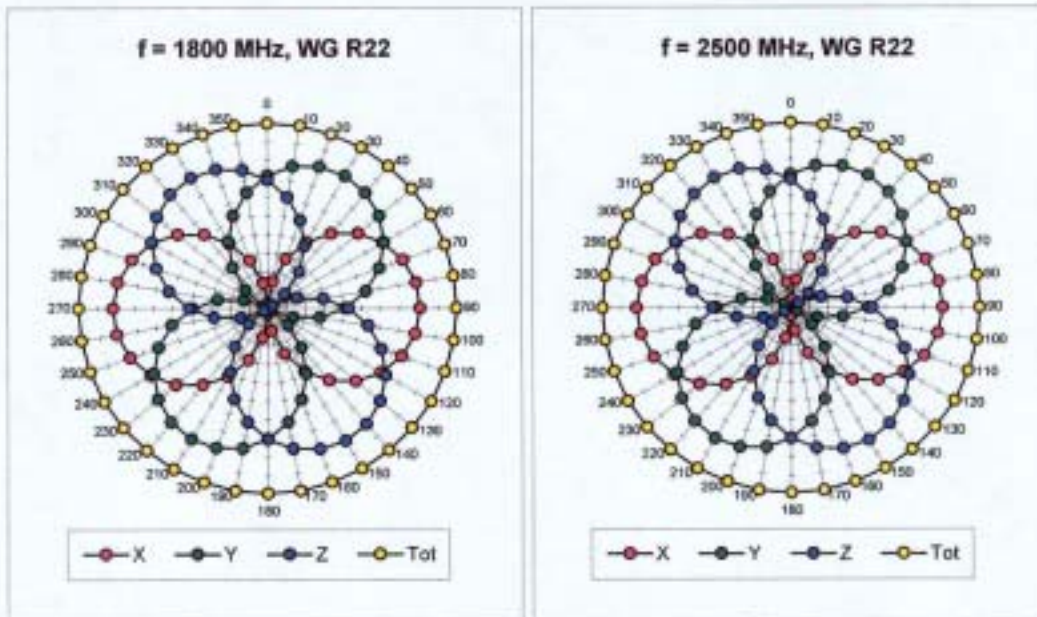


Isotropy Error (ϕ), $\theta = 0^\circ$

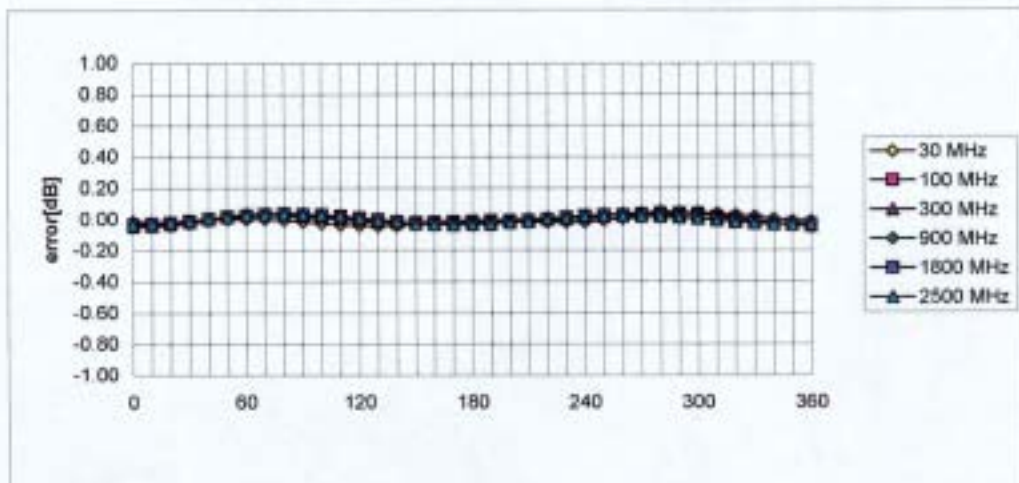

ET3DV6 SN:1759

March 7, 2003

Conversion Factor Assessment

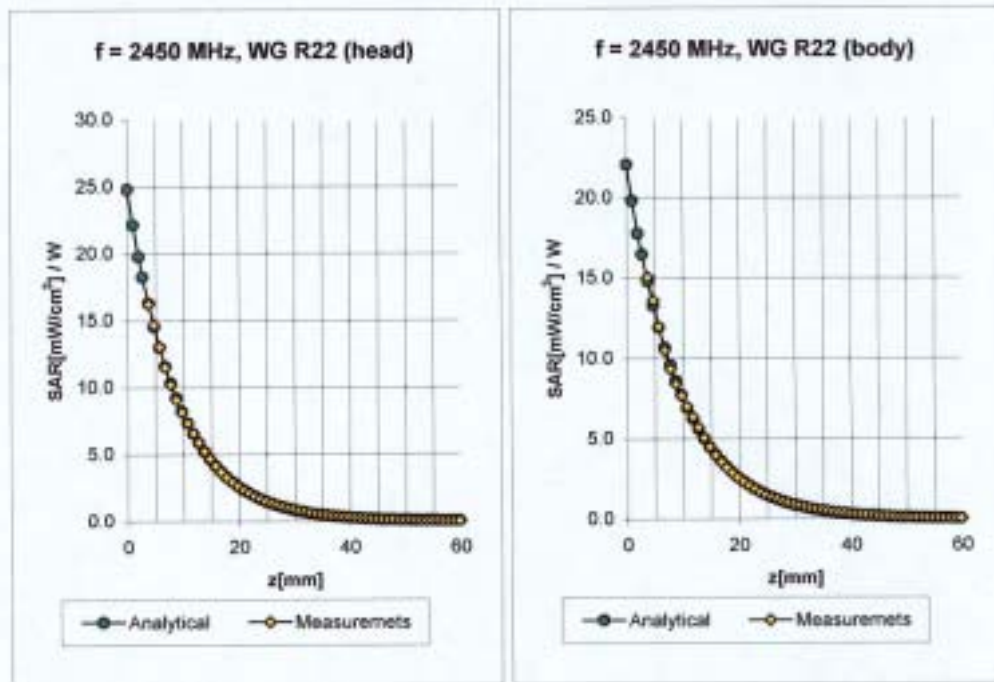

2450	Head	MHz	$\epsilon_r = 39.2 \pm 5\%$	$\sigma = 1.80 \pm 5\% \text{ mho/m}$
	ConvF X	$5.0 \pm 8.9\% (k=2)$	Boundary effect:	
	ConvF Y	$5.0 \pm 8.9\% (k=2)$	Alpha	0.98
	ConvF Z	$5.0 \pm 8.9\% (k=2)$	Depth	1.95
2450	Body	MHz	$\epsilon_r = 52.7 \pm 5\%$	$\sigma = 1.95 \pm 5\% \text{ mho/m}$
	ConvF X	$4.5 \pm 8.9\% (k=2)$	Boundary effect:	
	ConvF Y	$4.5 \pm 8.9\% (k=2)$	Alpha	1.01
	ConvF Z	$4.5 \pm 8.9\% (k=2)$	Depth	1.80

Uncertainty Analysis

DASY4 Uncertainty Budget According to IEEE P1528 [1]								
Error Description	Uncertainty value	Prob. Dist.	Div.	(c_i) 1g	(c_i) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(v_i) v_{eff}
Measurement System								
Probe Calibration	±4.8 %	N	1	1	1	±4.8 %	±4.8 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Readout Electronics	±1.0 %	N	1	1	1	±1.0 %	±1.0 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Conditions	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	875
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	R	√3	0.64	0.43	±1.8 %	±1.2 %	∞
Liquid Conductivity (meas.)	±2.5 %	N	1	0.64	0.43	±1.6 %	±1.1 %	∞
Liquid Permittivity (target)	±5.0 %	R	√3	0.6	0.49	±1.7 %	±1.4 %	∞
Liquid Permittivity (meas.)	±2.5 %	N	1	0.6	0.49	±1.5 %	±1.2 %	∞
Combined Std. Uncertainty						±10.3 %	±10.0 %	331
Expanded STD Uncertainty						±20.6 %	±20.1 %	

Phantom description

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 CA
Series No	TP-1150 and higher
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT1S CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9
- (*) The IT1S CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 28.02.2002

Signature / Stamp

F. Bornhult

Schmid & Partner
Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

Johannes Kappeler

System Validation from Original equipment supplier SPEAG Schmid & Partner

Date/Time: 03/05/03 16:17:40

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: SN727_SN3013_M2450_050303.da4

DUT: Dipole 2450 MHz; Serial: D2450V2 - SN727
Program: Dipole Calibration

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz; ($\sigma = 2.05$ mho/m, $\epsilon_r = 51.05$, $\rho = 1000$ kg/m³)
Phantom section: Flat Section

DASY4 Configuration:

- Probe: ES3DV2 - SN3013; ConvF(4.2, 4.2, 4.2); Calibrated: 1/19/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 - SN411; Calibrated: 1/16/2003
- Phantom: SAM with CRP - TP1006; Type: SAM 4.0; Serial: TP:1006
- Measurement SW: DASY4, V4.1 Build 25; Postprocessing SW: SEMCAD, V1.6 Build 105

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm

Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.7 V/m

Peak SAR = 27.6 W/kg

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.16 mW/g

Power Drift = 0.007 dB

