



A D T

# FCC TEST REPORT (BLUETOOTH/DTS)

**REPORT NO.:** RF140606E01-2

**MODEL NO.:** T77H526

**FCC ID:** MCLT77H526

**RECEIVED:** June 06, 2014

**TESTED:** June 18 to July 02, 2014

**ISSUED:** July 09, 2014

**APPLICANT:** Hon Hai PRECISION IND.CO.,LTD

**ADDRESS:** 5F-1, Hsin-An Road, Hsinchu, Science Industrial Park, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS:** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, Taiwan, R.O.C.

**TEST LOCATION (2):** No.49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

## TABLE OF CONTENTS

|  |    |
|--|----|
| RELEASE CONTROL RECORD .....                                     | 5  |
| 1 CERTIFICATION .....  | 6  |
| 2 SUMMARY OF TEST RESULTS .....                                  | 7  |
| 2.1 MEASUREMENT UNCERTAINTY .....                                | 9  |
| 3 GENERAL INFORMATION .....                                      | 10 |
| 3.1 GENERAL DESCRIPTION OF EUT (BLUETOOTH/DTS).....              | 10 |
| 3.2 DESCRIPTION OF TEST MODES .....                              | 12 |
| 3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL: .....     | 13 |
| 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....               | 17 |
| 3.5 DUTY CYCLE OF TEST SIGNAL .....                              | 18 |
| 3.6 DESCRIPTION OF SUPPORT UNITS .....                           | 19 |
| 3.7 CONFIGURATION OF SYSTEM UNDER TEST .....                     | 20 |
| 4 TEST PROCEDURES AND RESULTS (BLUETOOTH) .....                  | 21 |
| 4.1 CONDUCTED EMISSION MEASUREMENT .....                         | 21 |
| 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....             | 21 |
| 4.1.2 TEST INSTRUMENTS .....                                     | 21 |
| 4.1.3 TEST PROCEDURES.....                                       | 22 |
| 4.1.4 DEVIATION FROM TEST STANDARD .....                         | 22 |
| 4.1.5 TEST SETUP .....   | 22 |
| 4.1.6 EUT OPERATING CONDITIONS.....                              | 23 |
| 4.1.7 TEST RESULTS .....   | 24 |
| 4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....             | 26 |
| 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... | 26 |
| 4.2.2 TEST INSTRUMENTS .....                                     | 27 |
| 4.2.3 TEST PROCEDURES.....                                       | 29 |
| 4.2.4 DEVIATION FROM TEST STANDARD .....                         | 29 |
| 4.2.5 TEST SETUP .....   | 30 |
| 4.2.6 EUT OPERATING CONDITIONS.....                              | 30 |
| 4.2.7 TEST RESULTS .....   | 31 |
| 4.3 NUMBER OF HOPPING FREQUENCY USED .....                       | 38 |
| 4.3.1 LIMIT OF HOPPING FREQUENCY USED .....                      | 38 |
| 4.3.2 TEST INSTRUMENTS .....                                     | 38 |
| 4.3.3 TEST PROCEDURES.....                                       | 38 |
| 4.3.4 DEVIATION FROM TEST STANDARD .....                         | 38 |
| 4.3.5 TEST SETUP .....   | 39 |
| 4.3.6 TEST RESULTS .....   | 39 |
| 4.4 DWELL TIME ON EACH CHANNEL .....                             | 40 |
| 4.4.1 LIMIT OF DWELL TIME USED .....                             | 40 |
| 4.4.2 TEST INSTRUMENTS .....                                     | 40 |
| 4.4.3 TEST PROCEDURES.....                                       | 40 |
| 4.4.4 DEVIATION FROM TEST STANDARD .....                         | 41 |
| 4.4.5 TEST SETUP .....   | 41 |
| 4.4.6 TEST RESULTS .....   | 42 |



|       |  |    |
|-------|--|----|
| 4.5   | CHANNEL BANDWIDTH .....                                    | 46 |
| 4.5.1 | LIMITS OF CHANNEL BANDWIDTH.....                           | 46 |
| 4.5.2 | TEST INSTRUMENTS .....                                     | 46 |
| 4.5.3 | TEST PROCEDURE .....                                       | 46 |
| 4.5.4 | DEVIATION FROM TEST STANDARD.....                          | 46 |
| 4.5.5 | TEST SETUP .....   | 47 |
| 4.5.6 | EUT OPERATING CONDITION .....                              | 47 |
| 4.5.7 | TEST RESULTS .....   | 48 |
| 4.6   | HOPPING CHANNEL SEPARATION.....                            | 49 |
| 4.6.1 | LIMIT OF HOPPING CHANNEL SEPARATION.....                   | 49 |
| 4.6.2 | TEST INSTRUMENTS .....                                     | 49 |
| 4.6.3 | TEST PROCEDURES.....                                       | 49 |
| 4.6.4 | DEVIATION FROM TEST STANDARD.....                          | 49 |
| 4.6.5 | TEST SETUP .....   | 49 |
| 4.6.6 | TEST RESULTS .....   | 50 |
| 4.7   | MAXIMUM PEAK OUTPUT POWER.....                             | 51 |
| 4.7.1 | LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT .....      | 51 |
| 4.7.2 | INSTRUMENTS .....  | 51 |
| 4.7.3 | TEST PROCEDURES.....                                       | 51 |
| 4.7.4 | DEVIATION FROM TEST STANDARD.....                          | 51 |
| 4.7.5 | TEST SETUP .....   | 52 |
| 4.7.6 | EUT OPERATING CONDITION .....                              | 52 |
| 4.7.7 | TEST RESULTS .....   | 53 |
| 4.8   | CONDUCTED OUT-BAND EMISSION MEASUREMENT.....               | 54 |
| 4.8.1 | LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT .....    | 54 |
| 4.8.2 | TEST INSTRUMENTS .....                                     | 54 |
| 4.8.3 | TEST PROCEDURE .....                                       | 54 |
| 4.8.4 | DEVIATION FROM TEST STANDARD.....                          | 54 |
| 4.8.5 | TEST SETUP .....   | 54 |
| 4.8.6 | EUT OPERATING CONDITION .....                              | 54 |
| 4.8.7 | TEST RESULTS .....   | 55 |
| 5     | TEST TYPES AND RESULTS (DTS).....                          | 58 |
| 5.1   | CONDUCTED EMISSION MEASUREMENT .....                       | 58 |
| 5.1.1 | LIMITS OF CONDUCTED EMISSION MEASUREMENT .....             | 58 |
| 5.1.2 | TEST INSTRUMENTS .....                                     | 58 |
| 5.1.3 | TEST PROCEDURES.....                                       | 59 |
| 5.1.4 | DEVIATION FROM TEST STANDARD.....                          | 59 |
| 5.1.5 | TEST SETUP .....   | 59 |
| 5.1.6 | EUT OPERATING CONDITIONS.....                              | 60 |
| 5.1.7 | TEST RESULTS .....   | 61 |
| 5.2   | RADIATED EMISSION AND BANDEDGE MEASUREMENT.....            | 63 |
| 5.2.1 | LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT ..... | 63 |
| 5.2.2 | TEST INSTRUMENTS .....                                     | 64 |
| 5.2.3 | TEST PROCEDURES.....                                       | 66 |
| 5.2.4 | DEVIATION FROM TEST STANDARD.....                          | 67 |
| 5.2.5 | TEST SETUP .....   | 67 |
| 5.2.6 | EUT OPERATING CONDITIONS.....                              | 67 |
| 5.2.7 | TEST RESULTS .....   | 68 |

**A D T**

|       |  |    |
|-------|--|----|
| 5.3   | 6DB BANDWIDTH MEASUREMENT .....  | 72 |
| 5.3.1 | LIMITS OF 6DB BANDWIDTH MEASUREMENT .....  | 72 |
| 5.3.2 | TEST INSTRUMENTS .....   | 72 |
| 5.3.3 | TEST PROCEDURE .....   | 72 |
| 5.3.4 | DEVIATION FROM TEST STANDARD .....   | 72 |
| 5.3.5 | TEST SETUP .....   | 72 |
| 5.3.6 | EUT OPERATING CONDITIONS .....   | 72 |
| 5.3.7 | TEST RESULTS .....   | 73 |
| 5.4   | CONDUCTED OUTPUT POWER MEASUREMENT .....   | 74 |
| 5.4.1 | LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....                                       | 74 |
| 5.4.2 | TEST INSTRUMENTS .....   | 74 |
| 5.4.3 | TEST PROCEDURES .....  | 74 |
| 5.4.4 | DEVIATION FROM TEST STANDARD .....   | 75 |
| 5.4.5 | TEST SETUP .....   | 75 |
| 5.4.6 | EUT OPERATING CONDITIONS .....   | 75 |
| 5.4.7 | TEST RESULTS .....   | 76 |
| 5.5   | POWER SPECTRAL DENSITY MEASUREMENT .....   | 77 |
| 5.5.1 | LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....                                       | 77 |
| 5.5.2 | TEST INSTRUMENTS .....   | 77 |
| 5.5.3 | TEST PROCEDURE .....   | 77 |
| 5.5.4 | DEVIATION FROM TEST STANDARD .....   | 77 |
| 5.5.5 | TEST SETUP .....   | 77 |
| 5.5.6 | EUT OPERATING CONDITION .....  | 77 |
| 5.5.7 | TEST RESULTS .....   | 78 |
| 5.6   | CONDUCTED OUT-BAND EMISSION MEASUREMENT .....  | 79 |
| 5.6.1 | LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT .....                                  | 79 |
| 5.6.2 | TEST INSTRUMENTS .....   | 79 |
| 5.6.3 | TEST PROCEDURE .....   | 79 |
| 5.6.4 | DEVIATION FROM TEST STANDARD .....   | 80 |
| 5.6.5 | TEST SETUP .....   | 80 |
| 5.6.6 | EUT OPERATING CONDITION .....  | 80 |
| 5.6.7 | TEST RESULTS .....   | 80 |
| 6     | PHOTOGRAPHS OF THE TEST CONFIGURATION .....  | 82 |
| 7     | INFORMATION ON THE TESTING LABORATORIES .....  | 83 |
| 8     | APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB ..... | 84 |



A D T

## RELEASE CONTROL RECORD

| ISSUE NO.     | REASON FOR CHANGE | DATE ISSUED   |
|---------------|-------------------|---------------|
| RF140606E01-2 | Original release  | July 09, 2014 |



A D T

## 1 CERTIFICATION

**PRODUCT :** 802.11ac+802.11abgn + BT4.0+BT3.0+BT2.1/EDR  
Module

**BRAND NAME :** FOXCONN

**MODEL NO. :** T77H526


**TEST SAMPLE :** ENGINEERING SAMPLE

**APPLICANT :** Hon Hai PRECISION IND.CO.,LTD

**TESTED DATE :** June 18 to July 02, 2014

**STANDARDS :** **FCC Part 15, Subpart C (Section 15.247)**  
ANSI C63.10-2009

The above equipment (Model: T77H526) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** , **DATE:** July 09, 2014  
(Lori Chung, Specialist)

**APPROVED BY :** , **DATE:** July 09, 2014  
(May Chen, Manager)



## 2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

**For BT-EDR mode:**

| APPLIED STANDARD: FCC Part 15, Subpart C |   |        |   |
|--|---|--------|---|
| STANDARD SECTION                         | TEST TYPE AND LIMIT   | RESULT | REMARK  |
| 15.207                                   | AC Power Conducted Emission   | PASS   | Meet the requirement of limit. Minimum passing margin is -22.68dB at 0.36875MHz.                        |
| 15.247(a)(1) (iii)                       | Number of Hopping Frequency Used  | PASS   | Meet the requirement of limit.  |
| 15.247(a)(1) (iii)                       | Dwell Time on Each Channel  | PASS   | Meet the requirement of limit.  |
| 15.247(a)(1)                             | 1. Hopping Channel Separation<br>2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | PASS   | Meet the requirement of limit.  |
| 15.247(b)                                | Maximum Peak Output Power   | PASS   | Meet the requirement of limit.  |
| 15.247(d)                                | Transmitter Radiated Emissions  | PASS   | Meet the requirement of limit. Minimum passing margin is -3.0dB at 132.678MHz & 166.522MHz & 266.49MHz. |
| 15.247(d)                                | Band Edge Measurement   | PASS   | Meet the requirement of limit.  |
| 15.203                                   | Antenna Requirement   | PASS   | Antenna connector is I-PEX not a standard connector.  |



A D T

**For BT-LE mode:**

| APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) |  |        |   |
|---|--|--------|---|
| STANDARD SECTION  | TEST TYPE AND LIMIT                        | RESULT | REMARK  |
| 15.207  | AC Power Conducted Emission                | PASS   | Meet the requirement of limit. Minimum passing margin is -20.60dB at 0.36484MHz |
| 15.247(d)<br>15.209                                       | Radiated Emissions & Band Edge Measurement | PASS   | Meet the requirement of limit. Minimum passing margin is -3.0dB at 166.55MHz    |
| 15.247(a)(2)  | 6dB bandwidth                              | PASS   | Meet the requirement of limit.  |
| 15.247(b)   | Conducted Output power                     | PASS   | Meet the requirement of limit.  |
| 15.247(e)   | Power Spectral Density                     | PASS   | Meet the requirement of limit.  |
| 15.203  | Antenna Requirement                        | PASS   | Antenna connector is I-PEX not a standard connector.                            |

NOTE: Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.



## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| Measurement                       | Value   |
|-----------------------------------|---------|
| Conducted emissions               | 2.86 dB |
| Radiated emissions (30MHz-1GHz)   | 5.43 dB |
| Radiated emissions (1GHz -6GHz)   | 3.65 dB |
| Radiated emissions (6GHz -18GHz)  | 3.88 dB |
| Radiated emissions (18GHz -40GHz) | 4.11 dB |

### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT (BLUETOOTH/DTS)

|                              |   |
|------------------------------|---|
| <b>PRODUCT</b>               | 802.11ac+802.11abgn + BT4.0+BT3.0+BT2.1/EDR Module        |
| <b>MODEL NO.</b>             | T77H526   |
| <b>POWER SUPPLY</b>          | 5Vdc (from host equipment)                                |
| <b>MODULATION TYPE</b>       | GFSK, $\pi/4$ -DQPSK, 8DPSK for FHSS<br>GFSK for DTS      |
| <b>MODULATION TECHNOLOGY</b> | FHSS, DTS   |
| <b>DATE RATE</b>             | Up to 3Mbps for BT-EDR mode<br>Up to 1Mbps for BT-LE mode |
| <b>FREQUENCY RANGE</b>       | BT-EDR, BT-LE mode: 2402MHz ~ 2480MHz                     |
| <b>NUMBER OF CHANNEL</b>     | BT-EDR mode: 79BT-LE mode: 40                             |
| <b>MAX. OUTPUT POWER</b>     | BT-EDR mode: 5.000 mW<br>BT-LE mode: 5.236 mW             |
| <b>ANTENNA TYPE</b>          | Please see NOTE   |
| <b>DATA CABLE</b>            | NA  |
| <b>I/O PORTS</b>             | Refer to user's manual                                    |
| <b>ASSOCIATED DEVICES</b>    | NA  |

# NOTE:

1. There are Bluetooth 4.0 and WLAN technology used for the EUT.
2. WLAN and Bluetooth technology can transmit at same time.
3. Radiated emissions of the simultaneous operation (WLAN & Bluetooth) has been evaluated and no non-compliance was found.
4. The antennas provided to the EUT, please refer to the following table:

| Antenna No. | Transmitter Circuit | Brand                     | Model                   | Antenna Gain(dBi)<br><include cable loss> | Cable Loss (dB) | Frequency range (MHz to MHz) | Antenna Type | Connector Type | Cable Length (mm) |
|-------------|---------------------|---------------------------|-------------------------|---|-----------------|------------------------------|--------------|----------------|-------------------|
| 1           | Chain (0)           | Wistron Neweb Corporation | DC33001KT00 (Main port) | 1.54                                      | 1.38            | 2400~2500                    | PIFA         | I-PEX          | 363               |
|             |                     |                           |                         | 1.26                                      | 1.98            | 5150~5350                    |              |                |                   |
|             |                     |                           |                         | 0.57                                      | 2.04            | 5470~5725                    |              |                |                   |
|             |                     |                           |                         | 1.23                                      | 2.08            | 5725~5850                    |              |                |                   |
| 2           | Chain (1)           | Wistron Neweb Corporation | DC33001KT10 (Aux port)  | 0.63                                      | 2.13            | 2400~2500                    | PIFA         | I-PEX          | 593               |
|             |                     |                           |                         | 0.16                                      | 3.11            | 5150~5350                    |              |                |                   |
|             |                     |                           |                         | 0.35                                      | 3.21            | 5470~5725                    |              |                |                   |
|             |                     |                           |                         | 1.84                                      | 3.27            | 5725~5850                    |              |                |                   |

From the above antennas, Chain (0) Ant. 1 was selected as representative antenna and its data was recorded in this report.

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

79 channels are provided for BT-EDR mode

| Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) | Channel | Freq. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0       | 2402        | 20      | 2422        | 40      | 2442        | 60      | 2462        |
| 1       | 2403        | 21      | 2423        | 41      | 2443        | 61      | 2463        |
| 2       | 2404        | 22      | 2424        | 42      | 2444        | 62      | 2464        |
| 3       | 2405        | 23      | 2425        | 43      | 2445        | 63      | 2465        |
| 4       | 2406        | 24      | 2426        | 44      | 2446        | 64      | 2466        |
| 5       | 2407        | 25      | 2427        | 45      | 2447        | 65      | 2467        |
| 6       | 2408        | 26      | 2428        | 46      | 2448        | 66      | 2468        |
| 7       | 2409        | 27      | 2429        | 47      | 2449        | 67      | 2469        |
| 8       | 2410        | 28      | 2430        | 48      | 2450        | 68      | 2470        |
| 9       | 2411        | 29      | 2431        | 49      | 2451        | 69      | 2471        |
| 10      | 2412        | 30      | 2432        | 50      | 2452        | 70      | 2472        |
| 11      | 2413        | 31      | 2433        | 51      | 2453        | 71      | 2473        |
| 12      | 2414        | 32      | 2434        | 52      | 2454        | 72      | 2474        |
| 13      | 2415        | 33      | 2435        | 53      | 2455        | 73      | 2475        |
| 14      | 2416        | 34      | 2436        | 54      | 2456        | 74      | 2476        |
| 15      | 2417        | 35      | 2437        | 55      | 2457        | 75      | 2477        |
| 16      | 2418        | 36      | 2438        | 56      | 2458        | 76      | 2478        |
| 17      | 2419        | 37      | 2439        | 57      | 2459        | 77      | 2479        |
| 18      | 2420        | 38      | 2440        | 58      | 2460        | 78      | 2480        |
| 19      | 2421        | 39      | 2441        | 59      | 2461        |         |             |

40 channels are provided for BT-LE mode:

| CHANNEL | FREQ. (MHZ) | CHANNEL | FREQ. (MHZ) | CHANNEL | FREQ. (MHZ) | CHANNEL | FREQ. (MHZ) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0       | 2402        | 10      | 2422        | 20      | 2442        | 30      | 2462        |
| 1       | 2404        | 11      | 2424        | 21      | 2444        | 31      | 2464        |
| 2       | 2406        | 12      | 2426        | 22      | 2446        | 32      | 2466        |
| 3       | 2408        | 13      | 2428        | 23      | 2448        | 33      | 2468        |
| 4       | 2410        | 14      | 2430        | 24      | 2450        | 34      | 2470        |
| 5       | 2412        | 15      | 2432        | 25      | 2452        | 35      | 2472        |
| 6       | 2414        | 16      | 2434        | 26      | 2454        | 36      | 2474        |
| 7       | 2416        | 17      | 2436        | 27      | 2456        | 37      | 2476        |
| 8       | 2418        | 18      | 2438        | 28      | 2458        | 38      | 2478        |
| 9       | 2420        | 19      | 2440        | 29      | 2460        | 39      | 2480        |

### 3.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

#### For BT-EDR mode:

| EUT CONFIGURE MODE | APPLICABLE TO |         |         |      |    | DESCRIPTION |
|--------------------|---------------|---------|---------|------|----|-------------|
|                    | PLC           | RE < 1G | RE ≥ 1G | APCM | OB |             |
| -                  | √             | √       | √       | √    | √  | -           |

Where **PLC**: Power Line Conducted Emission

**RE < 1G**: Radiated Emission below 1GHz

**RE ≥ 1G**: Radiated Emission above 1GHz

**APCM**: Antenna Port Conducted Measurement

**OB**: Conducted Out-Band Emission Measurement

#### NOTE:

- The EUT's antenna (PIFA) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

#### POWER LINE CONDUCTED EMISSION:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Technology | Modulation Type | Packet Type |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78           | 0              | FHSS                  | GFSK            | DH5         |

#### RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Technology | Modulation Type | Packet Type |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78           | 0              | FHSS                  | GFSK            | DH5         |

#### RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Technology | Modulation Type | Packet Type |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78           | 0, 39, 78      | FHSS                  | GFSK            | DH5         |
| 0 to 78           | 0, 39, 78      | FHSS                  | 8DPSK           | 3DH5        |

# **ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Technology | Modulation Type | Packet Type |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78           | 0, 39, 78      | FHSS                  | GFSK            | DH5         |
| 0 to 78           | 0, 39, 78      | FHSS                  | 8DPSK           | 3DH5        |

# **CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| Available Channel | Tested Channel | Modulation Technology | Modulation Type | Packet Type |
|-------------------|----------------|-----------------------|-----------------|-------------|
| 0 to 78           | 0, 78          | FHSS                  | GFSK            | DH5         |
| 0 to 78           | 0, 78          | FHSS                  | 8DPSK           | 3DH5        |

# **TEST CONDITION:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY   |
|---------------|--------------------------|----------------------|-------------|
| PLC           | 25deg. C, 70%RH          | 120Vac, 60Hz         | Mike Hsieh  |
| RE<1G         | 25deg. C, 65%RH          | 120Vac, 60Hz         | Nelson Teng |
| RE≥1G         | 26deg. C, 75%RH          | 120Vac, 60Hz         | Chilin Lee  |
| APCM          | 25deg. C, 60%RH          | 120Vac, 60Hz         | Nelson Teng |
| OB            | 25deg. C, 60%RH          | 120Vac, 60Hz         | Nelson Teng |

# For BT-LE mode:

| EUT<br>CONFIGURE<br>MODE | APPLICABLE TO |         |         |      |    | DESCRIPTION |
|--------------------------|---------------|---------|---------|------|----|-------------|
|                          | PLC           | RE < 1G | RE ≥ 1G | APCM | OB |             |
| -                        | √             | √       | √       | √    | √  | -           |

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz  
**RE ≥ 1G**: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement  
**OB**: Conducted Out-Band Emission Measurement

## NOTE:

- The EUT's antenna (PIFA) had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane**.

## POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE  | AVAILABLE<br>CHANNEL | TESTED<br>CHANNEL | MODULATION<br>TECHNOLOGY | MODULATION<br>TYPE | DATA RATE<br>(Mbps) |
|-------|----------------------|-------------------|--------------------------|--------------------|---------------------|
| BT-LE | 0 to 39              | 0                 | DTS                      | GFSK               | 1                   |

## RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE  | AVAILABLE<br>CHANNEL | TESTED<br>CHANNEL | MODULATION<br>TECHNOLOGY | MODULATION<br>TYPE | DATA RATE<br>(Mbps) |
|-------|----------------------|-------------------|--------------------------|--------------------|---------------------|
| BT-LE | 0 to 39              | 0                 | DTS                      | GFSK               | 1                   |

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE  | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-------|-------------------|----------------|-----------------------|-----------------|------------------|
| BT-LE | 0 to 39           | 0, 19, 39      | DTS                   | GFSK            | 1                |

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE  | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-------|-------------------|----------------|-----------------------|-----------------|------------------|
| BT-LE | 0 to 39           | 0, 19, 39      | DTS                   | GFSK            | 1                |

**CONDUCTED OUT-BAND EMISSION MEASUREMENT:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

| MODE  | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
|-------|-------------------|----------------|-----------------------|-----------------|------------------|
| BT-LE | 0 to 39           | 0, 19, 39      | DTS                   | GFSK            | 1                |

**TEST CONDITION:**

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER (SYSTEM) | TESTED BY   |
|---------------|--------------------------|----------------------|-------------|
| PLC           | 25deg. C, 70%RH          | 120Vac, 60Hz         | Mike Hsieh  |
| RE<1G         | 25deg. C, 65%RH          | 120Vac, 60Hz         | Nelson Teng |
| RE≥1G         | 26deg. C, 75%RH          | 120Vac, 60Hz         | Nelson Teng |
| APCM          | 25deg. C, 60%RH          | 120Vac, 60Hz         | Nelson Teng |
| OB            | 25deg. C, 60%RH          | 120Vac, 60Hz         | Nelson Teng |



### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C (15.247)**

**558074 D01 DTS Meas Guidance v03r01**

ANSI C63.10-2009


All test items have been performed and recorded as per the above standards.

### 3.5 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is < 98 %, duty factor shall be considered.

For BT\_LE-GFSK:

Duty cycle = 0.081 ms/0.623 ms = 0.13

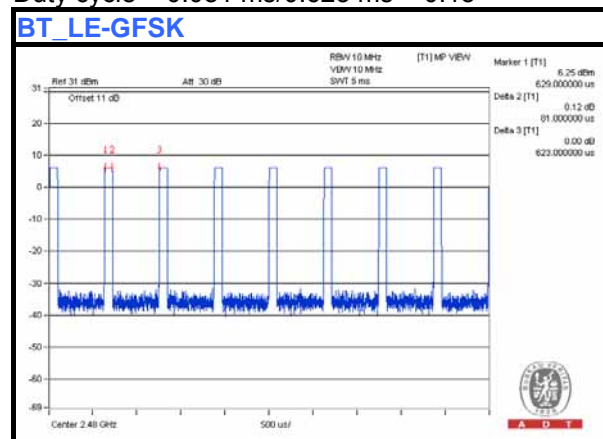



### 3.6 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| No. | Product               | Brand   | Model No. | Serial No. | FCC ID  | Remark             |
|-----|-----------------------|---------|-----------|------------|---------|--------------------|
| A   | PC                    | DELL    | DCNE      | HRJB32S    | FCC DoC | Provided by Lab    |
| B   | PCI to SDIO TEST TOOL | Foxconn | NA        | NA         | NA      | Supplied by client |
| C   | NB                    | DELL    | PP32LA    | DSL32S     | FCC DoC | Provided by Lab    |

**NOTE:**

1. All power cords of the above support units are non-shielded (1.8 m).

| No. | Cable           | Qty. | Length (m) | Shielded (Yes/ No) | Cores (Number) | Remark          |
|-----|-----------------|------|------------|--------------------|----------------|-----------------|
| 1.  | mini USB to USB | 1    | 1          | No                 | 0              | Provided by Lab |
| 2.  | UTP RJ-45       | 1    | 10         | No                 | 0              | Provided by Lab |

### 3.7 CONFIGURATION OF SYSTEM UNDER TEST

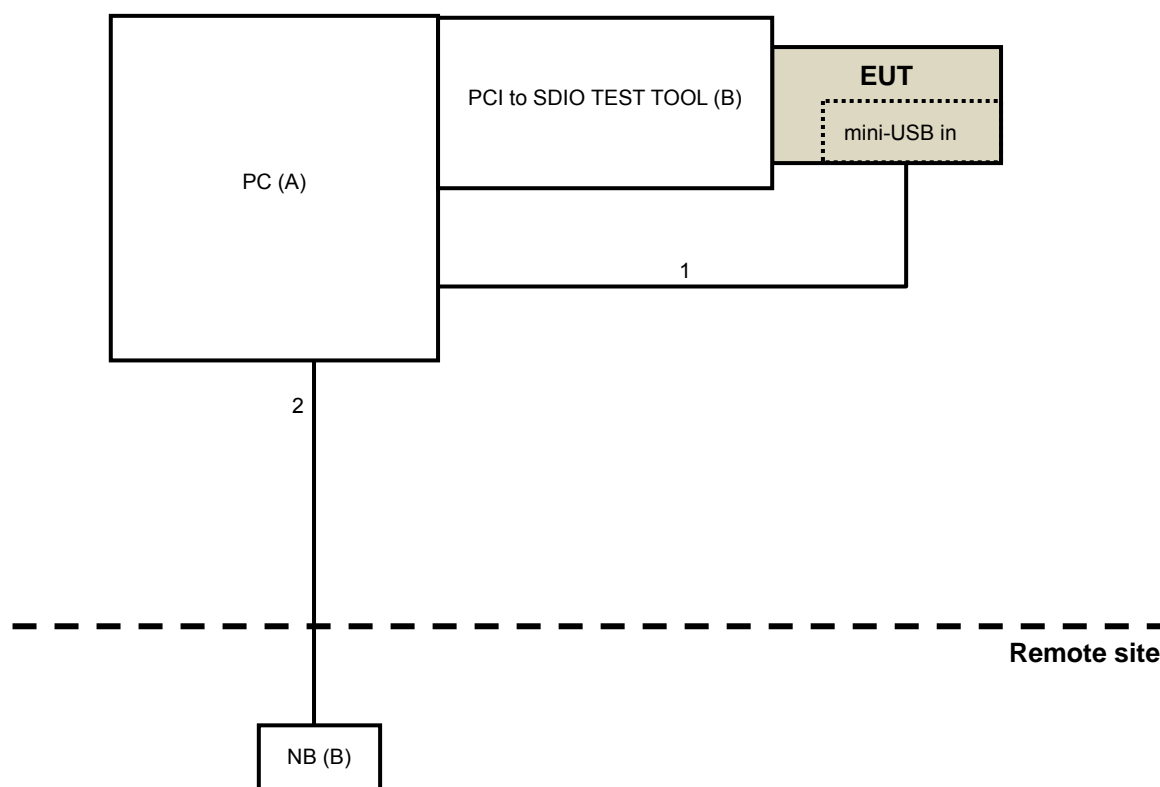

## 4 TEST PROCEDURES AND RESULTS (BLUETOOTH)

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dBμV) |          |
|-----------------------------|------------------------|----------|
|                             | Quasi-peak             | Average  |
| 0.15-0.5                    | 66 to 56               | 56 to 46 |
| 0.5-5                       | 56                     | 46       |
| 5-30                        | 60                     | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER  | MODEL NO.                   | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|-----------------------------|------------|-----------------|------------------|
| Test Receiver<br>ROHDE & SCHWARZ                                    | ESCS 30                     | 100375     | Apr. 29, 2014   | Apr. 28, 2015    |
| Line-Impedance<br>Stabilization Network<br>(for EUT)<br>SCHWARZBECK | NSLK8127                    | 8127-522   | Sep. 12, 2013   | Sep. 11, 2014    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral)         | ENV216                      | 100071     | Nov. 13, 2013   | Nov. 12, 2014    |
| RF Cable<br>(JYEBAO)  | 5DFB                        | COCCAB-001 | Mar. 10, 2014   | Mar. 09, 2015    |
| 50 ohms Terminator  | N/A                         | EMC-03     | Sep. 24, 2013   | Sep. 23, 2014    |
| 50 ohms Terminator  | N/A                         | EMC-02     | Oct. 01, 2013   | Sep. 30, 2014    |
| Software<br>ADT   | BV<br>ADT_Cond_V7.3.7.<br>3 | NA         | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: June 27, 2014

### 4.1.3 TEST PROCEDURES


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

**NOTE:** The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

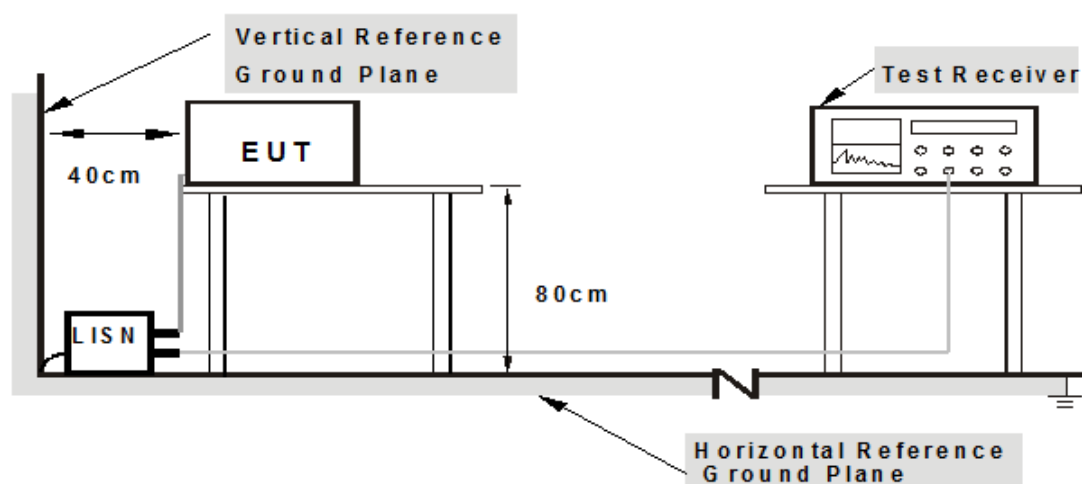

**Note:** 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit A (PC) which is placed on a testing table.
2. The communication partner run test program “DutApiMimoBtFmBrdigeUart.exe [WIN-X86-2.1.0.44-14.2.201.p98]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


#### 4.1.7 TEST RESULTS

| PHASE | Line (L) | DETECTOR FUNCTION | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq.    | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    | [MHz]    | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |          | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.22031  | 0.07   | 25.90         | 19.81 | 25.97          | 19.88 | 62.81     | 52.81 | -36.84 | -32.93 |
| 2  | 0.36875  | 0.09   | 29.31         | 25.76 | 29.40          | 25.85 | 58.53     | 48.53 | -29.13 | -22.68 |
| 3  | 1.89844  | 0.17   | 27.92         | 14.56 | 28.09          | 14.73 | 56.00     | 46.00 | -27.91 | -31.27 |
| 4  | 2.62500  | 0.20   | 27.19         | 19.68 | 27.39          | 19.88 | 56.00     | 46.00 | -28.61 | -26.12 |
| 5  | 11.09375 | 0.48   | 26.06         | 19.15 | 26.54          | 19.63 | 60.00     | 50.00 | -33.46 | -30.37 |
| 6  | 19.79688 | 0.71   | 24.12         | 18.63 | 24.83          | 19.34 | 60.00     | 50.00 | -35.17 | -30.66 |

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

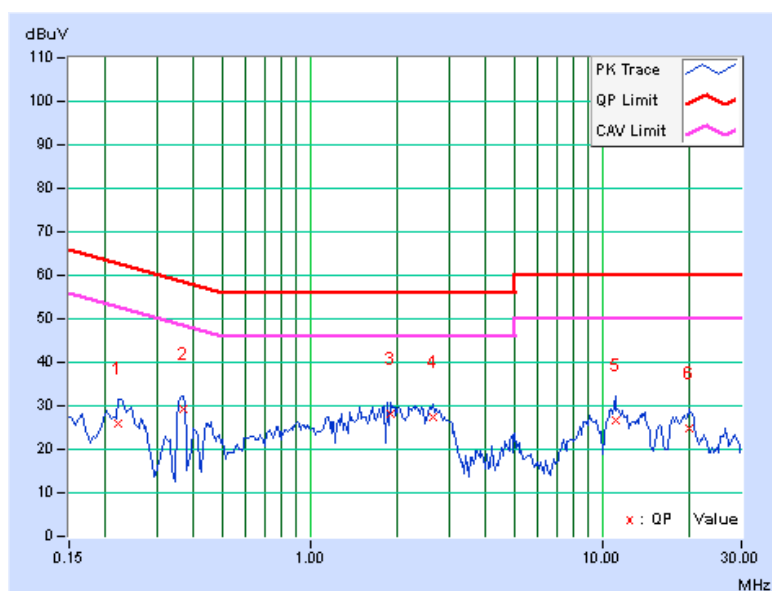




|       |             |                   |                                |
|-------|-------------|-------------------|--------------------------------|
| PHASE | Neutral (N) | DETECTOR FUNCTION | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq.    | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    | [MHz]    | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    |          | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.23203  | 0.07   | 24.92         | 20.16 | 24.99          | 20.23 | 62.38     | 52.38 | -37.38 | -32.14 |
| 2  | 0.36484  | 0.09   | 27.20         | 25.08 | 27.29          | 25.17 | 58.62     | 48.62 | -31.33 | -23.45 |
| 3  | 1.57031  | 0.16   | 25.08         | 14.05 | 25.24          | 14.21 | 56.00     | 46.00 | -30.76 | -31.79 |
| 4  | 2.28516  | 0.19   | 28.00         | 17.79 | 28.19          | 17.98 | 56.00     | 46.00 | -27.81 | -28.02 |
| 5  | 11.42969 | 0.49   | 24.71         | 17.70 | 25.20          | 18.19 | 60.00     | 50.00 | -34.80 | -31.81 |
| 6  | 18.63281 | 0.67   | 22.18         | 16.41 | 22.85          | 17.08 | 60.00     | 50.00 | -37.15 | -32.92 |

# REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

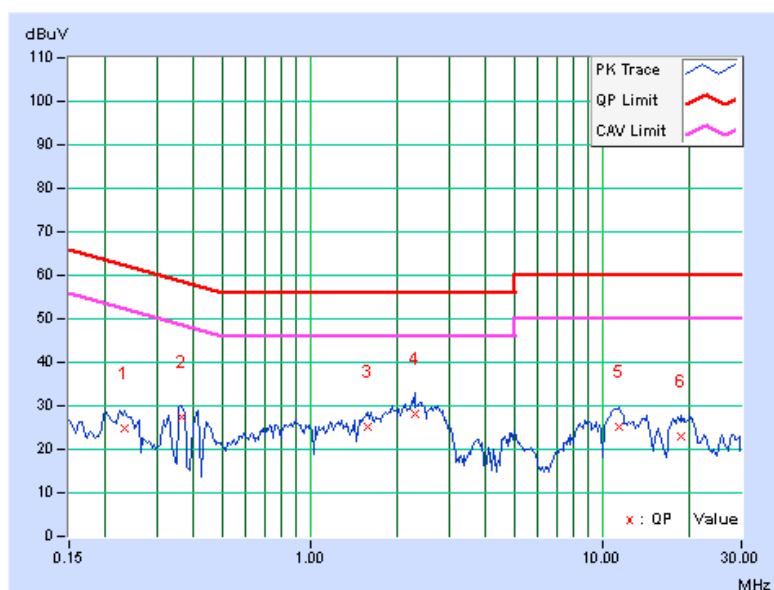

## 4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490     | 2400/F(kHz)                       | 300                           |
| 0.490 ~ 1.705     | 24000/F(kHz)                      | 30                            |
| 1.705 ~ 30.0      | 30                                | 30                            |
| 30 ~ 88           | 100                               | 3                             |
| 88 ~ 216          | 150                               | 3                             |
| 216 ~ 960         | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

## 4.2.2 TEST INSTRUMENTS

### For Below 1GHz test:

| DESCRIPTION & MANUFACTURER              | MODEL NO.                | SERIAL NO.                          | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|-------------------------------------|-----------------|------------------|
| MXE EMI Receiver<br>Agilent             | N9038A                   | MY50010156                          | Jan. 15, 2014   | Jan. 14, 2015    |
| Pre-Amplifier<br>Mini-Circuits          | ZFL-1000VH2<br>B         | AMP-ZFL-04                          | Nov. 13, 2013   | Nov. 12, 2014    |
| Trilog Broadband Antenna<br>SCHWARZBECK | VULB 9168                | 9168-361                            | Feb. 27, 2014   | Feb. 26, 2015    |
| RF Cable                                | NA                       | CHHCAB_001                          | Oct. 06, 2013   | Oct. 05, 2014    |
| Spectrum Analyzer<br>R&S                | FSV40                    | 100964                              | July 15, 2013   | July 14, 2014    |
| Horn_Antenna<br>AISI                    | AIH.8018                 | 0000220091110                       | Dec. 06, 2013   | Dec. 05, 2014    |
| Pre-Amplifier<br>Agilent                | 8449B                    | 3008A01923                          | Oct. 29, 2013   | Oct. 28, 2014    |
| RF Cable                                | NA                       | RF104-205<br>RF104-207<br>RF104-202 | Dec. 12, 2013   | Dec. 11, 2014    |
| Spectrum Analyzer<br>Agilent            | E4446A                   | MY48250253                          | Aug. 28, 2013   | Aug. 27, 2014    |
| Pre-Amplifier<br>SPACEK LABS            | SLKKa-48-6               | 9K16                                | Nov. 13, 2013   | Nov. 12, 2014    |
| Horn_Antenna<br>SCHWARZBECK             | BBHA 9170                | 9170-424                            | Oct. 08, 2013   | Oct. 07, 2014    |
| Software                                | ADT_Radiated<br>_V8.7.07 | NA                                  | NA              | NA               |
| Antenna Tower & Turn Table<br>CT        | NA                       | NA                                  | NA              | NA               |

### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: June 18 2014



A D T

**For Above 1GHz test:**

| DESCRIPTION & MANUFACTURER              | MODEL NO.                | SERIAL NO.                          | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|-------------------------------------|-----------------|------------------|
| MXE EMI Receiver<br>Agilent             | N9038A                   | MY51210105                          | Jan. 21,2014    | Jan. 20,2015     |
| Pre-Amplifier<br>Mini-Circuits          | ZFL-1000VH2<br>B         | AMP-ZFL-03                          | Nov. 13, 2013   | Nov. 12, 2014    |
| Trilog Broadband Antenna<br>SCHWARZBECK | VULB 9168                | 9168-360                            | Feb. 26, 2014   | Feb. 25, 2015    |
| RF Cable                                | NA                       | CHGCAB_001                          | Oct. 05, 2013   | Oct. 04, 2014    |
| Spectrum Analyzer<br>R&S                | FSV40                    | 100964                              | July 15, 2013   | July 14, 2014    |
| Horn_Antenna<br>AISI                    | AIH.8018                 | 0000320091110                       | Nov. 18, 2013   | Nov. 17, 2014    |
| Pre-Amplifier<br>Agilent                | 8449B                    | 3008A01923                          | Oct. 29, 2013   | Oct. 28, 2014    |
| RF Cable                                | NA                       | RF104-201<br>RF104-203<br>RF104-204 | Dec. 12, 2013   | Dec. 11, 2014    |
| Spectrum Analyzer<br>Agilent            | E4446A                   | MY48250253                          | Aug. 28, 2013   | Aug. 27, 2014    |
| Pre-Amplifier<br>SPACEK LABS            | SLKKa-48-6               | 9K16                                | Nov. 13, 2013   | Nov. 12, 2014    |
| Horn_Antenna<br>SCHWARZBECK             | BBHA 9170                | 9170-424                            | Oct. 08, 2013   | Oct. 07, 2014    |
| Software                                | ADT_Radiated<br>_V8.7.07 | NA                                  | NA              | NA               |
| Antenna Tower & Turn Table<br>CT        | NA                       | NA                                  | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: June 28, 2014

#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

**NOTE:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 1MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.4 DEVIATION FROM TEST STANDARD


No deviation

## 4.2.5 TEST SETUP

### <Frequency Range below 1GHz>

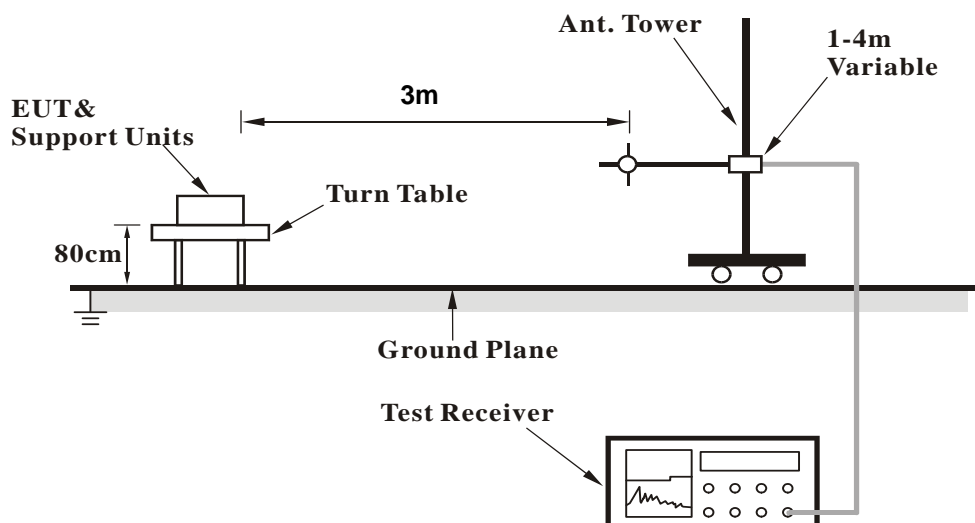

### <Frequency Range above 1GHz>

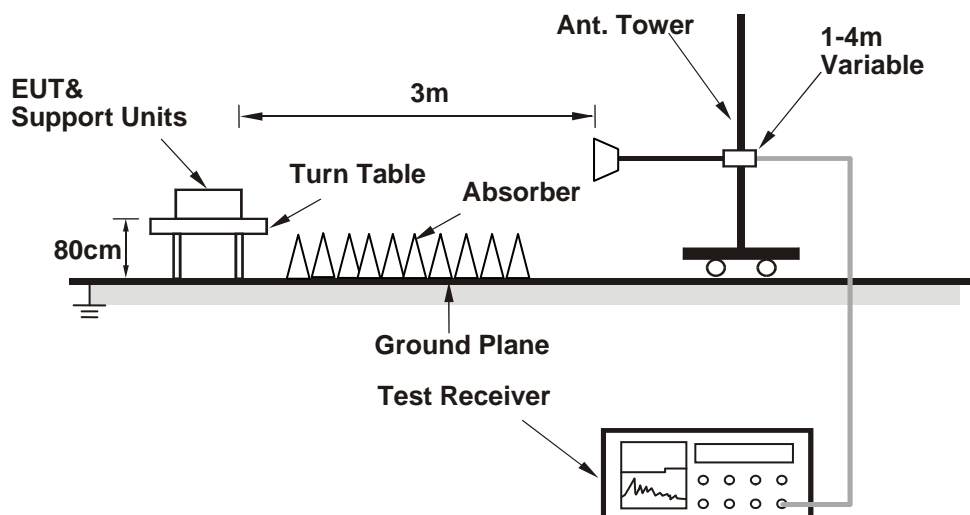

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



A D T

## 4.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### BT\_GFSK

|                 |              |                      |                 |
|-----------------|--------------|----------------------|-----------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | Below 1GHz   |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 119.90         | 33.4 QP                       | 43.5              | -10.1          | 1.56 H                   | 222                        | 48.39                  | -15.01                         |
| 2   | 132.68         | 40.5 QP                       | 43.5              | -3.0           | 1.99 H                   | 136                        | 54.46                  | -13.97                         |
| 3   | 166.52         | 40.5 QP                       | 43.5              | -3.0           | 1.49 H                   | 131                        | 53.82                  | -13.33                         |
| 4   | 266.13         | 42.8 QP                       | 46.0              | -3.2           | 1.00 H                   | 159                        | 56.22                  | -13.45                         |
| 5   | 334.53         | 39.2 QP                       | 46.0              | -6.8           | 1.00 H                   | 245                        | 50.17                  | -11.00                         |
| 6   | 399.83         | 35.9 QP                       | 46.0              | -10.1          | 2.00 H                   | 360                        | 45.63                  | -9.69                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 133.42         | 40.4 QP                       | 43.5              | -3.1           | 1.03 V                   | 303                        | 54.32                  | -13.88                         |
| 2   | 156.77         | 35.8 QP                       | 43.5              | -7.7           | 1.05 V                   | 287                        | 48.66                  | -12.90                         |
| 3   | 166.67         | 40.4 QP                       | 43.5              | -3.1           | 2.00 V                   | 108                        | 53.74                  | -13.35                         |
| 4   | 266.49         | 43.0 QP                       | 46.0              | -3.0           | 1.46 V                   | 360                        | 56.43                  | -13.45                         |
| 5   | 283.93         | 35.9 QP                       | 46.0              | -10.1          | 2.02 V                   | 40                         | 48.56                  | -12.69                         |
| 6   | 332.71         | 36.2 QP                       | 46.0              | -9.8           | 1.53 V                   | 242                        | 47.17                  | -11.00                         |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

## ABOVE 1GHz DATA

## BT\_GFSK

|                 |              |                      |           |
|-----------------|--------------|----------------------|-----------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      |           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 57.4 PK                       | 74.0              | -16.6          | 1.05 H                   | 135                        | 59.87                  | -2.47                          |
| 2   | 2390.00        | 27.3 AV                       | 54.0              | -26.7          | 1.05 H                   | 135                        | 29.77                  | -2.47                          |
| 3   | *2402.00       | 94.3 PK                       |                   |                | 1.05 H                   | 135                        | 96.71                  | -2.41                          |
| 4   | *2402.00       | 64.2 AV                       |                   |                | 1.05 H                   | 135                        | 66.61                  | -2.41                          |
| 5   | 4804.00        | 50.5 PK                       | 74.0              | -23.5          | 1.48 H                   | 122                        | 44.88                  | 5.62                           |
| 6   | 4804.00        | 20.4 AV                       | 54.0              | -33.6          | 1.48 H                   | 122                        | 14.78                  | 5.62                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 57.3 PK                       | 74.0              | -16.7          | 1.07 V                   | 296                        | 59.77                  | -2.47                          |
| 2   | 2390.00        | 27.2 AV                       | 54.0              | -26.8          | 1.07 V                   | 296                        | 29.67                  | -2.47                          |
| 3   | *2402.00       | 102.0 PK                      |                   |                | 1.07 V                   | 296                        | 104.41                 | -2.41                          |
| 4   | *2402.00       | 71.9 AV                       |                   |                | 1.07 V                   | 296                        | 74.31                  | -2.41                          |
| 5   | 4804.00        | 51.2 PK                       | 74.0              | -22.8          | 1.13 V                   | 100                        | 45.58                  | 5.62                           |
| 6   | 4804.00        | 21.1 AV                       | 54.0              | -32.9          | 1.13 V                   | 100                        | 15.48                  | 5.62                           |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading +  $20\log(\text{duty cycle})$ .





A D T

|                 |               |                      |           |
|-----------------|---------------|----------------------|-----------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2441.00       | 94.2 PK                       |                   |                | 1.11 H                   | 134                        | 96.44                  | -2.24                          |
| 2   | *2441.00       | 64.1 AV                       |                   |                | 1.11 H                   | 134                        | 66.34                  | -2.24                          |
| 3   | 4882.00        | 50.5 PK                       | 74.0              | -23.5          | 1.44 H                   | 108                        | 44.56                  | 5.94                           |
| 4   | 4882.00        | 20.4 AV                       | 54.0              | -33.6          | 1.44 H                   | 108                        | 14.46                  | 5.94                           |
| 5   | 7323.00        | 51.7 PK                       | 74.0              | -22.3          | 1.15 H                   | 132                        | 38.52                  | 13.18                          |
| 6   | 7323.00        | 21.6 AV                       | 54.0              | -32.4          | 1.15 H                   | 132                        | 8.42                   | 13.18                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2441.00       | 103.3 PK                      |                   |                | 1.07 V                   | 262                        | 105.54                 | -2.24                          |
| 2   | *2441.00       | 73.2 AV                       |                   |                | 1.07 V                   | 262                        | 75.44                  | -2.24                          |
| 3   | 4882.00        | 51.5 PK                       | 74.0              | -22.5          | 1.11 V                   | 98                         | 45.56                  | 5.94                           |
| 4   | 4882.00        | 21.4 AV                       | 54.0              | -32.6          | 1.11 V                   | 98                         | 15.46                  | 5.94                           |
| 5   | 7323.00        | 49.9 PK                       | 74.0              | -24.1          | 1.21 V                   | 229                        | 36.72                  | 13.18                          |
| 6   | 7323.00        | 19.8 AV                       | 54.0              | -34.2          | 1.21 V                   | 229                        | 6.62                   | 13.18                          |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

|                 |               |                      |           |
|-----------------|---------------|----------------------|-----------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2480.00       | 94.4 PK                       |                   |                | 1.17 H                   | 137                        | 96.46                  | -2.06                          |
| 2   | *2480.00       | 64.3 AV                       |                   |                | 1.17 H                   | 137                        | 66.36                  | -2.06                          |
| 3   | 2483.50        | 57.5 PK                       | 74.0              | -16.5          | 1.17 H                   | 137                        | 59.53                  | -2.03                          |
| 4   | 2483.50        | 27.4 AV                       | 54.0              | -26.6          | 1.17 H                   | 137                        | 29.43                  | -2.03                          |
| 5   | 4960.00        | 51.2 PK                       | 74.0              | -22.8          | 1.47 H                   | 114                        | 44.94                  | 6.26                           |
| 6   | 4960.00        | 21.1 AV                       | 54.0              | -32.9          | 1.47 H                   | 114                        | 14.84                  | 6.26                           |
| 7   | 7440.00        | 51.8 PK                       | 74.0              | -22.2          | 1.15 H                   | 123                        | 38.67                  | 13.13                          |
| 8   | 7440.00        | 21.7 AV                       | 54.0              | -32.3          | 1.15 H                   | 123                        | 8.57                   | 13.13                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2480.00       | 101.7 PK                      |                   |                | 1.06 V                   | 261                        | 103.76                 | -2.06                          |
| 2   | *2480.00       | 71.6 AV                       |                   |                | 1.06 V                   | 261                        | 73.66                  | -2.06                          |
| 3   | 2483.50        | 58.4 PK                       | 74.0              | -15.6          | 1.06 V                   | 261                        | 60.43                  | -2.03                          |
| 4   | 2483.50        | 28.3 AV                       | 54.0              | -25.7          | 1.06 V                   | 261                        | 30.33                  | -2.03                          |
| 5   | 4960.00        | 51.4 PK                       | 74.0              | -22.6          | 1.07 V                   | 102                        | 45.14                  | 6.26                           |
| 6   | 4960.00        | 21.3 AV                       | 54.0              | -32.7          | 1.07 V                   | 102                        | 15.04                  | 6.26                           |
| 7   | 7440.00        | 49.5 PK                       | 74.0              | -24.5          | 1.24 V                   | 240                        | 36.37                  | 13.13                          |
| 8   | 7440.00        | 19.4 AV                       | 54.0              | -34.6          | 1.24 V                   | 240                        | 6.27                   | 13.13                          |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

## BT\_8DPSK

|                 |              |                      |           |
|-----------------|--------------|----------------------|-----------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      |           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 58.7 PK                       | 74.0              | -15.3          | 1.15 H                   | 150                        | 61.17                  | -2.47                          |
| 2   | 2390.00        | 28.6 AV                       | 54.0              | -25.4          | 1.15 H                   | 150                        | 31.07                  | -2.47                          |
| 3   | *2402.00       | 95.7 PK                       |                   |                | 1.15 H                   | 150                        | 98.11                  | -2.41                          |
| 4   | *2402.00       | 65.6 AV                       |                   |                | 1.15 H                   | 150                        | 68.01                  | -2.41                          |
| 5   | 4804.00        | 53.9 PK                       | 74.0              | -20.1          | 1.43 H                   | 125                        | 48.28                  | 5.62                           |
| 6   | 4804.00        | 23.8 AV                       | 54.0              | -30.2          | 1.43 H                   | 125                        | 18.18                  | 5.62                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 60.3 PK                       | 74.0              | -13.7          | 1.06 V                   | 296                        | 62.77                  | -2.47                          |
| 2   | 2390.00        | 30.2 AV                       | 54.0              | -23.8          | 1.06 V                   | 296                        | 32.67                  | -2.47                          |
| 3   | *2402.00       | 101.6 PK                      |                   |                | 1.06 V                   | 296                        | 104.01                 | -2.41                          |
| 4   | *2402.00       | 71.5 AV                       |                   |                | 1.06 V                   | 296                        | 73.91                  | -2.41                          |
| 5   | 4804.00        | 53.6 PK                       | 74.0              | -20.4          | 1.11 V                   | 104                        | 47.98                  | 5.62                           |
| 6   | 4804.00        | 23.5 AV                       | 54.0              | -30.5          | 1.11 V                   | 104                        | 17.88                  | 5.62                           |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1 \text{ dB}$
7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

|                 |               |                      |           |
|-----------------|---------------|----------------------|-----------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2441.00       | 96.5 PK                       |                   |                | 1.18 H                   | 156                        | 98.74                  | -2.24                          |
| 2   | *2441.00       | 66.4 AV                       |                   |                | 1.18 H                   | 156                        | 68.64                  | -2.24                          |
| 3   | 4882.00        | 53.4 PK                       | 74.0              | -20.6          | 1.47 H                   | 98                         | 47.46                  | 5.94                           |
| 4   | 4882.00        | 23.3 AV                       | 54.0              | -30.7          | 1.47 H                   | 98                         | 17.36                  | 5.94                           |
| 5   | 7323.00        | 53.7 PK                       | 74.0              | -20.3          | 1.15 H                   | 113                        | 40.52                  | 13.18                          |
| 6   | 7323.00        | 23.6 AV                       | 54.0              | -30.4          | 1.15 H                   | 113                        | 10.42                  | 13.18                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2441.00       | 101.7 PK                      |                   |                | 1.06 V                   | 286                        | 103.94                 | -2.24                          |
| 2   | *2441.00       | 71.6 AV                       |                   |                | 1.06 V                   | 286                        | 73.84                  | -2.24                          |
| 3   | 4882.00        | 53.8 PK                       | 74.0              | -20.2          | 1.05 V                   | 108                        | 47.86                  | 5.94                           |
| 4   | 4882.00        | 23.7 AV                       | 54.0              | -30.3          | 1.05 V                   | 108                        | 17.76                  | 5.94                           |
| 5   | 7323.00        | 51.8 PK                       | 74.0              | -22.2          | 1.21 V                   | 227                        | 38.62                  | 13.18                          |
| 6   | 7323.00        | 21.7 AV                       | 54.0              | -32.3          | 1.21 V                   | 227                        | 8.52                   | 13.18                          |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB
7. Average value = peak reading +  $20\log(\text{duty cycle})$ .



A D T

|                 |               |                      |           |
|-----------------|---------------|----------------------|-----------|
| CHANNEL         | TX Channel 78 | DETECTOR<br>FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      |           |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2480.00       | 96.1 PK                       |                   |                | 1.16 H                   | 144                        | 98.16                  | -2.06                          |
| 2   | *2480.00       | 66.0 AV                       |                   |                | 1.16 H                   | 144                        | 68.06                  | -2.06                          |
| 3   | 2483.50        | 59.2 PK                       | 74.0              | -14.8          | 1.16 H                   | 144                        | 61.23                  | -2.03                          |
| 4   | 2483.50        | 29.1 AV                       | 54.0              | -24.9          | 1.16 H                   | 144                        | 31.13                  | -2.03                          |
| 5   | 4960.00        | 53.5 PK                       | 74.0              | -20.5          | 1.43 H                   | 110                        | 47.24                  | 6.26                           |
| 6   | 4960.00        | 23.4 AV                       | 54.0              | -30.6          | 1.43 H                   | 110                        | 17.14                  | 6.26                           |
| 7   | 7440.00        | 53.7 PK                       | 74.0              | -20.3          | 1.10 H                   | 114                        | 40.57                  | 13.13                          |
| 8   | 7440.00        | 23.6 AV                       | 54.0              | -30.4          | 1.10 H                   | 114                        | 10.47                  | 13.13                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2480.00       | 101.8 PK                      |                   |                | 1.05 V                   | 262                        | 103.86                 | -2.06                          |
| 2   | *2480.00       | 71.7 AV                       |                   |                | 1.05 V                   | 262                        | 73.76                  | -2.06                          |
| 3   | 2483.50        | 59.6 PK                       | 74.0              | -14.4          | 1.05 V                   | 262                        | 61.63                  | -2.03                          |
| 4   | 2483.50        | 29.5 AV                       | 54.0              | -24.5          | 1.05 V                   | 262                        | 31.53                  | -2.03                          |
| 5   | 4960.00        | 53.5 PK                       | 74.0              | -20.5          | 1.06 V                   | 112                        | 47.24                  | 6.26                           |
| 6   | 4960.00        | 23.4 AV                       | 54.0              | -30.6          | 1.06 V                   | 112                        | 17.14                  | 6.26                           |
| 7   | 7440.00        | 51.6 PK                       | 74.0              | -22.4          | 1.17 V                   | 229                        | 38.47                  | 13.13                          |
| 8   | 7440.00        | 21.5 AV                       | 54.0              | -32.5          | 1.17 V                   | 229                        | 8.37                   | 13.13                          |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. The DH5 packet was the worse case duty cycle for a transmit dwell time on a channel, based upon bluetooth theory the transmitter is on 0.625 \* 5 per 296.25 ms per channel. Therefore, the duty cycle correlation factor be equal to:  $20\log(3.125 / 100) = -30.1$  dB
7. Average value = peak reading +  $20\log(\text{duty cycle})$ .

### 4.3 NUMBER OF HOPPING FREQUENCY USED

#### 4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 hopping frequencies, and should be equally spaced.

#### 4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 02, 2014


#### 4.3.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

#### 4.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 4.3.5 TEST SETUP



### 4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer the test result. On the plots, it shows that the hopping frequencies are equally spaced.

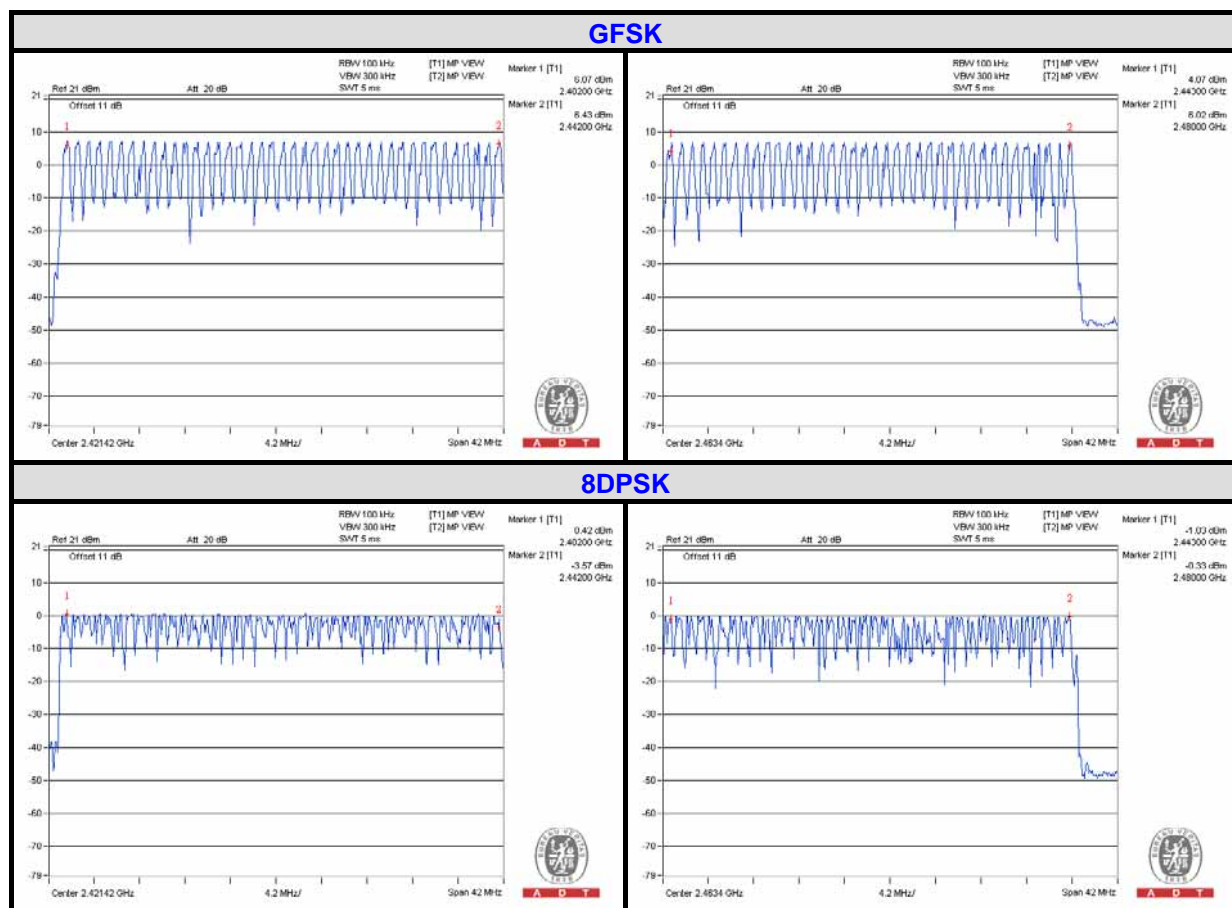

## 4.4 DWELL TIME ON EACH CHANNEL

### 4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 02, 2014

### 4.4.3 TEST PROCEDURES


- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.



#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP





#### 4.4.6 TEST RESULTS

For GFSK:


| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--|------------------------------------|---------------|--------------|
| DH1  | 49 times / 5 sec) *6.32=309.68 times             | 0.558                              | 172.8         | 400          |
| DH3  | 26 (times / 5 sec) *6.32=164.32 times            | 1.68                               | 276.06        | 400          |
| DH5  | 17 (times / 5 sec) *6.32=107.44 times            | 2.96                               | 318.02        | 400          |

**NOTE:** Test plots of the transmitting time slot are shown on next page.




A D T

### DH1

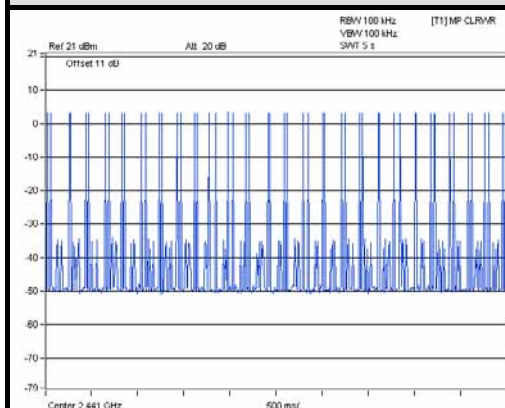


A D T

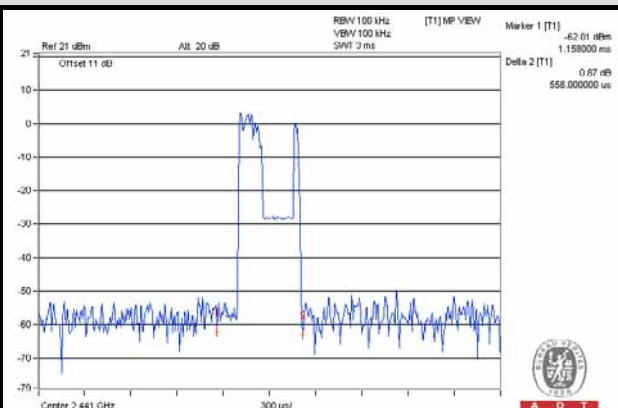


A D T

### DH3

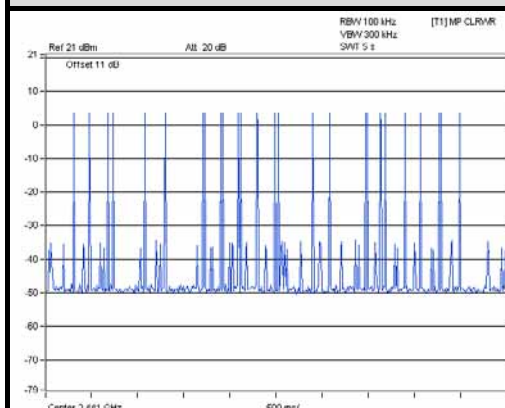


A D T

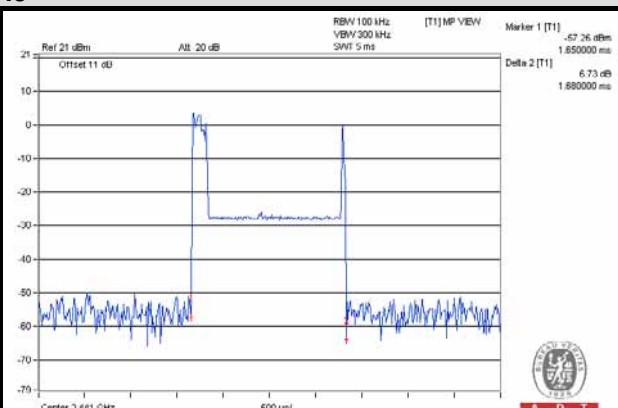


A D T

### DH5

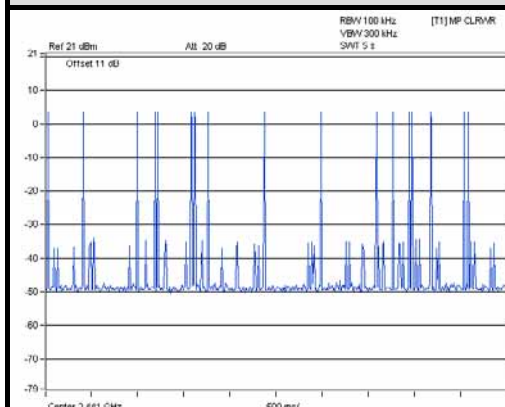

A D T

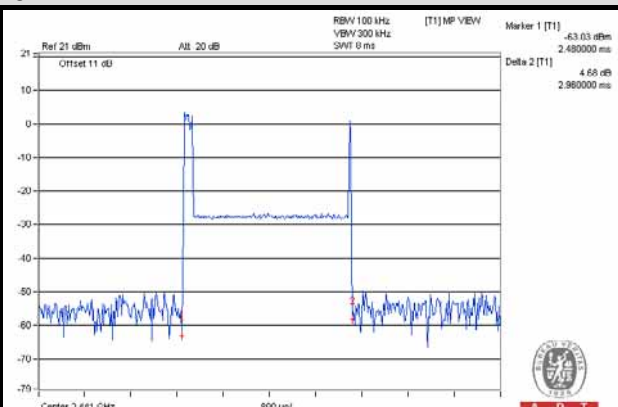

A D T

**For 8DPSK:**


| Mode | Number of transmission in a 31.6 (79Hopping*0.4) | Length of transmission time (msec) | Result (msec) | Limit (msec) |
|------|--|------------------------------------|---------------|--------------|
| 3DH1 | 49 (times / 5 sec) *6.32=322.32 times            | 0.456                              | 146.98        | 400          |
| 3DH3 | 25 (times / 5 sec) *6.32=170.64 times            | 1.75                               | 298.62        | 400          |
| 3DH5 | 17 (times / 5 sec) *6.32=101.12 times            | 2.976                              | 300.93        | 400          |

**NOTE:** Test plots of the transmitting time slot are shown on next page.




A D T

### DH1

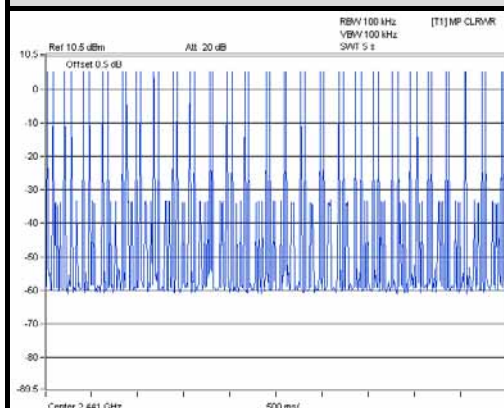


A D T

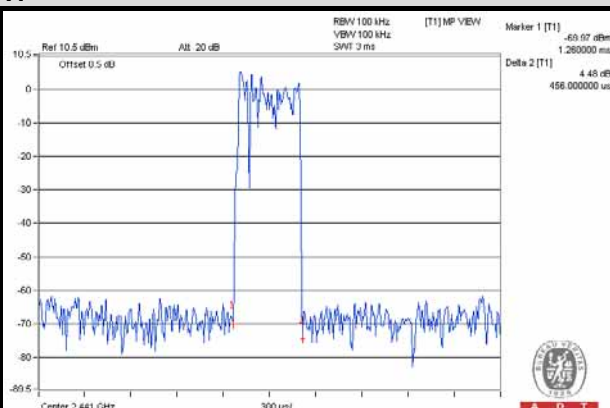


A D T

### DH3

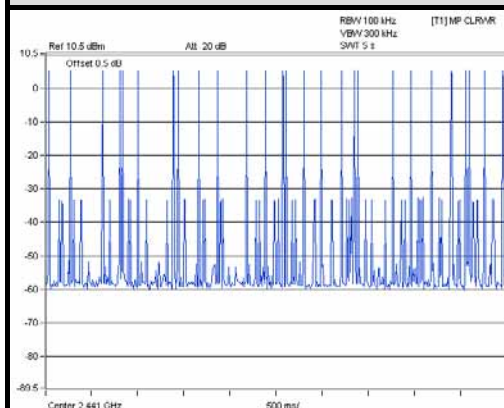


A D T

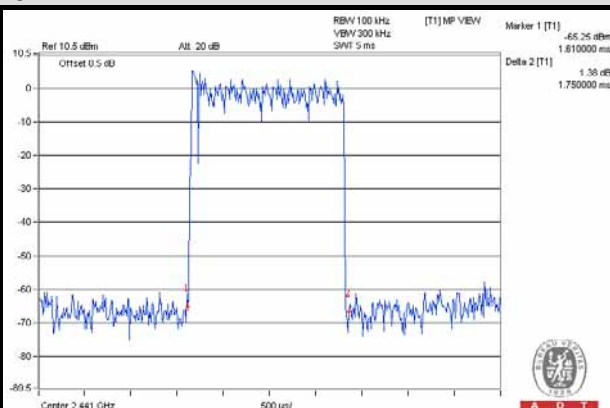


A D T

### DH5

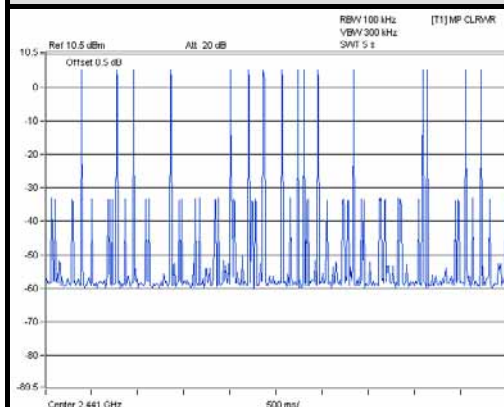

A D T

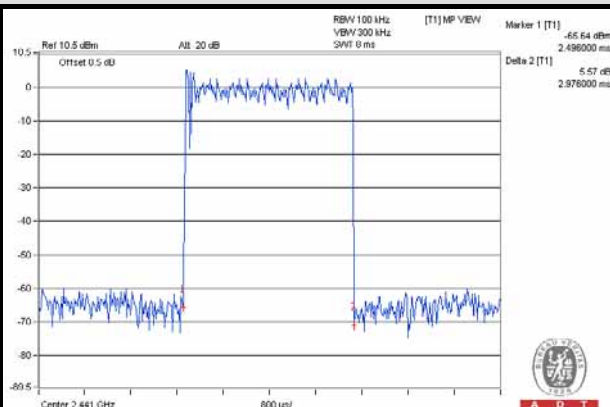

A D T

## 4.5 CHANNEL BANDWIDTH

### 4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

### 4.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 02, 2014


### 4.5.3 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.5.5 TEST SETUP




#### 4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

## 4.5.7 TEST RESULTS

| CHANNEL | FREQUENCY (MHz) | 20dB BANDWIDTH (MHz) |       |
|---------|-----------------|----------------------|-------|
|         |                 | GFSK                 | 8DPSK |
| 0       | 2402            | 0.95                 | 1.31  |
| 39      | 2441            | 0.96                 | 1.30  |
| 78      | 2480            | 0.95                 | 1.30  |

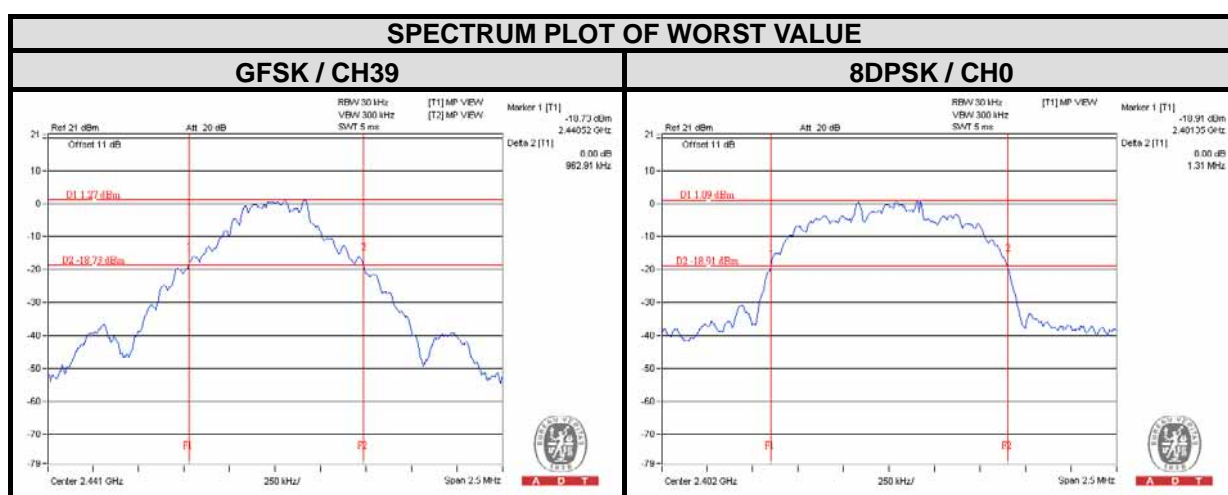



## 4.6 HOPPING CHANNEL SEPARATION

### 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25 kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

### 4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 02, 2014


### 4.6.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation


### 4.6.5 TEST SETUP



## 4.6.6 TEST RESULTS

| CHANNEL | FREQUENCY (MHz) | ADJACENT CHANNEL SEPARATION (MHz) |       | 20dB BANDWIDTH (MHz) |       | MINIMUM LIMIT (MHz) |       | PASS / FAIL |
|---------|-----------------|-----------------------------------|-------|----------------------|-------|---------------------|-------|-------------|
|         |                 | GFSK                              | 8DPSK | GFSK                 | 8DPSK | GFSK                | 8DPSK |             |
| 0       | 2402            | 1.00                              | 1.00  | 0.95                 | 1.31  | 0.64                | 0.88  | PASS        |
| 39      | 2441            | 1.00                              | 1.00  | 0.96                 | 1.30  | 0.64                | 0.87  | PASS        |
| 78      | 2480            | 1.01                              | 1.00  | 0.95                 | 1.30  | 0.64                | 0.87  | PASS        |

**NOTE:** The minimum limit is two-third 20dB bandwidth.

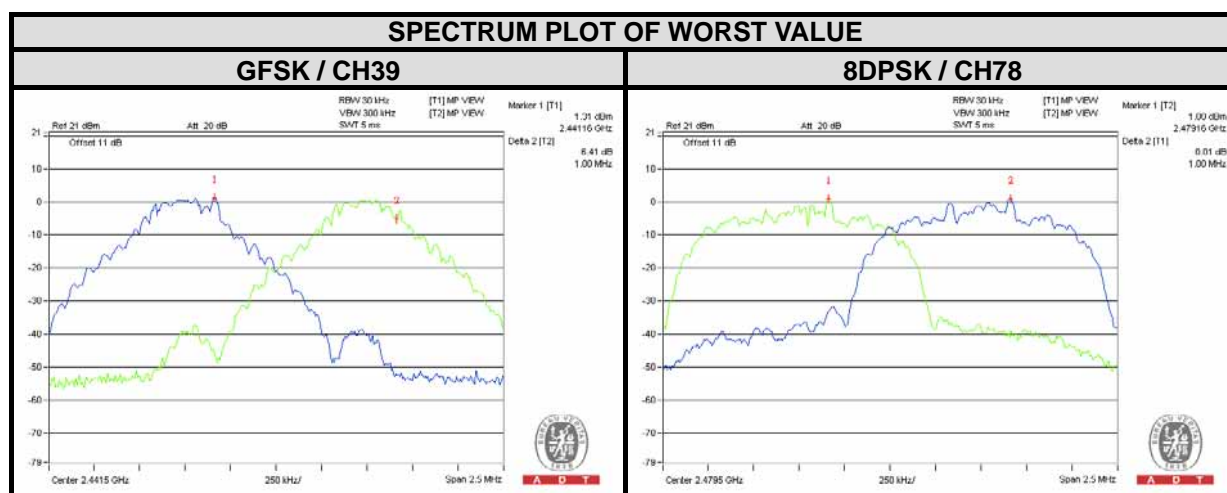

## 4.7 MAXIMUM PEAK OUTPUT POWER

### 4.7.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Limit is 125mW.

### 4.7.2 INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 02, 2014


### 4.7.3 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.7.5 TEST SETUP



For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

#### 4.7.6 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



A D T

#### 4.7.7 TEST RESULTS

| CHANNEL | FREQUENCY (MHz) | OUTPUT POWER (mW) |       | OUTPUT POWER (dBm) |       | POWER LIMIT (mW) | PASS / FAIL |
|---------|-----------------|-------------------|-------|--------------------|-------|------------------|-------------|
|         |                 | GFSK              | 8DPSK | GFSK               | 8DPSK |                  |             |
| 0       | 2402            | 2.460             | 5.000 | 3.91               | 6.99  | 125              | PASS        |
| 39      | 2441            | 2.291             | 4.467 | 3.60               | 6.50  | 125              | PASS        |
| 78      | 2480            | 2.213             | 4.083 | 3.45               | 6.11  | 125              | PASS        |

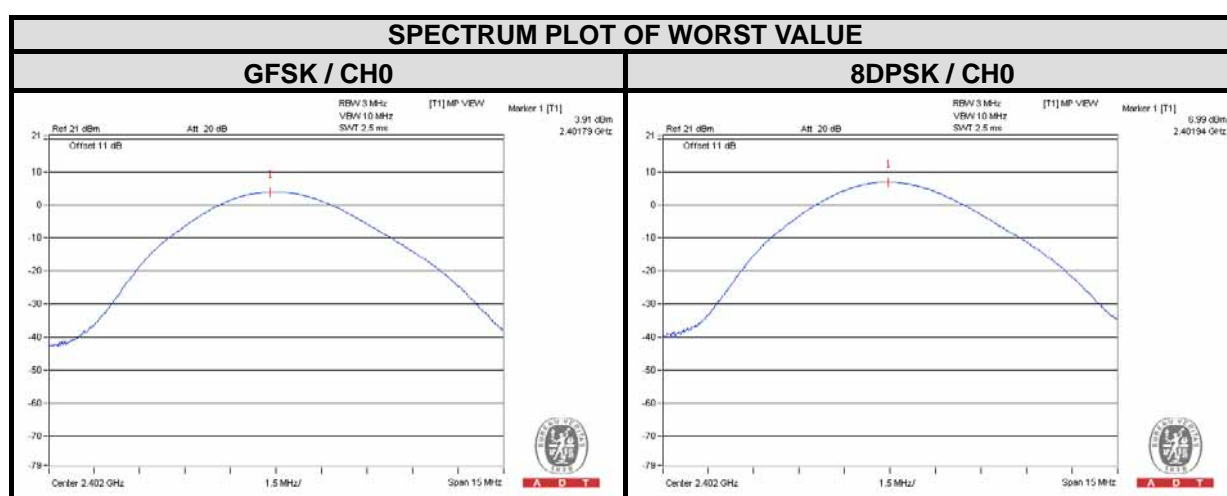

## 4.8 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 4.8.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.8.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 02, 2014


### 4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set RBW a of spectrum analyzer to 100 kHz and VBW of spectrum analyzer to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

### 4.8.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.8.5 TEST SETUP



### 4.8.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

#### 4.8.7 TEST RESULTS



The spectrum plots are attached on the following images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.





A D T

## GFSK



### Hopping disabled\_ Low Channel

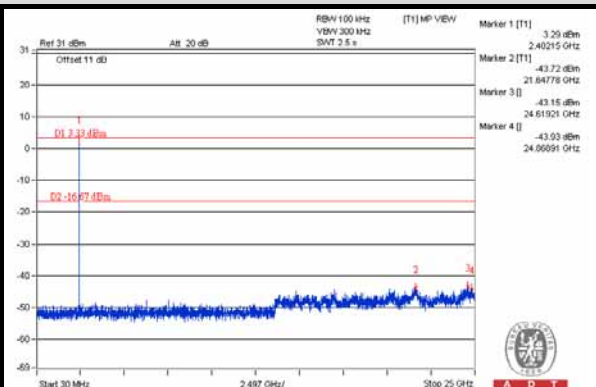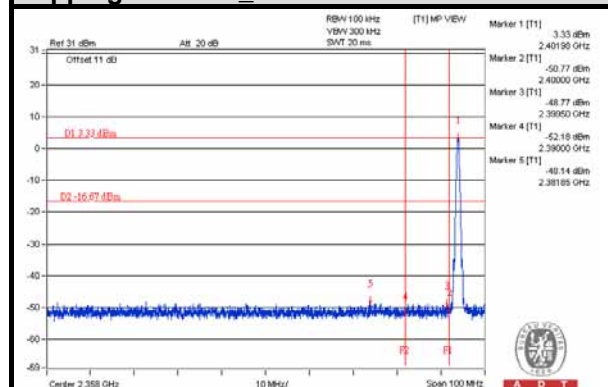



### Hopping disabled\_ High Channel

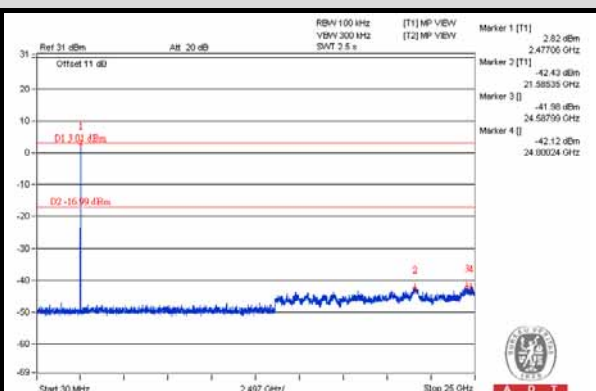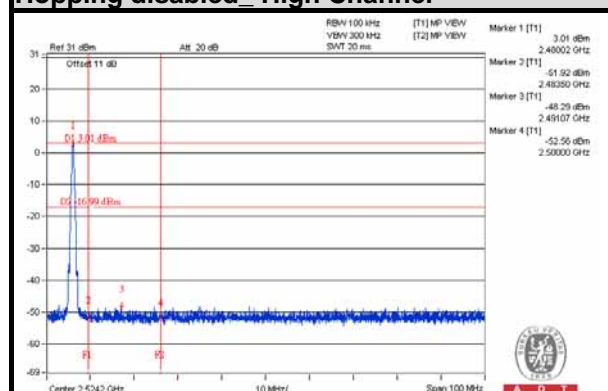

### Hopping enabled\_ Low Channel

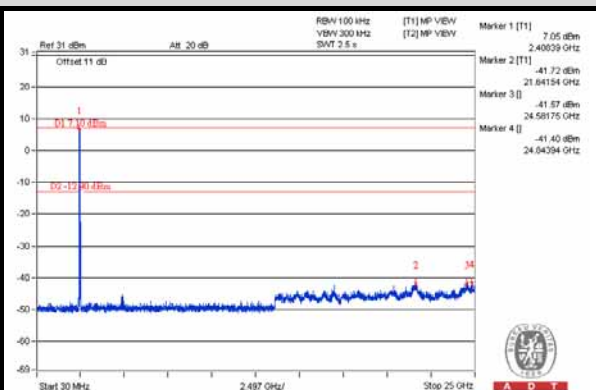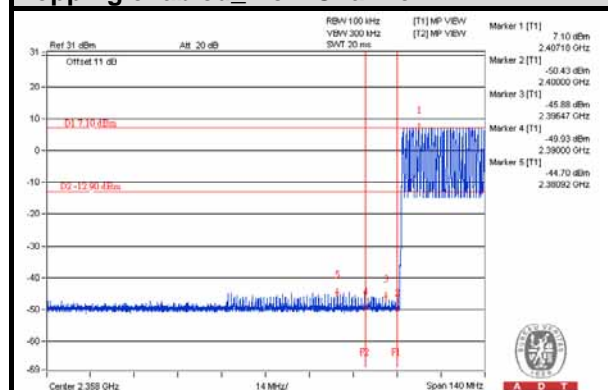

### Hopping enabled\_ High Channel

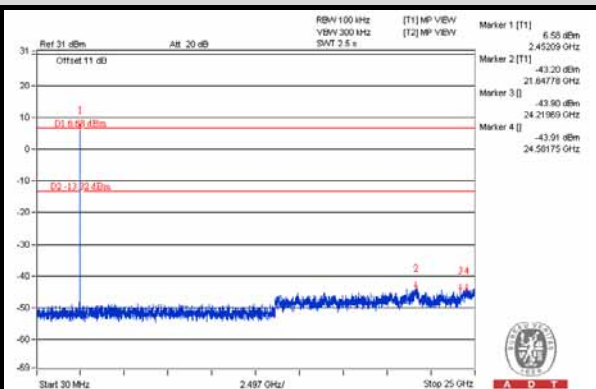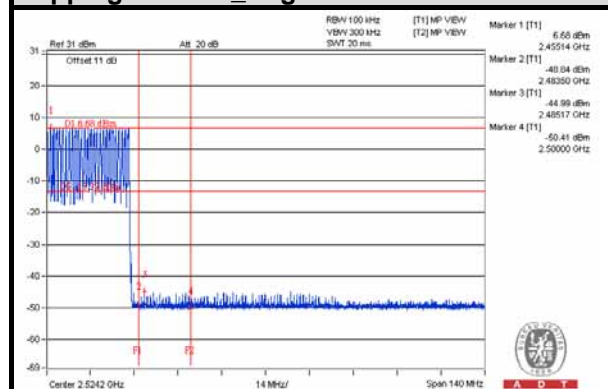









A D T

## 8DPSK



### Hopping disabled\_ Low Channel

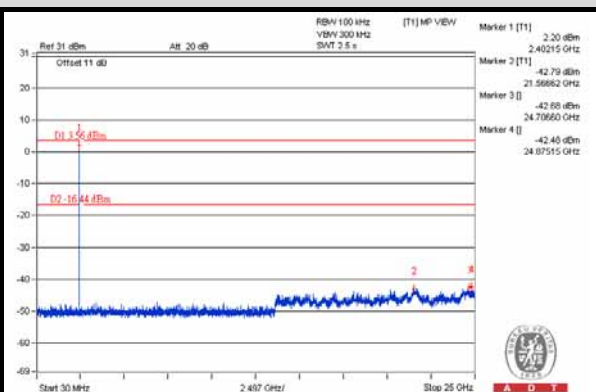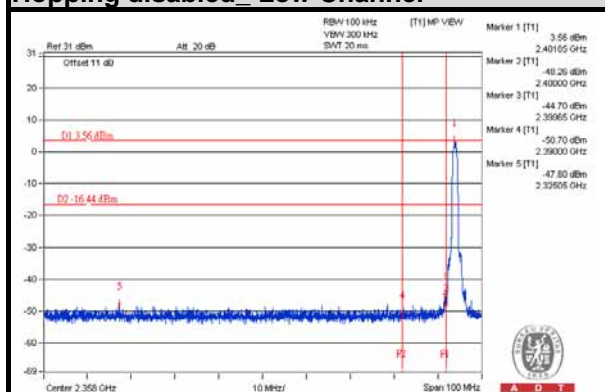



### Hopping disabled\_ High Channel

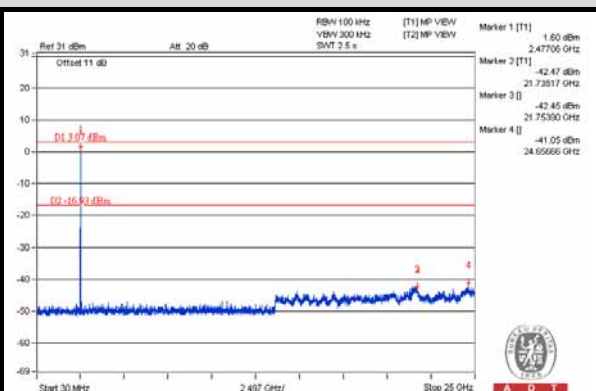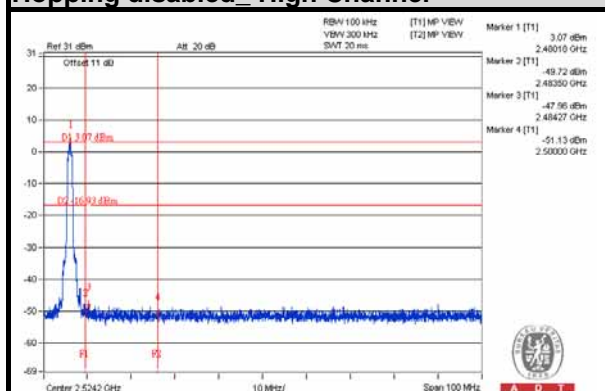

### Hopping enabled\_ Low Channel

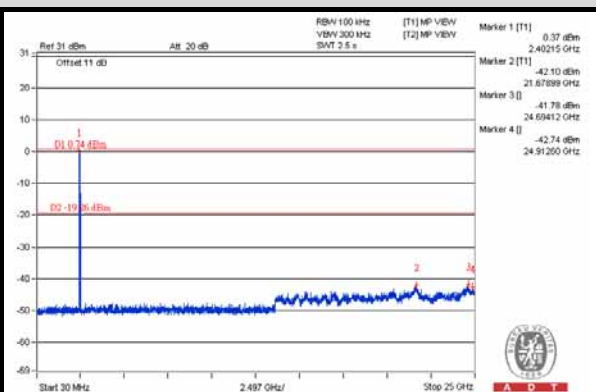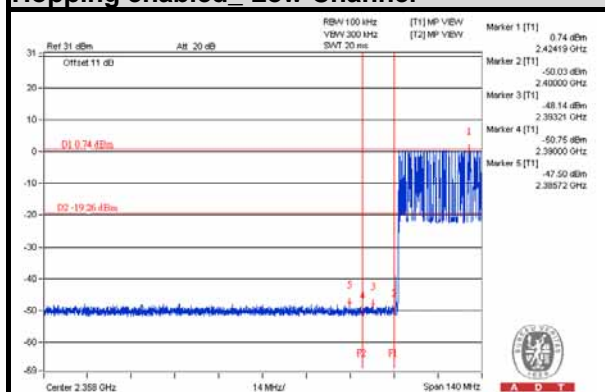

### Hopping enabled\_ High Channel

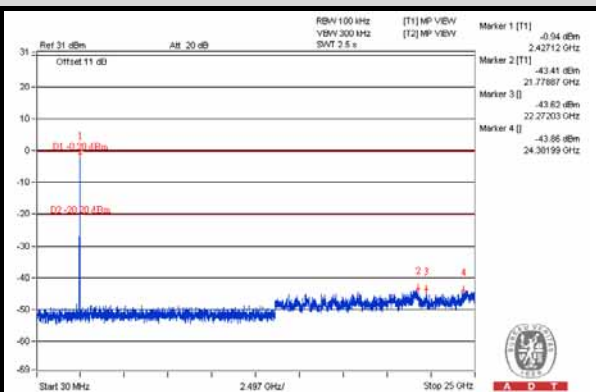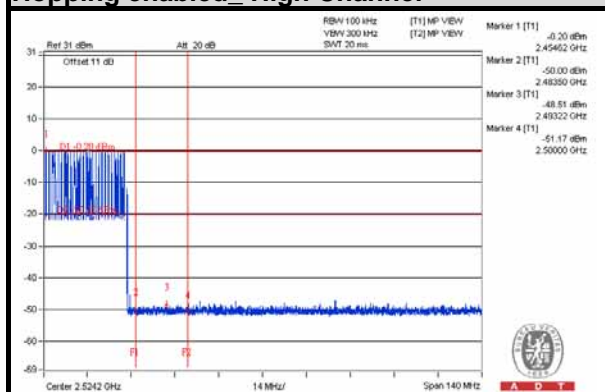

## 5 TEST TYPES AND RESULTS (DTS)

### 5.1 CONDUCTED EMISSION MEASUREMENT

#### 5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dB $\mu$ V) |          |
|-----------------------------|------------------------------|----------|
|                             | Quasi-peak                   | Average  |
| 0.15-0.5                    | 66 to 56                     | 56 to 46 |
| 0.5-5                       | 56                           | 46       |
| 5-30                        | 60                           | 50       |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 5.1.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER  | MODEL NO.                   | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|-----------------------------|------------|-----------------|------------------|
| Test Receiver<br>ROHDE & SCHWARZ                                    | ESCS 30                     | 100375     | Apr. 29, 2014   | Apr. 28, 2015    |
| Line-Impedance<br>Stabilization Network<br>(for EUT)<br>SCHWARZBECK | NSLK8127                    | 8127-522   | Sep. 12, 2013   | Sep. 11, 2014    |
| Line-Impedance<br>Stabilization Network<br>(for Peripheral)         | ENV216                      | 100071     | Nov. 13, 2013   | Nov. 12, 2014    |
| RF Cable<br>(JYEBAO)  | 5DFB                        | COCCAB-001 | Mar. 10, 2014   | Mar. 09, 2015    |
| 50 ohms Terminator  | N/A                         | EMC-03     | Sep. 24, 2013   | Sep. 23, 2014    |
| 50 ohms Terminator  | N/A                         | EMC-02     | Oct. 01, 2013   | Sep. 30, 2014    |
| Software<br>ADT   | BV<br>ADT_Cond_V7.3.7.<br>3 | NA         | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: June 27, 2014

### 5.1.3 TEST PROCEDURES

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


#### NOTE:

- The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

### 5.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.1.5 TEST SETUP

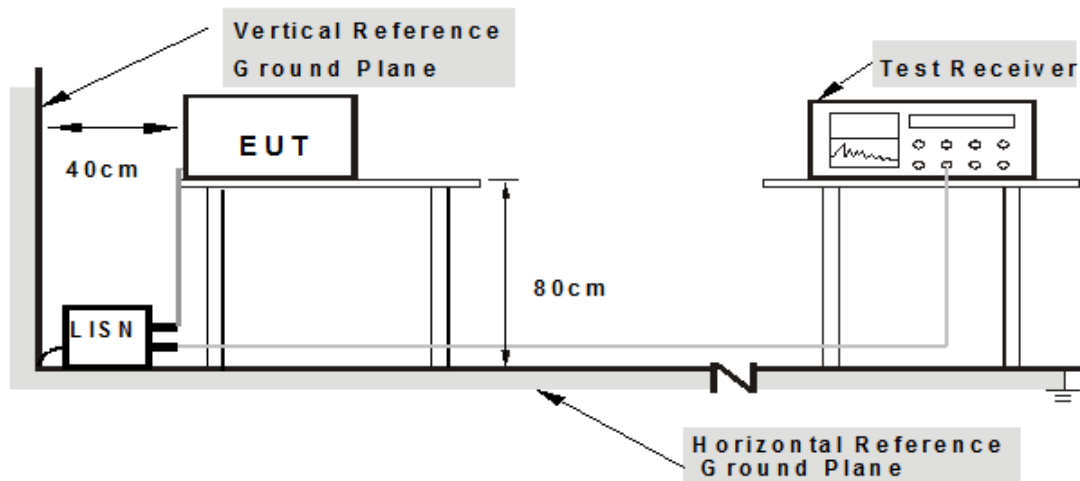

**Note: 1. Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 5.1.6 EUT OPERATING CONDITIONS

1. Connect the EUT with the support unit A (PC) which is placed on a testing table.
2. The communication partner run test program “DutApiMimoBtFmBrdigeUart.exe [WIN-X86-2.1.0.44-14.2.201.p98]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.


## 5.1.7 TEST RESULTS

| PHASE | Line (L) | DETECTOR FUNCTION | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq.<br>[MHz] | Corr.<br>Factor<br>(dB) | Reading Value<br>[dB (uV)] |       | Emission Level<br>[dB (uV)] |       | Limit<br>[dB (uV)] |       | Margin<br>(dB) |        |
|----|----------------|-------------------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
|    |                |                         | Q.P.                       | AV.   | Q.P.                        | AV.   | Q.P.               | AV.   | Q.P.           | AV.    |
| 1  | 0.22812        | 0.07                    | 26.92                      | 21.51 | 26.99                       | 21.58 | 62.52              | 52.52 | -35.53         | -30.94 |
| 2  | 0.36484        | 0.09                    | 29.84                      | 27.93 | 29.93                       | 28.02 | 58.62              | 48.62 | -28.69         | -20.60 |
| 3  | 1.90234        | 0.17                    | 28.30                      | 15.94 | 28.47                       | 16.11 | 56.00              | 46.00 | -27.53         | -29.89 |
| 4  | 4.92969        | 0.29                    | 20.34                      | 6.90  | 20.63                       | 7.19  | 56.00              | 46.00 | -35.37         | -38.81 |
| 5  | 12.00000       | 0.51                    | 27.72                      | 16.98 | 28.23                       | 17.49 | 60.00              | 50.00 | -31.77         | -32.51 |
| 6  | 20.09766       | 0.71                    | 23.65                      | 18.75 | 24.36                       | 19.46 | 60.00              | 50.00 | -35.64         | -30.54 |

### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

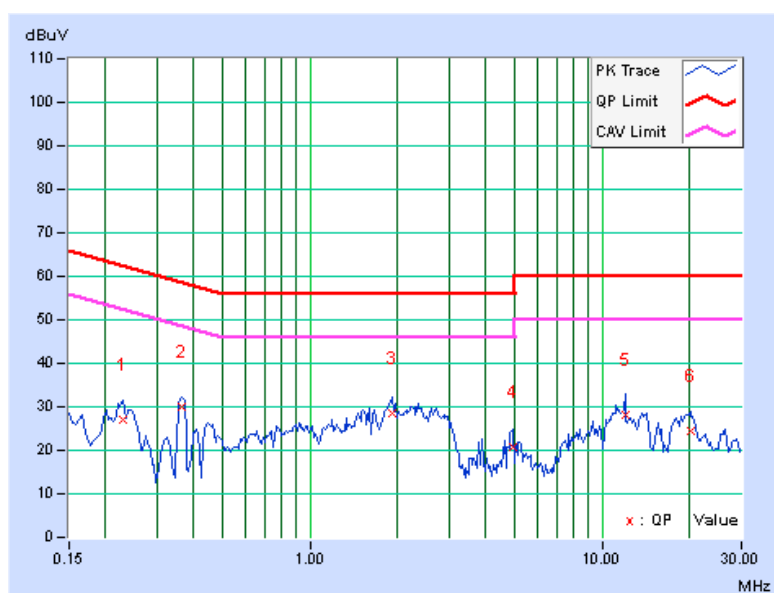


|       |             |                   |                                |
|-------|-------------|-------------------|--------------------------------|
| PHASE | Neutral (N) | DETECTOR FUNCTION | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq.    | Corr.  | Reading Value |       | Emission Level |       | Limit     |       | Margin |        |
|----|----------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
|    |          | Factor | [dB (uV)]     |       | [dB (uV)]      |       | [dB (uV)] |       | (dB)   |        |
|    | [MHz]    | (dB)   | Q.P.          | AV.   | Q.P.           | AV.   | Q.P.      | AV.   | Q.P.   | AV.    |
| 1  | 0.22031  | 0.07   | 24.53         | 18.49 | 24.60          | 18.56 | 62.81     | 52.81 | -38.21 | -34.25 |
| 2  | 0.36094  | 0.09   | 27.37         | 22.91 | 27.46          | 23.00 | 58.71     | 48.71 | -31.25 | -25.71 |
| 3  | 0.83359  | 0.12   | 19.74         | 9.52  | 19.86          | 9.64  | 56.00     | 46.00 | -36.14 | -36.36 |
| 4  | 2.43359  | 0.20   | 25.95         | 20.04 | 26.15          | 20.24 | 56.00     | 46.00 | -29.85 | -25.76 |
| 5  | 10.88672 | 0.47   | 24.00         | 18.42 | 24.47          | 18.89 | 60.00     | 50.00 | -35.53 | -31.11 |
| 6  | 19.14063 | 0.68   | 22.09         | 16.58 | 22.77          | 17.26 | 60.00     | 50.00 | -37.23 | -32.74 |

# REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

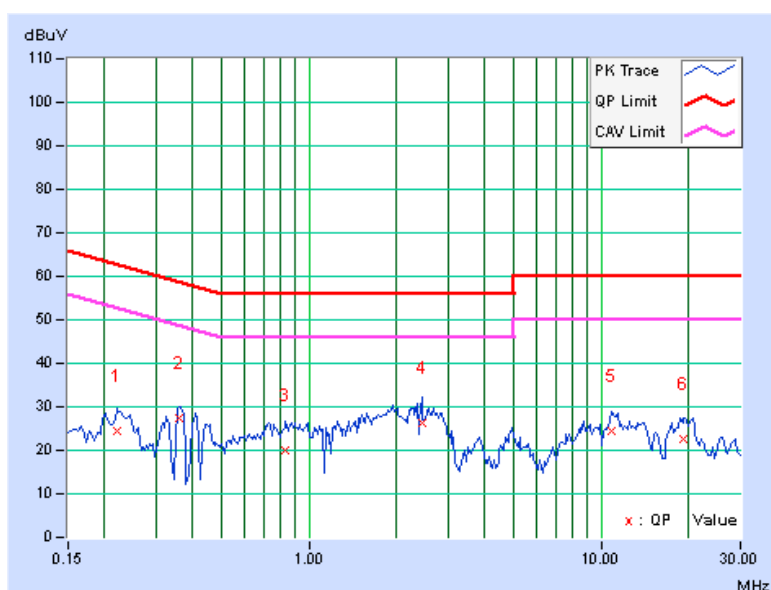

## 5.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

### 5.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

| Frequencies (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009-0.490       | 2400/F(kHz)                       | 300                           |
| 0.490-1.705       | 24000/F(kHz)                      | 30                            |
| 1.705-30.0        | 30                                | 30                            |
| 30-88             | 100                               | 3                             |
| 88-216            | 150                               | 3                             |
| 216-960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**A D T**

## 5.2.2 TEST INSTRUMENTS

### For Below 1GHz test:

| DESCRIPTION & MANUFACTURER              | MODEL NO.                | SERIAL NO.                          | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|-------------------------------------|-----------------|------------------|
| MXE EMI Receiver<br>Agilent             | N9038A                   | MY50010156                          | Jan. 15, 2014   | Jan. 14, 2015    |
| Pre-Amplifier<br>Mini-Circuits          | ZFL-1000VH2<br>B         | AMP-ZFL-04                          | Nov. 13, 2013   | Nov. 12, 2014    |
| Trilog Broadband Antenna<br>SCHWARZBECK | VULB 9168                | 9168-361                            | Feb. 27, 2014   | Feb. 26, 2015    |
| RF Cable                                | NA                       | CHHCAB_001                          | Oct. 06, 2013   | Oct. 05, 2014    |
| Spectrum Analyzer<br>R&S                | FSV40                    | 100964                              | July 15, 2013   | July 14, 2014    |
| Horn_Antenna<br>AISI                    | AIH.8018                 | 0000220091110                       | Dec. 06, 2013   | Dec. 05, 2014    |
| Pre-Amplifier<br>Agilent                | 8449B                    | 3008A01923                          | Oct. 29, 2013   | Oct. 28, 2014    |
| RF Cable                                | NA                       | RF104-205<br>RF104-207<br>RF104-202 | Dec. 12, 2013   | Dec. 11, 2014    |
| Spectrum Analyzer<br>Agilent            | E4446A                   | MY48250253                          | Aug. 28, 2013   | Aug. 27, 2014    |
| Pre-Amplifier<br>SPACEK LABS            | SLKKa-48-6               | 9K16                                | Nov. 13, 2013   | Nov. 12, 2014    |
| Horn_Antenna<br>SCHWARZBECK             | BBHA 9170                | 9170-424                            | Oct. 08, 2013   | Oct. 07, 2014    |
| Software                                | ADT_Radiated<br>_V8.7.07 | NA                                  | NA              | NA               |
| Antenna Tower & Turn Table<br>CT        | NA                       | NA                                  | NA              | NA               |

### Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. H.
4. The FCC Site Registration No. is 797305.
5. The CANADA Site Registration No. is IC 7450H-3.
6. Tested Date: June 18 2014





A D T

**For Above 1GHz test:**

| DESCRIPTION & MANUFACTURER              | MODEL NO.                | SERIAL NO.                          | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|-------------------------------------|-----------------|------------------|
| MXE EMI Receiver<br>Agilent             | N9038A                   | MY51210105                          | Jan. 21,2014    | Jan. 20,2015     |
| Pre-Amplifier<br>Mini-Circuits          | ZFL-1000VH2<br>B         | AMP-ZFL-03                          | Nov. 13, 2013   | Nov. 12, 2014    |
| Trilog Broadband Antenna<br>SCHWARZBECK | VULB 9168                | 9168-360                            | Feb. 26, 2014   | Feb. 25, 2015    |
| RF Cable                                | NA                       | CHGCAB_001                          | Oct. 05, 2013   | Oct. 04, 2014    |
| Spectrum Analyzer<br>R&S                | FSV40                    | 100964                              | July 15, 2013   | July 14, 2014    |
| Horn_Antenna<br>AISI                    | AIH.8018                 | 0000320091110                       | Nov. 18, 2013   | Nov. 17, 2014    |
| Pre-Amplifier<br>Agilent                | 8449B                    | 3008A01923                          | Oct. 29, 2013   | Oct. 28, 2014    |
| RF Cable                                | NA                       | RF104-201<br>RF104-203<br>RF104-204 | Dec. 12, 2013   | Dec. 11, 2014    |
| Spectrum Analyzer<br>Agilent            | E4446A                   | MY48250253                          | Aug. 28, 2013   | Aug. 27, 2014    |
| Pre-Amplifier<br>SPACEK LABS            | SLKKa-48-6               | 9K16                                | Nov. 13, 2013   | Nov. 12, 2014    |
| Horn_Antenna<br>SCHWARZBECK             | BBHA 9170                | 9170-424                            | Oct. 08, 2013   | Oct. 07, 2014    |
| Software                                | ADT_Radiated<br>_V8.7.07 | NA                                  | NA              | NA               |
| Antenna Tower & Turn Table<br>CT        | NA                       | NA                                  | NA              | NA               |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: June 28, 2014

### 5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle  $< 98\%$ ) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

## 5.2.4 DEVIATION FROM TEST STANDARD


No deviation

## 5.2.5 TEST SETUP

<Frequency Range below 1GHz>

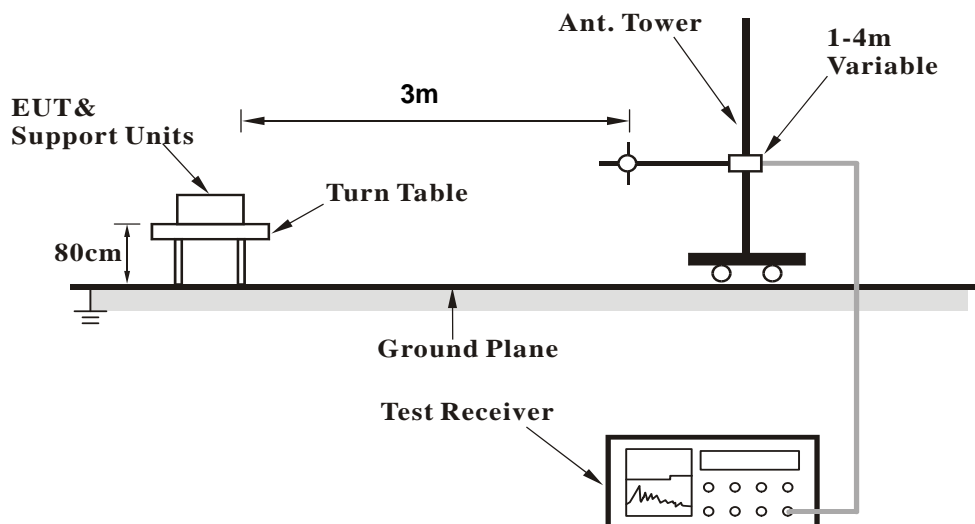

<Frequency Range above 1GHz>

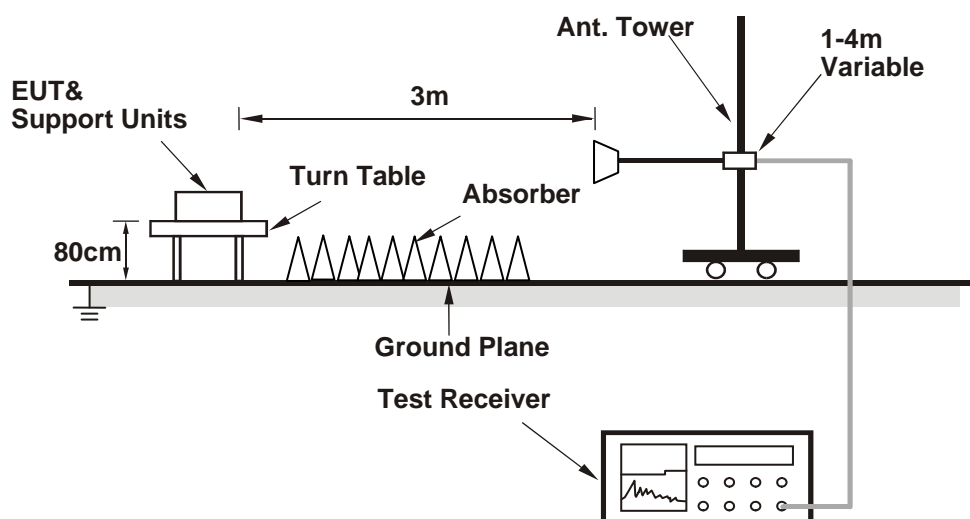

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

## 5.2.6 EUT OPERATING CONDITIONS

Same as 5.1.6



A D T

## 5.2.7 TEST RESULTS

### BELOW 1GHz WORST-CASE DATA

#### BT\_LE-GFSK

|                 |              |                      |                 |
|-----------------|--------------|----------------------|-----------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | Below 1GHz   |                      |                 |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 120.21         | 32.7 QP                       | 43.5              | -10.8          | 1.55 H                   | 212                        | 47.71                  | -14.99                         |
| 2   | 133.66         | 40.3 QP                       | 43.5              | -3.2           | 1.93 H                   | 130                        | 54.14                  | -13.86                         |
| 3   | 166.47         | 40.4 QP                       | 43.5              | -3.1           | 1.52 H                   | 162                        | 53.71                  | -13.33                         |
| 4   | 266.78         | 42.8 QP                       | 46.0              | -3.2           | 1.05 H                   | 137                        | 56.24                  | -13.43                         |
| 5   | 334.19         | 39.9 QP                       | 46.0              | -6.1           | 1.00 H                   | 214                        | 50.86                  | -11.00                         |
| 6   | 399.66         | 35.0 QP                       | 46.0              | -11.0          | 1.96 H                   | 23                         | 44.71                  | -9.70                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 133.33         | 40.4 QP                       | 43.5              | -3.1           | 1.00 V                   | 304                        | 54.25                  | -13.89                         |
| 2   | 156.84         | 36.6 QP                       | 43.5              | -6.9           | 1.05 V                   | 286                        | 49.47                  | -12.91                         |
| 3   | 166.55         | 40.5 QP                       | 43.5              | -3.0           | 1.99 V                   | 108                        | 53.82                  | -13.33                         |
| 4   | 266.23         | 42.8 QP                       | 46.0              | -3.2           | 1.47 V                   | 360                        | 56.27                  | -13.45                         |
| 5   | 283.02         | 36.3 QP                       | 46.0              | -9.7           | 2.00 V                   | 39                         | 49.05                  | -12.72                         |
| 6   | 331.51         | 37.1 QP                       | 46.0              | -8.9           | 1.50 V                   | 241                        | 48.06                  | -11.00                         |

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



A D T

## ABOVE 1GHz DATA

## BT\_LE-GFSK

|                 |              |                      |              |
|-----------------|--------------|----------------------|--------------|
| CHANNEL         | TX Channel 0 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz |                      | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 57.4 PK                       | 74.0              | -16.6          | 1.04 H                   | 136                        | 59.87                  | -2.47                          |
| 2   | 2390.00        | 47.5 AV                       | 54.0              | -6.5           | 1.04 H                   | 136                        | 49.97                  | -2.47                          |
| 3   | *2402.00       | 95.6 PK                       |                   |                | 1.04 H                   | 136                        | 98.01                  | -2.41                          |
| 4   | *2402.00       | 94.0 AV                       |                   |                | 1.04 H                   | 136                        | 96.41                  | -2.41                          |
| 5   | 4804.00        | 50.3 PK                       | 74.0              | -23.7          | 1.54 H                   | 291                        | 44.68                  | 5.62                           |
| 6   | 4804.00        | 42.0 AV                       | 54.0              | -12.0          | 1.54 H                   | 291                        | 36.38                  | 5.62                           |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | 2390.00        | 57.9 PK                       | 74.0              | -16.1          | 1.13 V                   | 316                        | 60.37                  | -2.47                          |
| 2   | 2390.00        | 47.4 AV                       | 54.0              | -6.6           | 1.13 V                   | 316                        | 49.87                  | -2.47                          |
| 3   | *2402.00       | 101.7 PK                      |                   |                | 1.13 V                   | 316                        | 104.11                 | -2.41                          |
| 4   | *2402.00       | 101.0 AV                      |                   |                | 1.13 V                   | 316                        | 103.41                 | -2.41                          |
| 5   | 4804.00        | 50.4 PK                       | 74.0              | -23.6          | 1.04 V                   | 96                         | 44.78                  | 5.62                           |
| 6   | 4804.00        | 41.9 AV                       | 54.0              | -12.1          | 1.04 V                   | 96                         | 36.28                  | 5.62                           |

## REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 19 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2440.00       | 95.8 PK                       |                   |                | 1.01 H                   | 126                        | 98.04                  | -2.24                          |
| 2   | *2440.00       | 94.3 AV                       |                   |                | 1.01 H                   | 126                        | 96.54                  | -2.24                          |
| 3   | 4880.00        | 50.0 PK                       | 74.0              | -24.0          | 1.52 H                   | 278                        | 44.06                  | 5.94                           |
| 4   | 4880.00        | 41.5 AV                       | 54.0              | -12.5          | 1.52 H                   | 278                        | 35.56                  | 5.94                           |
| 5   | 7320.00        | 51.3 PK                       | 74.0              | -22.7          | 1.11 H                   | 120                        | 38.11                  | 13.19                          |
| 6   | 7320.00        | 41.0 AV                       | 54.0              | -13.0          | 1.11 H                   | 120                        | 27.81                  | 13.19                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2440.00       | 102.3 PK                      |                   |                | 1.13 V                   | 260                        | 104.54                 | -2.24                          |
| 2   | *2440.00       | 101.2 AV                      |                   |                | 1.13 V                   | 260                        | 103.44                 | -2.24                          |
| 3   | 4880.00        | 51.0 PK                       | 74.0              | -23.0          | 1.06 V                   | 100                        | 45.06                  | 5.94                           |
| 4   | 4880.00        | 42.3 AV                       | 54.0              | -11.7          | 1.06 V                   | 100                        | 36.36                  | 5.94                           |
| 5   | 7320.00        | 49.7 PK                       | 74.0              | -24.3          | 1.16 V                   | 243                        | 36.51                  | 13.19                          |
| 6   | 7320.00        | 41.2 AV                       | 54.0              | -12.8          | 1.16 V                   | 243                        | 28.01                  | 13.19                          |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.



A D T

|                 |               |                      |              |
|-----------------|---------------|----------------------|--------------|
| CHANNEL         | TX Channel 39 | DETECTOR<br>FUNCTION | Peak (PK)    |
| FREQUENCY RANGE | 1GHz ~ 25GHz  |                      | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M |                |                               |                   |                |                          |                            |                        |                                |
|---|----------------|-------------------------------|-------------------|----------------|--------------------------|----------------------------|------------------------|--------------------------------|
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2480.00       | 94.0 PK                       |                   |                | 1.00 H                   | 360                        | 96.06                  | -2.06                          |
| 2   | *2480.00       | 93.7 AV                       |                   |                | 1.00 H                   | 360                        | 95.76                  | -2.06                          |
| 3   | 2483.50        | 60.7 PK                       | 74.0              | -13.3          | 1.00 H                   | 134                        | 62.73                  | -2.03                          |
| 4   | 2483.50        | 48.1 AV                       | 54.0              | -5.9           | 1.00 H                   | 134                        | 50.13                  | -2.03                          |
| 5   | 4960.00        | 49.3 PK                       | 74.0              | -24.7          | 1.49 H                   | 290                        | 43.04                  | 6.26                           |
| 6   | 4960.00        | 41.0 AV                       | 54.0              | -13.0          | 1.49 H                   | 290                        | 34.74                  | 6.26                           |
| 7   | 7440.00        | 51.2 PK                       | 74.0              | -22.8          | 1.10 H                   | 104                        | 38.07                  | 13.13                          |
| 8   | 7440.00        | 40.7 AV                       | 54.0              | -13.3          | 1.10 H                   | 104                        | 27.57                  | 13.13                          |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M   |                |                               |                   |                |                          |                            |                        |                                |
| NO.   | FREQ.<br>(MHz) | EMISSION<br>LEVEL<br>(dBuV/m) | LIMIT<br>(dBuV/m) | MARGIN<br>(dB) | ANTENNA<br>HEIGHT<br>(m) | TABLE<br>ANGLE<br>(Degree) | RAW<br>VALUE<br>(dBuV) | CORRECTION<br>FACTOR<br>(dB/m) |
| 1   | *2480.00       | 100.2 PK                      |                   |                | 1.12 V                   | 200                        | 102.26                 | -2.06                          |
| 2   | *2480.00       | 99.5 AV                       |                   |                | 1.12 V                   | 200                        | 101.56                 | -2.06                          |
| 3   | 2483.50        | 64.2 PK                       | 74.0              | -9.8           | 1.12 V                   | 200                        | 66.23                  | -2.03                          |
| 4   | 2483.50        | 48.4 AV                       | 54.0              | -5.6           | 1.12 V                   | 200                        | 50.43                  | -2.03                          |
| 5   | 4960.00        | 51.0 PK                       | 74.0              | -23.0          | 1.02 V                   | 103                        | 44.74                  | 6.26                           |
| 6   | 4960.00        | 42.0 AV                       | 54.0              | -12.0          | 1.02 V                   | 103                        | 35.74                  | 6.26                           |
| 7   | 7440.00        | 49.2 PK                       | 74.0              | -24.8          | 1.21 V                   | 259                        | 36.07                  | 13.13                          |
| 8   | 7440.00        | 40.8 AV                       | 54.0              | -13.2          | 1.21 V                   | 259                        | 27.67                  | 13.13                          |

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.

### 5.3 6dB BANDWIDTH MEASUREMENT

#### 5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 5.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 01, 2014


#### 5.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

#### 5.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.3.5 TEST SETUP




#### 5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 5.3.7 TEST RESULTS

| CHANNEL | FREQUENCY (MHz) | 6dB BANDWIDTH (MHz) | MINIMUM LIMIT (MHz) | PASS / FAIL |
|---------|-----------------|---------------------|---------------------|-------------|
| 0       | 2402            | 0.52                | 0.5                 | PASS        |
| 19      | 2440            | 0.52                | 0.5                 | PASS        |
| 39      | 2480            | 0.52                | 0.5                 | PASS        |

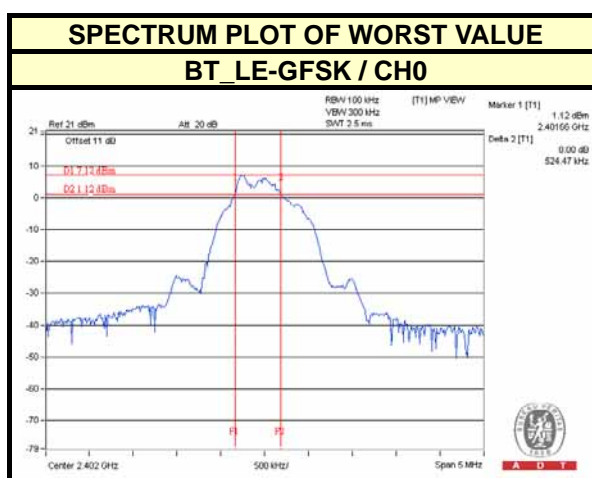

## 5.4 CONDUCTED OUTPUT POWER MEASUREMENT

### 5.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

### 5.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| Power meter<br>Anritsu     | ML2495A   | 1014008    | Apr. 30, 2014   | Apr. 29, 2015    |
| Power sensor<br>Anritsu    | MA2411B   | 0917122    | Apr. 30, 2014   | Apr. 29, 2015    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 01, 2014


### 5.4.3 TEST PROCEDURES

The peak / average power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak / average power sensor. Record the peak power level.

#### 5.4.4 DEVIATION FROM TEST STANDARD

No deviation.

#### 5.4.5 TEST SETUP



#### 5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6



## 5.4.7 TEST RESULTS

### FOR PEAK POWER

#### BT\_LE-GFSK

| CHANNEL | FREQUENCY (MHz) | PEAK POWER (mW) | PEAK POWER (dBm) | LIMIT (dBm) | PASS/FAIL |
|---------|-----------------|-----------------|------------------|-------------|-----------|
| 0       | 2402            | 5.236           | 7.19             | 30          | PASS      |
| 19      | 2440            | 5.047           | 7.03             | 30          | PASS      |
| 39      | 2480            | 4.831           | 6.84             | 30          | PASS      |

### FOR AVERAGE POWER

#### BT\_LE-GFSK

| CHANNEL | FREQUENCY (MHz) | AVERAGE POWER (mW) | AVERAGE POWER (dBm) |
|---------|-----------------|--------------------|---------------------|
| 0       | 2402            | 2.084              | 3.19                |
| 19      | 2440            | 2.061              | 3.14                |
| 39      | 2480            | 2.014              | 3.04                |

## 5.5 POWER SPECTRAL DENSITY MEASUREMENT

### 5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

### 5.5.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 01, 2014


### 5.5.3 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

### 5.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 5.5.5 TEST SETUP




### 5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6

## 5.5.7 TEST RESULTS

### BT\_LE-GFSK

| Channel | FREQUENCY (MHz) | PSD (dBm) | LIMIT (dBm) | PASS /FAIL |
|---------|-----------------|-----------|-------------|------------|
| 0       | 2402            | -13.96    | 8           | PASS       |
| 19      | 2440            | -14.34    | 8           | PASS       |
| 39      | 2480            | -14.66    | 8           | PASS       |

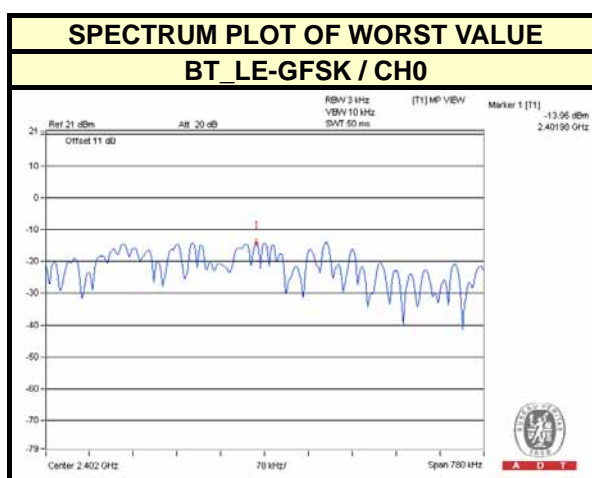

## 5.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

### 5.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below 20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 5.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| SPECTRUM ANALYZER R&S      | FSV 40    | 100964     | July 15, 2013   | July 14, 2014    |

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 01, 2014

### 5.6.3 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


#### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 5.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 5.6.5 TEST SETUP



#### 5.6.6 EUT OPERATING CONDITION

Same as Item 5.3.6

#### 5.6.7 TEST RESULTS

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.







A D T

## BT LE-GFSK


## CH 0

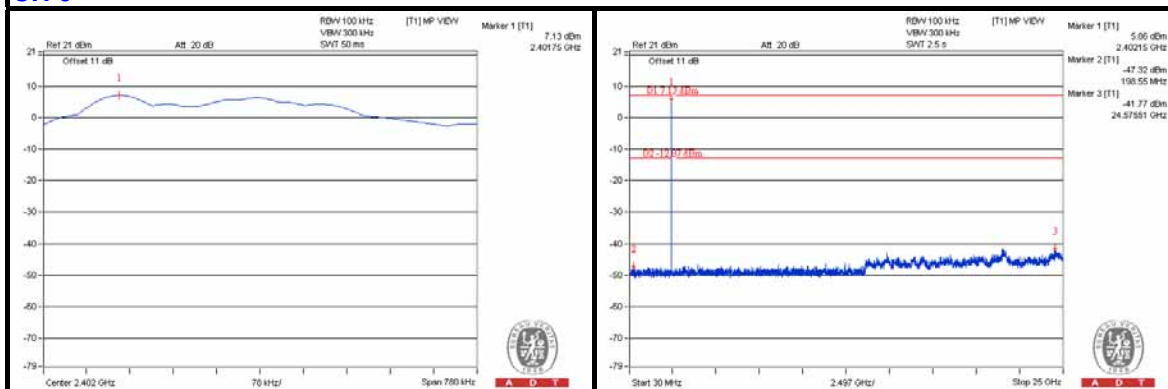


## CH 19

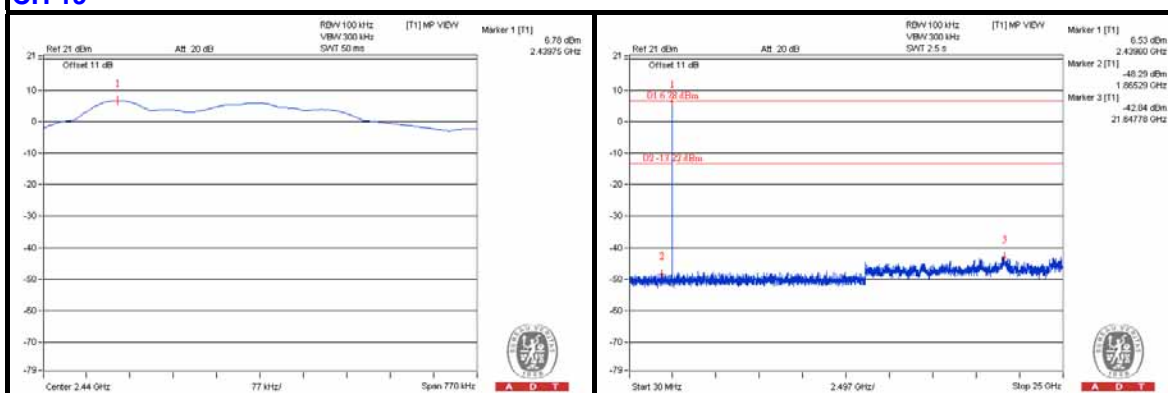


## CH 39

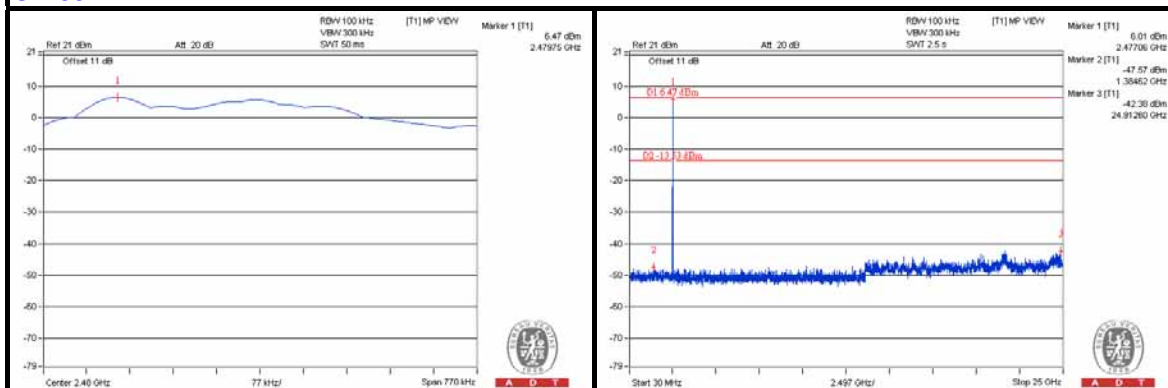

## CH 0 Band edge

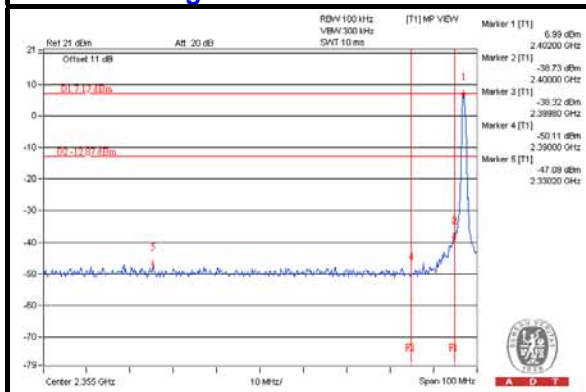

## CH 39 Band edge

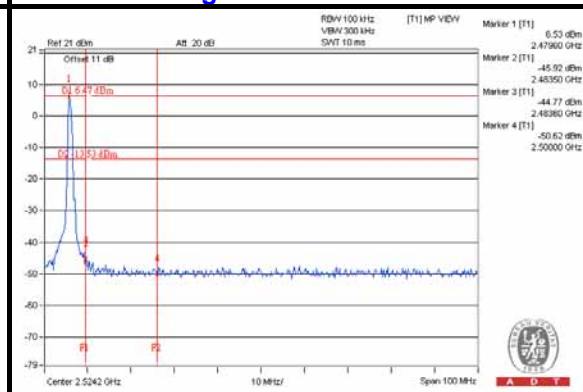



A D T

## 6 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

## 7 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

## **8 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**