



FCC RADIO TEST REPORT

FCC ID : SWX-UBB
Equipment : UniFi Building Bridge
Brand Name : UBIQUITI
Model Name : UBB
Applicant : Ubiquiti Inc.
685 Third Avenue, New York, New York 10017 USA
Manufacturer : Ubiquiti Inc.
685 Third Avenue, New York, New York 10017 USA
Standard : 47 CFR FCC Part 15.255

The product was received on Feb. 11, 2020, and testing was started from Feb. 17, 2020 and completed on Feb. 28, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013, 47 CFR FCC Part 15.255 and Millimeter Wave Test Procedures, FCC KDB 414788 D01 v01r01 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....3

Summary of Test Result.....4

1 General Description5

1.1 Information.....5

1.2 Applicable Standards8

1.3 Testing Location8

2 Test Configuration of Equipment under Test.....9

2.1 Test Channel Frequencies9

2.2 Conformance Tests and Related Test Frequencies.....10

2.3 EUT Operation during Test10

2.4 Accessories11

2.5 Support Equipment.....11

2.6 Far Field Boundary Calculations12

2.7 Test Setup Diagram13

3 Transmitter Test Result14

3.1 Occupied Bandwidth14

3.2 EIRP Power.....25

3.3 Peak Conducted Power.....29

3.4 Transmitter Spurious Emissions.....32

3.5 Frequency Stability.....58

3.6 Operation Restriction and Group Installation62

4 Test Equipment and Calibration Data63

5 Measurement Uncertainty65

Appendix A. Test Photos

Photographs of EUT v01



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	FCC 15.255(e)	Occupied Bandwidth	PASS	-
3.2	FCC 15.255(c)	EIRP Power	PASS	-
3.3	FCC 15.255(c)	Peak Conducted Power	PASS	-
3.4	FCC 15.255(d)	Transmitter Spurious Emissions	PASS	-
3.5	FCC 15.255(f)	Frequency Stability	PASS	-
3.6	FCC 15.255(a),(h)	Operation Restriction and Group Installation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information	
Frequency Range	57-71 GHz
The Channel Plan(s)	<p>For Bandwidth: 2.16 GHz</p> <p>Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz Channel 4: 64.80 GHz Channel 4.5: 65.88 GHz</p> <p>For Bandwidth: 1.08 GHz</p> <p>Channel 1: 58.32 GHz Channel 2: 59.40 GHz Channel 3: 60.48 GHz Channel 4: 61.56 GHz Channel 5: 62.64 GHz Channel 6: 63.72 GHz Channel 7: 64.80 GHz Channel 8: 65.88 GHz</p>
Modulation	$\pi/2$ -BPSK, $\pi/2$ -QPSK, $\pi/2$ -16QAM

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	PER831	Intergal Antenna	N/A	19.9

Note: The above information was declared by manufacturer.



1.1.3 Operating Conditions

Operating Conditions	
<input checked="" type="checkbox"/> -40 °C to +70 °C	
<input type="checkbox"/> 0 °C to +40 °C	
<input type="checkbox"/> Other:	
EUT Power Type	From PoE
Supply Voltage	<input type="checkbox"/> AC State AC voltage V
Supply Voltage	<input checked="" type="checkbox"/> DC State DC voltage 48 V

1.1.4 Equipment Use Condition

Equipment Use Condition
<input type="checkbox"/> Fixed field disturbance sensors at 61-61.5GHz
<input type="checkbox"/> Except fixed field disturbance sensors at 61-61.5GHz
<input checked="" type="checkbox"/> Except fixed field disturbance sensors

1.1.5 User Condition

Intended Operation
<input type="checkbox"/> Indoor
<input checked="" type="checkbox"/> Outdoor (except outdoor fixed Point to Point)
<input checked="" type="checkbox"/> Outdoor fixed Point to Point

Note: The above information was declared by manufacturer.

1.1.6 Duty Cycle

Duty Cycle	Duty Cycle Factor
The transmitter is intended for	100 %
	10



1.1.7 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR951623-09

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
1. Change the component and layout for PCB board of 60GHz. 2. Change the antenna for 60GHz.	1. Occupied Bandwidth 2. EIRP Power 3. Peak Conducted Power 4. Transmitter Spurious Emissions 5. Frequency Stability



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

1.3 Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Radiated	03CH06-CB	Stim Sung	20.2-20.9°C / 60-62%	Feb. 17, 2020 ~ Feb. 28, 2020
RF Conducted	TH03-CB	Eddie Weng	20.5-21.2°C / 55-56%	Feb. 28, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



2 Test Configuration of Equipment under Test

2.1 Test Channel Frequencies

For Bandwidth: 2.16 GHz:

Test Channel Frequencies Configuration	
Channel 1 (GHz)	58.32
Channel 2 (GHz)	60.48
Channel 3 (GHz)	62.64
Channel 4 (GHz)	64.80
Channel 4.5 (GHz)	65.88

For Bandwidth: 1.08 GHz:

Test Channel Frequencies Configuration	
Channel 1 (GHz)	58.32
Channel 5 (GHz)	62.64
Channel 8 (GHz)	65.88



2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)	
	Bandwidth: 2.16 GHz	Bandwidth: 1.08 GHz
Occupied Bandwidth	58.32, 60.48, 62.64, 64.80, 65.88	58.32, 62.64, 65.88
EIRP Power	58.32, 60.48, 62.64, 64.80, 65.88	58.32, 62.64, 65.88
Peak Conducted Power	58.32, 60.48, 62.64, 64.80, 65.88	58.32, 62.64, 65.88
Transmitter Spurious Emissions (below 1 GHz)	N/A	62.64
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32, 60.48, 62.64, 64.80, 65.88	58.32, 62.64, 65.88
Transmitter Spurious Emissions (above 40 GHz)	58.32, 60.48, 62.64, 64.80, 65.88	58.32, 62.64, 65.88
Frequency Stability	62.64	62.64

The following test modes were performed for all tests:

For Transmitter Spurious Emissions (below 1 GHz) test:

The EUT was performed at Y axis, X axis and Z axis position position for Transmitter Spurious Emissions (above 1 GHz) test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.

Channel: 62.64 GHz and Bandwidth: 1.08GHz was maximum power for EIRP Power test, thus the measurement for Transmitter Spurious Emissions (below 1 GHz) will follow this same test configuration.

For Transmitter Spurious Emissions (above 1 GHz) test:

The EUT was performed at Y axis, X axis and Z axis position, and the worst case was found at Y axis. So the measurement will follow this same test configuration.

2.3 EUT Operation during Test

During the test, "Telnet" under WIN 7 was executed the test program to control the EUT continuously transmit RF signal.



2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
PoE	UBIQUITI	GP-V480-032G	INPUT: 100-240V ~ 50/60MHz, Max 0.5A OUTPUT: 48V, 0.32A

2.5 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A



2.6 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$

where:

L = Largest Antenna Dimension, including the reflector, in meters

λ = wavelength in meters


For Bandwidth: 2.16 GHz

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.02	0.0051440	0.156	15.55
60.48	0.02	0.0049603	0.161	16.13
62.64	0.02	0.0047893	0.167	16.70
64.80	0.02	0.0046296	0.173	17.28
65.88	0.02	0.0045537	0.176	17.57

For Bandwidth: 1.08 GHz

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.02	0.0051440	0.156	15.55
62.64	0.02	0.0047893	0.167	16.70
65.88	0.02	0.0045537	0.176	17.57

2.7 Test Setup Diagram

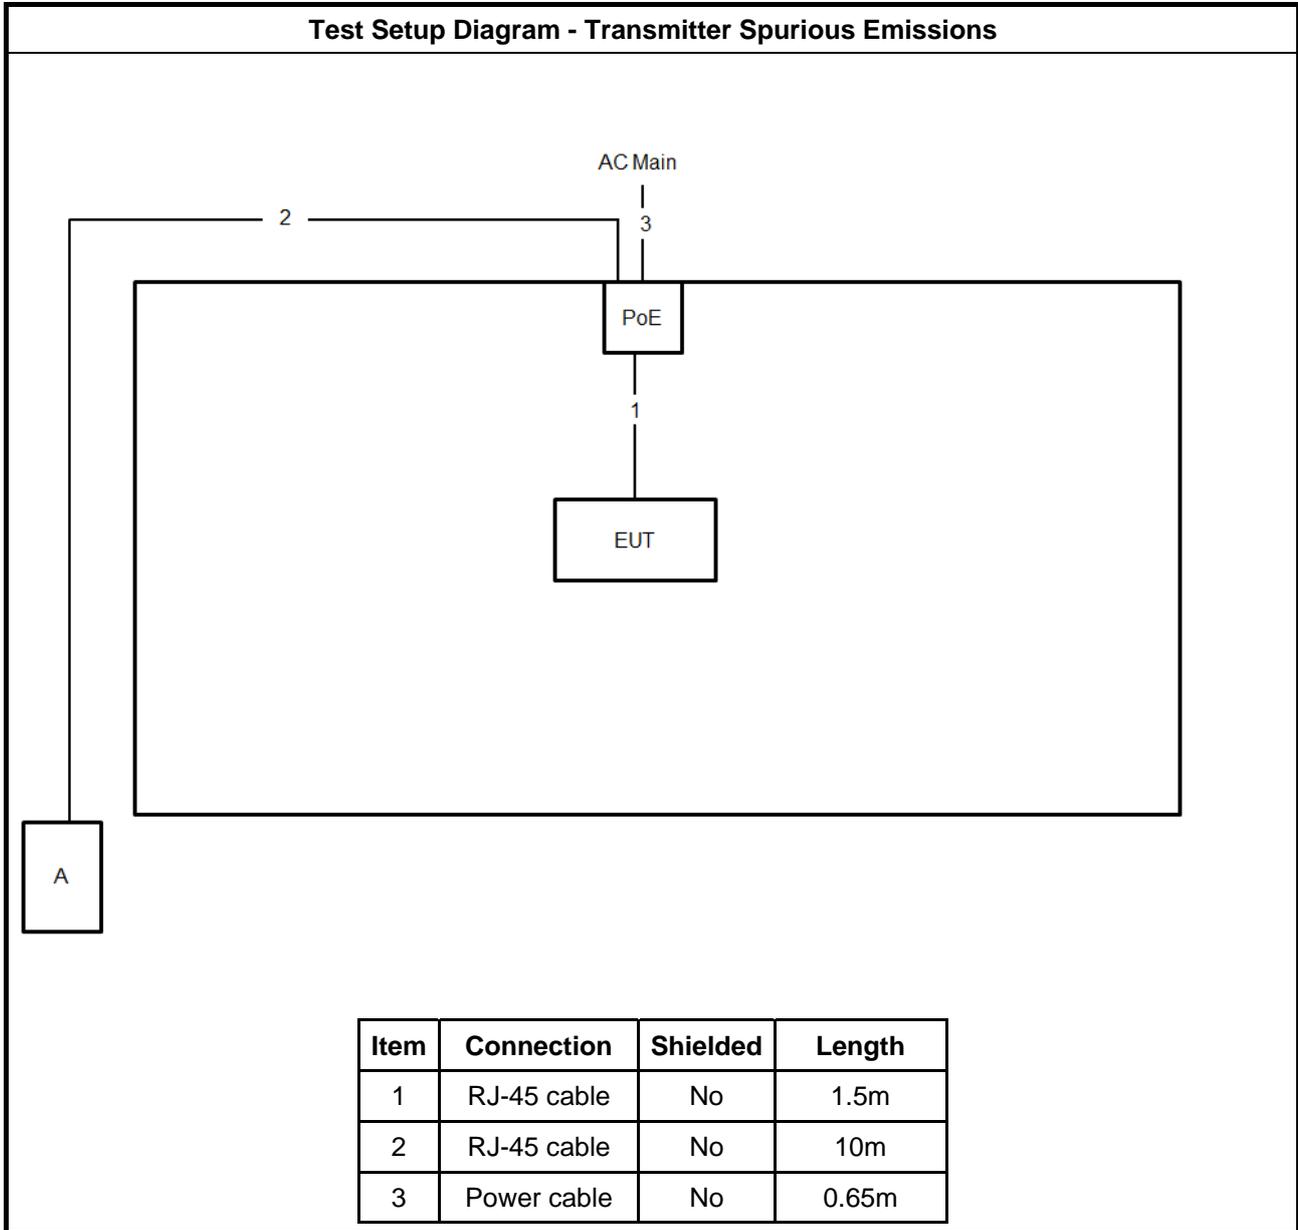



3 Transmitter Test Result

3.1 Occupied Bandwidth

3.1.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
99% Occupied Bandwidth (see Note 2)	None
NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.	
NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.	


3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

3.1.4 Test Setup

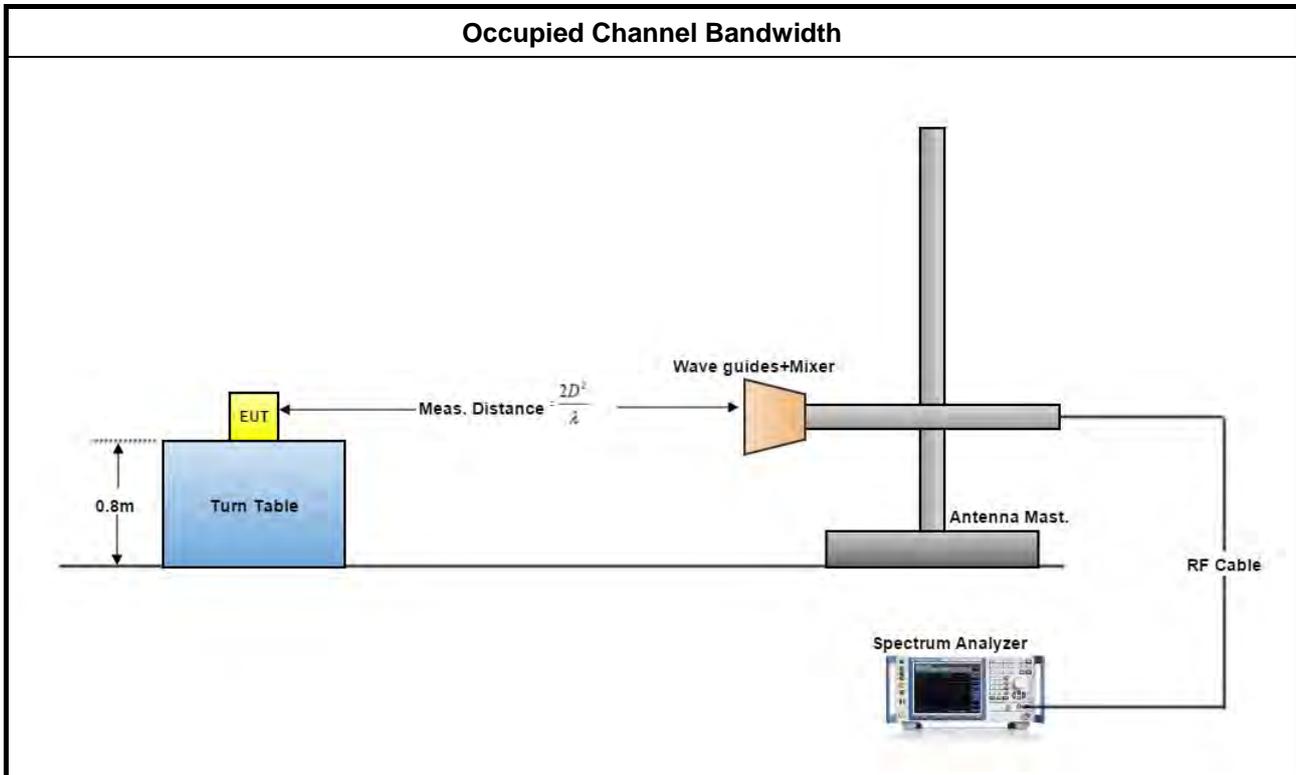



3.1.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.9.2
<p>NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.</p>	

For Bandwidth: 2.16 GHz

Test Results			
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
58.32	1411.00	2026.05	N/A
60.48	1382.10	2083.93	N/A
62.64	1396.50	2011.58	N/A
64.80	1483.40	1960.93	N/A
65.88	1468.90	1989.87	N/A



For Bandwidth: 1.08 GHz

Test Results			
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
58.32	735.20	998.55	N/A
62.64	759.80	1020.26	N/A
65.88	833.60	1124.46	N/A



3.1.5.1 Bandwidth Plots


For Bandwidth: 2.16 GHz

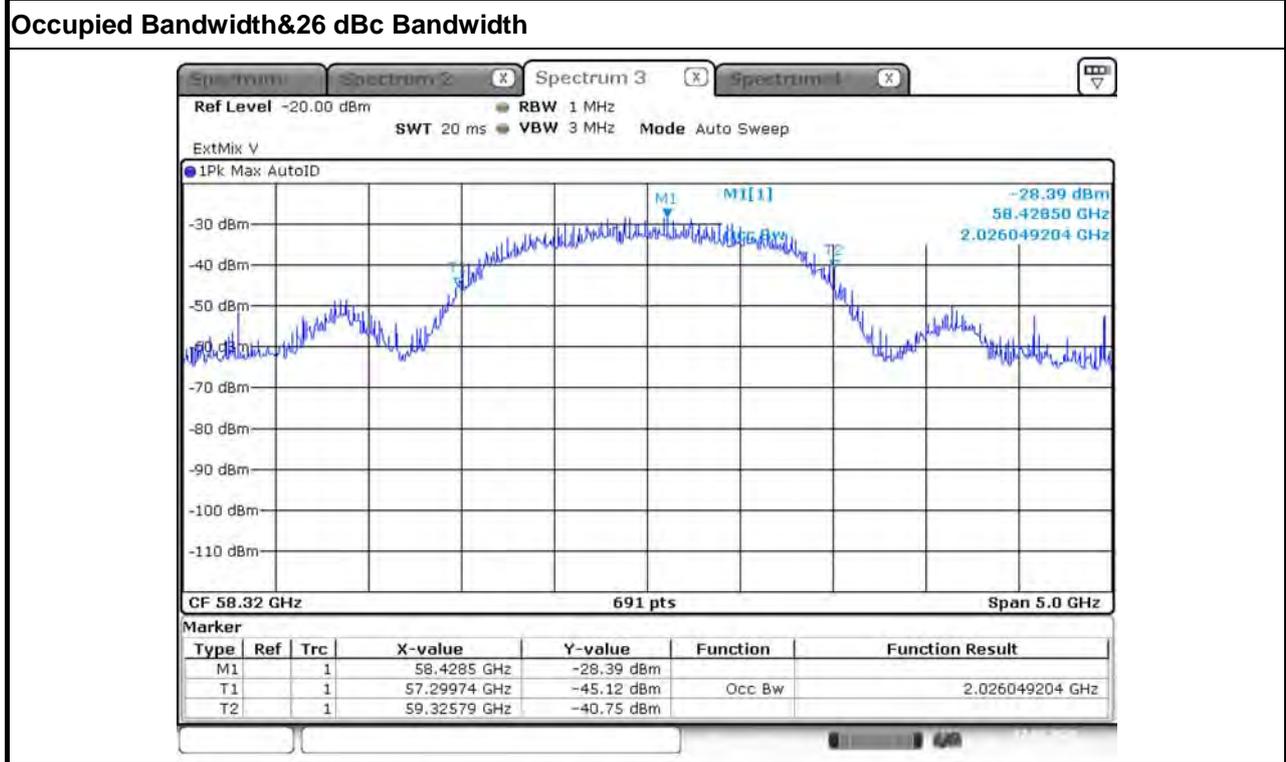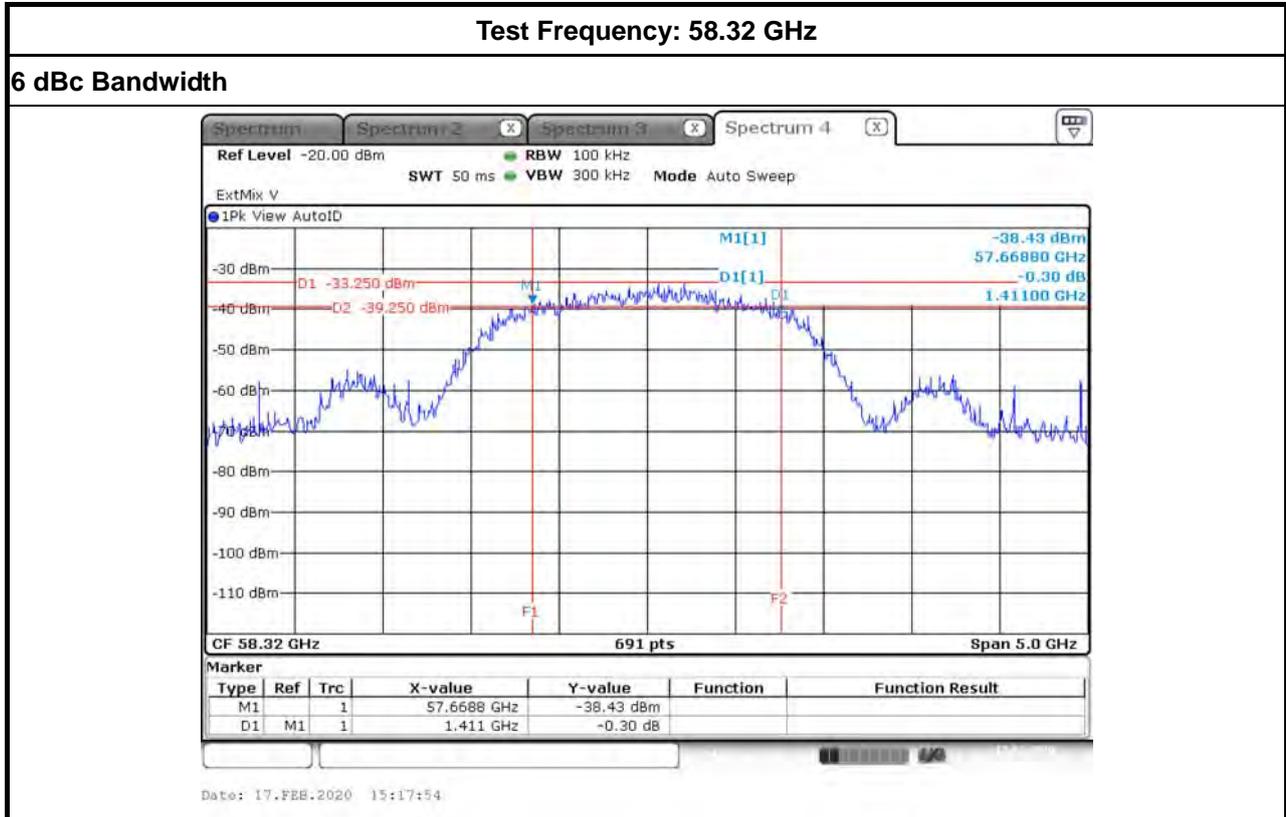




Test Frequency: 60.48GHz

6 dBc Bandwidth

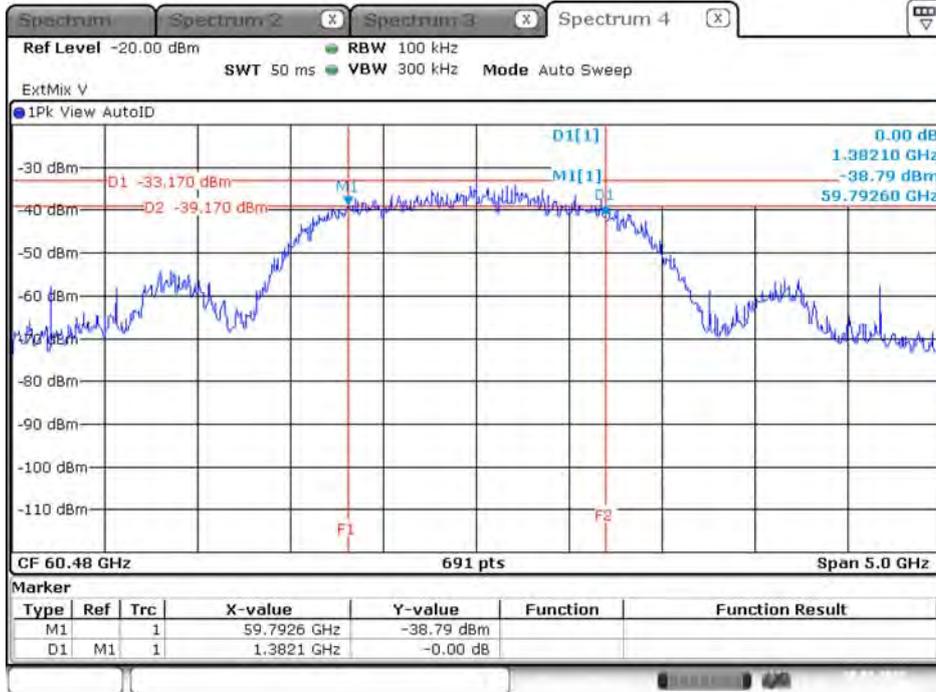

Occupied Bandwidth&26 dBc Bandwidth

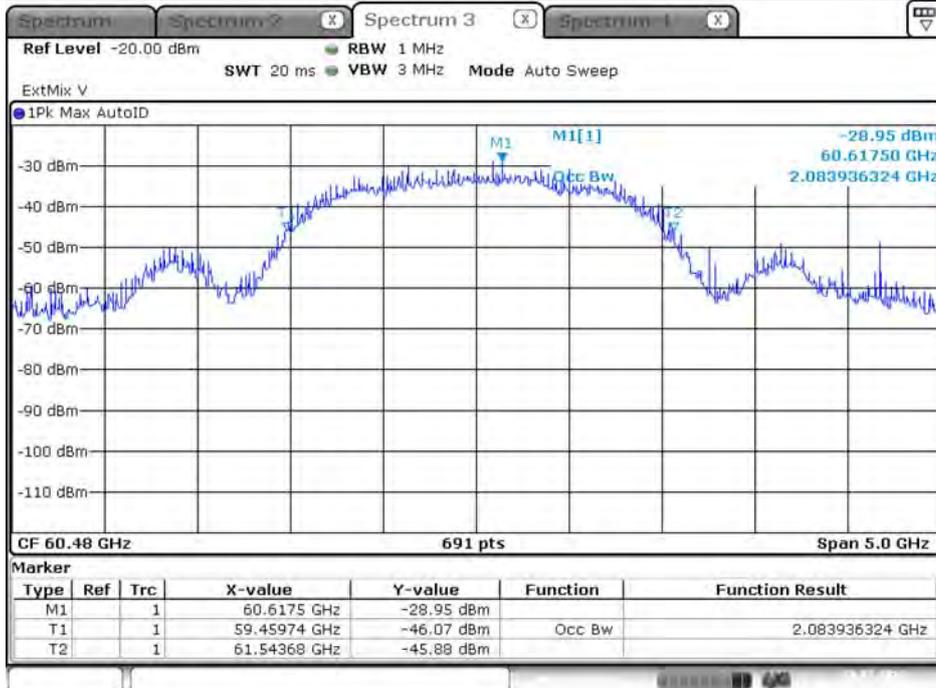


Date: 28.FEB.2020 09:32:54




Test Frequency: 62.64 GHz

6 dBc Bandwidth

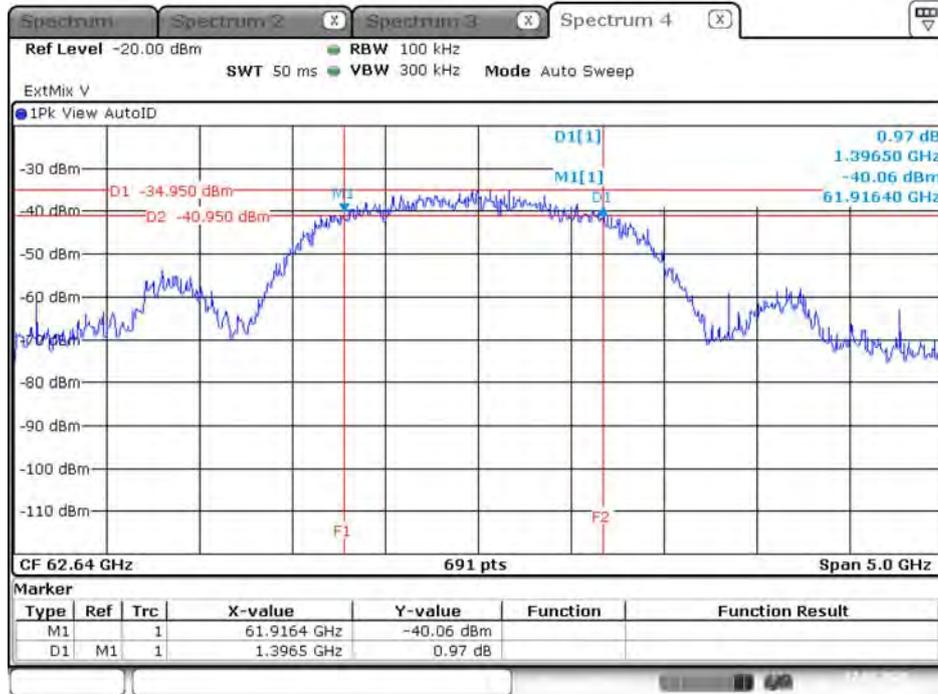

Date: 17.FEB.2020 15:22:00

Occupied Bandwidth

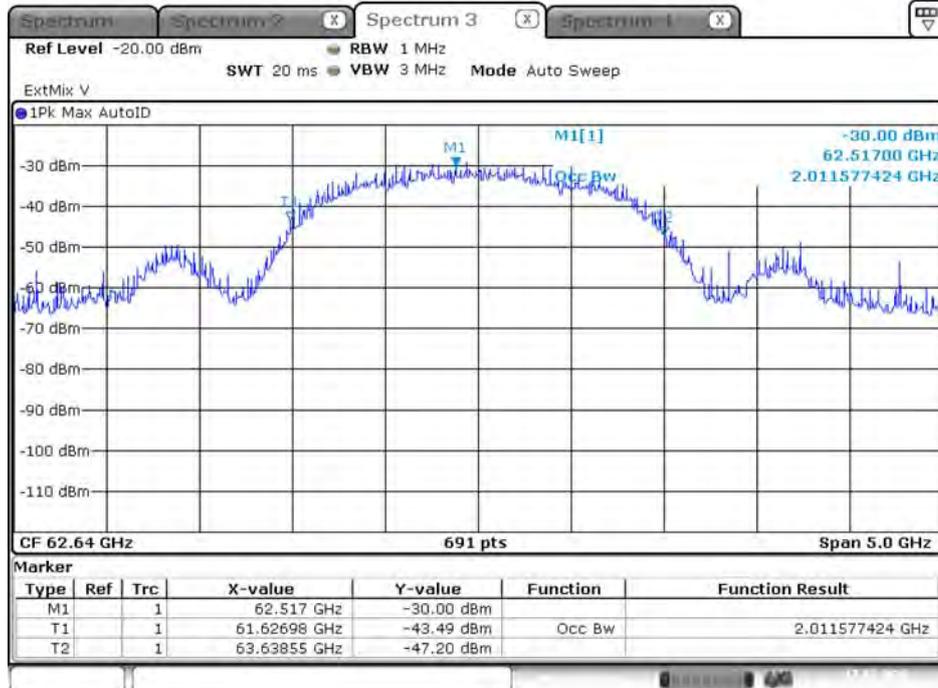


Date: 17.FEB.2020 15:20:31




Test Frequency: 64.80 GHz

6 dBc Bandwidth

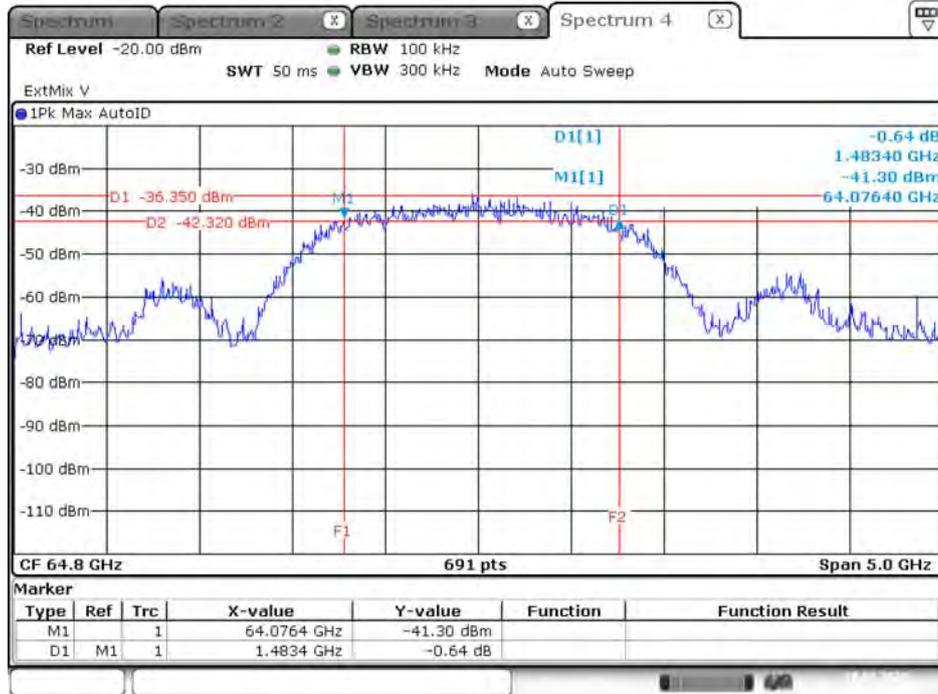

Date: 28.FEB.2020 10:08:02

Occupied Bandwidth

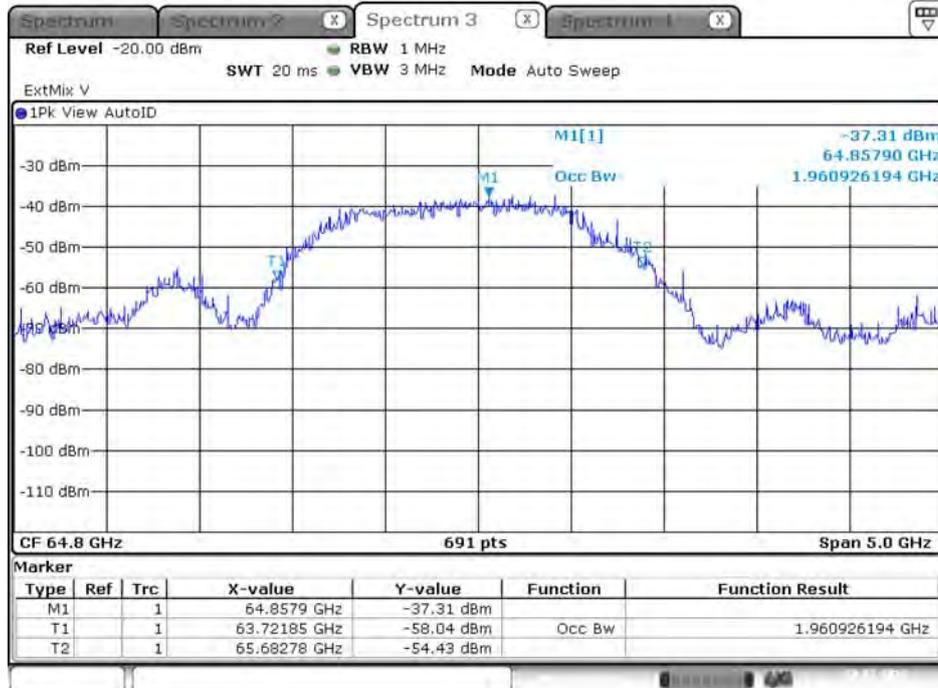


Date: 28.FEB.2020 10:10:06




Test Frequency: 65.88 GHz

6 dBc Bandwidth

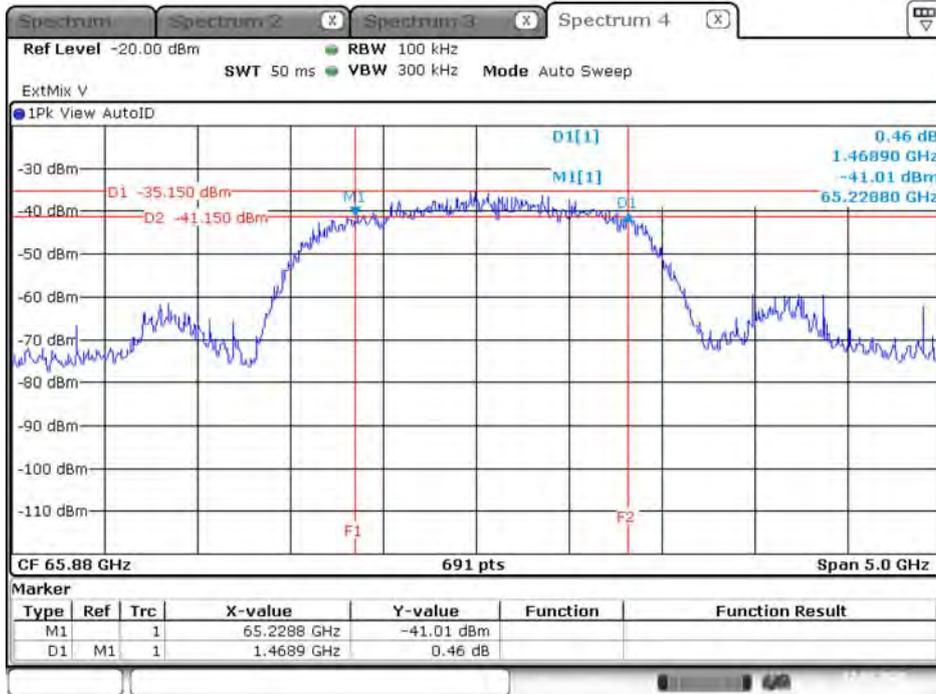

Date: 17.FEB.2020 15:29:58

Occupied Bandwidth

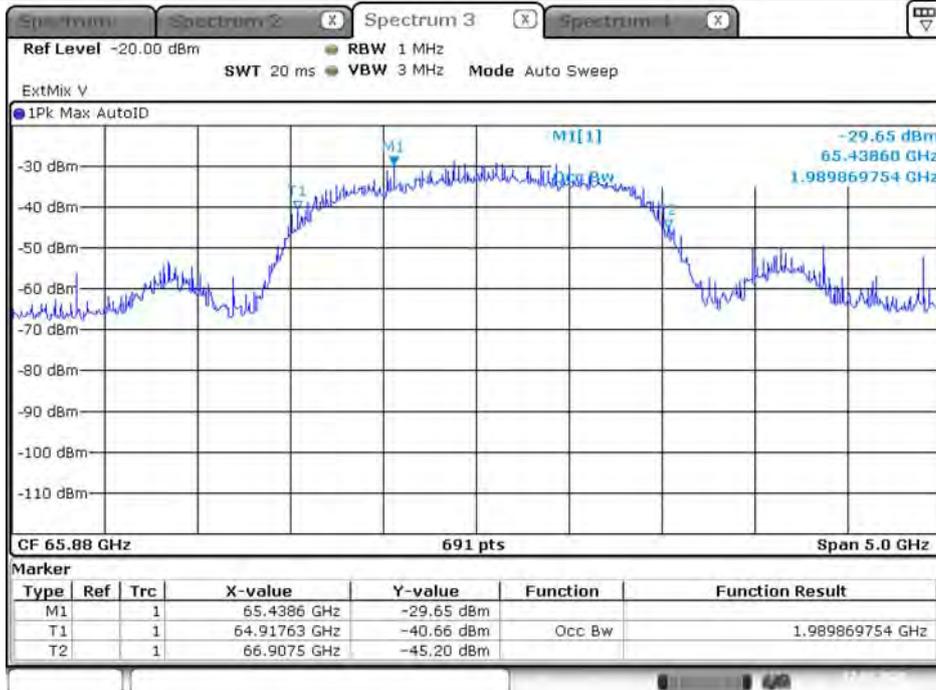


Date: 17.FEB.2020 15:28:07




For Bandwidth: 1.08 GHz

Test Frequency: 58.32 GHz

6 dBc Bandwidth

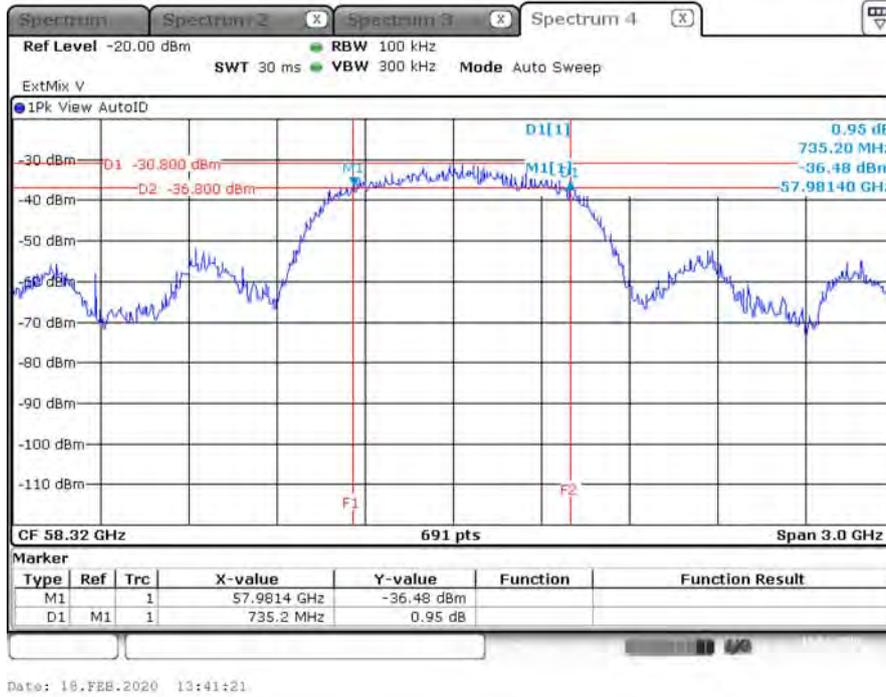


Occupied Bandwidth & 26 dBc Bandwidth

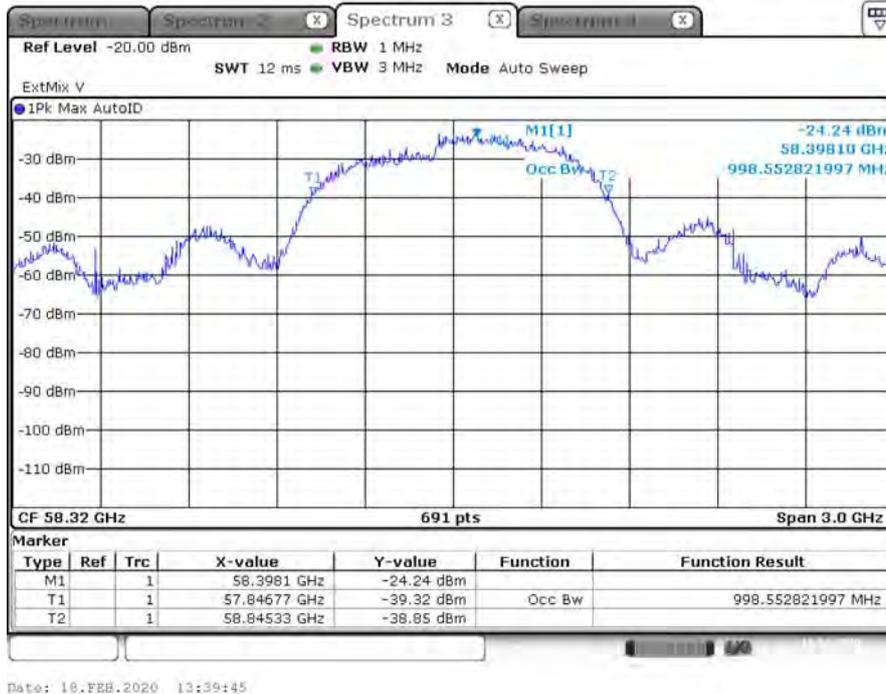




Test Frequency: 62.64 GHz

6 dBc Bandwidth

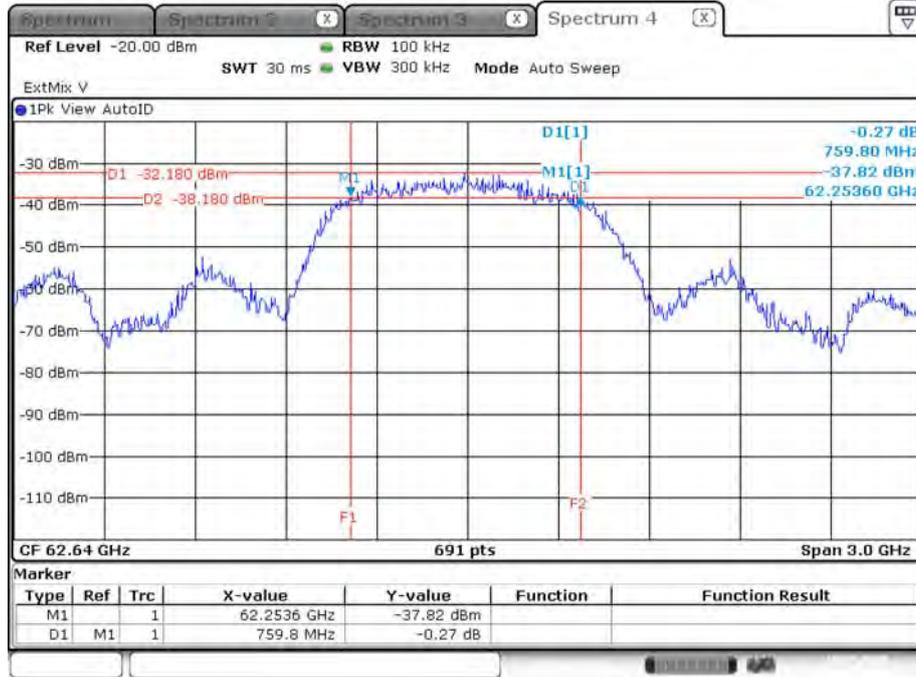

Date: 18.FEB.2020 13:53:00

Occupied Bandwidth&26 dBc Bandwidth

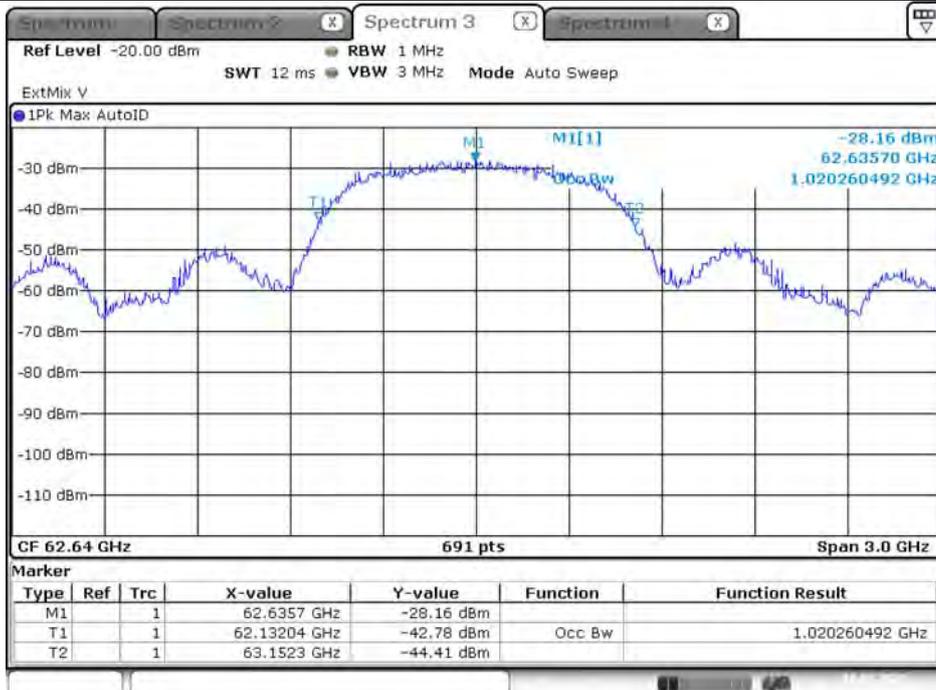


Date: 18.FEB.2020 13:51:38




Test Frequency: 65.88 GHz

6 dBc Bandwidth

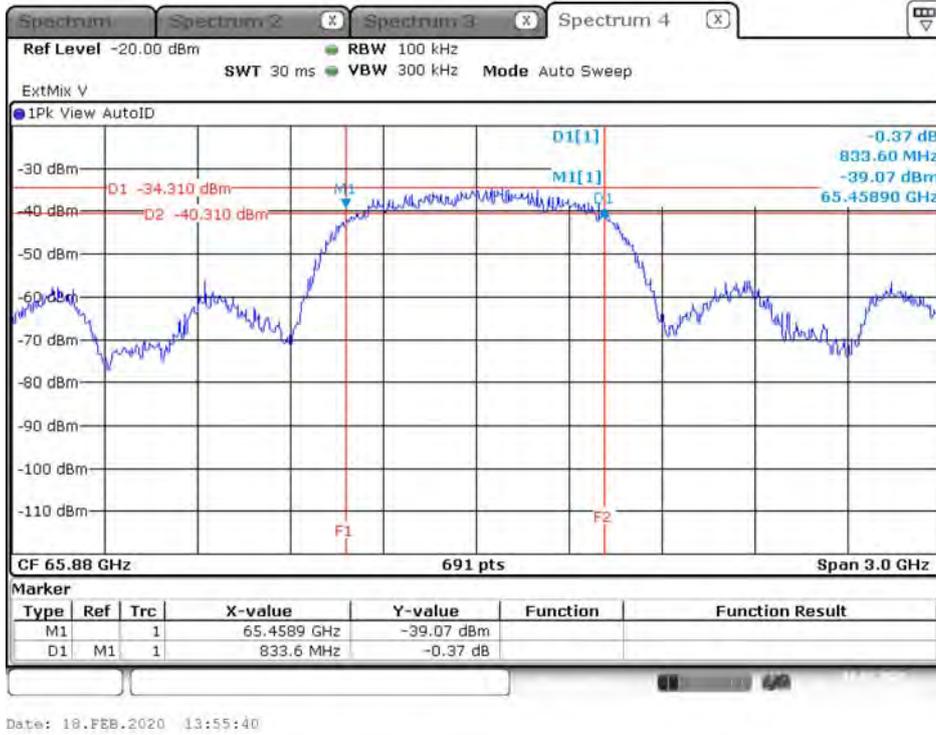

Occupied Bandwidth

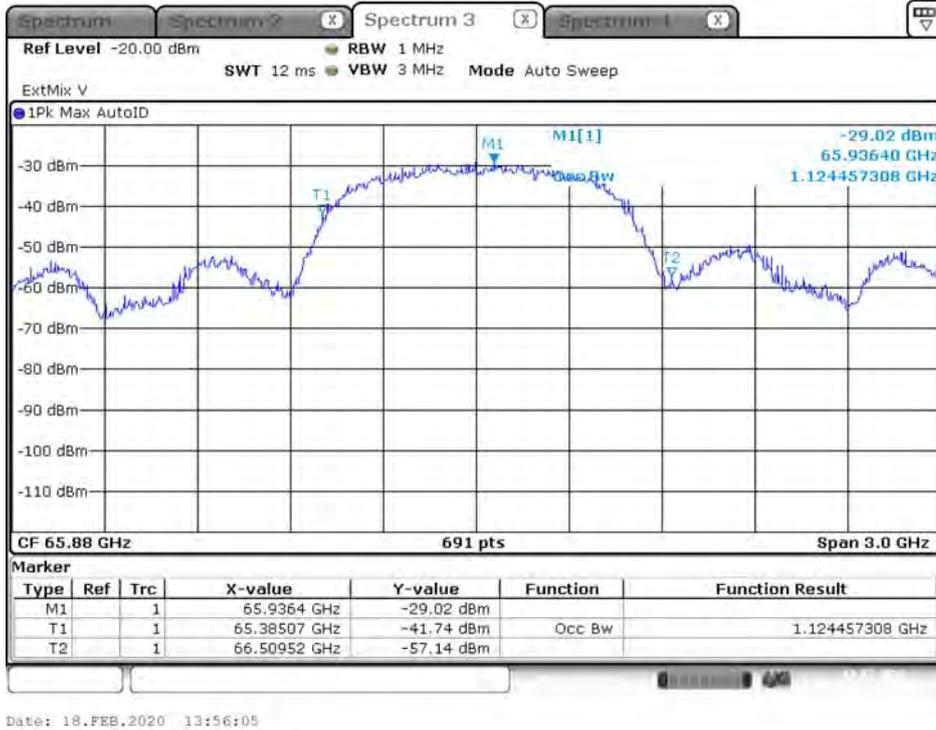



3.2 EIRP Power

3.2.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm

Note: For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.

NOTE: For the applicable limit, see FCC 15.255 (c)


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

3.2.4 Test Setup

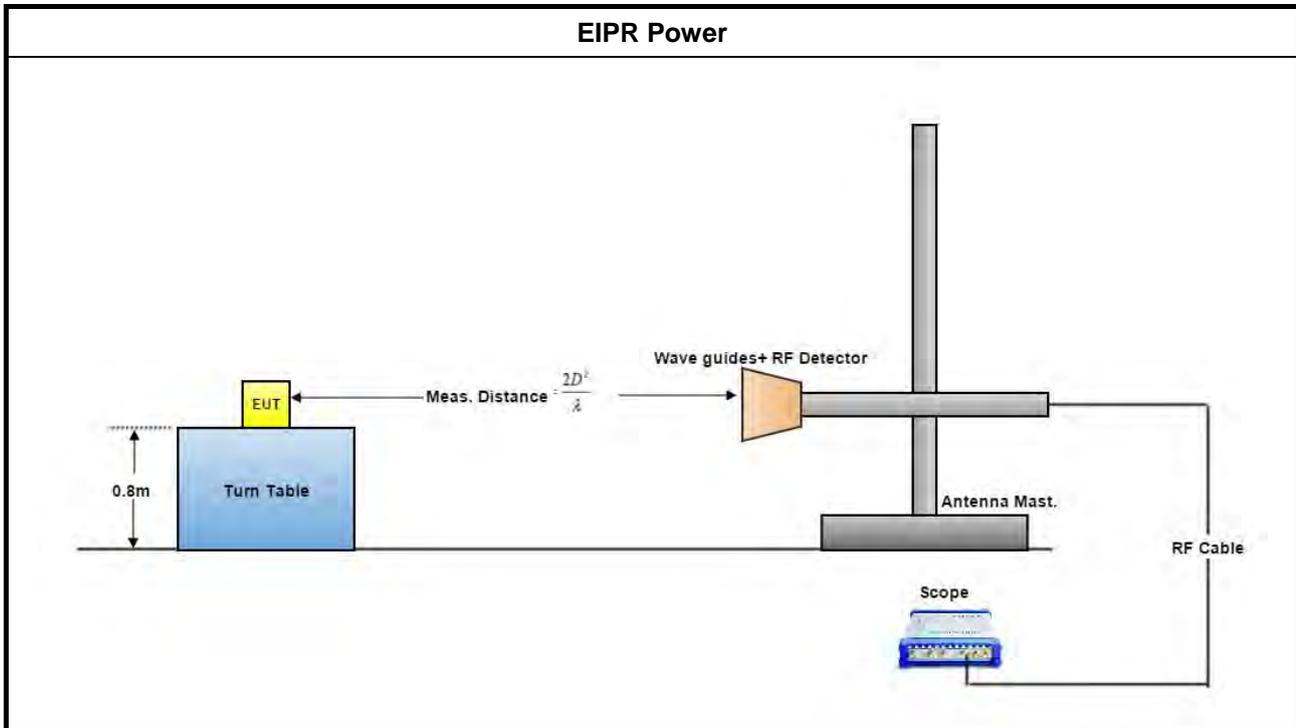

3.2.5 Test Result of EIRP Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
<p>NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.</p>	



3.2.5.1 Test Result of EIRP Power

For Bandwidth: 2.16 GHz

Test Distance		0.50m									
Test Results											
Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E _{Meas} (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	347.50	228.64	-4.25	-7.48	144.72	141.49	33.90	30.67	43	40
60.48	23.6	300.83	200.12	-5.37	-8.44	143.92	140.85	33.10	30.03	43	40
62.64	23.6	287.71	193.10	-5.69	-8.70	143.90	140.89	33.08	30.07	43	40
64.80	23.6	194.99	128.40	-8.63	-11.48	141.26	138.41	30.44	27.59	43	40
65.88	23.6	247.72	172.50	-6.88	-9.50	143.15	140.53	32.33	29.71	43	40

The measured power level is converted to EIRP using the Friis equation:

For radiated emissions, calculate the field strength (E) in dBuV/meter.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where:

E : is the field strength of the emission at the measurement distance, in dBuV/m

P : is the power measured at the output of the test antenna, in dBm

λ: is the wavelength of the emission under investigation [300/fMHz], in m

G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.

$$EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$$

where:

EIRP : is the equivalent isotopically radiated power, in dBm

E-meas. : is the field strength of the emission at the measurement distance, in dBuV/m

d-meas. : is the measurement distance, in m

NOTE 1: For the applicable limit, see FCC 15.255 (c)

NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.



Bandwidth: 1.8 GHz

Test Distance	0.50
----------------------	------

Test Results											
Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E_{Meas} (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	366.64	258.26	-3.82	-6.54	145.15	142.43	34.33	31.61	43	40
62.64	23.6	578.18	217.76	-0.06	-7.82	149.53	141.77	38.71	30.95	43	40
65.88	23.6	267.56	175.00	-6.24	-9.40	143.79	140.63	32.97	29.81	43	40

The measured power level is converted to EIRP using the Friis equation:
 For radiated emissions, calculate the field strength (E) in dBµV/meter.
 $E = 126.8 - 20\log(\lambda) + P - G$
 where:
 E : is the field strength of the emission at the measurement distance, in dBµV/m
 P : is the power measured at the output of the test antenna, in dBm
 λ : is the wavelength of the emission under investigation [300/fMHz], in m
 G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.
 $EIRP = E\text{-meas} + 20\log(d\text{-meas}) - 104.7$
 where:
 EIRP : is the equivalent isotopically radiated power, in dBm
 E-meas. : is the field strength of the emission at the measurement distance, in dBµV/m
 d-meas. : is the measurement distance, in m
 NOTE 1: For the applicable limit, see FCC 15.255 (c)
 NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.



3.3 Peak Conducted Power

3.3.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (BW/100) (see note 2)
NOTE 1: For the applicable limit, see FCC 15.255(c)	
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)	

3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

3.3.4 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.	



3.3.4.1 Peak Conducted Power

For Bandwidth: 2.16 GHz

Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	33.90	19.9	14.00	25.138	1411.00	500.00
60.48	33.10	19.9	13.20	20.889	1382.10	500.00
62.64	33.08	19.9	13.18	20.816	1396.50	500.00
64.80	30.44	19.9	10.54	11.320	1483.40	500.00
65.88	32.33	19.9	12.43	17.507	1468.90	500.00

NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.

NOTE 2: For the 6dBc bandwidth, see test report clause 3.1.5.

NOTE 3: For the applicable limit, see FCC 15.255(c)

NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)

$$P(\text{cond}) = \text{EIRP} - G(\text{dBi})$$

where:

G(dBi) is gain of EUT antenna.



For Bandwidth: 1.08 GHz

Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	34.33	19.9	14.43	27.754	735.20	500.00
62.64	38.71	19.9	18.81	76.092	759.80	500.00
65.88	32.97	19.9	13.07	20.286	833.60	500.00

NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.

NOTE 2: For the 6dBc bandwidth, see test report clause 3.1.5.

NOTE 3: For the applicable limit, see FCC 15.255(c)

NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm)

$$P(\text{cond}) = \text{EIRP} - G(\text{dBi})$$

where:

G(dBi) is gain of EUT antenna.



3.4 Transmitter Spurious Emissions


3.4.1 Limit of Transmitter Spurious Emissions


Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 μW, -9.91dBm)
NOTE 1: For the applicable limit, see FCC 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	


3.4.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

3.4.3 Test Setup

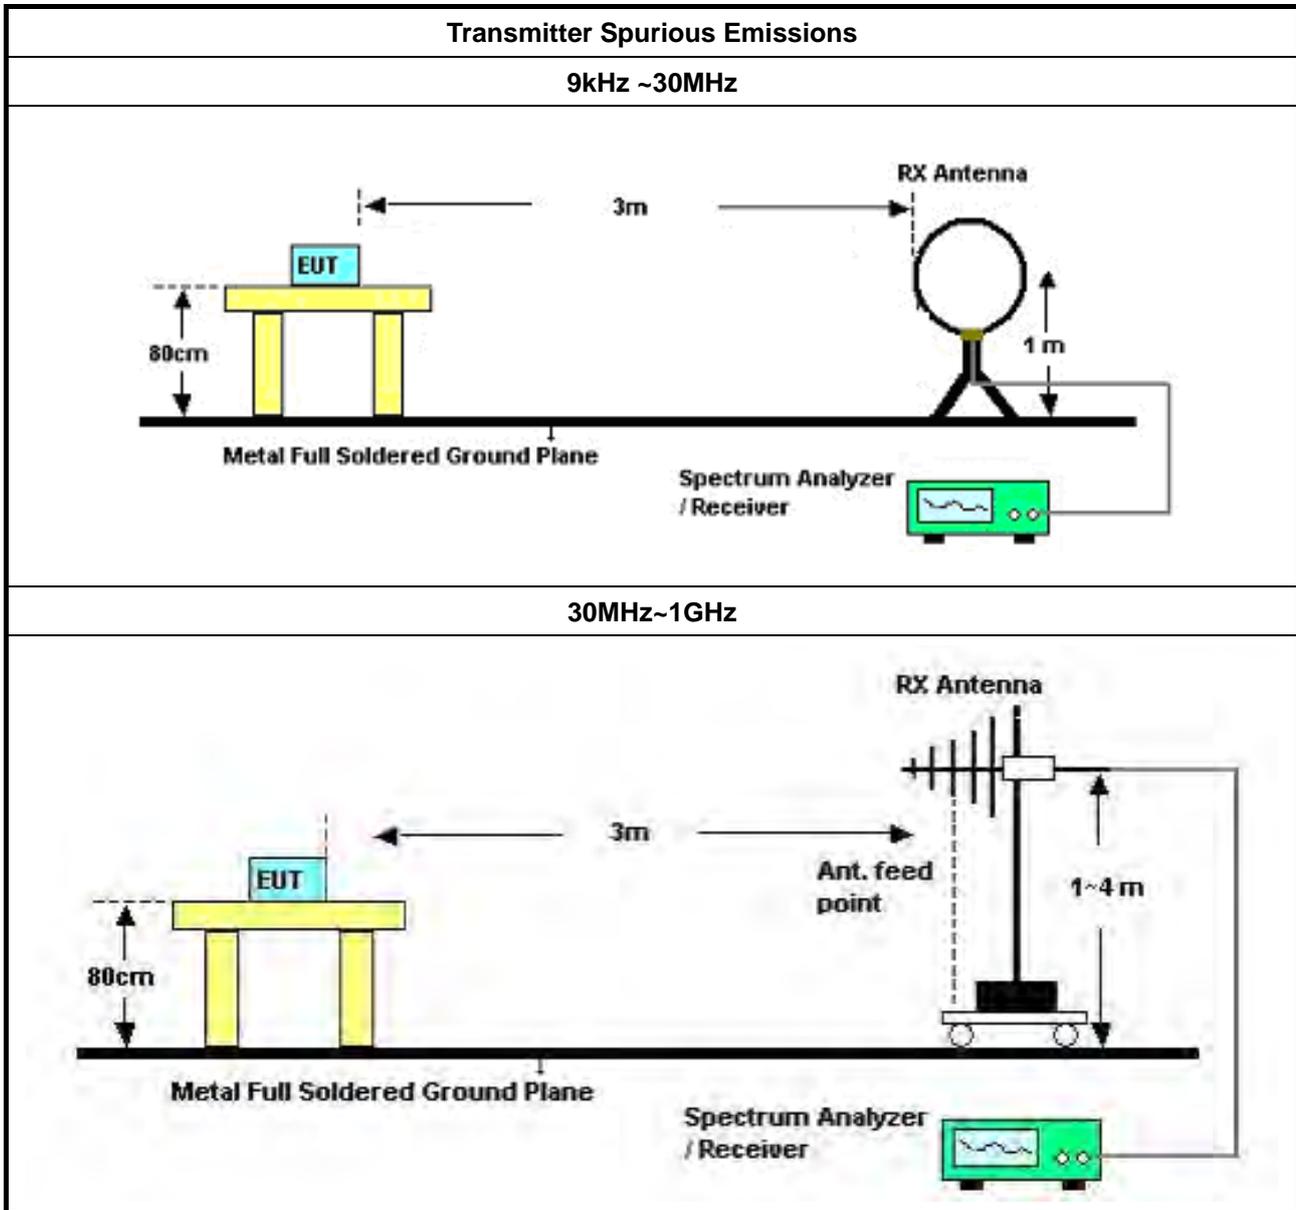

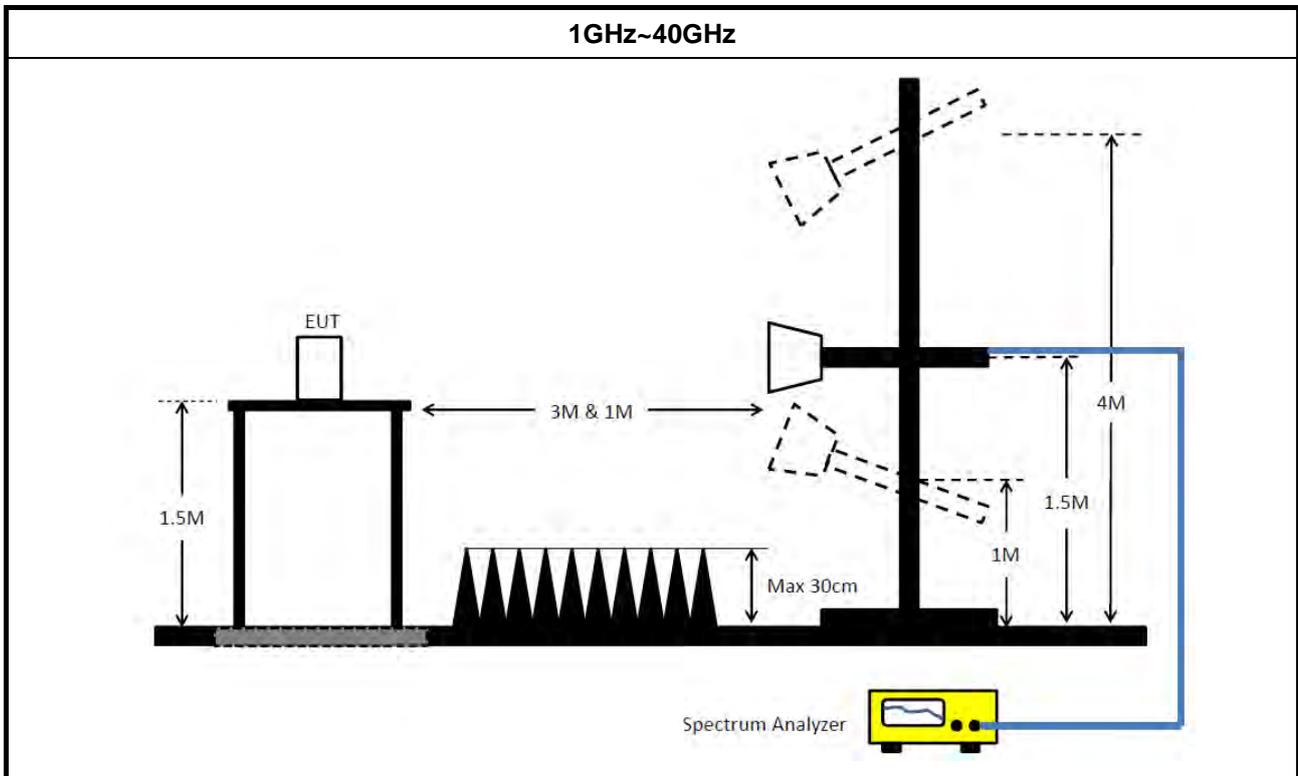

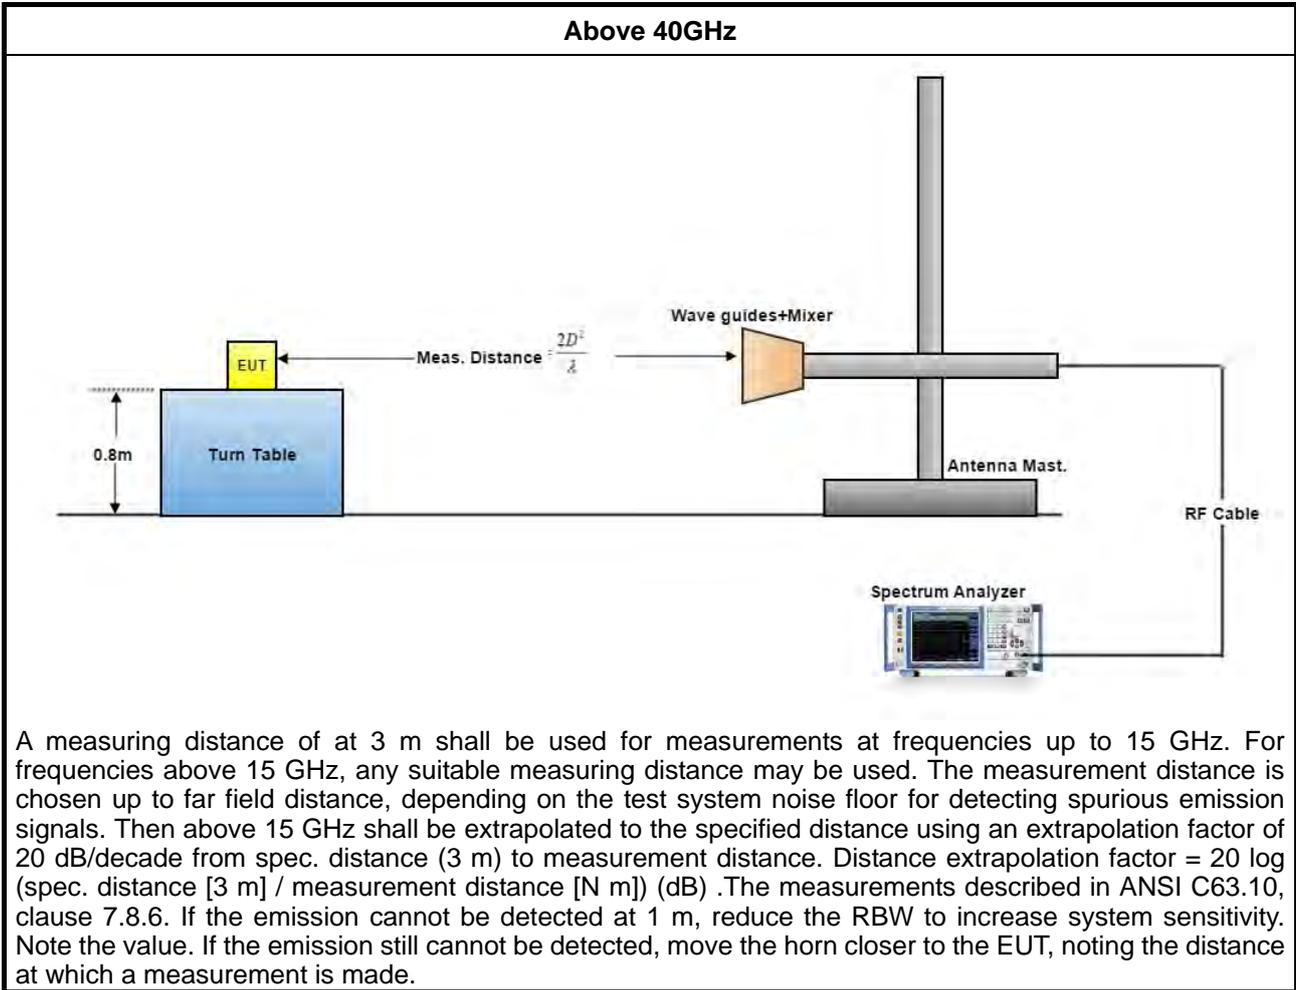

3.4.4 Test Result of Transmitter Spurious Emissions

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.12 ~ 9.13
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	



3.4.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.4.5.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.



3.4.5.2 Test Result of Transmitter Spurious Emissions

Test Range	30 MHz – 1000 MHz	Test Distance	3 m
Test Configuration	Normal Link		


Vertical

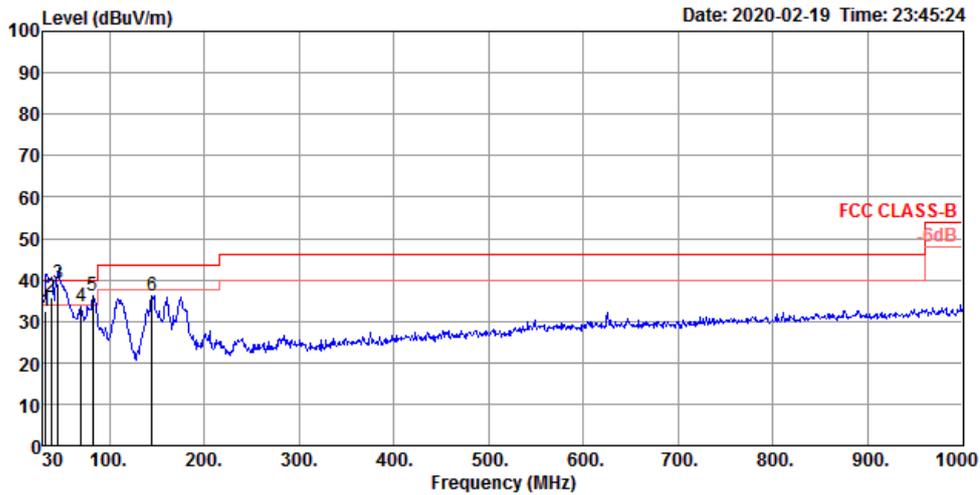

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	32.91	32.50	40.00	-7.50	37.60	0.60	22.87	28.57	125	138 QP	VERTICAL
2	38.73	35.63	40.00	-4.37	43.91	0.60	19.69	28.57	100	90 QP	VERTICAL
3	45.52	39.20	40.00	-0.80	50.90	0.59	16.27	28.56	100	35 QP	VERTICAL
4	69.77	33.53	40.00	-6.47	49.13	0.60	12.32	28.52	100	130 Peak	VERTICAL
5	82.38	36.29	40.00	-3.71	50.68	0.70	13.40	28.49	125	246 Peak	VERTICAL
6	144.46	36.23	43.50	-7.27	46.68	1.02	16.81	28.28	100	90 Peak	VERTICAL



Horizontal

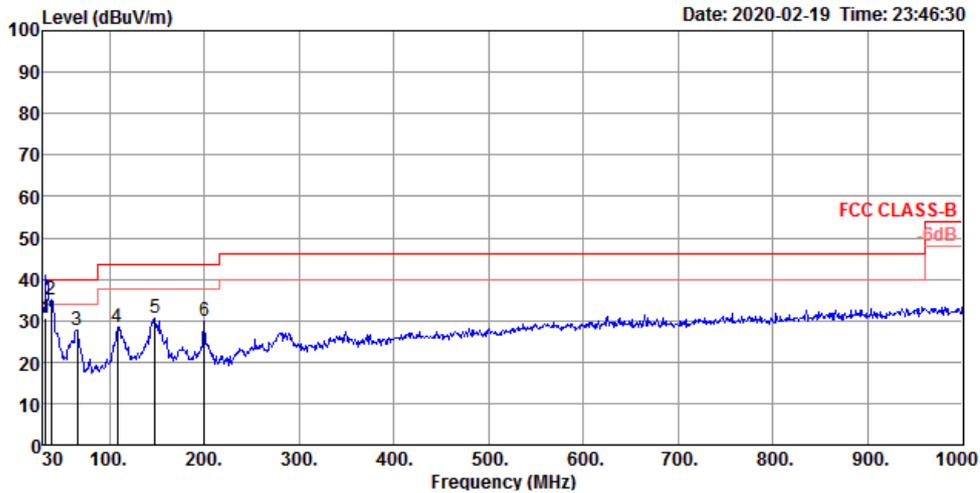

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	32.91	30.56	40.00	-9.44	35.66	0.60	22.87	28.57	125	171	QP	HORIZONTAL
2	38.73	34.98	40.00	-5.02	43.26	0.60	19.69	28.57	200	107	Peak	HORIZONTAL
3	65.89	27.75	40.00	-12.25	43.59	0.60	12.09	28.53	300	5	Peak	HORIZONTAL
4	108.57	28.57	43.50	-14.93	38.56	0.85	17.58	28.42	300	179	Peak	HORIZONTAL
5	148.34	30.49	43.50	-13.01	41.24	1.04	16.47	28.26	300	179	Peak	HORIZONTAL
6	199.75	29.86	43.50	-13.64	41.51	1.30	15.11	28.06	300	44	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



For Bandwidth: 2.16 GHz

Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	58.32

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.26	55.71	74.00	-18.29	42.59	9.65	38.30	34.83	286	332	Peak	VERTICAL
2	10560.26	44.67	54.00	-9.33	31.52	9.68	38.30	34.83	286	332	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.24	52.99	54.00	-1.01	39.87	9.65	38.30	34.83	209	69	Average	HORIZONTAL
2	10560.26	60.53	74.00	-13.47	47.41	9.65	38.30	34.83	209	69	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	60.48

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.24	46.33	54.00	-7.67	33.21	9.65	38.30	34.83	182	323	Average	VERTICAL
2	10560.69	58.61	74.00	-15.39	45.46	9.68	38.30	34.83	182	323	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.18	61.42	74.00	-12.58	48.30	9.65	38.30	34.83	223	67	Peak	HORIZONTAL
2	10560.29	52.93	54.00	-1.07	39.78	9.68	38.30	34.83	223	67	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	62.64

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.28	53.02	54.00	-0.98	39.87	9.68	38.30	34.83	206	58	Average	HORIZONTAL
2	10560.34	60.04	74.00	-13.96	46.89	9.68	38.30	34.83	206	58	Peak	HORIZONTAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.31	56.76	74.00	-17.24	43.61	9.68	38.30	34.83	200	328	Peak	VERTICAL
2	10560.33	45.21	54.00	-8.79	32.06	9.68	38.30	34.83	200	328	Average	VERTICAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	64.80

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.08	58.18	74.00	-15.82	45.06	9.65	38.30	34.83	191	326	Peak	VERTICAL
2	10560.33	46.31	54.00	-7.69	33.16	9.68	38.30	34.83	191	326	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.29	53.00	54.00	-1.00	39.85	9.68	38.30	34.83	142	67	Average	HORIZONTAL
2	10560.29	60.70	74.00	-13.30	47.55	9.68	38.30	34.83	142	67	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	65.88

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.00	56.57	74.00	-17.43	43.45	9.65	38.30	34.83	202	329	Peak	VERTICAL
2	10560.31	45.42	54.00	-8.58	32.27	9.68	38.30	34.83	202	329	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	10560.21	60.64	74.00	-13.36	47.52	9.65	38.30	34.83	205	66	Peak	HORIZONTAL
2	10560.23	53.35	54.00	-0.65	40.23	9.65	38.30	34.83	205	66	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	58.32

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18472.16	54.92	63.54	-8.62	53.31	13.82	37.97	50.18	150	153	Average	VERTICAL
2	18472.27	62.19	83.54	-21.35	60.58	13.82	37.97	50.18	150	153	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18472.30	60.33	83.54	-23.21	58.72	13.82	37.97	50.18	150	232	Peak	HORIZONTAL
2	18472.56	51.12	63.54	-12.42	49.51	13.82	37.97	50.18	150	232	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	60.48

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18470.26	52.76	63.54	-10.78	51.15	13.82	37.97	50.18	150	162	Average	VERTICAL
2	18477.58	64.17	83.54	-19.37	62.54	13.83	37.99	50.19	150	162	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18477.38	62.50	83.54	-21.04	60.87	13.83	37.99	50.19	150	151	Peak	HORIZONTAL
2	18477.92	49.35	63.54	-14.19	47.72	13.83	37.99	50.19	150	151	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	62.64

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18472.77	62.26	83.54	-21.28	60.65	13.82	37.97	50.18	150	155	Peak	VERTICAL
2	18472.87	55.69	63.54	-7.85	54.08	13.82	37.97	50.18	150	155	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18475.12	57.88	83.54	-25.66	56.25	13.83	37.99	50.19	150	142	Peak	HORIZONTAL
2	18475.33	52.64	63.54	-10.90	51.01	13.83	37.99	50.19	150	142	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	64.80

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18472.70	61.42	83.54	-22.12	59.81	13.82	37.97	50.18	150	148	Peak	VERTICAL
2	18473.36	51.38	63.54	-12.16	49.75	13.83	37.99	50.19	150	148	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18474.94	48.83	63.54	-14.71	47.20	13.83	37.99	50.19	150	155	Average	HORIZONTAL
2	18478.38	59.69	83.54	-23.85	58.06	13.83	37.99	50.19	150	155	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	65.88

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18473.02	55.52	63.54	-8.02	53.91	13.82	37.97	50.18	150	154	Average	VERTICAL
2	18473.05	62.61	83.54	-20.93	61.00	13.82	37.97	50.18	150	154	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18472.93	60.87	83.54	-22.67	59.26	13.82	37.97	50.18	150	231	Peak	HORIZONTAL
2	18473.09	51.20	63.54	-12.34	49.59	13.82	37.97	50.18	150	231	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	40GHz – 200GHz
-------------------	----------------

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.6	0.50	46.58	-57.58
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-21.39	3	6.4133	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
60.48	23.6	0.50	40.28	-59.28
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-24.36	3	3.2427	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	0.50	49.90	-59.67
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-22.89	3	4.5488	90.00	PASS



Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
64.80	23.6	0.50	51.92	-63.65
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-26.52	3	1.9694	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
65.88	23.6	0.50	53.00	-58.56
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-21.25	3	6.6260	90.00	PASS

Note:

$EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\text{Log}(4\pi d / \lambda)^2$

Which

$Prx = \text{Read Level.}$

$Grx = \text{Rx Antenna Gain.}$

A distance factor is offset and the formula is $20\text{LOG}(D1/D2)$

Which

$D1 = \text{Specification Distance}$

$D2 = \text{Measurement Distance}$



For Bandwidth: 1.08 GHz

Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	58.32

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1124.96	41.44	74.00	-32.56	48.38	3.16	24.21	34.31	106	231	Peak	VERTICAL
2	1125.02	34.30	54.00	-19.70	41.24	3.16	24.21	34.31	106	231	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1124.98	35.09	54.00	-18.91	42.03	3.16	24.21	34.31	171	165	Average	HORIZONTAL
2	1125.02	42.23	74.00	-31.77	49.17	3.16	24.21	34.31	171	165	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	62.64

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1124.98	34.12	54.00	-19.88	41.06	3.16	24.21	34.31	106	226	Average	VERTICAL
2	1125.16	41.97	54.00	-12.03	48.91	3.16	24.21	34.31	106	226	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1124.92	41.39	74.00	-32.61	48.33	3.16	24.21	34.31	167	156	Peak	HORIZONTAL
2	1125.02	34.55	54.00	-19.45	41.49	3.16	24.21	34.31	167	156	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Configuration	CTX	Test Freq. (GHz)	65.88

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1125.00	34.10	54.00	-19.90	41.04	3.16	24.21	34.31	107	224	Average	VERTICAL
2	1125.08	41.45	74.00	-32.55	48.39	3.16	24.21	34.31	107	224	Peak	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1124.97	41.27	74.00	-32.73	48.21	3.16	24.21	34.31	164	156	Peak	HORIZONTAL
2	1124.98	34.06	54.00	-19.94	41.00	3.16	24.21	34.31	164	156	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	58.32

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21275.73	59.65	83.54	-23.89	56.73	15.02	37.65	49.75	150	1	Peak	VERTICAL
2	21275.85	46.80	63.54	-16.74	43.88	15.02	37.65	49.75	150	1	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21275.95	46.94	63.54	-16.60	44.02	15.02	37.65	49.75	150	320	Average	HORIZONTAL
2	21276.84	59.54	83.54	-24.00	56.62	15.02	37.65	49.75	150	320	Peak	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	62.64

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21275.70	59.71	83.54	-23.83	56.79	15.02	37.65	49.75	150	136	Peak	VERTICAL
2	21276.54	46.06	63.54	-17.48	43.14	15.02	37.65	49.75	150	136	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21275.04	60.62	83.54	-22.92	57.70	15.02	37.65	49.75	150	222	Peak	HORIZONTAL
2	21276.88	46.71	63.54	-16.83	43.79	15.02	37.65	49.75	150	222	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Configuration	CTX	Test Freq. (GHz)	65.88

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21275.61	59.70	83.54	-23.84	56.78	15.02	37.65	49.75	150	94	Peak	VERTICAL
2	21276.38	46.77	63.54	-16.77	43.85	15.02	37.65	49.75	150	94	Average	VERTICAL

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	21276.46	59.59	83.54	-23.95	56.67	15.02	37.65	49.75	150	53	Peak	HORIZONTAL
2	21276.96	46.01	63.54	-17.53	43.09	15.02	37.65	49.75	150	53	Average	HORIZONTAL

Note: Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



Test Range	40GHz – 200GHz
-------------------	----------------

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.6	0.50	56.97	-58.30
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-20.37	3	8.1261	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	0.50	50.78	-63.93
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-27.00	3	1.7659	90.00	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
65.88	23.6	0.50	50.23	-65.38
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-28.54	3	1.2375	90.00	PASS

Note:
 $EIRP = Prx - Grx + \text{Free Space Path Loss} = Prx - Grx + 20\text{Log}(4\pi d / \lambda)^2$
 Which
 $Prx = \text{Read Level.}$
 $Grx = \text{Rx Antenna Gain.}$
 A distance factor is offset and the formula is $20\text{LOG}(D1/D2)$
 Which
 $D1 = \text{Specification Distance}$
 $D2 = \text{Measurement Distance}$

3.5 Frequency Stability

3.5.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


3.5.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.5.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

3.5.4 Test Setup

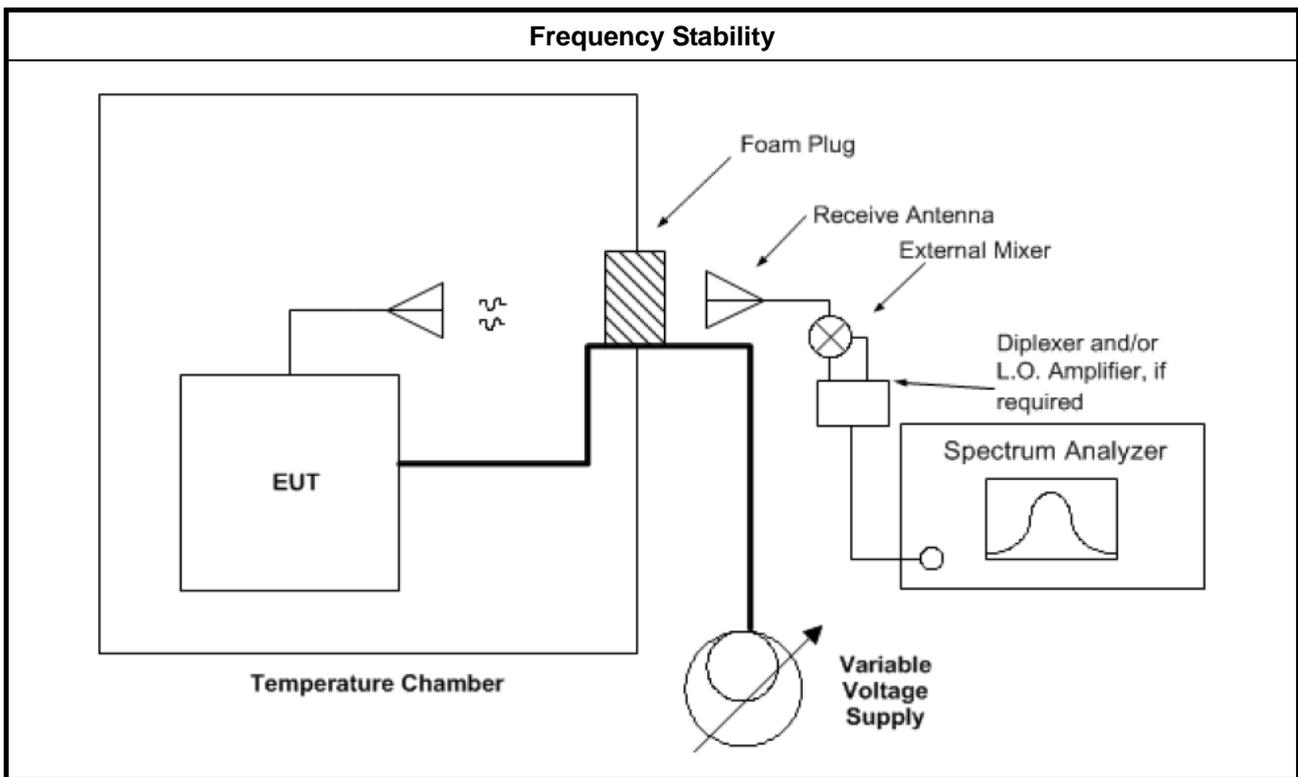



3.5.5 Test Result of Frequency Stability

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.5.5.1 Frequency Stability with Respect to Ambient Temperature

For Bandwidth: 2.16 GHz

Frequency Stability with Respect to Ambient Temperature			
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-40	62641.16	0	Within band
-30	62641.16	0	Within band
-20	62641.16	0	Within band
-10	62641.16	0	Within band
0	62641.16	0	Within band
10	62641.16	0	Within band
20	62641.16	Reference	Within band
30	62641.16	0	Within band
40	62641.16	0	Within band
50	62641.13	-30	Within band
60	62641.13	-30	Within band
70	62641.13	-30	Within band

NOTE: The manufacturer's specified temperature range of -40 to 70°C.



For Bandwidth: 1.08 GHz

Frequency Stability with Respect to Ambient Temperature			
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-40	62641.16	0	Within band
-30	62641.16	0	Within band
-20	62641.16	0	Within band
-10	62641.16	0	Within band
0	62641.16	0	Within band
10	62641.16	0	Within band
20	62641.16	Reference	Within band
30	62641.16	0	Within band
40	62641.16	0	Within band
50	62641.13	-30	Within band
60	62641.13	-30	Within band
70	62641.13	-30	Within band

NOTE: The manufacturer's specified temperature range of -40 to 70°C.



3.5.5.2 Frequency Stability When Varying Supply Voltage

For Bandwidth: 2.16 GHz

Frequency Stability When Varying Supply Voltage			
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (\pm kHz)
40.8	62641.16	0	Within band
48	62641.16	Reference	Within band
55.2	62641.16	0	Within band

NOTE: For the applicable limit, see FCC 15.255(f).

For Bandwidth: 1.08 GHz

Frequency Stability When Varying Supply Voltage			
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (\pm kHz)
40.8	62641.16	0	Within band
48	62641.16	Reference	Within band
55.2	62641.16	0	Within band

NOTE: For the applicable limit, see FCC 15.255(f).



3.6 Operation Restriction and Group Installation

3.6.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))
Group Installation	Operation is not permitted for the following products: <ul style="list-style-type: none">♦ External phase-locking (Refer as FCC 15.255 (h))

3.6.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for use on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

3.6.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 29, 2019	Mar. 28, 2020	Radiation (03CH03-CB)
Bilog Antenna with 6dB Attenuator	Schaffner & EMCI	CBL6112 & N-6-06	2888 & AT-N0611	30MHz ~ 1GHz	Oct. 12, 2019	Oct. 11, 2020	Radiation (03CH03-CB)
Horn Antenna	ETS-Lindgren	3115	6821	750MHz~18GHz	Jan. 20, 2020	Jan. 19, 2021	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jun. 27, 2019	Jun. 26, 2020	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8447D	2944A10259	9kHz ~ 1.3GHz	Jan. 15, 2020	Jan. 14, 2021	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Dec. 19, 2019	Dec.18, 2020	Radiation (03CH03-CB)
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 03, 2019	Jul. 02, 2020	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 19, 2019	Jun. 18, 2020	Radiation (03CH03-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 15, 2019	May 14, 2020	Radiation (03CH03-CB)
RF Cable-low	Woken	RG402	Low Cable-02+27	25MHz ~ 1GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+27	1GHz ~ 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-27	1GHz ~ 18GHz	Oct. 07, 2019	Oct. 06, 2020	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 24, 2019	Jul. 23, 2020	Radiation (03CH03-CB)
Mixer	OML	M19HWA	U91113-1	40 ~ 60 GHz	Oct. 01 2019	Sep. 30, 2020	Radiation (03CH03-CB)
Mixer	OML	M15HWA	V91113-1	50 ~ 75 GHz	Oct. 25 2019	Oct. 24, 2020	Radiation (03CH03-CB)
Mixer	OML	M12HWA	E91113-1	60 ~ 90 GHz	Oct. 25 2019	Oct. 24, 2020	Radiation (03CH03-CB)
Mixer	OML	M08HWA	F91113-1	90 ~ 140 GHz	Oct. 25 2019	Oct. 24, 2020	Radiation (03CH03-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	Oct. 25 2019	Oct. 24, 2020	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Detector	Millitech	DET-15-RPF W0	#A17807(067)	50 ~ 75 GHz	Dec. 12, 2019	Dec. 11, 2020	Radiation (03CH03-CB)
Pico Scope	Pico	Pico Scope 6402C	CX372/002	N/A	Jul. 07, 2019	Jul. 06, 2020	Radiation (03CH03-CB)
Temp. and Humidity Chamber	Gaint Force	GTH-408-40-CP-AR	MAA1410-011	-40~100 degree	Sep. 12, 2019	Sep. 11, 2020	Conducted (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 60GHz)	4.6 dB	Confidence levels of 95%
Radiated Emission (60GHz ~ 90GHz)	5.1 dB	Confidence levels of 95%
Radiated Emission (90GHz ~ 200GHz)	5.6 dB	Confidence levels of 95%
Temperature	1°C	Confidence levels of 95%