




5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5500MHz

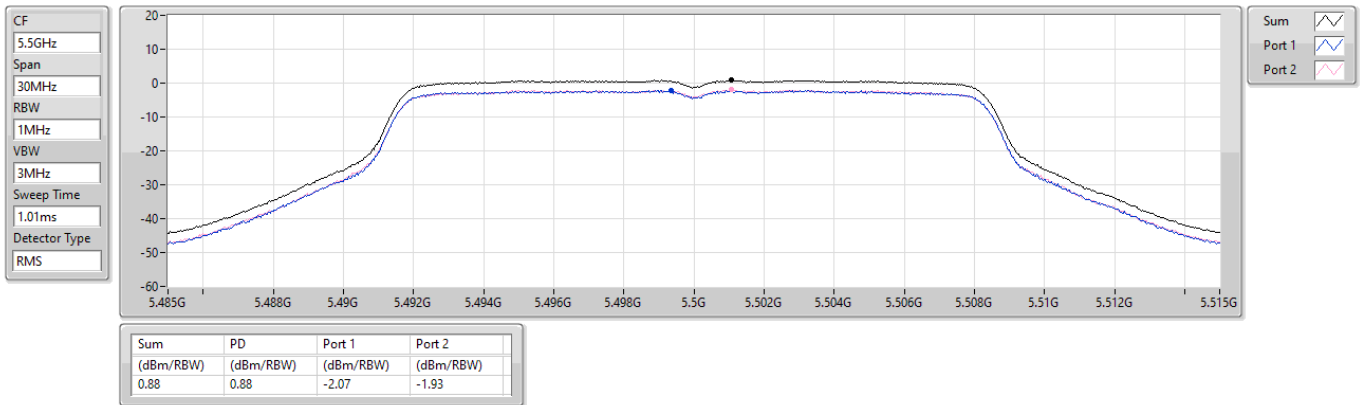

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5580MHz

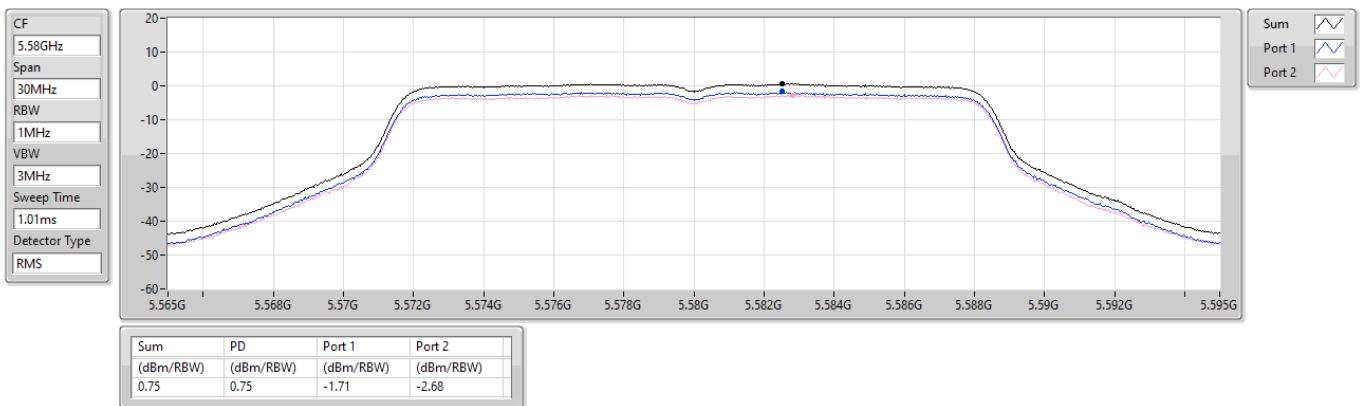

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5700MHz

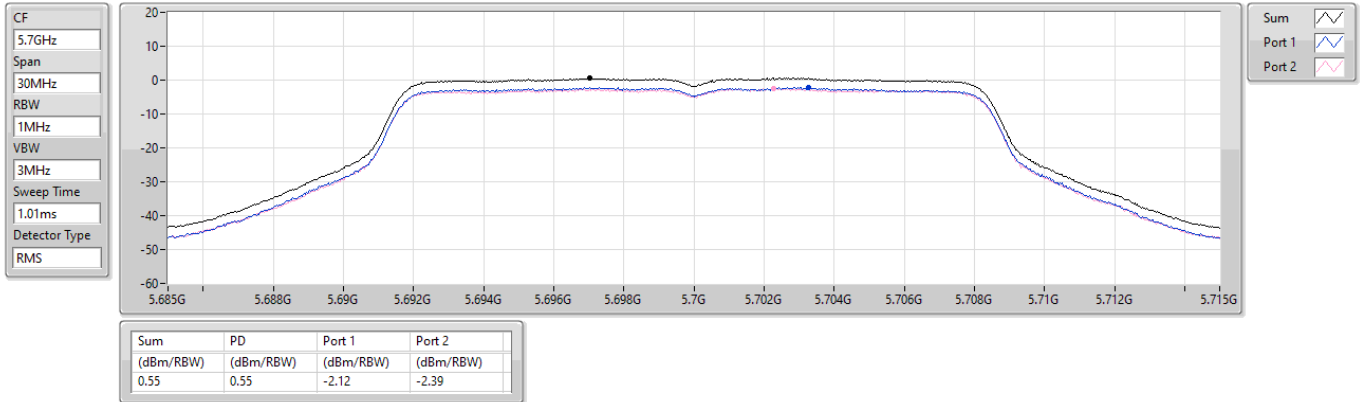

5.47-5.725GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5720MHz Straddle 5.47-5.725GHz

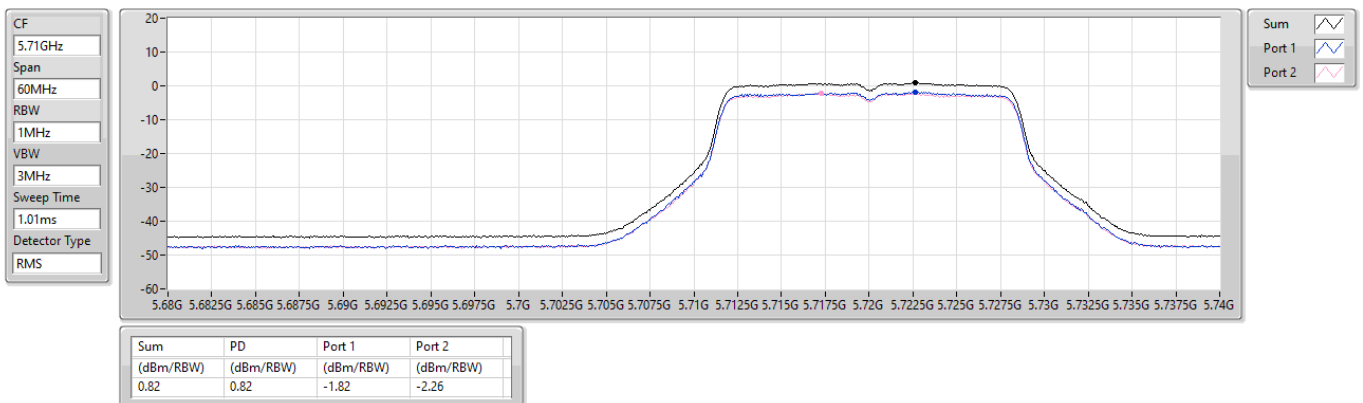

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5720MHz Straddle 5.725-5.85GHz

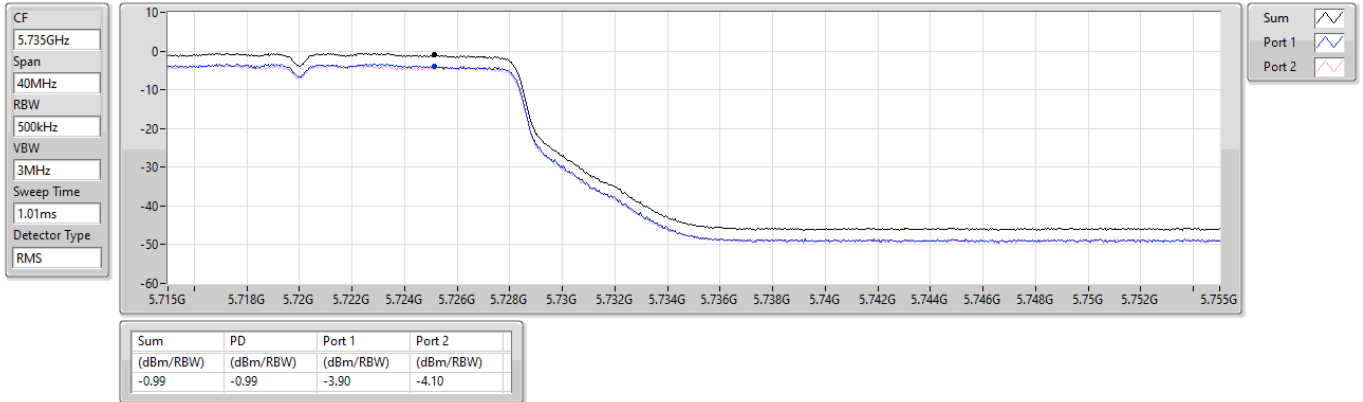

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5745MHz

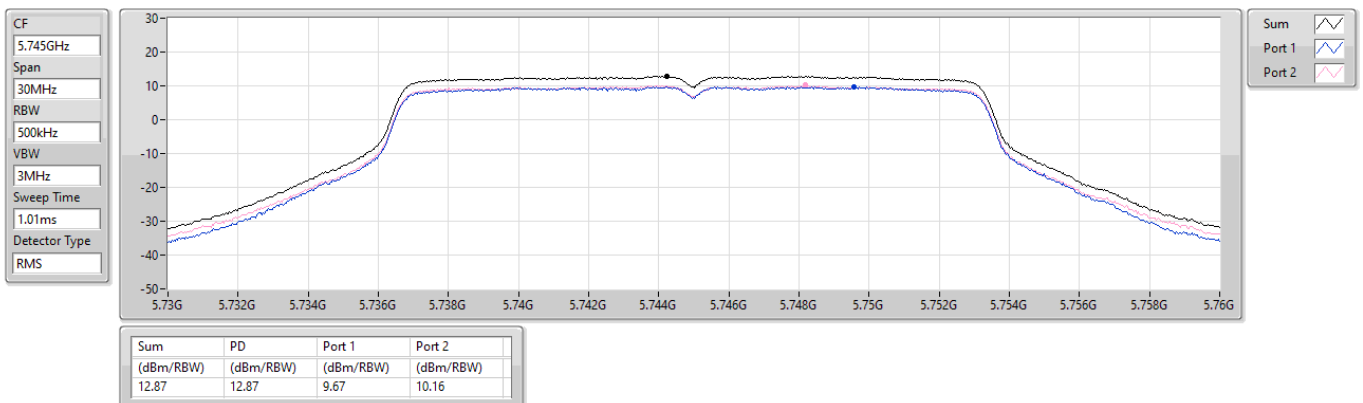

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5785MHz

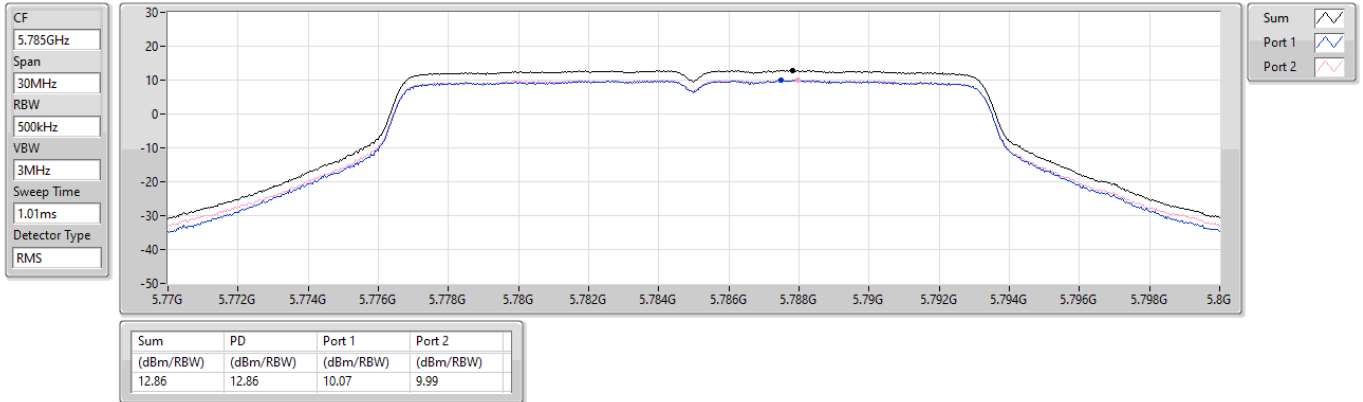

5.725-5.85GHz_802.11a_Nss1,(6Mbps)_2TX

PSD


5825MHz

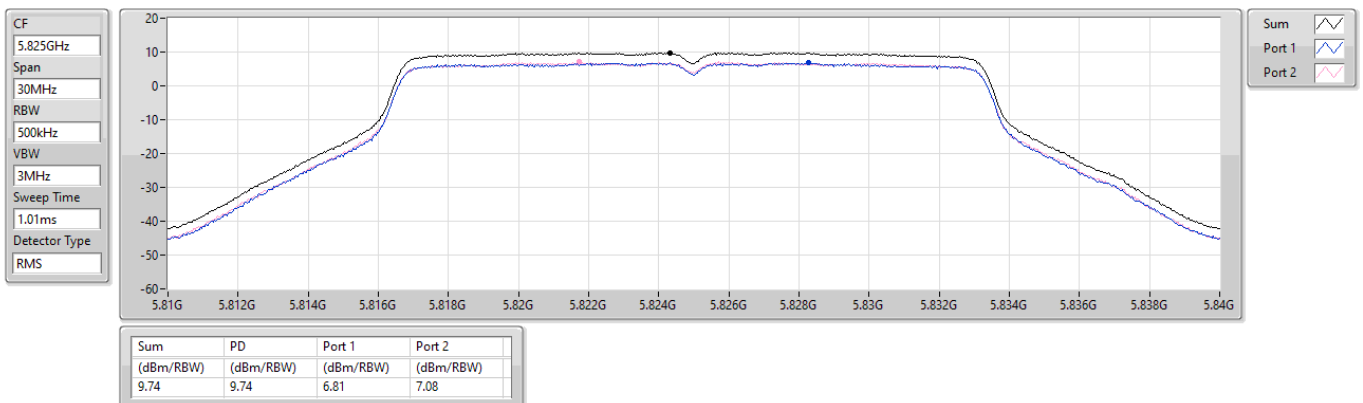

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD


5180MHz

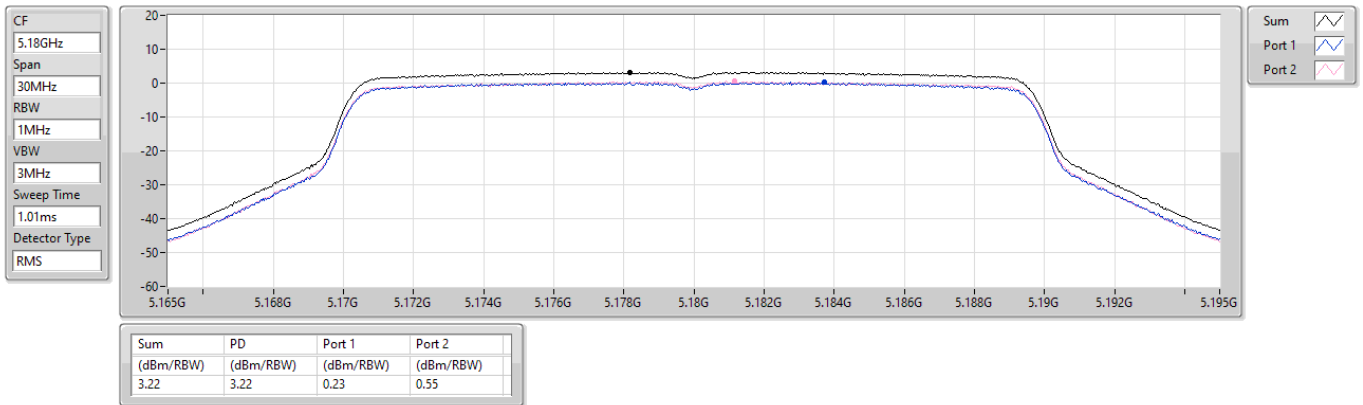

5.15-5.25GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD


5200MHz

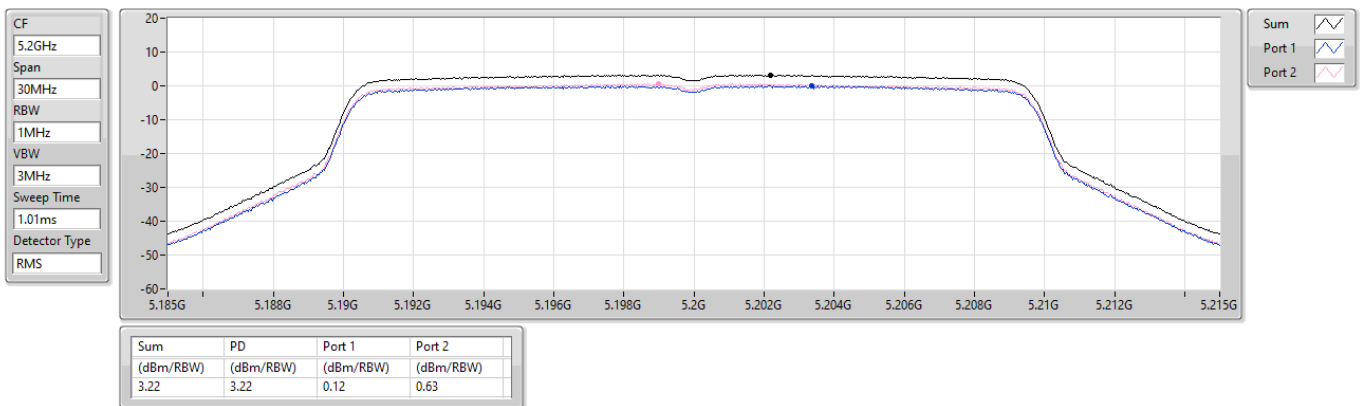

5.15-5.25GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5240MHz

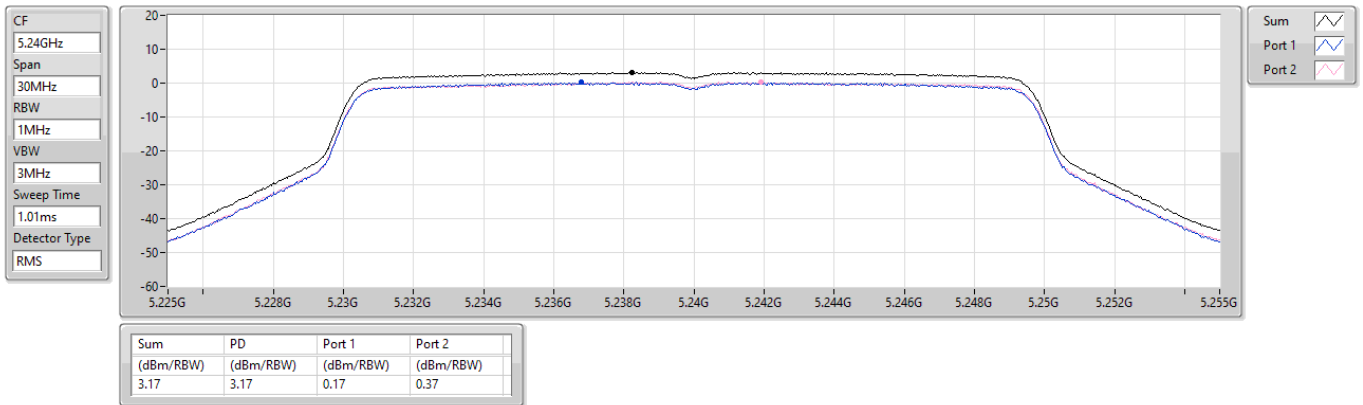

5.25-5.35GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5260MHz

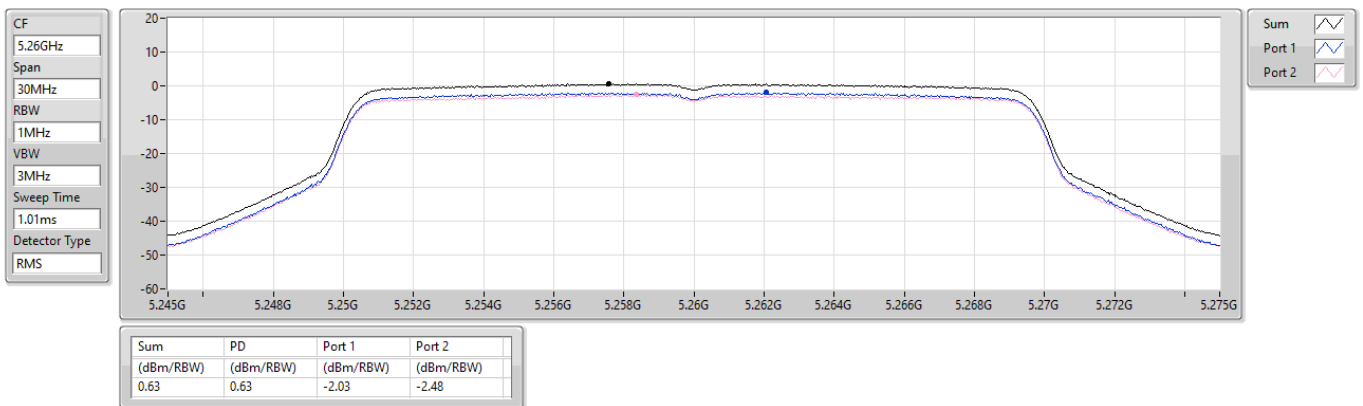


5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5300MHz

CF
5.3GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

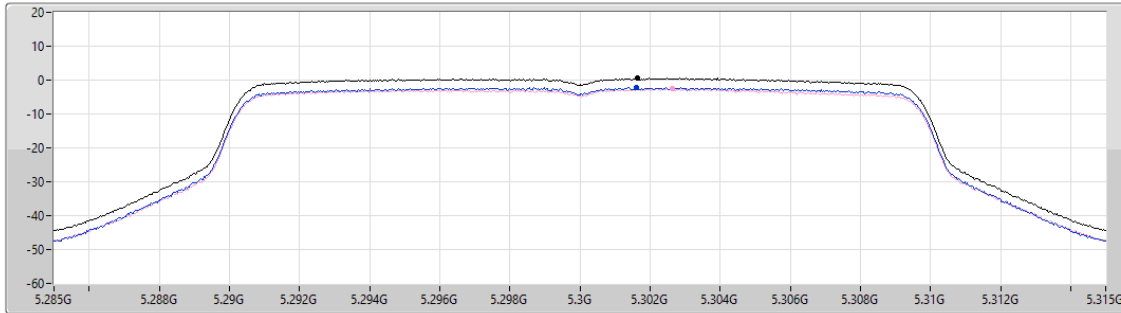

Sum
Port 1
Port 2


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.53	0.53	-2.24	-2.51

5.25-5.35GHz_802.11ax_HEW20_Nss1,(MCS0)_2TX

PSD

5320MHz

CF
5.32GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

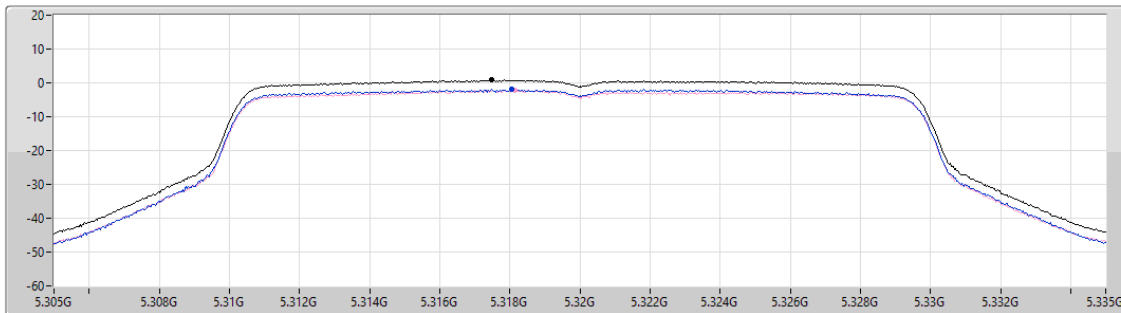

Sum
Port 1
Port 2

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.82	0.82	-1.97	-2.13




5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5500MHz

CF
5.5GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

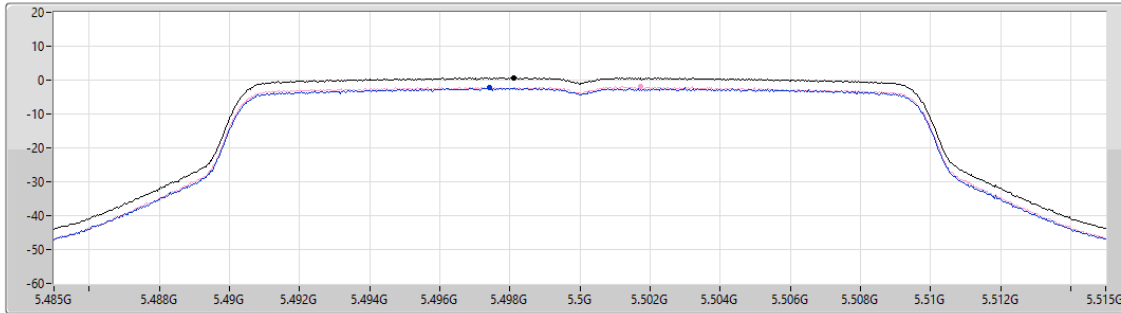

Sum
Port 1
Port 2


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.70	0.70	-2.33	-1.92

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5580MHz

CF
5.58GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

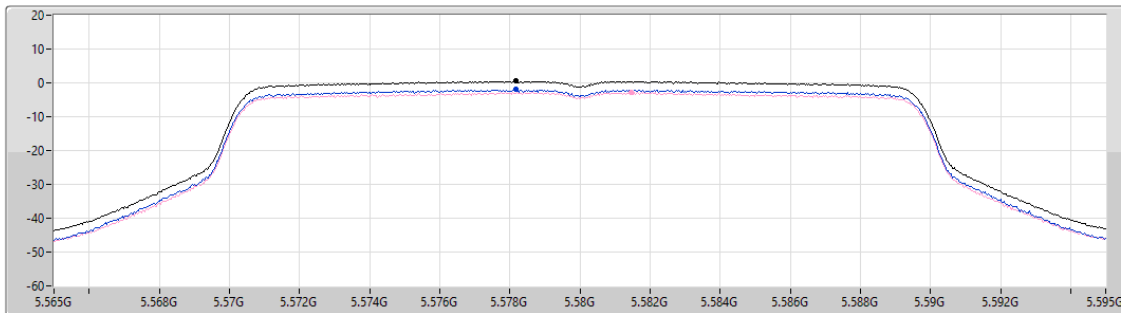

Sum
Port 1
Port 2


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.51	0.51	-2.03	-2.75

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5700MHz

CF
5.7GHz
Span
30MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

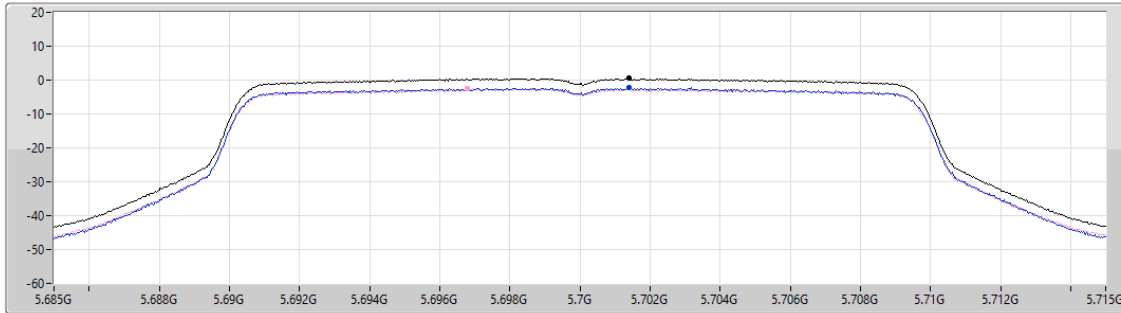

Sum
Port 1
Port 2


Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.54	0.54	-2.21	-2.62

5.47-5.725GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5720MHz Straddle 5.47-5.725GHz

CF
5.71GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

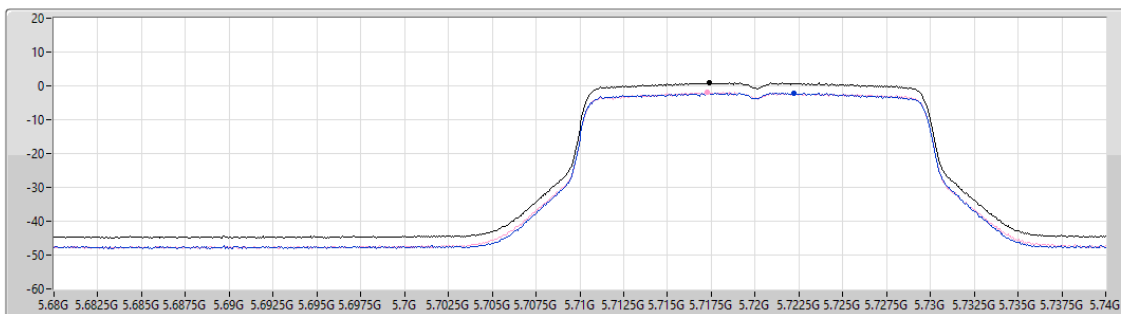


Sum
Port 1
Port 2

Sum (dBm/RBW)	PD (dBm/RBW)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)
0.88	0.88	-2.10	-1.92

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD


5720MHz Straddle 5.725-5.85GHz

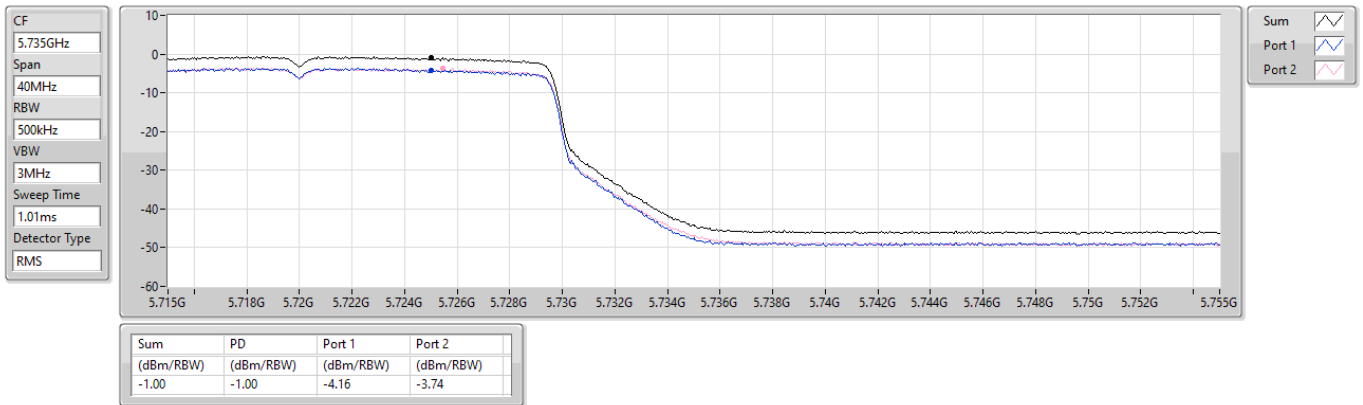

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5745MHz

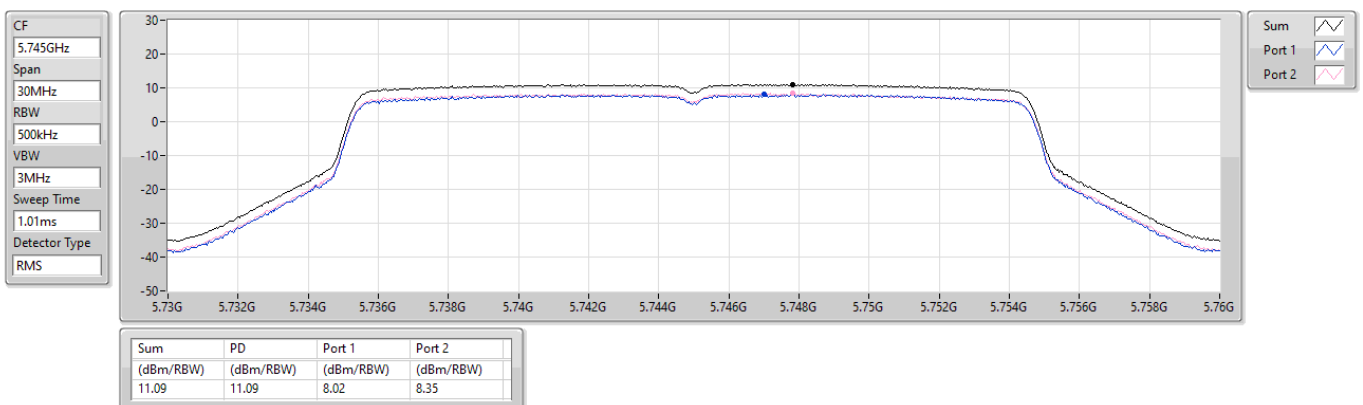


5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5785MHz

CF
5.785GHz
Span
30MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

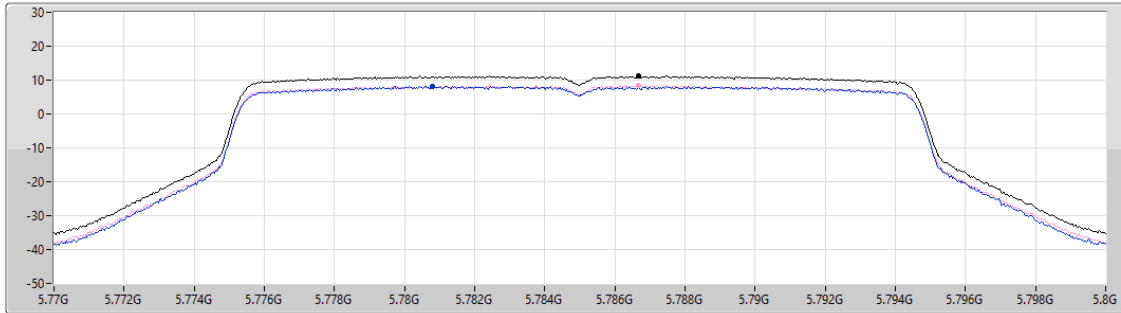

Sum
Port 1
Port 2


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
11.16	11.16	8.17	8.42

5.725-5.85GHz_802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

5825MHz

CF
5.825GHz
Span
30MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

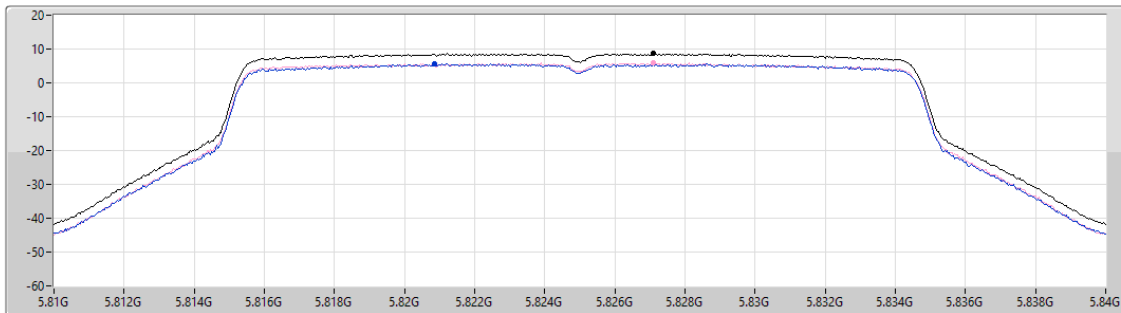


Sum
Port 1
Port 2

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
8.68	8.68	5.67	6.08

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD


5190MHz

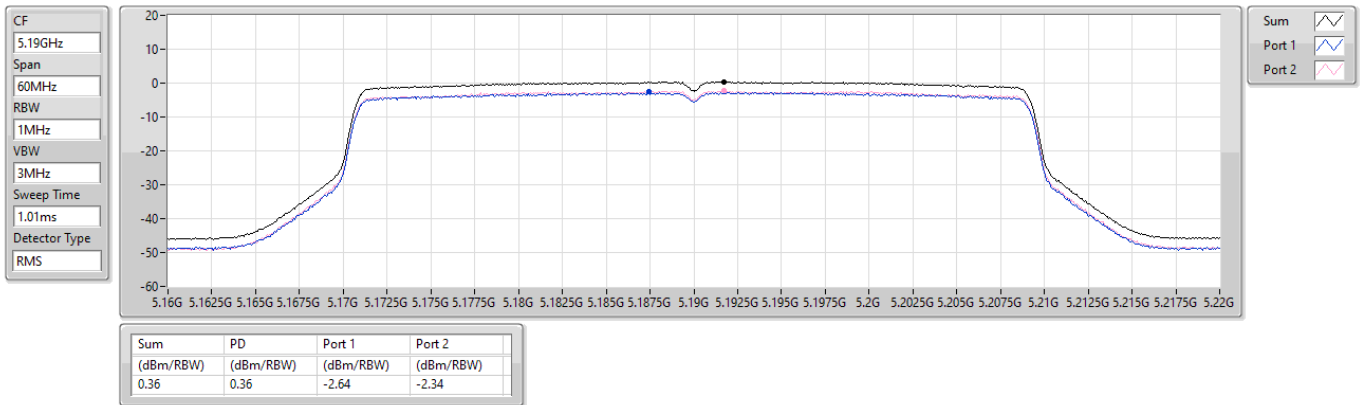

5.15-5.25GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD

5230MHz

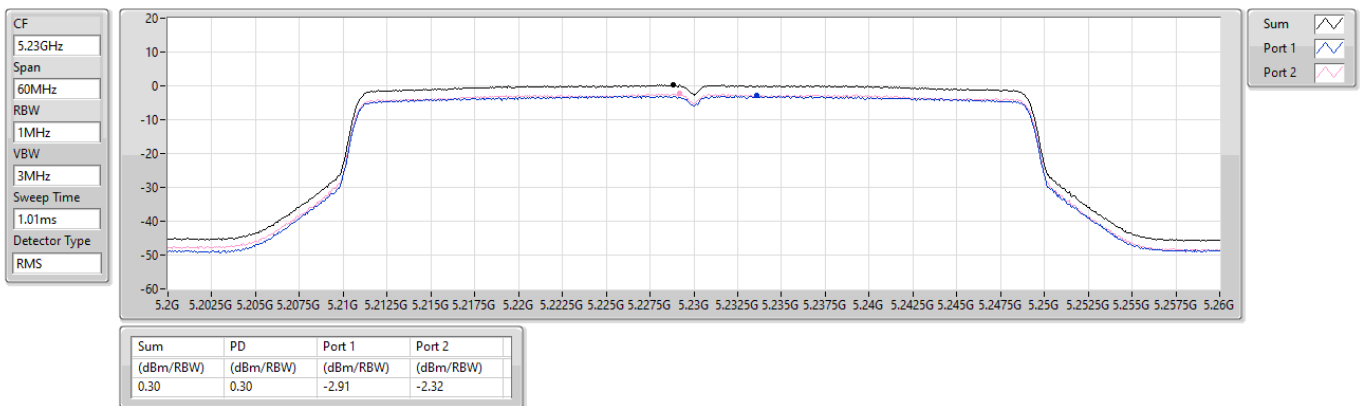




5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD


5270MHz

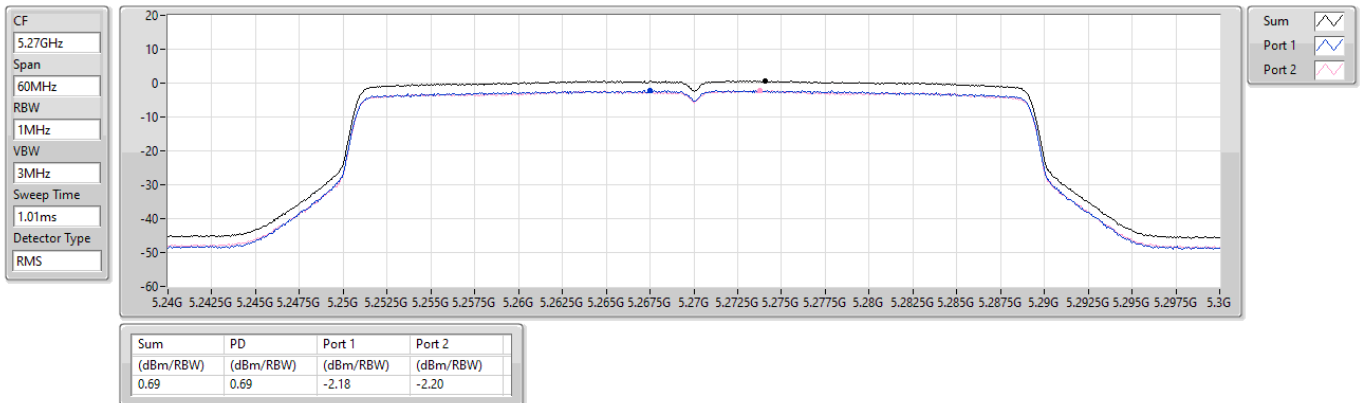

5.25-5.35GHz_802.11ax_HEW40_Nss1,(MCS0)_2TX

PSD


5310MHz

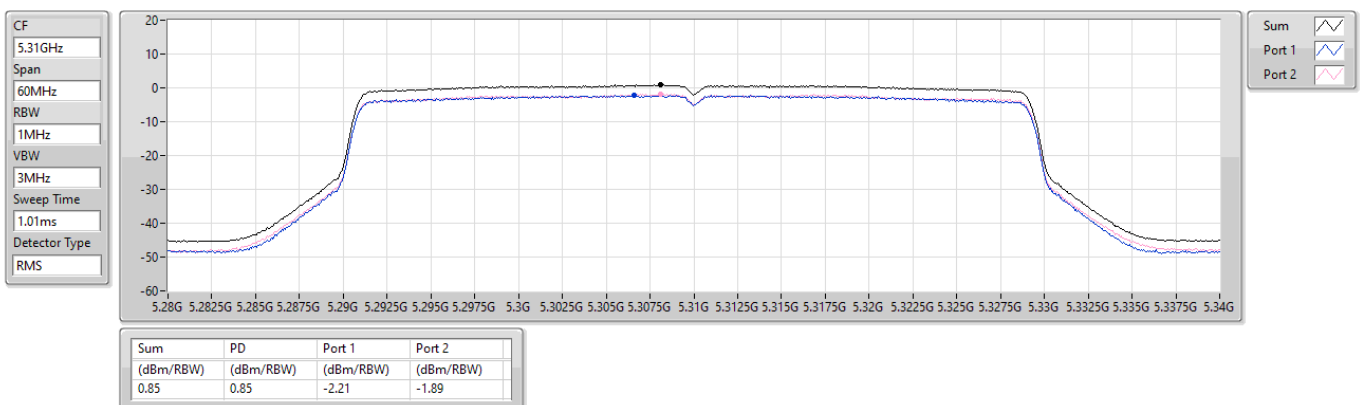

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5510MHz

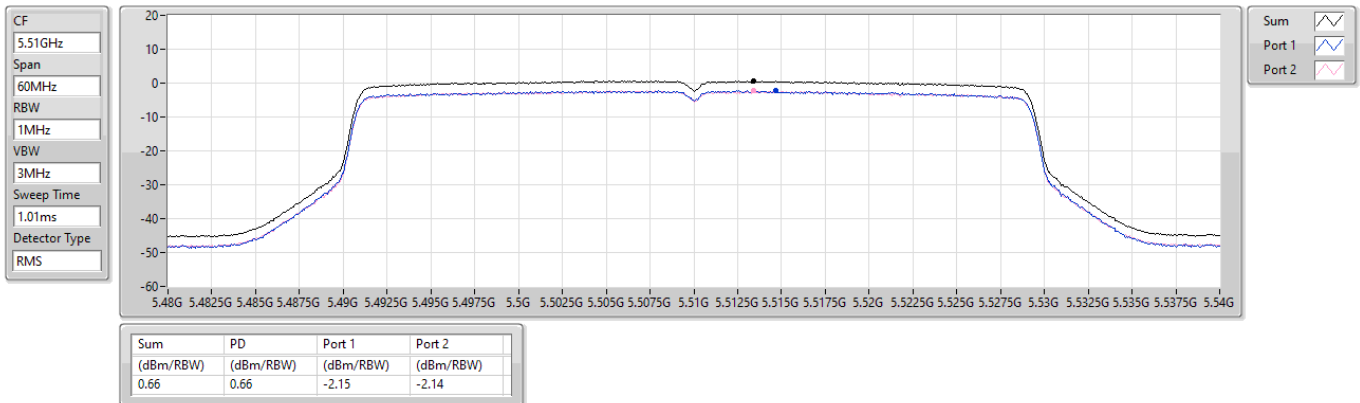

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5590MHz

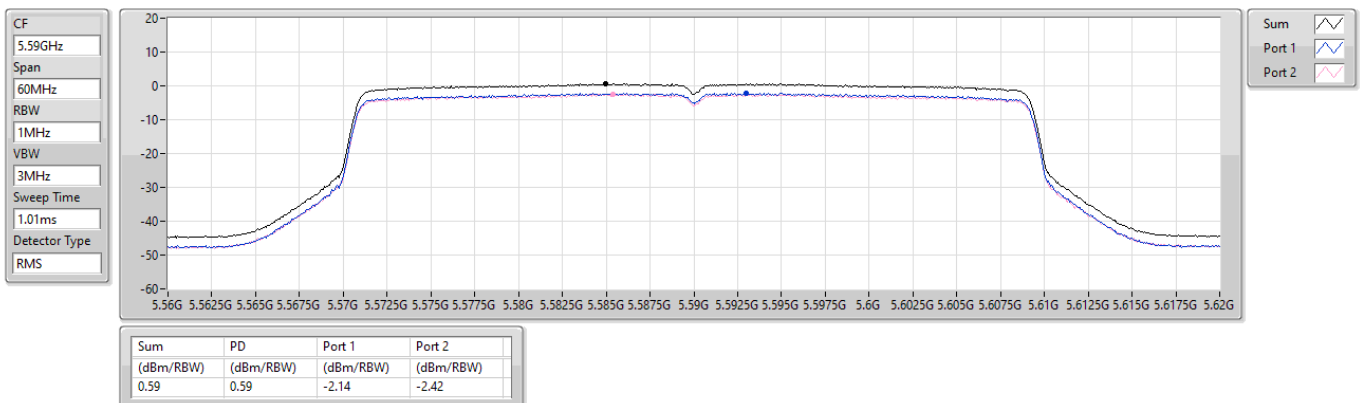

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5670MHz

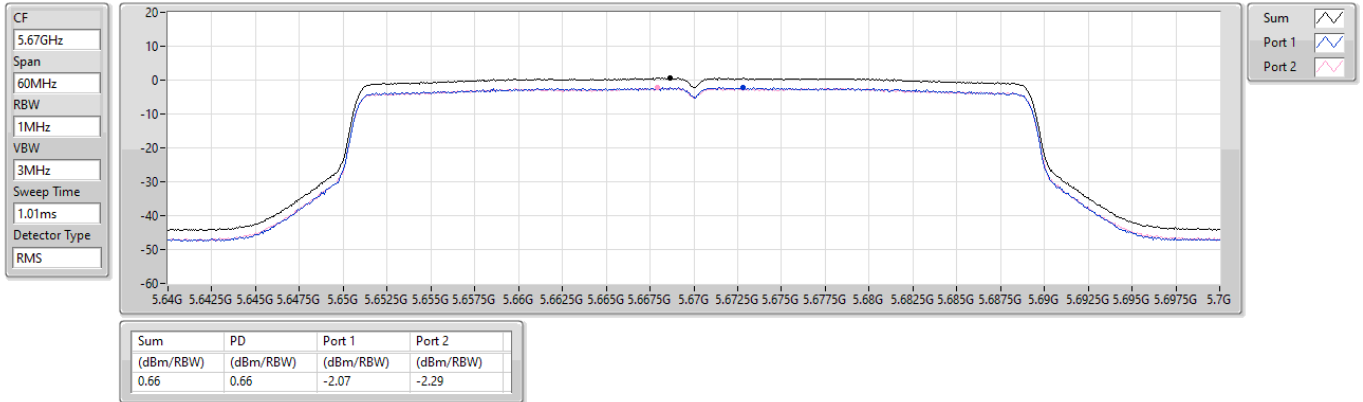

5.47-5.725GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5710MHz Straddle 5.47-5.725GHz

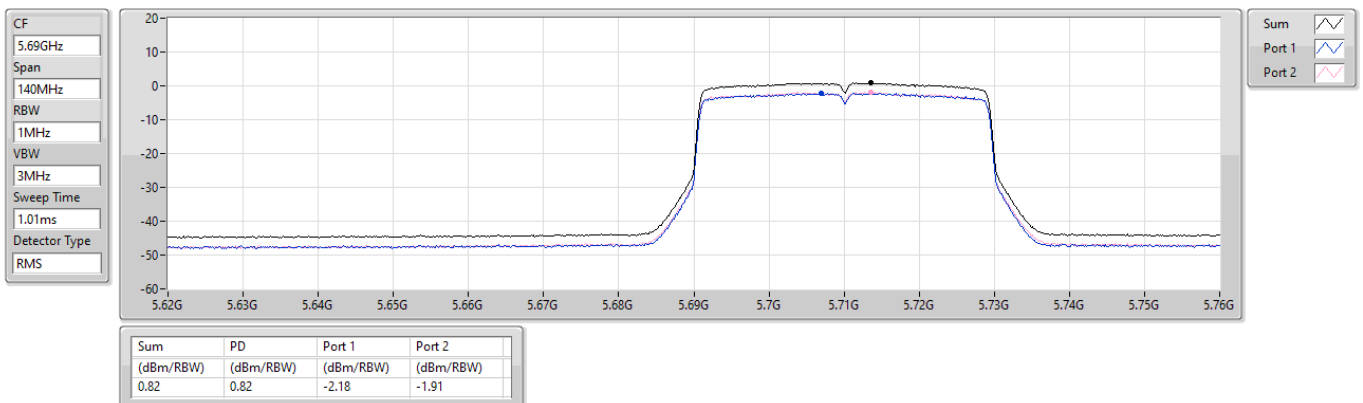

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD


5710MHz Straddle 5.725-5.85GHz

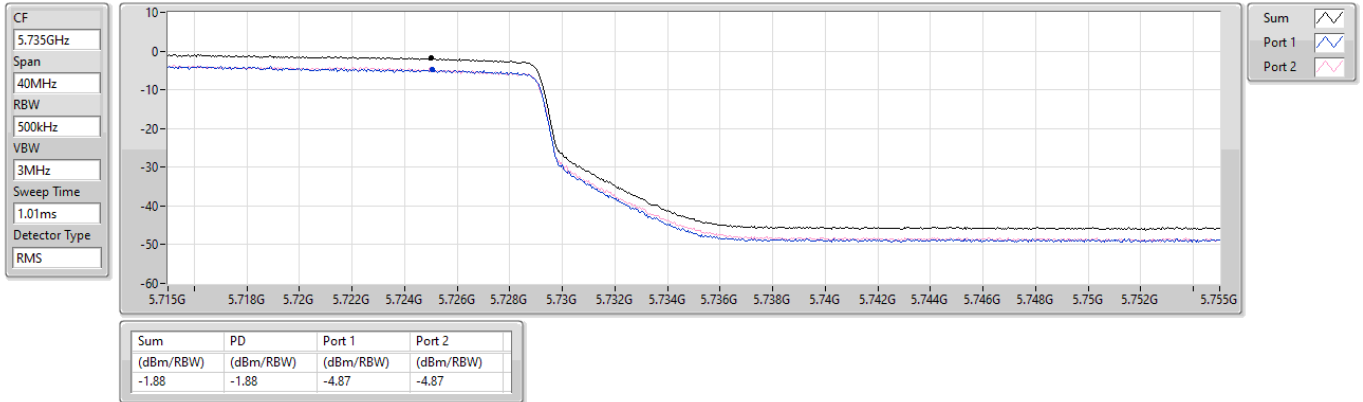

5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

5755MHz

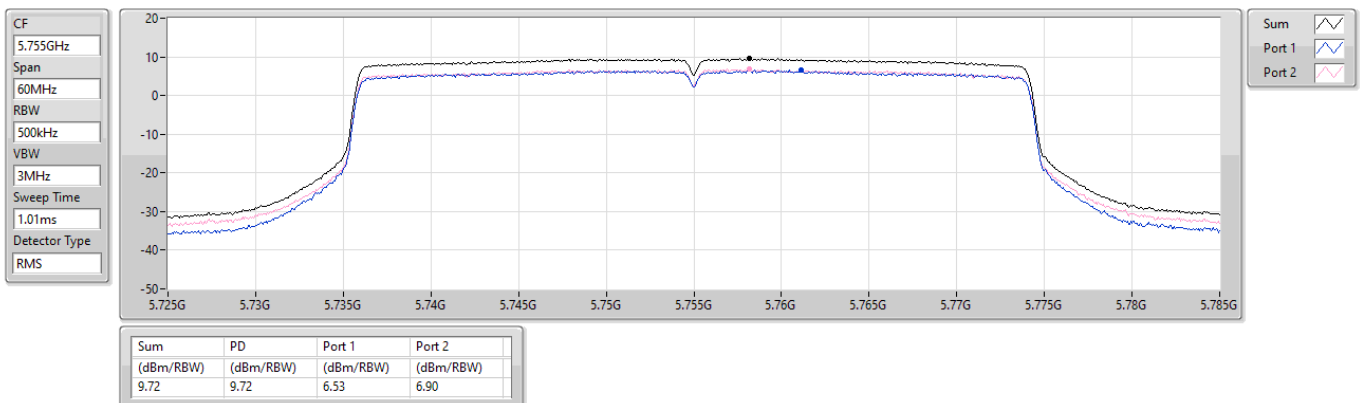


5.725-5.85GHz_802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

5795MHz

CF
5.795GHz
Span
60MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

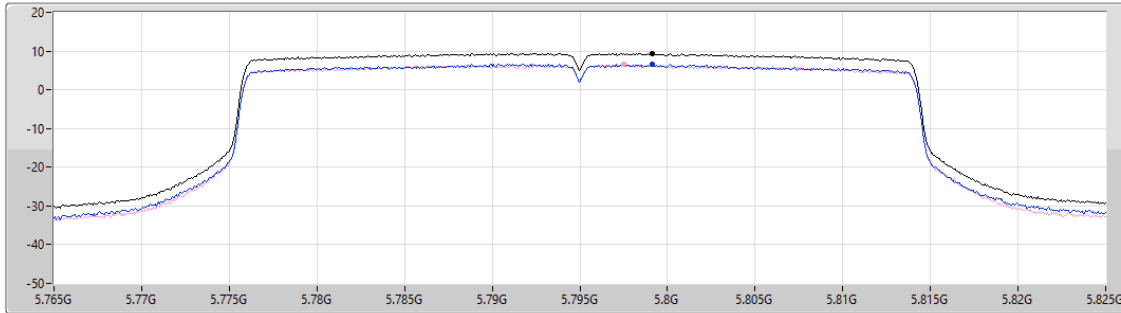

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.44	9.44	6.68	6.49


Sum
Port 1
Port 2

5.15-5.25GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5210MHz

CF
5.21GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

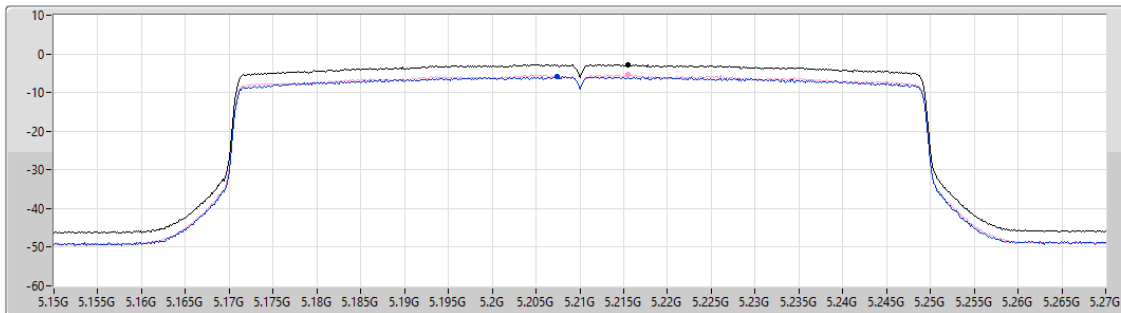


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-2.80	-2.80	-5.86	-5.42

Sum
Port 1
Port 2

5.25-5.35GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD


5290MHz

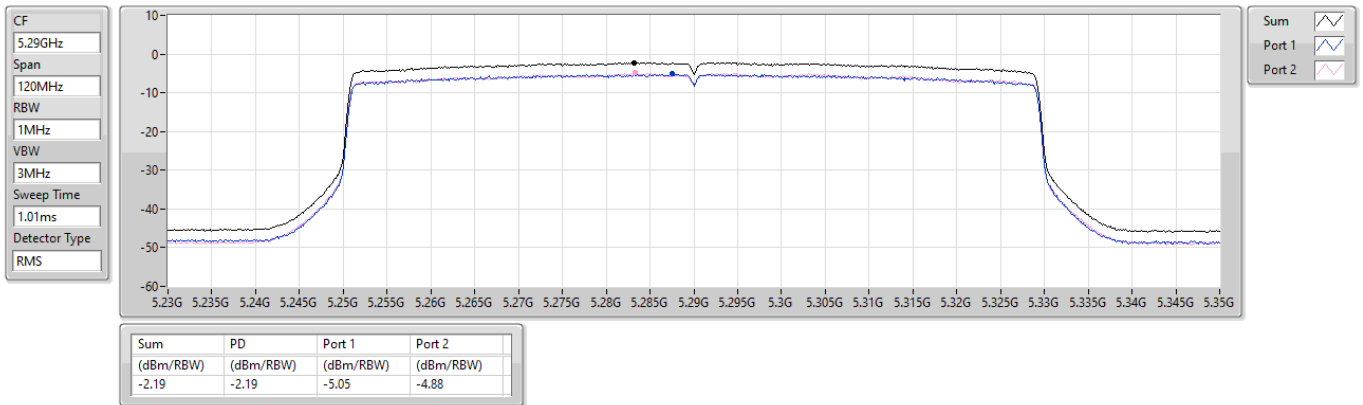

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5530MHz

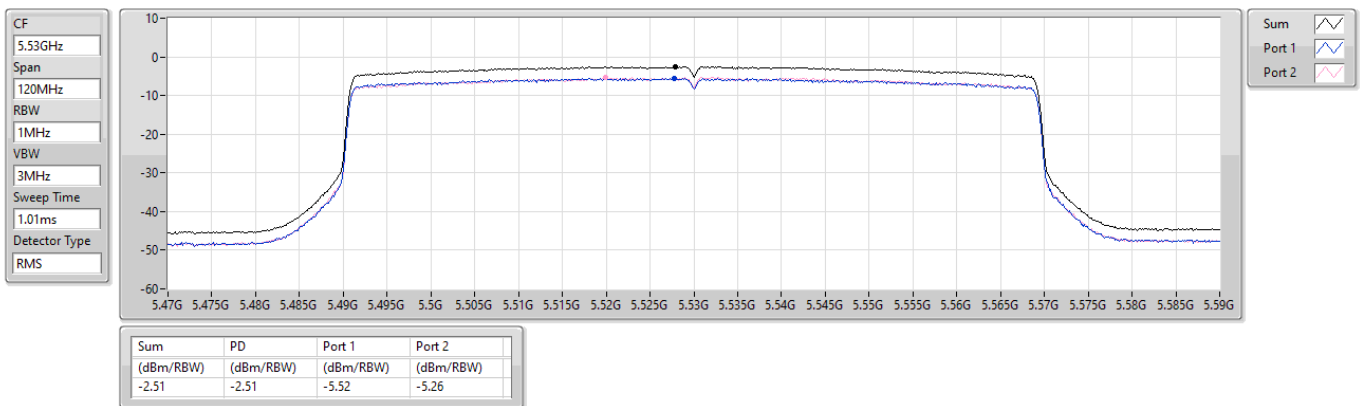




5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD


5610MHz

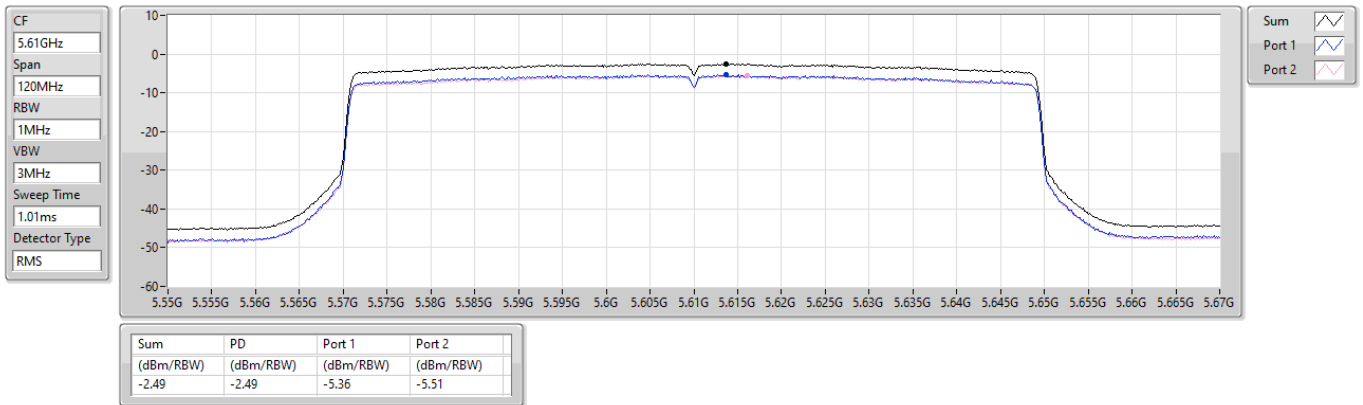

5.47-5.725GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5690MHz Straddle 5.47-5.725GHz

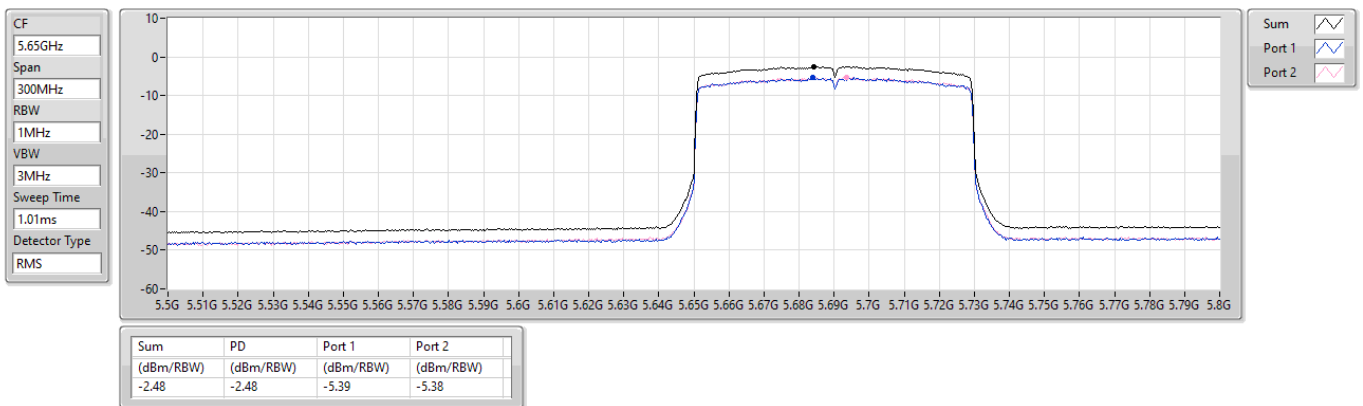




5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD


5690MHz Straddle 5.725-5.85GHz

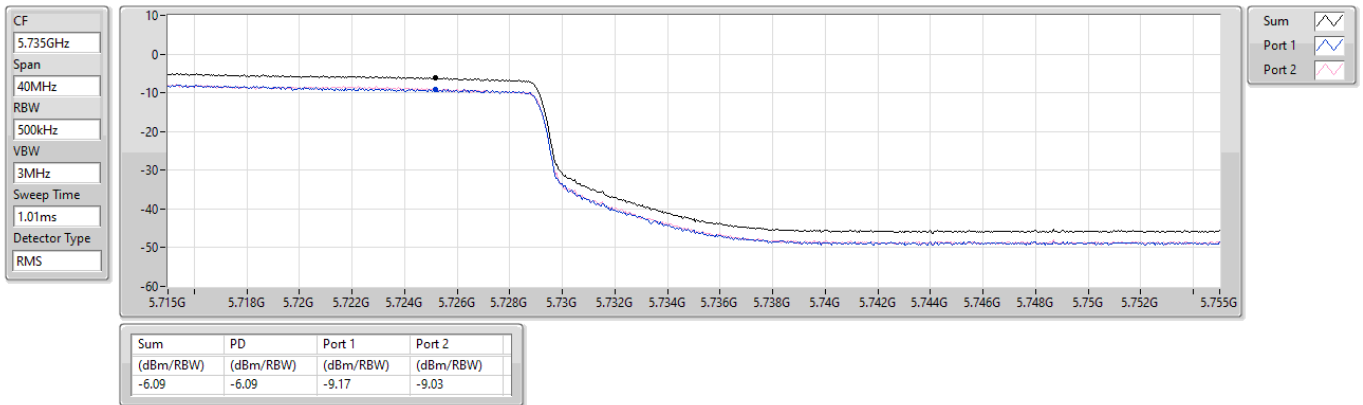

5.725-5.85GHz_802.11ax HEW80_Nss1,(MCS0)_2TX

PSD

5775MHz

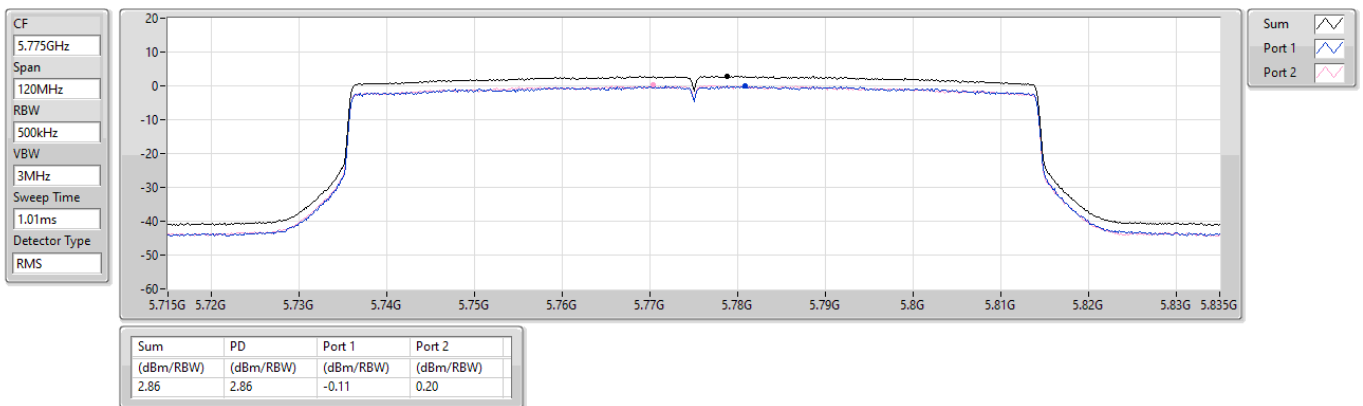



Unwanted Emissions (Below 1GHz)

Modulation	ax HE40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5795
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5795
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m)			



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBUV/m) <			



Modulation	11a	Test Freq. (MHz)	5180																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>41.67</td><td>0.62</td><td>Average</td><td>104</td><td>260</td></tr><tr><td>2</td><td>5150.00</td><td>53.83</td><td>74.00</td><td>-20.17</td><td>53.21</td><td>0.62</td><td>Peak</td><td>104</td><td>260</td></tr><tr><td>3</td><td>10360.00</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>46.47</td><td>8.21</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>4</td><td>15540.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>36.58</td><td>5.11</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>5</td><td>15540.00</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>50.23</td><td>5.11</td><td>Peak</td><td>100</td><td>21</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.29	54.00	-11.71	41.67	0.62	Average	104	260	2	5150.00	53.83	74.00	-20.17	53.21	0.62	Peak	104	260	3	10360.00	54.68	68.20	-13.52	46.47	8.21	Peak	100	56	4	15540.00	41.69	54.00	-12.31	36.58	5.11	Average	100	21	5	15540.00	55.34	74.00	-18.66	50.23	5.11	Peak	100	21
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	42.29	54.00	-11.71	41.67	0.62	Average	104	260																																																						
2	5150.00	53.83	74.00	-20.17	53.21	0.62	Peak	104	260																																																						
3	10360.00	54.68	68.20	-13.52	46.47	8.21	Peak	100	56																																																						
4	15540.00	41.69	54.00	-12.31	36.58	5.11	Average	100	21																																																						
5	15540.00	55.34	74.00	-18.66	50.23	5.11	Peak	100	21																																																						



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5240																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.46</td><td>54.00</td><td>-9.54</td><td>43.84</td><td>0.62</td><td>Average</td><td>167</td><td>181</td></tr><tr><td>2</td><td>5150.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>55.44</td><td>0.62</td><td>Peak</td><td>167</td><td>181</td></tr><tr><td>3</td><td>5350.00</td><td>43.14</td><td>54.00</td><td>-10.86</td><td>43.12</td><td>0.02</td><td>Average</td><td>167</td><td>181</td></tr><tr><td>4</td><td>5350.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>55.68</td><td>0.02</td><td>Peak</td><td>167</td><td>181</td></tr><tr><td>5</td><td>5376.00</td><td>45.41</td><td>54.00</td><td>-8.59</td><td>45.40</td><td>0.01</td><td>Average</td><td>167</td><td>181</td></tr><tr><td>6</td><td>5376.00</td><td>57.15</td><td>74.00</td><td>-16.85</td><td>57.14</td><td>0.01</td><td>Peak</td><td>167</td><td>181</td></tr><tr><td>7</td><td>10480.00</td><td>55.04</td><td>68.20</td><td>-13.16</td><td>46.48</td><td>8.56</td><td>Peak</td><td>100</td><td>89</td></tr><tr><td>8</td><td>15720.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>36.64</td><td>5.10</td><td>Average</td><td>100</td><td>32</td></tr><tr><td>9</td><td>15720.00</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>50.48</td><td>5.10</td><td>Peak</td><td>100</td><td>32</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.46	54.00	-9.54	43.84	0.62	Average	167	181	2	5150.00	56.06	74.00	-17.94	55.44	0.62	Peak	167	181	3	5350.00	43.14	54.00	-10.86	43.12	0.02	Average	167	181	4	5350.00	55.70	74.00	-18.30	55.68	0.02	Peak	167	181	5	5376.00	45.41	54.00	-8.59	45.40	0.01	Average	167	181	6	5376.00	57.15	74.00	-16.85	57.14	0.01	Peak	167	181	7	10480.00	55.04	68.20	-13.16	46.48	8.56	Peak	100	89	8	15720.00	41.74	54.00	-12.26	36.64	5.10	Average	100	32	9	15720.00	55.58	74.00	-18.42	50.48	5.10	Peak	100	32
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	44.46	54.00	-9.54	43.84	0.62	Average	167	181																																																																																														
2	5150.00	56.06	74.00	-17.94	55.44	0.62	Peak	167	181																																																																																														
3	5350.00	43.14	54.00	-10.86	43.12	0.02	Average	167	181																																																																																														
4	5350.00	55.70	74.00	-18.30	55.68	0.02	Peak	167	181																																																																																														
5	5376.00	45.41	54.00	-8.59	45.40	0.01	Average	167	181																																																																																														
6	5376.00	57.15	74.00	-16.85	57.14	0.01	Peak	167	181																																																																																														
7	10480.00	55.04	68.20	-13.16	46.48	8.56	Peak	100	89																																																																																														
8	15720.00	41.74	54.00	-12.26	36.64	5.10	Average	100	32																																																																																														
9	15720.00	55.58	74.00	-18.42	50.48	5.10	Peak	100	32																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							



Modulation	11a	Test Freq. (MHz)	5240																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>41.61</td><td>0.62</td><td>Average</td><td>100</td><td>262</td></tr><tr><td>2</td><td>5150.00</td><td>53.86</td><td>74.00</td><td>-20.14</td><td>53.24</td><td>0.62</td><td>Peak</td><td>100</td><td>262</td></tr><tr><td>3</td><td>5350.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>42.67</td><td>0.02</td><td>Average</td><td>100</td><td>262</td></tr><tr><td>4</td><td>5350.00</td><td>53.88</td><td>74.00</td><td>-20.12</td><td>53.86</td><td>0.02</td><td>Peak</td><td>100</td><td>262</td></tr><tr><td>5</td><td>5376.00</td><td>43.01</td><td>54.00</td><td>-10.99</td><td>43.00</td><td>0.01</td><td>Average</td><td>100</td><td>262</td></tr><tr><td>6</td><td>5376.00</td><td>54.25</td><td>74.00</td><td>-19.75</td><td>54.24</td><td>0.01</td><td>Peak</td><td>100</td><td>262</td></tr><tr><td>7</td><td>10480.00</td><td>54.81</td><td>68.20</td><td>-13.39</td><td>46.25</td><td>8.56</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>8</td><td>15720.00</td><td>41.82</td><td>54.00</td><td>-12.18</td><td>36.72</td><td>5.10</td><td>Average</td><td>100</td><td>28</td></tr><tr><td>9</td><td>15720.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>50.36</td><td>5.10</td><td>Peak</td><td>100</td><td>28</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.23	54.00	-11.77	41.61	0.62	Average	100	262	2	5150.00	53.86	74.00	-20.14	53.24	0.62	Peak	100	262	3	5350.00	42.69	54.00	-11.31	42.67	0.02	Average	100	262	4	5350.00	53.88	74.00	-20.12	53.86	0.02	Peak	100	262	5	5376.00	43.01	54.00	-10.99	43.00	0.01	Average	100	262	6	5376.00	54.25	74.00	-19.75	54.24	0.01	Peak	100	262	7	10480.00	54.81	68.20	-13.39	46.25	8.56	Peak	100	54	8	15720.00	41.82	54.00	-12.18	36.72	5.10	Average	100	28	9	15720.00	55.46	74.00	-18.54	50.36	5.10	Peak	100	28
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	42.23	54.00	-11.77	41.61	0.62	Average	100	262																																																																																														
2	5150.00	53.86	74.00	-20.14	53.24	0.62	Peak	100	262																																																																																														
3	5350.00	42.69	54.00	-11.31	42.67	0.02	Average	100	262																																																																																														
4	5350.00	53.88	74.00	-20.12	53.86	0.02	Peak	100	262																																																																																														
5	5376.00	43.01	54.00	-10.99	43.00	0.01	Average	100	262																																																																																														
6	5376.00	54.25	74.00	-19.75	54.24	0.01	Peak	100	262																																																																																														
7	10480.00	54.81	68.20	-13.39	46.25	8.56	Peak	100	54																																																																																														
8	15720.00	41.82	54.00	-12.18	36.72	5.10	Average	100	28																																																																																														
9	15720.00	55.46	74.00	-18.54	50.36	5.10	Peak	100	28																																																																																														



Modulation	11a	Test Freq. (MHz)	5260																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.64</td><td>54.00</td><td>-10.36</td><td>43.02</td><td>0.62</td><td>Average</td><td>165</td><td>181</td></tr><tr><td>2</td><td>5150.00</td><td>56.53</td><td>74.00</td><td>-17.47</td><td>55.91</td><td>0.62</td><td>Peak</td><td>165</td><td>181</td></tr><tr><td>3</td><td>5350.00</td><td>43.96</td><td>54.00</td><td>-10.04</td><td>43.94</td><td>0.02</td><td>Average</td><td>165</td><td>181</td></tr><tr><td>4</td><td>5350.00</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>56.19</td><td>0.02</td><td>Peak</td><td>165</td><td>181</td></tr><tr><td>5</td><td>5376.00</td><td>45.45</td><td>54.00</td><td>-8.55</td><td>45.44</td><td>0.01</td><td>Average</td><td>165</td><td>181</td></tr><tr><td>6</td><td>5376.00</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>56.67</td><td>0.01</td><td>Peak</td><td>165</td><td>181</td></tr><tr><td>7</td><td>10520.00</td><td>55.54</td><td>68.20</td><td>-12.66</td><td>47.10</td><td>8.44</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>8</td><td>15780.00</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>37.22</td><td>4.87</td><td>Average</td><td>100</td><td>34</td></tr><tr><td>9</td><td>15780.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>50.54</td><td>4.87</td><td>Peak</td><td>100</td><td>34</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.64	54.00	-10.36	43.02	0.62	Average	165	181	2	5150.00	56.53	74.00	-17.47	55.91	0.62	Peak	165	181	3	5350.00	43.96	54.00	-10.04	43.94	0.02	Average	165	181	4	5350.00	56.21	74.00	-17.79	56.19	0.02	Peak	165	181	5	5376.00	45.45	54.00	-8.55	45.44	0.01	Average	165	181	6	5376.00	56.68	74.00	-17.32	56.67	0.01	Peak	165	181	7	10520.00	55.54	68.20	-12.66	47.10	8.44	Peak	100	69	8	15780.00	42.09	54.00	-11.91	37.22	4.87	Average	100	34	9	15780.00	55.41	74.00	-18.59	50.54	4.87	Peak	100	34
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.64	54.00	-10.36	43.02	0.62	Average	165	181																																																																																														
2	5150.00	56.53	74.00	-17.47	55.91	0.62	Peak	165	181																																																																																														
3	5350.00	43.96	54.00	-10.04	43.94	0.02	Average	165	181																																																																																														
4	5350.00	56.21	74.00	-17.79	56.19	0.02	Peak	165	181																																																																																														
5	5376.00	45.45	54.00	-8.55	45.44	0.01	Average	165	181																																																																																														
6	5376.00	56.68	74.00	-17.32	56.67	0.01	Peak	165	181																																																																																														
7	10520.00	55.54	68.20	-12.66	47.10	8.44	Peak	100	69																																																																																														
8	15780.00	42.09	54.00	-11.91	37.22	4.87	Average	100	34																																																																																														
9	15780.00	55.41	74.00	-18.59	50.54	4.87	Peak	100	34																																																																																														



Modulation	11a	Test Freq. (MHz)	5260																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>42.26</td><td>0.62</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>2</td><td>5150.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>53.73</td><td>0.62</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>3</td><td>5350.00</td><td>42.81</td><td>54.00</td><td>-11.19</td><td>42.79</td><td>0.02</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>4</td><td>5350.00</td><td>54.46</td><td>74.00</td><td>-19.54</td><td>54.44</td><td>0.02</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>5</td><td>5376.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>42.98</td><td>0.01</td><td>Average</td><td>100</td><td>259</td></tr><tr><td>6</td><td>5376.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.64</td><td>0.01</td><td>Peak</td><td>100</td><td>259</td></tr><tr><td>7</td><td>10520.00</td><td>55.39</td><td>68.20</td><td>-12.81</td><td>46.95</td><td>8.44</td><td>Peak</td><td>100</td><td>34</td></tr><tr><td>8</td><td>15780.00</td><td>41.93</td><td>54.00</td><td>-12.07</td><td>37.06</td><td>4.87</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>9</td><td>15780.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>50.37</td><td>4.87</td><td>Peak</td><td>100</td><td>82</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.88	54.00	-11.12	42.26	0.62	Average	100	259	2	5150.00	54.35	74.00	-19.65	53.73	0.62	Peak	100	259	3	5350.00	42.81	54.00	-11.19	42.79	0.02	Average	100	259	4	5350.00	54.46	74.00	-19.54	54.44	0.02	Peak	100	259	5	5376.00	42.99	54.00	-11.01	42.98	0.01	Average	100	259	6	5376.00	54.65	74.00	-19.35	54.64	0.01	Peak	100	259	7	10520.00	55.39	68.20	-12.81	46.95	8.44	Peak	100	34	8	15780.00	41.93	54.00	-12.07	37.06	4.87	Average	100	82	9	15780.00	55.24	74.00	-18.76	50.37	4.87	Peak	100	82
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	42.88	54.00	-11.12	42.26	0.62	Average	100	259																																																																																														
2	5150.00	54.35	74.00	-19.65	53.73	0.62	Peak	100	259																																																																																														
3	5350.00	42.81	54.00	-11.19	42.79	0.02	Average	100	259																																																																																														
4	5350.00	54.46	74.00	-19.54	54.44	0.02	Peak	100	259																																																																																														
5	5376.00	42.99	54.00	-11.01	42.98	0.01	Average	100	259																																																																																														
6	5376.00	54.65	74.00	-19.35	54.64	0.01	Peak	100	259																																																																																														
7	10520.00	55.39	68.20	-12.81	46.95	8.44	Peak	100	34																																																																																														
8	15780.00	41.93	54.00	-12.07	37.06	4.87	Average	100	82																																																																																														
9	15780.00	55.24	74.00	-18.76	50.37	4.87	Peak	100	82																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							



Modulation	11a	Test Freq. (MHz)	5300																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>43.25</td><td>0.02</td><td>Average</td><td>162</td><td>181</td></tr><tr><td>2</td><td>5350.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>55.12</td><td>0.02</td><td>Peak</td><td>162</td><td>181</td></tr><tr><td>3</td><td>5376.00</td><td>45.19</td><td>54.00</td><td>-8.81</td><td>45.18</td><td>0.01</td><td>Average</td><td>162</td><td>181</td></tr><tr><td>4</td><td>5376.00</td><td>57.31</td><td>74.00</td><td>-16.69</td><td>57.30</td><td>0.01</td><td>Peak</td><td>162</td><td>181</td></tr><tr><td>5</td><td>10600.00</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>33.03</td><td>8.40</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>6</td><td>10600.00</td><td>55.67</td><td>74.00</td><td>-18.33</td><td>47.27</td><td>8.40</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>7</td><td>15900.00</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>37.15</td><td>4.82</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>8</td><td>15900.00</td><td>55.32</td><td>74.00</td><td>-18.68</td><td>50.50</td><td>4.82</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	43.27	54.00	-10.73	43.25	0.02	Average	162	181	2	5350.00	55.14	74.00	-18.86	55.12	0.02	Peak	162	181	3	5376.00	45.19	54.00	-8.81	45.18	0.01	Average	162	181	4	5376.00	57.31	74.00	-16.69	57.30	0.01	Peak	162	181	5	10600.00	41.43	54.00	-12.57	33.03	8.40	Average	100	60	6	10600.00	55.67	74.00	-18.33	47.27	8.40	Peak	100	60	7	15900.00	41.97	54.00	-12.03	37.15	4.82	Average	100	40	8	15900.00	55.32	74.00	-18.68	50.50	4.82	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5350.00	43.27	54.00	-10.73	43.25	0.02	Average	162	181																																																																																				
2	5350.00	55.14	74.00	-18.86	55.12	0.02	Peak	162	181																																																																																				
3	5376.00	45.19	54.00	-8.81	45.18	0.01	Average	162	181																																																																																				
4	5376.00	57.31	74.00	-16.69	57.30	0.01	Peak	162	181																																																																																				
5	10600.00	41.43	54.00	-12.57	33.03	8.40	Average	100	60																																																																																				
6	10600.00	55.67	74.00	-18.33	47.27	8.40	Peak	100	60																																																																																				
7	15900.00	41.97	54.00	-12.03	37.15	4.82	Average	100	40																																																																																				
8	15900.00	55.32	74.00	-18.68	50.50	4.82	Peak	100	40																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													




Modulation	11a	Test Freq. (MHz)	5300																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>42.66</td><td>0.02</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>2</td><td>5350.00</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>54.19</td><td>0.02</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>3</td><td>5376.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>42.83</td><td>0.01</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>4</td><td>5376.00</td><td>54.45</td><td>74.00</td><td>-19.55</td><td>54.44</td><td>0.01</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>5</td><td>10600.00</td><td>41.28</td><td>54.00</td><td>-12.72</td><td>32.88</td><td>8.40</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>6</td><td>10600.00</td><td>55.54</td><td>74.00</td><td>-18.46</td><td>47.14</td><td>8.40</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>7</td><td>15900.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>37.02</td><td>4.82</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>8</td><td>15900.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>50.32</td><td>4.82</td><td>Peak</td><td>100</td><td>100</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5350.00	42.68	54.00	-11.32	42.66	0.02	Average	100	254	2	5350.00	54.21	74.00	-19.79	54.19	0.02	Peak	100	254	3	5376.00	42.84	54.00	-11.16	42.83	0.01	Average	100	254	4	5376.00	54.45	74.00	-19.55	54.44	0.01	Peak	100	254	5	10600.00	41.28	54.00	-12.72	32.88	8.40	Average	100	30	6	10600.00	55.54	74.00	-18.46	47.14	8.40	Peak	100	30	7	15900.00	41.84	54.00	-12.16	37.02	4.82	Average	100	100	8	15900.00	55.14	74.00	-18.86	50.32	4.82	Peak	100	100
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5350.00	42.68	54.00	-11.32	42.66	0.02	Average	100	254																																																																																																								
2	5350.00	54.21	74.00	-19.79	54.19	0.02	Peak	100	254																																																																																																								
3	5376.00	42.84	54.00	-11.16	42.83	0.01	Average	100	254																																																																																																								
4	5376.00	54.45	74.00	-19.55	54.44	0.01	Peak	100	254																																																																																																								
5	10600.00	41.28	54.00	-12.72	32.88	8.40	Average	100	30																																																																																																								
6	10600.00	55.54	74.00	-18.46	47.14	8.40	Peak	100	30																																																																																																								
7	15900.00	41.84	54.00	-12.16	37.02	4.82	Average	100	100																																																																																																								
8	15900.00	55.14	74.00	-18.86	50.32	4.82	Peak	100	100																																																																																																								



Modulation	11a	Test Freq. (MHz)	5320																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>44.15</td><td>54.00</td><td>-9.85</td><td>44.13</td><td>0.02</td><td>Average</td><td>170</td><td>180</td></tr><tr><td>2</td><td>5350.00</td><td>57.72</td><td>74.00</td><td>-16.28</td><td>57.70</td><td>0.02</td><td>Peak</td><td>170</td><td>180</td></tr><tr><td>3</td><td>5376.00</td><td>45.36</td><td>54.00</td><td>-8.64</td><td>45.35</td><td>0.01</td><td>Average</td><td>170</td><td>180</td></tr><tr><td>4</td><td>5376.00</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>56.24</td><td>0.01</td><td>Peak</td><td>170</td><td>180</td></tr><tr><td>5</td><td>10640.00</td><td>41.48</td><td>54.00</td><td>-12.52</td><td>33.02</td><td>8.46</td><td>Average</td><td>100</td><td>65</td></tr><tr><td>6</td><td>10640.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>47.26</td><td>8.46</td><td>Peak</td><td>100</td><td>65</td></tr><tr><td>7</td><td>15960.00</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>37.20</td><td>4.72</td><td>Average</td><td>100</td><td>38</td></tr><tr><td>8</td><td>15960.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>50.74</td><td>4.72</td><td>Peak</td><td>100</td><td>38</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	44.15	54.00	-9.85	44.13	0.02	Average	170	180	2	5350.00	57.72	74.00	-16.28	57.70	0.02	Peak	170	180	3	5376.00	45.36	54.00	-8.64	45.35	0.01	Average	170	180	4	5376.00	56.25	74.00	-17.75	56.24	0.01	Peak	170	180	5	10640.00	41.48	54.00	-12.52	33.02	8.46	Average	100	65	6	10640.00	55.72	74.00	-18.28	47.26	8.46	Peak	100	65	7	15960.00	41.92	54.00	-12.08	37.20	4.72	Average	100	38	8	15960.00	55.46	74.00	-18.54	50.74	4.72	Peak	100	38
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5350.00	44.15	54.00	-9.85	44.13	0.02	Average	170	180																																																																																				
2	5350.00	57.72	74.00	-16.28	57.70	0.02	Peak	170	180																																																																																				
3	5376.00	45.36	54.00	-8.64	45.35	0.01	Average	170	180																																																																																				
4	5376.00	56.25	74.00	-17.75	56.24	0.01	Peak	170	180																																																																																				
5	10640.00	41.48	54.00	-12.52	33.02	8.46	Average	100	65																																																																																				
6	10640.00	55.72	74.00	-18.28	47.26	8.46	Peak	100	65																																																																																				
7	15960.00	41.92	54.00	-12.08	37.20	4.72	Average	100	38																																																																																				
8	15960.00	55.46	74.00	-18.54	50.74	4.72	Peak	100	38																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													

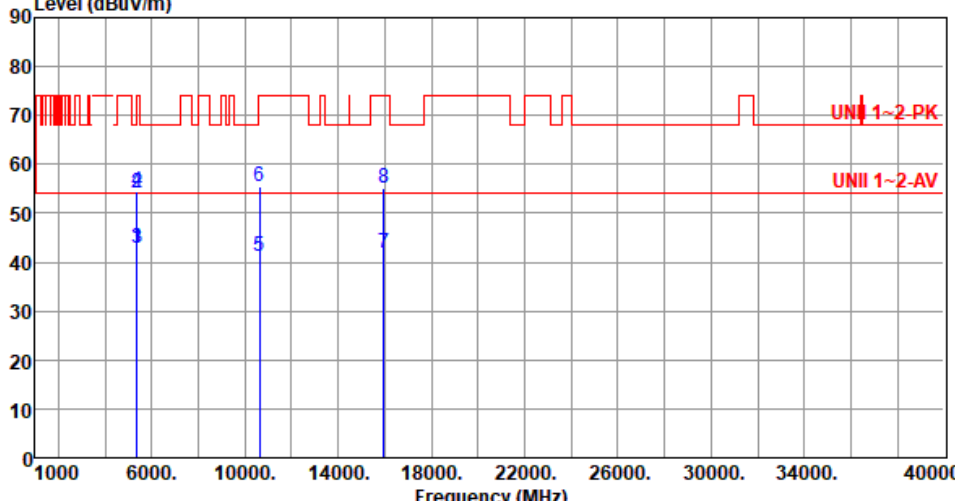


Modulation	11a	Test Freq. (MHz)	5320																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>42.83</td><td>0.02</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>2</td><td>5350.00</td><td>54.16</td><td>74.00</td><td>-19.84</td><td>54.14</td><td>0.02</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>3</td><td>5376.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>42.98</td><td>0.01</td><td>Average</td><td>100</td><td>252</td></tr><tr><td>4</td><td>5376.00</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>54.37</td><td>0.01</td><td>Peak</td><td>100</td><td>252</td></tr><tr><td>5</td><td>10640.00</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>32.88</td><td>8.46</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>6</td><td>10640.00</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>47.16</td><td>8.46</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>7</td><td>15960.00</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>37.24</td><td>4.72</td><td>Average</td><td>100</td><td>94</td></tr><tr><td>8</td><td>15960.00</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>50.56</td><td>4.72</td><td>Peak</td><td>100</td><td>94</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	42.85	54.00	-11.15	42.83	0.02	Average	100	252	2	5350.00	54.16	74.00	-19.84	54.14	0.02	Peak	100	252	3	5376.00	42.99	54.00	-11.01	42.98	0.01	Average	100	252	4	5376.00	54.38	74.00	-19.62	54.37	0.01	Peak	100	252	5	10640.00	41.34	54.00	-12.66	32.88	8.46	Average	100	35	6	10640.00	55.62	74.00	-18.38	47.16	8.46	Peak	100	35	7	15960.00	41.96	54.00	-12.04	37.24	4.72	Average	100	94	8	15960.00	55.28	74.00	-18.72	50.56	4.72	Peak	100	94
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5350.00	42.85	54.00	-11.15	42.83	0.02	Average	100	252																																																																																				
2	5350.00	54.16	74.00	-19.84	54.14	0.02	Peak	100	252																																																																																				
3	5376.00	42.99	54.00	-11.01	42.98	0.01	Average	100	252																																																																																				
4	5376.00	54.38	74.00	-19.62	54.37	0.01	Peak	100	252																																																																																				
5	10640.00	41.34	54.00	-12.66	32.88	8.46	Average	100	35																																																																																				
6	10640.00	55.62	74.00	-18.38	47.16	8.46	Peak	100	35																																																																																				
7	15960.00	41.96	54.00	-12.04	37.24	4.72	Average	100	94																																																																																				
8	15960.00	55.28	74.00	-18.72	50.56	4.72	Peak	100	94																																																																																				




Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	43.89	54.00	-10.11	43.56	0.33	Average	243	180
2	5460.00	56.88	74.00	-17.12	56.55	0.33	Peak	243	180
3	5470.00	57.51	68.20	-10.69	57.15	0.36	Peak	243	180
4	5856.00	57.44	68.20	-10.76	56.51	0.93	Peak	243	180
5	11000.00	42.25	54.00	-11.75	33.46	8.79	Average	100	88
6	11000.00	55.21	74.00	-18.79	46.42	8.79	Peak	100	88
7	16500.00	57.74	68.20	-10.46	51.21	6.53	Peak	100	63
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

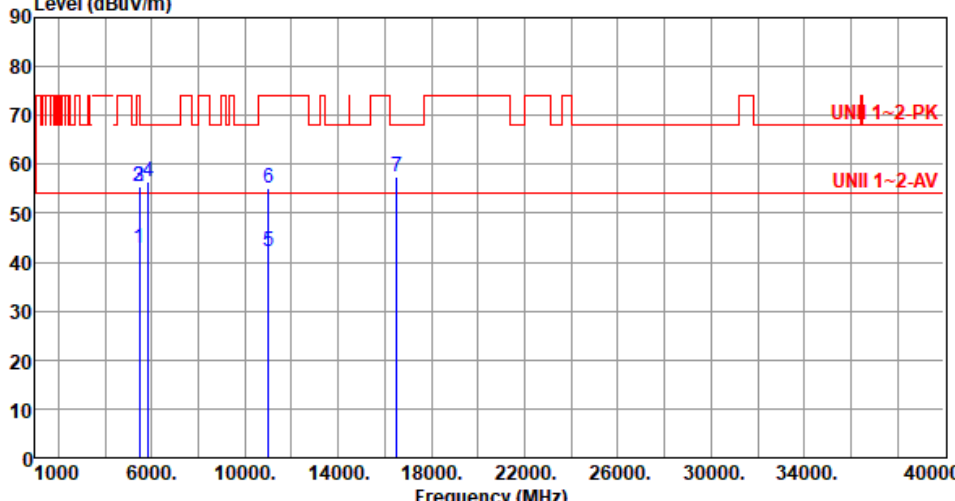

Modulation	11a	Test Freq. (MHz)	5500						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.75	54.00	-11.25	42.42	0.33	Average	100	242
2	5460.00	55.41	74.00	-18.59	55.08	0.33	Peak	100	242
3	5470.00	55.62	68.20	-12.58	55.26	0.36	Peak	100	242
4	5856.00	56.41	68.20	-11.79	55.48	0.93	Peak	100	242
5	11000.00	42.14	54.00	-11.86	33.35	8.79	Average	100	72
6	11000.00	55.08	74.00	-18.92	46.29	8.79	Peak	100	72
7	16500.00	57.59	68.20	-10.61	51.06	6.53	Peak	100	51
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

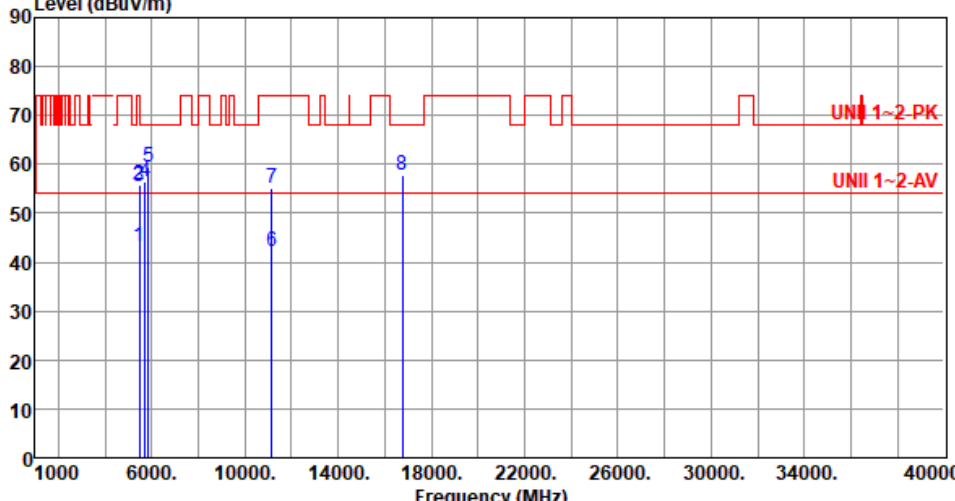

Modulation	11a	Test Freq. (MHz)	5580																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.04</td><td>54.00</td><td>-10.96</td><td>42.71</td><td>0.33</td><td>Average</td><td>235</td><td>181</td></tr><tr><td>2</td><td>5460.00</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>55.32</td><td>0.33</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>3</td><td>5470.00</td><td>55.52</td><td>68.20</td><td>-12.68</td><td>55.16</td><td>0.36</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>4</td><td>5725.00</td><td>56.49</td><td>68.20</td><td>-11.71</td><td>55.71</td><td>0.78</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>5</td><td>5856.00</td><td>59.41</td><td>68.20</td><td>-8.79</td><td>58.48</td><td>0.93</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>6</td><td>11160.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>33.86</td><td>8.33</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>7</td><td>11160.00</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>46.79</td><td>8.33</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>8</td><td>16740.00</td><td>57.80</td><td>68.20</td><td>-10.40</td><td>51.23</td><td>6.57</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.04	54.00	-10.96	42.71	0.33	Average	235	181	2	5460.00	55.65	74.00	-18.35	55.32	0.33	Peak	235	181	3	5470.00	55.52	68.20	-12.68	55.16	0.36	Peak	235	181	4	5725.00	56.49	68.20	-11.71	55.71	0.78	Peak	235	181	5	5856.00	59.41	68.20	-8.79	58.48	0.93	Peak	235	181	6	11160.00	42.19	54.00	-11.81	33.86	8.33	Average	100	90	7	11160.00	55.12	74.00	-18.88	46.79	8.33	Peak	100	90	8	16740.00	57.80	68.20	-10.40	51.23	6.57	Peak	100	70
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	43.04	54.00	-10.96	42.71	0.33	Average	235	181																																																																																				
2	5460.00	55.65	74.00	-18.35	55.32	0.33	Peak	235	181																																																																																				
3	5470.00	55.52	68.20	-12.68	55.16	0.36	Peak	235	181																																																																																				
4	5725.00	56.49	68.20	-11.71	55.71	0.78	Peak	235	181																																																																																				
5	5856.00	59.41	68.20	-8.79	58.48	0.93	Peak	235	181																																																																																				
6	11160.00	42.19	54.00	-11.81	33.86	8.33	Average	100	90																																																																																				
7	11160.00	55.12	74.00	-18.88	46.79	8.33	Peak	100	90																																																																																				
8	16740.00	57.80	68.20	-10.40	51.23	6.57	Peak	100	70																																																																																				



Modulation	11a	Test Freq. (MHz)	5580																																																																																																																																						
Polarization	Vertical																																																																																																																																								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																																									
Level (dBuV/m) <table><thead><tr><th>Point</th><th>Freq. (MHz)</th><th>Emission level (dBuV/m)</th><th>Limit (dBuV/m)</th><th>Margin (dB)</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.69</td><td>54.00</td><td>-11.31</td></tr><tr><td>2</td><td>5460.00</td><td>55.36</td><td>74.00</td><td>-18.64</td></tr><tr><td>3</td><td>5470.00</td><td>55.45</td><td>68.20</td><td>-12.75</td></tr><tr><td>4</td><td>5725.00</td><td>56.40</td><td>68.20</td><td>-11.80</td></tr><tr><td>5</td><td>5856.00</td><td>56.37</td><td>68.20</td><td>-11.83</td></tr><tr><td>6</td><td>11160.00</td><td>42.05</td><td>54.00</td><td>-11.95</td></tr><tr><td>7</td><td>11160.00</td><td>54.95</td><td>74.00</td><td>-19.05</td></tr><tr><td>8</td><td>16740.00</td><td>57.45</td><td>68.20</td><td>-10.75</td></tr></tbody></table> <table><thead><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>42.36</td><td>0.33</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>5460.00</td><td>55.36</td><td>74.00</td><td>-18.64</td><td>55.03</td><td>0.33</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>5470.00</td><td>55.45</td><td>68.20</td><td>-12.75</td><td>55.09</td><td>0.36</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>4</td><td>5725.00</td><td>56.40</td><td>68.20</td><td>-11.80</td><td>55.62</td><td>0.78</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>5</td><td>5856.00</td><td>56.37</td><td>68.20</td><td>-11.83</td><td>55.44</td><td>0.93</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>6</td><td>11160.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>33.72</td><td>8.33</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>7</td><td>11160.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>46.62</td><td>8.33</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>8</td><td>16740.00</td><td>57.45</td><td>68.20</td><td>-10.75</td><td>50.88</td><td>6.57</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>				Point	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	1	5460.00	42.69	54.00	-11.31	2	5460.00	55.36	74.00	-18.64	3	5470.00	55.45	68.20	-12.75	4	5725.00	56.40	68.20	-11.80	5	5856.00	56.37	68.20	-11.83	6	11160.00	42.05	54.00	-11.95	7	11160.00	54.95	74.00	-19.05	8	16740.00	57.45	68.20	-10.75	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.69	54.00	-11.31	42.36	0.33	Average	100	246	2	5460.00	55.36	74.00	-18.64	55.03	0.33	Peak	100	246	3	5470.00	55.45	68.20	-12.75	55.09	0.36	Peak	100	246	4	5725.00	56.40	68.20	-11.80	55.62	0.78	Peak	100	246	5	5856.00	56.37	68.20	-11.83	55.44	0.93	Peak	100	246	6	11160.00	42.05	54.00	-11.95	33.72	8.33	Average	100	50	7	11160.00	54.95	74.00	-19.05	46.62	8.33	Peak	100	50	8	16740.00	57.45	68.20	-10.75	50.88	6.57	Peak	100	60
Point	Freq. (MHz)	Emission level (dBuV/m)	Limit (dBuV/m)	Margin (dB)																																																																																																																																					
1	5460.00	42.69	54.00	-11.31																																																																																																																																					
2	5460.00	55.36	74.00	-18.64																																																																																																																																					
3	5470.00	55.45	68.20	-12.75																																																																																																																																					
4	5725.00	56.40	68.20	-11.80																																																																																																																																					
5	5856.00	56.37	68.20	-11.83																																																																																																																																					
6	11160.00	42.05	54.00	-11.95																																																																																																																																					
7	11160.00	54.95	74.00	-19.05																																																																																																																																					
8	16740.00	57.45	68.20	-10.75																																																																																																																																					
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																	
1	5460.00	42.69	54.00	-11.31	42.36	0.33	Average	100	246																																																																																																																																
2	5460.00	55.36	74.00	-18.64	55.03	0.33	Peak	100	246																																																																																																																																
3	5470.00	55.45	68.20	-12.75	55.09	0.36	Peak	100	246																																																																																																																																
4	5725.00	56.40	68.20	-11.80	55.62	0.78	Peak	100	246																																																																																																																																
5	5856.00	56.37	68.20	-11.83	55.44	0.93	Peak	100	246																																																																																																																																
6	11160.00	42.05	54.00	-11.95	33.72	8.33	Average	100	50																																																																																																																																
7	11160.00	54.95	74.00	-19.05	46.62	8.33	Peak	100	50																																																																																																																																
8	16740.00	57.45	68.20	-10.75	50.88	6.57	Peak	100	60																																																																																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																									



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5700																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>56.51</td><td>68.20</td><td>-11.69</td><td>55.73</td><td>0.78</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>2</td><td>5856.00</td><td>56.68</td><td>68.20</td><td>-11.52</td><td>55.75</td><td>0.93</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>3</td><td>11400.00</td><td>42.12</td><td>54.00</td><td>-11.88</td><td>34.03</td><td>8.09</td><td>Average</td><td>100</td><td>69</td></tr><tr><td>4</td><td>11400.00</td><td>55.03</td><td>74.00</td><td>-18.97</td><td>46.94</td><td>8.09</td><td>Peak</td><td>100</td><td>69</td></tr><tr><td>5</td><td>17100.00</td><td>57.29</td><td>68.20</td><td>-10.91</td><td>51.21</td><td>6.08</td><td>Peak</td><td>100</td><td>48</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	56.51	68.20	-11.69	55.73	0.78	Peak	100	241	2	5856.00	56.68	68.20	-11.52	55.75	0.93	Peak	100	241	3	11400.00	42.12	54.00	-11.88	34.03	8.09	Average	100	69	4	11400.00	55.03	74.00	-18.97	46.94	8.09	Peak	100	69	5	17100.00	57.29	68.20	-10.91	51.21	6.08	Peak	100	48
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5725.00	56.51	68.20	-11.69	55.73	0.78	Peak	100	241																																																						
2	5856.00	56.68	68.20	-11.52	55.75	0.93	Peak	100	241																																																						
3	11400.00	42.12	54.00	-11.88	34.03	8.09	Average	100	69																																																						
4	11400.00	55.03	74.00	-18.97	46.94	8.09	Peak	100	69																																																						
5	17100.00	57.29	68.20	-10.91	51.21	6.08	Peak	100	48																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	11a	Test Freq. (MHz)	5720																																																												
Polarization	Horizontal																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>56.16</td><td>0.88</td><td>Peak</td><td>214</td><td>180</td></tr><tr><td>2</td><td>5856.00</td><td>59.87</td><td>68.20</td><td>-8.33</td><td>58.94</td><td>0.93</td><td>Peak</td><td>214</td><td>180</td></tr><tr><td>3</td><td>11440.00</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>34.10</td><td>8.16</td><td>Average</td><td>100</td><td>95</td></tr><tr><td>4</td><td>11440.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>47.15</td><td>8.16</td><td>Peak</td><td>100</td><td>95</td></tr><tr><td>5</td><td>17160.00</td><td>57.72</td><td>68.20</td><td>-10.48</td><td>51.94</td><td>5.78</td><td>Peak</td><td>100</td><td>84</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	57.04	68.20	-11.16	56.16	0.88	Peak	214	180	2	5856.00	59.87	68.20	-8.33	58.94	0.93	Peak	214	180	3	11440.00	42.26	54.00	-11.74	34.10	8.16	Average	100	95	4	11440.00	55.31	74.00	-18.69	47.15	8.16	Peak	100	95	5	17160.00	57.72	68.20	-10.48	51.94	5.78	Peak	100	84
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5850.00	57.04	68.20	-11.16	56.16	0.88	Peak	214	180																																																						
2	5856.00	59.87	68.20	-8.33	58.94	0.93	Peak	214	180																																																						
3	11440.00	42.26	54.00	-11.74	34.10	8.16	Average	100	95																																																						
4	11440.00	55.31	74.00	-18.69	47.15	8.16	Peak	100	95																																																						
5	17160.00	57.72	68.20	-10.48	51.94	5.78	Peak	100	84																																																						




Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			

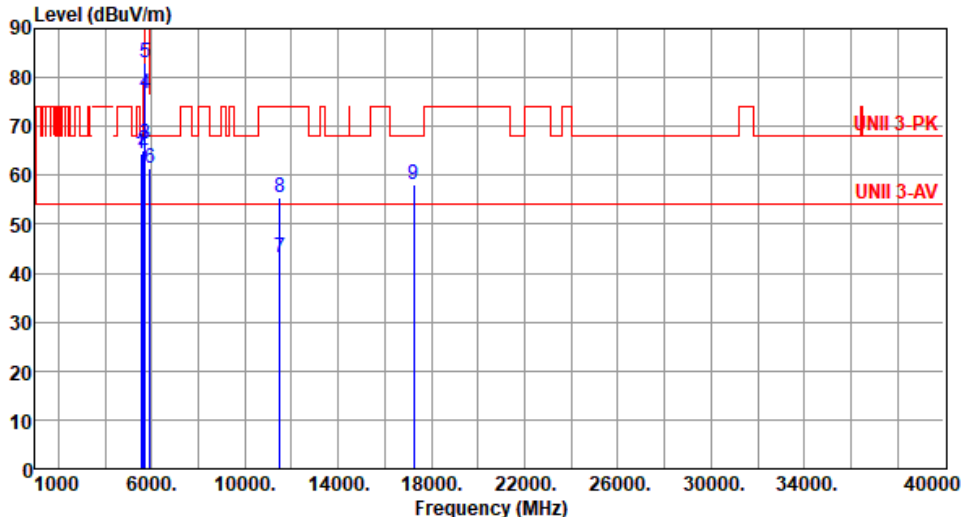


Modulation	11a	Test Freq. (MHz)	5745																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5553.00</td><td>64.54</td><td>68.20</td><td>-3.66</td><td>64.20</td><td>0.34</td><td>Peak</td><td>208</td><td>184</td></tr><tr><td>2</td><td>5650.00</td><td>65.24</td><td>68.20</td><td>-2.96</td><td>64.76</td><td>0.48</td><td>Peak</td><td>208</td><td>184</td></tr><tr><td>3</td><td>5700.00</td><td>66.30</td><td>105.20</td><td>-38.90</td><td>65.59</td><td>0.71</td><td>Peak</td><td>208</td><td>184</td></tr><tr><td>4</td><td>5720.00</td><td>76.79</td><td>110.80</td><td>-34.01</td><td>76.03</td><td>0.76</td><td>Peak</td><td>208</td><td>184</td></tr><tr><td>5</td><td>5725.00</td><td>82.97</td><td>122.20</td><td>-39.23</td><td>82.19</td><td>0.78</td><td>Peak</td><td>208</td><td>184</td></tr><tr><td>6</td><td>5925.00</td><td>61.36</td><td>68.20</td><td>-6.84</td><td>60.15</td><td>1.21</td><td>Peak</td><td>208</td><td>184</td></tr><tr><td>7</td><td>11490.00</td><td>43.22</td><td>54.00</td><td>-10.78</td><td>34.80</td><td>8.42</td><td>Average</td><td>100</td><td>116</td></tr><tr><td>8</td><td>11490.00</td><td>55.55</td><td>74.00</td><td>-18.45</td><td>47.13</td><td>8.42</td><td>Peak</td><td>100</td><td>116</td></tr><tr><td>9</td><td>17235.00</td><td>58.03</td><td>68.20</td><td>-10.17</td><td>52.24</td><td>5.79</td><td>Peak</td><td>100</td><td>142</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5553.00	64.54	68.20	-3.66	64.20	0.34	Peak	208	184	2	5650.00	65.24	68.20	-2.96	64.76	0.48	Peak	208	184	3	5700.00	66.30	105.20	-38.90	65.59	0.71	Peak	208	184	4	5720.00	76.79	110.80	-34.01	76.03	0.76	Peak	208	184	5	5725.00	82.97	122.20	-39.23	82.19	0.78	Peak	208	184	6	5925.00	61.36	68.20	-6.84	60.15	1.21	Peak	208	184	7	11490.00	43.22	54.00	-10.78	34.80	8.42	Average	100	116	8	11490.00	55.55	74.00	-18.45	47.13	8.42	Peak	100	116	9	17235.00	58.03	68.20	-10.17	52.24	5.79	Peak	100	142
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5553.00	64.54	68.20	-3.66	64.20	0.34	Peak	208	184																																																																																														
2	5650.00	65.24	68.20	-2.96	64.76	0.48	Peak	208	184																																																																																														
3	5700.00	66.30	105.20	-38.90	65.59	0.71	Peak	208	184																																																																																														
4	5720.00	76.79	110.80	-34.01	76.03	0.76	Peak	208	184																																																																																														
5	5725.00	82.97	122.20	-39.23	82.19	0.78	Peak	208	184																																																																																														
6	5925.00	61.36	68.20	-6.84	60.15	1.21	Peak	208	184																																																																																														
7	11490.00	43.22	54.00	-10.78	34.80	8.42	Average	100	116																																																																																														
8	11490.00	55.55	74.00	-18.45	47.13	8.42	Peak	100	116																																																																																														
9	17235.00	58.03	68.20	-10.17	52.24	5.79	Peak	100	142																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							

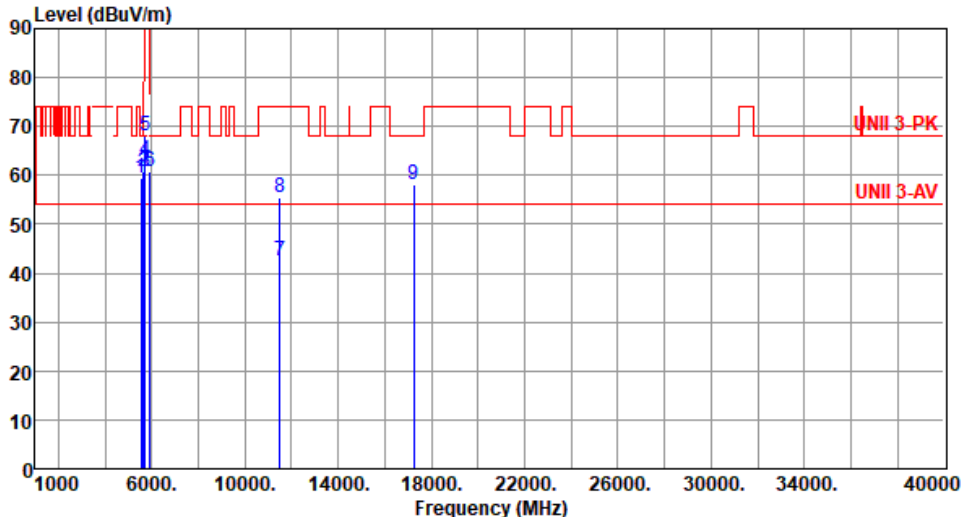


Modulation	11a	Test Freq. (MHz)	5745																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5553.00</td><td>59.35</td><td>68.20</td><td>-8.85</td><td>59.01</td><td>0.34</td><td>Peak</td><td>200</td><td>184</td></tr><tr><td>2</td><td>5650.00</td><td>60.61</td><td>68.20</td><td>-7.59</td><td>60.13</td><td>0.48</td><td>Peak</td><td>200</td><td>184</td></tr><tr><td>3</td><td>5700.00</td><td>60.92</td><td>105.20</td><td>-44.28</td><td>60.21</td><td>0.71</td><td>Peak</td><td>200</td><td>184</td></tr><tr><td>4</td><td>5720.00</td><td>62.98</td><td>110.80</td><td>-47.82</td><td>62.22</td><td>0.76</td><td>Peak</td><td>200</td><td>184</td></tr><tr><td>5</td><td>5725.00</td><td>67.92</td><td>122.20</td><td>-54.28</td><td>67.14</td><td>0.78</td><td>Peak</td><td>200</td><td>184</td></tr><tr><td>6</td><td>5925.00</td><td>60.78</td><td>68.20</td><td>-7.42</td><td>59.57</td><td>1.21</td><td>Peak</td><td>200</td><td>184</td></tr><tr><td>7</td><td>11490.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>34.18</td><td>8.42</td><td>Average</td><td>100</td><td>68</td></tr><tr><td>8</td><td>11490.00</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>47.15</td><td>8.42</td><td>Peak</td><td>100</td><td>68</td></tr><tr><td>9</td><td>17235.00</td><td>58.11</td><td>68.20</td><td>-10.09</td><td>52.32</td><td>5.79</td><td>Peak</td><td>100</td><td>26</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5553.00	59.35	68.20	-8.85	59.01	0.34	Peak	200	184	2	5650.00	60.61	68.20	-7.59	60.13	0.48	Peak	200	184	3	5700.00	60.92	105.20	-44.28	60.21	0.71	Peak	200	184	4	5720.00	62.98	110.80	-47.82	62.22	0.76	Peak	200	184	5	5725.00	67.92	122.20	-54.28	67.14	0.78	Peak	200	184	6	5925.00	60.78	68.20	-7.42	59.57	1.21	Peak	200	184	7	11490.00	42.60	54.00	-11.40	34.18	8.42	Average	100	68	8	11490.00	55.57	74.00	-18.43	47.15	8.42	Peak	100	68	9	17235.00	58.11	68.20	-10.09	52.32	5.79	Peak	100	26
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5553.00	59.35	68.20	-8.85	59.01	0.34	Peak	200	184																																																																																														
2	5650.00	60.61	68.20	-7.59	60.13	0.48	Peak	200	184																																																																																														
3	5700.00	60.92	105.20	-44.28	60.21	0.71	Peak	200	184																																																																																														
4	5720.00	62.98	110.80	-47.82	62.22	0.76	Peak	200	184																																																																																														
5	5725.00	67.92	122.20	-54.28	67.14	0.78	Peak	200	184																																																																																														
6	5925.00	60.78	68.20	-7.42	59.57	1.21	Peak	200	184																																																																																														
7	11490.00	42.60	54.00	-11.40	34.18	8.42	Average	100	68																																																																																														
8	11490.00	55.57	74.00	-18.43	47.15	8.42	Peak	100	68																																																																																														
9	17235.00	58.11	68.20	-10.09	52.32	5.79	Peak	100	26																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							

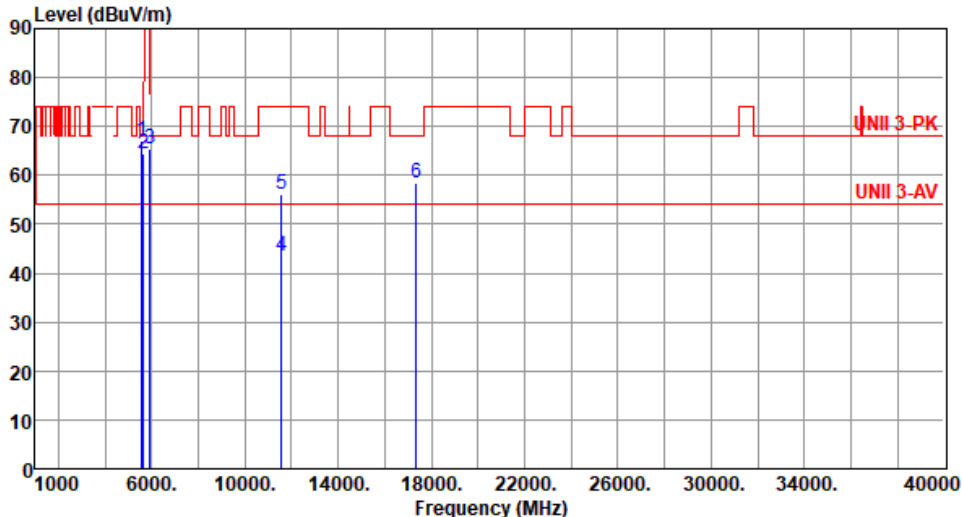


Modulation	11a	Test Freq. (MHz)	5785																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5593.00</td><td>66.92</td><td>68.20</td><td>-1.28</td><td>66.57</td><td>0.35</td><td>Peak</td><td>229</td><td>185</td></tr><tr><td>2</td><td>5650.00</td><td>64.32</td><td>68.20</td><td>-3.88</td><td>63.84</td><td>0.48</td><td>Peak</td><td>266</td><td>184</td></tr><tr><td>3</td><td>5925.00</td><td>65.28</td><td>68.20</td><td>-2.92</td><td>64.07</td><td>1.21</td><td>Peak</td><td>229</td><td>185</td></tr><tr><td>4</td><td>11570.00</td><td>43.58</td><td>54.00</td><td>-10.42</td><td>35.25</td><td>8.33</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>5</td><td>11570.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>47.65</td><td>8.33</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>6</td><td>17355.00</td><td>58.34</td><td>68.20</td><td>-9.86</td><td>52.11</td><td>6.23</td><td>Peak</td><td>100</td><td>186</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5593.00	66.92	68.20	-1.28	66.57	0.35	Peak	229	185	2	5650.00	64.32	68.20	-3.88	63.84	0.48	Peak	266	184	3	5925.00	65.28	68.20	-2.92	64.07	1.21	Peak	229	185	4	11570.00	43.58	54.00	-10.42	35.25	8.33	Average	100	183	5	11570.00	55.98	74.00	-18.02	47.65	8.33	Peak	100	183	6	17355.00	58.34	68.20	-9.86	52.11	6.23	Peak	100	186
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5593.00	66.92	68.20	-1.28	66.57	0.35	Peak	229	185																																																																
2	5650.00	64.32	68.20	-3.88	63.84	0.48	Peak	266	184																																																																
3	5925.00	65.28	68.20	-2.92	64.07	1.21	Peak	229	185																																																																
4	11570.00	43.58	54.00	-10.42	35.25	8.33	Average	100	183																																																																
5	11570.00	55.98	74.00	-18.02	47.65	8.33	Peak	100	183																																																																
6	17355.00	58.34	68.20	-9.86	52.11	6.23	Peak	100	186																																																																
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																									

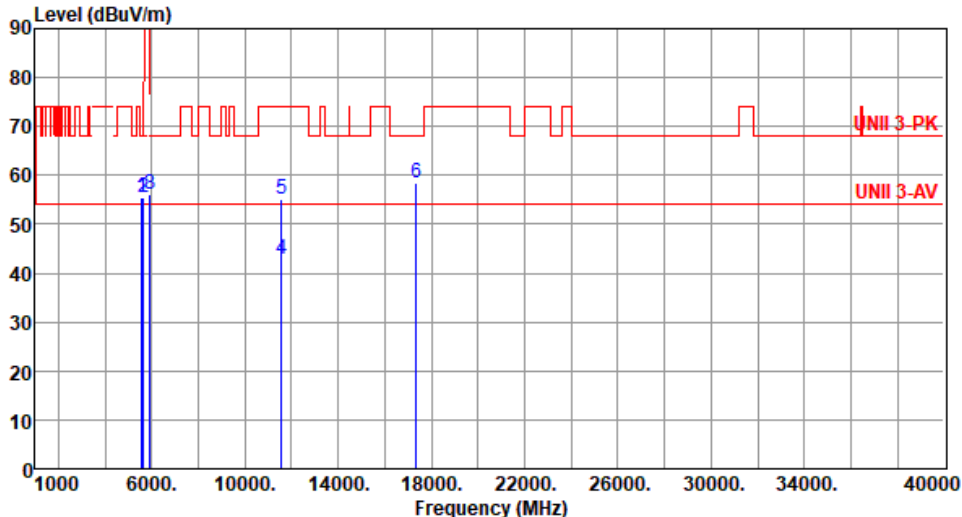


Modulation	11a	Test Freq. (MHz)	5785																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																									
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5593.00</td><td>55.48</td><td>68.20</td><td>-12.72</td><td>55.13</td><td>0.35</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>2</td><td>5650.00</td><td>55.31</td><td>68.20</td><td>-12.89</td><td>54.83</td><td>0.48</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>3</td><td>5925.00</td><td>56.25</td><td>68.20</td><td>-11.95</td><td>55.04</td><td>1.21</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>4</td><td>11570.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>34.43</td><td>8.33</td><td>Average</td><td>100</td><td>180</td></tr><tr><td>5</td><td>11570.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>46.88</td><td>8.33</td><td>Peak</td><td>100</td><td>180</td></tr><tr><td>6</td><td>17355.00</td><td>58.51</td><td>68.20</td><td>-9.69</td><td>52.28</td><td>6.23</td><td>Peak</td><td>100</td><td>164</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5593.00	55.48	68.20	-12.72	55.13	0.35	Peak	100	183	2	5650.00	55.31	68.20	-12.89	54.83	0.48	Peak	100	183	3	5925.00	56.25	68.20	-11.95	55.04	1.21	Peak	100	183	4	11570.00	42.76	54.00	-11.24	34.43	8.33	Average	100	180	5	11570.00	55.21	74.00	-18.79	46.88	8.33	Peak	100	180	6	17355.00	58.51	68.20	-9.69	52.28	6.23	Peak	100	164
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5593.00	55.48	68.20	-12.72	55.13	0.35	Peak	100	183																																																																
2	5650.00	55.31	68.20	-12.89	54.83	0.48	Peak	100	183																																																																
3	5925.00	56.25	68.20	-11.95	55.04	1.21	Peak	100	183																																																																
4	11570.00	42.76	54.00	-11.24	34.43	8.33	Average	100	180																																																																
5	11570.00	55.21	74.00	-18.79	46.88	8.33	Peak	100	180																																																																
6	17355.00	58.51	68.20	-9.69	52.28	6.23	Peak	100	164																																																																

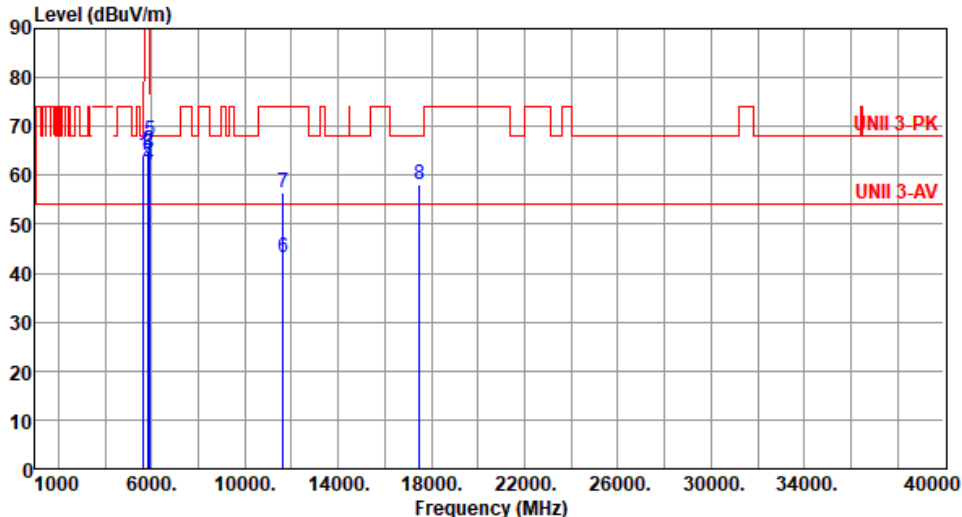

Modulation	11a	Test Freq. (MHz)	5825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5633.00</td><td>64.23</td><td>68.20</td><td>-3.97</td><td>63.79</td><td>0.44</td><td>Peak</td><td>224</td><td>180</td></tr><tr><td>2</td><td>5850.00</td><td>65.07</td><td>122.20</td><td>-57.13</td><td>64.19</td><td>0.88</td><td>Peak</td><td>224</td><td>180</td></tr><tr><td>3</td><td>5855.00</td><td>64.46</td><td>110.80</td><td>-46.34</td><td>63.54</td><td>0.92</td><td>Peak</td><td>224</td><td>180</td></tr><tr><td>4</td><td>5875.00</td><td>62.18</td><td>105.20</td><td>-43.02</td><td>61.14</td><td>1.04</td><td>Peak</td><td>224</td><td>180</td></tr><tr><td>5</td><td>5925.00</td><td>67.09</td><td>68.20</td><td>-1.11</td><td>65.88</td><td>1.21</td><td>Peak</td><td>224</td><td>180</td></tr><tr><td>6</td><td>11650.00</td><td>43.14</td><td>54.00</td><td>-10.86</td><td>35.23</td><td>7.91</td><td>Average</td><td>100</td><td>141</td></tr><tr><td>7</td><td>11650.00</td><td>56.35</td><td>74.00</td><td>-17.65</td><td>48.44</td><td>7.91</td><td>Peak</td><td>100</td><td>141</td></tr><tr><td>8</td><td>17475.00</td><td>58.11</td><td>68.20</td><td>-10.09</td><td>51.35</td><td>6.76</td><td>Peak</td><td>100</td><td>165</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5633.00	64.23	68.20	-3.97	63.79	0.44	Peak	224	180	2	5850.00	65.07	122.20	-57.13	64.19	0.88	Peak	224	180	3	5855.00	64.46	110.80	-46.34	63.54	0.92	Peak	224	180	4	5875.00	62.18	105.20	-43.02	61.14	1.04	Peak	224	180	5	5925.00	67.09	68.20	-1.11	65.88	1.21	Peak	224	180	6	11650.00	43.14	54.00	-10.86	35.23	7.91	Average	100	141	7	11650.00	56.35	74.00	-17.65	48.44	7.91	Peak	100	141	8	17475.00	58.11	68.20	-10.09	51.35	6.76	Peak	100	165
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5633.00	64.23	68.20	-3.97	63.79	0.44	Peak	224	180																																																																																				
2	5850.00	65.07	122.20	-57.13	64.19	0.88	Peak	224	180																																																																																				
3	5855.00	64.46	110.80	-46.34	63.54	0.92	Peak	224	180																																																																																				
4	5875.00	62.18	105.20	-43.02	61.14	1.04	Peak	224	180																																																																																				
5	5925.00	67.09	68.20	-1.11	65.88	1.21	Peak	224	180																																																																																				
6	11650.00	43.14	54.00	-10.86	35.23	7.91	Average	100	141																																																																																				
7	11650.00	56.35	74.00	-17.65	48.44	7.91	Peak	100	141																																																																																				
8	17475.00	58.11	68.20	-10.09	51.35	6.76	Peak	100	165																																																																																				

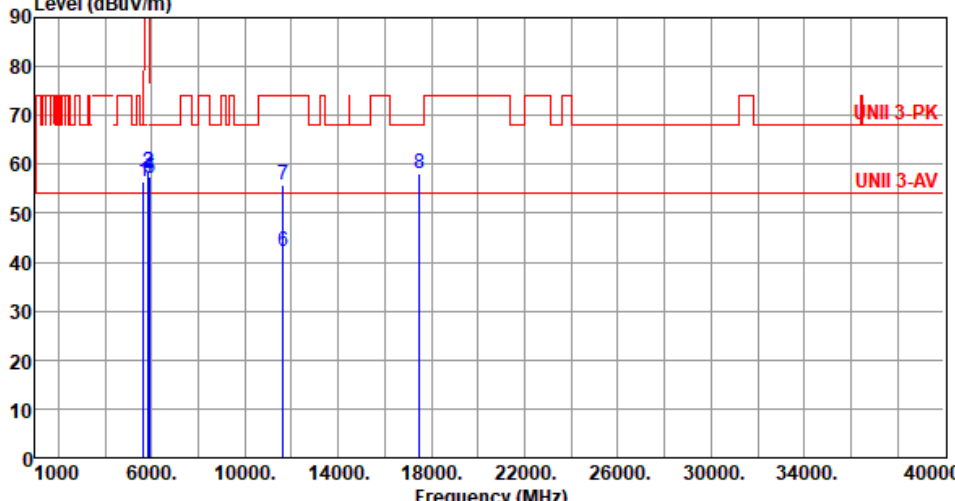

Modulation	11a	Test Freq. (MHz)	5825																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5633.00</td><td>56.45</td><td>68.20</td><td>-11.75</td><td>56.01</td><td>0.44</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>2</td><td>5850.00</td><td>58.45</td><td>122.20</td><td>-63.75</td><td>57.57</td><td>0.88</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>3</td><td>5855.00</td><td>58.31</td><td>110.80</td><td>-52.49</td><td>57.39</td><td>0.92</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>4</td><td>5875.00</td><td>57.49</td><td>105.20</td><td>-47.71</td><td>56.45</td><td>1.04</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>5</td><td>5925.00</td><td>57.28</td><td>68.20</td><td>-10.92</td><td>56.07</td><td>1.21</td><td>Peak</td><td>100</td><td>189</td></tr><tr><td>6</td><td>11650.00</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>34.43</td><td>7.91</td><td>Average</td><td>100</td><td>58</td></tr><tr><td>7</td><td>11650.00</td><td>55.81</td><td>74.00</td><td>-18.19</td><td>47.90</td><td>7.91</td><td>Peak</td><td>100</td><td>58</td></tr><tr><td>8</td><td>17475.00</td><td>58.24</td><td>68.20</td><td>-9.96</td><td>51.48</td><td>6.76</td><td>Peak</td><td>100</td><td>28</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5633.00	56.45	68.20	-11.75	56.01	0.44	Peak	100	189	2	5850.00	58.45	122.20	-63.75	57.57	0.88	Peak	100	189	3	5855.00	58.31	110.80	-52.49	57.39	0.92	Peak	100	189	4	5875.00	57.49	105.20	-47.71	56.45	1.04	Peak	100	189	5	5925.00	57.28	68.20	-10.92	56.07	1.21	Peak	100	189	6	11650.00	42.34	54.00	-11.66	34.43	7.91	Average	100	58	7	11650.00	55.81	74.00	-18.19	47.90	7.91	Peak	100	58	8	17475.00	58.24	68.20	-9.96	51.48	6.76	Peak	100	28
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5633.00	56.45	68.20	-11.75	56.01	0.44	Peak	100	189																																																																																				
2	5850.00	58.45	122.20	-63.75	57.57	0.88	Peak	100	189																																																																																				
3	5855.00	58.31	110.80	-52.49	57.39	0.92	Peak	100	189																																																																																				
4	5875.00	57.49	105.20	-47.71	56.45	1.04	Peak	100	189																																																																																				
5	5925.00	57.28	68.20	-10.92	56.07	1.21	Peak	100	189																																																																																				
6	11650.00	42.34	54.00	-11.66	34.43	7.91	Average	100	58																																																																																				
7	11650.00	55.81	74.00	-18.19	47.90	7.91	Peak	100	58																																																																																				
8	17475.00	58.24	68.20	-9.96	51.48	6.76	Peak	100	28																																																																																				



Unwanted Emissions (Above 1GHz) for ax HE20

Modulation	ax HE20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5180																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.16</td><td>54.00</td><td>-11.84</td><td>41.54</td><td>0.62</td><td>Average</td><td>106</td><td>261</td></tr><tr><td>2</td><td>5150.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>54.16</td><td>0.62</td><td>Peak</td><td>106</td><td>261</td></tr><tr><td>3</td><td>10360.00</td><td>54.78</td><td>68.20</td><td>-13.42</td><td>46.57</td><td>8.21</td><td>Peak</td><td>100</td><td>214</td></tr><tr><td>4</td><td>15540.00</td><td>41.59</td><td>54.00</td><td>-12.41</td><td>36.48</td><td>5.11</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>5</td><td>15540.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>50.48</td><td>5.11</td><td>Peak</td><td>100</td><td>157</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.16	54.00	-11.84	41.54	0.62	Average	106	261	2	5150.00	54.78	74.00	-19.22	54.16	0.62	Peak	106	261	3	10360.00	54.78	68.20	-13.42	46.57	8.21	Peak	100	214	4	15540.00	41.59	54.00	-12.41	36.48	5.11	Average	100	157	5	15540.00	55.59	74.00	-18.41	50.48	5.11	Peak	100	157
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	42.16	54.00	-11.84	41.54	0.62	Average	106	261																																																						
2	5150.00	54.78	74.00	-19.22	54.16	0.62	Peak	106	261																																																						
3	10360.00	54.78	68.20	-13.42	46.57	8.21	Peak	100	214																																																						
4	15540.00	41.59	54.00	-12.41	36.48	5.11	Average	100	157																																																						
5	15540.00	55.59	74.00	-18.41	50.48	5.11	Peak	100	157																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	ax HE20	Test Freq. (MHz)	5200																																																												
Polarization	Horizontal																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>45.31</td><td>54.00</td><td>-8.69</td><td>44.69</td><td>0.62</td><td>Average</td><td>177</td><td>180</td></tr><tr><td>2</td><td>5150.00</td><td>57.34</td><td>74.00</td><td>-16.66</td><td>56.72</td><td>0.62</td><td>Peak</td><td>177</td><td>180</td></tr><tr><td>3</td><td>10400.00</td><td>55.04</td><td>68.20</td><td>-13.16</td><td>46.51</td><td>8.53</td><td>Peak</td><td>100</td><td>173</td></tr><tr><td>4</td><td>15600.00</td><td>41.60</td><td>54.00</td><td>-12.40</td><td>36.75</td><td>4.85</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>5</td><td>15600.00</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>50.77</td><td>4.85</td><td>Peak</td><td>100</td><td>204</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.31	54.00	-8.69	44.69	0.62	Average	177	180	2	5150.00	57.34	74.00	-16.66	56.72	0.62	Peak	177	180	3	10400.00	55.04	68.20	-13.16	46.51	8.53	Peak	100	173	4	15600.00	41.60	54.00	-12.40	36.75	4.85	Average	100	204	5	15600.00	55.62	74.00	-18.38	50.77	4.85	Peak	100	204
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	45.31	54.00	-8.69	44.69	0.62	Average	177	180																																																						
2	5150.00	57.34	74.00	-16.66	56.72	0.62	Peak	177	180																																																						
3	10400.00	55.04	68.20	-13.16	46.51	8.53	Peak	100	173																																																						
4	15600.00	41.60	54.00	-12.40	36.75	4.85	Average	100	204																																																						
5	15600.00	55.62	74.00	-18.38	50.77	4.85	Peak	100	204																																																						



Modulation	ax HE20	Test Freq. (MHz)	5200																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.46</td><td>54.00</td><td>-11.54</td><td>41.84</td><td>0.62</td><td>Average</td><td>100</td><td>257</td></tr><tr><td>2</td><td>5150.00</td><td>53.96</td><td>74.00</td><td>-20.04</td><td>53.34</td><td>0.62</td><td>Peak</td><td>100</td><td>257</td></tr><tr><td>3</td><td>10400.00</td><td>54.91</td><td>68.20</td><td>-13.29</td><td>46.38</td><td>8.53</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>4</td><td>15600.00</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>36.58</td><td>4.85</td><td>Average</td><td>100</td><td>179</td></tr><tr><td>5</td><td>15600.00</td><td>55.33</td><td>74.00</td><td>-18.67</td><td>50.48</td><td>4.85</td><td>Peak</td><td>100</td><td>179</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.46	54.00	-11.54	41.84	0.62	Average	100	257	2	5150.00	53.96	74.00	-20.04	53.34	0.62	Peak	100	257	3	10400.00	54.91	68.20	-13.29	46.38	8.53	Peak	100	218	4	15600.00	41.43	54.00	-12.57	36.58	4.85	Average	100	179	5	15600.00	55.33	74.00	-18.67	50.48	4.85	Peak	100	179
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	42.46	54.00	-11.54	41.84	0.62	Average	100	257																																																						
2	5150.00	53.96	74.00	-20.04	53.34	0.62	Peak	100	257																																																						
3	10400.00	54.91	68.20	-13.29	46.38	8.53	Peak	100	218																																																						
4	15600.00	41.43	54.00	-12.57	36.58	4.85	Average	100	179																																																						
5	15600.00	55.33	74.00	-18.67	50.48	4.85	Peak	100	179																																																						

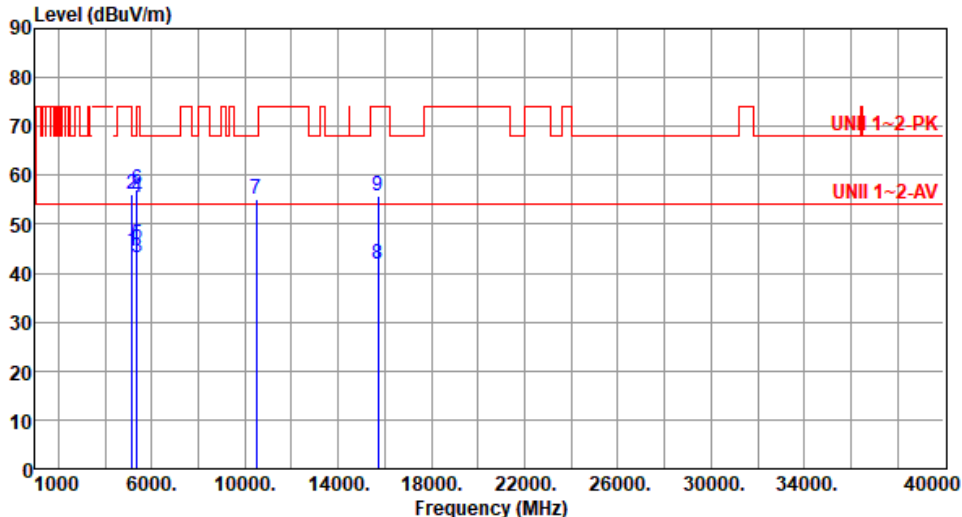

Modulation	ax HE20	Test Freq. (MHz)	5240																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>43.98</td><td>0.62</td><td>Average</td><td>168</td><td>183</td></tr><tr><td>2</td><td>5150.00</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>55.47</td><td>0.62</td><td>Peak</td><td>168</td><td>183</td></tr><tr><td>3</td><td>5350.00</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>43.25</td><td>0.02</td><td>Average</td><td>168</td><td>183</td></tr><tr><td>4</td><td>5350.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>55.45</td><td>0.02</td><td>Peak</td><td>168</td><td>183</td></tr><tr><td>5</td><td>5376.00</td><td>45.98</td><td>54.00</td><td>-8.02</td><td>45.97</td><td>0.01</td><td>Average</td><td>168</td><td>183</td></tr><tr><td>6</td><td>5376.00</td><td>57.17</td><td>74.00</td><td>-16.83</td><td>57.16</td><td>0.01</td><td>Peak</td><td>168</td><td>183</td></tr><tr><td>7</td><td>10480.00</td><td>55.14</td><td>68.20</td><td>-13.06</td><td>46.58</td><td>8.56</td><td>Peak</td><td>100</td><td>193</td></tr><tr><td>8</td><td>15720.00</td><td>41.85</td><td>54.00</td><td>-12.15</td><td>36.75</td><td>5.10</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>9</td><td>15720.00</td><td>55.77</td><td>74.00</td><td>-18.23</td><td>50.67</td><td>5.10</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.60	54.00	-9.40	43.98	0.62	Average	168	183	2	5150.00	56.09	74.00	-17.91	55.47	0.62	Peak	168	183	3	5350.00	43.27	54.00	-10.73	43.25	0.02	Average	168	183	4	5350.00	55.47	74.00	-18.53	55.45	0.02	Peak	168	183	5	5376.00	45.98	54.00	-8.02	45.97	0.01	Average	168	183	6	5376.00	57.17	74.00	-16.83	57.16	0.01	Peak	168	183	7	10480.00	55.14	68.20	-13.06	46.58	8.56	Peak	100	193	8	15720.00	41.85	54.00	-12.15	36.75	5.10	Average	100	223	9	15720.00	55.77	74.00	-18.23	50.67	5.10	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	44.60	54.00	-9.40	43.98	0.62	Average	168	183																																																																																														
2	5150.00	56.09	74.00	-17.91	55.47	0.62	Peak	168	183																																																																																														
3	5350.00	43.27	54.00	-10.73	43.25	0.02	Average	168	183																																																																																														
4	5350.00	55.47	74.00	-18.53	55.45	0.02	Peak	168	183																																																																																														
5	5376.00	45.98	54.00	-8.02	45.97	0.01	Average	168	183																																																																																														
6	5376.00	57.17	74.00	-16.83	57.16	0.01	Peak	168	183																																																																																														
7	10480.00	55.14	68.20	-13.06	46.58	8.56	Peak	100	193																																																																																														
8	15720.00	41.85	54.00	-12.15	36.75	5.10	Average	100	223																																																																																														
9	15720.00	55.77	74.00	-18.23	50.67	5.10	Peak	100	223																																																																																														



Modulation	ax HE20	Test Freq. (MHz)	5240																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.20</td><td>54.00</td><td>-11.80</td><td>41.58</td><td>0.62</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>2</td><td>5150.00</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>53.51</td><td>0.62</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>3</td><td>5350.00</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>42.76</td><td>0.02</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>4</td><td>5350.00</td><td>54.15</td><td>74.00</td><td>-19.85</td><td>54.13</td><td>0.02</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>5</td><td>5376.00</td><td>43.11</td><td>54.00</td><td>-10.89</td><td>43.10</td><td>0.01</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>6</td><td>5376.00</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>54.38</td><td>0.01</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>7</td><td>10480.00</td><td>54.94</td><td>68.20</td><td>-13.26</td><td>46.38</td><td>8.56</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>8</td><td>15720.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>36.67</td><td>5.10</td><td>Average</td><td>100</td><td>216</td></tr><tr><td>9</td><td>15720.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>50.43</td><td>5.10</td><td>Peak</td><td>100</td><td>216</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.20	54.00	-11.80	41.58	0.62	Average	100	258	2	5150.00	54.13	74.00	-19.87	53.51	0.62	Peak	100	258	3	5350.00	42.78	54.00	-11.22	42.76	0.02	Average	100	258	4	5350.00	54.15	74.00	-19.85	54.13	0.02	Peak	100	258	5	5376.00	43.11	54.00	-10.89	43.10	0.01	Average	100	258	6	5376.00	54.39	74.00	-19.61	54.38	0.01	Peak	100	258	7	10480.00	54.94	68.20	-13.26	46.38	8.56	Peak	100	247	8	15720.00	41.77	54.00	-12.23	36.67	5.10	Average	100	216	9	15720.00	55.53	74.00	-18.47	50.43	5.10	Peak	100	216
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	42.20	54.00	-11.80	41.58	0.62	Average	100	258																																																																																														
2	5150.00	54.13	74.00	-19.87	53.51	0.62	Peak	100	258																																																																																														
3	5350.00	42.78	54.00	-11.22	42.76	0.02	Average	100	258																																																																																														
4	5350.00	54.15	74.00	-19.85	54.13	0.02	Peak	100	258																																																																																														
5	5376.00	43.11	54.00	-10.89	43.10	0.01	Average	100	258																																																																																														
6	5376.00	54.39	74.00	-19.61	54.38	0.01	Peak	100	258																																																																																														
7	10480.00	54.94	68.20	-13.26	46.38	8.56	Peak	100	247																																																																																														
8	15720.00	41.77	54.00	-12.23	36.67	5.10	Average	100	216																																																																																														
9	15720.00	55.53	74.00	-18.47	50.43	5.10	Peak	100	216																																																																																														



Modulation	ax HE20	Test Freq. (MHz)	5260																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																							
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.87</td><td>54.00</td><td>-10.13</td><td>43.25</td><td>0.62</td><td>Average</td><td>161</td><td>181</td></tr><tr><td>2</td><td>5150.00</td><td>56.24</td><td>74.00</td><td>-17.76</td><td>55.62</td><td>0.62</td><td>Peak</td><td>161</td><td>181</td></tr><tr><td>3</td><td>5350.00</td><td>43.67</td><td>54.00</td><td>-10.33</td><td>43.65</td><td>0.02</td><td>Average</td><td>161</td><td>181</td></tr><tr><td>4</td><td>5350.00</td><td>56.24</td><td>74.00</td><td>-17.76</td><td>56.22</td><td>0.02</td><td>Peak</td><td>161</td><td>181</td></tr><tr><td>5</td><td>5376.00</td><td>45.40</td><td>54.00</td><td>-8.60</td><td>45.39</td><td>0.01</td><td>Average</td><td>161</td><td>181</td></tr><tr><td>6</td><td>5376.00</td><td>56.59</td><td>74.00</td><td>-17.41</td><td>56.58</td><td>0.01</td><td>Peak</td><td>161</td><td>181</td></tr><tr><td>7</td><td>10520.00</td><td>55.29</td><td>68.20</td><td>-12.91</td><td>46.85</td><td>8.44</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>8</td><td>15780.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>37.18</td><td>4.87</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>9</td><td>15780.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>50.44</td><td>4.87</td><td>Peak</td><td>100</td><td>204</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.87	54.00	-10.13	43.25	0.62	Average	161	181	2	5150.00	56.24	74.00	-17.76	55.62	0.62	Peak	161	181	3	5350.00	43.67	54.00	-10.33	43.65	0.02	Average	161	181	4	5350.00	56.24	74.00	-17.76	56.22	0.02	Peak	161	181	5	5376.00	45.40	54.00	-8.60	45.39	0.01	Average	161	181	6	5376.00	56.59	74.00	-17.41	56.58	0.01	Peak	161	181	7	10520.00	55.29	68.20	-12.91	46.85	8.44	Peak	100	188	8	15780.00	42.05	54.00	-11.95	37.18	4.87	Average	100	204	9	15780.00	55.31	74.00	-18.69	50.44	4.87	Peak	100	204
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5150.00	43.87	54.00	-10.13	43.25	0.62	Average	161	181																																																																																														
2	5150.00	56.24	74.00	-17.76	55.62	0.62	Peak	161	181																																																																																														
3	5350.00	43.67	54.00	-10.33	43.65	0.02	Average	161	181																																																																																														
4	5350.00	56.24	74.00	-17.76	56.22	0.02	Peak	161	181																																																																																														
5	5376.00	45.40	54.00	-8.60	45.39	0.01	Average	161	181																																																																																														
6	5376.00	56.59	74.00	-17.41	56.58	0.01	Peak	161	181																																																																																														
7	10520.00	55.29	68.20	-12.91	46.85	8.44	Peak	100	188																																																																																														
8	15780.00	42.05	54.00	-11.95	37.18	4.87	Average	100	204																																																																																														
9	15780.00	55.31	74.00	-18.69	50.44	4.87	Peak	100	204																																																																																														



Modulation	ax HE20	Test Freq. (MHz)	5260																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																											
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>42.93</td><td>54.00</td><td>-11.07</td><td>42.31</td><td>0.62</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>2</td><td>5150.00</td><td>54.18</td><td>74.00</td><td>-19.82</td><td>53.56</td><td>0.62</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>3</td><td>5350.00</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>42.94</td><td>0.02</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>4</td><td>5350.00</td><td>55.78</td><td>74.00</td><td>-18.22</td><td>55.76</td><td>0.02</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>5</td><td>5376.00</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>43.15</td><td>0.01</td><td>Average</td><td>100</td><td>249</td></tr><tr><td>6</td><td>5376.00</td><td>54.85</td><td>74.00</td><td>-19.15</td><td>54.84</td><td>0.01</td><td>Peak</td><td>100</td><td>249</td></tr><tr><td>7</td><td>10520.00</td><td>55.56</td><td>68.20</td><td>-12.64</td><td>47.12</td><td>8.44</td><td>Peak</td><td>100</td><td>223</td></tr><tr><td>8</td><td>15780.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>36.94</td><td>4.87</td><td>Average</td><td>100</td><td>187</td></tr><tr><td>9</td><td>15780.00</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>50.33</td><td>4.87</td><td>Peak</td><td>100</td><td>187</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	42.93	54.00	-11.07	42.31	0.62	Average	100	249	2	5150.00	54.18	74.00	-19.82	53.56	0.62	Peak	100	249	3	5350.00	42.96	54.00	-11.04	42.94	0.02	Average	100	249	4	5350.00	55.78	74.00	-18.22	55.76	0.02	Peak	100	249	5	5376.00	43.16	54.00	-10.84	43.15	0.01	Average	100	249	6	5376.00	54.85	74.00	-19.15	54.84	0.01	Peak	100	249	7	10520.00	55.56	68.20	-12.64	47.12	8.44	Peak	100	223	8	15780.00	41.81	54.00	-12.19	36.94	4.87	Average	100	187	9	15780.00	55.20	74.00	-18.80	50.33	4.87	Peak	100	187
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																		
		dBuV/m			dBuV			cm	deg																																																																																																																		
1	5150.00	42.93	54.00	-11.07	42.31	0.62	Average	100	249																																																																																																																		
2	5150.00	54.18	74.00	-19.82	53.56	0.62	Peak	100	249																																																																																																																		
3	5350.00	42.96	54.00	-11.04	42.94	0.02	Average	100	249																																																																																																																		
4	5350.00	55.78	74.00	-18.22	55.76	0.02	Peak	100	249																																																																																																																		
5	5376.00	43.16	54.00	-10.84	43.15	0.01	Average	100	249																																																																																																																		
6	5376.00	54.85	74.00	-19.15	54.84	0.01	Peak	100	249																																																																																																																		
7	10520.00	55.56	68.20	-12.64	47.12	8.44	Peak	100	223																																																																																																																		
8	15780.00	41.81	54.00	-12.19	36.94	4.87	Average	100	187																																																																																																																		
9	15780.00	55.20	74.00	-18.80	50.33	4.87	Peak	100	187																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																											



Modulation	ax HE20	Test Freq. (MHz)	5300																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>43.39</td><td>0.02</td><td>Average</td><td>165</td><td>183</td></tr><tr><td>2</td><td>5350.00</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>55.69</td><td>0.02</td><td>Peak</td><td>165</td><td>183</td></tr><tr><td>3</td><td>5376.00</td><td>45.29</td><td>54.00</td><td>-8.71</td><td>45.28</td><td>0.01</td><td>Average</td><td>165</td><td>183</td></tr><tr><td>4</td><td>5376.00</td><td>57.43</td><td>74.00</td><td>-16.57</td><td>57.42</td><td>0.01</td><td>Peak</td><td>165</td><td>183</td></tr><tr><td>5</td><td>10600.00</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>32.47</td><td>8.40</td><td>Average</td><td>100</td><td>157</td></tr><tr><td>6</td><td>10600.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>47.32</td><td>8.40</td><td>Peak</td><td>100</td><td>157</td></tr><tr><td>7</td><td>15900.00</td><td>42.03</td><td>54.00</td><td>-11.97</td><td>37.21</td><td>4.82</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>8</td><td>15900.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>50.13</td><td>4.82</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	43.41	54.00	-10.59	43.39	0.02	Average	165	183	2	5350.00	55.71	74.00	-18.29	55.69	0.02	Peak	165	183	3	5376.00	45.29	54.00	-8.71	45.28	0.01	Average	165	183	4	5376.00	57.43	74.00	-16.57	57.42	0.01	Peak	165	183	5	10600.00	40.87	54.00	-13.13	32.47	8.40	Average	100	157	6	10600.00	55.72	74.00	-18.28	47.32	8.40	Peak	100	157	7	15900.00	42.03	54.00	-11.97	37.21	4.82	Average	100	182	8	15900.00	54.95	74.00	-19.05	50.13	4.82	Peak	100	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5350.00	43.41	54.00	-10.59	43.39	0.02	Average	165	183																																																																																				
2	5350.00	55.71	74.00	-18.29	55.69	0.02	Peak	165	183																																																																																				
3	5376.00	45.29	54.00	-8.71	45.28	0.01	Average	165	183																																																																																				
4	5376.00	57.43	74.00	-16.57	57.42	0.01	Peak	165	183																																																																																				
5	10600.00	40.87	54.00	-13.13	32.47	8.40	Average	100	157																																																																																				
6	10600.00	55.72	74.00	-18.28	47.32	8.40	Peak	100	157																																																																																				
7	15900.00	42.03	54.00	-11.97	37.21	4.82	Average	100	182																																																																																				
8	15900.00	54.95	74.00	-19.05	50.13	4.82	Peak	100	182																																																																																				




Modulation	ax HE20	Test Freq. (MHz)	5300																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.00</td><td>43.15</td><td>54.00</td><td>-10.85</td><td>43.13</td><td>0.02</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>2</td><td>5350.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>55.16</td><td>0.02</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>3</td><td>5376.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>42.94</td><td>0.01</td><td>Average</td><td>100</td><td>258</td></tr><tr><td>4</td><td>5376.00</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>55.11</td><td>0.01</td><td>Peak</td><td>100</td><td>258</td></tr><tr><td>5</td><td>10600.00</td><td>41.15</td><td>54.00</td><td>-12.85</td><td>32.75</td><td>8.40</td><td>Average</td><td>100</td><td>234</td></tr><tr><td>6</td><td>10600.00</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>47.22</td><td>8.40</td><td>Peak</td><td>100</td><td>234</td></tr><tr><td>7</td><td>15900.00</td><td>41.68</td><td>54.00</td><td>-12.32</td><td>36.86</td><td>4.82</td><td>Average</td><td>100</td><td>194</td></tr><tr><td>8</td><td>15900.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>50.13</td><td>4.82</td><td>Peak</td><td>100</td><td>194</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5350.00	43.15	54.00	-10.85	43.13	0.02	Average	100	258	2	5350.00	55.18	74.00	-18.82	55.16	0.02	Peak	100	258	3	5376.00	42.95	54.00	-11.05	42.94	0.01	Average	100	258	4	5376.00	55.12	74.00	-18.88	55.11	0.01	Peak	100	258	5	10600.00	41.15	54.00	-12.85	32.75	8.40	Average	100	234	6	10600.00	55.62	74.00	-18.38	47.22	8.40	Peak	100	234	7	15900.00	41.68	54.00	-12.32	36.86	4.82	Average	100	194	8	15900.00	54.95	74.00	-19.05	50.13	4.82	Peak	100	194
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level			reading			High	Table																																																																																																								
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																								
1	5350.00	43.15	54.00	-10.85	43.13	0.02	Average	100	258																																																																																																								
2	5350.00	55.18	74.00	-18.82	55.16	0.02	Peak	100	258																																																																																																								
3	5376.00	42.95	54.00	-11.05	42.94	0.01	Average	100	258																																																																																																								
4	5376.00	55.12	74.00	-18.88	55.11	0.01	Peak	100	258																																																																																																								
5	10600.00	41.15	54.00	-12.85	32.75	8.40	Average	100	234																																																																																																								
6	10600.00	55.62	74.00	-18.38	47.22	8.40	Peak	100	234																																																																																																								
7	15900.00	41.68	54.00	-12.32	36.86	4.82	Average	100	194																																																																																																								
8	15900.00	54.95	74.00	-19.05	50.13	4.82	Peak	100	194																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	ax HE20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			

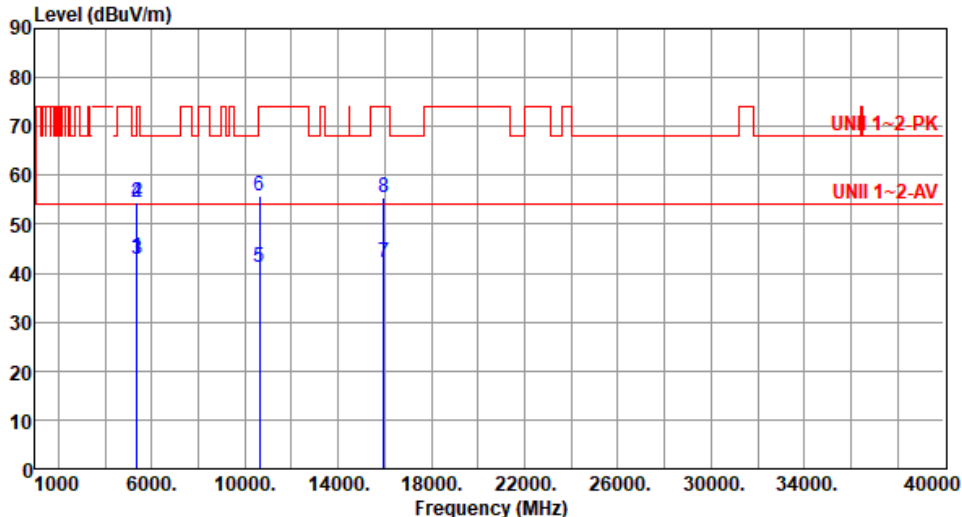

Modulation	ax HE20	Test Freq. (MHz)	5320																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>43.22</td><td>0.02</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>2</td><td>5350.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>54.33</td><td>0.02</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>3</td><td>5376.00</td><td>43.00</td><td>54.00</td><td>-11.00</td><td>42.99</td><td>0.01</td><td>Average</td><td>100</td><td>244</td></tr><tr><td>4</td><td>5376.00</td><td>54.52</td><td>74.00</td><td>-19.48</td><td>54.51</td><td>0.01</td><td>Peak</td><td>100</td><td>244</td></tr><tr><td>5</td><td>10640.00</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>32.75</td><td>8.46</td><td>Average</td><td>100</td><td>175</td></tr><tr><td>6</td><td>10640.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>47.26</td><td>8.46</td><td>Peak</td><td>100</td><td>175</td></tr><tr><td>7</td><td>15960.00</td><td>42.05</td><td>54.00</td><td>-11.95</td><td>37.33</td><td>4.72</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>8</td><td>15960.00</td><td>55.56</td><td>74.00</td><td>-18.44</td><td>50.84</td><td>4.72</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5350.00	43.24	54.00	-10.76	43.22	0.02	Average	100	244	2	5350.00	54.35	74.00	-19.65	54.33	0.02	Peak	100	244	3	5376.00	43.00	54.00	-11.00	42.99	0.01	Average	100	244	4	5376.00	54.52	74.00	-19.48	54.51	0.01	Peak	100	244	5	10640.00	41.21	54.00	-12.79	32.75	8.46	Average	100	175	6	10640.00	55.72	74.00	-18.28	47.26	8.46	Peak	100	175	7	15960.00	42.05	54.00	-11.95	37.33	4.72	Average	100	208	8	15960.00	55.56	74.00	-18.44	50.84	4.72	Peak	100	208
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5350.00	43.24	54.00	-10.76	43.22	0.02	Average	100	244																																																																																																								
2	5350.00	54.35	74.00	-19.65	54.33	0.02	Peak	100	244																																																																																																								
3	5376.00	43.00	54.00	-11.00	42.99	0.01	Average	100	244																																																																																																								
4	5376.00	54.52	74.00	-19.48	54.51	0.01	Peak	100	244																																																																																																								
5	10640.00	41.21	54.00	-12.79	32.75	8.46	Average	100	175																																																																																																								
6	10640.00	55.72	74.00	-18.28	47.26	8.46	Peak	100	175																																																																																																								
7	15960.00	42.05	54.00	-11.95	37.33	4.72	Average	100	208																																																																																																								
8	15960.00	55.56	74.00	-18.44	50.84	4.72	Peak	100	208																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	ax HE20	Test Freq. (MHz)	5500																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.86</td><td>54.00</td><td>-10.14</td><td>43.53</td><td>0.33</td><td>Average</td><td>236</td><td>180</td></tr><tr><td>2</td><td>5460.00</td><td>57.68</td><td>74.00</td><td>-16.32</td><td>57.35</td><td>0.33</td><td>Peak</td><td>236</td><td>180</td></tr><tr><td>3</td><td>5470.00</td><td>57.84</td><td>68.20</td><td>-10.36</td><td>57.48</td><td>0.36</td><td>Peak</td><td>236</td><td>180</td></tr><tr><td>4</td><td>5856.00</td><td>59.67</td><td>68.20</td><td>-8.53</td><td>58.74</td><td>0.93</td><td>Peak</td><td>236</td><td>180</td></tr><tr><td>5</td><td>11000.00</td><td>42.30</td><td>54.00</td><td>-11.70</td><td>33.51</td><td>8.79</td><td>Average</td><td>100</td><td>248</td></tr><tr><td>6</td><td>11000.00</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>46.51</td><td>8.79</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>7</td><td>16500.00</td><td>57.86</td><td>68.20</td><td>-10.34</td><td>51.33</td><td>6.53</td><td>Peak</td><td>100</td><td>217</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.86	54.00	-10.14	43.53	0.33	Average	236	180	2	5460.00	57.68	74.00	-16.32	57.35	0.33	Peak	236	180	3	5470.00	57.84	68.20	-10.36	57.48	0.36	Peak	236	180	4	5856.00	59.67	68.20	-8.53	58.74	0.93	Peak	236	180	5	11000.00	42.30	54.00	-11.70	33.51	8.79	Average	100	248	6	11000.00	55.30	74.00	-18.70	46.51	8.79	Peak	100	248	7	16500.00	57.86	68.20	-10.34	51.33	6.53	Peak	100	217
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	43.86	54.00	-10.14	43.53	0.33	Average	236	180																																																																										
2	5460.00	57.68	74.00	-16.32	57.35	0.33	Peak	236	180																																																																										
3	5470.00	57.84	68.20	-10.36	57.48	0.36	Peak	236	180																																																																										
4	5856.00	59.67	68.20	-8.53	58.74	0.93	Peak	236	180																																																																										
5	11000.00	42.30	54.00	-11.70	33.51	8.79	Average	100	248																																																																										
6	11000.00	55.30	74.00	-18.70	46.51	8.79	Peak	100	248																																																																										
7	16500.00	57.86	68.20	-10.34	51.33	6.53	Peak	100	217																																																																										




Modulation	ax HE20	Test Freq. (MHz)	5500																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.51</td><td>54.00</td><td>-10.49</td><td>43.18</td><td>0.33</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>2</td><td>5460.00</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>55.13</td><td>0.33</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>3</td><td>5470.00</td><td>56.29</td><td>68.20</td><td>-11.91</td><td>55.93</td><td>0.36</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>4</td><td>5856.00</td><td>56.91</td><td>68.20</td><td>-11.29</td><td>55.98</td><td>0.93</td><td>Peak</td><td>100</td><td>254</td></tr><tr><td>5</td><td>11000.00</td><td>41.97</td><td>54.00</td><td>-12.03</td><td>33.18</td><td>8.79</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>11000.00</td><td>54.98</td><td>74.00</td><td>-19.02</td><td>46.19</td><td>8.79</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>7</td><td>16500.00</td><td>57.76</td><td>68.20</td><td>-10.44</td><td>51.23</td><td>6.53</td><td>Peak</td><td>100</td><td>213</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.51	54.00	-10.49	43.18	0.33	Average	100	254	2	5460.00	55.46	74.00	-18.54	55.13	0.33	Peak	100	254	3	5470.00	56.29	68.20	-11.91	55.93	0.36	Peak	100	254	4	5856.00	56.91	68.20	-11.29	55.98	0.93	Peak	100	254	5	11000.00	41.97	54.00	-12.03	33.18	8.79	Average	100	108	6	11000.00	54.98	74.00	-19.02	46.19	8.79	Peak	100	108	7	16500.00	57.76	68.20	-10.44	51.23	6.53	Peak	100	213
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	43.51	54.00	-10.49	43.18	0.33	Average	100	254																																																																										
2	5460.00	55.46	74.00	-18.54	55.13	0.33	Peak	100	254																																																																										
3	5470.00	56.29	68.20	-11.91	55.93	0.36	Peak	100	254																																																																										
4	5856.00	56.91	68.20	-11.29	55.98	0.93	Peak	100	254																																																																										
5	11000.00	41.97	54.00	-12.03	33.18	8.79	Average	100	108																																																																										
6	11000.00	54.98	74.00	-19.02	46.19	8.79	Peak	100	108																																																																										
7	16500.00	57.76	68.20	-10.44	51.23	6.53	Peak	100	213																																																																										



Modulation	ax HE20	Test Freq. (MHz)	5580																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																																																	
Level (dBuV/m) UNI 1-2-PK UNI 1-2-AV <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>42.99</td><td>54.00</td><td>-11.01</td><td>42.66</td><td>0.33</td><td>Average</td><td>232</td><td>179</td></tr><tr><td>2</td><td>5460.00</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>55.19</td><td>0.33</td><td>Peak</td><td>232</td><td>179</td></tr><tr><td>3</td><td>5470.00</td><td>55.80</td><td>68.20</td><td>-12.40</td><td>55.44</td><td>0.36</td><td>Peak</td><td>232</td><td>179</td></tr><tr><td>4</td><td>5725.00</td><td>56.67</td><td>68.20</td><td>-11.53</td><td>55.89</td><td>0.78</td><td>Peak</td><td>232</td><td>179</td></tr><tr><td>5</td><td>5856.00</td><td>59.57</td><td>68.20</td><td>-8.63</td><td>58.64</td><td>0.93</td><td>Peak</td><td>232</td><td>179</td></tr><tr><td>6</td><td>11160.00</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>33.57</td><td>8.33</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>7</td><td>11160.00</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>46.83</td><td>8.33</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>8</td><td>16740.00</td><td>57.91</td><td>68.20</td><td>-10.29</td><td>51.34</td><td>6.57</td><td>Peak</td><td>100</td><td>157</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5460.00	42.99	54.00	-11.01	42.66	0.33	Average	232	179	2	5460.00	55.52	74.00	-18.48	55.19	0.33	Peak	232	179	3	5470.00	55.80	68.20	-12.40	55.44	0.36	Peak	232	179	4	5725.00	56.67	68.20	-11.53	55.89	0.78	Peak	232	179	5	5856.00	59.57	68.20	-8.63	58.64	0.93	Peak	232	179	6	11160.00	41.90	54.00	-12.10	33.57	8.33	Average	100	247	7	11160.00	55.16	74.00	-18.84	46.83	8.33	Peak	100	247	8	16740.00	57.91	68.20	-10.29	51.34	6.57	Peak	100	157
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5460.00	42.99	54.00	-11.01	42.66	0.33	Average	232	179																																																																																																								
2	5460.00	55.52	74.00	-18.48	55.19	0.33	Peak	232	179																																																																																																								
3	5470.00	55.80	68.20	-12.40	55.44	0.36	Peak	232	179																																																																																																								
4	5725.00	56.67	68.20	-11.53	55.89	0.78	Peak	232	179																																																																																																								
5	5856.00	59.57	68.20	-8.63	58.64	0.93	Peak	232	179																																																																																																								
6	11160.00	41.90	54.00	-12.10	33.57	8.33	Average	100	247																																																																																																								
7	11160.00	55.16	74.00	-18.84	46.83	8.33	Peak	100	247																																																																																																								
8	16740.00	57.91	68.20	-10.29	51.34	6.57	Peak	100	157																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	

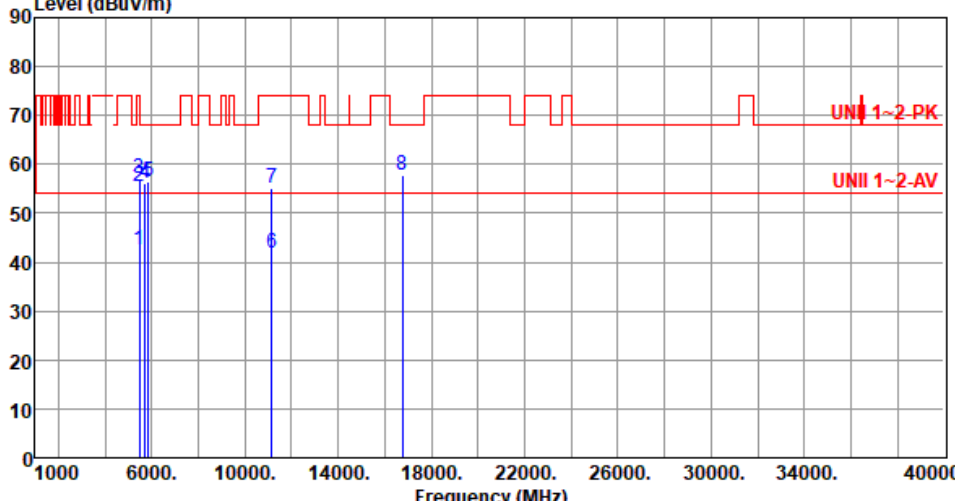

Modulation	ax HE20	Test Freq. (MHz)	5580																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>42.33</td><td>0.33</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>2</td><td>5460.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>55.16</td><td>0.33</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>3</td><td>5470.00</td><td>57.07</td><td>68.20</td><td>-11.13</td><td>56.71</td><td>0.36</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>4</td><td>5725.00</td><td>56.29</td><td>68.20</td><td>-11.91</td><td>55.51</td><td>0.78</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>5</td><td>5856.00</td><td>56.56</td><td>68.20</td><td>-11.64</td><td>55.63</td><td>0.93</td><td>Peak</td><td>100</td><td>251</td></tr><tr><td>6</td><td>11160.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>33.51</td><td>8.33</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>7</td><td>11160.00</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>46.84</td><td>8.33</td><td>Peak</td><td>100</td><td>218</td></tr><tr><td>8</td><td>16740.00</td><td>57.76</td><td>68.20</td><td>-10.44</td><td>51.19</td><td>6.57</td><td>Peak</td><td>100</td><td>223</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.66	54.00	-11.34	42.33	0.33	Average	100	251	2	5460.00	55.49	74.00	-18.51	55.16	0.33	Peak	100	251	3	5470.00	57.07	68.20	-11.13	56.71	0.36	Peak	100	251	4	5725.00	56.29	68.20	-11.91	55.51	0.78	Peak	100	251	5	5856.00	56.56	68.20	-11.64	55.63	0.93	Peak	100	251	6	11160.00	41.84	54.00	-12.16	33.51	8.33	Average	100	218	7	11160.00	55.17	74.00	-18.83	46.84	8.33	Peak	100	218	8	16740.00	57.76	68.20	-10.44	51.19	6.57	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	42.66	54.00	-11.34	42.33	0.33	Average	100	251																																																																																				
2	5460.00	55.49	74.00	-18.51	55.16	0.33	Peak	100	251																																																																																				
3	5470.00	57.07	68.20	-11.13	56.71	0.36	Peak	100	251																																																																																				
4	5725.00	56.29	68.20	-11.91	55.51	0.78	Peak	100	251																																																																																				
5	5856.00	56.56	68.20	-11.64	55.63	0.93	Peak	100	251																																																																																				
6	11160.00	41.84	54.00	-12.16	33.51	8.33	Average	100	218																																																																																				
7	11160.00	55.17	74.00	-18.83	46.84	8.33	Peak	100	218																																																																																				
8	16740.00	57.76	68.20	-10.44	51.19	6.57	Peak	100	223																																																																																				



Modulation	ax HE20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	ax HE20	Test Freq. (MHz)	5700																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>57.04</td><td>68.20</td><td>-11.16</td><td>56.26</td><td>0.78</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>2</td><td>5856.00</td><td>57.65</td><td>68.20</td><td>-10.55</td><td>56.72</td><td>0.93</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>11400.00</td><td>42.25</td><td>54.00</td><td>-11.75</td><td>34.16</td><td>8.09</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>4</td><td>11400.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>47.33</td><td>8.09</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>5</td><td>17100.00</td><td>58.21</td><td>68.20</td><td>-9.99</td><td>52.13</td><td>6.08</td><td>Peak</td><td>100</td><td>178</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	57.04	68.20	-11.16	56.26	0.78	Peak	100	246	2	5856.00	57.65	68.20	-10.55	56.72	0.93	Peak	100	246	3	11400.00	42.25	54.00	-11.75	34.16	8.09	Average	100	208	4	11400.00	55.42	74.00	-18.58	47.33	8.09	Peak	100	208	5	17100.00	58.21	68.20	-9.99	52.13	6.08	Peak	100	178
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5725.00	57.04	68.20	-11.16	56.26	0.78	Peak	100	246																																																						
2	5856.00	57.65	68.20	-10.55	56.72	0.93	Peak	100	246																																																						
3	11400.00	42.25	54.00	-11.75	34.16	8.09	Average	100	208																																																						
4	11400.00	55.42	74.00	-18.58	47.33	8.09	Peak	100	208																																																						
5	17100.00	58.21	68.20	-9.99	52.13	6.08	Peak	100	178																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	ax HE20	Test Freq. (MHz)	5720																																																												
Polarization	Horizontal																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>57.18</td><td>68.20</td><td>-11.02</td><td>56.30</td><td>0.88</td><td>Peak</td><td>215</td><td>182</td></tr><tr><td>2</td><td>5856.00</td><td>59.70</td><td>68.20</td><td>-8.50</td><td>58.77</td><td>0.93</td><td>Peak</td><td>215</td><td>182</td></tr><tr><td>3</td><td>11440.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>34.28</td><td>8.16</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>4</td><td>11440.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>47.31</td><td>8.16</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>5</td><td>17160.00</td><td>58.11</td><td>68.20</td><td>-10.09</td><td>52.33</td><td>5.78</td><td>Peak</td><td>100</td><td>226</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	57.18	68.20	-11.02	56.30	0.88	Peak	215	182	2	5856.00	59.70	68.20	-8.50	58.77	0.93	Peak	215	182	3	11440.00	42.44	54.00	-11.56	34.28	8.16	Average	100	188	4	11440.00	55.47	74.00	-18.53	47.31	8.16	Peak	100	188	5	17160.00	58.11	68.20	-10.09	52.33	5.78	Peak	100	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5850.00	57.18	68.20	-11.02	56.30	0.88	Peak	215	182																																																						
2	5856.00	59.70	68.20	-8.50	58.77	0.93	Peak	215	182																																																						
3	11440.00	42.44	54.00	-11.56	34.28	8.16	Average	100	188																																																						
4	11440.00	55.47	74.00	-18.53	47.31	8.16	Peak	100	188																																																						
5	17160.00	58.11	68.20	-10.09	52.33	5.78	Peak	100	226																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	ax HE20	Test Freq. (MHz)	5720																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5850.00</td><td>57.66</td><td>68.20</td><td>-10.54</td><td>56.78</td><td>0.88</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>2</td><td>5856.00</td><td>58.03</td><td>68.20</td><td>-10.17</td><td>57.10</td><td>0.93</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>3</td><td>11440.00</td><td>41.72</td><td>54.00</td><td>-12.28</td><td>33.56</td><td>8.16</td><td>Average</td><td>100</td><td>204</td></tr><tr><td>4</td><td>11440.00</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>47.13</td><td>8.16</td><td>Peak</td><td>100</td><td>204</td></tr><tr><td>5</td><td>17160.00</td><td>57.72</td><td>68.20</td><td>-10.48</td><td>51.94</td><td>5.78</td><td>Peak</td><td>100</td><td>184</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	57.66	68.20	-10.54	56.78	0.88	Peak	100	247	2	5856.00	58.03	68.20	-10.17	57.10	0.93	Peak	100	247	3	11440.00	41.72	54.00	-12.28	33.56	8.16	Average	100	204	4	11440.00	55.29	74.00	-18.71	47.13	8.16	Peak	100	204	5	17160.00	57.72	68.20	-10.48	51.94	5.78	Peak	100	184
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5850.00	57.66	68.20	-10.54	56.78	0.88	Peak	100	247																																																						
2	5856.00	58.03	68.20	-10.17	57.10	0.93	Peak	100	247																																																						
3	11440.00	41.72	54.00	-12.28	33.56	8.16	Average	100	204																																																						
4	11440.00	55.29	74.00	-18.71	47.13	8.16	Peak	100	204																																																						
5	17160.00	57.72	68.20	-10.48	51.94	5.78	Peak	100	184																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															

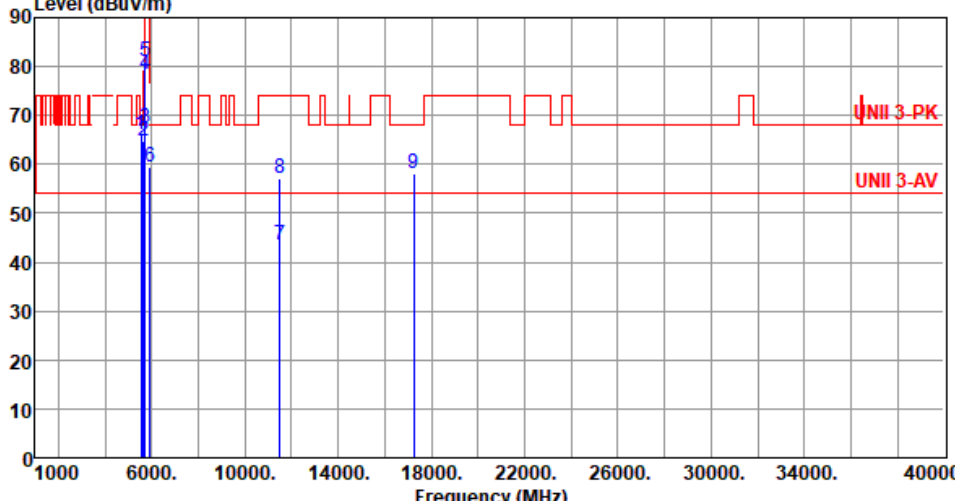

Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5553.00</td><td>66.00</td><td>68.20</td><td>-2.20</td><td>65.66</td><td>0.34</td><td>Peak</td><td>206</td><td>183</td></tr><tr><td>2</td><td>5650.00</td><td>64.80</td><td>68.20</td><td>-3.40</td><td>64.32</td><td>0.48</td><td>Peak</td><td>206</td><td>183</td></tr><tr><td>3</td><td>5700.00</td><td>67.27</td><td>105.20</td><td>-37.93</td><td>66.56</td><td>0.71</td><td>Peak</td><td>206</td><td>183</td></tr><tr><td>4</td><td>5720.00</td><td>78.54</td><td>110.80</td><td>-32.26</td><td>77.78</td><td>0.76</td><td>Peak</td><td>206</td><td>183</td></tr><tr><td>5</td><td>5725.00</td><td>81.11</td><td>122.20</td><td>-41.09</td><td>80.33</td><td>0.78</td><td>Peak</td><td>206</td><td>183</td></tr><tr><td>6</td><td>5925.00</td><td>59.54</td><td>68.20</td><td>-8.66</td><td>58.33</td><td>1.21</td><td>Peak</td><td>206</td><td>183</td></tr><tr><td>7</td><td>11490.00</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>35.12</td><td>8.42</td><td>Average</td><td>100</td><td>183</td></tr><tr><td>8</td><td>11490.00</td><td>56.98</td><td>74.00</td><td>-17.02</td><td>48.56</td><td>8.42</td><td>Peak</td><td>100</td><td>183</td></tr><tr><td>9</td><td>17235.00</td><td>58.17</td><td>68.20</td><td>-10.03</td><td>52.38</td><td>5.79</td><td>Peak</td><td>100</td><td>184</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5553.00	66.00	68.20	-2.20	65.66	0.34	Peak	206	183	2	5650.00	64.80	68.20	-3.40	64.32	0.48	Peak	206	183	3	5700.00	67.27	105.20	-37.93	66.56	0.71	Peak	206	183	4	5720.00	78.54	110.80	-32.26	77.78	0.76	Peak	206	183	5	5725.00	81.11	122.20	-41.09	80.33	0.78	Peak	206	183	6	5925.00	59.54	68.20	-8.66	58.33	1.21	Peak	206	183	7	11490.00	43.54	54.00	-10.46	35.12	8.42	Average	100	183	8	11490.00	56.98	74.00	-17.02	48.56	8.42	Peak	100	183	9	17235.00	58.17	68.20	-10.03	52.38	5.79	Peak	100	184
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5553.00	66.00	68.20	-2.20	65.66	0.34	Peak	206	183																																																																																														
2	5650.00	64.80	68.20	-3.40	64.32	0.48	Peak	206	183																																																																																														
3	5700.00	67.27	105.20	-37.93	66.56	0.71	Peak	206	183																																																																																														
4	5720.00	78.54	110.80	-32.26	77.78	0.76	Peak	206	183																																																																																														
5	5725.00	81.11	122.20	-41.09	80.33	0.78	Peak	206	183																																																																																														
6	5925.00	59.54	68.20	-8.66	58.33	1.21	Peak	206	183																																																																																														
7	11490.00	43.54	54.00	-10.46	35.12	8.42	Average	100	183																																																																																														
8	11490.00	56.98	74.00	-17.02	48.56	8.42	Peak	100	183																																																																																														
9	17235.00	58.17	68.20	-10.03	52.38	5.79	Peak	100	184																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																							

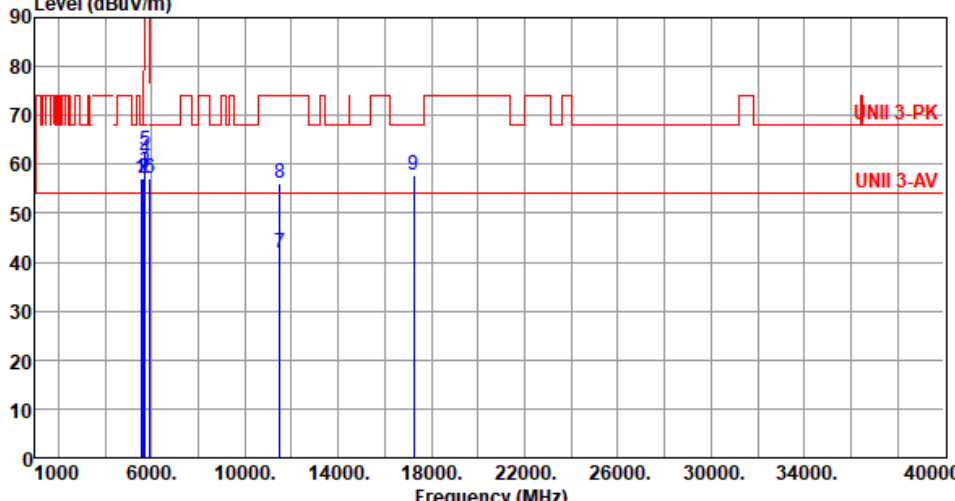


Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5553.00</td><td>57.17</td><td>68.20</td><td>-11.03</td><td>56.83</td><td>0.34</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>2</td><td>5650.00</td><td>57.05</td><td>68.20</td><td>-11.15</td><td>56.57</td><td>0.48</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>3</td><td>5700.00</td><td>58.55</td><td>105.20</td><td>-46.65</td><td>57.84</td><td>0.71</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>4</td><td>5720.00</td><td>61.10</td><td>110.80</td><td>-49.70</td><td>60.34</td><td>0.76</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>5</td><td>5725.00</td><td>62.91</td><td>122.20</td><td>-59.29</td><td>62.13</td><td>0.78</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>6</td><td>5925.00</td><td>57.14</td><td>68.20</td><td>-11.06</td><td>55.93</td><td>1.21</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>7</td><td>11490.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>33.42</td><td>8.42</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>8</td><td>11490.00</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>47.57</td><td>8.42</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>9</td><td>17235.00</td><td>57.90</td><td>68.20</td><td>-10.30</td><td>52.11</td><td>5.79</td><td>Peak</td><td>100</td><td>162</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5553.00	57.17	68.20	-11.03	56.83	0.34	Peak	100	188	2	5650.00	57.05	68.20	-11.15	56.57	0.48	Peak	100	188	3	5700.00	58.55	105.20	-46.65	57.84	0.71	Peak	100	188	4	5720.00	61.10	110.80	-49.70	60.34	0.76	Peak	100	188	5	5725.00	62.91	122.20	-59.29	62.13	0.78	Peak	100	188	6	5925.00	57.14	68.20	-11.06	55.93	1.21	Peak	100	188	7	11490.00	41.84	54.00	-12.16	33.42	8.42	Average	100	203	8	11490.00	55.99	74.00	-18.01	47.57	8.42	Peak	100	203	9	17235.00	57.90	68.20	-10.30	52.11	5.79	Peak	100	162
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5553.00	57.17	68.20	-11.03	56.83	0.34	Peak	100	188																																																																																														
2	5650.00	57.05	68.20	-11.15	56.57	0.48	Peak	100	188																																																																																														
3	5700.00	58.55	105.20	-46.65	57.84	0.71	Peak	100	188																																																																																														
4	5720.00	61.10	110.80	-49.70	60.34	0.76	Peak	100	188																																																																																														
5	5725.00	62.91	122.20	-59.29	62.13	0.78	Peak	100	188																																																																																														
6	5925.00	57.14	68.20	-11.06	55.93	1.21	Peak	100	188																																																																																														
7	11490.00	41.84	54.00	-12.16	33.42	8.42	Average	100	203																																																																																														
8	11490.00	55.99	74.00	-18.01	47.57	8.42	Peak	100	203																																																																																														
9	17235.00	57.90	68.20	-10.30	52.11	5.79	Peak	100	162																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																							




Modulation	ax HE20	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) <			

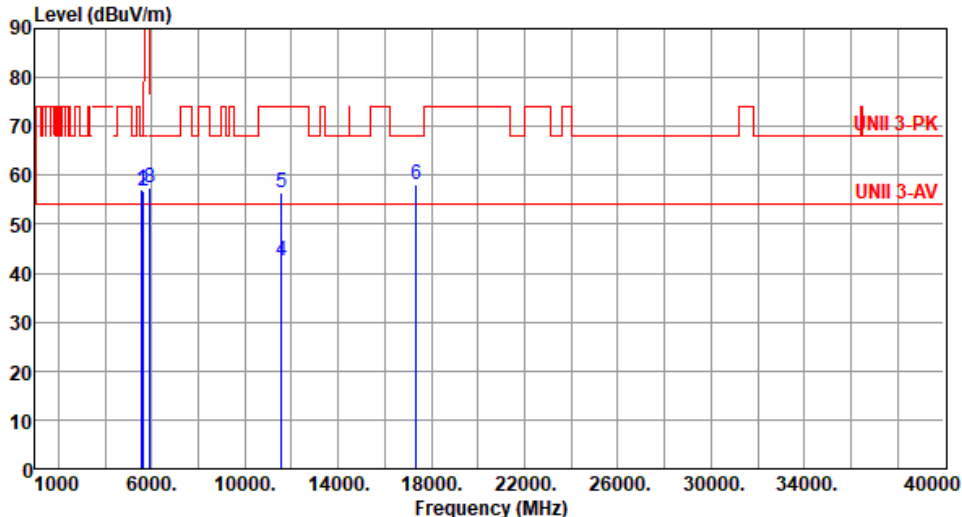


Modulation	ax HE20	Test Freq. (MHz)	5785						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5593.00	57.10	68.20	-11.10	56.75	0.35	Peak	100	189
2	5650.00	56.81	68.20	-11.39	56.33	0.48	Peak	100	189
3	5925.00	57.58	68.20	-10.62	56.37	1.21	Peak	100	189
4	11570.00	42.49	54.00	-11.51	34.16	8.33	Average	100	211
5	11570.00	56.46	74.00	-17.54	48.13	8.33	Peak	100	211
6	17355.00	58.27	68.20	-9.93	52.04	6.23	Peak	100	187
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

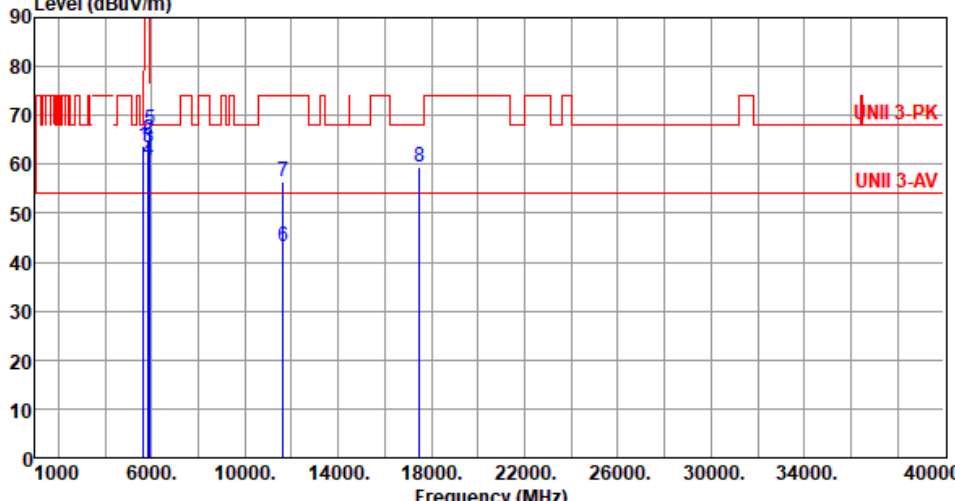

Modulation	ax HE20	Test Freq. (MHz)	5825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5633.00</td><td>63.77</td><td>68.20</td><td>-4.43</td><td>63.33</td><td>0.44</td><td>Peak</td><td>241</td><td>180</td></tr><tr><td>2</td><td>5850.00</td><td>64.96</td><td>122.20</td><td>-57.24</td><td>64.08</td><td>0.88</td><td>Peak</td><td>241</td><td>180</td></tr><tr><td>3</td><td>5855.00</td><td>63.30</td><td>110.80</td><td>-47.50</td><td>62.38</td><td>0.92</td><td>Peak</td><td>241</td><td>180</td></tr><tr><td>4</td><td>5875.00</td><td>60.62</td><td>105.20</td><td>-44.58</td><td>59.58</td><td>1.04</td><td>Peak</td><td>241</td><td>180</td></tr><tr><td>5</td><td>5925.00</td><td>67.11</td><td>68.20</td><td>-1.09</td><td>65.90</td><td>1.21</td><td>Peak</td><td>213</td><td>180</td></tr><tr><td>6</td><td>11650.00</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>35.33</td><td>7.91</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>7</td><td>11650.00</td><td>56.47</td><td>74.00</td><td>-17.53</td><td>48.56</td><td>7.91</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>8</td><td>17475.00</td><td>59.44</td><td>68.20</td><td>-8.76</td><td>52.68</td><td>6.76</td><td>Peak</td><td>100</td><td>186</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5633.00	63.77	68.20	-4.43	63.33	0.44	Peak	241	180	2	5850.00	64.96	122.20	-57.24	64.08	0.88	Peak	241	180	3	5855.00	63.30	110.80	-47.50	62.38	0.92	Peak	241	180	4	5875.00	60.62	105.20	-44.58	59.58	1.04	Peak	241	180	5	5925.00	67.11	68.20	-1.09	65.90	1.21	Peak	213	180	6	11650.00	43.24	54.00	-10.76	35.33	7.91	Average	100	215	7	11650.00	56.47	74.00	-17.53	48.56	7.91	Peak	100	215	8	17475.00	59.44	68.20	-8.76	52.68	6.76	Peak	100	186
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5633.00	63.77	68.20	-4.43	63.33	0.44	Peak	241	180																																																																																				
2	5850.00	64.96	122.20	-57.24	64.08	0.88	Peak	241	180																																																																																				
3	5855.00	63.30	110.80	-47.50	62.38	0.92	Peak	241	180																																																																																				
4	5875.00	60.62	105.20	-44.58	59.58	1.04	Peak	241	180																																																																																				
5	5925.00	67.11	68.20	-1.09	65.90	1.21	Peak	213	180																																																																																				
6	11650.00	43.24	54.00	-10.76	35.33	7.91	Average	100	215																																																																																				
7	11650.00	56.47	74.00	-17.53	48.56	7.91	Peak	100	215																																																																																				
8	17475.00	59.44	68.20	-8.76	52.68	6.76	Peak	100	186																																																																																				

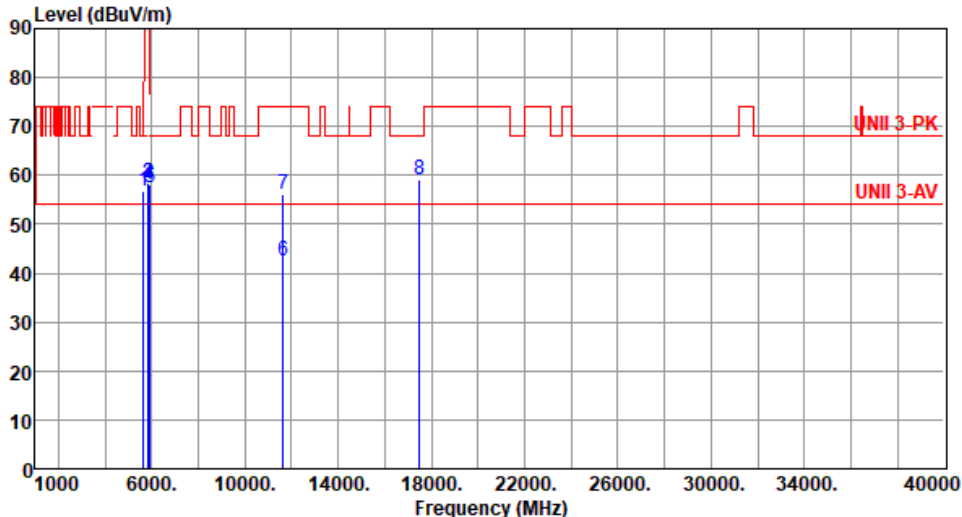

Modulation	ax HE20	Test Freq. (MHz)	5825																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5633.00</td><td>56.67</td><td>68.20</td><td>-11.53</td><td>56.23</td><td>0.44</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>2</td><td>5850.00</td><td>58.53</td><td>122.20</td><td>-63.67</td><td>57.65</td><td>0.88</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>3</td><td>5855.00</td><td>58.35</td><td>110.80</td><td>-52.45</td><td>57.43</td><td>0.92</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>4</td><td>5875.00</td><td>58.07</td><td>105.20</td><td>-47.13</td><td>57.03</td><td>1.04</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>5925.00</td><td>57.42</td><td>68.20</td><td>-10.78</td><td>56.21</td><td>1.21</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>6</td><td>11650.00</td><td>42.42</td><td>54.00</td><td>-11.58</td><td>34.51</td><td>7.91</td><td>Average</td><td>100</td><td>221</td></tr><tr><td>7</td><td>11650.00</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>48.23</td><td>7.91</td><td>Peak</td><td>100</td><td>221</td></tr><tr><td>8</td><td>17475.00</td><td>59.22</td><td>68.20</td><td>-8.98</td><td>52.46</td><td>6.76</td><td>Peak</td><td>100</td><td>194</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5633.00	56.67	68.20	-11.53	56.23	0.44	Peak	100	186	2	5850.00	58.53	122.20	-63.67	57.65	0.88	Peak	100	186	3	5855.00	58.35	110.80	-52.45	57.43	0.92	Peak	100	186	4	5875.00	58.07	105.20	-47.13	57.03	1.04	Peak	100	186	5	5925.00	57.42	68.20	-10.78	56.21	1.21	Peak	100	186	6	11650.00	42.42	54.00	-11.58	34.51	7.91	Average	100	221	7	11650.00	56.14	74.00	-17.86	48.23	7.91	Peak	100	221	8	17475.00	59.22	68.20	-8.98	52.46	6.76	Peak	100	194
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5633.00	56.67	68.20	-11.53	56.23	0.44	Peak	100	186																																																																																				
2	5850.00	58.53	122.20	-63.67	57.65	0.88	Peak	100	186																																																																																				
3	5855.00	58.35	110.80	-52.45	57.43	0.92	Peak	100	186																																																																																				
4	5875.00	58.07	105.20	-47.13	57.03	1.04	Peak	100	186																																																																																				
5	5925.00	57.42	68.20	-10.78	56.21	1.21	Peak	100	186																																																																																				
6	11650.00	42.42	54.00	-11.58	34.51	7.91	Average	100	221																																																																																				
7	11650.00	56.14	74.00	-17.86	48.23	7.91	Peak	100	221																																																																																				
8	17475.00	59.22	68.20	-8.98	52.46	6.76	Peak	100	194																																																																																				

Unwanted Emissions (Above 1GHz) for ax HE40

Modulation	ax HE40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) <			



Modulation	ax HE40	Test Freq. (MHz)	5190
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5230																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>43.58</td><td>0.62</td><td>Average</td><td>175</td><td>181</td></tr><tr><td>2</td><td>5150.00</td><td>56.36</td><td>74.00</td><td>-17.64</td><td>55.74</td><td>0.62</td><td>Peak</td><td>175</td><td>181</td></tr><tr><td>3</td><td>5350.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>43.10</td><td>0.02</td><td>Average</td><td>175</td><td>181</td></tr><tr><td>4</td><td>5350.00</td><td>54.64</td><td>74.00</td><td>-19.36</td><td>54.62</td><td>0.02</td><td>Peak</td><td>175</td><td>181</td></tr><tr><td>5</td><td>10460.00</td><td>54.79</td><td>68.20</td><td>-13.41</td><td>46.19</td><td>8.60</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>6</td><td>15690.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>36.69</td><td>5.02</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>7</td><td>15690.00</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>50.89</td><td>5.02</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.20	54.00	-9.80	43.58	0.62	Average	175	181	2	5150.00	56.36	74.00	-17.64	55.74	0.62	Peak	175	181	3	5350.00	43.12	54.00	-10.88	43.10	0.02	Average	175	181	4	5350.00	54.64	74.00	-19.36	54.62	0.02	Peak	175	181	5	10460.00	54.79	68.20	-13.41	46.19	8.60	Peak	100	50	6	15690.00	41.71	54.00	-12.29	36.69	5.02	Average	100	40	7	15690.00	55.91	74.00	-18.09	50.89	5.02	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	44.20	54.00	-9.80	43.58	0.62	Average	175	181																																																																										
2	5150.00	56.36	74.00	-17.64	55.74	0.62	Peak	175	181																																																																										
3	5350.00	43.12	54.00	-10.88	43.10	0.02	Average	175	181																																																																										
4	5350.00	54.64	74.00	-19.36	54.62	0.02	Peak	175	181																																																																										
5	10460.00	54.79	68.20	-13.41	46.19	8.60	Peak	100	50																																																																										
6	15690.00	41.71	54.00	-12.29	36.69	5.02	Average	100	40																																																																										
7	15690.00	55.91	74.00	-18.09	50.89	5.02	Peak	100	40																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE40	Test Freq. (MHz)	5230																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.01</td><td>54.00</td><td>-11.99</td><td>41.39</td><td>0.62</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>2</td><td>5150.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>54.59</td><td>0.62</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>3</td><td>5350.00</td><td>41.31</td><td>54.00</td><td>-12.69</td><td>41.29</td><td>0.02</td><td>Average</td><td>100</td><td>253</td></tr><tr><td>4</td><td>5350.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>54.39</td><td>0.02</td><td>Peak</td><td>100</td><td>253</td></tr><tr><td>5</td><td>10460.00</td><td>54.68</td><td>68.20</td><td>-13.52</td><td>46.08</td><td>8.60</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>6</td><td>15690.00</td><td>41.50</td><td>54.00</td><td>-12.50</td><td>36.48</td><td>5.02</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>7</td><td>15690.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>50.66</td><td>5.02</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.01	54.00	-11.99	41.39	0.62	Average	100	253	2	5150.00	55.21	74.00	-18.79	54.59	0.62	Peak	100	253	3	5350.00	41.31	54.00	-12.69	41.29	0.02	Average	100	253	4	5350.00	54.41	74.00	-19.59	54.39	0.02	Peak	100	253	5	10460.00	54.68	68.20	-13.52	46.08	8.60	Peak	100	40	6	15690.00	41.50	54.00	-12.50	36.48	5.02	Average	100	30	7	15690.00	55.68	74.00	-18.32	50.66	5.02	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	42.01	54.00	-11.99	41.39	0.62	Average	100	253																																																																										
2	5150.00	55.21	74.00	-18.79	54.59	0.62	Peak	100	253																																																																										
3	5350.00	41.31	54.00	-12.69	41.29	0.02	Average	100	253																																																																										
4	5350.00	54.41	74.00	-19.59	54.39	0.02	Peak	100	253																																																																										
5	10460.00	54.68	68.20	-13.52	46.08	8.60	Peak	100	40																																																																										
6	15690.00	41.50	54.00	-12.50	36.48	5.02	Average	100	30																																																																										
7	15690.00	55.68	74.00	-18.32	50.66	5.02	Peak	100	30																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE40	Test Freq. (MHz)	5270																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.36</td><td>54.00</td><td>-9.64</td><td>43.74</td><td>0.62</td><td>Average</td><td>250</td><td>182</td></tr><tr><td>2</td><td>5150.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>54.56</td><td>0.62</td><td>Peak</td><td>250</td><td>182</td></tr><tr><td>3</td><td>5350.00</td><td>44.58</td><td>54.00</td><td>-9.42</td><td>44.56</td><td>0.02</td><td>Average</td><td>250</td><td>182</td></tr><tr><td>4</td><td>5350.00</td><td>56.14</td><td>74.00</td><td>-17.86</td><td>56.12</td><td>0.02</td><td>Peak</td><td>250</td><td>182</td></tr><tr><td>5</td><td>10540.00</td><td>54.95</td><td>68.20</td><td>-13.25</td><td>46.60</td><td>8.35</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>6</td><td>15810.00</td><td>41.71</td><td>54.00</td><td>-12.29</td><td>37.02</td><td>4.69</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>7</td><td>15810.00</td><td>54.98</td><td>74.00</td><td>-19.02</td><td>50.29</td><td>4.69</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.36	54.00	-9.64	43.74	0.62	Average	250	182	2	5150.00	55.18	74.00	-18.82	54.56	0.62	Peak	250	182	3	5350.00	44.58	54.00	-9.42	44.56	0.02	Average	250	182	4	5350.00	56.14	74.00	-17.86	56.12	0.02	Peak	250	182	5	10540.00	54.95	68.20	-13.25	46.60	8.35	Peak	100	60	6	15810.00	41.71	54.00	-12.29	37.02	4.69	Average	100	30	7	15810.00	54.98	74.00	-19.02	50.29	4.69	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	44.36	54.00	-9.64	43.74	0.62	Average	250	182																																																																										
2	5150.00	55.18	74.00	-18.82	54.56	0.62	Peak	250	182																																																																										
3	5350.00	44.58	54.00	-9.42	44.56	0.02	Average	250	182																																																																										
4	5350.00	56.14	74.00	-17.86	56.12	0.02	Peak	250	182																																																																										
5	10540.00	54.95	68.20	-13.25	46.60	8.35	Peak	100	60																																																																										
6	15810.00	41.71	54.00	-12.29	37.02	4.69	Average	100	30																																																																										
7	15810.00	54.98	74.00	-19.02	50.29	4.69	Peak	100	30																																																																										



Modulation	ax HE40	Test Freq. (MHz)	5270																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>42.88</td><td>54.00</td><td>-11.12</td><td>42.26</td><td>0.62</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>2</td><td>5150.00</td><td>54.11</td><td>74.00</td><td>-19.89</td><td>53.49</td><td>0.62</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>3</td><td>5350.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>42.49</td><td>0.02</td><td>Average</td><td>100</td><td>243</td></tr><tr><td>4</td><td>5350.00</td><td>54.20</td><td>74.00</td><td>-19.80</td><td>54.18</td><td>0.02</td><td>Peak</td><td>100</td><td>243</td></tr><tr><td>5</td><td>10540.00</td><td>54.80</td><td>68.20</td><td>-13.40</td><td>46.45</td><td>8.35</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>6</td><td>15810.00</td><td>41.58</td><td>54.00</td><td>-12.42</td><td>36.89</td><td>4.69</td><td>Average</td><td>100</td><td>80</td></tr><tr><td>7</td><td>15810.00</td><td>54.88</td><td>74.00</td><td>-19.12</td><td>50.19</td><td>4.69</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	42.88	54.00	-11.12	42.26	0.62	Average	100	243	2	5150.00	54.11	74.00	-19.89	53.49	0.62	Peak	100	243	3	5350.00	42.51	54.00	-11.49	42.49	0.02	Average	100	243	4	5350.00	54.20	74.00	-19.80	54.18	0.02	Peak	100	243	5	10540.00	54.80	68.20	-13.40	46.45	8.35	Peak	100	20	6	15810.00	41.58	54.00	-12.42	36.89	4.69	Average	100	80	7	15810.00	54.88	74.00	-19.12	50.19	4.69	Peak	100	80
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	42.88	54.00	-11.12	42.26	0.62	Average	100	243																																																																										
2	5150.00	54.11	74.00	-19.89	53.49	0.62	Peak	100	243																																																																										
3	5350.00	42.51	54.00	-11.49	42.49	0.02	Average	100	243																																																																										
4	5350.00	54.20	74.00	-19.80	54.18	0.02	Peak	100	243																																																																										
5	10540.00	54.80	68.20	-13.40	46.45	8.35	Peak	100	20																																																																										
6	15810.00	41.58	54.00	-12.42	36.89	4.69	Average	100	80																																																																										
7	15810.00	54.88	74.00	-19.12	50.19	4.69	Peak	100	80																																																																										



Modulation	ax HE40	Test Freq. (MHz)	5310																																																																						
Polarization	Horizontal																																																																								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>45.84</td><td>54.00</td><td>-8.16</td><td>45.82</td><td>0.02</td><td>Average</td><td>173</td><td>182</td></tr><tr><td>2</td><td>5350.00</td><td>56.72</td><td>74.00</td><td>-17.28</td><td>56.70</td><td>0.02</td><td>Peak</td><td>173</td><td>182</td></tr><tr><td>3</td><td>10620.00</td><td>40.72</td><td>54.00</td><td>-13.28</td><td>32.29</td><td>8.43</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>4</td><td>10620.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>47.16</td><td>8.43</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>5</td><td>15930.00</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>37.05</td><td>4.74</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>6</td><td>15930.00</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>50.05</td><td>4.74</td><td>Peak</td><td>100</td><td>185</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	45.84	54.00	-8.16	45.82	0.02	Average	173	182	2	5350.00	56.72	74.00	-17.28	56.70	0.02	Peak	173	182	3	10620.00	40.72	54.00	-13.28	32.29	8.43	Average	100	155	4	10620.00	55.59	74.00	-18.41	47.16	8.43	Peak	100	155	5	15930.00	41.79	54.00	-12.21	37.05	4.74	Average	100	185	6	15930.00	54.79	74.00	-19.21	50.05	4.74	Peak	100	185
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	45.84	54.00	-8.16	45.82	0.02	Average	173	182																																																																
2	5350.00	56.72	74.00	-17.28	56.70	0.02	Peak	173	182																																																																
3	10620.00	40.72	54.00	-13.28	32.29	8.43	Average	100	155																																																																
4	10620.00	55.59	74.00	-18.41	47.16	8.43	Peak	100	155																																																																
5	15930.00	41.79	54.00	-12.21	37.05	4.74	Average	100	185																																																																
6	15930.00	54.79	74.00	-19.21	50.05	4.74	Peak	100	185																																																																



Modulation	ax HE40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5510																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																			
Level (dBuV/m) 90 80 70 60 50 40 30 20 10 0 1000 6000. 10000. 14000. 18000. 22000. 26000. 30000. 34000. 40000 Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>45.31</td><td>0.33</td><td>Average</td><td>219</td><td>182</td></tr><tr><td>2</td><td>5460.00</td><td>57.76</td><td>74.00</td><td>-16.24</td><td>57.43</td><td>0.33</td><td>Peak</td><td>219</td><td>182</td></tr><tr><td>3</td><td>5470.00</td><td>59.17</td><td>68.20</td><td>-9.03</td><td>58.81</td><td>0.36</td><td>Peak</td><td>219</td><td>182</td></tr><tr><td>4</td><td>5856.00</td><td>59.71</td><td>68.20</td><td>-8.49</td><td>58.78</td><td>0.93</td><td>Peak</td><td>219</td><td>182</td></tr><tr><td>5</td><td>11020.00</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>33.29</td><td>8.67</td><td>Average</td><td>100</td><td>200</td></tr><tr><td>6</td><td>11020.00</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>46.29</td><td>8.67</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>7</td><td>16530.00</td><td>57.56</td><td>68.20</td><td>-10.64</td><td>51.25</td><td>6.31</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.64	54.00	-8.36	45.31	0.33	Average	219	182	2	5460.00	57.76	74.00	-16.24	57.43	0.33	Peak	219	182	3	5470.00	59.17	68.20	-9.03	58.81	0.36	Peak	219	182	4	5856.00	59.71	68.20	-8.49	58.78	0.93	Peak	219	182	5	11020.00	41.96	54.00	-12.04	33.29	8.67	Average	100	200	6	11020.00	54.96	74.00	-19.04	46.29	8.67	Peak	100	200	7	16530.00	57.56	68.20	-10.64	51.25	6.31	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	45.64	54.00	-8.36	45.31	0.33	Average	219	182																																																																										
2	5460.00	57.76	74.00	-16.24	57.43	0.33	Peak	219	182																																																																										
3	5470.00	59.17	68.20	-9.03	58.81	0.36	Peak	219	182																																																																										
4	5856.00	59.71	68.20	-8.49	58.78	0.93	Peak	219	182																																																																										
5	11020.00	41.96	54.00	-12.04	33.29	8.67	Average	100	200																																																																										
6	11020.00	54.96	74.00	-19.04	46.29	8.67	Peak	100	200																																																																										
7	16530.00	57.56	68.20	-10.64	51.25	6.31	Peak	100	50																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5590						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5460.00	43.85	54.00	-10.15	43.52	0.33	Average	228	182
2	5460.00	57.11	74.00	-16.89	56.78	0.33	Peak	228	182
3	5470.00	57.45	68.20	-10.75	57.09	0.36	Peak	228	182
4	5725.00	56.53	68.20	-11.67	55.75	0.78	Peak	228	182
5	5856.00	59.67	68.20	-8.53	58.74	0.93	Peak	228	182
6	11180.00	41.65	54.00	-12.35	33.37	8.28	Average	100	60
7	11180.00	54.85	74.00	-19.15	46.57	8.28	Peak	100	60
8	16770.00	58.00	68.20	-10.20	51.39	6.61	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE40	Test Freq. (MHz)	5590																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																																																													
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>42.28</td><td>0.33</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>5460.00</td><td>54.30</td><td>74.00</td><td>-19.70</td><td>53.97</td><td>0.33</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>5470.00</td><td>54.37</td><td>68.20</td><td>-13.83</td><td>54.01</td><td>0.36</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>4</td><td>5725.00</td><td>55.37</td><td>68.20</td><td>-12.83</td><td>54.59</td><td>0.78</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>5</td><td>5856.00</td><td>56.55</td><td>68.20</td><td>-11.65</td><td>55.62</td><td>0.93</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>6</td><td>11180.00</td><td>41.41</td><td>54.00</td><td>-12.59</td><td>33.13</td><td>8.28</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>7</td><td>11180.00</td><td>54.71</td><td>74.00</td><td>-19.29</td><td>46.43</td><td>8.28</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>8</td><td>16770.00</td><td>57.82</td><td>68.20</td><td>-10.38</td><td>51.21</td><td>6.61</td><td>Peak</td><td>100</td><td>25</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.61	54.00	-11.39	42.28	0.33	Average	100	246	2	5460.00	54.30	74.00	-19.70	53.97	0.33	Peak	100	246	3	5470.00	54.37	68.20	-13.83	54.01	0.36	Peak	100	246	4	5725.00	55.37	68.20	-12.83	54.59	0.78	Peak	100	246	5	5856.00	56.55	68.20	-11.65	55.62	0.93	Peak	100	246	6	11180.00	41.41	54.00	-12.59	33.13	8.28	Average	100	40	7	11180.00	54.71	74.00	-19.29	46.43	8.28	Peak	100	40	8	16770.00	57.82	68.20	-10.38	51.21	6.61	Peak	100	25
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	42.61	54.00	-11.39	42.28	0.33	Average	100	246																																																																																				
2	5460.00	54.30	74.00	-19.70	53.97	0.33	Peak	100	246																																																																																				
3	5470.00	54.37	68.20	-13.83	54.01	0.36	Peak	100	246																																																																																				
4	5725.00	55.37	68.20	-12.83	54.59	0.78	Peak	100	246																																																																																				
5	5856.00	56.55	68.20	-11.65	55.62	0.93	Peak	100	246																																																																																				
6	11180.00	41.41	54.00	-12.59	33.13	8.28	Average	100	40																																																																																				
7	11180.00	54.71	74.00	-19.29	46.43	8.28	Peak	100	40																																																																																				
8	16770.00	57.82	68.20	-10.38	51.21	6.61	Peak	100	25																																																																																				



Modulation	ax HE40	Test Freq. (MHz)	5670																																																												
Polarization	Horizontal																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>57.98</td><td>68.20</td><td>-10.22</td><td>57.20</td><td>0.78</td><td>Peak</td><td>222</td><td>181</td></tr><tr><td>2</td><td>5856.00</td><td>59.77</td><td>68.20</td><td>-8.43</td><td>58.84</td><td>0.93</td><td>Peak</td><td>222</td><td>181</td></tr><tr><td>3</td><td>11340.00</td><td>41.44</td><td>54.00</td><td>-12.56</td><td>33.25</td><td>8.19</td><td>Average</td><td>100</td><td>100</td></tr><tr><td>4</td><td>11340.00</td><td>54.61</td><td>74.00</td><td>-19.39</td><td>46.42</td><td>8.19</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>5</td><td>17010.00</td><td>57.49</td><td>68.20</td><td>-10.71</td><td>51.28</td><td>6.21</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	57.98	68.20	-10.22	57.20	0.78	Peak	222	181	2	5856.00	59.77	68.20	-8.43	58.84	0.93	Peak	222	181	3	11340.00	41.44	54.00	-12.56	33.25	8.19	Average	100	100	4	11340.00	54.61	74.00	-19.39	46.42	8.19	Peak	100	100	5	17010.00	57.49	68.20	-10.71	51.28	6.21	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5725.00	57.98	68.20	-10.22	57.20	0.78	Peak	222	181																																																						
2	5856.00	59.77	68.20	-8.43	58.84	0.93	Peak	222	181																																																						
3	11340.00	41.44	54.00	-12.56	33.25	8.19	Average	100	100																																																						
4	11340.00	54.61	74.00	-19.39	46.42	8.19	Peak	100	100																																																						
5	17010.00	57.49	68.20	-10.71	51.28	6.21	Peak	100	40																																																						

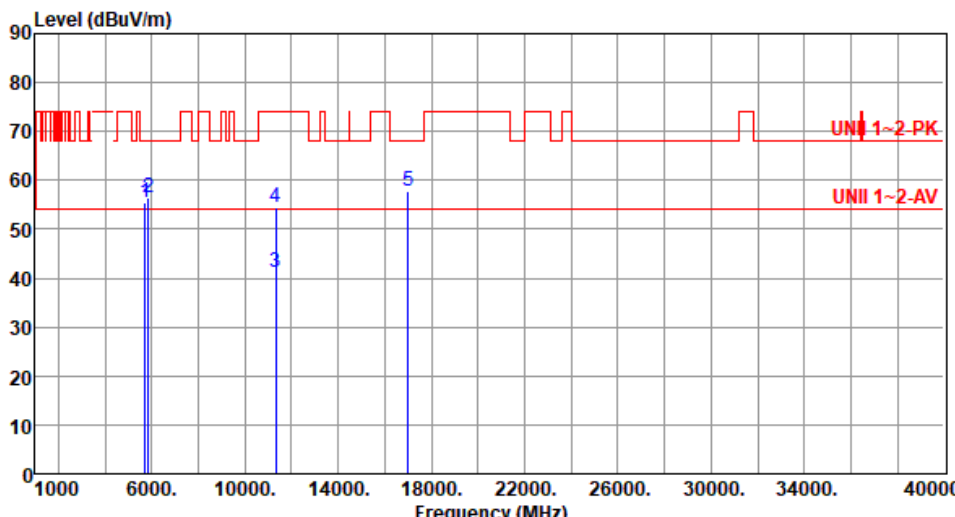

Modulation	ax HE40	Test Freq. (MHz)	5670																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>55.37</td><td>68.20</td><td>-12.83</td><td>54.59</td><td>0.78</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>2</td><td>5856.00</td><td>56.59</td><td>68.20</td><td>-11.61</td><td>55.66</td><td>0.93</td><td>Peak</td><td>100</td><td>242</td></tr><tr><td>3</td><td>11340.00</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>33.15</td><td>8.19</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>4</td><td>11340.00</td><td>54.47</td><td>74.00</td><td>-19.53</td><td>46.28</td><td>8.19</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>5</td><td>17010.00</td><td>57.62</td><td>68.20</td><td>-10.58</td><td>51.41</td><td>6.21</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	55.37	68.20	-12.83	54.59	0.78	Peak	100	242	2	5856.00	56.59	68.20	-11.61	55.66	0.93	Peak	100	242	3	11340.00	41.34	54.00	-12.66	33.15	8.19	Average	100	60	4	11340.00	54.47	74.00	-19.53	46.28	8.19	Peak	100	60	5	17010.00	57.62	68.20	-10.58	51.41	6.21	Peak	100	50
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5725.00	55.37	68.20	-12.83	54.59	0.78	Peak	100	242																																																						
2	5856.00	56.59	68.20	-11.61	55.66	0.93	Peak	100	242																																																						
3	11340.00	41.34	54.00	-12.66	33.15	8.19	Average	100	60																																																						
4	11340.00	54.47	74.00	-19.53	46.28	8.19	Peak	100	60																																																						
5	17010.00	57.62	68.20	-10.58	51.41	6.21	Peak	100	50																																																						



Modulation	ax HE40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m)			




Modulation	ax HE40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):65			
Level (dBuV/m) </			




Modulation	ax HE40	Test Freq. (MHz)	5755
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			

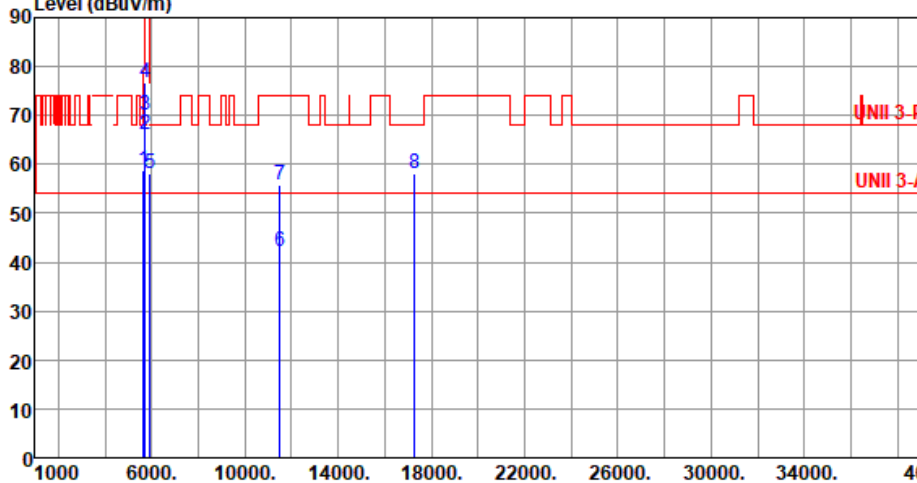


Modulation	ax HE40	Test Freq. (MHz)	5755																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.81</td><td>68.20</td><td>-9.39</td><td>58.33</td><td>0.48</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>2</td><td>5700.00</td><td>65.94</td><td>105.20</td><td>-39.26</td><td>65.23</td><td>0.71</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>3</td><td>5720.00</td><td>70.20</td><td>110.80</td><td>-40.60</td><td>69.44</td><td>0.76</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>4</td><td>5725.00</td><td>76.64</td><td>122.20</td><td>-45.56</td><td>75.86</td><td>0.78</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>5</td><td>5925.00</td><td>57.96</td><td>68.20</td><td>-10.24</td><td>56.75</td><td>1.21</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>6</td><td>11510.00</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>33.86</td><td>8.47</td><td>Average</td><td>100</td><td>164</td></tr><tr><td>7</td><td>11510.00</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>47.23</td><td>8.47</td><td>Peak</td><td>100</td><td>164</td></tr><tr><td>8</td><td>17265.00</td><td>58.13</td><td>68.20</td><td>-10.07</td><td>52.31</td><td>5.82</td><td>Peak</td><td>100</td><td>203</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.81	68.20	-9.39	58.33	0.48	Peak	100	182	2	5700.00	65.94	105.20	-39.26	65.23	0.71	Peak	100	182	3	5720.00	70.20	110.80	-40.60	69.44	0.76	Peak	100	182	4	5725.00	76.64	122.20	-45.56	75.86	0.78	Peak	100	182	5	5925.00	57.96	68.20	-10.24	56.75	1.21	Peak	100	182	6	11510.00	42.33	54.00	-11.67	33.86	8.47	Average	100	164	7	11510.00	55.70	74.00	-18.30	47.23	8.47	Peak	100	164	8	17265.00	58.13	68.20	-10.07	52.31	5.82	Peak	100	203
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	58.81	68.20	-9.39	58.33	0.48	Peak	100	182																																																																																				
2	5700.00	65.94	105.20	-39.26	65.23	0.71	Peak	100	182																																																																																				
3	5720.00	70.20	110.80	-40.60	69.44	0.76	Peak	100	182																																																																																				
4	5725.00	76.64	122.20	-45.56	75.86	0.78	Peak	100	182																																																																																				
5	5925.00	57.96	68.20	-10.24	56.75	1.21	Peak	100	182																																																																																				
6	11510.00	42.33	54.00	-11.67	33.86	8.47	Average	100	164																																																																																				
7	11510.00	55.70	74.00	-18.30	47.23	8.47	Peak	100	164																																																																																				
8	17265.00	58.13	68.20	-10.07	52.31	5.82	Peak	100	203																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

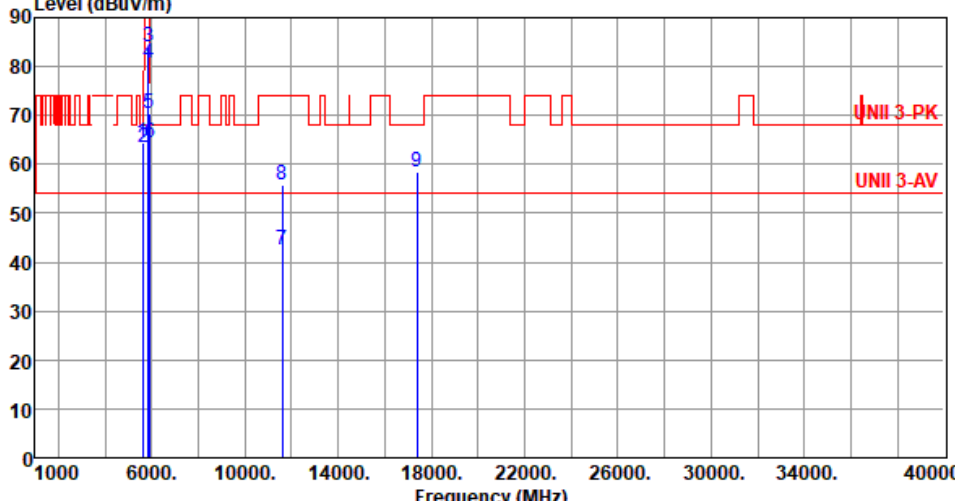

Modulation	ax HE40	Test Freq. (MHz)	5795																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5603.00</td><td>64.47</td><td>68.20</td><td>-3.73</td><td>64.11</td><td>0.36</td><td>Peak</td><td>270</td><td>182</td></tr><tr><td>2</td><td>5650.00</td><td>63.56</td><td>68.20</td><td>-4.64</td><td>63.08</td><td>0.48</td><td>Peak</td><td>270</td><td>182</td></tr><tr><td>3</td><td>5850.00</td><td>84.15</td><td>122.20</td><td>-38.05</td><td>83.27</td><td>0.88</td><td>Peak</td><td>270</td><td>182</td></tr><tr><td>4</td><td>5855.00</td><td>80.72</td><td>110.80</td><td>-30.08</td><td>79.80</td><td>0.92</td><td>Peak</td><td>270</td><td>182</td></tr><tr><td>5</td><td>5875.00</td><td>70.47</td><td>105.20</td><td>-34.73</td><td>69.43</td><td>1.04</td><td>Peak</td><td>270</td><td>182</td></tr><tr><td>6</td><td>5925.00</td><td>64.58</td><td>68.20</td><td>-3.62</td><td>63.37</td><td>1.21</td><td>Peak</td><td>270</td><td>182</td></tr><tr><td>7</td><td>11590.00</td><td>42.44</td><td>54.00</td><td>-11.56</td><td>34.27</td><td>8.17</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>8</td><td>11590.00</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>47.52</td><td>8.17</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>9</td><td>17385.00</td><td>58.49</td><td>68.20</td><td>-9.71</td><td>52.07</td><td>6.42</td><td>Peak</td><td>100</td><td>223</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5603.00	64.47	68.20	-3.73	64.11	0.36	Peak	270	182	2	5650.00	63.56	68.20	-4.64	63.08	0.48	Peak	270	182	3	5850.00	84.15	122.20	-38.05	83.27	0.88	Peak	270	182	4	5855.00	80.72	110.80	-30.08	79.80	0.92	Peak	270	182	5	5875.00	70.47	105.20	-34.73	69.43	1.04	Peak	270	182	6	5925.00	64.58	68.20	-3.62	63.37	1.21	Peak	270	182	7	11590.00	42.44	54.00	-11.56	34.27	8.17	Average	100	177	8	11590.00	55.69	74.00	-18.31	47.52	8.17	Peak	100	177	9	17385.00	58.49	68.20	-9.71	52.07	6.42	Peak	100	223
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5603.00	64.47	68.20	-3.73	64.11	0.36	Peak	270	182																																																																																														
2	5650.00	63.56	68.20	-4.64	63.08	0.48	Peak	270	182																																																																																														
3	5850.00	84.15	122.20	-38.05	83.27	0.88	Peak	270	182																																																																																														
4	5855.00	80.72	110.80	-30.08	79.80	0.92	Peak	270	182																																																																																														
5	5875.00	70.47	105.20	-34.73	69.43	1.04	Peak	270	182																																																																																														
6	5925.00	64.58	68.20	-3.62	63.37	1.21	Peak	270	182																																																																																														
7	11590.00	42.44	54.00	-11.56	34.27	8.17	Average	100	177																																																																																														
8	11590.00	55.69	74.00	-18.31	47.52	8.17	Peak	100	177																																																																																														
9	17385.00	58.49	68.20	-9.71	52.07	6.42	Peak	100	223																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																							

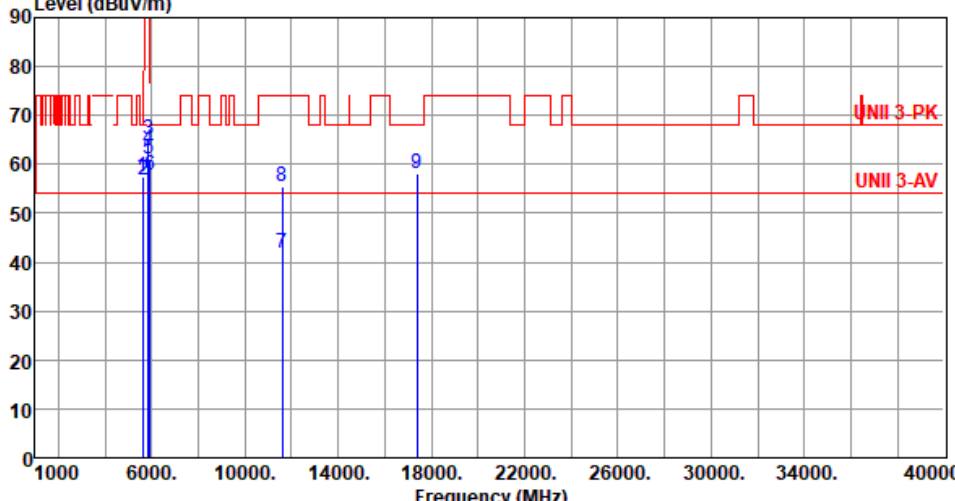

Modulation	ax HE40	Test Freq. (MHz)	5795																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Sean Yu Temperature(°C):23 Humidity(%):62																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5603.00</td><td>57.49</td><td>68.20</td><td>-10.71</td><td>57.13</td><td>0.36</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>2</td><td>5650.00</td><td>56.95</td><td>68.20</td><td>-11.25</td><td>56.47</td><td>0.48</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>3</td><td>5850.00</td><td>65.12</td><td>122.20</td><td>-57.08</td><td>64.24</td><td>0.88</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>4</td><td>5855.00</td><td>63.20</td><td>110.80</td><td>-47.60</td><td>62.28</td><td>0.92</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>5</td><td>5875.00</td><td>61.15</td><td>105.20</td><td>-44.05</td><td>60.11</td><td>1.04</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>6</td><td>5925.00</td><td>57.63</td><td>68.20</td><td>-10.57</td><td>56.42</td><td>1.21</td><td>Peak</td><td>100</td><td>186</td></tr><tr><td>7</td><td>11590.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>33.52</td><td>8.17</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>8</td><td>11590.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>47.14</td><td>8.17</td><td>Peak</td><td>100</td><td>185</td></tr><tr><td>9</td><td>17385.00</td><td>58.25</td><td>68.20</td><td>-9.95</td><td>51.83</td><td>6.42</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5603.00	57.49	68.20	-10.71	57.13	0.36	Peak	100	186	2	5650.00	56.95	68.20	-11.25	56.47	0.48	Peak	100	186	3	5850.00	65.12	122.20	-57.08	64.24	0.88	Peak	100	186	4	5855.00	63.20	110.80	-47.60	62.28	0.92	Peak	100	186	5	5875.00	61.15	105.20	-44.05	60.11	1.04	Peak	100	186	6	5925.00	57.63	68.20	-10.57	56.42	1.21	Peak	100	186	7	11590.00	41.69	54.00	-12.31	33.52	8.17	Average	100	185	8	11590.00	55.31	74.00	-18.69	47.14	8.17	Peak	100	185	9	17385.00	58.25	68.20	-9.95	51.83	6.42	Peak	100	176
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5603.00	57.49	68.20	-10.71	57.13	0.36	Peak	100	186																																																																																														
2	5650.00	56.95	68.20	-11.25	56.47	0.48	Peak	100	186																																																																																														
3	5850.00	65.12	122.20	-57.08	64.24	0.88	Peak	100	186																																																																																														
4	5855.00	63.20	110.80	-47.60	62.28	0.92	Peak	100	186																																																																																														
5	5875.00	61.15	105.20	-44.05	60.11	1.04	Peak	100	186																																																																																														
6	5925.00	57.63	68.20	-10.57	56.42	1.21	Peak	100	186																																																																																														
7	11590.00	41.69	54.00	-12.31	33.52	8.17	Average	100	185																																																																																														
8	11590.00	55.31	74.00	-18.69	47.14	8.17	Peak	100	185																																																																																														
9	17385.00	58.25	68.20	-9.95	51.83	6.42	Peak	100	176																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																							

Unwanted Emissions (Above 1GHz) for ax HE80

Modulation	ax HE80	Test Freq. (MHz)	5210
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):22 Humidity(%):64			
Level (dBUV/m)			



Modulation	ax HE80	Test Freq. (MHz)	5210																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>42.74</td><td>0.62</td><td>Average</td><td>103</td><td>247</td></tr><tr><td>2</td><td>5150.00</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>53.48</td><td>0.62</td><td>Peak</td><td>103</td><td>247</td></tr><tr><td>3</td><td>5350.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>42.65</td><td>0.02</td><td>Average</td><td>103</td><td>247</td></tr><tr><td>4</td><td>5350.00</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>54.56</td><td>0.02</td><td>Peak</td><td>103</td><td>247</td></tr><tr><td>5</td><td>10420.00</td><td>54.44</td><td>68.20</td><td>-13.76</td><td>45.87</td><td>8.57</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>6</td><td>15630.00</td><td>41.30</td><td>54.00</td><td>-12.70</td><td>36.47</td><td>4.83</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>7</td><td>15630.00</td><td>55.07</td><td>74.00</td><td>-18.93</td><td>50.24</td><td>4.83</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.36	54.00	-10.64	42.74	0.62	Average	103	247	2	5150.00	54.10	74.00	-19.90	53.48	0.62	Peak	103	247	3	5350.00	42.67	54.00	-11.33	42.65	0.02	Average	103	247	4	5350.00	54.58	74.00	-19.42	54.56	0.02	Peak	103	247	5	10420.00	54.44	68.20	-13.76	45.87	8.57	Peak	100	90	6	15630.00	41.30	54.00	-12.70	36.47	4.83	Average	100	20	7	15630.00	55.07	74.00	-18.93	50.24	4.83	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.36	54.00	-10.64	42.74	0.62	Average	103	247																																																																										
2	5150.00	54.10	74.00	-19.90	53.48	0.62	Peak	103	247																																																																										
3	5350.00	42.67	54.00	-11.33	42.65	0.02	Average	103	247																																																																										
4	5350.00	54.58	74.00	-19.42	54.56	0.02	Peak	103	247																																																																										
5	10420.00	54.44	68.20	-13.76	45.87	8.57	Peak	100	90																																																																										
6	15630.00	41.30	54.00	-12.70	36.47	4.83	Average	100	20																																																																										
7	15630.00	55.07	74.00	-18.93	50.24	4.83	Peak	100	20																																																																										



Modulation	ax HE80	Test Freq. (MHz)	5290																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.07</td><td>54.00</td><td>-8.93</td><td>44.45</td><td>0.62</td><td>Average</td><td>171</td><td>183</td></tr><tr><td>2</td><td>5150.00</td><td>56.02</td><td>74.00</td><td>-17.98</td><td>55.40</td><td>0.62</td><td>Peak</td><td>171</td><td>183</td></tr><tr><td>3</td><td>5350.00</td><td>46.91</td><td>54.00</td><td>-7.09</td><td>46.89</td><td>0.02</td><td>Average</td><td>171</td><td>183</td></tr><tr><td>4</td><td>5350.00</td><td>58.82</td><td>74.00</td><td>-15.18</td><td>58.80</td><td>0.02</td><td>Peak</td><td>171</td><td>183</td></tr><tr><td>5</td><td>10580.00</td><td>54.75</td><td>68.20</td><td>-13.45</td><td>46.39</td><td>8.36</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>6</td><td>15870.00</td><td>41.21</td><td>54.00</td><td>-12.79</td><td>36.49</td><td>4.72</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>7</td><td>15870.00</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>50.28</td><td>4.72</td><td>Peak</td><td>100</td><td>35</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.07	54.00	-8.93	44.45	0.62	Average	171	183	2	5150.00	56.02	74.00	-17.98	55.40	0.62	Peak	171	183	3	5350.00	46.91	54.00	-7.09	46.89	0.02	Average	171	183	4	5350.00	58.82	74.00	-15.18	58.80	0.02	Peak	171	183	5	10580.00	54.75	68.20	-13.45	46.39	8.36	Peak	100	100	6	15870.00	41.21	54.00	-12.79	36.49	4.72	Average	100	35	7	15870.00	55.00	74.00	-19.00	50.28	4.72	Peak	100	35
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	45.07	54.00	-8.93	44.45	0.62	Average	171	183																																																																										
2	5150.00	56.02	74.00	-17.98	55.40	0.62	Peak	171	183																																																																										
3	5350.00	46.91	54.00	-7.09	46.89	0.02	Average	171	183																																																																										
4	5350.00	58.82	74.00	-15.18	58.80	0.02	Peak	171	183																																																																										
5	10580.00	54.75	68.20	-13.45	46.39	8.36	Peak	100	100																																																																										
6	15870.00	41.21	54.00	-12.79	36.49	4.72	Average	100	35																																																																										
7	15870.00	55.00	74.00	-19.00	50.28	4.72	Peak	100	35																																																																										



Modulation	ax HE80	Test Freq. (MHz)	5290																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.34</td><td>54.00</td><td>-10.66</td><td>42.72</td><td>0.62</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>2</td><td>5150.00</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>54.59</td><td>0.62</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>3</td><td>5350.00</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>42.95</td><td>0.02</td><td>Average</td><td>100</td><td>245</td></tr><tr><td>4</td><td>5350.00</td><td>55.14</td><td>74.00</td><td>-18.86</td><td>55.12</td><td>0.02</td><td>Peak</td><td>100</td><td>245</td></tr><tr><td>5</td><td>10580.00</td><td>54.51</td><td>68.20</td><td>-13.69</td><td>46.15</td><td>8.36</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>6</td><td>15870.00</td><td>41.01</td><td>54.00</td><td>-12.99</td><td>36.29</td><td>4.72</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>7</td><td>15870.00</td><td>54.84</td><td>74.00</td><td>-19.16</td><td>50.12</td><td>4.72</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.34	54.00	-10.66	42.72	0.62	Average	100	245	2	5150.00	55.21	74.00	-18.79	54.59	0.62	Peak	100	245	3	5350.00	42.97	54.00	-11.03	42.95	0.02	Average	100	245	4	5350.00	55.14	74.00	-18.86	55.12	0.02	Peak	100	245	5	10580.00	54.51	68.20	-13.69	46.15	8.36	Peak	100	60	6	15870.00	41.01	54.00	-12.99	36.29	4.72	Average	100	20	7	15870.00	54.84	74.00	-19.16	50.12	4.72	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.34	54.00	-10.66	42.72	0.62	Average	100	245																																																																										
2	5150.00	55.21	74.00	-18.79	54.59	0.62	Peak	100	245																																																																										
3	5350.00	42.97	54.00	-11.03	42.95	0.02	Average	100	245																																																																										
4	5350.00	55.14	74.00	-18.86	55.12	0.02	Peak	100	245																																																																										
5	10580.00	54.51	68.20	-13.69	46.15	8.36	Peak	100	60																																																																										
6	15870.00	41.01	54.00	-12.99	36.29	4.72	Average	100	20																																																																										
7	15870.00	54.84	74.00	-19.16	50.12	4.72	Peak	100	20																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE80	Test Freq. (MHz)	5530																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																			
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>47.97</td><td>54.00</td><td>-6.03</td><td>47.64</td><td>0.33</td><td>Average</td><td>281</td><td>181</td></tr><tr><td>2</td><td>5460.00</td><td>59.87</td><td>74.00</td><td>-14.13</td><td>59.54</td><td>0.33</td><td>Peak</td><td>281</td><td>181</td></tr><tr><td>3</td><td>5470.00</td><td>61.40</td><td>68.20</td><td>-6.80</td><td>61.04</td><td>0.36</td><td>Peak</td><td>281</td><td>181</td></tr><tr><td>4</td><td>5856.00</td><td>59.58</td><td>68.20</td><td>-8.62</td><td>58.65</td><td>0.93</td><td>Peak</td><td>224</td><td>181</td></tr><tr><td>5</td><td>11060.00</td><td>41.69</td><td>54.00</td><td>-12.31</td><td>33.21</td><td>8.48</td><td>Average</td><td>100</td><td>190</td></tr><tr><td>6</td><td>11060.00</td><td>54.63</td><td>74.00</td><td>-19.37</td><td>46.15</td><td>8.48</td><td>Peak</td><td>100</td><td>190</td></tr><tr><td>7</td><td>16590.00</td><td>57.22</td><td>68.20</td><td>-10.98</td><td>51.11</td><td>6.11</td><td>Peak</td><td>100</td><td>40</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.97	54.00	-6.03	47.64	0.33	Average	281	181	2	5460.00	59.87	74.00	-14.13	59.54	0.33	Peak	281	181	3	5470.00	61.40	68.20	-6.80	61.04	0.36	Peak	281	181	4	5856.00	59.58	68.20	-8.62	58.65	0.93	Peak	224	181	5	11060.00	41.69	54.00	-12.31	33.21	8.48	Average	100	190	6	11060.00	54.63	74.00	-19.37	46.15	8.48	Peak	100	190	7	16590.00	57.22	68.20	-10.98	51.11	6.11	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	47.97	54.00	-6.03	47.64	0.33	Average	281	181																																																																										
2	5460.00	59.87	74.00	-14.13	59.54	0.33	Peak	281	181																																																																										
3	5470.00	61.40	68.20	-6.80	61.04	0.36	Peak	281	181																																																																										
4	5856.00	59.58	68.20	-8.62	58.65	0.93	Peak	224	181																																																																										
5	11060.00	41.69	54.00	-12.31	33.21	8.48	Average	100	190																																																																										
6	11060.00	54.63	74.00	-19.37	46.15	8.48	Peak	100	190																																																																										
7	16590.00	57.22	68.20	-10.98	51.11	6.11	Peak	100	40																																																																										




Modulation	ax HE80	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):22 Humidity(%):64			
Level (dBuV/m)			



Modulation	ax HE80	Test Freq. (MHz)	5610																																																																																										
Polarization	Horizontal																																																																																												
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																													
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>44.59</td><td>0.33</td><td>Average</td><td>235</td><td>181</td></tr><tr><td>2</td><td>5460.00</td><td>56.54</td><td>74.00</td><td>-17.46</td><td>56.21</td><td>0.33</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>3</td><td>5470.00</td><td>57.88</td><td>68.20</td><td>-10.32</td><td>57.52</td><td>0.36</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>4</td><td>5725.00</td><td>60.12</td><td>68.20</td><td>-8.08</td><td>59.34</td><td>0.78</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>5</td><td>5856.00</td><td>59.50</td><td>68.20</td><td>-8.70</td><td>58.57</td><td>0.93</td><td>Peak</td><td>235</td><td>181</td></tr><tr><td>6</td><td>11220.00</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>33.36</td><td>8.20</td><td>Average</td><td>100</td><td>185</td></tr><tr><td>7</td><td>11220.00</td><td>54.49</td><td>74.00</td><td>-19.51</td><td>46.29</td><td>8.20</td><td>Peak</td><td>100</td><td>185</td></tr><tr><td>8</td><td>16830.00</td><td>57.96</td><td>68.20</td><td>-10.24</td><td>51.30</td><td>6.66</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.92	54.00	-9.08	44.59	0.33	Average	235	181	2	5460.00	56.54	74.00	-17.46	56.21	0.33	Peak	235	181	3	5470.00	57.88	68.20	-10.32	57.52	0.36	Peak	235	181	4	5725.00	60.12	68.20	-8.08	59.34	0.78	Peak	235	181	5	5856.00	59.50	68.20	-8.70	58.57	0.93	Peak	235	181	6	11220.00	41.56	54.00	-12.44	33.36	8.20	Average	100	185	7	11220.00	54.49	74.00	-19.51	46.29	8.20	Peak	100	185	8	16830.00	57.96	68.20	-10.24	51.30	6.66	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	44.92	54.00	-9.08	44.59	0.33	Average	235	181																																																																																				
2	5460.00	56.54	74.00	-17.46	56.21	0.33	Peak	235	181																																																																																				
3	5470.00	57.88	68.20	-10.32	57.52	0.36	Peak	235	181																																																																																				
4	5725.00	60.12	68.20	-8.08	59.34	0.78	Peak	235	181																																																																																				
5	5856.00	59.50	68.20	-8.70	58.57	0.93	Peak	235	181																																																																																				
6	11220.00	41.56	54.00	-12.44	33.36	8.20	Average	100	185																																																																																				
7	11220.00	54.49	74.00	-19.51	46.29	8.20	Peak	100	185																																																																																				
8	16830.00	57.96	68.20	-10.24	51.30	6.66	Peak	100	40																																																																																				

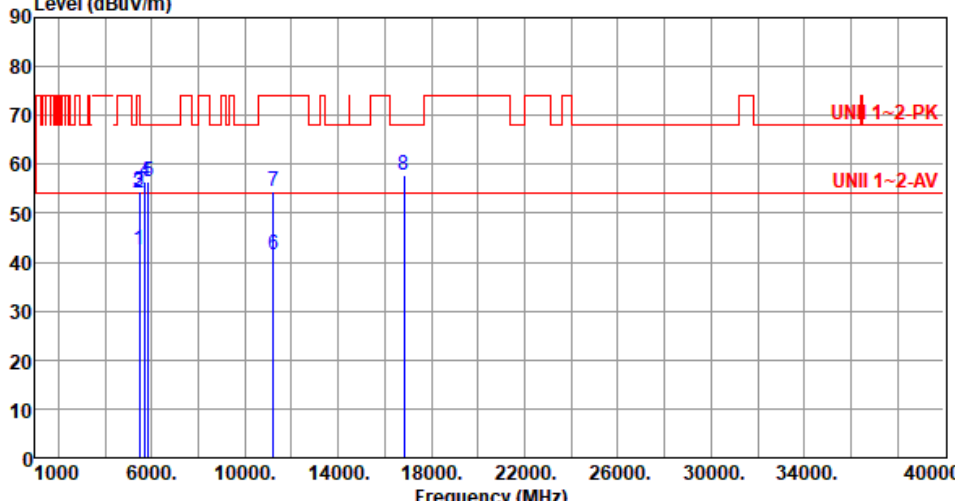

Modulation	ax HE80	Test Freq. (MHz)	5610																																																																																										
Polarization	Vertical																																																																																												
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>42.15</td><td>0.33</td><td>Average</td><td>100</td><td>246</td></tr><tr><td>2</td><td>5460.00</td><td>54.21</td><td>74.00</td><td>-19.79</td><td>53.88</td><td>0.33</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>3</td><td>5470.00</td><td>54.40</td><td>68.20</td><td>-13.80</td><td>54.04</td><td>0.36</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>4</td><td>5725.00</td><td>56.57</td><td>68.20</td><td>-11.63</td><td>55.79</td><td>0.78</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>5</td><td>5856.00</td><td>56.58</td><td>68.20</td><td>-11.62</td><td>55.65</td><td>0.93</td><td>Peak</td><td>100</td><td>246</td></tr><tr><td>6</td><td>11220.00</td><td>41.41</td><td>54.00</td><td>-12.59</td><td>33.21</td><td>8.20</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>7</td><td>11220.00</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>46.13</td><td>8.20</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>8</td><td>16830.00</td><td>57.73</td><td>68.20</td><td>-10.47</td><td>51.07</td><td>6.66</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.48	54.00	-11.52	42.15	0.33	Average	100	246	2	5460.00	54.21	74.00	-19.79	53.88	0.33	Peak	100	246	3	5470.00	54.40	68.20	-13.80	54.04	0.36	Peak	100	246	4	5725.00	56.57	68.20	-11.63	55.79	0.78	Peak	100	246	5	5856.00	56.58	68.20	-11.62	55.65	0.93	Peak	100	246	6	11220.00	41.41	54.00	-12.59	33.21	8.20	Average	100	60	7	11220.00	54.33	74.00	-19.67	46.13	8.20	Peak	100	60	8	16830.00	57.73	68.20	-10.47	51.07	6.66	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	42.48	54.00	-11.52	42.15	0.33	Average	100	246																																																																																				
2	5460.00	54.21	74.00	-19.79	53.88	0.33	Peak	100	246																																																																																				
3	5470.00	54.40	68.20	-13.80	54.04	0.36	Peak	100	246																																																																																				
4	5725.00	56.57	68.20	-11.63	55.79	0.78	Peak	100	246																																																																																				
5	5856.00	56.58	68.20	-11.62	55.65	0.93	Peak	100	246																																																																																				
6	11220.00	41.41	54.00	-12.59	33.21	8.20	Average	100	60																																																																																				
7	11220.00	54.33	74.00	-19.67	46.13	8.20	Peak	100	60																																																																																				
8	16830.00	57.73	68.20	-10.47	51.07	6.66	Peak	100	20																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	ax HE80		Test Freq. (MHz)		5690				
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):65									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	5850.00	57.10	68.20	-11.10	56.22	0.88	Peak	231	180
2	5856.00	59.69	68.20	-8.51	58.76	0.93	Peak	231	180
3	11380.00	41.59	54.00	-12.41	33.46	8.13	Average	100	188
4	11380.00	54.52	74.00	-19.48	46.39	8.13	Peak	100	188
5	17070.00	57.71	68.20	-10.49	51.46	6.25	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).




Modulation	ax HE80	Test Freq. (MHz)	5690																																																												
Polarization	Vertical																																																														
Test By :Roger Lu Temperature(°C):23 Humidity(%):65																																																															
Level (dBuV/m) UNI 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5850.00</td><td>55.68</td><td>68.20</td><td>-12.52</td><td>54.80</td><td>0.88</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>2</td><td>5856.00</td><td>56.21</td><td>68.20</td><td>-11.99</td><td>55.28</td><td>0.93</td><td>Peak</td><td>100</td><td>248</td></tr><tr><td>3</td><td>11380.00</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>33.22</td><td>8.13</td><td>Average</td><td>100</td><td>90</td></tr><tr><td>4</td><td>11380.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>46.22</td><td>8.13</td><td>Peak</td><td>100</td><td>90</td></tr><tr><td>5</td><td>17070.00</td><td>57.48</td><td>68.20</td><td>-10.72</td><td>51.23</td><td>6.25</td><td>Peak</td><td>100</td><td>40</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5850.00	55.68	68.20	-12.52	54.80	0.88	Peak	100	248	2	5856.00	56.21	68.20	-11.99	55.28	0.93	Peak	100	248	3	11380.00	41.35	54.00	-12.65	33.22	8.13	Average	100	90	4	11380.00	54.35	74.00	-19.65	46.22	8.13	Peak	100	90	5	17070.00	57.48	68.20	-10.72	51.23	6.25	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5850.00	55.68	68.20	-12.52	54.80	0.88	Peak	100	248																																																						
2	5856.00	56.21	68.20	-11.99	55.28	0.93	Peak	100	248																																																						
3	11380.00	41.35	54.00	-12.65	33.22	8.13	Average	100	90																																																						
4	11380.00	54.35	74.00	-19.65	46.22	8.13	Peak	100	90																																																						
5	17070.00	57.48	68.20	-10.72	51.23	6.25	Peak	100	40																																																						



Modulation	ax HE80	Test Freq. (MHz)	5775																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																																																											
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>67.06</td><td>68.20</td><td>-1.14</td><td>66.58</td><td>0.48</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>2</td><td>5700.00</td><td>75.66</td><td>105.20</td><td>-29.54</td><td>74.95</td><td>0.71</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>3</td><td>5720.00</td><td>75.85</td><td>110.80</td><td>-34.95</td><td>75.09</td><td>0.76</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>4</td><td>5725.00</td><td>75.92</td><td>122.20</td><td>-46.28</td><td>75.14</td><td>0.78</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>5</td><td>5850.00</td><td>75.60</td><td>122.20</td><td>-46.60</td><td>74.72</td><td>0.88</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>6</td><td>5855.00</td><td>73.56</td><td>110.80</td><td>-37.24</td><td>72.64</td><td>0.92</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>7</td><td>5875.00</td><td>73.41</td><td>105.20</td><td>-31.79</td><td>72.37</td><td>1.04</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>8</td><td>5925.00</td><td>65.09</td><td>68.20</td><td>-3.11</td><td>63.88</td><td>1.21</td><td>Peak</td><td>241</td><td>181</td></tr><tr><td>9</td><td>11550.00</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>33.41</td><td>8.49</td><td>Average</td><td>100</td><td>120</td></tr><tr><td>10</td><td>11550.00</td><td>54.89</td><td>74.00</td><td>-19.11</td><td>46.40</td><td>8.49</td><td>Peak</td><td>100</td><td>120</td></tr><tr><td>11</td><td>17325.00</td><td>57.34</td><td>68.20</td><td>-10.86</td><td>51.29</td><td>6.05</td><td>Peak</td><td>100</td><td>60</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	67.06	68.20	-1.14	66.58	0.48	Peak	241	181	2	5700.00	75.66	105.20	-29.54	74.95	0.71	Peak	241	181	3	5720.00	75.85	110.80	-34.95	75.09	0.76	Peak	241	181	4	5725.00	75.92	122.20	-46.28	75.14	0.78	Peak	241	181	5	5850.00	75.60	122.20	-46.60	74.72	0.88	Peak	241	181	6	5855.00	73.56	110.80	-37.24	72.64	0.92	Peak	241	181	7	5875.00	73.41	105.20	-31.79	72.37	1.04	Peak	241	181	8	5925.00	65.09	68.20	-3.11	63.88	1.21	Peak	241	181	9	11550.00	41.90	54.00	-12.10	33.41	8.49	Average	100	120	10	11550.00	54.89	74.00	-19.11	46.40	8.49	Peak	100	120	11	17325.00	57.34	68.20	-10.86	51.29	6.05	Peak	100	60
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5650.00	67.06	68.20	-1.14	66.58	0.48	Peak	241	181																																																																																																																		
2	5700.00	75.66	105.20	-29.54	74.95	0.71	Peak	241	181																																																																																																																		
3	5720.00	75.85	110.80	-34.95	75.09	0.76	Peak	241	181																																																																																																																		
4	5725.00	75.92	122.20	-46.28	75.14	0.78	Peak	241	181																																																																																																																		
5	5850.00	75.60	122.20	-46.60	74.72	0.88	Peak	241	181																																																																																																																		
6	5855.00	73.56	110.80	-37.24	72.64	0.92	Peak	241	181																																																																																																																		
7	5875.00	73.41	105.20	-31.79	72.37	1.04	Peak	241	181																																																																																																																		
8	5925.00	65.09	68.20	-3.11	63.88	1.21	Peak	241	181																																																																																																																		
9	11550.00	41.90	54.00	-12.10	33.41	8.49	Average	100	120																																																																																																																		
10	11550.00	54.89	74.00	-19.11	46.40	8.49	Peak	100	120																																																																																																																		
11	17325.00	57.34	68.20	-10.86	51.29	6.05	Peak	100	60																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																											

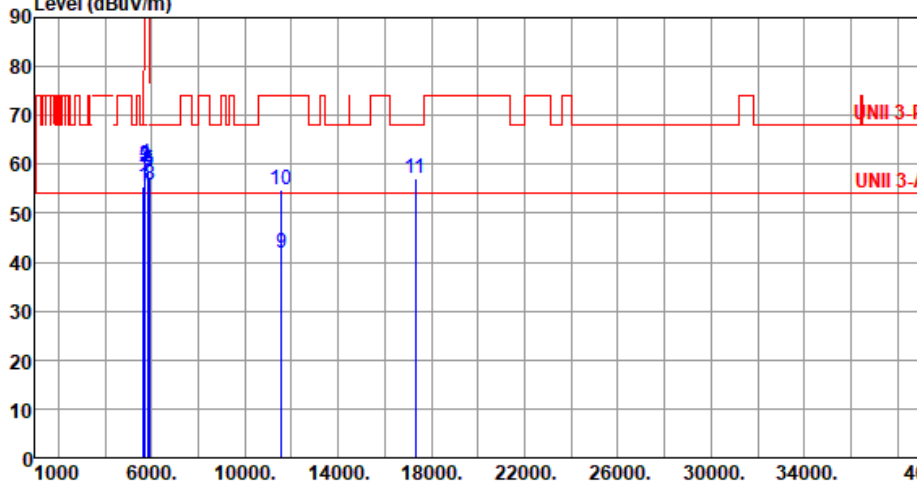

Modulation	ax HE80	Test Freq. (MHz)	5775																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Roger Lu Temperature(°C):22 Humidity(%):64																																																																																																																											
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>55.56</td><td>68.20</td><td>-12.64</td><td>55.08</td><td>0.48</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>2</td><td>5700.00</td><td>59.40</td><td>105.20</td><td>-45.80</td><td>58.69</td><td>0.71</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>3</td><td>5720.00</td><td>59.90</td><td>110.80</td><td>-50.90</td><td>59.14</td><td>0.76</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>4</td><td>5725.00</td><td>60.09</td><td>122.20</td><td>-62.11</td><td>59.31</td><td>0.78</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>5</td><td>5850.00</td><td>58.71</td><td>122.20</td><td>-63.49</td><td>57.83</td><td>0.88</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>6</td><td>5855.00</td><td>58.57</td><td>110.80</td><td>-52.23</td><td>57.65</td><td>0.92</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>7</td><td>5875.00</td><td>57.44</td><td>105.20</td><td>-47.76</td><td>56.40</td><td>1.04</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>8</td><td>5925.00</td><td>55.63</td><td>68.20</td><td>-12.57</td><td>54.42</td><td>1.21</td><td>Peak</td><td>102</td><td>183</td></tr><tr><td>9</td><td>11550.00</td><td>41.70</td><td>54.00</td><td>-12.30</td><td>33.21</td><td>8.49</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>10</td><td>11550.00</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>46.17</td><td>8.49</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>11</td><td>17325.00</td><td>57.08</td><td>68.20</td><td>-11.12</td><td>51.03</td><td>6.05</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	55.56	68.20	-12.64	55.08	0.48	Peak	102	183	2	5700.00	59.40	105.20	-45.80	58.69	0.71	Peak	102	183	3	5720.00	59.90	110.80	-50.90	59.14	0.76	Peak	102	183	4	5725.00	60.09	122.20	-62.11	59.31	0.78	Peak	102	183	5	5850.00	58.71	122.20	-63.49	57.83	0.88	Peak	102	183	6	5855.00	58.57	110.80	-52.23	57.65	0.92	Peak	102	183	7	5875.00	57.44	105.20	-47.76	56.40	1.04	Peak	102	183	8	5925.00	55.63	68.20	-12.57	54.42	1.21	Peak	102	183	9	11550.00	41.70	54.00	-12.30	33.21	8.49	Average	100	60	10	11550.00	54.66	74.00	-19.34	46.17	8.49	Peak	100	60	11	17325.00	57.08	68.20	-11.12	51.03	6.05	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5650.00	55.56	68.20	-12.64	55.08	0.48	Peak	102	183																																																																																																																		
2	5700.00	59.40	105.20	-45.80	58.69	0.71	Peak	102	183																																																																																																																		
3	5720.00	59.90	110.80	-50.90	59.14	0.76	Peak	102	183																																																																																																																		
4	5725.00	60.09	122.20	-62.11	59.31	0.78	Peak	102	183																																																																																																																		
5	5850.00	58.71	122.20	-63.49	57.83	0.88	Peak	102	183																																																																																																																		
6	5855.00	58.57	110.80	-52.23	57.65	0.92	Peak	102	183																																																																																																																		
7	5875.00	57.44	105.20	-47.76	56.40	1.04	Peak	102	183																																																																																																																		
8	5925.00	55.63	68.20	-12.57	54.42	1.21	Peak	102	183																																																																																																																		
9	11550.00	41.70	54.00	-12.30	33.21	8.49	Average	100	60																																																																																																																		
10	11550.00	54.66	74.00	-19.34	46.17	8.49	Peak	100	60																																																																																																																		
11	17325.00	57.08	68.20	-11.12	51.03	6.05	Peak	100	40																																																																																																																		




Modulation Mode	ax HE40	Test Freq. (MHz)	5310
Power Phase	Line		

Test by : Brad Wu

Temperature: 22°C

Humidity: 63%

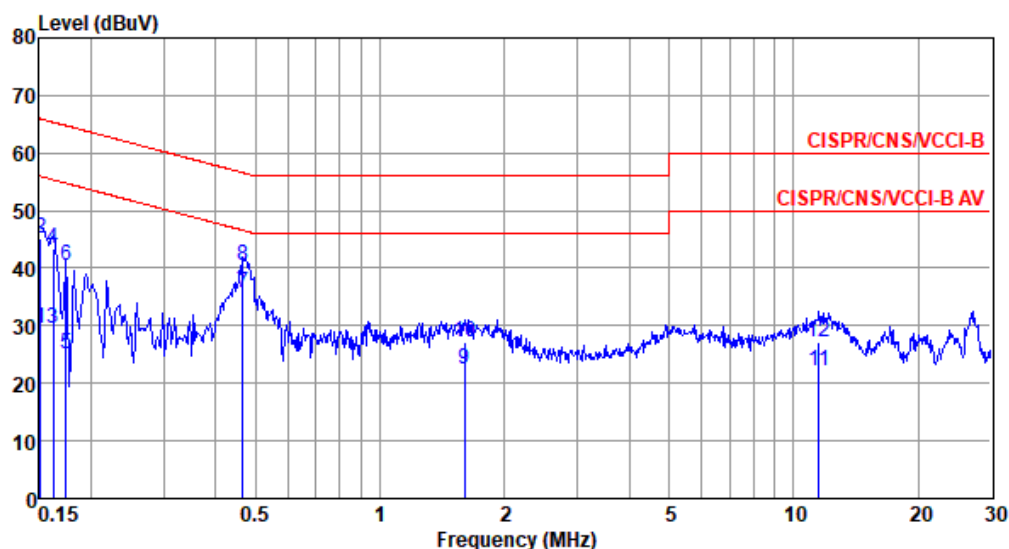

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.151	29.50	55.96	-26.46	19.56	9.65	0.08	0.21	Average
2	0.151	45.21	65.96	-20.75	35.27	9.65	0.08	0.21	QP
3	0.162	29.61	55.34	-25.73	19.66	9.65	0.08	0.22	Average
4	0.162	43.48	65.34	-21.86	33.53	9.65	0.08	0.22	QP
5	0.174	25.12	54.77	-29.65	15.15	9.65	0.08	0.24	Average
6	0.174	40.49	64.77	-24.28	30.52	9.65	0.08	0.24	QP
7*	0.466	35.66	46.58	-10.92	25.60	9.64	0.09	0.33	Average
8	0.466	40.52	56.58	-16.06	30.46	9.64	0.09	0.33	QP
9	1.602	22.44	46.00	-23.56	12.21	9.66	0.15	0.42	Average
10	1.602	27.29	56.00	-28.71	17.06	9.66	0.15	0.42	QP
11	11.498	22.23	50.00	-27.77	11.67	9.70	0.35	0.51	Average
12	11.498	27.12	60.00	-32.88	16.56	9.70	0.35	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	ax HE40	Test Freq. (MHz)	5310
Power Phase	Neutral		

Test by : Brad Wu

Temperature: 22°C

Humidity: 63%

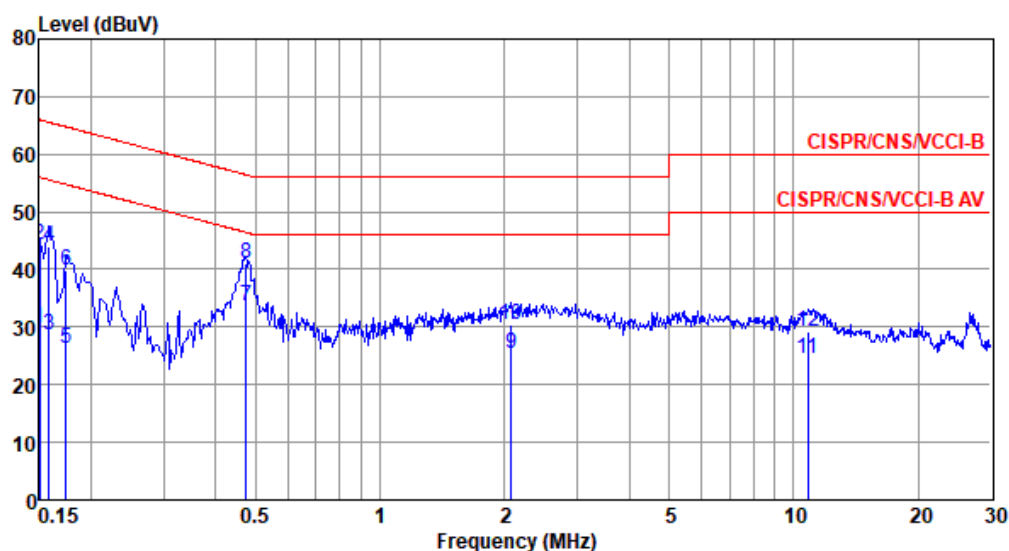

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	29.71	56.00	-26.29	19.83	9.66	0.08	0.14	Average
2	0.150	44.28	66.00	-21.72	34.40	9.66	0.08	0.14	QP
3	0.158	28.71	55.56	-26.85	18.82	9.66	0.08	0.15	Average
4	0.158	44.01	65.56	-21.55	34.12	9.66	0.08	0.15	QP
5	0.174	26.17	54.77	-28.60	16.27	9.65	0.08	0.17	Average
6	0.174	39.80	64.77	-24.97	29.90	9.65	0.08	0.17	QP
7*	0.474	33.74	46.45	-12.71	23.73	9.64	0.09	0.28	Average
8	0.474	41.04	56.45	-15.41	31.03	9.64	0.09	0.28	QP
9	2.077	25.43	46.00	-20.57	15.18	9.66	0.17	0.42	Average
10	2.077	30.50	56.00	-25.50	20.25	9.66	0.17	0.42	QP
11	10.847	24.47	50.00	-25.53	13.84	9.75	0.33	0.55	Average
12	10.847	29.18	60.00	-30.82	18.55	9.75	0.33	0.55	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	ax HE40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Brad Wu

Temperature: 22°C

Humidity: 63%

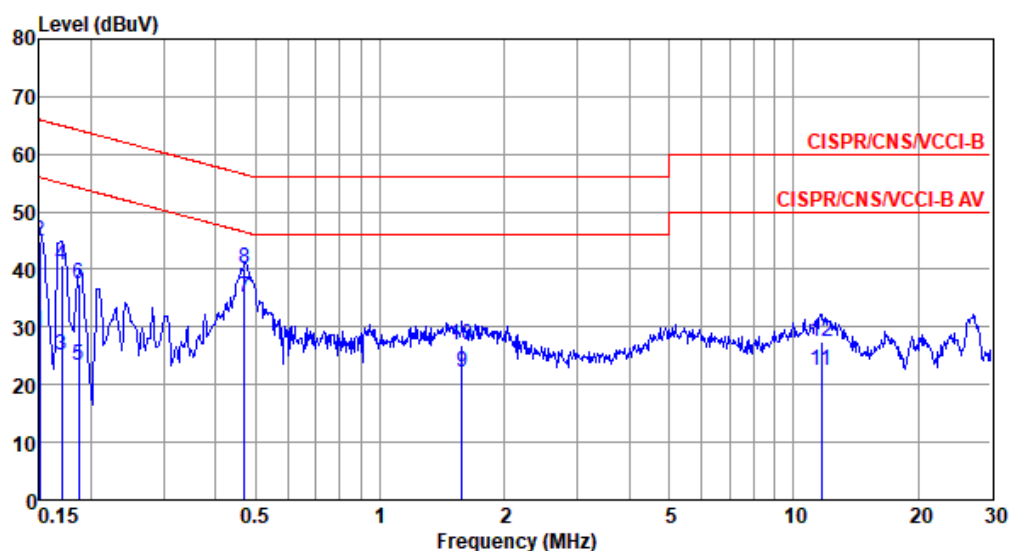

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	29.14	56.00	-26.86	19.20	9.65	0.08	0.21	Average
2	0.150	44.97	66.00	-21.03	35.03	9.65	0.08	0.21	QP
3	0.170	25.01	54.94	-29.93	15.05	9.65	0.08	0.23	Average
4	0.170	40.63	64.94	-24.31	30.67	9.65	0.08	0.23	QP
5	0.186	23.44	54.20	-30.76	13.46	9.65	0.08	0.25	Average
6	0.186	37.57	64.20	-26.63	27.59	9.65	0.08	0.25	QP
7*	0.471	35.05	46.49	-11.44	24.99	9.64	0.09	0.33	Average
8	0.471	40.09	56.49	-16.40	30.03	9.64	0.09	0.33	QP
9	1.577	22.04	46.00	-23.96	11.81	9.66	0.15	0.42	Average
10	1.577	26.92	56.00	-29.08	16.69	9.66	0.15	0.42	QP
11	11.683	22.33	50.00	-27.67	11.77	9.70	0.35	0.51	Average
12	11.683	27.41	60.00	-32.59	16.85	9.70	0.35	0.51	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	ax HE40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Brad Wu

Temperature: 22°C

Humidity: 63%

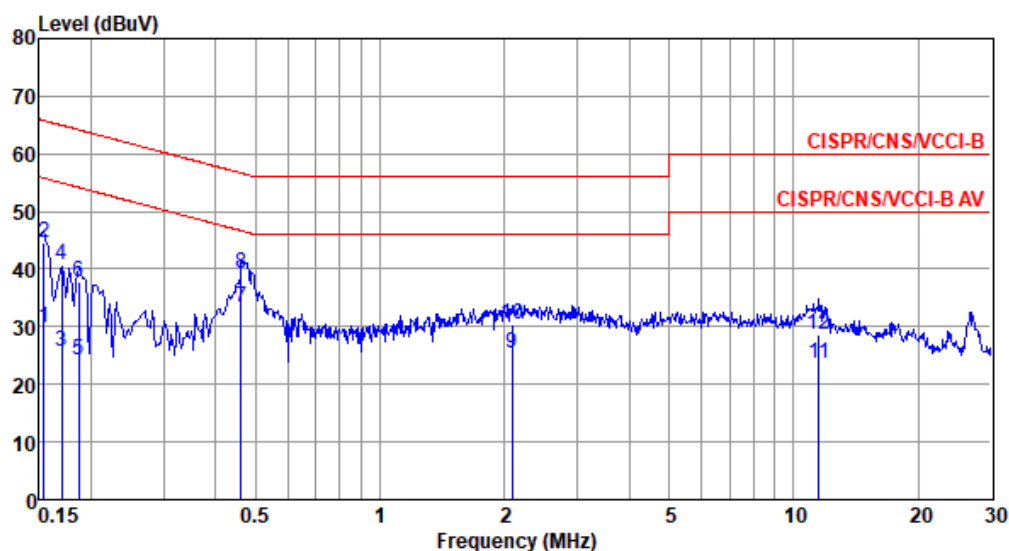

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.154	29.71	55.78	-26.07	19.82	9.66	0.08	0.15	Average
2	0.154	44.59	65.78	-21.19	34.70	9.66	0.08	0.15	QP
3	0.170	25.58	54.94	-29.36	15.67	9.66	0.08	0.17	Average
4	0.170	40.66	64.94	-24.28	30.75	9.66	0.08	0.17	QP
5	0.186	24.27	54.20	-29.93	14.35	9.65	0.08	0.19	Average
6	0.186	37.75	64.20	-26.45	27.83	9.65	0.08	0.19	QP
7*	0.461	33.27	46.67	-13.40	23.27	9.64	0.09	0.27	Average
8	0.461	39.36	56.67	-17.31	29.36	9.64	0.09	0.27	QP
9	2.088	25.45	46.00	-20.55	15.20	9.66	0.17	0.42	Average
10	2.088	30.28	56.00	-25.72	20.03	9.66	0.17	0.42	QP
11	11.498	23.75	50.00	-26.25	13.09	9.76	0.35	0.55	Average
12	11.498	28.75	60.00	-31.25	18.09	9.76	0.35	0.55	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).