



Model: **ALLY-R1900**

Designed in the USA by Amped Wireless.
Assembled in China.

ALLY - Whole Home Smart Wi-Fi Router

S/N:

MAC (2.4GHz):

MAC (5GHz):

MAC (LAN):

WPS Pin:

Factory Default Settings:

To reset to factory default settings, hold down the reset button for 10 seconds.

Login Settings

Web Menu: <http://setup.ampedwireless.com>

IP Address: 192.168.3.1

Wi-Fi Settings

SSID:

Power Rating: DC 12V, 2.5A

For product support, installation guides, software updates and frequently asked questions, please visit: <http://www.ampedwireless.com/support/>



FCC ID: ZTT-ALLYR1900
IC: 10233A-ALLYR1900
CAN ICES-3(B) / NMB-3(B)



Model: **ALLY-R1900K**

Designed in the USA by Amped Wireless.
Assembled in China.

ALLY - Whole Home Smart Wi-Fi Router

S/N:

MAC (5GHz):

MAC (2.4GHz):

MAC (LAN):

WPS Pin:

Factory Default Settings:

To reset to factory default settings, hold down the reset button for 10 seconds.

Login Settings

Web Menu: <http://setup.ampedwireless.com>

IP Address: 192.168.3.1

Wi-Fi Settings

SSID:

Power Rating: DC 12V, 2.5A

For product support, installation guides, software updates and frequently asked questions, please visit: <http://www.ampedwireless.com/support/>



FCC ID: ZTT-ALLYR1900
IC: 10233A-ALLYR1900
CAN ICES-3(B) / NMB-3(B)



Model: **ALLY-R2100K**

Designed in the USA by Amped Wireless.
Assembled in China.

ALLY 2100 - Whole Home Smart Wi-Fi Router

S/N:

MAC (5GHz):

MAC (2.4GHz):

MAC (LAN):

WPS Pin:

Factory Default Settings:

To reset to factory default settings, hold down the reset button for 10 seconds.

Login Settings

Web Menu: <http://setup.ampedwireless.com>

IP Address: 192.168.3.1

Wi-Fi Settings

SSID:

Power Rating: DC 12V, 2.5A


For product support, installation guides, software updates and frequently asked questions, please visit: <http://www.ampedwireless.com/support/>



FCC ID: ZTT-ALLYR1900

Label Location:

<Bottom Cover>

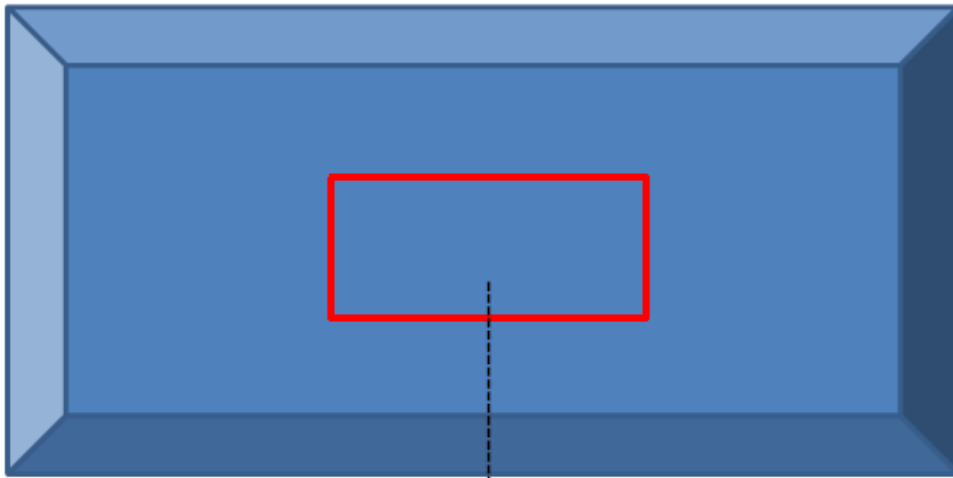

Label Here