



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001288
Quote Number: QRTL01-324
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

CERTIFICATE OF COMPLIANCE FCC PART 90 CERTIFICATION & INDUSTRY CANADA CERTIFICATION

Test Lab: Rhein Tech Laboratories, Inc. 360 Herndon Parkway Suite 1400 Herndon, VA 20170 Phone: 703-689-0368 Fax: 703-689-2056 Web Site: www.rheintech.com	Applicant Information Topaz3, LLC 10828 NW Air World Drive Kansas City, MO 64153 USA
---	---

FCC Classification:	☐ TBC – Licensed Broadcast Station Transmitter ☐ TBF – Licensed Broadcast Transmitter Held to Face ☐ TBT – Licensed Broadcast Transmitter Worn on Body ☐ TNB – Licensed Non-Broadcast Station Transmitter ☐ TNE – Licensed Non-Broadcast Transmitter Held to Ear ☒ TNF – Licensed Non-Broadcast Transmitter Held to Face ☐ TNT – Licensed Non-Broadcast Transmitter Worn on Body
FCC Rule Part(s):	Part 90: Private Land Mobile Radio Services
Industry Canada Standard:	RSS-119: Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
FRN Number:	0005824115
FCC ID:	O7KPL5161
Model(s):	PL5161 Portable Radio
Date of Test Report:	December 19, 2001

Frequency Range	Output Power (W) Conducted	Freq. Tolerance (ppm)	Emission Designator
148-174 MHz	5.3	3.8	16K0F3E
148-174 MHz	1.2	3.8	16K0F3E
148-174 MHz	5.3	3.8	11K0F3E
148-174 MHz	1.2	3.8	11K0F3E

We, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards.

Furthermore, there was no deviation from, additions to or exclusions from the FCC Part 2, FCC Part 15, FCC Part 90, Industry Canada RSS-119, ANSI C63.4, ANSI/TIA/EIA603 and ANSI/TIA/EIA 603-1.

Signature: 

Date: December 19, 2001

Typed/Printed Name: Bruno Clavier

Position: Vice President of Operations
(NVLAP Signatory)



Accredited by the National Voluntary Accreditation Program for the specific scope of accreditation under Lab Code 200061-0.

Note: This report may not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.



TABLE OF CONTENTS

1	GENERAL INFORMATION.....	5
1.1	SCOPE.....	5
1.2	TEST FACILITY.....	5
1.3	RELATED SUBMITAL(S)/GRANT(S).....	5
2	EQUIPMENT INFORMATION.....	6
2.1	APPLICANT AND EQUIPMENT INFORMATION.....	6
2.2	JUSTIFICATION.....	6
2.3	EXERCISING THE EUT.....	6
2.4	TEST SYSTEM DETAILS.....	7
2.5	CONFIGURATION OF TESTED SYSTEM.....	7
3	NECESSARY BANDWIDTH AND EMISSION BANDWIDTH - §2.202.....	8
4	DC VOLTAGE AND CURRENT AT FINAL AMPLIFIER STAGE - §2.1033 (C)(8).....	9
5	RF POWER OUTPUT - §2.1046.....	10
5.1	TEST PROCEDURE.....	10
5.2	TEST DATA.....	10
5.3	RF POWER OUTPUT TEST EQUIPMENT.....	10
5.4	EFFECTIVE RADIATED POWER OUTPUT TEST DATA - §2.1046.....	11
6	MODULATION CHARACTERISTICS - §2.1047.....	12
6.1	AUDIO FREQUENCY RESPONSE - §2.1047(A) TEST PROCEDURE.....	12
6.2	MODULATION CHARACTERISTICS TEST EQUIPMENT.....	12
6.3	MODULATION CHARACTERISTICS TEST DATA.....	13
6.4	AUDIO LOW PASS FILTER - §2.1047(A) TEST PROCEDURE.....	14
6.5	MODULATION LIMITING - §2.1047(B) TEST PROCEDURE.....	15
7	OCCUPIED BANDWIDTH - §2.1049.....	23
7.1	OCCUPIED BANDWIDTH - §2.1049 TEST PROCEDURE.....	23
7.2	OCCUPIED BANDWIDTH TEST EQUIPMENT.....	23
7.3	OCCUPIED BANDWIDTH TEST DATA.....	24
8	SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051.....	28
8.1	SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 TEST PROCEDURE.....	28
8.2	SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT.....	28
8.3	SPURIOUS EMISSIONS TEST DATA.....	29
9	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053.....	32
9.1	RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053.....	32
9.2	RADIATED SPURIOUS TEST EQUIPMENT.....	32
9.3	FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053.....	33
9.3.1	CFR 47 PART 90.210 REQUIREMENTS.....	33
9.4	FIELD STRENGTH OF SPURIOUS RADIATION TEST EQUIPMENT.....	33
10	FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055.....	35
10.1	FREQUENCY STABILITY TEST PROCEDURE.....	35
10.2	FREQUENCY STABILITY/TEMPERATURE VARIATION.....	35
10.3	FREQUENCY STABILITY TEST EQUIPMENT.....	35
10.4	FREQUENCY STABILITY TEST DATA - §2.1055.....	36
11	SPECTRAL EFFICIENCY REQUIREMENTS - §90.203(J3).....	38
12	TRANSIENT FREQUENCY BEHAVIOR - §90.214.....	38
12.1	TRANSIENT FREQUENCY BEHAVIOR TEST EQUIPMENT.....	38
12.2	TRANSIENT FREQUENCY BEHAVIOR TEST DATA.....	38
12.2.1	LIMITS.....	38
12.2.2	MAXIMUM FREQUENCY DIFFERENCE BETWEEN TIME T2 AND T3: CALCULATION:.....	39



TABLE INDEX

TABLE 2-1:	EQUIPMENT UNDER TEST (EUT).....	7
TABLE 2-2:	EXTERNAL COMPONENTS IN TEST CONFIGURATION.....	7
TABLE 4-1:	DC VOLTAGE AND CURRENT AT FINAL AMPLIFIER STAGE	9
TABLE 5-1:	RF POWER OUTPUT TEST EQUIPMENT	10
TABLE 5-2:	POWER OUTPUT DATA - \$2.1046 (HIGH POWER)	11
TABLE 5-3:	RF POWER OUTPUT (RATED POWER)	11
TABLE 6-1:	MODULATION CHARACTERISTICS TEST EQUIPMENT	12
TABLE 7-1:	OCCUPIED BANDWIDTH TEST EQUIPMENT	23
TABLE 8-1:	SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT.....	28
TABLE 8-2:	SPURIOUS EMISSIONS – {CHANNEL 1 (148.025 MHZ); 25K CH SP; 53 W}; CONDUCTED POWER = 5.3W.....	29
TABLE 8-3:	SPURIOUS EMISSIONS {CHANNEL 3 (155.025 MHZ); 25.K CH SP; 5.3W}; CONDUCTED POWER = 5.3W.....	30
TABLE 8-4:	SPURIOUS EMISSIONS {CHANNEL 4 (173.980 MHZ); 12.5K CH SP; 53 W}; CONDUCTED POWER = 5.3W.....	31
TABLE 9-1:	RADIATED SPURIOUS TEST EQUIPMENT.....	32
TABLE 9-2:	FIELD STRENGTH OF SPURIOUS RADIATION {(CHANNEL 1 AT 148.025MHZ, 5 W) SUBSTITUTION METHOD}; CONDUCTED POWER = 5.3W.....	34
TABLE 10-1:	FREQUENCY STABILITY TEST EQUIPMENT	35
TABLE 10-2:	TEMPERATURE FREQUENCY STABILITY.....	36
TABLE 10-3:	FREQUENCY STABILITY/VOLTAGE VARIATION.....	37
TABLE 11-1:	TRANSIENT FREQUENCY BEHAVIOR TEST EQUIPMENT.....	38

PLOT INDEX

PLOT 6-1:	MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE {25 KHZ CHANNEL BANDWIDTH}.....	13
PLOT 6-2:	MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER	14
PLOT 6-3:	MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND NEGATIVE PEAK	15
PLOT 6-4:	MODULATION LIMITING: WIDE BAND POSITIVE PEAK	16
PLOT 6-5:	MODULATION LIMITING: NARROW BAND NEGATIVE PEAK	17
PLOT 6-6:	MODULATION LIMITING: NARROW BAND POSITIVE PEAK	18
PLOT 6-7:	MODULATION CHARACTERISTICS OF CTCSS {WIDE BAND NEGATIVE PEAK}.....	19
PLOT 6-8:	MODULATION CHARACTERISTICS OF CTCSS {WIDE BAND NEGATIVE PEAK}.....	20
PLOT 6-9:	MODULATION CHARACTERISTICS OF CTCSS {NARROW BAND NEGATIVE PEAK}.....	21
PLOT 6-10:	MODULATION CHARACTERISTICS OF CTCSS {NARROW BAND NEGATIVE PEAK}.....	22
PLOT 7-1:	OCCUPIED BANDWIDTH – 25 KHZ CHANNEL BANDWIDTH: MASK B (AUDIO MODULATION: 2,500 HZ).....	24
PLOT 7-2:	OCCUPIED BANDWIDTH –12.5 KHZ CHANNEL BANDWIDTH: MASK D (AUDIO MODULATION: 2,500 HZ).....	25
PLOT 7-3:	OCCUPIED BANDWIDTH –25 KHZ CTCSS CHANNEL BANDWIDTH: MASK B (AUDIO MODULATION: 2,500 HZ).....	26
PLOT 7-4:	OCCUPIED BANDWIDTH –12.5 KHZ CTCSS CHANNEL BANDWIDTH: MASK D (AUDIO MODULATION: 2,500 HZ).....	27
PLOT 10-1:	TEMPERATURE FREQUENCY STABILITY.....	36
PLOT 10-2:	FREQUENCY STABILITY/VOLTAGE VARIATION.....	37
PLOT 11-1:	TRANSIENT FREQUENCY BEHAVIOR {CARRIER OFF TIME} CHANNEL 5: NB (12.5KHZ) 1 W RATED	39
PLOT 11-2:	TRANSIENT FREQUENCY BEHAVIOR {CARRIER OFF TIME} CHANNEL 1: WB(25KHZ); 5 W RATED	40
PLOT 11-3:	TRANSIENT FREQUENCY BEHAVIOR {CARRIER ON TIME} CHANNEL 5: NB(12.5KHZ) 1 W RATED.....	41
PLOT 11-4:	TRANSIENT FREQUENCY BEHAVIOR {CARRIER ON TIME}CHANNEL 1 : WB (25KHZ) 5 W RATED.....	42



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

APPENDIX INDEX

APPENDIX A:	RF EXPOSURE.....	43
APPENDIX B:	AGENCY AUTHORIZATION LETTER.....	44
APPENDIX C:	CONFIDENTIALITY REQUEST LETTER.....	45
APPENDIX D:	ATTESTATION LETTER(S).....	46
APPENDIX E:	PRODUCT DESCRIPTION.....	47
APPENDIX F:	LABEL AND LABEL LOCATION.....	48
APPENDIX G:	BILL OF MATERIAL (PARTS LIST).....	49
APPENDIX H:	SCHEMATIC.....	50
APPENDIX I:	BLOCK DIAGRAM	51
APPENDIX J:	MANUAL	52
APPENDIX K:	TEST PHOTOGRAPHS.....	53
APPENDIX L:	EXTERNAL PHOTOGRAPHS.....	57
APPENDIX M:	INTERNAL PHOTOGRAPHS.....	62
APPENDIX N:	ADDITIONAL INFORMATION FOR CANADIAN CERTIFICATION	68

PHOTOGRAPH INDEX

PHOTOGRAPH 1:	LABEL LOCATION	48
PHOTOGRAPH 2:	RADIATED EMISSIONS FRONT VIEW.....	53
PHOTOGRAPH 3:	RADIATED EMISSIONS REAR VIEW.....	54
PHOTOGRAPH 4:	SUBSTITUTION DIPOLE ANTENNA USED FOR FREQUENCIES (30 MHZ – 1 GHZ)	55
PHOTOGRAPH 5:	SUBSTITUTION HORN ANTENNA USED FOR FREQUENCIES (1 GHZ-18 GHZ)	56
PHOTOGRAPH 6:	FRONT VIEW	57
PHOTOGRAPH 7:	LEFT SIDE VIEW	58
PHOTOGRAPH 8:	RIGHT SIDE VIEW	59
PHOTOGRAPH 9:	REAR VIEW.....	60
PHOTOGRAPH 10:	BOTTOM VIEW.....	61
PHOTOGRAPH 11:	FRONT VIEW OF PCB BOARD.....	62
PHOTOGRAPH 12:	REAR VIEW OF PCB BOARD.....	63
PHOTOGRAPH 13:	FRONT VIEW OF THE HOUSING.....	64
PHOTOGRAPH 14:	INSIDE VIEW OF HOUSING.....	65
PHOTOGRAPH 15:	FRONT VIEW OF THE CHASSIS	66
PHOTOGRAPH 16:	INSIDE VIEW OF CHASSIS	67



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

1 GENERAL INFORMATION

1.1 SCOPE

FCC Rules and Regulations CFR 47 Part 90: This part states the conditions under which radio communications systems may be licensed and used in the Public Safety, Special Emergency, Industrial, Land Transportation and Radiolocation Radio Services. These rules do not govern radio systems employed by agencies of the Federal Government.

Industry Canada RSS-119: This document sets out standards for radio transmitters and receivers for the land mobile and fixed services in bands allocated within the 24.41 MHz to 960 MHz range. The equipment is subject to licensing, pursuant to subsection 4(1) of the Radio communication Act.

All measurements contained in this application were conducted in accordance with the FCC Rules and Regulations CFR47, Industry Canada RSS-119 and ANSI/TIA/EIA603-1992/-1-1998 Land Mobile FM or PM Communications Equipment Measurement and Performance Standards. The instrumentation utilized for the measurements conforms to the ANSI C63.4 standard for EMI and Field Strength Instrumentation. Calibration checks are performed regularly on the instruments, and all accessories including high pass filter, coaxial attenuator, preamplifier and cables.

1.2 TEST FACILITY

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communication Commission to perform AC line conducted and radiated emissions testing (ANSI C63.4 1992).

1.3 RELATED SUBMITAL(S)/GRANT(S)

This is an original application for Certification.



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

2 EQUIPMENT INFORMATION

2.1 APPLICANT AND EQUIPMENT INFORMATION

Topaz3, LLC
10828 NW Air World Drive
Kansas City, MO 64153
USA

FCC Classification:	☐ TBC – Licensed Broadcast Station Transmitter ☐ TBF – Licensed Broadcast Transmitter Held to Face ☐ TBT – Licensed Broadcast Transmitter Worn on Body ☐ TNB – Licensed Non-Broadcast Station Transmitter ☐ TNE – Licensed Non-Broadcast Transmitter Held to Ear ☒ TNF – Licensed Non-Broadcast Transmitter Held to Face ☐ TNT – Licensed Non-Broadcast Transmitter Worn on Body
FCC Rule Part(s):	Part 90: Private Land Mobile Radio Services
Industry Canada Standard:	RSS-119: Land Mobile and Fixed Radio Transmitters and Receivers, 27.41 to 960 MHz
FRN Number:	0005824115
FCC ID:	O7KPL5161
Model(s):	PL5161 Portable Radio
Date of Test Report:	December 19, 2001

Frequency Range	Output Power (W) Conducted	Freq. Tolerance (ppm)	Emission Designator
148-174 MHz	5.3	3.8	16K0F3E
148-174 MHz	1.2	3.8	16K0F3E
148-174 MHz	5.3	3.8	11K0F3E
148-174 MHz	1.2	3.8	11K0F3E

2.2 JUSTIFICATION

There was no deviation from the standards mentioned in the report.

2.3 EXERCISING THE EUT

The EUT was exercised in accordance with the standards mentioned in this report.



2.4 TEST SYSTEM DETAILS

The FCC Identifiers for all equipment, plus descriptions of all cables used in the tested system are:

TABLE 2-1: EQUIPMENT UNDER TEST (EUT)

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
PORTABLE RADIO	TOPAZ3, L.L.C.	PL5161	N/A	O7KPL5161	N/A	

TABLE 2-2: EXTERNAL COMPONENTS IN TEST CONFIGURATION

PART	MANUFACTURER	MODEL	SERIAL NUMBER	FCC ID	CABLE DESCRIPTION	RTL BAR CODE
BATTERY	TOPAZ3, L.L.C.	N/A	N/A	N/A	N/A	013355
BATTERY CHARGER	TOPAZ3, L.L.C.	N/A	N/A	N/A	N/A	013355

2.5 CONFIGURATION OF TESTED SYSTEM

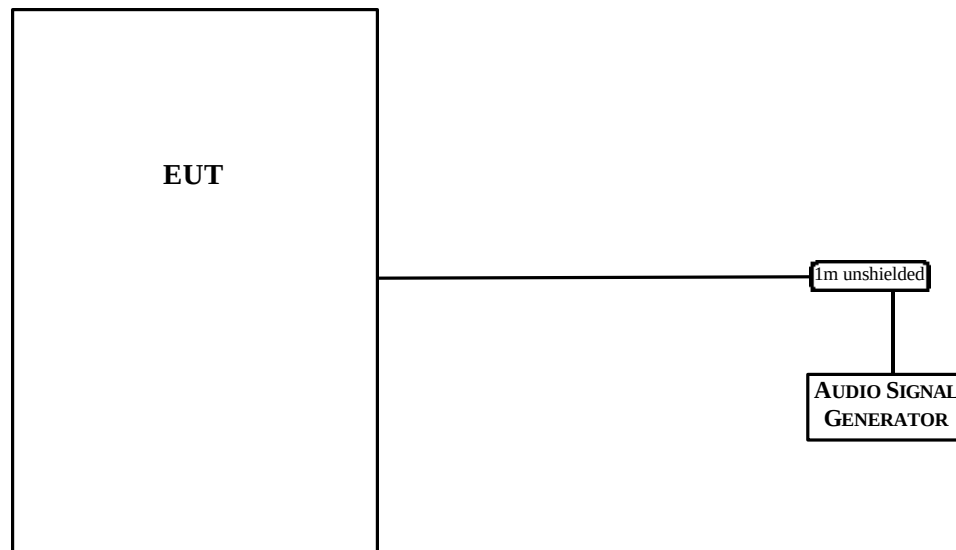


FIGURE 2-1: CONFIGURATION OF TESTED SYSTEM



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

3 NECESSARY BANDWIDTH AND EMISSION BANDWIDTH - §2.202

Type of Emission: F3E

Necessary Bandwidth and Emission Bandwidth:

12.5kHz (NB channel): $B_n = 11K0F3E$

25kHz (WB channel): $B_n = 16K0F3E$

Calculation:

Max modulation(M) in kHz: 3

Max deviation (D) in kHz: 2.5 (NB) and 5 (BB)

Constant factor (K): 1

$B_n = 2 \times M + 2 \times DK$

TEST PERSONNEL:

Rachid Sehb

Test Technician/Engineer

Signature

11/10/2001

Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

4 DC VOLTAGE AND CURRENT AT FINAL AMPLIFIER STAGE - §2.1033 (C)(8)

TABLE 4-1: DC VOLTAGE AND CURRENT AT FINAL AMPLIFIER STAGE

DC Voltage	7.17
Current	1.65

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

5 RF POWER OUTPUT - \$2.1046

5.1 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.1

The EUT was connected to a coaxial attenuator having a 50 Ω load impedance.

5.2 TEST DATA

The following channels (in MHz) were tested: 148.025, 155.025, 165.025, and 173.980
The worst-case Output Power (highest and lowest) levels are shown.

CARRIER OUTPUT POWER (UNMODULATED)

5.3 RF POWER OUTPUT TEST EQUIPMENT

TABLE 5-1: RF POWER OUTPUT TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
900770	Hewlett Packard	437B	Power Meter	2949A02966
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102
900769	Hewlett Packard	8481B	Power Sensor	2702A05059
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

5.4 EFFECTIVE RADIATED POWER OUTPUT TEST DATA - §2.1046

TABLE 5-2: POWER OUTPUT DATA - §2.1046 (HIGH POWER)

Channel	Frequency (MHz)	RF Power measured (Watt)*
1	148.025	5.3
2	155.025	5.3
3	165.025	5.3
4	173.980	5.2
5	148.025	1.1
6	155.025	1.2
7	165.025	1.2
8	173.980	1.1

* Measurement accuracy: +/- 3%

TABLE 5-3: RF POWER OUTPUT (RATED POWER)

Rated Power (W)
5.0

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

6 MODULATION CHARACTERISTICS - §2.1047

6.1 AUDIO FREQUENCY RESPONSE - §2.1047(A) TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.6

The audio frequency response is the degree of closeness to which the frequency deviation of the transmitter follows a prescribed characteristic.

The input audio level at 1000 Hz is set to produce 20% of the rated system deviation. This point is shown as the 0 dB reference level, noted DEVref.

The audio signal generator was varied from 100Hz to 5kHz with the input level held constant.

The deviation in kHz was recorded using a modulation analyzer as DEVfreq.

The response in dB relative to 1 kHz was calculated as follows:

Audio Frequency Response = 20 LOG (DEVfreq/DEVref)

6.2 MODULATION CHARACTERISTICS TEST EQUIPMENT

TABLE 6-1: MODULATION CHARACTERISTICS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

6.3 MODULATION CHARACTERISTICS TEST DATA

PLOT 6-1: MODULATION CHARACTERISTICS - AUDIO FREQUENCY RESPONSE {25 KHZ CHANNEL BANDWIDTH}

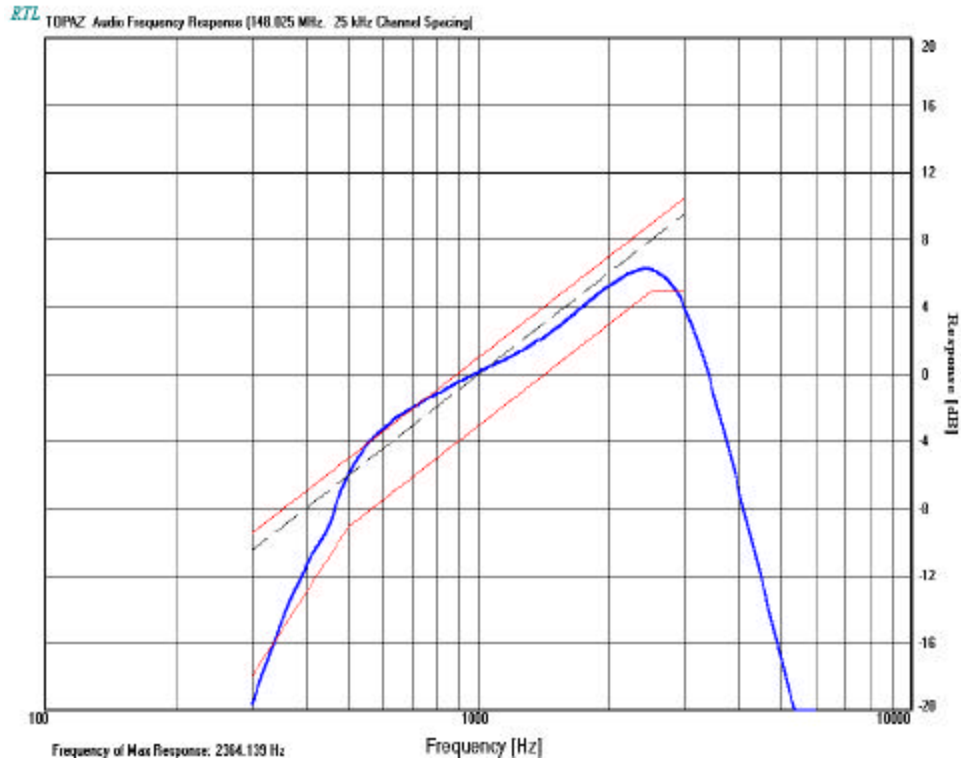

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119


Exhibit 1

6.4 AUDIO LOW PASS FILTER - §2.1047(A) TEST PROCEDURE

ANSI/TIA/EIA-603-1992, 2.2.15

The Audio Low Pass Filter Response is the frequency response of the post limiter low pass filter circuit above 3000 Hz.

PLOT 6-2: MODULATION CHARACTERISTICS – AUDIO LOW PASS FILTER

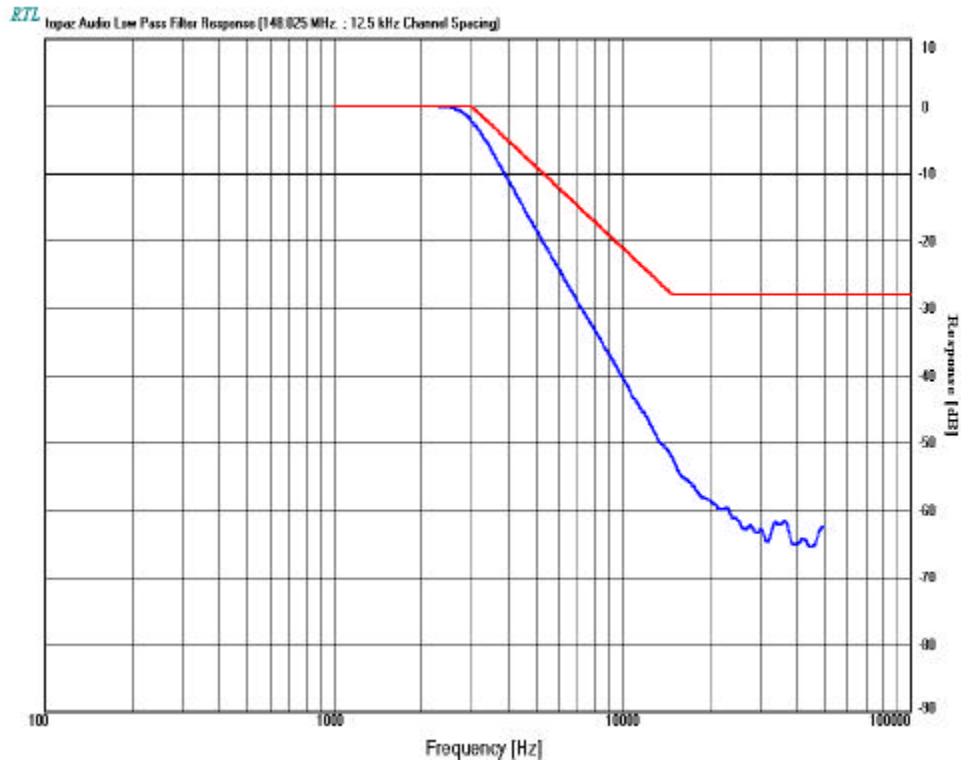

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




6.5 MODULATION LIMITING - §2.1047(B) TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.3

The transmitter is adjusted for full rated system deviation. The audio input level is adjusted for 60% of rated system deviation at 1000Hz. Using this level as a reference (0dB) the audio input level is varied from the reference to a level +20 dB above it and -20 dB under it, for modulation frequencies of 300Hz, 1,000Hz, 2,500Hz and 3,000Hz. The system deviation obtained as a function of the input level is recorded.

Both Positive and Negative Peak deviations were recorded. Test Data
The CTCSS mode has also been tested

PLOT 6-3: MODULATION CHARACTERISTICS – MODULATION LIMITING: WIDE BAND NEGATIVE PEAK

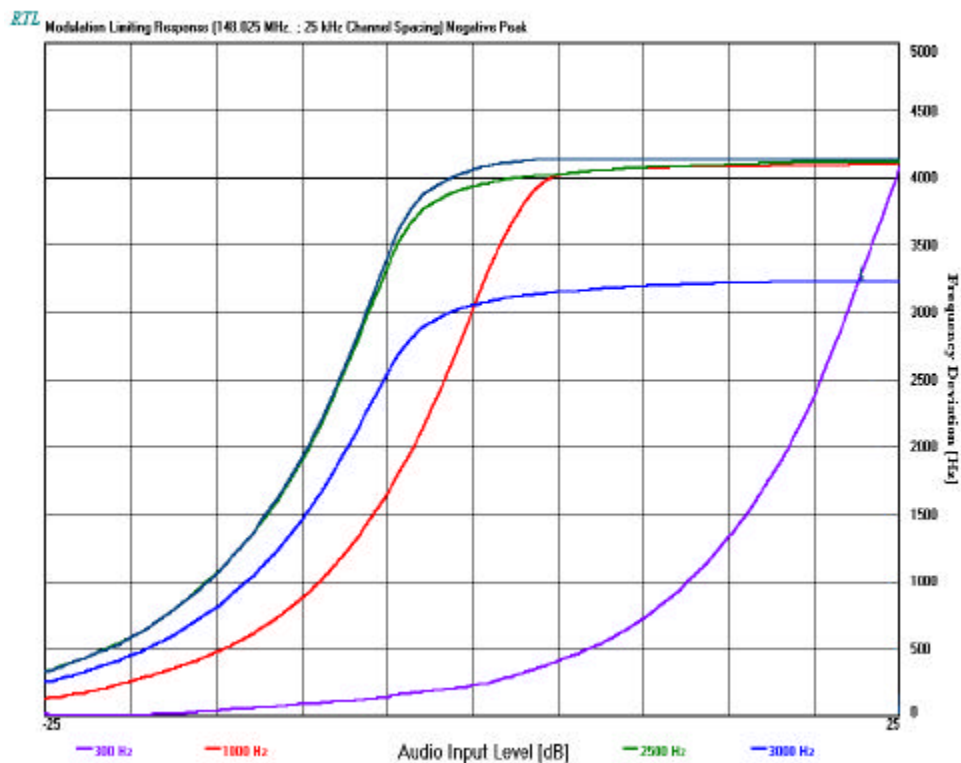

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-4: MODULATION LIMITING: WIDE BAND POSITIVE PEAK

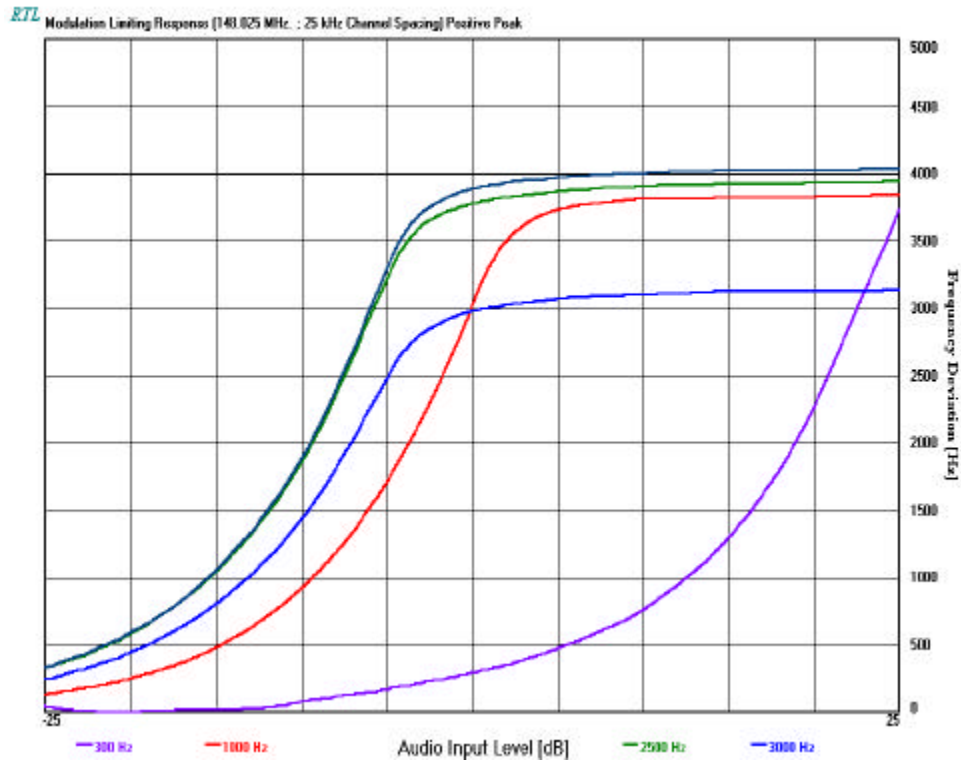

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-5: MODULATION LIMITING: NARROW BAND NEGATIVE PEAK

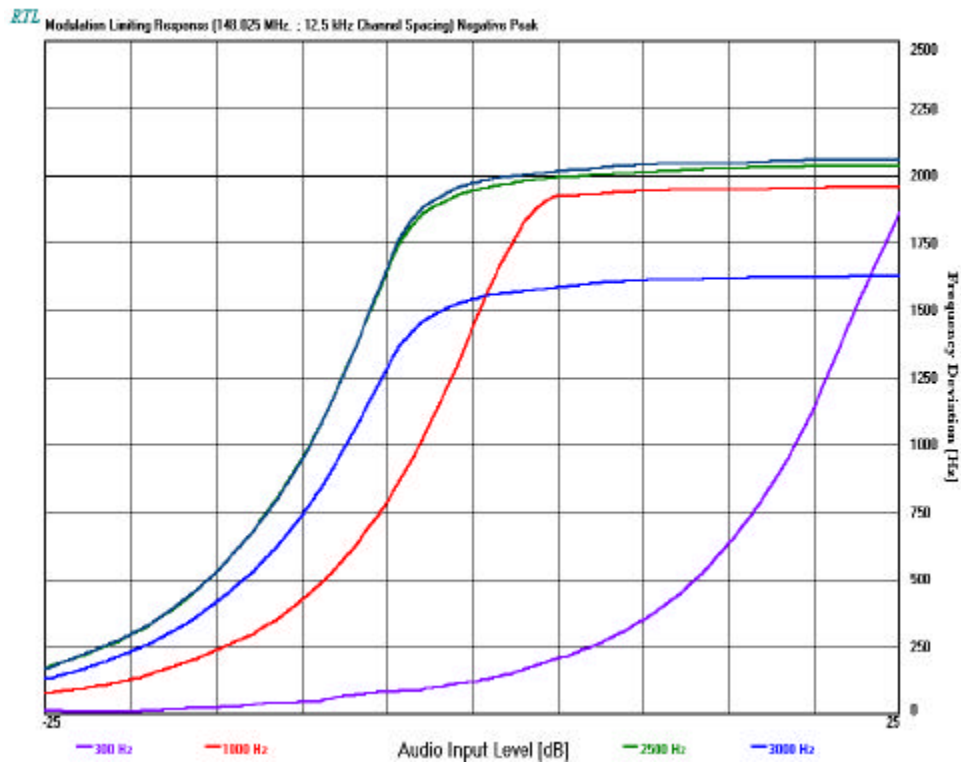

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-6: MODULATION LIMITING: NARROW BAND POSITIVE PEAK

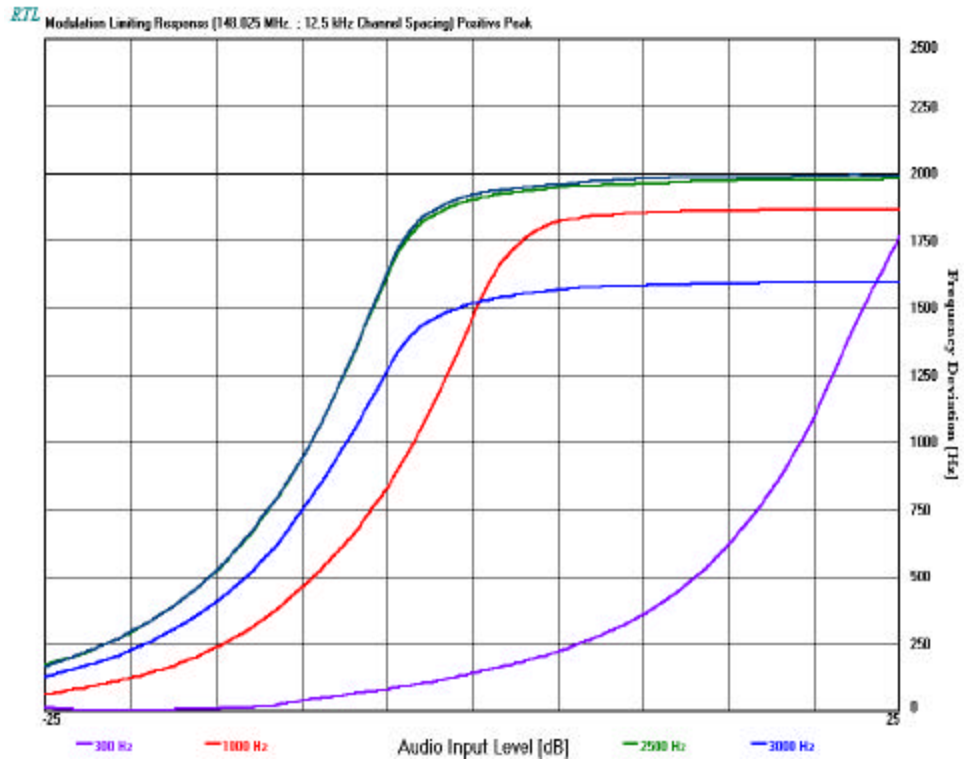

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-7: MODULATION CHARACTERISTICS OF CTCSS {WIDE BAND NEGATIVE PEAK}

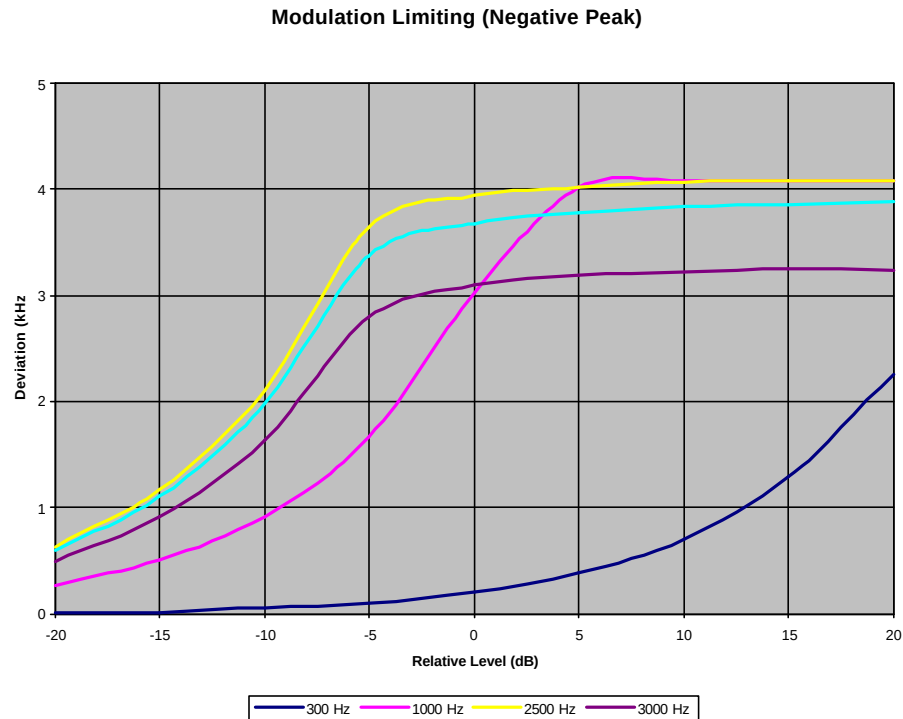

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-8: MODULATION CHARACTERISTICS OF CTCSS {WIDE BAND NEGATIVE PEAK}

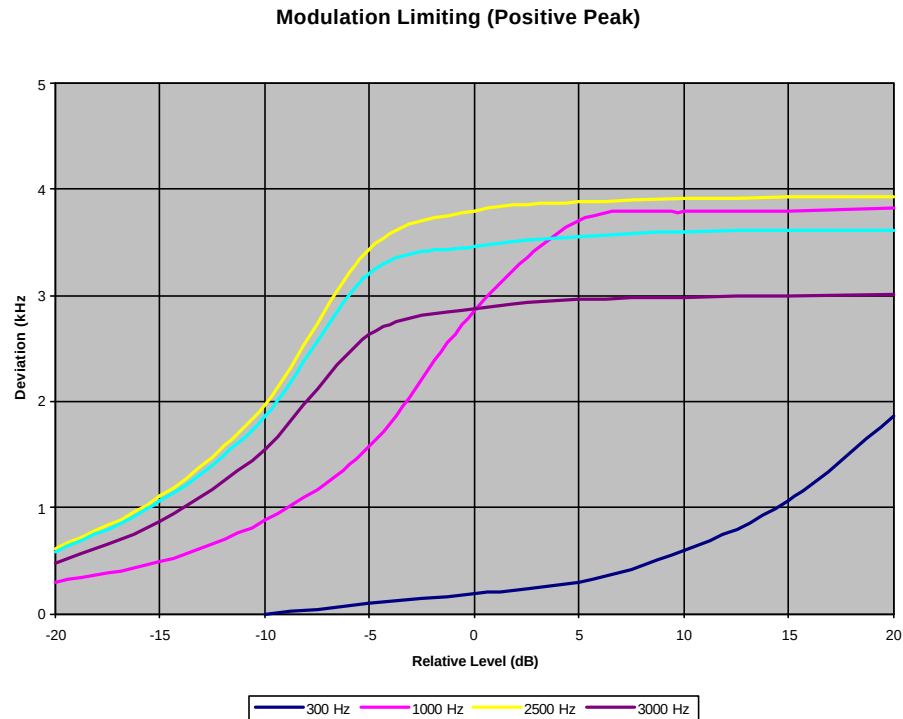

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-9: MODULATION CHARACTERISTICS OF CTCSS {NARROW BAND NEGATIVE PEAK}

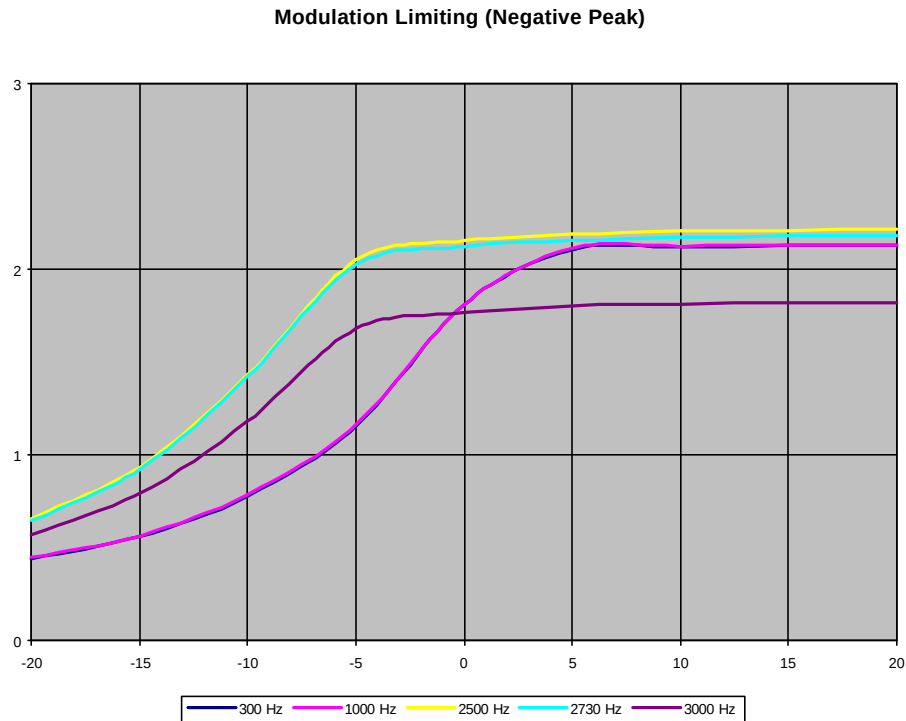

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 6-10: MODULATION CHARACTERISTICS OF CTCSS {NARROW BAND NEGATIVE PEAK}

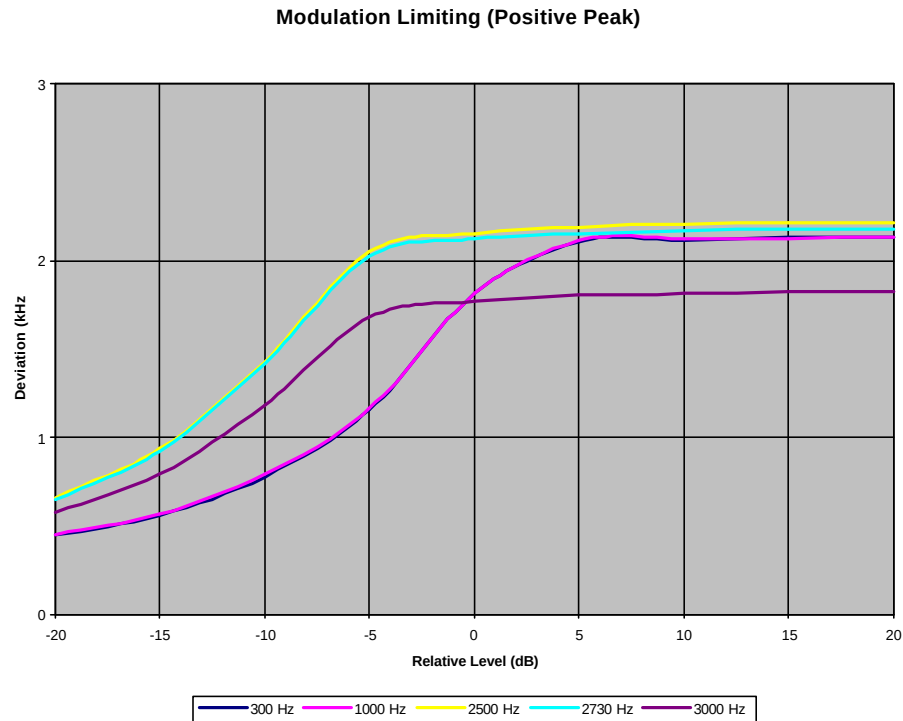

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

7 OCCUPIED BANDWIDTH - §2.1049

7.1 OCCUPIED BANDWIDTH- §2.1049 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, section 2.2.11

Device with audio modulation: Transmitter is modulated with a 2500 Hz sine wave at an input level of 16 dB greater than that required to produce 50% of rated system deviation at 1000 Hz.

The device was also tested in CTCSS mode.

Device with digital modulation: N/A

7.2 OCCUPIED BANDWIDTH TEST EQUIPMENT

TABLE 7-1: OCCUPIED BANDWIDTH TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9kHz – 40 GHz)	3943A01719




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

7.3 OCCUPIED BANDWIDTH TEST DATA

PLOT 7-1: OCCUPIED BANDWIDTH – 25 KHZ CHANNEL BANDWIDTH: MASK B (AUDIO MODULATION: 2,500 HZ)

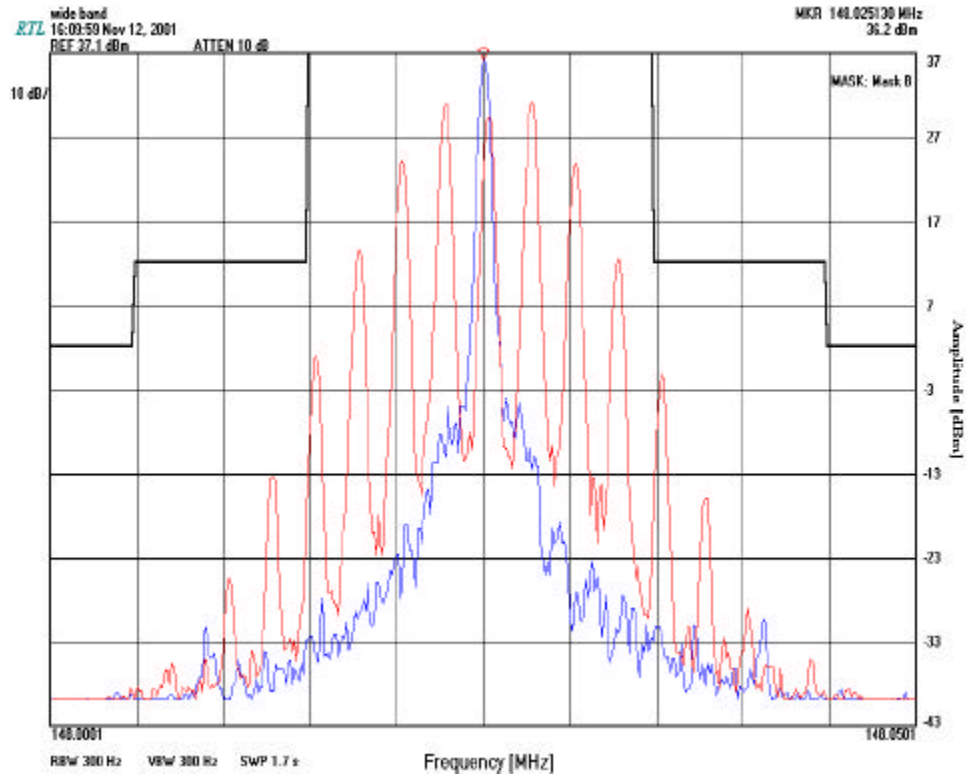

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 7-2: OCCUPIED BANDWIDTH –12.5 KHZ CHANNEL BANDWIDTH: MASK D (AUDIO MODULATION: 2,500 HZ)

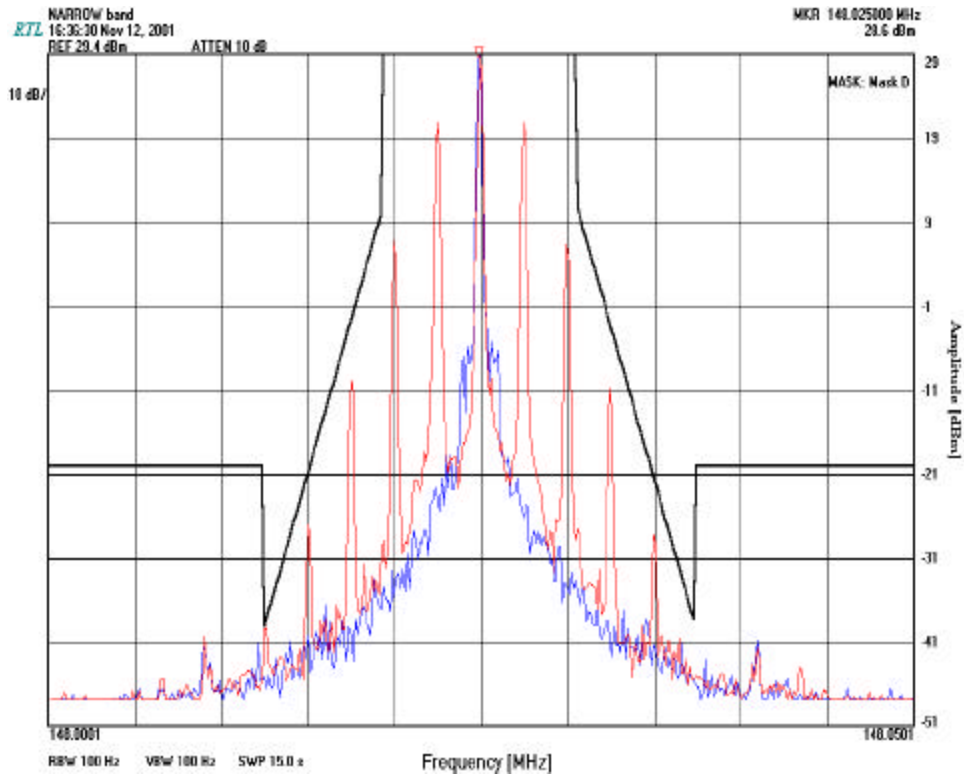

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 7-3: OCCUPIED BANDWIDTH -25 KHZ CTCSS CHANNEL BANDWIDTH: MASK B (AUDIO MODULATION: 2,500 HZ)

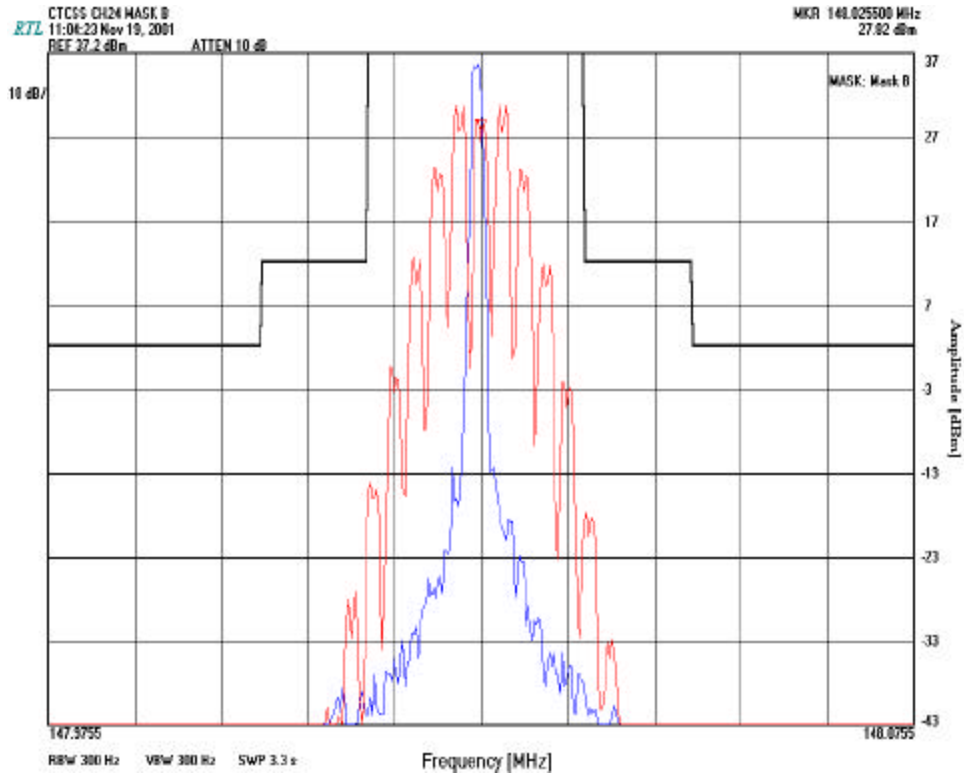

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 7-4: OCCUPIED BANDWIDTH -12.5 KHZ CTCSS CHANNEL BANDWIDTH: MASK D (AUDIO MODULATION: 2,500 HZ)

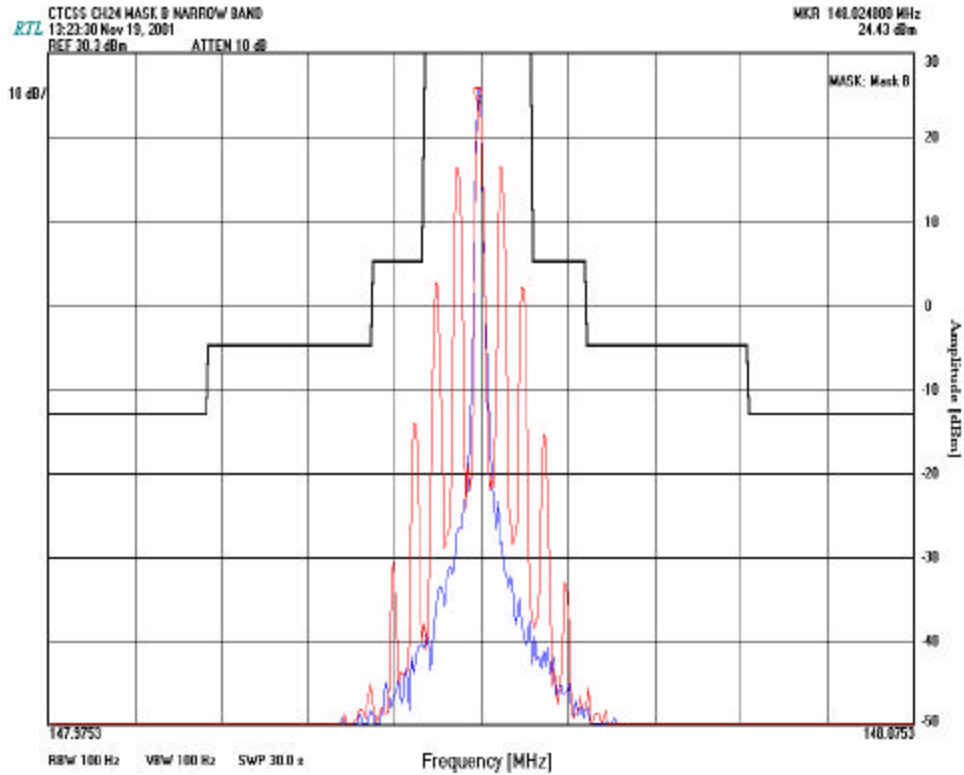

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

8 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051

8.1 SPURIOUS EMISSIONS AT ANTENNA TERMINAL - §2.1051 TEST PROCEDURE

ANSI/TIA/EIA-603-1992, Section 2.2.13

The transmitter is terminated with a 50 Ω load and interfaced with a spectrum analyzer.

The transmitter is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1000 Hz.

8.2 SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT

TABLE 8-1: SPURIOUS EMISSIONS AT ANTENNA TERMINAL TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
900927	Tektronix	ASG 100	Audio Signal Generator	B03274 V2.3
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585
901054	Hewlett Packard	HP 3586B	Selective Level Meter	1928A01892
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

8.3 SPURIOUS EMISSIONS TEST DATA

Frequency range of measurement per Part 2.1057: 9kHz to 10 x Fc

Limits: Mask B (dBm): $P(\text{dBm}) - (43 + 10 \times \log P(\text{W}))$
Mask D (dBm): $P(\text{dBm}) - (50 + 10 \times \log P(\text{W}))$

The following channels (in MHz) were investigated: 148.025, 155.025, and 173.980

The worst-case (unwanted emissions) channels are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

TABLE 8-2: SPURIOUS EMISSIONS – {CHANNEL 1 (148.025 MHz); 25K CH SP; 5.3 W}; CONDUCTED POWER = 5.3W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
296.050	73.9	57.2	-16.7
444.075	64.4	57.2	-7.1
592.100	83.0	57.2	-25.8
740.125	76.5	57.2	-19.3
888.150	92.2	57.2	-35.0
1036.175	>105	57.2	
1184.200	104.6	57.2	-47.4
1332.225	>105	57.2	
1480.250	>105	57.2	

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

TABLE 8-3: SPURIOUS EMISSIONS {CHANNEL 3 (155.025 MHZ); 25.K CH SP; 5.3W}: CONDUCTED POWER = 5.3W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
310.050	68.8	57.2	-11.6
465.075	78.9	57.2	-21.7
620.100	78.0	57.2	-20.8
775.125	79.3	57.2	-22.1
930.150	82.3	57.2	-25.1
1085.175	94.7	57.2	-37.4
1240.200	121.4	57.2	-64.2
1395.225	>120	57.2	
1550.250	114.4	57.2	-57.2

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

TABLE 8-4: SPURIOUS EMISSIONS {CHANNEL 4 (173.980 MHZ); 12.5K CH SP; 5.3 W}; CONDUCTED POWER = 5.3W

Frequency (MHz)	Level (dBc)	Limit (dBc)	Margin(dB)
347.960	69.0	57.2	-11.84
521.940	77.1	57.2	-19.94
695.920	77.2	57.2	-20.04
869.900	78.7	57.2	-21.54
1043.880	>100	57.2	
1217.860	109.5	57.2	-52.34
1391.840	>100	57.2	
1565.820	>100	57.2	
1739.800	>100	57.2	

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

9 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

9.1 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

ANSI/TIA/EIA-603-1992, section 2.2.12

The transmitter is terminated with a 50 Ω load and is modulated with a 2,500 Hz sine wave at an input level 16 dB greater than that required to produce 50% of the rated system deviation at 1000 Hz.

Refer to section "Radiated Measurement" in this report for further information.

9.2 RADIATED SPURIOUS TEST EQUIPMENT

TABLE 9-1: RADIATED SPURIOUS TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
900791	Schaffner@Chase	CBL6112	Antenna (25MHz – 2GHz)	2099
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719
900917	Hewlett Packard	8648C	Synthesized. Signal Generator (9 KHz to 3200 MHz)	3537A01741
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01 to 20 GHz	3610A00866
900814	Electro-Metrics	RGA-60	Double Ridge Horn Antenna (1-18GHz)	2310



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

9.3 FIELD STRENGTH OF SPURIOUS RADIATION TEST DATA - §2.1053

9.3.1 CFR 47 PART 90.210 REQUIREMENTS

The worst-case emissions test data are shown. The magnitude of emissions attenuated more than 20 dB below the FCC limit need not be recorded.

The signal generator level from the substitution measurement is corrected by subtracting the cable loss, from the signal generator to the transmitting antenna, and further corrected by adding the transmitting antenna gain (corrected to a half wave dipole, i.e. dBd). This corrected level is then subtracted from the carrier value (dbm), resulting in a dBc level. The final margin is arrived at, by subtracting this corrected value from the limit. An example is shown below:

Frequency (MHz)	Signal Generator Level (dBm)	Site Factor (dB)*	Corrected Signal Generator Level (dBc)	Margin (dB)
272.0	-74.4	-1.0	113.0	-55.4

-74.4 dBm

-1.0 dB (-0.4 dB cable loss – (1.6 dBi –2.15)corrected antenna gain)

-75.4 dBm

37.62 dBm (conducted power measurement) - (-75.4 dBm) = 113.0 dBc

57.62 (limit=50+10LogP) – 113.0 (dBc) = -55.4 (dB)

9.4 FIELD STRENGTH OF SPURIOUS RADIATION TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Schaffner@Chase	CBL6112	Anetenna (25MHz – 2GHz)	2099	08/23/2002
900932	Hewlett Packard	8449B OPT H02	Preamplifier (1-26.5 GHz)	3008A00505	N/A
901020	Hewlett Packard	8564E	Portable Spectrum Analyzer (9 kHz - 40 GHz)	3943A01719	06/07/02
900917	Hewlett Packard	8648C	Synthesized. Signal Generator (9 KHz to 3200 MHz)	3537A01741	04/10/02
900928	Hewlett Packard	83752A	Synthesized Sweeper, 0.01 to 20 GHz	3610A00866	05/11/02



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

**TABLE 9-2: FIELD STRENGTH OF SPURIOUS RADIATION {(CHANNEL 1 AT 148.025MHZ, 5 W) SUBSTITUTION METHOD}:
CONDUCTED POWER = 5.3W**

Frequency	S/G level (dBm)	Cable Loss*	Difference in gain (ref. To 1/2 wave dipole)	Emission level (dBc)	Limit (dBc) Mask D	Margin (dB)
296.050	-24.0	-0.7	-0.7	62.6	57.2	-5.4
444.075	-32.5	-1.1	-0.6	71.4	57.2	-14.2
592.100	-25.5	-1	-1.2	64.9	57.2	-7.7
740.125	-24.7	-0.6	-1.2	63.7	57.2	-6.5
888.150	-32.0	-0.5	-1.1	70.8	57.2	-13.6
1036.175	-49.7	-1.3	2.3	85.9	57.2	-28.7
1184.200	-54.0	-1.0	3.8	88.4	57.2	-31.2
1332.225	<55.0			>85.0	57.2	
1480.250	<55.0			>85.0	57.2	

*This insertion loss corresponds to the cable connecting the RF Signal Generator to the 1/2 wave dipole antenna.

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



10 FREQUENCY STABILITY / TEMPERATURE VARIATION - §2.1055

10.1 FREQUENCY STABILITY TEST PROCEDURE:

ANSI/TIA/EIA-603-1992, section 2.2.2

The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The EUT was evaluated over the temperature range -30°C to +50°C.

The temperature was initially set to -30°C and a 2-hour period was observed for stabilization of the EUT.

The frequency stability was measured within one minute after application of primary power to the transmitter. The temperature was raised at intervals of 10 degrees centigrade through the range. A ½ an hour period was observed to stabilize the EUT at each measurement step and the frequency stability was measured within one minute after application of primary power to the transmitter.

Additionally, the power supply voltage of the EUT was varied from 85% to 115% of the nominal voltage.

The worst-case test data are shown.

10.2 FREQUENCY STABILITY/TEMPERATURE VARIATION

Limit is 2.5 ppm for device with a 12.5 kHz channel bandwidth

Limit is 5 ppm for device with a 25 kHz channel bandwidth

The 5 Watt radio was tested with 12.5kHz and 25 kHz channel bandwidth.

The channel selected for temperature stability is representative of all the channels since the device uses similar circuitry for all the channels.

10.3 FREQUENCY STABILITY TEST EQUIPMENT

TABLE 10-1: FREQUENCY STABILITY TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
900946	Tenney Engineering, Inc.	TH65	Temperature Chamber with Humidity	11380
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

10.4 FREQUENCY STABILITY TEST DATA - §2.1055

PLOT 10-1: TEMPERATURE FREQUENCY STABILITY

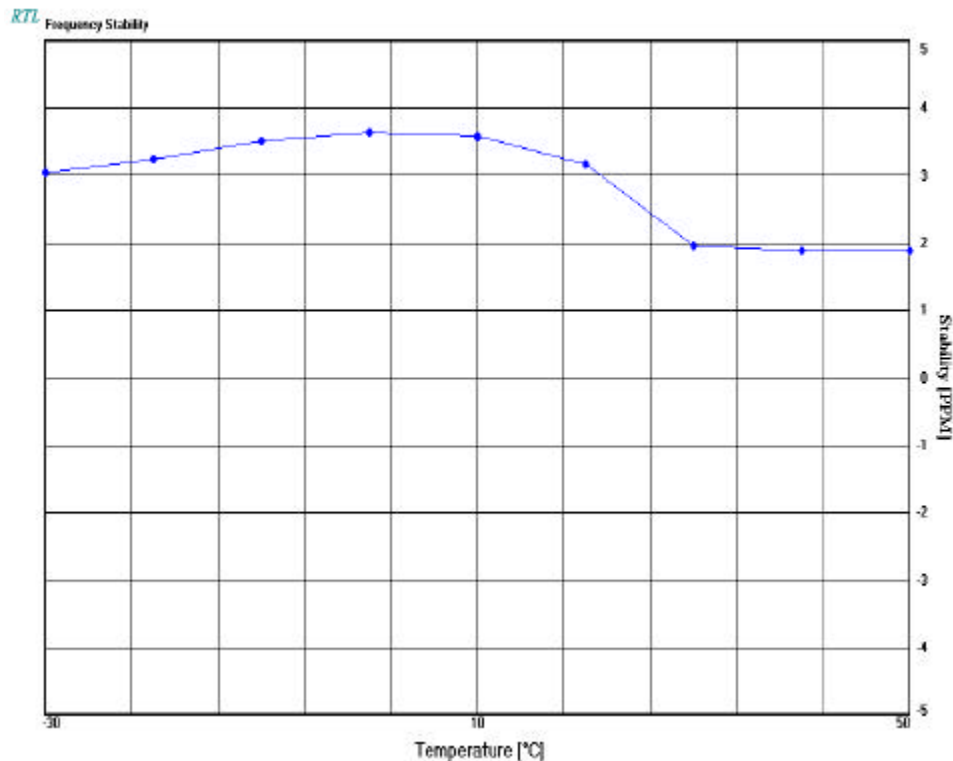


TABLE 10-2: TEMPERATURE FREQUENCY STABILITY

Temperature (C)	Frequency Measured (MHz)	ppm
-30	148.025450	3.04
-20	148.025480	3.24
-10	148.025520	3.51
0	148.025540	3.65
10	148.025530	3.58
20	148.025471	3.18
30	148.025290	1.96
40	148.025280	1.89
50	148.025280	1.89

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 10-2: FREQUENCY STABILITY/VOLTAGE VARIATION

Battery Endpoint = 3.1 VDC

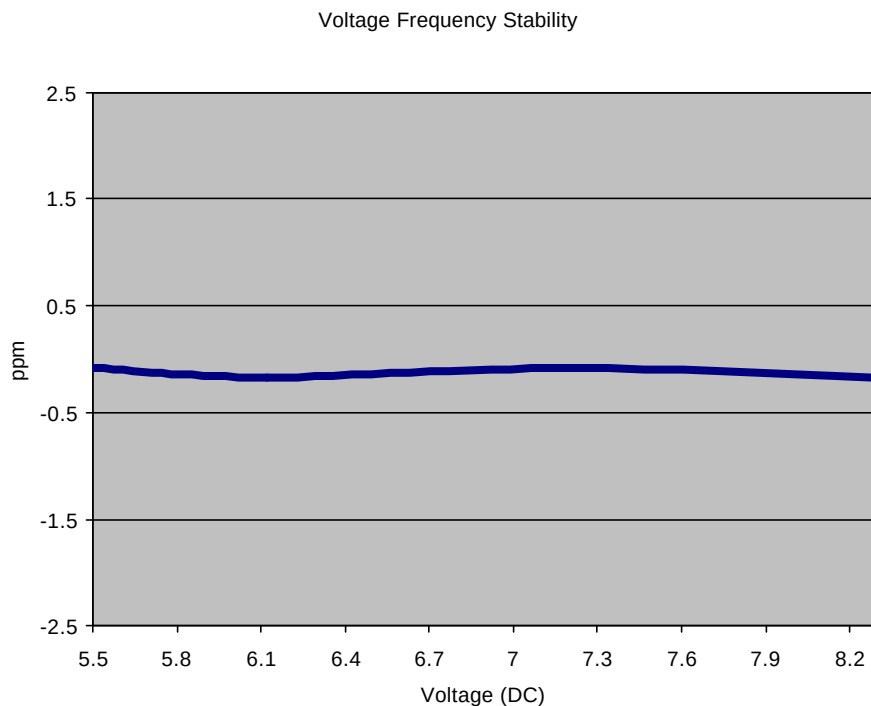


TABLE 10-3: FREQUENCY STABILITY/VOLTAGE VARIATION

Battery endpoint is measured at 3.1 VDC, the worst case variation of 0.72 ppm

Voltage (VDC)	Frequency Measured (MHz)	ppm
5.5	148.024988	-0.08107
6.12	148.024975	-0.16889
7.2	148.024988	-0.08107
8.28	148.024975	-0.16889

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer


Signature

11/10/2001
Date Of Test



11 SPECTRAL EFFICIENCY REQUIREMENTS - §90.203(J3)

This radio meets the spectral efficiency requirements of 1 voice channel per 12.5 kHz of channel bandwidths for 25 kHz channel spacing.

12 TRANSIENT FREQUENCY BEHAVIOR - §90.214

ANSI/TIA/EIA-603-1992, section 2.2.19

12.1 TRANSIENT FREQUENCY BEHAVIOR TEST EQUIPMENT

TABLE 12-1: TRANSIENT FREQUENCY BEHAVIOR TEST EQUIPMENT

RTL Asset #	Manufacturer	Model	Part Type	Serial Number
901057	Hewlett Packard	3336B	Synthesizer/Level Generator	2514A02585
901055	Hewlett Packard	8901A Opt. 002-003	Modulation Analyzer	2545A04102
901054	Hewlett Packard	3586B	Selective Level Meter	1928A01892

12.2 TRANSIENT FREQUENCY BEHAVIOR TEST DATA

12.2.1 LIMITS

Requirements for EUT with 25 kHz channel spacing:

Time Intervals (*)(**)	Maximum Frequency Difference(***)	150-174 MHz	421-512 MHz
t1(****)	± 25 kHz	5.0 mSec	10.0 mSec
t2	± 12.5 kHz	20.0 mSec	25.0 mSec
t3(****)	± 25 kHz	5.0 mSec	10.0 mSec

Requirements for EUT with 12.5 kHz channel spacing:

Time Intervals (*)(**)	Maximum Frequency Difference(***)	150-174 MHz	421-512 MHz
t1(****)	± 12.5 kHz	5.0 mSec	10.0 mSec
t2	± 6.25 kHz	20.0 mSec	25.0 mSec
t3(****)	± 12.5 kHz	5.0 mSec	10.0 mSec

(*) t on is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

t 1 is the time period immediately following ton.

t2 is the time period immediately following t1.

t3 is the time period from the instant when the transmitter is turned off until toff.

toff is the instant when the 1 kHz test signal starts to rise.

(**) During the time from the end of t2 to the beginning of t3, the frequency difference must not exceed the limits specified in § 90.213.

(***) Difference between the actual transmitter frequency and the assigned transmitter frequency.

(****) If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

12.2.2 MAXIMUM FREQUENCY DIFFERENCE BETWEEN TIME T2 AND T3: CALCULATION:

The frequency stability is required to be 2.5ppm.


Calculation:

4 div. on scope represent 12.5kHz for narrow band channel.

Therefore, $464.55\text{M} \times 2.5 \text{ ppm} \times \pm 4 \text{ Divisions}$ divided by 12.5kHz equals about ± 0.4 division. 0.4 Div. correspond to 1.161 kHz

PLOT 12-1: TRANSIENT FREQUENCY BEHAVIOR {CARRIER OFF TIME} CHANNEL 5: NB (12.5KHZ) 1 W RATED

RF Signal Generator: Modulation 12.5kHz deviation

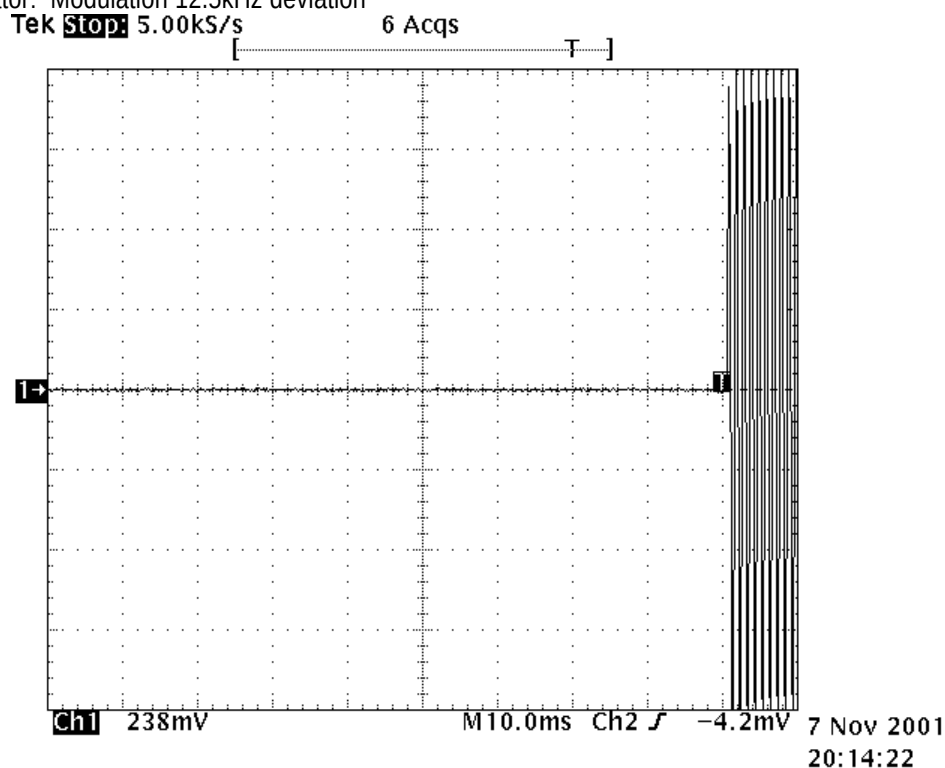

Timebase: 10 ms/div

Trigger: On positive edge of Ch2, level -4mV

Ch1: 250mV/div, Probe 1.000:1

Vertical scale: ± 4 div. corresponds to ± 12.5 kHz

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 12-2: TRANSIENT FREQUENCY BEHAVIOR {CARRIER OFF TIME} CHANNEL 1: WB(25KHZ); 5 W RATED

RF Signal Generator: Modulation 25kHz deviation

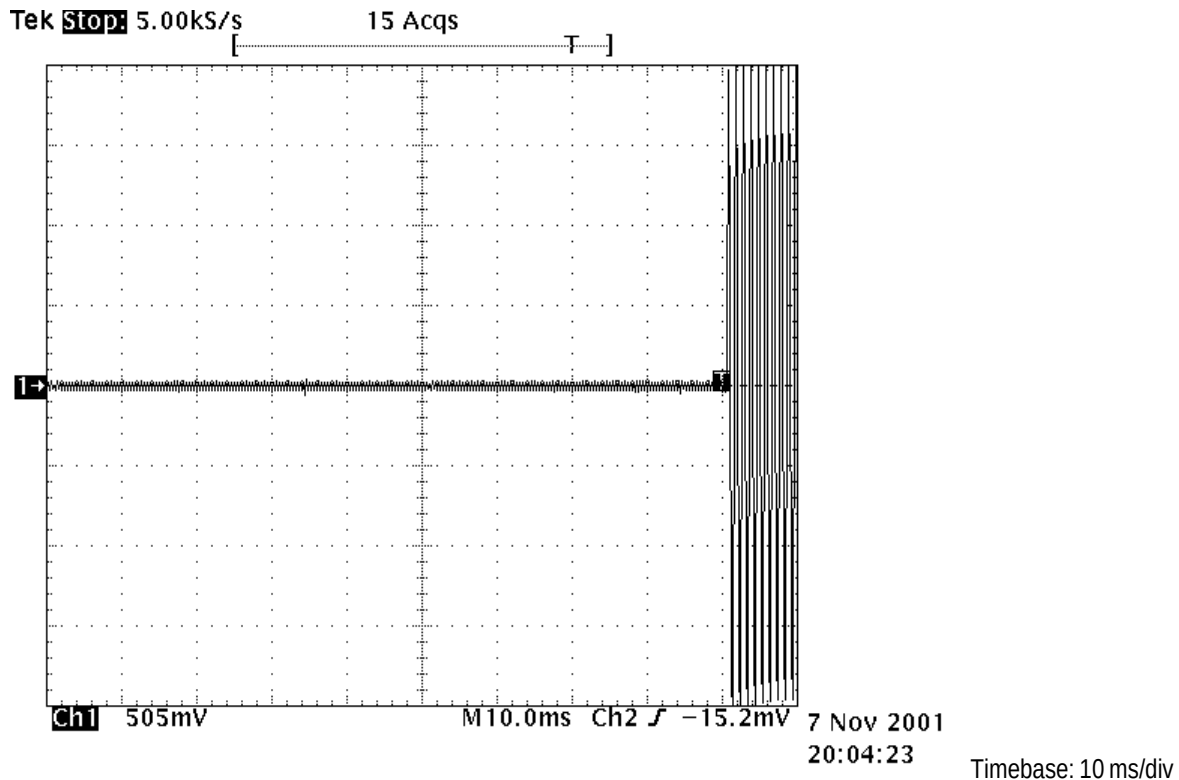

Timebase: 10 ms/div
Trigger: On positive edge of Ch2, level -15.2V
Ch1: 500mV/div, Probe 1.000:1
Vertical scale: +/- 4 div. corresponds to +/- 25 kHz

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test




360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119

Exhibit 1

PLOT 12-3: TRANSIENT FREQUENCY BEHAVIOR {CARRIER ON TIME} CHANNEL 5: NB(12.5KHZ) 1 W RATED

RF Signal Generator: Modulation 12.5kHz deviation

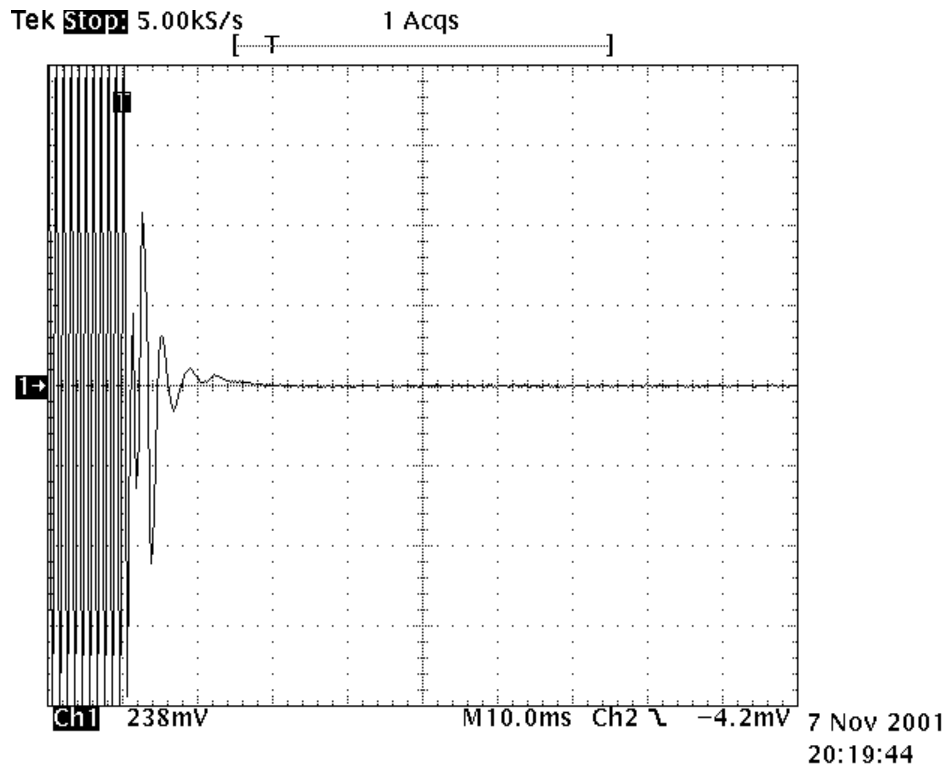

Timebase: 10 ms/div
Trigger: On negative edge of Ch2, level -4.0mV
Ch1: 250 mV/div, Probe 1.000:1
Vertical scale: +/- 4 div. corresponds to +/- 12.5 kHz

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test



360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Work Order: 2001289
Quote Number: QRTL01-326
Dates of Tests: November 10, 2001
FCC Part 90 Certification &
Industry Canada RSS-119


Exhibit 1

PLOT 12-4: TRANSIENT FREQUENCY BEHAVIOR {CARRIER ON TIME} CHANNEL 1 : WB (25KHZ) 5 W RATED

RF Signal Generator: Modulation 25kHz deviation

Tek Stop: 5.00kS/s

1 Acqs

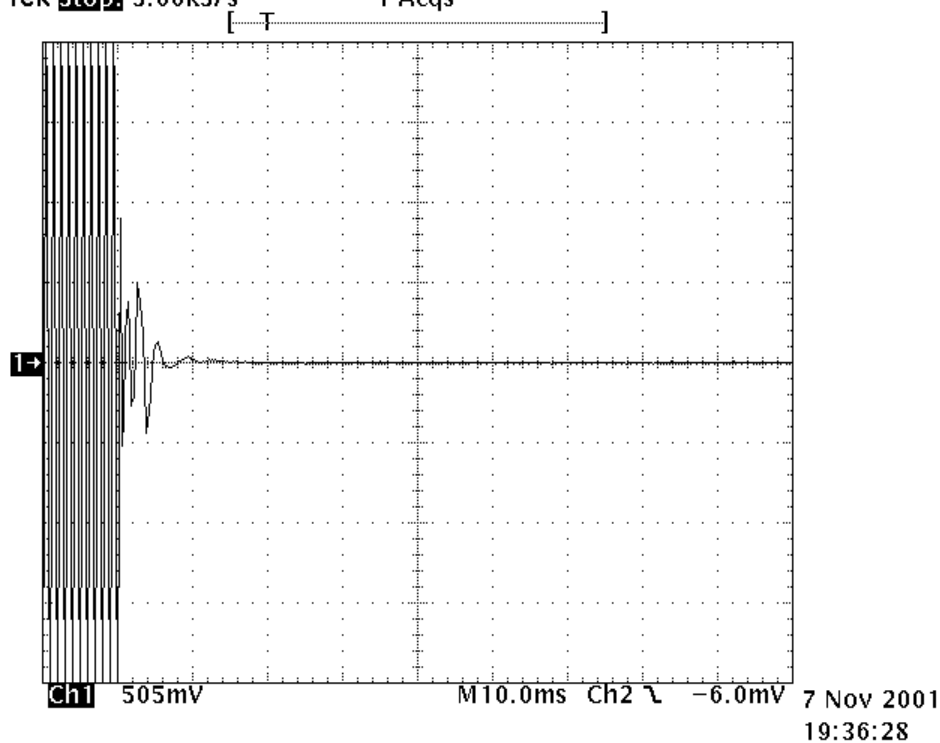

Timebase: 10 ms/div

Trigger: On negative edge of Ch2, level -6.0mV

Ch1: 500 mV/div, Probe 1.000:1

Vertical scale: +/- 4 div. corresponds to +/- 25 kHz

TEST PERSONNEL:

Rachid Sehb
Test Technician/Engineer

Signature

11/10/2001
Date Of Test