



FCC Certification Test Report
for
Blast Technology ApS
FCC ID: RZC-WDMX

April 12, 2004

Prepared for:

Blast Technology ApS
Toftevej 51
Horning 8362 Denmark

Prepared By:

Washington Laboratories, Ltd.
7560 Lindbergh Drive
Gaithersburg, Maryland 20879



FCC Certification Test Program

FCC Certification Test Report for the Blast Technology ApS WDMX-512 Wireless Router FCC ID: RZC-WDMX

April 12, 2004


WLL JOB# 8033

Prepared by:



Brian J. Dettling
Documentation Specialist

Reviewed by:



Gregory M. Snyder
Chief EMC Engineer

Abstract

This report has been prepared on behalf of Blast Technology ApS to support the attached Application for Equipment Authorization. The test report and application are submitted for a Spread Spectrum Transceiver under Part 15.247 of the FCC Rules and Regulations. This Federal Communication Commission (FCC) Certification Test Report documents the test configuration and test results for a Blast Technology TT8870 Radio Card.

Blast Technology ApS wishes to have this device approved as a module. An Attestation letter and required consumer information are found in the exhibits related to this application.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

The Blast Technology ApS WDMX-512 complies with the limits for a Direct Sequence Spread Spectrum Transmitter device under Part 15.247 of the FCC Rules and Regulations.

The Blast Technology ApS WDMX-512 is equivalent to the ZCOM Module (FCC ID: M4Y-0325) as the basis for its 802.11 functionality.

Table of Contents

Abstract	ii
1 Introduction	1
1.1 Compliance Statement	1
1.2 Test Scope	1
1.3 Contract Information	1
1.4 Test Dates	1
1.5 Test and Support Personnel	1
1.6 Abbreviations	2
2 Equipment Under Test	3
2.1 EUT Identification & Description	3
2.2 Test Configuration	3
2.3 Testing Algorithm	3
2.4 Test Location	3
2.5 Measurements	4
2.5.1 References	4
2.6 Measurement Uncertainty	4
3 Test Equipment	5
4 Test Results	6
4.1 Duty Cycle Correction	Error! Bookmark not defined.
4.2 RF Power Output: (FCC Part §2.1046)	6
4.3 Occupied Bandwidth: (FCC Part §2.1049)	8
4.4 Channel Spacing and Number of Hop Channels (FCC Part §15247(a)(1))	Error! Bookmark not defined.
4.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)	10
4.6 Radiated Spurious Emissions: (FCC Part §2.1053)	17
4.6.1 Test Procedure	17

List of Tables

Table 1. Device Summary	3
Table 2: Test Equipment List	5
Table 3. RF Power Output	6
Table 4. Occupied Bandwidth Results	10
Table 5: Radiated Emission Test Data, Low Frequency Data (Restricted Bands)	19
Table 6: Radiated Emission Test Data, High Frequency Data (Restricted Bands)	20
Table 7: Radiated Emission Test Data, Channel 1 Harmonics	22
Table 8: Radiated Emission Test Data, Channel 5 Harmonics	Error! Bookmark not defined.
Table 9: Radiated Emission Test Data, Channel 11 Harmonics	Error! Bookmark not defined.

List of Figures

Figure 4-1. Duty Cycle Plot.....	Error! Bookmark not defined.
Figure 4-2. RF Peak Power, Low Channel	Error! Bookmark not defined.
Figure 4-3. RF Peak Power, Mid Channel.....	Error! Bookmark not defined.
Figure 4-4. RF Peak Power, High Channel	Error! Bookmark not defined.
Figure 4-5. Occupied Bandwidth, Low Channel	9
Figure 4-6. Occupied Bandwidth, Mid Channel	9
Figure 4-7. Occupied Bandwidth, High Channel	10
Figure 4-8. Channel Spacing	Error! Bookmark not defined.
Figure 4-9. Number of Channels, Plot 1	Error! Bookmark not defined.
Figure 4-10. Number of Channels, Plot 2	Error! Bookmark not defined.
Figure 4-11. Conducted Spurious Emissions, Low Channel 30 – 2.425GHz	11
Figure 4-12. Conducted Spurious Emissions, Low Channel 2.4GHz – 2.9214GHz	12
Figure 4-13. Conducted Spurious Emissions, Low Channel 2.9 – 10GHz	12
Figure 4-14. Conducted Spurious Emissions, Low Channel 10GHz - 25GHz.....	13
Figure 4-15. Conducted Spurious Emissions, Mid Channel 30MHz – 2.5GHz	13
Figure 4-16. Conducted Spurious Emissions, Mid Channel 2.4GHz - 2.914.....	14
Figure 4-17. Conducted Spurious Emissions, Mid Channel 2.679GHz - 10GHz	14
Figure 4-18. Conducted Spurious Emissions, Mid Channel 10GHz – 25GHz.....	15
Figure 4-19. Conducted Spurious Emissions, High Channel 30MHz – 2.472GHz.....	15
Figure 4-20. Conducted Spurious Emissions, High Channel 2.4GHz – 2.9GHz	16
Figure 4-21. Conducted Spurious Emissions, High Channel 2.9GHz – 10GHz	16
Figure 4-22. Conducted Spurious Emissions, High Channel 10GHz – 25GHz	17

1 Introduction

1.1 Compliance Statement

The Blast Technology ApS WDMX-512 complies with the limits for a Direct Sequence Spread Spectrum Transmitter device under Part 15.247 of the FCC Rules and Regulations.

1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance with FCC Public Notice DA 00-705 and the 2001 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

1.3 Contract Information

Customer: Blast Technology ApS
Toftevej 51
Horning 8362 Denmark

Quotation Number: 61476

1.4 Test Dates

Testing was performed from March 15, 2004 to March 18, 2004.

1.5 Test and Support Personnel

Washington Laboratories: Steve Koster, Ken Gemmell

1.6 Abbreviations

A	Ampere
Ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	Bandwidth
CE	Conducted Emission
cm	centimeter
CW	Continuous Wave
dB	decibel
dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga - prefix for 10^9 multiplier
Hz	Hertz
IF	Intermediate Frequency
k	kilo - prefix for 10^3 multiplier
M	Mega - prefix for 10^6 multiplier
m	Meter
μ	micro - prefix for 10^{-6} multiplier
NB	Narrowband
LISN	Line Impedance Stabilization Network
RE	Radiated Emissions
RF	Radio Frequency
rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt

2 Equipment Under Test

2.1 EUT Identification & Description

The Blast Technology ApS WDMX-512 is a Wi-Fi enable lighting control device employing a ZCOM PCMCIA Card (FCC ID: M4Y-0325) and a Nearson Model 151 antenna. The unit uses 11 channels in the 2.4GHz ISM band. The direct sequence spread spectrum signal is modulated using one of the following methods: DQPSK, DBPSK or CCK. The Wireless Router is an IEEE 802.11b Wireless LAN adapter that is used to connect to networked resources such as Internet and Internal LAN resources.

Table 1. Device Summary

ITEM	DESCRIPTION
Manufacturer:	Blast Technology ApS
FCC ID Number	RZC-WDMX
EUT Name:	Wireless Router
Model:	WDMX-512
FCC Rule Parts:	§15.247
Frequency Range:	2412MHz – 2462MHz
Maximum Output Power:	0.1W (20 dBm)
Modulation:	DQPSK, DBPSK or CCK
Occupied Bandwidth:	11.6 MHz
Keying:	Automatic
Type of Information:	Data
Number of Channels:	11
Power Output Level	Fixed
Antenna Connector	MMCX
Antenna Type	5dBi Omni Type (Whip)
Interface:	PCMCIA Slot
Power Source & Voltage:	120VAC

2.2 Test Configuration

The WDMX-512 was configured with an extender card attached to a laptop PC and a 5dBi antenna.

2.3 Testing Algorithm

The WDMX-512 was programmed for continuous transmission at the highest power level. The unit was set to transmit on the lowest channel, highest channel, and a mid channel.

Worst-case emission levels are provided in the test results data.

2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file

with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

2.5 Measurements

2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Direct Sequence Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is ± 2.3 dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, Total Uncertainty = $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$ dB.

Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

Table 2: Test Equipment List

Manufacturer	Model/Type	Function	Identification	Cal. Due
HP	8568B	Spectrum Analyzer	2634A02888	7/07/04
HP	85650A	Quasi-Peak Adapter	3303A01786	7/08/04
HP	HP 8593A	Spectrum Analyzer	3009A00739	6/25/04
HP	8449B	Microwave Preamp	3008A00385	9/29/05
Solar	8012-50-R-24BNC	LISN	8379493	6/30/04
Narda	V638	Horn Antenna	210	7/22/04
ARA	LPB-2520	BiconiLog Antenna	1044	6/20/04
ARA	DRG118/A	Microwave Horn Antenna	1236	4/17/04
HP	85685A	RF Preselector	3221A01395	7/07/04
EMCO	3110B	Biconical Antenna	9808-1078	6/20/04
EMCO	3146A	Log Periodic Antenna	8912-1129	6/20/04
Tektronix	TDS 220	Oscilloscope	00333	8/18/04
HP	8648C Signal	Generator	00075	4/30/04
Agilent	8474B	Diode Detector	00416	12/19/04
HP	438A	Power Meter	00394	3/10/04

3 Test Results

3.1 RF Power Output: (FCC Part §2.1046)

The output power was measured a low, high and middle channel.

The power measurement was made using the substitution method. The output of the EUT was connected to a diode detector, which was connected to the input of an oscilloscope. When the radio was turned on, the deflection of the oscilloscope was noted. Then, a signal generator, set to the same frequency as the radio, was connected to the input of the diode and the signal adjusted to get the same deflection as caused by the radio. The output of the signal generator was then connected to the input of a power meter and the resultant power measured. This represents the conducted output power from the radio, which is summarized in the following table.

Table 3. RF Power Output

Channel and/or Frequency	Measured Level (dBm)	Measured Level (Watts)	Rated (Watts)	Limit (Watts)
Channel 1- 2412 MHz	19.84	0.096	0.100	1
Channel 5 – 2432 MHz	20.08	0.102	0.100	1
Channel 11- 2462 MHz	19.77	0.095	0.100	1

3.2 Power Spectral Density

For DSSS devices, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system.

Table 4. RF Power Output

Frequency	Level	Limit	Pass/Fail
Low Channel 2412 MHz	-4.68 dBm	8 dBm	Pass
Mid Channel 2432MHz	-4.55 dBm	8 dBm	Pass
High Channel 2462 MHz	-4.77 dBm	8 dBm	Pass

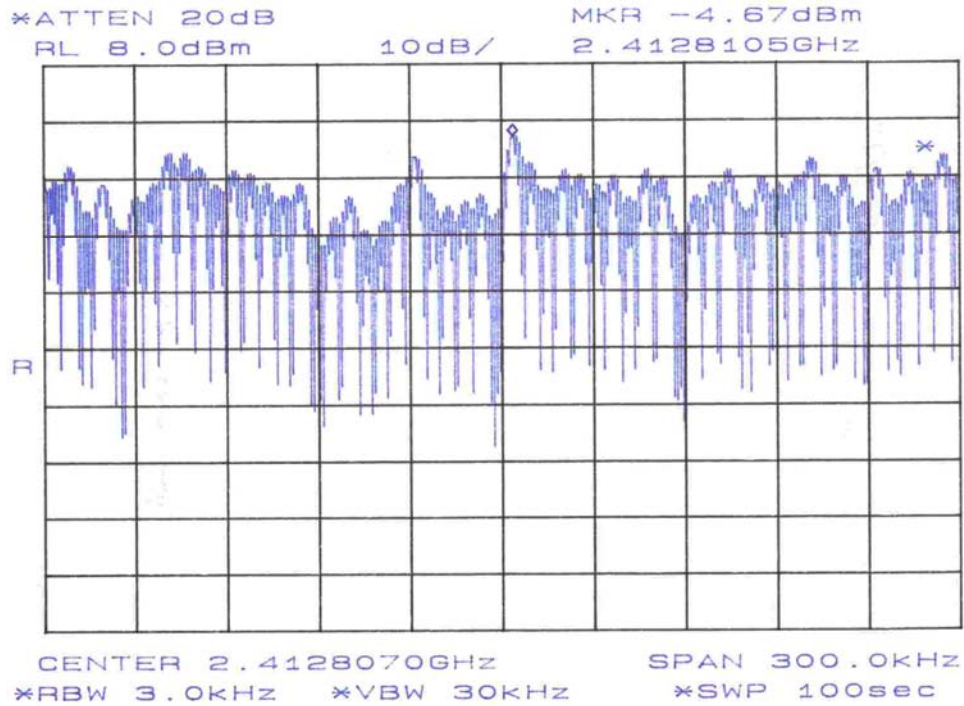


Figure 1: Power Spectral Density Plot, Channel 1

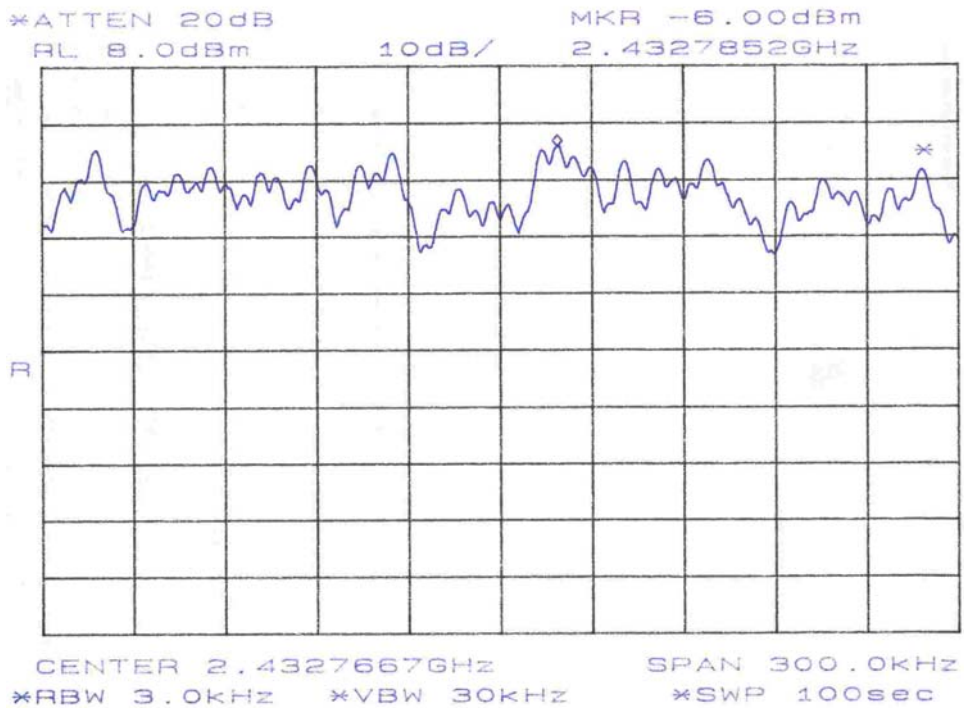


Figure 2: Power Spectral Density Plot, Channel 5

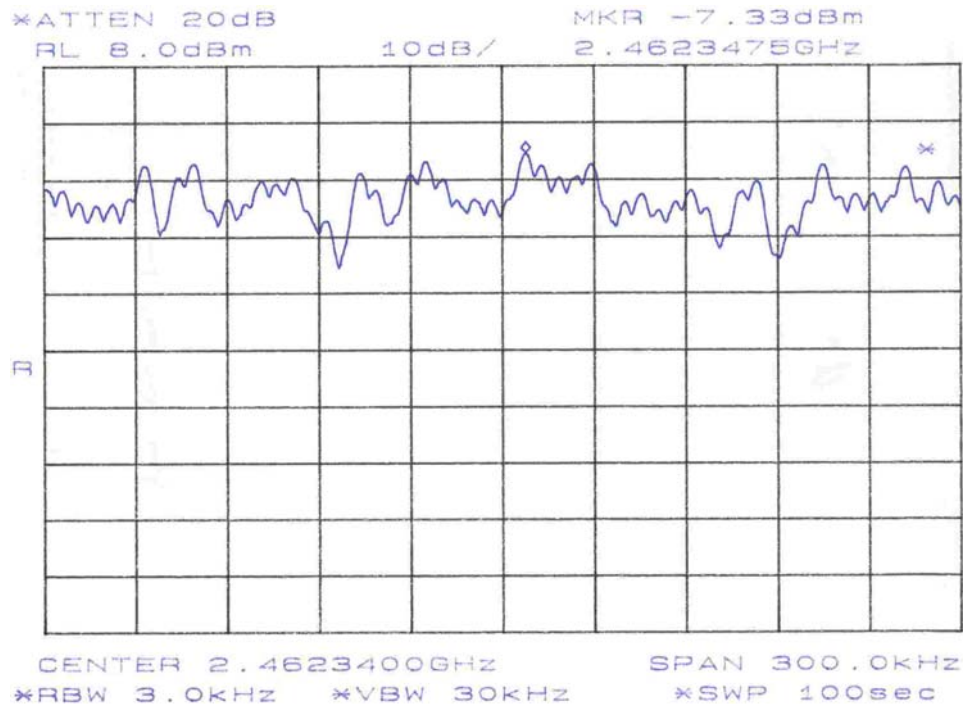


Figure 3: Power Spectral Density Plot, Channel 11

3.3 Occupied Bandwidth: (FCC Part §2.1049)

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

For Direct Sequence Spread Spectrum Systems, FCC Part 15.247 requires that the minimum 6 dB bandwidth be at least 500 kHz. Three channels were measured with the data shown in Figure 4 through Figure 6. At full modulation, the occupied bandwidth was measured as shown:

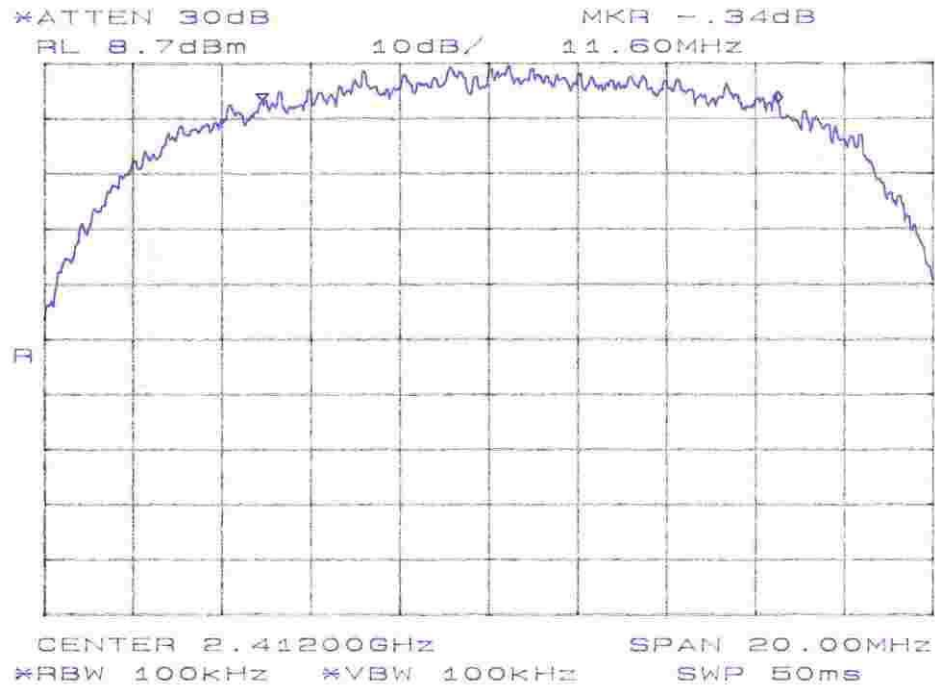


Figure 4. Occupied Bandwidth, Low Channel

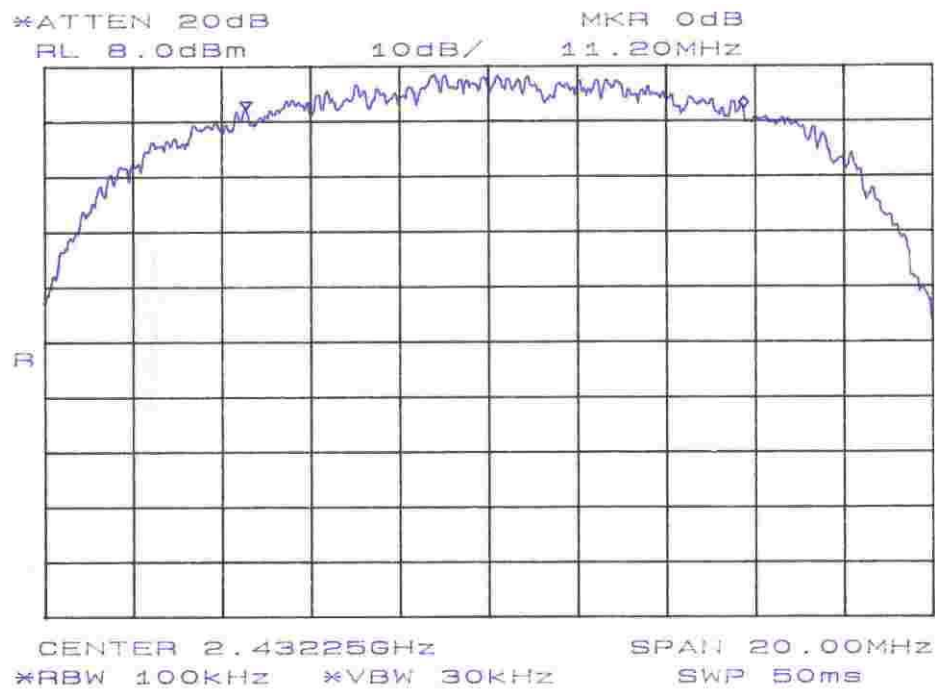


Figure 5. Occupied Bandwidth, Mid Channel

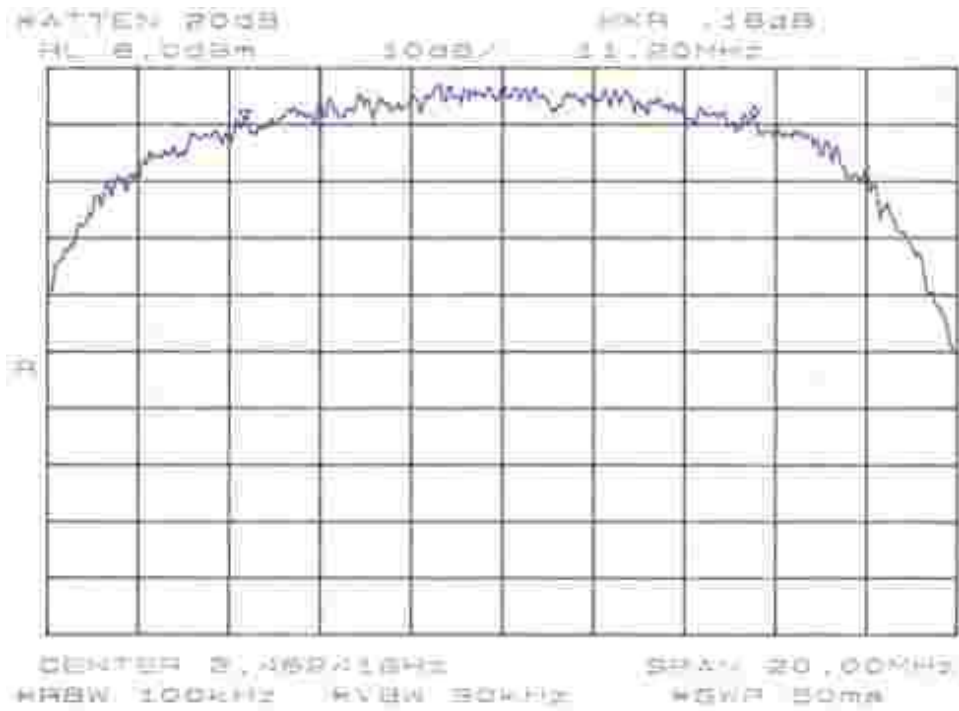


Figure 6. Occupied Bandwidth, High Channel

Table 5 provides a summary of the Occupied Bandwidth Results.

Table 5. Occupied Bandwidth Results

Frequency	Bandwidth	Limit	Pass/Fail
Channel 1- 2412MHz	11.60MHz	> 500k	Pass
Channel 5- 2432MHz	11.20MHz	> 500k	Pass
Channel 11- 2462MHz	11.20MHz	> 500k	Pass

3.4 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)

The EUT must comply with requirements for spurious emissions at antenna terminals. Per §15.247(c) all spurious emissions in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device is operating shall be attenuated 20 dB below the highest power level in a 100 kHz bandwidth within the band containing the highest level of the desired power.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer

resolution bandwidth was set to 100 kHz and the video bandwidth was set to 100 kHz. The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the carrier frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz up to the tenth harmonic of the carrier.

The following are plots of the conducted spurious emissions data.

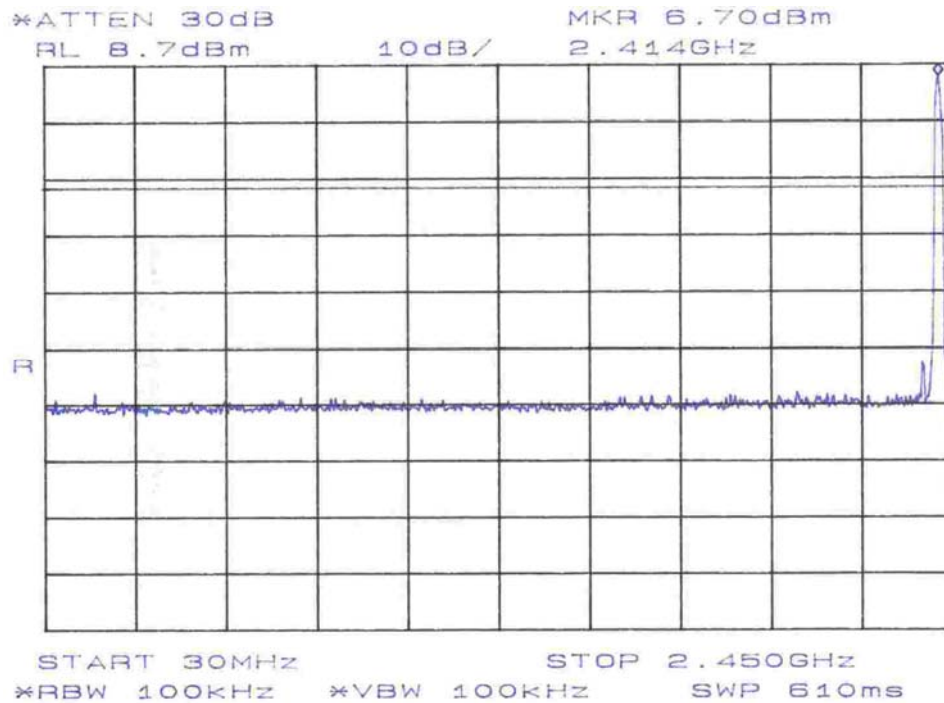


Figure 7. Conducted Spurious Emissions, Low Channel 30 – 2.450GHz

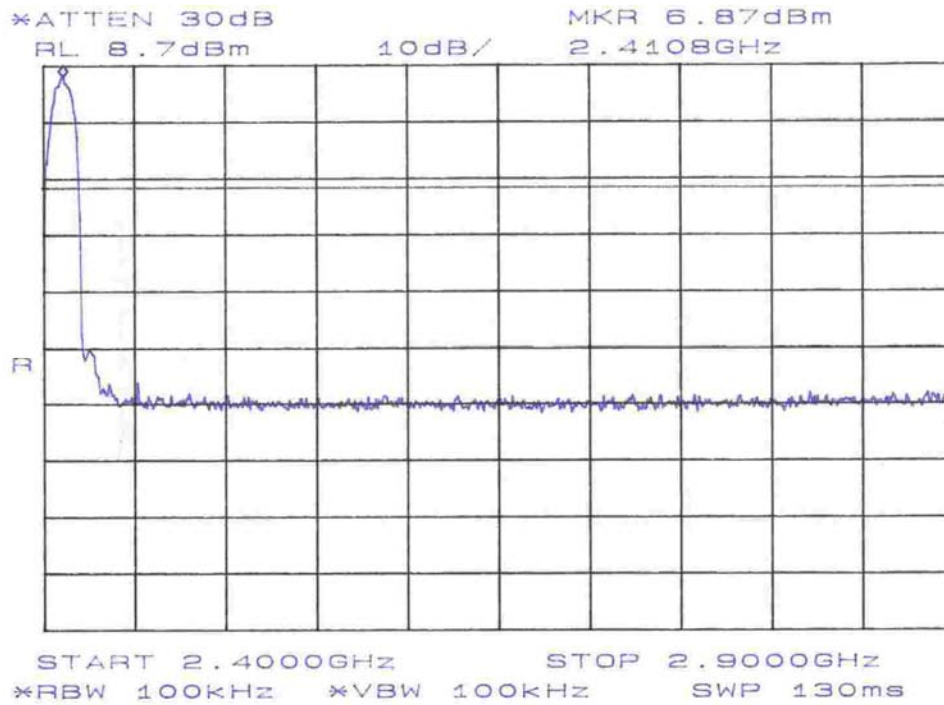


Figure 8. Conducted Spurious Emissions, Low Channel 2.4GHz – 2.9GHz

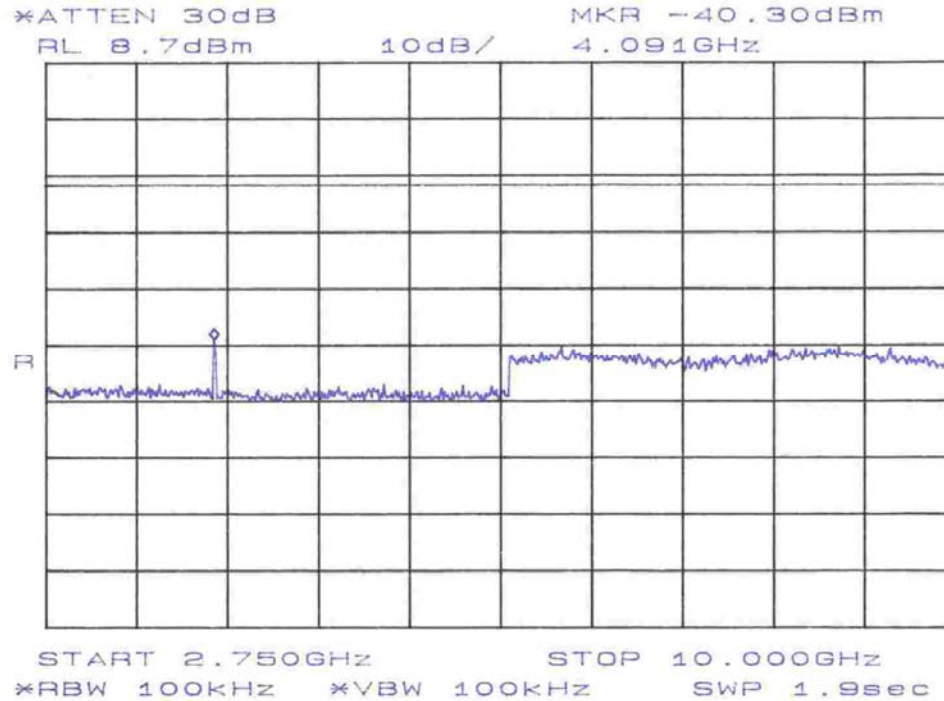


Figure 9. Conducted Spurious Emissions, Low Channel 2.75 – 10GHz

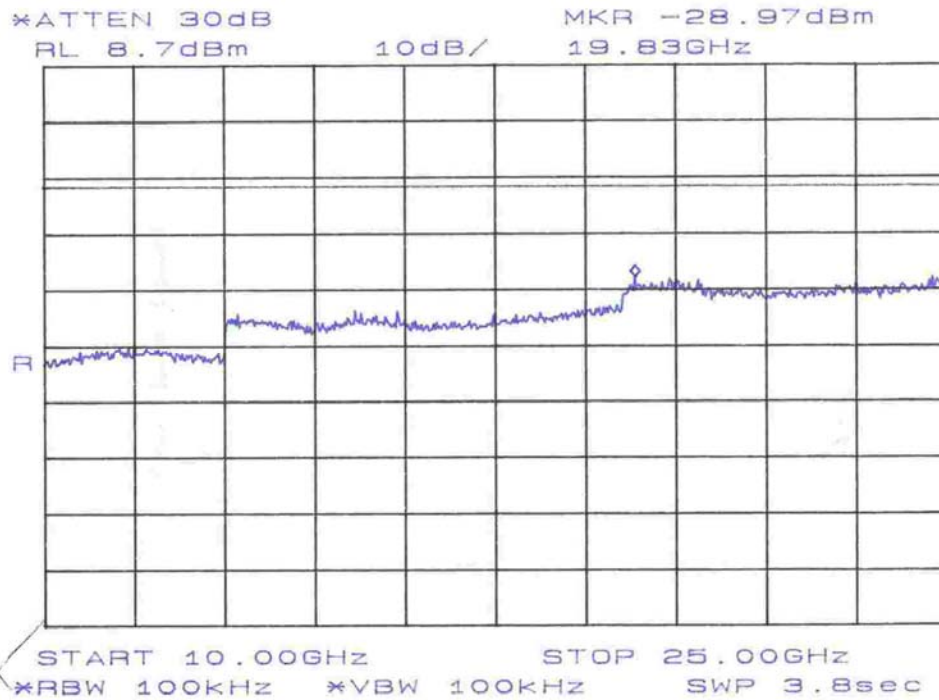


Figure 10. Conducted Spurious Emissions, Low Channel 10GHz - 25GHz

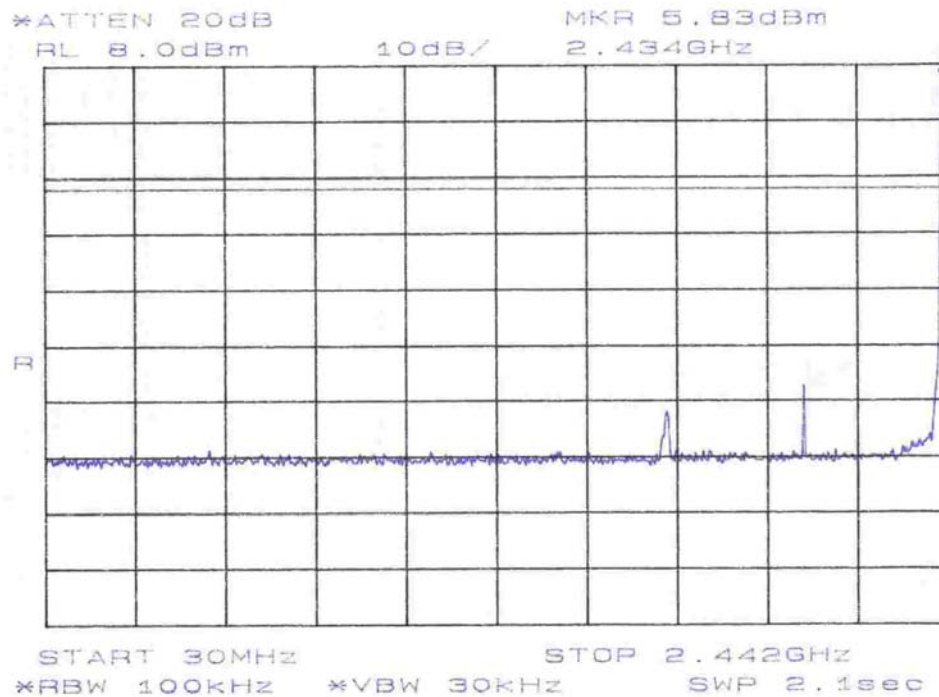


Figure 11. Conducted Spurious Emissions, Mid Channel 30MHz – 2.442GHz

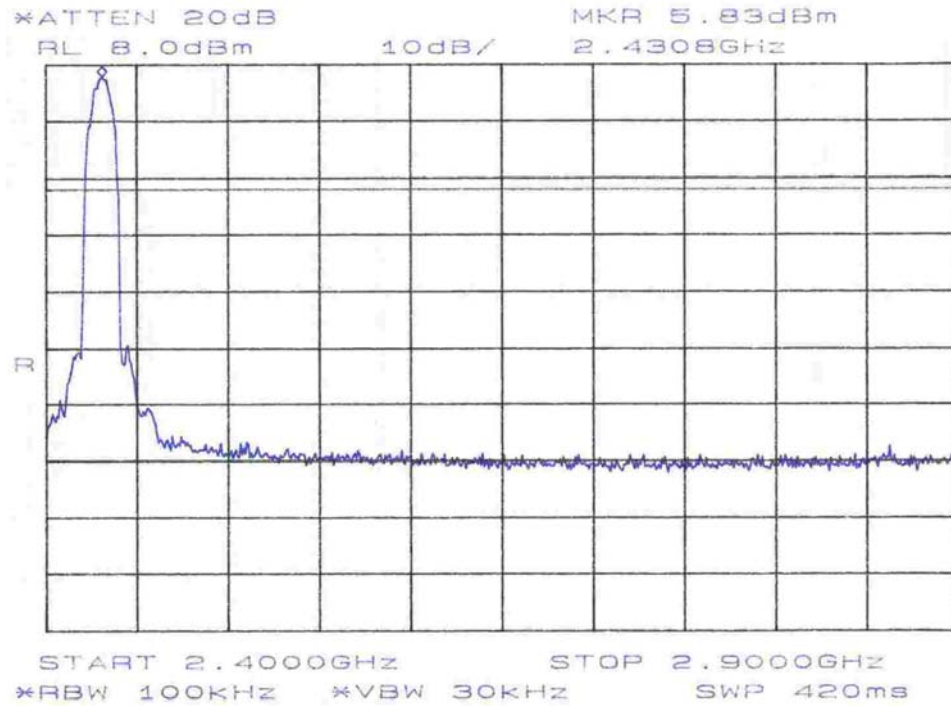


Figure 12. Conducted Spurious Emissions, Mid Channel 2.4GHz - 2.9GHz

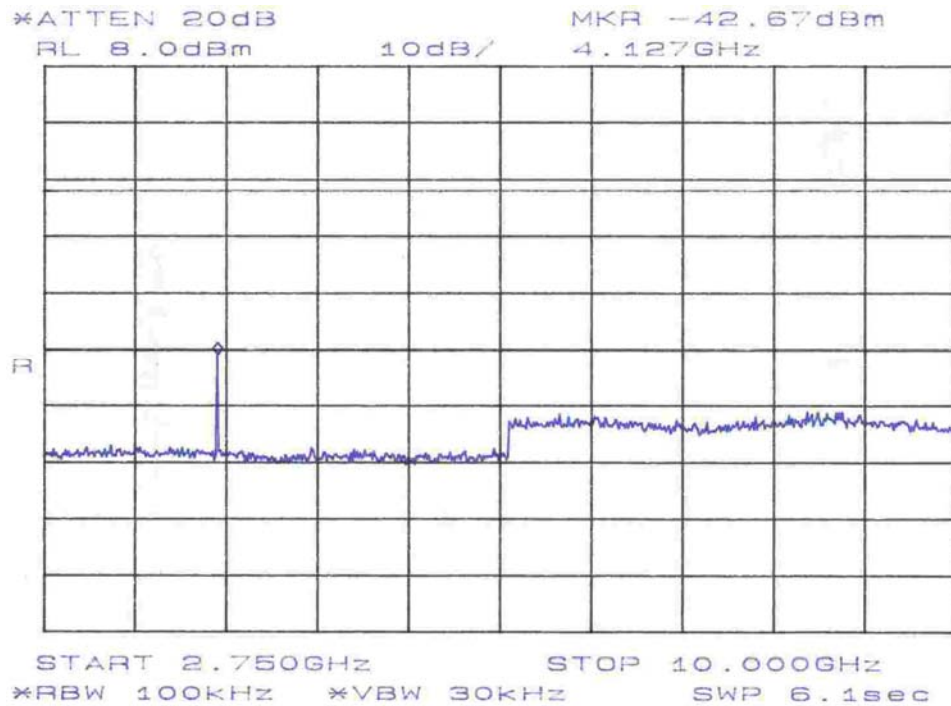


Figure 13. Conducted Spurious Emissions, Mid Channel 2.75GHz - 10GHz

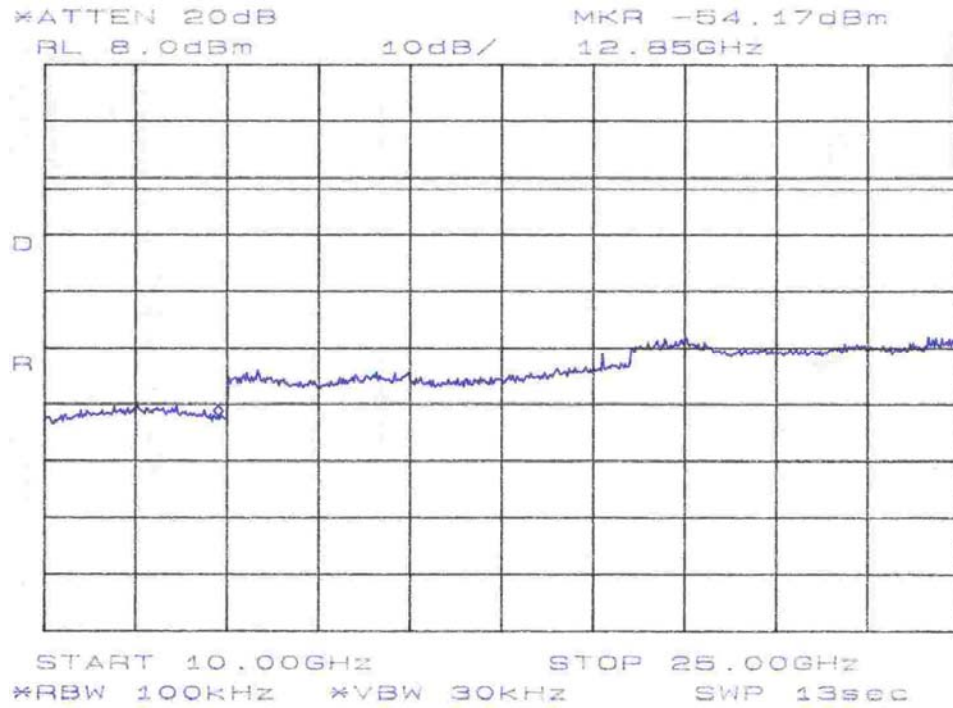


Figure 14. Conducted Spurious Emissions, Mid Channel 10GHz – 25GHz

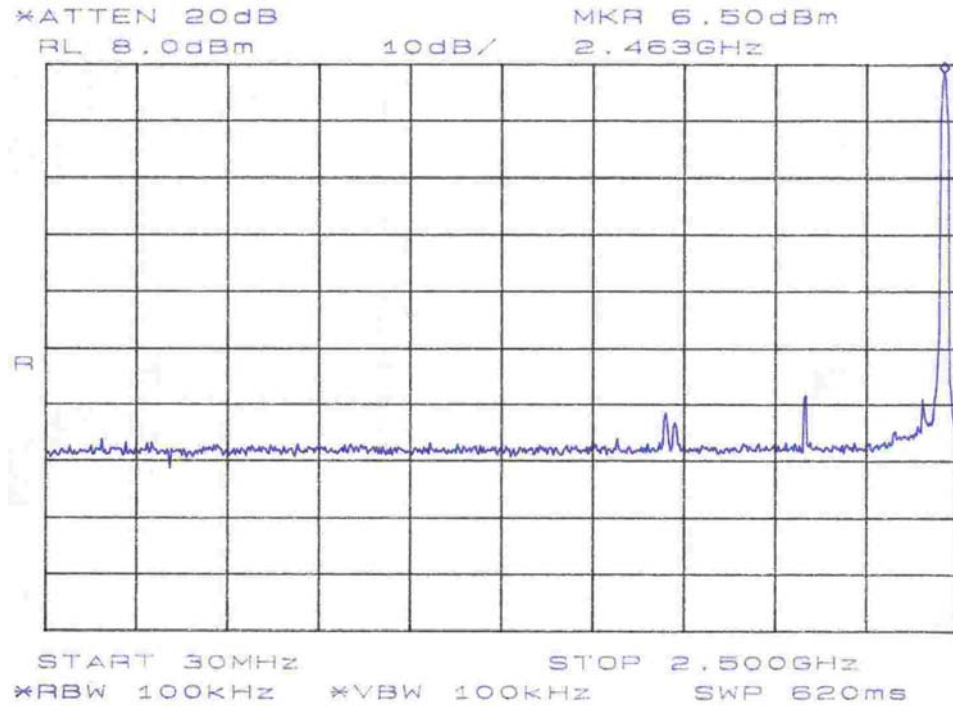


Figure 15. Conducted Spurious Emissions, High Channel 30MHz – 2.5GHz

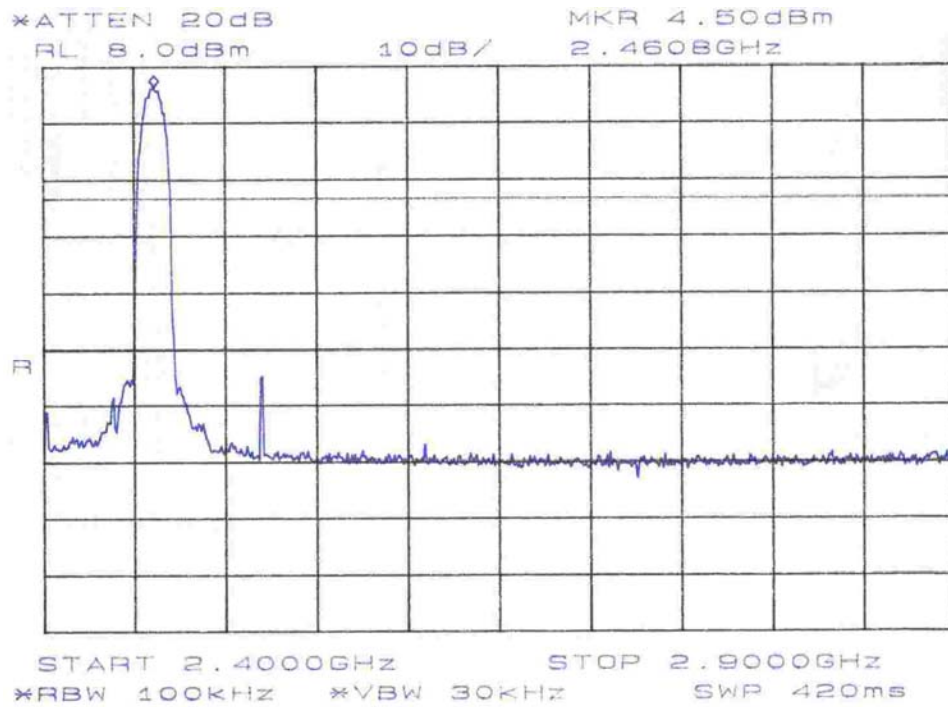


Figure 16. Conducted Spurious Emissions, High Channel 2.4GHz – 2.9GHz

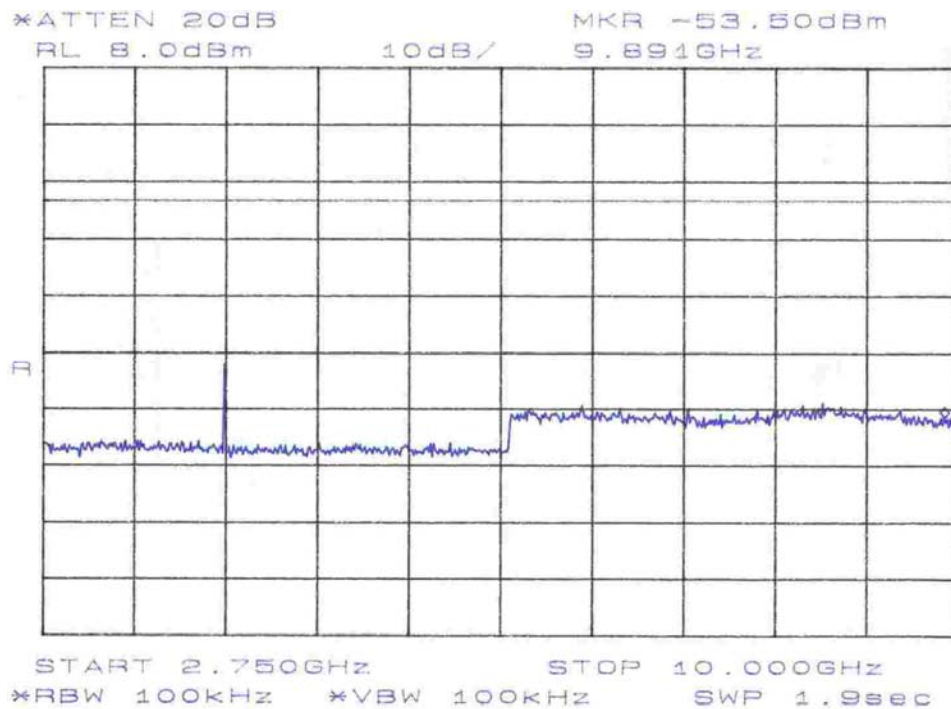


Figure 17. Conducted Spurious Emissions, High Channel 2.75GHz – 10GHz

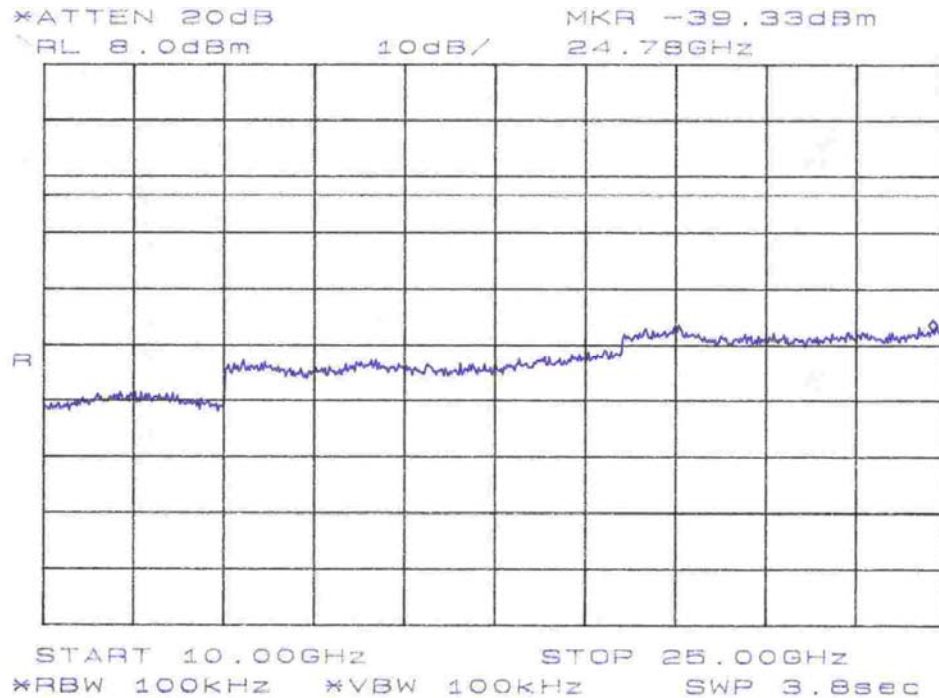


Figure 18. Conducted Spurious Emissions, High Channel 10GHz – 25GHz

3.5 Radiated Spurious Emissions: (FCC Part §2.1053)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

3.5.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2001. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>100 kHz
>1000 MHz	1 MHz	<30 Hz (Avg.) 1MHz (Peak)

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2001. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

Emissions were scanned up to the 10th harmonic of the fundamental frequency. Worst case emissions are reported in the data table. Band Edge data are included in Table 9 followed by plots of the band edge emissions.

The following is a sample calculation used in the data tables for calculating the final field strength of spurious emissions and comparing these levels to the specified limits.

Sample Calculation:

Spectrum Analyzer Voltage (SA Level):	VdB μ V
Antenna Factor (Ant Corr):	AFdB/m
Cable Loss Correction (Cable Corr):	CCdB
Amplifier Gain:	GdB
Electric Field (Corr Level):	EdB μ V/m = VdB μ V + AFdB/m + CCdB - GdB
To convert to linear units:	E μ V/m = antilog (EdB μ V/m/20)

Table 6: Radiated Emission Test Data, Low Frequency Data (Restricted Bands)

CLIENT:	Blast Tech	DATE:	3/15/2004
TESTER:	Steve Koster	JOB #:	8033
<u>EUT Information:</u>		<u>Test Requirements:</u>	
EUT:	PCMCIA Radio	TEST STANDARD:	FCC Part 15
CONFIGURATION:	802.11 radio	DISTANCE:	3m
CLOCKS:	2.4 GHz	CLASS:	B
S/N:	X32638NU00040		
<u>Test Equipment/Limit:</u>			
ANTENNA:	A_00007		
LIMIT:	LFCC_3m_Class_B		
CABLE:	CSITE2_3m		
AMPLIFIER (dB)	None		

Frequency	Polarity	Azimuth	Ant. Hght	SA Level (QP)	Ant. Corr.	Cable Corr.	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Degree	m	dBμV	dB/m	dB	dBμV/m	μV/m	μV/m	dB
73.80	V	225.0	1.0	14.3	6.6	1.5	22.4	13.2	100.0	-17.6
110.01	V	180.0	1.0	19.6	10.0	1.7	31.3	36.9	150.0	-12.2
133.45	V	180.0	1.0	17.0	10.2	1.9	29.1	28.6	150.0	-14.4
110.00	H	0.0	4.0	21.8	10.0	1.7	33.5	47.5	150.0	-10.0
131.99	H	0.0	4.0	21.5	10.4	1.9	33.8	48.9	150.0	-9.7
133.46	H	180.0	4.0	20.8	10.2	1.9	32.9	44.3	150.0	-10.6
263.98	H	0.0	1.5	17.0	13.1	2.4	32.6	42.5	200.0	-13.5
270.34	H	0.0	1.5	17.5	13.8	2.5	33.8	48.8	200.0	-12.3
330.00	H	0.0	1.5	15.4	14.0	2.7	32.1	40.4	200.0	-13.9

Table 7: Radiated Emission Test Data, (Restricted Bands >1GHz): Average

CLIENT:	Blast Tech	DATE:	3/15/2004
TESTER:	Steve Koster	JOB #:	8033
<u>EUT Information:</u>		<u>Test Requirements:</u>	
EUT:	PCMCIA Radio	TEST STANDARD:	FCC Part 15
CONFIGURATION:	802.11 radio	DISTANCE:	3m
CLOCKS:	2.4 GHz	CLASS:	B
S/N:	X32638NU00040		
<u>Test Equipment/Limit:</u>			
ANTENNA:	A_00425	CABLE:	CSITE2_3m
LIMIT:	LFCC_3m_Class_B	AMPLIFIER (dB)	#00066

Average Data

Frequency	Polarity	Azimuth	Ant. Hght	SA Level (Avg.)	Ant. Corr.	Cable Corr.	Amp Gain	Corr. Level	Corr. Level	Limit	Margin
(MHz)	H/V	Degree	m	dBµV	dB/m	dB	dB	dBµV/m	µV/m	µV/m	dB
Chan 1											
4092.0	H	180.0	1.0	33.4	31.7	3.1	35.5	32.7	43.2	500.0	-21.3
4092.0	V	180.0	1.0	35.9	31.7	3.1	35.5	35.2	57.5	500.0	-18.8
4824.0	H	0.0	1.0	29.8	33.3	4.2	35.9	31.4	37.2	500.0	-22.6 a
4824.0	V	0.0	1.0	28.7	33.3	4.2	35.9	30.3	32.7	500.0	-23.7 a
7236.0	H	0.0	1.0	27.2	37.6	4.5	35.9	33.4	46.8	500.0	-20.6 a
7236.0	V	0.0	1.0	27.0	37.6	4.5	35.9	33.2	45.7	500.0	-20.8 a
12060.00	H	0.0	1.0	27.6	41.4	5.2	35.8	38.4	83.2	500.0	-15.6 a
12060.00	V	0.0	1.0	27.1	41.4	5.2	35.8	37.9	78.5	500.0	-16.1 a
14472.00	H	0.0	1.0	30.5	40.8	7.6	34.8	44.1	160.3	500.0	-9.9 a
14472.00	V	0.0	1.0	30.4	40.8	7.6	34.8	44.0	158.5	500.0	-10.0 a
19296.00	H	0.0	1.0	37.0	39.7	7.8	35.4	49.1	285.1	500.0	-4.9 a
19296.00	V	0.0	1.0	35.3	39.7	7.8	35.4	47.4	234.4	500.0	-6.6 a
Chan 5											
1552.80	H	270.0	1.0	36.6	27.8	2.6	35.8	31.2	36.3	500.0	-22.8
1552.80	V	270.0	1.0	38.5	27.8	2.6	35.8	33.1	45.2	500.0	-20.9
4127.30	H	90.0	1.0	39.4	31.5	3.0	35.5	38.4	83.2	500.0	-15.6
4127.30	V	90.0	1.0	44.7	31.5	3.0	35.5	43.7	153.1	500.0	-10.3
4864.00	H	0.0	1.0	30.1	33.4	4.3	36.0	31.8	38.9	500.0	-22.2 a
4864.00	V	0.0	1.0	28.6	33.4	4.3	36.0	30.3	32.7	500.0	-23.7 a
7296.00	H	0.0	1.0	26.2	37.7	4.6	35.9	32.6	42.7	500.0	-21.4 a
7296.00	V	0.0	1.0	26.4	37.7	4.6	35.9	32.8	43.7	500.0	-21.2 a
12160.00	H	0.0	1.0	26.7	41.3	5.4	35.7	37.7	76.7	500.0	-16.3 a
12160.00	V	0.0	1.0	27.4	41.3	5.4	35.7	38.4	83.2	500.0	-15.6 a
19456.00	H	0.0	1.0	37.3	39.7	7.8	35.3	49.5	298.5	500.0	-4.5 a
19456.00	V	0.0	1.0	37.5	39.7	7.8	35.3	49.7	305.5	500.0	-4.3 a
Chan 11											
1721.00	H	180.0	1.0	39.4	28.3	2.9	35.7	34.9	55.9	500.0	-19.0

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Hght m	SA Level (Avg.) dB μ V	Ant. Corr. dB/m	Cable Corr. dB	Amp Gain dB	Corr. Level dB μ V/m	Corr. Level μ V/m	Limit μ V/m	Margin dB
4200.00	H	180.0	1.0	38.4	31.7	3.1	35.5	37.8	77.3	500.0	-16.2
4200.00	V	180.0	1.0	40.0	31.7	3.1	35.5	39.4	93.0	500.0	-14.6
4924.00	V	0.0	1.0	26.7	33.5	4.4	36.0	28.6	26.9	500.0	-25.4 a
4924.00	H	0.0	1.0	27.0	33.5	4.4	36.0	28.9	27.9	500.0	-25.1 a
7386.00	V	0.0	1.0	26.5	37.8	4.6	35.9	33.0	44.7	500.0	-21.0 a
7386.00	H	0.0	1.0	27.3	37.8	4.6	35.9	33.8	49.0	500.0	-20.2 a
12310.00	V	0.0	1.0	27.1	41.1	5.6	35.5	38.3	82.2	500.0	-15.7 a
12310.00	H	0.0	1.0	27.9	41.1	5.6	35.5	39.1	90.2	500.0	-14.9 a
19696.00	V	0.0	1.0	35.4	39.7	7.8	35.3	47.6	239.9	500.0	-6.4 a
19696.00	H	0.0	1.0	35.7	39.7	7.8	35.3	47.9	248.3	500.0	-6.1 a
22158.00	V	0.0	1.0	36.0	40.5	8.4	35.0	49.9	312.6	500.0	-4.1 a
22158.00	H	0.0	1.0	36.2	40.5	8.4	35.0	50.1	319.9	500.0	-3.9 a

a = ambient reading

Table 8: Radiated Emission Test Data, (Restricted Bands >1GHz): Peak

CLIENT:	Blast Tech	DATE:	3/15/2004
TESTER:	Steve Koster	JOB #:	8033
<u>EUT Information:</u>		<u>Test Requirements:</u>	
EUT:	PCMCIA Radio	TEST STANDARD:	FCC Part 15
CONFIGURATION:	802.11 radio	DISTANCE:	3m
CLOCKS:	2.4 GHz	CLASS:	B
S/N:	X32638NU00040		
<u>Test Equipment/Limit:</u>			
ANTENNA:	A_00425	CABLE:	CSITE2_3m
LIMIT:	LFCC_3m_Class_B	AMPLIFIER (dB)	#00066

Peak Data

Frequency	Polarity	Azimuth	Ant.	SA	Ant.	Cable	Amp	Corr.	Corr.	Limit	Margin
(MHz)	H/V	Degree	Hght	Level	Corr.	Corr.	Gain	Level	Level		
			m	(Peak)							
				dBμV	dB/m	dB	dB	dBμV/m	μV/m	μV/m	dB
Chan 1											
4092.0	H	180.0	1.0	47.3	31.7	3.1	35.5	46.6	213.8	5000.0	-27.4
4092.0	V	180.0	1.0	48.6	31.7	3.1	35.5	47.9	248.3	5000.0	-26.1
4824.0	H	0.0	1.0	44.6	33.3	4.2	35.9	46.2	204.2	5000.0	-27.8 a
4824.0	V	0.0	1.0	42.1	33.3	4.2	35.9	43.7	153.1	5000.0	-30.3 a
7236.0	H	0.0	1.0	35.6	37.6	4.5	35.9	41.8	123.0	5000.0	-32.2 a
7236.0	V	0.0	1.0	35.0	37.6	4.5	35.9	41.2	114.8	5000.0	-32.8 a
12060.00	H	0.0	1.0	35.5	41.4	5.2	35.8	46.3	206.5	5000.0	-27.7 a
12060.00	V	0.0	1.0	34.3	41.4	5.2	35.8	45.1	179.9	5000.0	-28.9 a
14472.00	H	0.0	1.0	40.3	40.8	7.6	34.8	53.9	495.5	5000.0	-20.1 a
14472.00	V	0.0	1.0	40.5	40.8	7.6	34.8	54.1	507.0	5000.0	-19.9 a
19296.00	H	0.0	1.0	48.3	39.7	7.8	35.4	60.4	1047.1	5000.0	-13.6 a
19296.00	V	0.0	1.0	46.2	39.7	7.8	35.4	58.3	822.2	5000.0	-15.7 a
Chan 5											
1552.80	H	270.0	1.0	50.6	27.8	2.6	35.8	45.2	182.0	5000.0	-28.8
1552.80	V	270.0	1.0	48.7	27.8	2.6	35.8	43.3	146.2	5000.0	-30.7
4127.30	H	90.0	1.0	51.3	31.5	3.0	35.5	50.3	327.3	5000.0	-23.7
4127.30	V	90.0	1.0	54.6	31.5	3.0	35.5	53.6	478.6	5000.0	-20.4
4864.00	H	0.0	1.0	36.5	33.4	4.3	36.0	38.2	81.3	5000.0	-35.8 a
4864.00	V	0.0	1.0	39.9	33.4	4.3	36.0	41.6	120.2	5000.0	-32.4 a
7296.00	H	0.0	1.0	31.1	37.7	4.6	35.9	37.5	75.0	5000.0	-36.5 a
7296.00	V	0.0	1.0	35.4	37.7	4.6	35.9	41.8	123.0	5000.0	-32.2 a
12160.00	H	0.0	1.0	35.5	41.3	5.4	35.7	46.5	211.3	5000.0	-27.5 a
12160.00	V	0.0	1.0	39.2	41.3	5.4	35.7	50.2	323.6	5000.0	-23.8 a
19456.00	H	0.0	1.0	46.7	39.7	7.8	35.3	58.9	881.0	5000.0	-15.1 a
19456.00	V	0.0	1.0	46.8	39.7	7.8	35.3	59.0	891.3	5000.0	-15.0 a

Frequency (MHz)	Polarity H/V	Azimuth Degree	Ant. Hght m	SA Level (Peak) dB μ V	Ant. Corr. dB/m	Cable Corr. dB	Amp Gain dB	Corr. Level dB μ V/m	Corr. Level μ V/m	Limit μ V/m	Margin dB
Chan 11											
1721.00	H	180.0	1.0	53.8	28.3	2.9	35.7	49.3	293.4	5000.0	-24.6
4200.00	H	180.0	1.0	51.7	31.7	3.1	35.5	51.1	357.6	5000.0	-22.9
4200.00	V	180.0	1.0	52.9	31.7	3.1	35.5	52.3	410.6	5000.0	-21.7
4924.00	V	0.0	1.0	33.8	33.5	4.4	36.0	35.7	61.0	5000.0	-38.3 a
4924.00	H	0.0	1.0	39.8	33.5	4.4	36.0	41.7	121.6	5000.0	-32.3 a
7386.00	V	0.0	1.0	37.5	37.8	4.6	35.9	44.0	158.5	5000.0	-30.0 a
7386.00	H	0.0	1.0	38.5	37.8	4.6	35.9	45.0	177.8	5000.0	-29.0 a
12310.00	V	0.0	1.0	34.4	41.1	5.6	35.5	45.6	190.5	5000.0	-28.4 a
12310.00	H	0.0	1.0	34.5	41.1	5.6	35.5	45.7	192.8	5000.0	-28.3 a
19696.00	V	0.0	1.0	49.7	39.7	7.8	35.3	61.9	1244.5	5000.0	-12.1 a
19696.00	H	0.0	1.0	50.3	39.7	7.8	35.3	62.5	1333.5	5000.0	-11.5 a
22158.00	V	0.0	1.0	49.3	40.5	8.4	35.0	63.2	1445.4	5000.0	-10.8 a
22158.00	H	0.0	1.0	49.7	40.5	8.4	35.0	63.6	1513.6	5000.0	-10.4 a

a = ambient reading

Table 9; FCC Part 15.247 Band Edge Radiated Emissions Test Data Sheet

CLIENT:	BlastTechnology	DATE:	4/5/2004
TESTER:	Greg Snyder	JOB #:	8033
<u>EUT Information:</u>		<u>Test Requirements:</u>	
EUT:	PCMCIA Module	TEST STANDARD:	FCC Part 15
CONFIGURATION:	Transmitting	DISTANCE:	3m
CLOCKS:	2.412GHz (Channel 1) and 2.462 GHz (Channel 11)		
<u>Test Equipment/Limit:</u>			
ANTENNA:	A_00425		
LIMIT:	LFCC_3m_Class_B		
CABLE:	CSITE1_HF		
AMPLIFIER (dB)	A_00066		

Frequency (MHz)	Pol H/V	Az Degree	Ant. Hght (m)	SA Level (dBμV)	Ant. Corr. (dB/m)	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level (dBμV/m)	Corr. Level (μV/m)	Limit (μV/m)	Margin dB	Notes
2499.00	V	90.0	1.0	64.0	30.0	3.0	35.6	61.4	1178.6	5000.0	-12.6	Peak
2487.60	V	90.0	1.0	45.5	30.0	3.0	35.6	42.9	139.7	500.0	-11.1	Avg
2310.00	V	270.0	1.0	69.3	29.7	2.9	35.6	66.3	2073.0	5000.0	-7.6	Peak
2362.00	V	270.0	1.0	44.8	29.8	2.9	35.6	41.9	125.1	500.0	-12.0	Avg

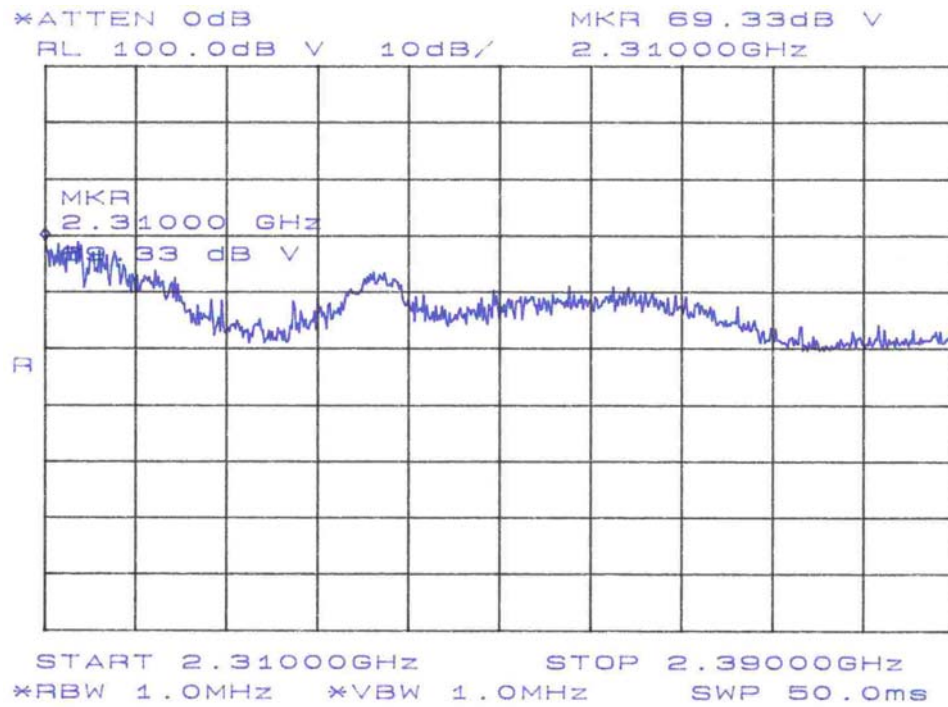


Figure 3-19. Channel 1 Band Edge, Peak

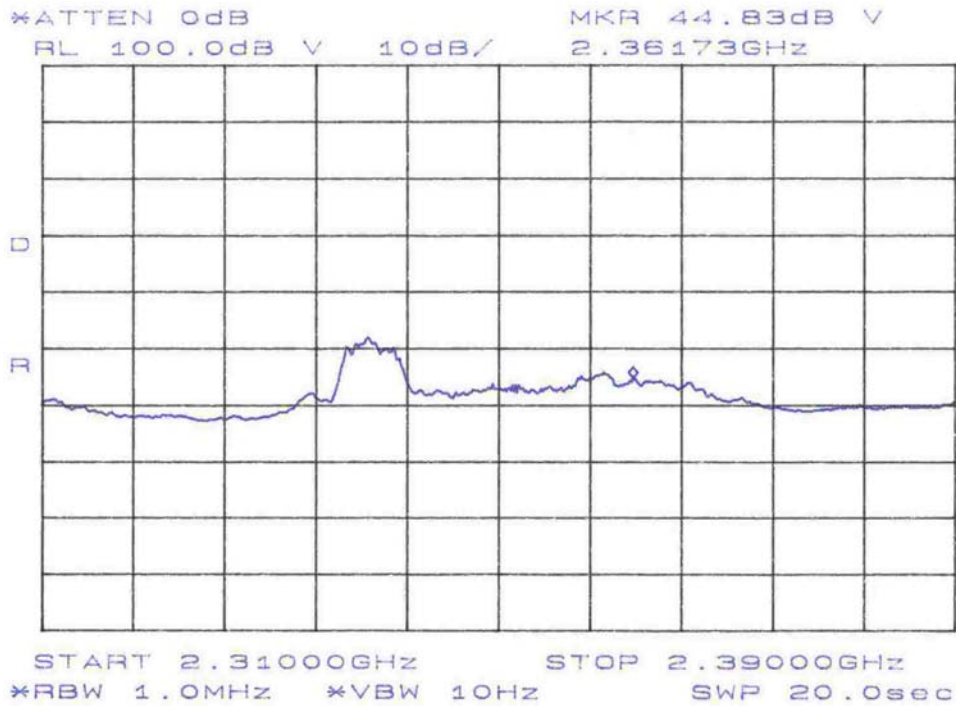


Figure 3-20. Channel 1 Band Edge, Average

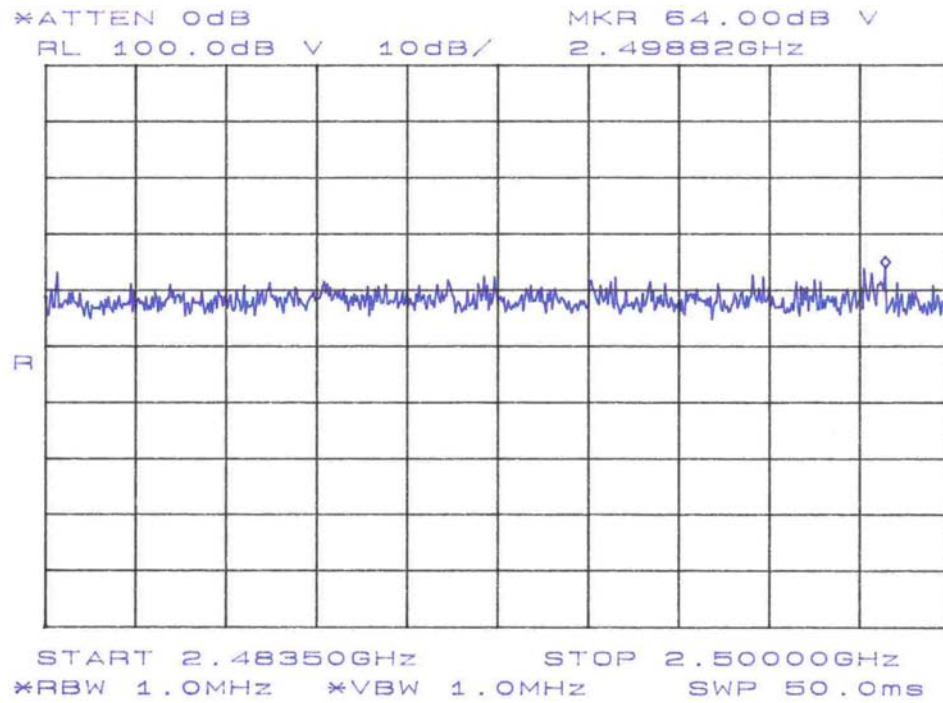


Figure 3-21. Channel 11 Band Edge, Peak

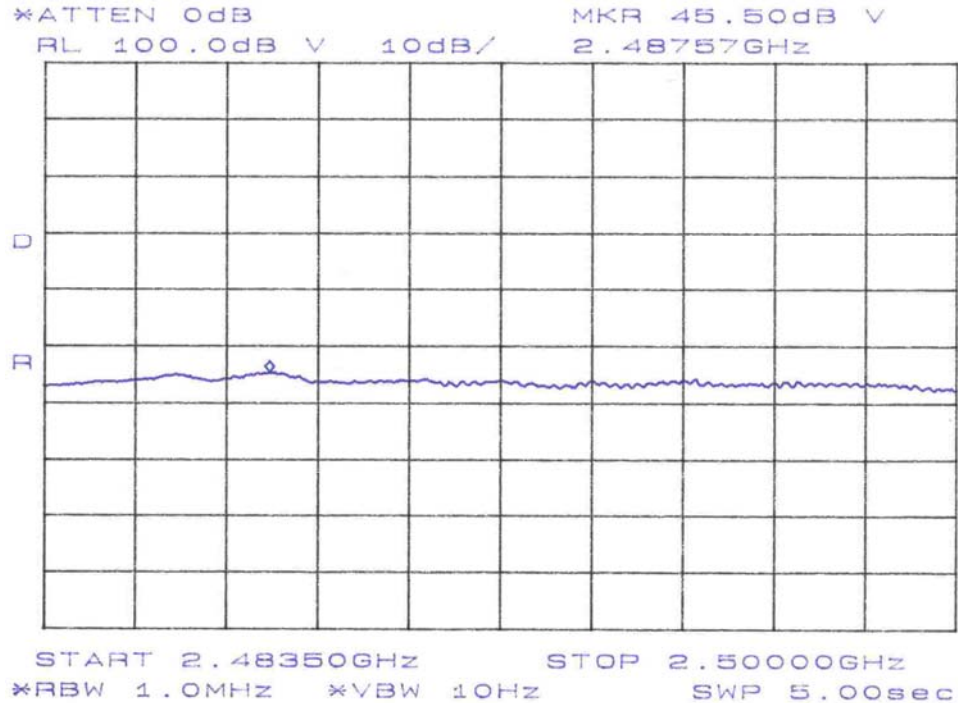


Figure 3-22. Channel 11 Band Edge, Average

3.6 AC Powerline Conducted Emissions: (FCC Part §15.207)

The EUT was placed on an 80 cm high 1 x 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50 Ω /50 μ H Line Impedance Stabilization Network bonded to a 3 x 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power and data cables were moved about to obtain maximum emissions.

The 50 Ω output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak or peak, as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth.

Data is recorded in Table 10.

Table 10, Conducted Emissions Test Data Sheet

CLIENT:	Blast Technologies	DATE:	03/17/04
TEST STANDARD:	FCC Part 15	JOB #:	8033
MODEL:	PCMIA Radio	CLASS:	FCC_B
TESTER:	James Ritter	TEST SITE:	CSITE1_CE
TEST VOLTAGE:	120 VAC		

LINE 1 - NEUTRAL

Frequency	Level	Cable	Limit	Margin	Level	Cable	Limit	Margin
	QP	Loss	QP	QP	AVG	Loss	AVG	AVG
MHz	dBu	dB	dBuV	dB	dBuV	dB	dBuV	dB
	V							
0.191	41.1	10.6	64.0	-12.3	27.2	10.6	54.0	-16.2
0.286	31.9	10.8	60.6	-18.0	21.5	10.8	50.6	-18.4
0.569	30.8	10.7	56.0	-14.5	24.9	10.7	46.0	-10.4
1.687	28.6	10.9	56.0	-16.5	18.4	10.9	46.0	-16.7
3.129	29.9	11.1	56.0	-15.0	18.8	11.1	46.0	-16.1
5.321	31.5	11.2	60.0	-17.3	22.4	11.2	50.0	-16.4
8.005	27.9	11.4	60.0	-20.7	27.9	11.4	50.0	-10.7
26.060	17.1	12.1	60.0	-30.8	17.1	12.1	50.0	-20.8

LINE 2 - PHASE

Frequency	Level	Cable	Limit	Margin	Level	Cable	Limit	Margin
	QP	Loss	QP	QP	AVG	Loss	AVG	AVG
MHz	dBu	dB	dBuV	dB	dBuV	dB	dBuV	dB
	V							
0.191	40.7	10.6	64.0	-12.7	27.0	10.6	54.0	-16.4
0.287	31.1	10.8	60.6	-18.7	21.2	10.8	50.6	-18.6
0.569	31.2	10.7	56.0	-14.1	24.6	10.7	46.0	-10.7
1.687	28.6	10.9	56.0	-16.5	18.1	10.9	46.0	-17.0
3.129	29.3	11.1	56.0	-15.6	18.7	11.1	46.0	-16.2
5.321	31.0	11.2	60.0	-17.8	19.1	11.2	50.0	-19.7
8.000	27.5	11.4	60.0	-21.1	27.5	11.4	50.0	-11.1
11.140	22.9	11.5	60.0	-25.6	22.9	11.5	50.0	-15.6