



**Microsoft Mobile Oy**

**Application  
For  
Certification**

**FCC ID: PYADT-904**

**Wireless Charging Plate**

**Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)**

**2.4GHz Transceiver**

**Report No.: 150728037SZN-003**

Prepared and Checked by:

Approved by:

Sign on file

Leo Lai  
Project Engineer

---

Andy Yan  
Senior Project Engineer  
Date: November 12, 2015

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_TX\_b

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China

Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labelling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	<i>Instruction Manual</i>
<i>EXHIBIT 8:</i>	<i>Miscellaneous Information</i>
<i>EXHIBIT 9:</i>	<i>Miscellaneous Information</i>
<i>EXHIBIT 10:</i>	<i>Test Equipment List</i>

# INTERTEK TESTING SERVICES

## MEASUREMENT/TECHNICAL REPORT

**Microsoft Mobile Oy**

**Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)**

**FCC ID: PYADT-904**

This report concerns (check one): Original Grant ☒ Class II Change ☐

Equipment Type: DTS - Digital Transmission System

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes ☐ No ☒

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes ☐ No ☒

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-14 Edition] provision.

Report prepared by:

Leo Lai  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, Block D, Huahan Building, Langshan Road,  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8614 0661  
Fax: (86 755) 8601 6751

# INTERTEK TESTING SERVICES

---

## Table of Contents

<b>1.0 <u>Summary of test results</u></b>	<b>2</b>
1.1 Related Submittal(s) Grant	2
<b>2.0 <u>General Description</u></b>	<b>4</b>
2.1 Product Description	4
2.2 Test Methodology	4
2.3 Test Facility	4
<b>3.0 <u>System Test Configuration</u></b>	<b>6</b>
3.1 Justification	6
3.2 EUT Exercising Software	6
3.3 Special Accessories	6
3.4 Equipment Modification	6
3.5 Measurement Uncertainty	7
3.6 Support Equipment List and Description	7
<b>4.0 <u>Test Results</u></b>	<b>9</b>
4.1 Maximum Conducted Output Power at Antenna Terminals	9
4.2 Minimum 6dB RF Bandwidth	10
4.3 Maximum Power Density	13
4.4 Out of Band Conducted Emissions	16
4.5 Out of Band Radiated Emissions	24
4.6 Transmitter Radiated Emissions in Restricted Bands	25
4.7 Field Strength Calculation	26
4.8 Radiated Spurious Emission	27
4.9 Conducted Emission (Number of Hopping Frequencies)	32
4.10 Radiated Emission from Digital Section of Transceiver	35
<b>5.0 <u>Equipment Photographs</u></b>	<b>37</b>
<b>6.0 <u>Product Labelling</u></b>	<b>39</b>
<b>7.0 <u>Technical Specifications</u></b>	<b>41</b>
<b>8.0 <u>Instruction Manual</u></b>	<b>43</b>
<b>9.0 <u>Miscellaneous Information</u></b>	<b>45</b>
9.1 Discussion of Pulse Desensitization	46
9.2 Emissions Test Procedures	47
<b>10.0 <u>Test Equipment List</u></b>	<b>50</b>
<b>11.0 <u>Annex</u></b>	<b>51</b>

## INTERTEK TESTING SERVICES

---

### List of attached file

Exhibit type	File Description	filename
Test Report	Test Report	report.pdf
Operational Description	Technical Description	descri.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
External Photos	External Photo	external photos.pdf
Internal Photos	Internal Photo	internal photos.pdf
ID Label/Location Info	Label Artwork and Location	label.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Users Manual	User Manual	manual.pdf
Cover Letter	Letter of Agency	letter of agency.pdf
RF Exposure	RF Exposure	RF Exposure.pdf

**EXHIBIT 1**

**SUMMARY OF TEST RESULTS**

## INTERTEK TESTING SERVICES

---

### 1.0 Summary of Test

**Microsoft Mobile Oy - MODEL:  
DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)**

**FCC ID: PYADT-904**

TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)(3)	Pass
6 dB Bandwidth	15.247(a)(2)	Pass
Max. Power Density	15.247(e)	Pass
Out of Band Antenna Conducted Emission	15.247(d)	Pass
Radiated Emission in Restricted Bands	15.247(d)	Pass
AC Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass (See Notes)

Notes: The EUT uses Integral Antenna which in accordance to Section 15.203 is considered sufficient to comply with the provisions of this section.

### 1.1 Related Submittal(s) Grants

This is an application for certification of Bluetooth 4.0 LE portion for the Wireless Charging Plate.

Remaining portions are subject to the following procedures:

1. Wireless Charging Function (110-150KHz): 150728037SZN-001

**EXHIBIT 2**

**GENERAL DESCRIPTION**



## INTERTEK TESTING SERVICES

---

### 2.0 **General Description**

#### 2.1 Product Description

The equipment under test (EUT) is a Wireless Charging Plate with BT4.0 LE function operating in 2402-2480MHz. The EUT is powered by DC 5.2V. For more detail information pls. refer to the user manual.

Antenna Type: Integral antenna

Bluetooth Version: 4.0 BLE

Modulation Type: GFSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 2.2 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10: 2013 and KDB 558074 v03r03. Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

#### 2.3 Test Facility

The Semi-Anechoic chamber and shield room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, Block D, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 242492).

**EXHIBIT 3**  
**SYSTEM TEST CONFIGURATION**

## INTERTEK TESTING SERVICES

---

### 3.0 **System Test Configuration**

#### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10: 2013.

The EUT was powered by DC 5.2V from adapter(Adapter Input: 120V/60Hz) during the test. Only the worst case data was reported.

All packets DH1, DH3 & DH5 mode in all modulation types GFSK were tested, and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit was flushed with the rear of the table when it was powered by adapter up to 1GHz and placed in the centre of turntable above 1GHz.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

#### 3.2 EUT Exercising Software

No software is used.

#### 3.3 Special Accessories

No Special Accessory attached.

#### 3.4 Equipment Modification

Any modifications installed previous to testing by Microsoft Mobile Oy will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

## INTERTEK TESTING SERVICES

---

### 3.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 3.6 Support Equipment List and Description

This product was tested in the following configuration:

Refer List:

Description	Manufacturer	Model No.
Mobile Phone	Nokia	Lumia 820
Adapter	Nokia	AC-60C

**EXHIBIT 4**  
**TEST RESULTS**

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.0 **Measurement Results**

#### 4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(3):

The antenna port of the EUT was connected to the input of a broadband peak RF power meter. The power meter have a Resolution bandwidth that is greater than OBW and utilize a fast-responding diode detector. Power was read directly at the EUT antenna terminals

For antennas with gains of 6 dBi or less, maximum allowed Transmitter output is 1 watt (+30 dBm).

Bluetooth 4.0 (Antenna Gain = 4.06dBi) (GFSK, 1Mbps)		
Frequency (MHz)	Output in dBm	Output in mWatt
Low Channel: 2402	-3.51	0.45
Middle Channel: 2440	-4.05	0.39
High Channel: 2480	-4.85	0.33

Cable loss: 0.5 dB    External Attenuation: 0 dB

Cable loss, external attenuation has been included in OFFSET function

EUT max. output level = -3.51 dBm

For RF Exposure, the information is saved with filename: RF exposure.pdf.

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.2 Minimum 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 KHz according to FCC KDB 558074. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6dB bandwidth was determined from where the channel output spectrum intersected the display line.



Limit: The 6 dB Bandwidth is at least 500 kHz.

Bluetooth 4.0 (GFSK, 1Mbps)	
Frequency (MHz)	6 dB Bandwidth (MHz)
Low Channel: 2402	0.699
Middle Channel: 2440	0.719
High Channel: 2480	0.739

The test plots are attached as below.

# INTERTEK TESTING SERVICES


GFSK:

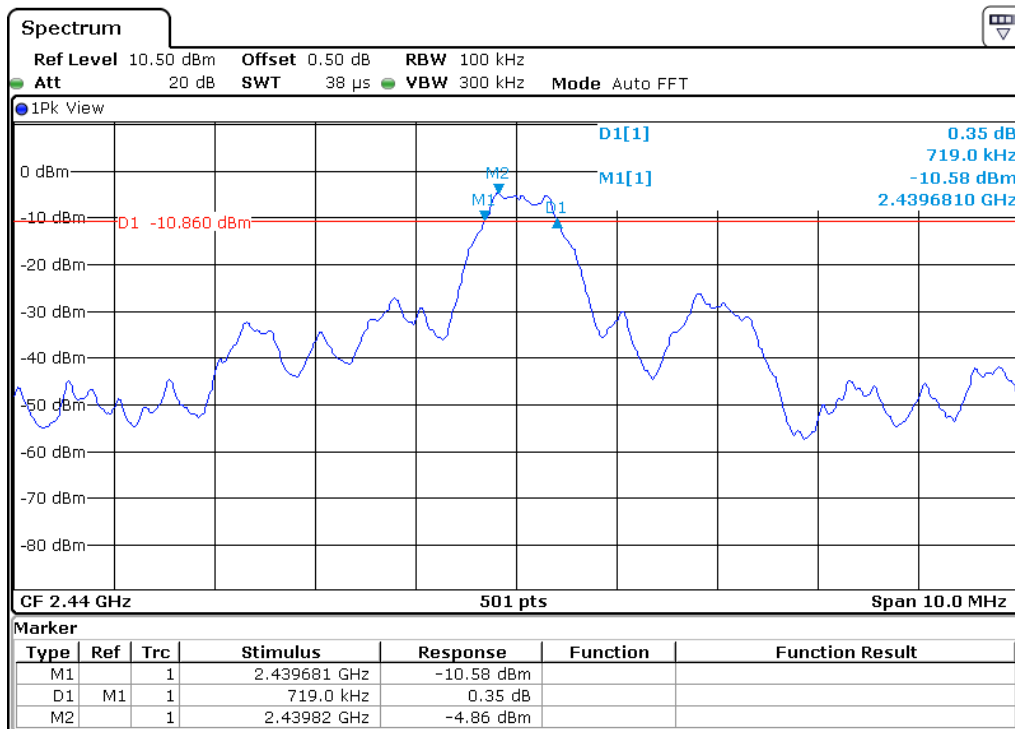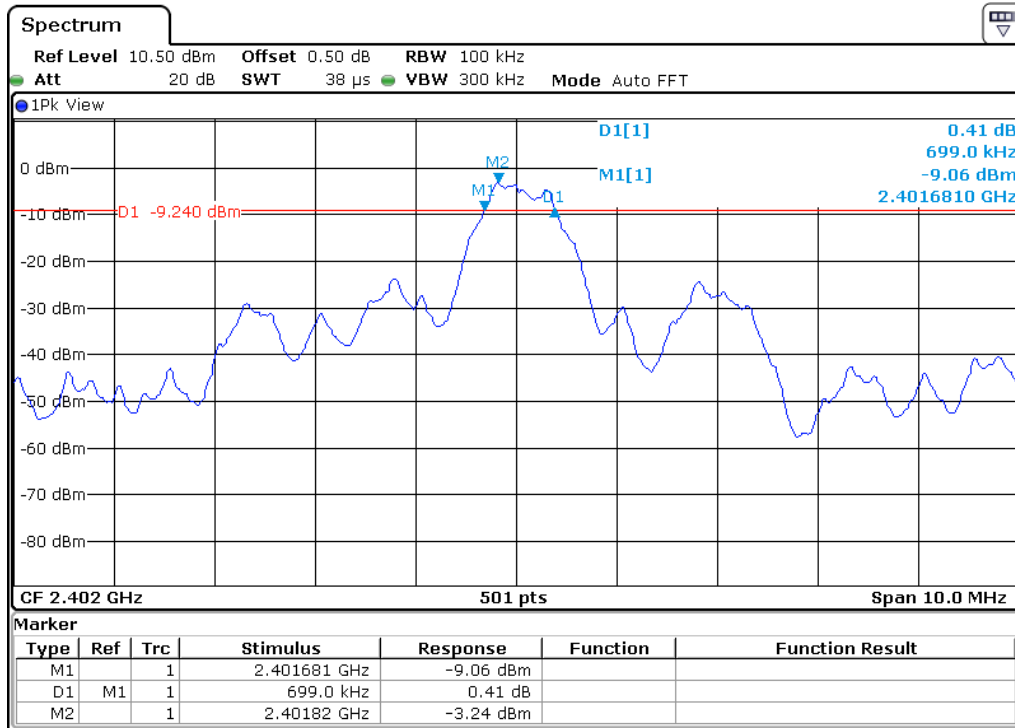

TRF No.: FCC 15C\_TX\_b  
 FCC ID: PYADT-904



# INTERTEK TESTING SERVICES

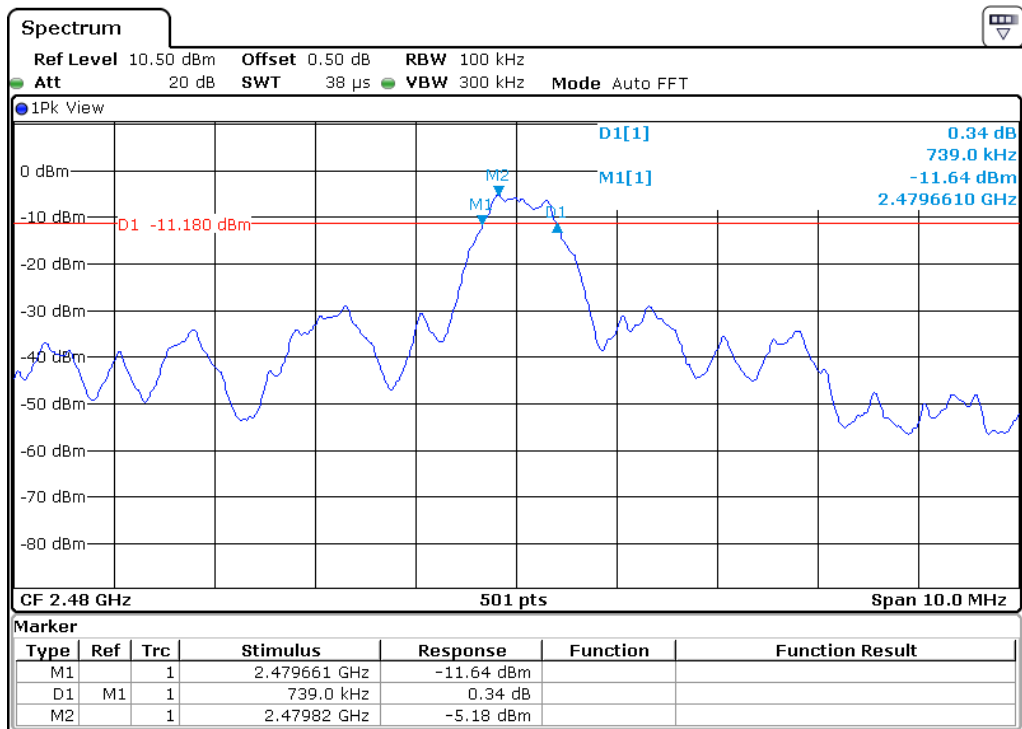

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.3 Maximum Power Density Reading, FCC Rule 15.247(e):

The Measurement Procedure PKPSD was set according to the FCC KDB 558074.

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.



Limit: The Power Density does not exceed 8dBm/ 3 kHz.

Bluetooth 4.0 (GFSK, 1Mbps)	
Frequency (MHz)	Power Density with RBW 100KHz (dBm)
Low Channel: 2402	-4.35
Middle Channel: 2440	-4.88
High Channel: 2480	-5.52

The test plots are attached as below.


# INTERTEK TESTING SERVICES

GFSK:

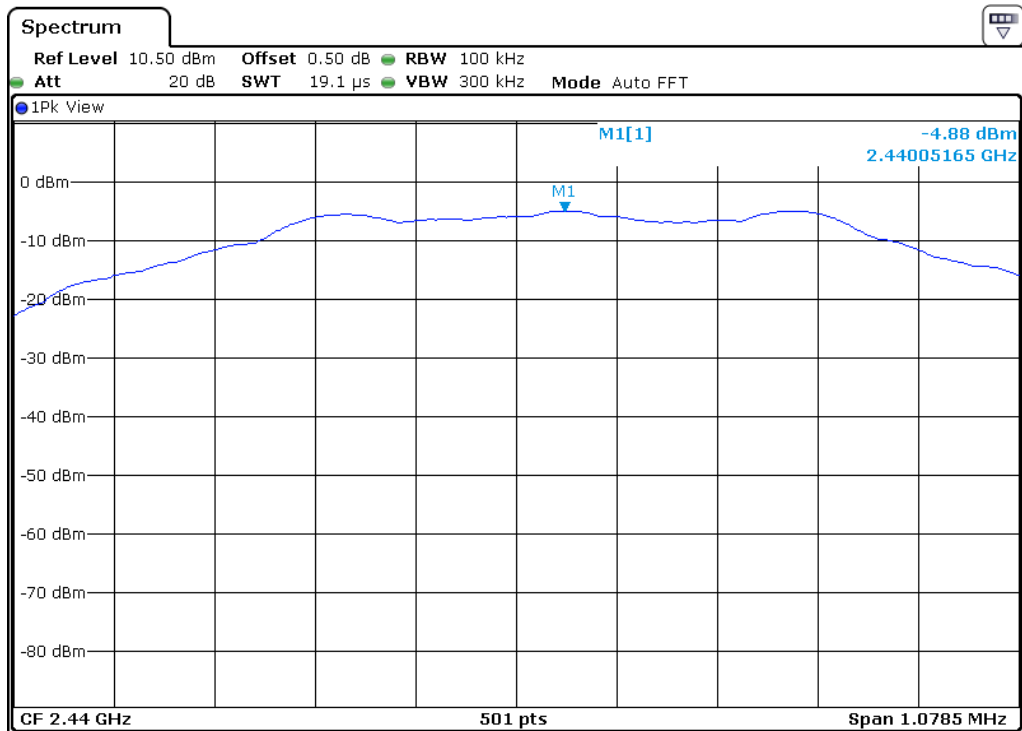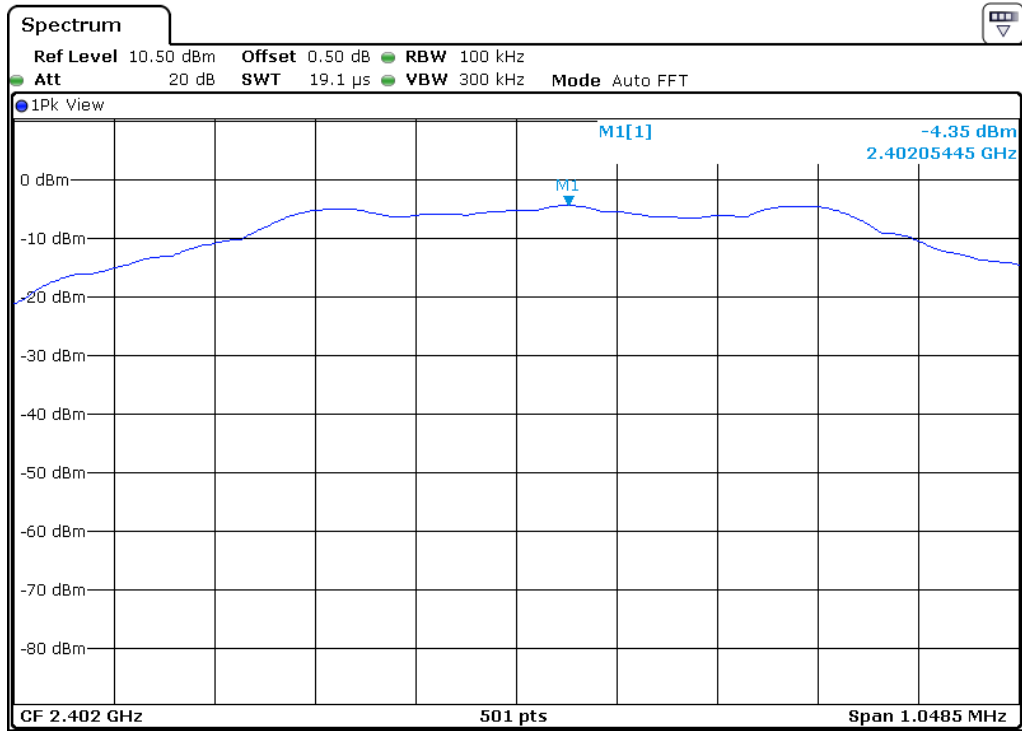

TRF No.: FCC 15C\_TX\_b  
FCC ID: PYADT-904

INTERTEK TESTING SERVICES

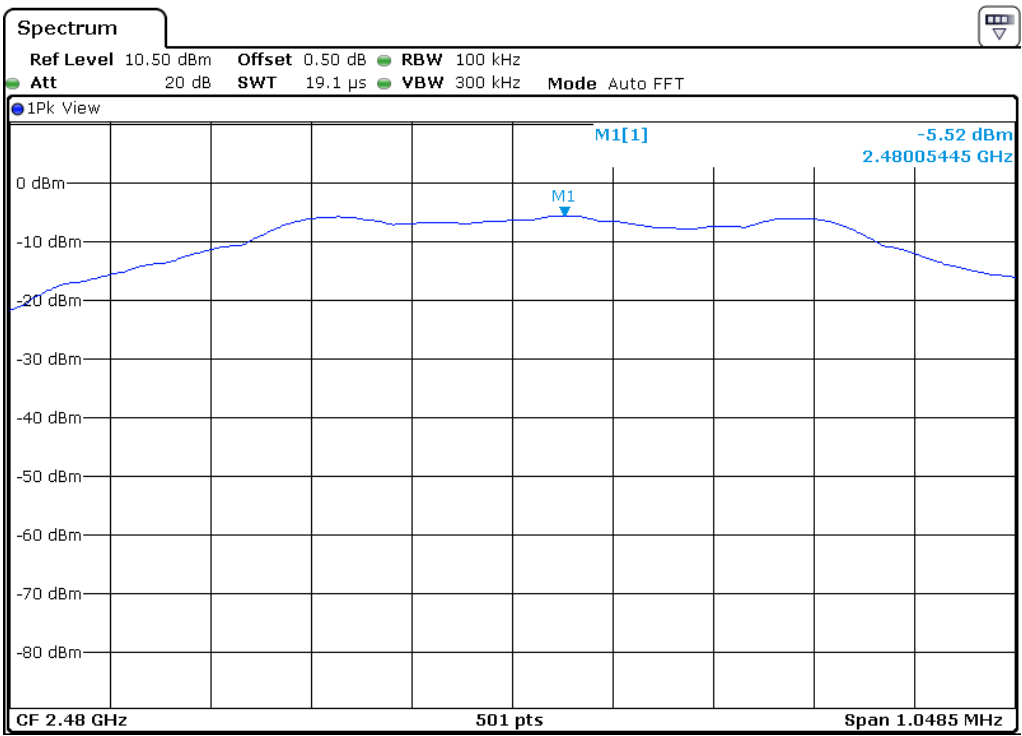

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.4 Out of Band Conducted Emissions, FCC Rule 15.247(d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. The Measurement Procedure was set according to the FCC KDB 558074.



Refer to the attached test plots for out of band conducted emissions data with rate of 1Mbps for Bluetooth 4.0.

The test plots showed all spurious emission up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.



The test plots are attached as below.

## INTERTEK TESTING SERVICES


Channel 0 (2402MHz) Reference Level: -4.35 dBm

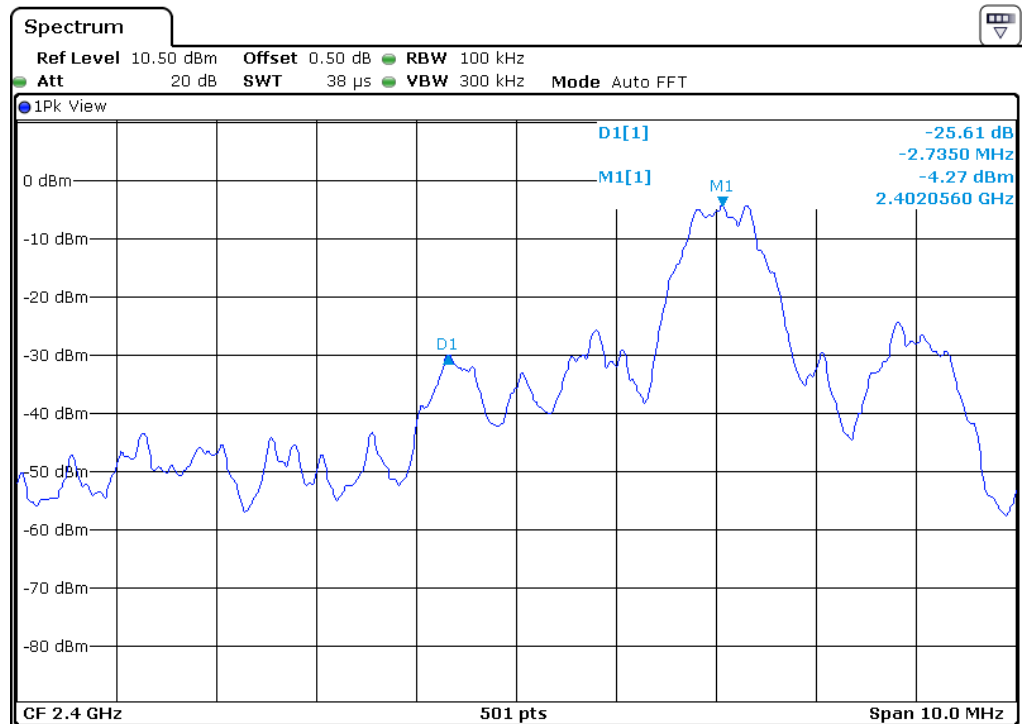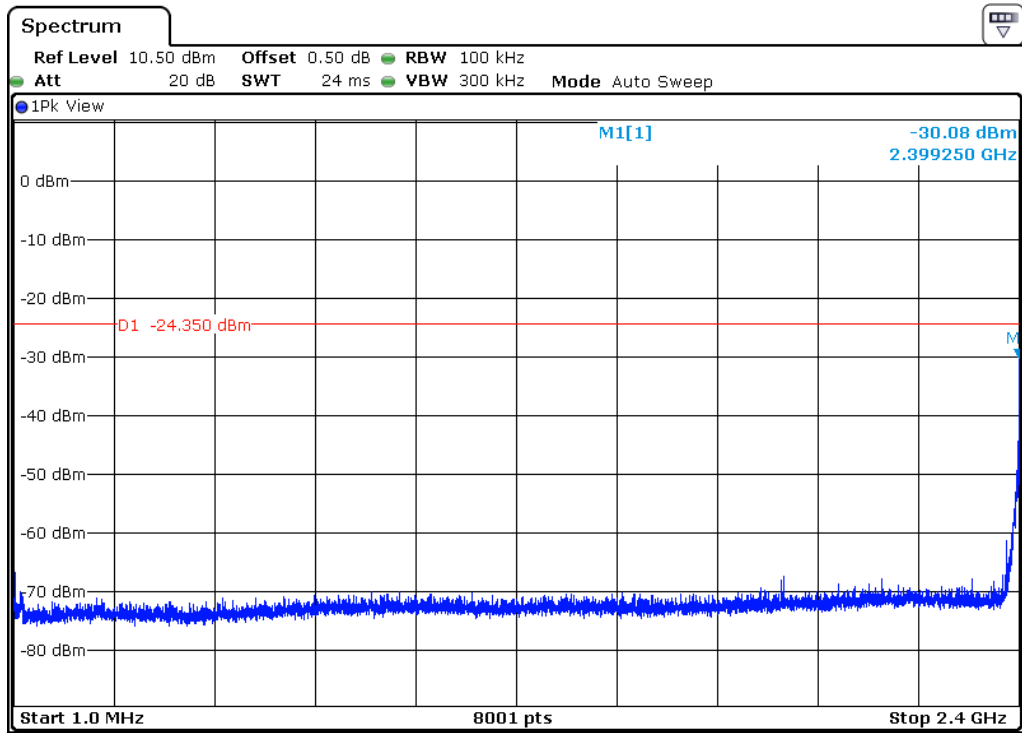


# INTERTEK TESTING SERVICES

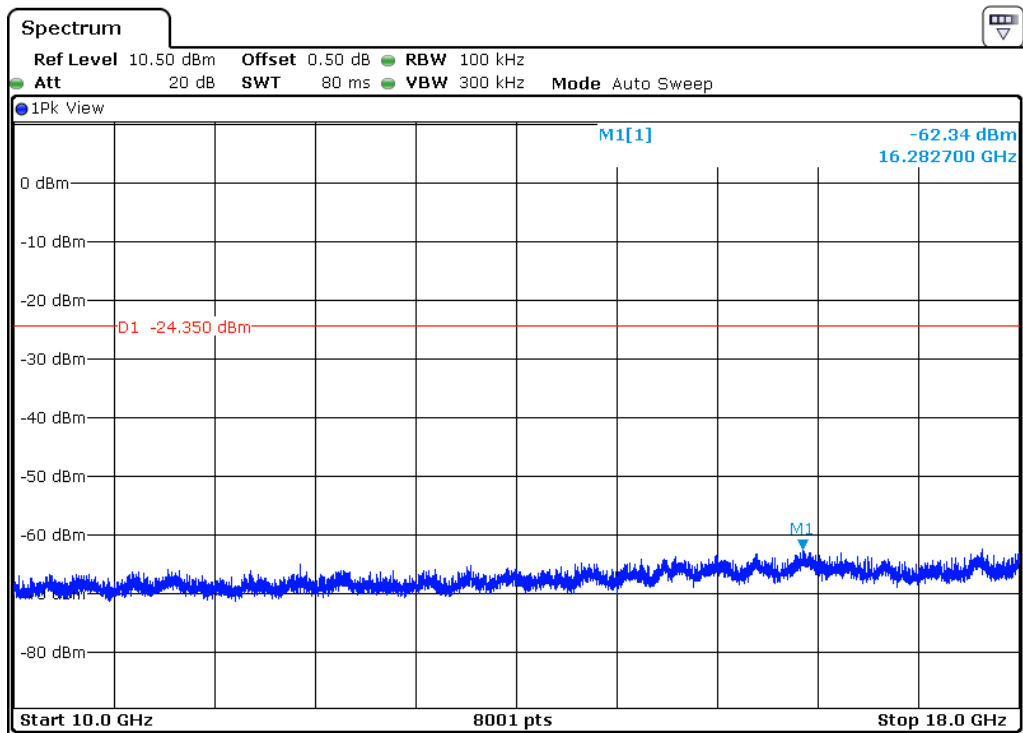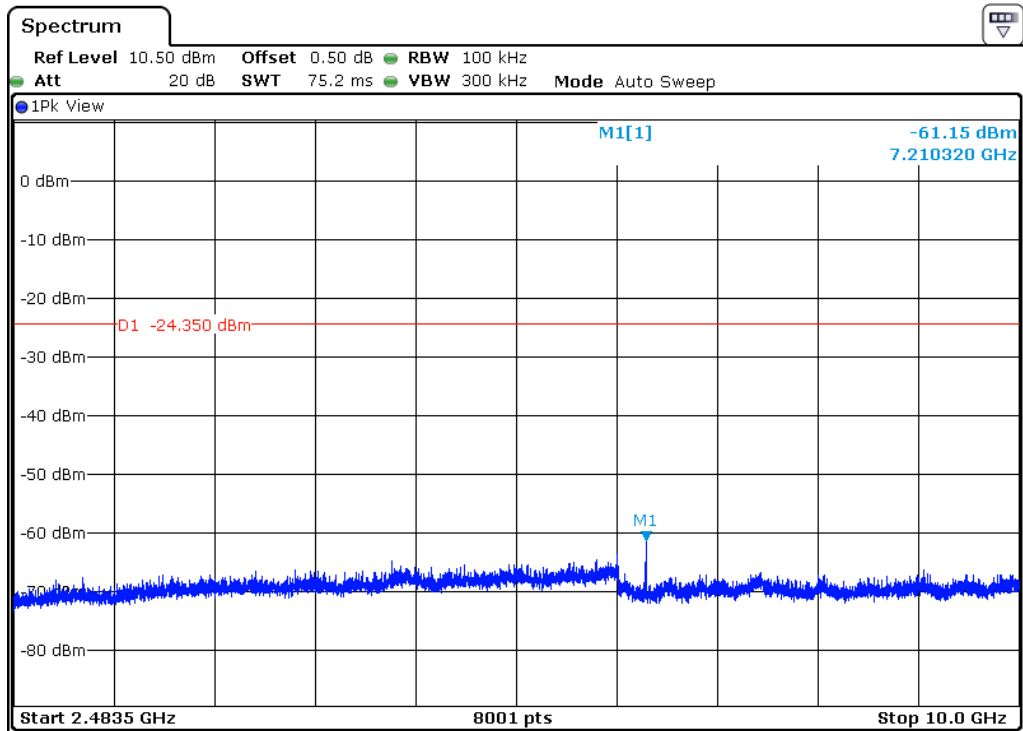

# INTERTEK TESTING SERVICES


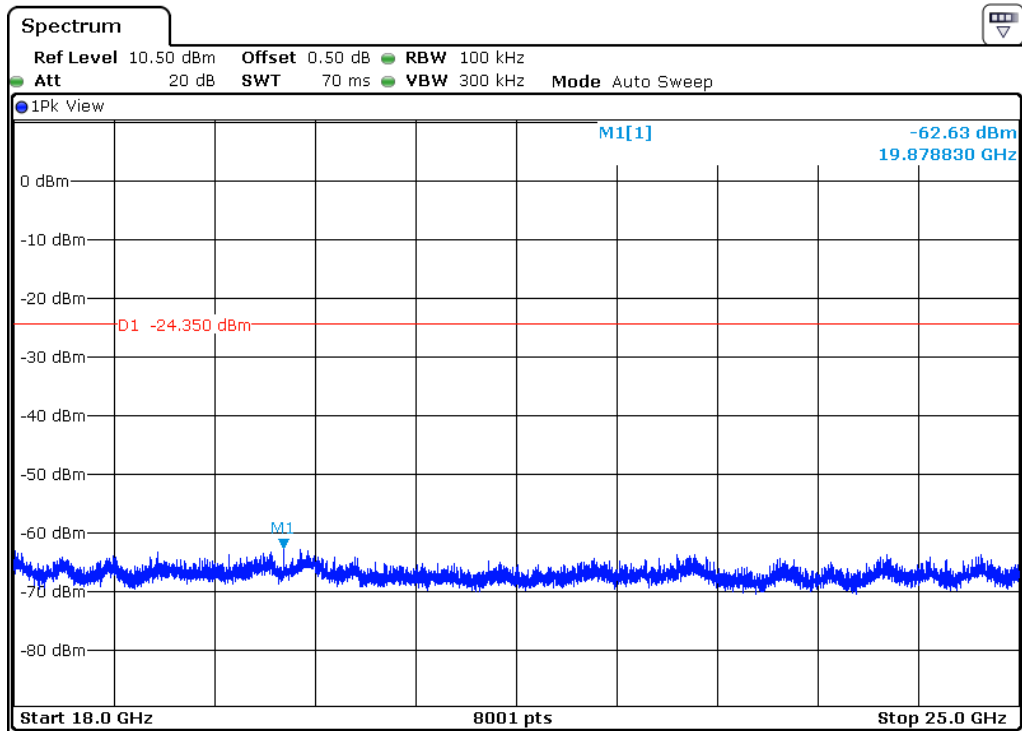


Channel 19 (2440MHz) Reference Level: -4.88 dBm

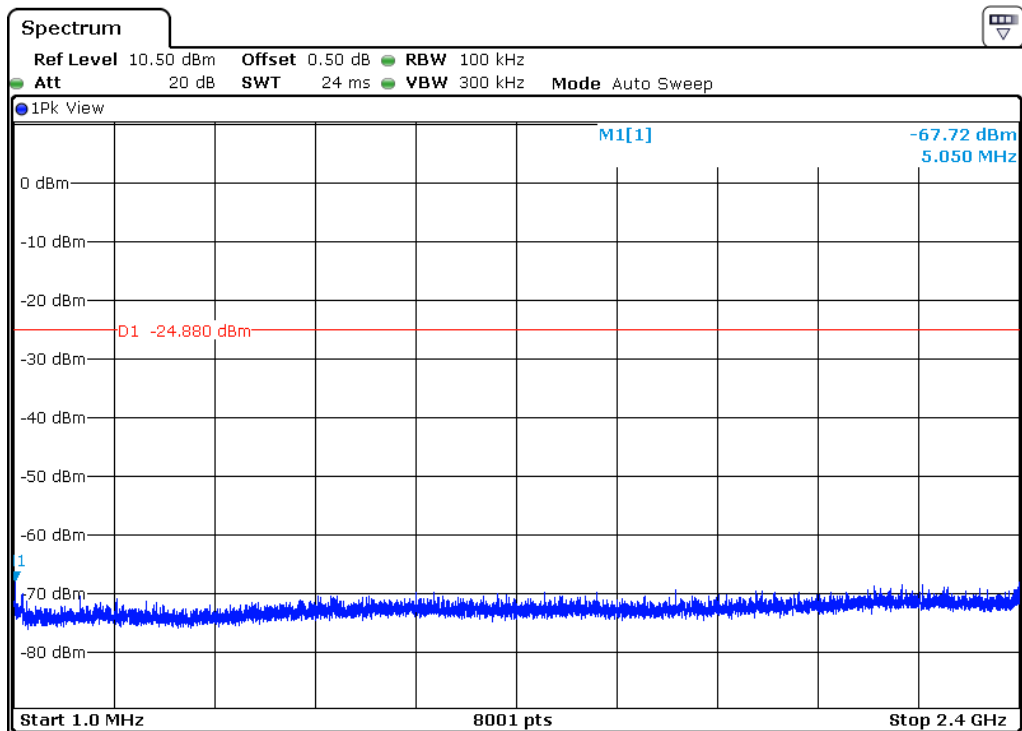





# INTERTEK TESTING SERVICES

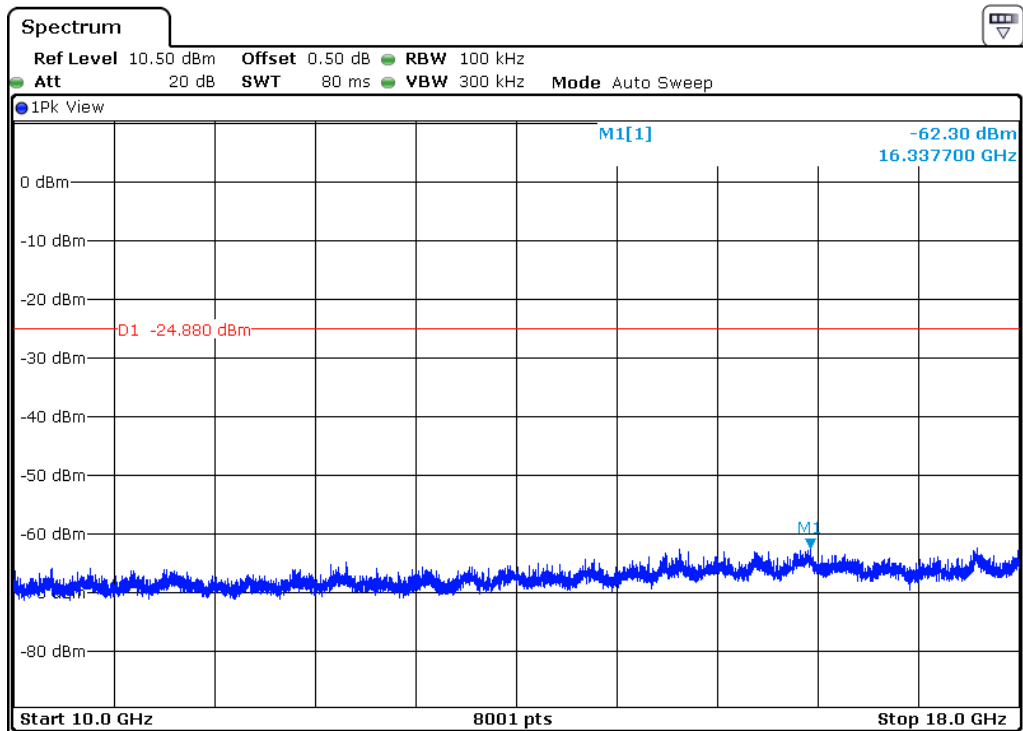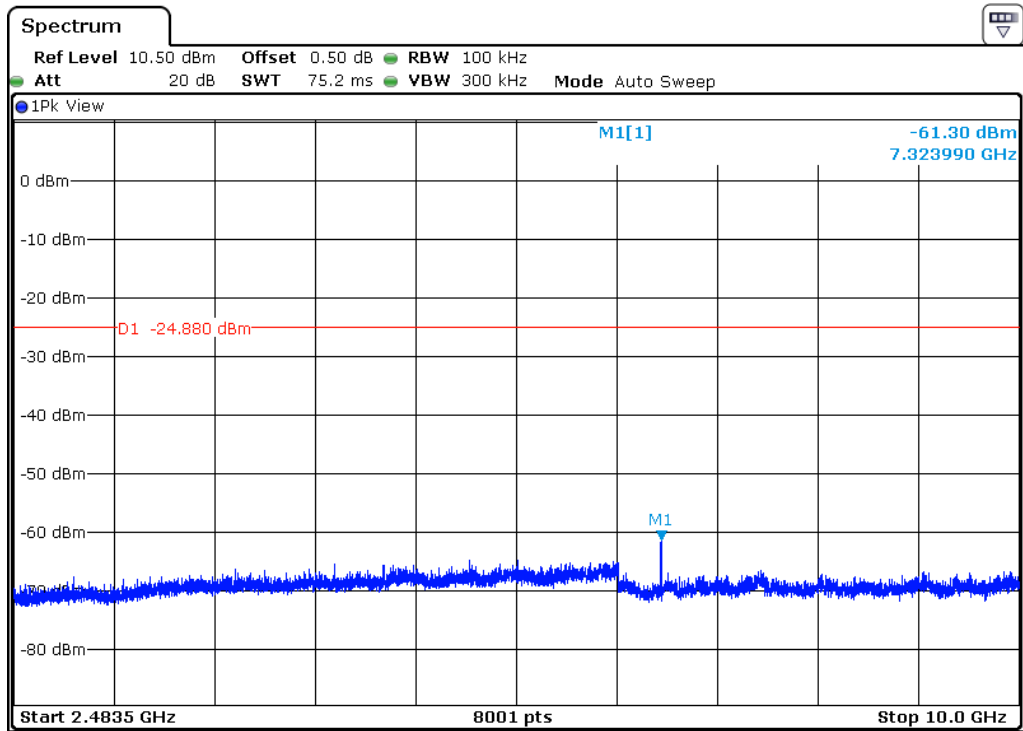



## INTERTEK TESTING SERVICES

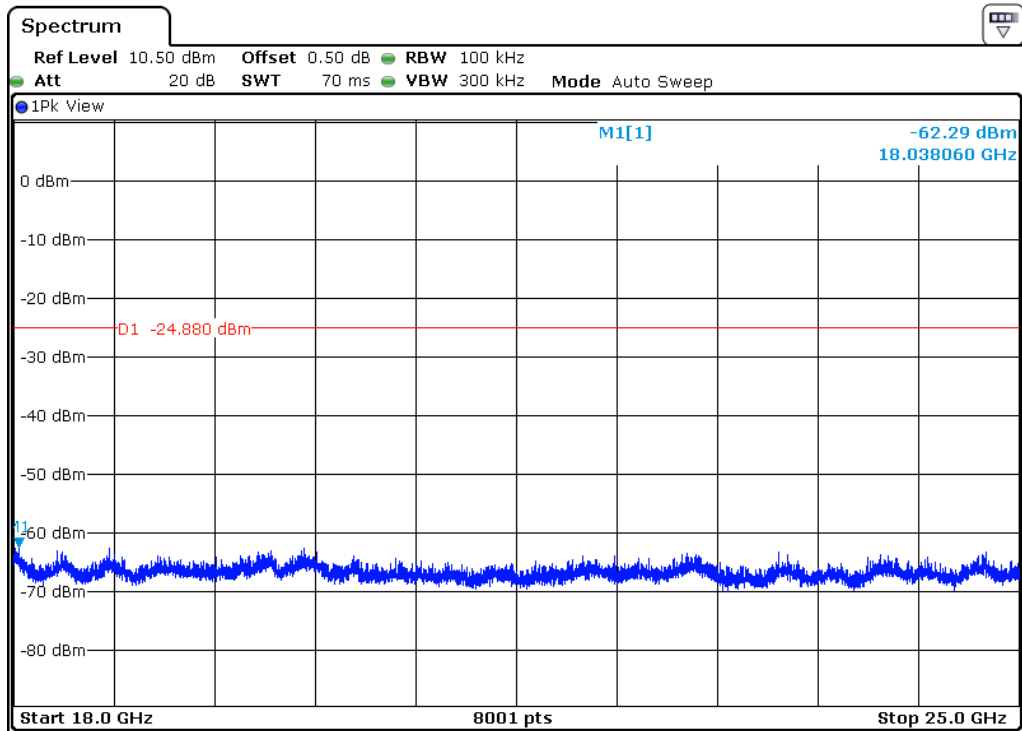



Channel 39 (2480MHz) Reference Level: -5.52 dBm

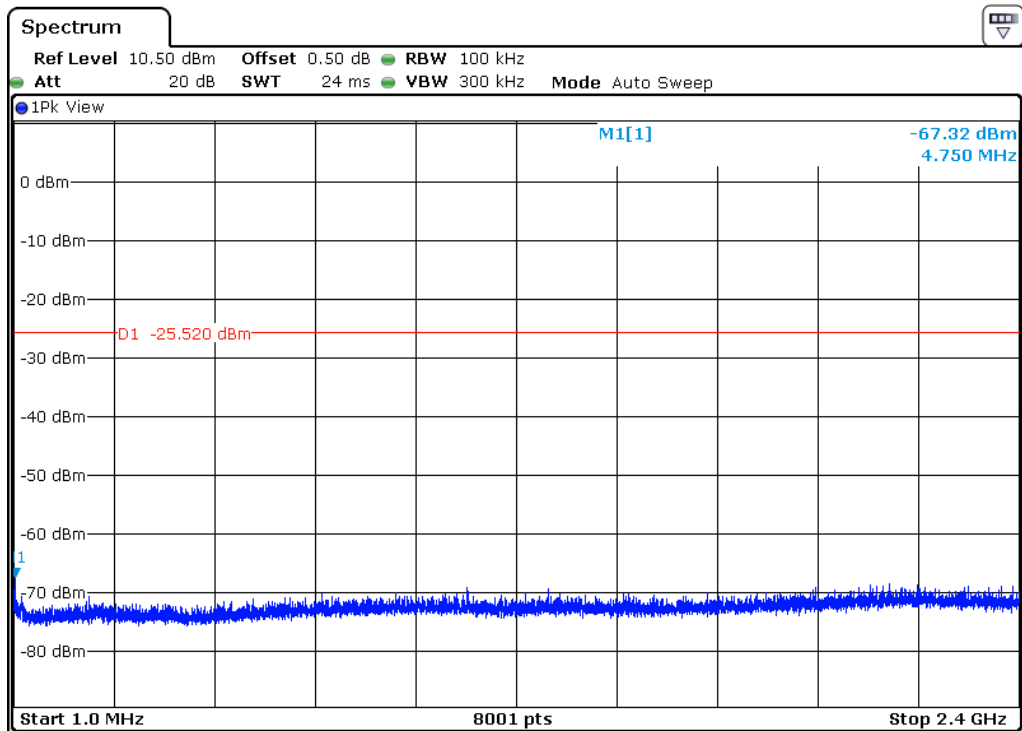

# INTERTEK TESTING SERVICES

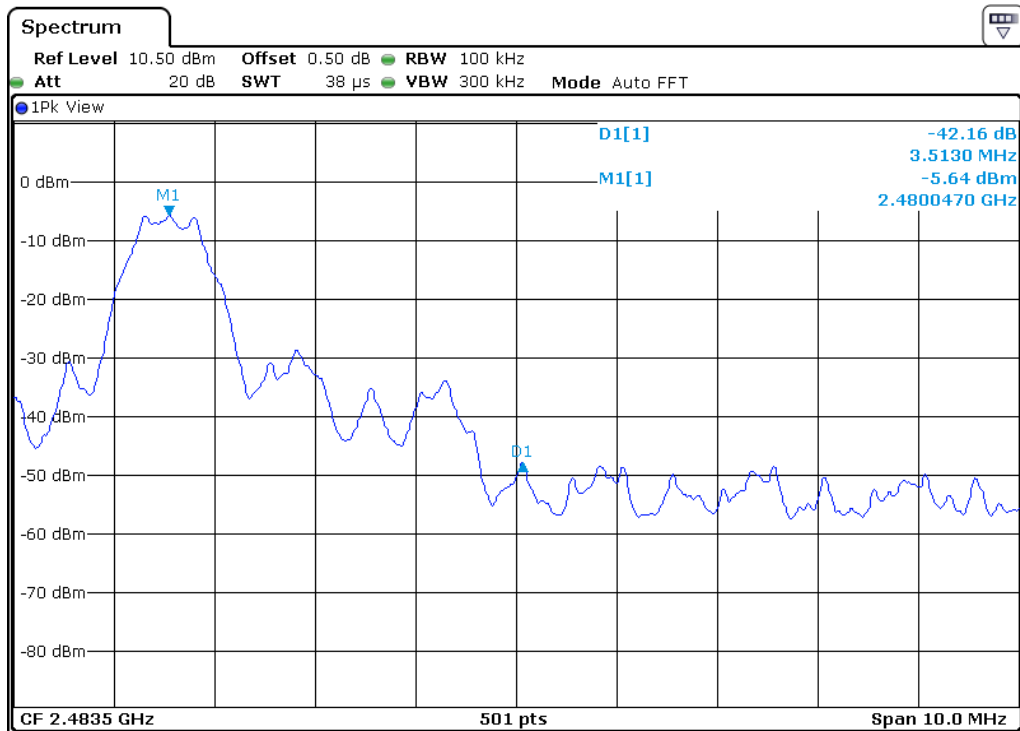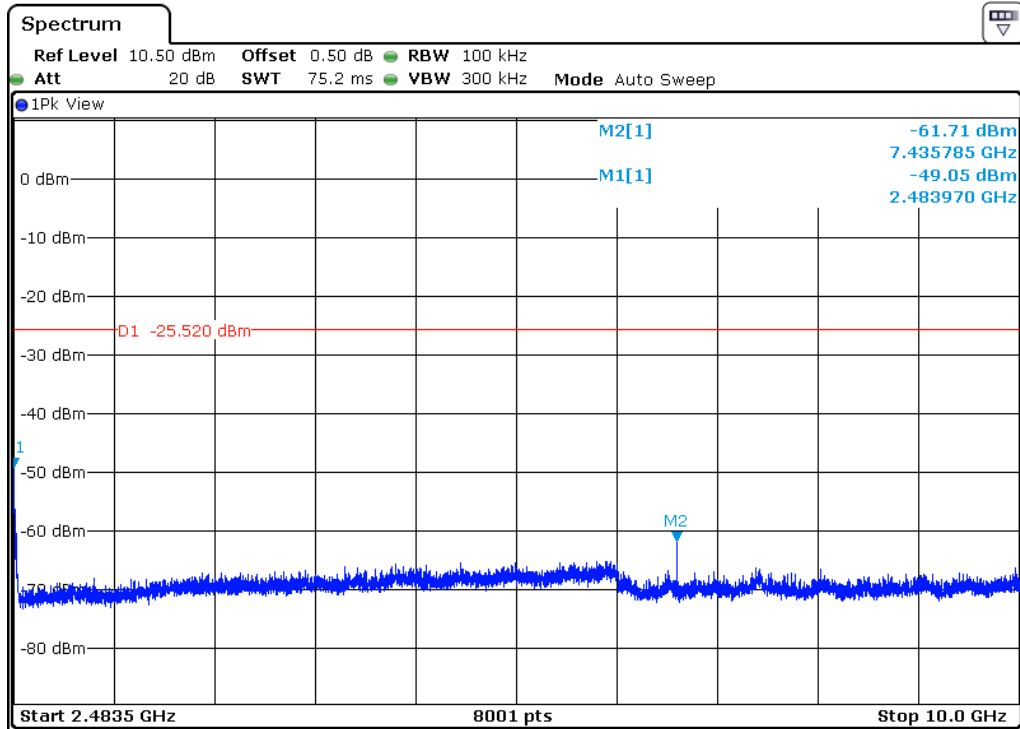

# INTERTEK TESTING SERVICES

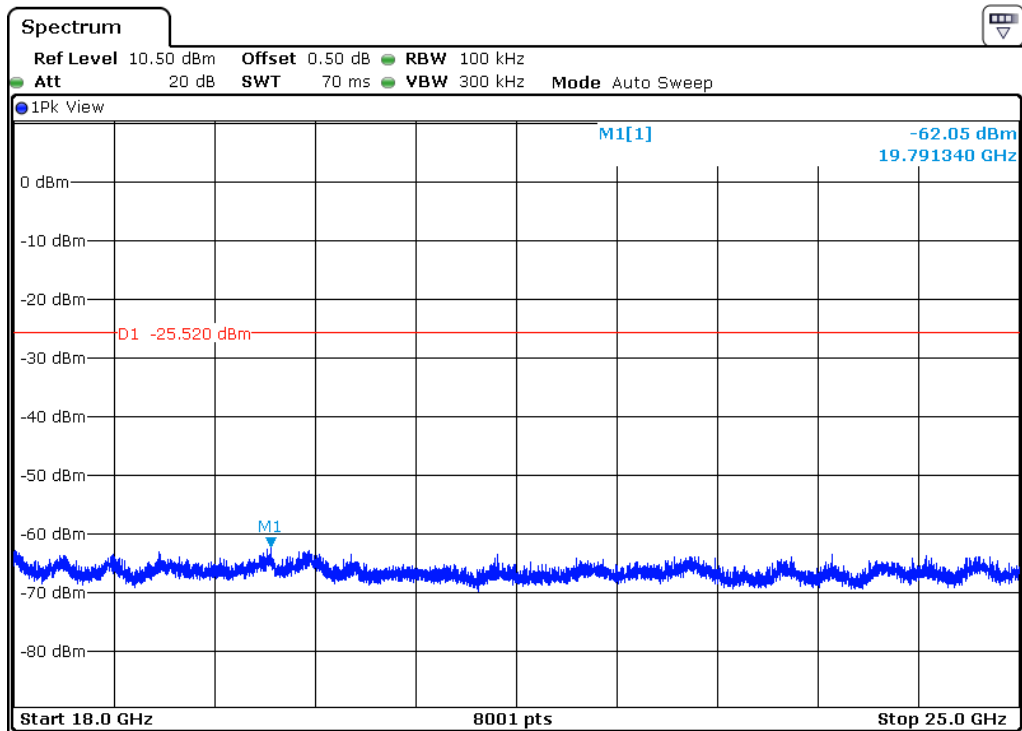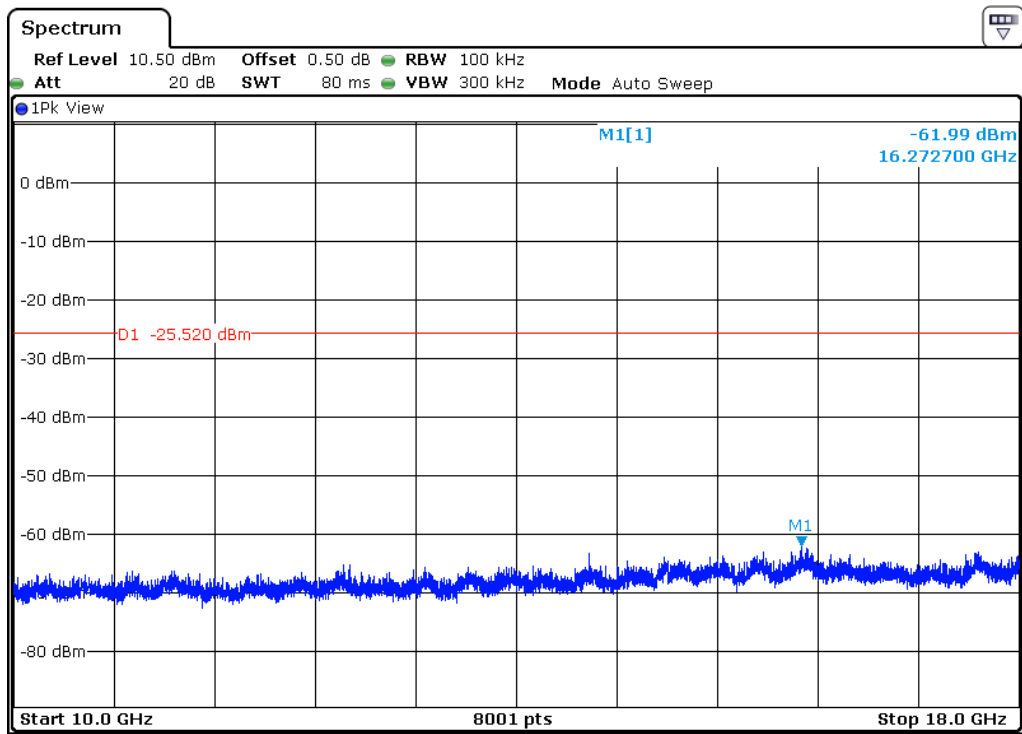

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.5 Out of Band Radiated Emissions (for emissions in 4.4 above that are less than 20dB below carrier), FCC Rule 15.247(d):

For out of band emissions that are close to or that exceed the 20dB attenuation requirement described in the specification, radiated measurements were performed at a 3m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- ☒ Not required, since all emissions are more than 20dB below fundamental  
☐ See attached data sheet

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD$$

Where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 = 42 \text{ dB}\mu\text{V/m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm } [(42 \text{ dB}\mu\text{V/m})/20] = 125.9 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.8 Radiated Spurious Emission

The simultaneous transmission spurious was considered.

Worst Case Radiated Spurious Emission at 49.860MHz is passed by 5.5 dB margin.

For the electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.



## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy Date of Test: August 8, 2015  
Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)  
Worst Case Operating Mode: BT Link with wireless Charging

Table 1

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	30.000	39.1	20.0	5.6	24.7	40.0	-15.3
Horizontal	159.960	37.0	20.0	8.4	25.4	43.5	-18.1
Horizontal	441.765	35.9	20.0	11.7	27.6	46.0	-18.4
Vertical	30.000	29.6	20.0	18.3	27.9	40.0	-12.1
Vertical	49.860	38.8	20.0	15.7	34.5	40.0	-5.5
Vertical	159.980	43.3	20.0	5.4	28.7	43.5	-14.8

- NOTES: 1. Quasi-Peak detector is used except for others stated.
2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. All emissions are below the QP limit.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy Date of Test: August 8, 2015  
 Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)  
 Mode: BT transmitting with wireless charging

Table 2 (2402MHz)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	*2390.000	73.6	36.5	28.1	65.2	74.0	-8.8
Vertical	*4804.000	56.9	36.1	33.1	53.9	74.0	-20.1

Polarization	Frequency (MHz)	Reading Average (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	*2390.000	53.5	36.5	28.1	45.1	54.0	-8.9
Vertical	*4804.000	44.3	36.1	33.1	41.3	54.0	-12.7

- Notes:
1. Peak detector Data unless otherwise stated. Above 1000 MHz, RBW=1MHz, VBW=3MHz is used for Peak measurement, RBW=1MHz, VBW=10Hz is used for Average value.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205 and RSS Gen (issue 4) - 8.10. The corresponding limit as per 15.209 and RSS Gen (issue 4) - 8.9 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy Date of Test: August 8, 2015  
 Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)  
 Mode: BT transmitting with wireless charging

Table 3(2440MHz)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	*4880.000	56.2	36.1	33.3	53.4	74.0	-20.6
Vertical	*7320.000	50.2	36.2	37.9	51.9	74.0	-22.1

Polarization	Frequency (MHz)	Reading Average (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	*4880.000	45.2	36.1	33.3	42.4	54.0	-11.6
Vertical	*7320.000	41.1	36.2	37.9	42.8	54.0	-11.2

- Notes: 1. Peak detector Data unless otherwise stated. Above 1000 MHz, RBW=1MHz, VBW=3MHz is used for Peak measurement, RBW=1MHz, VBW=10Hz is used for Average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205 and RSS Gen (issue 4) - 8.10. The corresponding limit as per 15.209 and RSS Gen (issue 4) - 8.9 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Test Engineer: Leo Lai

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy Date of Test: August 8, 2015  
 Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)  
 Mode: BT transmitting with wireless charging

Table 4(2480MHz)

### Radiated Emissions

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Peak Limit at 3m (dBμV/m)	Margin (dB)
Vertical	*2483.500	63.5	36.7	28.6	55.4	74.0	-18.6
Vertical	*4960.000	56.3	36.1	33.4	53.6	74.0	-20.4
Vertical	*7440.000	51.1	36.2	38.2	53.1	74.0	-20.9

Polarization	Frequency (MHz)	Reading Average (dBμV)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Average Limit at 3m (dBμV/m)	Margin (dB)
Vertical	*2483.500	50.0	36.7	28.6	41.9	54.0	-12.1
Vertical	*4960.000	44.8	36.1	33.4	42.1	54.0	-11.9
Vertical	*7440.000	40.4	36.2	38.2	42.4	54.0	-11.6

- Notes: 1. Peak detector Data unless otherwise stated. Above 1000 MHz, RBW=1MHz, VBW=3MHz is used for Peak measurement, RBW=1MHz, VBW=10Hz is used for Average value.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna used for the emission over 1000MHz.
- \* Emission within the restricted band meets the requirement of section 15.205 and RSS Gen (issue 4) - 8.10. The corresponding limit as per 15.209 and RSS Gen (issue 4) - 8.9 is based on Quasi peak limit for frequencies below 1000 MHz and average limit for frequencies over 1000 MHz. The radio frequency emissions above 1GHz also meet corresponding 20dB permitted peak limit with a peak detector function.

Test Engineer: Leo Lai

TRF No.: FCC 15C\_TX\_b  
 FCC ID: PYADT-904

## INTERTEK TESTING SERVICES

---

### 4.9 Conducted Emission

Worst Case Live-Conducted emission at 4.462MHz is Passed by 7.2 dB margin

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy


Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

Worst Case Operating Mode: BT Link

### Conducted Emission Test – FCC

Pursuant to 15.207 Emissions Requirement

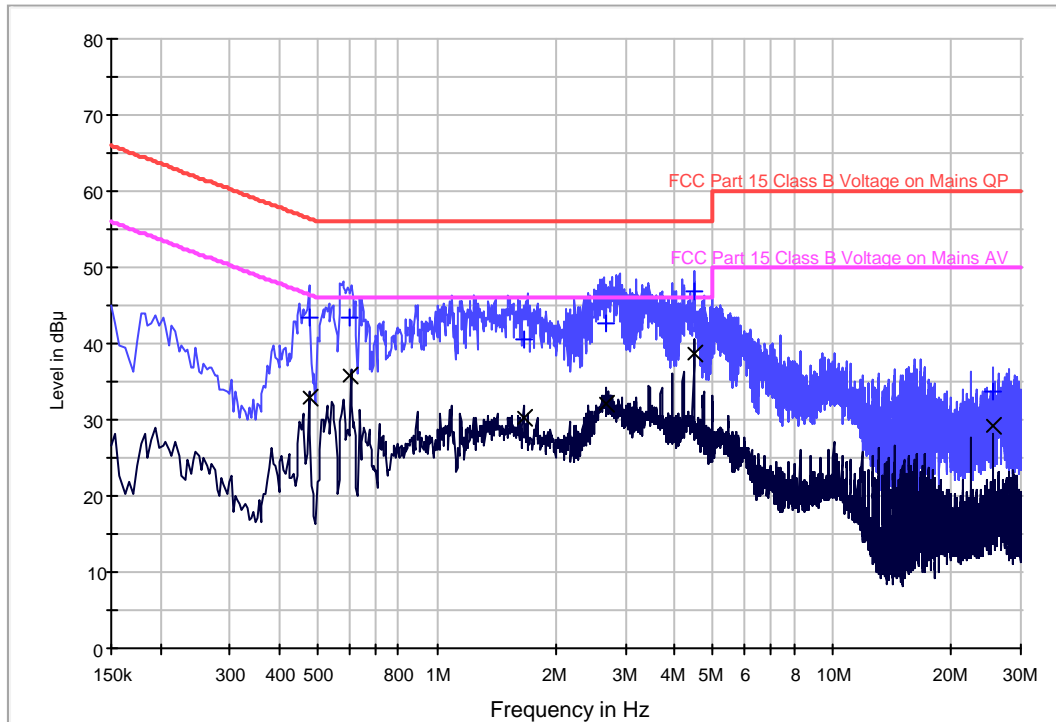

#### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.474000	43.4	L1	9.9	13.0	56.4
0.604500	43.4	L1	10.0	12.6	56.0
1.654000	40.7	L1	9.9	15.4	56.0
2.678000	42.6	L1	10.0	13.4	56.0
4.462000	46.9	L1	10.0	9.1	56.0
25.598000	33.7	L1	10.3	26.3	60.0

#### Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.474000	32.8	L1	9.9	13.6	46.4
0.604500	35.7	L1	10.0	10.3	46.0
1.654000	30.3	L1	9.9	15.7	46.0
2.678000	32.0	L1	10.0	14.0	46.0
4.462000	38.8	L1	10.0	7.2	46.0
25.598000	29.1	L1	10.3	20.9	50.0

TRF No.: FCC 15C\_TX\_b

FCC ID: PYADT-904

## INTERTEK TESTING SERVICES

Applicant: Microsoft Mobile Oy


Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

Worst Case Operating Mode: BT Link

### Conducted Emission Test – FCC

Pursuant to 15.207 Emissions Requirement

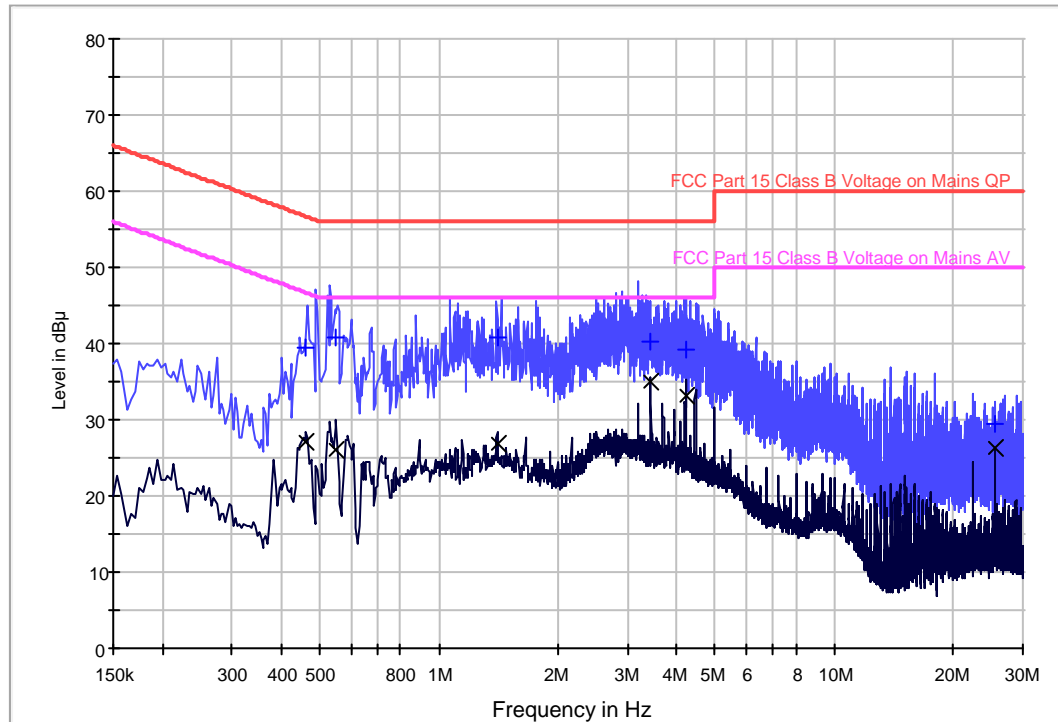

#### Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.462000	39.4	N	10.2	17.3	56.7
0.550500	40.8	N	10.3	15.2	56.0
1.402000	40.7	N	10.3	15.3	56.0
3.438000	40.3	N	10.3	15.7	56.0
4.206000	39.1	N	10.3	16.9	56.0
25.602000	29.4	N	10.4	30.6	60.0

#### Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.462000	27.2	N	10.2	19.5	46.7
0.550500	26.0	N	10.3	20.0	46.0
1.402000	27.0	N	10.3	19.0	46.0
3.438000	35.0	N	10.3	11.0	46.0
4.206000	33.2	N	10.3	12.8	46.0
25.602000	26.3	N	10.4	23.7	50.0

## INTERTEK TESTING SERVICES

---

Applicant: Microsoft Mobile Oy

Date of Test: August 8, 2015

Model: DT-904 (HW: V2.2, MW: V2.0, WLC FW: V0068, BT FW: V1.9)

### 4.10 Radiated Emissions from Digital Section of Transceiver, FCC Ref: 15.109

☒ Not required - No digital part

☐ Test results are attached

☐ Included in the separated report.



**EXHIBIT 5**  
**EQUIPMENT PHOTOGRAPHS**

### 5.0 **Equipment Photographs**

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 6**

### **PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

### 6.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 7**

### **TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 7.0 **Technical Specifications**

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

# **INTERTEK TESTING SERVICES**

---

## **EXHIBIT 8**

### **INSTRUCTION MANUAL**

## INTERTEK TESTING SERVICES

---

### 8.0 **Instruction Manual**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.



## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 9**

### **MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

### 9.0 **Miscellaneous Information**

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

## INTERTEK TESTING SERVICES

---

### 9.1 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device. With a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

## INTERTEK TESTING SERVICES

---

### 9.2 **Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10: 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjust through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

## INTERTEK TESTING SERVICES

---

### 9.2 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10: 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 10**

### **TEST EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

### 10.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ185-01	EMI Receiver	R&S	ESCI	100547	07-Feb-2015	07-Feb-2016
SZ061-08	Horn Antenna	ETS	3115	00092346	17-Oct-2014	17-Oct-2015
EM031-03	EXA Spectrum Analyzer	R&S	FSV40	101506	08-Jul-2015	08-Jul-2016
SZ061-06	Active Loop Antenna	Electro-Metrics	EM-6876	217	29-Apr-2015	29-Apr-2016
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	07-Feb-2015	07-Feb-2016
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	19-Apr-2014	19-Apr-2016
SZ182-02	RF Power Meter	Anritsu	ML2496A	1302005	20-May-2015	20-May-2016
SZ182-02-01	Pulse Power Sensor	Anritsu	MA2411B	1207429	20-May-2015	20-May-2016
SZ062-22	RF Cable	HUBER+SUHNER	SF104PE	MY1913/4PE	07-Apr-2015	07-Oct-2015
SZ062-23	RF Cable	HUBER+SUHNER	SF104PE	MY4262/4PE	07-Apr-2015	07-Oct-2015
SZ062-26	RF Cable	HUBER+SUHNER	SF104PE	MY4556/4PE	27-Jun-2015	27-Dec-2015
SZ067-04	Notch Filter	Micro-Tronics	BRM5070 2-02	--	20-May-2015	20-May-2016
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	01-Nov-2014	01-Nov-2015
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	01-Nov-2014	01-Nov-2015
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	24-Jun-2015	24-Jun-2016
SZ188-03	Shielding Room	ETS	RFD-100	4100	23-Aug-2014	23-Aug-2016
SZ065-03	Bluetooth Tester	R&S	CBT32	--	07-Feb-2015	07-Feb-2016

## INTERTEK TESTING SERVICES

---

### 11.0 Annex

#### Document History

Report No.	Issue Date	Comments
150728037SZN-003	November 12, 2015	Original