

FCC Test Report

Report No.: AGC01559210737FE01

FCC ID : 2AANZCLIPC

APPLICATION PURPOSE: Original Equipment

PRODUCT DESIGNATION: HOVER-1 - ECLIPSE HOVERBOARD

BRAND NAME : HOVER-1

DSA-CLIP, DSA-CLIP-21C, DSA-CLIP-BKGD-21C, DSA-CLIP-IRD-21C, DSA-CLIP-DKRD-21C,

DSA-CLIP-IRD-21C, DSA-CLIP-DKRD-21C, DSA-CLIP-CRB-21C, DSA-CLIP-XXX-21C,

DSA-AH-CLIP-21C, DSA-AH-CLIP-BKGD-21C,

MODEL NAME : DSA-AH-CLIP-IRD-21C, DSA-AH-CLIP-DKRD-21C,

DSA-AH-CLIP-CRB-21C, DSA-AH-CLIP-XXX-21C,

H1-CLIP-21C, H1-CLIP-BKGD-21C, H1-CLIP-IRD-21C,

H1-CLIP-DKRD-21C, H1-CLIP-CRB-21C,

H1-CLIP-XXX-21C

APPLICANT : DGL Group, Ltd.

DATE OF ISSUE : Nov. 16, 2021

STANDARD(S) : FCC Bart 15.2475

REPORT VERSION

Attestation of Global Compliance (Shenzhen) Co., Ltd





Page 2 of 56

REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Nov. 16, 2021	Valid	Initial Release



Page 3 of 56

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	
3. MEASUREMENT UNCERTAINTY	8
4. DESCRIPTION OF TEST MODES	9
5. SYSTEM TEST CONFIGURATION	10
5.1. CONFIGURATION OF TESTED SYSTEM	10
5.2. EQUIPMENT USED IN TESTED SYSTEM	10
5.3. SUMMARY OF TEST RESULTS	10
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	12
7.1. MEASUREMENT PROCEDURE	12
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	12
7.3. LIMITS AND MEASUREMENT RESULT	13
8. BANDWIDTH	15
8.1. MEASUREMENT PROCEDURE	15
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	15
9. CONDUCTED SPURIOUS EMISSION	19
9.1. MEASUREMENT PROCEDURE	19
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	19
9.3. MEASUREMENT EQUIPMENT USED	19
9.4. LIMITS AND MEASUREMENT RESULT	19
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	26



Page 4 of 56

10.1. MEASUREMENT PROCEDURE	26
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
10.3. MEASUREMENT EQUIPMENT USED	
10.4. LIMITS AND MEASUREMENT RESULT	26
11. RADIATED EMISSION	28
11.1. MEASUREMENT PROCEDURE	28
11.2. TEST SETUP	29
11.3. LIMITS AND MEASUREMENT RESULT	30
11.4. TEST RESULT	30
12. LINE CONDUCTED EMISSION TEST	40
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	40
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	40
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	41
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	41
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	41
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	42
APPENDIX B: PHOTOGRAPHS OF FUT	



Page 5 of 56

1. VERIFICATION OF COMPLIANCE

Applicant	DGL Group, Ltd.
Address	195 Raritan Center Parkway Edison, NJ 08837
Manufacturer	DGL Group, Ltd.
Address	195 Raritan Center Parkway Edison, NJ 08837
Product Designation	HOVER-1 - ECLIPSE HOVERBOARD
Brand Name	HOVER-1
Test Model	DSA-CLIP
Series Model	DSA-CLIP-21C, DSA-CLIP-BKGD-21C, DSA-CLIP-IRD-21C, DSA-CLIP-DKRD-21C, DSA-CLIP-CRB-21C, DSA-CLIP-XXX-21C, DSA-AH-CLIP-21C, DSA-AH-CLIP-BKGD-21C, DSA-AH-CLIP-IRD-21C, DSA-AH-CLIP-DKRD-21C, DSA-AH-CLIP-CRB-21C, DSA-AH-CLIP-XXX-21C, H1-CLIP-21C, H1-CLIP-BKGD-21C, H1-CLIP-IRD-21C, H1-CLIP-DKRD-21C, H1-CLIP-CRB-21C, H1-CLIP-XXX-21C
Declaration of Difference	All the series models are the same as the test model except for the model names and the color of appearance.
Date of test	Aug. 26, 2021 to Nov. 16, 2021
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-BLE/RF

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Reviewed By

Calvin Liu
(Reviewer)

Approved By

Max Zhang
(Authorized Officer)

Nov. 16, 2021

Nov. 16, 2021



Page 6 of 56

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "HOVER-1 - ECLIPSE HOVERBOARD". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz		
RF Output Power	0.109dBm (Max)		
Bluetooth Version	4.0		
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps		
Number of channels	40 Channel		
Antenna Designation	PCB Antenna (Comply with requirements of the FCC part 15.203)		
Antenna Gain	0dBi		
Hardware Version	V4.2		
Software Version	V1.0		
Power Supply	DC 3.8V by battery or DC 36 V by adapter		

Adapter:

Model Name	FY-0634201500
Rated Input	100-240V, 50/60Hz
Rated Output	DC 42V, 1.5A

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402 MHz	
	1	2404 MHz	
2400~2483.5MHz			
100	38	2478 MHz	
	39	2480 MHz	



Page 7 of 56

2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2AANZCLIPC** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 8 of 56

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



Page 9 of 56

/Inspection The test results

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



Page 10 of 56

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:

EU	Г

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	HOVER-1 - ECLIPSE HOVERBOARD	DSA-CLIP	2AANZCLIPC	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



Page 11 of 56

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

TEST EQUIPMENT OF CONDUCTED EMISSION TEST

Equipment	Equipment Manufacturer Model		S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	May 15, 2021	May 14, 2022
LISN	R&S	ESH2-Z5	100086	Jun. 09, 2021	Jun. 08, 2022
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	May 15, 2021	May 14, 2022
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 07, 2020	Dec. 06, 2021
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 23, 2020	Mar. 22, 2022
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.16, 2019	Sep. 15, 2021
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Sep.15, 2021	Sep. 14, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	May 22, 2020	May 21, 2022
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2022
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2021	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



Page 12 of 56

7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW ≥ DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

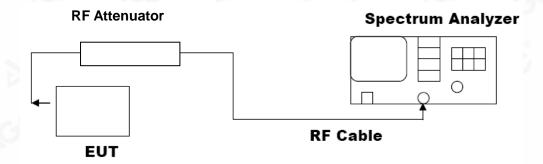




Page 13 of 56

7.3. LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power					
Test Mode Test Channel Peak Power Limits (MHz) (dBm) Pass or Fail						
	2402	0.109	≤30	Pass		
GFSK 1M	2440	-0.065	≤30	Pass		
8	2480	-0.379	≤30	Pass		

Test Graphs of Conducted Output Power












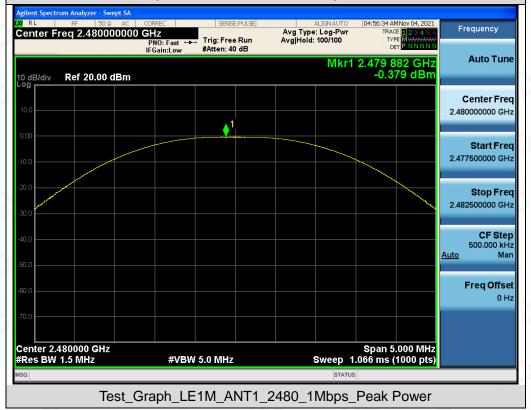



Page 15 of 56

8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW ≥3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.


Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.

8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and DTS Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
- 60	2402	1.031	0.713	≥0.5	Pass
GFSK 1M	2440	1.031	0.717	≥0.5	Pass
®	2480	1.032	0.716	≥0.5	Pass







Test Graphs of Occupied Bandwidth Center Freq: 2.402000000 GHz
Trig: Free Run Avg|Hold: 10/10
#Atten: 30 dB Frequency Center Freg 2 402000000 GHz Radio Device: BTS Ref 30.00 dBm 2.402000000 GHz Center 2.402 GHz #Res BW 30 kHz Span 3 MHz Sweep 4.133 ms CF Step 300.000 kHz **#VBW 100 kHz** 6.18 dBm **Total Power** Occupied Bandwidth 1.0314 MHz Freq Offset **Transmit Freq Error** 5.284 kHz **OBW Power** 99.00 % -26.00 dB x dB Bandwidth 1.273 MHz x dB Test_Graph_LE1M_ANT1_2402_1Mbps_OBW 04:52:53 AMNov 04, 2021 Radio Std: None Center Freq: 2.440000000 GHz Trig: Free Run Avg|Hol #Atten: 30 dB Frequency Avg|Hold: 10/10 #IFGain:Low Radio Device: BTS Ref 30.00 dBm Center Freq 2.440000000 GHz Span 3 MHz Sweep 4.133 ms Center 2.44 GHz #Res BW 30 kHz CF Step 300.000 kHz **#VBW 100 kHz** <u>Auto</u> 6.00 dBm **Total Power** Occupied Bandwidth 1.0307 MHz Freq Offset Transmit Freq Error 12.764 kHz **OBW Power** 99.00 % x dB Bandwidth 1.275 MHz x dB -26.00 dB

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the Bedicated Posting/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written exchorization of AGC he test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc~cert.com.


Test_Graph_LE1M_ANT1_2440_1Mbps_OBW






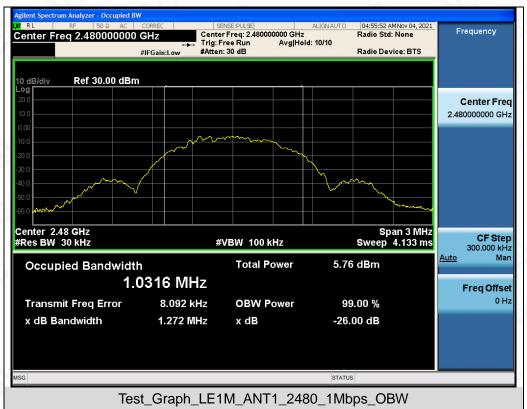




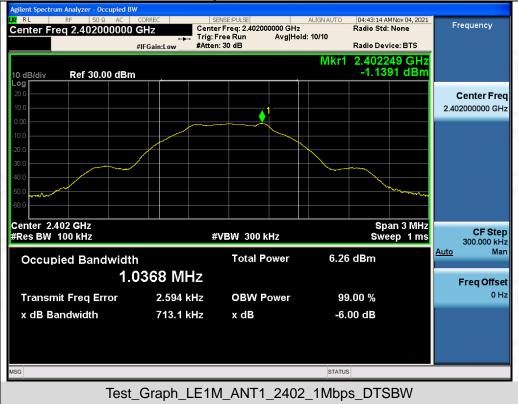





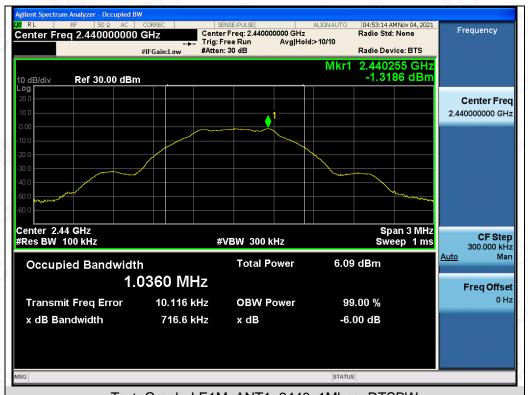





Page 19 of 56

9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT					
Analia alda I insita	Measurement Result				
Applicable Limits	Test Data	Criteria			
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS			







Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Test_Graph_LE1M_ANT1_2402_1Mbps_Reference Level

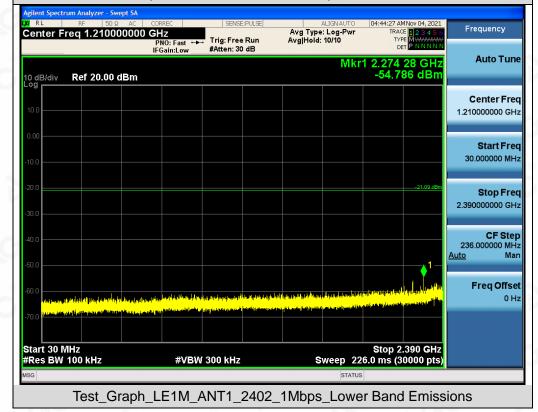








Test_Graph_LE1M_ANT1_2402_1Mbps_Higher Band Emissions






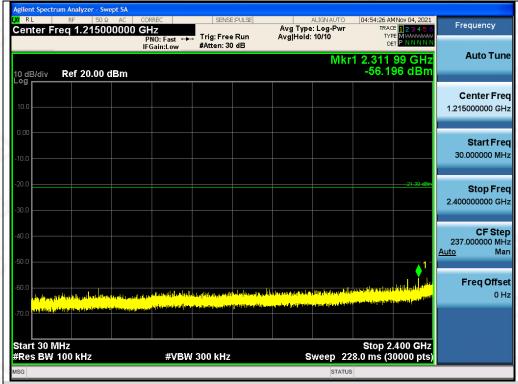

Test_Graph_LE1M_ANT1_2440_1Mbps_Lower Band Emissions












Test_Graph_LE1M_ANT1_2480_1Mbps_Reference Level

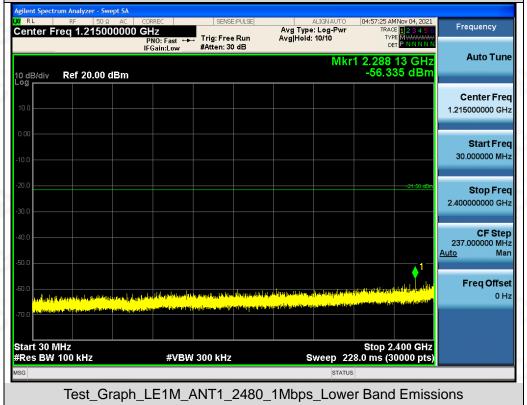




g/Inspection
The test results
the test report.




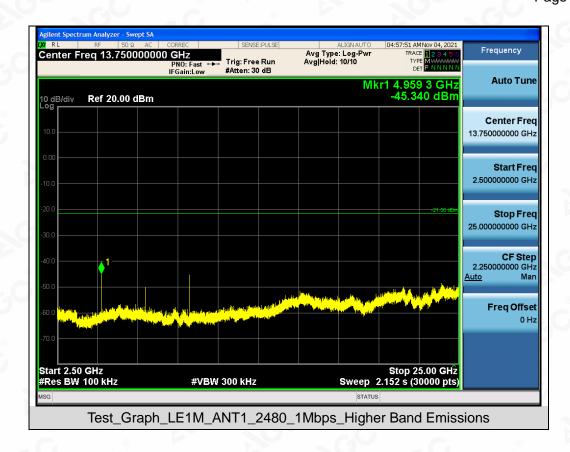







Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

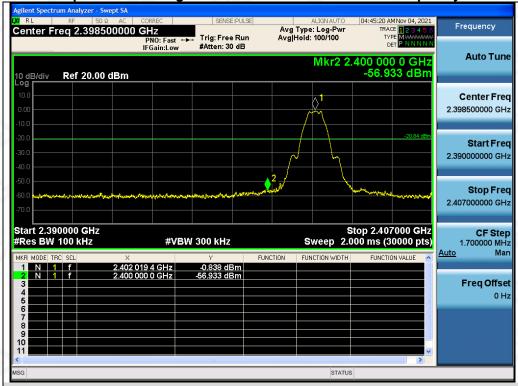



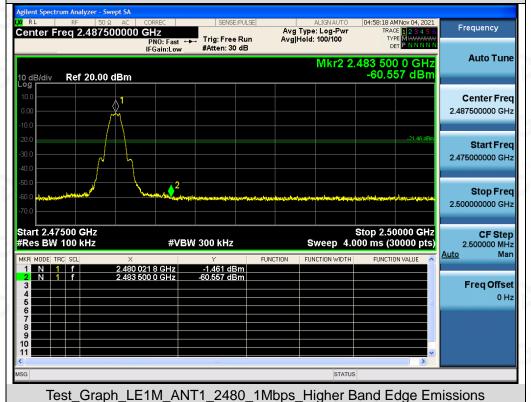

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the abdicated resing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuence of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc=cert.com.



Page 26 of 56

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED


Refer to Section 6.

10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density					
Test Mode Test Channel Power density Limit Pass or Fail (MHz) (dBm/3kHz) Pass or Fail					
	2402	-15.719	≪8	Pass	
GFSK 1M	2440	-15.689	≪8	Pass	
	2480	-16.153	≪8	Pass	


Test Graphs of Conducted Output Power Spectral Density









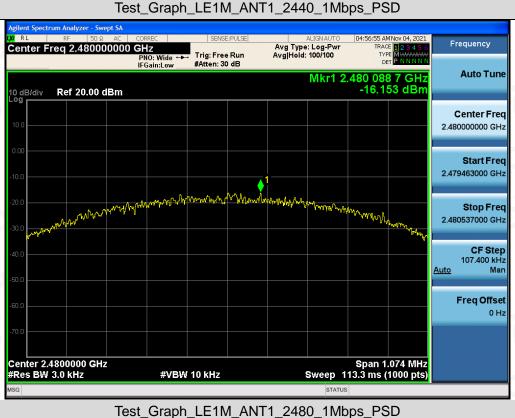



Page 28 of 56

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- The EUT was placed on the top of the turntable 0.1 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

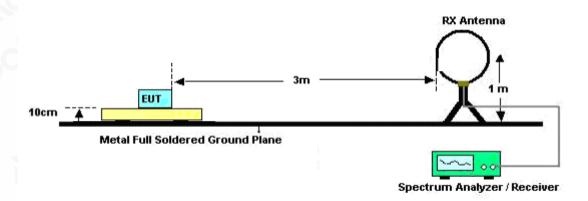

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

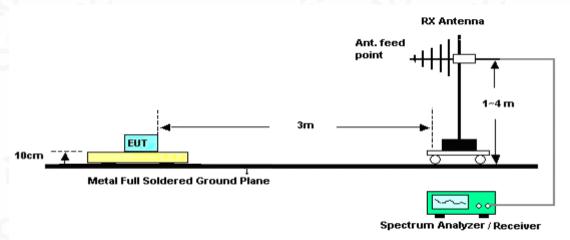

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

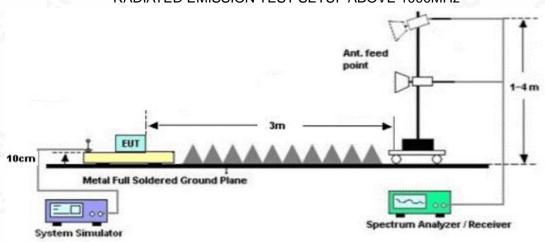

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the coefficient of stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.



Page 30 of 56

11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT

Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Page 31 of 56

Radiated emission from 30MHz to 1000MHz

EUT	HOVER-1-ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

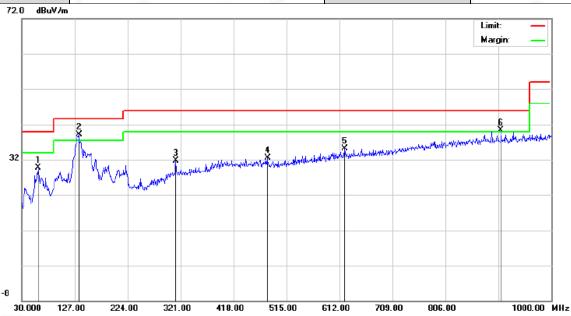


No.	Μk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dΒ	Detector
1		60.0190	9.88	19.85	29.73	40.00	-10.27	peak
2	*	133.2270	18.72	20.38	39.10	43.50	-4.40	peak
3		310.5512	9.82	21.90	31.72	46.00	-14.28	peak
4		480.0799	7.45	24.99	32.44	46.00	-13.56	peak
5		621.7000	7.87	27.21	35.08	46.00	-10.92	peak
6	ļ	907.8500	8.52	31.77	40.29	46.00	-5.71	peak

RESULT: PASS



110 AGGG 1	333210	,, ,,		-01	
	Page	32	of	56	

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

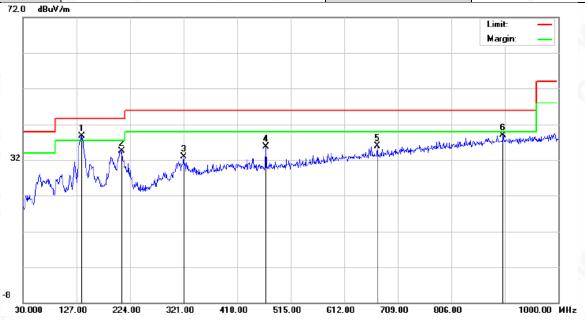

No	. Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dΒ	Detector
1	*	135.5130	17.97	20.69	38.66	43.50	-4.84	peak
2		208.9850	19.45	15.03	34.48	43.50	-9.02	peak
3		320.9503	10.74	22.21	32.95	46.00	-13.05	peak
4		471.0982	10.67	24.99	35.66	46.00	-10.34	peak
5		671.1027	8.02	27.82	35.84	46.00	-10.16	peak
6		901.8570	7.13	31.70	38.83	46.00	-7.17	peak

RESULT: PASS

Note:

- 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.
- 2. All test modes had been tested. The mode1 is the worst case and recorded in the report.



Page 33 of 56

Radiated emission above 1GHz

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4804.000	43.78	0.08	43.86	74	-30.14	peak	
4804.000	35.89	0.08	35.97	54	-18.03	AVG	
7206.000	38.77	2.21	40.98	74	-33.02	peak	
7206.000	32.51	2.21	34.72	54	-19.28	AVG	
		©				8	
			8			- 0	

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- Value Type
4804.000	44.41	0.08	44.49	74	-29.51	peak
4804.000	36.27	0.08	36.35	54	-17.65	AVG
7206.000	38.61	2.21	40.82	74	-33.18	peak
7206.000	30.89	2.21	33.1	54	-20.9	AVG
(8)			-0	(

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 34 of 56

/Inspection The test results the test report.

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880.000	44.65	0.14	44.79	74	-29.21	peak
4880.000	35.74	0.14	35.88	54	-18.12	AVG
7320.000	39.72	2.36	42.08	74	-31.92	peak
7320.000	31.53	2.36	33.89	54	-20.11	AVG
8	8			(8)	©	
emark:	- 0	®		.60	- 6	@
ctor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			- G

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
45.38	0.14	45.52	74	-28.48	peak
38.21	0.14	38.35	54	-15.65	AVG
40.81	2.36	43.17	74 🌕	-30.83	peak
32.86	2.36	35.22	54	-18.78	AVG
	0			a .C	(8)
	(dBμV) 45.38 38.21 40.81	(dBµV) (dB) 45.38 0.14 38.21 0.14 40.81 2.36	(dBμV) (dB) (dBμV/m) 45.38 0.14 45.52 38.21 0.14 38.35 40.81 2.36 43.17	(dBμV) (dB) (dBμV/m) (dBμV/m) 45.38 0.14 45.52 74 38.21 0.14 38.35 54 40.81 2.36 43.17 74	(dBμV) (dB) (dBμV/m) (dBμV/m) (dBμV/m) 45.38 0.14 45.52 74 -28.48 38.21 0.14 38.35 54 -15.65 40.81 2.36 43.17 74 -30.83

Factor = Antenna Factor + Cable Loss - Pre-amplifier.



Page 35 of 56

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Tene
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	45.61	0.22	45.83	74	-28.17	peak
4960.000	35.98	0.22	36.2	54	-17.8	AVG
7440.000	38.99	2.64	41.63	74	-32.37	peak
7440.000	29.56	2.64	32.2	54	-21.8	AVG
			- 64			

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	43.51	0.22	43.73	74	-30.27	peak
4960.000	34.59	0.22	34.81	54	-19.19	AVG
7440.000	38.77	2.64	41.41	74 🔍	-32.59	peak
7440.000	29.45	2.64	32.09	54	-21.91	AVG
- 6	- 60	<u> </u>			60	-6
emark:			-6	8		
actor = Anter	nna Factor + Cable	Loss - Pre-	amplifier.			


RESULT: PASS

Note

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.







Test result for band edge emission at restricted bands

EUT	HOVER-1 - ECLIPSE HOVERBOARD	Model Name	DSA-CLIP
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal


Test Graph for Peak Measurement

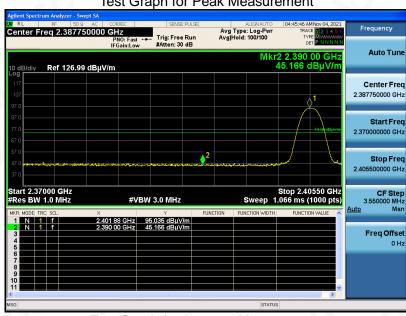

Test Graph for Average Measurement

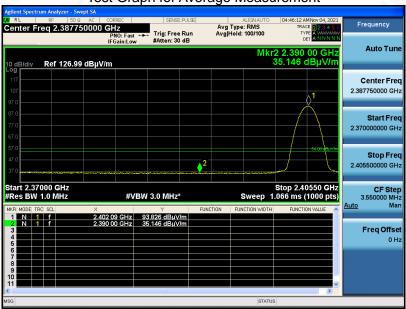


RESULT: PASS






EUT HOVER-1 - ECLIPSE HOVERBOARD DSA-CLIP **Model Name Temperature** 25° C **Relative Humidity** 55.4% **Test Voltage** Normal Voltage **Pressure** 960hPa **Test Mode** Mode 1 **Antenna** Vertical


Test Graph for Peak Measurement

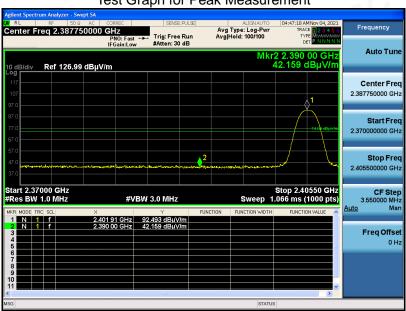

Test Graph for Average Measurement

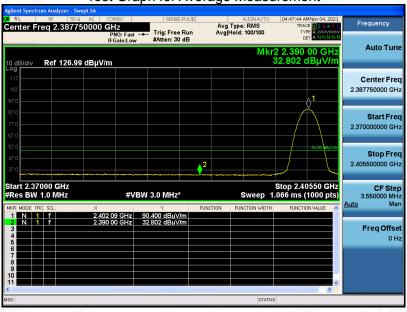


RESULT: PASS






EUT HOVER-1 - ECLIPSE HOVERBOARD DSA-CLIP **Model Name Temperature** 25° C **Relative Humidity** 55.4% Normal Voltage **Pressure** 960hPa **Test Voltage Test Mode** Mode 3 **Antenna** Horizontal


Test Graph for Peak Measurement

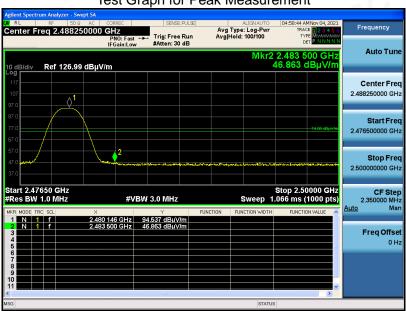

Test Graph for Average Measurement

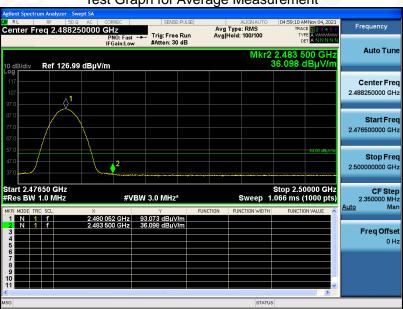


RESULT: PASS






EUT HOVER-1 - ECLIPSE HOVERBOARD DSA-CLIP **Model Name Temperature** 25° C **Relative Humidity** 55.4% **Pressure** 960hPa **Test Voltage** Normal Voltage **Test Mode** Mode 3 **Antenna** Vertical

Test Graph for Peak Measurement

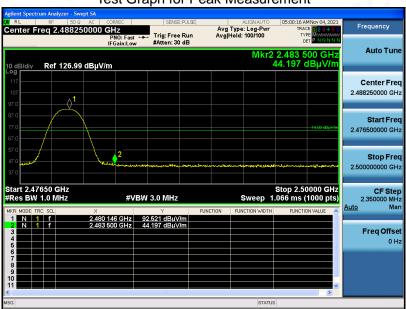



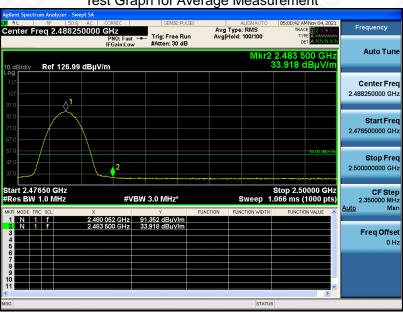

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



Page 40 of 56

12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francis	Maximum RF Line Voltage			
Frequency	Q.P.(dBuV)	Average(dBuV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

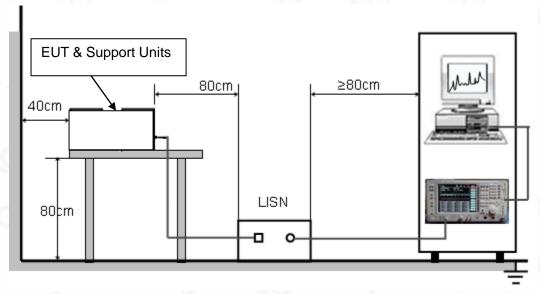



Page 41 of 56

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- The test data of the worst case condition(s) was reported on the Summary Data page.

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A


Note: The BT function cannot transmit when charging.






APPENDIX A: PHOTOGRAPHS OF TEST SETUP


RADIATED EMISSION TEST SETUP BELOW 1GHZ

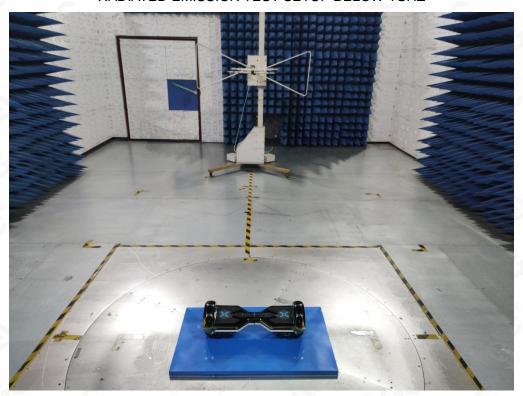

RADIATED EMISSION TEST SETUP ABOVE 1GHZ

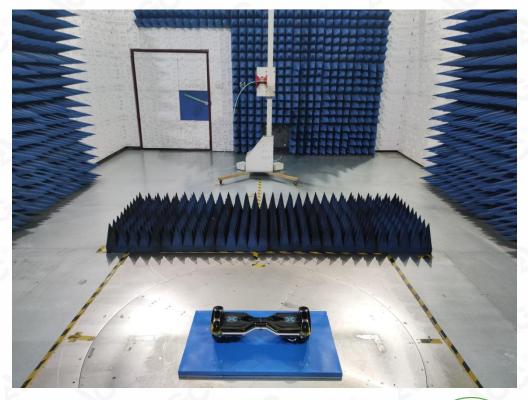

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the specificated resting/inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the writter pathorization of AGC, the test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15day after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc@agc-cert.com.





CONDUCTED TEST SETUP

