


Test Report

Report No. : CQASZ20241202551E
Applicant: Shenzhen Hollyland Technology Co., Ltd.
Address of Applicant: 8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China
Equipment Under Test (EUT):
Product: Wireless Microphone
Model No.: M71R2
Test Model No.: M71R2
Brand Name: 
FCC ID: 2ADZC-M71R2
Standards: 47 CFR Part 15, Subpart C
KDB558074 D01 15.247 Meas Guidance v05r02
ANSI C63.10:2013
Date of Receipt: 2024-12-4
Date of Test: 2024-12-4 to 2025-3-5
Date of Issue: 2025-3-5
Test Result : PASS*

*In the configuration tested, the EUT complied with the standards specified above.

Tested By:

Lewis Zhou

(Lewis Zhou)

Reviewed By:

Timo Lei

(Timo Lei)

Approved By:

Jack Ai

(Jack Ai)



1 Version

Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20241202551E	Rev.01	Initial report	2025-3-5

2 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15.203	/	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15.247	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15.247	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

3 Contents


	Page
1 VERSION	2
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF EUT	5
4.3 ADDITIONAL INSTRUCTIONS	7
4.4 TEST ENVIRONMENT	8
4.5 DESCRIPTION OF SUPPORT UNITS	8
4.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY	9
4.7 TEST LOCATION	10
4.8 TEST FACILITY	10
4.9 ABNORMALITIES FROM STANDARD CONDITIONS	10
4.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
4.11 EQUIPMENT LIST	11
5 TEST RESULTS AND MEASUREMENT DATA	12
5.1 ANTENNA REQUIREMENT	12
5.2 CONDUCTED EMISSIONS	13
5.3 CONDUCTED PEAK OUTPUT POWER	17
5.4 20dB OCCUPIED BANDWIDTH	22
5.5 CARRIER FREQUENCIES SEPARATION	26
5.6 HOPPING CHANNEL NUMBER	29
5.7 DWELL TIME	31
5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS	35
5.9 SPURIOUS RF CONDUCTED EMISSIONS	40
5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM	48
5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS	50
5.11.1 Radiated Emission below 1GHz	53
5.11.2 Transmitter Emission above 1GHz	55
6 PHOTOGRAPHS - EUT TEST SETUP	56
7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS	57

4 General Information

4.1 Client Information

Applicant:	Shenzhen Hollyland Technology Co., Ltd.
Address of Applicant:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China
Manufacturer:	Shenzhen Hollyland Technology Co., Ltd.
Address of Manufacturer:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China
Factory:	Shenzhen Hollyland Technology Co., Ltd.
Address of Factory:	8F, Building 5D, Skyworth Innovation Valley, Tangtou Road, Shiyan Street, Baoan District, Shenzhen, 518055 China

4.2 General Description of EUT

Product Name:	Wireless Microphone
Model No.:	M71R2
Test Model No.:	M71R2
Trade Mark:	
Software Version:	HLD_A6701_H048_S1.0.0.29_BurnFiles_Common_20250118_RX
Hardware Version:	V58
Operation Frequency:	2404MHz~2478MHz
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK
Transfer Rate:	2Mbps
Number of Channel:	38
Hopping Channel Type:	Adaptive Frequency Hopping systems
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable
Test Software of EUT:	FCC_Tool_V3.01
Antenna Type:	LDS antenna
Antenna Gain:	Ant1:2.95dBi Ant2:3.76dBi
Power Supply:	Li-ion battery: DC 3.87V 300mAh/1.161Wh
Simultaneous Transmission	<input checked="" type="checkbox"/> Simultaneous TX is supported and evaluated in this report. <input type="checkbox"/> Simultaneous TX is not supported.

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	
10	2422MHz	20	2442MHz	30	2462MHz	40	

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The Lowest channel	2404MHz
The Middle channel	2440MHz
The Highest channel	2478MHz

4.3 Additional Instructions

EUT Test Software Settings:		
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: ***#3646633#**	
EUT Power level:	(Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
GFSK	CH1	2404
	CH19	2440
	CH38	2478

Run Software:

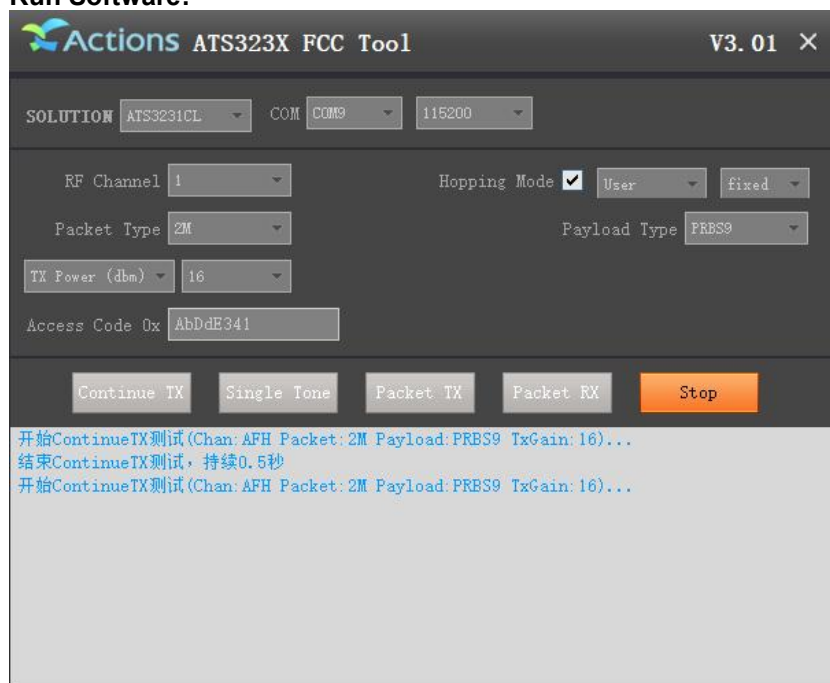

4.4 Test Environment

Operating Environment:	
Temperature:	25 °C
Humidity:	54% RH
Atmospheric Pressure:	1009mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

4.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	Supplied
Adapter	MI	/	/	CQA

4.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty
1	Radiated Emission (Below 1GHz)	5.12dB
2	Radiated Emission (Above 1GHz)	4.60dB
3	Conducted Disturbance (0.15~30MHz)	3.34dB
4	Radio Frequency	3×10^{-8}
5	Duty cycle	0.6 %
6	Occupied Bandwidth	1.1%
7	RF conducted power	0.86dB
8	RF power density	0.74
9	Conducted Spurious emissions	0.86dB
10	Temperature test	0.8℃
11	Humidity test	2.0%
12	Supply voltages	0.5 %
13	Frequency Error	5.5 Hz

4.7 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 22984-1

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

4.9 Abnormalities from Standard Conditions

None.

4.10 Other Information Requested by the Customer

None.

4.11 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU26	CQA-038	2024/9/2	2025/9/1
Spectrum analyzer	R&S	FSU40	CQA-075	2024/9/2	2025/9/1
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2024/9/2	2025/9/1
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2024/9/2	2025/9/1
Preamplifier	EMCI	EMC184055SE	CQA-089	2024/9/2	2025/9/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-060	2023/9/8	2026/9/7
Bilog Antenna	R&S	HL562	CQA-011	2023/11/01	2026/10/31
Horn Antenna	R&S	HF906	CQA-012	2023/11/01	2026/10/31
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2023/9/7	2026/9/6
Coaxial Cable (Above 1GHz)	CQA	N/A	C007	2024/9/2	2025/9/1
Coaxial Cable (Below 1GHz)	CQA	N/A	C013	2024/9/2	2025/9/1
Antenna Connector	CQA	RFC-01	CQA-080	2024/9/2	2025/9/1
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2024/9/2	2025/9/1
Power meter	R&S	NRVD	CQA-029	2024/9/2	2025/9/1
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2024/9/2	2025/9/1
EMI Test Receiver	R&S	ESR7	CQA-005	2024/9/2	2025/9/1
LISN	R&S	ENV216	CQA-003	2024/9/2	2025/9/1
Coaxial cable	CQA	N/A	CQA-C009	2024/9/2	2025/9/1
DC power	KEYSIGHT	E3631A	CQA-028	2024/9/2	2025/9/1

Test software:


	Manufacturer	Software brand	Software version
Radiated Emissions test software	Tonscend	JS1120-3	Version:8
Conducted Emissions test software	Audix	e3	Version:9
RF Conducted test software	Audix	e3	V3.5.39

Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

5 Test results and Measurement Data


5.1 Antenna Requirement

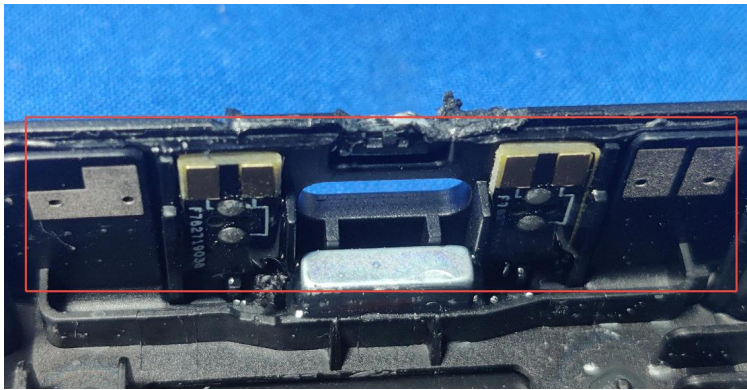Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
<p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p>	
EUT Antenna:	
<p>The antenna is LDS antenna.</p> <p>The connection/connection type between the antenna to the EUT's antenna port is:unique coupling</p> <p>This is either permanently attachment or a unique coupling that satisfies the requirement.</p>	

Exploratory Test Mode:	Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.
Final Test Mode:	Through Pre-scan, find the GFSK modulation at the lowest channel is the worst case. Only the worst case is recorded in the report.
Test Voltage:	AC 120V/60Hz
Test Results:	Pass

Measurement Data

Live line:

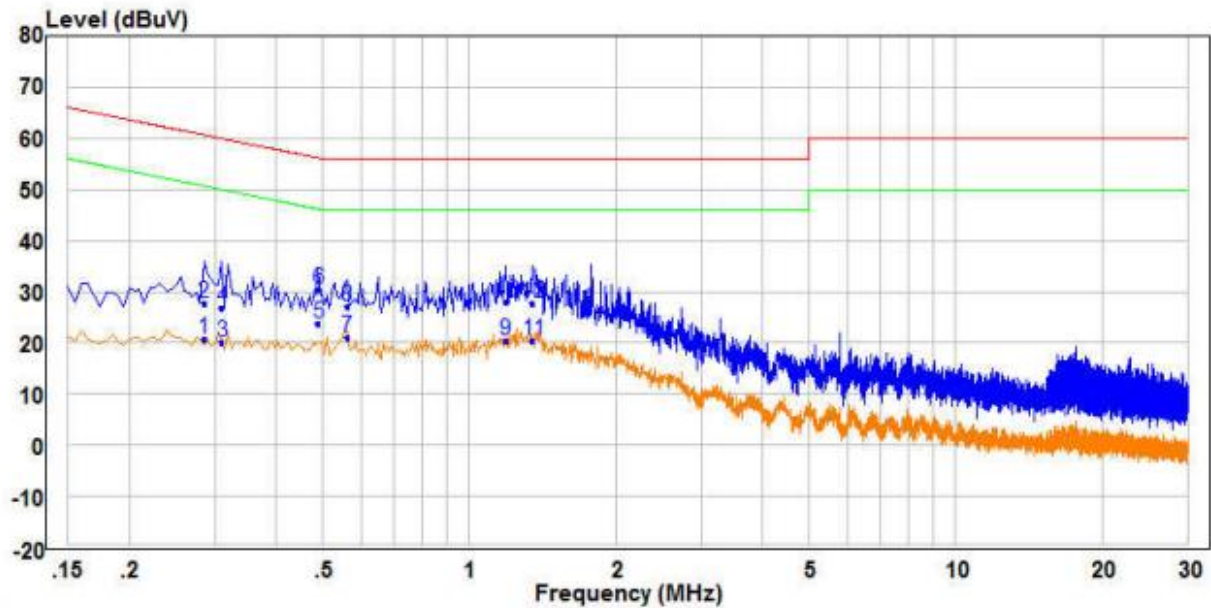


	Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.285	11.16	9.51	20.67	50.67	-30.00	Average	Line
2	0.285	18.13	9.51	27.64	60.67	-33.03	QP	Line
3	0.310	10.70	9.50	20.20	49.97	-29.77	Average	Line
4	0.310	17.47	9.50	26.97	59.97	-33.00	QP	Line
5 PP	0.490	13.99	9.69	23.68	46.17	-22.49	Average	Line
6 QP	0.490	20.88	9.69	30.57	56.17	-25.60	QP	Line
7	0.560	11.18	9.76	20.94	46.00	-25.06	Average	Line
8	0.560	17.26	9.76	27.02	56.00	-28.98	QP	Line
9	1.190	10.18	10.19	20.37	46.00	-25.63	Average	Line
10	1.190	17.82	10.19	28.01	56.00	-27.99	QP	Line
11	1.350	9.80	10.54	20.34	46.00	-25.66	Average	Line
12	1.350	17.15	10.54	27.69	56.00	-28.31	QP	Line

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:


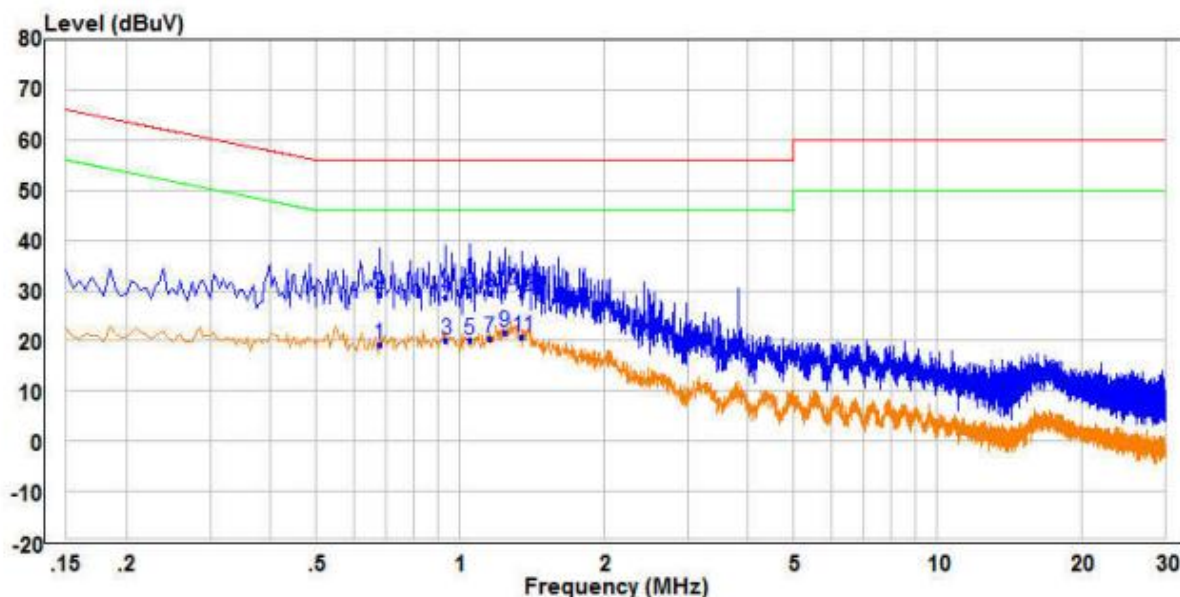


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark	Pol/Phase
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.680	9.44	9.88	19.32	46.00	-26.68	Average	Neutral
2	0.680	19.25	9.88	29.13	56.00	-26.87	QP	Neutral
3	0.935	10.43	9.74	20.17	46.00	-25.83	Average	Neutral
4	0.935	19.05	9.74	28.79	56.00	-27.21	QP	Neutral
5	1.050	10.33	9.70	20.03	46.00	-25.97	Average	Neutral
6	1.050	19.47	9.70	29.17	56.00	-26.83	QP	Neutral
7	1.155	10.72	9.71	20.43	46.00	-25.57	Average	Neutral
8	1.155	19.82	9.71	29.53	56.00	-26.47	QP	Neutral
9 PP	1.240	12.01	9.71	21.72	46.00	-24.28	Average	Neutral
10 QP	1.240	20.32	9.71	30.03	56.00	-25.97	QP	Neutral
11	1.350	10.94	9.72	20.66	46.00	-25.34	Average	Neutral
12	1.350	19.32	9.72	29.04	56.00	-26.96	QP	Neutral

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

5.3 Conducted Peak Output Power

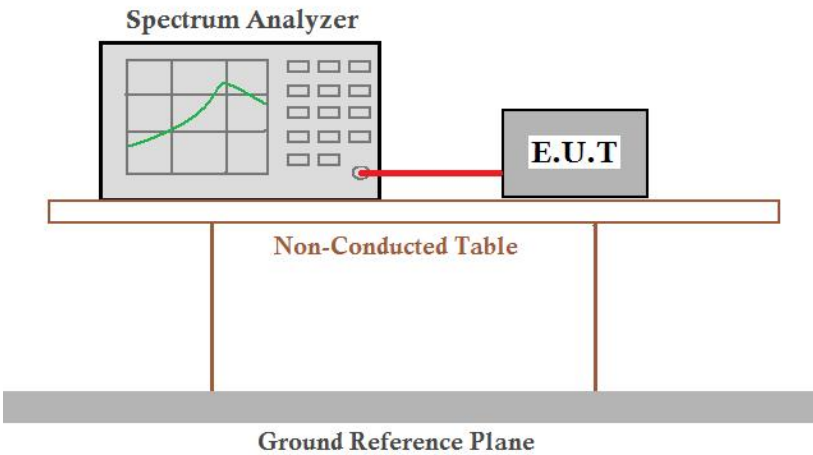Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	<p>Setup for Power meter measurement method</p>  <p>Setup for Spectrum analyser measurement method</p>  <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit:	21dBm
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Ant1:

Test Mode	Antenna	Freq (MHz)	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
GFSK	Ant1	2404	13.92	≤21	PASS
		2440	14.51	≤21	PASS
		2478	14.86	≤21	PASS


Ant2:


Test Mode	Antenna	Freq (MHz)	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
GFSK	Ant2	2404	13.97	≤21	PASS
		2440	14.55	≤21	PASS
		2478	14.88	≤21	PASS

Ant1+Ant2:

Test Mode	Antenna	Freq (MHz)	Conducted Peak Power [dBm]	Conducted Limit [dBm]	Verdict
GFSK	Ant1+Ant2	2404	16.96	≤21	PASS
		2440	17.54	≤21	PASS
		2478	17.88	≤21	PASS


Test plot as follows:

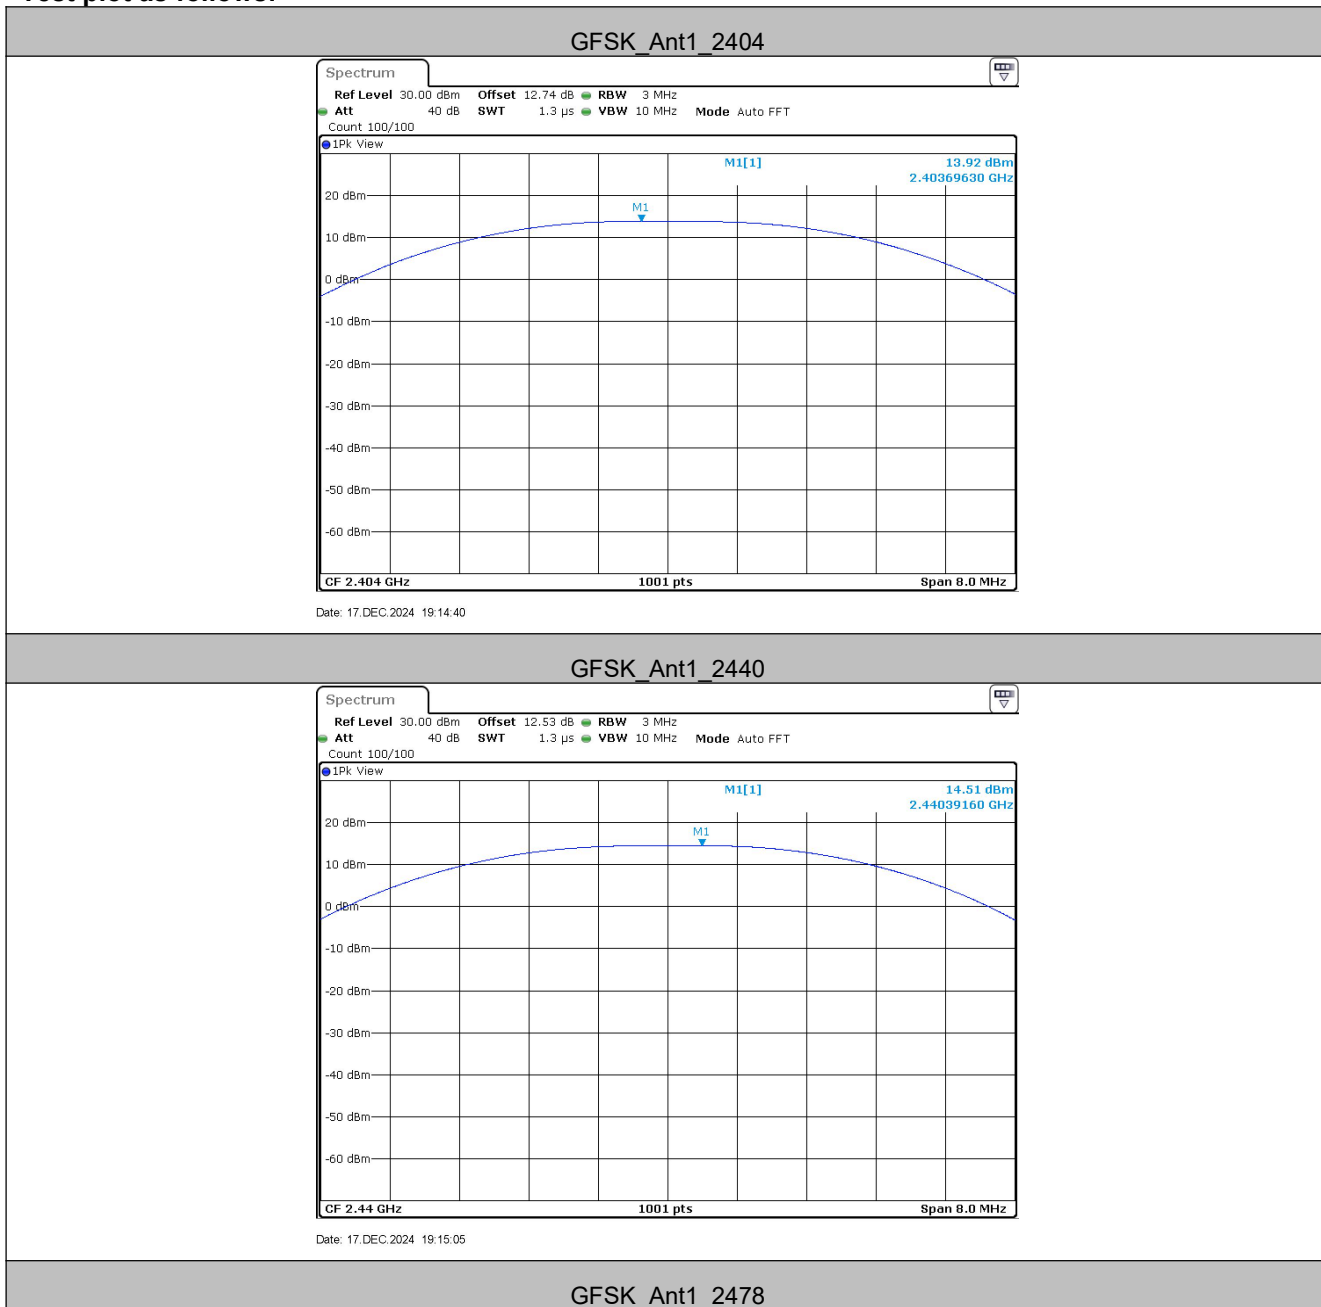

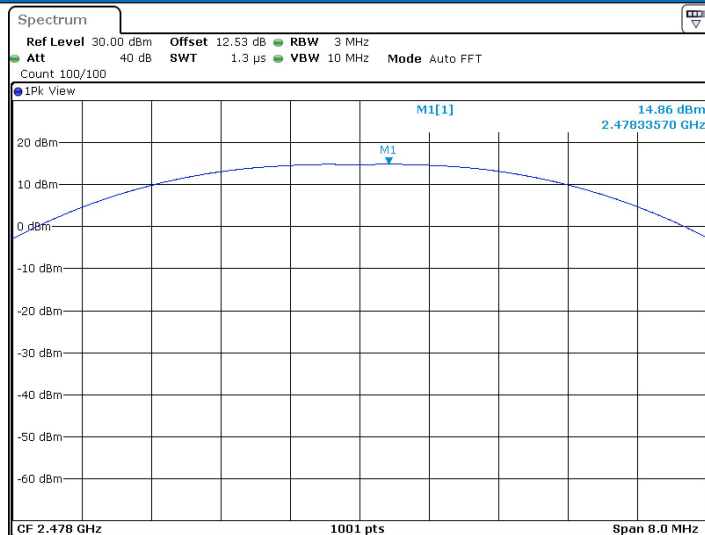


Date: 17.DEC.2024 19:15:22

GFSK_Ant2_2404

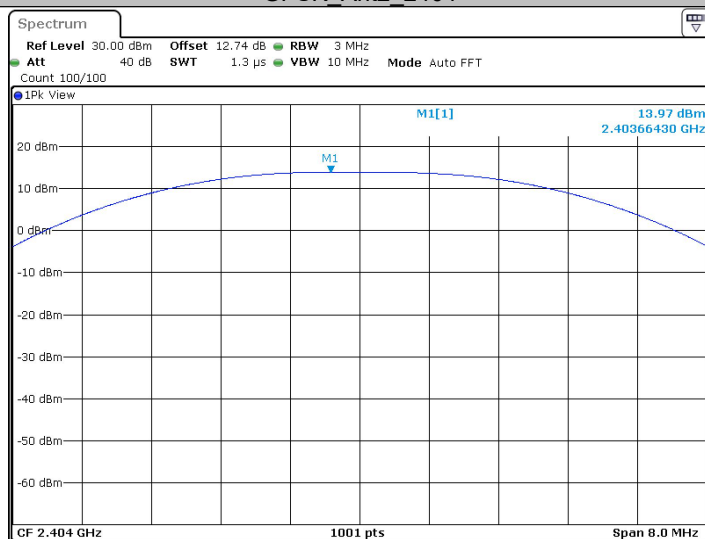


Date: 17.DEC.2024 19:34:07

GFSK_Ant2_2440

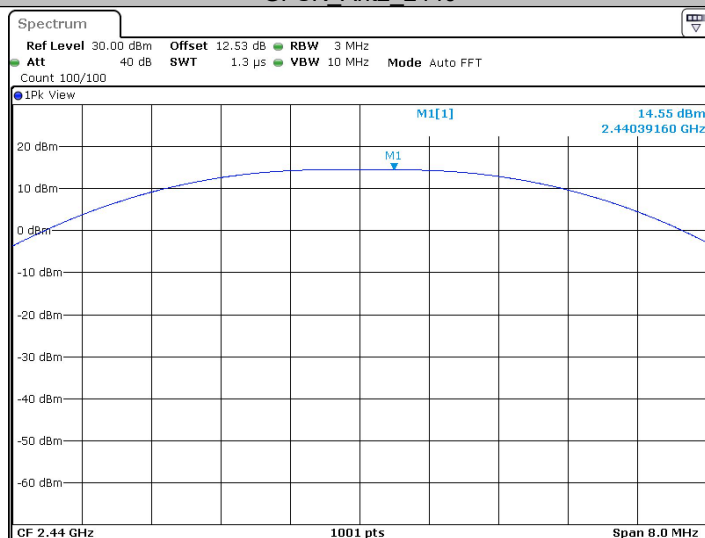


Date: 17.DEC.2024 19:34:28

GFSK_Ant2_2478

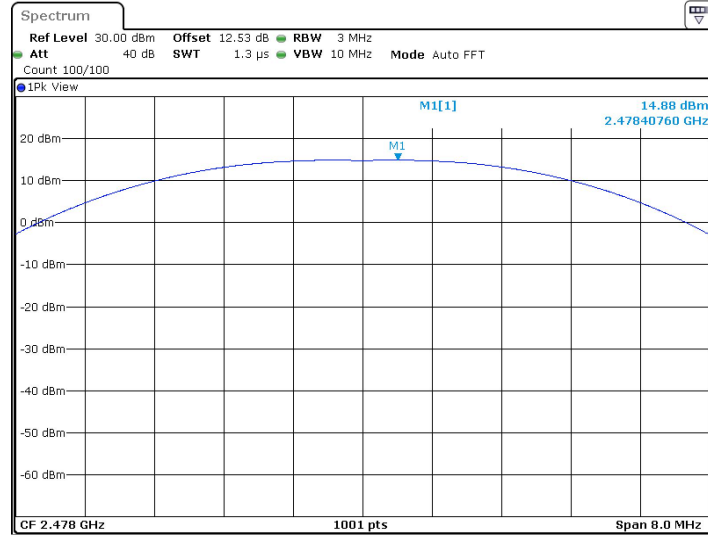

Date: 17 DEC 2024 19:35:09

5.4 20dB Occupied Bandwidth

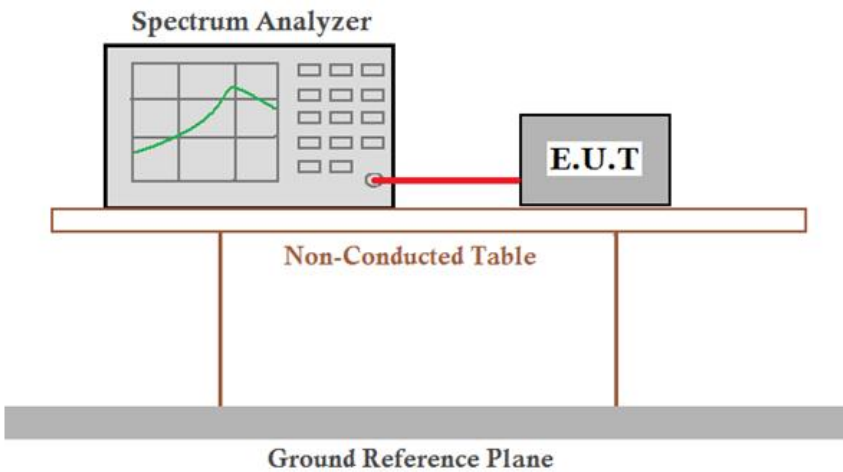Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	NA
Exploratory Test Mode:	Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data


Ant1:


Test channel	20dB Occupy Bandwidth (MHz)
	GFSK
Lowest	2.16
Middle	2.16
Highest	2.16

Ant2:

Test channel	20dB Occupy Bandwidth (MHz)
	GFSK
Lowest	2.16
Middle	2.16
Highest	2.16


Test plot as follows:

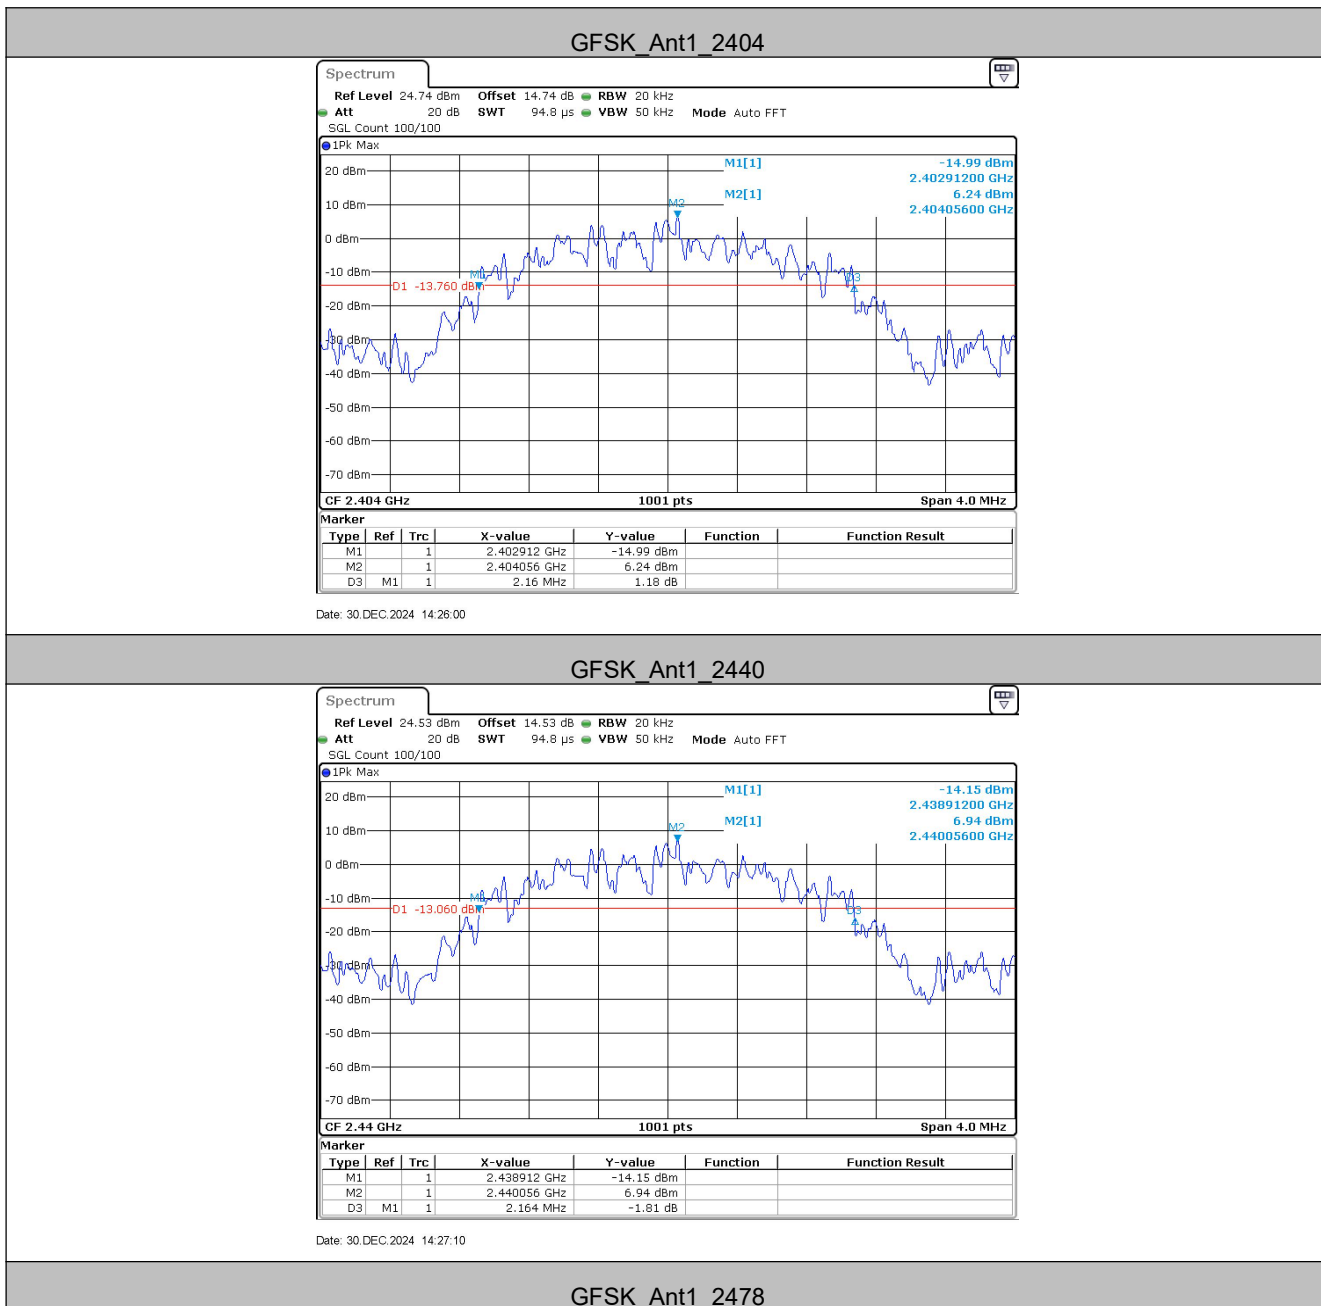

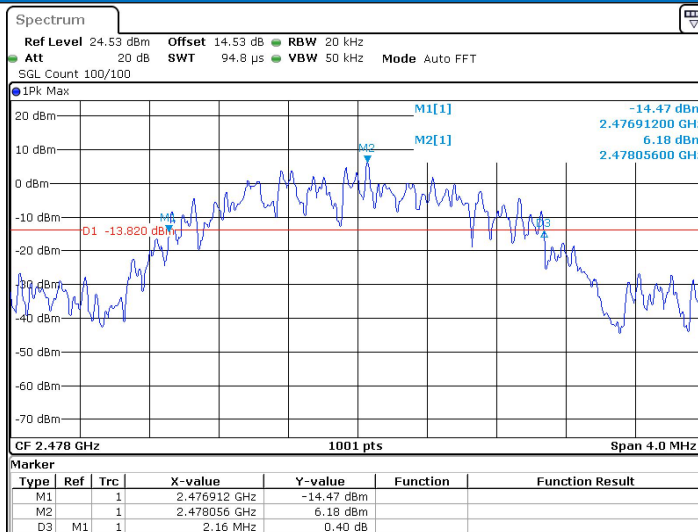


Date: 30.DEC.2024 14:27:53

GFSK_Ant2_2404

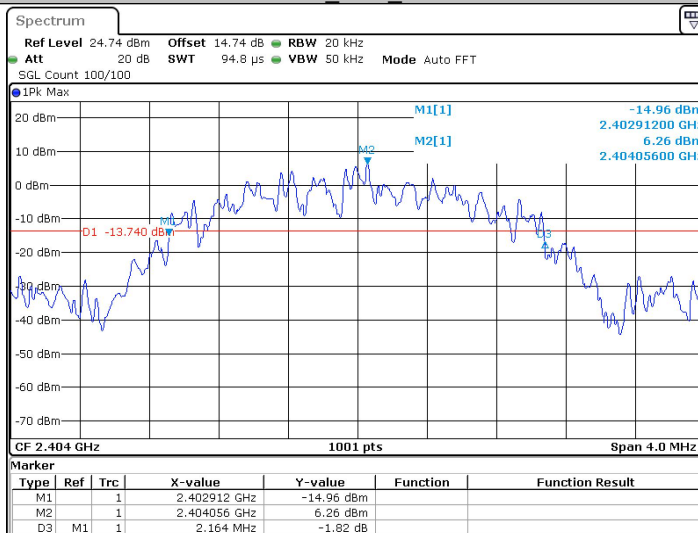


Date: 30.DEC.2024 14:28:24

GFSK_Ant2_2440

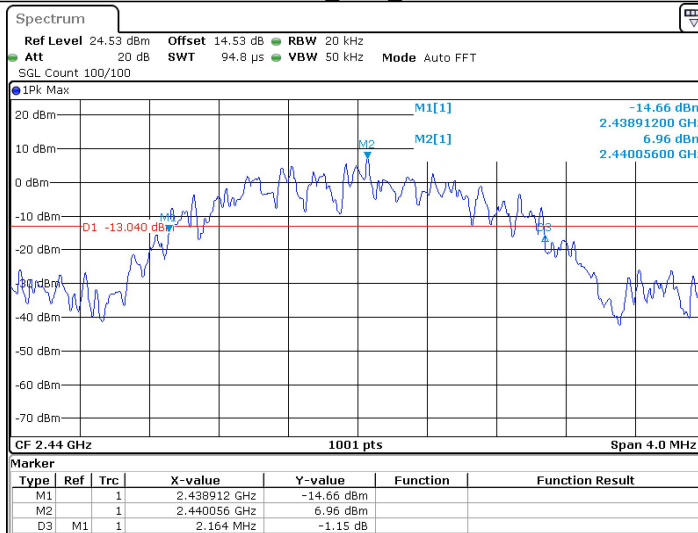

Date: 30.DEC.2024 14:29:11

GFSK_Ant2_2478

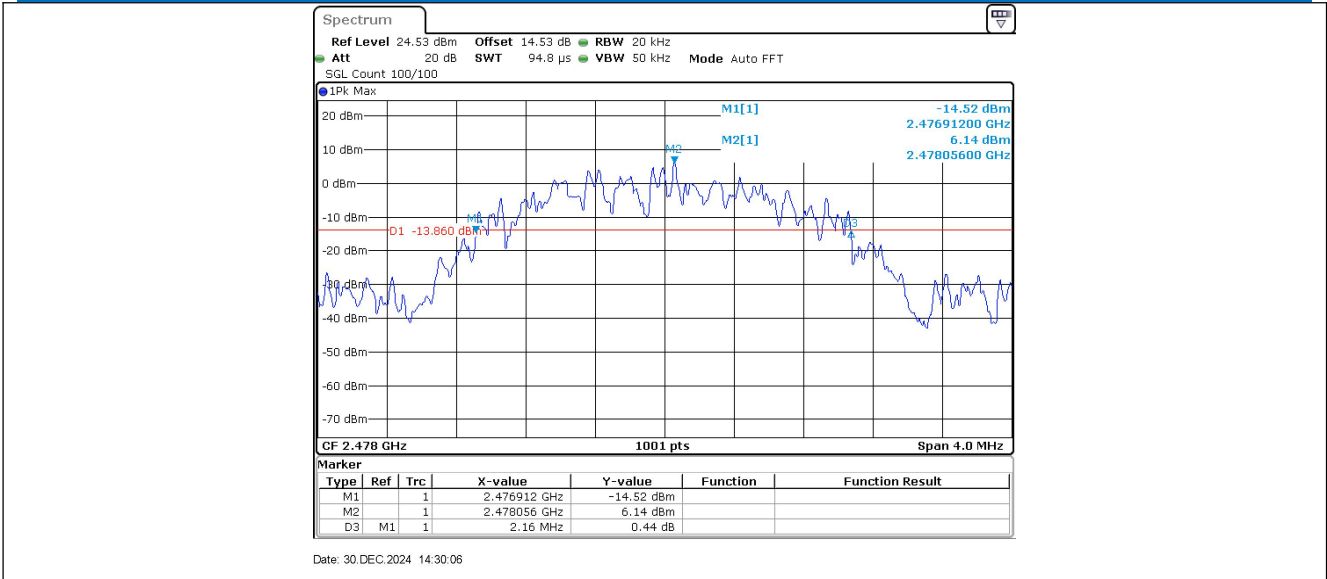

5.5 Carrier Frequencies Separation

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Limit:	2/3 of the 20dB bandwidth
	Remark: the transmission power is less than 0.125W.
Exploratory Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Ant1:

TestMode	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
GFSK	Hop	2.005	≥ 1.44	PASS

Mode	20dB bandwidth (MHz) (worse case)	Limit (MHz) (Carrier Frequencies Separation)
GFSK	2.16	≥ 1.44

Ant2:


TestMode	Freq(MHz)	Result[MHz]	Limit[MHz]	Verdict
GFSK	Hop	2	≥ 1.44	PASS

Mode	20dB bandwidth (MHz) (worse case)	Limit (MHz) (Carrier Frequencies Separation)
GFSK	2.16	≥ 1.44

Test plot as follows:




5.6 Hopping Channel Number

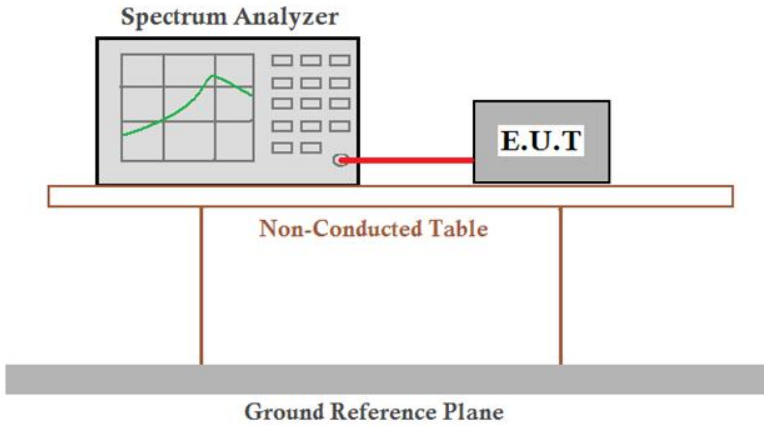Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Remark: $Offset = \text{Cable loss} + \text{attenuation factor}$.</p>
Limit:	At least 15 channels
Exploratory Test Mode:	hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass

Measurement Data

Mode	Hopping channel numbers	Limit
GFSK	38	≥ 15

Test plot as follows:

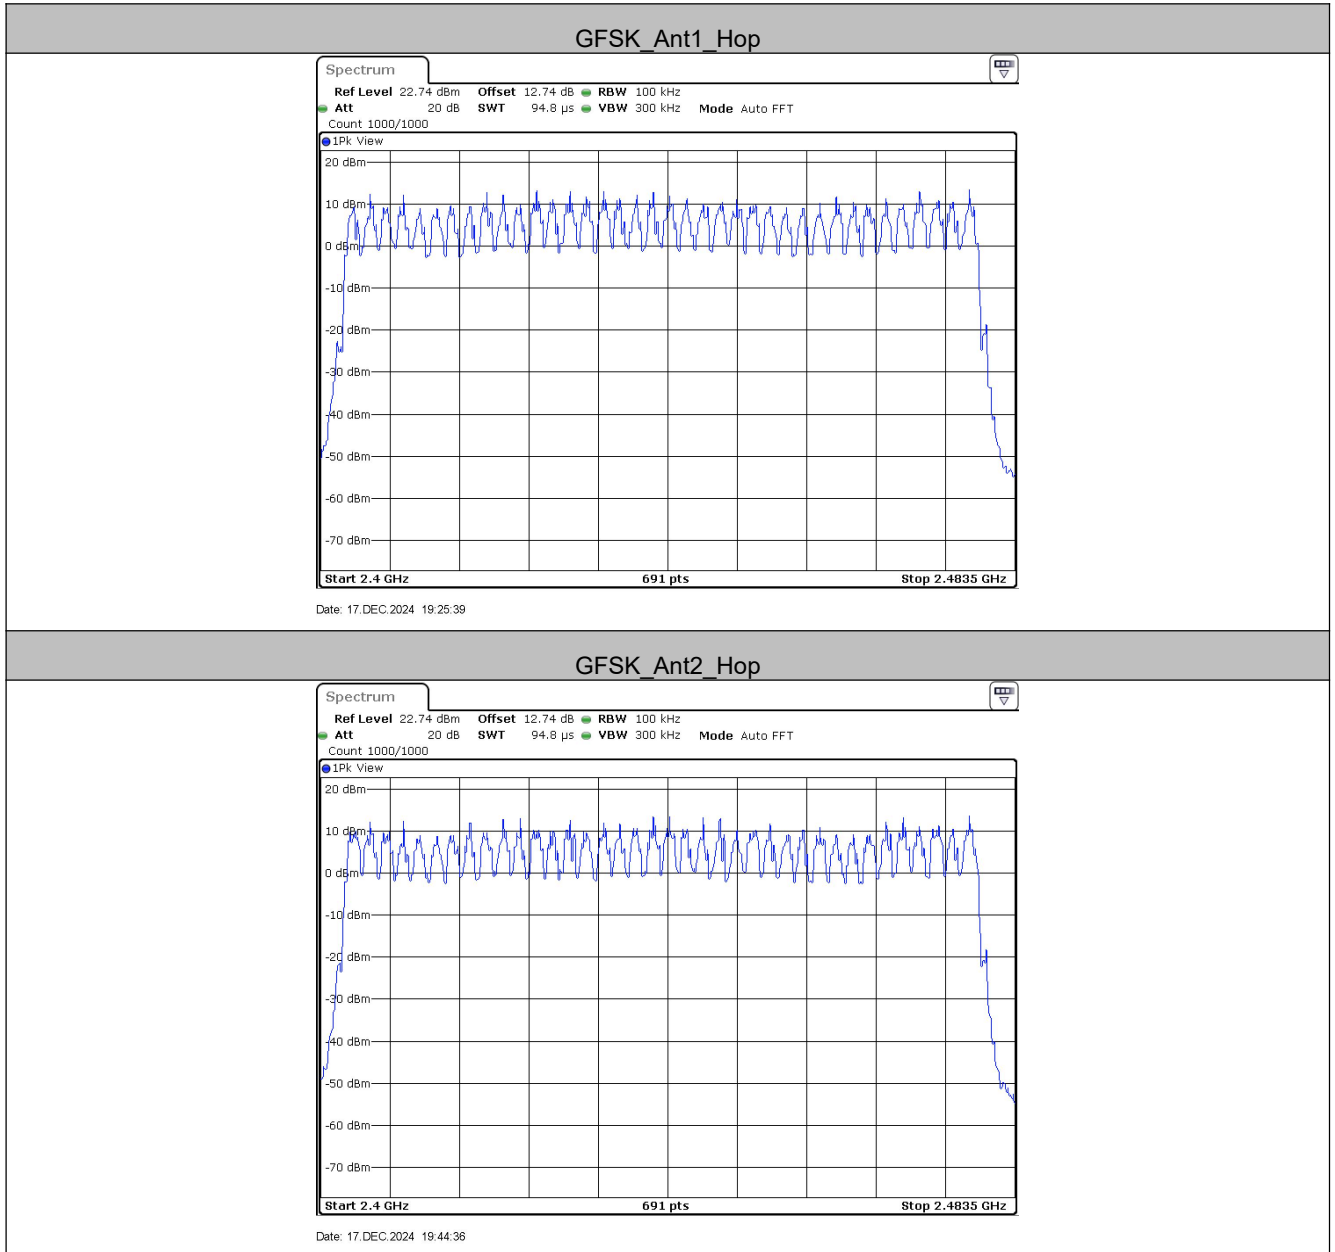

5.7 Dwell Time

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>Diagram illustrating the test setup for dwell time measurement. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p> <p>Remark: Offset=Cable loss+ attenuation factor.</p>
Test Mode:	Hopping transmitting with all kind of modulation and all kind of data type.
Limit:	0.4 Second
Test Results:	Pass

Measurement Data

Ant1:

TestMode	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
GFSK	Hop	1.054	310	0.327	≤0.4	PASS


Ant2:

TestMode	Freq(MHz)	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
GFSK	Hop	1.054	310	0.327	≤0.4	PASS


Remark:

The test period: T= 0.4 Second/Channel x 38 Channel = 15.2 s


Test plot as follows:

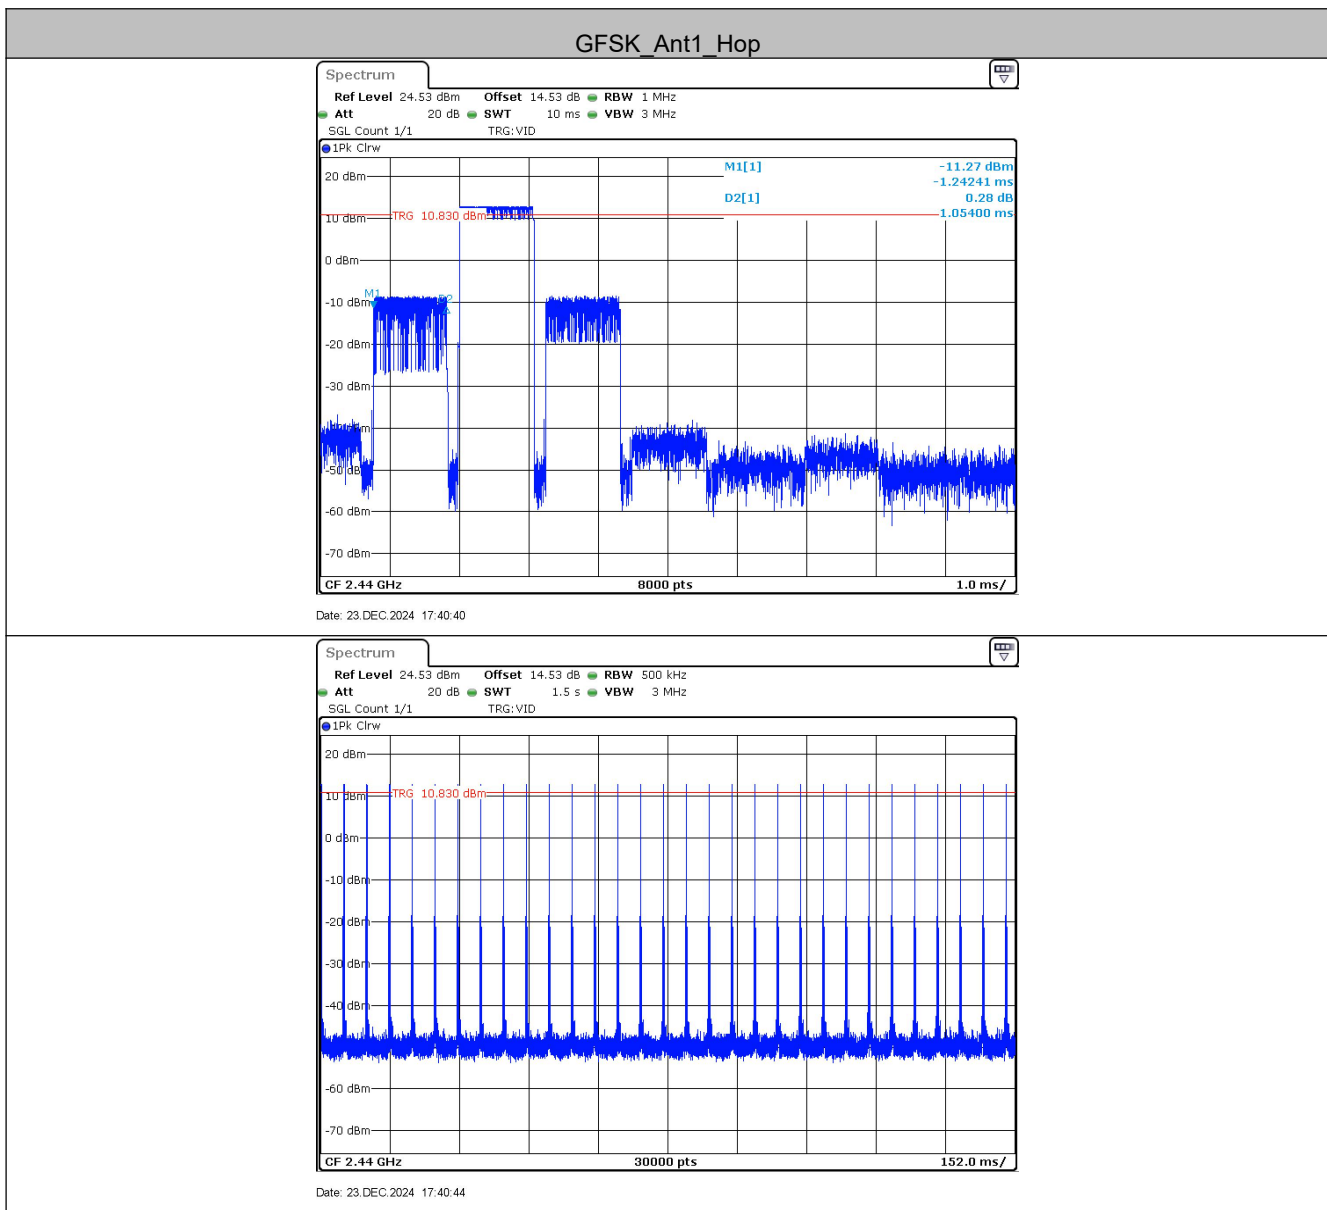

GFSK_Ant2_Hop

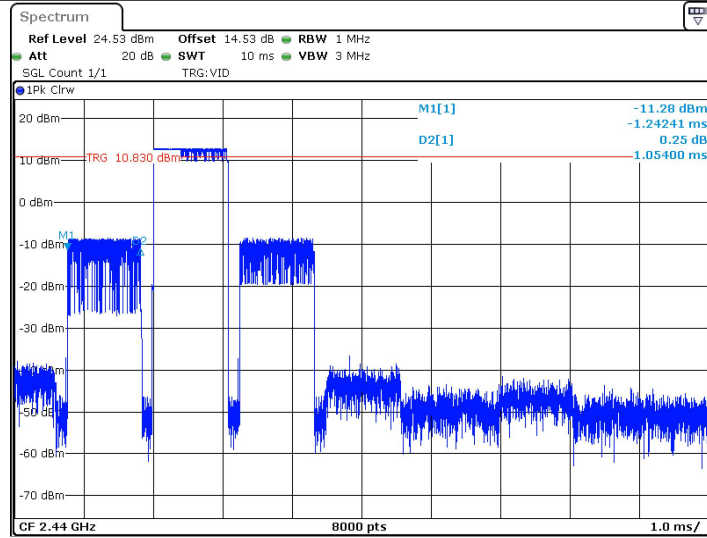


Date: 23.DEC.2024 17:42:12

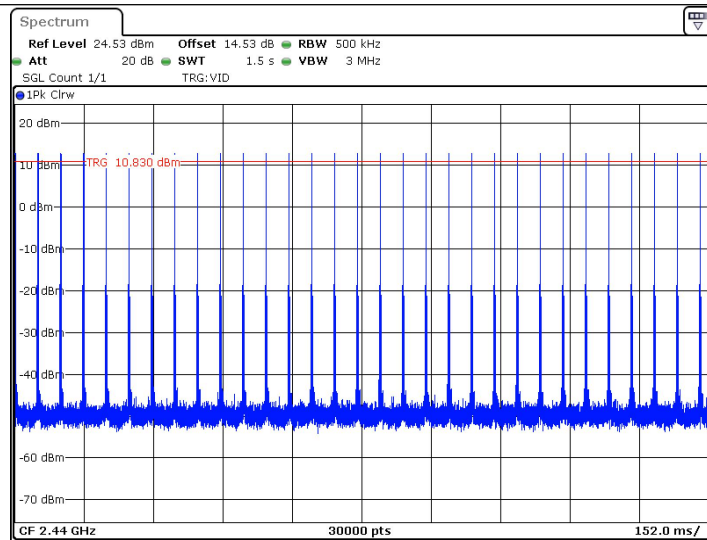

Date: 23.DEC.2024 17:42:15

5.8 Band-edge for RF Conducted Emissions

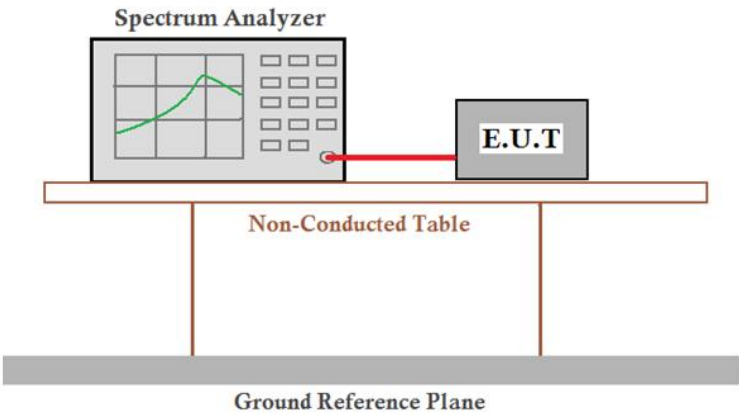Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p><i>Remark: Offset=cable loss+ attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Exploratory Test Mode:	Hopping and Non-hopping transmitting with all kind of modulation and all kind of data type
Final Test Mode:	Only the worst case is recorded in the report.
Test Results:	Pass


Measurement Data**Ant1:**


TestMode	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	Low	2404	13.25	-46.72	≤ -6.75	PASS
	High	2478	14.40	-51.45	≤ -5.6	PASS
	Low	HOP_2404	10.03	-52.29	≤ -9.97	PASS
	High	Hop_2478	10.28	-47.51	≤ -9.72	PASS

Ant2:

TestMode	ChName	Freq(MHz)	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
GFSK	Low	2404	13.27	-47.86	≤ -6.73	PASS
	High	2478	14.43	-47.59	≤ -5.57	PASS
	Low	HOP_2404	8.83	-52	≤ -11.17	PASS
	High	Hop_2478	10.26	-52.87	≤ -9.74	PASS


Test plot as follows:

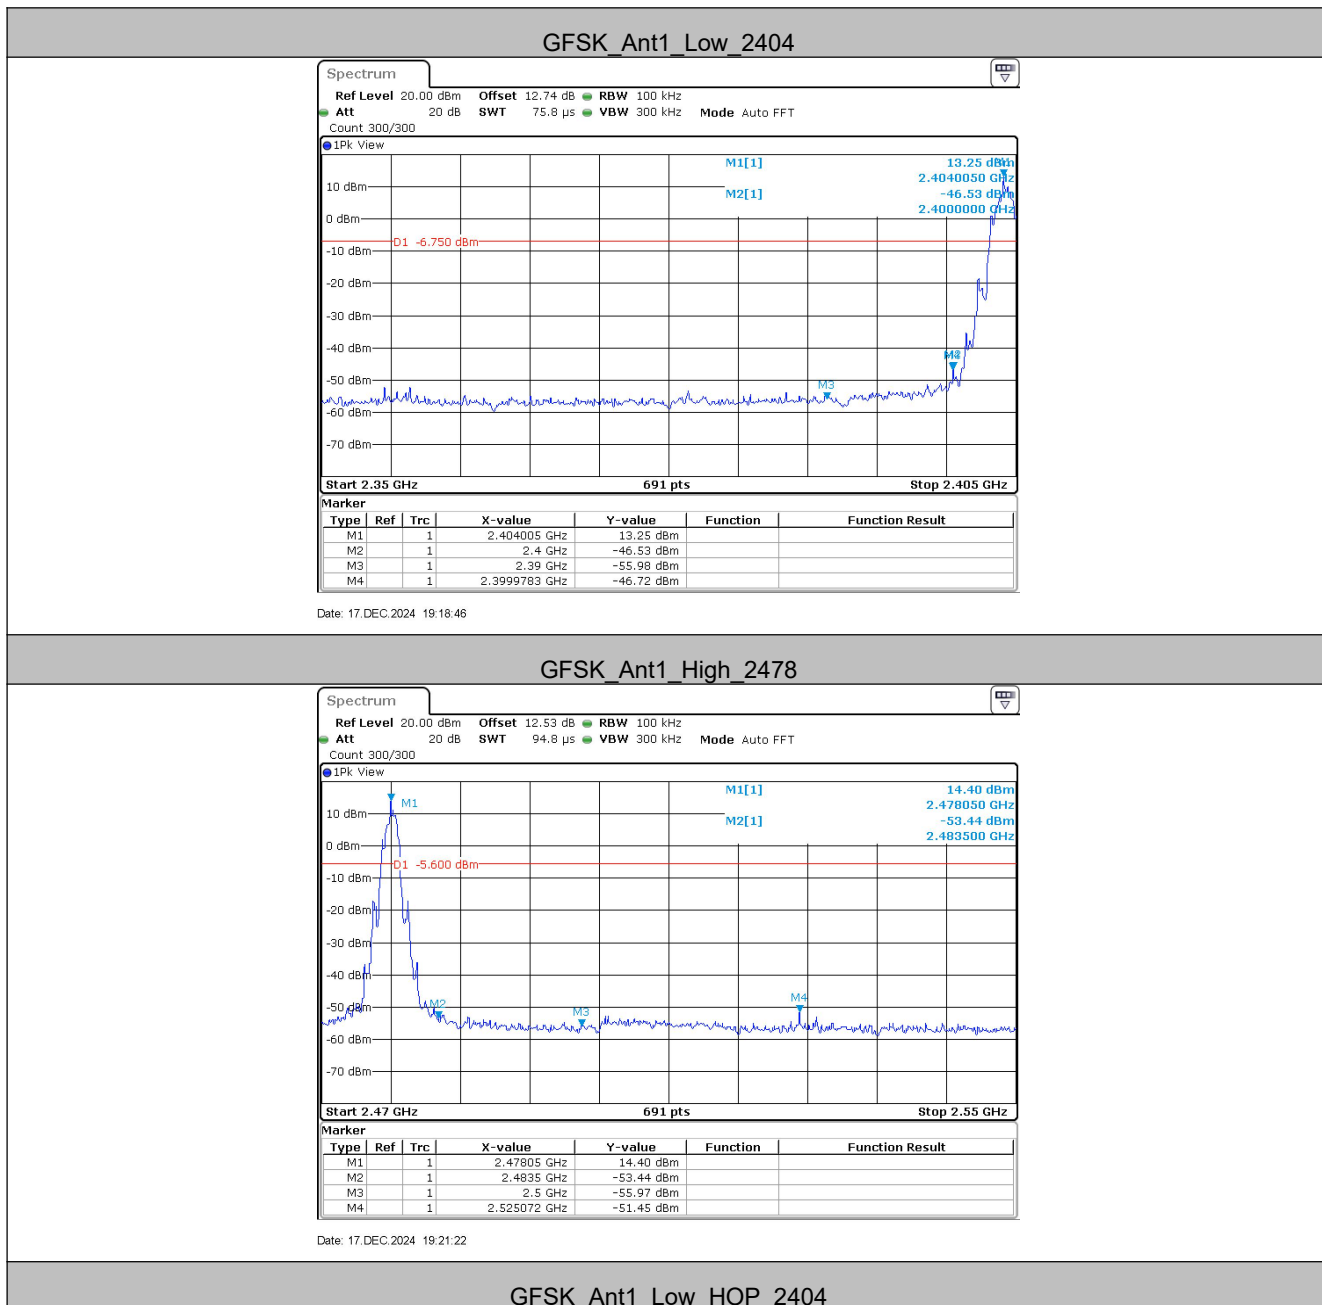

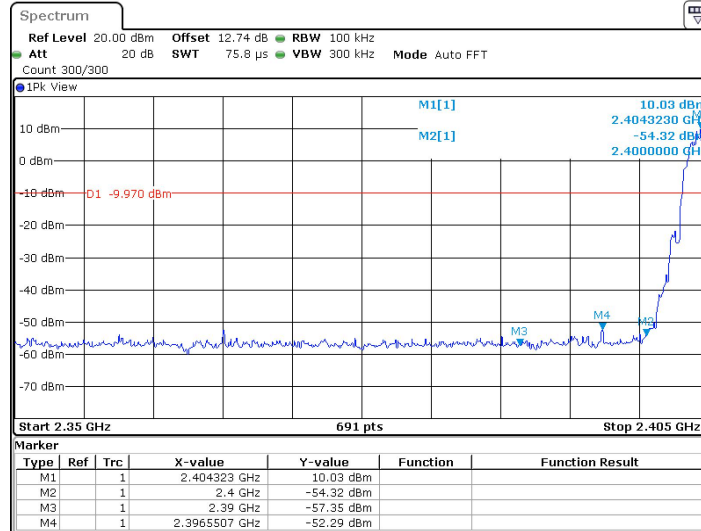


Date: 17 DEC 2024 19:23:18

GFSK Ant1 High Hop 2478

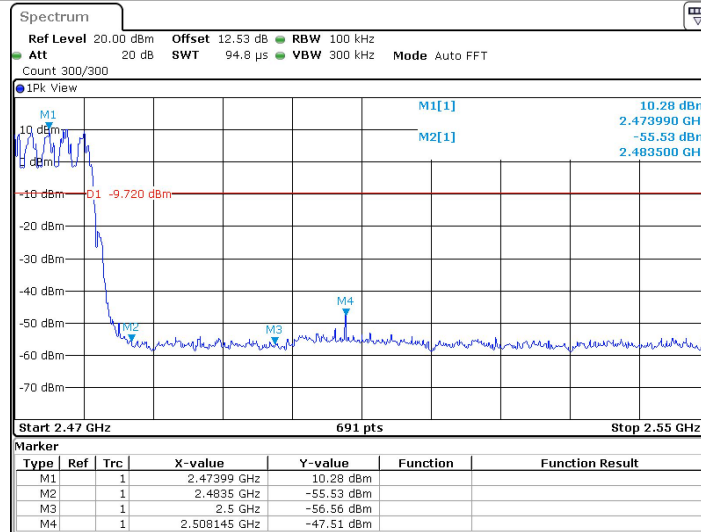

Date: 17 DEC 2024 19:26:42

GFSK Ant2 Low 2404

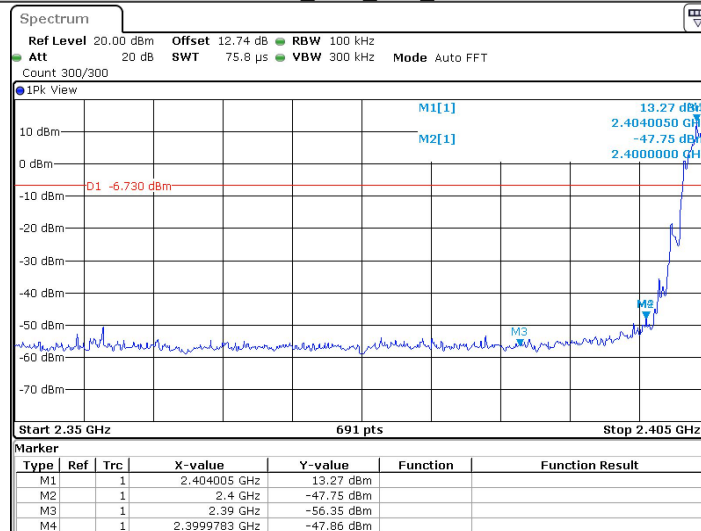

Date: 17 DEC 2024 19:35:42