

APPENDIX 2 : SAR Measurement data

P1510D / Body / Main Front / 11.b 2437MHz / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.045 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.86 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.188 W/kg


SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.106 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.1 degree.C. , After 24.1 degree.C.

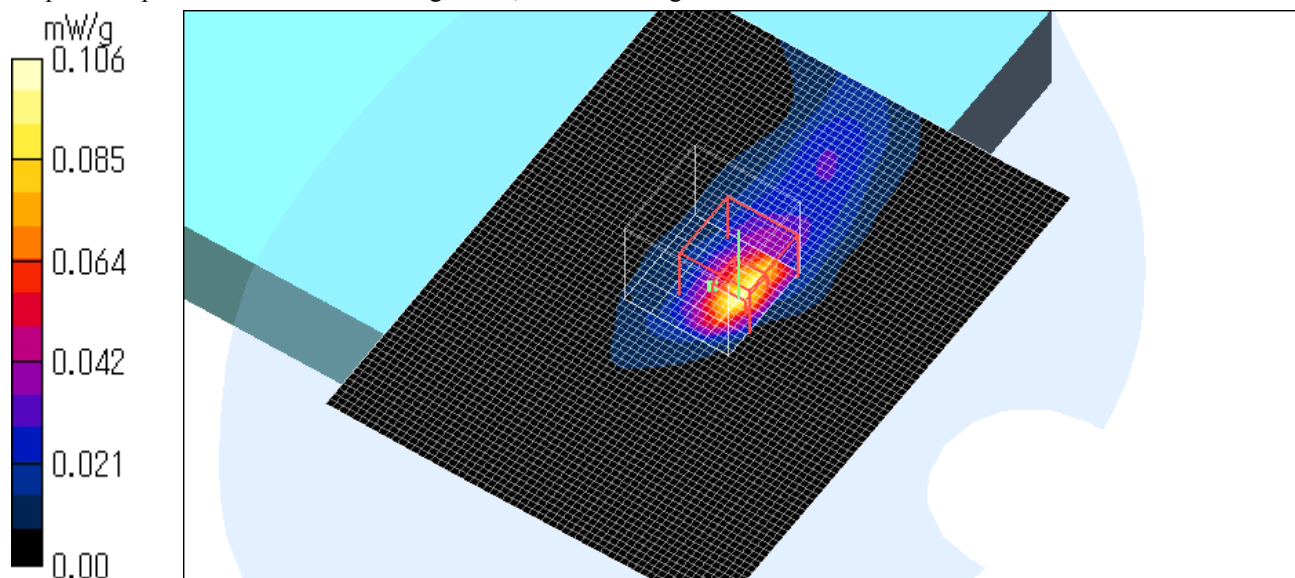

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Back / 11.b 2437MHz / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.015 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 1.99 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.034 W/kg


SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00702 mW/g

Maximum value of SAR (measured) = 0.014 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.2 degree.C. , After 24.2 degree.C.

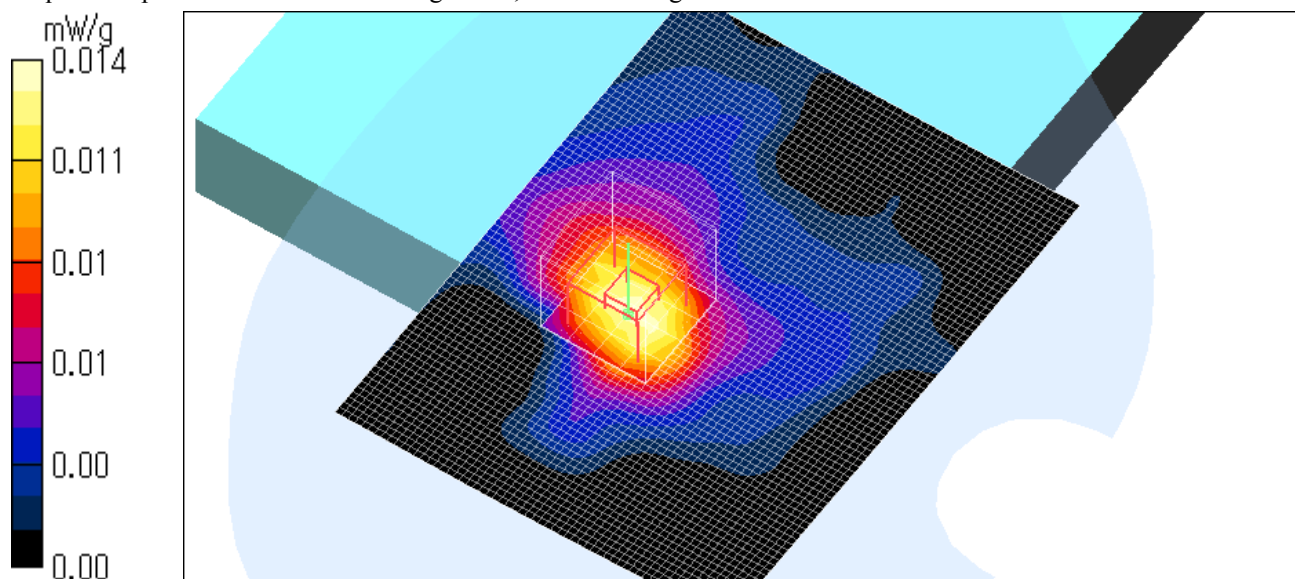

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Bottom / 11.b 2437MHz/ CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.01 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.962 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.018 W/kg


SAR(1 g) = 0.00339 mW/g; SAR(10 g) = 0.00181 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.1 degree.C. , After 24.2 degree.C.

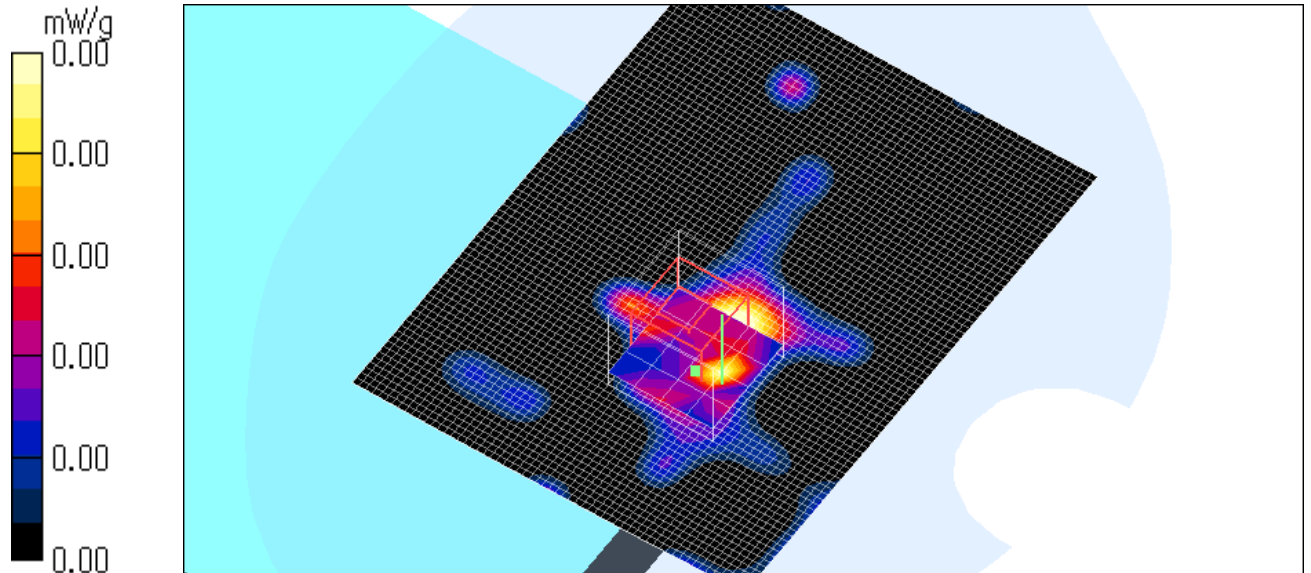

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main side / 11.b 2437MHz / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.174 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.52 V/m; Power Drift = -0.226 dB

Peak SAR (extrapolated) = 0.482 W/kg


SAR(1 g) = 0.176 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.195 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

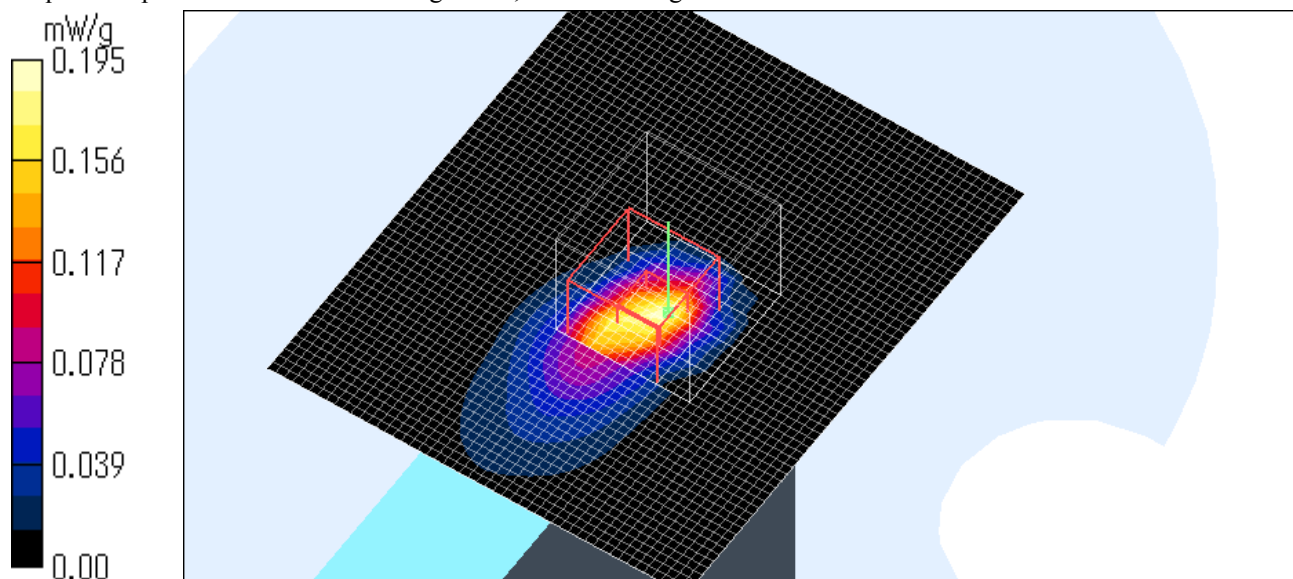

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.b 2437MHz/ CCK(11Mbps) / Option Battery

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.149 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.22 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.492 W/kg


SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.202 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

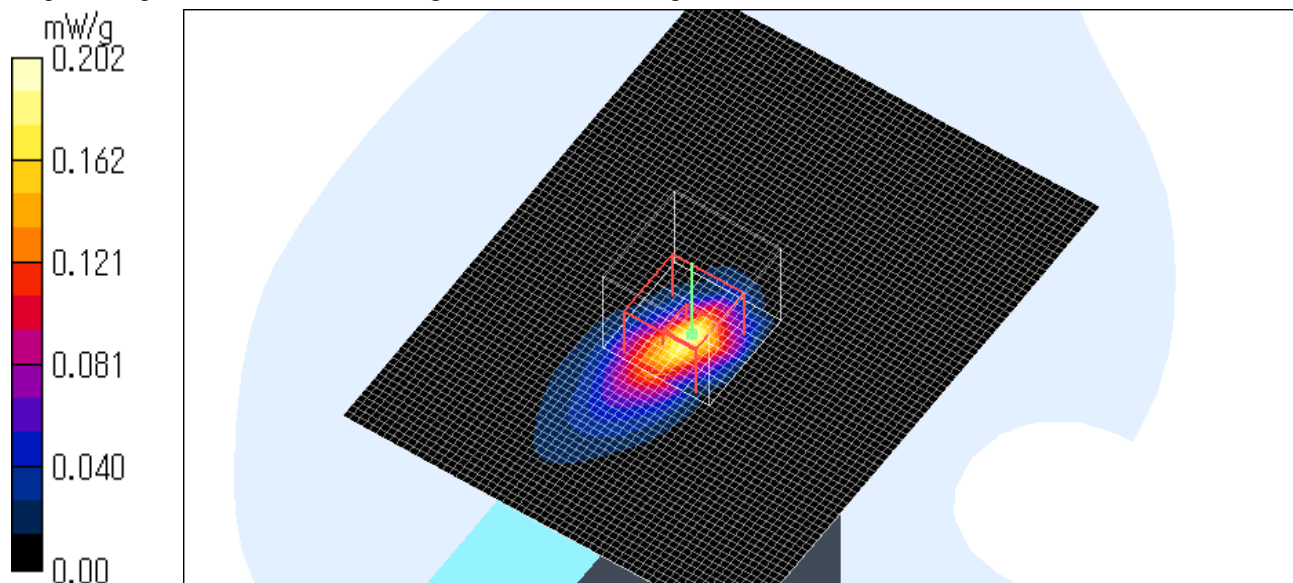

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.b 2412MHz/ CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.173 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.488 W/kg


SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.214 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

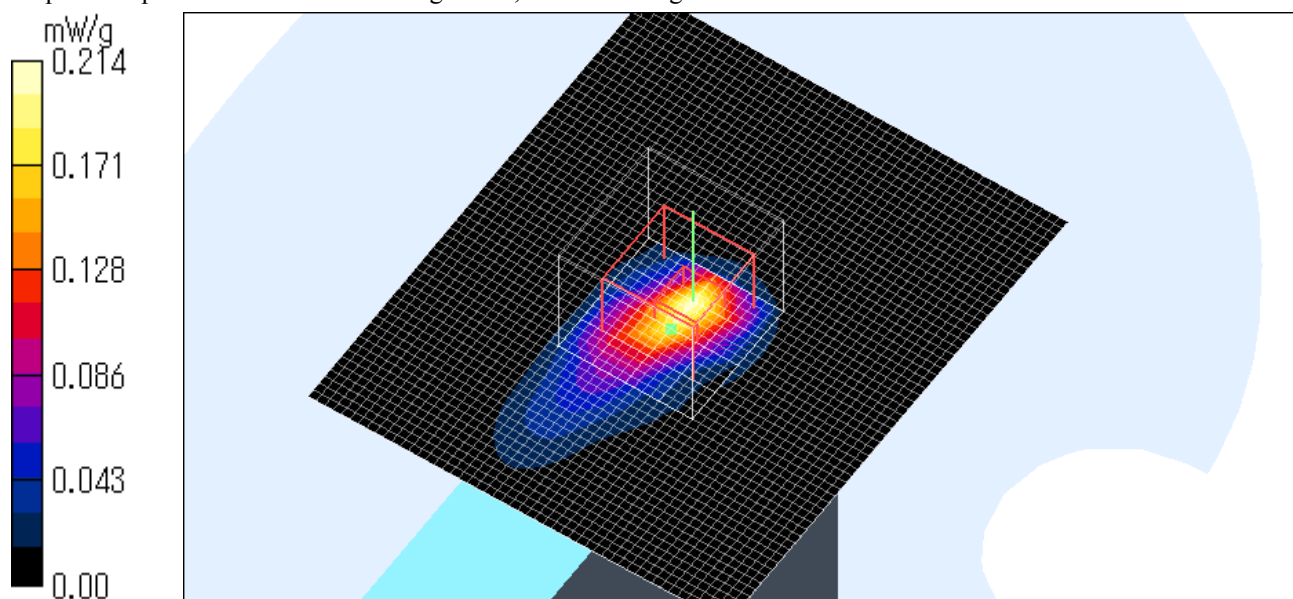

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510 / Body / Main Side / 11.b 2462MHz / CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.176 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.555 W/kg


SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.201 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.4 degree.C.

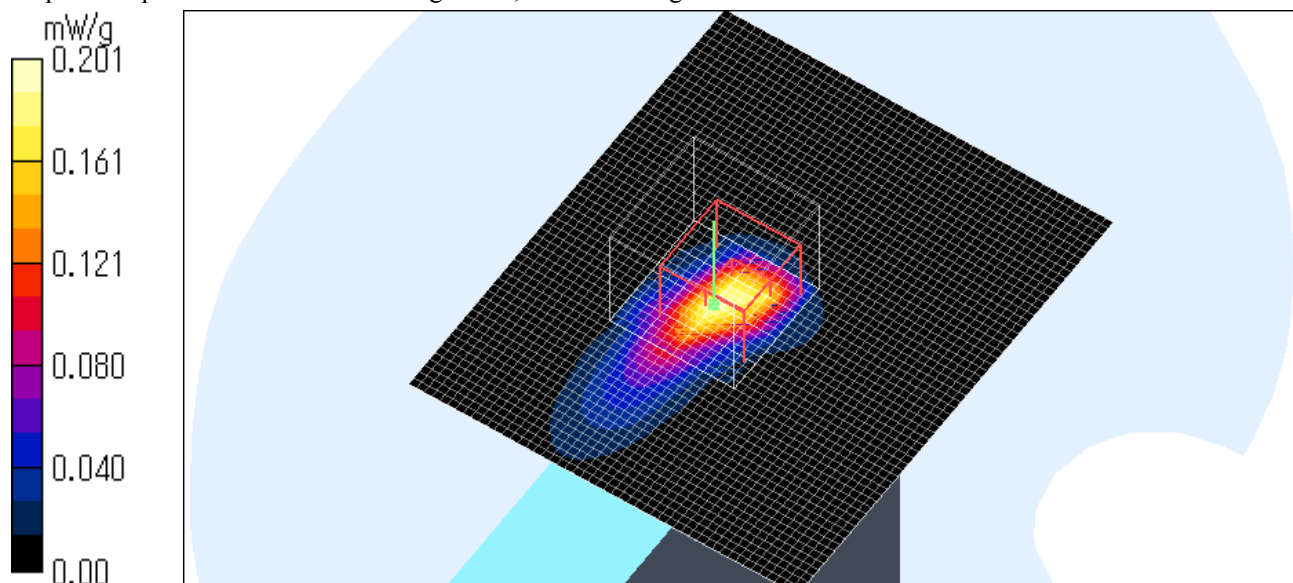

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2437MHz / BPSK(6Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.165 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.40 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.529 W/kg


SAR(1 g) = 0.185 mW/g; SAR(10 g) = 0.071 mW/g

Maximum value of SAR (measured) = 0.198 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.4 degree.C.

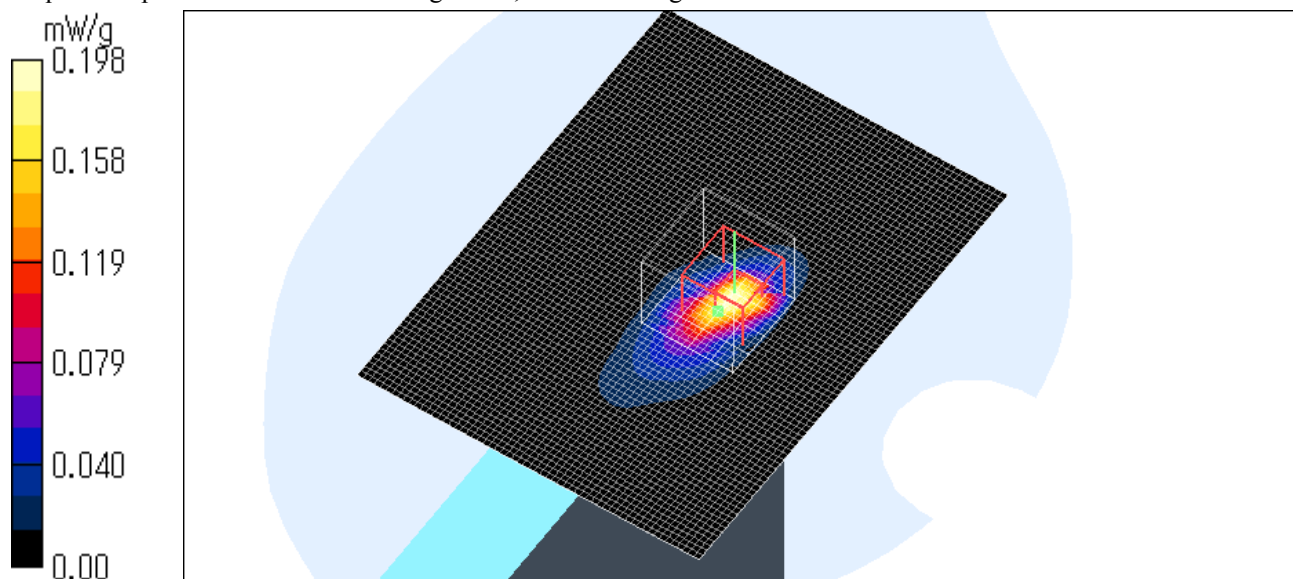

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2437MHz /QPSK(18Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.259 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = -0.178 dB

Peak SAR (extrapolated) = 0.553 W/kg


SAR(1 g) = 0.197 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.229 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.5 degree.C.

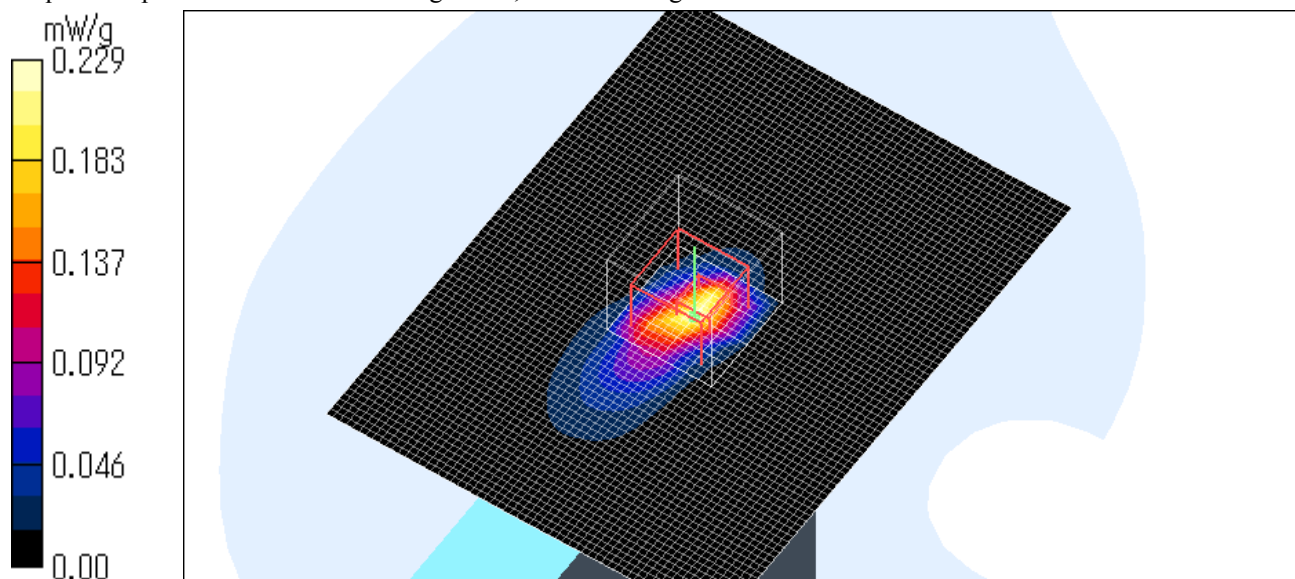

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2437MHz /16QAM(24Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.206 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 0.551 W/kg


SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.213 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.4 degree.C.

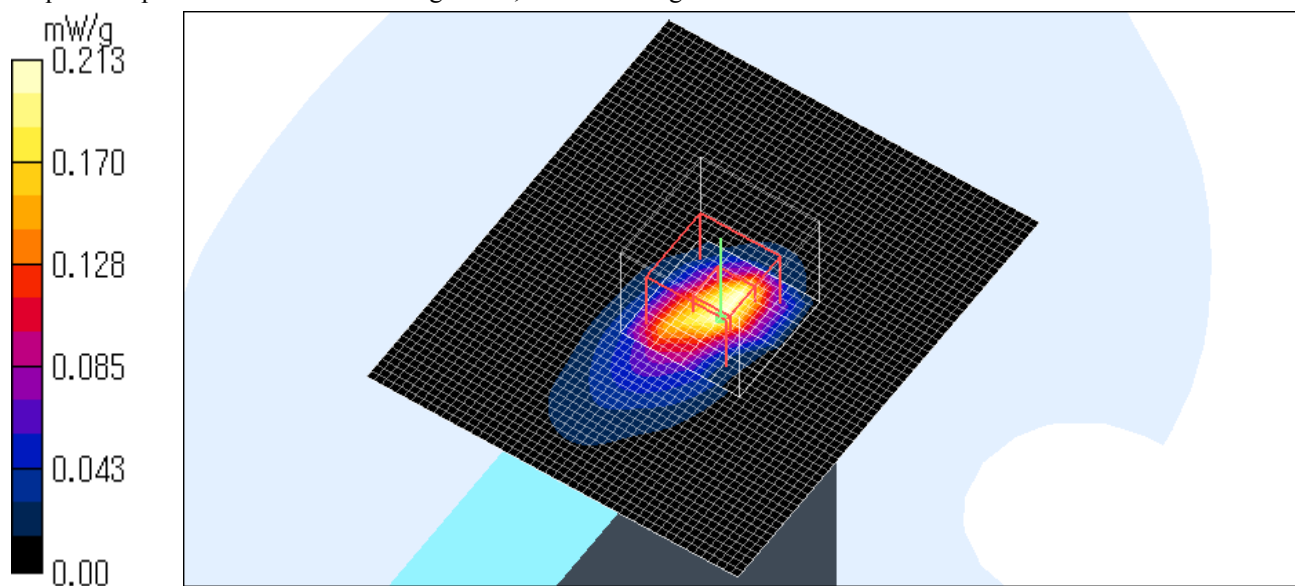

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2437MHz /64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.198 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.79 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.560 W/kg


SAR(1 g) = 0.199 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.231 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.4 degree.C.

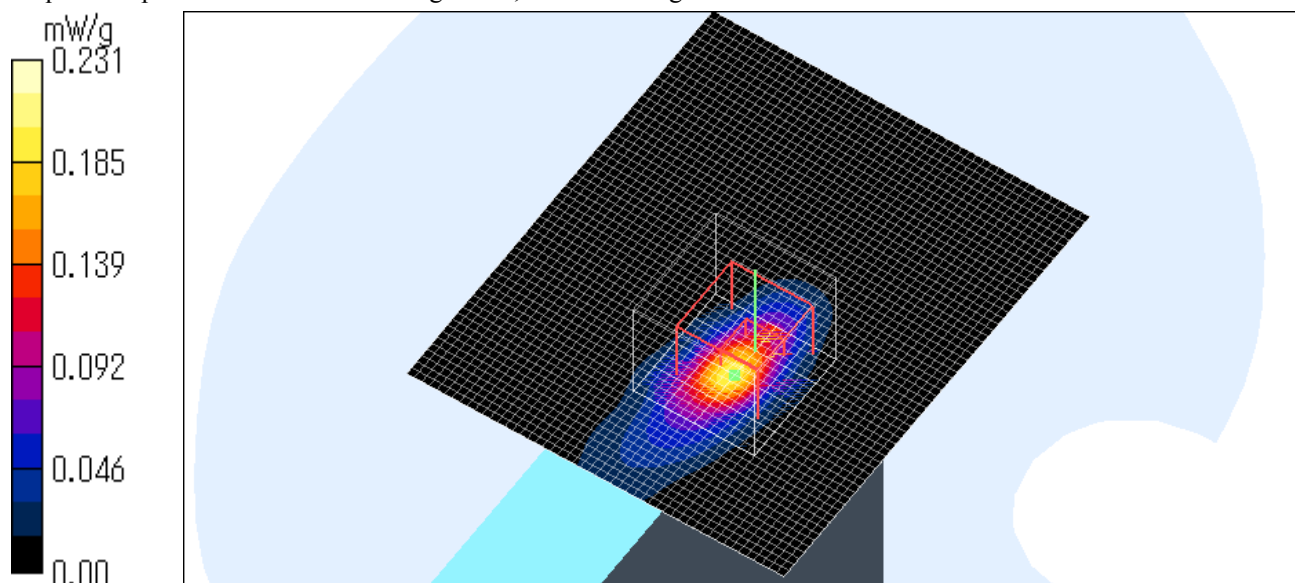

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Front / 11.g 2437MHz / 64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.055 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.97 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 0.207 W/kg


SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.031 mW/g

Maximum value of SAR (measured) = 0.096 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.7 degree.C. , After 24.6 degree.C.

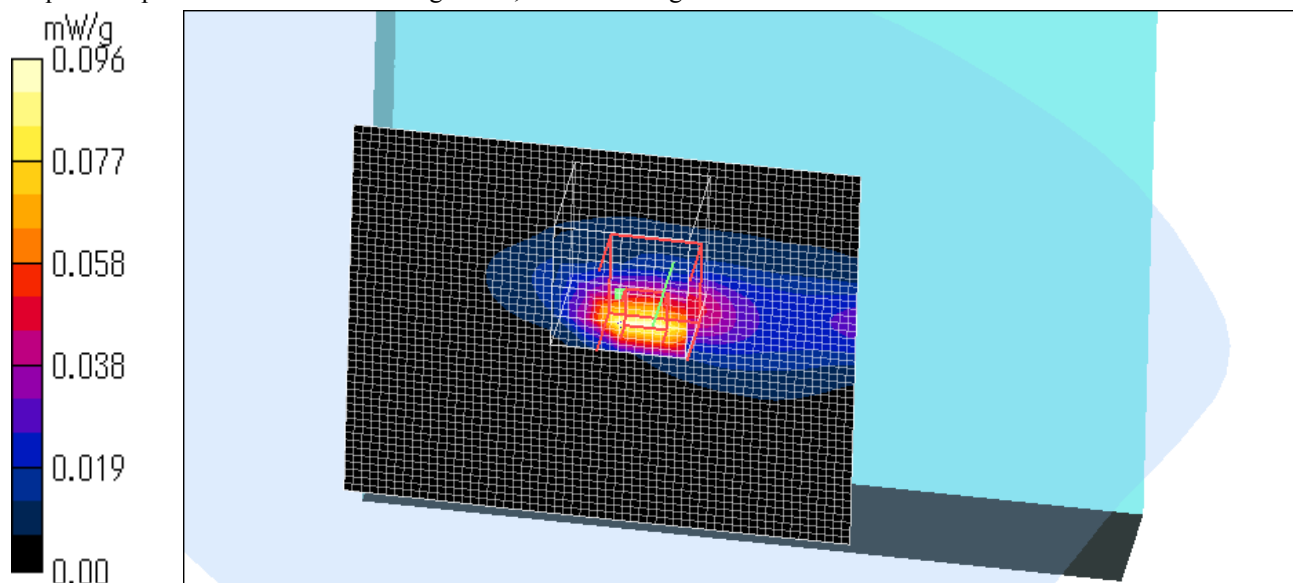

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Back / 11.g 2437MHz / 64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.91 \text{ mho/m}$; $\epsilon_r = 49.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.010 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.27 V/m ; Power Drift = 0.218 dB

Peak SAR (extrapolated) = 0.018 W/kg


SAR(1 g) = 0.011 mW/g ; SAR(10 g) = 0.00625 mW/g

Maximum value of SAR (measured) = 0.011 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C .

Liquid Temperature = Before 24.5 degree.C , After 24.5 degree.C .

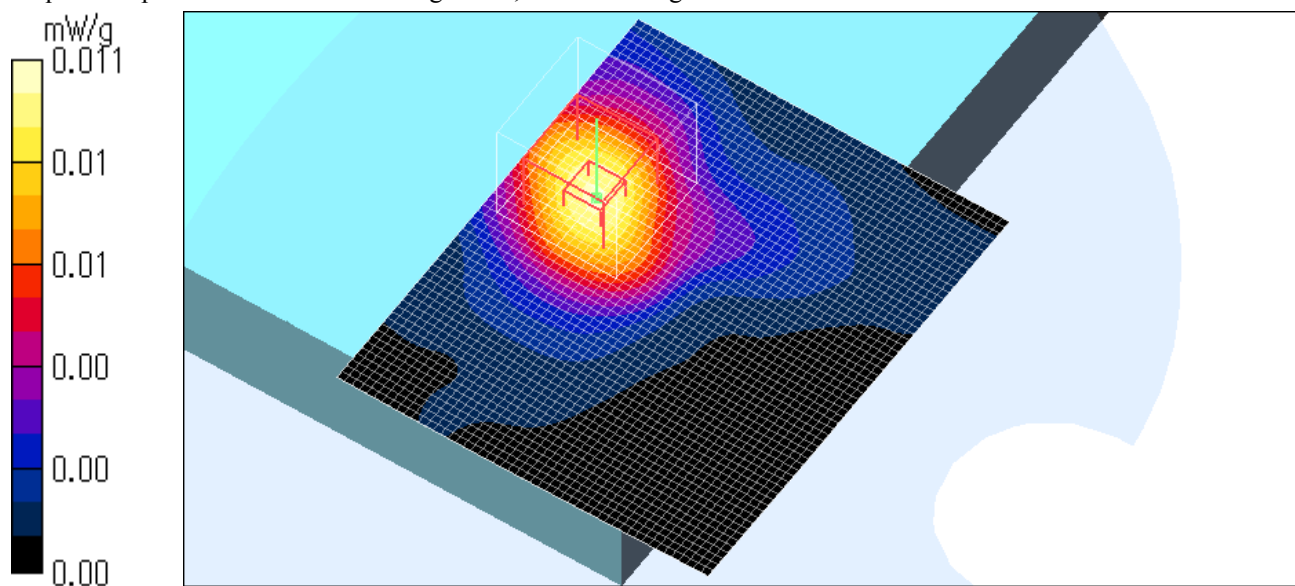

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Bottom / 11.g 2437MHz / 64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.809 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 0.01 W/kg


SAR(1 g) = 0.00282 mW/g; SAR(10 g) = 0.00107 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.6 degree.C. , After 24.6 degree.C.

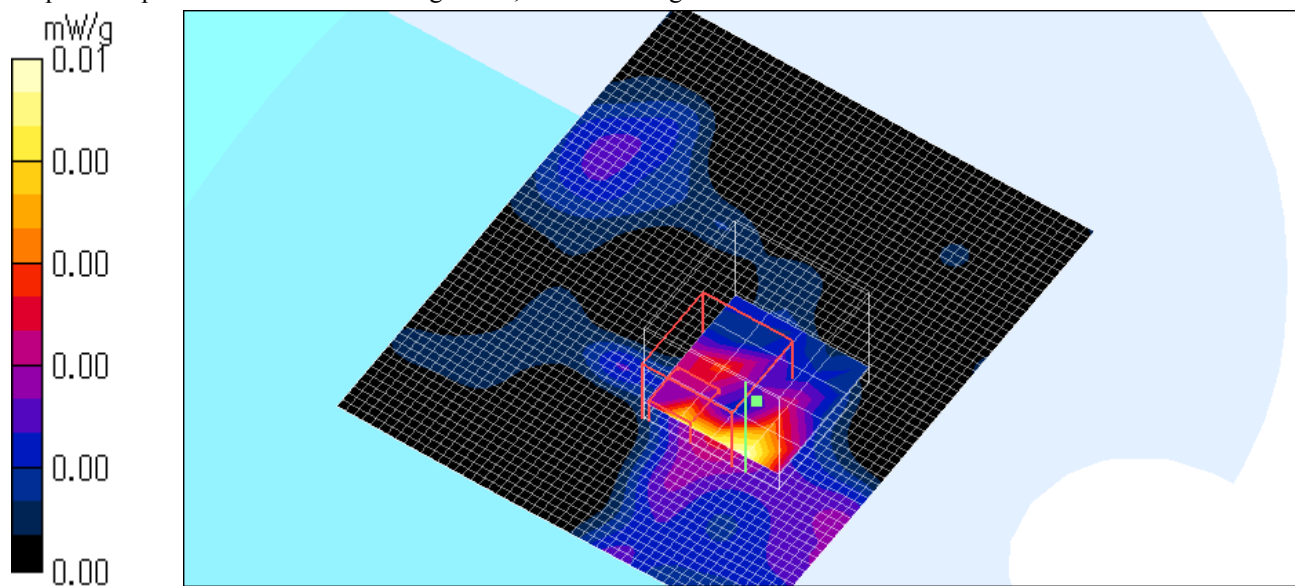

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2412MHz / 64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.91 \text{ mho/m}$; $\epsilon_r = 49.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.172 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.94 V/m ; Power Drift = -0.101 dB

Peak SAR (extrapolated) = 0.567 W/kg


SAR(1 g) = 0.204 mW/g ; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.227 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.7 degree.C. , After 24.7 degree.C.

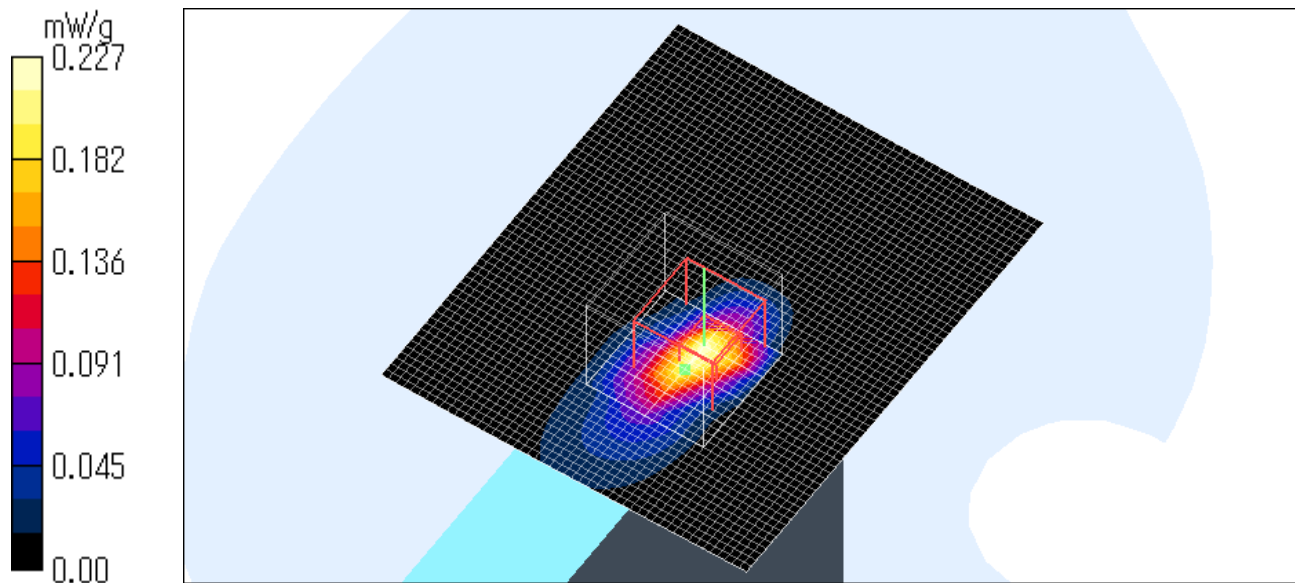

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2462MHz / 64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.225 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 6.37 V/m; Power Drift = 0.221 dB

Peak SAR (extrapolated) = 0.598 W/kg


SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.239 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.7 degree.C. , After 24.7 degree.C.

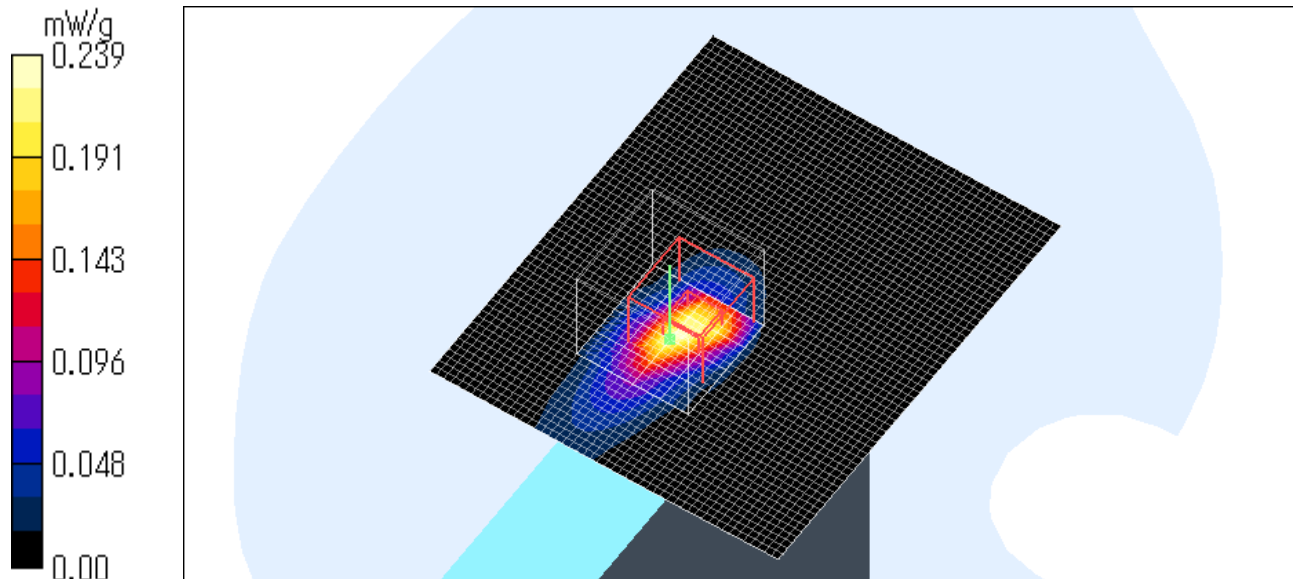

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

Z-axis at maximum SAR location

P1510D / Body / Main Side / 11.g 2462MHz / 64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 49.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:


Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

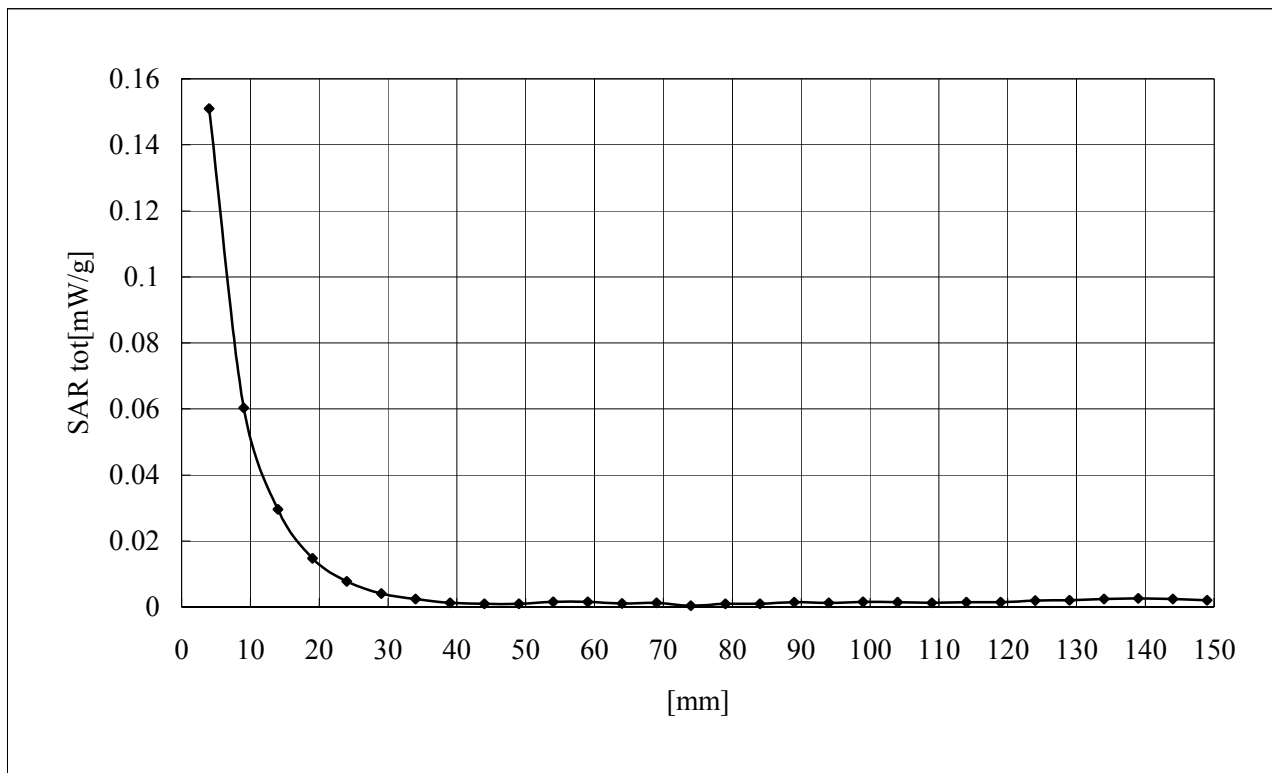

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Main Side / 11.g 2437MHz / 64QAM(108Mbps) / Turbo mode

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x61x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.217 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.69 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.590 W/kg


SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.215 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

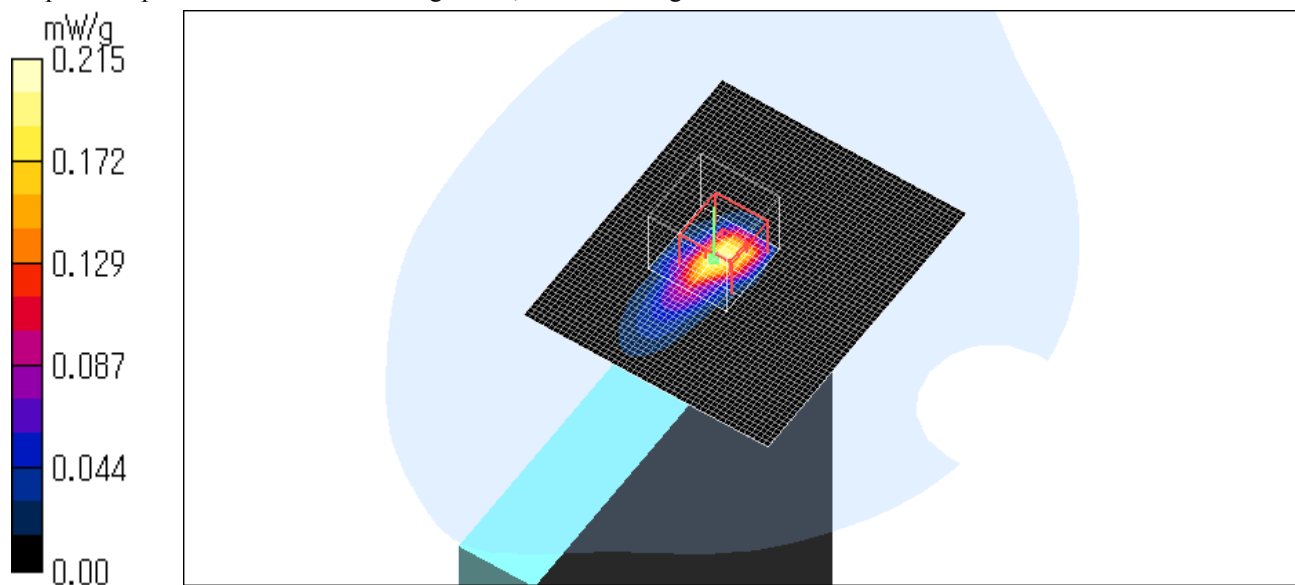

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Front / 11.b 2437MHz /CCK (11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 50.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.086 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.52 V/m ; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 0.311 W/kg


SAR(1 g) = 0.124 mW/g ; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.156 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3degree.C.

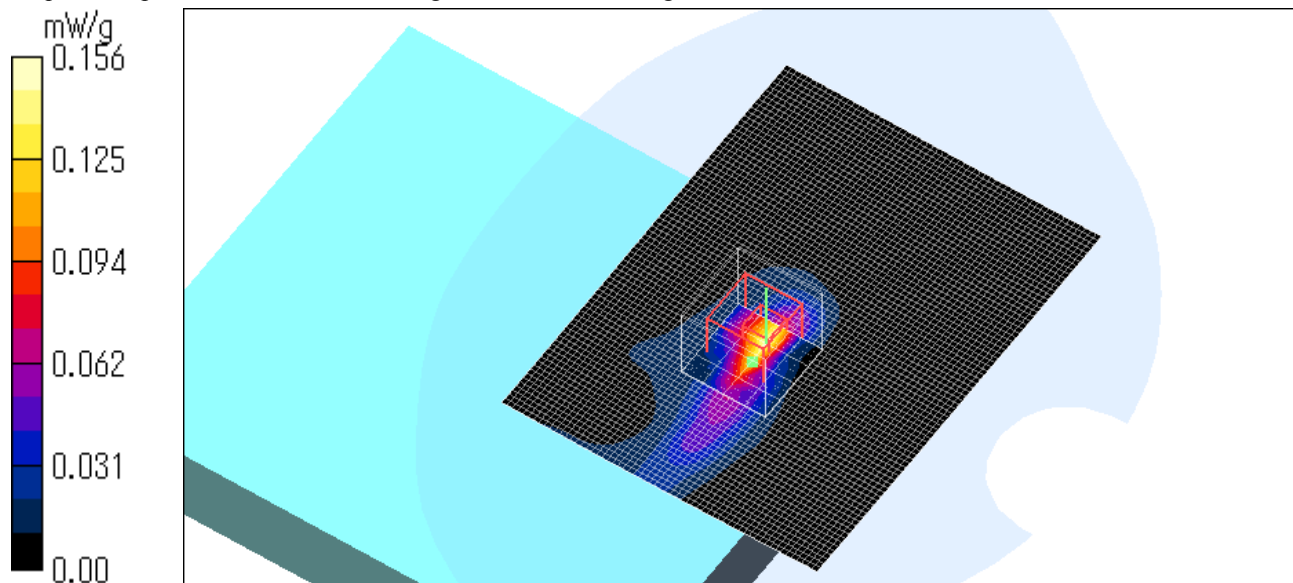

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Back / 11.b 2437MHz / CCK (11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.011 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.76 V/m; Power Drift = -0.246 dB

Peak SAR (extrapolated) = 0.027 W/kg


SAR(1 g) = 0.00952 mW/g; SAR(10 g) = 0.00548 mW/g

Maximum value of SAR (measured) = 0.01 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

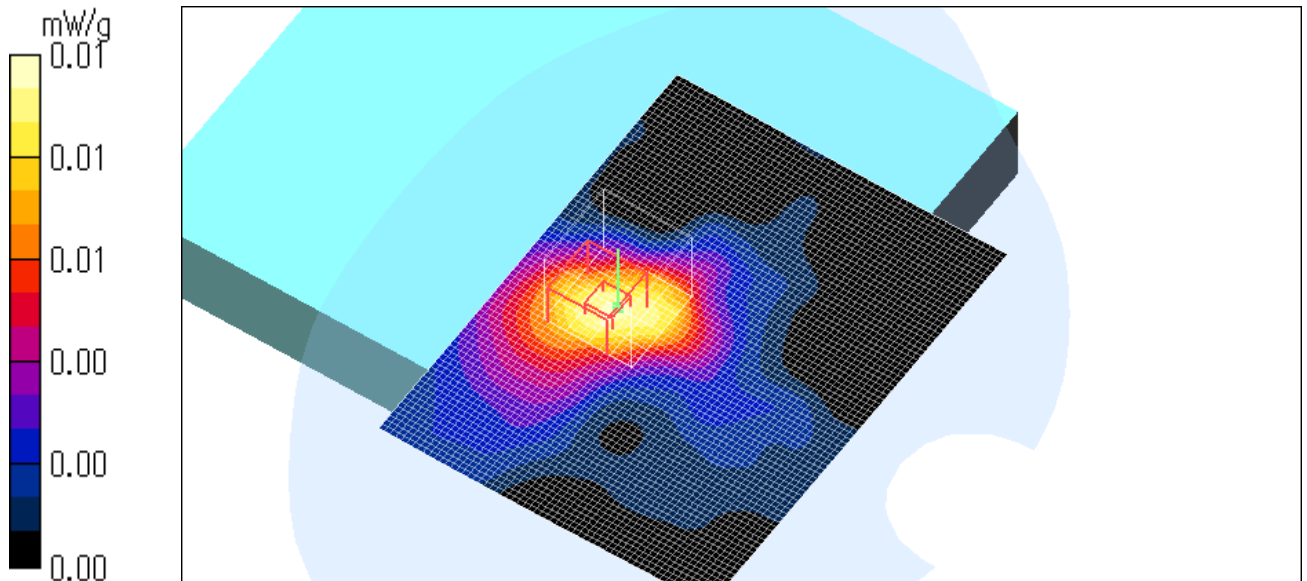

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Bottom / 11.b 2437MHz/ CCK (11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.792 V/m; Power Drift = 0.220 dB

Peak SAR (extrapolated) = 0.00 W/kg


SAR(1 g) = 0.00228 mW/g; SAR(10 g) = 0.00106 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

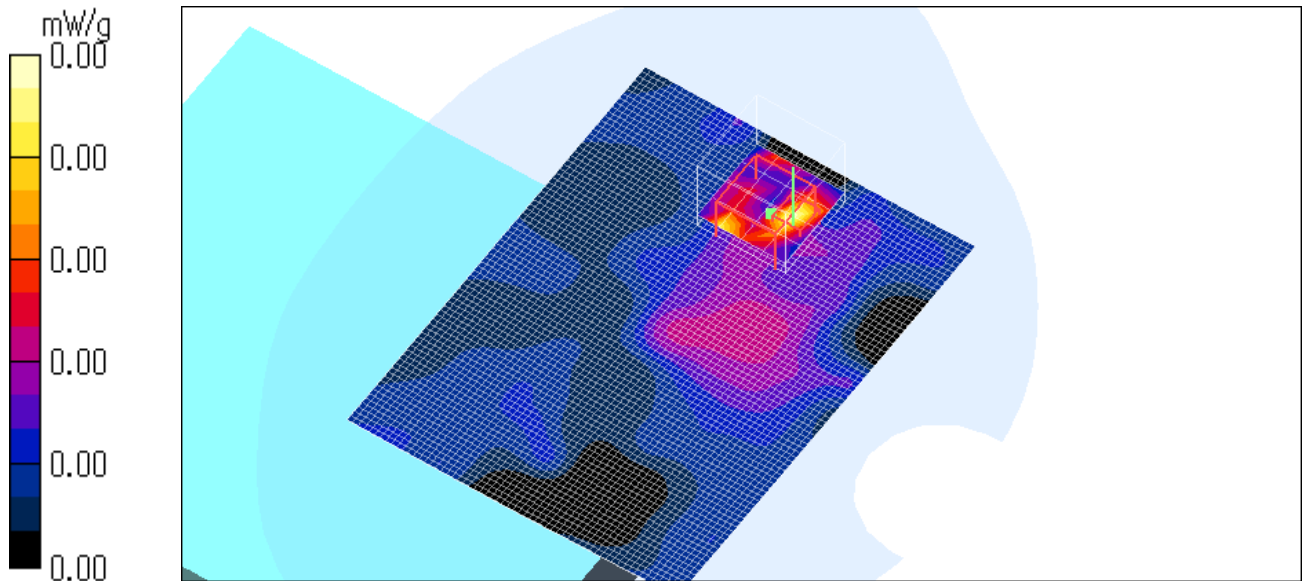

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side / 11.b 2437MHz/ CCK (11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.172 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.04 V/m; Power Drift = -0.116 dB

Peak SAR (extrapolated) = 0.476 W/kg


SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.185 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

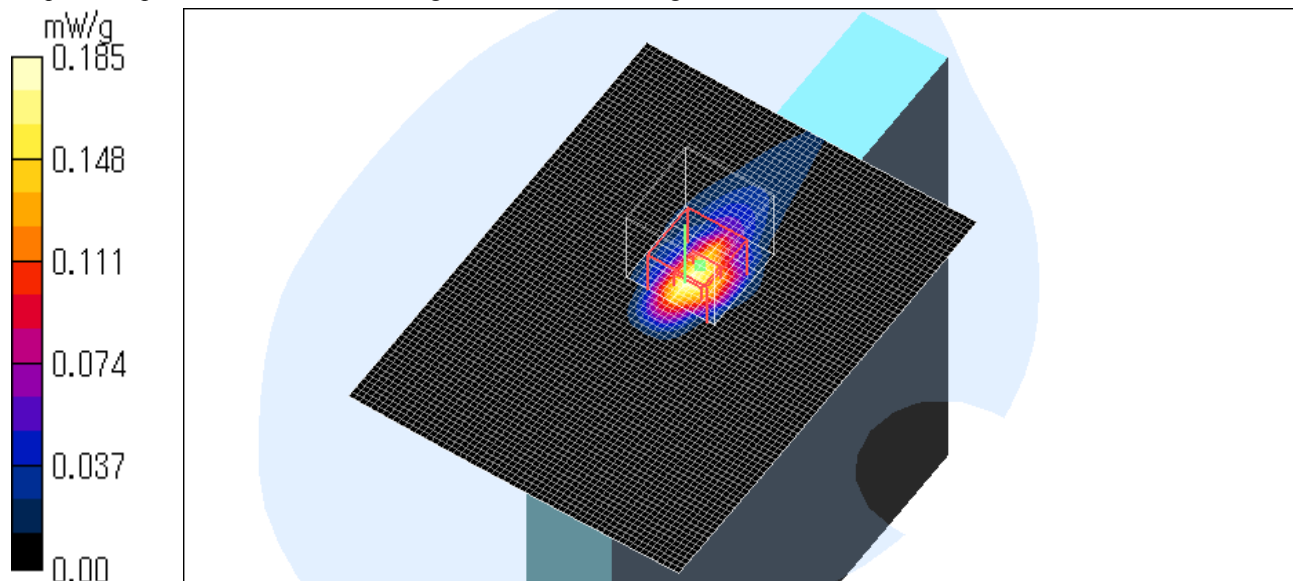

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side/ 11.b 2412MHz / CCK (11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.178 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.66 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.444 W/kg


SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.068 mW/g

Maximum value of SAR (measured) = 0.192 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.3degree.C. , After 24.3degree.C.

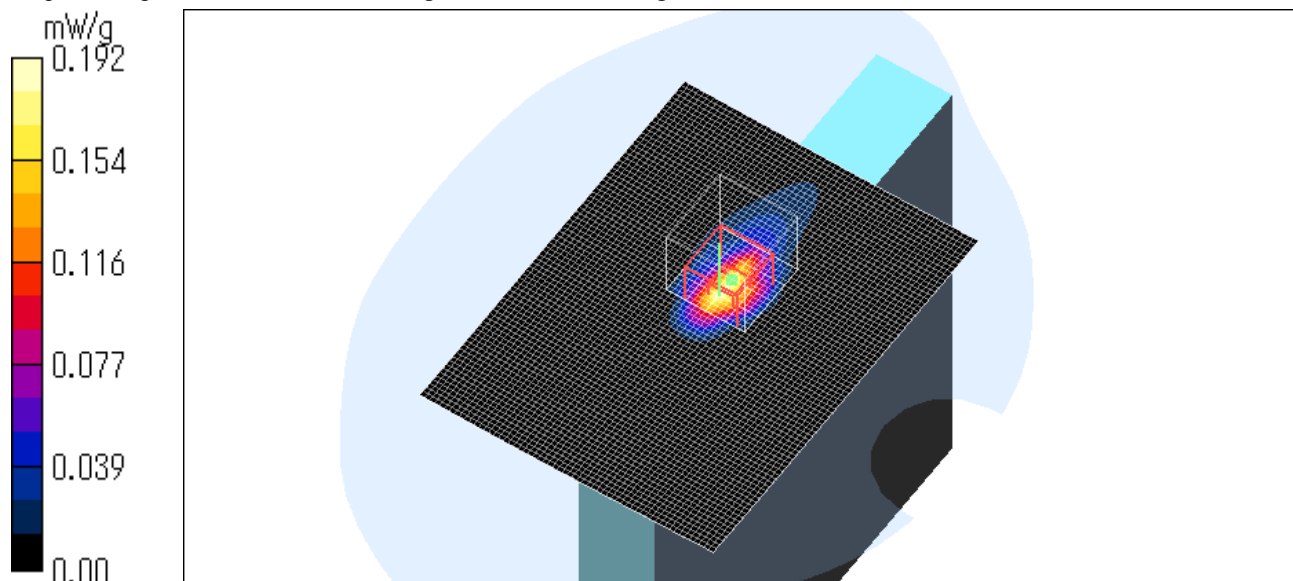

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side / 11.b 2462MHz /CCK(11Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.210 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.73 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 0.427 W/kg


SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.062 mW/g

Maximum value of SAR (measured) = 0.183 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.3 degree.C. , After 24.3 degree.C.

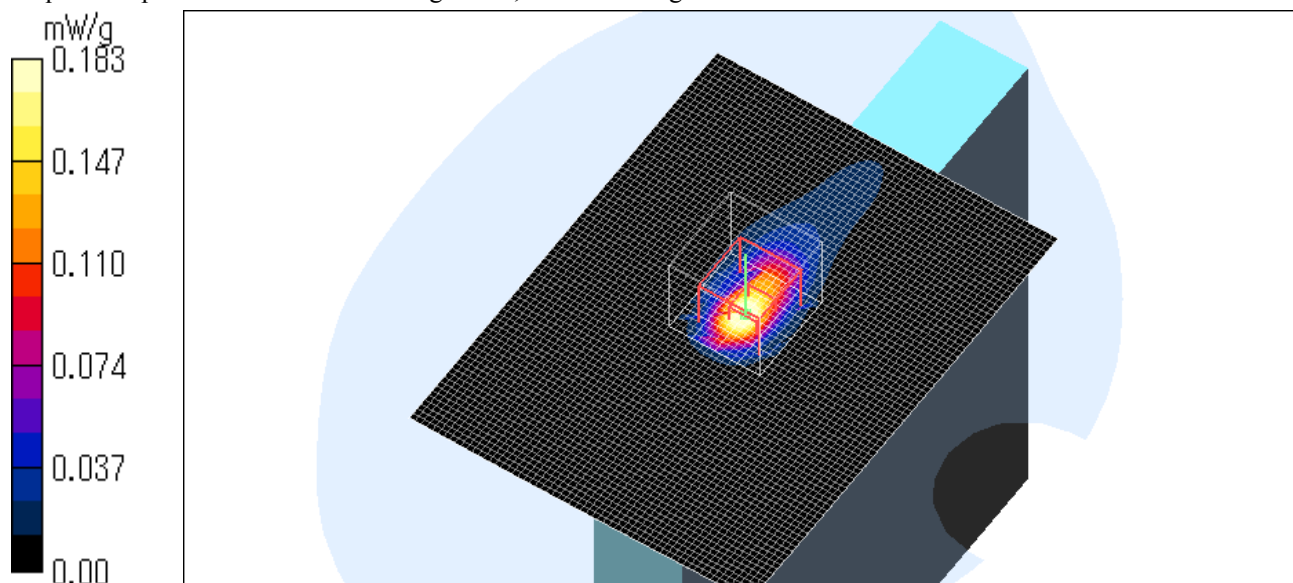

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side / 11.g 2437MHz / BPSK (6Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.209 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.31 V/m; Power Drift = 0.158 dB

Peak SAR (extrapolated) = 0.485 W/kg


SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.213 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

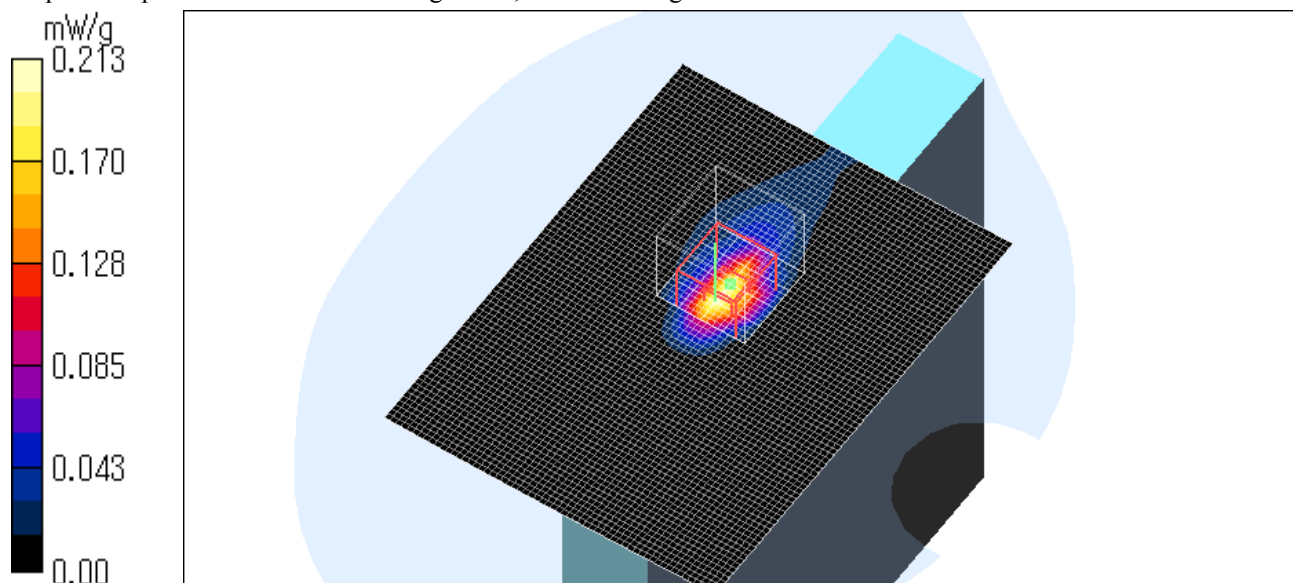

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side / 11.g 2437MHz / QPSK(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 2 \text{ mho/m}$; $\epsilon_r = 50.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: $dx=20\text{mm}$, $dy=20\text{mm}$

Maximum value of SAR (interpolated) = 0.204 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.87 V/m ; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.524 W/kg


SAR(1 g) = 0.197 mW/g ; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.221 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0°C .

Liquid Temperature = Before 24.5°C . , After 24.5°C .

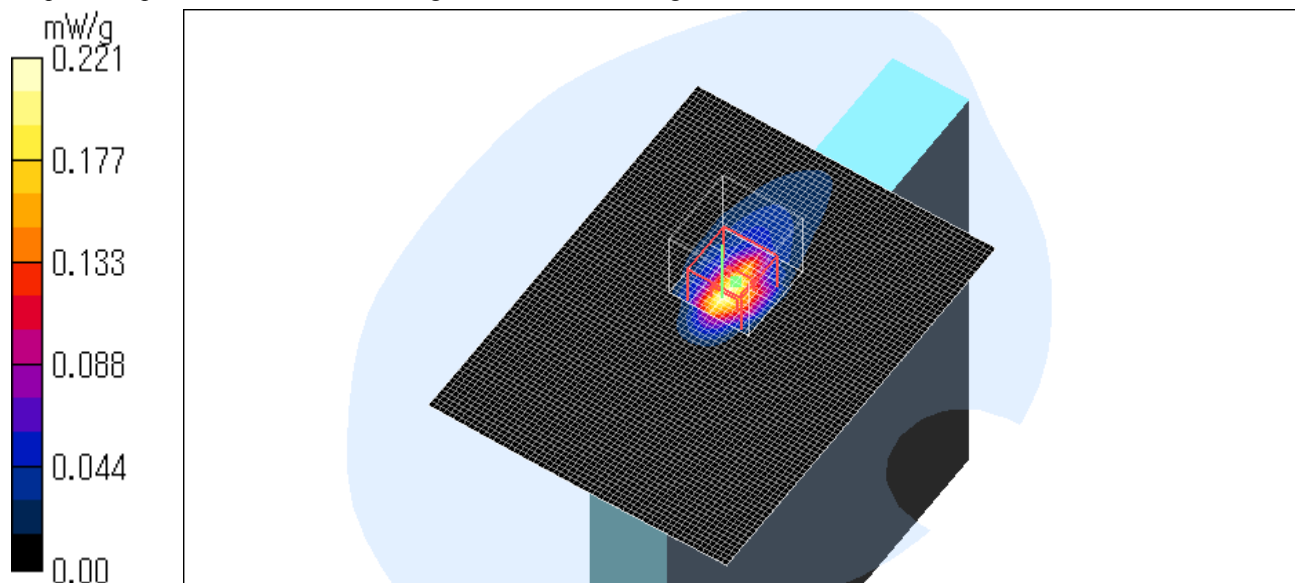

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510 / Body / Aux Front (A) / 11.g 2437MHz /16QAM (24Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.190 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.02 V/m; Power Drift = -0.196 dB

Peak SAR (extrapolated) = 0.498 W/kg


SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.209 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

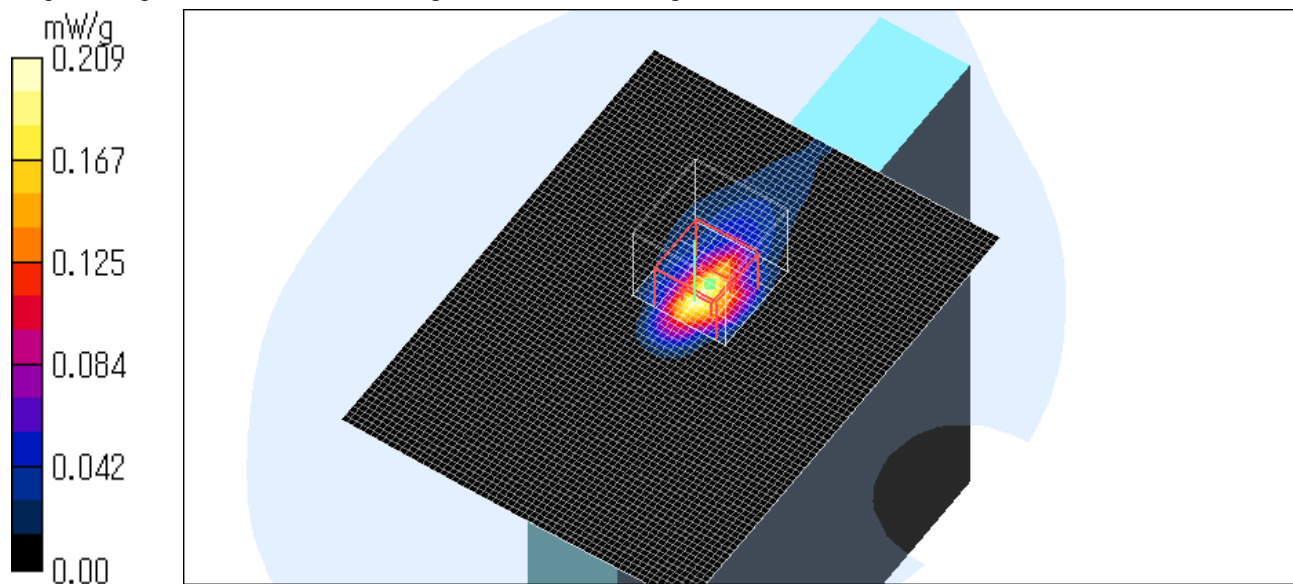

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side / 11.g 2437MHz /64QAM(54Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.206 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.00 V/m; Power Drift = -0.145 dB

Peak SAR (extrapolated) = 0.494 W/kg


SAR(1 g) = 0.187 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0 degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

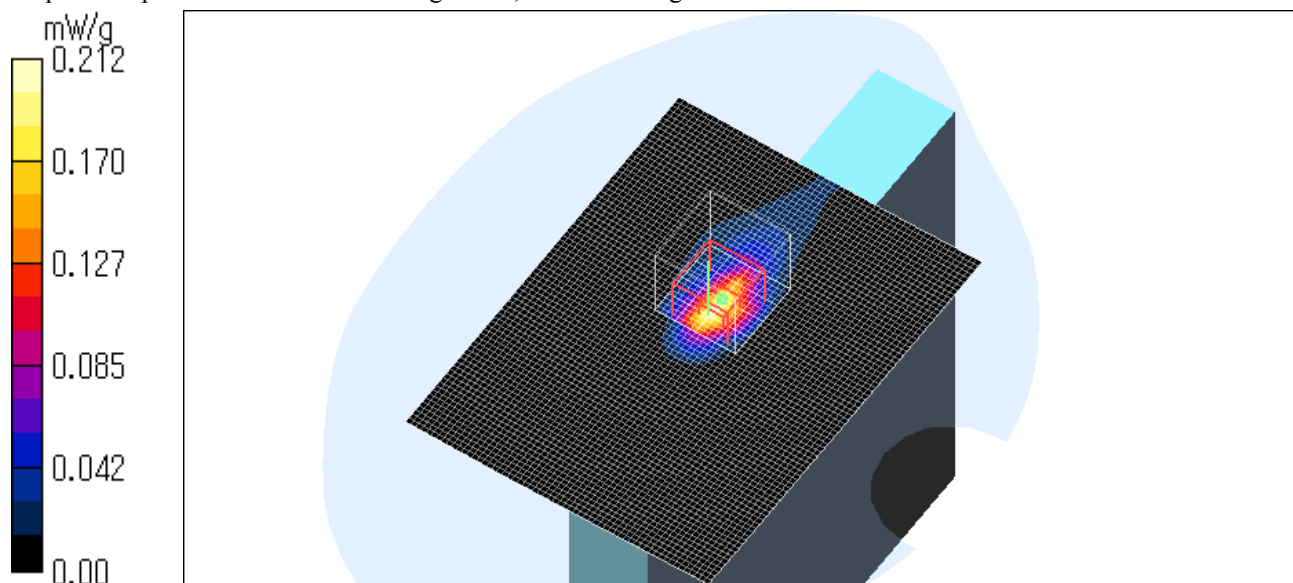

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Front / 11.g 2437MHz /QPSK(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.057 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.34 V/m; Power Drift = -0.127 dB

Peak SAR (extrapolated) = 0.298 W/kg


SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.127 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.3 degree.C.

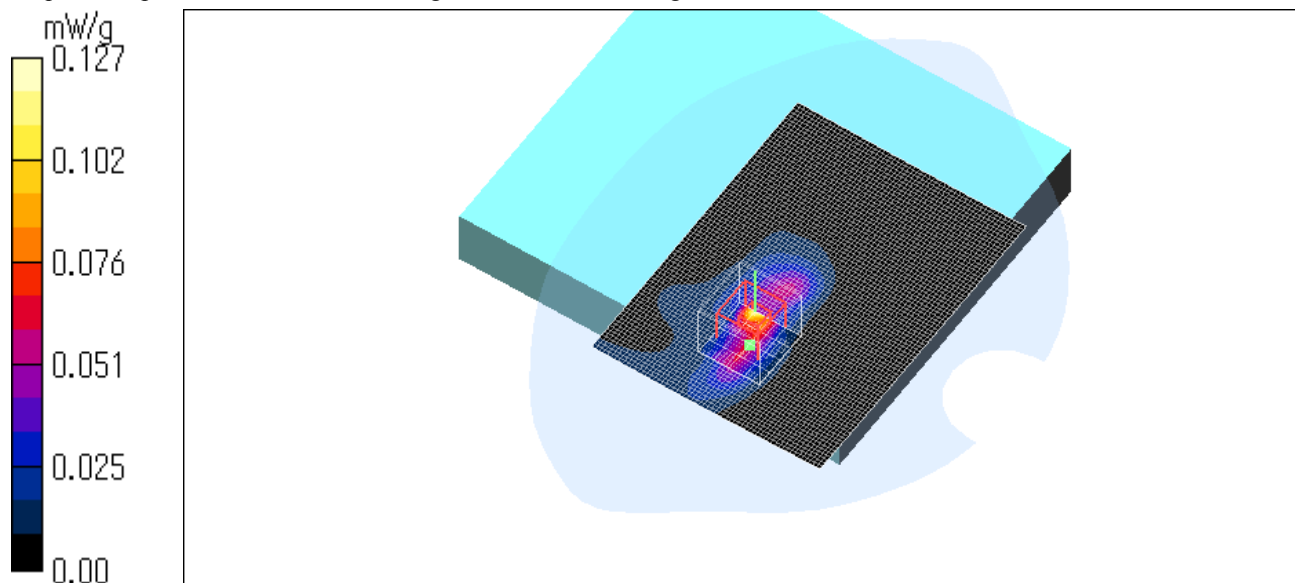

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Back / 11.g 2437MHz /QPSK(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.013 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.41 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.025 W/kg


SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00572 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.5 degree.C. , After 24.5 degree.C.

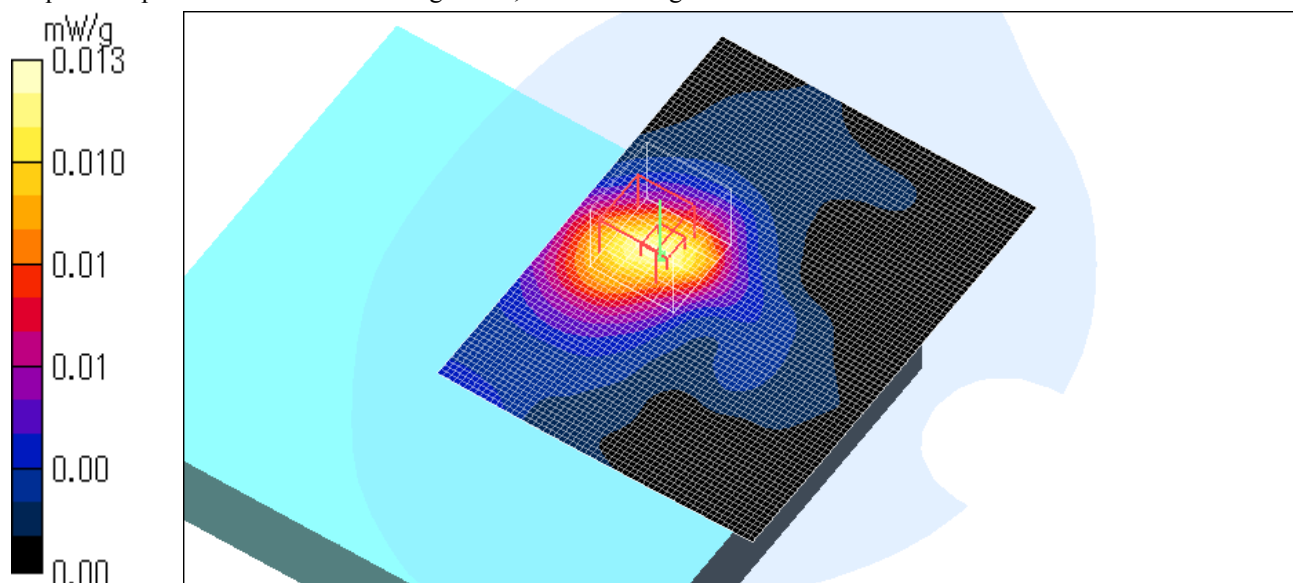

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510 / Body / Aux Bottom / 11g 2437MHz / QPSK(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.00 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.09 V/m; Power Drift = 0.515 dB

Peak SAR (extrapolated) = 0.01 W/kg


SAR(1 g) = 0.00264 mW/g; SAR(10 g) = 0.00135 mW/g

Maximum value of SAR (measured) = 0.00 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.4 degree.C.

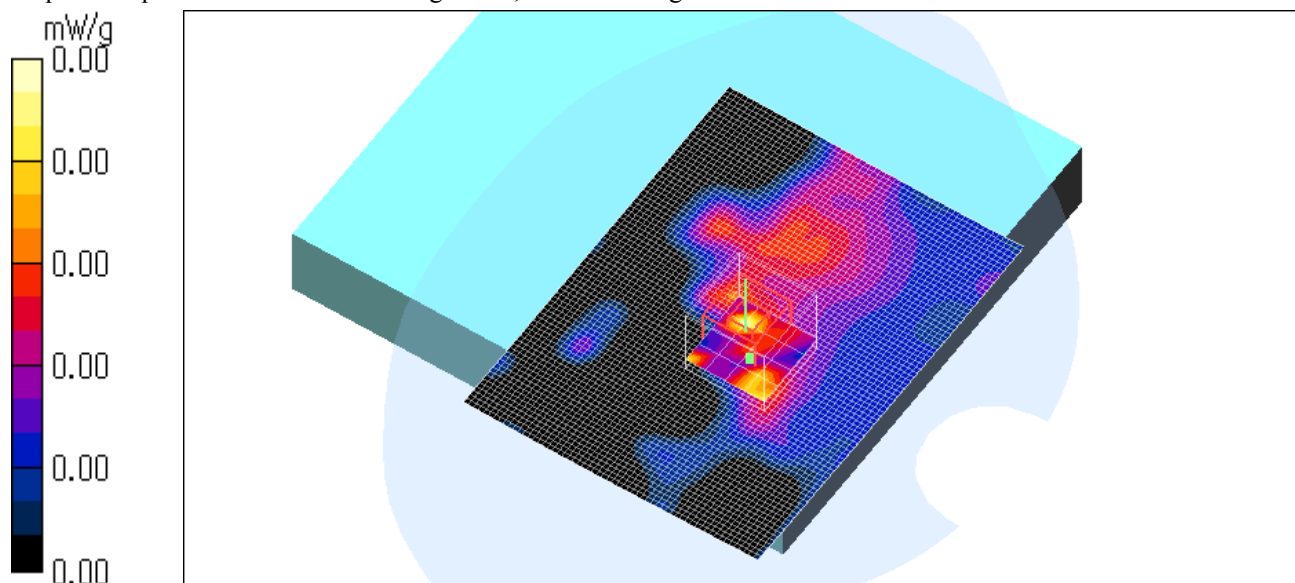

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Front / 11.g 2412MHz / QPSK(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.203 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.02 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.514 W/kg


SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.081 mW/g

Maximum value of SAR (measured) = 0.244 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.4 degree.C.

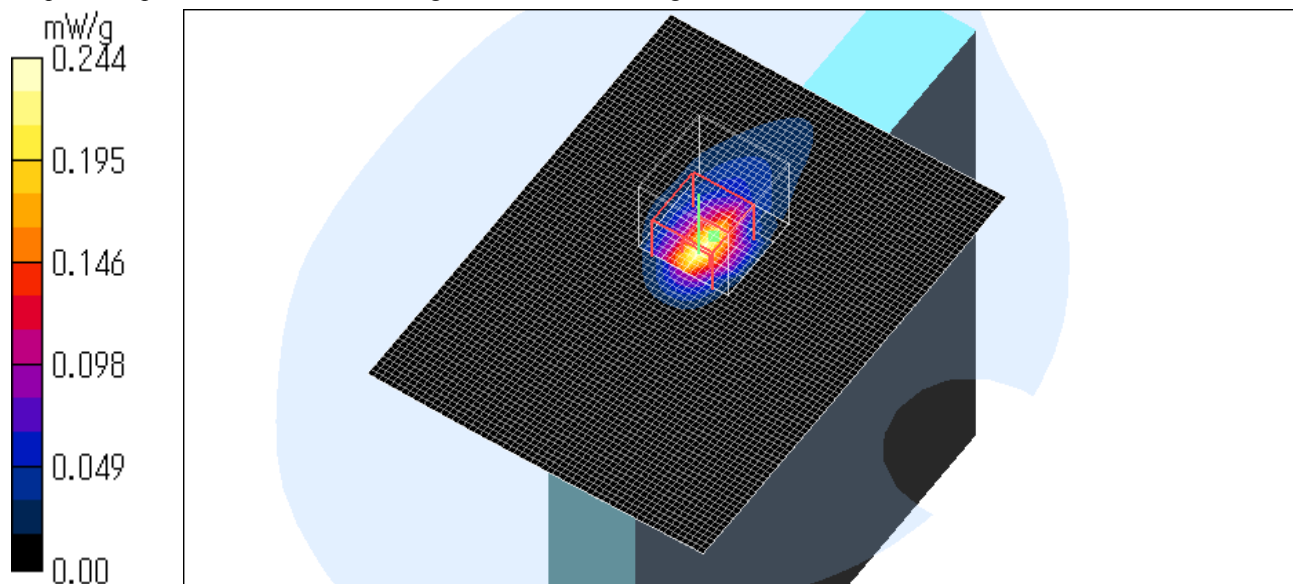

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

P1510D / Body / Aux Side/ 11.g 2462MHz / QPSK(12Mbps)

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 50.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.14, 4.14, 4.14); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn516; Calibrated: 2005/03/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (61x81x1): Measurement grid: $dx=20$ mm, $dy=20$ mm

Maximum value of SAR (interpolated) = 0.203 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 5.95 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.488 W/kg


SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.072 mW/g

Maximum value of SAR (measured) = 0.212 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.4 degree.C. , After 24.3 degree.C.

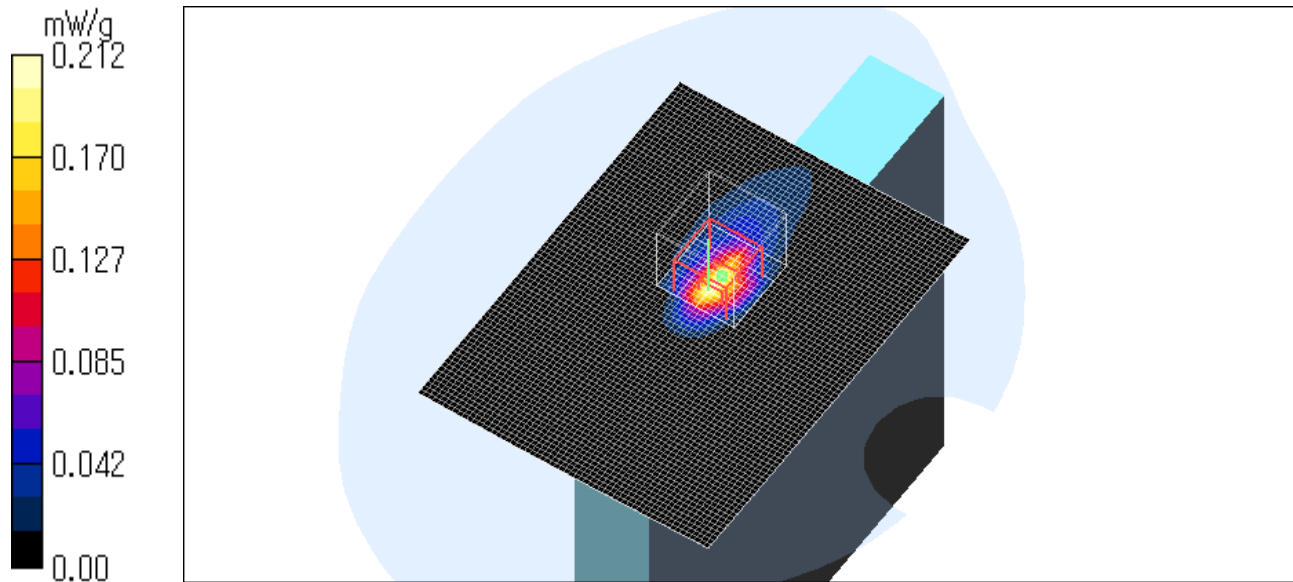

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

APPENDIX 3: Validation Measurement data

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Dipole 2450 MHz;
- Type: D2450V2; Serial: SN:713

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.8$ mho/m; $\epsilon_r = 36.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2003/04/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 22.4 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 98.4 V/m; Power Drift = -0.017 dB

Peak SAR (extrapolated) = 29.1 W/kg


SAR(1 g) = 14 mW/g; SAR(10 g) = 6.53 mW/g

Maximum value of SAR (measured) = 15.8 mW/g

Test Date = 05/11/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.8 degree.C. , After 24.9 degree.C.

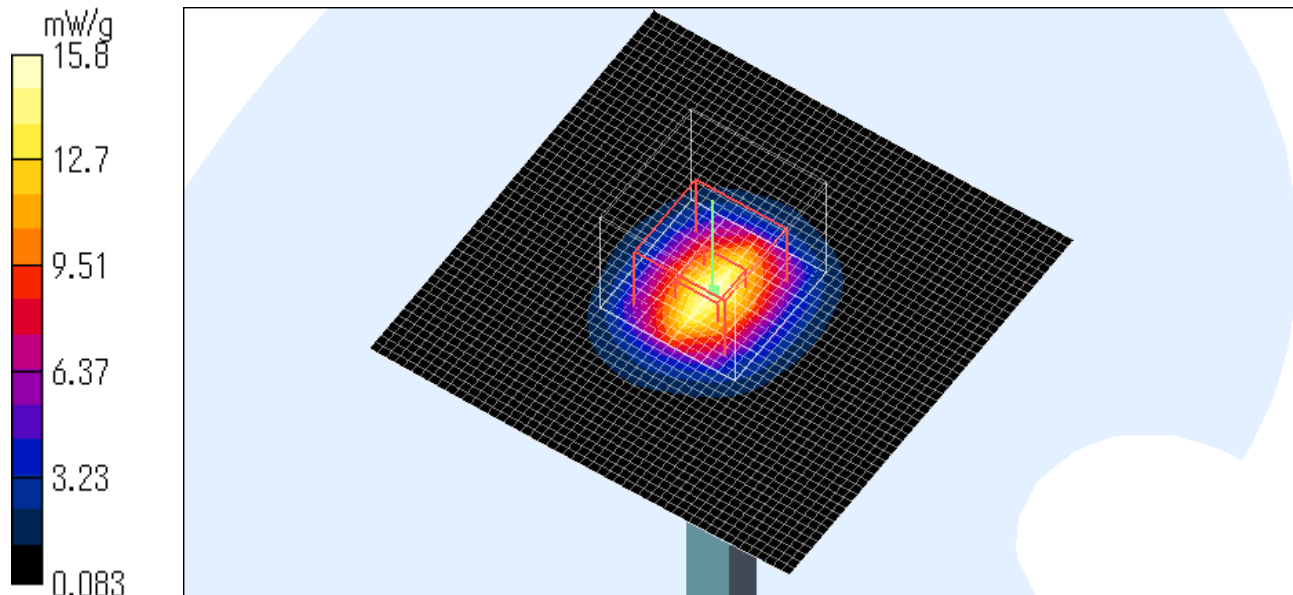

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124

System Validation / Dipole 2450 MHz / Forward Conducted Power : 250mW

Dipole 2450 MHz;
- Type: D2450V2; Serial: SN:713

Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 37.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

Probe: ET3DV6 - SN1684; ConvF(4.39, 4.39, 4.39); Calibrated: 2004/09/02

Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

Electronics: DAE3 Sn509; Calibrated: 2003/04/10

Phantom: SAM 1196

Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 145

Area Scan (51x51x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 22.2 mW/g

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 98.1 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 29.4 W/kg


SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.56 mW/g

Maximum value of SAR (measured) = 15.9 mW/g

Test Date = 05/12/05

Ambient Temperature = 25.0degree.C.

Liquid Temperature = Before 24.8 degree.C. , After 24.8 degree.C.

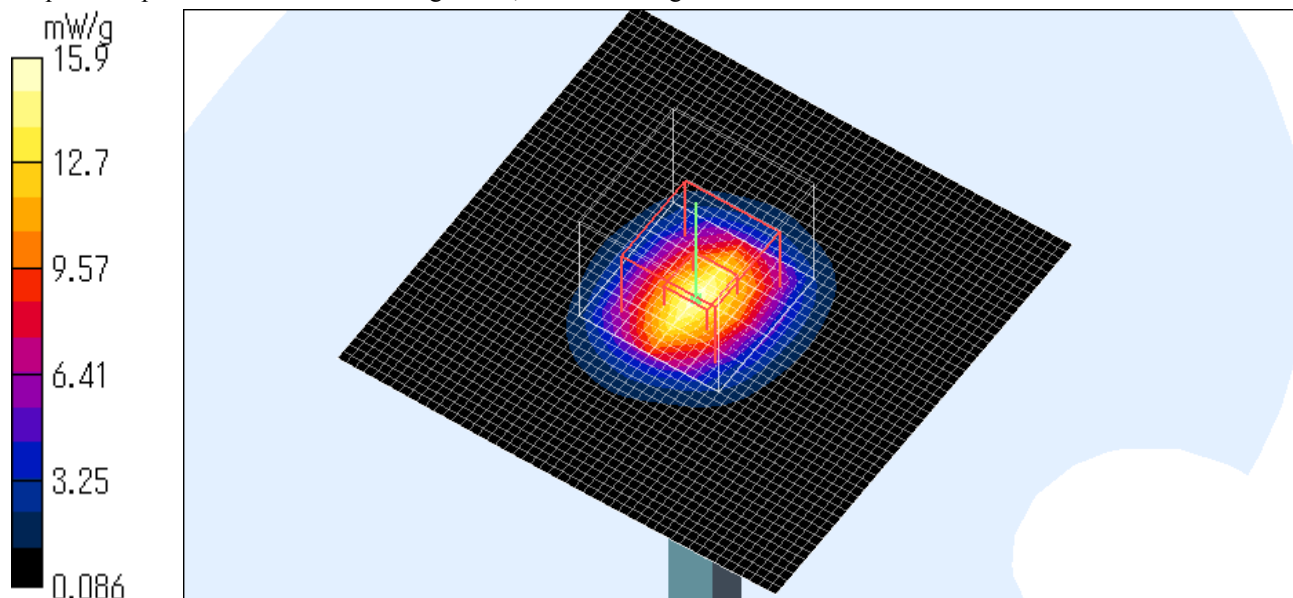

UL Apex Co., Ltd.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116

Facsimile: +81 596 24 8124