



FCC PART 90

TEST AND MEASUREMENT REPORT

For

Cohda Wireless Pty Ltd

82-84 Melbourne Street,
North Adelaide, SA 5006, Australia

**Model: MK5
FCC ID: 2AEGPMK5RSU**

| | |
|--|--|
| Report Type: Original Report | Product Type: DSRCS-RSU Radio Module |
| Prepared By Chen Ge Test Engineer | |
| Report Number <u>R1411254-90 Rev B</u> | |
| Report Date <u>2015-05-06</u> | |
| Reviewed By Bo Li RF Lead | |
| Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164 | |

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*” (Rev 2)

TABLE OF CONTENTS

| | |
|---|-----------|
| 1 General Description..... | 5 |
| 1.1 Product Description for Equipment Under Test (EUT) | 5 |
| 1.2 Mechanical Description of EUT | 5 |
| 1.3 Objective..... | 5 |
| 1.4 Related Submittal(s)/Grant(s) | 5 |
| 1.5 Test Methodology | 5 |
| 1.6 Measurement Uncertainty..... | 5 |
| 1.7 Test Facility | 6 |
| 2 System Test Configuration..... | 7 |
| 2.1 Justification..... | 7 |
| 2.2 EUT Exercise Software..... | 7 |
| 2.3 Special Equipment | 7 |
| 2.4 Equipment Modifications..... | 7 |
| 2.5 Local Support Equipment | 7 |
| 2.6 EUT Internal Configuration Details..... | 7 |
| 3 Summary of Test Results | 8 |
| 4 FCC §2.1091– RF Exposure..... | 9 |
| 4.1 Applicable Standard..... | 9 |
| 4.2 MPE Prediction..... | 9 |
| 4.3 MPE Results | 9 |
| 5 FCC §2.1046, §90.377 & ASTM E 2213-03 §8.9.1 – RF Output Power | 10 |
| 5.1 Applicable Standards | 10 |
| 5.2 Test Procedure | 10 |
| 5.3 Test Equipment List and Details | 10 |
| 5.4 Test Environmental Conditions | 10 |
| 5.5 Test Results..... | 10 |
| 6 FCC §2.1049 - Emission Bandwidths..... | 11 |
| 6.1 Applicable Standard..... | 11 |
| 6.2 Test Procedure | 11 |
| 6.3 Test Equipment List and Details | 11 |
| 6.4 Test Environmental Conditions | 11 |
| 6.5 Test Results..... | 12 |
| 7 FCC §90.210 & ASTM E 2213-03 §8.9.1 – Transmit Spectrum Mask..... | 16 |
| 7.1 Applicable Standards | 16 |
| 7.2 Test Procedure | 17 |
| 7.3 Test Equipment List and Details | 17 |
| 7.4 Test Environmental Conditions | 17 |
| 7.5 Test Results..... | 17 |
| 8 FCC §2.1055 & ASTM E 2213-03 §8.9.4 - Frequency Tolerance | 21 |
| 8.1 Applicable Standards | 21 |
| 8.2 Measurement Procedure..... | 21 |
| 8.3 Test Equipment List and Details | 22 |
| 8.4 Test Environmental Conditions | 22 |
| 8.5 Test Results..... | 23 |
| 9 FCC §2.1051 & ASTM E2213-03 §8.9.2 - Transmit Conducted Spurious Emissions | 24 |
| 9.1 Applicable Standards | 24 |
| 9.2 Measurement Procedure..... | 24 |
| 9.3 Test Equipment List and Details | 24 |
| 9.4 Test Environmental Conditions | 24 |
| 9.5 Test Results..... | 25 |

| | |
|--|-----------|
| 10 FCC §2.1053 & ASTM E2213-03 §8.9.2 – Field Strength of Spurious Emissions..... | 27 |
| 10.1 Applicable Standard..... | 27 |
| 10.2 Measurement Procedure..... | 27 |
| 10.3 Test Equipment List and Details..... | 27 |
| 10.4 Test Environmental Conditions | 27 |
| 10.5 Test Results..... | 28 |
| 11 Exhibit A – FCC Equipment Labeling Requirements..... | 30 |
| 11.1 FCC ID Label Requirements | 30 |
| 11.2 EUT Label Contents and Location..... | 30 |
| 12 Exhibit B – Test Setup Photographs | 31 |
| 13.1 EUT Front View | 33 |
| 13.2 EUT Back View..... | 33 |
| 13.3 EUT Top View without shielding..... | 34 |
| 13.4 EUT Supporting Board Front View..... | 34 |
| 13.5 EUT Supporting Board Back View | 35 |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|-------------------|-------------------------|------------------|
| 0 | R1411254-90 | Original Report | 2015-02-20 |
| 1 | R1411254-90 Rev A | Revised Report | 2015-04-23 |
| 2 | R1411254-90 Rev B | Revised Report | 2015-05-06 |

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of, *Cohda Wireless Pty Ltd.*, and their product model: *MK5*; FCC ID: 2AEGPMK5RSU or the “EUT” as referred to in this report. The EUT’s a DSRCS-RSU Radio Module operates in 5850-5925 MHz band.

1.2 Mechanical Description of EUT

The EUT measures 13cm (L), 8.3cm (W), 5cm (H), and weighs 0.05 kg.

The data gathered are from a production sample provided by the manufacturer, serial number: 04E548020174, assigned by Client.

1.3 Objective

This report is prepared on behalf of *Cohda Wireless Pty Ltd* in accordance with Part 2, Part 90. The objective is to determine compliance with FCC Part 90.

1.4 Related Submittal(s)/Grant(s)

N/A.

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI TIA-603-D and ASTM E2213-03

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR16-4-2:2011, The Treatment of Uncertainty in EMC Measurements, the values ranging from ± 2.0 dB for Conducted Emissions tests and ± 4.0 dB for Radiated Emissions tests are the most accurate estimates pertaining to uncertainty of EMC measurements at BACL Corp.

1.7 Test Facility

Bay area compliance Laboratories Corp. (BACL) is:

1- An independent Commercial Test Laboratory accredited to **ISO 17025: 2005** by **A2LA**, in the fields of: Electromagnetic Compatibility & Telecommunications covering Emissions, Immunity, Radio, RF Exposure, Safety and Telecom. This includes NEBS (Network Equipment Building System), Wireless RF, Telecommunications Terminal Equipment (TTE); Network Equipment; Information Technology Equipment (ITE); Medical Electrical Equipment; Industrial, Commercial, and Medical Test Equipment; Professional Audio and Video Equipment; Electronic (Digital) Products; Industrial and Scientific Instruments; Cabled Distribution Systems and Energy Efficiency Lighting.

2- An ENERGY STAR Recognized Laboratory, for the LM80 Testing, a wide variety of Luminaires and Computers.

3- A NIST Designated Phase-I and Phase-II CAB including: ACMA (Australian Communication and Media Authority), BSMI (Bureau of Standards, Metrology and Inspection of Taiwan), IDA (Infocomm Development Authority of Singapore), IC(Industry Canada), Korea (Ministry of Communications Radio Research Laboratory), NCC (Formerly DGT; Directorate General of Telecommunication of Chinese Taipei) OFTA (Office of the Telecommunications Authority of Hong Kong), Vietnam, VCCI - Voluntary Control Council for Interference of Japan and a designated EU CAB (Conformity Assessment Body) (Notified Body) for the EMC and R&TTE Directives.

4- A Product Certification Body accredited to **ISO Guide 65: 1996** by **A2LA** to certify:

- 1- Unlicensed, Licensed radio frequency devices and Telephone Terminal Equipment for the FCC. Scope A1, A2, A3, A4, B1, B2, B3, B4 & C.
2. Radio Standards Specifications (RSS) in the Category I Equipment Standards List and All Broadcasting Technical Standards (BETS) in Category I Equipment Standards List for Industry Canada.
3. Radio Communication Equipment for Singapore.
4. Radio Equipment Specifications, GMDSS Marine Radio Equipment Specifications, and Fixed Network Equipment Specifications for Hong Kong.
5. Japan MIC Telecommunication Business Law (A1, A2) and Radio Law (B1, B2 and B3).
6. Audio/Video, Battery Charging Systems, Computers, Displays, Enterprise Servers, Imaging Equipment, Set-Top Boxes, Telephony, Televisions, Ceiling Fans, CFLs (Including GU24s),Decorative Light Strings, Integral LED Lamps, Luminaires, Residential Ventilating Fans.

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2009, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to TIA-603-D and ASTM E2213-03.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The test utility used was putty.

2.3 Special Equipment

There were no special accessories were required, included, or intended for use with EUT during these tests.

2.4 Equipment Modifications

No modifications were made to the EUT.

2.5 Local Support Equipment

| Manufacturer | Description | Model | Part Number | Calibration Date |
|--------------|-------------------|----------------|-------------|------------------|
| Dell | Laptop | Latitude E5420 | - | N/A |
| BK PRECISION | DC Power Supply | E3 | N/A | N/A |
| Fluke | Digital Voltmeter | 189 | N/A | 2014-02-05 |

2.6 EUT Internal Configuration Details

EUT is a PCB board module.

3 Summary of Test Results

Results reported relate only to the product tested.

| FCC Rules | Description of Test | Results |
|--|--------------------------------------|-----------|
| FCC §2.1091 | RF Exposure | Compliant |
| FCC §2.1046, §90.377 & ASTM E2213-03 8.9.1 | Output Power | Compliant |
| FCC §2.1049 | Emission Bandwidth | Compliant |
| FCC §90.210 & ASTM E2213-03 8.9.1 | Transmit Spectrum Mask | Compliant |
| FCC §2.1055 & ASTM E2213-03 8.9.5 | Frequency Stability | Compliant |
| FCC §2.1051 & ASTM E2213-03 8.9.2 | Transmit Spurious Emission-Conducted | Compliant |
| FCC §2.1053 & ASTM E2213-03 8.9.2 | Transmit Spurious Emission-Radiated | Compliant |

4 FCC §2.1091– RF Exposure

4.1 Applicable Standard

According to FCC §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for General Population/Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | * (100) | 30 |
| 1.34-30 | 824/f | 2.19/f | * (180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

4.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

4.3 MPE Results

| | |
|---|---------------|
| <u>Maximum peak output power at antenna input terminal (dBm):</u> | <u>22.81</u> |
| <u>Maximum peak output power at antenna input terminal (mW):</u> | <u>190.98</u> |
| <u>Prediction distance (cm):</u> | <u>20</u> |
| <u>Prediction frequency (MHz):</u> | <u>5860</u> |
| <u>Maximum Antenna Gain, typical (dBi):</u> | <u>6</u> |
| <u>Maximum Antenna Gain (numeric):</u> | <u>3.98</u> |
| <u>Power density of prediction frequency at 20 cm (mW/cm²):</u> | <u>0.15</u> |
| <u>MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u> | <u>1</u> |

The device compliances with FCC MPE limit at 20 cm distance.

5 FCC §2.1046, §90.377 & ASTM E 2213-03 §8.9.1 – RF Output Power

5.1 Applicable Standards

FCC §2.1046, §90.377.

According to ASTM E2213-03 §8.9.1, Private OBU operations in Channels 172, 174, 176, 178, and 184 shall not exceed 28.8 dBm antenna input power and 33 dBm EIRP. Private OBU operations in Channel 175 shall not exceed 10 dBm antenna input power and 23 dBm EIRP. Private OBU operations in Channels 180, 181, and 182 shall not exceed 20 dBm antenna input power and 23 dBm EIRP.

5.2 Test Procedure

TIA-603-D

5.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2014-09-29 | 1 year |

Statement of Traceability: BACL Corp. attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

5.4 Test Environmental Conditions

| | |
|--------------------|-------------|
| Temperature: | 22-26 °C |
| Relative Humidity: | 42-46 % |
| ATM Pressure: | 101-102 kPa |

The testing was performed by Chen Ge from 2015-01-19 and 2015-01-23 at RF site.

5.5 Test Results

| Channel | Frequency (MHz) | Conducted Output Power Chain 0 (dBm) | Conducted Output Power Chain 1 (dBm) | Total Conducted Output Power (dBm) | Antenna Gain (dBi) | Conducted Output Power Limit (dBm) | E.I.R.P (dBm) | E.I.R.P Limit (dBm) |
|---------|-----------------|--------------------------------------|--------------------------------------|------------------------------------|--------------------|------------------------------------|---------------|---------------------|
| 172 | 5860 | 19.86 | 19.73 | 22.81 | 6 | 28.8 | 28.81 | 33 |
| 178 | 5890 | 19.32 | 19.26 | 22.30 | 6 | 28.8 | 28.30 | 33 |
| 180 | 5900 | 13.54 | 13.35 | 16.46 | 6 | 20 | 22.46 | 23 |
| 182 | 5910 | 13.74 | 13.58 | 16.67 | 6 | 20 | 22.67 | 23 |
| 184 | 5920 | 19.73 | 19.69 | 22.72 | 6 | 28.8 | 28.72 | 33 |

6 FCC §2.1049 - Emission Bandwidths

6.1 Applicable Standard

According to FCC §2.1049

6.2 Test Procedure

The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual.

The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between two recorded frequencies is the occupied bandwidth.

6.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2014-09-29 | 1 year |

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

6.4 Test Environmental Conditions

| | |
|--------------------|-------------|
| Temperature: | 22-26 °C |
| Relative Humidity: | 42-46 % |
| ATM Pressure: | 101-102 kPa |


The testing was performed by Chen Ge from 2015-01-19 and 2015-01-23 at RF site.

6.5 Test Results


| Channel | Frequency (MHz) | 99% Emission Bandwidth (MHz) Chain 1 | 99% Emission Bandwidth (MHz) Chain 2 |
|---------|-----------------|--------------------------------------|--------------------------------------|
| Low | 5860 | 8.0080 | 8.0120 |
| Middle | 5890 | 8.0341 | 8.0262 |
| High | 5920 | 8.0354 | 8.0404 |

Please refer to the following plots for the test results


Low Channel, 5860 MHz Chain 1

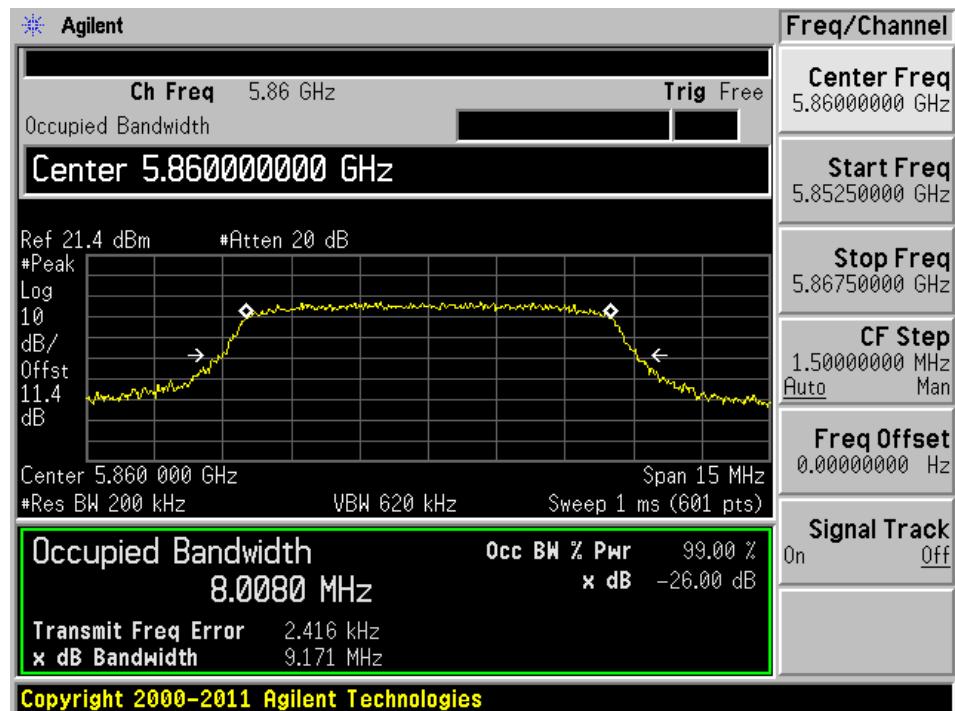


Low Channel, 5860 MHz Chain 2

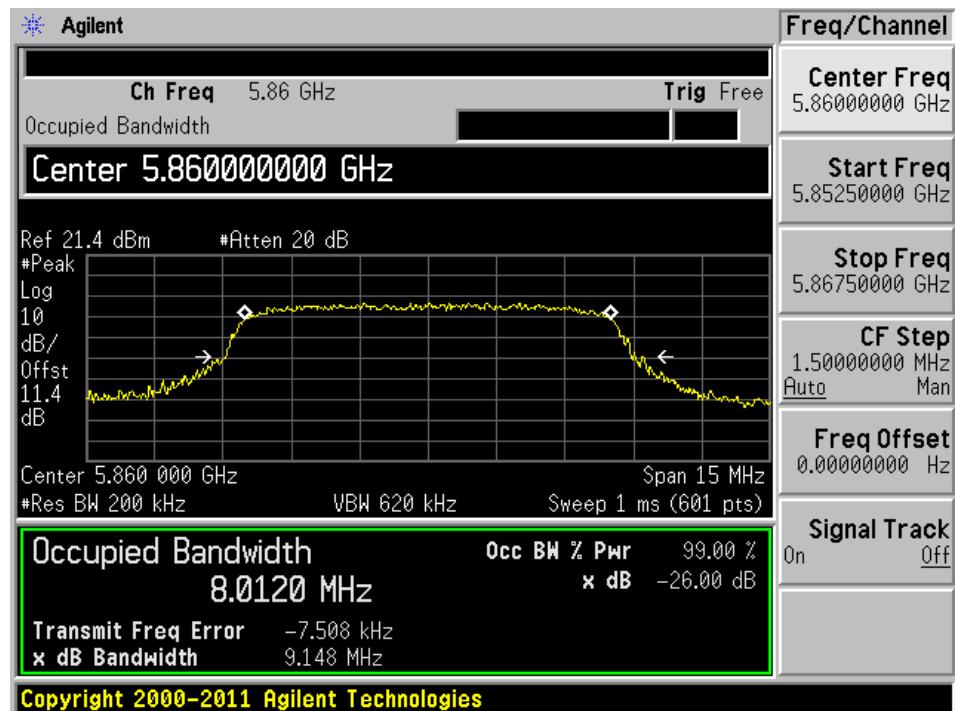


Middle Channel, 5890 MHz Chain 1

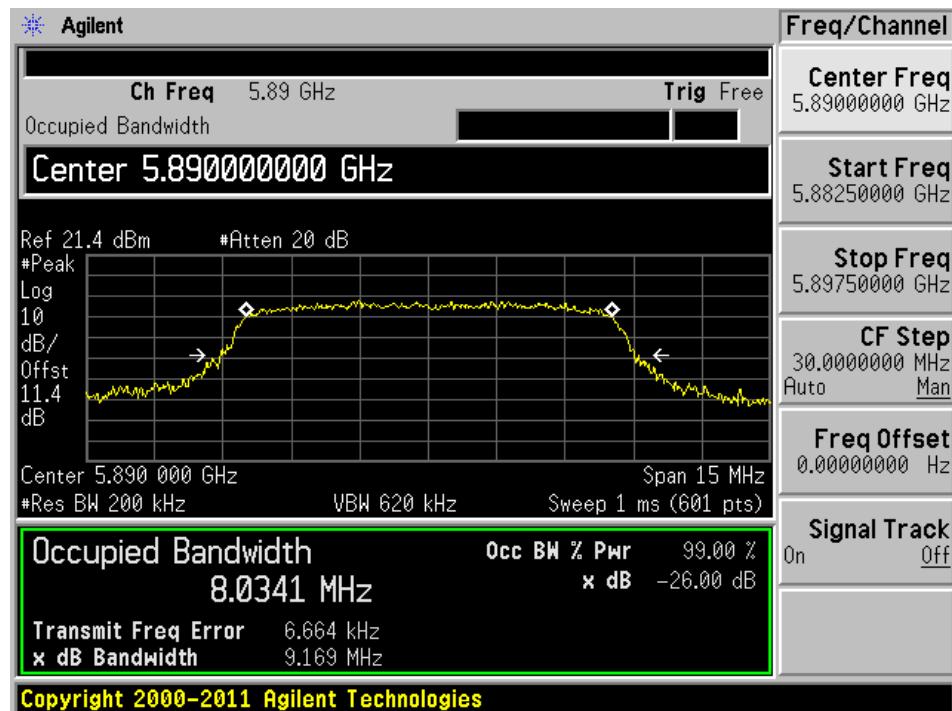


Middle Channel, 5890 MHz Chain 2

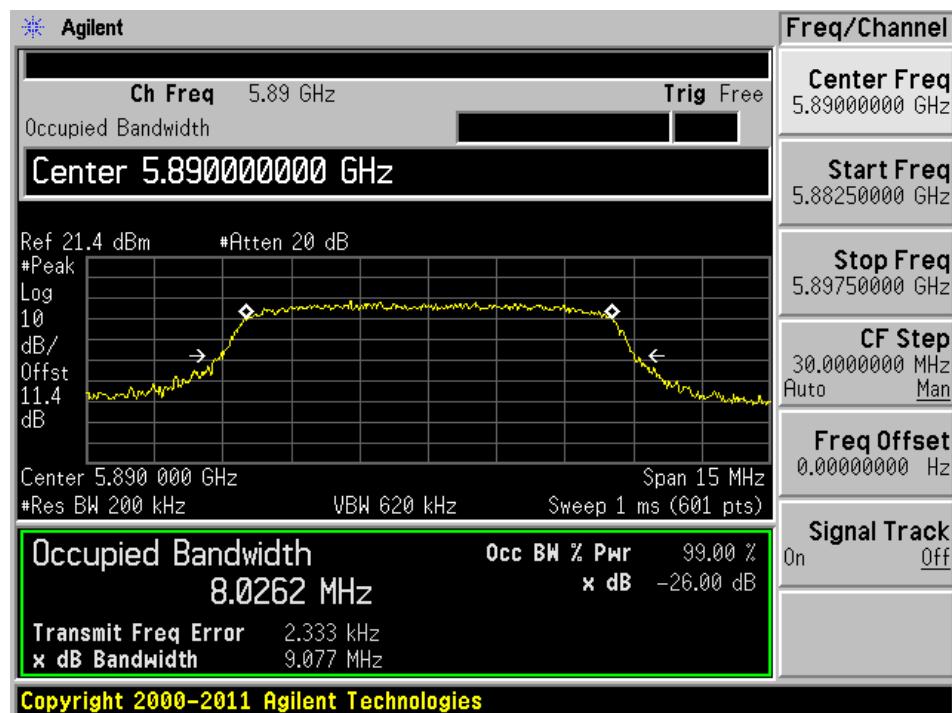

High Channel, 5920 MHz Chain 1

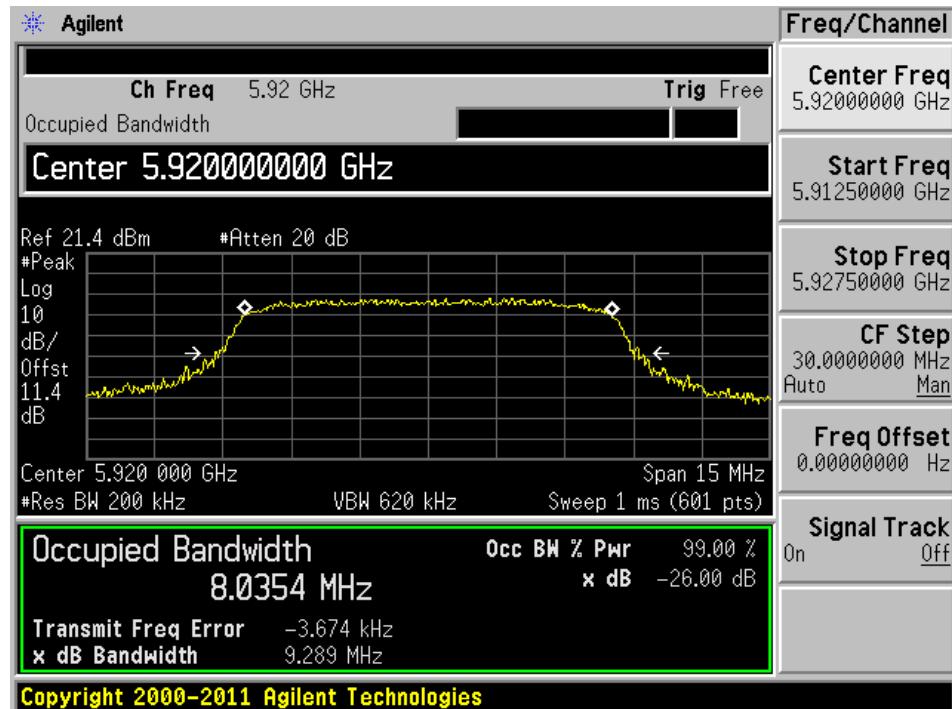

High Channel, 5920 MHz Chain 2

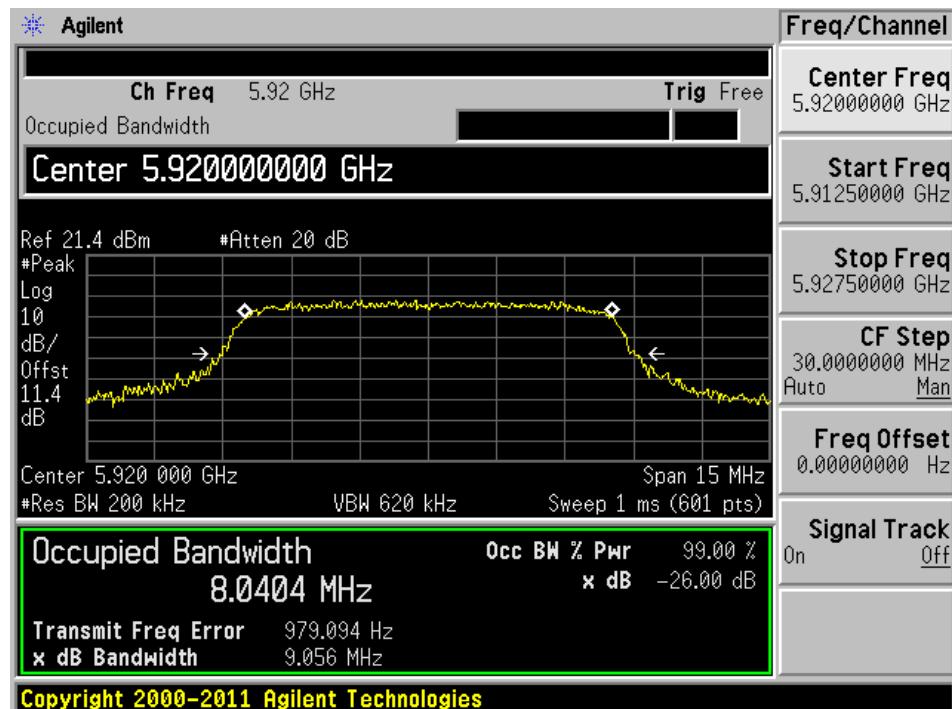

7 FCC §90.210 & ASTM E 2213-03 §8.9.1 – Transmit Spectrum Mask

7.1 Applicable Standards

FCC §90.210, ASTME 2213-03 §8.9.1

TABLE 10 DSRC Spectrum Mask^A

NOTE—Reduction in Power Spectral Density, dB_r.

| Class | ± 4.5-MHz Offset | ± 5.0-MHz Offset | ± 5.5-MHz Offset | ± 10-MHz Offset | ± 15-MHz Offset |
|---------|------------------|------------------|------------------|-----------------|-----------------|
| Class A | 0 | -10 | -20 | -28 | -40 |
| Class B | 0 | -16 | -20 | -28 | -40 |
| Class C | 0 | -26 | -32 | -40 | -50 |
| Class D | 0 | -35 | -45 | -55 | -65 |

^A From IEEE 802.11a. Copyright 1999 IEEE. All rights reserved.

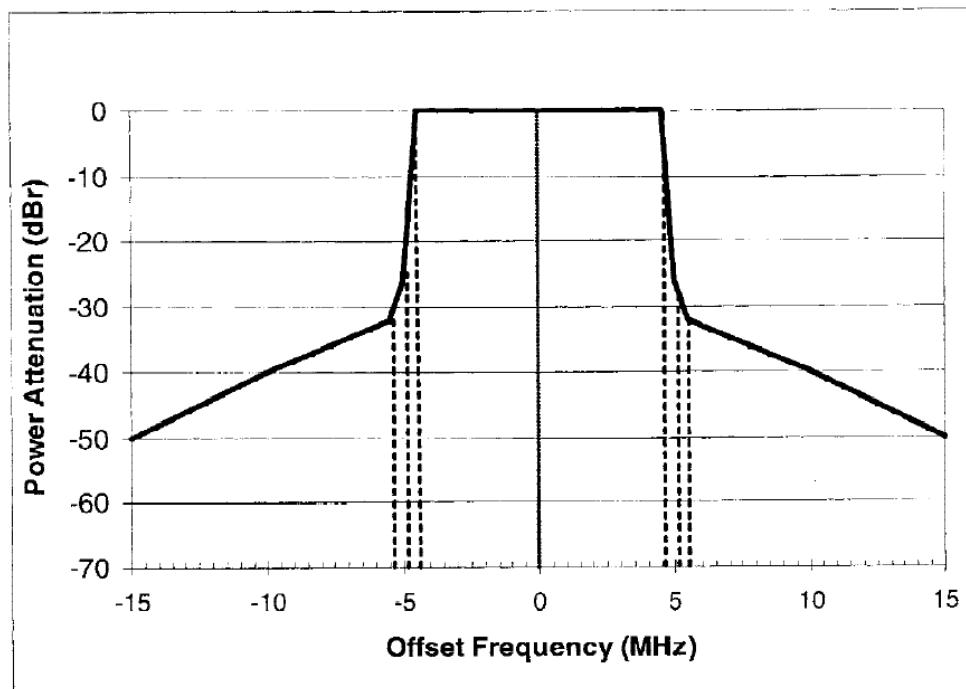


FIG. 14 Class C Transmit Spectrum Mask

7.2 Test Procedure

The DSRC transmitted spectrum mask is relative to the device class of operation. The power in the transmitted spectrum for all DSRC devices shall be -25 dBm or less within 100 kHz outside all channel and band edges. This will be accomplished by attenuating the transmitted signal 100 kHz outside the channel and band edges by $55 + 10\log(P)$ dB, where P is the total transmitted power in watts. The transmitted spectral density of the transmitted signal for all devices shall fall within the spectral mask, as detailed in Table 10.5. The measurements shall be made using a 100 kHz resolution bandwidth and a 30 kHz video bandwidth.

7.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2014-09-29 | 1 year |

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

7.4 Test Environmental Conditions


| | |
|---------------------------|-------------|
| Temperature: | 22-26 °C |
| Relative Humidity: | 42-46 % |
| ATM Pressure: | 101-102 kPa |

The testing was performed by Chen Ge from 2015-01-19 and 2015-01-23 at RF site.


7.5 Test Results

Please refer to the following plots for the test result


Low Channel, 5860 MHz Chain 1

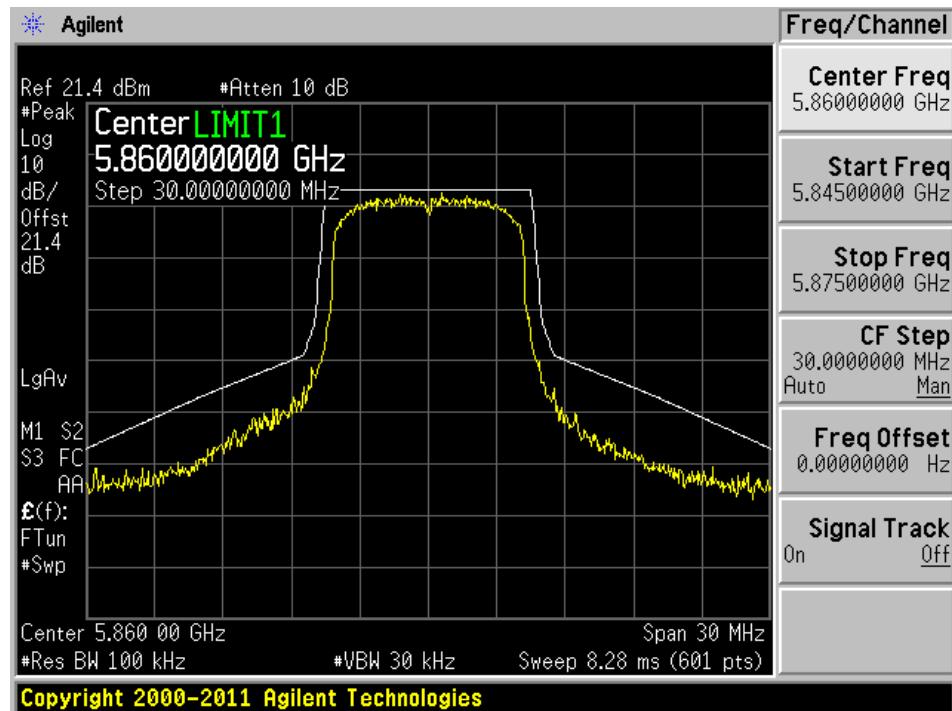


Low Channel, 5860 MHz Chain 2

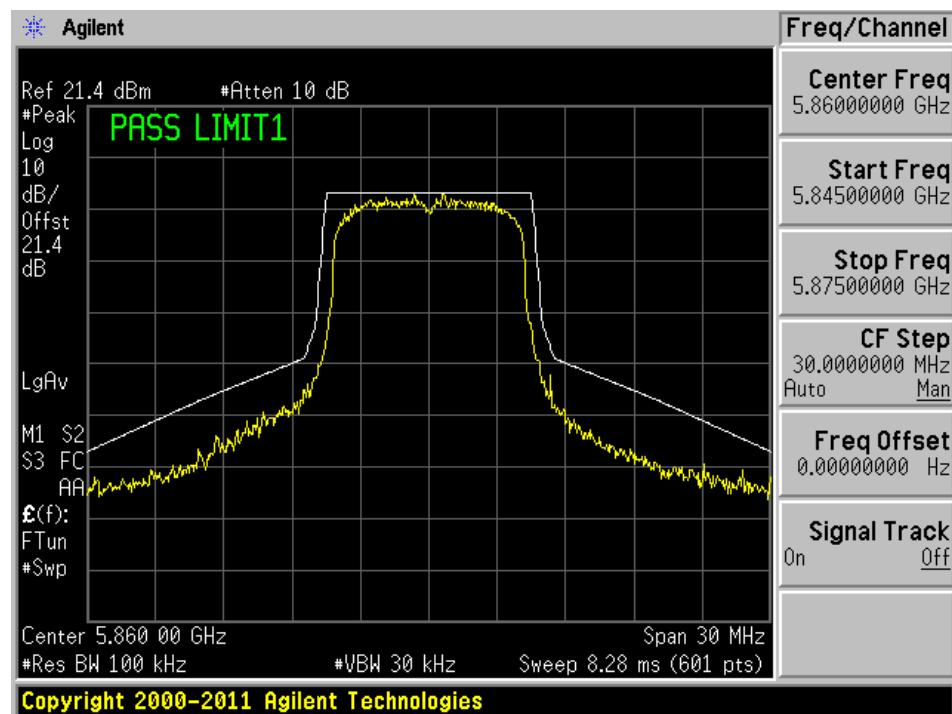


Middle Channel, 5890 MHz Chain 1

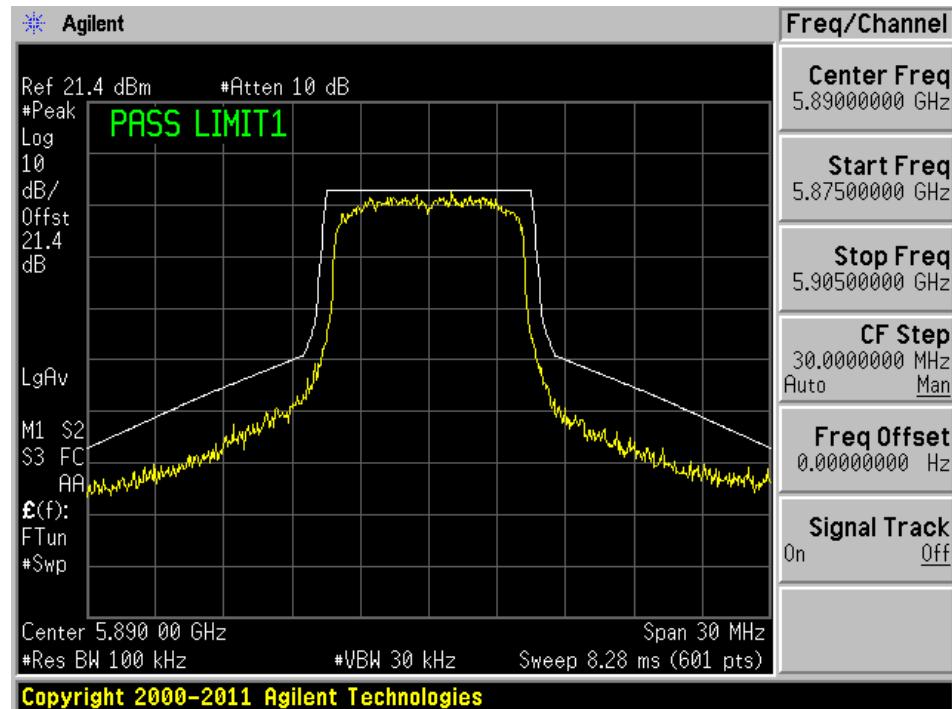


Middle Channel, 5890 MHz Chain 2

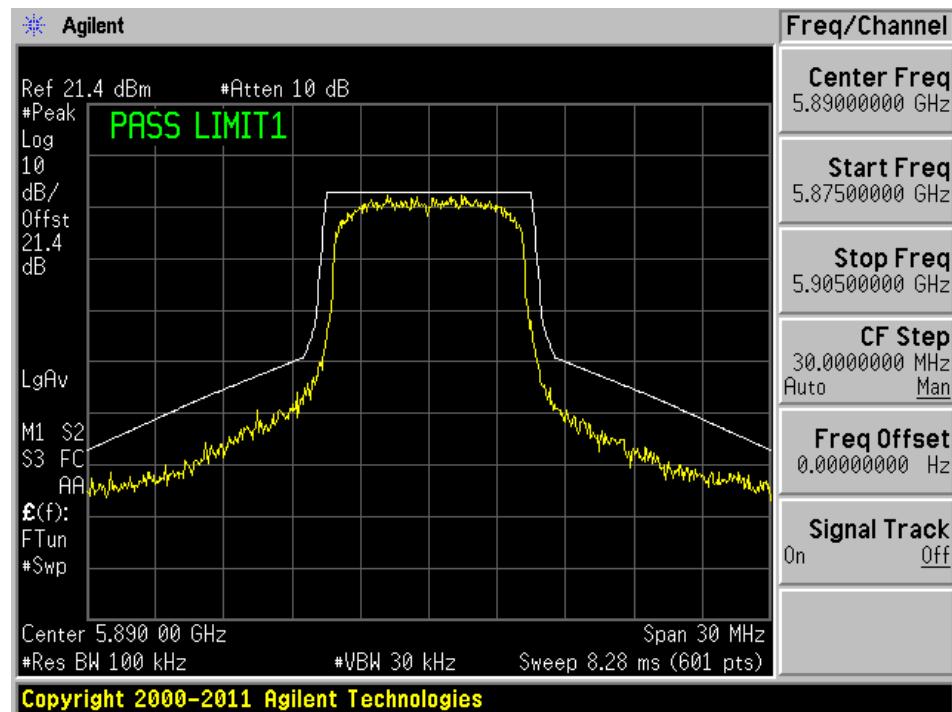

High Channel, 5920 MHz Chain 1

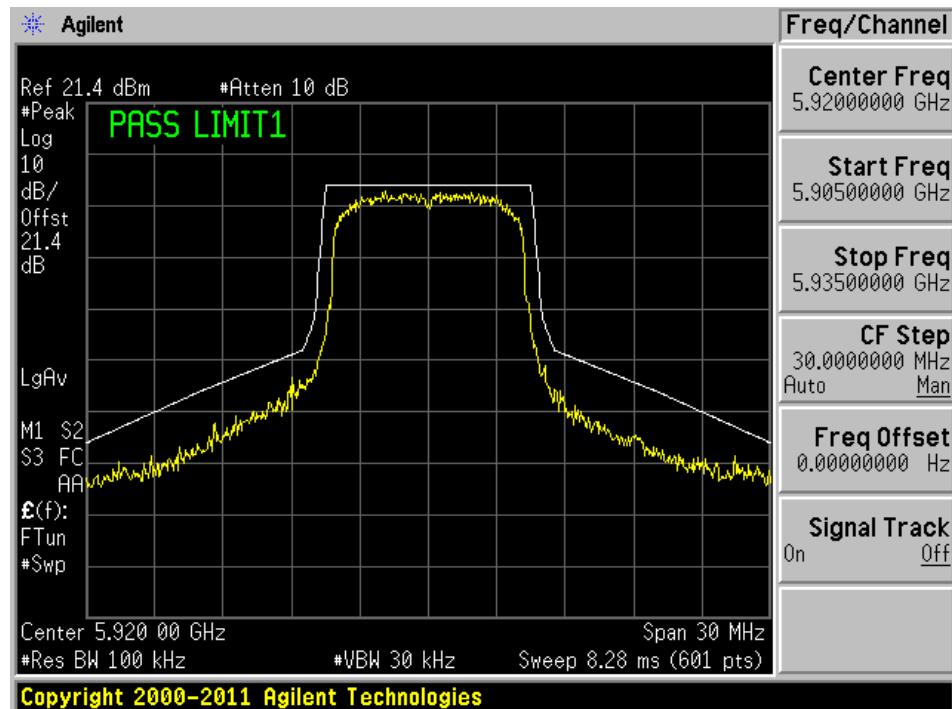

High Channel, 5920 MHz Chain 2

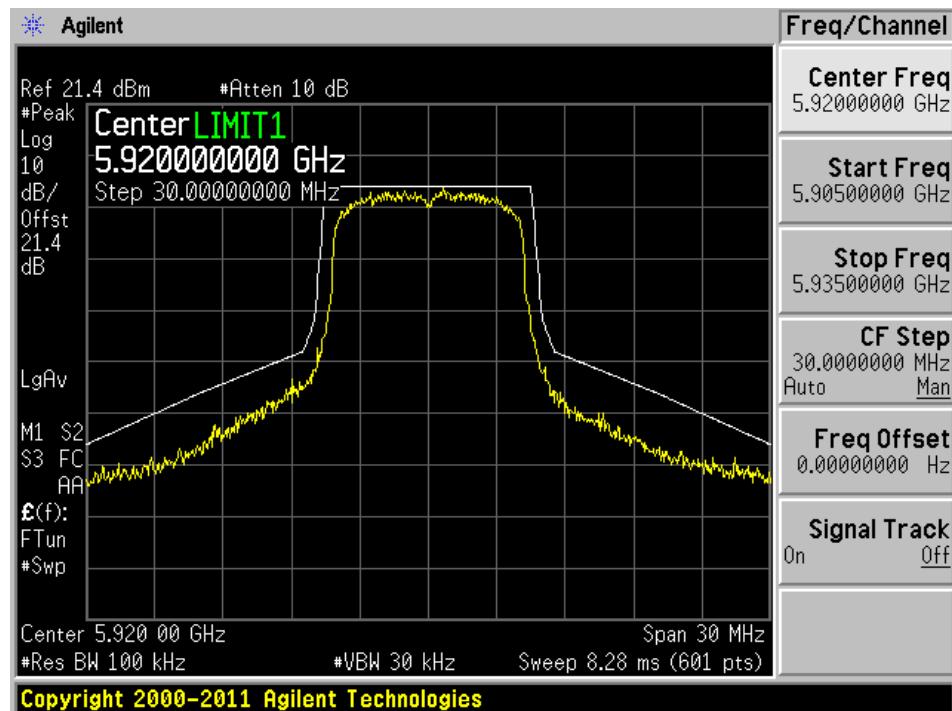

8 FCC §2.1055 & ASTM E 2213-03 §8.9.4 - Frequency Tolerance

8.1 Applicable Standards

According to FCC §2.1055 and ASTM E2213-03 8.9.4

8.2 Measurement Procedure

According to ANSI/TIA-D 2010 section 2.2.2, the carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

The measurement method is as following:

- Operate the equipment in standby conditions for 15 minutes before proceeding.
- Record the carrier frequency of the transmitter as MCF MHz.
- Calculate the ppm frequency error by the following:

$$\text{Ppm error} = ((\text{MCF}/\text{ACF}) - 1) * 10^6$$

Where

MCF is the Measured Carrier Frequency in MHz

ACF is the Assigned Carrier Frequency in MHz

- The value recorded above is the carrier frequency stability.

According to RSS-Gen issue 3 Section 4.7, frequency stability is a measure of frequency drift due to temperature and supply voltage variations with reference to the frequency measurement at an appropriate reference temperature and the rated supply voltage.

Unless specified otherwise in the RSS that is applicable to the device, the reference temperature for transmitters is +20 °C.

A hand-held device that is only capable of operating using internal batteries shall be tested using a new battery without any further requirement to vary the supply voltage. Alternatively, an external supply voltage can be used and set at the battery nominal voltage, and again at the battery operating end point voltage which must be specified by the equipment manufacturer.

The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency-determining circuit element shall be made subsequent to this initial set-up.

With the transmitter installed in an environment test chamber, the unmodulated carrier frequency shall be measured under the conditions specified below. A sufficient stabilization period at each temperature shall be used prior to each frequency measurement. The following temperatures and supply voltage ranges apply, unless specified otherwise in the applicable RSS.

- (a) At temperature of -30 °C, +20 °C and +50 °C, and at the manufacturer's rated supply voltage; and
- (b) At a temperature of +20 °C and at ±15 percent of the manufacturer's rated supply voltage.

If the frequency stability limits are only met at a different temperature range than specified in (a), the frequency stability requirement will be deemed met if the transmitter is automatically inhibited from operating outside this

different temperature range and the published equipment operating characteristics are revised to reflect this different temperature range.

If an unmodulated carrier is not available, the measurement method shall be described in the test report.

8.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|---------------------|-----------|------------|------------------|----------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2014-09-29 | 1 year |
| Tenney | Temperature Chamber | TUJR | 27445-06 | 2014-07-09 | 1 year |
| BK PRECISION | DC Power Supply | E3 | N/A | N/A | N/A |
| Fluke | Digital Voltmeter | 189 | N/A | 2014-02-05 | 1 Year |

Statement of Traceability: *BACL Corp.* attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

8.4 Test Environmental Conditions

| | |
|---------------------------|-------------|
| Temperature: | 22-26 °C |
| Relative Humidity: | 42-46 % |
| ATM Pressure: | 101-102 kPa |

The testing was performed by Chen Ge from 2015-01-19 and 2015-01-23 at RF site.

8.5 Test Results

Reference Frequency, Middle Channel, 5890 MHz

| Temperature (°C) | Voltage (V) | Measured Frequency | | Limit (ppm) |
|---------------------|----------------|--------------------|------|----------------|
| | | (MHz) | ppm | |
| -40 | 12 | 5890.033 | 5.60 | ± 10 |
| -30 | 12 | 5890.031 | 5.26 | ± 10 |
| -20 | 12 | 5890.057 | 9.68 | ± 10 |
| -10 | 12 | 5890.051 | 8.66 | ± 10 |
| 0 | 12 | 5890.050 | 8.49 | ± 10 |
| 10 | 12 | 5890.044 | 7.47 | ± 10 |
| 20 | 10.8 | 5890.054 | 9.17 | ± 10 |
| 20 | 12 | 5890.038 | 6.45 | ± 10 |
| 20 | 13.2 | 5890.035 | 5.94 | ± 10 |
| 30 | 12 | 5890.043 | 7.30 | ± 10 |
| 40 | 12 | 5890.046 | 7.81 | ± 10 |
| 50 | 12 | 5890.032 | 5.43 | ± 10 |
| 60 | 12 | 5890.040 | 6.79 | ± 10 |
| 70 | 12 | 5890.037 | 6.28 | ± 10 |
| 80 | 12 | 5890.041 | 6.96 | ± 10 |
| 85 | 12 | 5890.041 | 6.96 | ± 10 |

Note: 1) Test is based on Chain 2, which is the worst case.

2) The Temperature range was declared by client.

9 FCC §2.1051 & ASTM E2213-03 §8.9.2 - Transmit Conducted Spurious Emissions

9.1 Applicable Standards

According to ASTM EN2213-03 8.9.2:

8.9.2.2 The transmitted spectral mask for class A, B, C, and D devices are shown in Figs. 12-15. In addition, all DSRC site installations shall limit the EIRP in the transmitted spectrum to -25 dBm or less in the 100 kHz at the channel edges and the band edges. Additional filtering that supplements the filtering provided by the transmitter may be needed for some antenna/transmitter combinations.

9.2 Measurement Procedure

The DSRC transmitted spectrum mask is relative to the device class of operation. The power in the transmitted spectrum for all DSRC devices shall be -25 dBm or less within 100 kHz outside all channel and band edges. This will be accomplished by attenuating the transmitted signal 100 kHz outside the channel and band edges by $55 + 10\log(P)$ dB, where P is the total transmitted power in watts. The transmitted spectral density of the transmitted signal for all devices shall fall within the spectral mask, as detailed in Table 10.5. The measurements shall be made using a 100 kHz resolution bandwidth and a 30 kHz video bandwidth.

9.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------|-------------------|-----------|------------|------------------|----------------------|
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2014-09-29 | 1 year |

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.


9.4 Test Environmental Conditions

| | |
|--------------------|-------------|
| Temperature: | 22-26 °C |
| Relative Humidity: | 42-46 % |
| ATM Pressure: | 101-102 kPa |


The testing was performed by Chen Ge from 2015-01-19 and 2015-01-23 at RF site.

9.5 Test Results


Low Channel 5860 MHz Chain 1, 30MHz – 40GHz

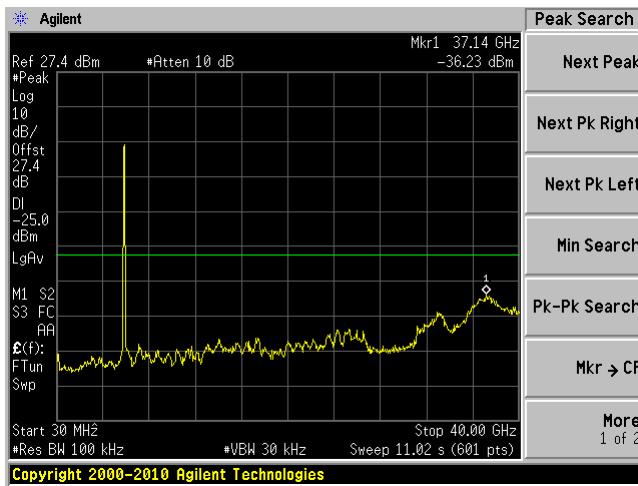


Low Channel 5860 MHz Chain 2, 30MHz – 40GHz

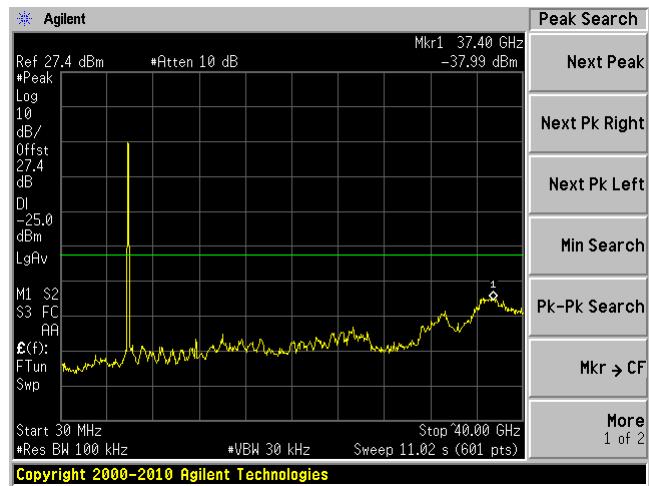


Middle Channel 5890 MHz Chain 1, 30MHz – 40GHz

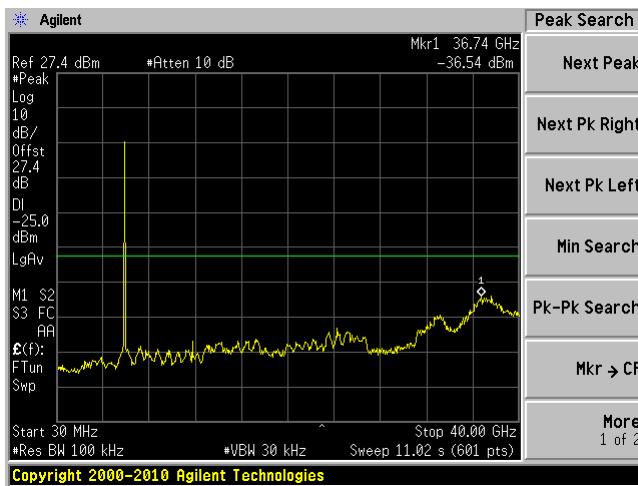


Middle Channel 5890 MHz Chain 2, 30MHz – 40GHz

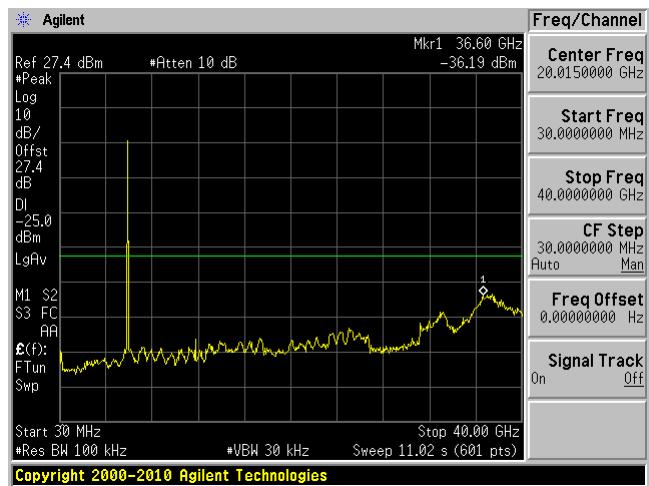

High Channel 5920 MHz Chain 1, 30MHz – 40GHz

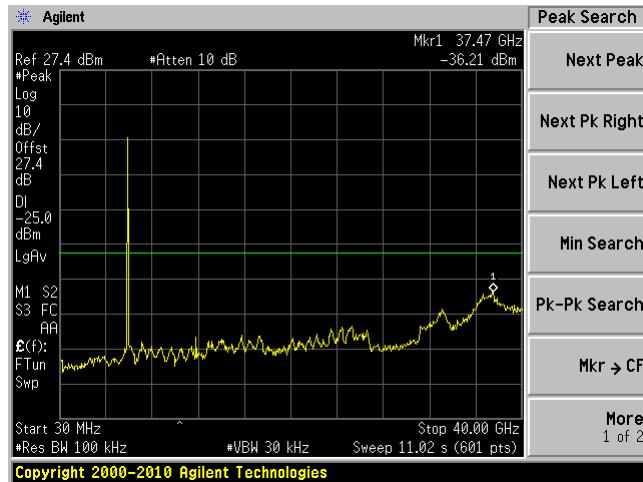

High Channel 5920 MHz Chain 2, 30MHz – 40GHz

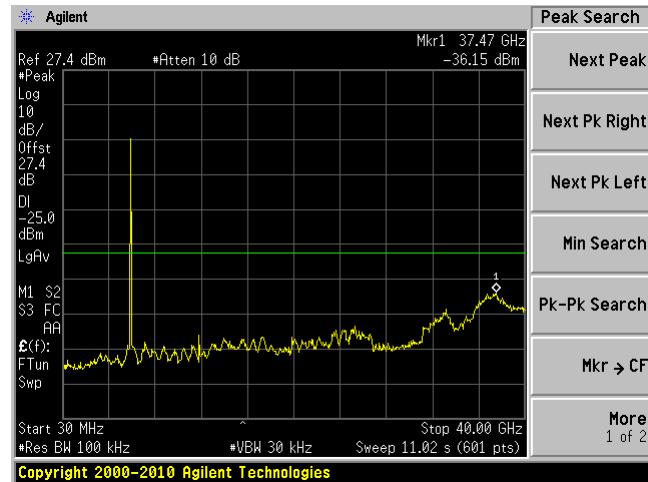

10 FCC §2.1053 & ASTM E2213-03 §8.9.2 – Field Strength of Spurious Emissions

10.1 Applicable Standard

According to ASTM EN2213-03 8.9.2, the transmitted spectral mask for class A, B, C, and D devices are shown in Figs. 12-15. In addition, all DSRC site installations shall limit the EIRP in the transmitted spectrum to -25 dBm or less in the 100 kHz at the channel edges and the band edges. Additional filtering that supplements the filtering provided by the transmitter may be needed for some antenna/transmitter combinations.

10.2 Measurement Procedure

The DSRC transmitted spectrum mask is relative to the device class of operation. The power in the transmitted spectrum for all DSRC devices shall be -25 dBm or less within 100 kHz outside all channel and band edges. This will be accomplished by attenuating the transmitted signal 100 kHz outside the channel and band edges by $55 + 10\log(P)$ dB, where P is the total transmitted power in watts. The transmitted spectral density of the transmitted signal for all devices shall fall within the spectral mask, as detailed in Table 10.5. The measurements shall be made using a 100 kHz resolution bandwidth and a 30 kHz video bandwidth.

10.3 Test Equipment List and Details

| Manufacturer | Description | Model No. | Serial No. | Calibration Date | Calibration Interval |
|--------------------|---------------------|-------------------|------------|------------------|----------------------|
| Sunol Science Corp | System Controller | SC99V | 122303-1 | N/R | N/R |
| Sunol Science Corp | Combination Antenna | JB3 | A020106-3 | 2014-06-18 | 1 year |
| Hewlett Packard | Pre-amplifier | 8447D | 2944A06639 | 2014-06-09 | 1 year |
| Mini-Circuits | Pre-amplifier | ZVA-183-S | 570400946 | 2014-05-09 | 1 year |
| Agilent | Spectrum Analyzer | E4446A | US44300386 | 2014-09-29 | 1 year |
| EMCO | Horn Antenna | 3315 | 9511-4627 | 2014-10-17 | 1 year |
| Eaton | Antenna, Horn | 96001 | 2617 | 2014-11-18 | 1 year |
| Com-Power | Antenna, Dipole | AD-100 | 2229 | 2014-08-26 | 2 year |
| Rohde & Schwarz | EMI Test Receiver | ESCI 1166.5950K03 | 100337 | 2014-03-28 | 1 year |

Statement of Traceability: **BACL Corp.** attests that all calibrations have been performed per the A2LA requirements, traceable to the NIST.

10.4 Test Environmental Conditions

| | |
|---------------------------|-------------|
| Temperature: | 22-26 °C |
| Relative Humidity: | 42-46 % |
| ATM Pressure: | 101-102 kPa |

The testing was performed by Chen Ge from 2015-01-19 and 2015-01-23 at 5 meter chamber 3.

10.5 Test Results

Low Channel Frequency: 5860 MHz

| Freq. (MHz) | S.A. Amp. (dB μ V) | Table Azimuth Degrees | Test Antenna | | Substitution | | | | Absolute Level (dBm) | FCC | |
|----------------|------------------------------|-----------------------------|---------------|-----------------|-----------------------|-----------------------|----------------------|-----------------------|----------------------------|----------------|----------------|
| | | | Height (m) | Polar (H/ V) | S.G Freq. (MHz) | S.G Level (dBm) | Ant. Gain (dB) | Cable Loss (dB) | | Limit (dBm) | Margin (dB) |
| 198 | 59.32 | 57 | 100 | V | 198 | -50.46 | 0 | 0.1 | -50.56 | -25 | -25.56 |
| 228.1 | 60.02 | 92 | 100 | H | 228.1 | -43.11 | 0 | 0.2 | -43.31 | -25 | -18.31 |
| 142.6 | 55.6 | 114 | 100 | V | 142.6 | -54.49 | 0 | 0.1 | -54.59 | -25 | -29.59 |
| 263 | 56.99 | 109 | 100 | H | 263 | -45.13 | 0 | 0.2 | -45.33 | -25 | -20.33 |
| 2433 | 42.12 | 210 | 150 | V | 2433 | -63.36 | 9.421 | 0.51 | -54.449 | -25 | -29.449 |
| 1188 | 35.62 | 115 | 150 | H | 1188 | -73.79 | 5.341 | 0.25 | -68.699 | -25 | -43.699 |
| 8946 | 34.2 | 0 | 150 | V | 8946 | -57.93 | 11.314 | 1.14 | -47.756 | -25 | -22.756 |
| 10673 | 33.6 | 0 | 150 | H | 10673 | -56.36 | 11.495 | 1.43 | -46.295 | -25 | -21.295 |

Middle Channel Frequency: 5890 MHz

| Freq. (MHz) | S.A. Amp. (dB μ V) | Table Azimuth Degrees | Test Antenna | | Substitution | | | | Absolute Level (dBm) | FCC | |
|----------------|------------------------------|-----------------------------|---------------|-----------------|-----------------------|-----------------------|----------------------|-----------------------|----------------------------|----------------|----------------|
| | | | Height (m) | Polar (H/ V) | S.G Freq. (MHz) | S.G Level (dBm) | Ant. Gain (dB) | Cable Loss (dB) | | Limit (dBm) | Margin (dB) |
| 196 | 60.53 | 196 | 100 | V | 196 | -50.25 | 0 | 0.1 | -50.35 | -25 | -25.35 |
| 229 | 60.96 | 70 | 100 | H | 229 | -47.17 | 0 | 0.2 | -47.37 | -25 | -22.37 |
| 96 | 54.8 | 306 | 100 | V | 96 | -56.91 | 0 | 0.08 | -56.99 | -25 | -31.99 |
| 265 | 56.61 | 272 | 100 | H | 265 | -50.59 | 0 | 0.2 | -50.79 | -25 | -25.79 |
| 1187 | 38.1 | 309 | 150 | V | 1187 | -71.31 | 5.324 | 0.25 | -66.236 | -25 | -41.236 |
| 1961 | 34.2 | 0 | 150 | H | 1961 | -72.92 | 8.457 | 0.4 | -64.863 | -25 | -39.863 |
| 9736 | 34.56 | 0 | 150 | V | 9736 | -57.53 | 11.908 | 1.18 | -46.802 | -25 | -21.802 |
| 10096 | 33.89 | 0 | 150 | H | 10096 | -57.31 | 11.336 | 1.41 | -47.384 | -25 | -22.384 |

High Channel Frequency: 5920 MHz

| Freq. (MHz) | S.A. Amp. (dB μ V) | Table Azimuth Degrees | Test Antenna | | Substitution | | | | Absolute Level (dBm) | FCC | |
|----------------|------------------------------|-----------------------------|---------------|-----------------|-----------------------|-----------------------|----------------------|-----------------------|----------------------------|----------------|----------------|
| | | | Height (m) | Polar (H/ V) | S.G Freq. (MHz) | S.G Level (dBm) | Ant. Gain (dB) | Cable Loss (dB) | | Limit (dBm) | Margin (dB) |
| 198.9 | 59 | 59 | 100 | V | 198.9 | -51.78 | 0 | 0.1 | -51.88 | -25 | -26.88 |
| 223.2 | 59.37 | 261 | 100 | H | 223.2 | -49.03 | 0 | 0.2 | -49.23 | -25 | -24.23 |
| 325.2 | 40.9 | 73 | 100 | V | 325.2 | -64.7 | 0 | 0.3 | -65 | -25 | -40 |
| 151.4 | 50.82 | 77 | 100 | H | 151.4 | -58.37 | 0 | 0.1 | -58.47 | -25 | -33.47 |
| 1187 | 36.01 | 0 | 150 | V | 1187 | -73.4 | 5.324 | 0.25 | -68.326 | -25 | -43.326 |
| 1735 | 33.94 | 0 | 150 | H | 1735 | -74.49 | 8.98 | 0.35 | -65.86 | -25 | -40.86 |
| 10258 | 33.82 | 0 | 150 | V | 10258 | -56.91 | 11.293 | 1.4 | -47.017 | -25 | -22.017 |
| 10655 | 33.56 | 0 | 150 | H | 10655 | -56.4 | 11.495 | 1.45 | -46.355 | -25 | -21.355 |