

Product Name:Smart Phone	Report No: ITEZA2-202400107RF5
Product Model: Blade10 Pro, Blade10, Blade10 Ultra, Blade10 S, Blade10 E, Blade10 SE, Blade10 Plus, Blade10 Max, Blade10 Power	Security Classification: Open
Version: V1.0	Total Page:122

TIRT Testing Report

Prepared By:	Checked By:	Approved By:	
Aaron Long	Stone Tang	Joky Wang	
<i>Aaron Long</i>	<i>Stone Tang</i>	<i>Joky Wang</i>	

FCCRadio Test Report

FCC ID: 2AX4YBLADE10PRO

This report concerns:Original Grant

Applicant:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Manufacturer:	Shenzhen DOOGEE Hengtong Technology CO.,LTD
Address:	B, 2/F, Building A4, Silicon Valley Power Digital Industrial Park, No. 22, Longhua New District, Shenzhen, China
Sample No:	1000032108
Product Name:	Smart Phone
Brand Name:	DOOGEE
Model No.:	Blade10 Pro, Blade10, Blade10 Ultra, Blade10 S, Blade10 E, Blade10 SE, Blade10 Plus, Blade10 Max, Blade10 Power
Test No.:	Blade10 Pro

Date of Receipt:	2024/04/23
Date of Test:	2024/04/23~2024/05/22
Issued Date:	2024/05/27
Testing Lab:	TIRT

Note: This report shall not be reproduced except in full, without the written approval of Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.

This document may be altered or revised by Beijing TIRT Technology Service Co.,Ltd Shenzhen.Laboratory.Personnel only, and shall be noted in the revision section of the document. The test results of this report relate only to the tested sample identified in this report.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 TEST MODES	12
2.3 DUTY CYCLE	14
2.4 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED	29
2.5 SUPPORT UNITS	29
3 .AC POWER LINE CONDUCTED EMISSIONS	30
3.1 LIMIT	30
3.2 TEST PROCEDURE	30
3.3 DEVIATIONFROMTESTSTANDARD	30
3.4 TESTSETUP	31
3.5 EUT OPERATION CONDITIONS	31
3.6 TEST RESULTS	31
4 . RADIATED EMISSIONS	32
4.1 LIMIT	32
4.2 TEST PROCEDURE	32
4.3 DEVIATIONFROMTESTSTANDARD	34
4.4 TESTSETUP	34
4.5 EUT OPERATION CONDITIONS	35
4.6 TEST RESULTS - 9 KHZTO 30MHZ	35
4.7 TEST RESULTS - 30 MHZTO 1000 MHZ	35
4.8 TEST RESULTS - ABOVE1000 MHZ	35
5 .BANDWIDTH	36
5.1 LIMIT	36
5.2 TEST PROCEDURE	36
5.3 DEVIATION FROM STANDARD	36
5.4 TEST SETUP	37
5.5 EUT OPERATION CONDITIONS	37

5.6 TEST RESULTS	37
6 .MAXIMUM OUTPUT POWER	38
6.1 LIMIT	38
6.2 TEST PROCEDURE	38
6.3 DEVIATION FROM STANDARD	38
6.4 TEST SETUP	38
6.5 EUT OPERATION CONDITIONS	38
6.6 TEST RESULTS	38
7 .POWER SPECTRAL DENSITY	39
7.1 LIMIT	39
7.2 TEST PROCEDURE	39
7.3 DEVIATION FROM STANDARD	39
7.4 TEST SETUP	40
7.5 EUT OPERATION CONDITIONS	40
7.6 TEST RESULTS	40
8 .FREQUENCY STABILITY	41
8.1 LIMIT	41
8.2 TEST PROCEDURE	41
8.3 DEVIATION FROM STANDARD	41
8.4 TEST SETUP	41
8.5 EUT OPERATION CONDITIONS	41
8.6 TEST RESULTS	41
9 . MEASUREMENT INSTRUMENTS LIST	42
10 .EUT TEST PHOTOS	43
11 .EUT PHOTOS	45
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	53
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	55
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	56
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	58
APPENDIX E -BANDWIDTH	70
APPENDIX F -MAXIMUM OUTPUT POWER	85
APPENDIX G - POWER SPECTRAL DENSITY	100
APPENDIX H - Frequency Stability	115

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
ITEZA2-202400107RF5	V1.0	Original Report.	2024.05.27	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	NOTE (5)
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving.the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐Outdoor access point device
 - ☐Indoor access point device
 - ☐Fixed point-to-point access points device
 - ☒Client device
- (5) The manufacturer states that the frequency sability is in compliance with 15.407(g).
- (6) Measurement Standard Used:
 - FCC Rules and Regulations Part 15 Subpart E
 - ANSI C63.4:2014, ANSI C63.10:2013

1.1 TEST FACILITY

Company:	Beijing TIRT Technology Service Co.,Ltd Shenzhen
Address:	104 Building C, Xinmingsheng Industrial Park No.132, Zhangge Old Village East Zone, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, Guangdong, P. R. China
CNAS Registration Number:	CNAS L14158
A2LA Registration Number:	6049.01
FCC Accredited Lab.Designation Number:	CN1366
FCC Test Firm Registration Number:	820690
Telephone:	+86-0755-27087573

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The TIRT measurement uncertainty as below table:

Uncertainty	
Parameter	Uncertainty
Occupied Channel Bandwidth	± 142.12 KHz
RF power conducted	± 0.74 dB
RF power radiated	± 3.25 dB
Spurious emissions, conducted	± 1.78 dB
Spurious emissions, radiated (30MHz~1GHz)	± 4.6 dB
Spurious emissions, radiated (1GHz ~ 18GHz)	± 4.9 dB
Conduction Emissions(150kHz~30MHz)	± 3.1 dB
Humidity	$\pm 4.6\%$
Temperature	$\pm 0.7^{\circ}\text{C}$
Time	$\pm 1.25\%$

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25.1°C	52%	DC 3.87V from battery	Stone Tang
Radiated Emissions-9kHz to 30MHz	24.5°C	50%	DC 3.87V from battery	Stone Tang
Radiated Emissions-30MHz to 1000MHz	24.2°C	53%	DC 3.87V from battery	Stone Tang
Radiated Emissions-Above 1000 MHz	26.0°C	53%	DC 3.87V from battery	Stone Tang
Bandwidth	25.0°C	56%	DC 3.87V from battery	Stone Tang
Maximum Output Power	24.9°C	54%	DC 3.87V from battery	Stone Tang
Power Spectral Density	25.1°C	62%	DC 3.87V from battery	Stone Tang

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Smart Phone
Brand Name	DOOGEE
Test Model	Blade10 Pro
Series Model	Blade10 Pro, Blade10, Blade10 Ultra, Blade10 S, Blade10 E, Blade10 SE, Blade10 Plus, Blade10 Max, Blade10 Power
Model Difference(s)	There is no difference except the name of the model
Software Version	DOOGEE-Blade10Pro-EEA-Android14.0-20240512
Hardware Version	SC6020LU-MB-1.0.1-20240411
Power Rating	DC 3.87V from battery or DC 5V from adapter
Operation FrequencyBand(s)	UNII-1: 5180 MHz~5240 MHz UNII-2A: 5260 MHz ~ 5320 MHz UNII-3: 5745 MHz~5825MHz
Modulation Type	IEEE 802.11n: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE 802.11a: OFDM (64QAM,16QAM,QPSK,BPSK) IEEE802.11ac: OFDM (64QAM,16QAM, 256QAM,QPSK,BPSK)
Maximum Output Power UNII-1	IEEE 802.11ac80: 12.74dBm(0.018793W)
Maximum Output Power UNII-2A	IEEE 802.11ac40: 11.24dBm(0.013305W)
Maximum Output Power UNII-3	IEEE 802.11ac40: 11.86dBm(0.015346W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Manufactured	Model Name	Antenna Type	Connector	Gain (dBi)
1	SHENZHEN HENGXIANGTONG ANTENNA TECHNOLOGY CO., LTD.	F1C	PIFA	N/A	1.27

Note:

- 1) The antenna gain is provided by the manufacturer.
- 2) The antenna is for testing purposes only.

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) ModeChannel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) ModeChannel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) ModeChannel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 13	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 14	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 15	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 16	TX AC(VHT20) Mode Channel 52/60/64 (UNII-2A)
Mode 17	TX AC(VHT40) Mode Channel 54/62 (UNII-2A)
Mode 18	TX AC(VHT80) Mode Channel 58 (UNII-2A)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - Below 1GHz	
Final Test Mode	Description
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)

Radiated Emissions Test - Above 1GHz	
Final Test Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A ModeChannel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT20) Mode Channel 36/40/48 (UNII-1)
Mode 5	TX AC(VHT40) Mode Channel 38/46 (UNII-1)
Mode 6	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 7	TX A Mode Channel 149/157/165 (UNII-3)
Mode 8	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 9	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 10	TX AC(VHT20) Mode Channel 149/157/165 (UNII-3)
Mode 11	TX AC(VHT40) Mode Channel 151/159 (UNII-3)
Mode 12	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions andradiated emission below 1 GHz test, the TX N(HT40) Mode Channel 36 (UNII-1)is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) All the bit rate of transmitter have been tested and found the lowest rate is found tobe the worst case and recorded.
- (4) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode,only the worst cases are documented for other test items.

2.3DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.


If duty cycle is $< 98\%$, duty factor shall be considered.

The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.


TestMode	Antenna	Freq(MHz)	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11A	Ant1	5180	1.39	1.43	97.20
		5200	1.40	1.43	97.90
		5240	1.39	1.43	97.20
		5260	1.40	1.43	97.90
		5280	1.39	1.42	97.89
		5320	1.39	1.42	97.89
		5745	1.39	1.43	97.20
		5785	1.40	1.43	97.90
		5825	1.39	1.43	97.20
11N20SISO	Ant1	5180	1.30	1.33	97.74
		5200	1.29	1.33	96.99
		5240	1.31	1.34	97.76
		5260	1.30	1.33	97.74
		5280	1.30	1.34	97.01
		5320	1.29	1.33	96.99
		5745	1.30	1.34	97.01
		5785	1.30	1.34	97.01
		5825	1.29	1.33	96.99
11N40SISO	Ant1	5190	0.65	0.68	95.59
		5230	0.65	0.69	94.20
		5270	0.65	0.69	94.20
		5310	0.65	0.68	95.59
		5755	0.65	0.69	94.20
		5795	0.65	0.68	95.59
11AC20SISO	Ant1	5180	1.31	1.35	97.04
		5200	1.31	1.35	97.04
		5240	1.30	1.35	96.30
		5260	1.31	1.35	97.04
		5280	1.31	1.35	97.04
		5320	1.31	1.34	97.76
		5745	1.31	1.35	97.04
		5785	1.31	1.35	97.04
		5825	1.32	1.35	97.78
11AC40SISO	Ant1	5190	0.65	0.69	94.20
		5230	0.66	0.69	95.65
		5270	0.66	0.69	95.65
		5310	0.65	0.69	94.20
		5755	0.65	0.69	94.20
		5795	0.65	0.69	94.20
11AC80SISO	Ant1	5210	0.32	0.36	88.89
		5290	0.32	0.36	88.89
		5775	0.32	0.36	88.89

11A_Ant1_5180

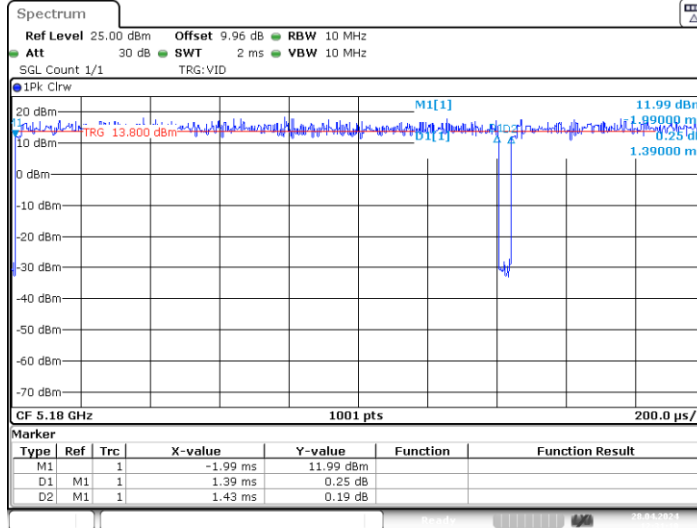


Date: 28.APR.2024 12:31:10

11A_Ant1_5200

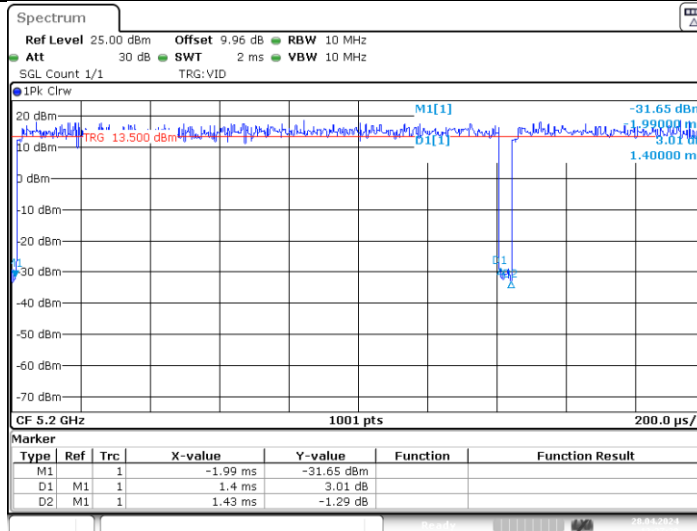


Date: 28.APR.2024 12:37:29

11A_Ant1_5240

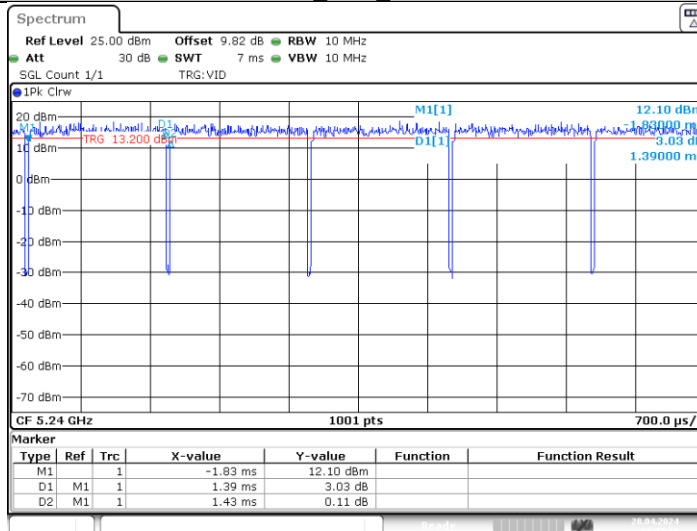


Date: 28.APR.2024 12:42:18

11A_Ant1_5260

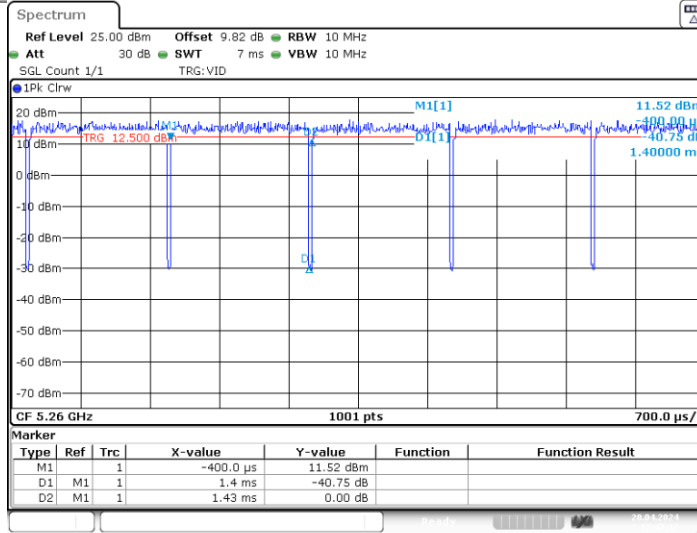


Date: 28.APR.2024 12:47:17

11A_Ant1_5280

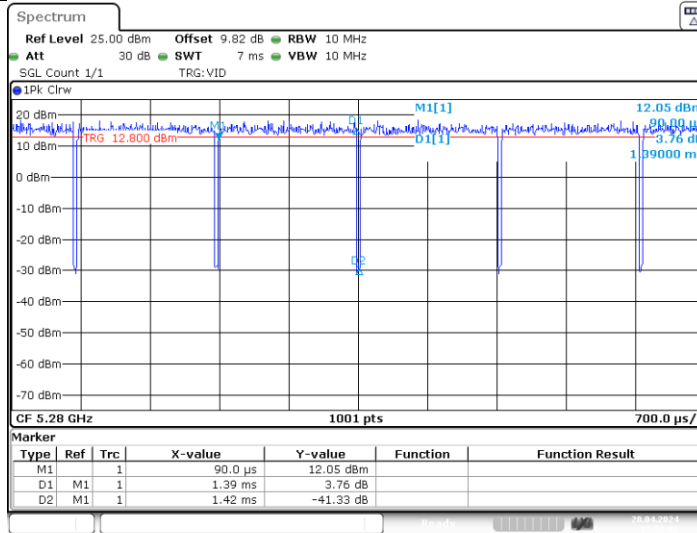


Date: 28.APR.2024 12:52:02

11A_Ant1_5320

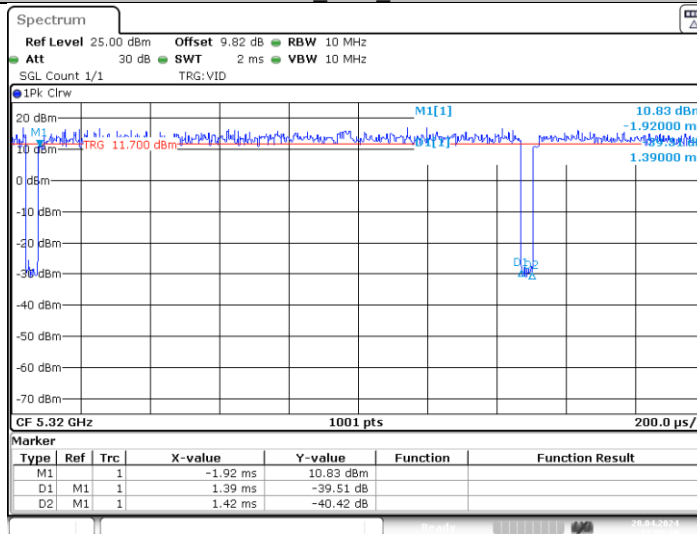


Date: 28.APR.2024 12:59:11

11A_Ant1_5745

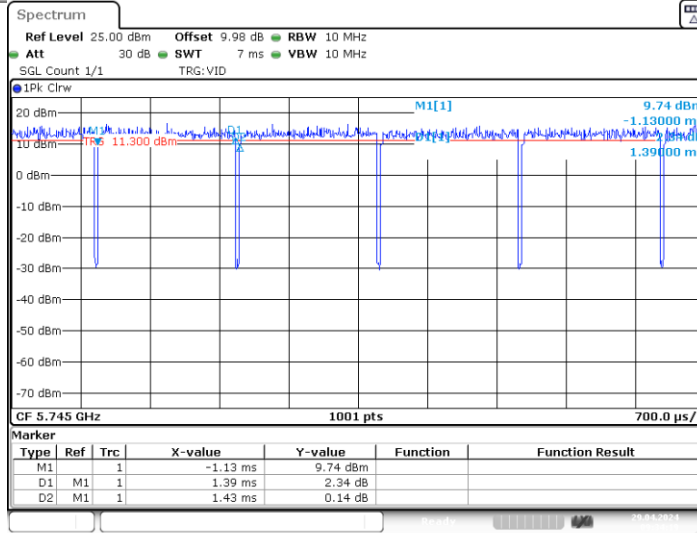


Date: 29.APR.2024 09:34:19

11A_Ant1_5785

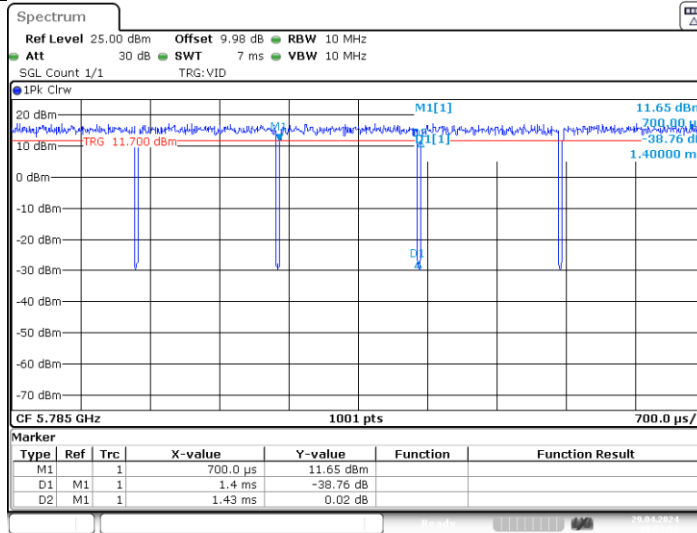


Date: 29.APR.2024 09:53:52

11A_Ant1_5825

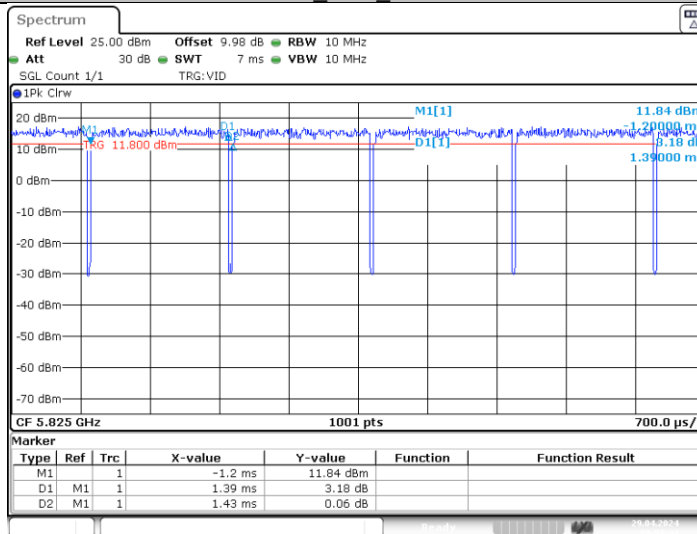


Date: 29.APR.2024 09:58:44

11N20SISO_Ant1_5180

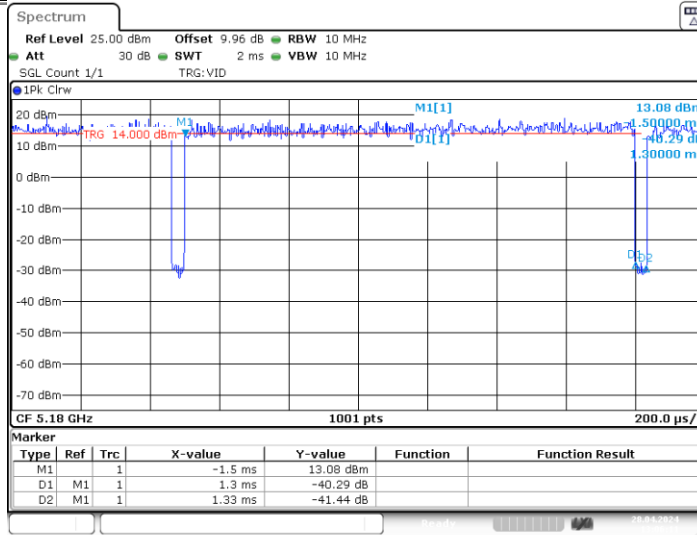


Date: 28.APR.2024 13:06:12

11N20SISO_Ant1_5200

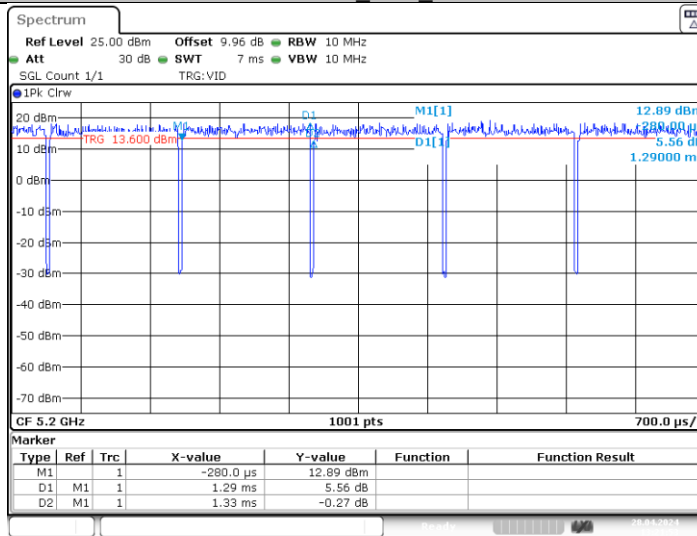


Date: 28.APR.2024 13:21:53

11N20SISO_Ant1_5240

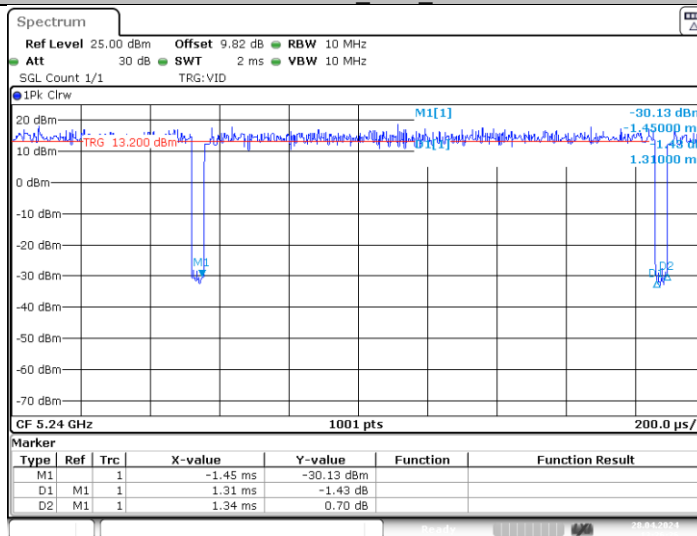


Date: 28.APR.2024 13:26:36

11N20SISO_Ant1_5260

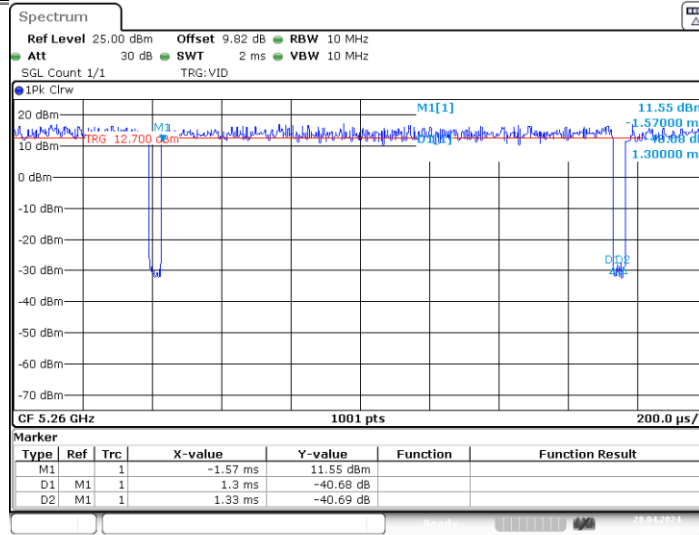


Date: 28.APR.2024 13:31:20

11N20SISO_Ant1_5280

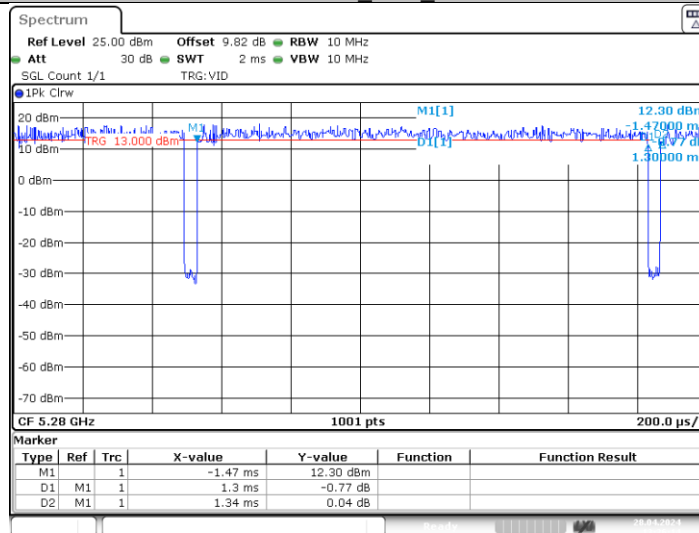


Date: 28.APR.2024 13:36:14

11N20SISO_Ant1_5320

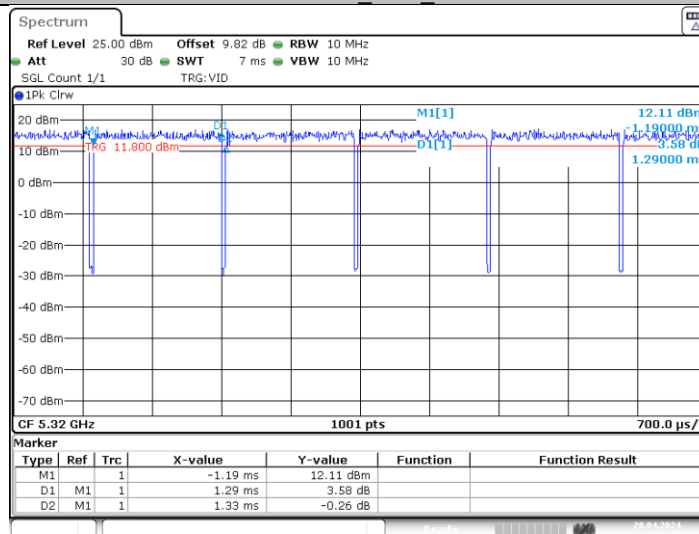


Date: 28.APR.2024 13:41:14


11N20SISO_Ant1_5745

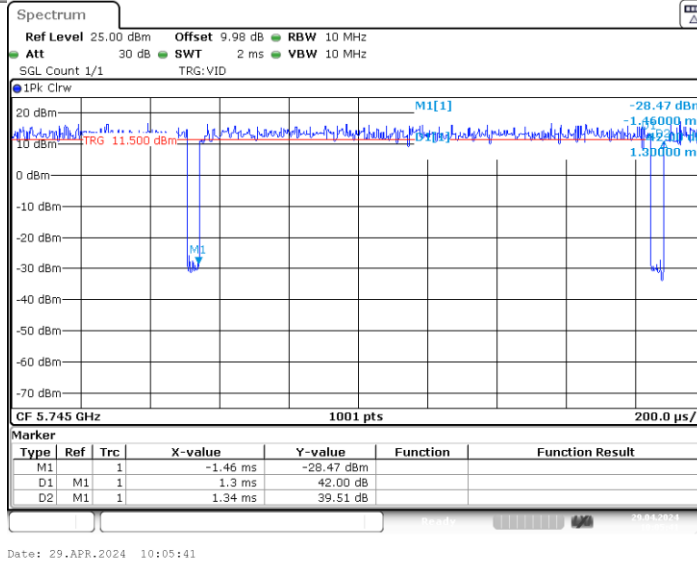


11N20SISO_Ant1_5785

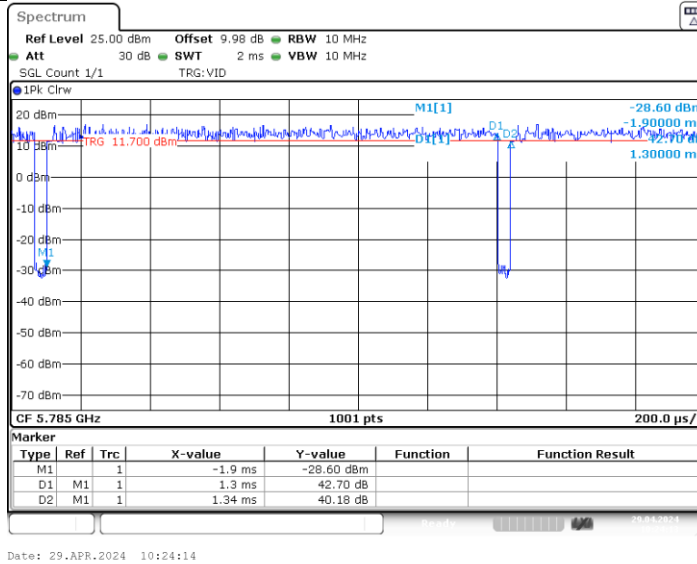

11N20SISO_Ant1_5825

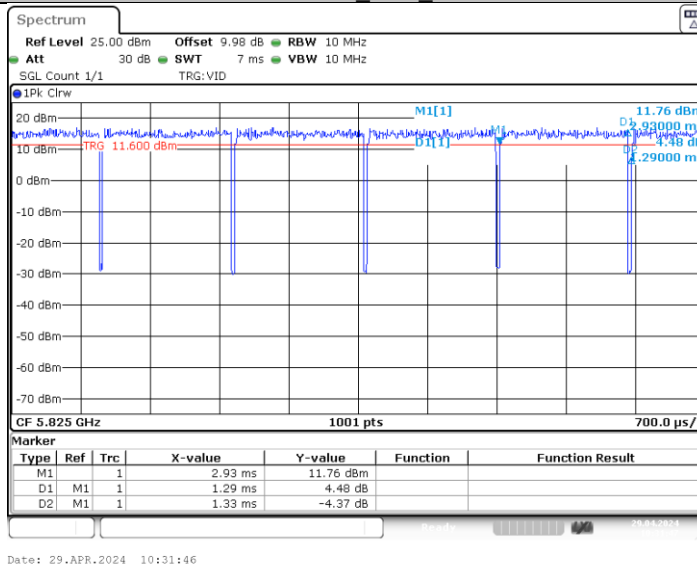


11N40SISO_Ant1_5190

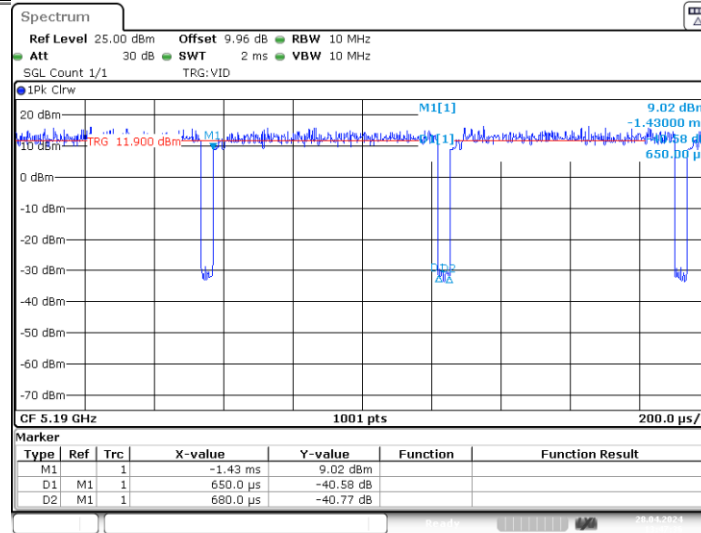


Date: 28.APR.2024 13:47:35

11N40SISO_Ant1_5230

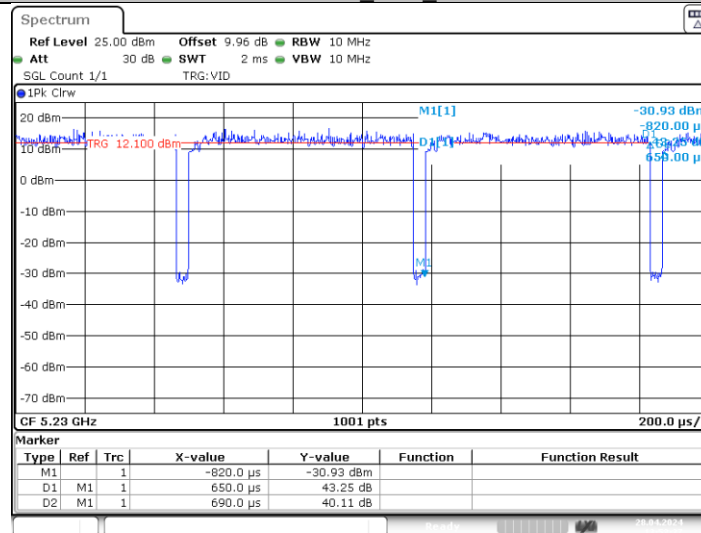


Date: 28.APR.2024 13:53:37

11N40SISO_Ant1_5270

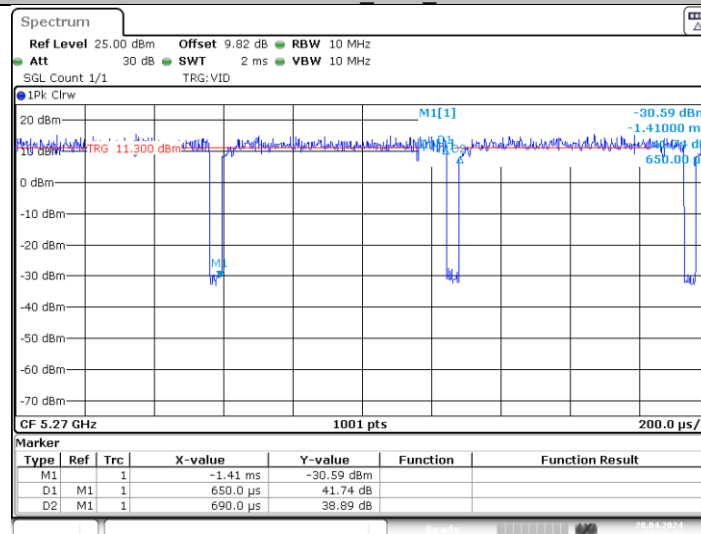


Date: 28.APR.2024 13:58:43

11N40SISO_Ant1_5310

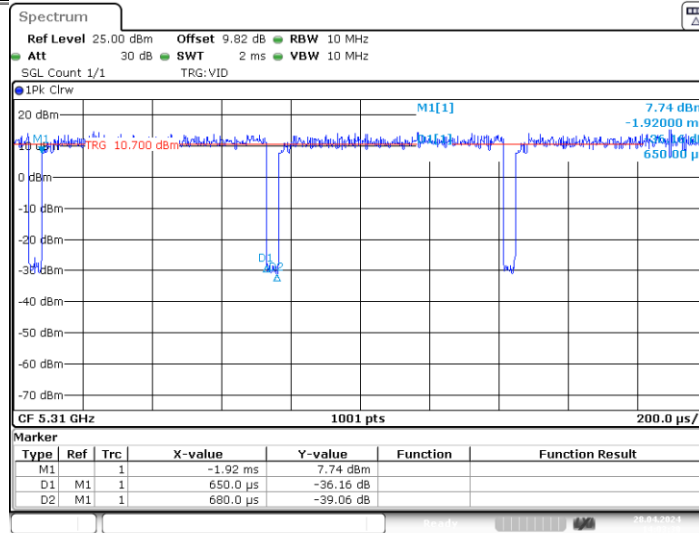


Date: 28.APR.2024 14:03:31

11N40SISO_Ant1_5755

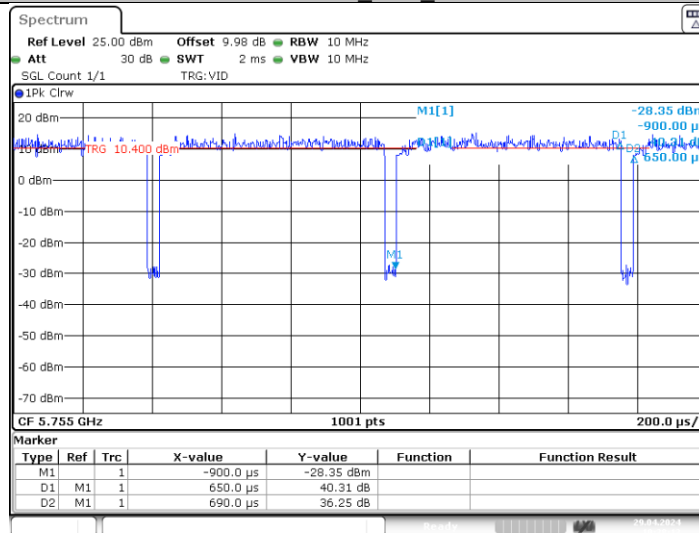


Date: 29.APR.2024 10:38:13

11N40SISO_Ant1_5795

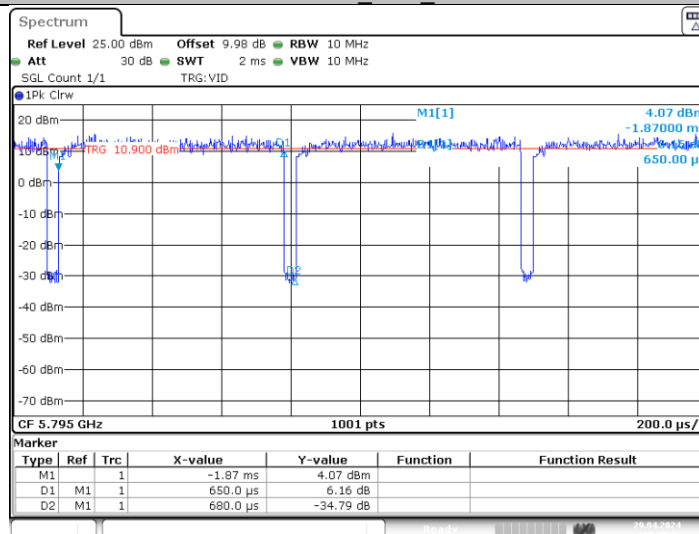


Date: 29.APR.2024 10:49:36

11AC20SISO_Ant1_5180

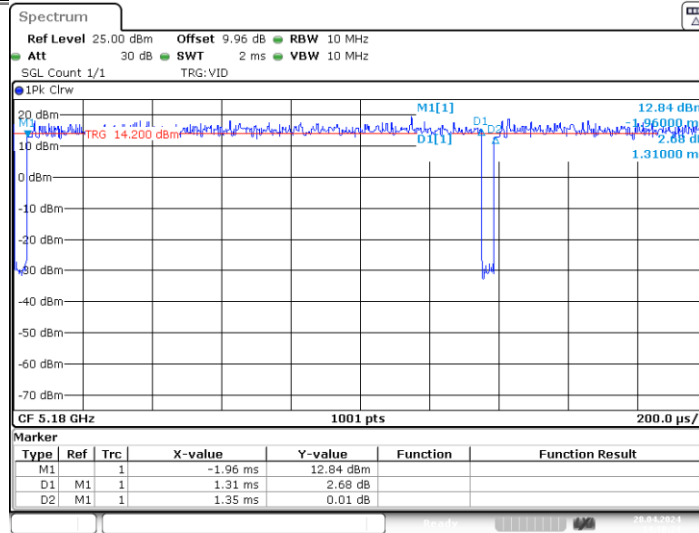


Date: 28.APR.2024 14:10:24

11AC20SISO_Ant1_5200

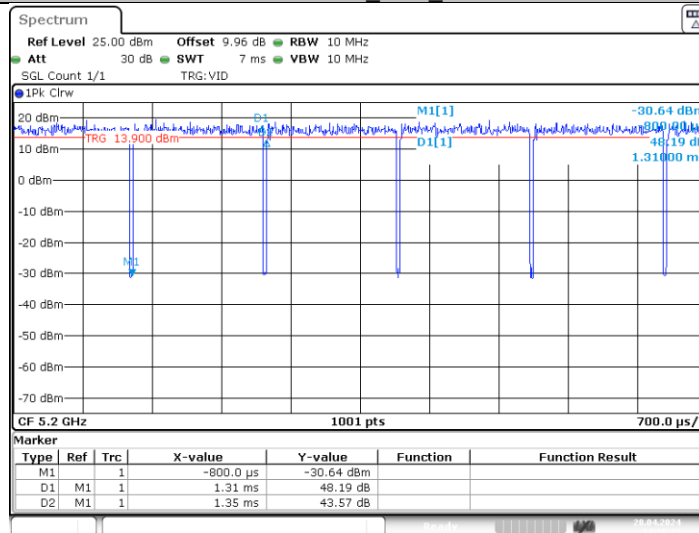


Date: 28.APR.2024 14:16:32

11AC20SISO_Ant1_5240

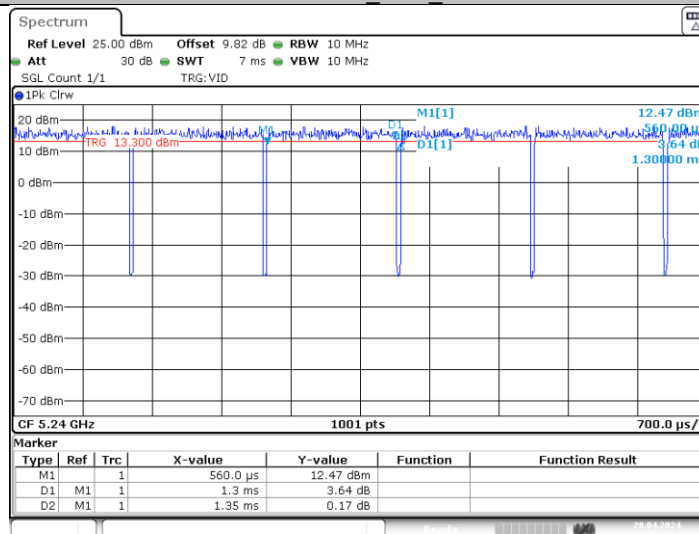


Date: 28.APR.2024 14:21:43

11AC20SISO_Ant1_5260

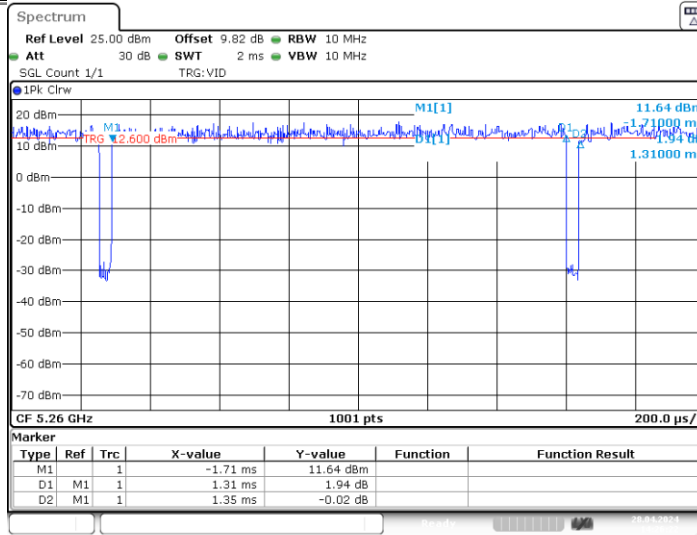


Date: 28.APR.2024 14:26:22

11AC20SISO_Ant1_5280

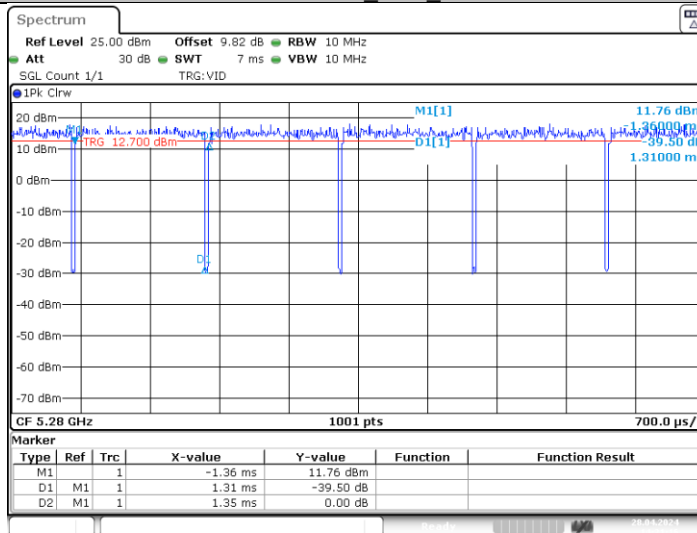


Date: 28.APR.2024 14:31:15

11AC20SISO_Ant1_5320

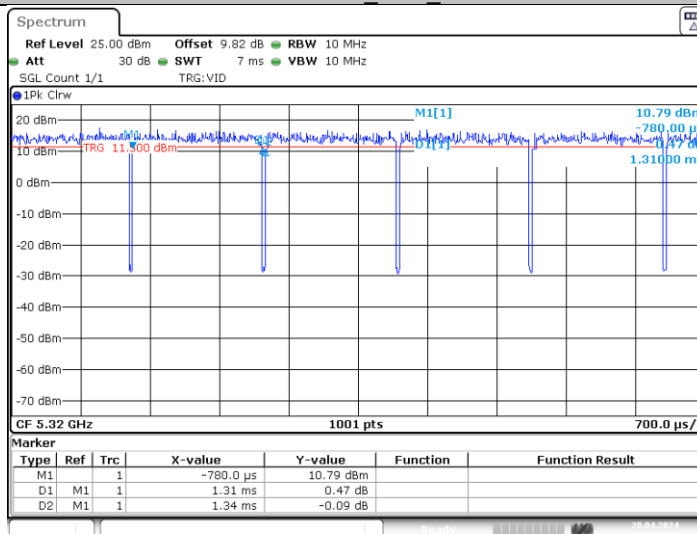


Date: 28.APR.2024 14:36:31


11AC20SISO_Ant1_5745

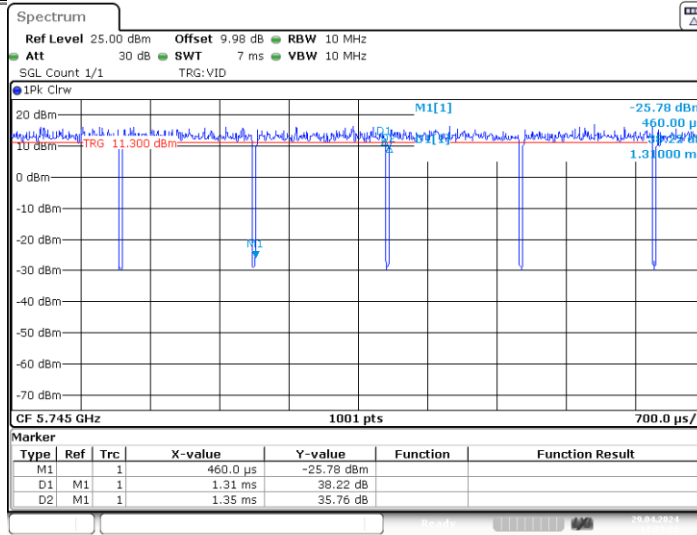


11AC20SISO_Ant1_5785

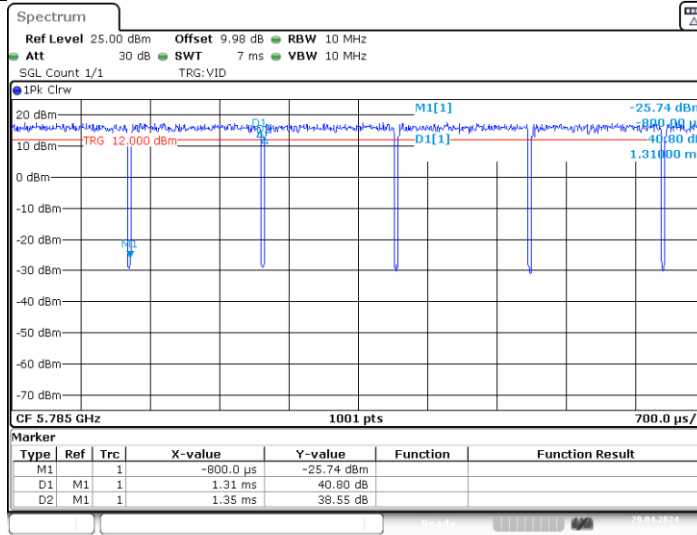


11AC20SISO_Ant1_5825

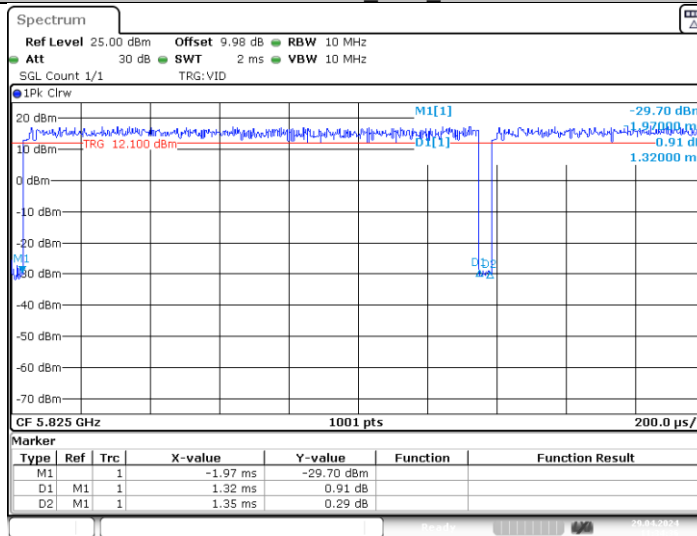


11AC40SISO_Ant1_5190

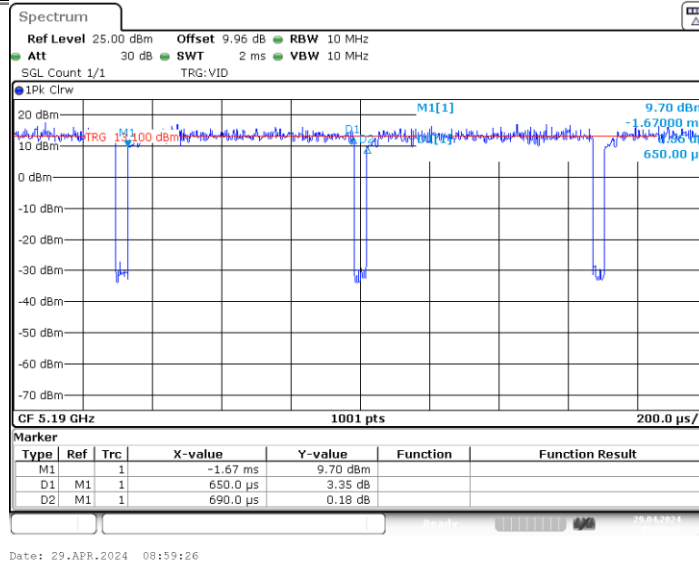


11AC40SISO_Ant1_5230

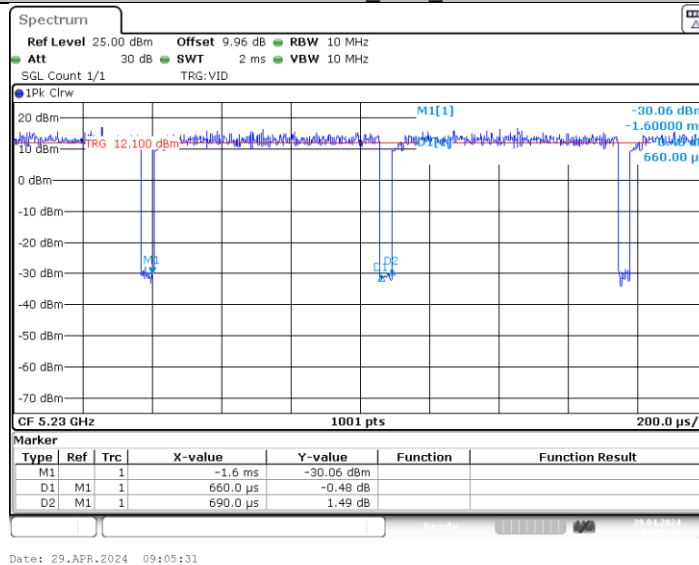

11AC40SISO_Ant1_5270

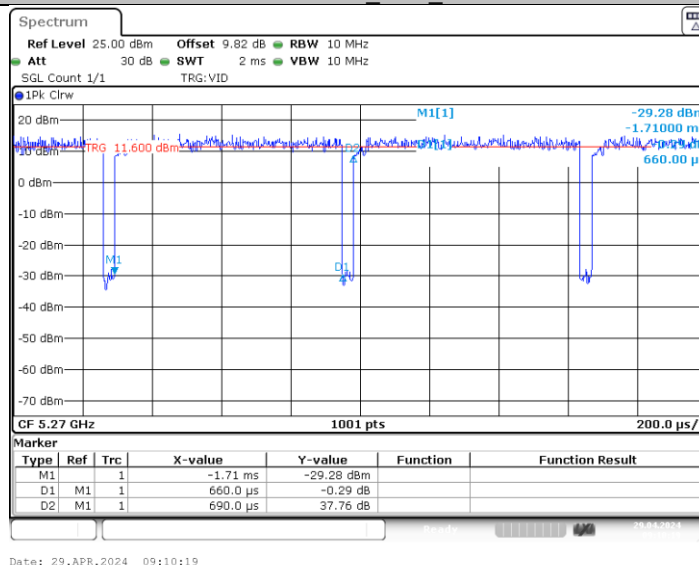


11AC40SISO_Ant1_5310

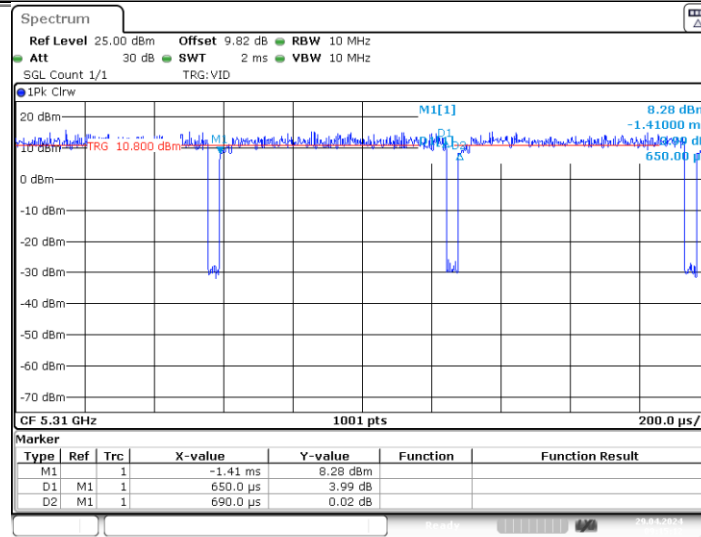


Date: 29.APR.2024 09:15:13

11AC40SISO_Ant1_5755

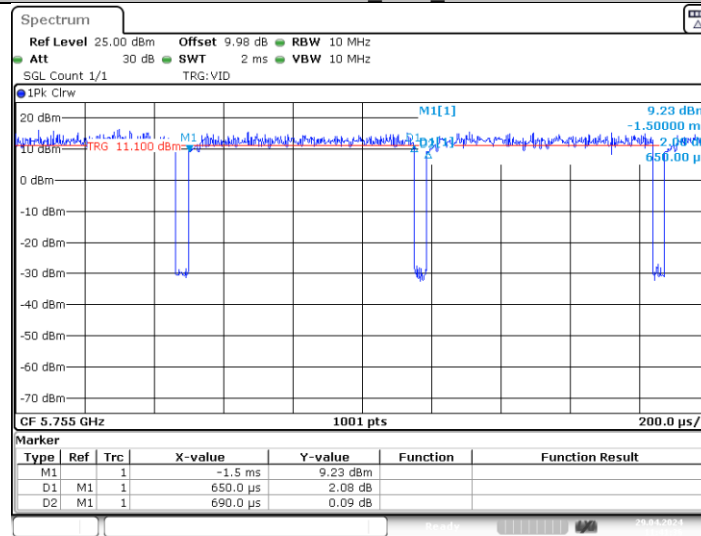


Date: 29.APR.2024 11:41:36

11AC40SISO_Ant1_5795

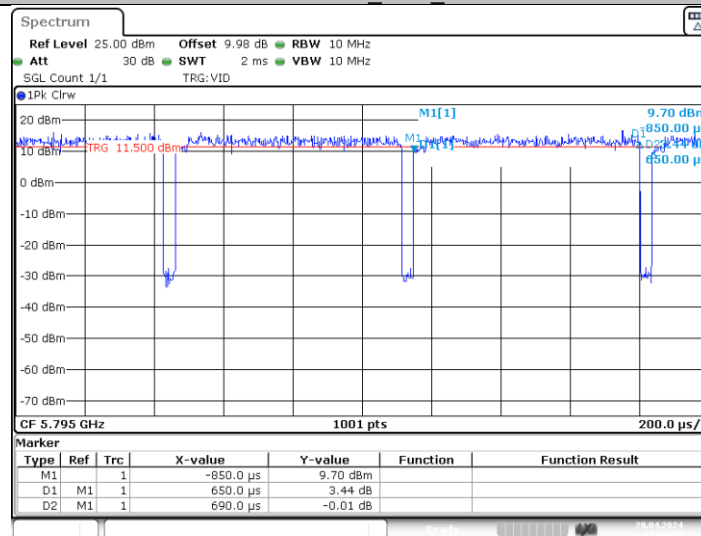


Date: 29.APR.2024 11:48:38

11AC80SISO_Ant1_5210

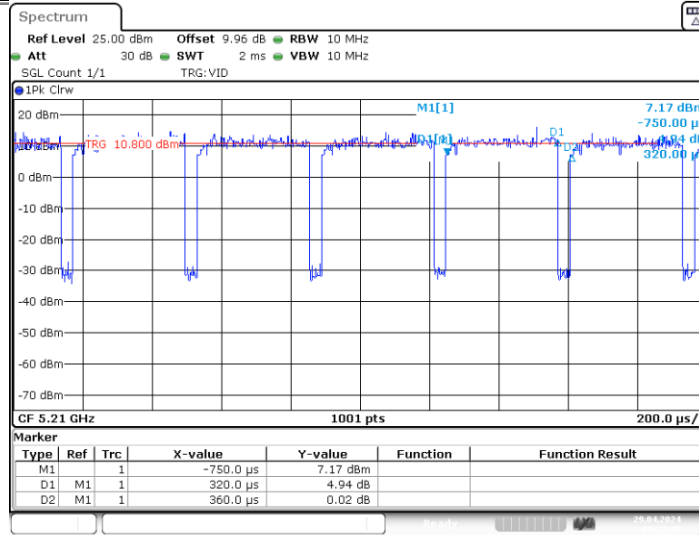


Date: 29.APR.2024 09:21:39

11AC80SISO_Ant1_5290

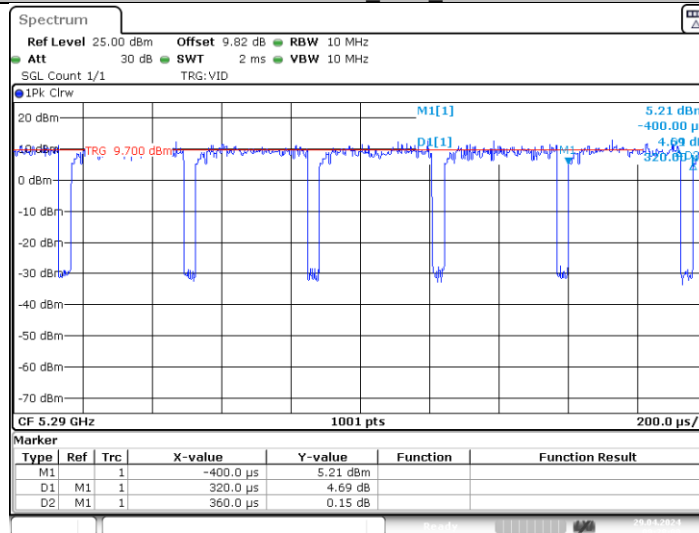

Date: 29.APR.2024 09:28:00

11AC80SISO_Ant1_5775

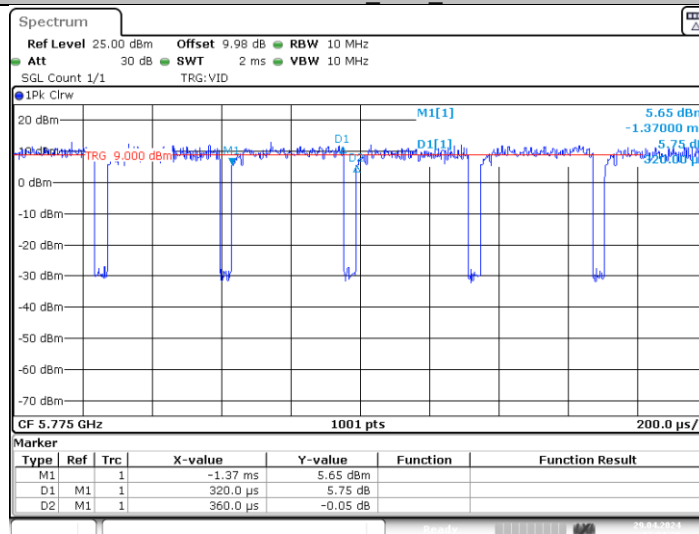

Date: 29.APR.2024 12:01:28

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth set VBW> 1/T, Trefers to the minimum transmission duration over which the transmitter is on and istransmitting at its maximum power control level for the tested mode of operation.

2.4BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED

EUT

2.5SUPPORT UNITS

Support Equipment				
No.	Equipment	Brand Name	Model Name	Remarks
1	/	/	/	/

3.AC POWER LINE CONDUCTED EMISSIONS

3.1LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the groundplane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3DEVIATIONFROMTESTSTANDARD

No deviation