

Ant. Pol. Horizontal

Test Mode: N(HT20) Mode 2462MHz

110.0 dBuV/m

FCC Part15 Class C 3M Above-16 Peak

FCC Part15 Class C 3M Above-16 AV

No.	Frequency (MHz)	Factor (dB/m)		Level (dBuV/m)		Margin (dB)	Detector
1	2483.500	31.50	36.50	68.00	74.00	-6.00	peak
2	2483.500	31.50	15.91	47.41	54.00	-6.59	AVG

2508.80

2520.80

2532.80

2544.80

2568.80 MHz

Remarks:

10.0

2448.800 2460.80


2472.80

2484.80

2496.80

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



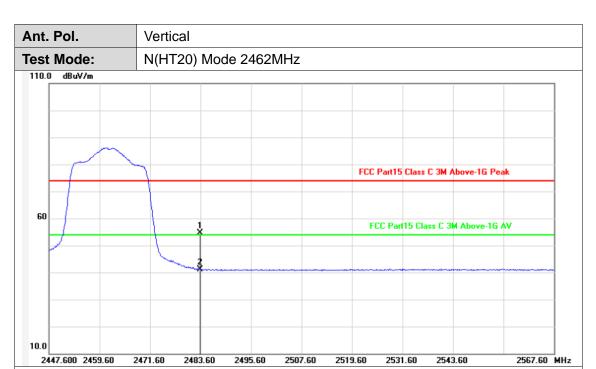


No.	Frequency (MHz)	l		Level (dBuV/m)	I		Detector
1	2483.500	31.50	23.16	54.66	74.00	-19.34	peak
2	2483.500	31.50	9.69	41.19	54.00	-12.81	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



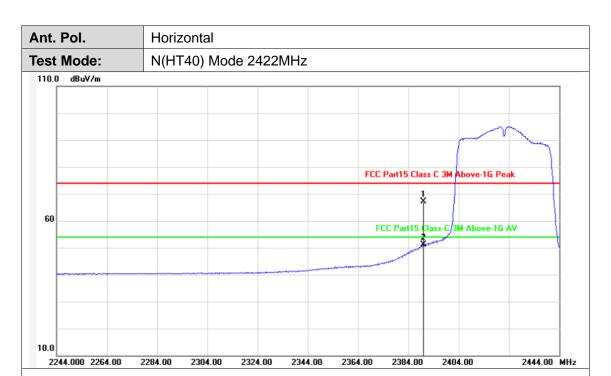


No.	Frequency (MHz)	I		Level (dBuV/m)	I	Margin (dB)	Detector
1	2390.000	31.10	35.94	67.04	74.00	-6.96	peak
2	2390.000	31.10	20.05	51.15	54.00	-2.85	AVG

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2443.90 MHz



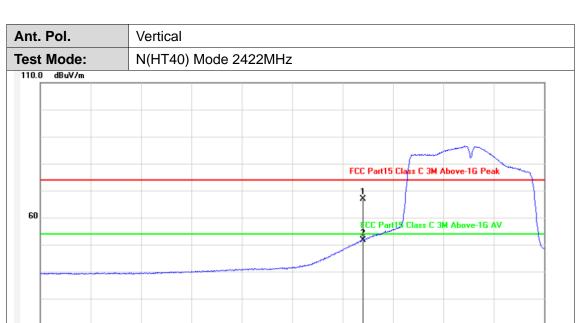

No.	Frequency (MHz)	Factor (dB/m)	_	Level (dBuV/m)		Margin (dB)	Detector
1	2390.000	31.10	35.86	66.96	74.00	-7.04	peak
2	2390.000	31.10	20.63	51.73	54.00	-2.27	AVG

2368.90

2383.90

2398.90

2413.90

Remarks:

10.0

2293.900 2308.90

2323.90

2338.90

2353.90

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor



Test Mode: N(HT40) Mode 2452MHz

110.0 dBuV/m

FCC Part15 Class C 3M Above-16 Peak

FCC Part15 Class C 3M Above-16 AV

No.	Frequency (MHz)	Factor (dB/m)		Level (dBuV/m)		Margin (dB)	Detector
1	2483.500	31.50	33.04	64.54	74.00	-9.46	peak
2	2483.500	31.50	15.89	47.39	54.00	-6.61	AVG

2528.00

2548.00

2568.00

2588.00

2628.00 MHz

Remarks:

2428.000 2448.00

2468.00

2488.00

2508.00

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2581.00 MHz



Ant. Pol. Vertical **Test Mode:** N(HT40) Mode 2452MHz 110.0 dBuV/m FCC Part15 Class C 3M Above-1G Peak 60 FCC Part15 Class C 3M Above-1G AV

No.	Frequency (MHz)	I		Level (dBuV/m)		Margin (dB)	Detector
1	2483.500	31.50	28.24	59.74	74.00	-14.26	peak
2	2483.500	31.50	11.48	42.98	54.00	-11.02	AVG

2506.00

2521.00

2536.00

2551.00

Remarks:

10.0

2431.000 2446.00

2461.00

2476.00


2491.00


1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor







Conducted Emission data:

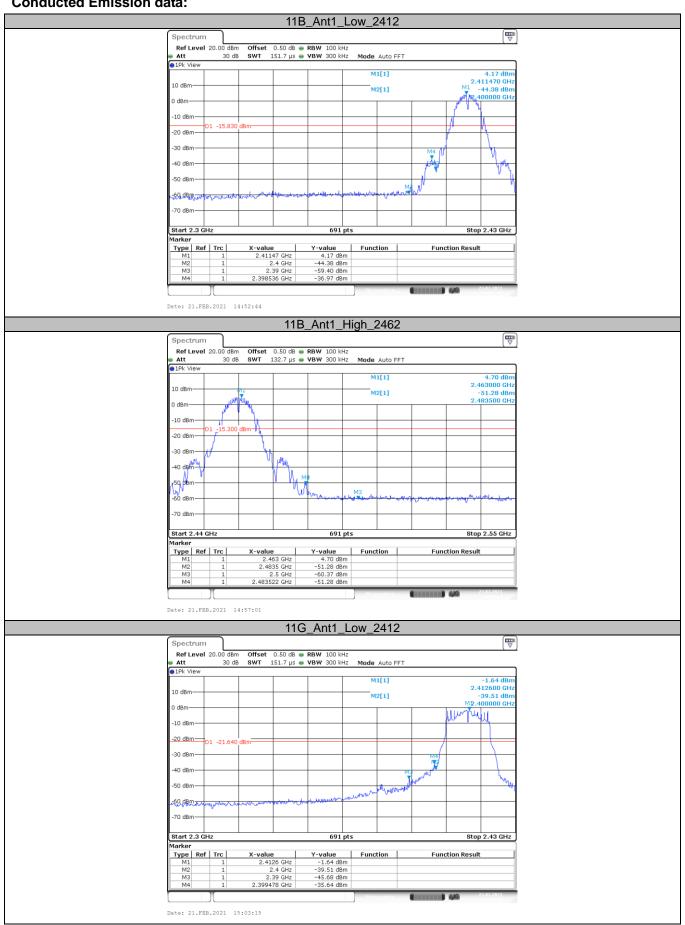



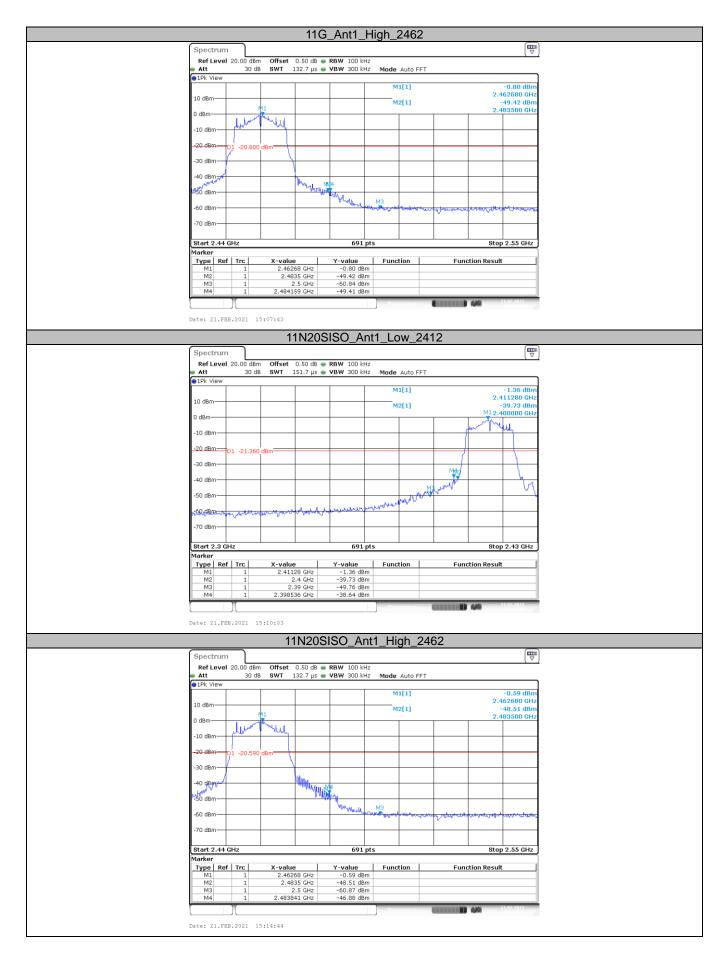



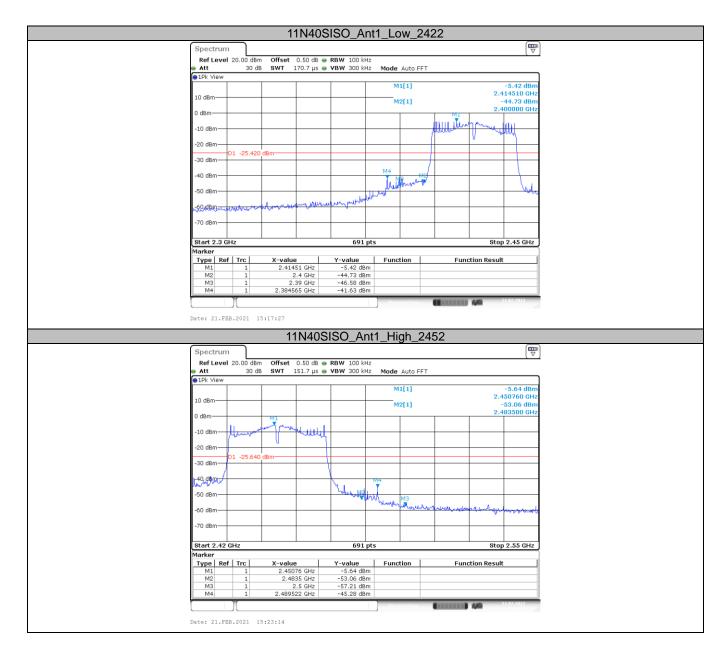




3.4. Bandwidth

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2)

Test Item	Limit	Frequency Range(MHz)
Bandwidth	>=500 KHz (6dB bandwidth)	2400~2483.5

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. DTS Spectrum Setting:
 - (1) Set RBW = 100 kHz.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.
 - **OCB Spectrum Setting:**
 - (1) Set RBW = $1\% \sim 5\%$ occupied bandwidth.
 - (2) Set the video bandwidth (VBW) ≥ 3 RBW.
 - (3) Detector = Peak.
 - (4) Trace mode = Max hold.
 - (5) Sweep = Auto couple.

NOTE: The EUT was set to continuously transmitting in each mode and low, Middle and high channel for the test.

Test Mode

Please refer to the clause 2.3.







Test Results


Туре	Channel	99% Bandwidth (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result	
	01	11.748	8.120			
802.11b	06	11.788	8.120	≥500	Pass	
	11		8.120			
	01	16.983	15.520			
802.11g	06	17.103	15.560	≥500	Pass	
	11	16.903	15.240			
	01	18.062	15.240			
802.11n(HT20)	06	18.102	15.240	≥500	Pass	
	11	17.982	15.240			
	03	36.124	35.360			
802.11n(HT40)	06	35.964	35.360	≥500	Pass	
	09	35.964	35.360			

CTC Laboratories, Inc.









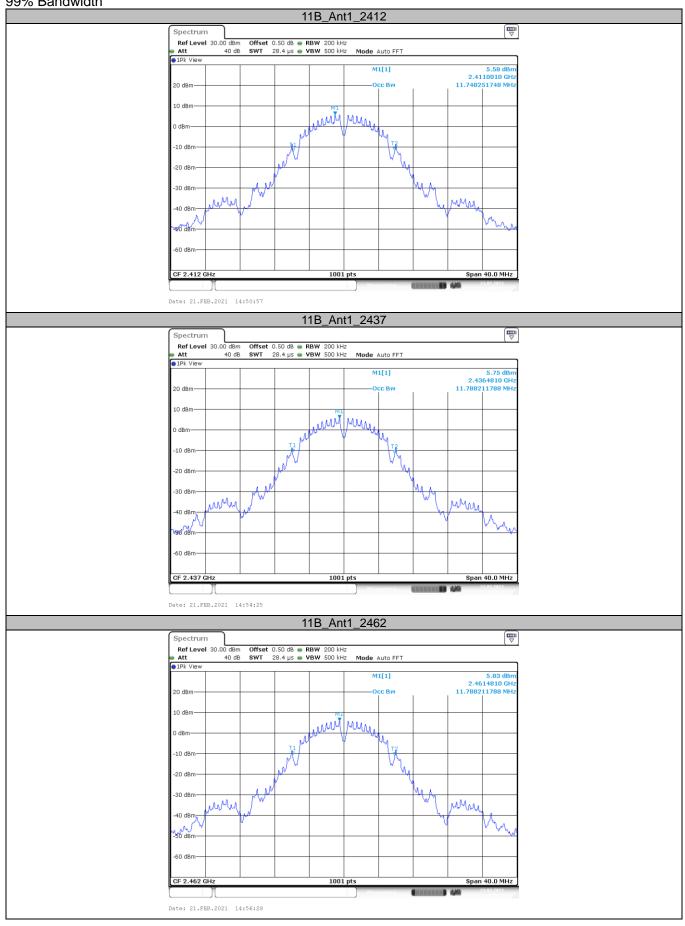





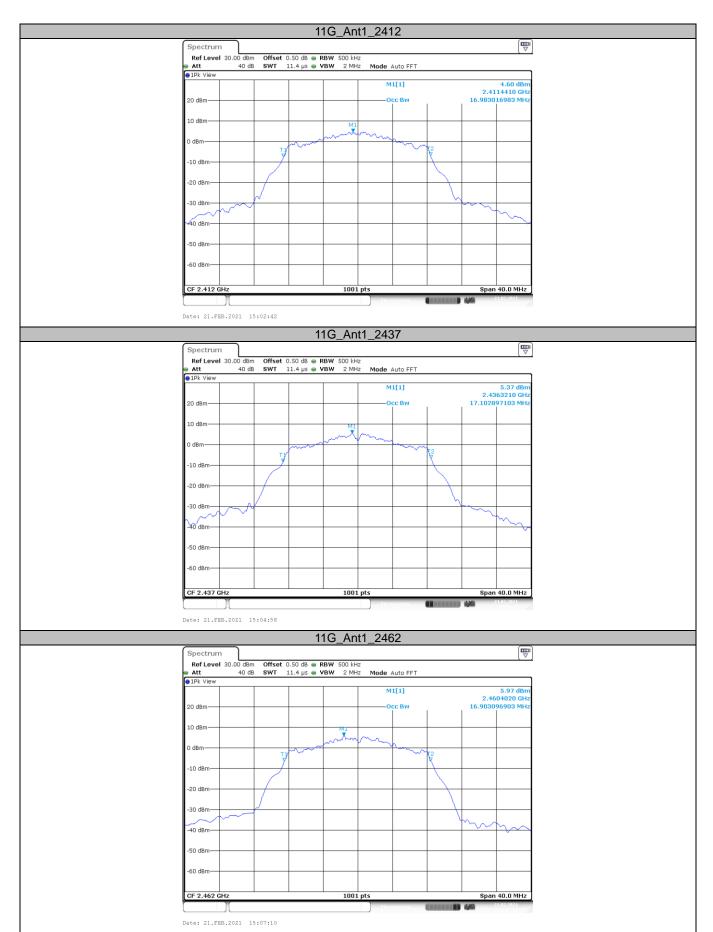




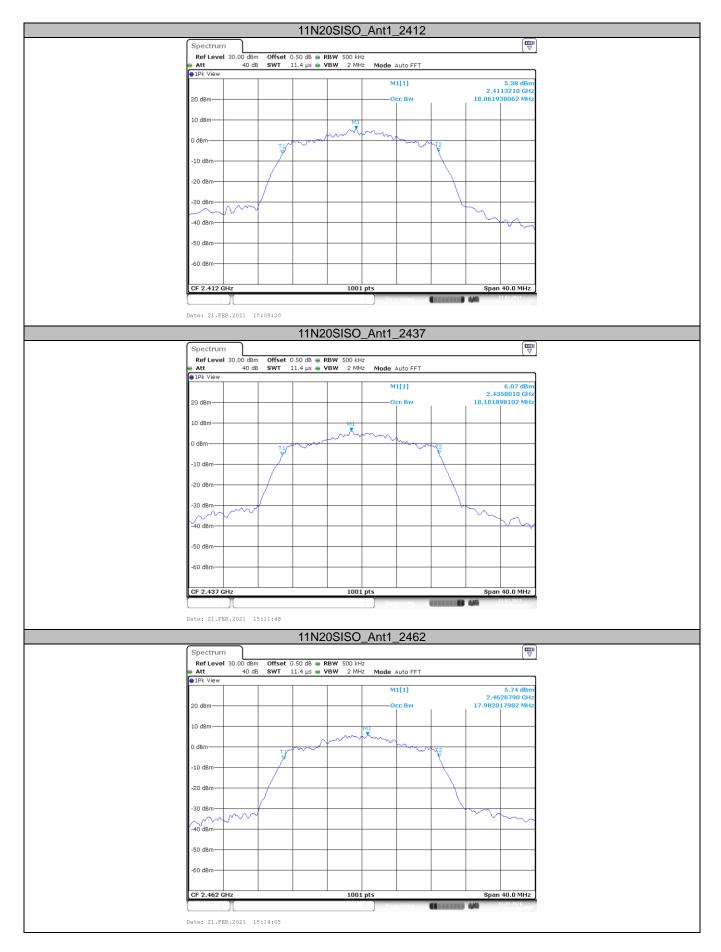

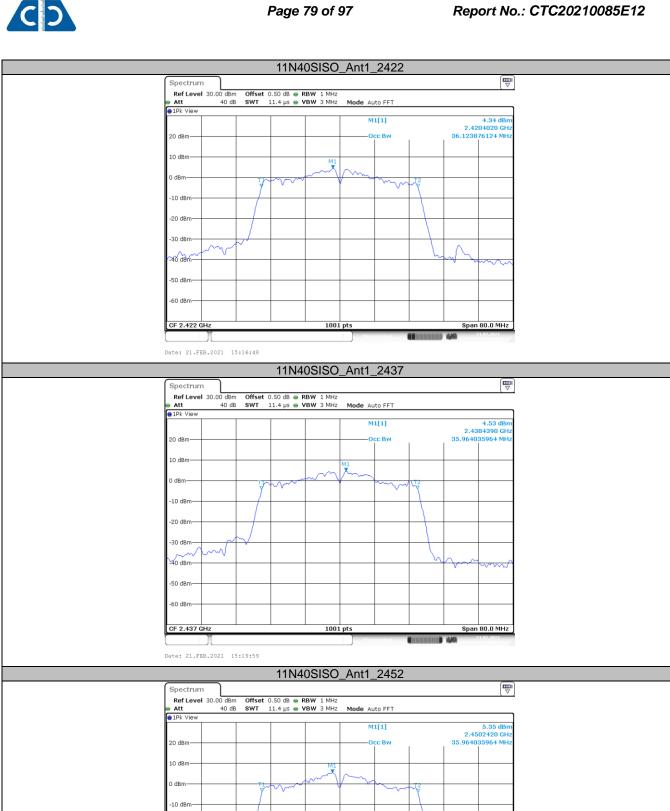




-30 dBm 40 dBm -50 dBm -60 dBm

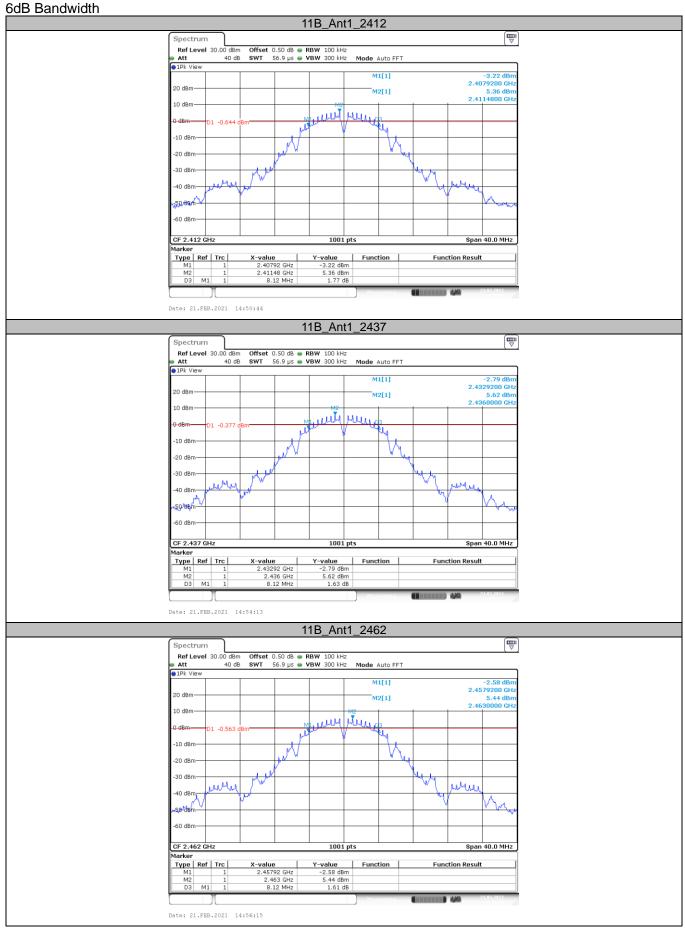




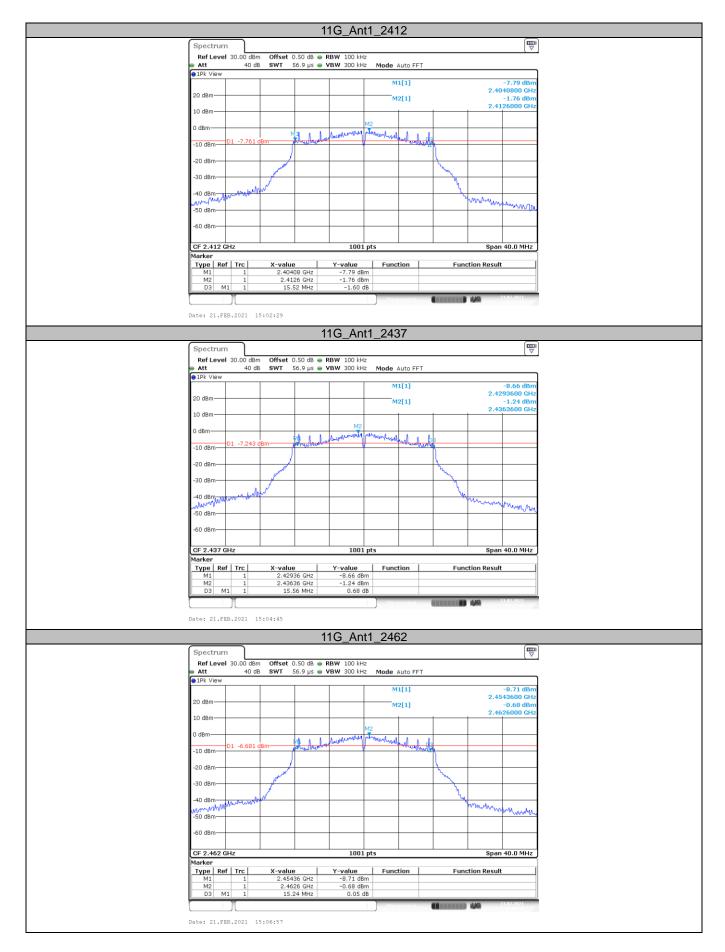






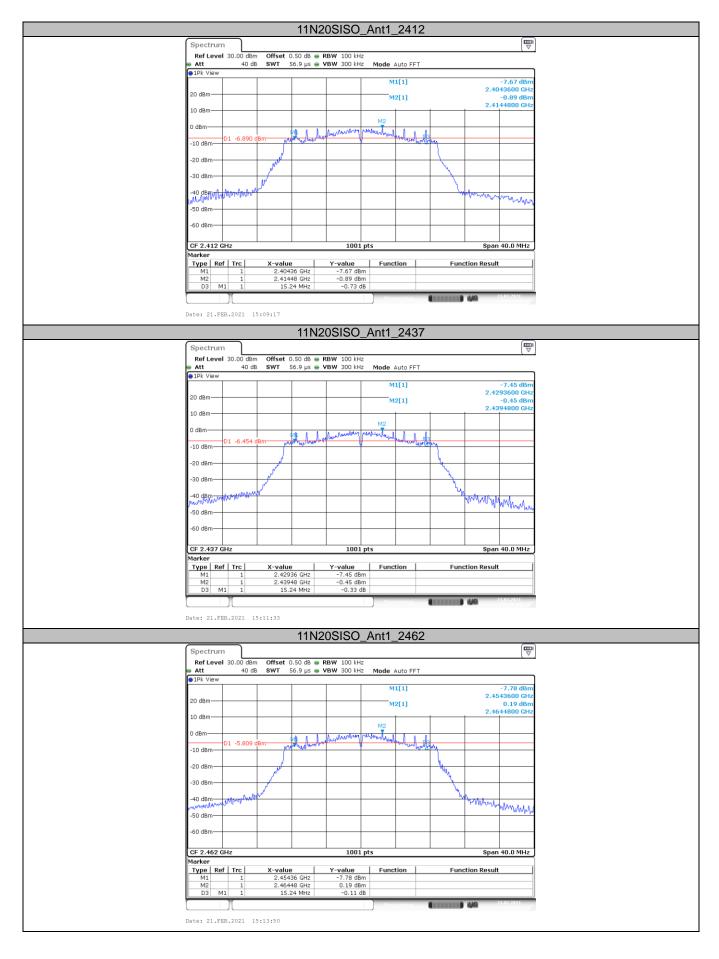



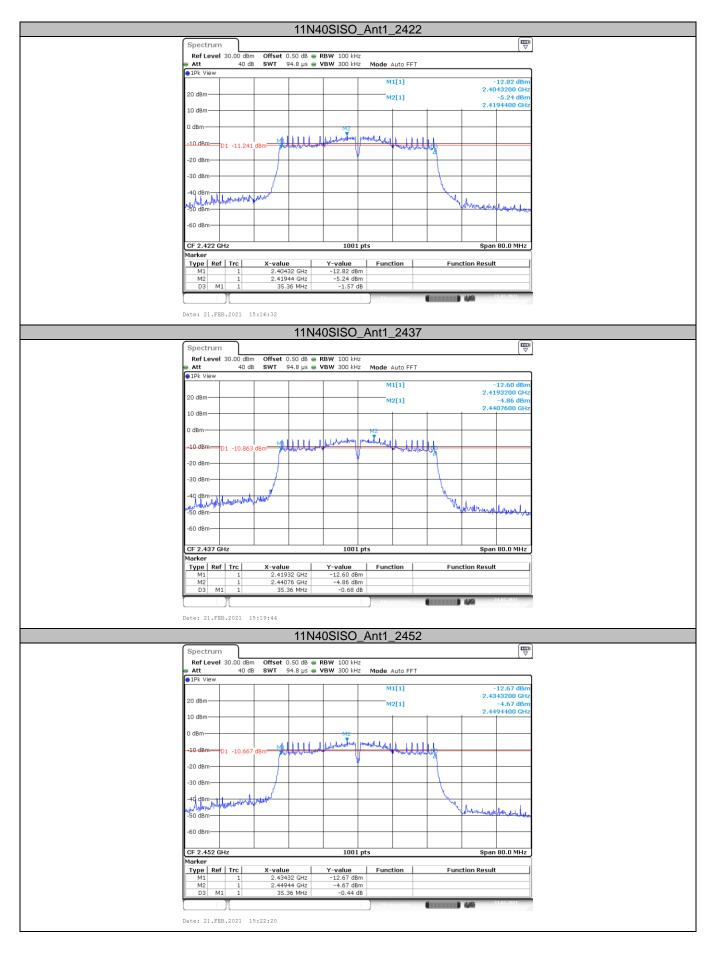




3.5. Peak Output Power

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3)

Section	Test Item	Limit	Frequency Range(MHz)
CFR 47 FCC 15.247(b)(3)	Maximum conducted output power	1 Watt or 30dBm	2400~2483.5

Test Configuration



Test Procedure

- 1. The maximum conducted output power may be measured using a broadband Peak RF power meter.
- 2. Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor.
- 3. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.
- 4. Record the measurement data.

Test Mode

Please refer to the clause 2.3

Test Result





TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
		2412	15.84	<=30 PA	PASS
11B	Ant1	2437	16.11		PASS
		2462	16.23	<=30	PASS
		2412	17.84	<=30	PASS
11G	Ant1	2437	18.42	<=30	PASS
		2462	18.63	<=30	PASS
		2412	18.22	<=30	PASS
11N20SISO	Ant1	2437	18.63	<=30	PASS
		2462	19.04	<=30	PASS
		2422	16.88	<=30	PASS
11N40SISO	Ant1	2437	17.26	<=30 PAS	PASS
		2452	17.47	<=30	PASS

Note: Test results increased RF cable loss by 0.5dB.

Page 86 of 97

Report No.: CTC20210085E12



3.6. Power Spectral Density

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

Test Item	Limit	Frequency Range(MHz)
Power Spectral Density	8dBm(in any 3 kHz)	2400~2483.5

Test Configuration



Test Procedure

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz Set the VBW to: 10 kHz

Detector: peak Sweep time: auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.

Test Mode

Please refer to the clause 2.3






Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
		2412	-8.21	<=8	PASS
11B	Ant1	2437	-8.19	<=8	PASS
		2462	-9.21	<=8	PASS
		2412	-12.67	<=8	PASS
11G	Ant1	2437	-12.37	<=8	PASS
		2462	-12.25	<=8	PASS
		2412	-12.54	<=8	PASS
11N20SISO	Ant1	2437	-12.35	<=8	PASS
		2462	-12.00	<=8	PASS
		2422	-18.00	<=8	PASS
11N40SISO	Ant1	2437	-16.14	<=8	PASS
		2452	-16.02	<=8	PASS


Note: Duty Cycle Correction Factor = 10*log(1/duty cycle)


The Duty Cycle Correction Factor is compensated in the graph.




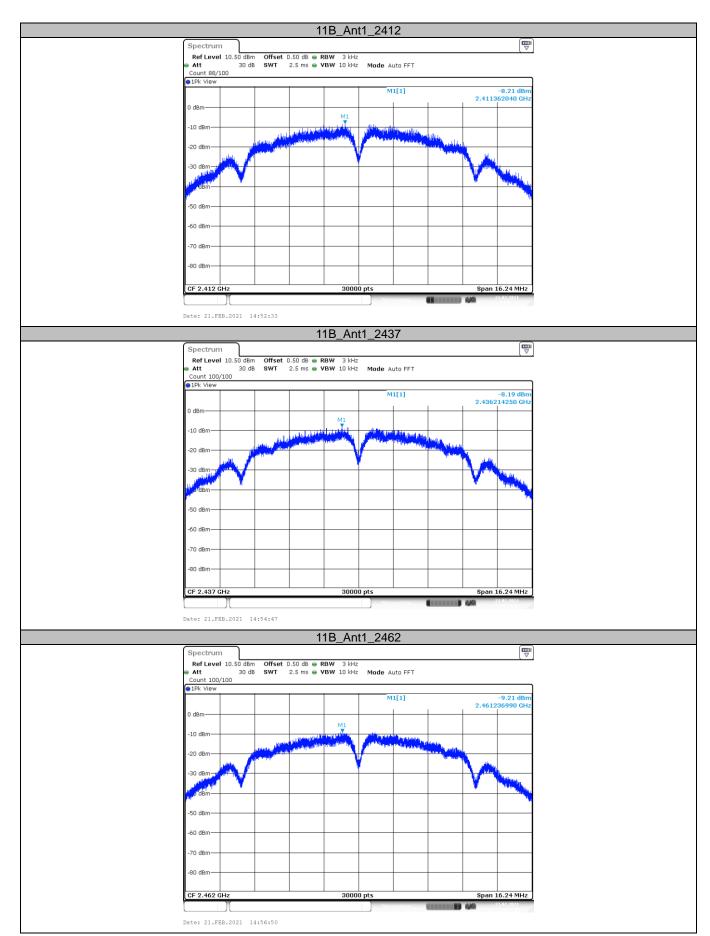




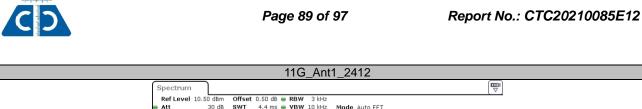

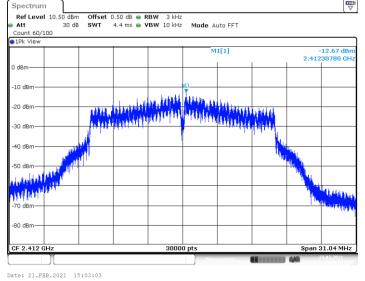

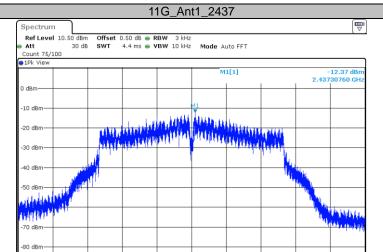


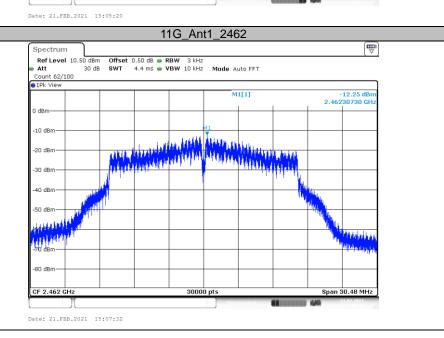


CF 2.437 GH





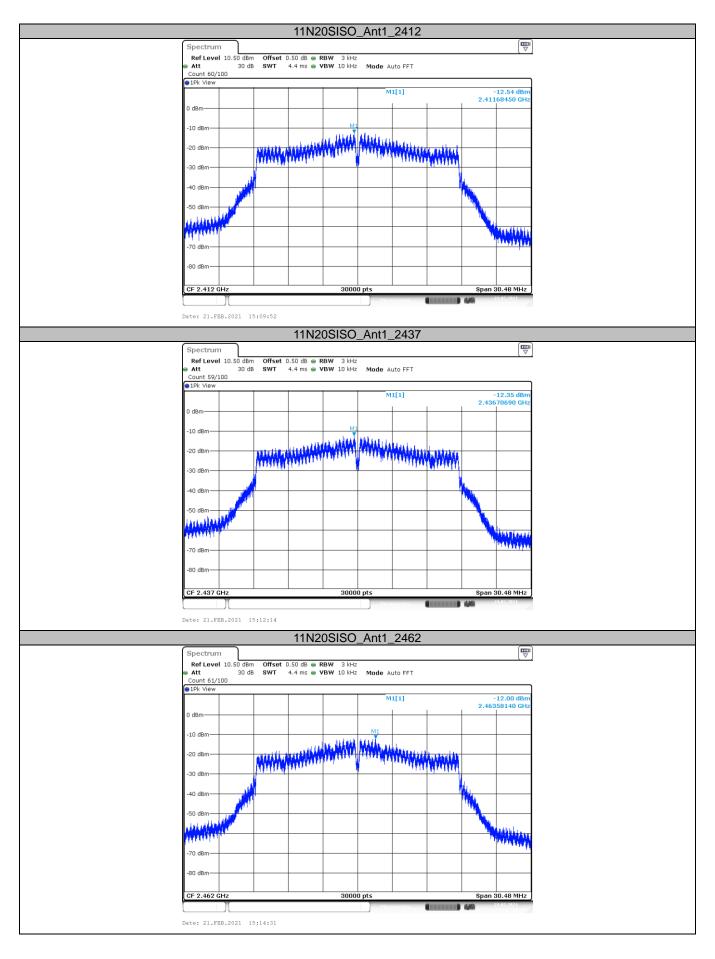



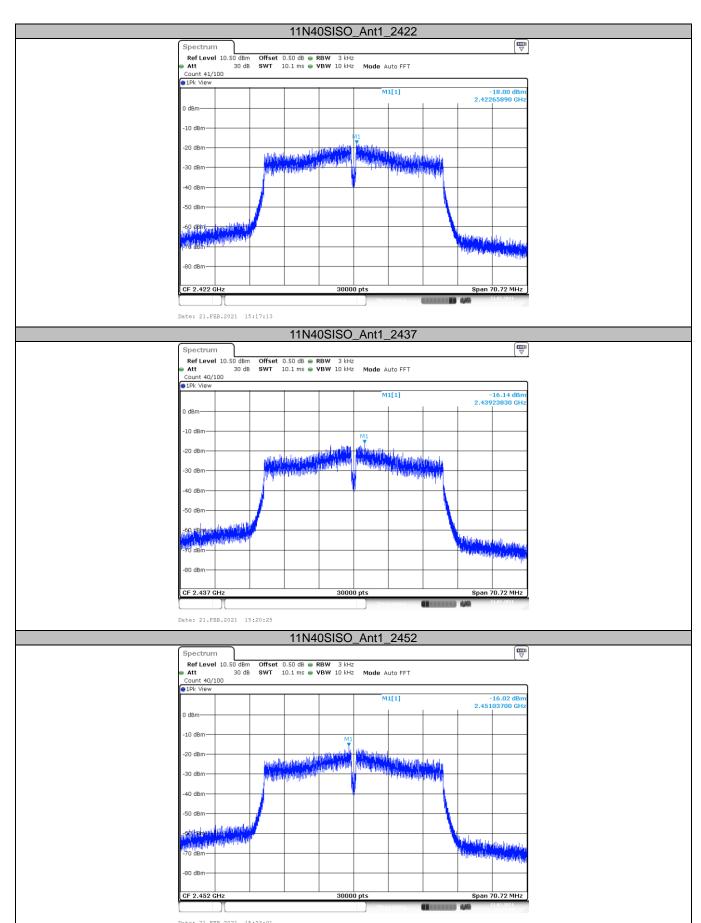




3.7. Duty Cycle

Limit

None, for report purposes only.

Test Configuration



Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- 2. The EUT was directly connected to the Spectrum Analyzer and antenna output port as show in the block diagram above. The measurement according to section 10.2 of KDB 558074 D01 DTS Meas Guidance v05r02.
- 3. Spectrum Setting:

Set analyzer center frequency to DTS channel center frequency.

Set the span to 0Hz Set the RBW to 10MHz Set the VBW to 10MHz

Detector: peak Sweep time: auto

Allow trace to fully stabilize. Then use the peak marker function to determine the maximum amplitude level.


Test Mode

Please refer to the clause 2.3

Test Result


TestMode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]
11B	Ant1	2412	8.39	8.49	98.82
		2437	8.39	8.49	98.82
		2462	8.39	8.49	98.82
11G	Ant1	2412	1.38	1.49	92.95
		2437	1.39	1.49	93.03
		2462	1.39	1.49	92.95
11N20SISO	Ant1	2412	1.30	1.40	92.60
		2437	1.30	1.40	92.51
		2462	1.30	1.40	92.51
11N40SISO	Ant1	2422	0.64	0.69	93.45
		2437	0.64	0.69	93.44
		2452	0.64	0.69	93.44



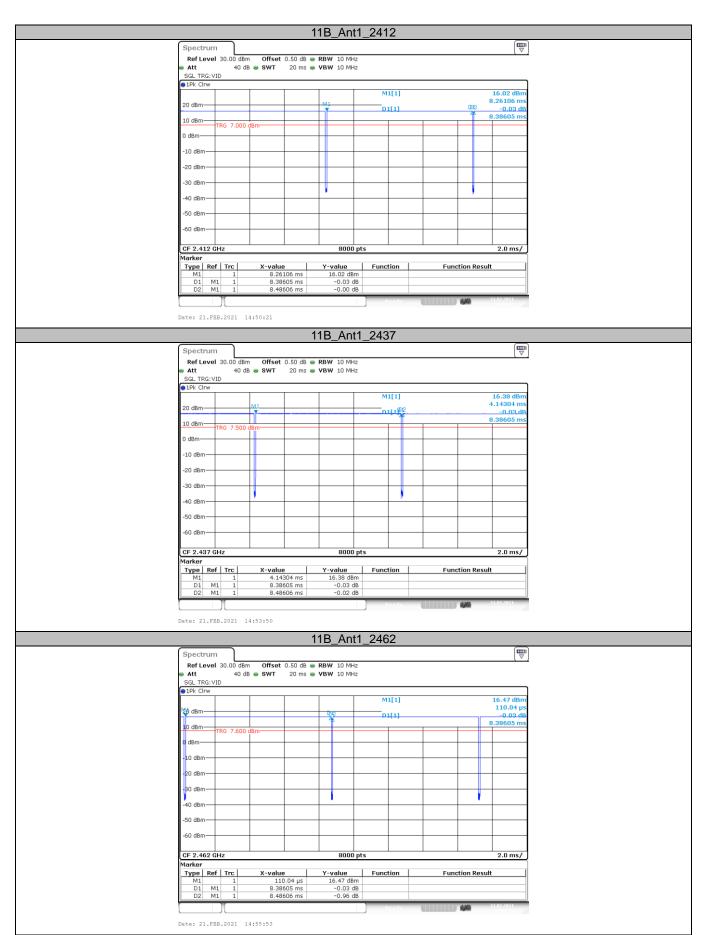


CTC Laboratories, Inc.



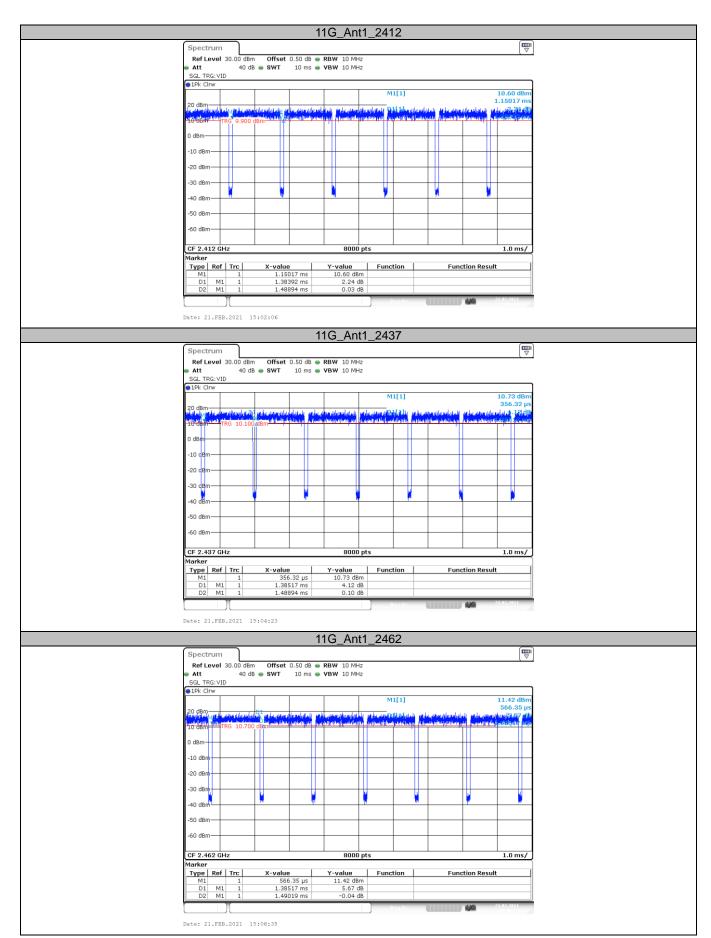


CTC Laboratories, Inc.



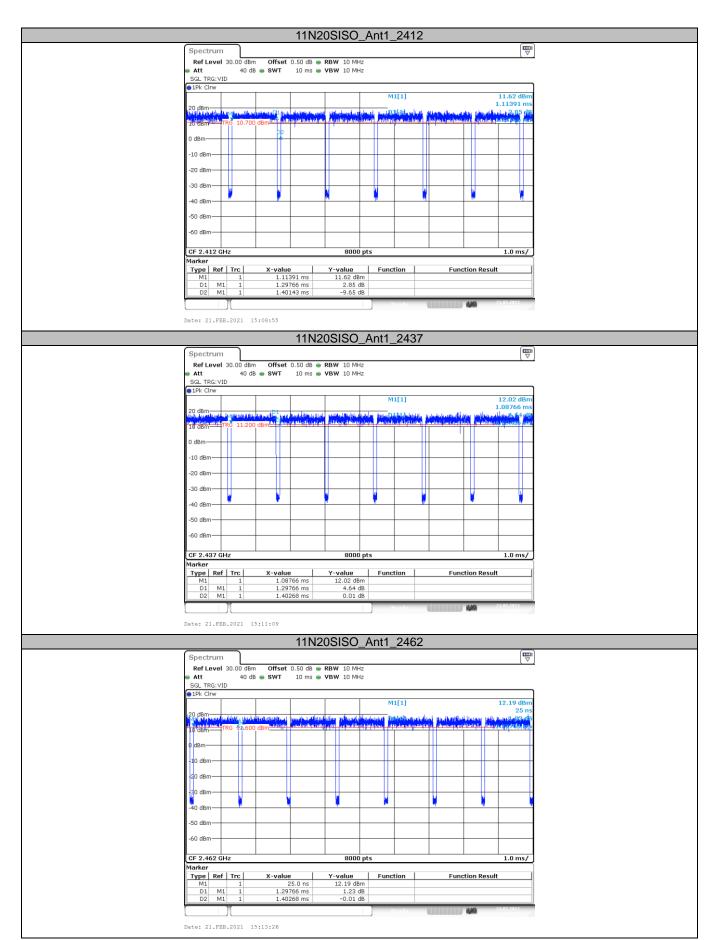



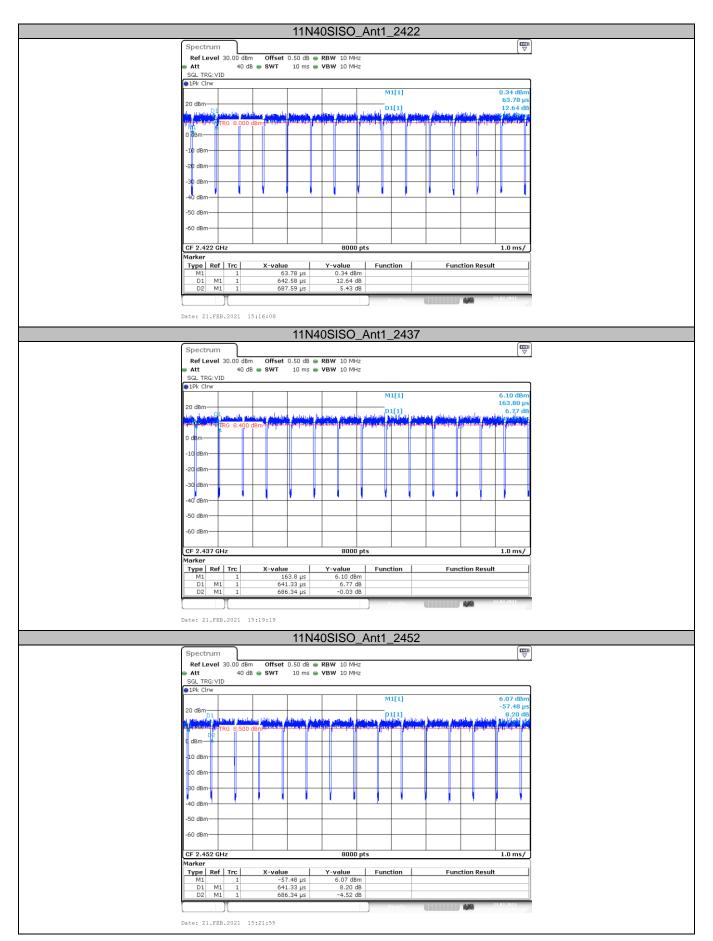

CTC Laboratories, Inc.





3.8. Antenna requirement

Requirement

FCC CFR Title 47 Part 15 Subpart C Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):

(i) Systems operating in the 2400~2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result

The directional gain of the antenna less than 6dBi, please refer to the EUT internal photographs antenna photo.

