

FCC TEST REPORT

Client Name : Autel Intelligent Tech. Corp., Ltd.

Address : 7th-8th, 10th Floor, Bldg. B1, Zhiyuan,Xueyuan Rd. Xili,
Nanshan Shenzhen China

Product Name : AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM

Date : Jul. 09, 2021

Shenzhen Anbotech Compliance Laboratory Limited



Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of Channels.....	6
1.6. Description of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	12
4. Radiated Emission and Band Edge.....	21
4.1. Test Standard and Limit.....	21
4.2. Test Setup.....	22
4.3. Test Procedure.....	23
4.4. Test Data.....	24
5. 20DB Occupy Bandwidth Test.....	34
5.1. Test Standard and Limit.....	34
5.2. Test Setup.....	34
5.3. Test Procedure.....	34
5.4. Test Data.....	34
6. Dwell Time Test.....	38
6.1. Test Standard and Limit.....	38
6.2. Test Setup.....	38
6.3. Test Procedure.....	38
6.4. Test Data.....	38
7. Antenna Requirement.....	41
7.1. Test Standard and Requirement.....	41
7.2. Antenna Connected Construction.....	41
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	42
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	44
APPENDIX III -- INTERNAL PHOTOGRAPH.....	44



TEST REPORT

Applicant : Autel Intelligent Tech. Corp., Ltd.
Manufacturer : Autel Intelligent Tech. Corp., Ltd.
Product Name : AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM
Model No. : MS906 Pro-TS
Trade Mark : AUTEL
Rating(s) : Input: DC 12V, 3A (with DC 3.85V, 11600mAh battery inside)

Test Standard(s) : FCC Part15 Subpart C, Section 15.231

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotech Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotech Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotech Compliance Laboratory Limited.

Date of Receipt

Apr. 20, 2021

Date of Test

Apr. 20~May 10, 2021

Prepared by



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Autel Intelligent Tech. Corp., Ltd.
Address	:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan Shenzhen China
Manufacturer	:	Autel Intelligent Tech. Corp., Ltd.
Address	:	7th-8th, 10th Floor, Bldg. B1, Zhiyuan, Xueyuan Rd. Xili, Nanshan Shenzhen China
Factory 1	:	Autel Intelligent Technology Corp., Ltd. Guangming Branch
Address	:	7F&6F, East Wing, Building 2, and 6F of Electronical Building, Yanxiang Industrial Zone, Gaoxin Rd, Dongzhou Community of Guangming New District, Shenzhen
Factory 2	:	AUTEL VIETNAM COMPANY LIMITED
Address	:	4th Floor, Factory#6, Land#CN1, An Duong Industrial Zone, Hong Phong Township, An Duong County, Hai Phong, Viet Nam

1.2. Description of Device (EUT)

Product Name	:	AUTOMOTIVE DIAGNOSIS & ANALYSIS SYSTEM
Model No.	:	MS906 Pro-TS
Trade Mark	:	AUTEL
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter DC 3.85V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	BDR+EDR: 2402-2480MHz WiFi 2.4G: 802.11b/ g/ n(HT20): 2412-2462MHz WiFi 5.2G: 5180MHz~5240MHz WiFi 5.8G: 5745MHz~5825MHz SRD: 315MHz, 433.92MHz RF ID: 125KHz
	Number of Channel:	BDR+EDR: 79 Channels SRD: 2 Channels RF ID: 1 Channel WiFi 2.4G: 11 Channels for 802.11g/ n(HT20) WiFi 5.2G: 4 Channels for 802.11a/n(HT20)/ac(HT20) 2 Channels for 802.11n(HT40)/ac(HT40) 1 Channels for 802.11ac(HT80) WiFi 5.8G:

		5 Channels for 802.11a/n(HT20)/ac(HT20) 2 Channels for 802.11n(HT40)/ac(HT40) 1 Channels for 802.11ac(HT80)
	Modulation Type:	BDR+EDR: GFSK, $\pi/4$ -DQPSK, 8-DPSK SRD: FSK, ASK RF ID: ASK WiFi 2.4G: CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM WiFi 5G: OFDM with BPSK/QPSK/16QAM/64QAM/256QAM
	Antenna Type:	BDR+EDR: Ceramic antenna WiFi 2.4G & WiFi 5.2G & WiFi 5.8G: PIFA Antenna 433.92MHz&315 MHz&125KHz: Monopole antenna
	Antenna Gain(Peak):	BDR+EDR: 0 dBi WiFi 2.4G: 3.4 dBi WiFi 5.2G / WiFi 5.8G: 3.4 dBi 433.92MHz: 0 dBi 315 MHz: 0dBi 125KHz: 0 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for SRD module.		



1.3. Auxiliary Equipment Used During Test

N/A	:	
-----	---	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Frequency
TX Mode	315 MHz
TX Mode	433.92 MHz

For Radiated Emission	
Final Test Mode	Frequency
TX Mode	315 MHz
TX Mode	433.92 MHz

Note:



1. During the test, the EUT was keeping continuous transmission.

1.5. List of Channels

Mode	Frequency
Mode 1	315 MHz
Mode 2	433.92 MHz



1.6. Description of Test Setup

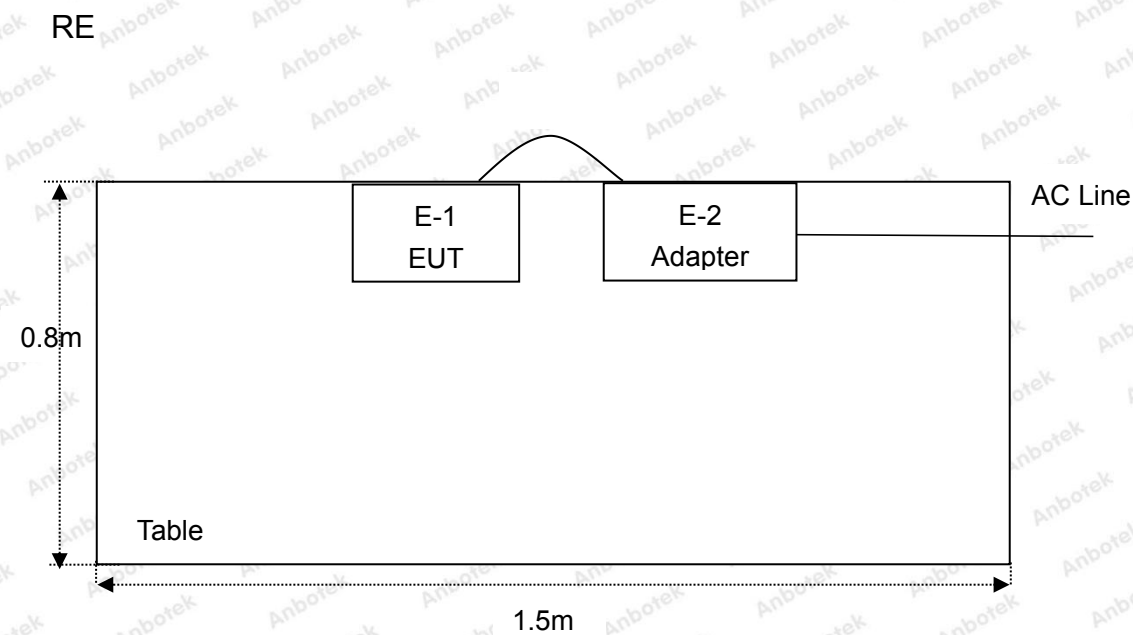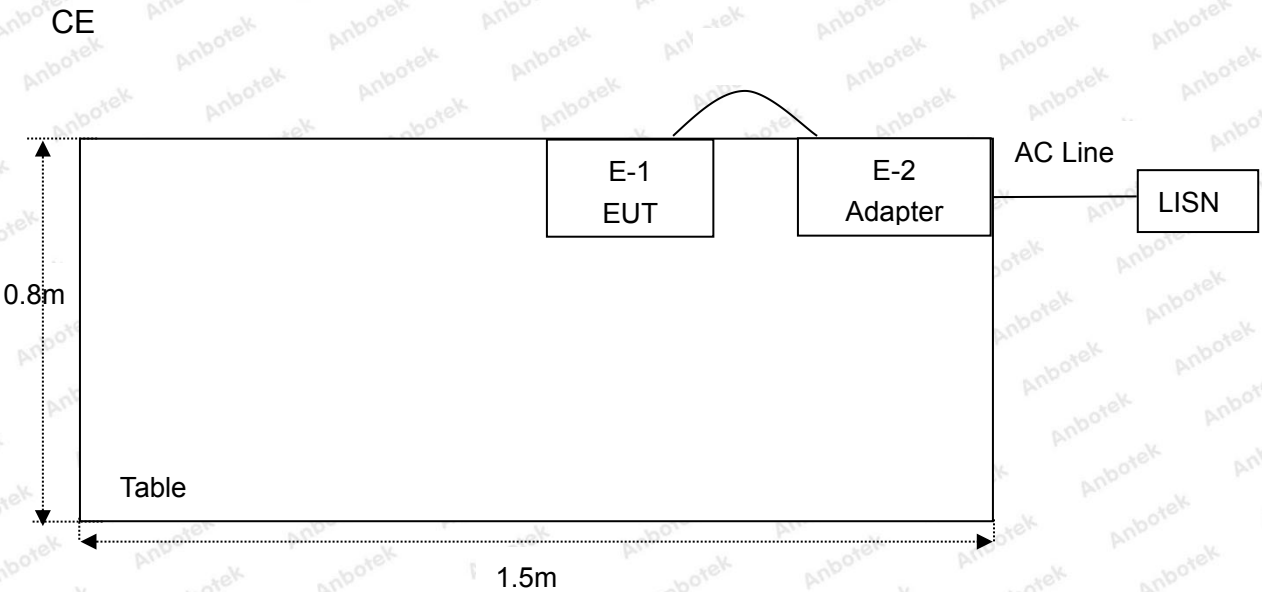

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year



1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A-1

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102



2. Summary of Test Results

Standard Section	Test Item	Result
15.203	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209/15.231(b)	Spurious Emission	PASS
15.231(c)	20dB Occupied Bandwidth	PASS
15.231(a)	Dwell time	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		




3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

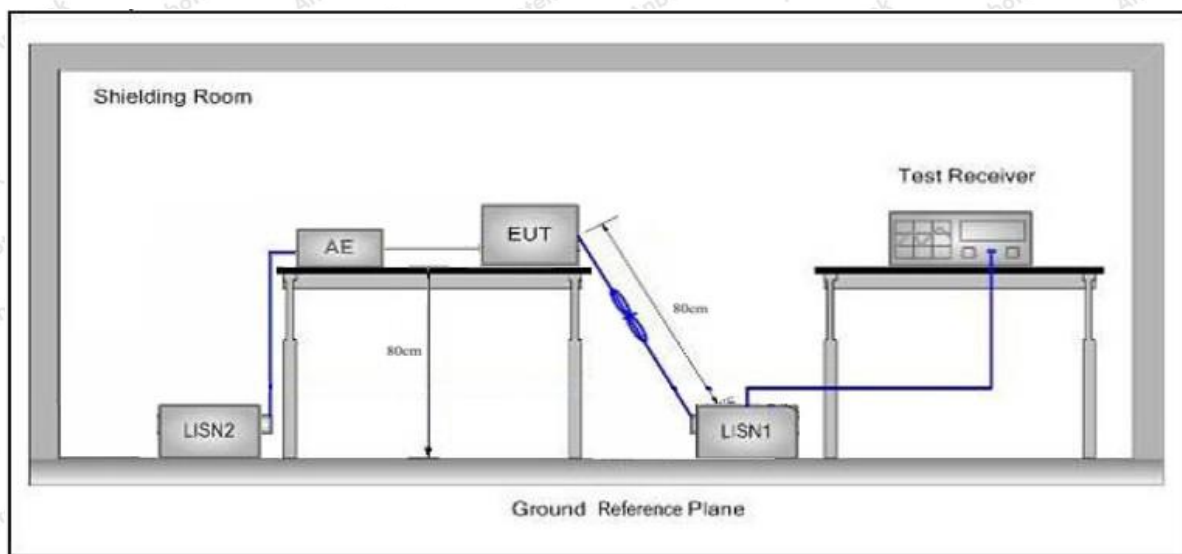

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test CAR REMOTE (ESCI) set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.


3.4. Test Data

Only the worst case data was showed in the report, please to see the following pages.



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 433.92MHz (ASK)
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 24.4℃ Hum.: 49%

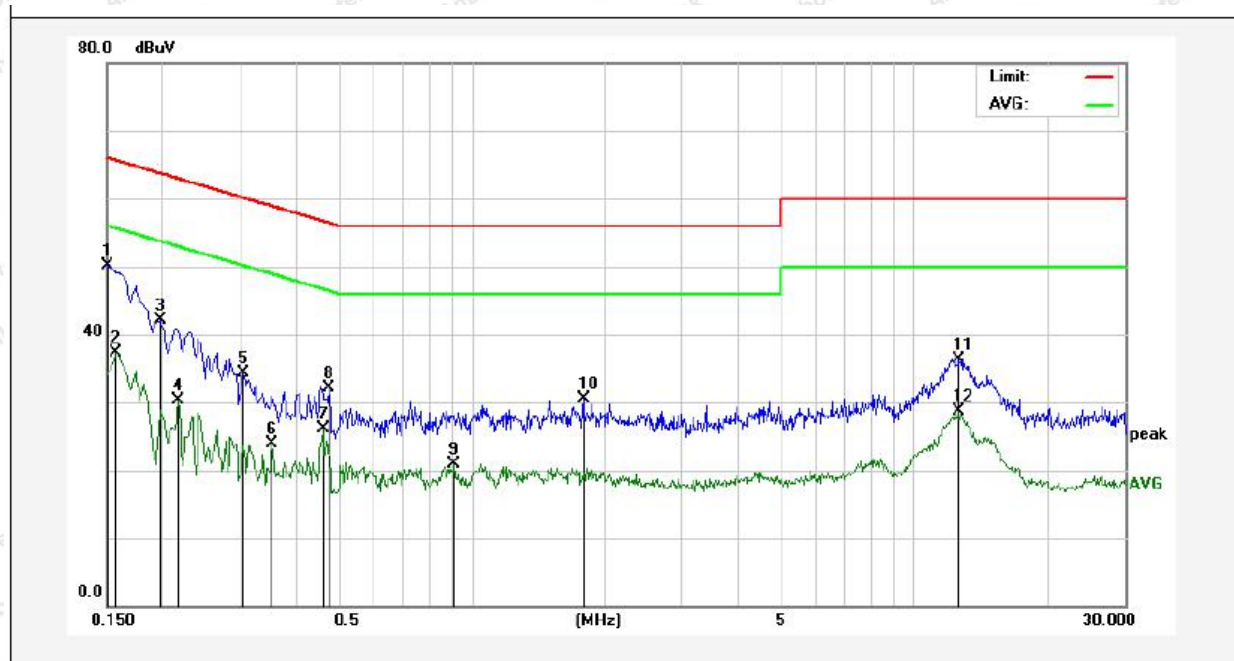


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	30.13	19.90	50.03	65.99	-15.96	QP	
2	0.1580	17.47	19.90	37.37	55.56	-18.19	AVG	
3	0.1980	22.13	19.90	42.03	63.69	-21.66	QP	
4	0.2180	10.38	19.90	30.28	52.89	-22.61	AVG	
5	0.3060	14.36	19.89	34.25	60.08	-25.83	QP	
6	0.3540	3.96	19.91	23.87	48.87	-25.00	AVG	
7	0.4620	6.19	19.96	26.15	46.66	-20.51	AVG	
8	0.4780	12.12	19.97	32.09	56.37	-24.28	QP	
9	0.9180	0.76	20.10	20.86	46.00	-25.14	AVG	
10	1.7940	10.42	20.14	30.56	56.00	-25.44	QP	
11	12.7140	16.09	20.30	36.39	60.00	-23.61	QP	
12	12.7140	8.32	20.30	28.62	50.00	-21.38	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 433.92MHz (ASK)
Test Specification: AC 120V, 60Hz for adapter
Comment: Neutral Line
Tem.: 24.4℃ Hum.: 49%

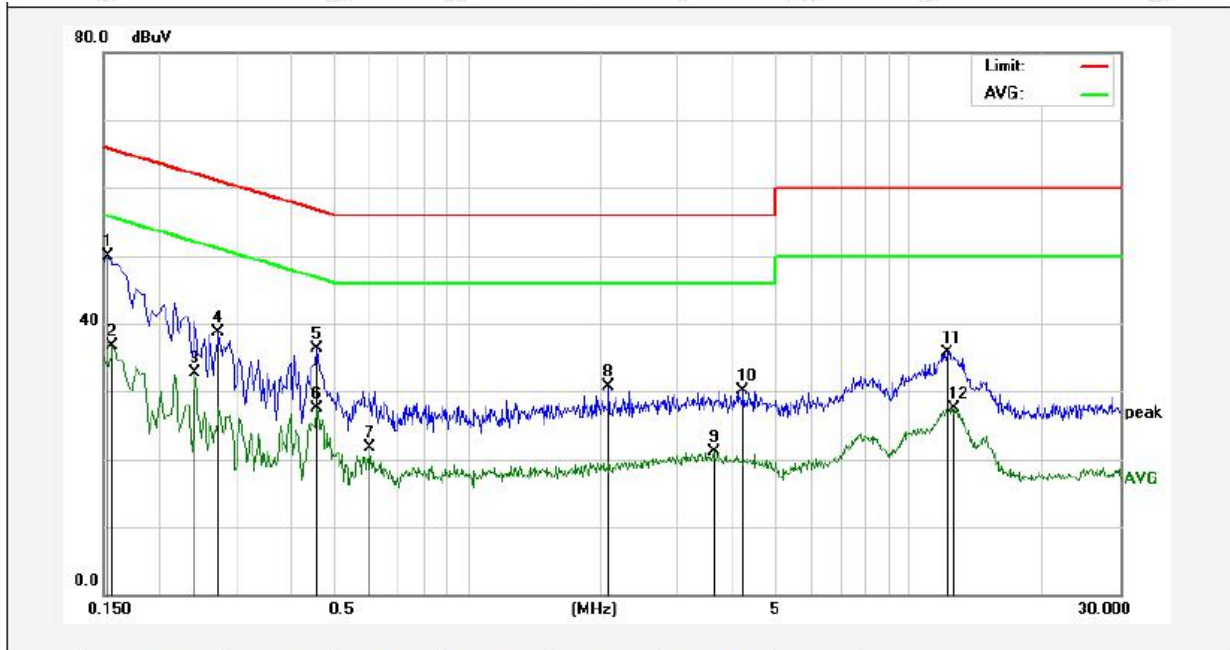


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1539	30.06	19.90	49.96	65.78	-15.82	QP	
2	0.1580	16.74	19.90	36.64	55.56	-18.92	AVG	
3	0.2420	12.77	19.89	32.66	52.02	-19.36	AVG	
4	0.2740	18.75	19.89	38.64	60.99	-22.35	QP	
5	0.4580	16.27	19.96	36.23	56.73	-20.50	QP	
6	0.4580	7.63	19.96	27.59	46.73	-19.14	AVG	
7	0.6020	1.61	20.01	21.62	46.00	-24.38	AVG	
8	2.0900	10.47	20.14	30.61	56.00	-25.39	QP	
9	3.6060	0.94	20.17	21.11	46.00	-24.89	AVG	
10	4.2220	9.87	20.19	30.06	56.00	-25.94	QP	
11	12.2380	15.42	20.30	35.72	60.00	-24.28	QP	
12	12.5460	7.13	20.30	27.43	50.00	-22.57	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 433.92MHz (ASK)
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.4℃ Hum.: 49%

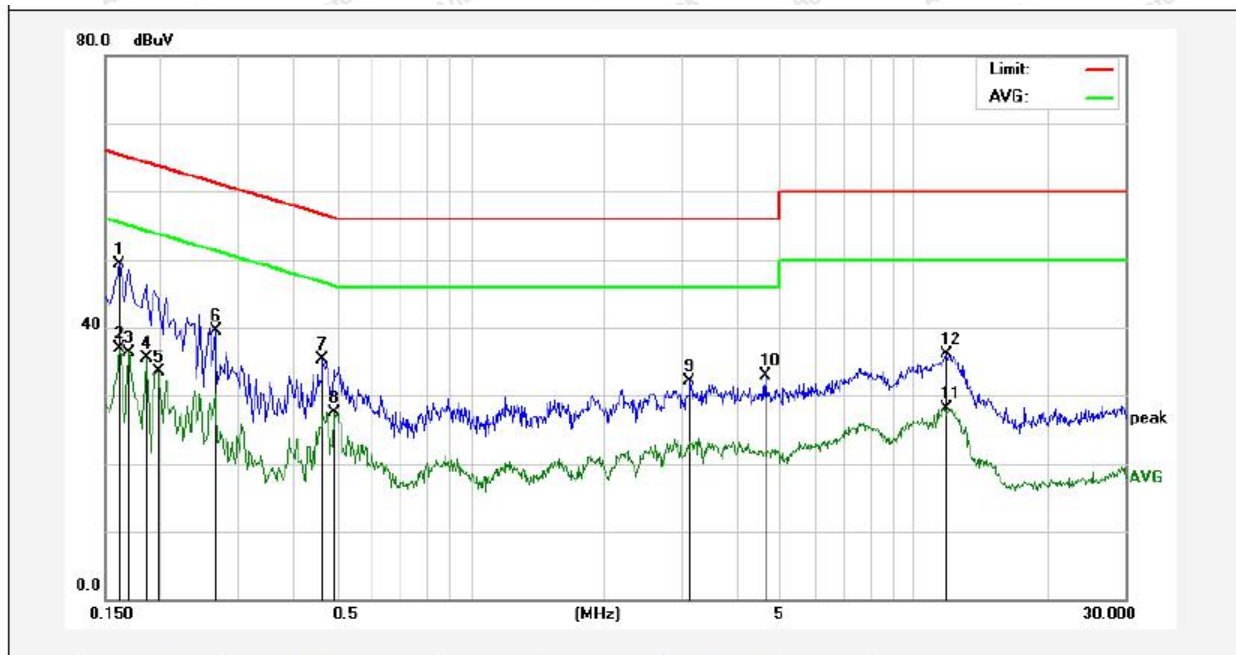


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1620	29.48	19.90	49.38	65.36	-15.98	QP	
2	0.1620	16.92	19.90	36.82	55.36	-18.54	AVG	
3	0.1700	16.34	19.90	36.24	54.96	-18.72	AVG	
4	0.1860	15.68	19.90	35.58	54.21	-18.63	AVG	
5	0.1980	13.57	19.90	33.47	53.69	-20.22	AVG	
6	0.2660	19.55	19.89	39.44	61.24	-21.80	QP	
7	0.4660	15.31	19.96	35.27	56.58	-21.31	QP	
8	0.4940	7.54	19.98	27.52	46.10	-18.58	AVG	
9	3.1300	11.85	20.16	32.01	56.00	-23.99	QP	
10	4.6300	12.71	20.20	32.91	56.00	-23.09	QP	
11	11.7860	7.87	20.31	28.18	50.00	-21.82	AVG	
12	11.8340	15.71	20.31	36.02	60.00	-23.98	QP	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 433.92MHz (ASK)
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.4℃ Hum.: 49%

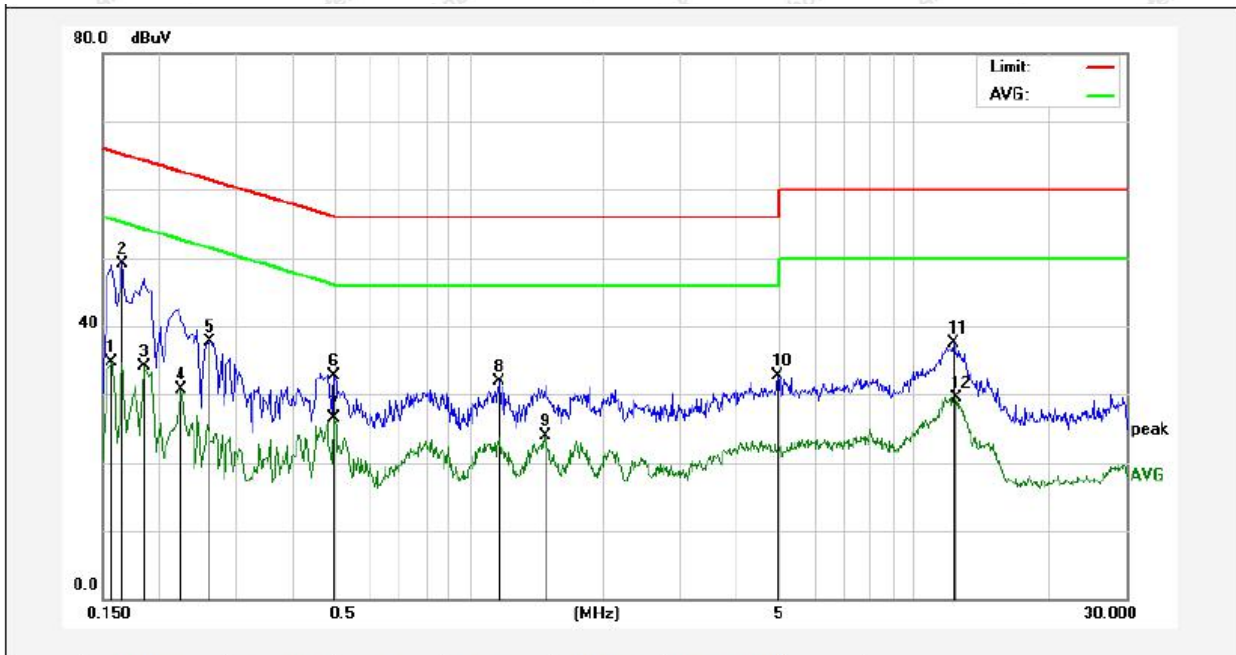


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	14.74	19.90	34.64	55.56	-20.92	AVG	
2	0.1660	29.17	19.90	49.07	65.15	-16.08	QP	
3	0.1860	14.20	19.90	34.10	54.21	-20.11	AVG	
4	0.2260	10.89	19.89	30.78	52.59	-21.81	AVG	
5	0.2620	17.86	19.89	37.75	61.36	-23.61	QP	
6	0.4980	12.77	19.98	32.75	56.03	-23.28	QP	
7	0.4980	6.44	19.98	26.42	46.03	-19.61	AVG	
8	1.1660	11.75	20.12	31.87	56.00	-24.13	QP	
9	1.4780	3.73	20.13	23.86	46.00	-22.14	AVG	
10	4.9300	12.51	20.20	32.71	56.00	-23.29	QP	
11	12.2620	17.21	20.30	37.51	60.00	-22.49	QP	
12	12.4780	9.22	20.30	29.52	50.00	-20.48	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: 315MHz (ASK)
Test Specification: AC 120V, 60Hz for adapter
Comment: Live Line
Tem.: 24.4°C Hum.: 49%

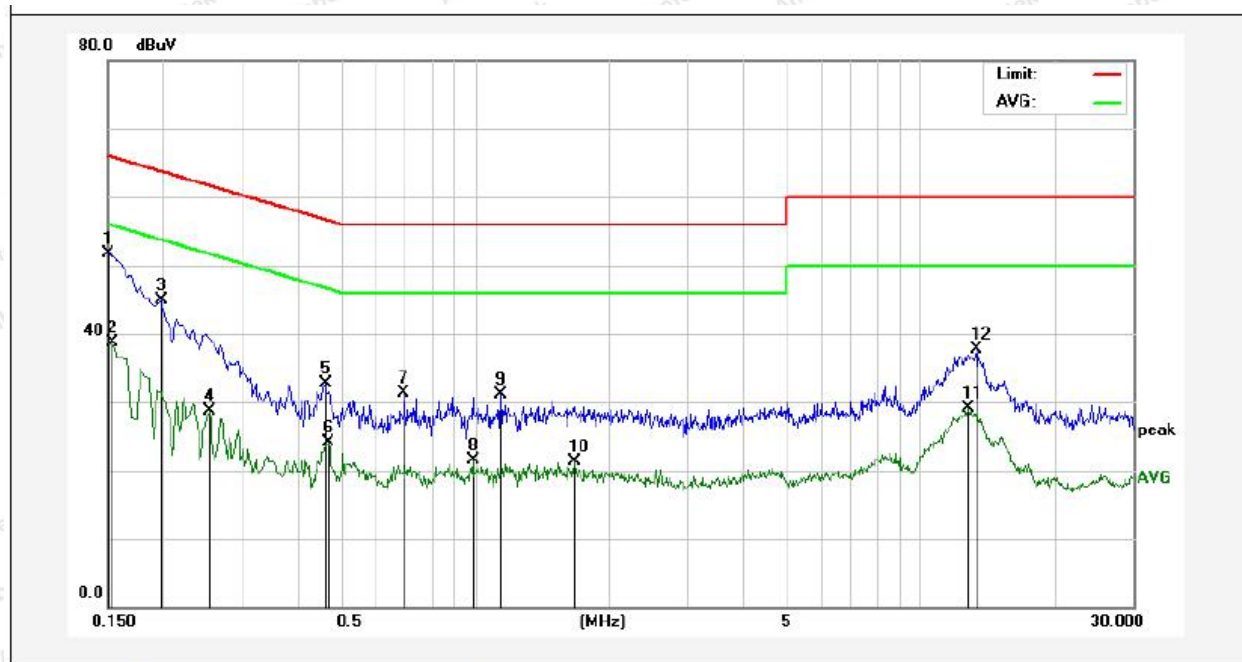


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	31.80	19.90	51.70	65.99	-14.29	QP	
2	0.1539	18.85	19.90	38.75	55.78	-17.03	AVG	
3	0.1980	24.99	19.90	44.89	63.69	-18.80	QP	
4	0.2540	8.75	19.89	28.64	51.62	-22.98	AVG	
5	0.4620	12.66	19.96	32.62	56.66	-24.04	QP	
6	0.4700	4.08	19.97	24.05	46.51	-22.46	AVG	
7	0.6940	11.25	20.04	31.29	56.00	-24.71	QP	
8	0.9940	1.33	20.12	21.45	46.00	-24.55	AVG	
9	1.1460	11.04	20.12	31.16	56.00	-24.84	QP	
10	1.6780	1.12	20.13	21.25	46.00	-24.75	AVG	
11	12.7940	8.81	20.30	29.11	50.00	-20.89	AVG	
12	13.3780	17.37	20.29	37.66	60.00	-22.34	QP	



Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: 315MHz (ASK)
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.4℃ Hum.: 49%

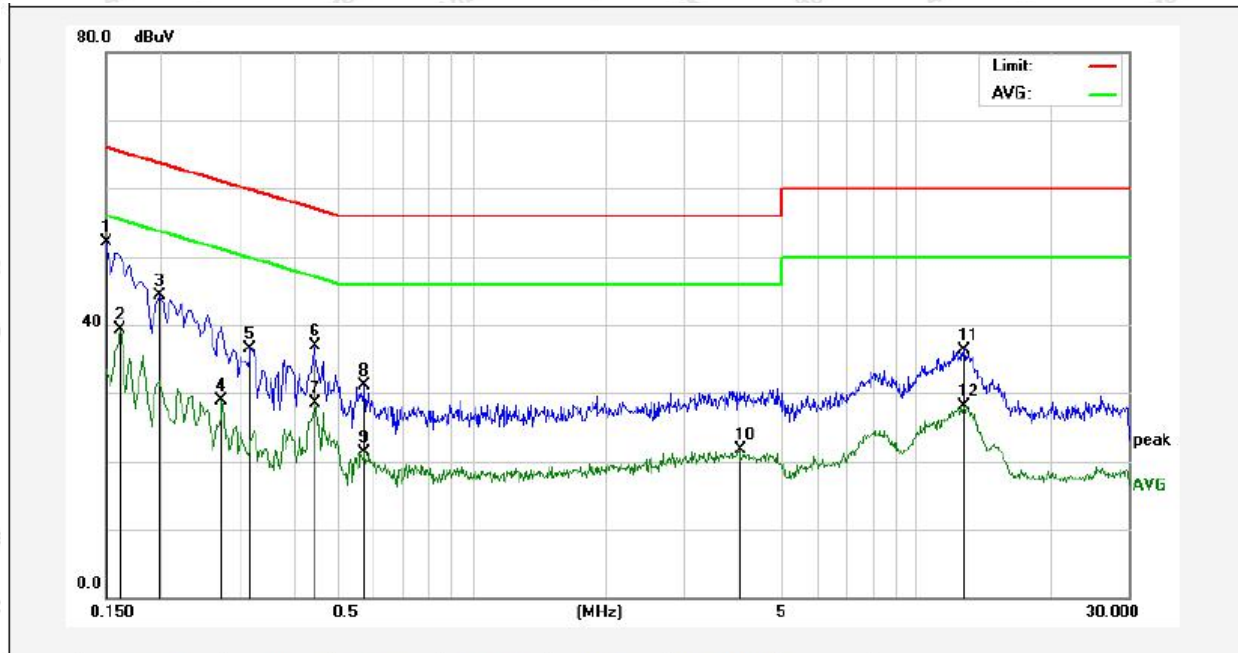

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	32.13	19.90	52.03	65.99	-13.96	QP	
2	0.1620	19.34	19.90	39.24	55.36	-16.12	AVG	
3	0.1980	24.39	19.90	44.29	63.69	-19.40	QP	
4	0.2740	9.03	19.89	28.92	50.99	-22.07	AVG	
5	0.3180	16.53	19.90	36.43	59.76	-23.33	QP	
6	0.4420	17.05	19.95	37.00	57.02	-20.02	QP	
7	0.4460	8.58	19.96	28.54	46.95	-18.41	AVG	
8	0.5740	11.09	20.00	31.09	56.00	-24.91	QP	
9	0.5740	1.33	20.00	21.33	46.00	-24.67	AVG	
10	4.0220	1.48	20.18	21.66	46.00	-24.34	AVG	
11	12.8139	15.93	20.29	36.22	60.00	-23.78	QP	
12	12.8139	7.74	20.29	28.03	50.00	-21.97	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 315MHz (ASK)
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.4°C Hum.: 49%

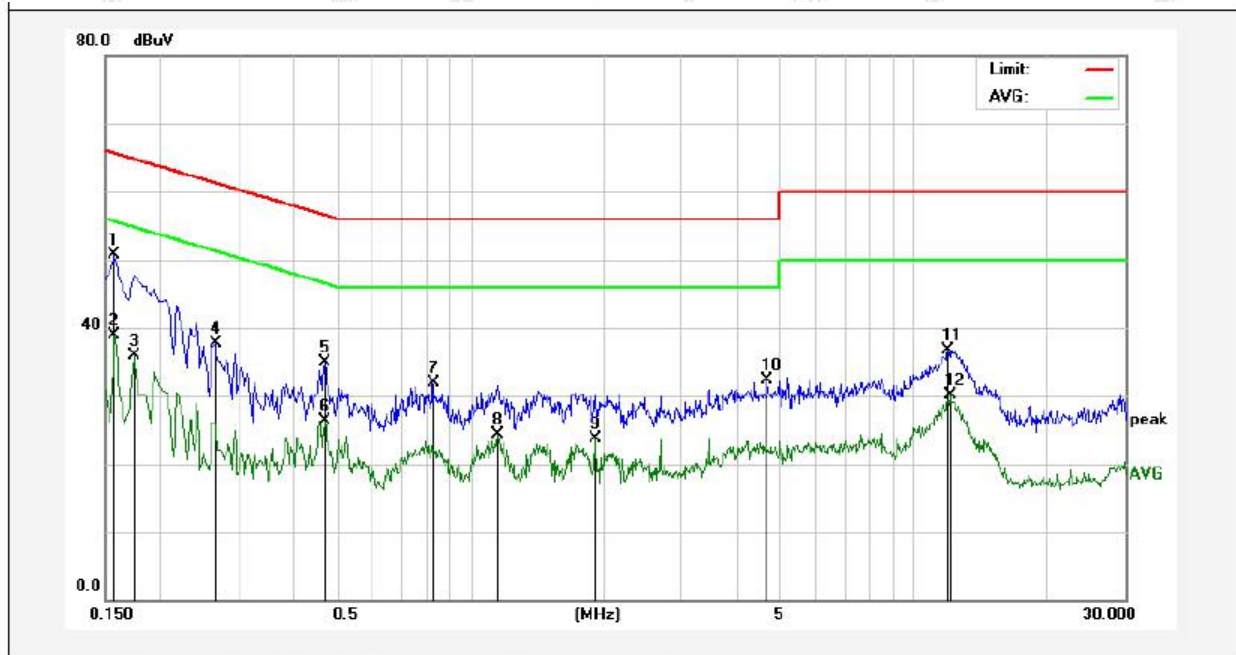


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	30.72	19.90	50.62	65.56	-14.94	QP	
2	0.1580	18.98	19.90	38.88	55.56	-16.68	AVG	
3	0.1740	16.00	19.90	35.90	54.76	-18.86	AVG	
4	0.2660	17.84	19.89	37.73	61.24	-23.51	QP	
5	0.4700	15.02	19.97	34.99	56.51	-21.52	QP	
6	0.4700	6.34	19.97	26.31	46.51	-20.20	AVG	
7	0.8260	11.82	20.07	31.89	56.00	-24.11	QP	
8	1.1500	4.22	20.12	24.34	46.00	-21.66	AVG	
9	1.9180	3.47	20.14	23.61	46.00	-22.39	AVG	
10	4.6820	12.04	20.20	32.24	56.00	-23.76	QP	
11	11.9900	16.48	20.31	36.79	60.00	-23.21	QP	
12	12.0979	9.71	20.31	30.02	50.00	-19.98	AVG	



Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: 315MHz (ASK)
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.4℃ Hum.: 49%

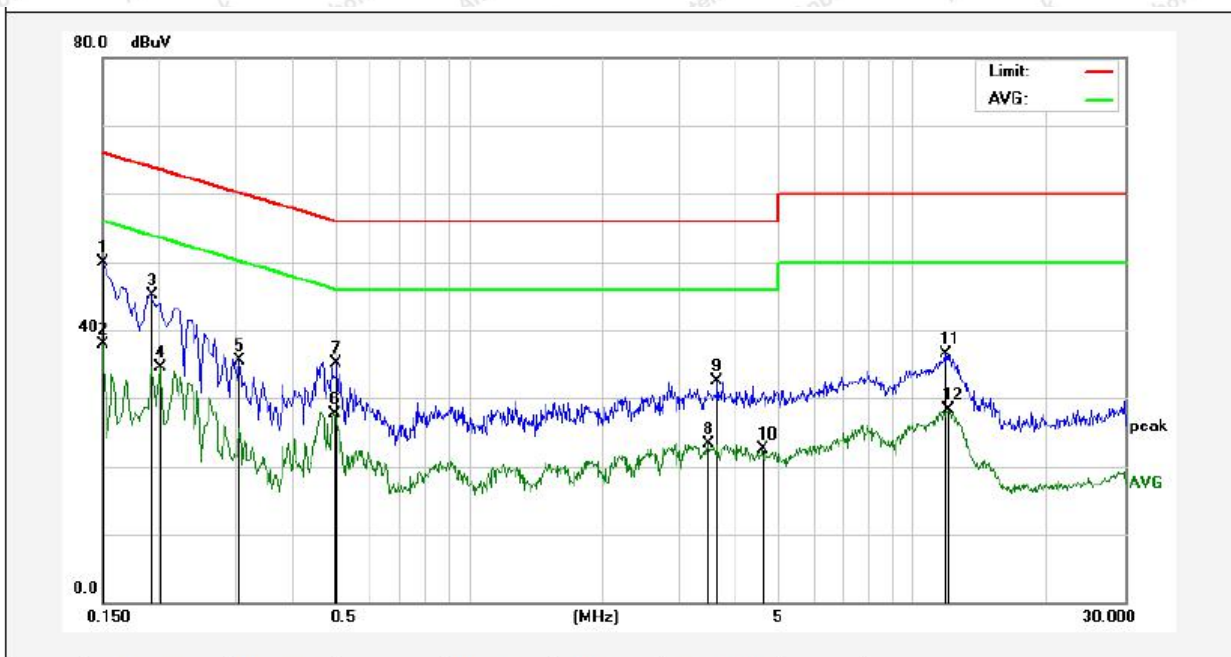

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1499	30.08	19.90	49.98	66.00	-16.02	QP	
2	0.1499	17.94	19.90	37.84	56.00	-18.16	AVG	
3	0.1940	25.14	19.90	45.04	63.86	-18.82	QP	
4	0.2020	14.64	19.90	34.54	53.52	-18.98	AVG	
5	0.3060	15.52	19.89	35.41	60.08	-24.67	QP	
6	0.4980	7.82	19.98	27.80	46.03	-18.23	AVG	
7	0.5060	15.18	19.98	35.16	56.00	-20.84	QP	
8	3.4620	3.22	20.17	23.39	46.00	-22.61	AVG	
9	3.6260	12.41	20.17	32.58	56.00	-23.42	QP	
10	4.5739	2.34	20.20	22.54	46.00	-23.46	AVG	
11	11.8659	16.14	20.31	36.45	60.00	-23.55	QP	
12	12.0539	8.02	20.31	28.33	50.00	-21.67	AVG	

4. Radiated Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209, 15.205 and 15.231(b)				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1) The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

the formulas for calculating the maximum permitted fundamental field strengths are as follows:

for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$.

The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level

Emission Level (dBuV/m) = $20 \log$ Emission Level ($\mu\text{V/m}$)

The field strength of emission limits have been calculated in below table:

Fundamental Frequency (MHz)	Field Strength of Fundamental (dBuV/m)@3m
315	75.62 (AVG)
315	95.62 (Peak)
433.92	80.82 (AVG)
433.92	100.82 (Peak)

4.2. Test Setup

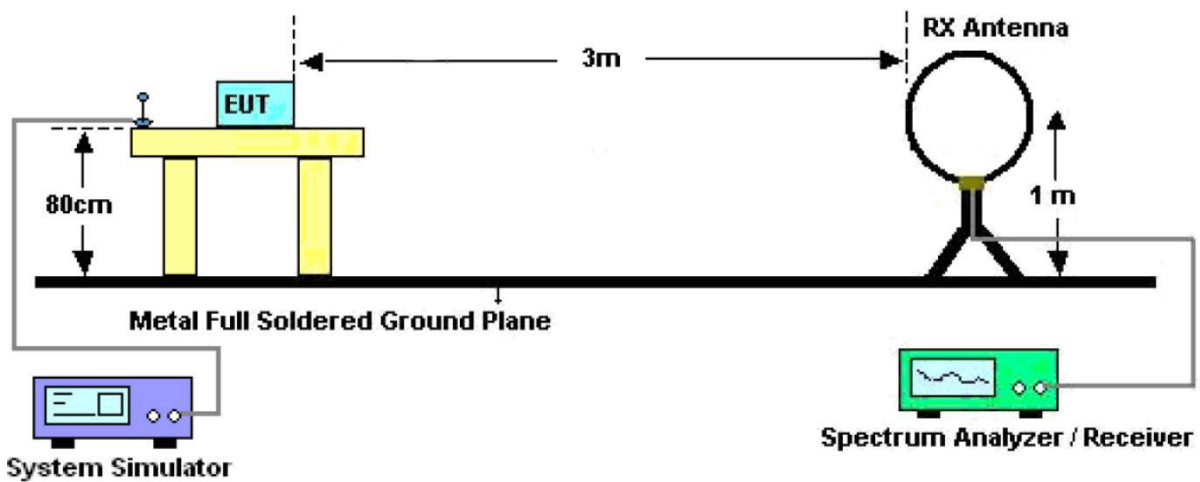


Figure 1. Below 30MHz

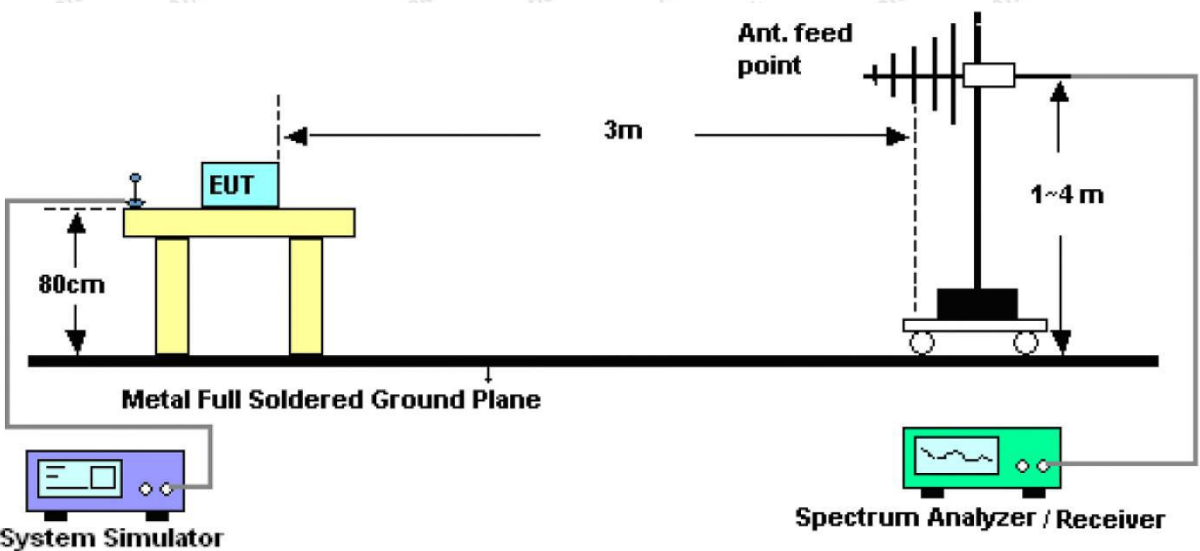


Figure 2. 30MHz to 1GHz

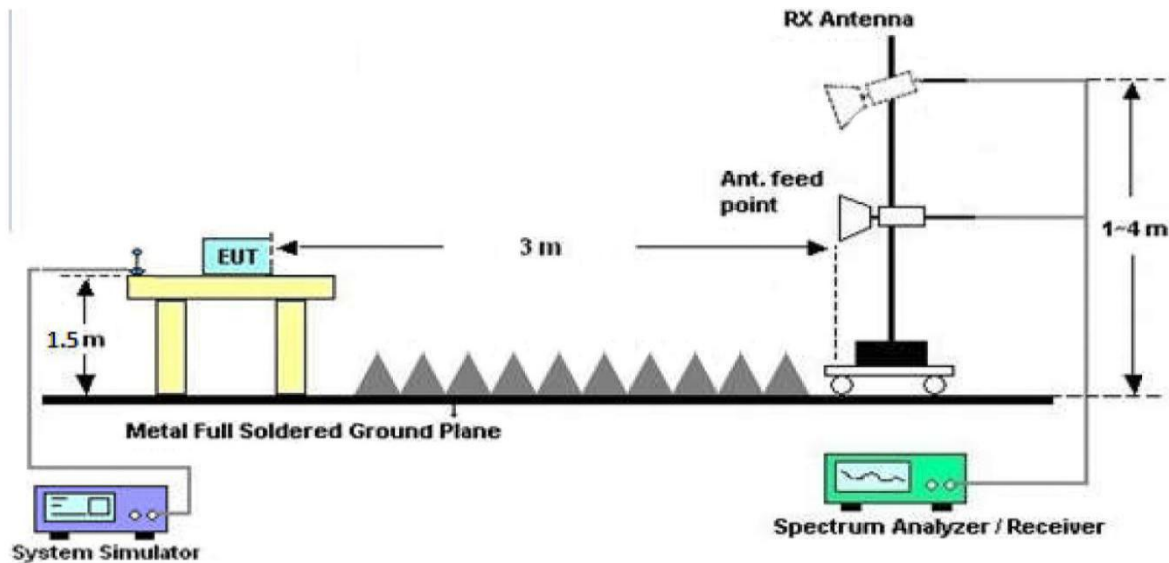


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data

PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

During the test, pre-scan all modes, only the worst case is recorded in the report.



Report No.: 18220WC10072605

FCC ID: WQ8-MS906PRO-TS

Page 25 of 44

Test Results (30~1000MHz)

Test Mode: 433.92MHz(ASK)
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.4°C/47%RH




No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	160.3456	49.69	-21.78	27.91	43.50	-15.59	QP	100	0	
2	171.3926	43.78	-21.24	22.54	43.50	-20.96	QP	100	360	
3	221.3921	51.47	-19.43	32.04	46.00	-13.96	QP	100	0	
4	232.5318	49.75	-19.20	30.55	46.00	-15.45	QP	100	360	
5	325.5958	47.81	-13.63	34.18	46.00	-11.82	QP	100	0	
6	651.9417	38.82	-6.79	32.03	46.00	-13.97	QP	100	360	



Test Results (30~1000MHz)

Test Mode: 433.92MHz(ASK)
Power Source: AC 120V, 60Hz for adapter
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 24.4°C/47%RH

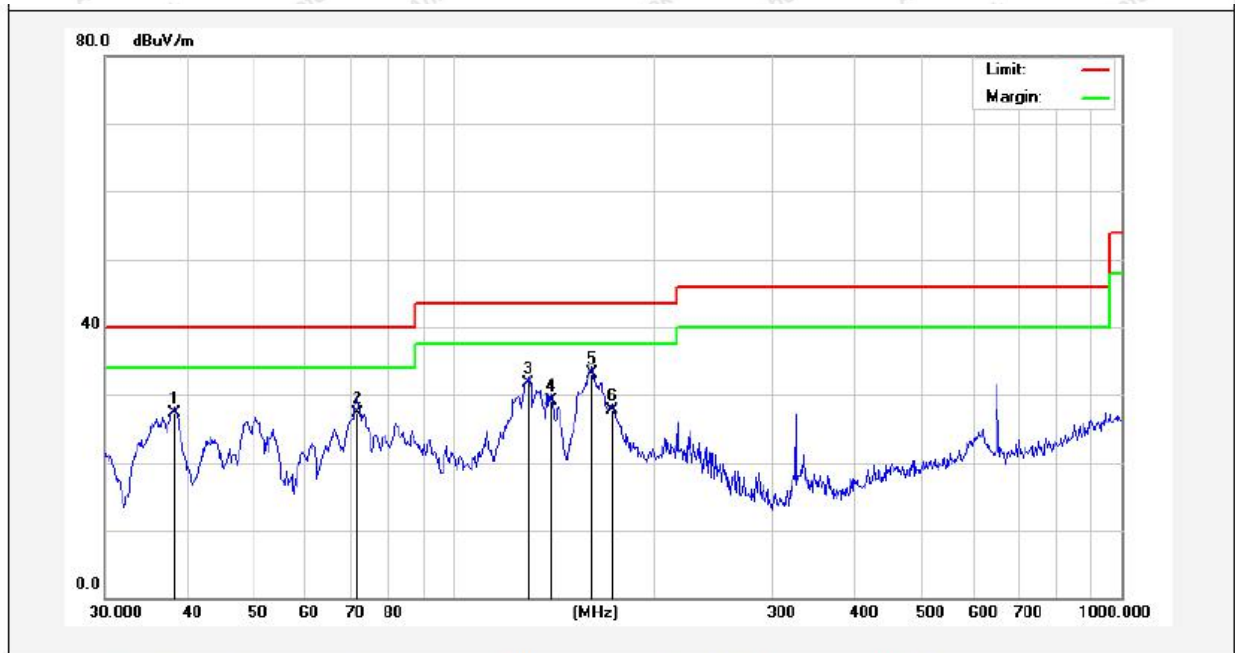

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.0783	41.95	-14.62	27.33	40.00	-12.67	QP	100	0	
2	71.8320	45.75	-18.49	27.26	40.00	-12.74	QP	100	360	
3	129.4677	50.95	-19.32	31.63	43.50	-11.87	QP	100	0	
4	139.8508	49.20	-20.05	29.15	43.50	-14.35	QP	100	360	
5	160.9089	52.40	-19.37	33.03	43.50	-10.47	QP	100	0	
6	172.5988	46.32	-18.68	27.64	43.50	-15.86	QP	100	360	

Remark:

1. Results = Reading + Cable Loss +Ant Factor –Amplifier



Test Results (30~1000MHz)

Test Mode: 315MHz(ASK)
Power Source: AC 120V, 60Hz for adapter
Polarization: Horizontal
Temp.(°C)/Hum.(%RH): 24.4°C/47%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	122.8340	44.99	-21.50	23.49	43.50	-20.01	QP	100	0	
2	134.5592	44.16	-20.67	23.49	43.50	-20.01	QP	100	360	
3	160.9089	49.30	-21.75	27.55	43.50	-15.95	QP	100	0	
4	228.4904	50.02	-19.28	30.74	46.00	-15.26	QP	100	360	
5	325.5958	47.23	-13.63	33.60	46.00	-12.40	QP	100	0	
6	651.9417	38.89	-6.79	32.10	46.00	-13.90	QP	100	360	




Report No.: 18220WC10072605

FCC ID: WQ8-MS906PRO-TS

Page 28 of 44

Test Results (30~1000MHz)

Test Mode: 315MHz(ASK)
Power Source: AC 120V, 60Hz for adapter
Polarization: Vertical
Temp.(°C)/Hum.(%RH): 24.4°C/47%RH

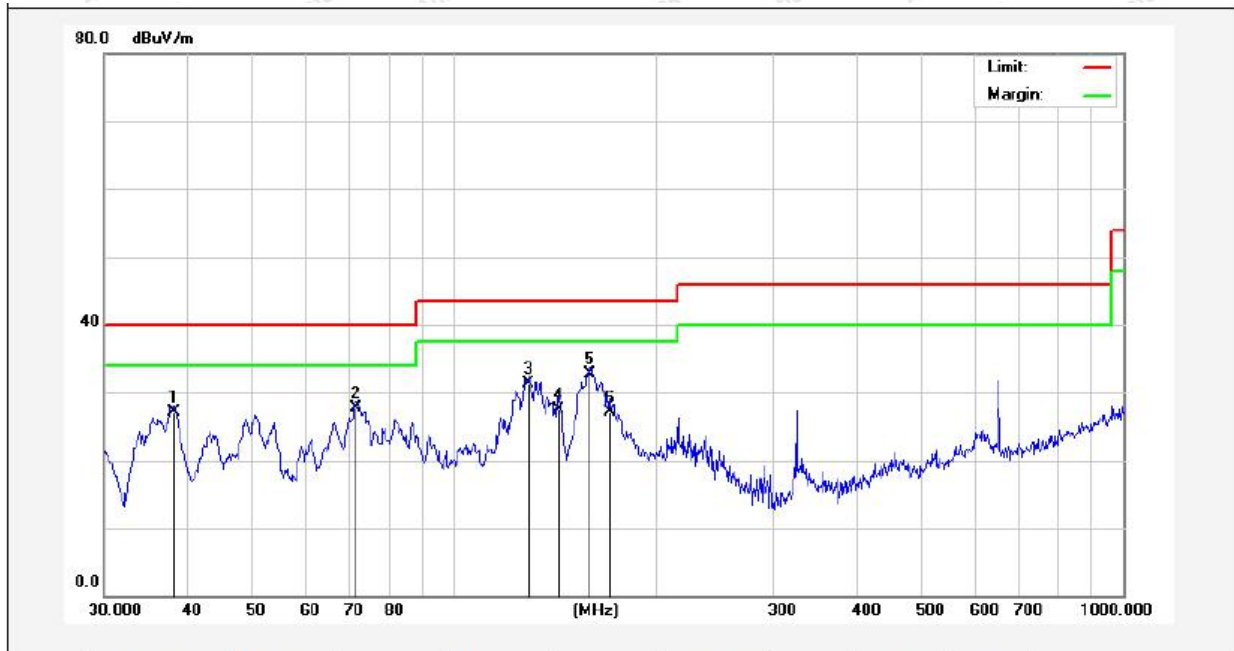

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.0783	41.80	-14.62	27.18	40.00	-12.82	QP	100	0	
2	71.3300	46.28	-18.50	27.78	40.00	-12.22	QP	100	360	
3	129.4677	50.68	-19.32	31.36	43.50	-12.14	QP	100	0	
4	143.3261	47.47	-20.02	27.45	43.50	-16.05	QP	100	360	
5	159.7844	52.09	-19.44	32.65	43.50	-10.85	QP	100	0	
6	170.7926	45.85	-18.80	27.05	43.50	-16.45	QP	100	360	

Remark:

1. Results = Reading + Cable Loss +Ant Factor -Amplifier



Test Results (Fundamental)

Mode	Freq.	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det.
	(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
TX Mode (ASK)	315.00	H	93.60	1.52	12.64	31.45	--	76.31	95.62	PK
	315.00	H	92.18	1.52	12.64	31.45	-11.22	65.09	75.62	AV
	315.00	V	77.71	1.52	12.64	31.45	--	60.42	95.62	PK
	315.00	V	79.11	1.52	12.64	31.45	-11.22	49.20	75.62	AV
TX Mode (FSK)	315.00	H	93.29	1.52	12.64	31.45	--	76.00	95.62	PK
	315.00	H	93.78	1.52	12.64	31.45	-34.98	41.02	75.62	AV
	315.00	V	97.20	1.52	12.64	31.45	--	79.91	95.62	PK
	315.00	V	97.15	1.52	12.64	31.45	-34.98	44.93	75.62	AV
TX Mode (ASK)	433.92	H	93.26	1.52	12.64	31.45	--	75.97	100.82	PK
	433.92	H	93.26	1.52	12.64	31.45	-11.15	64.82	80.82	AV
	433.92	V	80.69	1.52	12.64	31.45	--	63.40	100.82	PK
	433.92	V	80.69	1.52	12.64	31.45	-11.15	52.25	80.82	AV
TX Mode (FSK)	433.92	H	93.59	1.52	12.64	31.45	--	76.30	100.82	PK
	433.92	H	93.59	1.52	12.64	31.45	-11.75	64.55	80.82	AV
	433.92	V	80.93	1.52	12.64	31.45	--	63.64	100.82	PK
	433.92	V	80.93	1.52	12.64	31.45	-11.75	51.89	80.82	AV

Remark:

1. Result = Reading + Cable Loss + Ant Factor – Amplifier + Duty cycle Factor

2. Pulse Desensitization Correction Factor

Mode	Freq. (MHz)	Pulse Width (ms)	2/Pulse Width (kHz)
TX Mode	315(ASK)	9.6	0.21
TX Mode	315(FSK)	9.2	0.22
TX Mode	433.92(ASK)	9.6	0.21
TX Mode	433.92(FSK)	9.0	0.22

RBW(1000kHz) > 2/Pulse Width

Therefore PDCF is not needed.

3. AV=PEAK +Duty Cycle Factor

4. Duty Cycle Factor


Mode	Freq. (MHz)	T on1 (ms)	N1	T period(ms)	Duty Cycle	Duty Cycle Factor
TX Mode	315(ASK)	9.6	10	349.2	27.49%	-11.22
TX Mode	315(FSK)	9.2	24	12960	1.78%	-34.98
TX Mode	433.92(ASK)	9.6	10	346.4	27.71%	-11.15
TX Mode	433.92(FSK)	9.0	10	348.0	25.86%	-11.75

$$T_{on} = T_{on1} \times N$$


$$\text{Duty Cycle} = T_{on} / T_{period}$$

$$\text{Duty Cycle Factor} = 20 \times \lg(\text{Duty Cycle})$$


315MHz(ASK)-T period

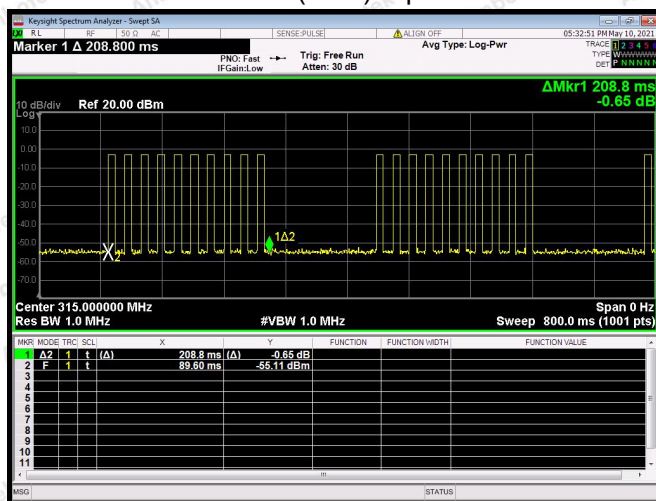


315MHz(ASK)-T on1

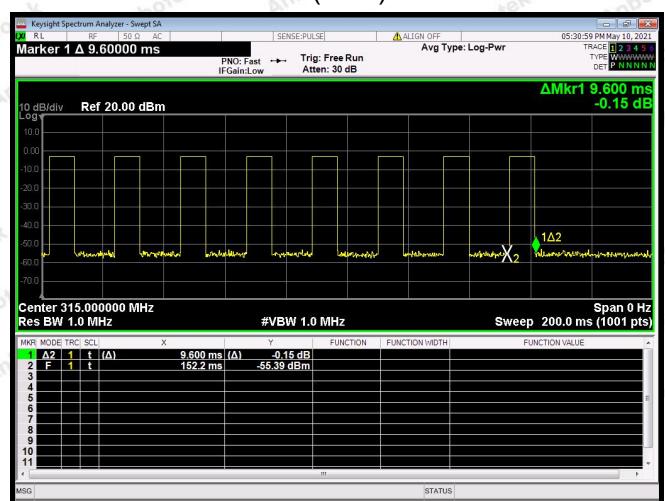


315MHz(FSK)-T period

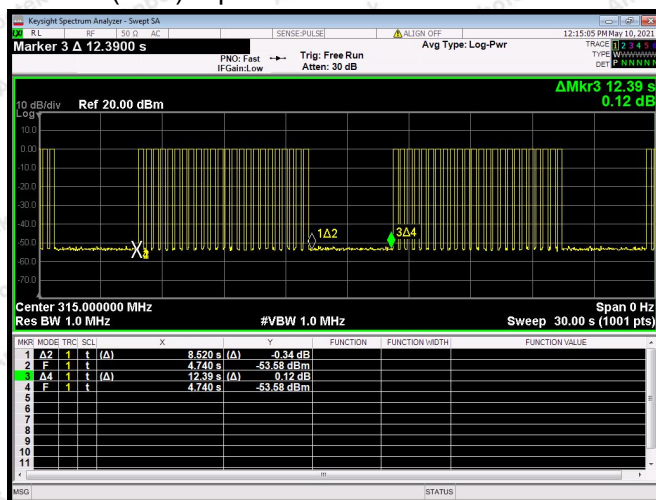


315MHz(FSK)-T on1

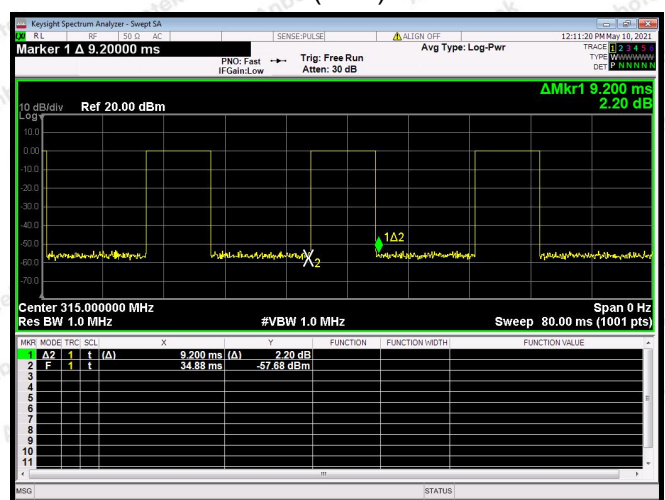


433.92MHz(ASK)-T period

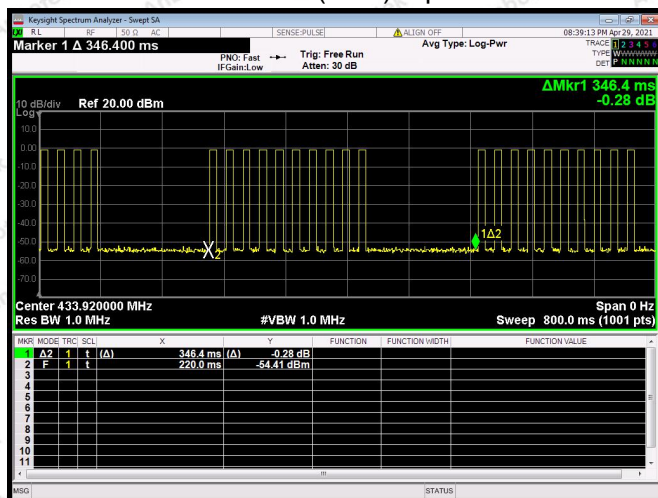


433.92MHz(ASK)-T on1

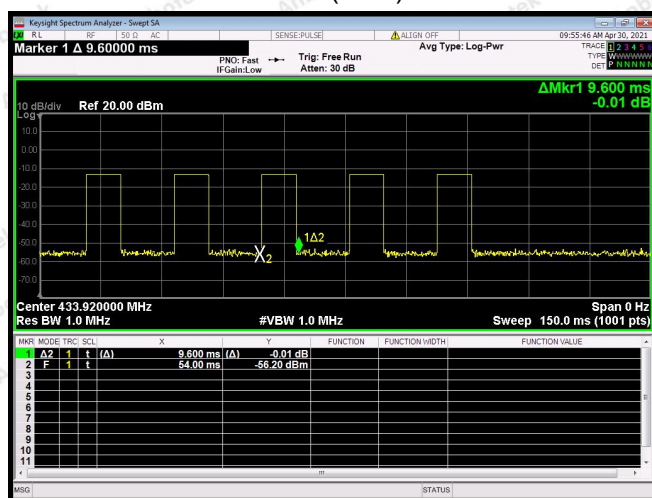

433.92MHz(FSK)-T period

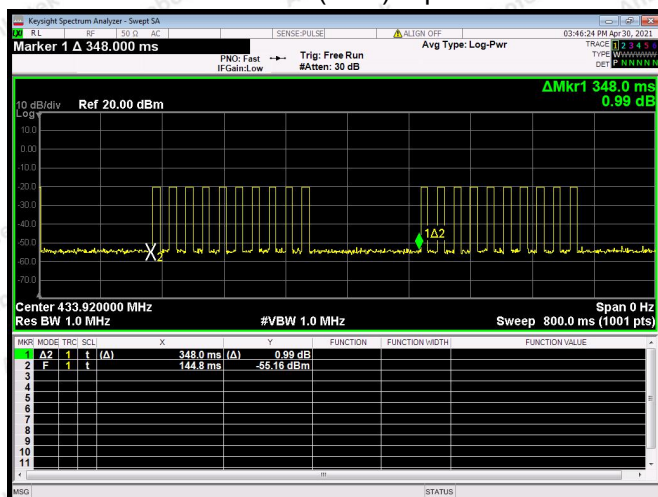

433.92MHz(FSK)-T on1

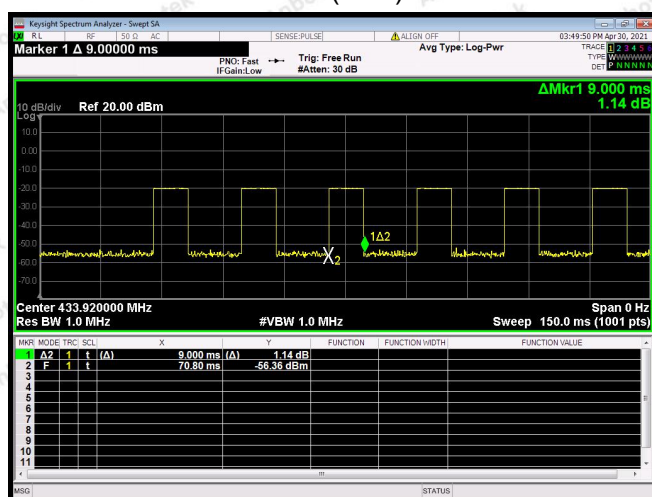

Test Results (Harmonics Emissions+Radiated Emissions from 1G-4G)

315MHz(ASK)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
630.00	H	74.18	1.92	12.71	31.72	--	57.09	75.62	PK
630.00	H	73.46	1.92	12.71	31.72	-11.22	45.87	55.62	AV
630.00	V	75.07	1.92	12.71	31.72	--	57.98	75.62	PK
630.00	V	76.20	1.92	12.71	31.72	-11.22	46.76	55.62	AV
945.00	H	52.99	2.38	21.43	32.45	--	44.35	74	PK
945.00	H	51.91	2.38	21.43	32.45	-11.22	33.13	54	AV
945.00	V	55.10	2.38	18.56	32.45	--	43.59	74	PK
945.00	V	53.85	2.38	18.56	32.45	-11.22	32.37	54	AV
1260.00	H	-	-	-	-	-	-	74	PK
1260.00	H	-	-	-	-	-	-	54	AV
1260.00	V	-	-	-	-	-	-	74	PK
1260.00	V	-	-	-	-	-	-	54	AV

315MHz(FSK)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
630.00	H	73.02	1.92	12.71	31.72	--	55.93	75.62	PK
630.00	H	72.64	1.92	12.71	31.72	-34.98	20.95	55.62	AV
630.00	V	74.55	1.92	12.71	31.72	--	57.46	75.62	PK
630.00	V	75.76	1.92	12.71	31.72	-34.98	22.48	55.62	AV
945.00	H	52.72	2.38	21.43	32.45	--	44.08	74	PK
945.00	H	51.98	2.38	21.43	32.45	-34.98	9.10	54	AV
945.00	V	54.27	2.38	18.56	32.45	--	42.76	74	PK
945.00	V	54.56	2.38	18.56	32.45	-34.98	7.78	54	AV
1260.00	H	-	-	-	-	-	-	74	PK
1260.00	H	-	-	-	-	-	-	54	AV
1260.00	V	-	-	-	-	-	-	74	PK
1260.00	V	-	-	-	-	-	-	54	AV



433.92MHz(ASK)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
867.84	H	56.32	1.92	12.71	31.72	--	39.23	80.82	PK
867.84	H	43.18	1.92	12.71	31.72	-11.15	28.08	60.82	AV
867.84	V	58.76	1.92	12.71	31.72	--	41.67	80.82	PK
867.84	V	45.90	1.92	12.71	31.72	-11.15	30.52	60.82	AV
1301.76	H	43.31	2.38	21.43	32.45	--	34.67	74.00	PK
1301.76	H	30.31	2.38	21.43	32.45	-11.15	23.52	54.00	AV
1301.76	V	43.74	2.38	18.56	32.45	--	32.23	74.00	PK
1301.76	V	29.12	2.38	18.56	32.45	-11.15	21.08	54.00	AV

433.92MHz(FSK)

Frequency	Antenna	Reading	Cable Loss	Ant Factor	Amplifier	Duty cycle Factor	Results	Limits	Det
(MHz)	Pol.	(dBuV/m)	(dB)	(dB)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	Mode
867.84	H	55.18	1.92	12.71	31.72	--	38.09	80.82	PK
867.84	H	43.17	1.92	12.71	31.72	-11.75	26.34	60.82	AV
867.84	V	57.89	1.92	12.71	31.72	--	40.80	80.82	PK
867.84	V	45.54	1.92	12.71	31.72	-11.75	29.05	60.82	AV
1301.76	H	44.08	2.38	21.43	32.45	--	35.44	74	PK
1301.76	H	30.37	2.38	21.43	32.45	-11.75	23.69	54	AV
1301.76	V	43.07	2.38	18.56	32.45	--	31.56	74	PK
1301.76	V	28.76	2.38	18.56	32.45	-11.75	19.81	54	AV

Remark:


1. Result = Reading + Cable Loss +Ant Factor –Amplifier + Duty cycle Factor

5. 20DB Occupy Bandwidth Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.231 (c)
Test Limit	According to FCC Part 15.231(c), The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

5.2. Test Setup



5.3. Test Procedure

1. Place the EUT on the table and set it in the continuously transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 30kHz, VBW $\geq$ 3*RBW =100kHz,
Span= 1MHz
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -20dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

5.4. Test Data

Test Item	: 20dB Bandwidth
Test Voltage	: DC 3.85V Battery inside
Test Result	: PASS

Test Mode	: Continuously transmitting
Temperature	: 22.7℃
Humidity	: 55%RH




Mode	Freq. (MHz)	Modulation Type	20DB Bandwidth (kHz)	Limit (kHz)	Results
TX Mode	315	ASK	142.5	≤ 787.5	PASS
TX Mode	315	FSK	159.1	≤ 787.5	PASS
TX Mode	433.92	ASK	160.4	≤ 1084.8	PASS
TX Mode	433.92	FSK	191.5	≤ 1084.8	PASS

Note: Limit=0.0025*Freq.




315 MHz(ASK)

Plot of 20DB Bandwidth

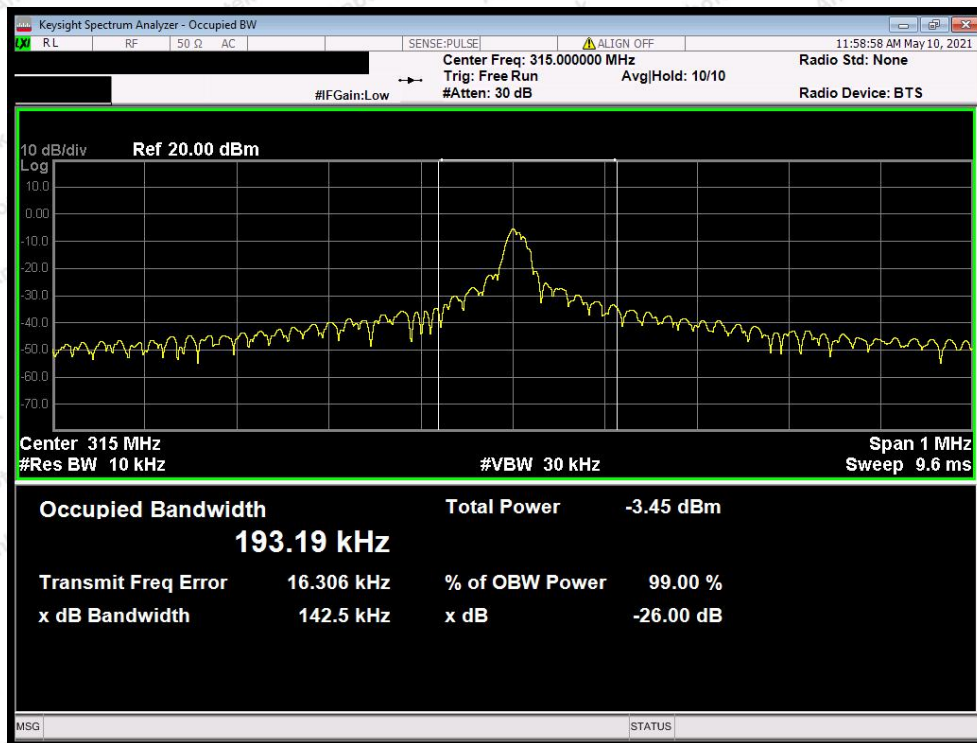


315 MHz(FSK)

Plot of 20DB Bandwidth

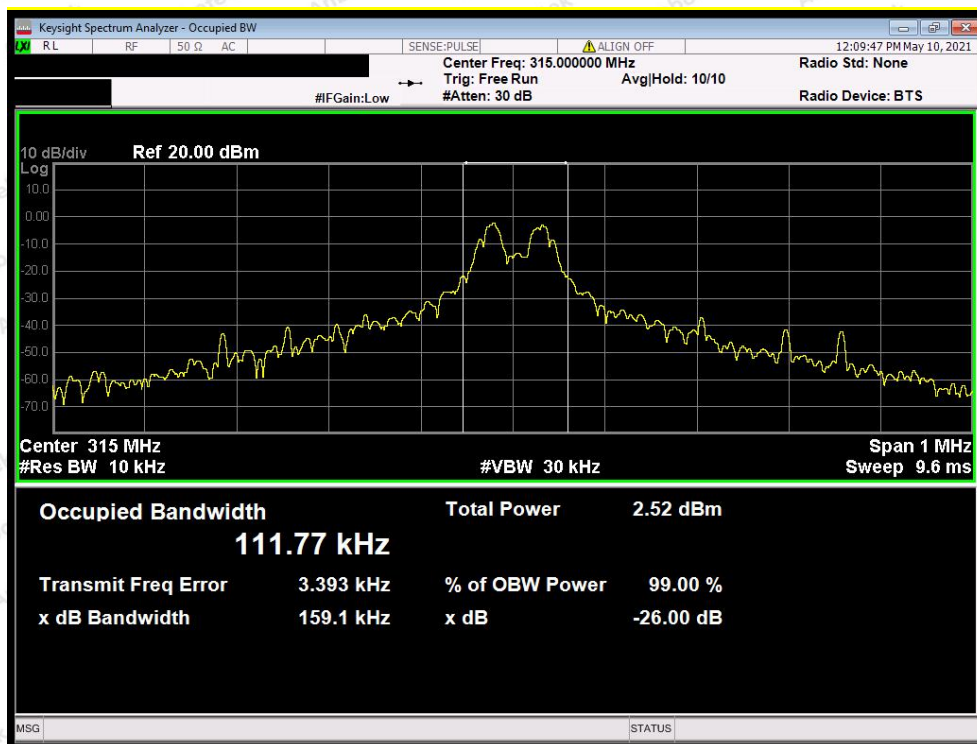


433.92 MHz(ASK)

Plot of 20DB Bandwidth

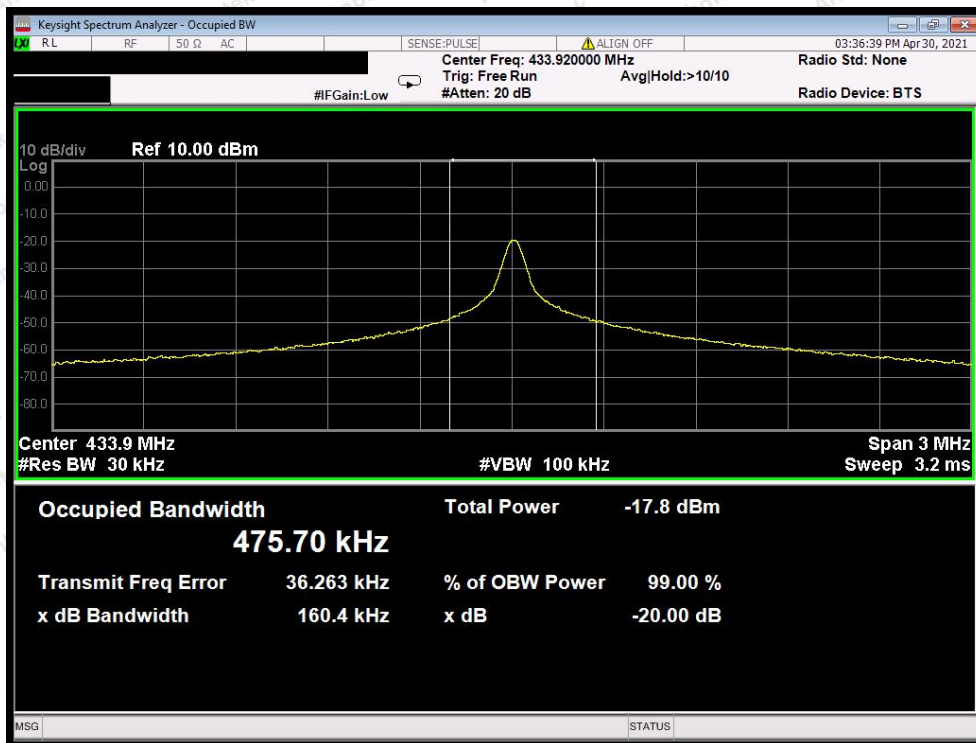

433.92 MHz(FSK)

Plot of 20DB Bandwidth

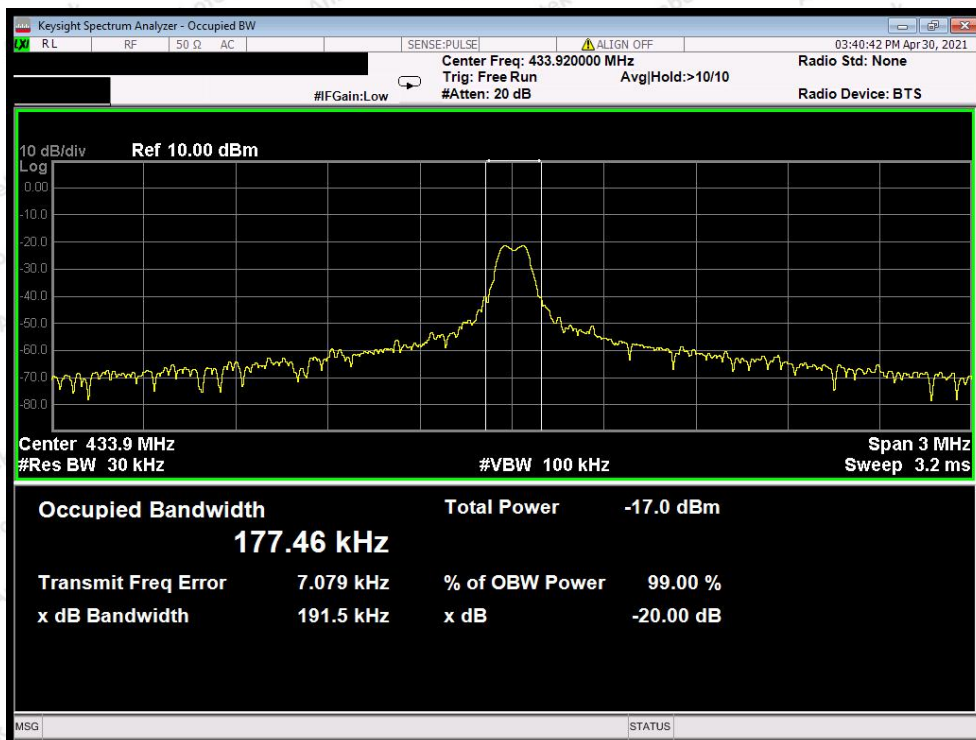


6. Dwell Time Test

6.1. Test Standard and Limit

Test Standard	FCC Part 15.231(a)(1)
Test Limit	According to FCC Part 15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released

6.2. Test Setup



6.3. Test Procedure

1. Place the EUT on the table and set it in continuously transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as
RBW=1000kHz, VBW= 1000 kHz, Span= 0Hz, Sweep Time= 20 Seconds.
3. Record the Delta mark time.

6.4. Test Data


Test Item : Dwell Time
 Test Voltage : DC 3.85V Battery inside
 Test Result : PASS

Test Mode : Continuously transmitting
 Temperature : 22.7℃
 Humidity : 55%RH


Mode	Freq. (MHz)	Modulation Type	Transmitting time(s)	Limit(s)	Results
TX Mode	315	ASK	1.02	≤5	PASS
TX Mode	315	FSK	1.06	≤5	PASS
TX Mode	433.92	ASK	0.27	≤5	PASS
TX Mode	433.92	FSK	0.36	≤5	PASS

Please refer the following plot.


315 MHz(ASK)

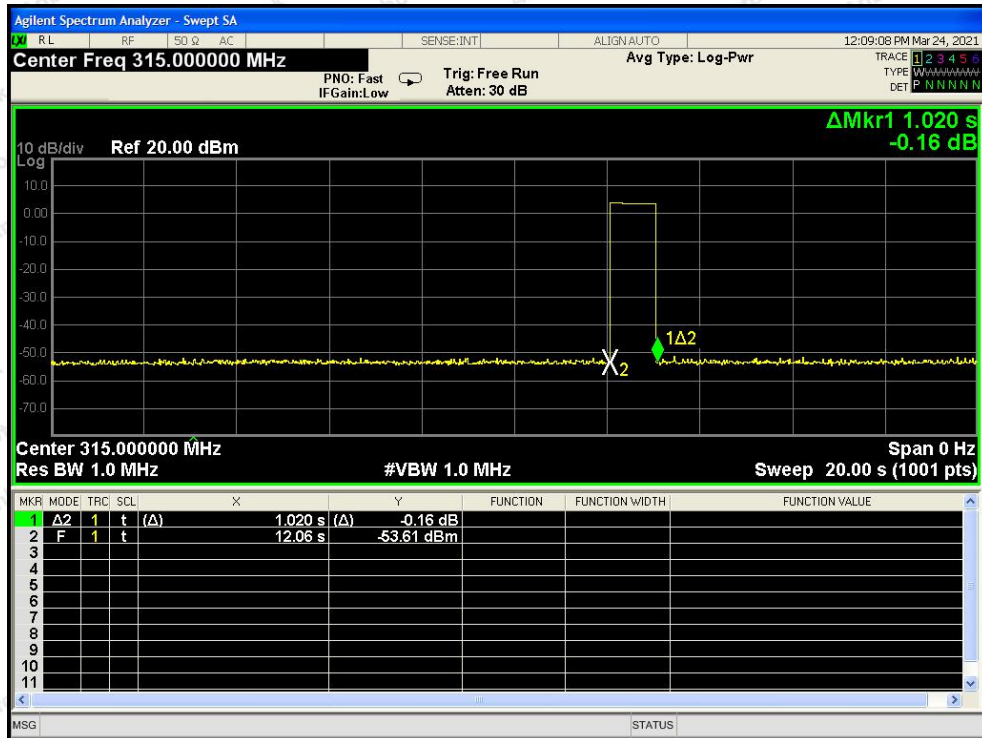


315 MHz(FSK)

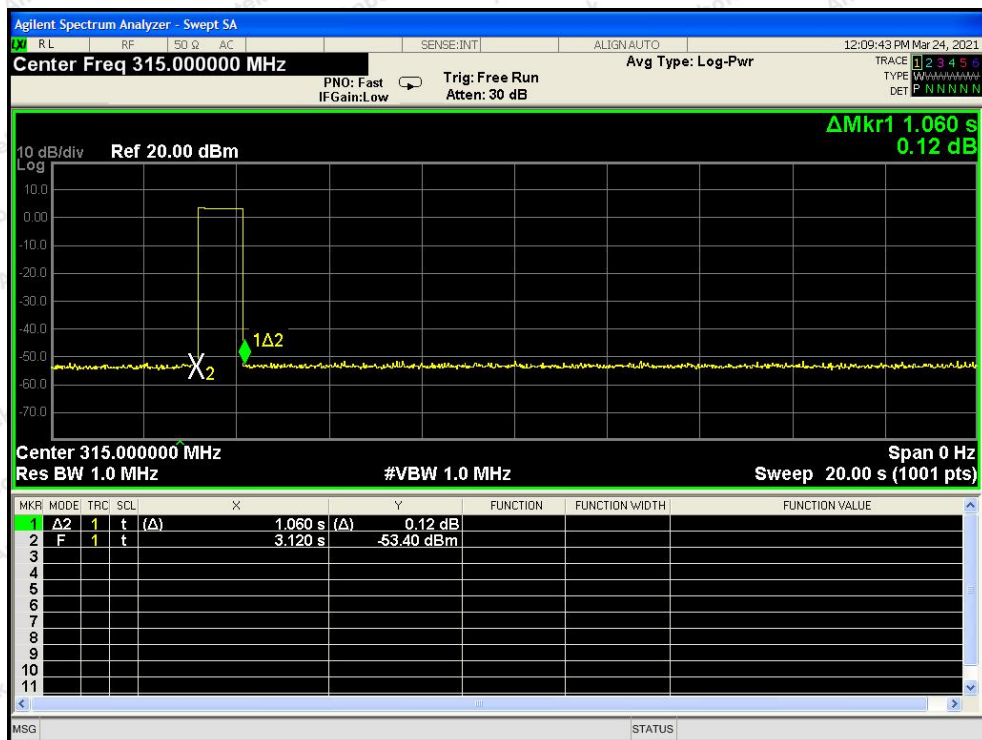

433.92 MHz(ASK)

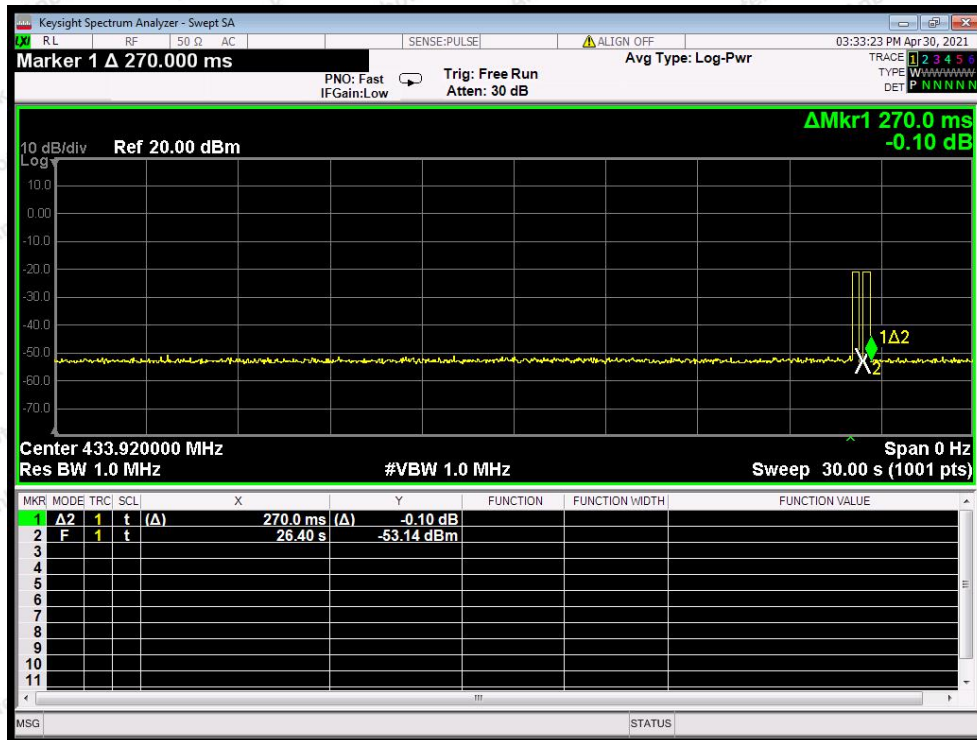

433.92 MHz(FSK)

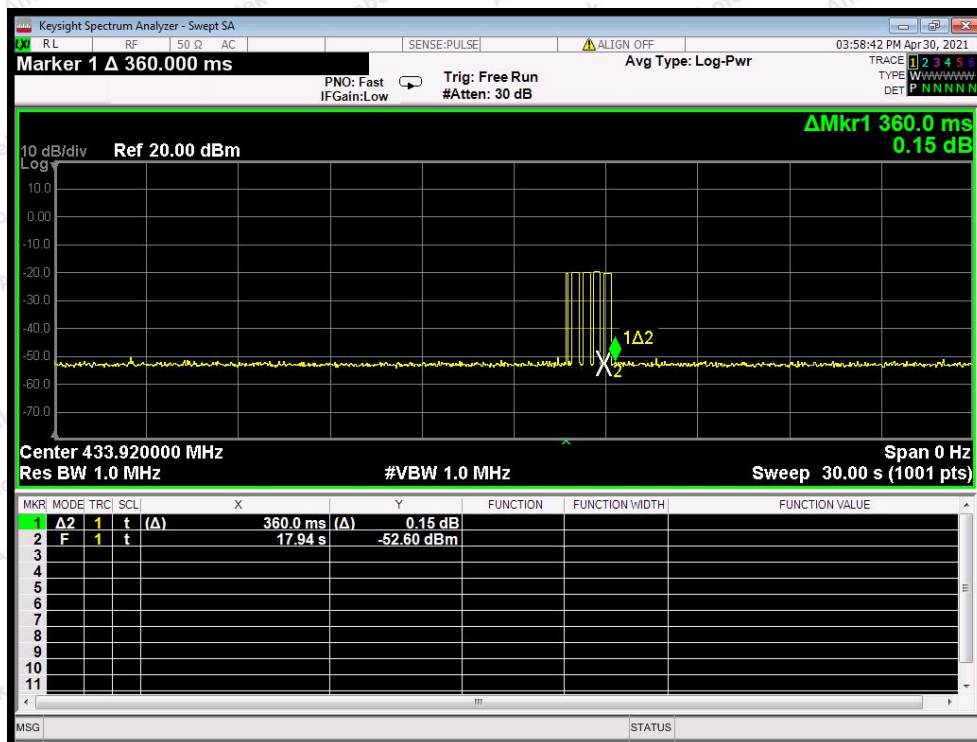

7. Antenna Requirement

7.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. Antenna requirement must meet at least one of the following: 1) Antenna must be permanently attached to device. 2) The antenna must use a unique type of connector to attach to the device. 3) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.

7.2. Antenna Connected Construction

The antenna is a Monopole antenna which permanently attached, and the best case gain of the antenna is 0dBi. It complies with the standard requirement.





APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test

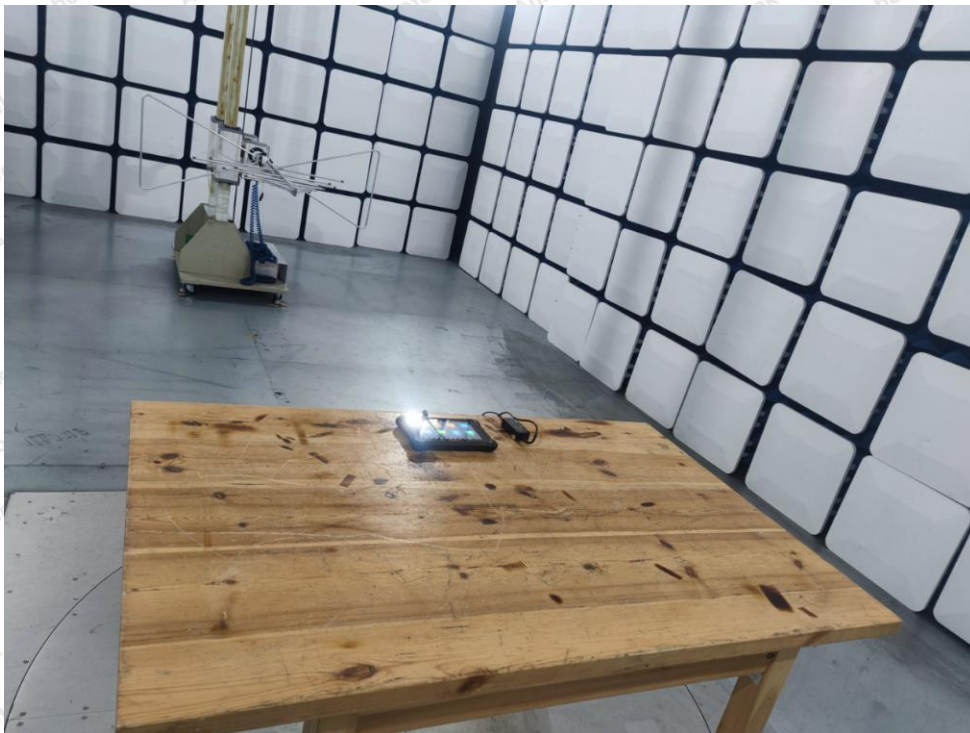

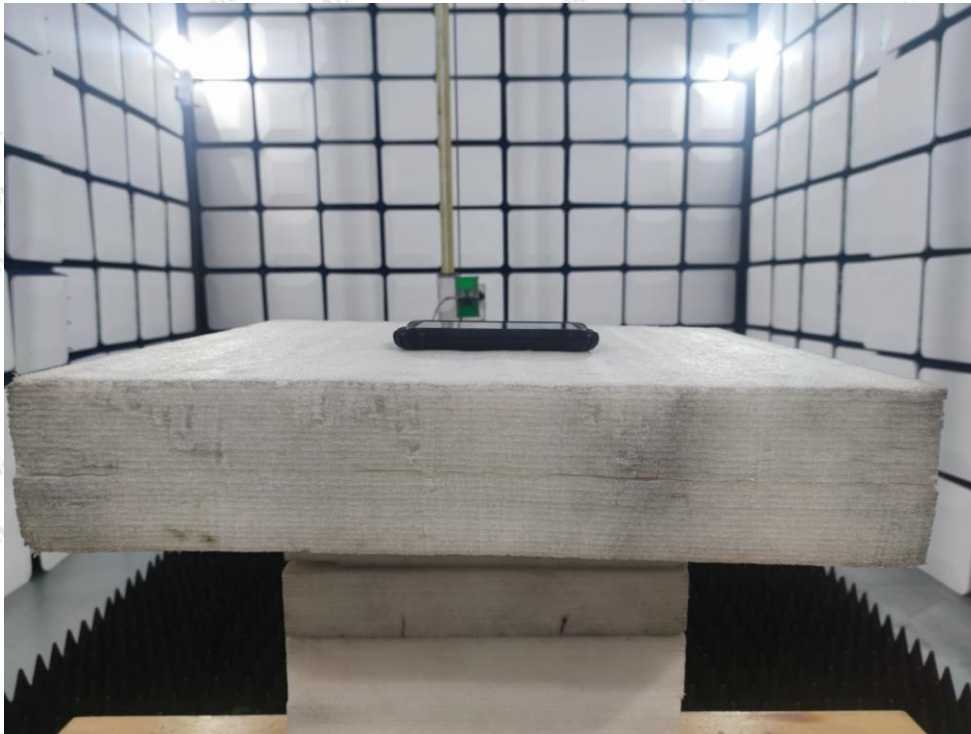

APPENDIX II -- EXTERNAL PHOTOGRAPH

Reference to the test report 18220WC10072601.

APPENDIX III -- INTERNAL PHOTOGRAPH

Reference to the test report 18220WC10072601.

----- End of Report -----

